

Prüfbericht-Nr.: Test report no.:	ULR-TC568822300000016F	Auftrags-Nr.: Order no.:	146621230 010	Seite 1 von 71 Page 1 of 71
Kunden-Referenz-Nr.: Client reference no.:	2024735	Auftragsdatum: Order date:	2021-10-11	
Auftraggeber: Client:	1. HONEYWELL INTERNATIONAL INC 1860W, ROSE GARDEN LANE, AZ75,M-16-7988, PHOENIX, ARIZON, UNITED STATES 2. Honeywell LTD 500 Brooksbank Avenue, North Vancouver, BC, V7J 3S4; Canada			
Prüfgegenstand: Test item:	Industrial RTLS			
Bezeichnung Identification	OW-RTLTG2	Serien -Nr.: Serial no.:	14W23C12345678912	
Auftrags-Inhalt: Order content:	Testing and issue of Test Report and Grant Certificate			
Prüfgrundlage: Test specification:	FCC Part 15 Subpart C 15.247,15.205 & 15.209 RSS 247 Issue 2,RSS Gen Issue 5			
Wareneingangsdatum: Date of sample receipt:	2021-12-16			
Prüfmuster-Nr.: Test sample no.:	A003238199-001			
Prüfzeitraum: Testing period:	2021-12-16 - 2021-12-30			
Ort der Prüfung: Place of testing:	Wireless laboratory, Bangalore			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (India) Pvt. Ltd. 27/B,2nd cross road, Electronic city Phase1, Bangalore-560100, India FCC Test Site Registration No: 496599 IC Test Site Registration Number: 3665-1			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	genehmigt von: authorized by:			
Datum: Date: 2021-12-16	Ausstellatum: Issue date: 2022-04-06			
Stellung / Position: Yogesh V Engineer	Stellung / Position: Lokesh Ramu Manager			
Sonstiges / Other: FCC ID: S5751460078 IC: 573W-51460078				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 2 von 71
Page 2 of 71

TEST SUMMARY

Test Item	Applicable Standard		Result
	FCC	ISED	
Maximum conducted (average) output power	FCC 15.247 (b)(3)	RSS 247 Issue 2, Section 5.4 (d)	Pass
Maximum Power Spectral Density	FCC 15.247(e)	RSS 247 Issue 2, Section 5.2 (b)	Pass
DTS Bandwidth	FCC 15.247(a)(2)	RSS 247 Issue 2, Section 5.2 (a)	Pass
Emissions in non-restricted frequency bands	FCC 15.247(d)	RSS 247 Issue 2, Section 5.5	Pass
Spurious Radiated Emissions and Restricted Bands of Operation	FCC 15.209 / FCC 15.205	RSS-Gen Issue 5, Section 8.9 /8.10	Pass

Product Category: Electronics Testing
Test Discipline: EMC Test Facility

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 3 von 71
Page 3 of 71

REVISION HISTORY OF THIS REPORT

Report Number	Version	Description	Issue date
ULR- TC568822300000016F	01	Initial issue of report	2022-04-06

Table of Contents

1	GENERAL REMARKS	5
1.1	Attachments	5
2	TEST SITES	6
2.1	Testing Facilities.....	6
2.2	List of Test and Measurement Instruments.....	6
3	GENERAL PRODUCT INFORMATION.....	7
3.1	Product Function and Intended Use.....	7
3.2	Ratings and System Details of Equipment under Test	7
3.3	Measurement Uncertainty:	8
4	TEST SET-UP AND OPERATION MODE.....	9
4.1	Principle of Configuration Selection	9
4.2	Test Operation and Test Software	9
4.3	Special Accessories and Auxiliary Equipment	9
4.4	Simultaneous Transmission	9
4.5	Countermeasures to achieve EMC Compliance	9
4.6	List of frequencies	10
5	Operational Description	11
6	Block Diagram.....	11
7	TEST METHODOLOGY	12
7.1	Radiated Emission Test	12
7.1.1	Test Setup Configuration	12
8	TEST RESULTS	14
8.1	Maximum Average Conducted Output Power.....	14
8.2	Maximum Power Spectral Density	19
8.3	Occupied bandwidth.....	24
8.4	Emissions in non-restricted frequency bands and Conducted Spurious Emission.....	29
8.4.1	Band edge and reference plots	30
8.4.2	Out-Of-Band Emissions.....	36
8.5	Spurious Radiated Emissions & Restricted Bands of Operation	48
9	LIST OF TABLES.....	71

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 5 von 71
Page 5 of 71

1 GENERAL REMARKS

1.1 Attachments

All attachments are part of this test report and are issued in separate document

1. Test Setup photos
2. EUT External Photos
3. EUT Internal Photos
4. FCC Label and Label Location
5. Block Diagram
6. Specification of EUT
7. Schematic Diagrams
8. Bill of Material
9. User Manual
10. Maximum Permissible Exposure Information

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 6 von 71
Page 6 of 71

2 TEST SITES

2.1 Testing Facilities

1. TÜV Rheinland (India) Pvt.Ltd.,
27/B, 2nd Cross,
ElectronicCityPhase1
Bangalore – 560 100,
India
2. TUV Rheinland (India) Pvt.Ltd.,
108 , Beside ISBR Business School,
Electronic city Phase I
Bangalore - 560 100,
India

2.2 List of Test and Measurement Instruments

Table 1: List of test and measurement instruments

Equipment	Manufacturer	Model Name	Serial Number	Firmware Versions	Calibration Due Date	Periodicity	Test Facility
Active loop antenna	Schwarzbeck	FMZB 1519 B	1519B-00111	-	27.04.2022	Yearly	Radiated Spurious Emission
Balun & Biconical Antenna	Schwarzbeck Mess-Elektronik	BBA 9106+V HBB 9124	9124-1117	-	25.02.2022	Yearly	
Log - Periodical Antenna	Schwarzbeck Mess-Elektronik	VUSLP 9111B	9111B-324	-	24.02.2022	Yearly	
Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-1944	-	11.05.2022	Yearly	
Semi Anechoic Chamber	Frankonia	-	-	-	-	-	
Fully Anechoic Chamber	Albatross	-	-	-	-	-	
EMI Receiver	Rohde & Schwarz	ESW 44	101732	4.73.SP5	19.05.2022	Yearly	
EMI Receiver	Rohde & Schwarz	ESW44	101773	1.72SP1	27.01.2022	Yearly	
Spectrum Analyzer	Agilent	E4407B	US41192 772	A.14.06	15.12.2022	Yearly	

Table 2: Instrument application Software versions

SL. No.	Test Type	Application software	Version
1	Radiated spurious emission measurement in FAC	EMC 32	10.60.00
1	Radiated spurious emission measurement in FAC	BAT EMC	3.20.0.17

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 7 von 71
Page 7 of 71

3 GENERAL PRODUCT INFORMATION

3.1 Product Function and Intended Use

RTLS Tag is a personnel wearable Industrial wireless Tag operating at 2.4 GHz ISM band. It is a compact, light, and simple battery-operated device that will be wearable handily using a clip accessory. The RTLS Tag communicates with FDAP32 Anchors to enable Real-time location tracking. It is an intrinsically safe class1/div1 certified device with a battery life lasting up to 3 years. The RTLS Tag has an IP65 rating and the ability to operate in harsh environments. The RTLS Tag can also be mounted and used for asset tracking.

3.2 Ratings and System Details of Equipment under Test

Table 3: Ratings and System Details as declared by Client*

Protocol	IEEE 802.15.4
Operating Frequency Range	2405 MHz – 2475 MHz
No. of Channels	15
Channel Spacing	5MHz
Tx Transmitting Power	8 dBm
Maximum Measured Power	8.50dBm at 2405MHz Frequency
Modulation	DSSS (O-QPSK)
Data Rate	250kbits/sec
Number of antennas	3
Antenna Gain & Antenna Type	1. Chip Antenna 2.4GHz - Chip RF Antenna 2.4GHz ~ 2.5GHz 0.5dbi Solder Surface Mount 2450AT18A100E 0.5dbi (Peak Gain) 2. Chip Antenna 2.4GHz - Chip RF Antenna 2.4GHz ~ 2.5GHz 0.5dbi Solder Surface Mount 2450AT18A100E 0.5dbi (Peak Gain) 3. Chip Antenna 2.4GHz - Bluetooth Chip RF Antenna 2.4GHz ~ 2.483GHz 1.7dBi Solder Surface Mount W30081.1dBi(Peak Gain)
Supply Voltage to Product	3.6 V DC Battery Supply
Environmental conditions	Operating temperature is -20 deg to +60 deg
EUT Dimension	88 mm height x 62.5 mm length x 20.6 mm width

***Disclaimer:** The information/data is supplied by the client and the same is considered to arrive at the final value. Any changes made apart from the specified specification, can directly impact on the tests results. Refer the products user manual for more details.

3.3 Measurement Uncertainty:

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k = 2$

Table 4: Measurement Uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 5 \%$
RF output power, conducted	$\pm 1.5 \text{ dB}$
Power Spectral Density, conducted	$\pm 3 \text{ dB}$
Unwanted Emissions, conducted	$\pm 3 \text{ dB}$
All emissions, radiated	$\pm 6 \text{ dB}$
Temperature	$\pm 3 \text{ }^{\circ}\text{C}$
Supply Voltages	$\pm 3 \%$
Time	$\pm 5 \%$

Note: The Listed Measurement Uncertainties are the worst-case uncertainty, for the respective test cases. Above Table is for reporting purpose only and not used in determining Final Pass/Fail verdict.

4 TEST SET-UP AND OPERATION MODE

4.1 Principle of Configuration Selection

Transmission was enabled with highest possible duty cycle transmission on low, mid and high channel.

4.2 Test Operation and Test Software

Hardware Version: OW-RTL TG2

Software Version: R100.1-15.0

Hardware version of identification Number (HVIN): OW-RTL TG2

Firmware version of identification Number (FVIN): R100.1-15.0

4.3 Special Accessories and Auxiliary Equipment

None

4.4 Simultaneous Transmission

IEEE 802.15.4 (DTS) and Proprietary (FHSS) will not be able to transmit simultaneously and also Antenna 1 and Antenna 2 will not be able to transmit simultaneously.

4.5 Countermeasures to achieve EMC Compliance

None

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 10 von 71
Page 10 of 71

4.6 List of frequencies

Frequency Band (MHz)	Channel No.	Channel Frequency (MHz)
2400 – 2483.5	01	2405
	02	2410
	03	2415
	04	2420
	05	2425
	06	2430
	07	2435
	08	2440
	09	2445
	10	2450
	11	2455
	12	2460
	13	2465
	14	2470
	15	2475

Table 5: List of EUT Center frequencies

Channel used for EUT testing

Channel low : 2405MHz

Channel mid : 2440MHz

Channel High : 2475MHz


Note:

1. TUV Sample Identification number : A003238199-001 – Radiated & Conducted test Sample

5 Operational Description

The RTLS Tag (Real time location Sensing) is an RF radio module which detects and calculates the position of the asset/person carrying the module within an installation. The RTLS Tag works in tandem with the Anchor (module) to calculate the position information. The RTLS Tag is an intrinsically safe module expected to be worn as a badge on a person or fixed to an asset within an installation. The RTLS Tag is a battery-operated compact module. Block diagram of the Tag is shown below. All the frequency generating components are marked.

6 Block Diagram

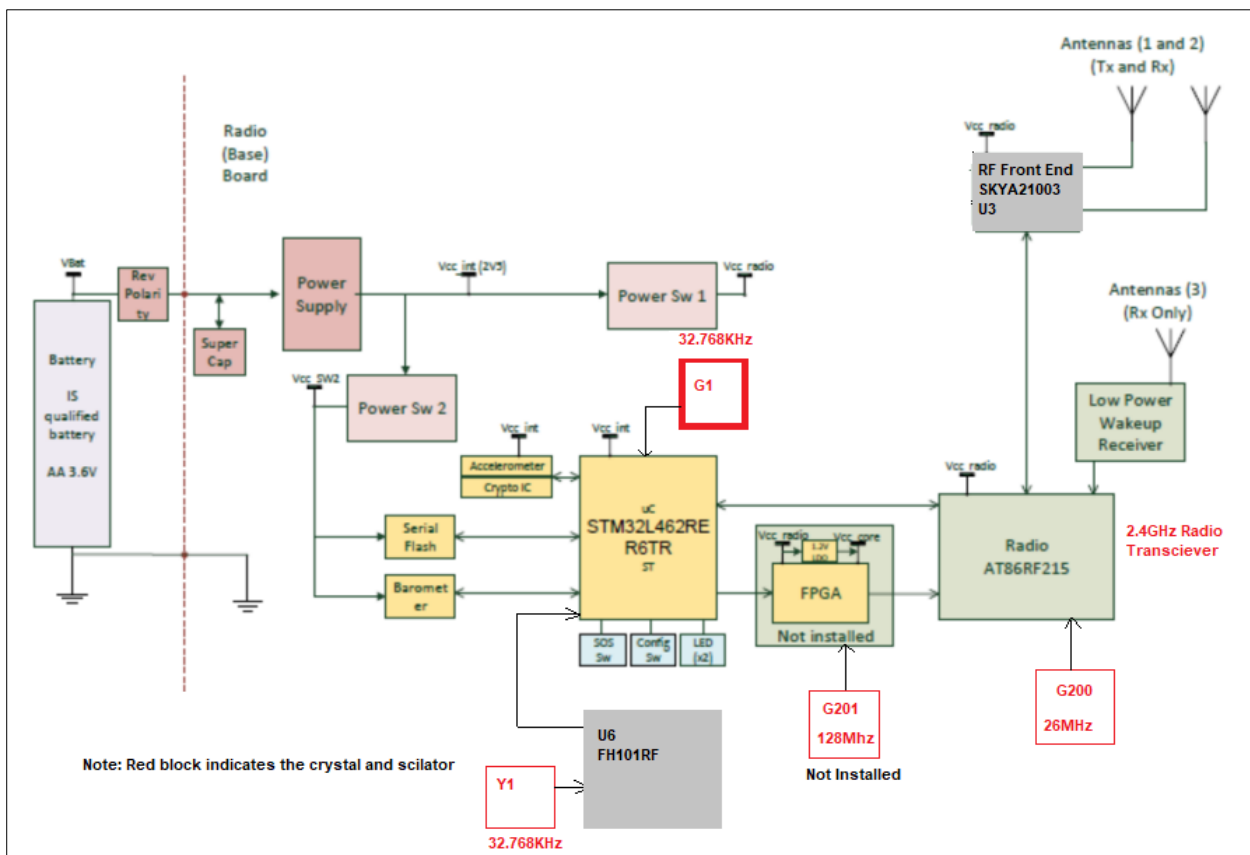

7 TEST METHODOLOGY

7.1 Radiated Emission Test

The radiated emission measurement was performed according to the procedures in ANSI C63.10-2013. The equipment under test (EUT) was placed at the middle of the 80 cm high turntable for below 1 GHz & 1.5 m height for above 1 GHz measurement, and the EUT is 3 meters far from the measuring antenna. The turntable was rotated 360° for obtaining the maximum emission. The height of the measuring antennas was scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained. The measurement above 1000 MHz was performed by horn antenna, The measurement below 30 MHz was performed by loop antenna, Measurement from 30 MHz to 200 MHz was performed by Baloon and Biconical Antenna, and measurement from 200 MHz to 1 GHz was performed by Log-Periodic Antenna.

The EUT was rotated around the X-, Y-, and Z-Axis and the results from worst case axis are recorded

7.1.1 Test Setup Configuration

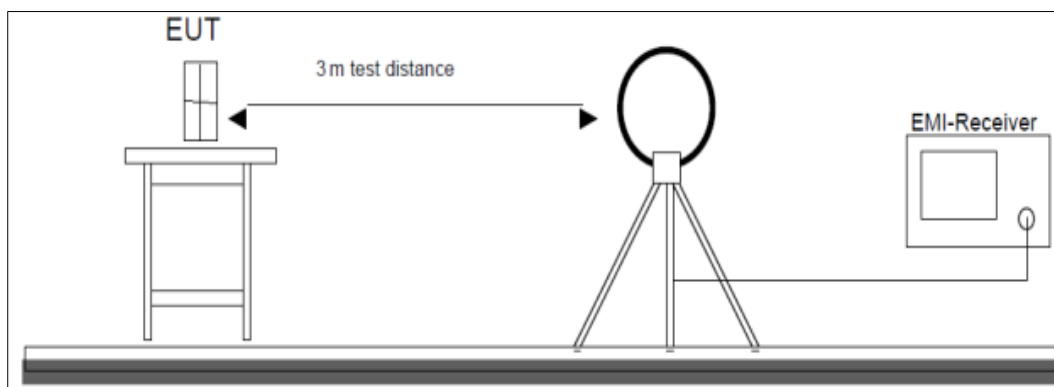


Figure 1: Frequency Range 9 kHz- 30 MHz

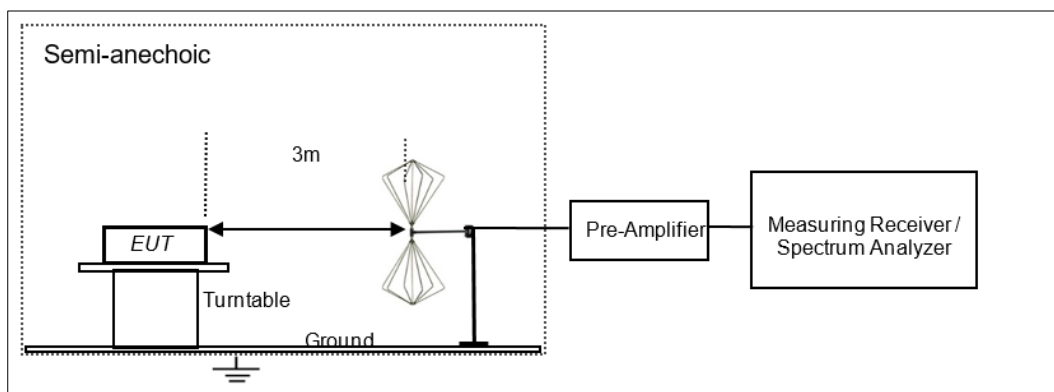


Figure 2: Frequency Range 30 MHz – 200 MHz

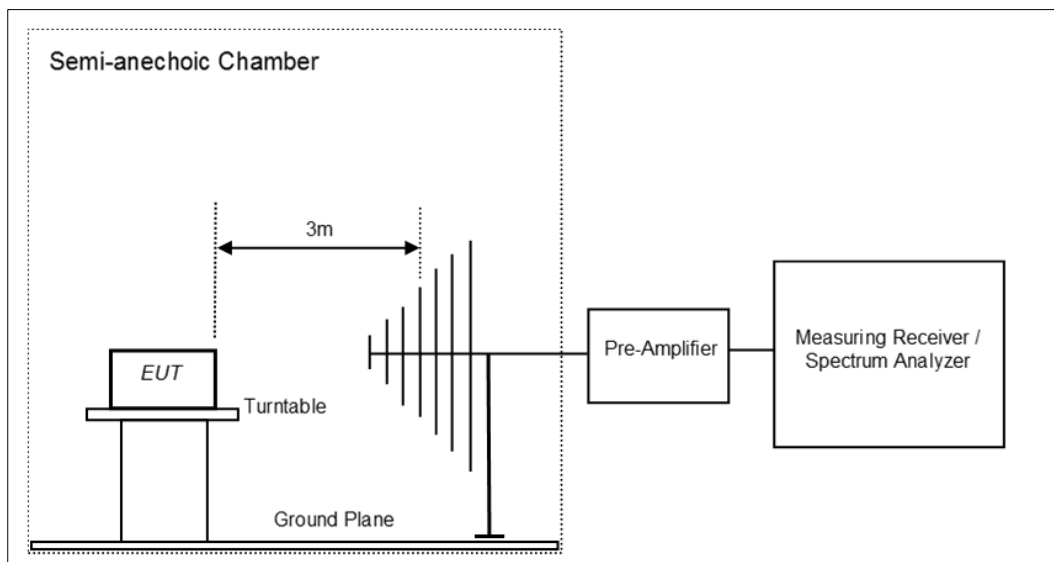


Figure 3: Frequency Range 200 MHz - 1GHz

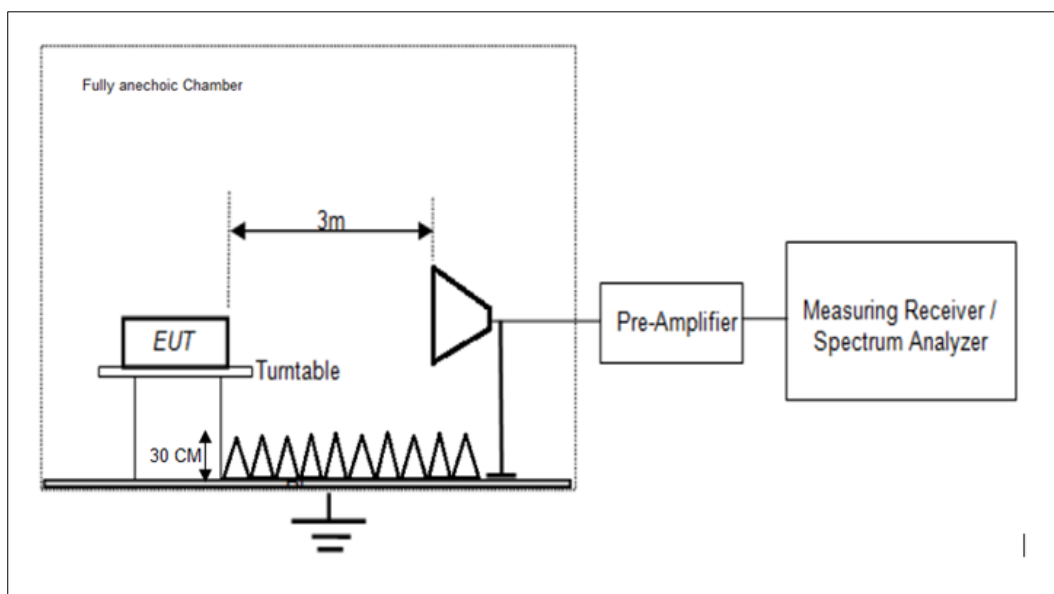


Figure 4: Frequency Range above 1 GHz

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 14 von 71
Page 14 of 71


8 TEST RESULTS

8.1 Maximum Average Conducted Output Power

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (b)(3) / RSS 247 Issue 2, Section 5.4 (d)
Test Method	Subclause 11.9.2.2.2 of ANSI C63.10
Measurement Bandwidth	100KHz
Detector	Average
Port of testing	Antenna port
Requirement	Power ≤ 1 W (30 dBm) & e.i.r.p ≤ 4 W (36 dBm)

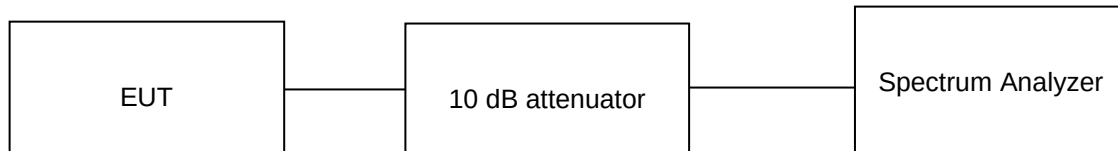

Test Condition

Normal Test Condition:

Temperature (Norm) = + 23.0 °C Voltage = 3.6V DC through DC Supply Relative humidity: 64%

KDB Guidelines applied:

Measurements were made as per section 8.3.2.2 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:

Test Report No.:

ULR-TC568822300000016F

Seite 15 von 71

Page 15 of 71


Test results:

Note:

1. All the losses are included during measurement and final values are mentioned in the test report
2. Total Peak Output power (dBm) = Measured Peak power (dBm) + Attenuator factor (10dB) + Cable loss (1.6dB)
3. This product do not support additional beamforming gain / directional gain, it uses single antenna and hence Directional gain of the single antenna is 0.5 dBi

Data rate	Channel Frequency (MHz)	Measured Average Power (ANT-1) (dBm)	Measured Average Power (ANT-2) (dBm)	Maximum e.i.r.p (ANT-1) (dBm)	Maximum e.i.r.p (ANT-2) (dBm)	Total Maximum e.i.r.p (dBm)	Power Limit (dBm)	e.i.r.p limit (dBm)
250Kbps	2405	8.32	8.44	8.82	8.94	--	30	36
	2440	8.16	8.25	8.66	8.75	--	30	36
	2475	7.74	7.77	8.24	8.27	--	30	36

Antenna 1

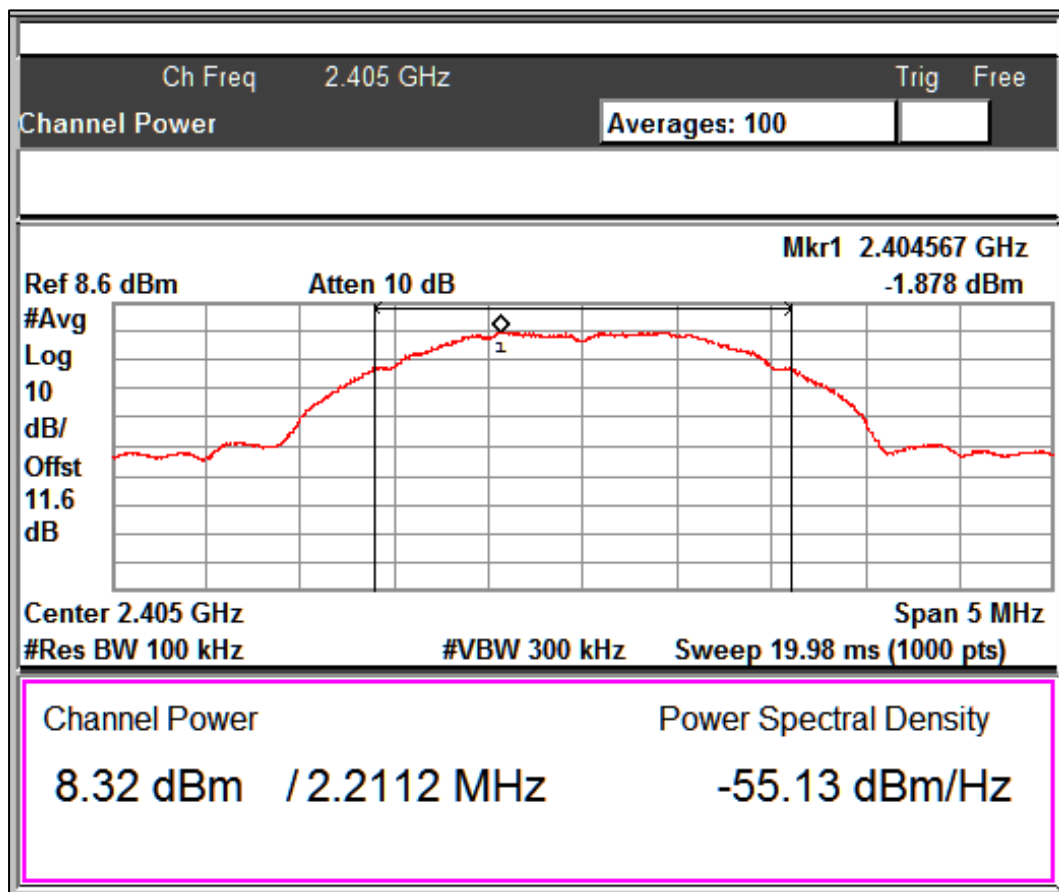


Channel Frequency: 2405MHz


Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 16 von 71
Page 16 of 71

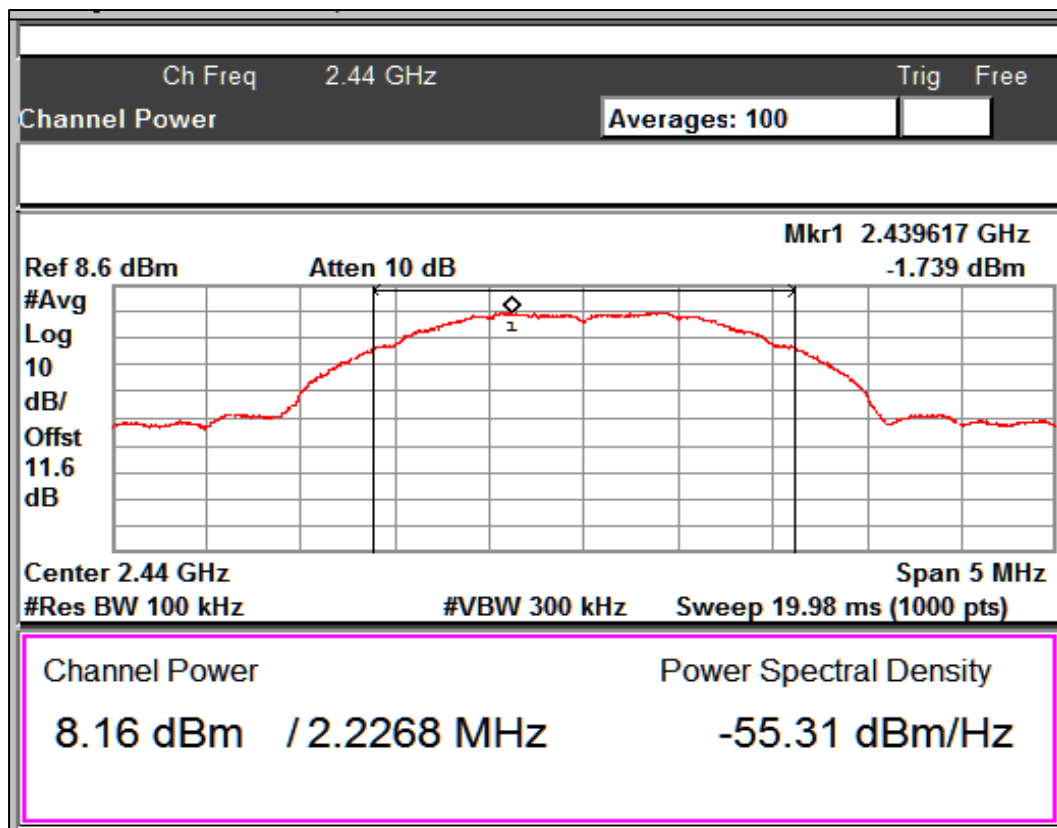

Channel Frequency: 2440MHz

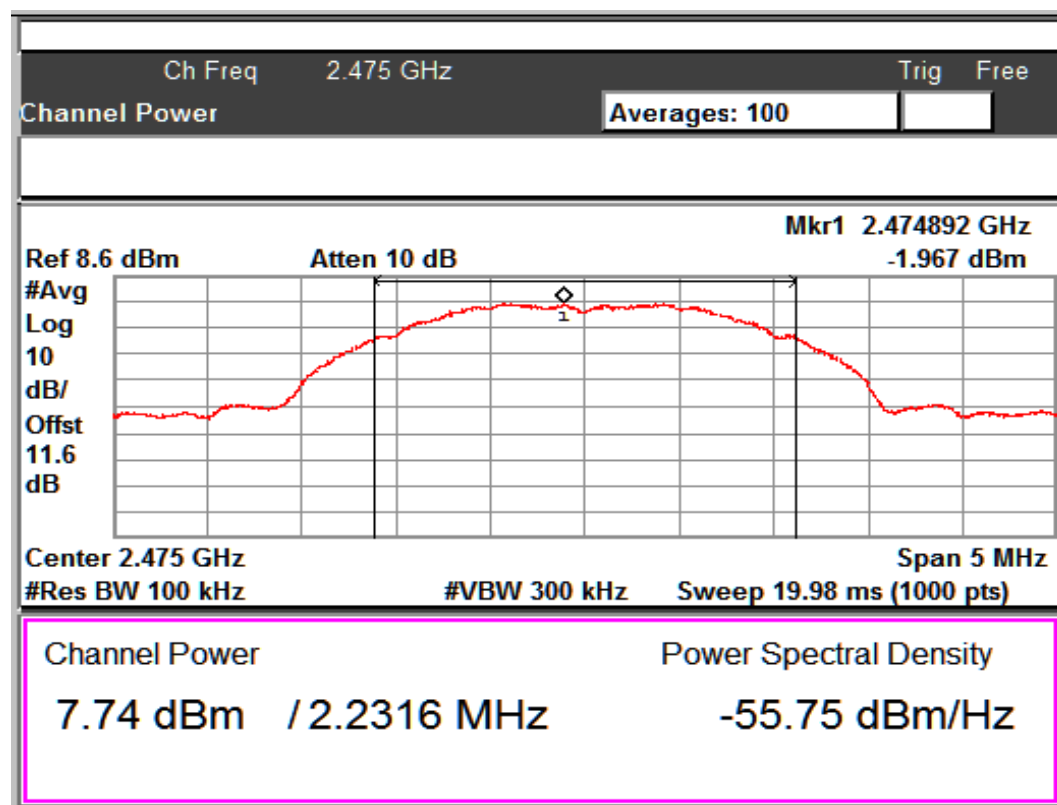


Channel Frequency: 2475MHz

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000016F

Seite 17 von 71
Page 17 of 71

Antenna 2

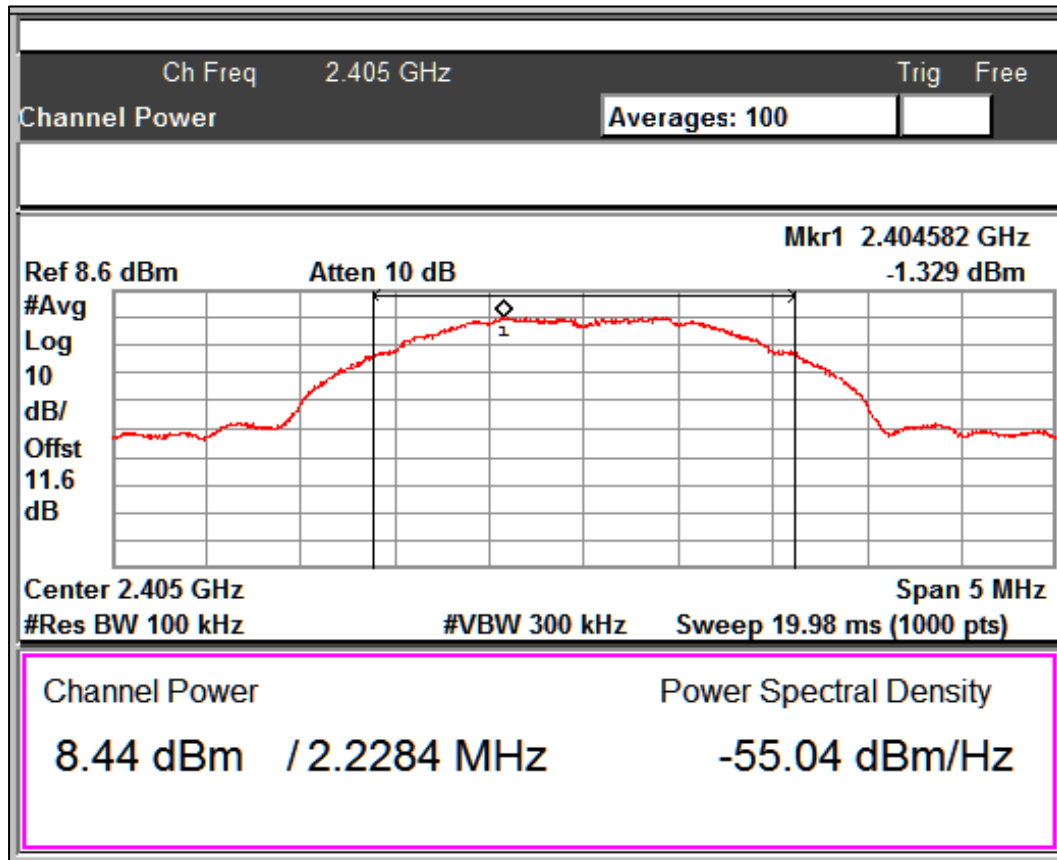

Channel Frequency: 2405MHz

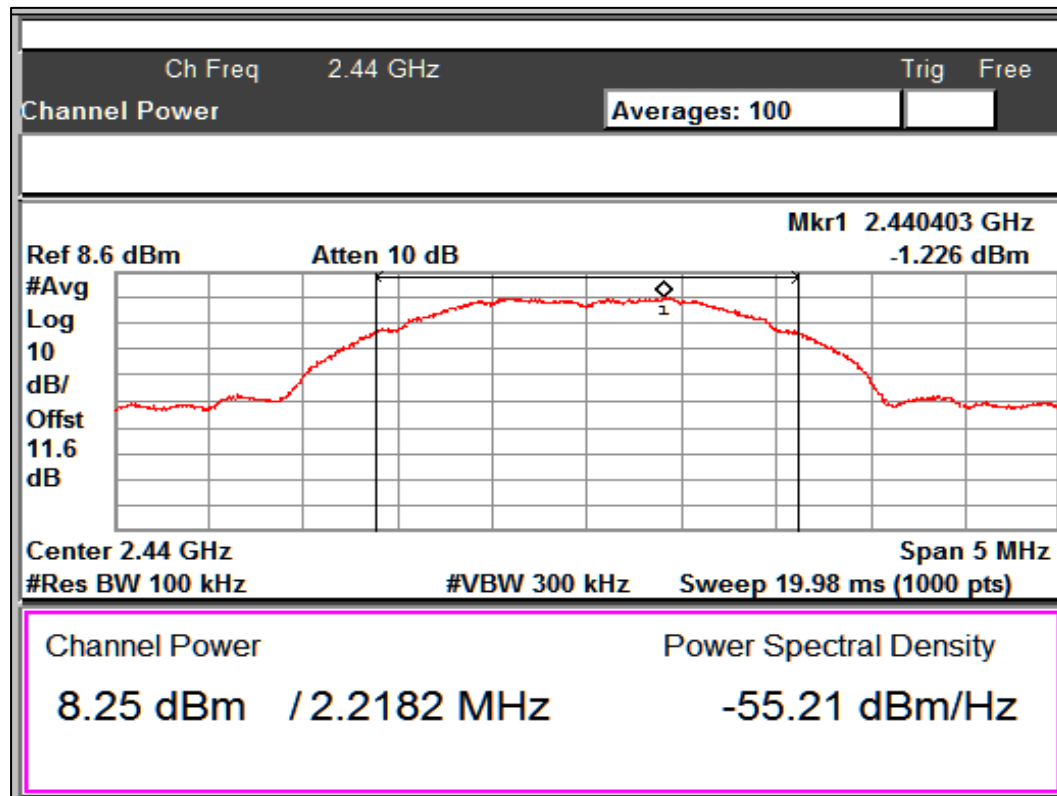


Channel Frequency: 2440MHz

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 18 von 71
Page 18 of 71

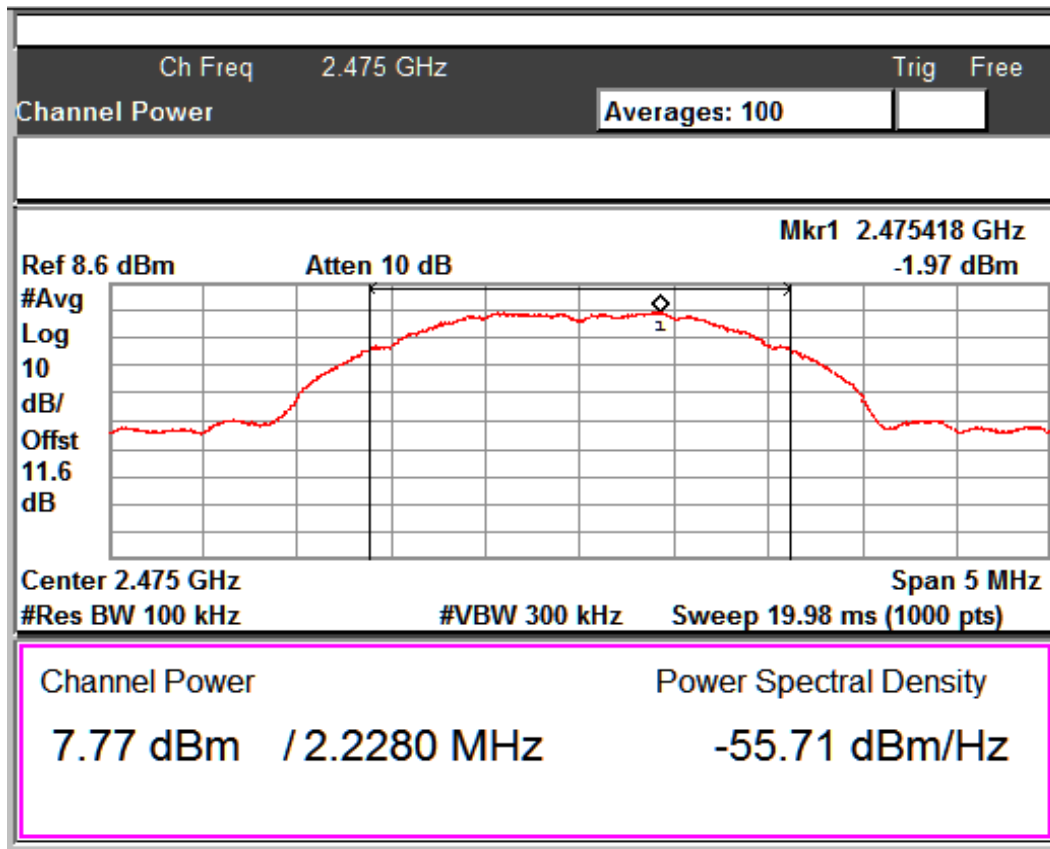

Channel Frequency: 2475MHz

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 19 von 71
Page 19 of 71


8.2 Maximum Power Spectral Density

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (e) / RSS 247 Issue 2, Section 5.2 (b)
Test Method	Subclause 11.10.3 of ANSI C63.10
Measurement Bandwidth	100 kHz
Detector	Average
Port of testing	Antenna port
Requirement	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm

Test Method:

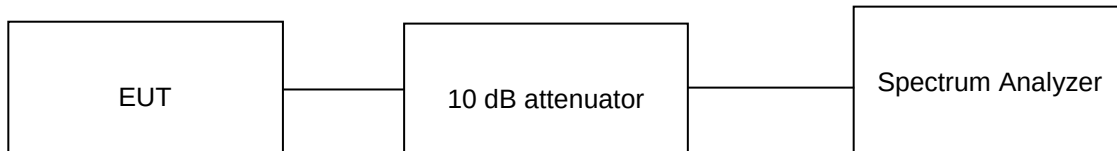

Test Condition

Normal Test Condition:

Temperature (Norm) = + 23°C

Voltage = 3.6V DC through DC Supply

Relative humidity: 64 %

KDB Guidelines applied:

Measurements were made as per section 8.4 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 20 von 71
Page 20 of 71


Test results:

Note:

1. All the losses are included during measurement and final values are mentioned in the test report.
2. Total Average PSD (dBm) = Measured Average PSD (dBm) + Attenuator factor (10dB) + Cable loss (1.6dB)
3. This product do not support additional beamforming gain / directional gain, it uses signal antenna and hence directional gain of the single antenna is 0.5 dBi

Data rate	Channel Frequency (MHz)	Measured average PSD (ANT-1) (dBm/100kHz)	Measured average PSD (ANT-2) (dBm/100kHz)	Total Measured average PSD (dBm/100kHz)	PSD Limit (dBm/100kHz)
250Kbps	2405	-1.53	-1.14	1.68	8.00
	2440	-1.68	-1.36	1.49	8.00
	2475	-1.99	-1.97	1.03	8.00

Antenna 1:

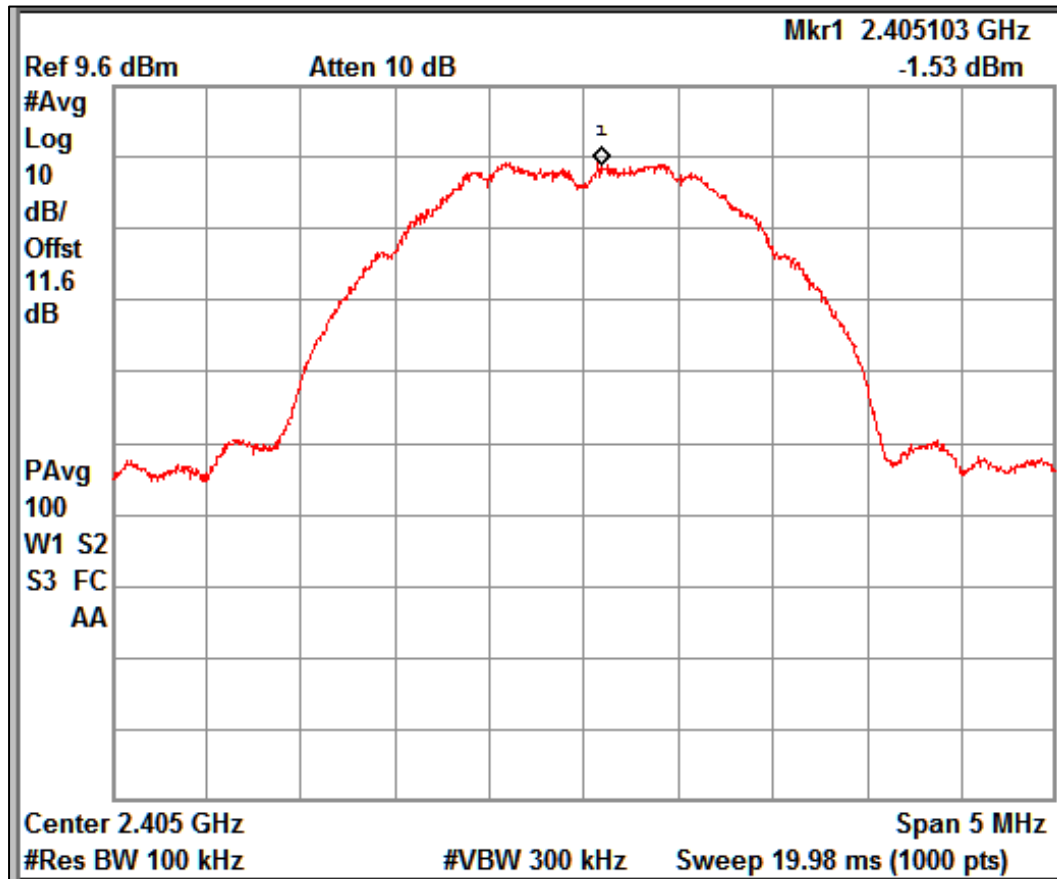

Channel Frequency: 2405MHz


Prüfbericht - Nr.:

Test Report No.:


ULR-TC568822300000016F

Seite 21 von 71

Page 21 of 71

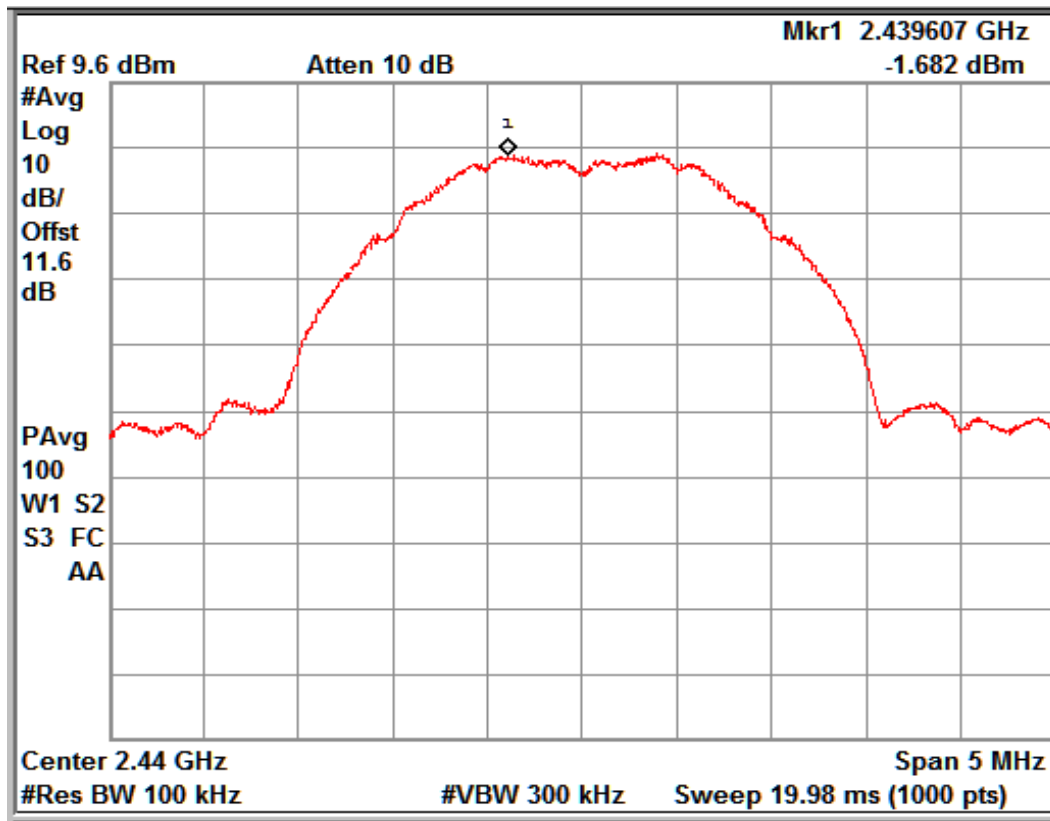

Channel Frequency: 2440MHz

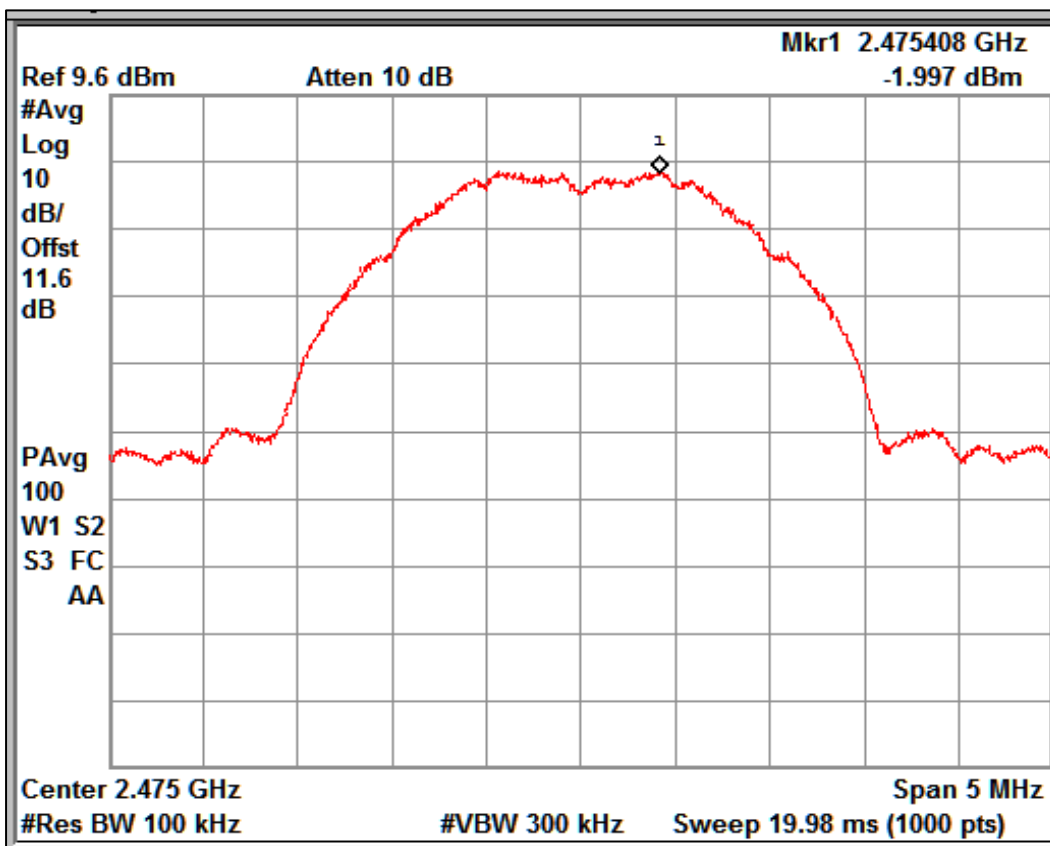

Channel Frequency: 2475MHz

Prüfbericht - Nr.:


Test Report No.:

ULR-TC568822300000016F

Seite 22 von 71

Page 22 of 71

Antenna 2:

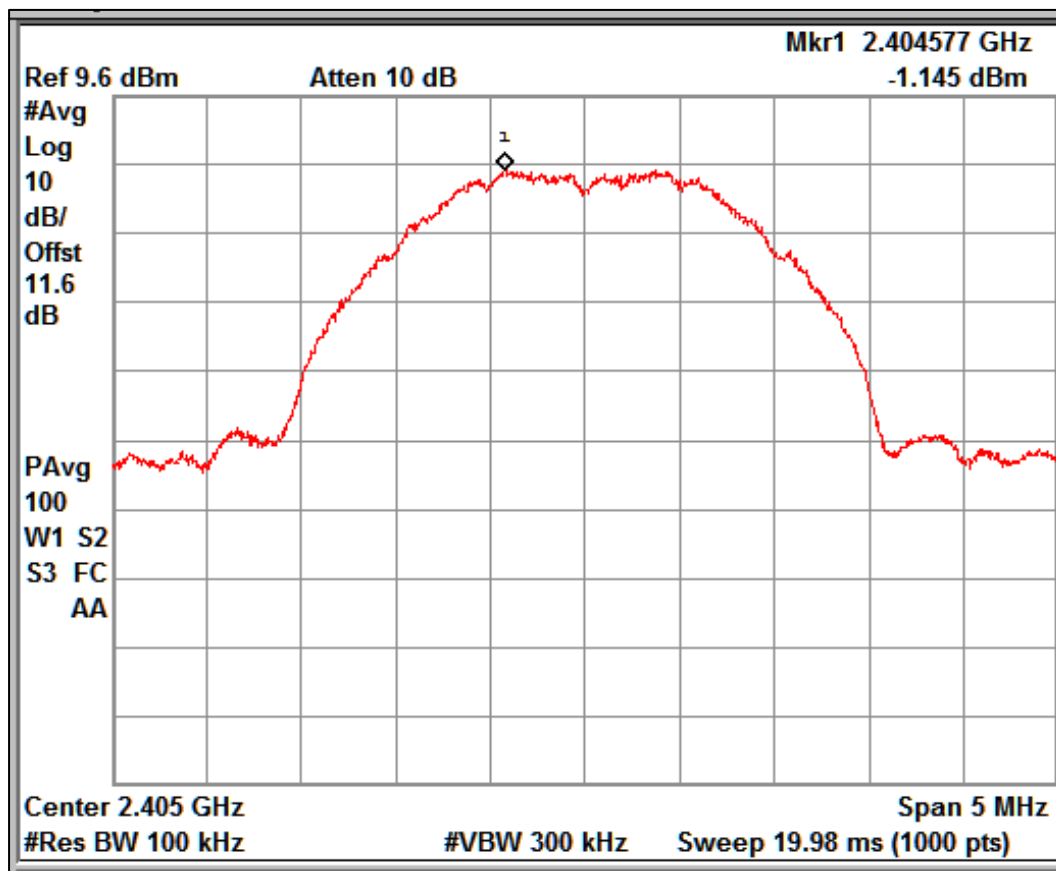

Channel Frequency: 2405MHz


Prüfbericht - Nr.:

Test Report No.:


ULR-TC568822300000016F

Seite 23 von 71

Page 23 of 71

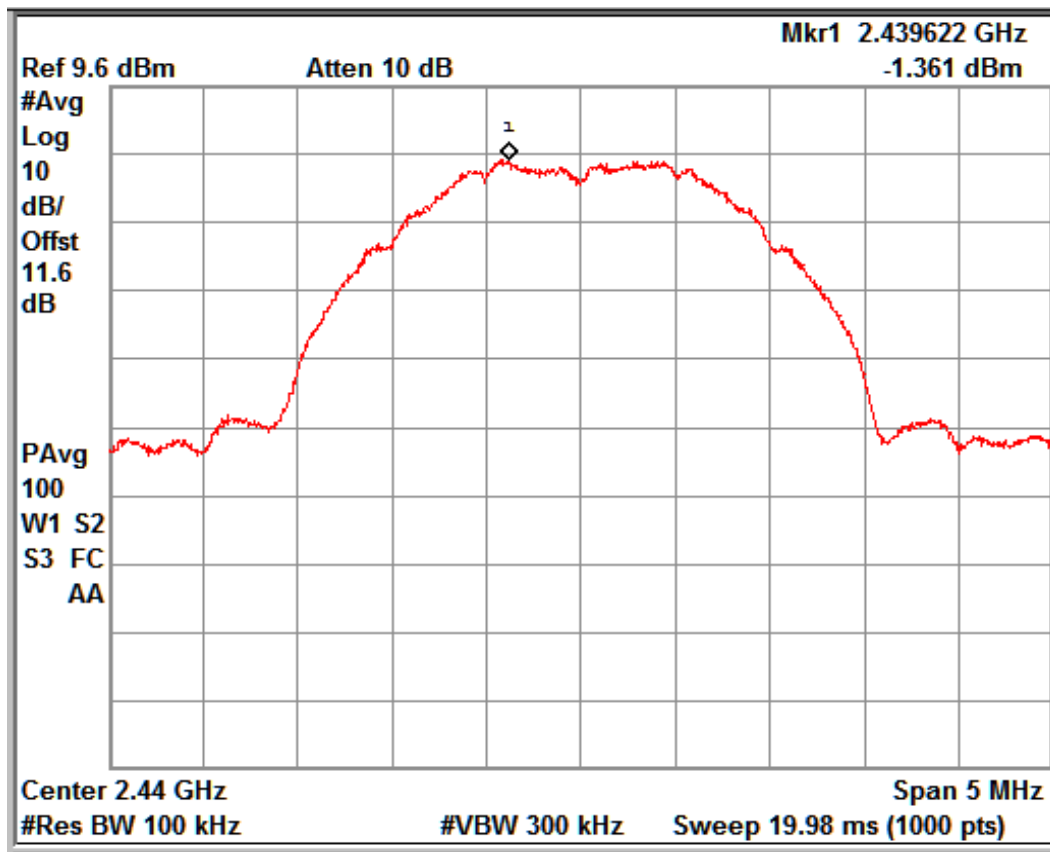

Channel Frequency: 2440MHz

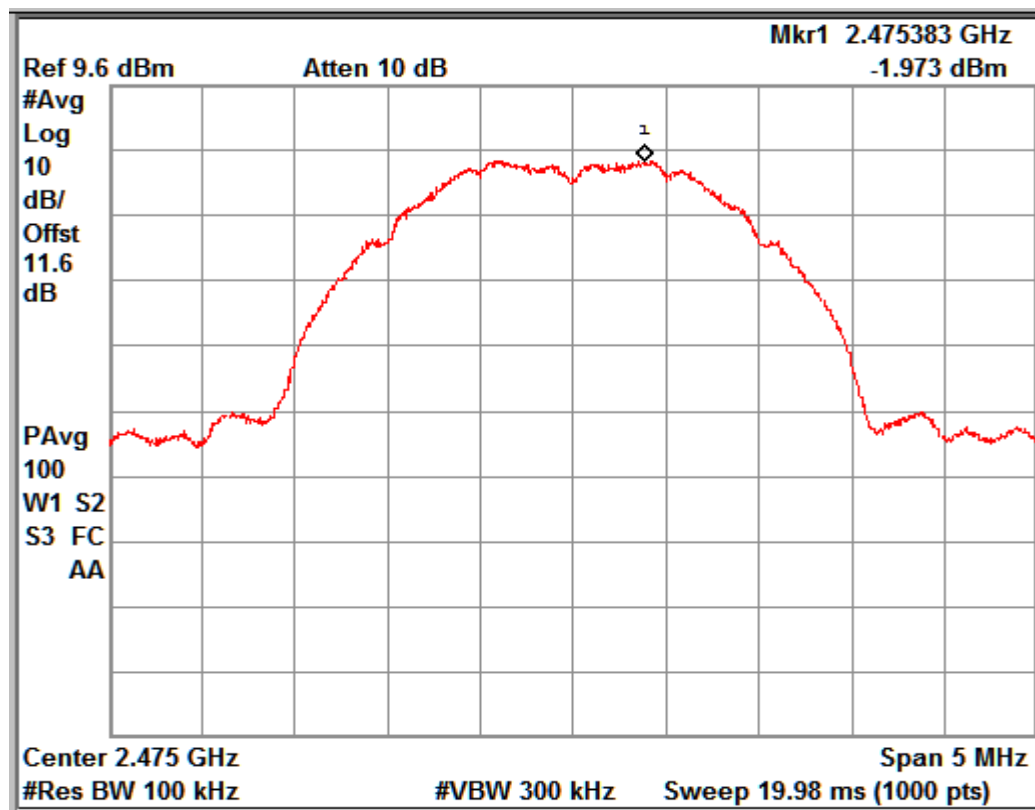

Channel Frequency: 2475MHz

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 24 von 71
Page 24 of 71


8.3 Occupied bandwidth

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (a) (2) / RSS 247 Issue 2, Section 5.2 (a)
Test Method	Subclause 11.8.1 of ANSI C63.10
Measurement Bandwidth	100 kHz for x dB bandwidth 1 to 5% of OCB for 99% bandwidth
Detector	Peak
Port of testing	Antenna port
Requirement	The minimum 6 dB bandwidth shall be at least 500 kHz

Test Method:

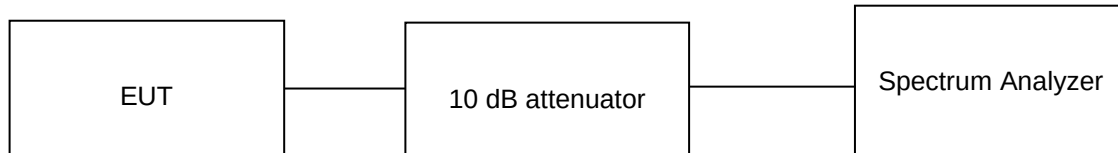

Test Condition

Normal Test Condition:

Temperature (Norm) = + 23.0 °C Voltage = 3.6V DC through DC Supply Relative humidity: 64%

KDB Guidelines applied:

Measurements were made as per section 8.2 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 25 von 71
Page 25 of 71


Test results:

Note:

1. All the losses are included during measurement and final values are mentioned in the test report.
2. Total Peak Output power (dBm) = Measured Peak power (dBm) + Attenuator factor (10dB) + Cable loss (1.6dB)
3. This product do not support additional beamforming gain / directional gain, it uses single antenna and hence Directional gain of the single antenna is 0.5 dBi.

Antenna 1:

Data rate	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	99% OBW (MHz)	6dB Bandwidth Limit (MHz)
250Kbps	2405	1.58	2.21	>=0.5
	2440	1.58	2.22	>=0.5
	2475	1.60	2.23	>=0.5

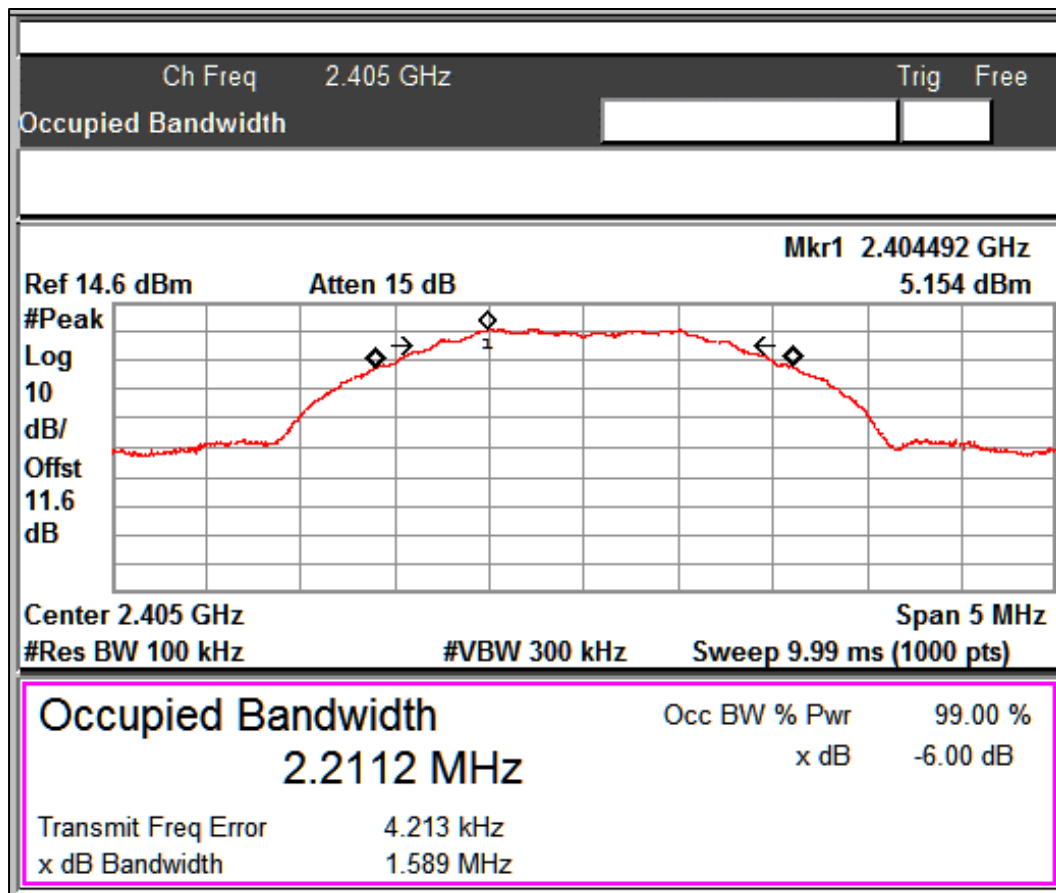


Channel Frequency: 2405MHz


Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 26 von 71
Page 26 of 71

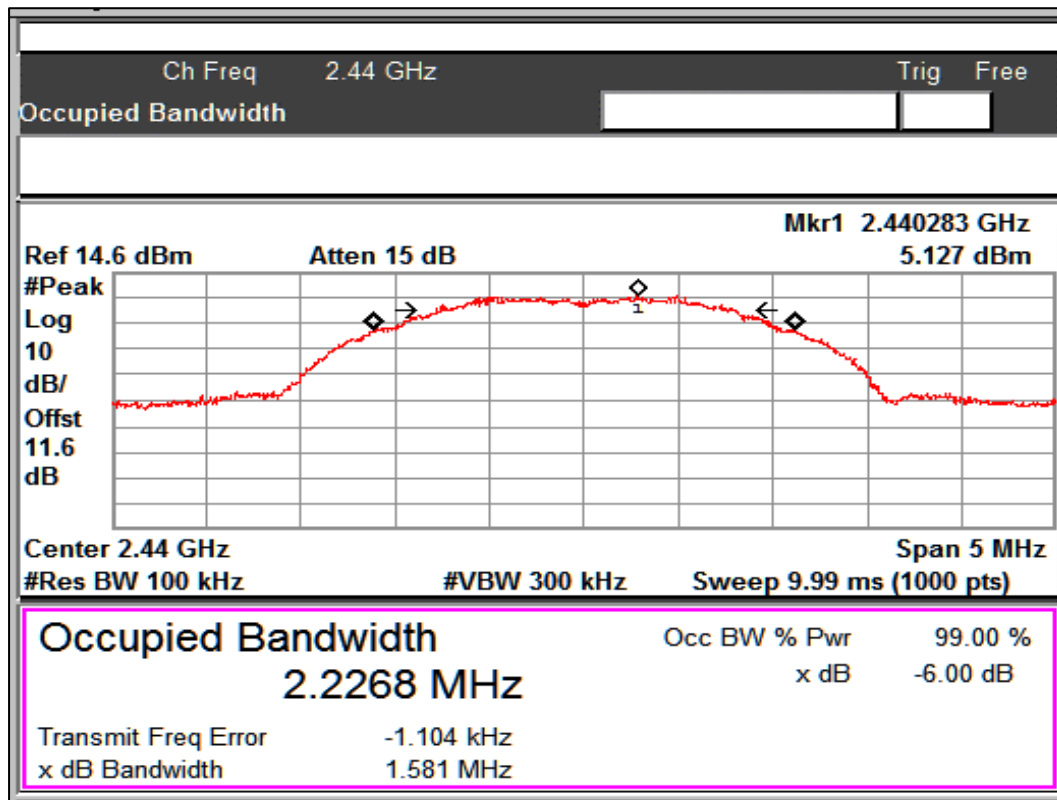

Channel Frequency: 2440MHz

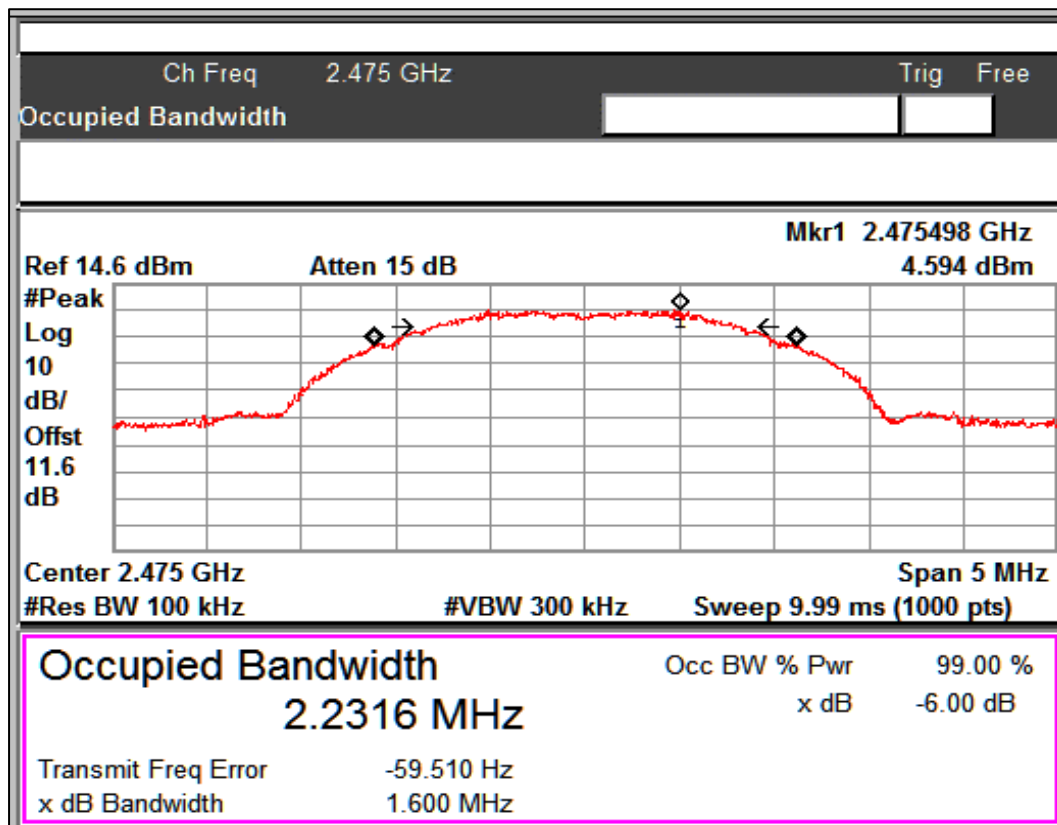

Channel Frequency: 2475MHz


Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 27 von 71
Page 27 of 71

Antenna 2:

Data rate	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	99% OBW (MHz)	6dB Bandwidth Limit (MHz)
250Kbps	2405	1.56	2.22	>=0.5
	2440	1.55	2.21	>=0.5
	2475	1.57	2.22	>=0.5

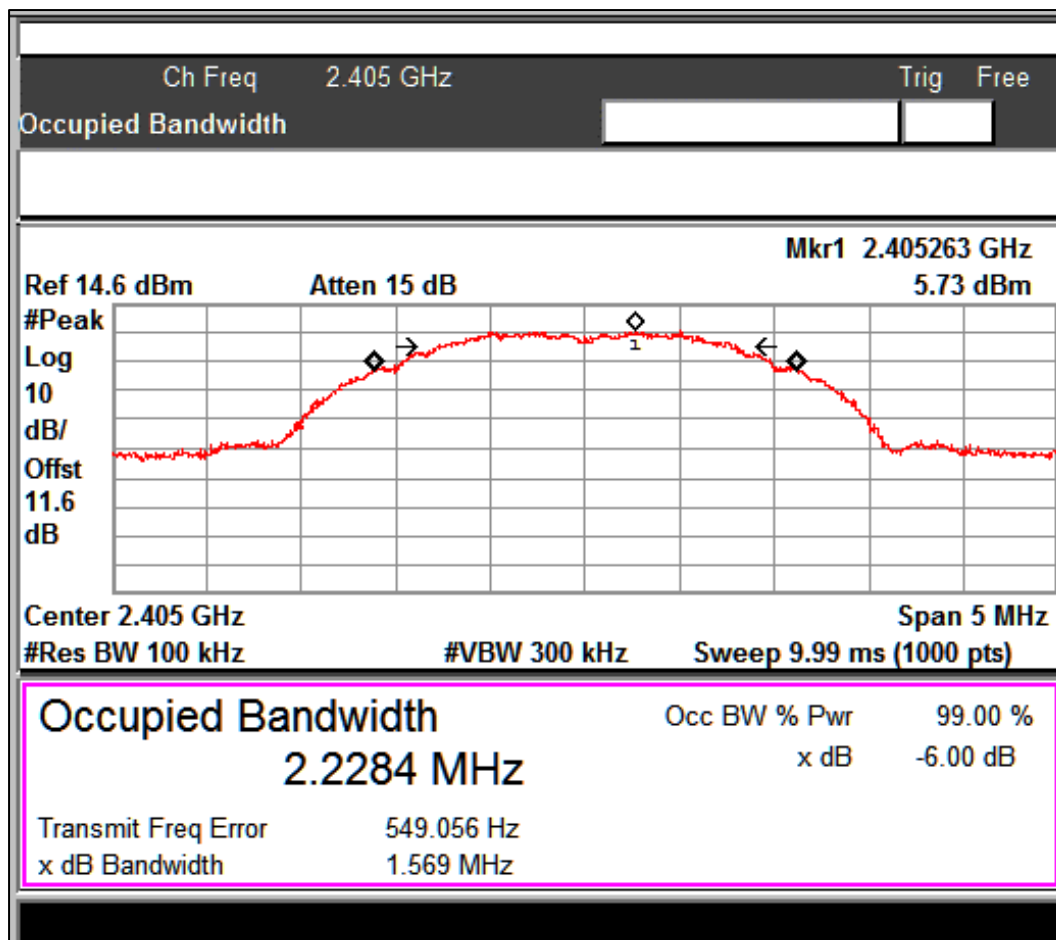


Channel Frequency: 2405MHz


Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 28 von 71
Page 28 of 71

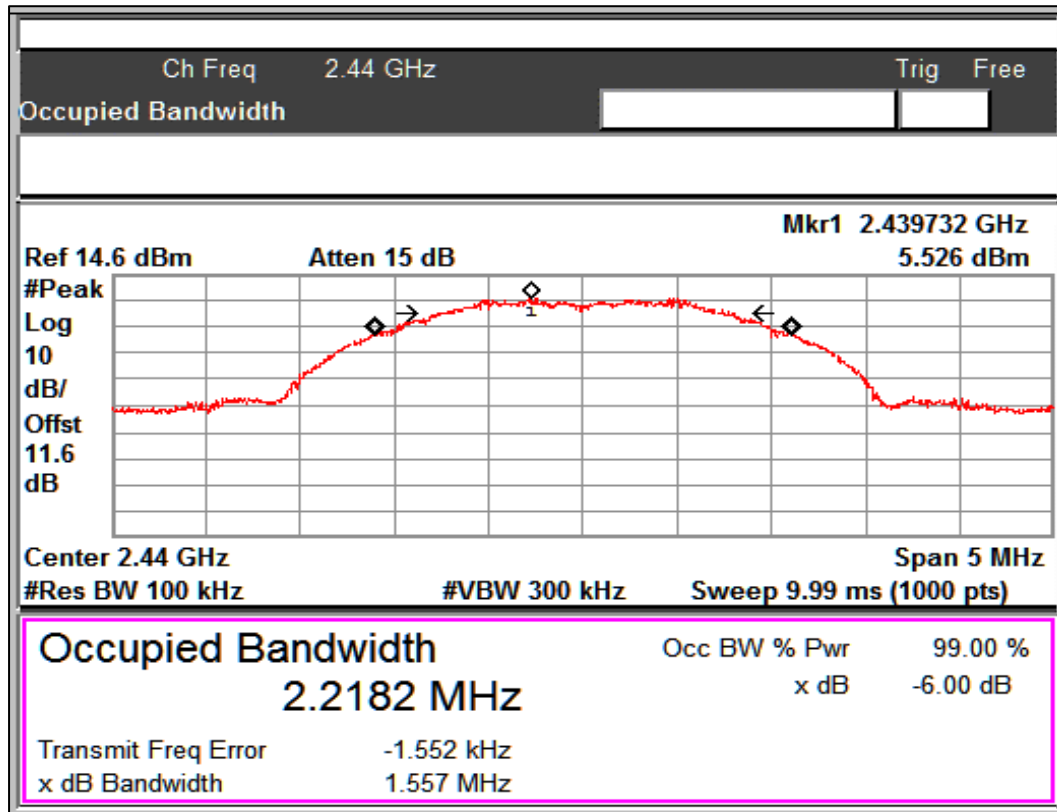

Channel Frequency: 2440MHz

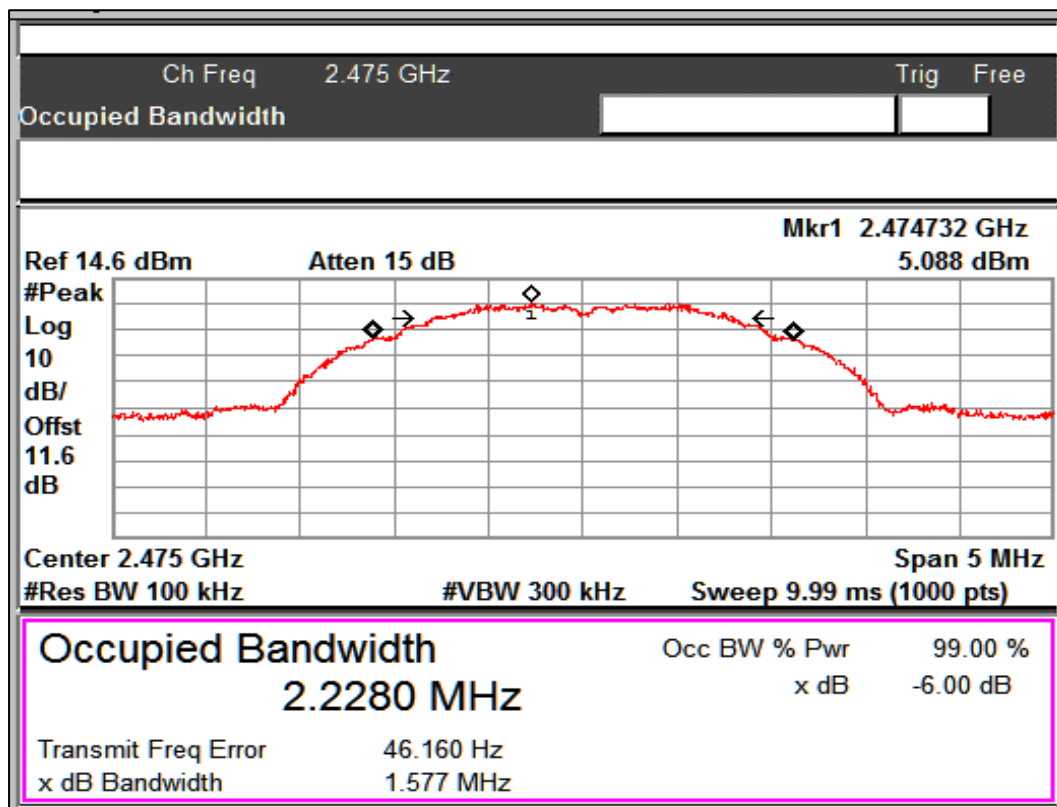

Channel Frequency: 2475MHz

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 29 von 71
Page 29 of 71


8.4 Emissions in non-restricted frequency bands and Conducted Spurious Emission

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d) / RSS 247 Issue 2, Section 5.5
Test Method	Subclause 11.11 of ANSI C63.10
Measurement Bandwidth	100 kHz
Detector	Peak
Port of testing	Antenna port
Requirement	In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits

Test Method:

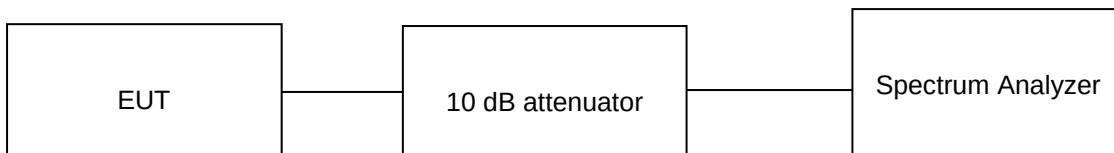

Test Condition

Normal Test Condition:

Temperature (Norm) = + 23.0 °C Voltage = 3.6V DC through DC Supply Relative humidity: 64%

KDB Guidelines applied:

Measurements were made as per section 8.5 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 30 von 71
Page 30 of 71

Test results:


Note:

1. All the losses are included during measurement and final values are mentioned in the test report
2. Final Value (dBm) = Measured Value (dBm) + Attenuator factor (10dB) + Cable loss (1.6dB)
3. This product do not support additional beamforming gain / directional gain, it uses single antenna and hence Directional gain of the single antenna is 0.5 dBi
4. Only worst case results are reported

8.4.1 Band edge and reference plots

Antenna 1:

Data rate	Channel Frequency (MHz)	Reference Value (B) (dBm)	Band edge Frequency (MHz)	Value at Band edge (A) (dBm)	A-B (dBc)	Minimum Limit (dBc)
250Kbps	2405	5.42	2399.61	-45.08	-50.50	-30
	2475	5.01	2483.50	-51.83	-56.84	-30

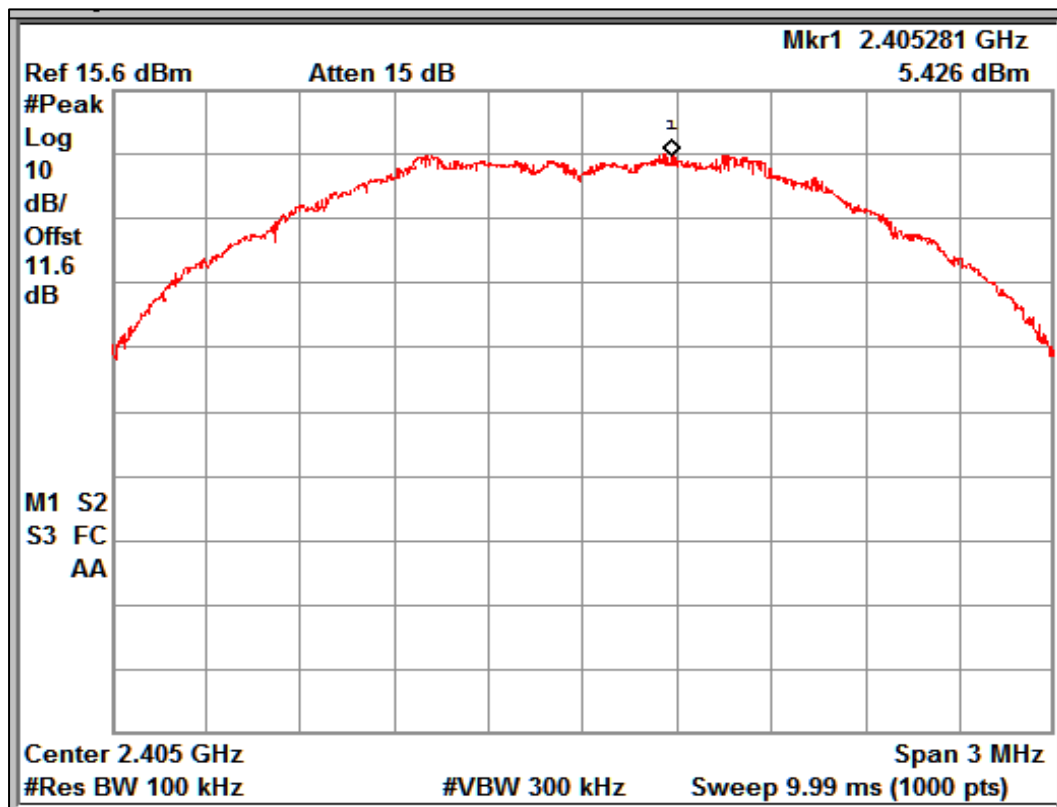


Reference plot for 2405MHz


Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F


Seite 31 von 71
Page 31 of 71

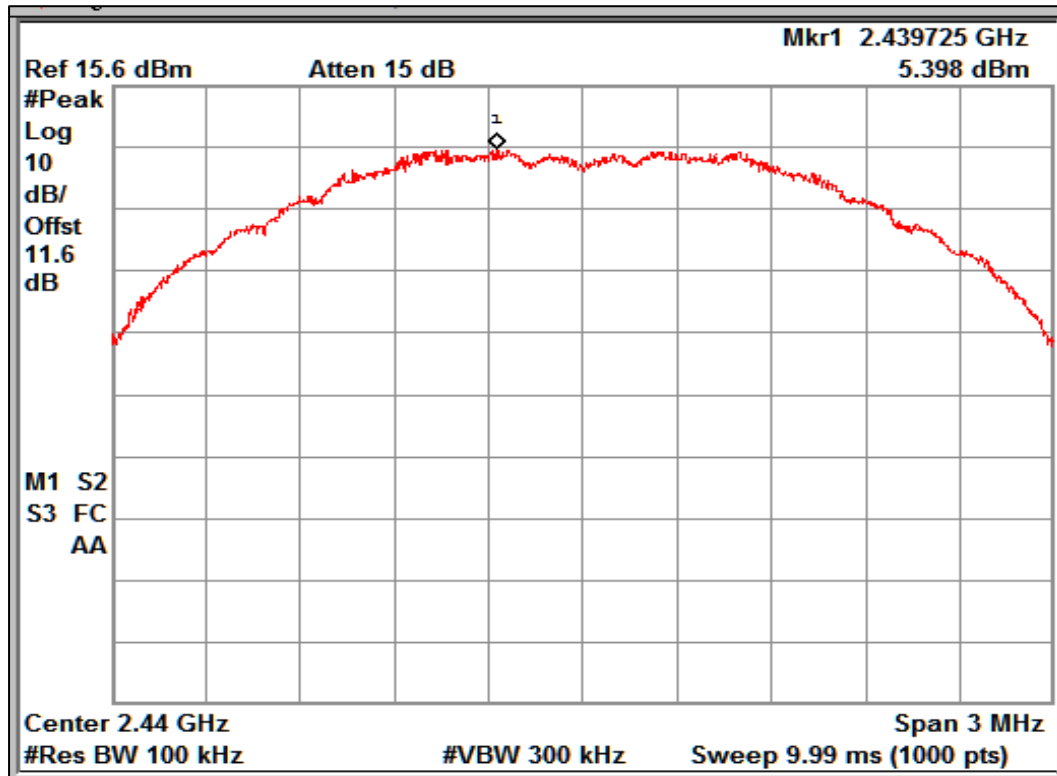


Reference plot for 2440MHz

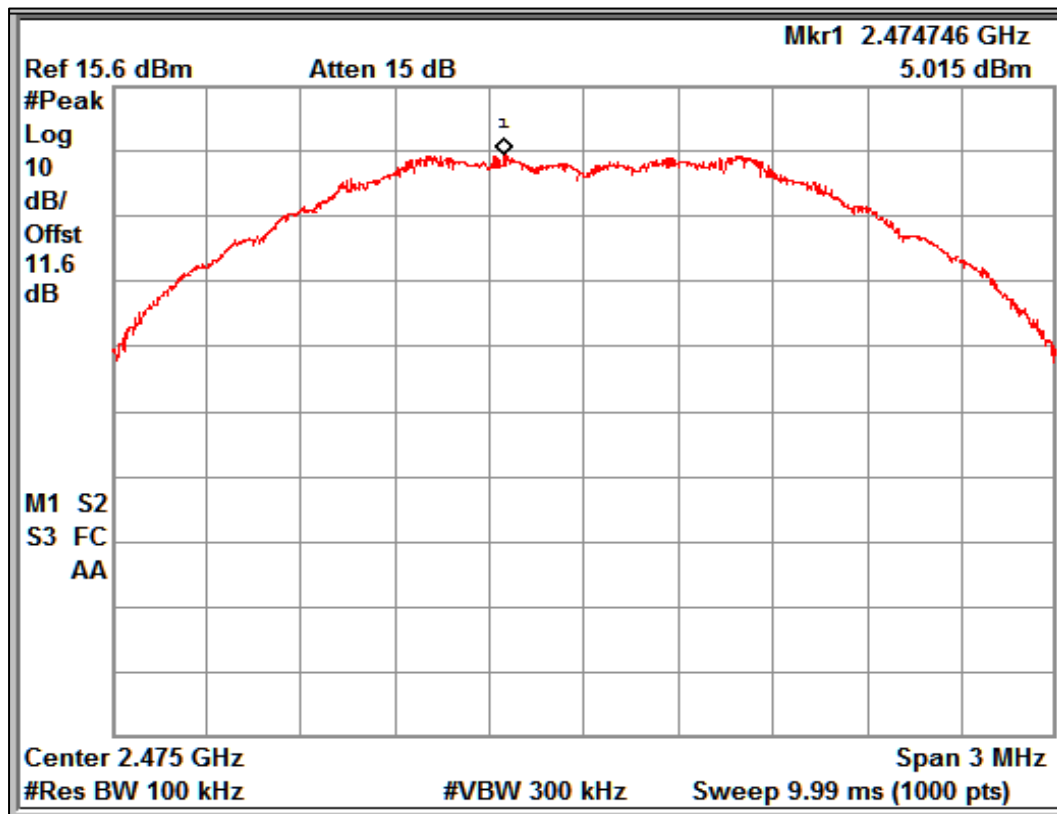

Reference plot for 2475MHz

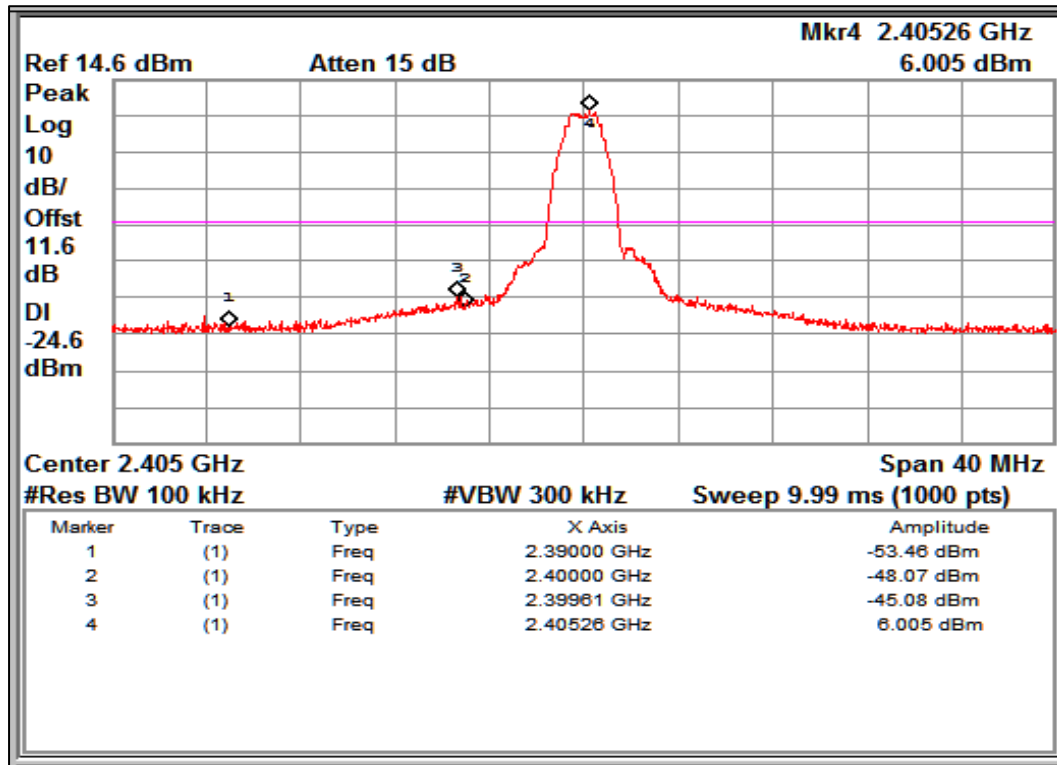

Band edge Channel Frequency 2405MHz

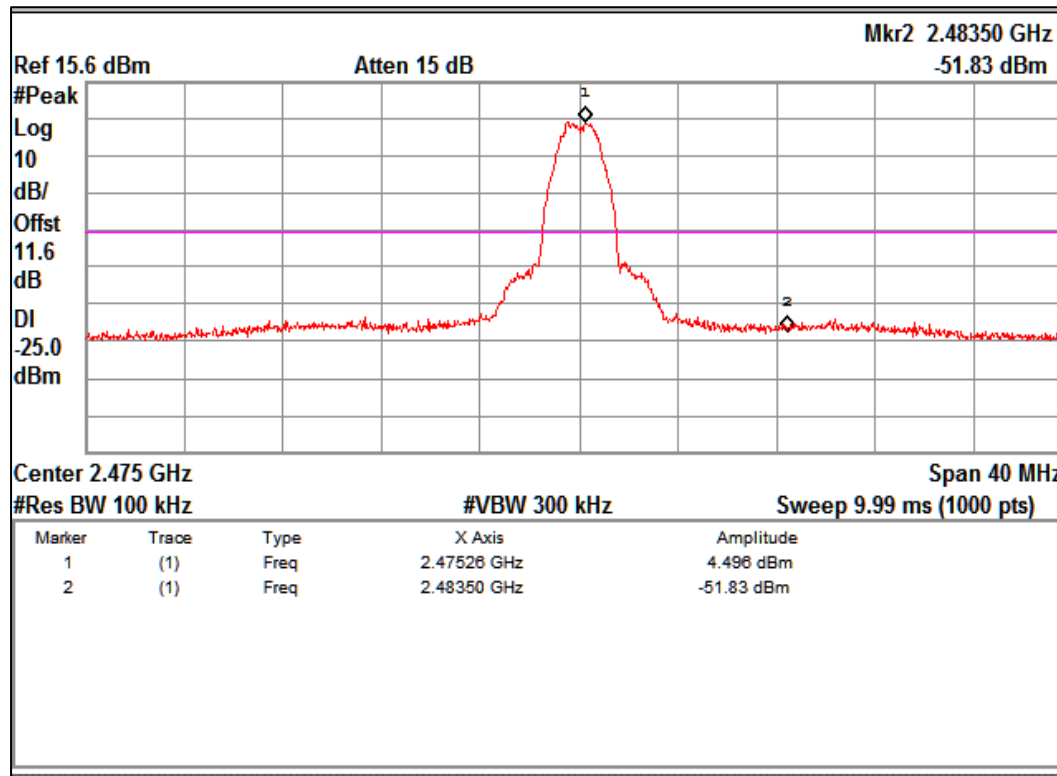

Band edge Channel Frequency 2475MHz

Prüfbericht - Nr.:

Test Report No.:


ULR-TC568822300000016F

Seite 33 von 71

Page 33 of 71

Antenna 2:

Data rate	Channel Frequency (MHz)	Reference Value (B) (dBm)	Band edge Frequency (MHz)	Value at Band edge (A) (dBm)	A-B (dBc)	Minimum Limit (dBc)
250Kbps	2405	5.65	2400.00	-47.43	-53.08	-30
	2475	5.07	2483.50	-50.93	-56.00	-30

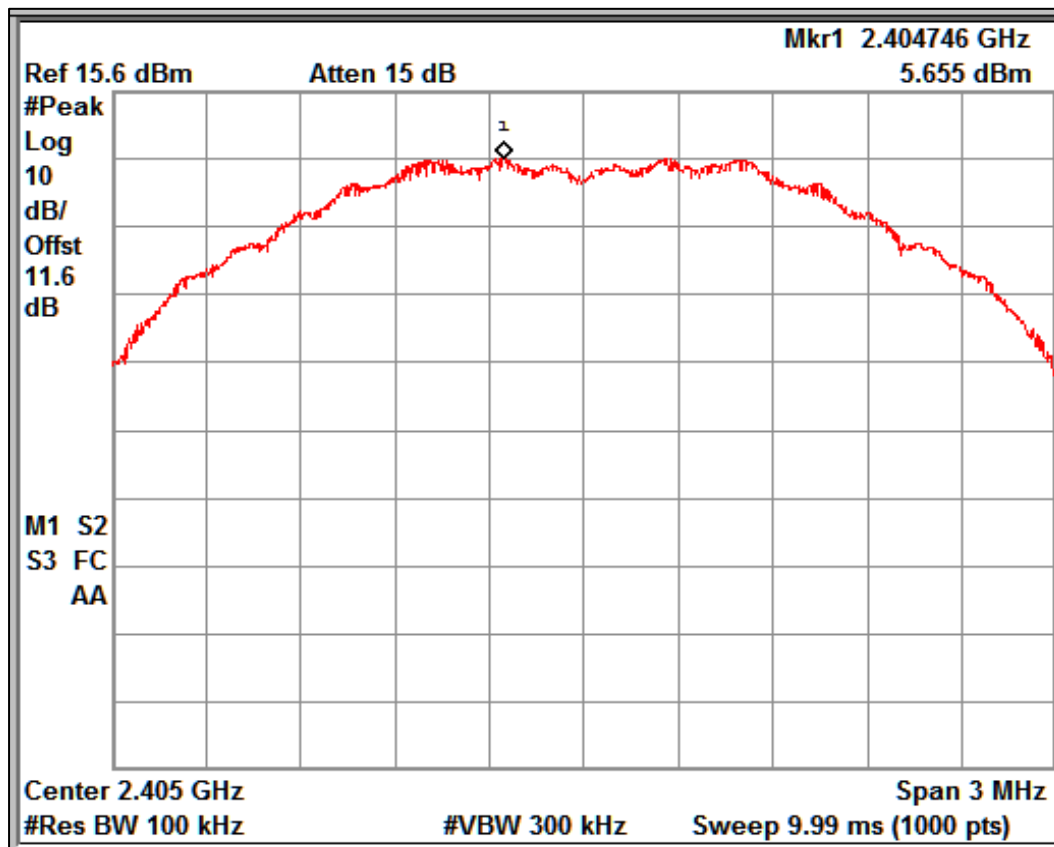


Reference plot for 2405MHz


Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F


Seite 34 von 71
Page 34 of 71

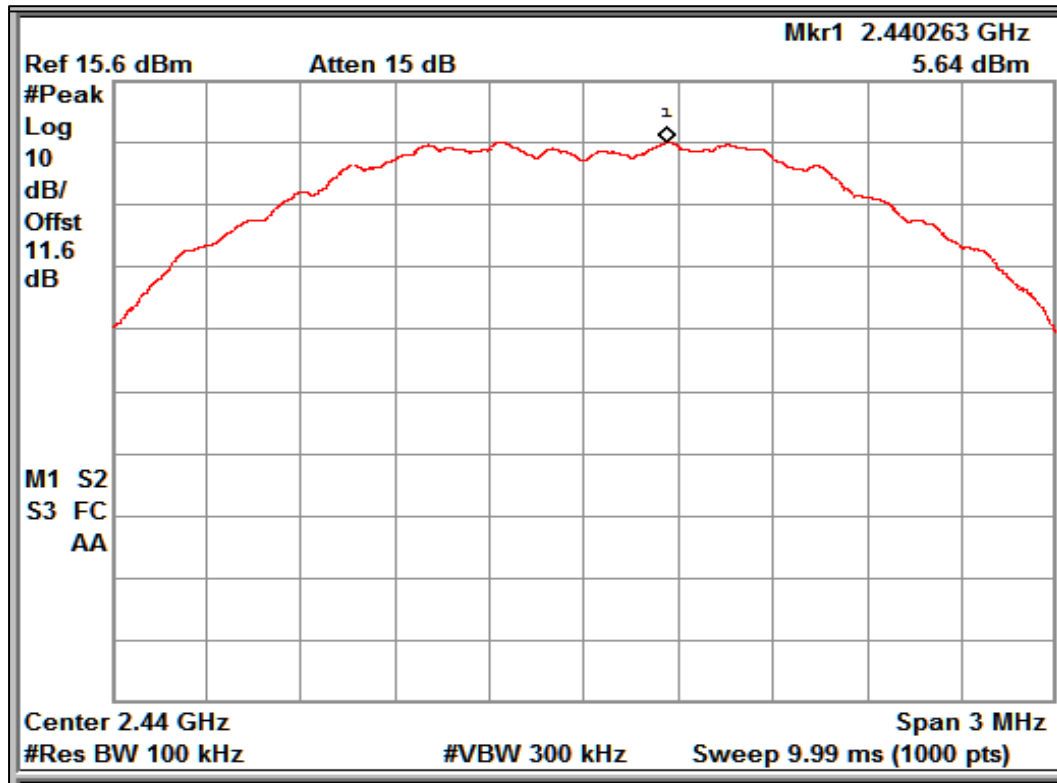


Reference plot for 2440MHz

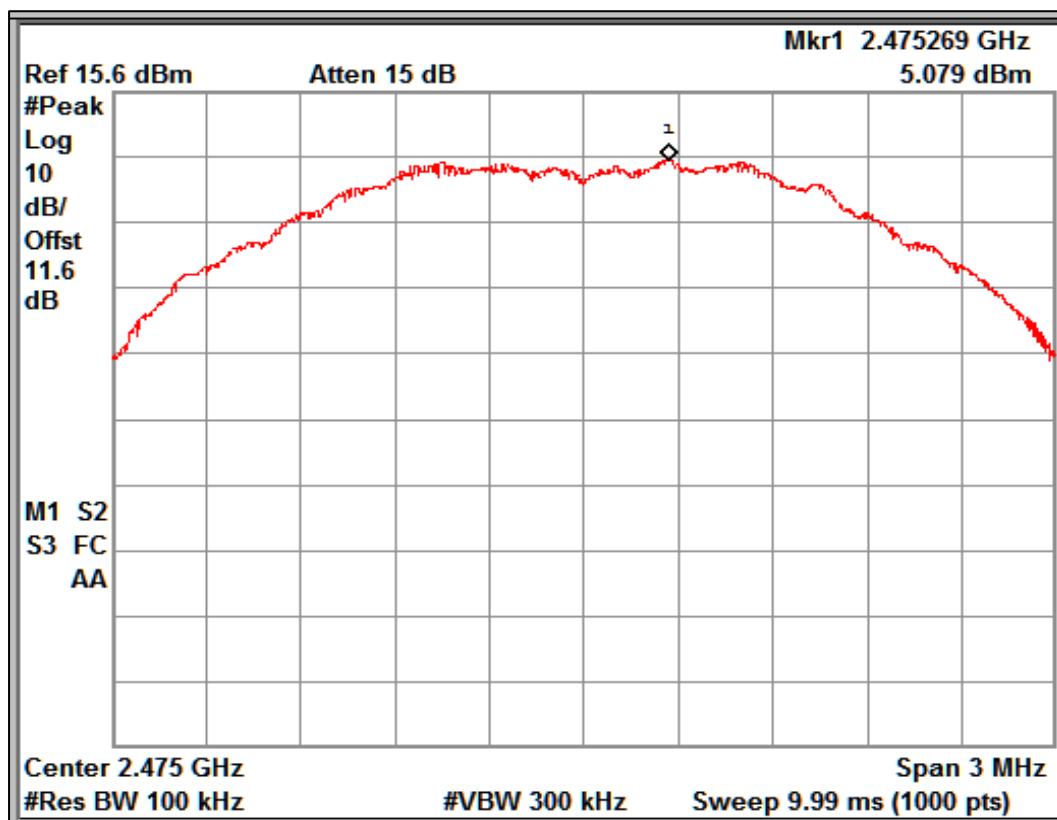

Reference plot for 2475MHz

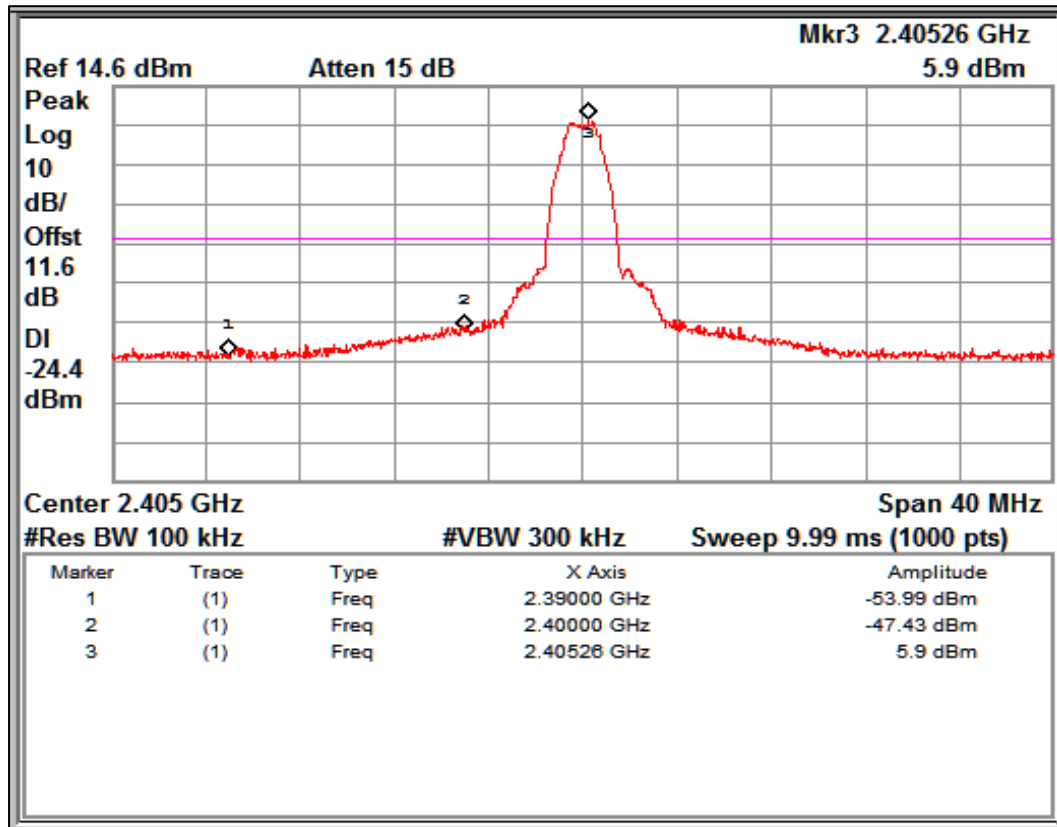


Band edge Channel Frequency 2405MHz

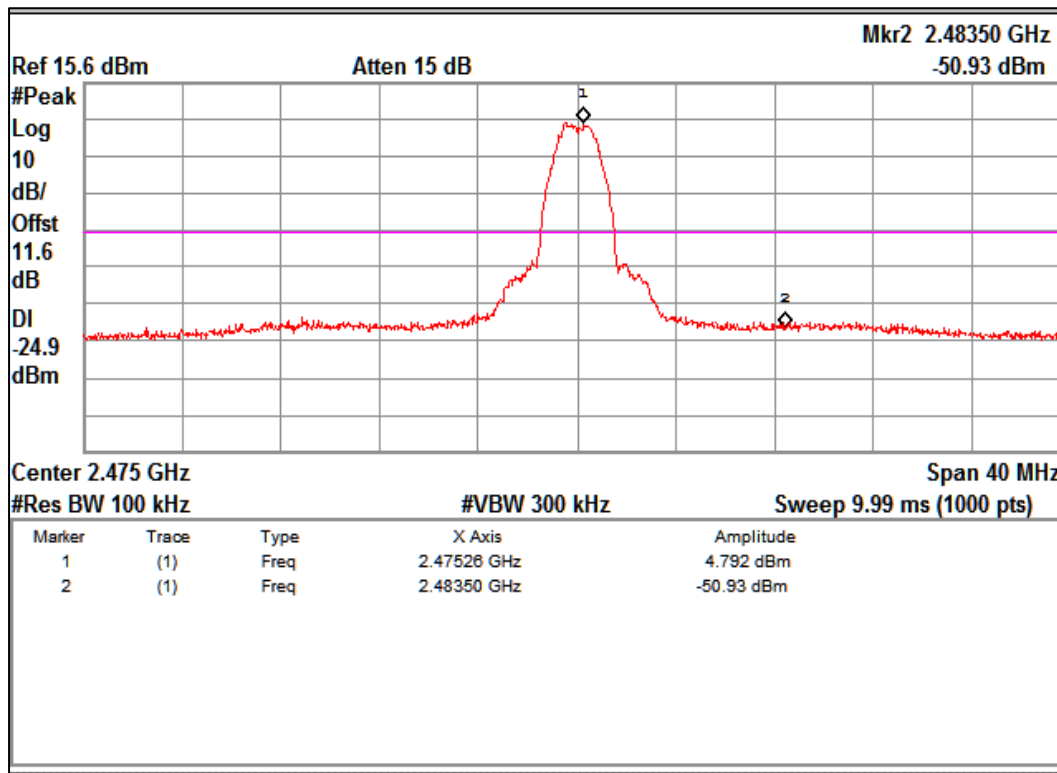

Band edge Channel Frequency 2475MHz


8.4.2 Out-Of-Band Emissions

Antenna1:

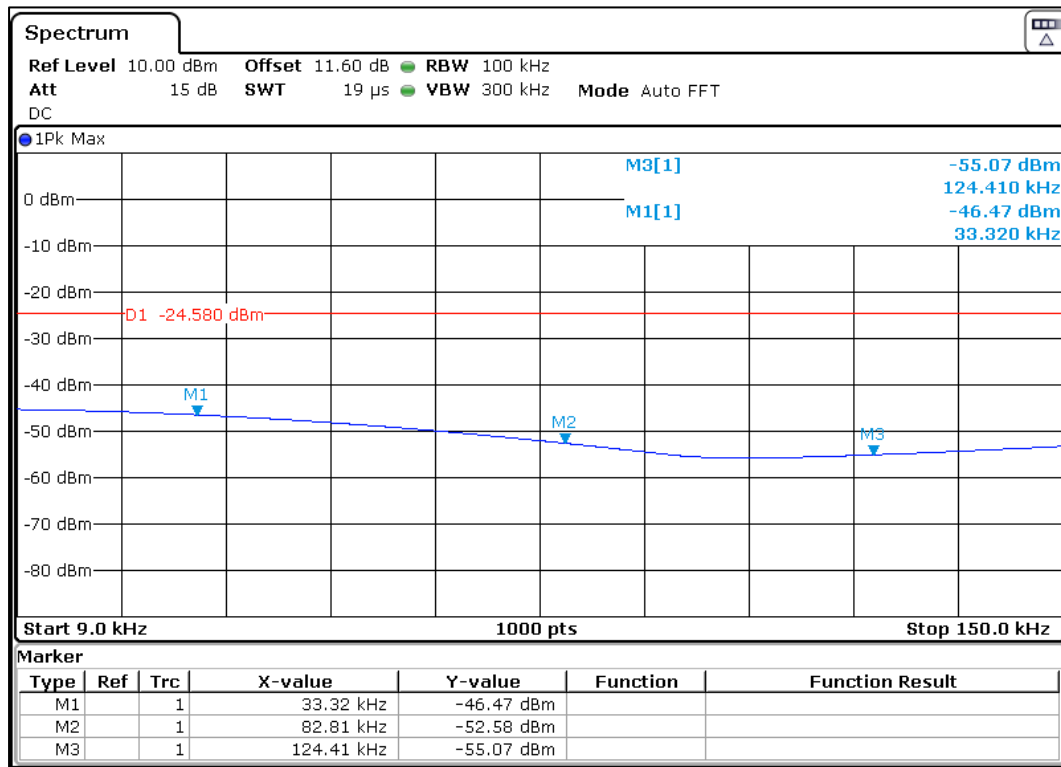

Channel Frequency 2405MHz

Frequency Range 9KHz – 150KHz

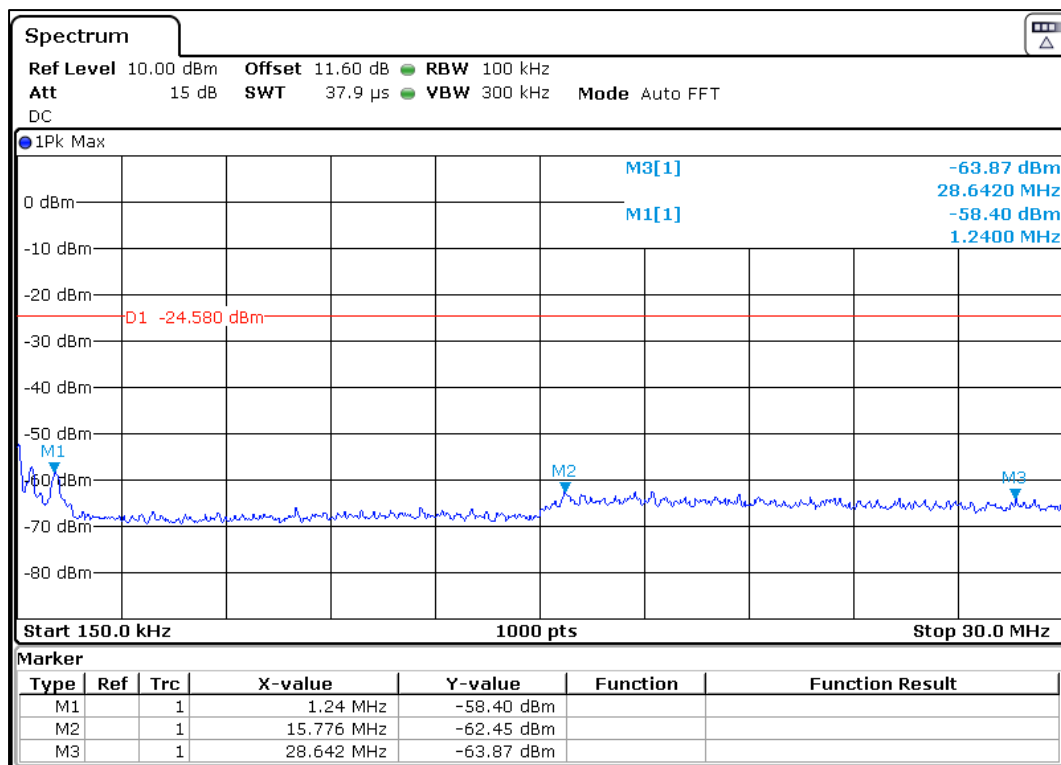


Channel Frequency 2405MHz

Frequency Range 150KHz – 30MHz

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000016F

Seite 37 von 71
Page 37 of 71

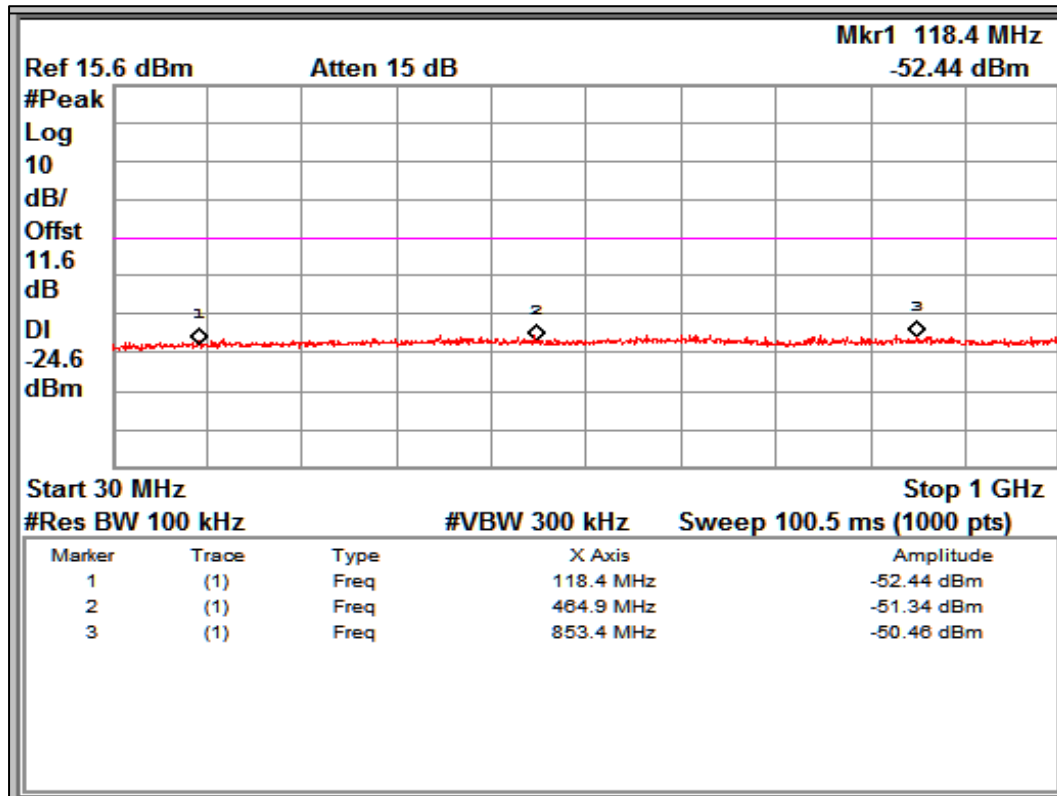

Channel Frequency 2405MHz

Frequency Range 30MHz – 1GHz

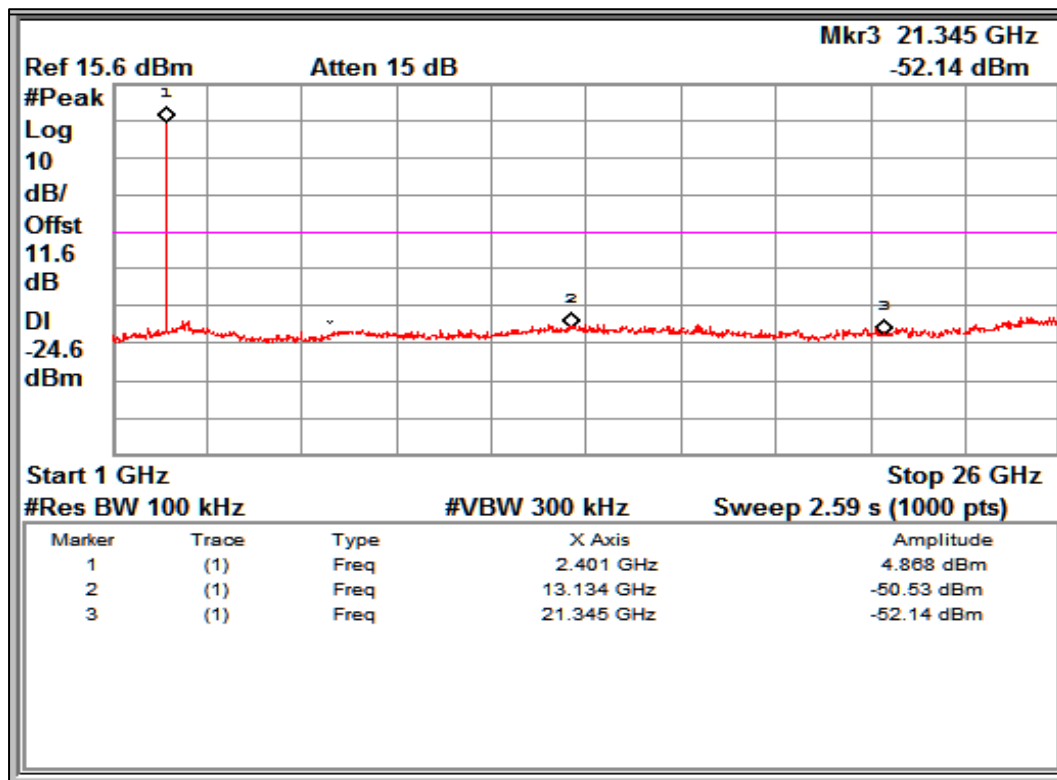


Channel Frequency 2405MHz

Frequency Range 1GHz – 26GHz

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000016F

Seite 38 von 71
Page 38 of 71

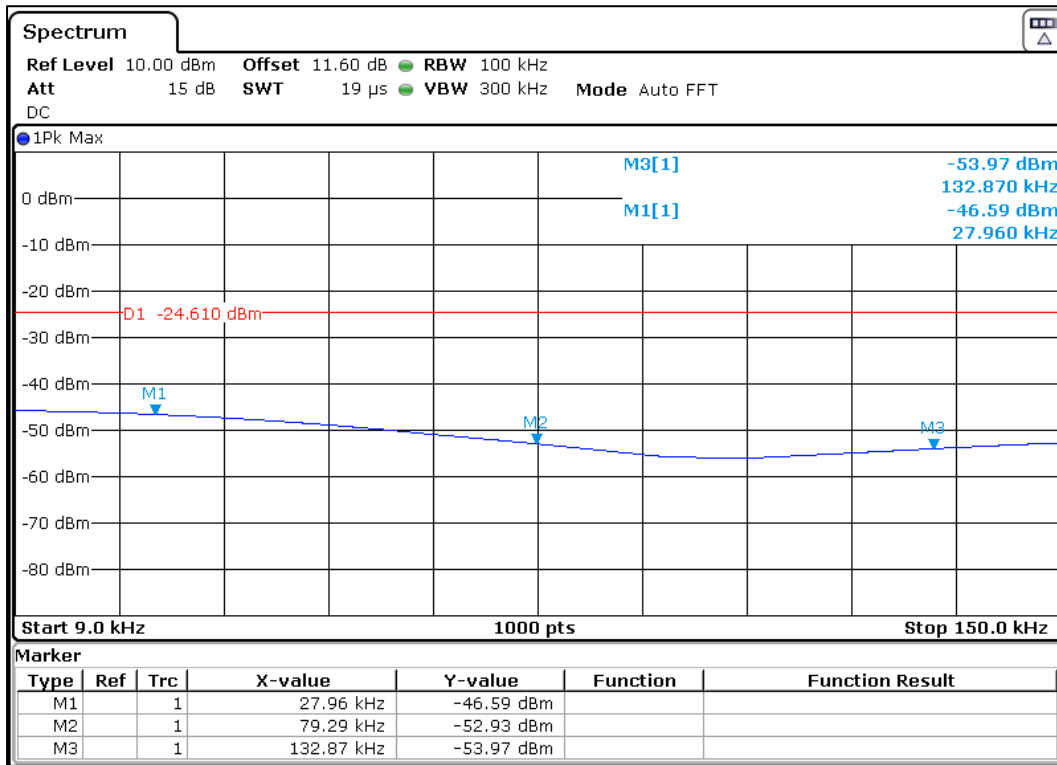

Channel Frequency 2440MHz

Frequency Range 9KHz – 150KHz

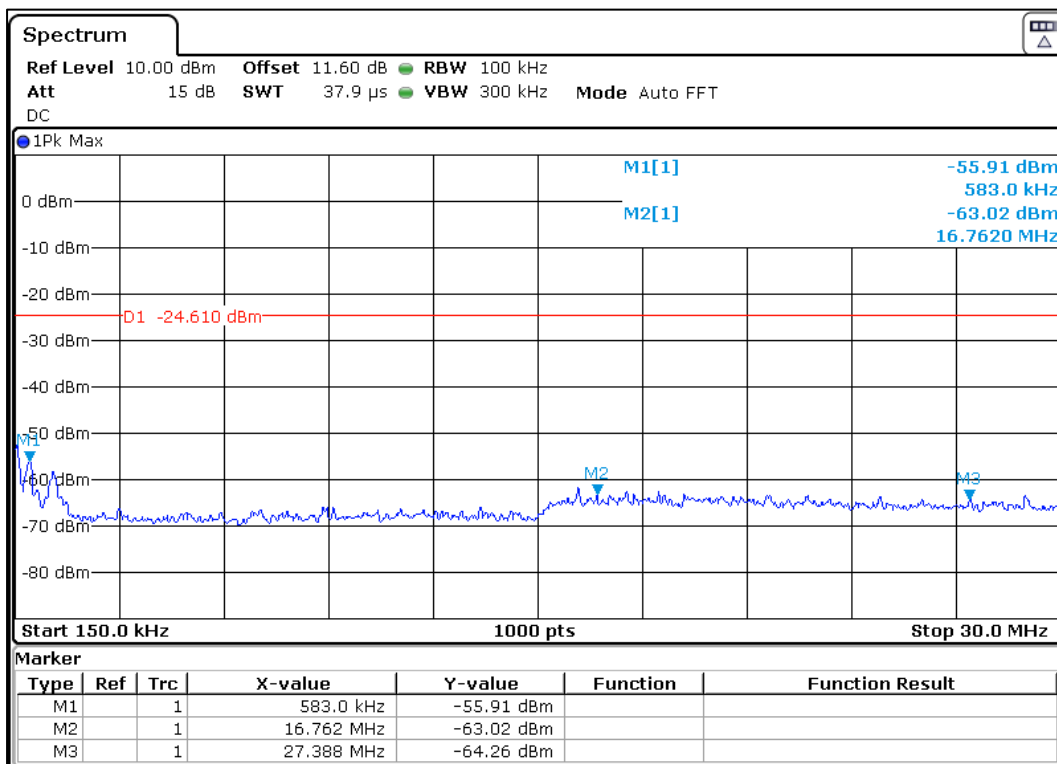


Channel Frequency 2440MHz

Frequency Range 150KHz – 30MHz

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000016F

Seite 39 von 71
Page 39 of 71

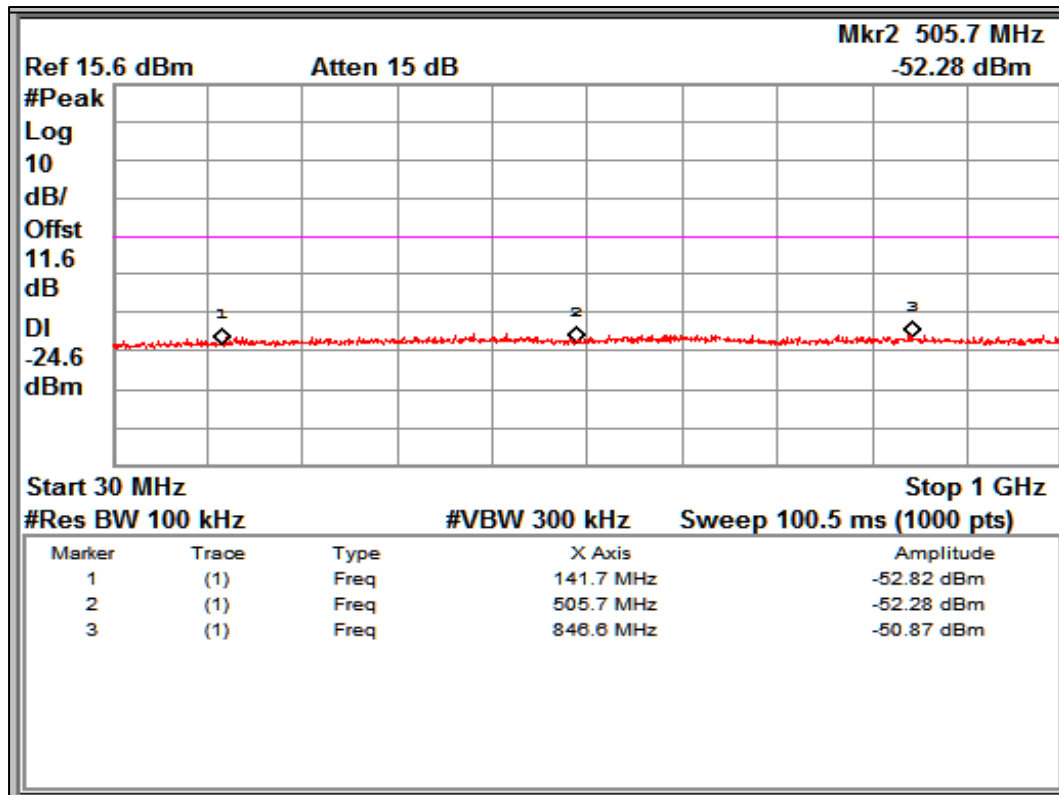


Channel Frequency 2440MHz

Frequency Range 30MHz – 1GHz

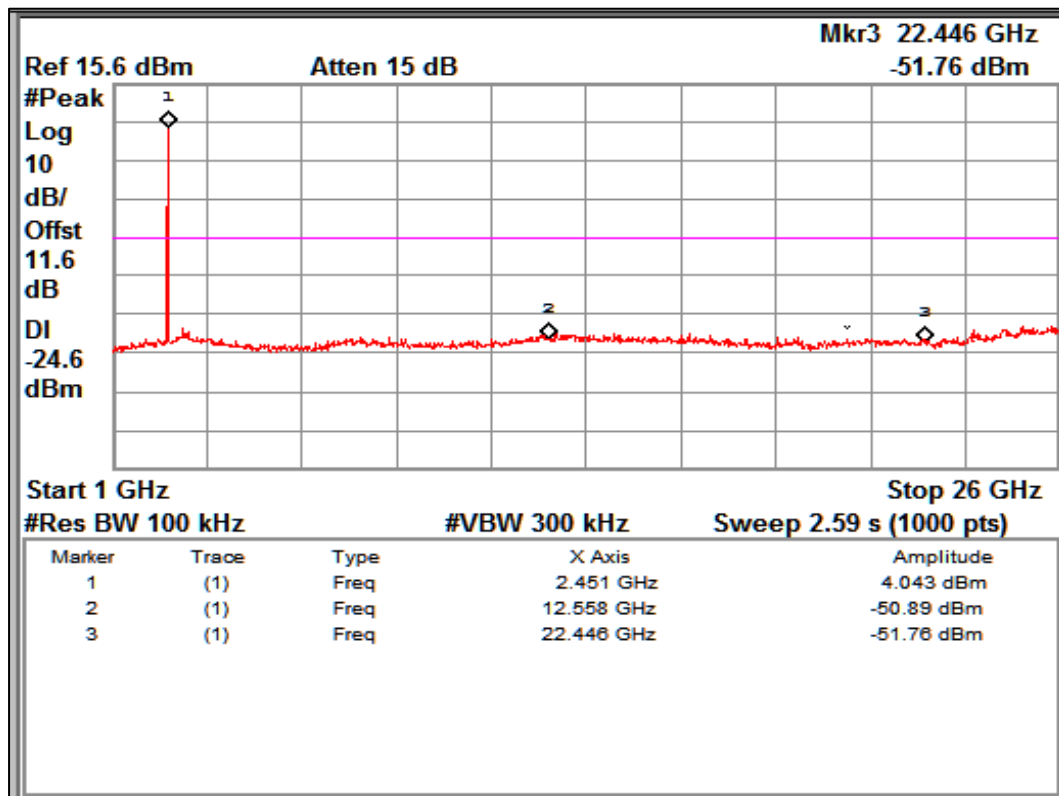


Channel Frequency 2440MHz

Frequency Range 1GHz – 26GHz

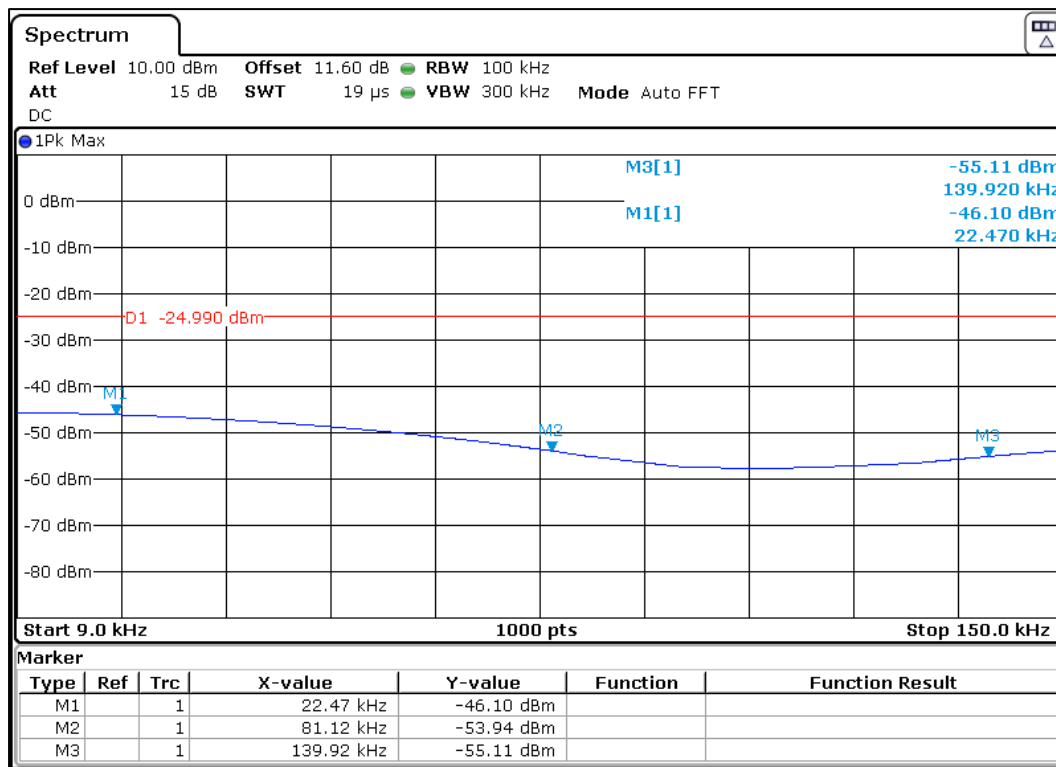

Channel Frequency 2475MHz

Frequency Range 9KHz – 150KHz

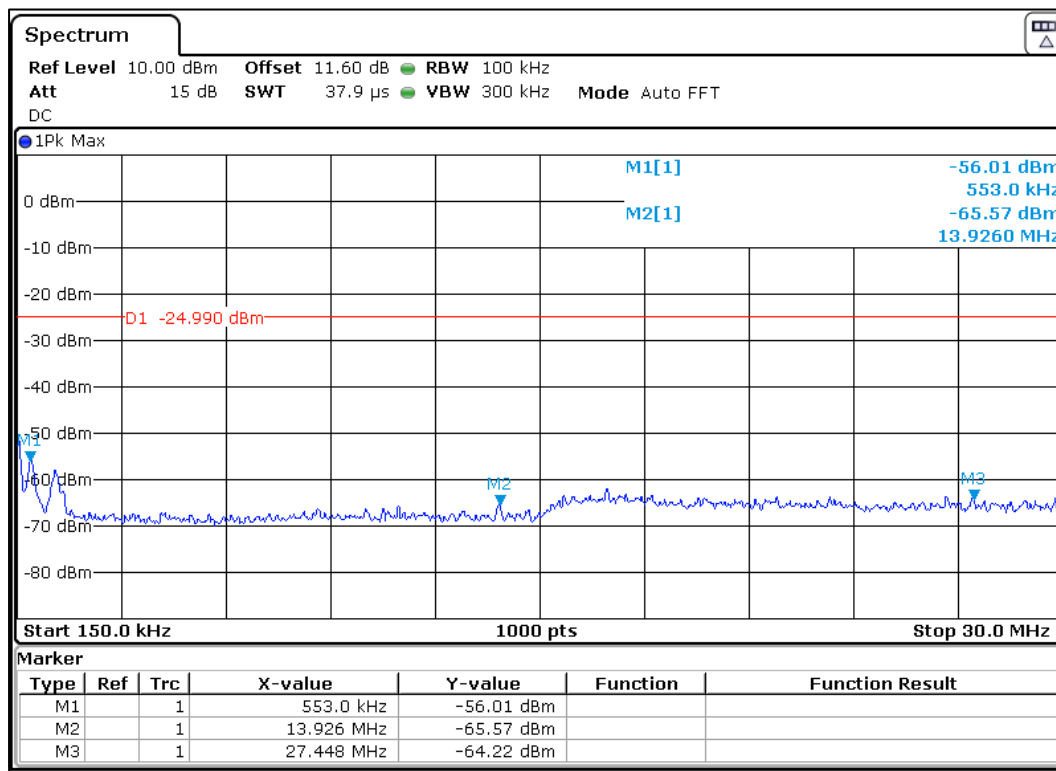


Channel Frequency 2475MHz

Frequency Range 150KHz – 30MHz

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000016F

Seite 41 von 71
Page 41 of 71

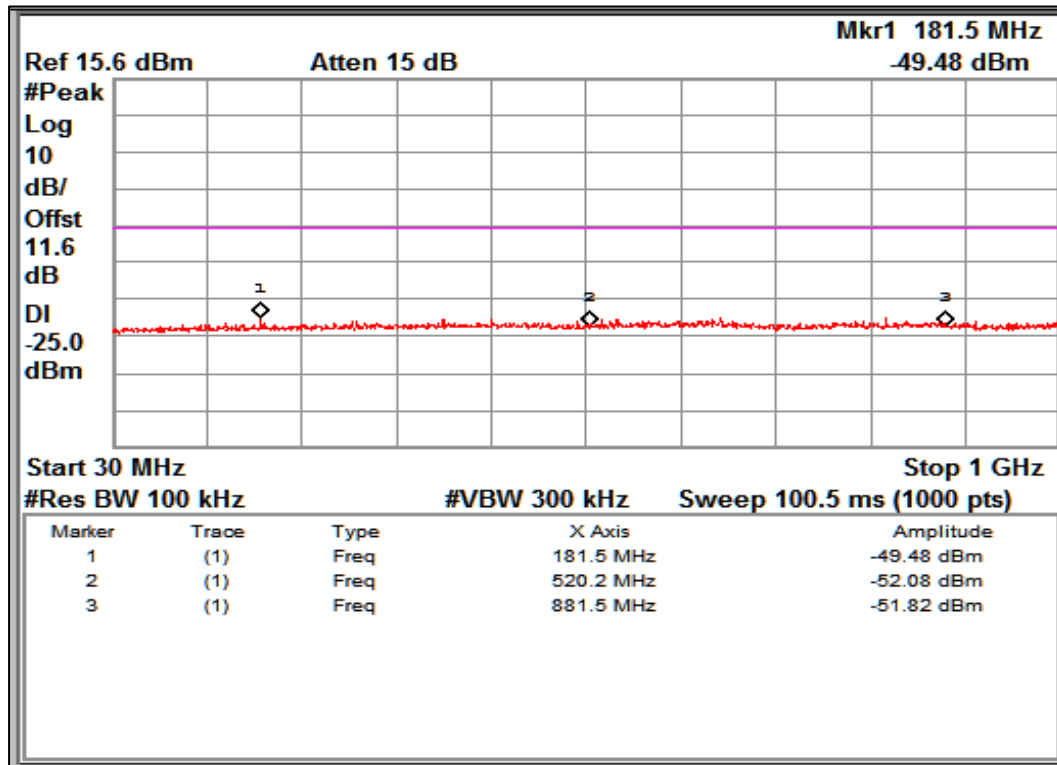

Channel Frequency 2475MHz

Frequency Range 30MHz – 1GHz

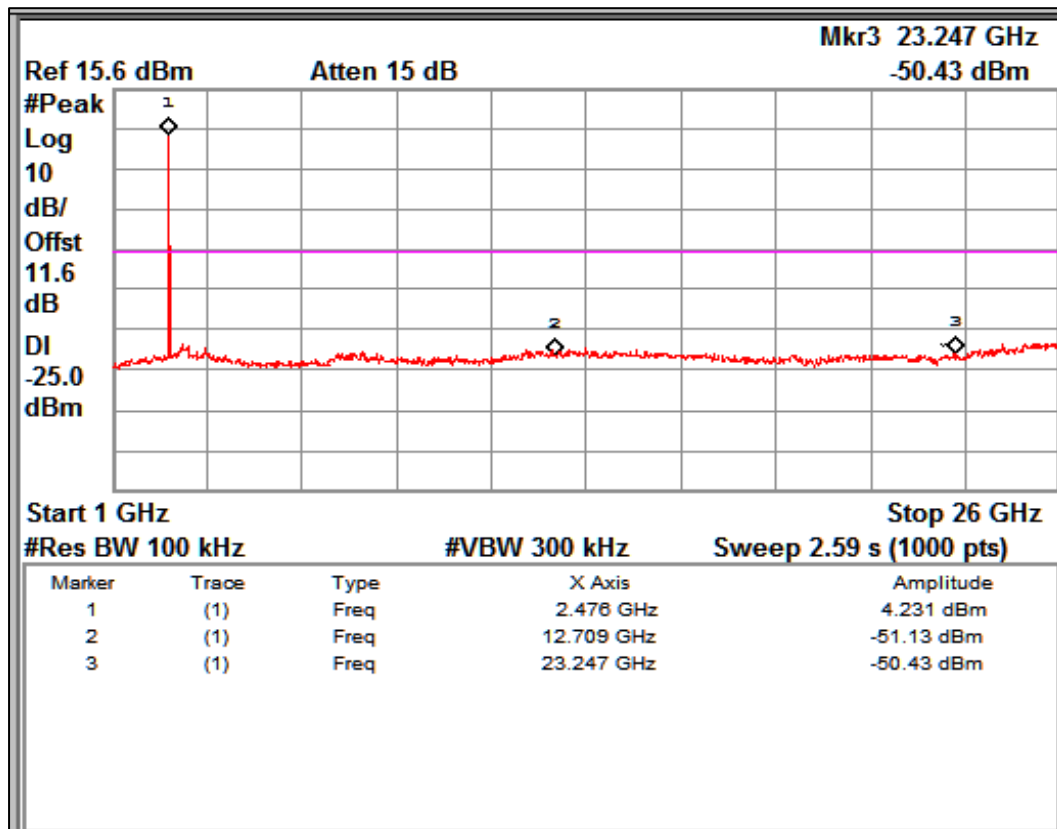

Channel Frequency 2475MHz

Frequency Range 1GHz – 26GHz

Prüfbericht - Nr.:


Test Report No.:

ULR-TC568822300000016F

Seite 42 von 71


Page 42 of 71

Antenna 2:

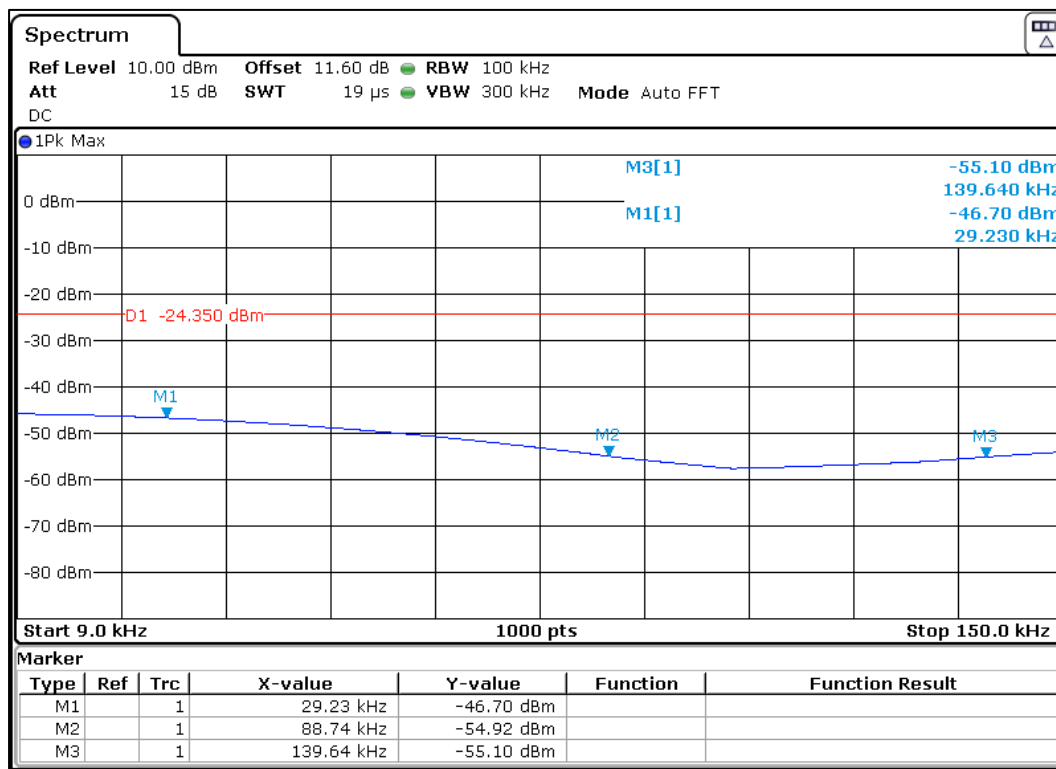

Channel Frequency 2405MHz

Frequency Range 9KHz – 150KHz

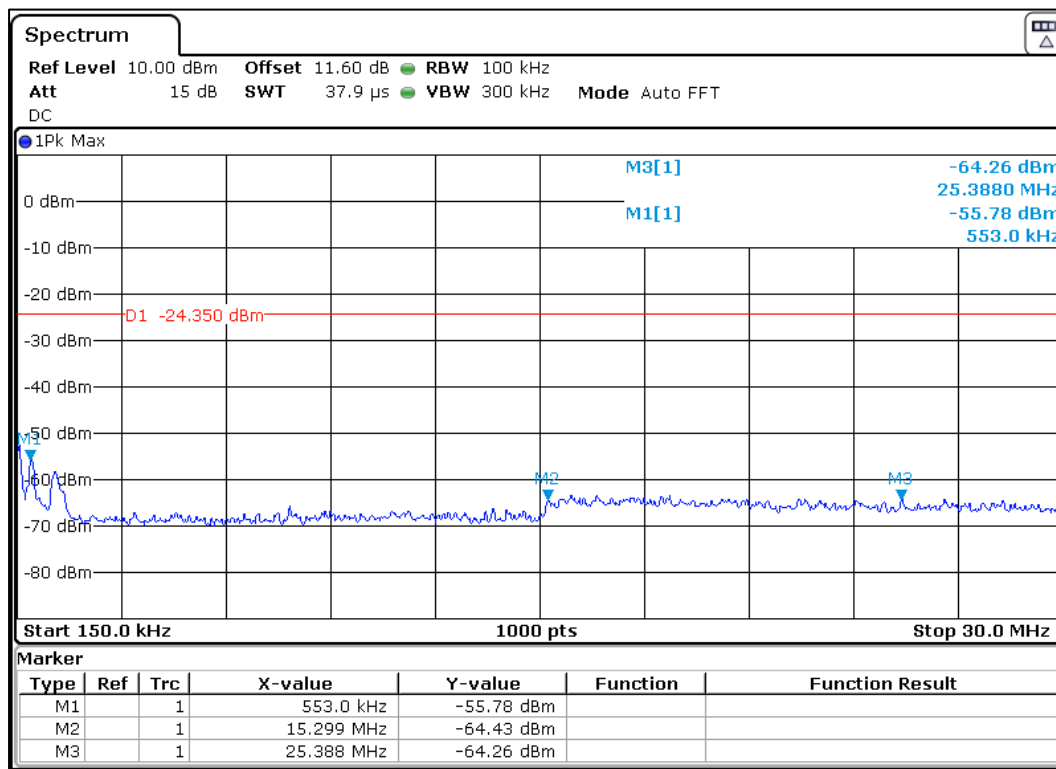

Channel Frequency 2405MHz

Frequency Range 150KHz – 30MHz


Prüfbericht - Nr.:

Test Report No.:

ULR-TC568822300000016F


Seite 43 von 71

Page 43 of 71

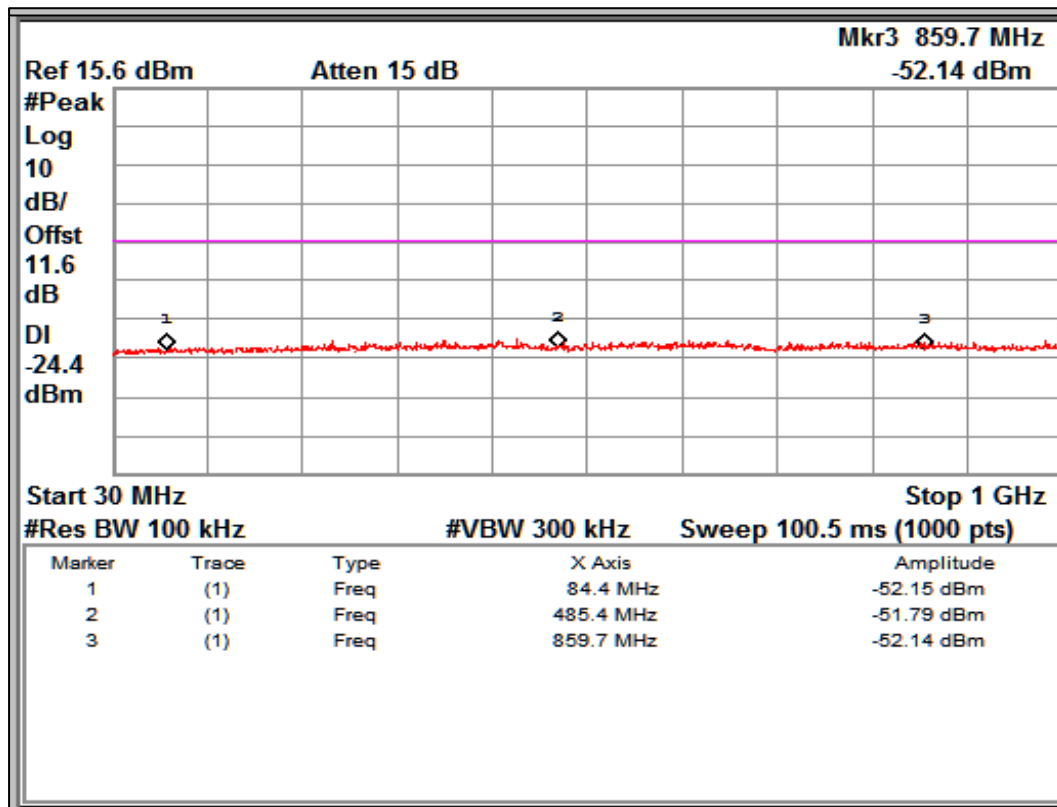

Channel Frequency 2405MHz

Frequency Range 30MHz – 1GHz

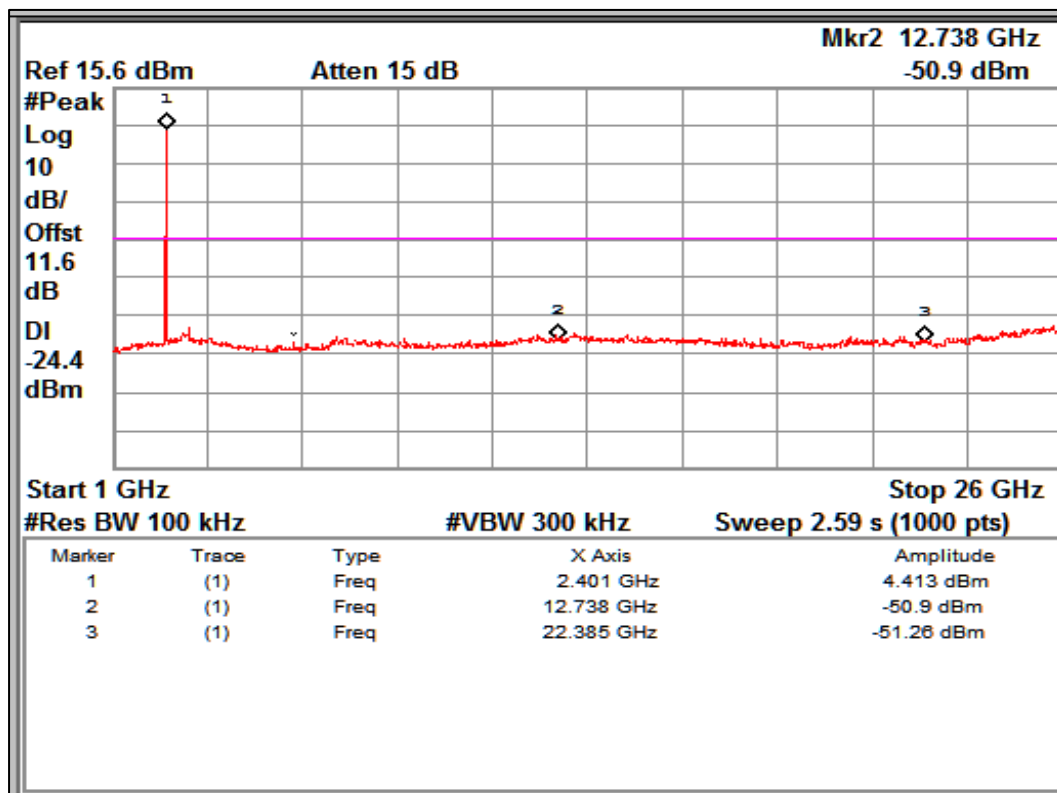


Channel Frequency 2405MHz

Frequency Range 1GHz – 26GHz

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000016F

Seite 44 von 71
Page 44 of 71

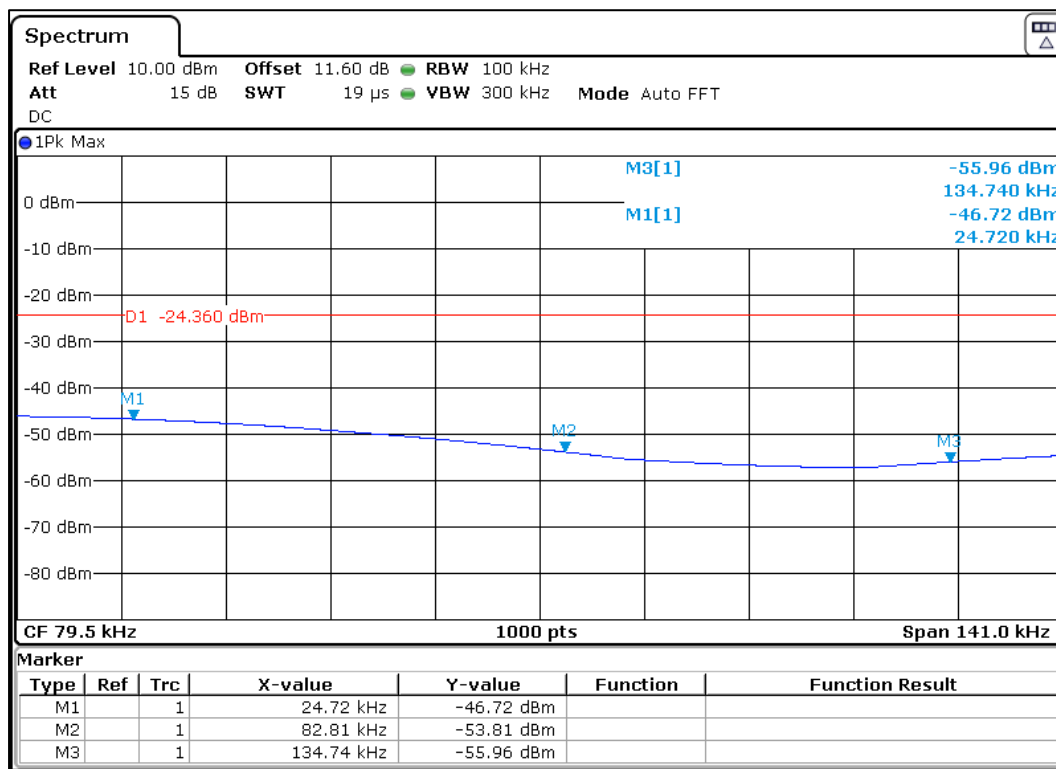

Channel Frequency 2440MHz

Frequency Range 9KHz – 150KHz

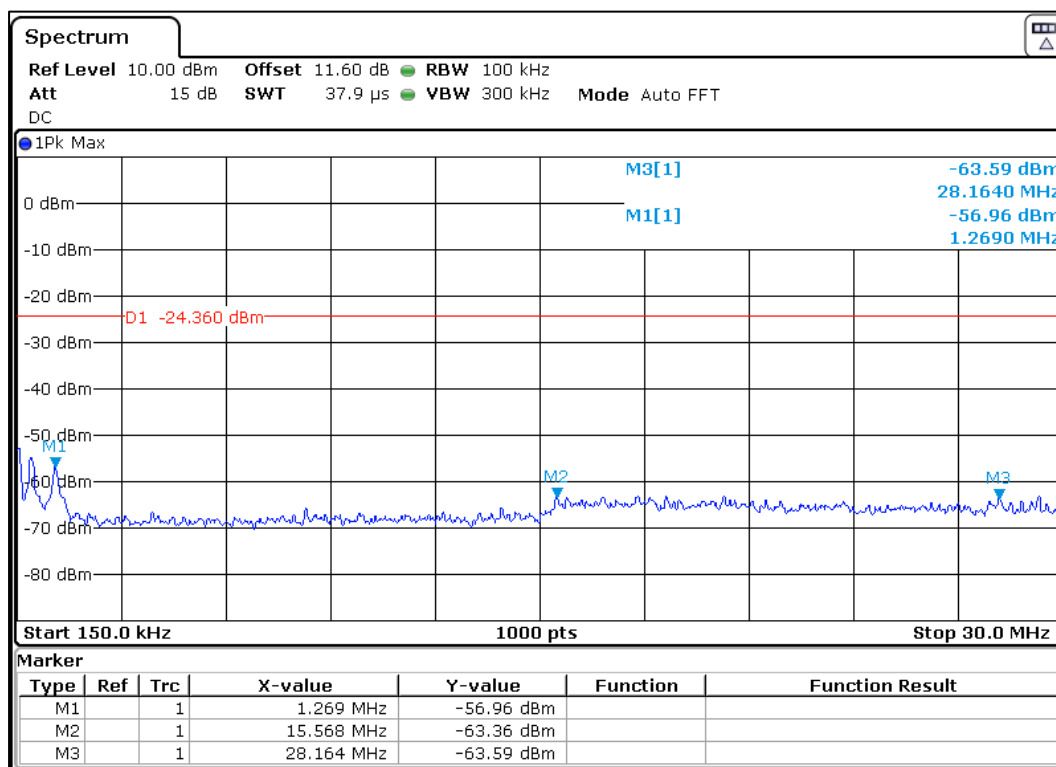


Channel Frequency 2440MHz

Frequency Range 150KHz – 30MHz

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000016F

Seite 45 von 71
Page 45 of 71

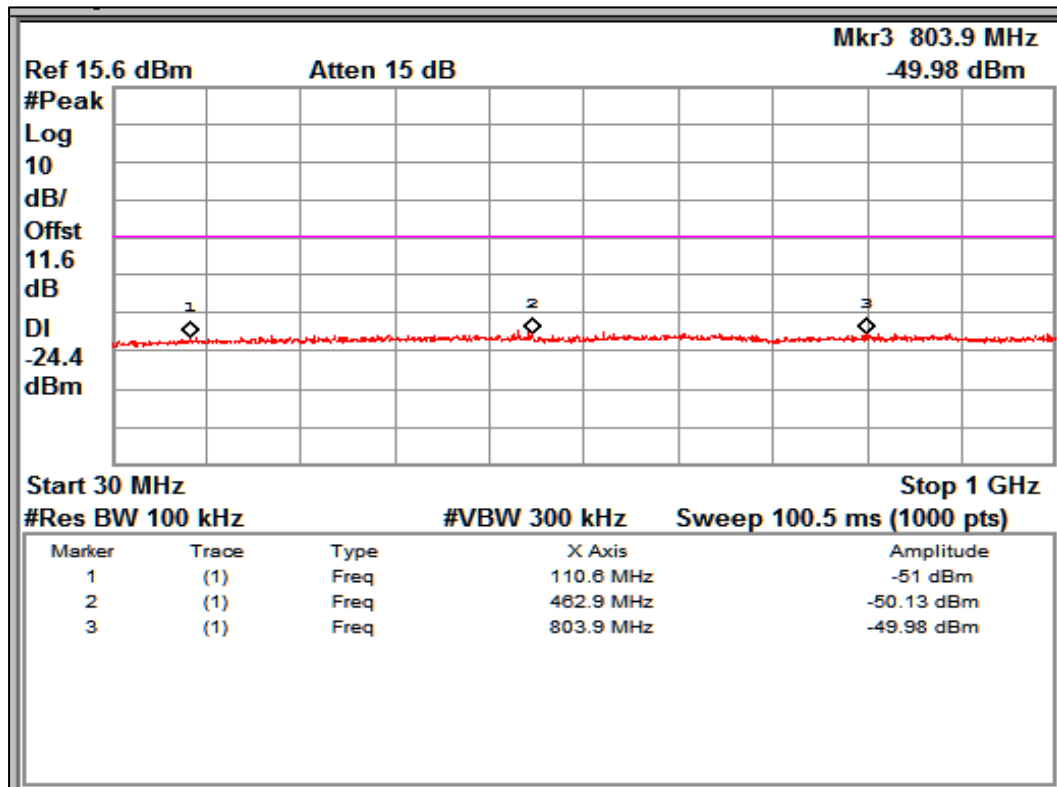


Channel Frequency 2440MHz

Frequency Range 30MHz – 1GHz

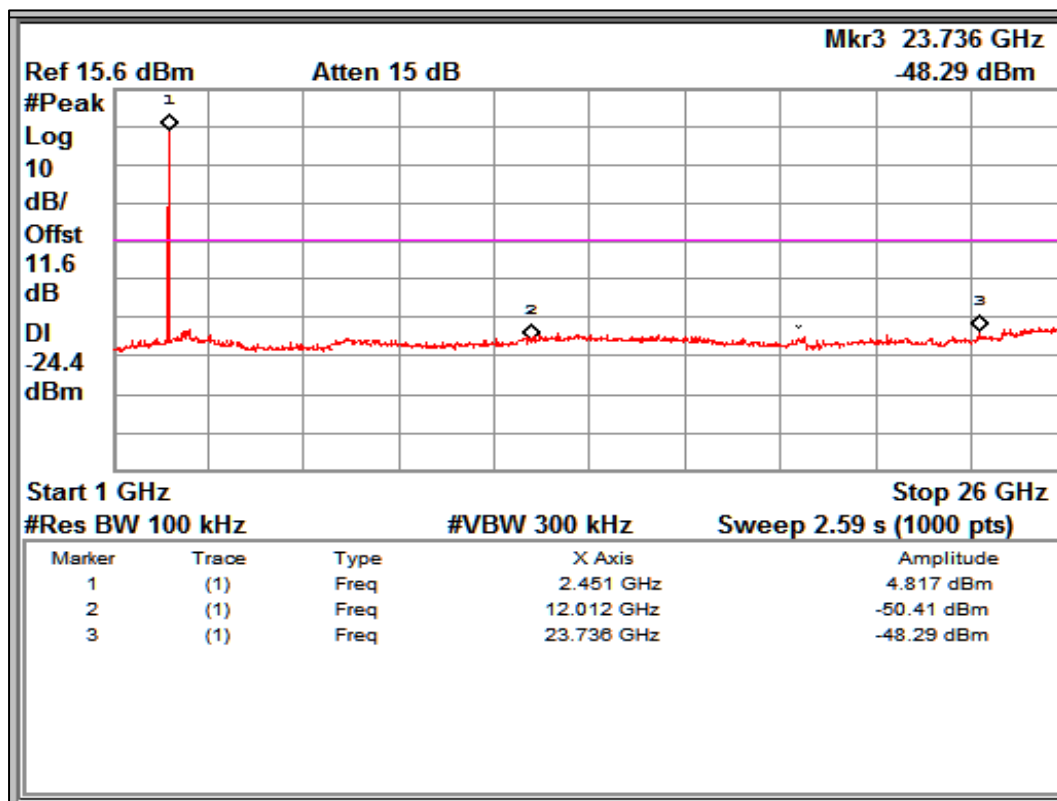


Channel Frequency 2440MHz

Frequency Range 1GHz – 26GHz

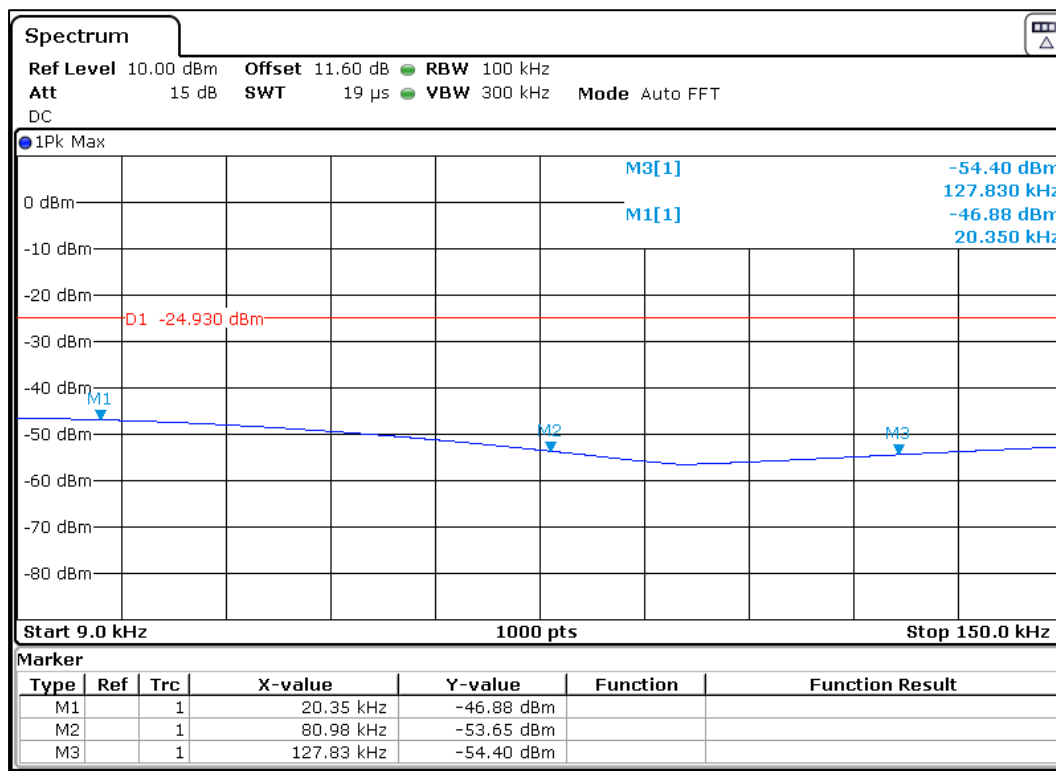

Channel Frequency 2475MHz

Frequency Range 9KHz – 150KHz

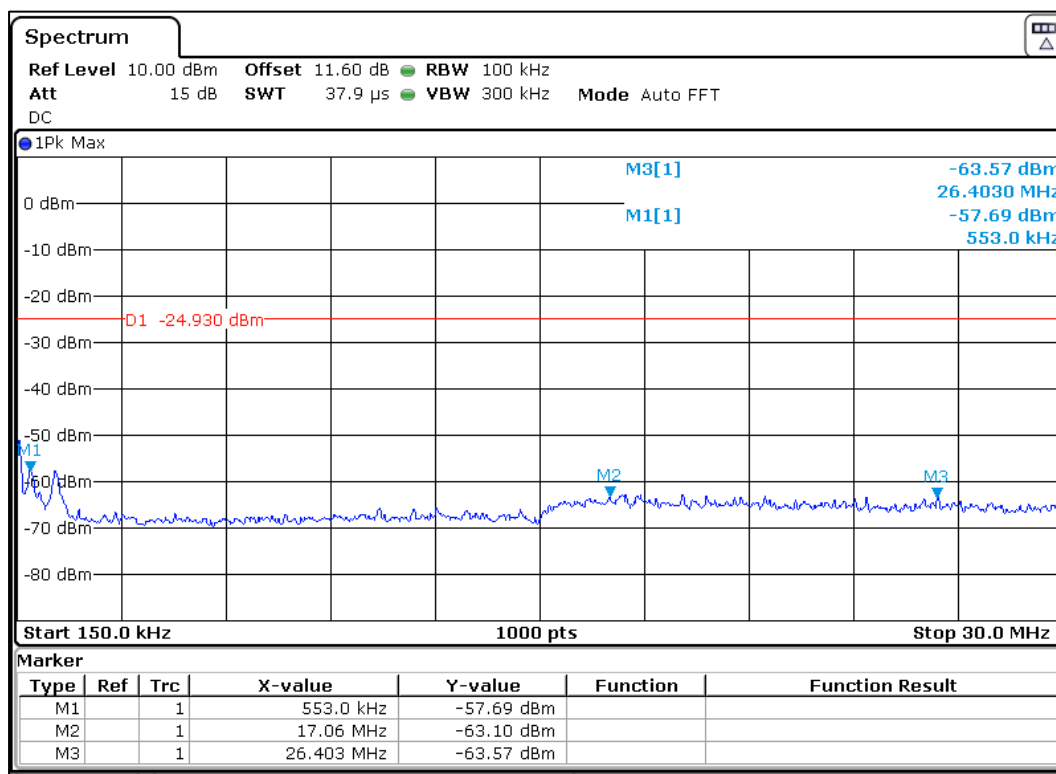


Channel Frequency 2475MHz

Frequency Range 150KHz – 30MHz

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000016F

Seite 47 von 71
Page 47 of 71

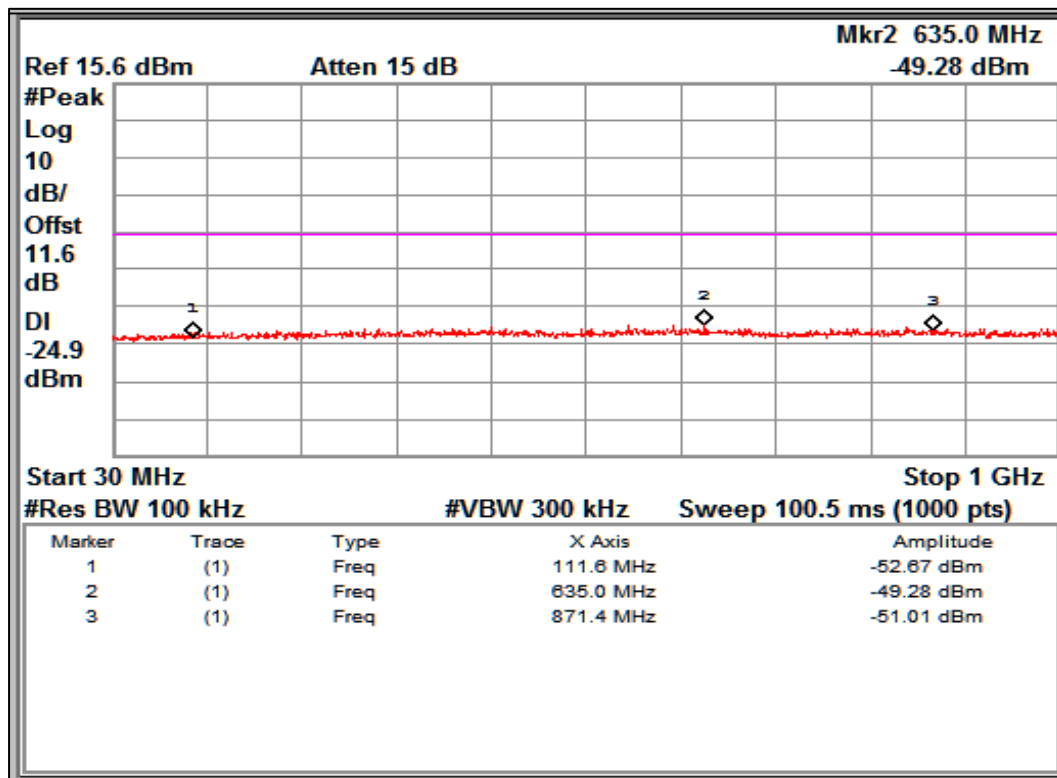

Channel Frequency 2475MHz

Frequency Range 30MHz – 1GHz

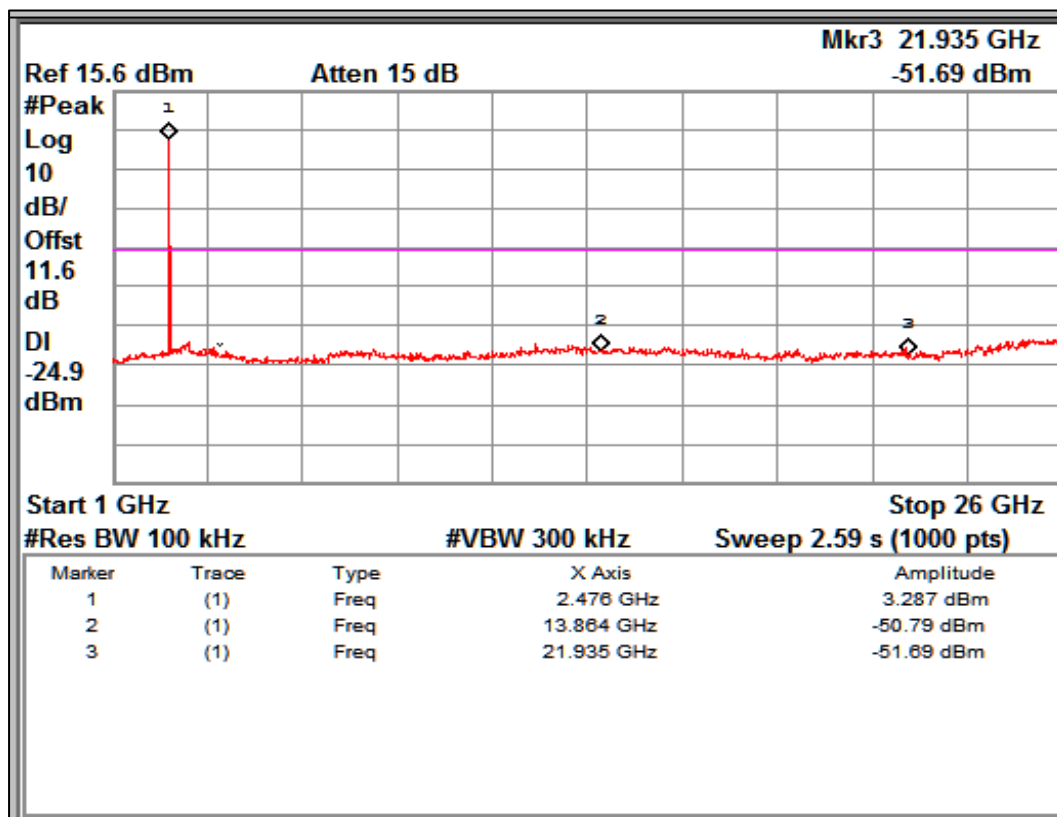

Channel Frequency 2475MHz

Frequency Range 1GHz – 26GHz

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 48 von 71
Page 48 of 71

8.5 Spurious Radiated Emissions & Restricted Bands of Operation

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d) / (15.209 & 15.205)
Test Method	ANSI C63.10
Measurement Location	Semi Anechoic Chamber 30MHz - 1 GHz Fully Anechoic Chamber 1 GHz - 40GHz
Measurement Bandwidth	100 kHz for frequency range < 1GHz 1 MHz for Frequency range >1GHz
Detector	Refer remarks below
Measuring Distance	3 m
Requirement	As per the limits mentioned in the below table
Test setup	Refer TEST METHODOLOGY

Table 6: Transmitter limits for Radiated emission

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Distance of Measurement (m)
0.009 – 0.490	2400/F(kHz)	48.50 – 13.80	300*
0.490 – 1.705	24000/F(kHz)	33.80 – 23.00	30*
1.705 -30	30	29.54	30*
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Remark: * The limit shows in the table above of frequency range 0.009 – 0.490, 0.490 – 1.705 MHz and 1.705-30MHz is at 300 meter, 30 meter and 30 meter range respectively, which corresponds to 128.51 – 93.80, 73.80 – 62.96 and 69.54 dBμV/m at 3m range by extrapolation calculation and the measurement of loop antenna.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

Test Conditions:

Temperature (Norm) = + 23.5 °C

Voltage = 3.3V DC Battery Supply

Relative humidity: 63%

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 49 von 71
Page 49 of 71

Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report. Refer TEST METHODOLOGY for more details


Test results for frequency range 9kHz – 30MHz

No emissions found in frequency range 9 kHz to 30 MHz, and measured levels are below 20dB from the limit line, hence not reported

Antenna 1


Table 7: Test results for frequency range 30MHz – 200MHz

Antenna Polarization	Measured Frequency (MHz)	Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Vertical	66.65(Pk)	4.21	40.00	-35.79
	162.12(Pk)	13.10	43.50	-30.40
	165.18(Pk)	23.83	43.50	-19.67
	174.58(Pk)	23.64	43.50	-19.86
	186.53(Pk)	15.72	43.50	-27.78
Horizontal	128.27(Pk)	18.21	43.50	-25.29
	136.53(Pk)	18.84	43.50	-24.66
	167.07(Pk)	22.64	43.50	-20.86
	171.79(Pk)	25.43	43.50	-18.07
	175.36(Pk)	14.69	43.50	-28.81

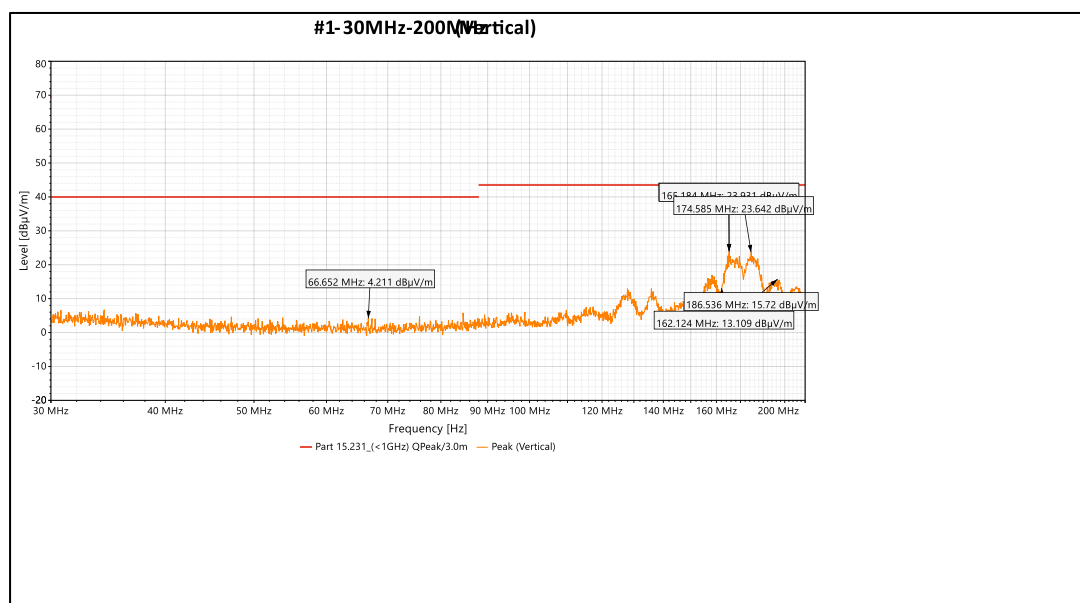

Channel Frequency 30MHz – 200MHz

Polarization Vertical

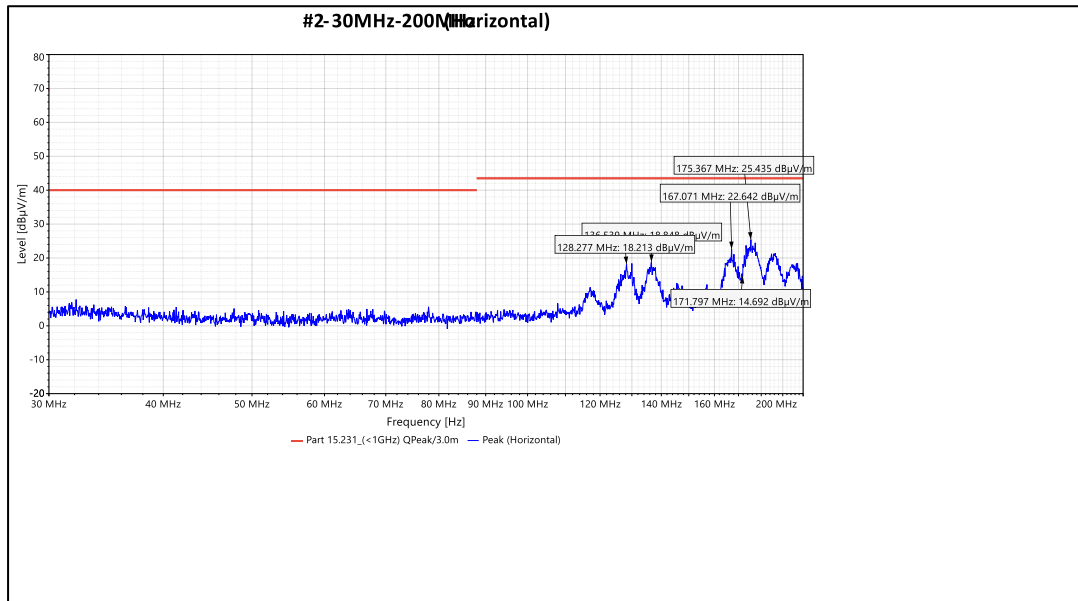


Channel Frequency 30MHz – 200MHz

Polarization Horizontal


Table 8: Test results for frequency range 200MHz – 1GHz

Antenna Polarization	Frequency (MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	235.76	20.59	46	-25.41
	324.4	28.94	46	-17.06
	364.88	34.74	46	-11.26
	423.84	30.32	46	-15.68
Horizontal	334.88	36.43	46	-9.57
	345.04	39.03	46	-6.97
	375.52	37.01	46	-8.99

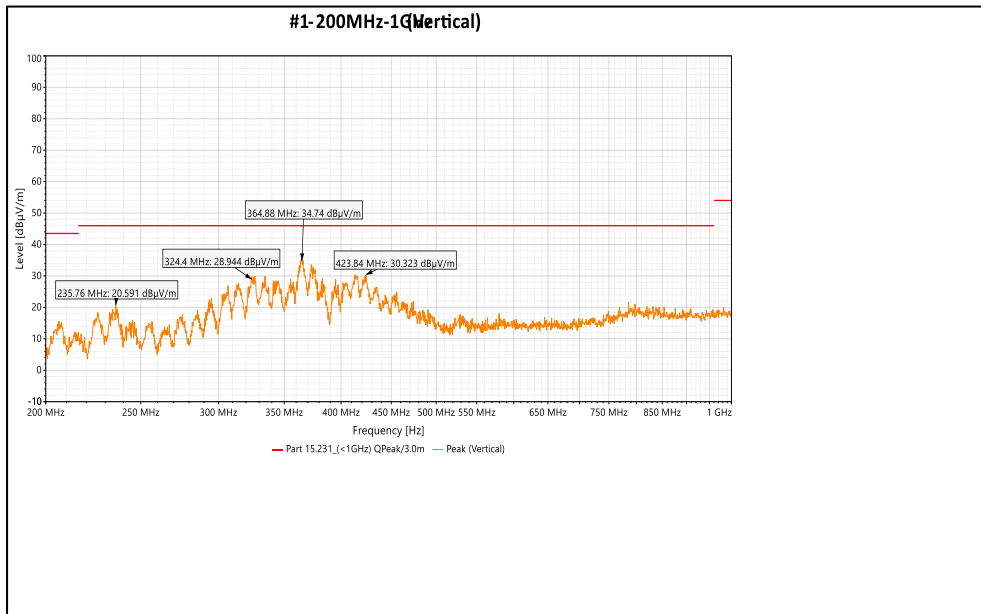

Channel Frequency 200MHz – 1GHz

Polarization Vertical

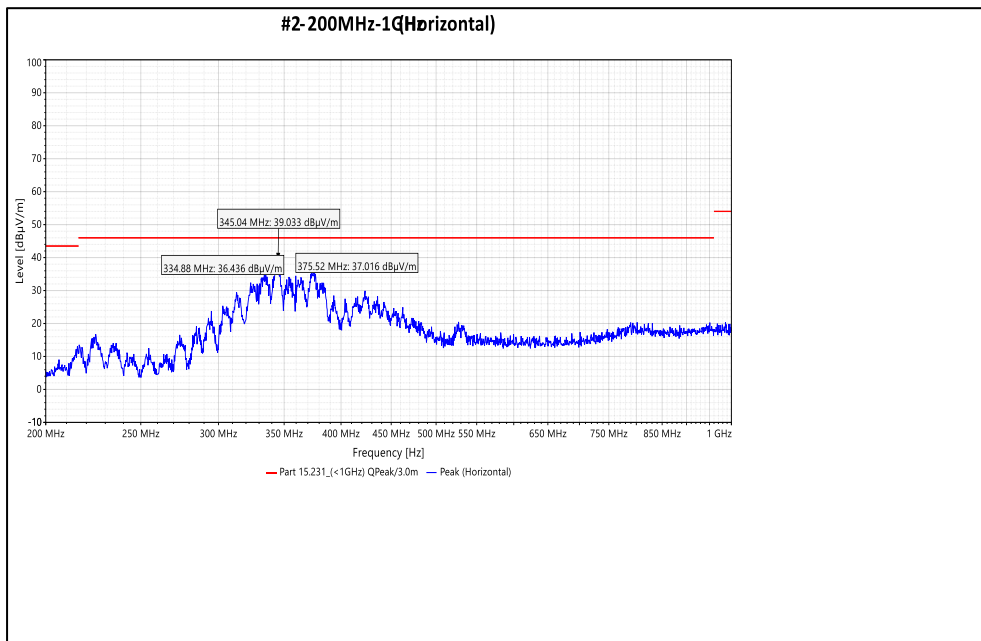

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000016F

Seite 52 von 71
Page 52 of 71

Antenna 2

Table 9: Test results for frequency range 30MHz – 200MHz

Antenna Polarization	Measured Frequency (MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	66.65(Pk)	4.21	40.00	-35.79
	162.12(Pk)	13.10	43.50	-30.40
	165.18(Pk)	23.83	43.50	-19.67
	174.58(Pk)	23.64	43.50	-19.86
	186.53(Pk)	15.72	43.50	-27.78
Horizontal	128.27(Pk)	18.21	43.50	-25.29
	136.53(Pk)	18.84	43.50	-24.66
	167.07(Pk)	22.64	43.50	-20.86
	171.79(Pk)	25.43	43.50	-18.07
	175.36(Pk)	14.69	43.50	-28.81

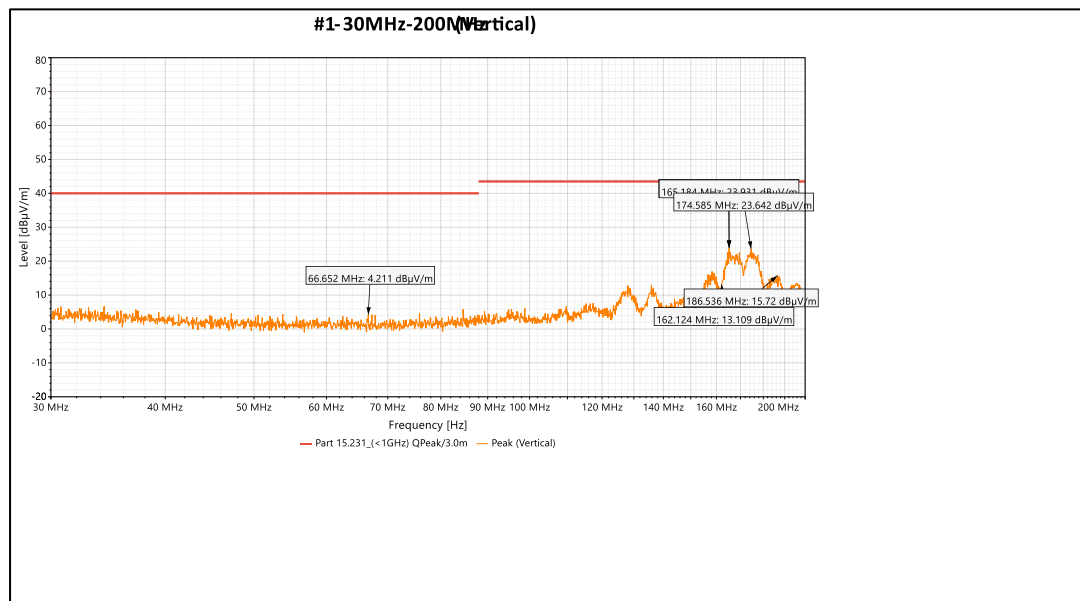


Channel Frequency 30MHz – 200MHz

Polarization Vertical

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 53 von 71
Page 53 of 71

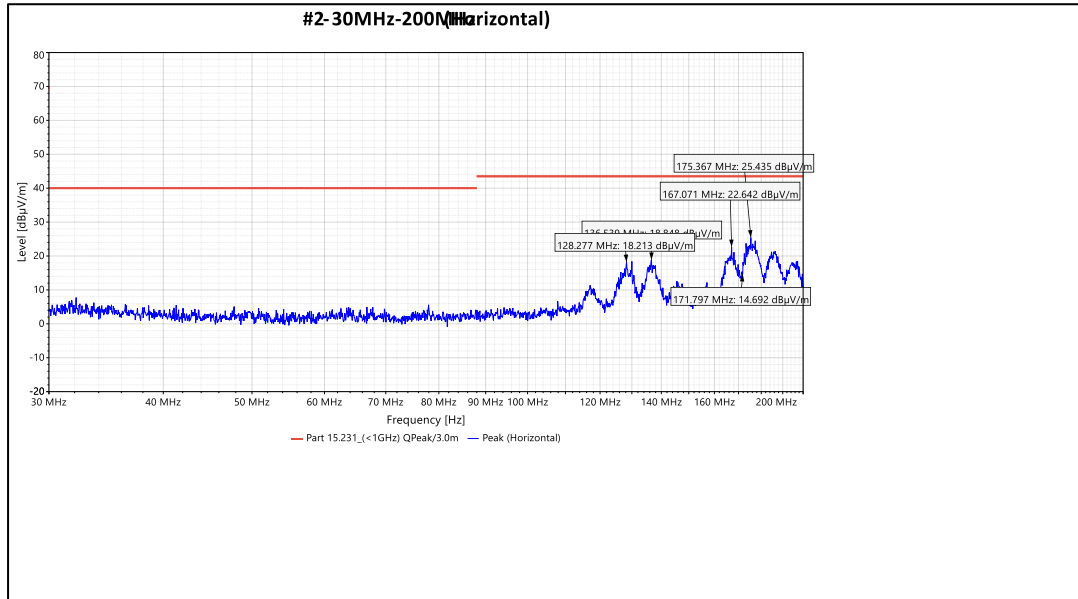


Channel Frequency 30MHz – 200MHz

Polarization Horizontal


Table 10: Test results for frequency range 200MHz – 1GHz

Antenna Polarization	Frequency (MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	235.76	20.59	46	-25.41
	324.4	28.94	46	-17.06
	364.88	34.74	46	-11.26
	423.84	30.32	46	-15.68
Horizontal	334.88	36.43	46	-9.57
	345.04	39.03	46	-6.97
	375.52	37.01	46	-8.99

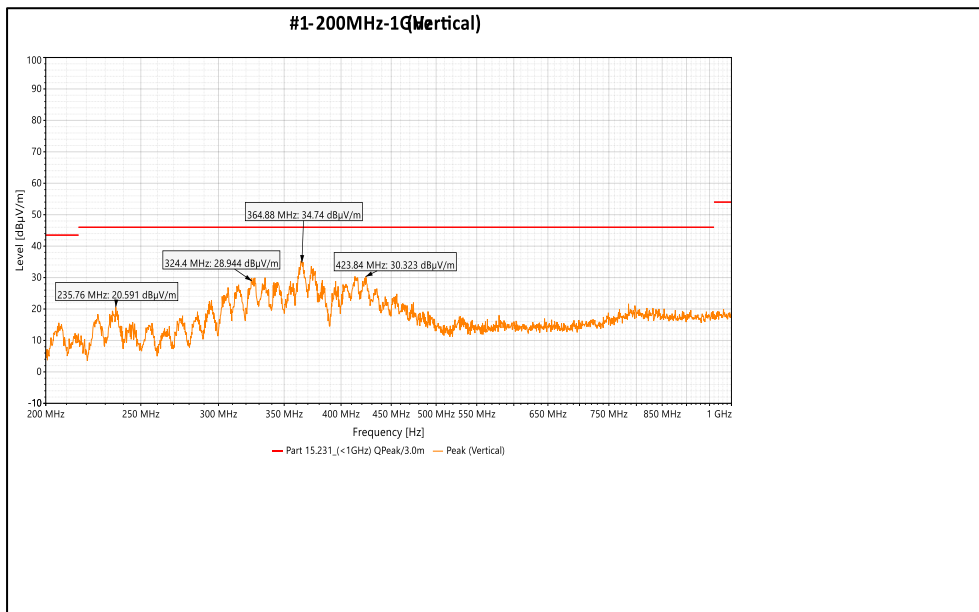

Channel Frequency 200MHz – 1GHz

Polarization Vertical

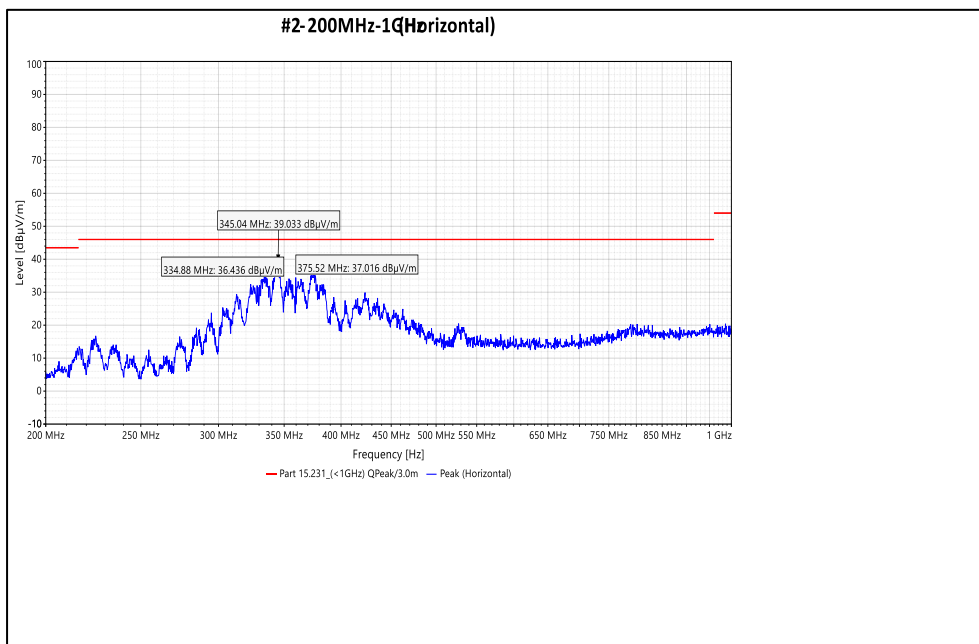

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 55 von 71
Page 55 of 71


Table 11: Test results for the frequencies above 1GHz:

Antenna 1:

Channel Frequency (MHz)	Frequency (MHz)	Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2405	2390(Pk)	Vertical	41.1	74	-32.9
	2390(Av)		27.28	54	-26.72
	2405(Pk)		100.3	*	-
	2405(Av)		96.68	*	-
	4810(Pk)		46.37	74	-27.63
	4810(Av)		37.54	54	-16.46
	7215(Pk)		No harmonics found	74	-74.00
	7215(Av)		No harmonics found	54	-54.00
	2390(Pk)	Horizontal	39.55	74	-34.45
	2390(Av)		26.60	54	-27.40
	2405(Pk)		99.70	*	-
	2405(Av)		96.08	*	-
	4810(Pk)		41.24	74	-32.76
	4810(Av)		28.93	54	-25.07
	7215(Pk)		No harmonics found	74	-74.00
	7215(Av)		No harmonics found	54	-54.00
2440	2440(Pk)	Vertical	99.97	*	-
	2440(Av)		96.32	*	-
	4880(Pk)		47.29	74	-26.71
	4880(Av)		38.12	54	-15.88
	7320(Pk)		No harmonics found	74	-74.00
	7320(Av)		No harmonics found	54	-54.00
	2440(Pk)	Horizontal	99.20	*	-
	2440(Av)		95.54	*	-
	4880(Pk)		41.34	74	-32.66
	4880(Av)		30.55	54	-23.45
	7320(Pk)		46.27	74	-27.73
	7320(Av)		35.43	54	-18.57
2475	2475(Pk)	Vertical	99.51	*	-
	2475(Av)		95.91	*	-
	2483.5(Pk)		46.3	74	-27.7
	2483.5(Av)		35.04	54	-18.96
	4950(Pk)		46.19	74	-27.81
	4950(Av)		37.58	54	-16.42
	7425(Pk)		No harmonics found	74	-74.00
	7425(Av)		No harmonics found	54	-54.00
	2475(Pk)	Horizontal	98.67	*	-
	2475(Av)		95.08	*	-
	2483.5(Pk)		45.64	74	-28.36
	2483.5(Av)		34.05	54	-19.95
	4950(Pk)		39.8	74	-34.2
	4950(Av)		28.05	54	-25.95
	7425(Pk)		47.2	74	-26.8
	7425(Av)		36.28	54	-17.72


*, - : Restricted bands of operation

Pk: Peak Detector;
Av: Average Detect

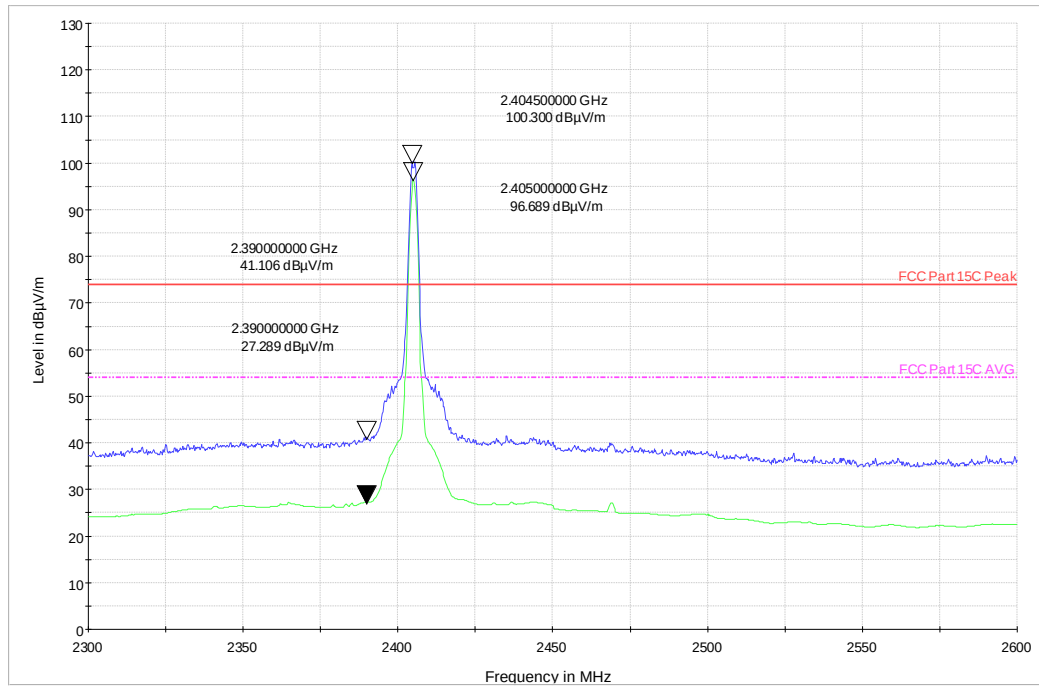


Channel Frequency: 2405MHz

Polarization: Vertical

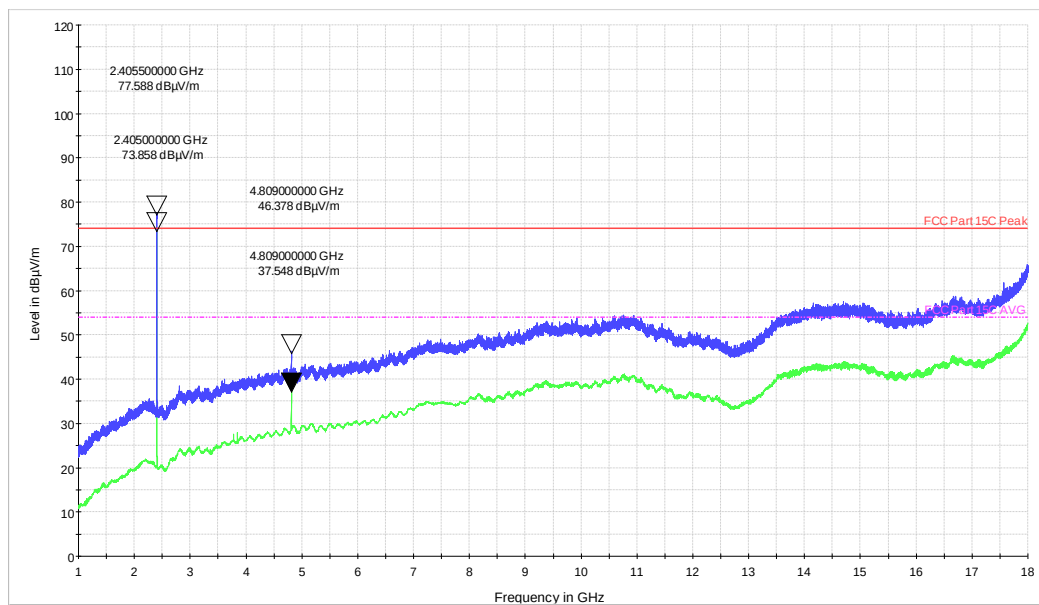


Channel Frequency: 1GHz -18GHz

Polarization: Vertical

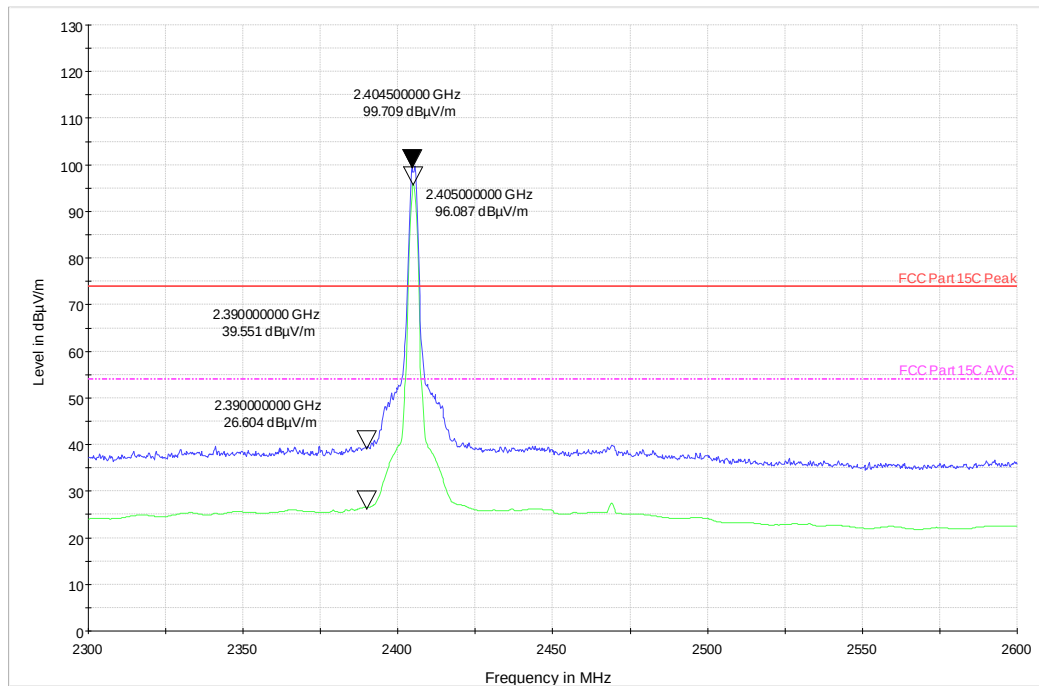


Channel Frequency: 2405MHz

Polarization: Horizontal

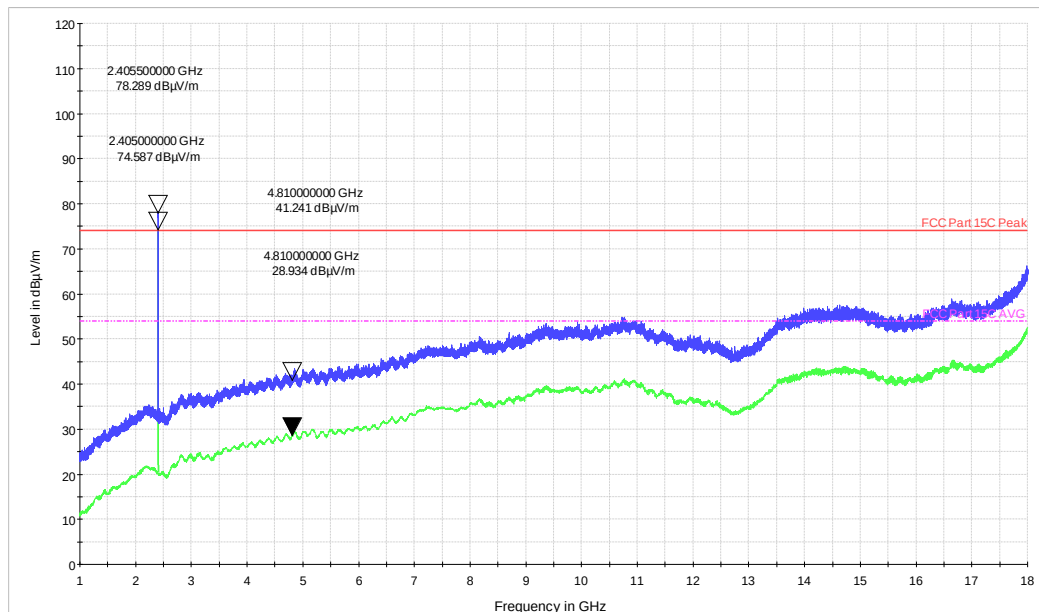


Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

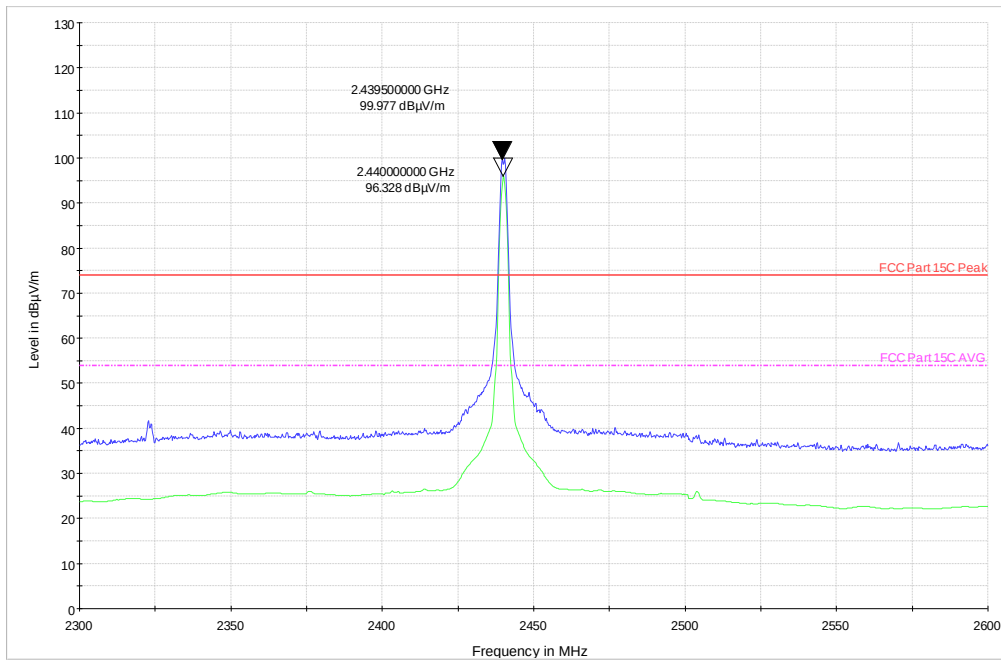


Channel Frequency: 2440MHz

Polarization: vertical

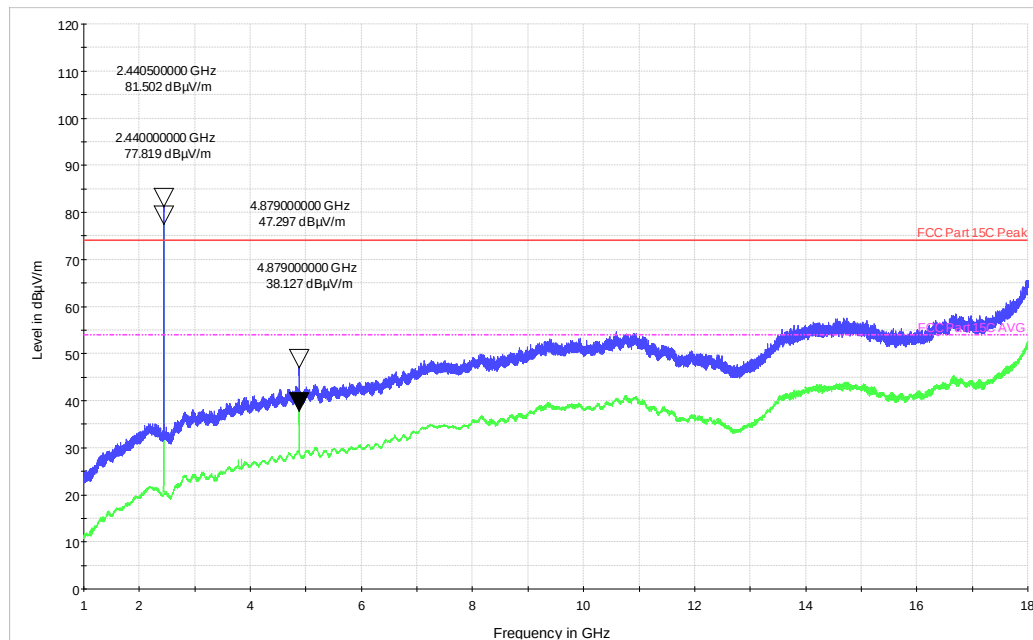


Channel Frequency: 1GHz -18GHz

Polarization: vertical

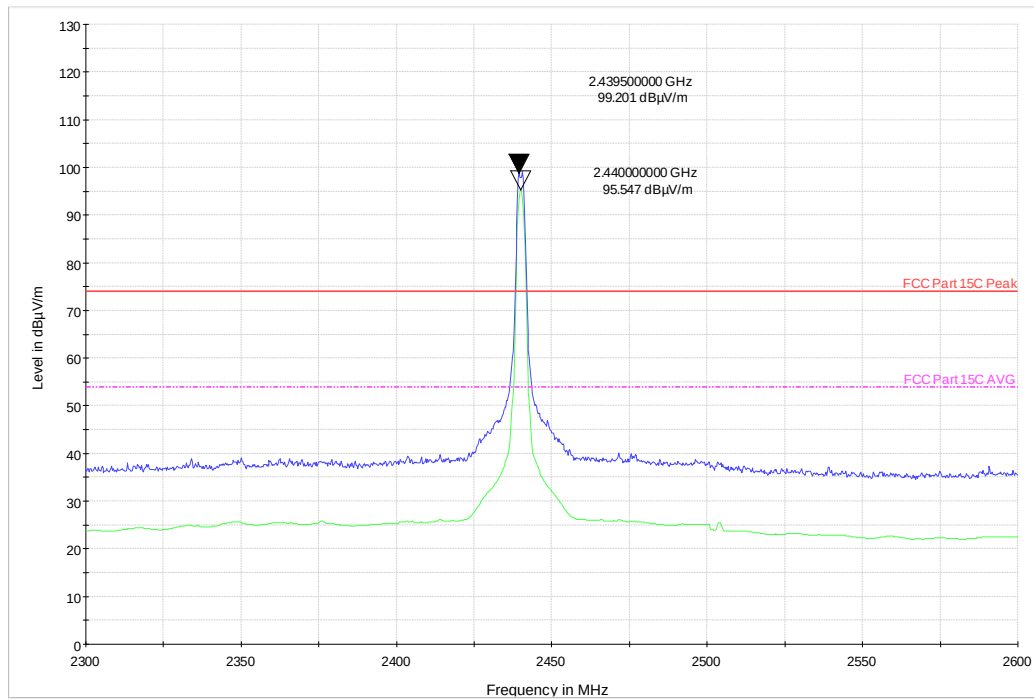


Channel Frequency: 2440MHz

Polarization: Horizontal

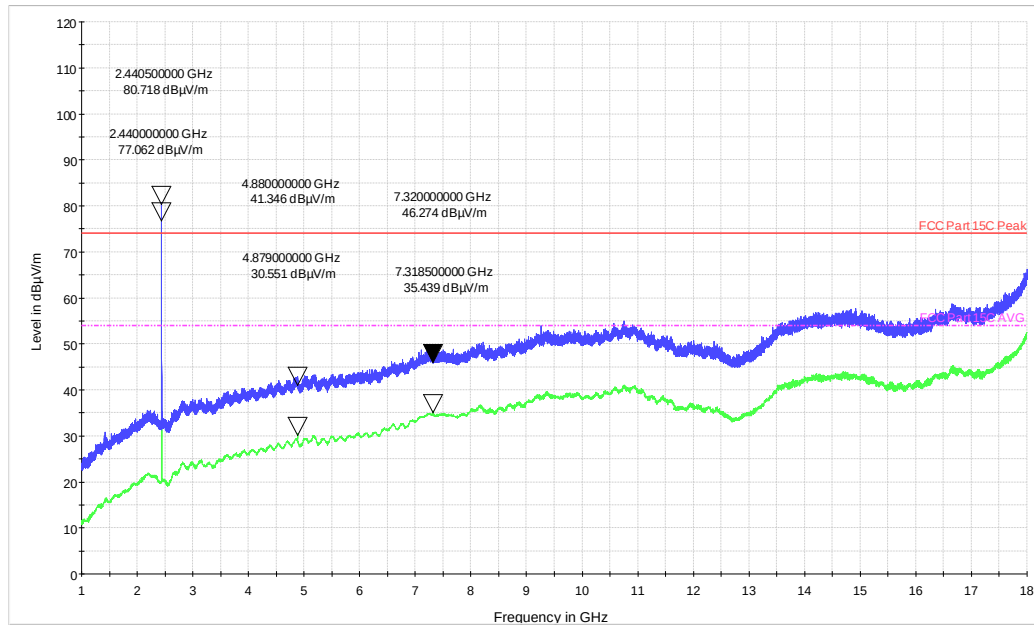


Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

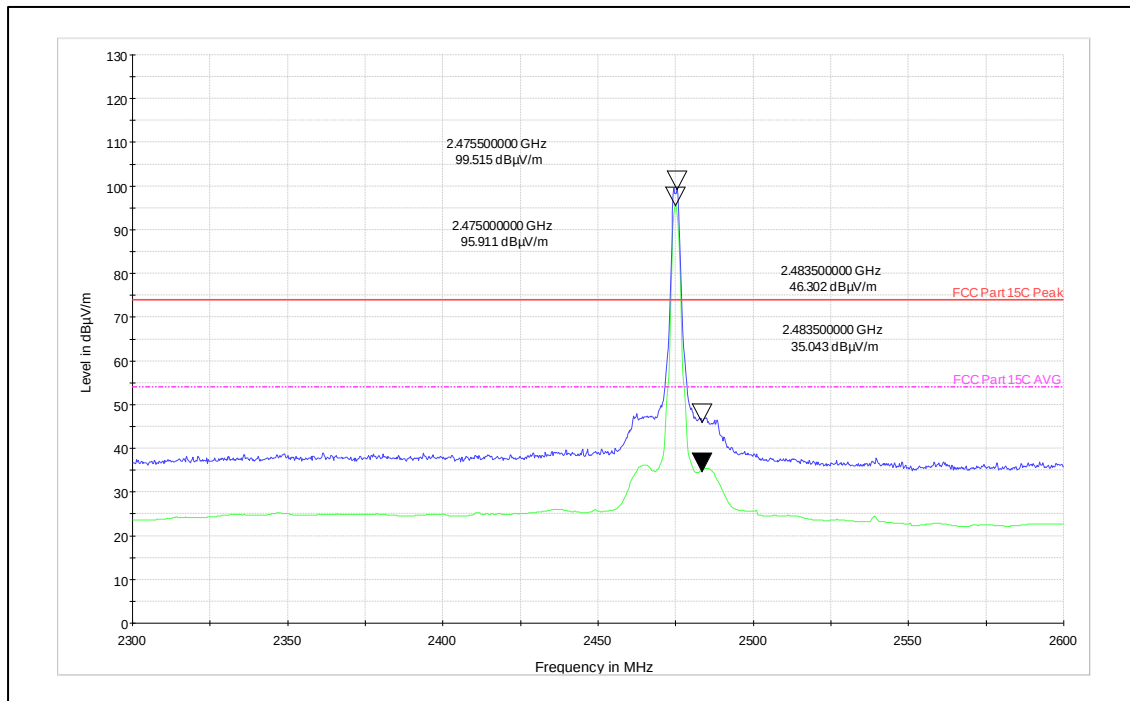


Channel Frequency: 2475MHz

Polarization: vertical

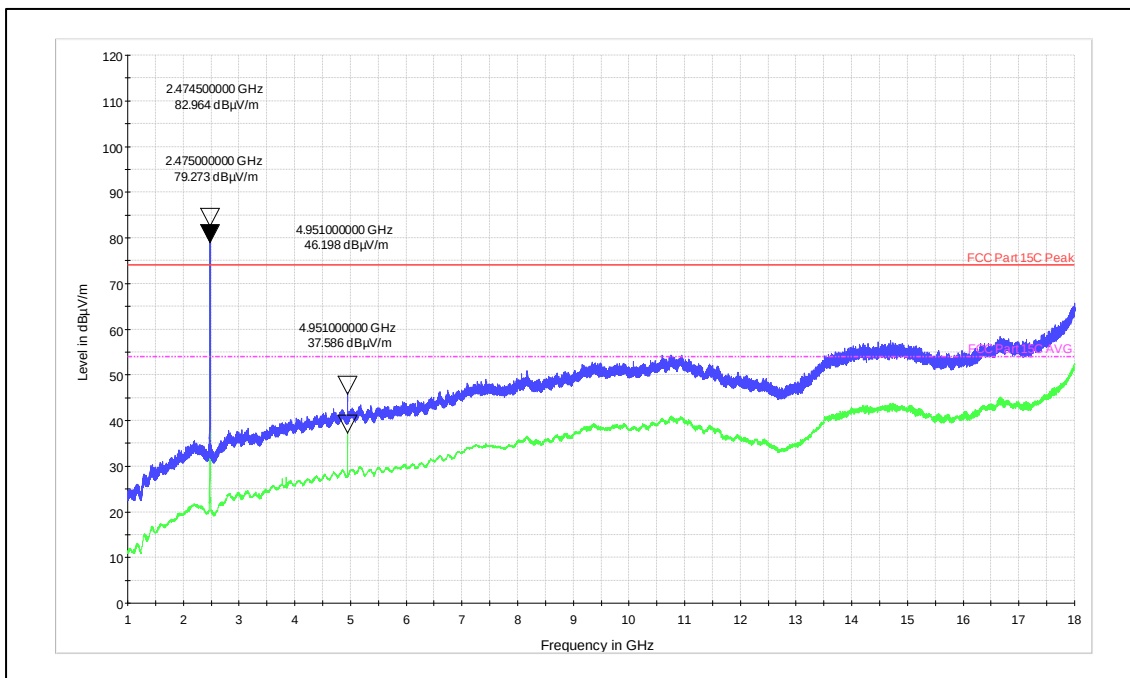


Channel Frequency: 1GHz -18GHz

Polarization: vertical

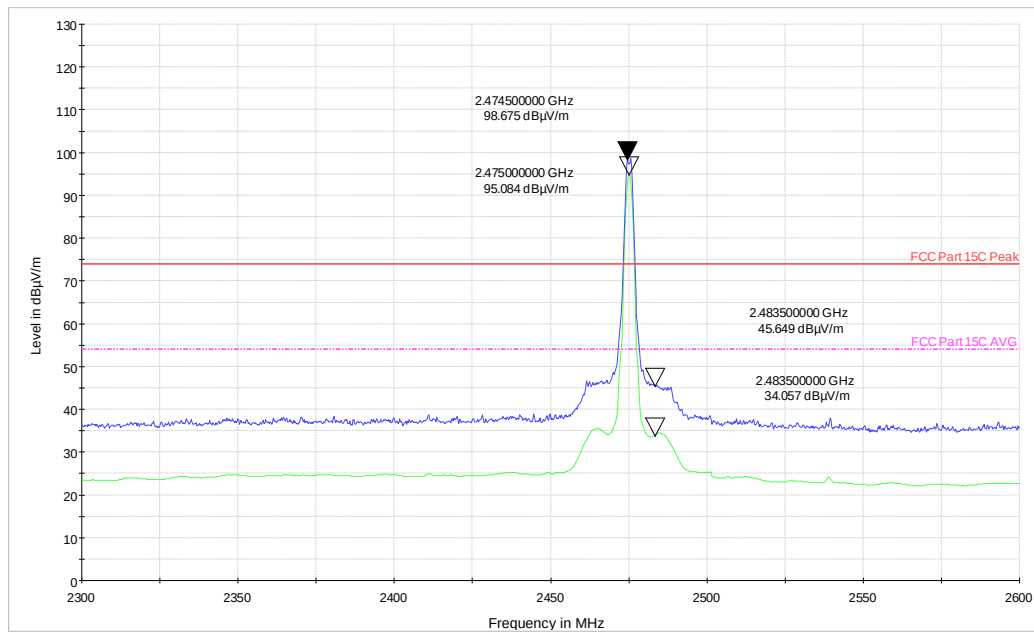


Channel Frequency: 2475GHz

Polarization: Horizontal

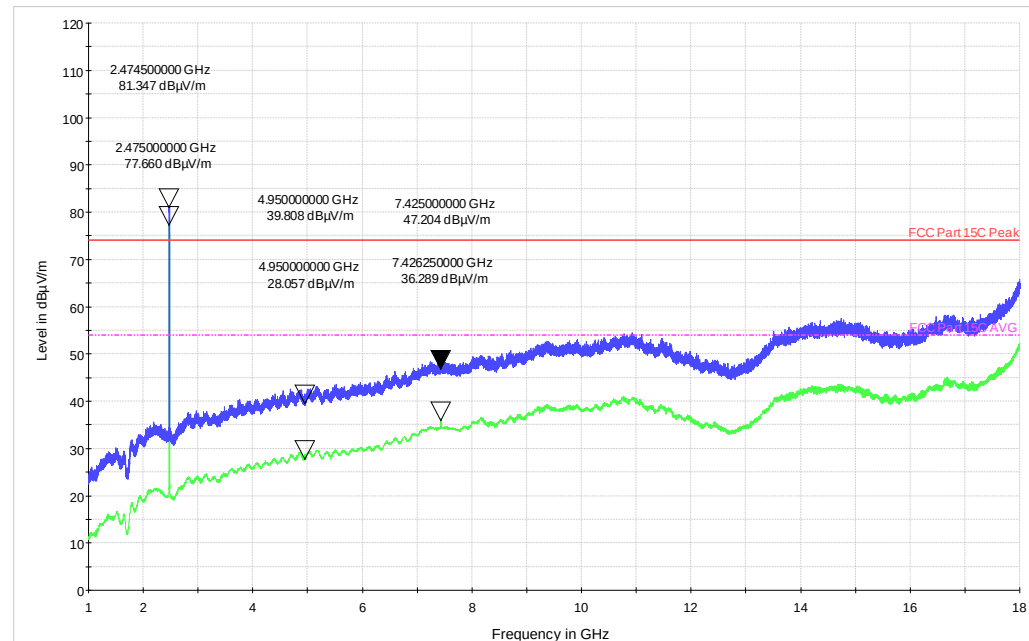


Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

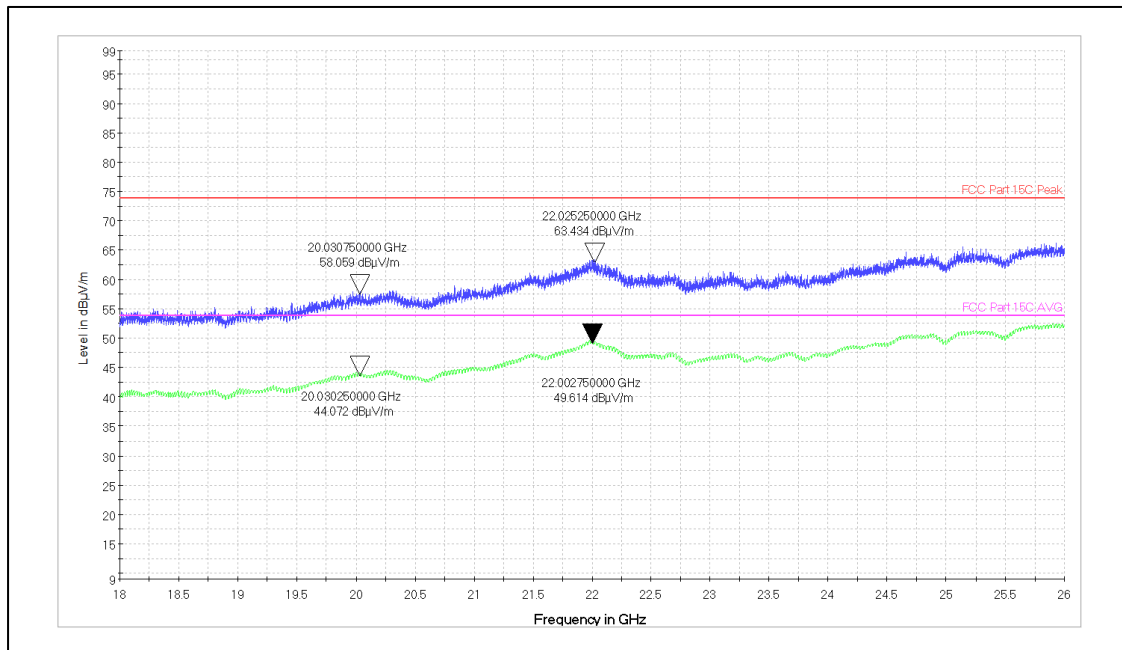

Channel Frequency: 18GHz -26GHz

Polarization: Vertical

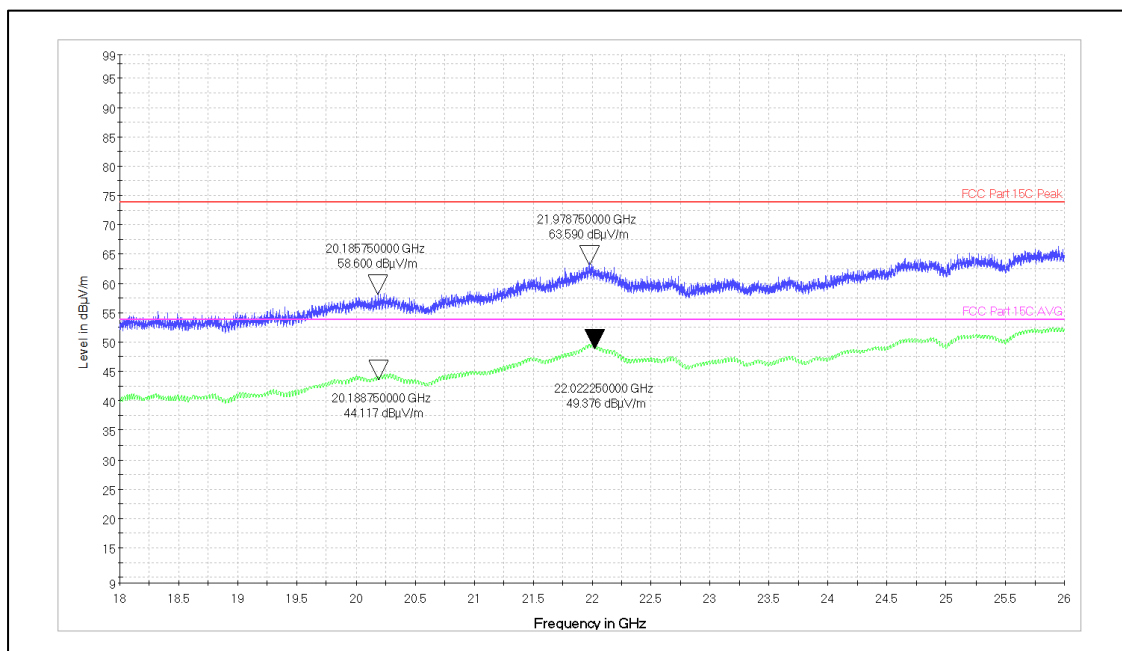

Channel Frequency: 18GHz -26GHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 63 von 71
Page 63 of 71


Antenna 2:

Channel Frequency (MHz)	Frequency (MHz)	Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2405	2390(Pk)	Vertical	41.13	74	-32.87
	2390(Av)		27.71	54	-26.29
	2405(Pk)		101.23	*	-
	2405(Av)		97.67	*	-
	4810(Pk)		47.75	74	-26.25
	4810(Av)		38.98	54	-15.02
	7215(Pk)		No harmonics found	74	-74.00
	7215(Av)		No harmonics found	54	-54.00
	2390(Pk)	Horizontal	36.34	74	-37.66
	2390(Av)		23.53	54	-30.47
	2405(Pk)		94.35	*	-
	2405(Av)		90.77	*	-
	4810(Pk)		41.27	74	-32.73
	4810(Av)		31.01	54	-22.99
	7215(Pk)		46.97	74	-27.03
	7215(Av)		36.40	54	-17.60
2440	2440(Pk)	Vertical	101.67	*	-
	2440(Av)		98.03	*	-
	4880(Pk)		46.33	74	-27.67
	4880(Av)		36.86	54	-17.14
	7320(Pk)		No harmonics found	74	-74.00
	7320(Av)		No harmonics found	54	-54.00
	2440(Pk)	Horizontal	93.76	*	-
	2440(Av)		90.08	*	-
	4880(Pk)		41.57	74	-32.43
	4880(Av)		31.84	54	-22.16
	7320(Pk)		46.94	74	-27.06
	7320(Av)		36.08	54	-17.92
2475	2475(Pk)	Vertical	101.88	*	-
	2475(Av)		98.22	*	-
	2483.5(Pk)		49.56	74	-24.44
	2483.5(Av)		37.57	54	-16.43
	4950(Pk)		45.73	74	-28.27
	4950(Av)		36.40	54	-17.60
	7425(Pk)		No harmonics found	74	-74.00
	7425(Av)		No harmonics found	54	-54.00
	2475(Pk)	Horizontal	95.46	*	-
	2475(Av)		91.79	*	-
	2483.5(Pk)		48.31	74	-25.69
	2483.5(Av)		30.71	54	-23.29
	4950(Pk)		39.77	74	-34.23
	4950(Av)		28.69	54	-25.31
	7425(Pk)		46.58	74	-27.42
	7425(Av)		35.70	54	-18.30

*, - : Restricted bands of operation


Pk: Peak Detector;

Av: Average Detect

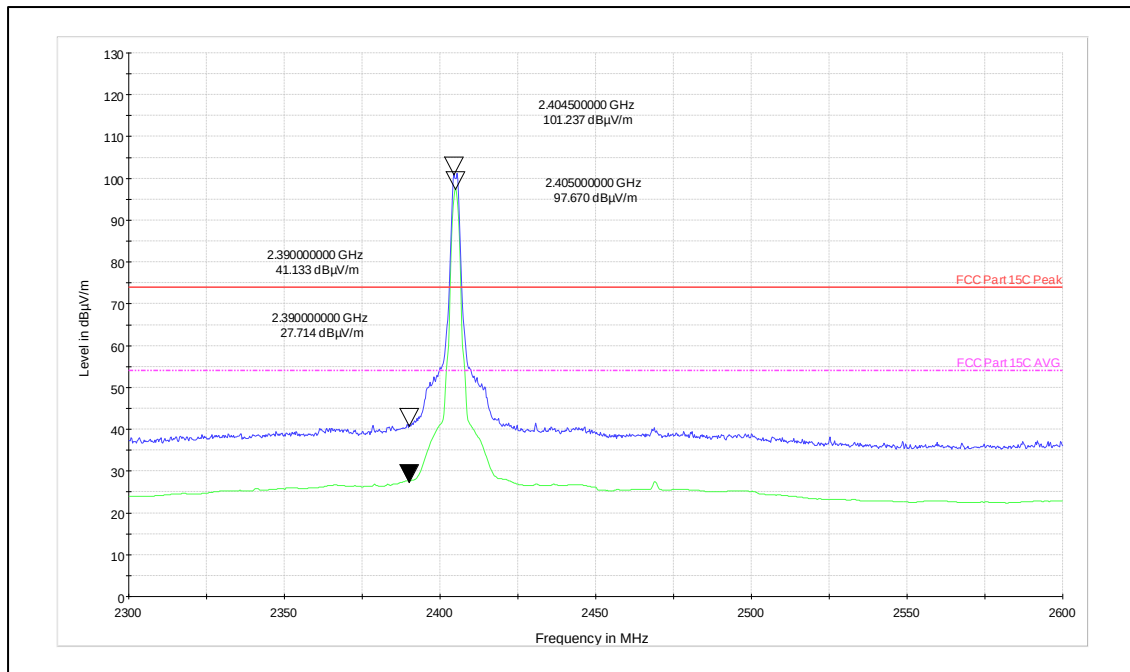


Channel Frequency: 2405MHz

Polarization: Vertical

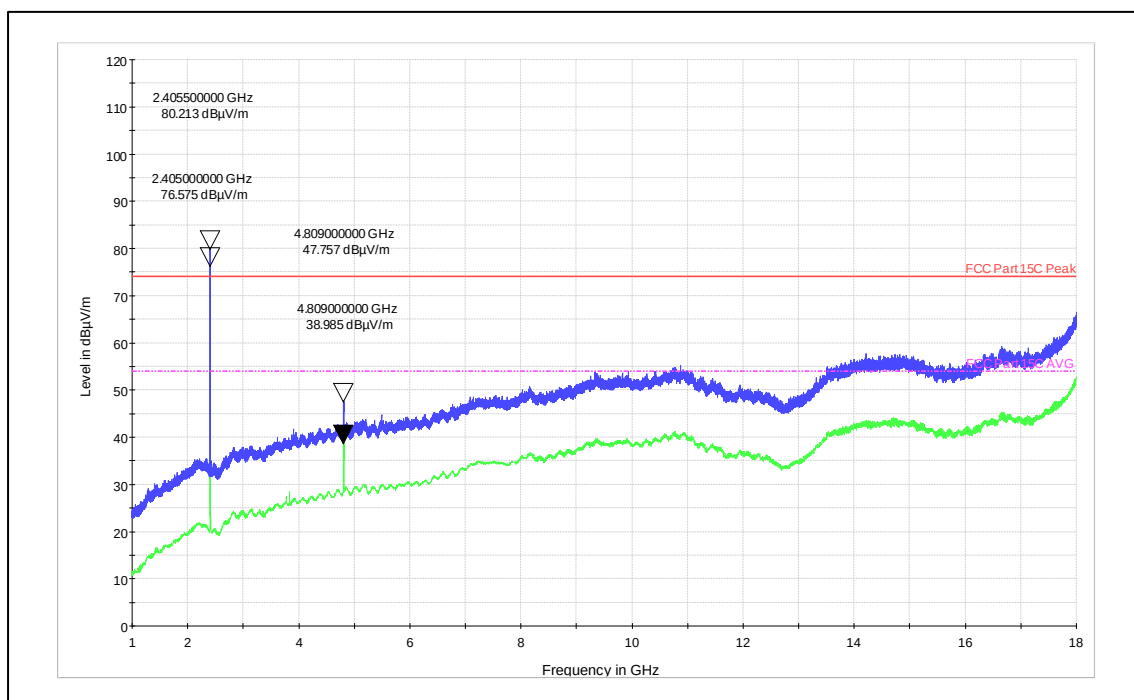


Channel Frequency: 1GHz -18GHz

Polarization: Vertical

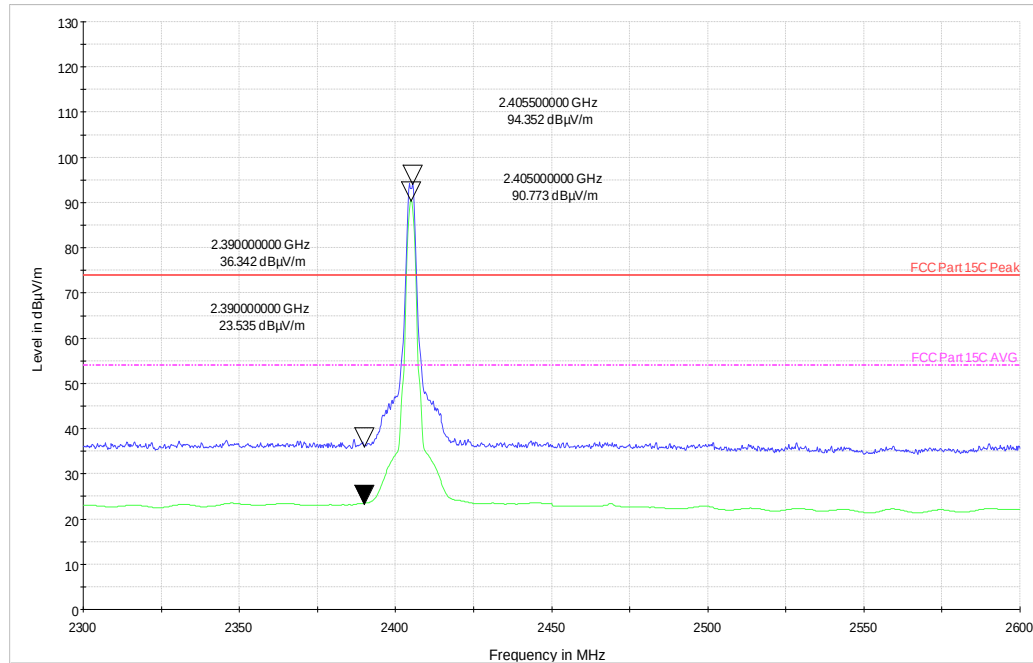


Channel Frequency: 2405MHz

Polarization: Horizontal

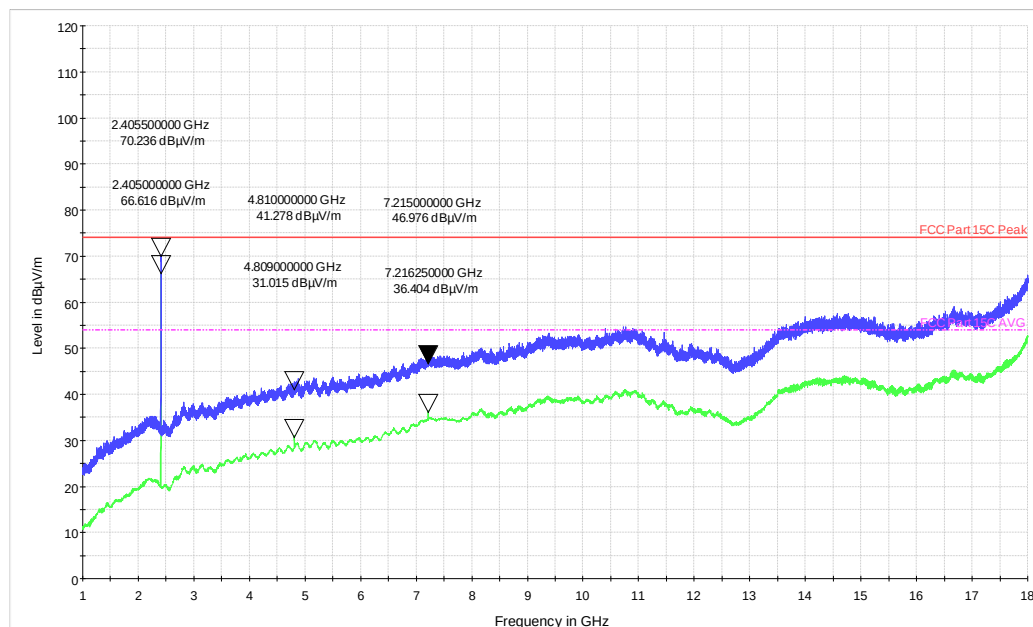


Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

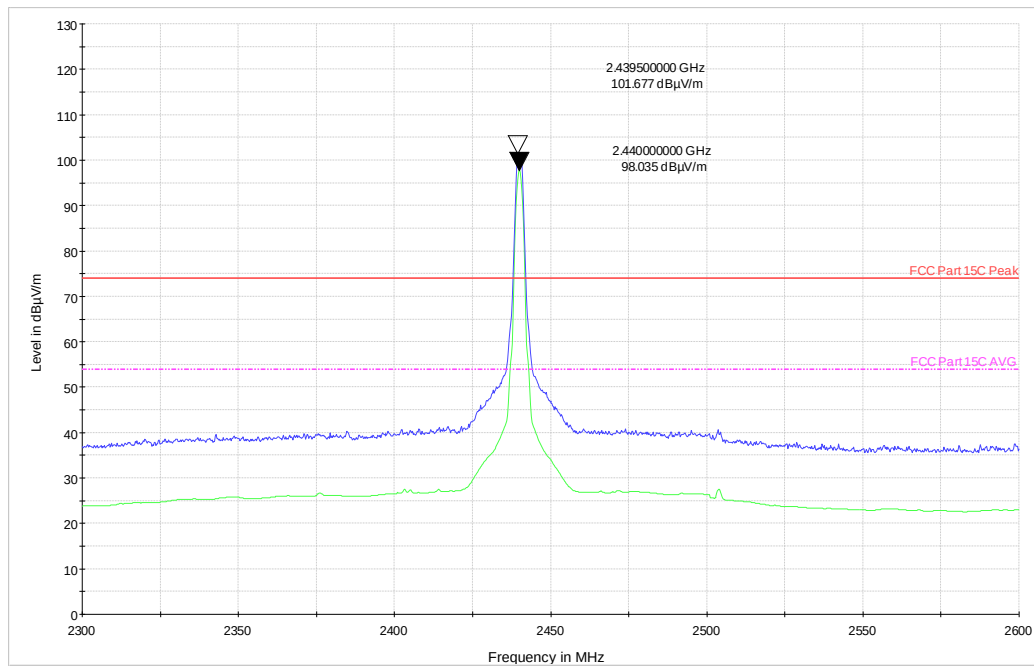


Channel Frequency: 2440GHz

Polarization: vertical

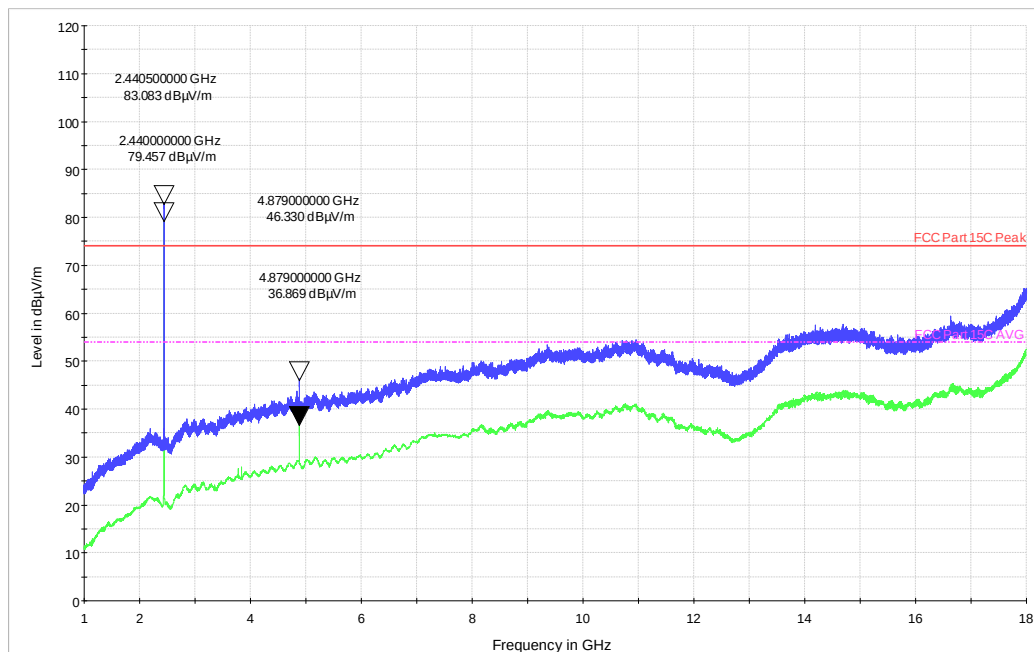


Channel Frequency: 1GHz -18GHz

Polarization: vertical

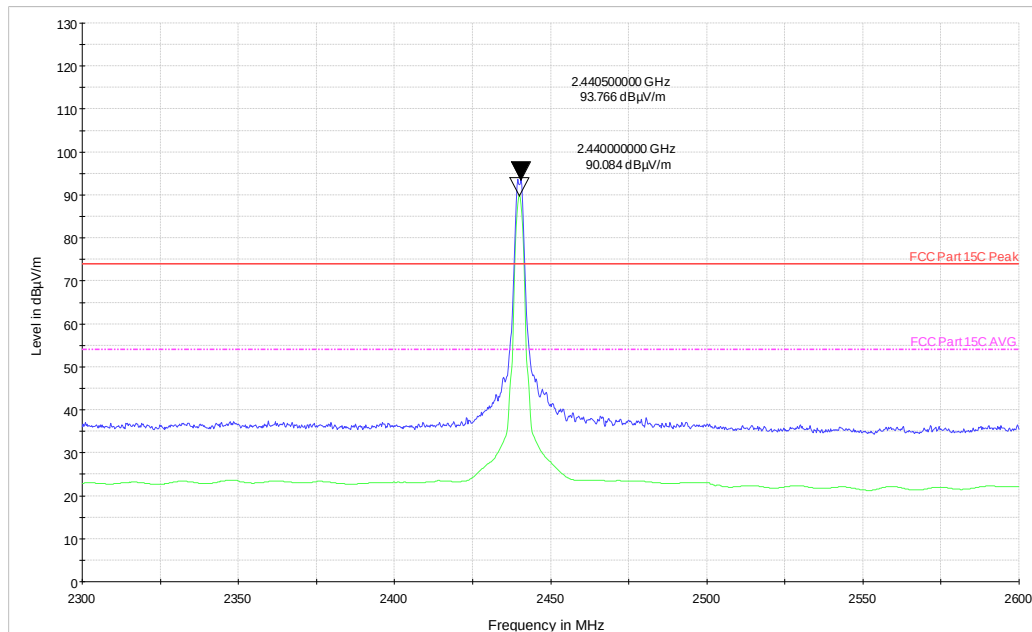


Channel Frequency: 2440MHz

Polarization: Horizontal

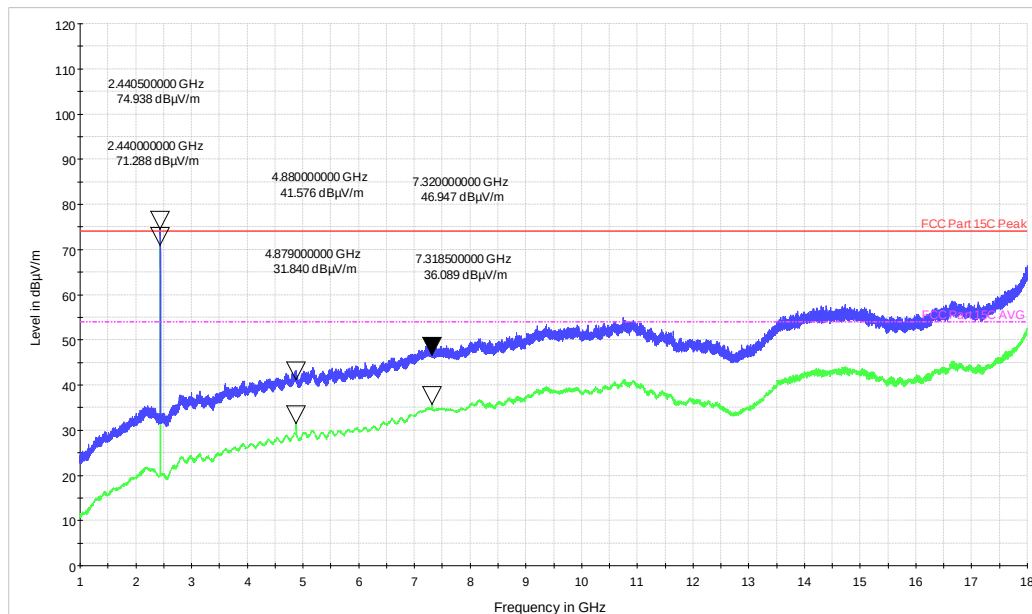


Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

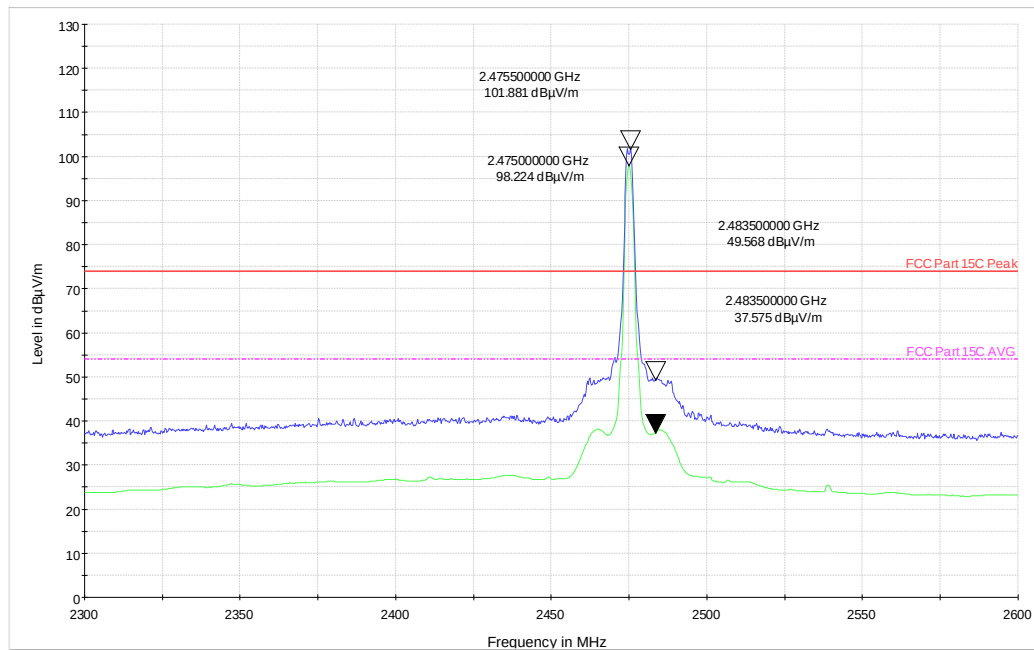


Channel Frequency: 2475MHz

Polarization: vertical

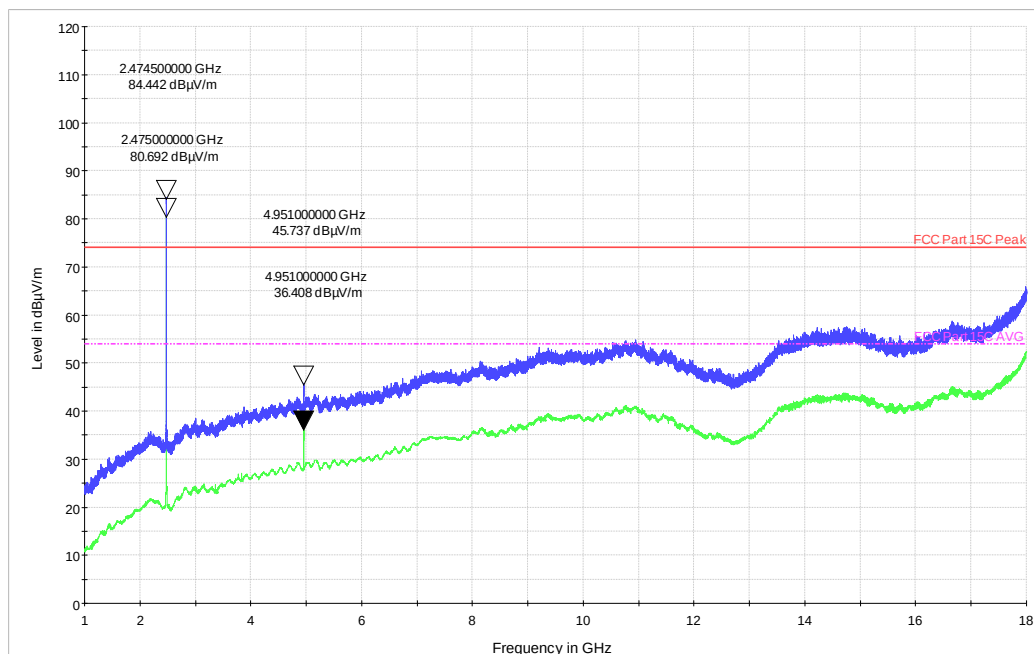


Channel Frequency: 1GHz -18GHz

Polarization: vertical

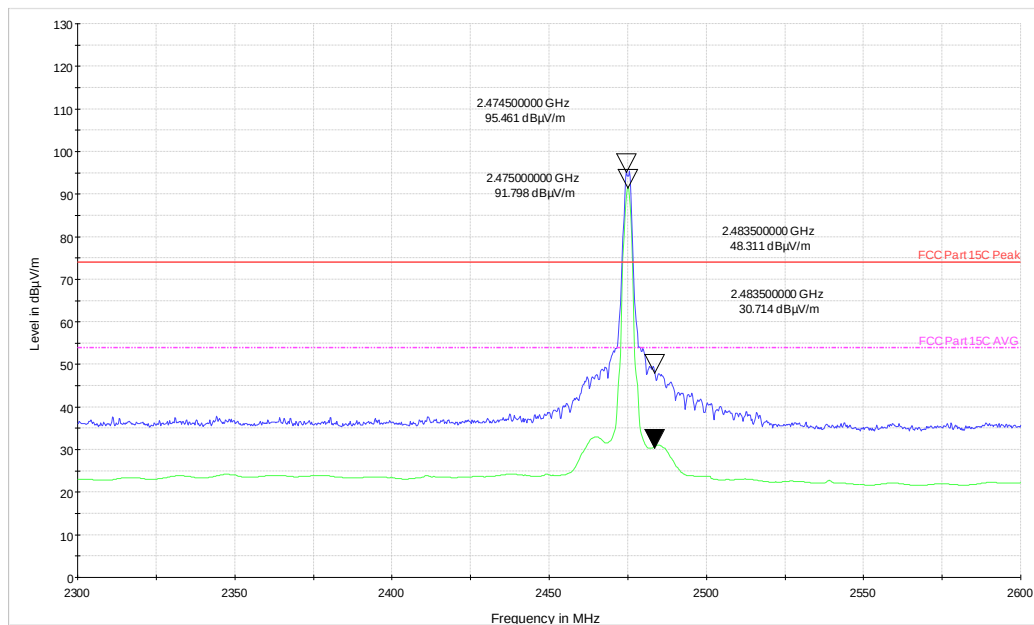


Channel Frequency: 2475GHz

Polarization: Horizontal

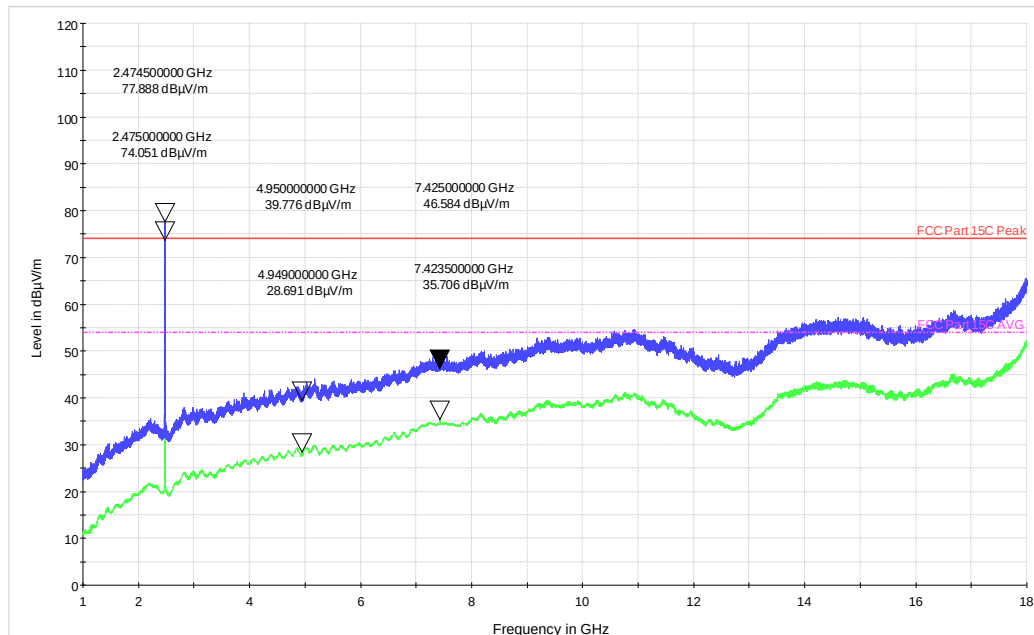


Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

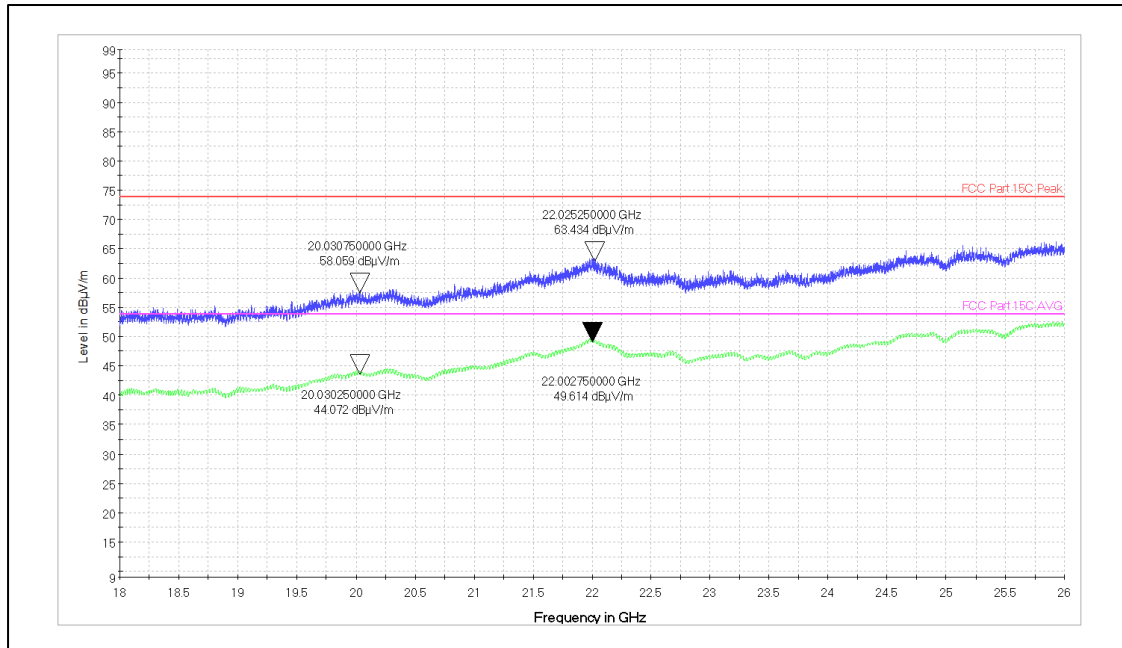

Channel Frequency: 18GHz -26GHz

Polarization: Vertical

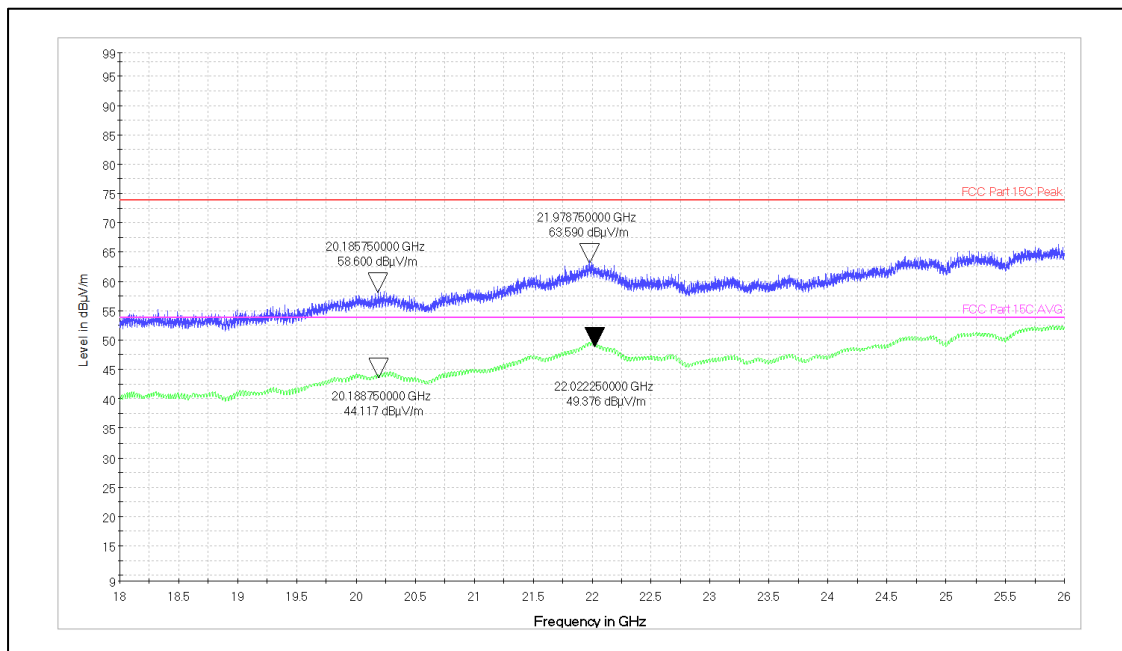

Channel Frequency: 18GHz -26GHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000016F

Seite 71 von 71
Page 71 of 71

9 LIST OF TABLES

Table 1: List of test and measurement instruments	6
Table 2: Instrument application Software versions	6
Table 3: Ratings and System Details as declared by Client*	7
Table 4: Measurement Uncertainty	8
Table 5: List of EUT Center frequencies	10
Table 6: Transmitter limits for Radiated emission	48
Table 7: Test results for frequency range 30MHz – 200MHz	49
Table 8: Test results for frequency range 200MHz – 1GHz	50
Table 9: Test results for frequency range 30MHz – 200MHz	52
Table 10: Test results for frequency range 200MHz – 1GHz	53
Table 11: Test results for the frequencies above 1GHz:	55

*****End of test report*****