



FCC Test Report

Part 15 subpart C

Client Information:

Applicant: Proexpress Distributor LLC
Applicant add.: 11011 GREENWOOD AVE.N APT S, SEATTLE, WA 98103

Product Information:

Product Name: Remote-control planes
Model No.: X5C
Derivative model No.: X5P, X5A, X5C Pro, X5A Pro
Brand Name: AKASO、 KingSlim、 Cnest
FCC ID: S5V-D847013063

Standards: CFR 47 FCC PART 15 SUBPART C:2013 section 249

Prepared By:

UL-CCIC Company Limited

Add. : Electronic Building, Parage Electronic Industrial Park, No. 8 Nanyun Er Road,
Guangzhou Science Park, Guangzhou, 510663 China

Date of Receipt: Aug. 08, 2015

Date of Test: Aug. 08~ 18, 2015

Date of Issue: Aug. 18, 2015

Test Result: Pass

This device described above has been tested by Dongguan Yaxu (AiT) Technology Limited, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

*This test report must not be used by the client to claim product endorsement by any agency of the U.S. government.

Reviewed by: Lanbore Tang

Approved by: Richard Si



1 Contents

	Page
COVER PAGE	
1 CONTENTS.....	2
2 TEST SUMMARY.....	3
2.1 COMPLIANCE WITH FCC PART 15 SUBPART C.....	3
2.2 MEASUREMENT UNCERTAINTY	4
3 TEST FACILITY	5
3.1 DEVIATION FROM STANDARD	5
3.2 ABNORMALITIES FROM STANDARD CONDITIONS	5
4 GENERAL INFORMATION	6
4.1 GENERAL DESCRIPTION OF EUT	6
4.2 TEST LOCATION.....	6
5 DESCRIPTION OF TEST CONDITIONS.....	8
5.1 E.U.T. OPERATION	8
5.2 EUT PERIPHERAL LIST	9
5.3 TEST PERIPHERAL LIST.....	9
6 EQUIPMENTS LIST FOR ALL TEST ITEMS.....	10
7 TEST RESULT	11
7.1 ANTENNA REQUIREMENT	11
7.2 FIELD STRENGTH OF FUNDAMENTAL& FIELD STRENGTH OF UNWANTED EMISSIONS& BAND EDGE	12
7.2.1 Duty cycle measurement:.....	17
7.2.2 Fundamental field strength measurement:.....	17
7.2.3 Radiated Emissions Test Data	19
7.2.4 Band Edge Measurement:.....	23
7.2.5 Restricted Bands Measurement:	24
7.3 OCCUPIED BANDWIDTH.....	25
7.4 CONDUCTED EMISSIONS AT MAINS TERMINALS 150 KHZ TO 30 MHZ	27
8 PHOTOGRAPHS	28
8.1 RADIATED EMISSION TEST SETUP	28
9 EUT CONSTRUCTIONAL DETAILS.....	29



2 Test Summary

2.1 Compliance with FCC Part 15 subpart C

Test	Test Requirement	Standard Paragraph	Result
Field Strength of Fundamental	FCC PART 15 C section 15.249 (a)	ANSI C63.10: Clause 6.6	PASS
Field Strength of Unwanted Emissions	FCC PART 15 C section 15.249 (a) section 15.249 (d)	ANSI C63.10: Clause 6.4, 6.6 and 6.7	PASS
Band Edges	FCC PART 15 C section 15.249 (d)	ANSI C63.10: Clause 6.9.2	PASS
Occupied Bandwidth	FCC PART 15 C section 15.215(c)	ANSI C63.10: Clause 6.9.1	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	N/A

Remark:

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.

Model description:

According to the declaration from the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, with only difference being the model name.

Therefore only one model X5C was tested in this report.



2.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, the maximum value of the uncertainty as below:

No.	Item	Uncertainty
1	Conducted Emission Test	1.20dB
2	Radiated Emission Test	3.30dB
3	RF power,conducted	0.16dB
4	RF power density,conducted	0.24dB
5	Spurious emissions,conducted	0.21dB
6	All emissions,radiated(<1G)	4.68dB
7	All emissions,radiated(>1G)	4.89dB



3 Test Facility

The test facility is recognized, certified or accredited by the following organizations:

.CNAS- Registration No: L6177

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2005 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on Apr. 18, 2013

.FCC- Registration No: 248337

The 3m Semi-Anechoic Chamber, 3m/10m Open Area Test Site and Shielding Room of Dongguan Yaxu (AiT) Technology Limited have been registered by Federal Communications Commission (FCC) on Aug.29, 2014.

.Industry Canada(IC)-Registration No: IC6819A-1

The 3m Semi-Anechoic Chamber and 3m of Dongguan Yaxu (AiT) Technology Limited have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing on Oct. 01, 2014.

.VCCI- Registration No: 2705

The 3m/10m Open Area Test Site, Shielding Room and 3m Chamber of Dongguan Yaxu (AiT) Technology Limited have been registered by Voluntary Control Council for Interference on Nov. 21, 2012. The Telecommunication Ports Conducted Disturbance Measurement of Dongguan Yaxu (AiT) Technology Limited have been registered by Voluntary Control Council for Interference on May. 13, 2013.

3.1 Deviation from standard

None

3.2 Abnormalities from standard conditions

None



4 General Information

4.1 General Description of EUT

Manufacturer:	Proexpress Distributor LLC
Manufacturer Address:	11011 GREENWOOD AVE.N APT S, SEATTLE, WA 98103
EUT Name:	Remote-control planes
Model No.:	X5C
Operation frequency:	2405 MHz to 2475 MHz
Number of channel:	15 channels
Modulation Type and Antenna Type:	GFSK (only supports 1Mbps without supporting other data rates) non-removable antenna
Antenna Gain:	0 dBi
HW version:	V1.1
SW version:	V1.0
Brand Name:	N/A
Serial No:	N/A
Derivative model No.:	X5P, X5A, X5C Pro, X5A Pro
Power Supply Range:	DC 9.0V(6*1.5V AA battery)
Power Supply:	DC 9.0V from battery
Power Cord:	N/A
Signal Cable:	N/A

4.2 Test Location

All tests were performed at:

Dongguan Yaxu (AiT) Technology Limited.

No. 22, Jinqianling Third Street, Jitigang, Huangjiang, Dongguan, Guangdong, China.

Tel.: +86.769.82020499 Fax.: +86.769.82020495



Description of Channel:					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2405	08	2440	15	2475
02	2410	09	2445		
03	2415	10	2450		
04	2420	11	2455		
05	2425	12	2460		
06	2430	13	2465		
07	2435	14	2470		



5 Description of Test conditions

5.1 E.U.T. Operation

Test Voltage: DC 9.0V from battery(6*1.5V AA new batteries)

Temperature: 20.0 -25.0 °C

Humidity: 38-50 % RH

Atmospheric Pressure: 1000 -1010 mbar

Test frequencies and frequency range: According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified



5.2 EUT Peripheral List

No.	Equipment	Manufacturer	Model No.	Serial No.	Power cord	signal cable
1	N/A	N/A	N/A	N/A	N/A	N/A

5.3 Test Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	signal cable
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A



6 Equipments List for All Test Items

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	ADVANTEST	R3182	150900201	2015.06.29	2016.06.28
2	EMI Measuring Receiver	R&S	ESR	101160	2014.12.12	2015.12.11
3	Low Noise Pre Amplifier	Tsj	MLA-10K01-B01-27	1205323	2015.06.29	2016.06.28
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2014.12.02	2015.12.01
5	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	3206	2014.12.03	2015.12.02
6	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2014.12.03	2015.12.02
7	SHF-EHF Horn	SCHWARZBECK	BBHA9170	BBHA9170367	2014.12.03	2015.12.02
8	Loop Antenna	ARA	PLA-1030/B	1029	2015.03.20	2016.03.19
9	Radiated Cable 1# (30MHz-1GHz)	FUJIKURA	5D-2W	01	2015.01.04	2016.01.03
10	Radiated Cable 2# (1GHz-25GHz)	FUJIKURA	10D2W	02	2014.12.25	2015.12.24
11	Conducted Cable 1#(9KHz-30MHz)	FUJIKURA	1D-2W	01	2015.01.04	2016.01.03
12	SMA Antenna connector	Dosin	Dosin-SMA	N/A	N/A	N/A

Note: The SMA antenna connector is soldered on the PCB board in order to perform conducted tests and this SMA antenna connector is listed in the equipment list.


7 Test Result

7.1 Antenna Requirement

Standard requirement

EUT Antenna

The antenna is non-removable antenna and no consideration of replacement. The maximum gain of the antenna is 0 dBi.

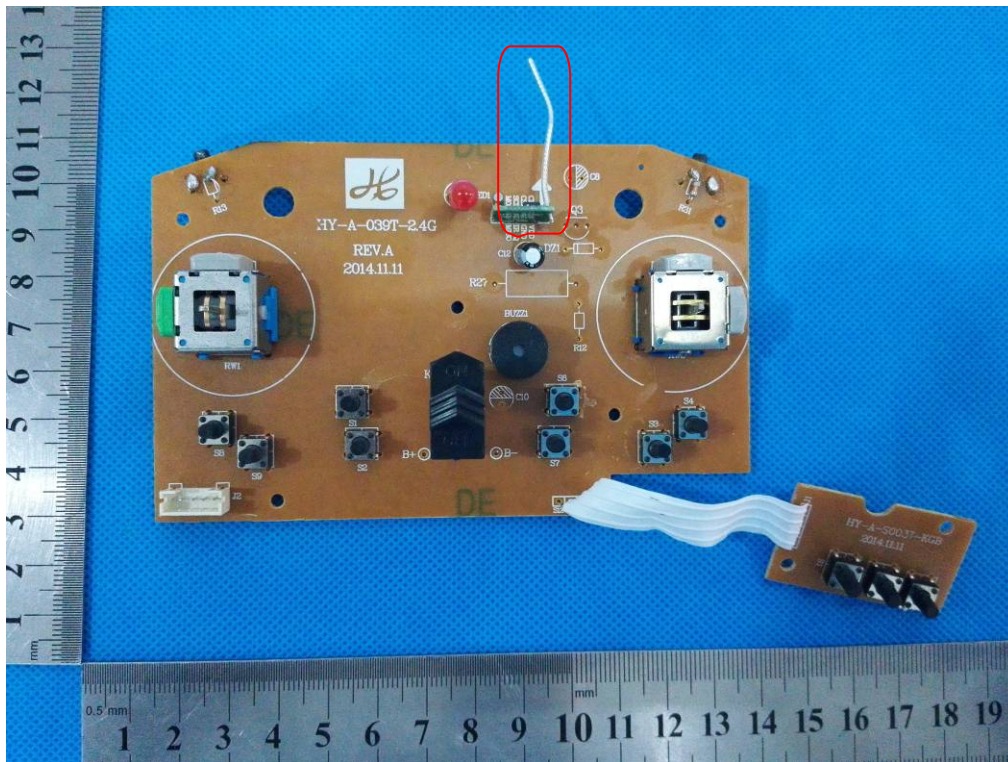

Test result: The unit does meet the FCC requirements.



7.2 Field Strength of Fundamental& Field Strength of Unwanted Emissions& Band Edge

Test Requirement: FCC Part15 C section 15.249

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB μ V/m @ 3m)	Field Strength of Harmonics (dB μ V/m @ 3m)
902 to 928	94.0	54.0
2400 to 2483.5	94.0	54.0
5725 to 5875	94.0	54.0
24000 to 24250	108.0	68.0

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Limits: The fundamental frequency rang is in the frequency band of the EUT is 2405 MHz ~ 2475 MHz.

The limit for AVG field strength dB μ V/m for the fundamental frequency = 94.0 dB μ V/m.

The limit for Peak field strength dB μ V/m for the fundamental frequency = 114.0 dB μ V/m.

No fundamental is allowed in the restricted bands.

The limit for AVG field strength dB μ V/m for the harmonics and other above 1G frequencies = 54.0 dB μ V/m.

The limit for Peak field strength dB μ V/m for the harmonics and other above 1G frequencies = 74.0 dB μ V/m.

Test Method: ANSI C63.10: Clause 6.4, 6.6 and 6.7 for Field Strength of Fundamental& Field Strength of Unwanted Emissions
ANSI C63.10: Clause 6.9.2 for Band Edge

Status: Pre-test the EUT in continuous transmitting mode with setup as stand-alone in X, Y, Z threes axes, found the worst case is Z axes and report the data.

Measurement Distance: 3m (Semi-Anechoic Chamber)

Frequency range: 9 kHz – 25 GHz for transmitting mode.

Test instrumentation resolution bandwidth

9 kHz (9 kHz - 30 MHz), 120 kHz (30 MHz - 1000 MHz), 1 MHz (1000 MHz – 25 GHz)



Detector:

For PK and QP value:

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For AV value:

RBW = 1 MHz for $f \geq 1$ GHz,

VBW = 10 Hz

Sweep = auto

Detector function = peak

Trace = max hold



Test Procedure:

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3) 1 GHz to 25 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.


For testing performed with the horn antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

For the radiated emission test above 1GHz:


Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Test Configuration:


- 1) 9 kHz to 30 MHz emissions:

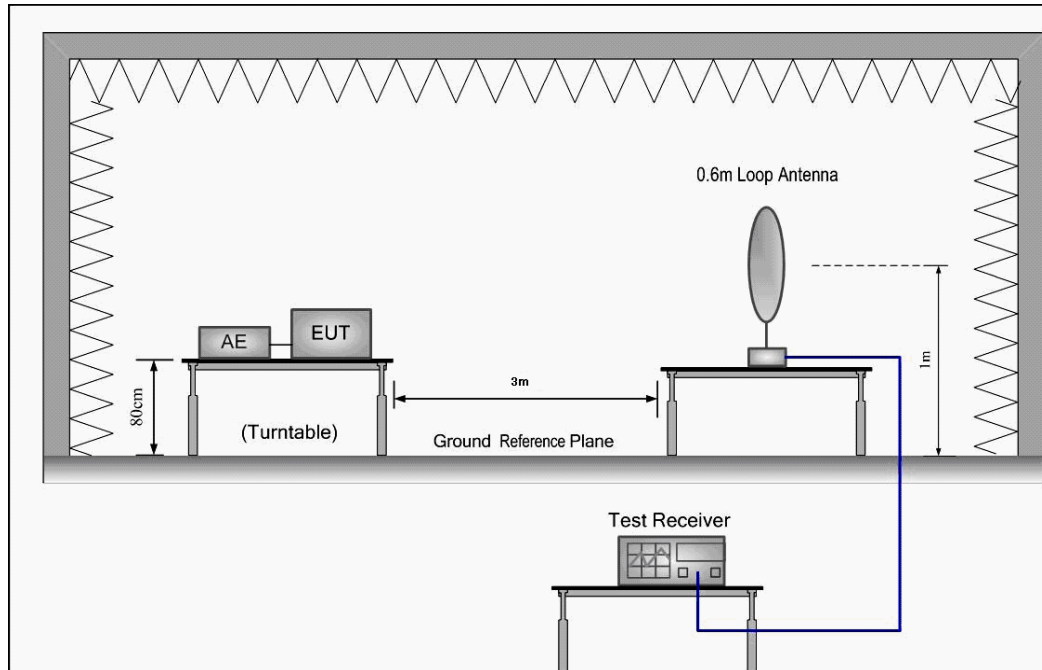

- 2) 30 MHz to 1 GHz emissions:

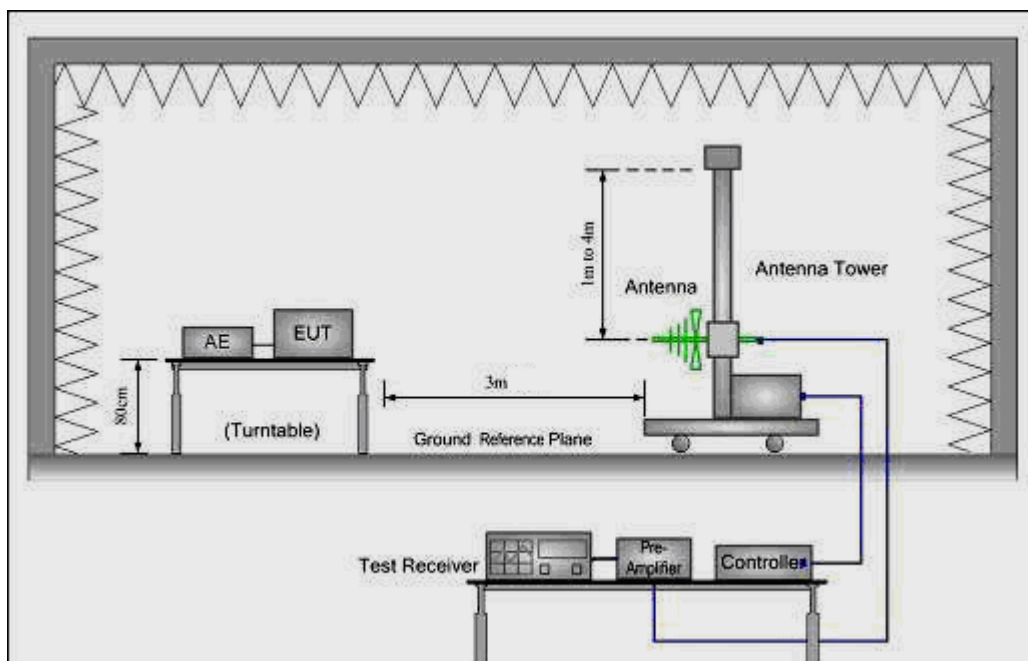

3) 1 GHz to 10 GHz emissions:

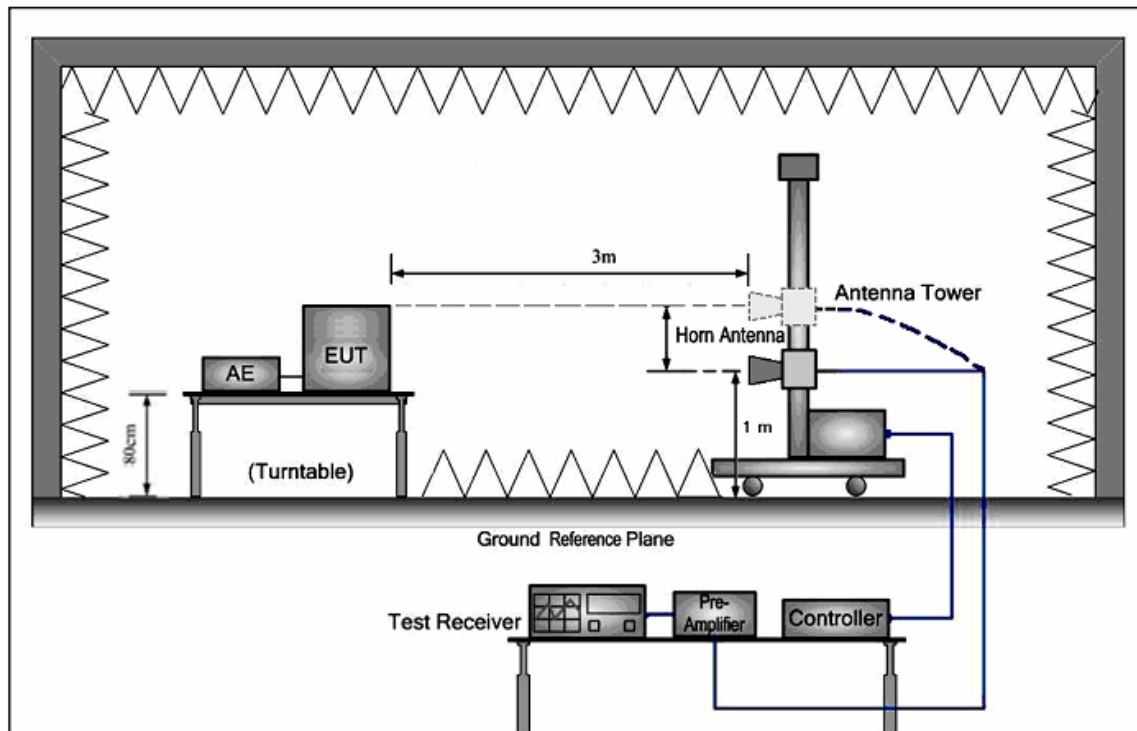


The field strength is calculated by adding the Antenna Factor, Cable Loss & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor



7.2.1 Duty cycle measurement:

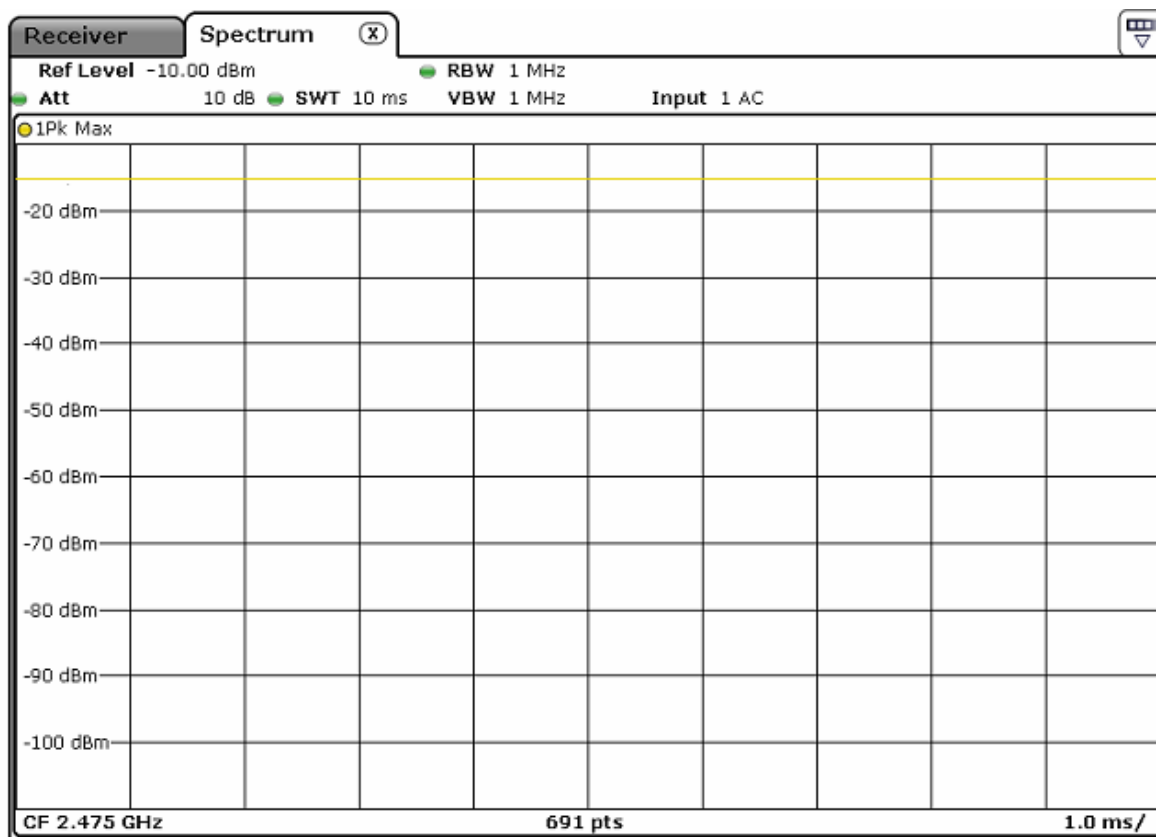

7.2.2 Fundamental field strength measurement:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Antenna polarization
2405.000	105.54	-5.64	99.9	114.00	-14.10	Peak	V
2405.000	93.68	-5.64	88.04	94.00	-5.96	AVG	V
2405.000	103.66	-5.64	98.02	114.00	-15.98	Peak	H
2405.000	92.17	-5.64	86.53	94.00	-7.47	AVG	H
2445.000	101.25	-5.32	95.93	114.00	-18.07	Peak	V
2445.000	90.83	-5.32	85.51	94.00	-8.49	AVG	V
2445.000	102.58	-5.32	97.26	114.00	-16.74	Peak	H
2445.000	91.24	-5.32	85.92	94.00	-8.08	AVG	H
2475.000	99.46	-5.05	94.41	114.00	-19.59	Peak	V
2475.000	89.43	-5.05	84.38	94.00	-9.62	AVG	V
2475.000	100.52	-5.05	95.47	114.00	-18.53	Peak	H
2475.000	90.52	-5.05	85.47	94.00	-8.53	AVG	H



Note: Measurement Level = Reading Level + Factor
Factor=Ant Factor + Cable Loss– Pre-amplifier.



7.2.3 Radiated Emissions Test Data

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Pre-test the EUT in continuous transmitting mode with setup as stand-alone in 2405,2445 and 2475 threes channels, found the worst case is 2405 and report the data.

EUT:	Remote-control planes	Model Name :	X5C
Temperature:	25 °C	Test Data	2015-08-14
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX mode(worse-case)	Test Voltage :	DC 9.0V from battery
Measurement Distance	3 m	Frenqucy Range	30MHz to 1GHz
RBW/VBW	100KHz / 300KHz for spectrum, RBW=120KHz for receiver.		

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
38.8878	44.61	-14.51	30.10	40.00	-9.90	QUASI-PEAK
50.0566	41.72	-14.22	27.50	40.00	-12.50	QUASI-PEAK
129.4677	47.15	-14.95	32.20	43.50	-11.30	QUASI-PEAK
196.5098	47.15	-14.22	32.93	43.50	-10.57	QUASI-PEAK
434.0650	38.31	-6.61	31.70	46.00	-14.30	QUASI-PEAK
*654.2318	38.83	-1.63	37.20	46.00	-8.80	QUASI-PEAK

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
48.6719	48.36	-18.46	29.90	40.00	-10.10	QUASI-PEAK
87.7248	43.60	-18.60	25.00	40.00	-15.00	QUASI-PEAK
161.4740	42.68	-14.88	27.80	43.50	-15.70	QUASI-PEAK
283.9791	36.65	-10.15	26.50	46.00	-19.50	QUASI-PEAK
375.9384	40.54	-7.54	33.00	46.00	-13.00	QUASI-PEAK
*520.8881	41.57	-4.97	36.60	46.00	-9.40	QUASI-PEAK



Note: '*' means the worst case

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss– Pre-amplifier.

Above 1GHz Field Strength of Unwanted Emissions Measurement

EUT:	Remote-control planes	Model Name :	X5C
Temperature:	25 °C	Test Data	2015-08-14
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX mode	Test Voltage :	DC 9.0V from battery
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	1MHz/1MHz for Peak, 1MHz/10Hz for Average. non-restricted band: 100KHz/300KHz for Peak.		

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4810.0000	52.11	5.07	57.18	74.00	-16.82	PEAK
*4810.0000	39.26	5.07	44.33	54.00	-9.67	AVERAGE
7215.0000	44.21	7.07	51.28	74.00	-22.72	PEAK
7215.0000	30.16	7.07	37.23	54.00	-16.77	AVERAGE
9620.0000	36.89	10.69	47.58	74.00	-26.42	PEAK
9620.0000	25.00	10.69	35.69	54.00	-18.31	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4810.0000	50.02	5.07	55.09	74.00	-18.91	PEAK
*4810.0000	37.70	5.07	42.77	54.00	-11.23	AVERAGE
7215.0000	41.46	7.07	48.53	74.00	-25.47	PEAK
7215.0000	29.09	7.07	36.16	54.00	-17.84	AVERAGE
9620.0000	35.79	10.69	46.48	74.00	-27.52	PEAK
9620.0000	22.05	10.69	32.74	54.00	-21.26	AVERAGE

Note: '*' means the worst case

10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss– Pre-amplifier.

Low Channel: 2405 MHz



(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBUV)	Correct Factor (dB)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector Type
4890.0000	51.07	5.15	56.22	74.00	-17.78	PEAK
*4890.0000	37.22	5.15	42.37	54.00	-11.63	AVERAGE
7335.0000	41.51	7.59	49.10	74.00	-24.90	PEAK
7335.0000	30.10	7.59	37.69	54.00	-16.31	AVERAGE
9780.0000	35.60	11.46	47.06	74.00	-26.94	PEAK
9780.0000	22.76	11.46	34.22	54.00	-19.78	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBUV)	Correct Factor (dB)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector Type
4890.0000	49.08	5.15	54.23	74.00	-19.77	PEAK
*4890.0000	36.51	5.15	41.66	54.00	-12.34	AVERAGE
7335.0000	40.95	7.59	48.54	74.00	-25.46	PEAK
7335.0000	27.13	7.59	34.72	54.00	-19.28	AVERAGE
9780.0000	35.70	11.46	47.16	74.00	-26.84	PEAK
9780.0000	23.19	11.46	34.65	54.00	-19.35	AVERAGE

Note: '*' means the worst case

10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss– Pre-amplifier.

Middle Channel: 2445 MHz



(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4950.0000	49.72	5.21	54.93	74.00	-19.07	PEAK
*4950.0000	37.44	5.21	42.65	54.00	-11.35	AVERAGE
7425.0000	39.08	7.99	47.07	74.00	-26.93	PEAK
7425.0000	26.89	7.99	34.88	54.00	-19.12	AVERAGE
9960.0000	36.01	12.20	48.21	74.00	-25.79	PEAK
9960.0000	24.23	12.20	36.43	54.00	-17.57	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4950.0000	50.07	5.21	55.28	74.00	-18.72	PEAK
*4950.0000	38.54	5.21	43.75	54.00	-10.25	AVERAGE
7425.0000	39.67	7.99	47.66	74.00	-26.34	PEAK
7425.0000	27.41	7.99	35.40	54.00	-18.60	AVERAGE
9960.0000	34.63	12.20	46.83	74.00	-27.17	PEAK
9960.0000	20.59	12.20	32.79	54.00	-21.21	AVERAGE

Note: '**' means the worst case

10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss– Pre-amplifier.

High Channel: 2475 MHz



7.2.4 Band Edge Measurement:

Ant.Pol. H/V	Freq. (MHz)	Reading		Ant/CF CF(dB)	Act		Limit	
		Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)
Lowest 2405 MHz								
V	2400.00	43.98	34.28	-5.72	38.26	28.56	74.00	54.00
H	2400.00	42.76	31.86	-5.72	37.04	26.14	74.00	54.00
Highest 2475 MHz								
V	2483.50	42.91	31.64	-4.98	37.93	26.66	74.00	54.00
H	2483.50	43.43	32.59	-4.98	38.45	27.61	74.00	54.00

Remark:

1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor.

Test result: The unit does meet the FCC requirements.



7.2.5 Restricted Bands Measurement:

EUT:	Remote-control planes	Model Name :	X5C
Temperature:	25 °C	Test Data	2015-08-14
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX mode	Test Voltage :	DC 9.0V from battery
Note:	1. The transmitter was setup to transmit at the lowest channel. Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was setup to transmit at the highest channel. Then the field strength was measured at 2483.5-2500 MHz. 3. The data of 2390MHz and 2483.5MHz was the worst.		

Ant.Pol. H/V	Freq. (MHz)	Reading		Ant/CF CF(dB)	Act		Limit	
		Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)
V	2390.00	43.27	33.17	-5.79	37.48	27.38	74.00	54.00
H	2390.00	42.15	31.1	-5.79	36.36	25.31	74.00	54.00
V	2483.50	42.91	31.64	-4.98	37.93	26.66	74.00	54.00
H	2483.50	43.43	32.59	-4.98	38.45	27.61	74.00	54.00

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode.
- (2) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (3) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.

7.3 Occupied Bandwidth

Test Requirement: FCC Part 15 C section 15.215


(c)Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Method: ANSI C63.10: Clause 6.9.1


Operation within the band 2405 MHz to 2475 MHz

Method of measurement: A small sample of the transmitter output was fed into the Spectrum Analyzer and the attached plot was taken.


Test in the frequency 2405MHz (20 dB bandwidth)

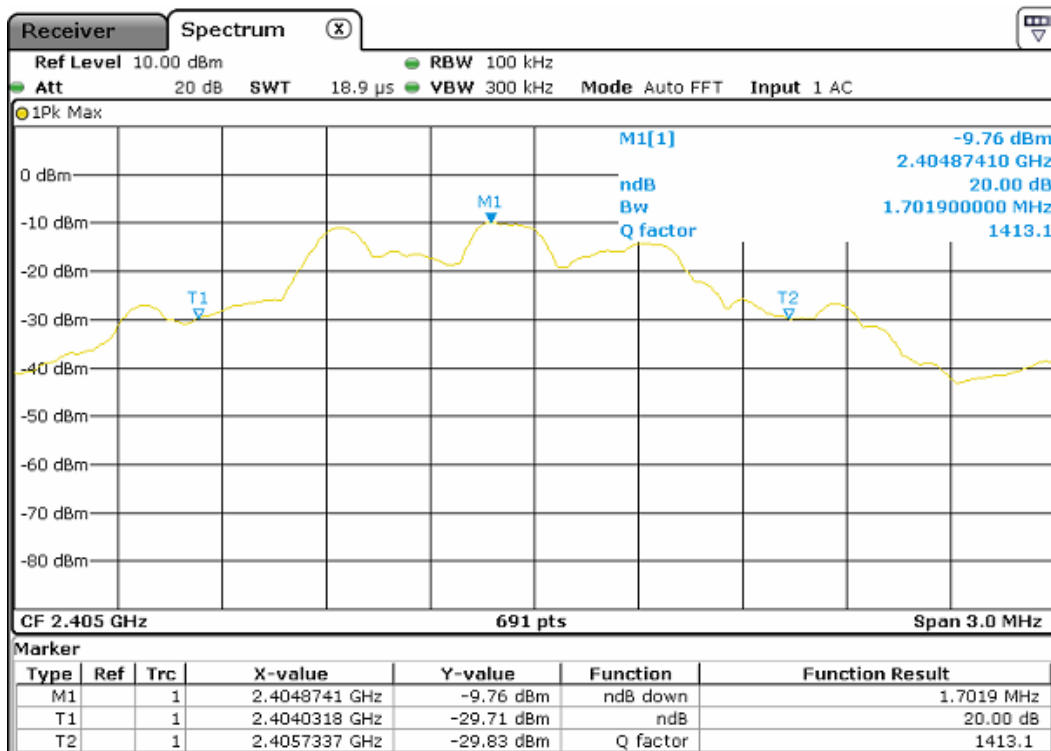

Test in the frequency 2445MHz (20 dB bandwidth)

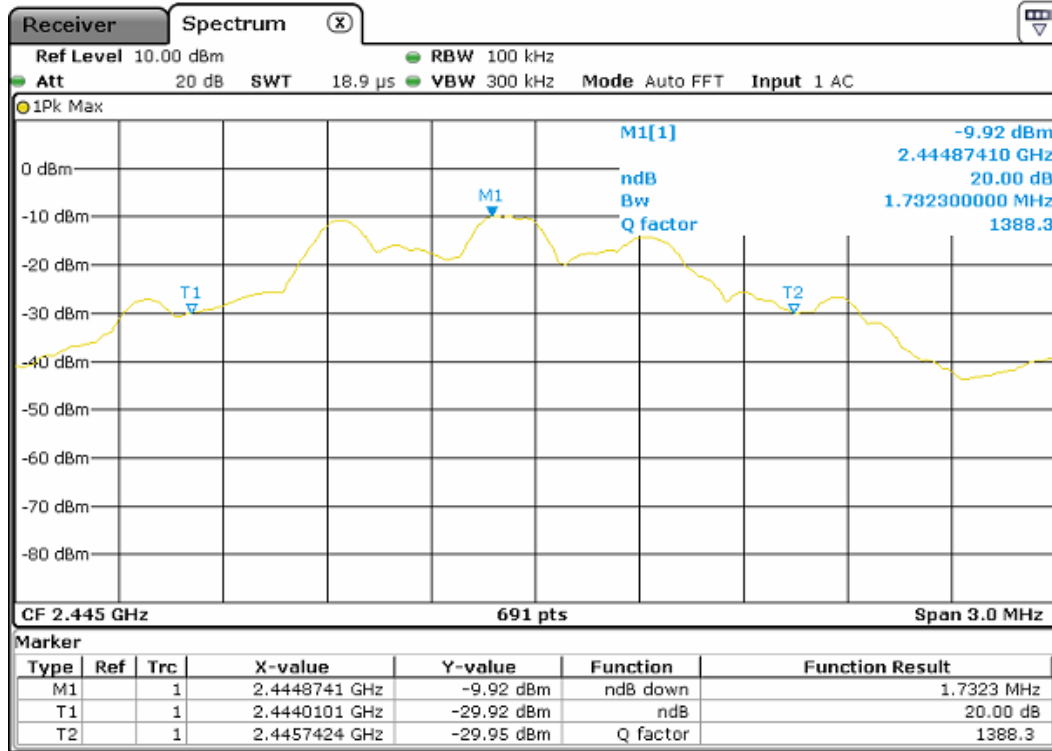

Test in the frequency 2475MHz (20 dB bandwidth)

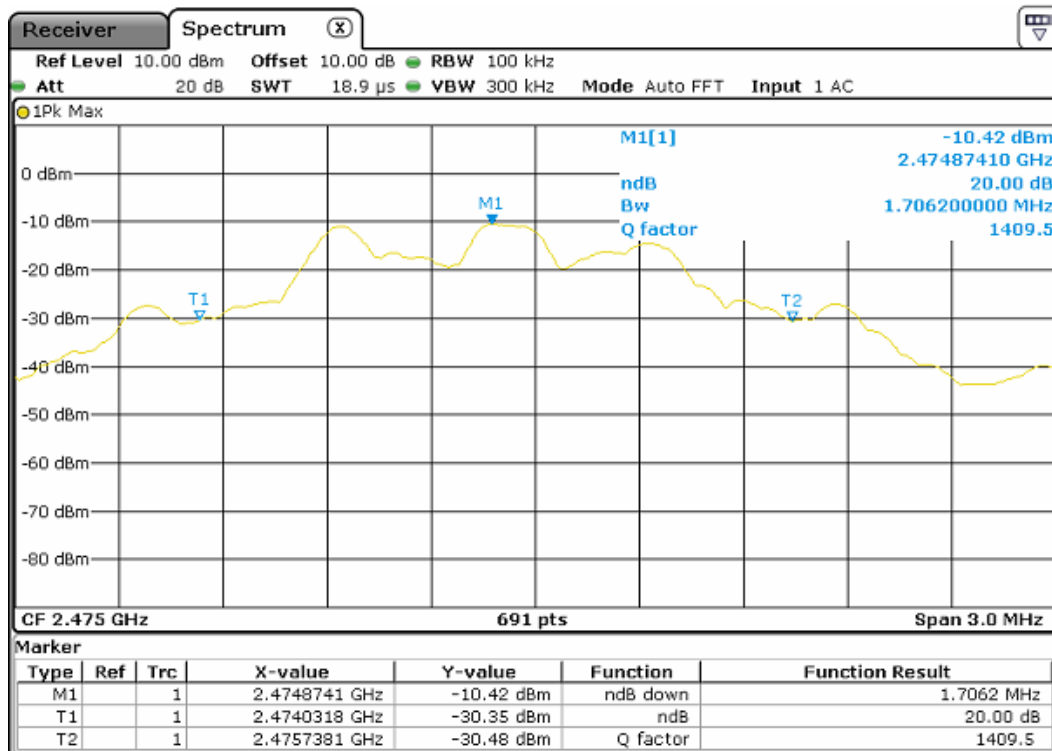



7.4 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz


Test Requirement:	FCC Part 15 C section 15.207
Test Method:	ANSI C63.10: Clause 6.2
Frequency Range:	150 kHz to 30 MHz
Detector:	Peak for pre-scan (9 kHz Resolution Bandwidth)
Test Result	N/A (Please see the remark as below)

Remark: Because the EUT employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Measurements to demonstrate compliance with the conducted limits are not required for devices.


8 Photographs

8.1 Radiated Emission Test Setup

Below 1G

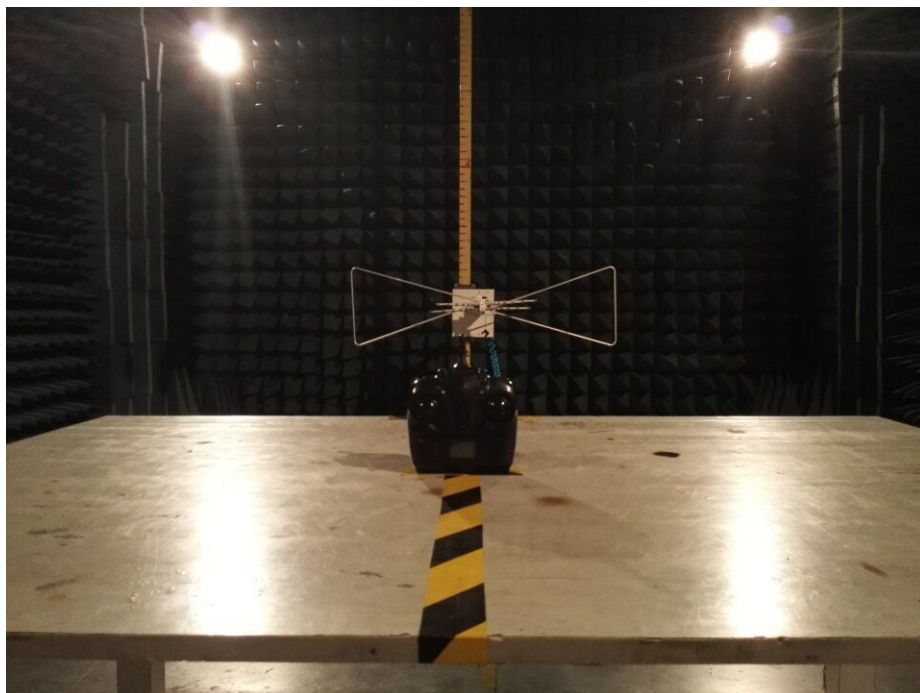



Above 1G


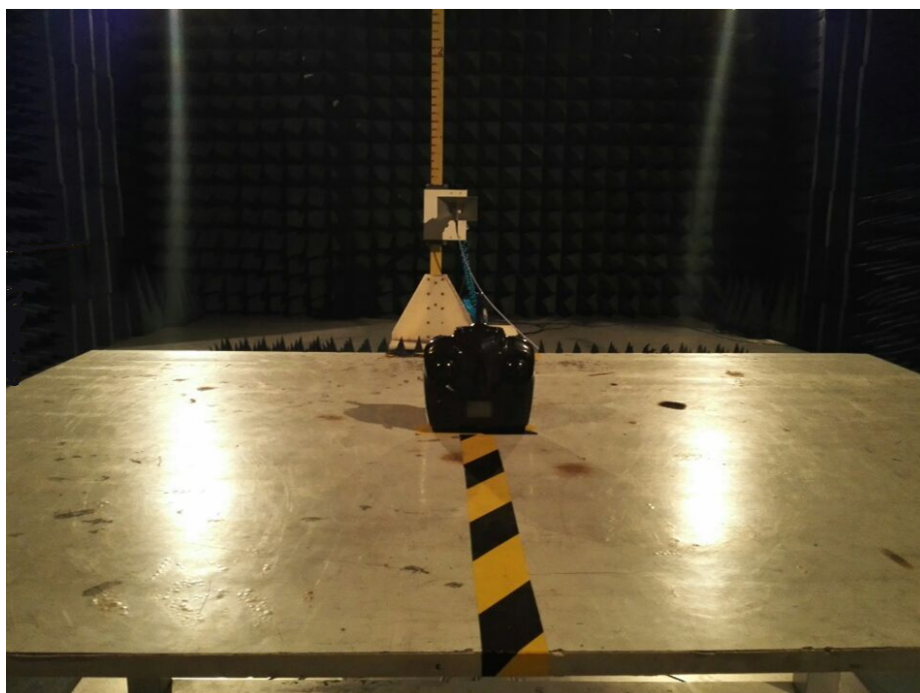




9 EUT Constructional Details









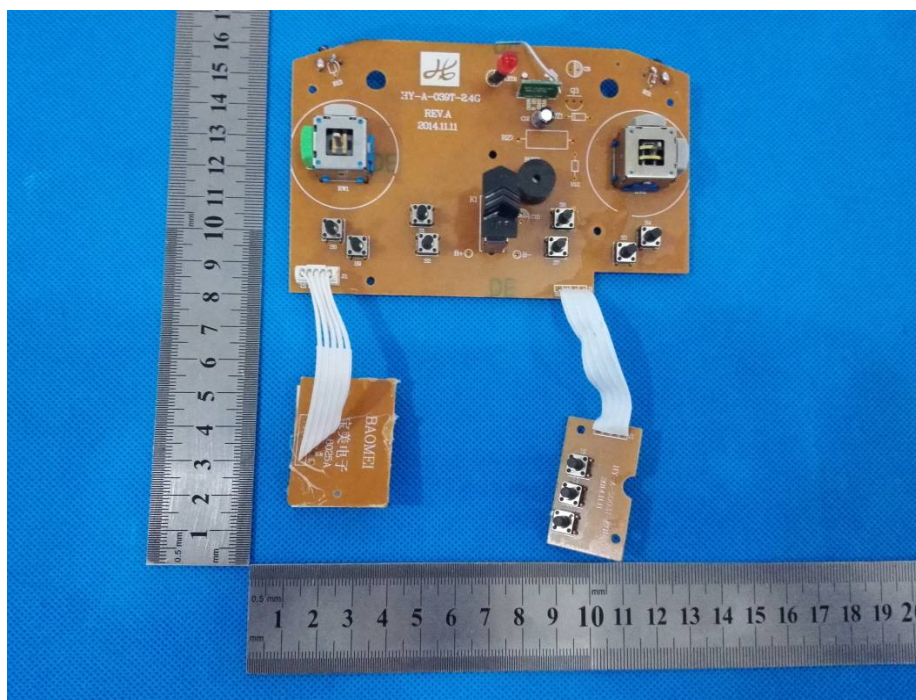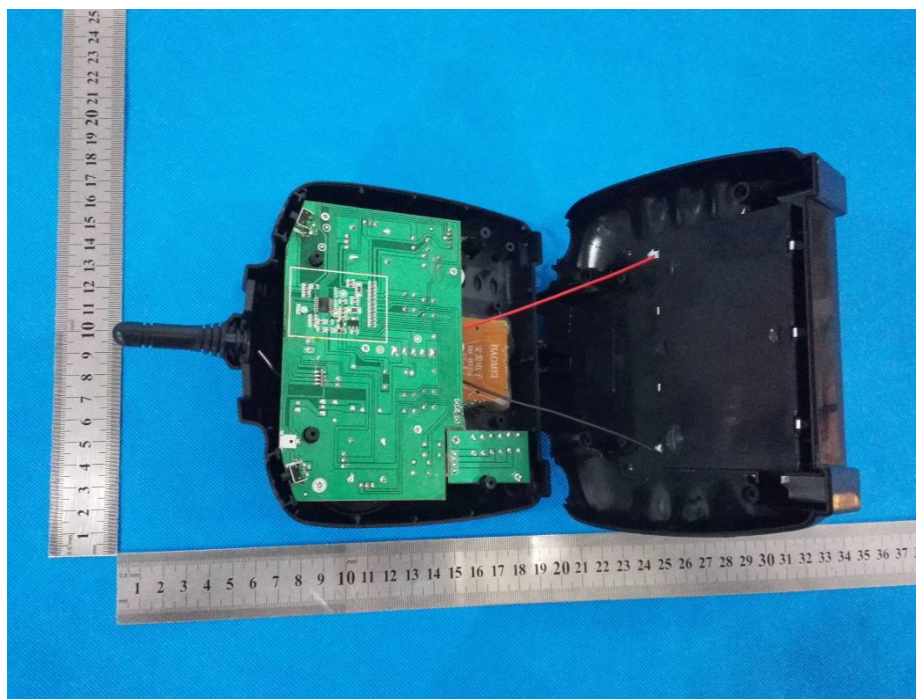

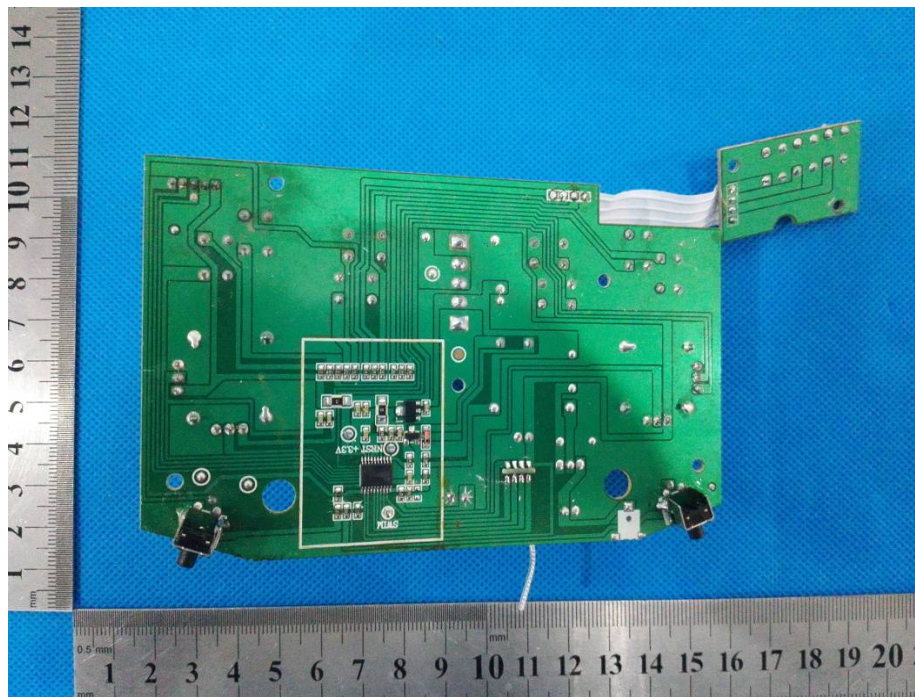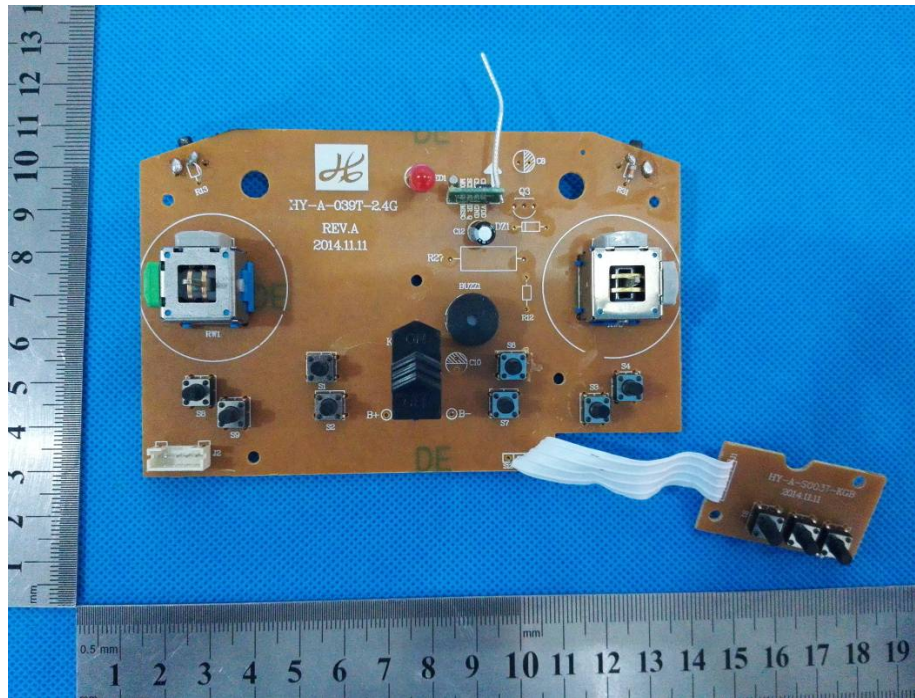

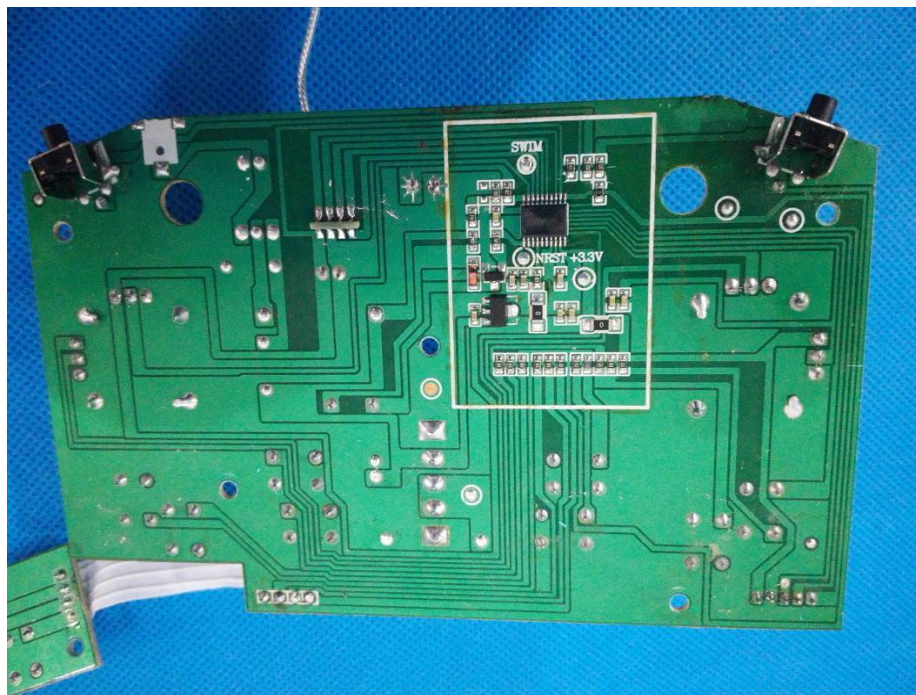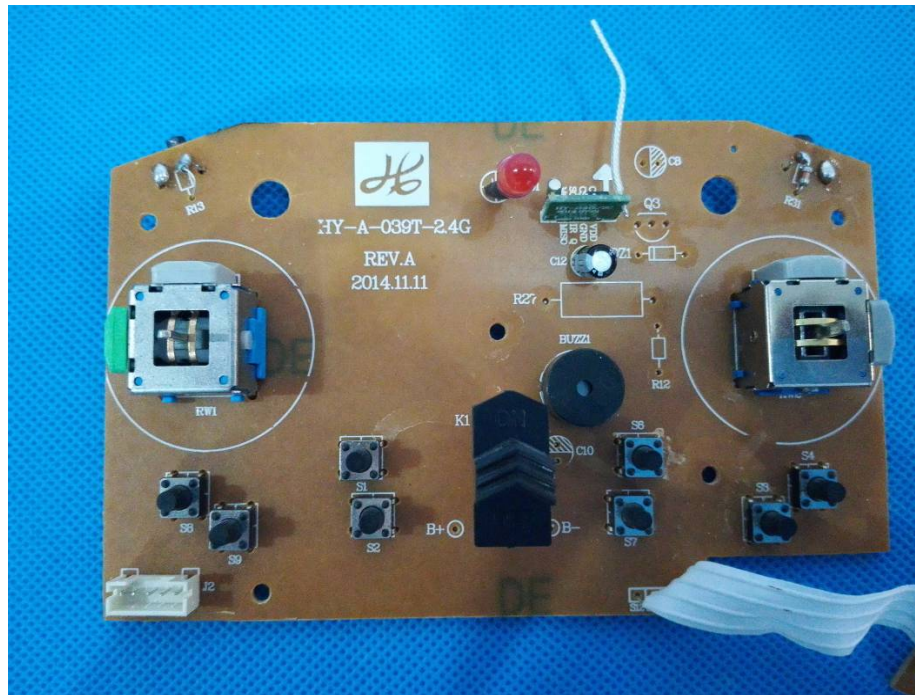

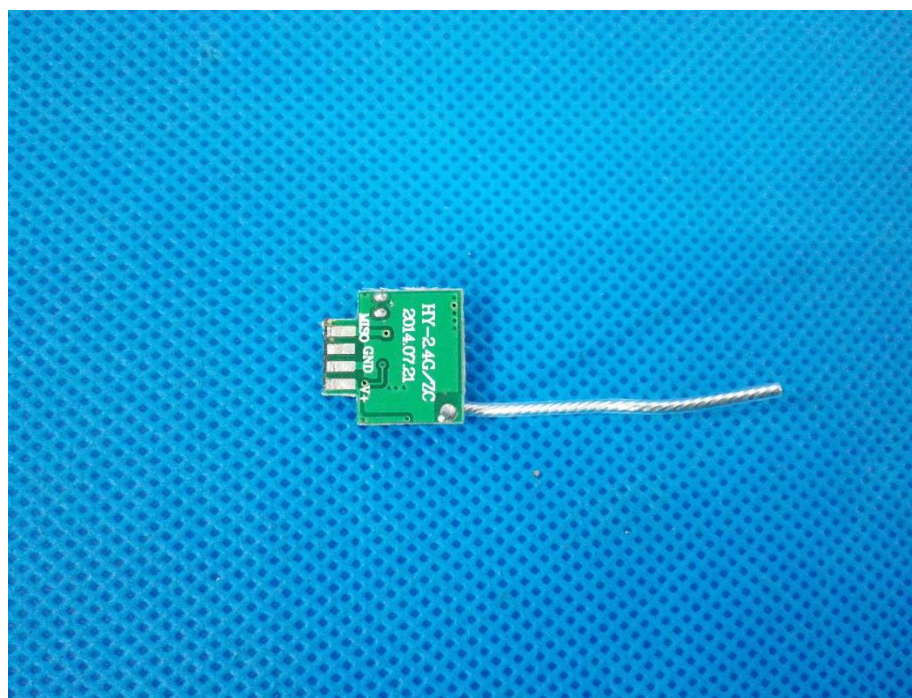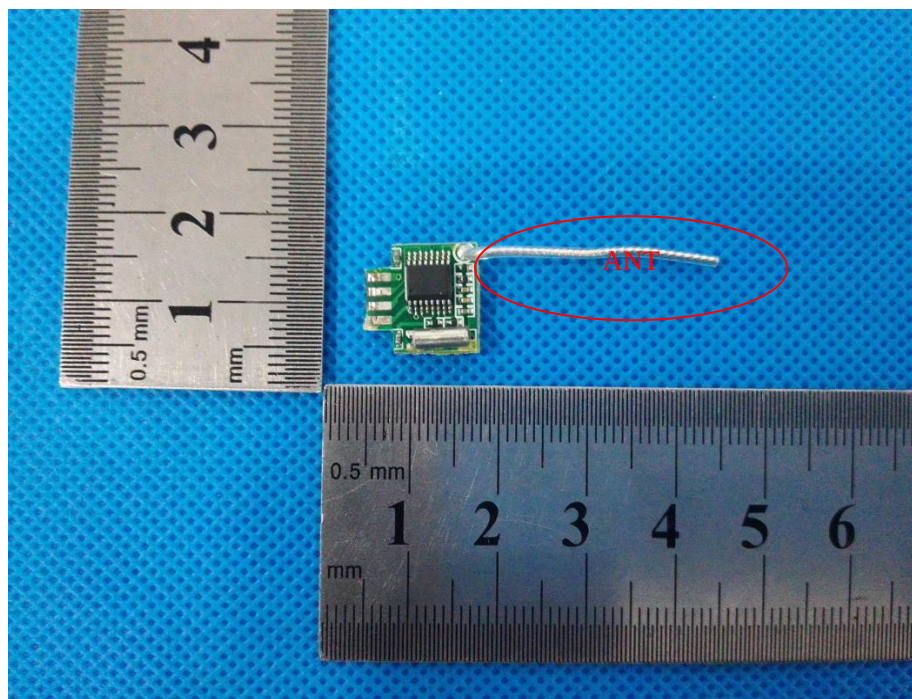

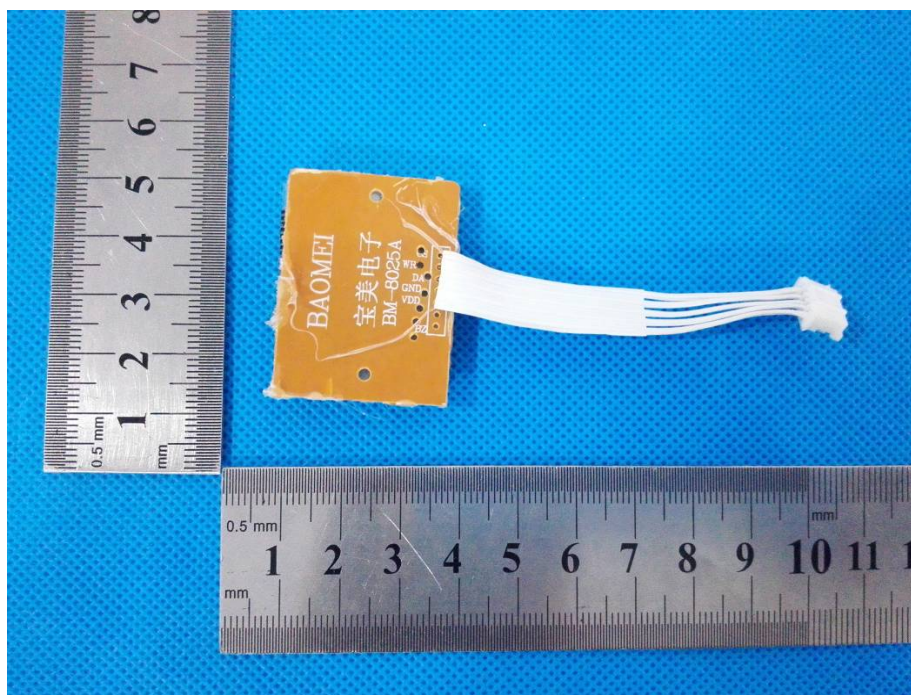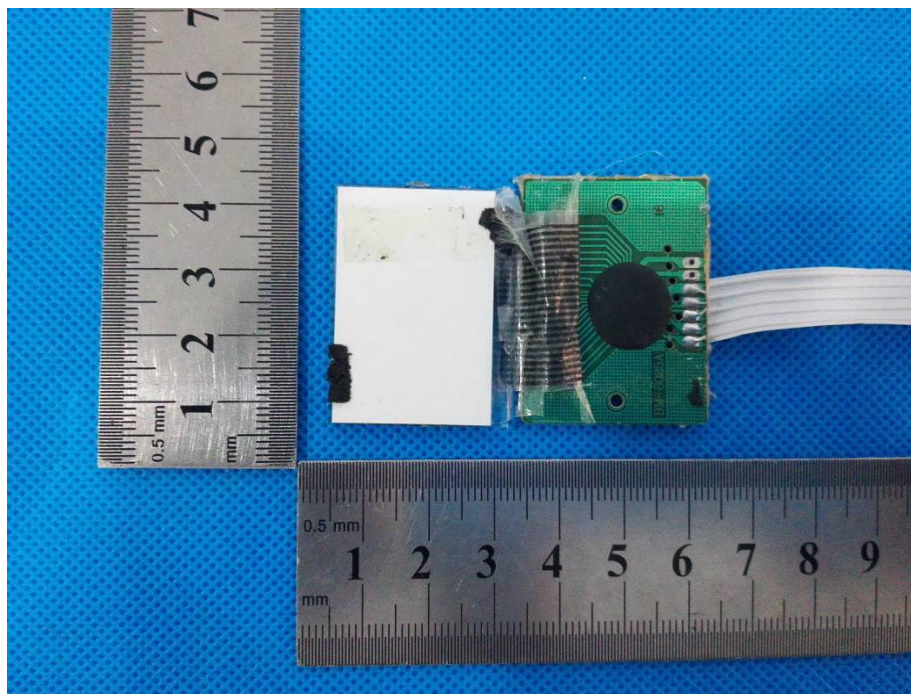

****End of report****