

TEST REPORT

Product : 9.7 inch 3G Phone Tablet
Trade mark : Dragon Touch, KINGPAD, KINGSLIM, AKASO
Model/Type reference : E97, E97 PRO, E97X, E97 PLUS, E970, E97 ULTIMATE
Serial Number : N/A
Report Number : EED32H00097801
FCC ID : S5V-D970E1
Date of Issue : Dec. 30, 2015
Test Standards : 47 CFR Part 15 Subpart C (2014)
Test result : PASS

Prepared for:

Proexpress Distributor LLC
11011 GREENWOOD AVE. N APT 5, SEATTLE, WA 98103.

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:

Enon-Li

Reviewed by:

Kevin Tang

Approved by:

Sheek Luo

Date:

Dec. 30, 2015

Sheek Luo

Lab supervisor

Check No.: 2212890594



2 Version

Version No.	Date	Description
00	Dec. 30, 2015	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to DA00-705 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.

Model No.: E97, E97 PRO, E97X, E97 PLUS, E970, E97 ULTIMATE

Only the model E97 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being model name and brand name.


4 Content

1 COVER PAGE.....	1
2 VERSION.....	2
3 TEST SUMMARY.....	3
4 CONTENT.....	4
5 TEST REQUIREMENT.....	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION.....	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	8
6.6 TEST FACILITY.....	8
6.7 DEVIATION FROM STANDARDS.....	9
6.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.10 MEASUREMENT UNCERTAINTY(95% CONFIDENCE LEVELS, K=2).....	10
7 EQUIPMENT LIST.....	11
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION.....	13
Appendix A) 20dB Occupied Bandwidth.....	14
Appendix B) Carrier Frequency Separation.....	18
Appendix C) Dwell Time.....	22
Appendix D) Hopping Channel Number.....	26
Appendix E) Conducted Peak Output Power.....	28
Appendix F) Band-edge for RF Conducted Emissions.....	32
Appendix G) RF Conducted Spurious Emissions.....	37
Appendix H) Pseudorandom Frequency Hopping Sequence.....	44
Appendix I) Antenna Requirement.....	45
Appendix J) AC Power Line Conducted Emission.....	46
Appendix K) Restricted bands around fundamental frequency (Radiated).....	49
Appendix L) Radiated Spurious Emissions.....	51
PHOTOGRAPHS OF TEST SETUP.....	56
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....	58

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

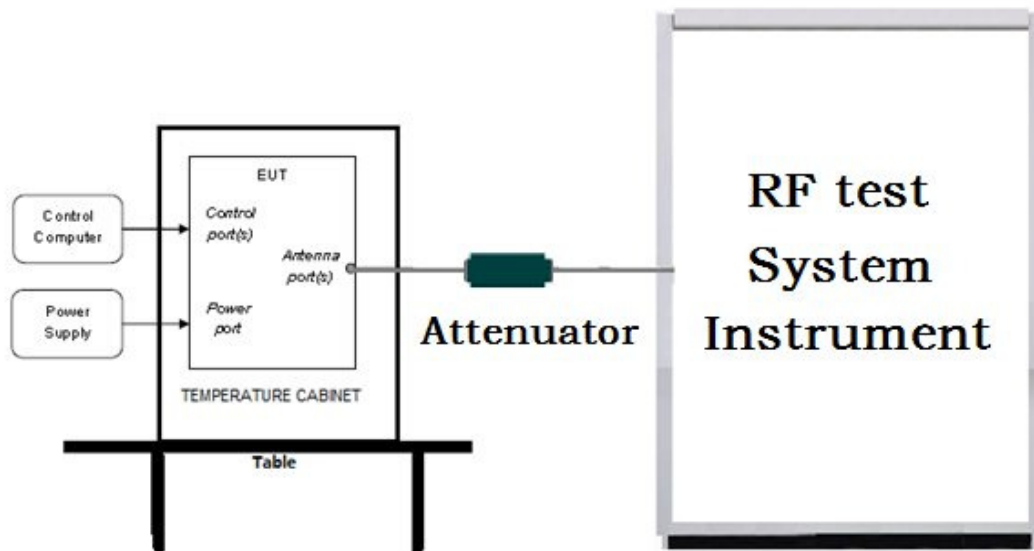

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

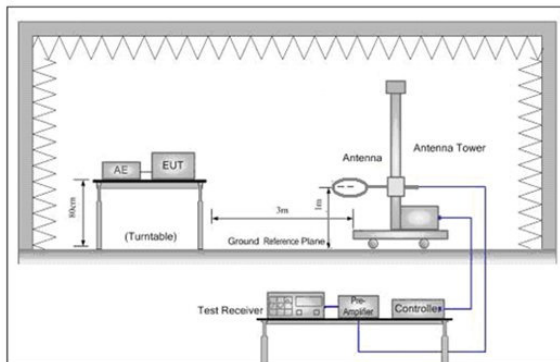


Figure 1. Below 30MHz

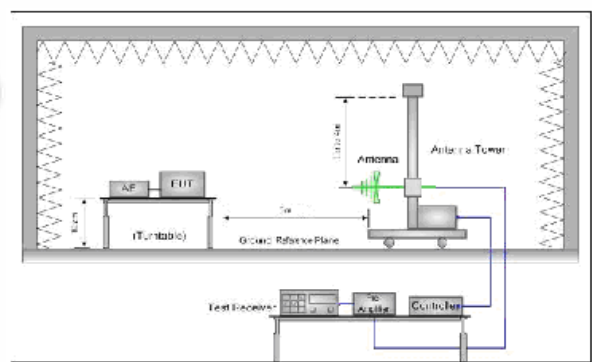


Figure 2. 30MHz to 1GHz


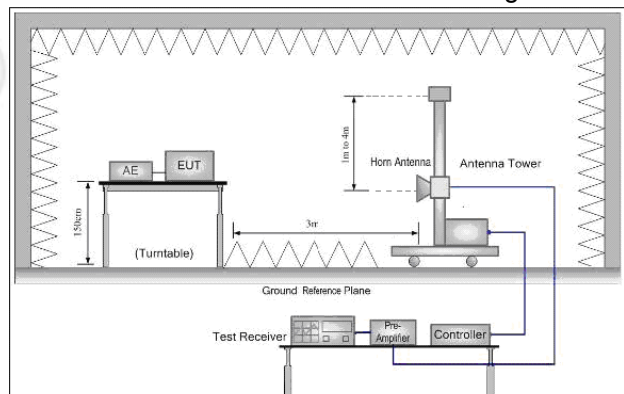


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

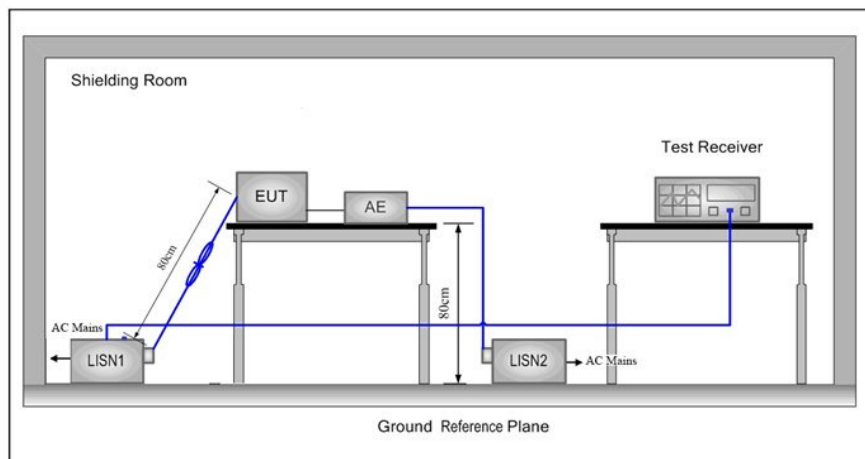

5.2 Test Environment

Operating Environment:

Temperature:	22 °C
Humidity:	50% RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ π /4DQPSK/ 8DPSK(DH1,DH3,DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

6 General Information

6.1 Client Information

Applicant:	Proexpress Distributor LLC
Address of Applicant:	11011 GREENWOOD AVE. N APT 5, SEATTLE, WA 98103.
Manufacturer:	Proexpress Distributor LLC
Address of Manufacturer:	11011 GREENWOOD AVE. N APT 5, SEATTLE, WA 98103.

6.2 General Description of EUT

Product Name:	9.7 inch 3G Phone Tablet		
Model No.:	E97, E97 PRO, E97X, E97 PLUS, E970, E97 ULTIMATE		
Test Mode No.:	E97		
Trade Mark:	Dragon Touch, KINGPAD, KINGSLIM, AKASO		
EUT Supports Radios application:	Bluetooth V4.0 for classic mode		
Power Supply:	Adapter:	Model: WTA0502000USB1 Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5.0V=2000mA	
	Battery:	Li-ion 3.7V/6000mAH	
Sample Received Date:	Jul. 22, 2015		
Sample tested Date:	Jul. 22, 2015 to Dec. 30, 2015		

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz						
Bluetooth Version:	Bluetooth V4.0						
Modulation Type:	GFSK, π /4DQPSK, 8DPSK						
Number of Channel:	79						
Sample Type:	Portable production						
Test Power Grade:	N/A (manufacturer declare)						
Test Software of EUT:	N/A (manufacturer declare)						
Antenna Type:	Integral						
Antenna Gain:	-1.45dBi						
Test Voltage:	120V~60Hz						
Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz

9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China518101

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 565659

Centre Testing International Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 565659.

IC-Registration No.: 7408A

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A .

IC-Registration No.: 7408B

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B.

NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The Radiation 3 &10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563. Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

6.7 Deviation from Standards

None.

6.8 Abnormalities from Standard Conditions

None.

6.9 Other Information Requested by the Customer

None.

6.10 Measurement Uncertainty(95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB(1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB(1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	04-14-2015	04-13-2016
Communication test set test set	Agilent	N4010A	MY47230124	04-02-2015	04-01-2016
Spectrum Analyzer	Keysight	N9010A	MY54510339	04-01-2015	03-31-2016
Attenuator	HuaXiang	SHX370	15040701	04-01-2015	03-31-2016
Signal Generator	Keysight	N5182B	MY53051549	03-31-2015	03-30-2016
High-pass filter(3-18GHz)	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-13-2015	01-12-2016
High-pass filter(5-18GHz)	MICRO-TRONICS	SPA-F-63029-4	---	01-13-2015	01-12-2016
band rejection filter (GSM900)	Sinoscite	FL5CX01CA09C L12-0395-001	---	01-13-2015	01-12-2016
band rejection filter (GSM850)	Sinoscite	FL5CX01CA08C L12-0393-001	---	01-13-2015	01-12-2016
band rejection filter (GSM1800)	Sinoscite	FL5CX02CA04C L12-0396-002	---	01-13-2015	01-12-2016
band rejection filter (GSM1900)	Sinoscite	FL5CX02CA03C L12-0394-001	---	01-13-2015	01-12-2016
DC Power	Keysight	E3642A	MY54436035	03-31-2015	03-30-2016
PC-1	Lenovo	R4960d	---	04-01-2015	03-31-2016
BT&WI-FI Automatic control	R&S	OSPB157	101374	04-01-2015	03-31-2016
RF control unit	JS Tonscend	JS0806-2	2015860006	04-01-2015	03-31-2016
BT&WI-FI Automatic test software	JS Tonscend	JSTS1120-2	---	04-01-2015	03-31-2016

Conducted disturbance Test					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	06-30-2015	06-28-2016
Receiver	R&S	ESCI	100009	06-30-2015	06-28-2016
Temperature/ Humidity Indicator	Belida	TT-512	101	07-09-2015	07-07-2016
Communication test set	Agilent	E5515C	GB47050533	01-13-2015	01-12-2016
Communication test set	R&S	CMW500	152394	04-19-2015	04-18-2016
LISN	R&S	ENV216	100098	06-30-2015	06-28-2016
LISN	schwarzbeck	NNLK8121	8121-529	06-30-2015	06-28-2016
Voltage Probe	R&S	ESH2-Z3	100042	07-09-2014	07-08-2017
Current Probe	R&S	EZ17	100106	07-09-2014	07-08-2017
ISN	TESEQ GmbH	ISN T800	30297	01-29-2015	01-27-2017

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber	TDK	SAC-3	---	06-02-2013	06-01-2016
TRILOG Broadband Antenna	schwarzbeck	VULB9163	9163-617	07-31-2015	07-29-2016
Microwave Preamplifier	Agilent	8449B	3008A02425	02-05-2015	02-04-2016
Horn Antenna	ETS-LINDGREN	3117	00057410	06-30-2015	06-28-2018
Loop Antenna	ETS	6502	00071730	07-30-2015	07-28-2017
Spectrum Analyzer	R&S	FSP40	100416	06-30-2015	06-28-2016
Receiver	R&S	ESCI	100435	06-30-2015	06-28-2016
Multi device Controller	matur	NCD/070/10711112	---	01-13-2015	01-12-2016
LISN	schwarzbeck	NNBM8125	81251547	06-30-2015	06-28-2016
LISN	schwarzbeck	NNBM8125	81251548	06-30-2015	06-28-2016
Signal Generator	Agilent	E4438C	MY45095744	04-19-2015	04-18-2016
Signal Generator	Keysight	E8257D	MY53401106	04-14-2015	04-13-2016
Temperature/ Humidity Indicator	TAYLOR	1451	1905	07- 08-2015	07-06-2016
Communication test set	Agilent	E5515C	GB47050533	01-13-2015	01-12-2016
Cable line	Fulai(7M)	SF106	5219/6A	01-13-2015	01-12-2016
Cable line	Fulai(6M)	SF106	5220/6A	01-13-2015	01-12-2016
Cable line	Fulai(3M)	SF106	5216/6A	01-13-2015	01-12-2016
Cable line	Fulai(3M)	SF106	5217/6A	01-13-2015	01-12-2016
Communication test set	R&S	CMW500	152394	04-19-2015	04-18-2016
High-pass filter(3-18GHz)	Sinoscite	FL3CX03WG18NM 12-0398-002	---	01-13-2015	01-12-2016
High-pass filter(5-18GHz)	MICRO-TRONICS	SPA-F-63029-4	---	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX01CA09CL1 2-0395-001	---	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX01CA08CL1 2-0393-001	---	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX02CA04CL1 2-0396-002	---	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX02CA03CL1 2-0394-001	---	01-13-2015	01-12-2016

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2014)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)


Appendix A) 20dB Occupied Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	Refer to section 5 for details
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.
Instruments Used:	Refer to section 7 for details
Test Results:	Pass



Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
GFSK	LCH	0.9609	0.89058	PASS	Peak detector
GFSK	MCH	0.9549	0.88323	PASS	
GFSK	HCH	0.9590	0.88800	PASS	
$\pi/4$ DQPSK	LCH	1.277	1.1694	PASS	
$\pi/4$ DQPSK	MCH	1.277	1.1658	PASS	
$\pi/4$ DQPSK	HCH	1.275	1.1598	PASS	
8DPSK	LCH	1.279	1.1704	PASS	
8DPSK	MCH	1.281	1.1661	PASS	
8DPSK	HCH	1.275	1.1659	PASS	

Test Graph

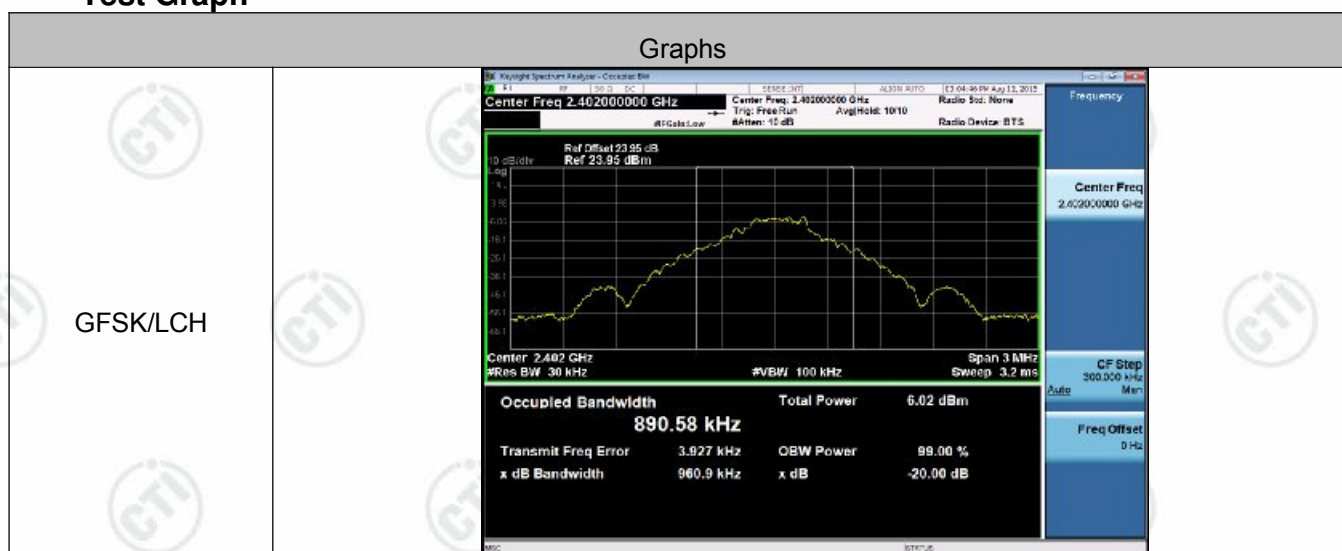

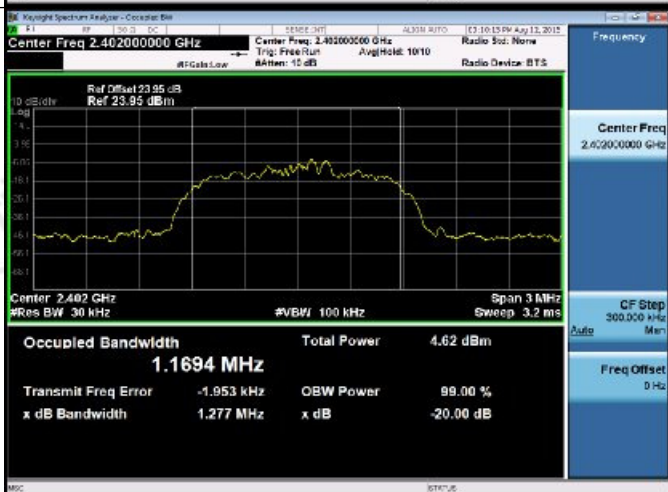GFSK/MCH	 Center Freq 2.441000000 GHz Ref Offset 23.76 dB Ref 23.76 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 883.23 kHz Total Power 7.03 dBm Transmit Freq Error 3.710 kHz OBW Power 99.00 % x dB Bandwidth 954.9 kHz x dB -20.00 dB
GFSK/HCH	 Center Freq 2.480000000 GHz Ref Offset 23.76 dB Ref 23.76 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 888.00 kHz Total Power 6.76 dBm Transmit Freq Error 4.197 kHz OBW Power 99.00 % x dB Bandwidth 959.0 kHz x dB -20.00 dB
$\pi/4$ DQPSK/LCH	 Center Freq 2.402000000 GHz Ref Offset 23.95 dB Ref 23.95 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1694 MHz Total Power 4.62 dBm Transmit Freq Error -1.953 kHz OBW Power 99.00 % x dB Bandwidth 1.277 MHz x dB -20.00 dB

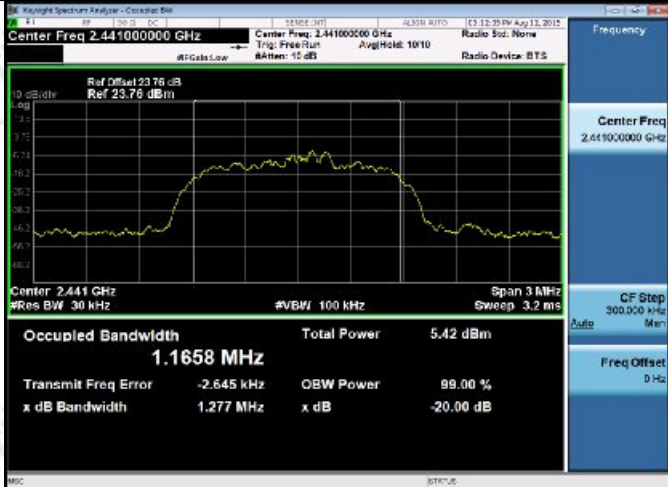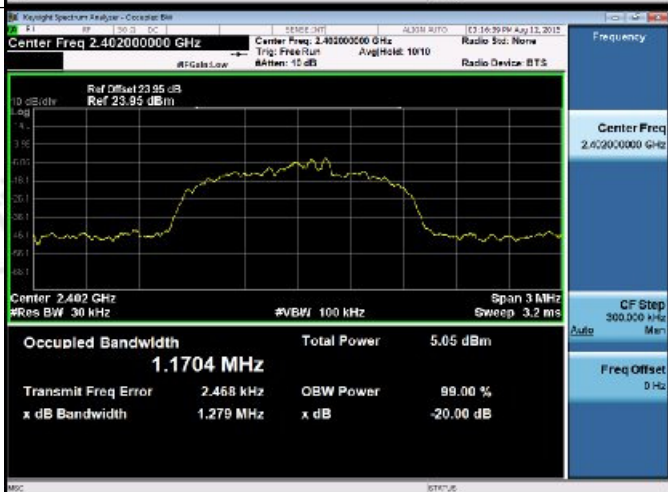$\pi/4$DQPSK/MCH	 Center Freq 2.441000000 GHz Ref Offset 23.76 dB Ref 23.76 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1658 MHz Total Power 5.42 dBm Transmit Freq Error -2.645 kHz OBW Power 99.00 % x dB Bandwidth 1.277 MHz x dB -20.00 dB
$\pi/4$DQPSK/HCH	 Center Freq 2.480000000 GHz Ref Offset 23.76 dB Ref 23.76 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1598 MHz Total Power 5.52 dBm Transmit Freq Error -2.314 kHz OBW Power 99.00 % x dB Bandwidth 1.275 MHz x dB -20.00 dB
8DPSK/LCH	 Center Freq 2.402000000 GHz Ref Offset 23.95 dB Ref 23.95 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1704 MHz Total Power 5.05 dBm Transmit Freq Error 2.468 kHz OBW Power 99.00 % x dB Bandwidth 1.279 MHz x dB -20.00 dB

8DPSK/MCH	 Center Freq 2.441000000 GHz Ref Offset 23.76 dB Ref 23.76 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1661 MHz Total Power 5.95 dBm Transmit Freq Error 3.649 kHz x dB Bandwidth 1.281 MHz OBW Power 99.00 % x dB -20.00 dB
8DPSK/HCH	 Center Freq 2.480000000 GHz Ref Offset 23.76 dB Ref 23.76 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1659 MHz Total Power 5.61 dBm Transmit Freq Error 2.186 kHz x dB Bandwidth 1.275 MHz OBW Power 99.00 % x dB -20.00 dB


Appendix B) Carrier Frequency Separation


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	Refer to section 5 for details
Limit:	2/3 of the 20dB bandwidth or 20 dB bandwidth. Remark: the transmission power is less than 0.125W.
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Instruments Used:	Refer to section 7 for details
Test Results:	Pass

Result Table


Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(MHz)	Verdict
GFSK	LCH	1.026	>0.961	PASS
GFSK	MCH	1.022	>0.955	PASS
GFSK	HCH	1.000	>0.959	PASS
$\pi/4$ DQPSK	LCH	1.014	>0.851	PASS
$\pi/4$ DQPSK	MCH	1.006	>0.851	PASS
$\pi/4$ DQPSK	HCH	0.910	>0.850	PASS
8DPSK	LCH	1.000	>0.853	PASS
8DPSK	MCH	1.150	>0.854	PASS
8DPSK	HCH	1.082	>0.850	PASS

Test Graph

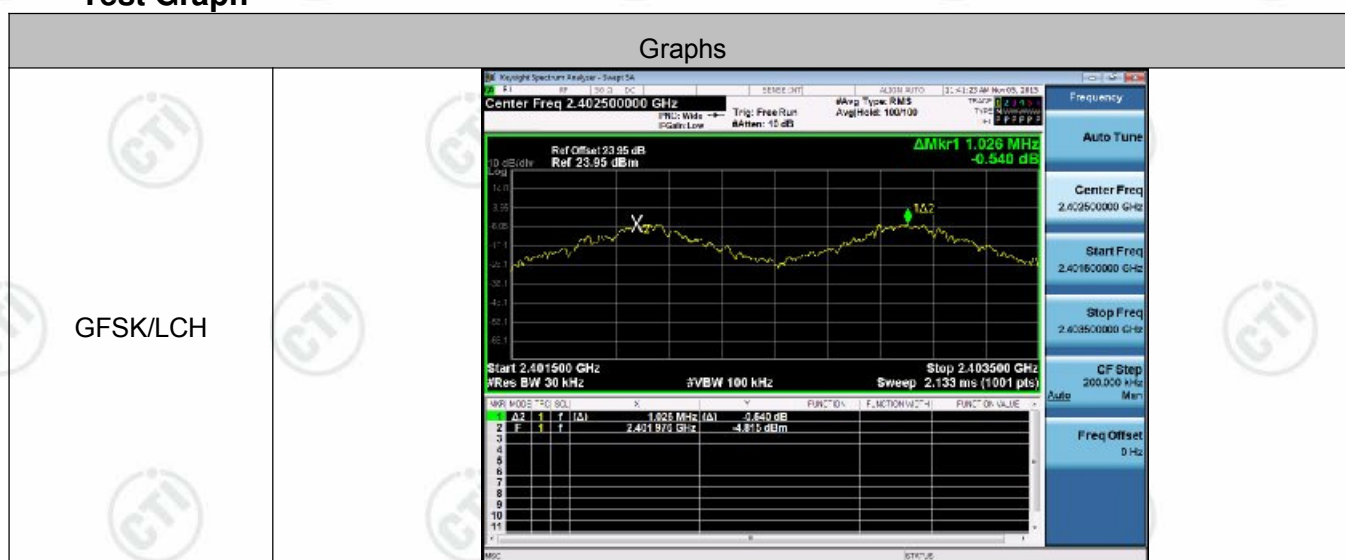

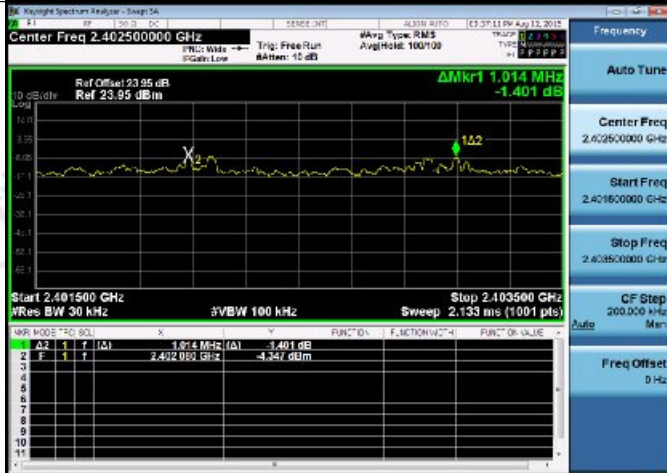GFSK/MCH	
GFSK/HCH	
$\pi/4$ DQPSK/LCH	

$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	
8DPSK/LCH	

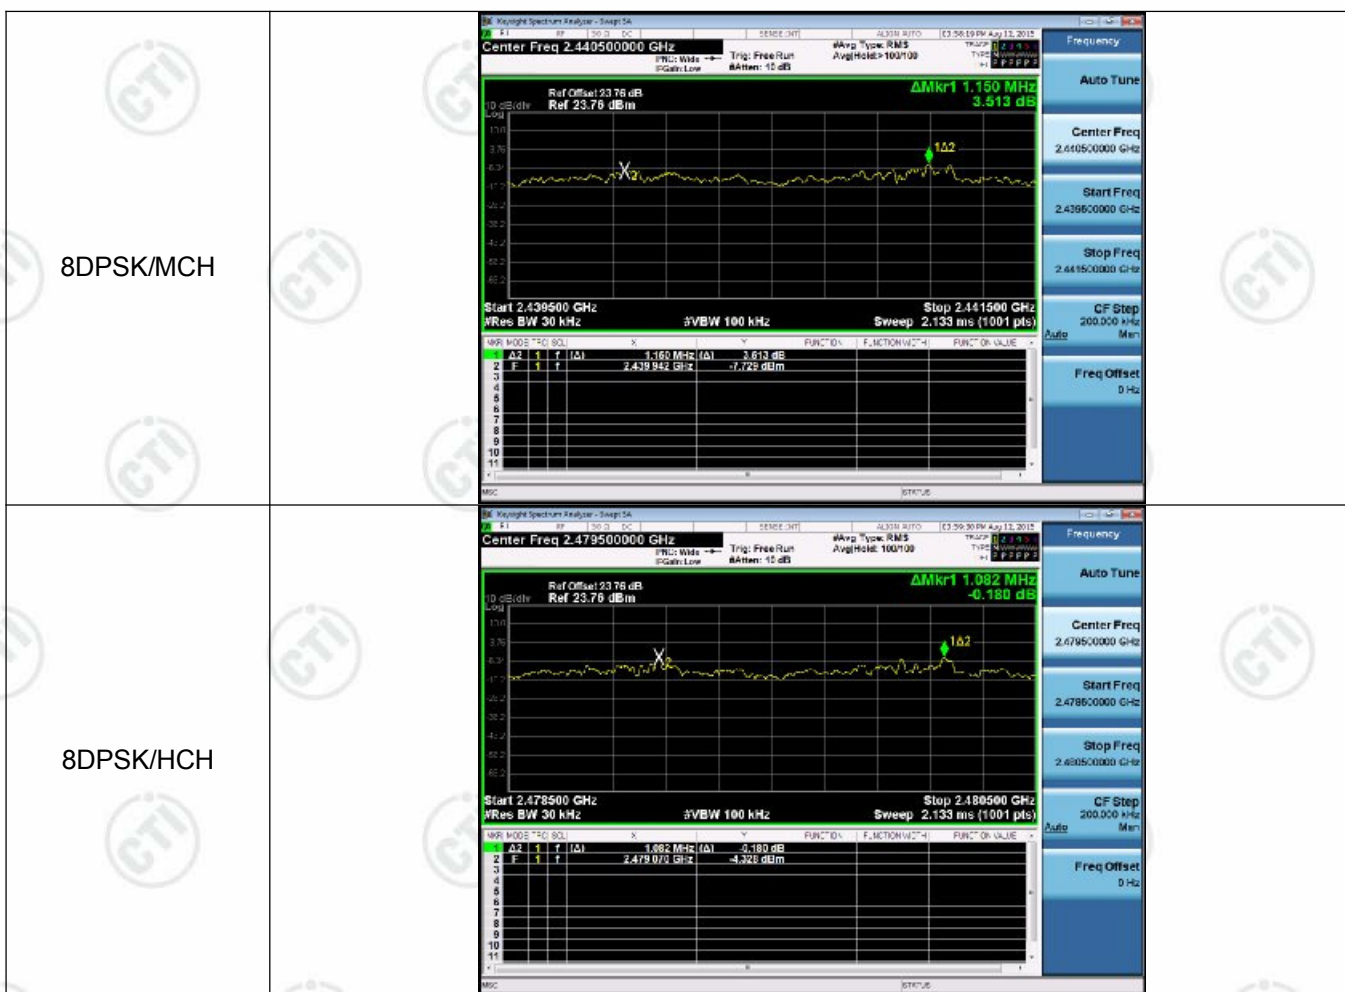


Appendix C) Dwell Time



Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	Refer to section 5 for details
Instruments Used:	Refer to section 7 for details
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Limit:	0.4 Second
Test Results:	Pass



Result Table

Mode	Pack et	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	0.395	320	0.126	32	PASS
GFSK	DH3	0.851	160	0.136	68	PASS
GFSK	DH5	2.900	106	0.310	77	PASS
$\pi/4$ DQPSK	2DH1	0.410	320	0.131	33	PASS
$\pi/4$ DQPSK	2DH3	1.662	160	0.266	66	PASS
$\pi/4$ DQPSK	2DH5	2.908	106	0.310	78	PASS
8DPSK	3DH1	0.408	320	0.131	33	PASS
8DPSK	3DH3	1.659	160	0.265	66	PASS
8DPSK	3DH5	2.911	106	0.309	78	PASS

Test Graph

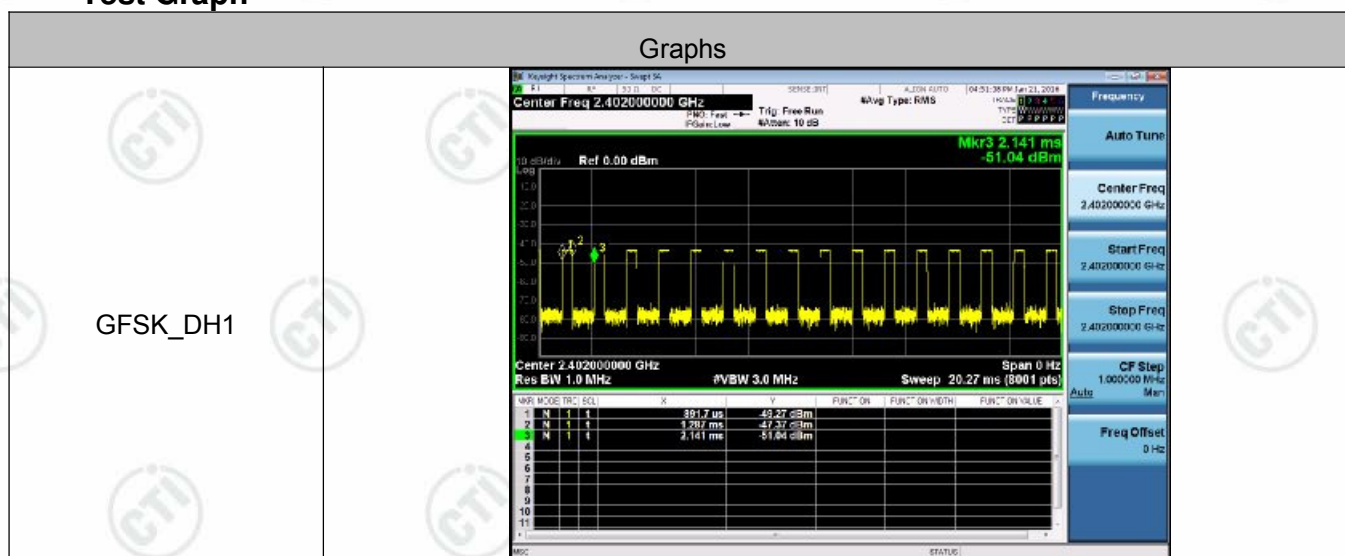

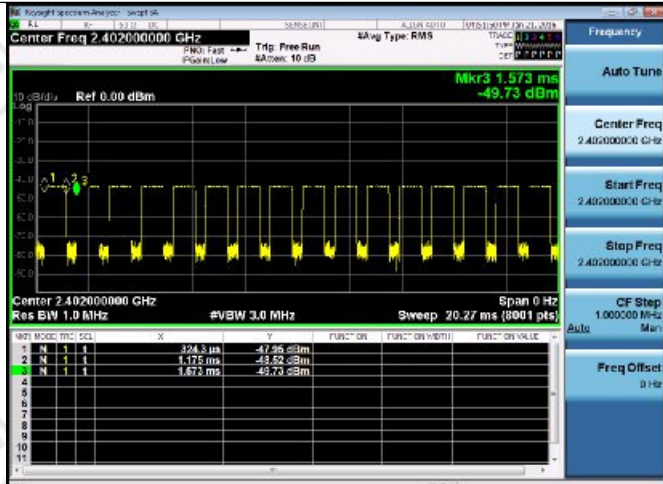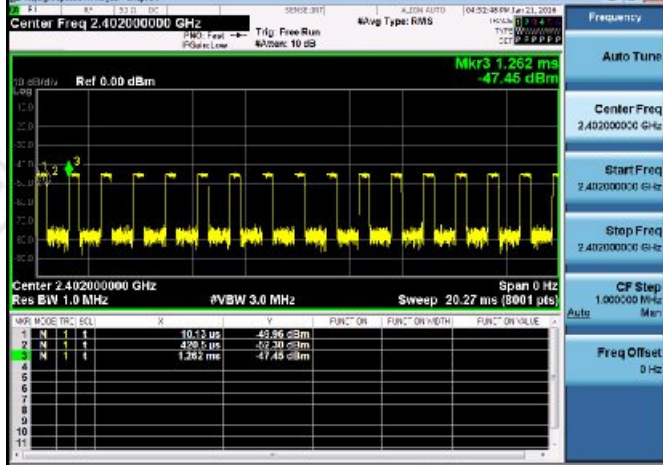GFSK_DH3	 Center Freq 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 20.27 ms (8001 pts) <table><tr><th>MN</th><th>MO</th><th>TR</th><th>CL</th><th>X</th><th>Y</th><th>FUNC</th><th>ON</th><th>FUNC</th><th>ON</th><th>VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>1</td><td>324.3 ms</td><td>-49.96 dBm</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>1</td><td>1.175 ms</td><td>-49.52 dBm</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>1</td><td>1.672 ms</td><td>-49.73 dBm</td><td></td><td></td><td></td><td></td><td></td></tr></table>	MN	MO	TR	CL	X	Y	FUNC	ON	FUNC	ON	VALUE	1	N	1	1	324.3 ms	-49.96 dBm						2	N	1	1	1.175 ms	-49.52 dBm						3	N	1	1	1.672 ms	-49.73 dBm					
MN	MO	TR	CL	X	Y	FUNC	ON	FUNC	ON	VALUE																																			
1	N	1	1	324.3 ms	-49.96 dBm																																								
2	N	1	1	1.175 ms	-49.52 dBm																																								
3	N	1	1	1.672 ms	-49.73 dBm																																								
GFSK_DH5	 Center Freq 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 20.27 ms (8001 pts) <table><tr><th>MN</th><th>MO</th><th>TR</th><th>CL</th><th>X</th><th>Y</th><th>FUNC</th><th>ON</th><th>FUNC</th><th>ON</th><th>VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>1</td><td>102.4 ms</td><td>-50.79 dBm</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>1</td><td>3.082 ms</td><td>-49.30 dBm</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>1</td><td>3.934 ms</td><td>-47.73 dBm</td><td></td><td></td><td></td><td></td><td></td></tr></table>	MN	MO	TR	CL	X	Y	FUNC	ON	FUNC	ON	VALUE	1	N	1	1	102.4 ms	-50.79 dBm						2	N	1	1	3.082 ms	-49.30 dBm						3	N	1	1	3.934 ms	-47.73 dBm					
MN	MO	TR	CL	X	Y	FUNC	ON	FUNC	ON	VALUE																																			
1	N	1	1	102.4 ms	-50.79 dBm																																								
2	N	1	1	3.082 ms	-49.30 dBm																																								
3	N	1	1	3.934 ms	-47.73 dBm																																								
$\pi/4$ DQPSK_2DH1	 Center Freq 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 20.27 ms (8001 pts) <table><tr><th>MN</th><th>MO</th><th>TR</th><th>CL</th><th>X</th><th>Y</th><th>FUNC</th><th>ON</th><th>FUNC</th><th>ON</th><th>VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>1</td><td>10.13 ms</td><td>-49.96 dBm</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>1</td><td>420.5 ms</td><td>-49.30 dBm</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>1</td><td>1.262 ms</td><td>-47.45 dBm</td><td></td><td></td><td></td><td></td><td></td></tr></table>	MN	MO	TR	CL	X	Y	FUNC	ON	FUNC	ON	VALUE	1	N	1	1	10.13 ms	-49.96 dBm						2	N	1	1	420.5 ms	-49.30 dBm						3	N	1	1	1.262 ms	-47.45 dBm					
MN	MO	TR	CL	X	Y	FUNC	ON	FUNC	ON	VALUE																																			
1	N	1	1	10.13 ms	-49.96 dBm																																								
2	N	1	1	420.5 ms	-49.30 dBm																																								
3	N	1	1	1.262 ms	-47.45 dBm																																								

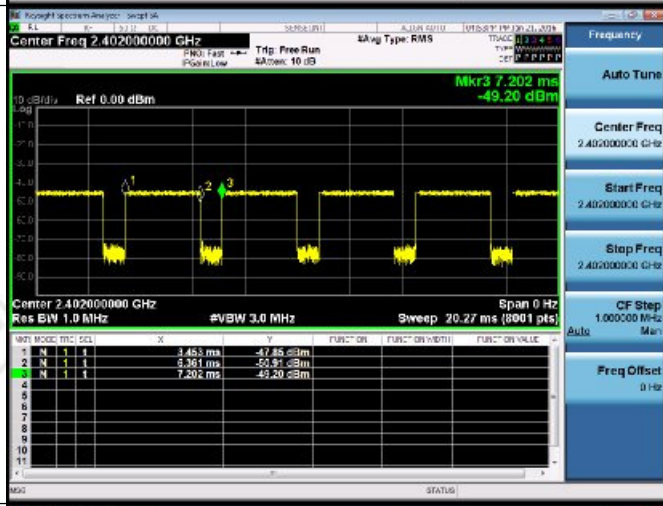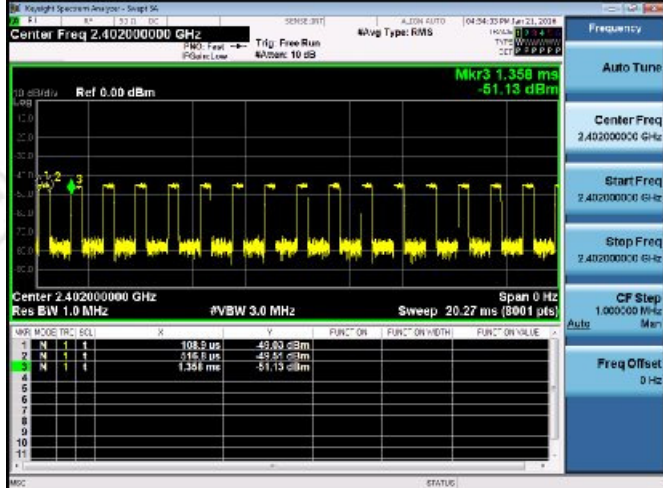$\pi/4$ DQPSK_2DH3	 Center Freq 2.402000000 GHz Ref 0.00 dBm Mkr3 3.390 ms -50.46 dBm <table><thead><tr><th>M</th><th>MO</th><th>TRG</th><th>EN</th><th>VAL</th><th>UNIT</th><th>FUNC</th><th>ON</th><th>OFF</th><th>ON VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>1</td><td>3.390 ms</td><td>-51.56 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>1</td><td>2.551 ms</td><td>-50.48 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>1</td><td>3.380 ms</td><td>-50.46 dBm</td><td></td><td></td><td></td><td></td></tr></tbody></table>	M	MO	TRG	EN	VAL	UNIT	FUNC	ON	OFF	ON VALUE	1	N	1	1	3.390 ms	-51.56 dBm					2	N	1	1	2.551 ms	-50.48 dBm					3	N	1	1	3.380 ms	-50.46 dBm				
M	MO	TRG	EN	VAL	UNIT	FUNC	ON	OFF	ON VALUE																																
1	N	1	1	3.390 ms	-51.56 dBm																																				
2	N	1	1	2.551 ms	-50.48 dBm																																				
3	N	1	1	3.380 ms	-50.46 dBm																																				
$\pi/4$ DQPSK_2DH5	 Center Freq 2.402000000 GHz Ref 0.00 dBm Mkr3 7.202 ms -49.20 dBm <table><thead><tr><th>M</th><th>MO</th><th>TRG</th><th>EN</th><th>VAL</th><th>UNIT</th><th>FUNC</th><th>ON</th><th>OFF</th><th>ON VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>1</td><td>3.463 ms</td><td>-47.86 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>1</td><td>3.361 ms</td><td>-50.91 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>1</td><td>7.202 ms</td><td>-49.20 dBm</td><td></td><td></td><td></td><td></td></tr></tbody></table>	M	MO	TRG	EN	VAL	UNIT	FUNC	ON	OFF	ON VALUE	1	N	1	1	3.463 ms	-47.86 dBm					2	N	1	1	3.361 ms	-50.91 dBm					3	N	1	1	7.202 ms	-49.20 dBm				
M	MO	TRG	EN	VAL	UNIT	FUNC	ON	OFF	ON VALUE																																
1	N	1	1	3.463 ms	-47.86 dBm																																				
2	N	1	1	3.361 ms	-50.91 dBm																																				
3	N	1	1	7.202 ms	-49.20 dBm																																				
8DPSK_3DH1	 Center Freq 2.402000000 GHz Ref 0.00 dBm Mkr3 1.356 ms -51.13 dBm <table><thead><tr><th>M</th><th>MO</th><th>TRG</th><th>EN</th><th>VAL</th><th>UNIT</th><th>FUNC</th><th>ON</th><th>OFF</th><th>ON VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>1</td><td>108.9 Hz</td><td>-49.93 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>1</td><td>916.6 Hz</td><td>-49.91 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>1</td><td>1.356 ms</td><td>-51.13 dBm</td><td></td><td></td><td></td><td></td></tr></tbody></table>	M	MO	TRG	EN	VAL	UNIT	FUNC	ON	OFF	ON VALUE	1	N	1	1	108.9 Hz	-49.93 dBm					2	N	1	1	916.6 Hz	-49.91 dBm					3	N	1	1	1.356 ms	-51.13 dBm				
M	MO	TRG	EN	VAL	UNIT	FUNC	ON	OFF	ON VALUE																																
1	N	1	1	108.9 Hz	-49.93 dBm																																				
2	N	1	1	916.6 Hz	-49.91 dBm																																				
3	N	1	1	1.356 ms	-51.13 dBm																																				




Appendix D) Hopping Channel Number


Test Requirement:	47 CFR Part 15C Section 15.247 (b)
Test Method:	ANSI C63.10:2013
Test Setup:	Refer to section 5 for details
Limit:	At least 15 channels
Test Mode:	Hopping transmitting with all kind of modulation.
Instruments Used:	Refer to section 7 for details
Test Results:	Pass

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

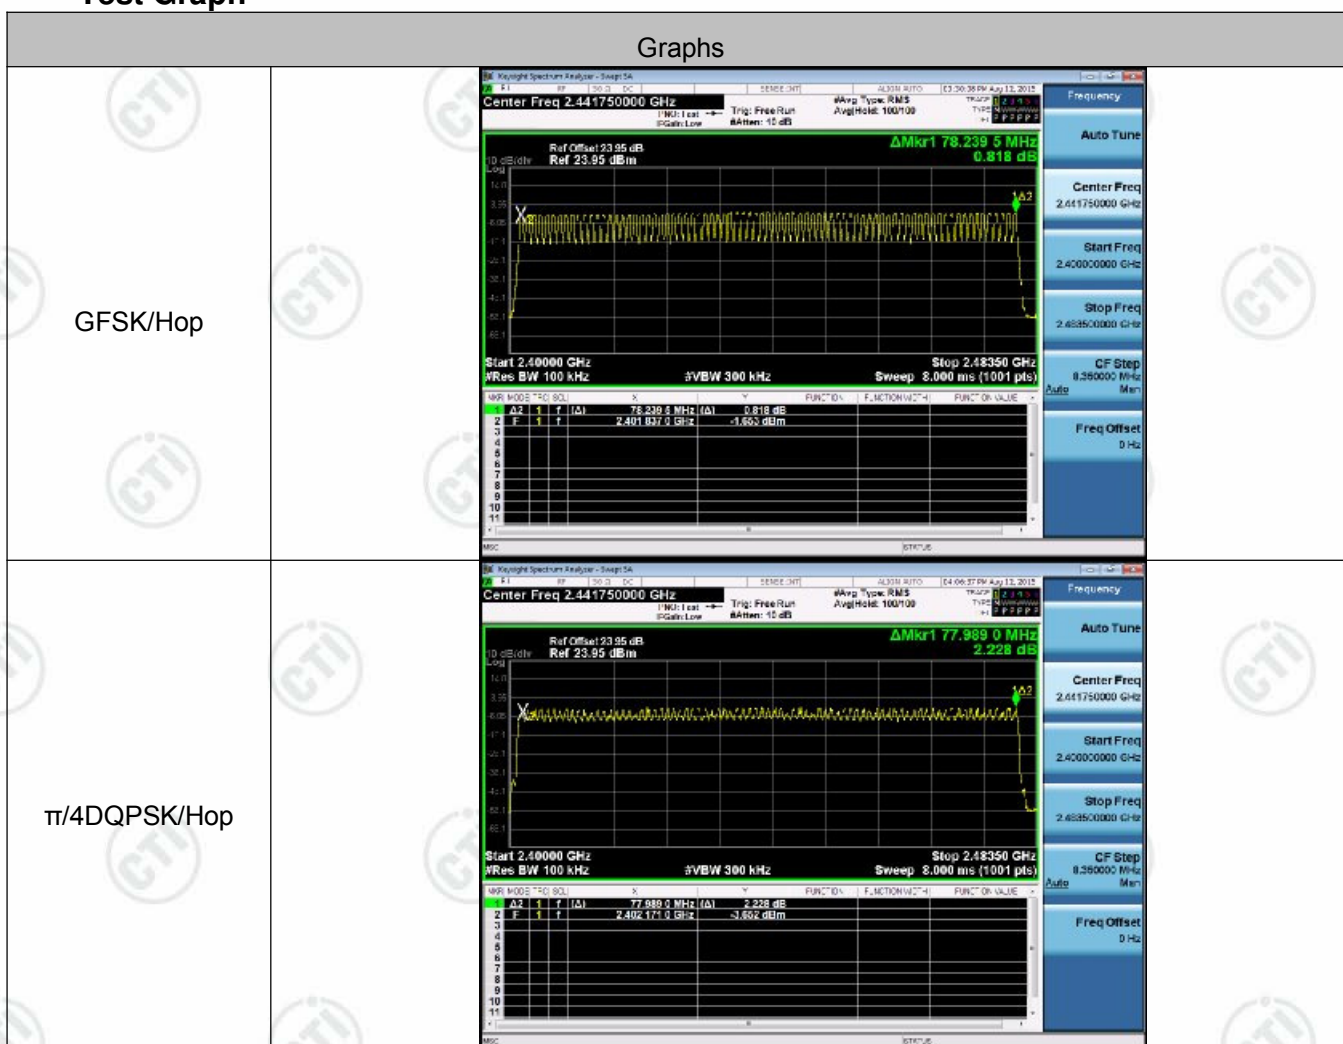

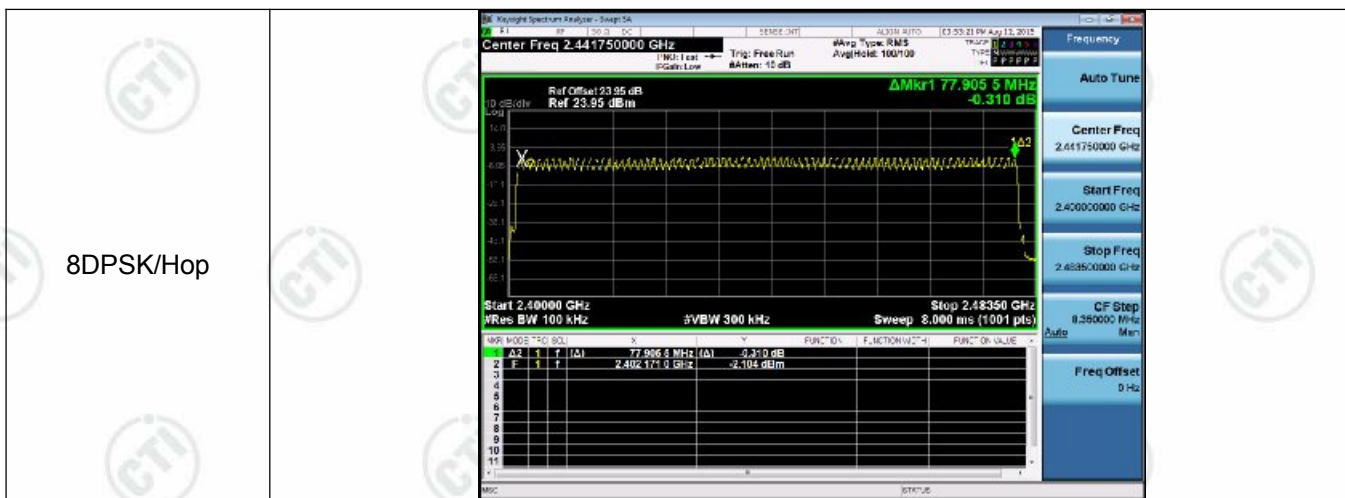


Appendix E) Conducted Peak Output Power


Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	Refer to section 5 for details
Limit:	30dBm or 21dBm
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.
Instruments Used:	Refer to section 7 for details
Test Results:	Pass


Result Table


Mode	Channel.	Maximum Peak Output Power [dBm]	Limit(dBm)	Verdict
GFSK	LCH	-1.129	30	PASS
GFSK	MCH	-0.275	30	PASS
GFSK	HCH	-0.496	30	PASS
$\pi/4$ DQPSK	LCH	-1.396	21	PASS
$\pi/4$ DQPSK	MCH	-0.488	21	PASS
$\pi/4$ DQPSK	HCH	-0.713	21	PASS
8DPSK	LCH	-1.282	21	PASS
8DPSK	MCH	-0.274	21	PASS
8DPSK	HCH	-0.547	21	PASS

Test Graph

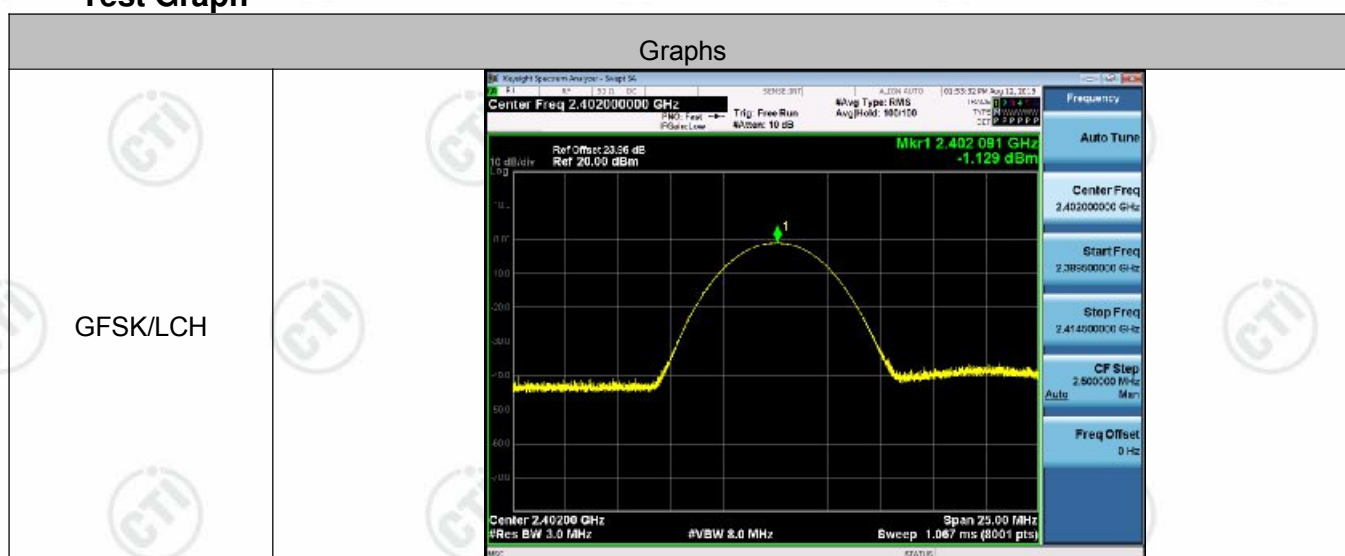

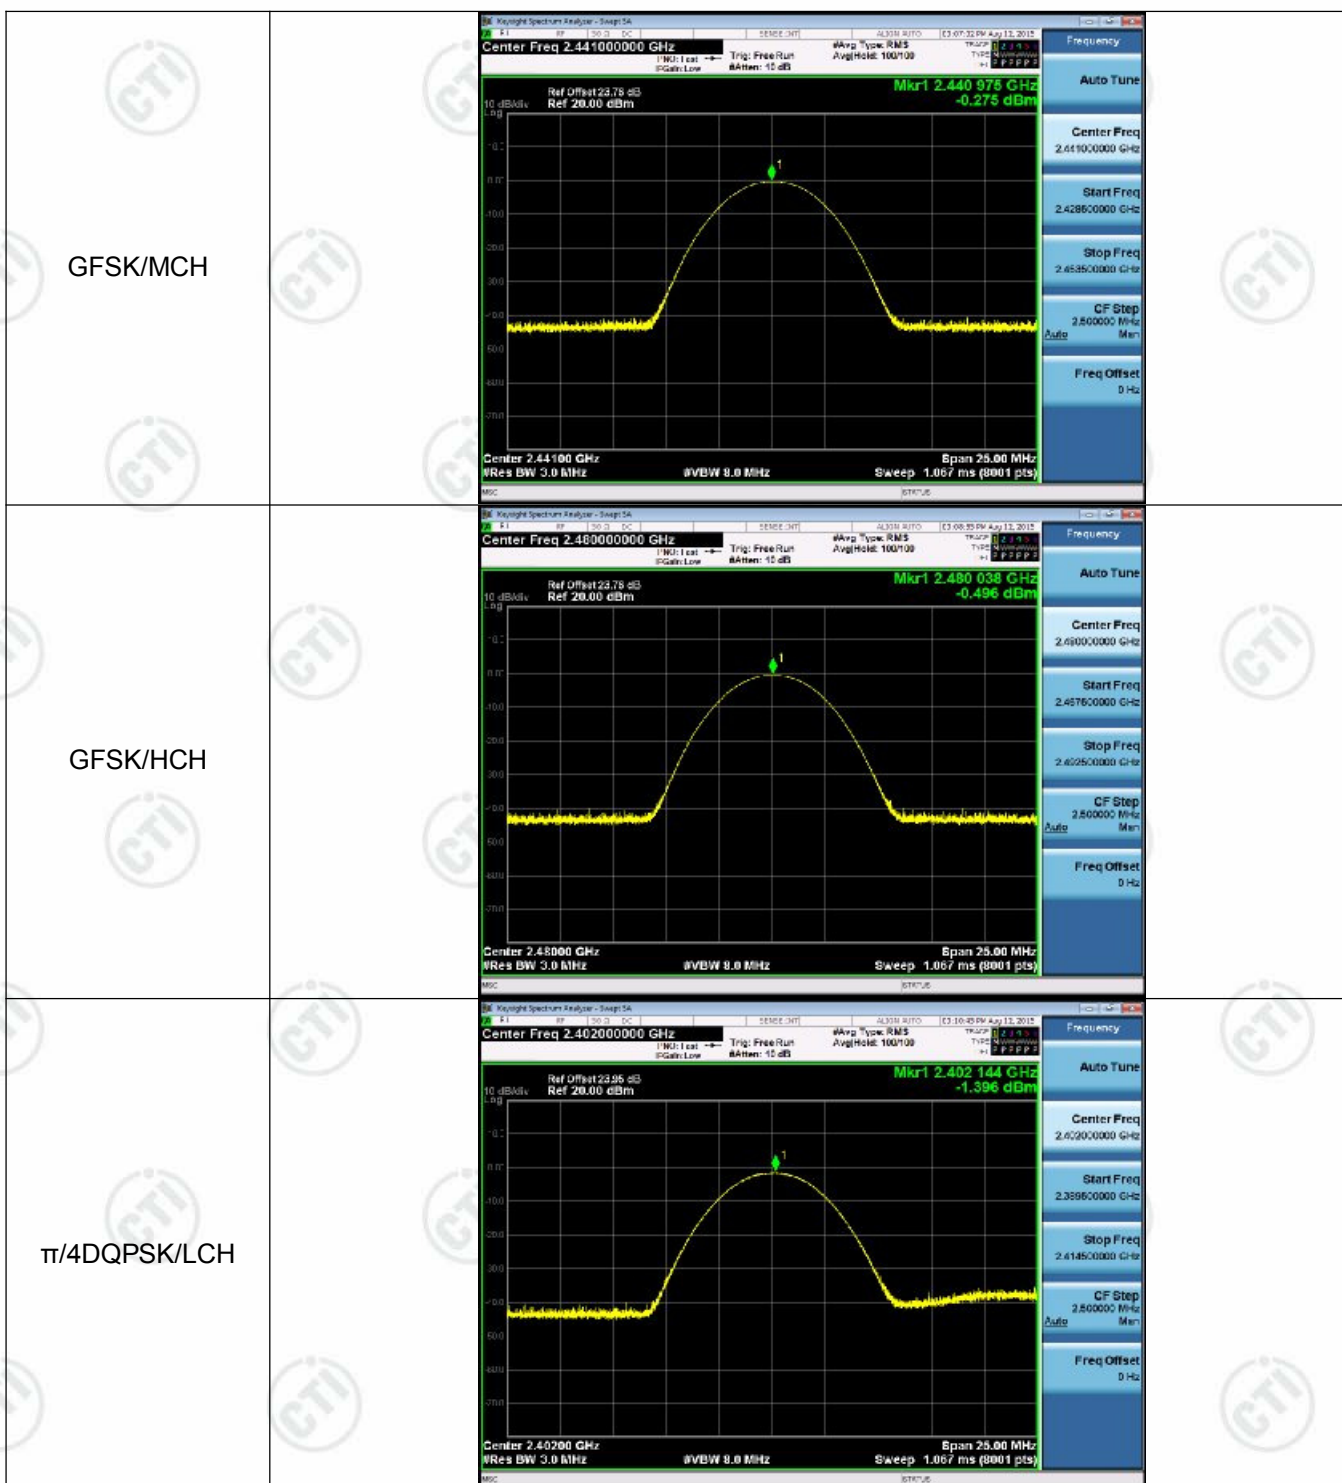

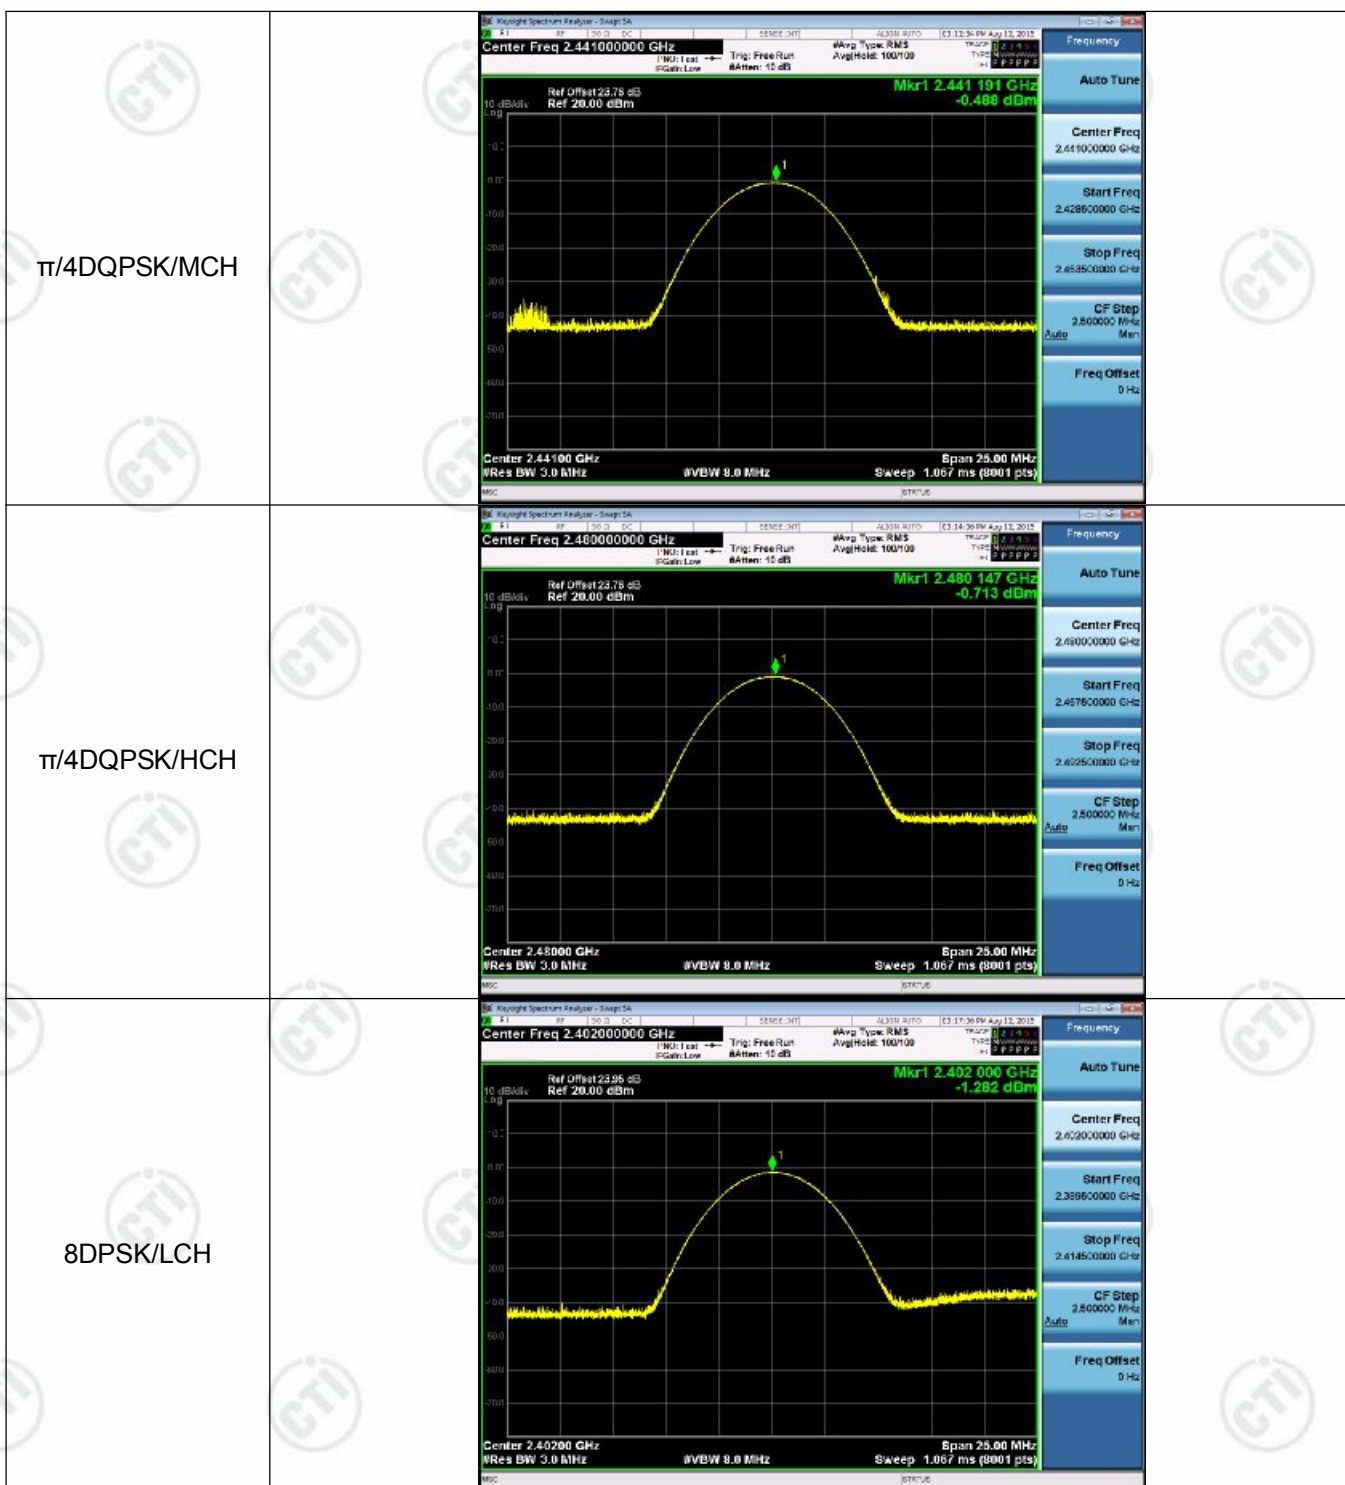

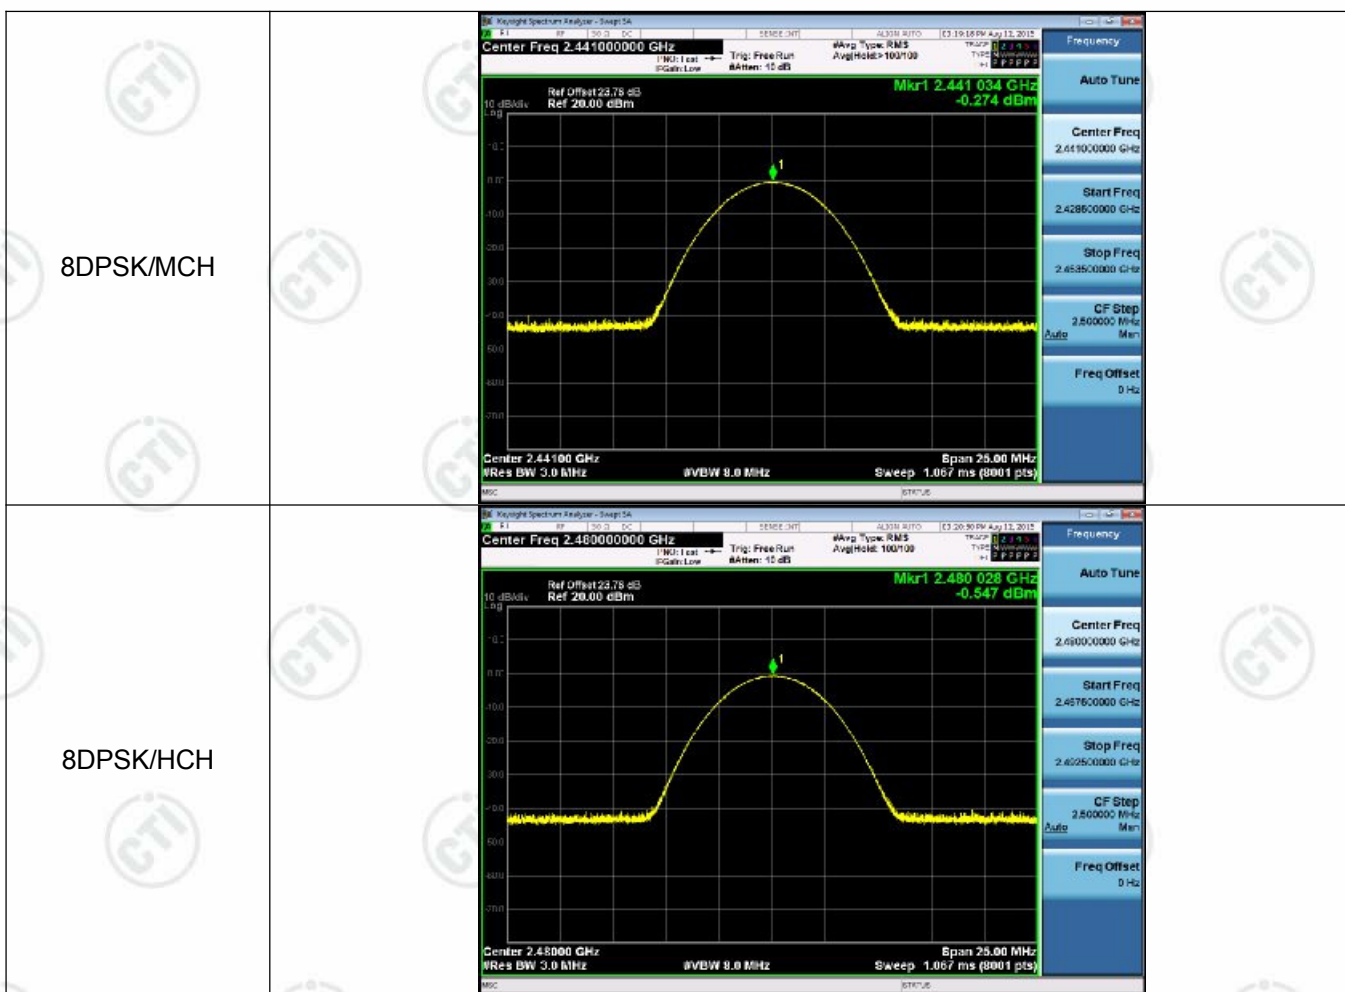


Appendix F) Band-edge for RF Conducted Emissions



Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	Refer to section 5 for details
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Instruments Used:	Refer to section 7 for details
Test Results:	Pass

Result Table

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	-1.501	Off	-56.164	-21.50	PASS
			-0.307	On	-55.279	-20.31	PASS
GFSK	HCH	2480	-0.829	Off	-55.374	-20.83	PASS
			-0.651	On	-54.977	-20.65	PASS
$\pi/4$ DQPSK	LCH	2402	-2.465	Off	-55.046	-22.47	PASS
			-1.292	On	-54.999	-21.29	PASS
$\pi/4$ DQPSK	HCH	2480	-1.715	Off	-54.673	-21.72	PASS
			-1.567	On	-54.344	-21.57	PASS
8DPSK	LCH	2402	-2.350	Off	-56.740	-22.35	PASS
			-1.277	On	-55.314	-21.28	PASS
8DPSK	HCH	2480	-1.728	Off	-56.087	-21.73	PASS
			-1.428	On	-54.952	-21.43	PASS


Test Graph

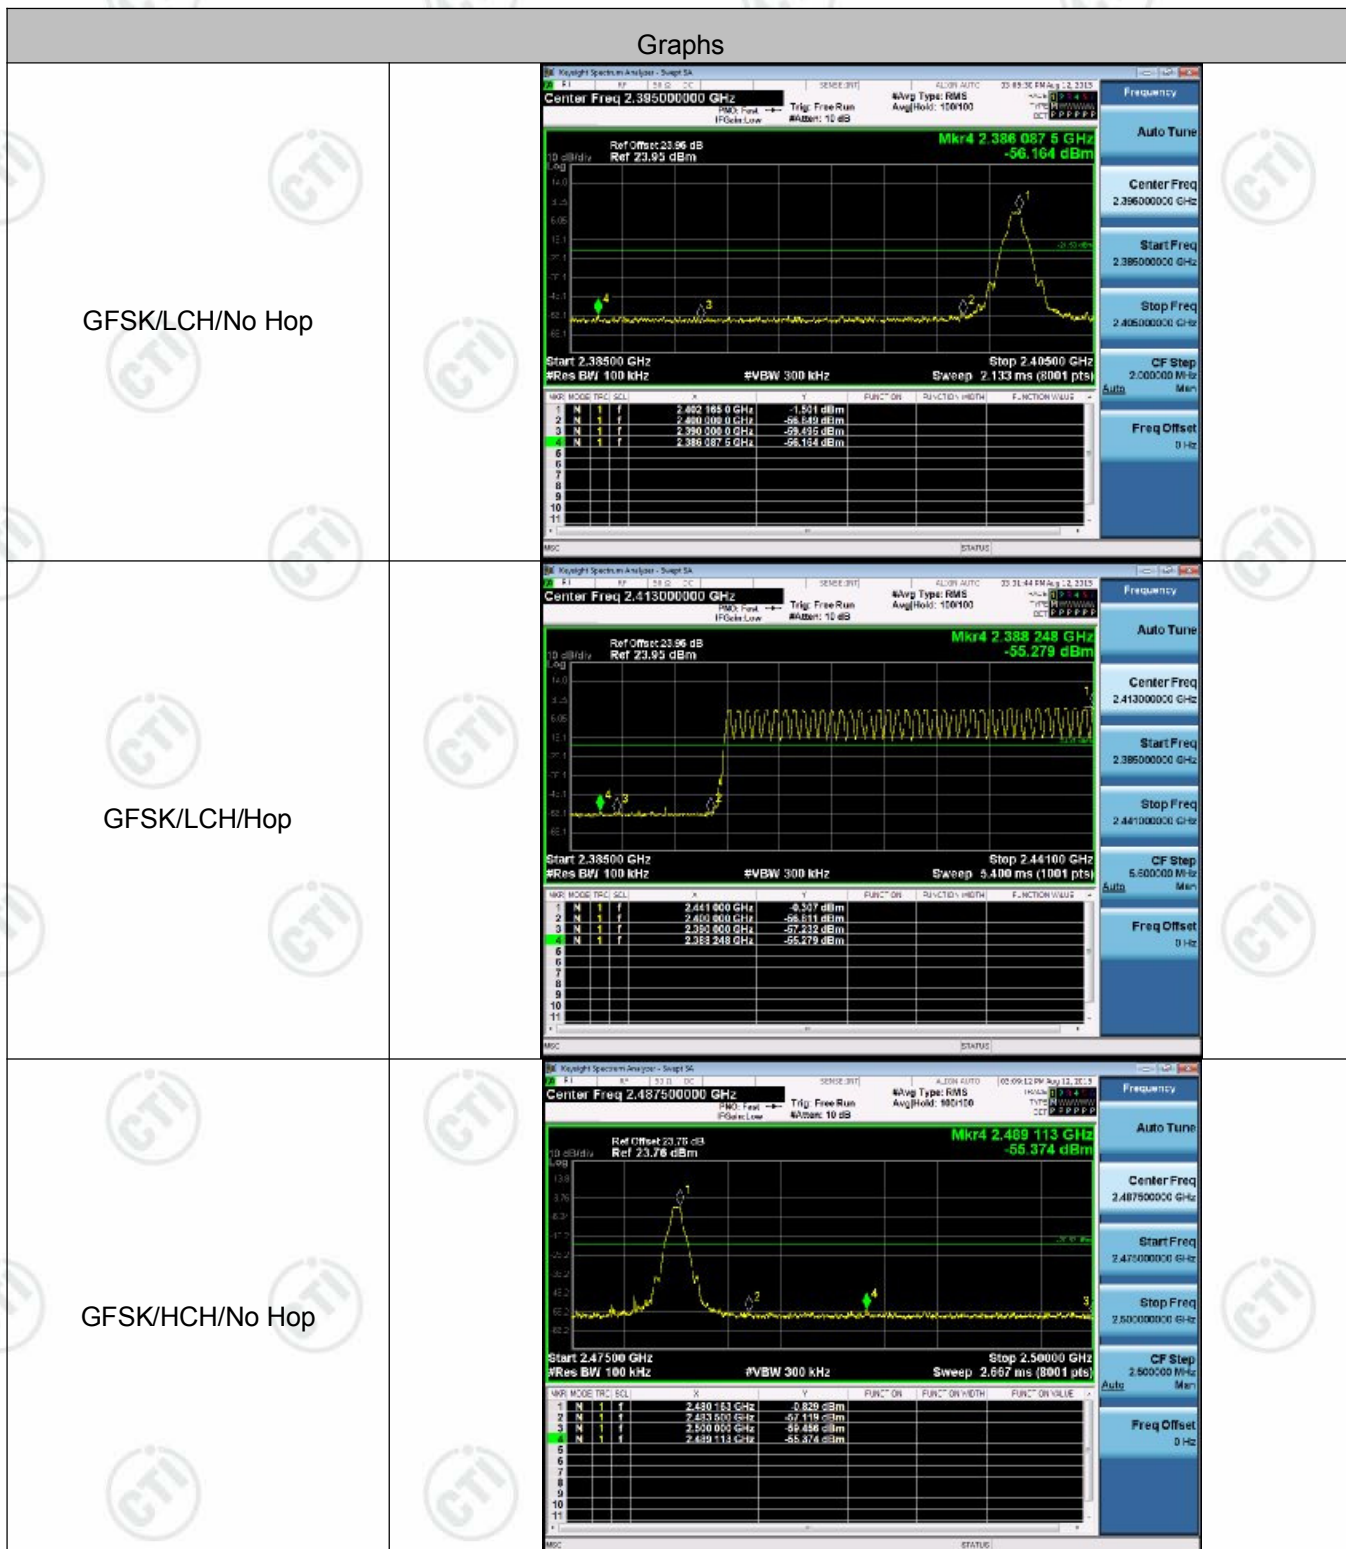

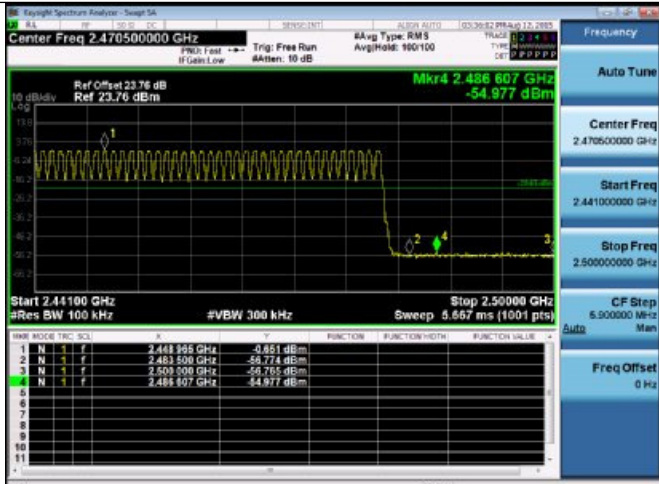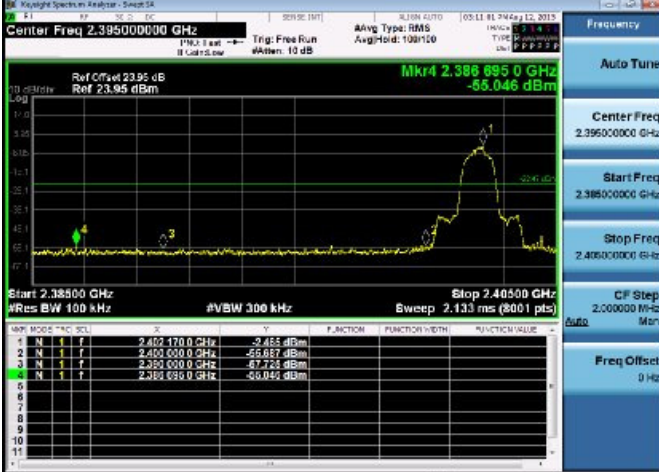
GFSK/HCH/Hop	
$\pi/4$DQPSK/LCH/No Hop	
$\pi/4$DQPSK/LCH/Hop	




8DPSK/LCH/Hop

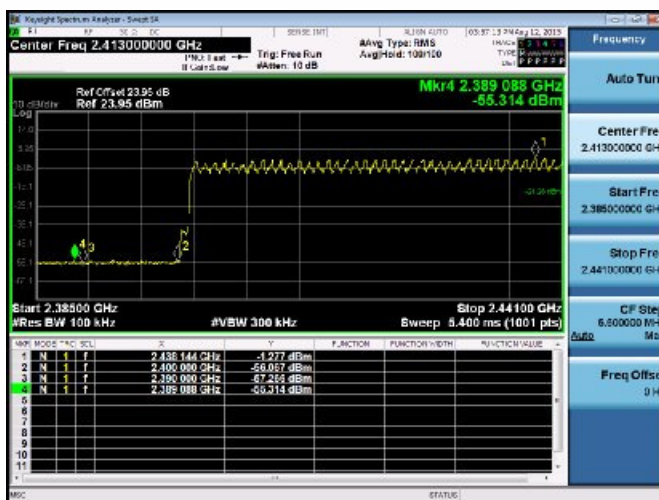

8DPSK/HCH/No Hop

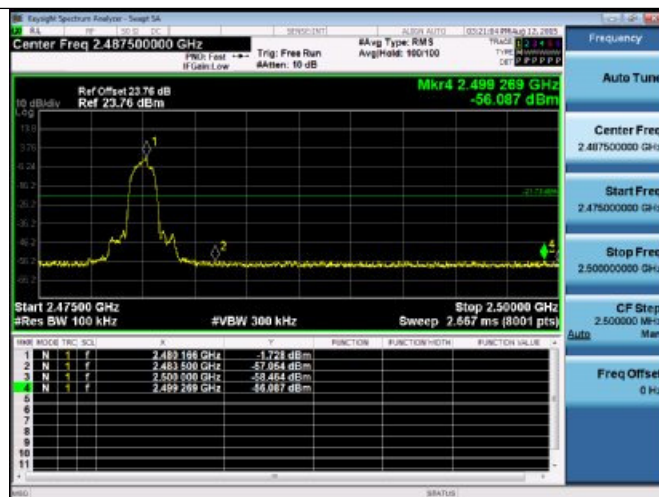

8DPSK/HCH/Hop

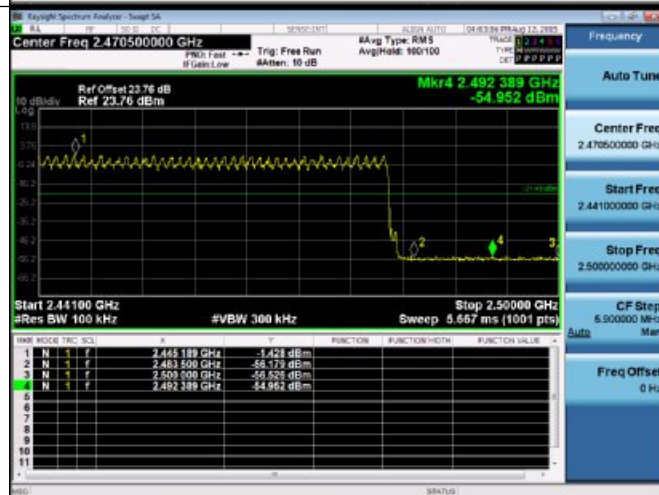

Appendix G) RF Conducted Spurious Emissions



Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	Refer to section 5 for details
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.
Instruments Used:	Refer to section 7 for details
Test Results:	Pass


Result Table



Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	-2.005	<Limit	PASS
GFSK	MCH	-0.575	<Limit	PASS
GFSK	HCH	-1.039	<Limit	PASS
$\pi/4$ DQPSK	LCH	-2.991	<Limit	PASS
$\pi/4$ DQPSK	MCH	-1.539	<Limit	PASS
$\pi/4$ DQPSK	HCH	-1.736	<Limit	PASS
8DPSK	LCH	-3.262	<Limit	PASS
8DPSK	MCH	-2.201	<Limit	PASS
8DPSK	HCH	-1.747	<Limit	PASS


Test Graph





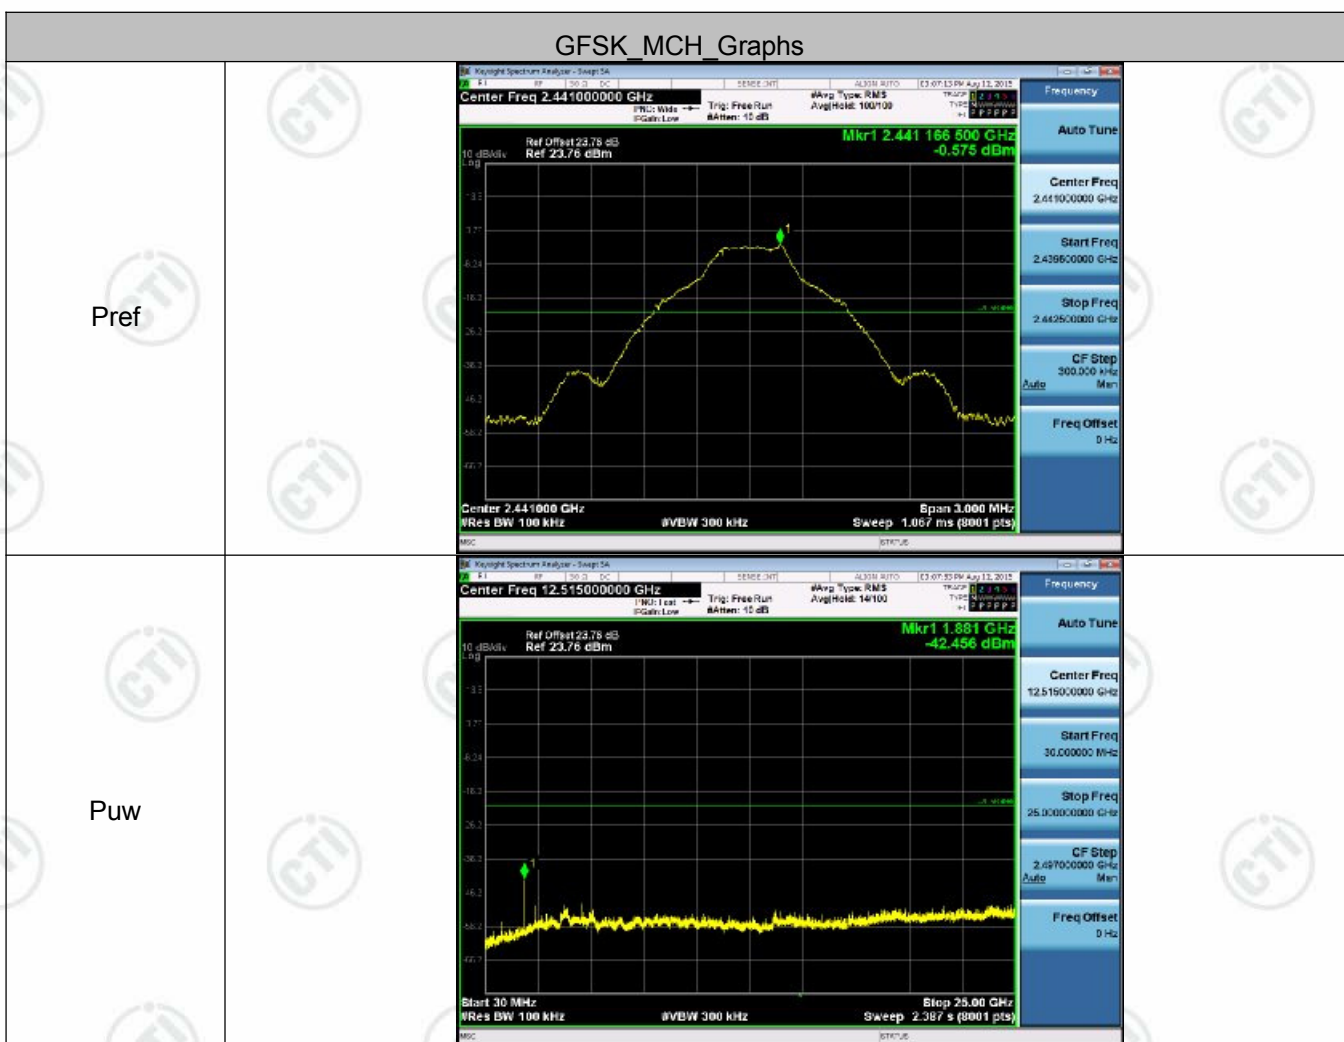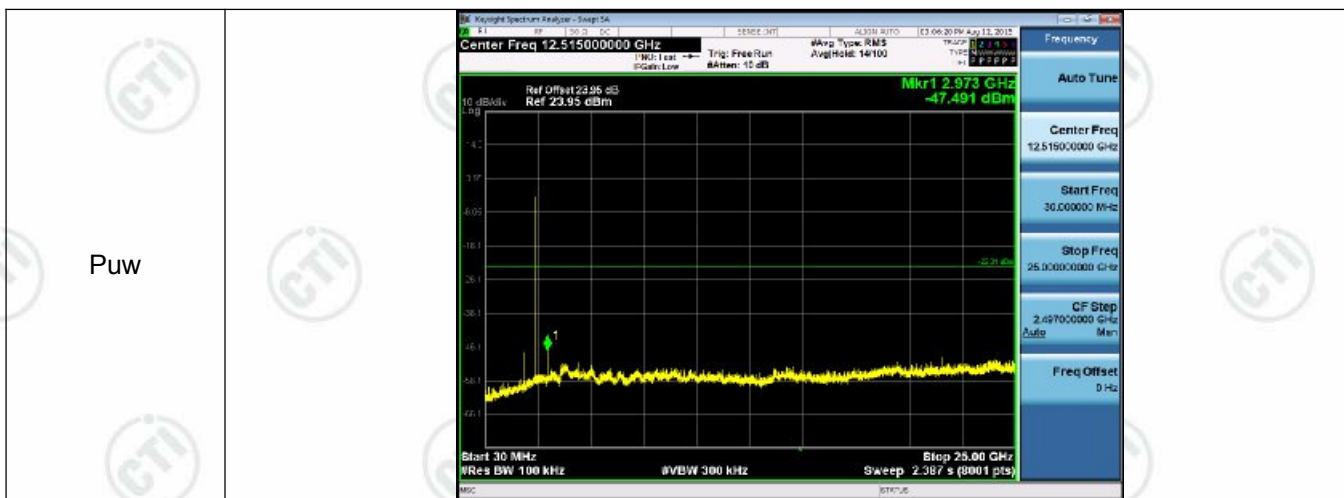

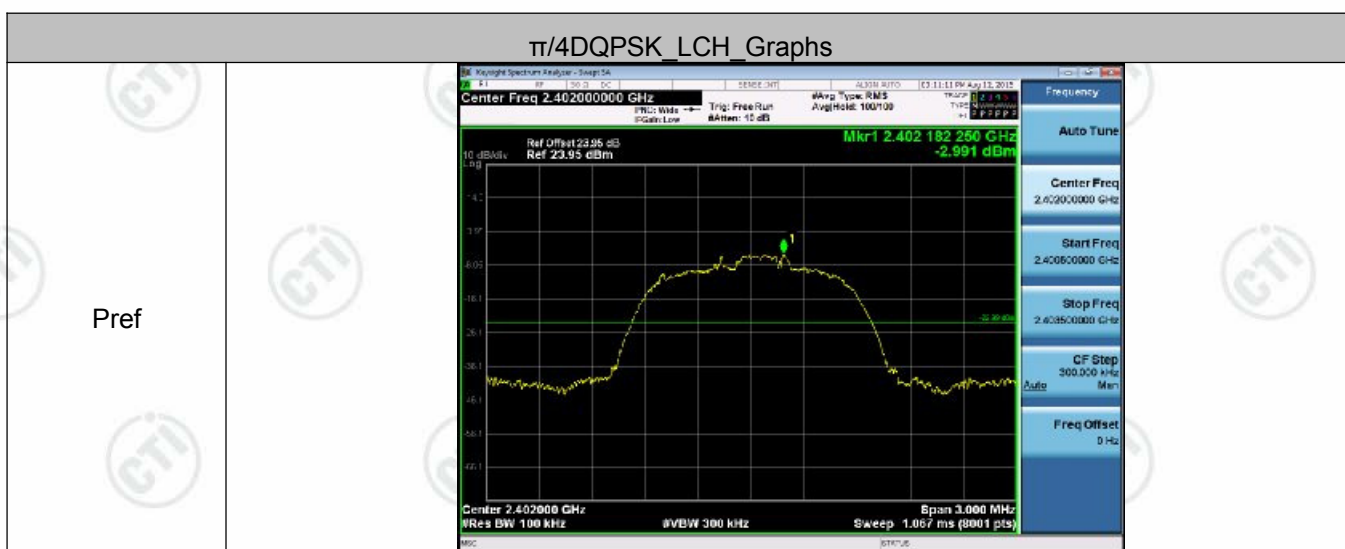

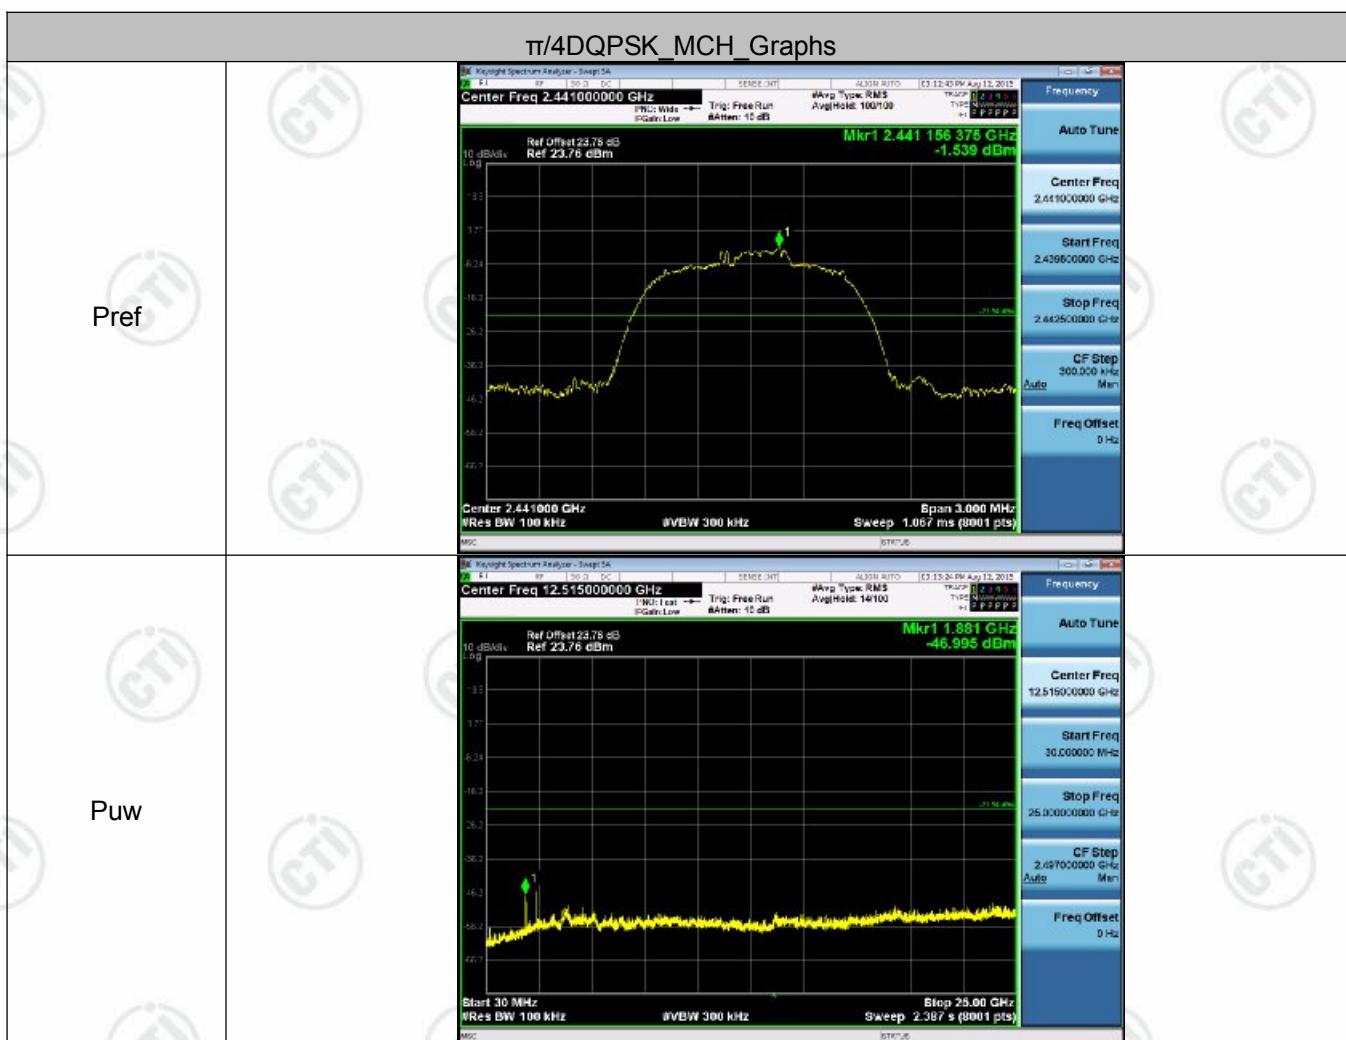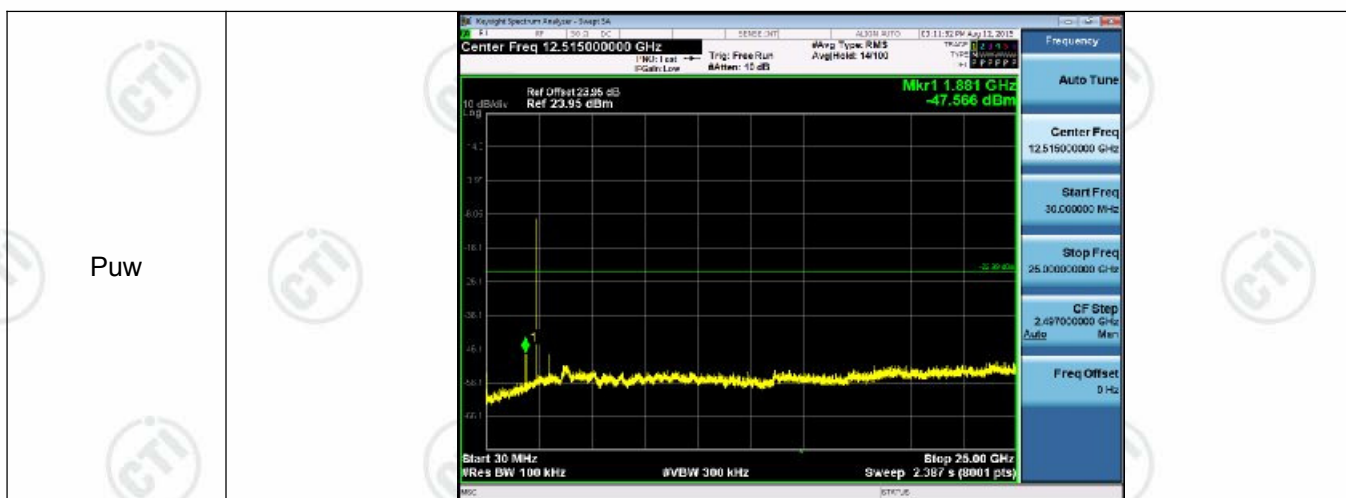

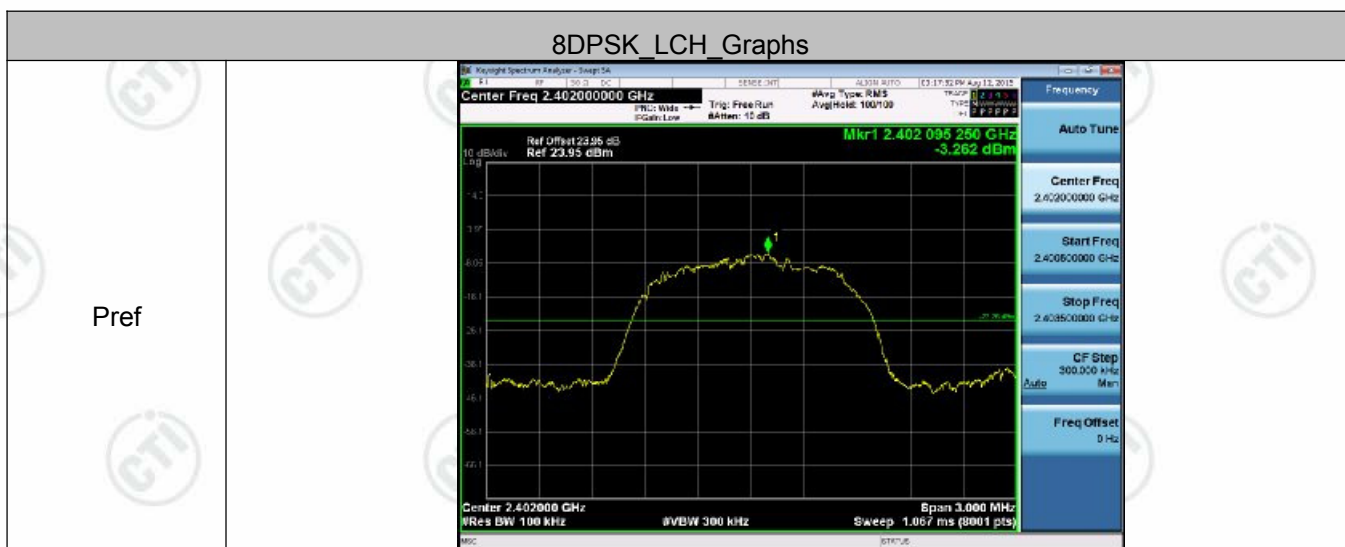

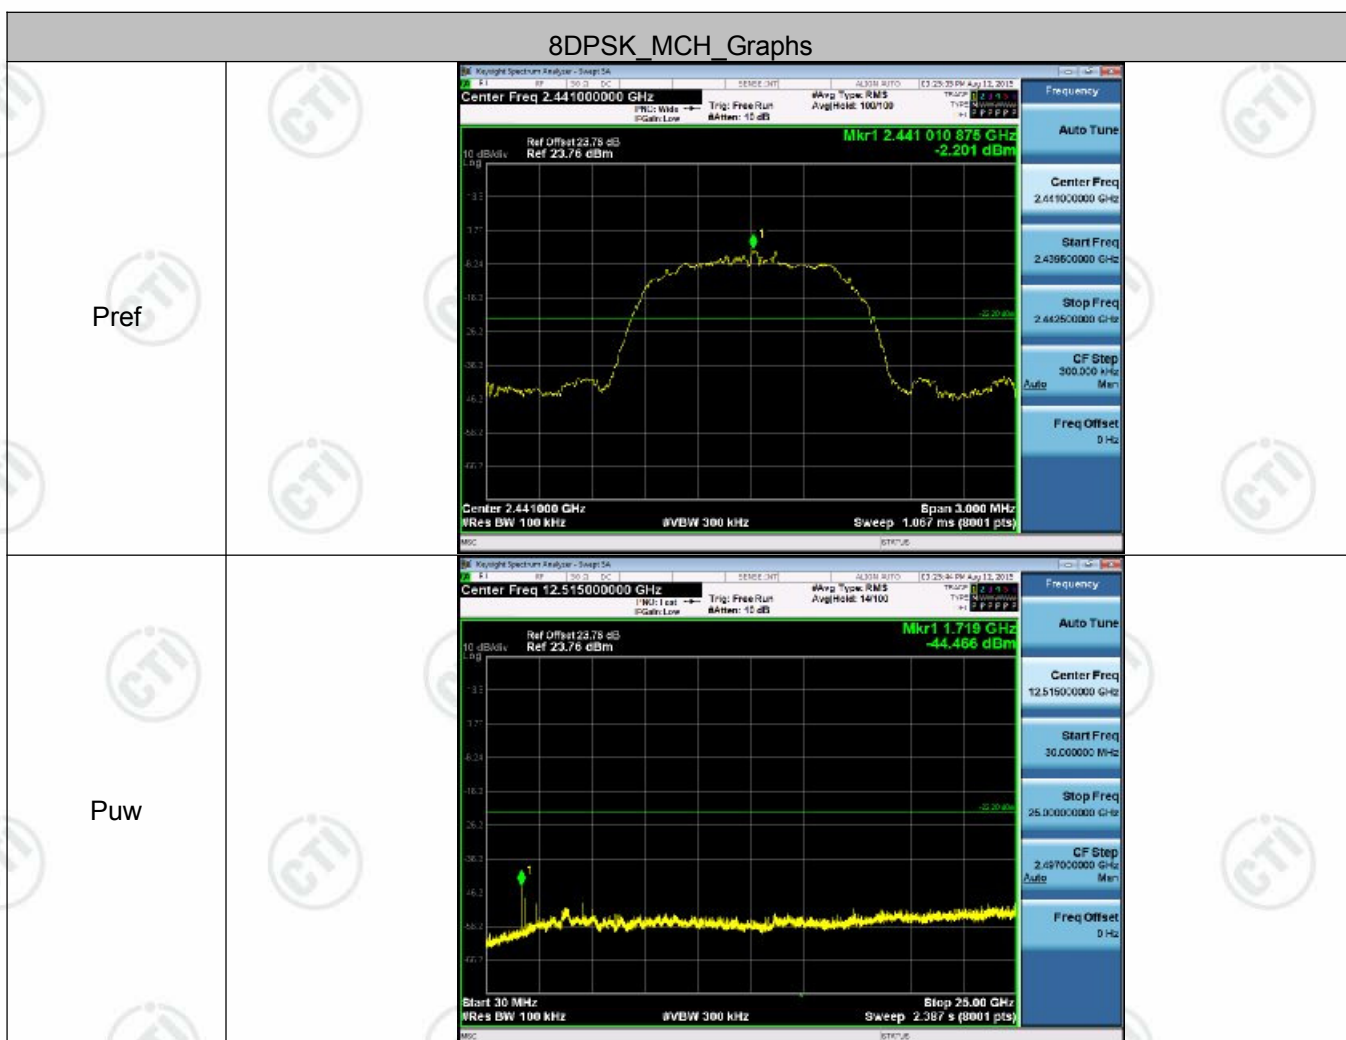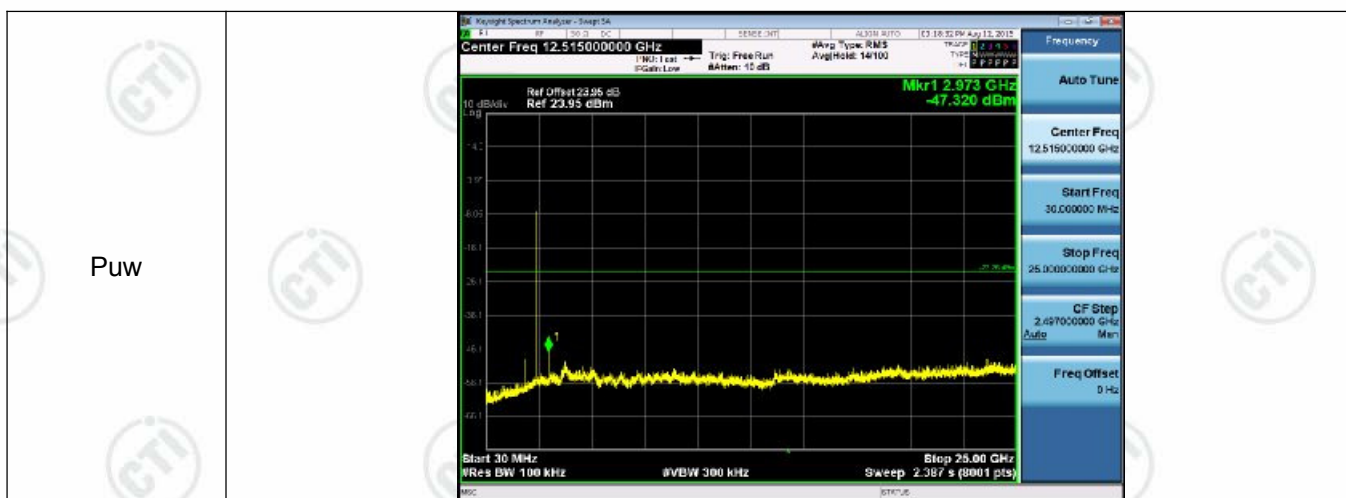



Appendix H) Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.	
EUT Pseudorandom Frequency Hopping Sequence	
The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> An example of Pseudorandom Frequency Hopping Sequence as follow: Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals. The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.	

Appendix I) Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -1.45dBi.

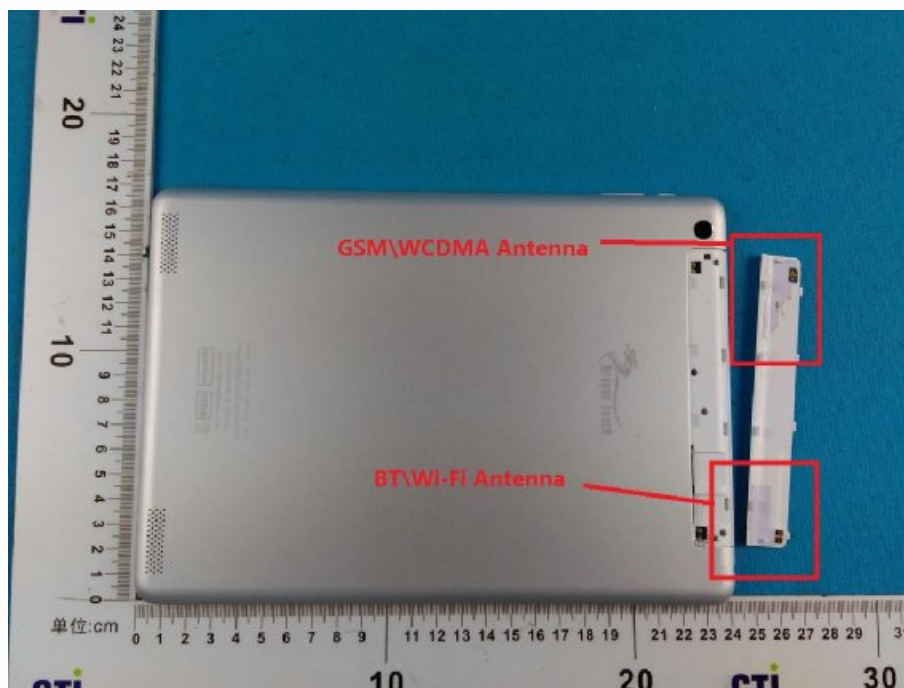

Appendix J) AC Power Line Conducted Emission


Test Procedure:	Test frequency range :150KHz-30MHz 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.																
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency			Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

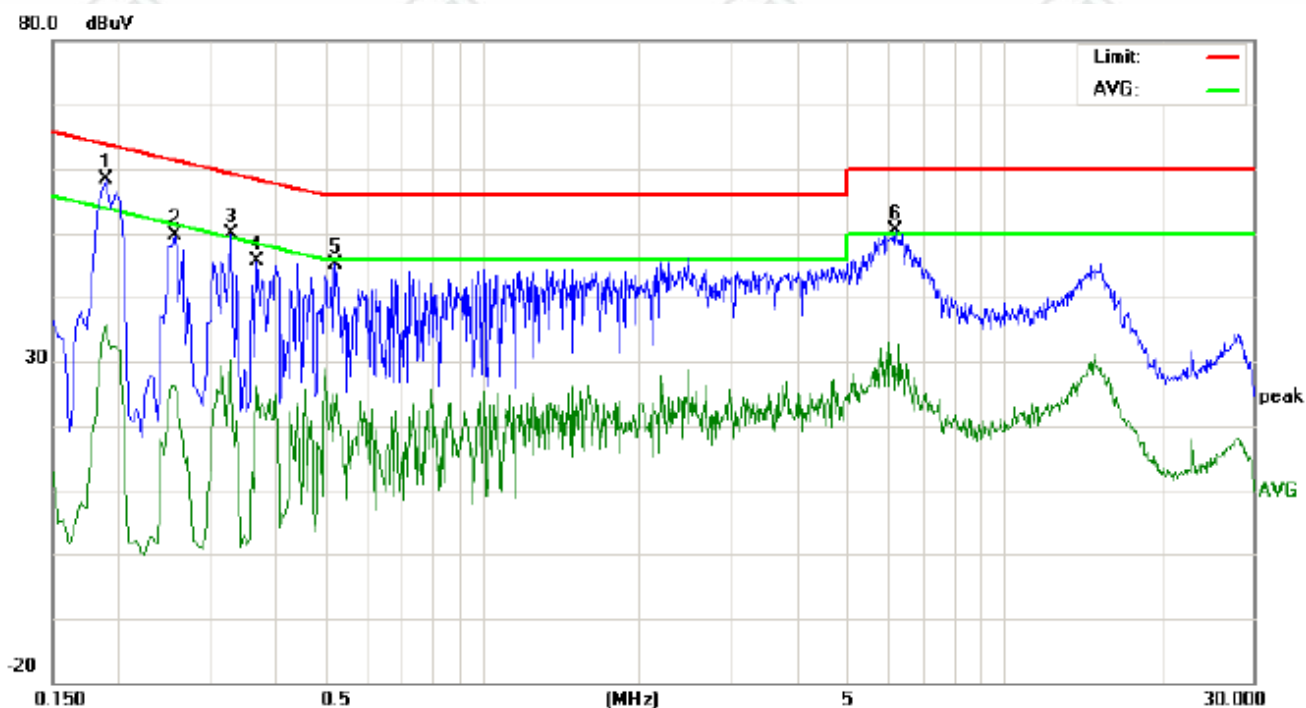

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1900	48.50	45.44	26.09	9.80	58.30	55.24	35.89	64.03	54.03	-8.79	-18.14	P	
2	0.2580	39.70	36.21	16.39	9.80	49.50	46.01	26.19	61.49	51.49	-15.48	-25.30	P	
3	0.3300	40.05	37.11	20.33	9.83	49.88	46.94	30.16	59.45	49.45	-12.51	-19.29	P	
4	0.3700	35.72	31.49	16.37	9.87	45.59	41.36	26.24	58.50	48.50	-17.14	-22.26	P	
5	0.5220	35.28	32.12	12.62	9.90	45.18	42.02	22.52	56.00	46.00	-13.98	-23.48	P	
6	6.2100	40.49	36.55	17.14	10.00	50.49	46.55	27.14	60.00	50.00	-13.45	-22.86	P	

Neutral line:

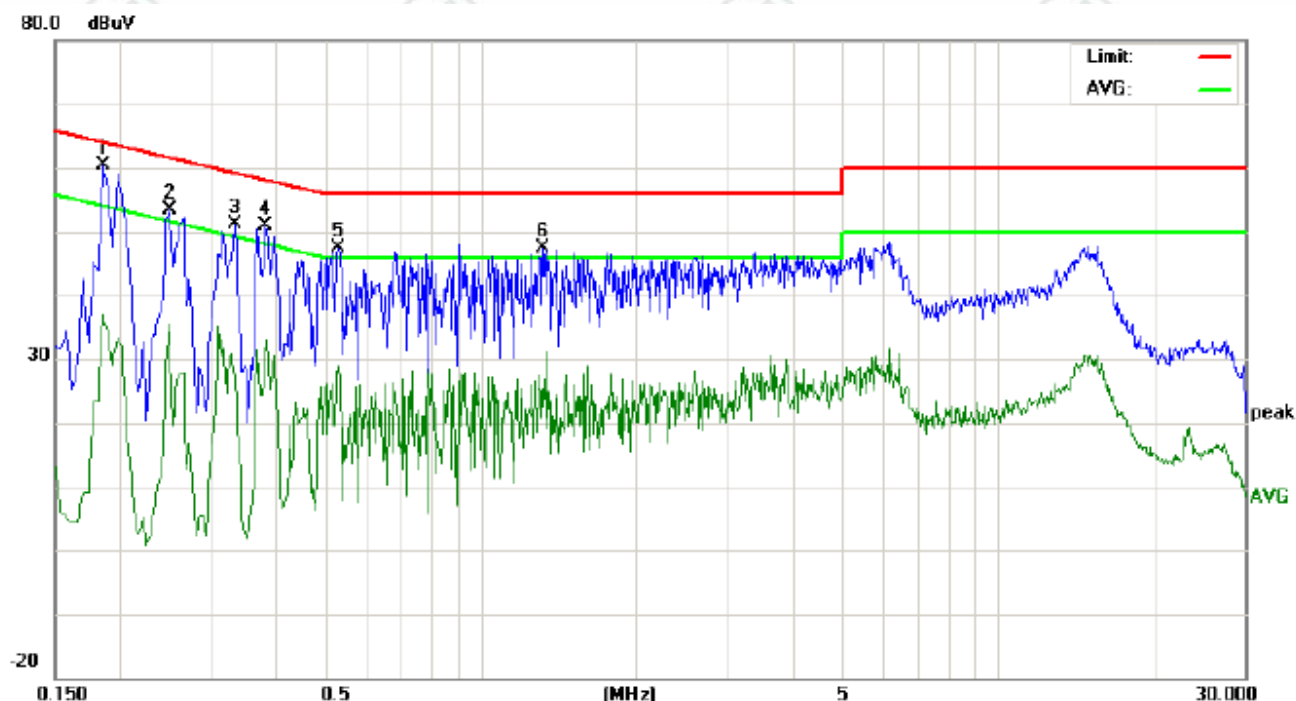

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1860	50.51	46.21	27.01	9.80	60.31	56.01	36.81	64.21	54.21	-8.20	-17.40	P	
2	0.2500	43.60	39.22	25.68	9.80	53.40	49.02	35.48	61.75	51.75	-12.73	-16.27	P	
3	0.3339	41.28	36.28	17.26	9.83	51.11	46.11	27.09	59.35	49.35	-13.24	-22.26	P	
4	0.3820	41.06	36.51	18.89	9.88	50.94	46.39	28.77	58.23	48.23	-11.84	-19.46	P	
5	0.5299	37.38	33.56	19.07	9.90	47.28	43.46	28.97	56.00	46.00	-12.54	-17.03	P	
6	1.3180	37.36	33.96	14.24	10.00	47.36	43.96	24.24	56.00	46.00	-12.04	-21.76	P	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. Pretest the Voltage at 120V AC and 240V AC ,Find the worst Voltage is 120V AC,only show the worst data is the test report.

Appendix K) Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). - Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBμV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	

Test plot as follows:

Frequency (MHz)	Read Level (dBμV)	Level (dBμV/m)	Antenna Factor (dB/m)	Cable Loss (dB)	Premap Factor (dB)	Limit (dBμV/m)	Over Limit (dB)	Antenna Polaxis	Remark	Test channel
2390.00	44.26	43.86	32.53	4.28	37.21	74	-30.14	H	PK	Lowest
2390.00	44.25	43.85	32.53	4.28	37.21	74	-30.15	V	PK	Lowest
2483.50	46.16	46.19	32.71	4.51	37.19	74	-27.81	H	PK	Highest
2483.50	46.41	46.44	32.71	4.51	37.19	74	-27.56	V	PK	Highest

Remark:

1) Scan from the Restricted bands around fundamental frequency (Radiated) test data, The test data which are more than 20dB but below the Average limit not be reported.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor


3)Pretest the Voltage at 120V AC and 240V AC ,Find the worst Voltage is 120V AC,only show the worst data is the test report.

Appendix L) Radiated Spurious Emissions


Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Above 1GHz test procedure as below:					
g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBµV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Radiated Spurious Emissions test Data: **Radiated Emission below 1GHz**

30MHz~1GHz (QP)

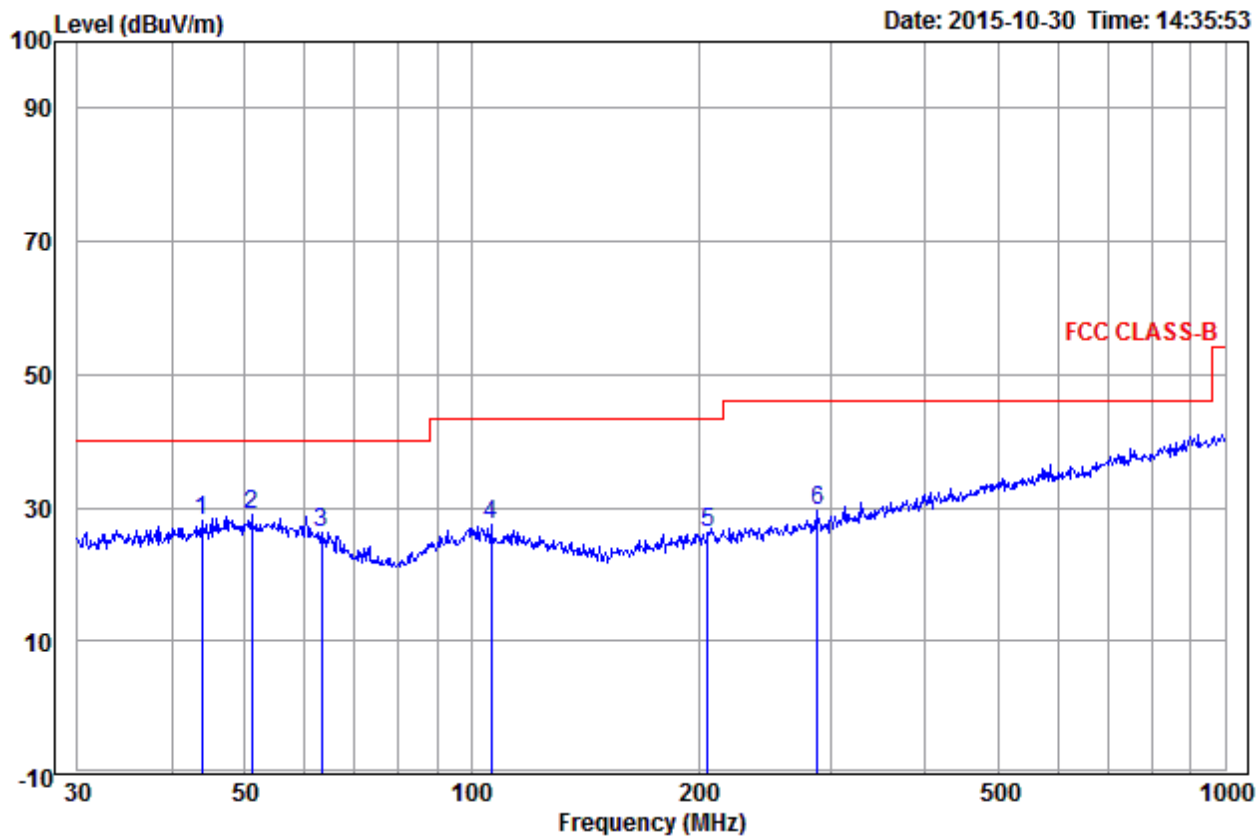

	Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	43.81	14.57	0.88	12.57	28.02	40.00	-11.98	Horizontal	
2 pp	51.12	14.94	1.40	12.49	28.83	40.00	-11.17	Horizontal	
3	63.31	12.61	1.44	12.35	26.40	40.00	-13.60	Horizontal	
4	106.01	12.70	1.57	13.21	27.48	43.50	-16.02	Horizontal	
5	205.68	11.70	2.23	12.19	26.12	43.50	-17.38	Horizontal	
6	287.99	13.25	2.37	13.81	29.43	46.00	-16.57	Horizontal	

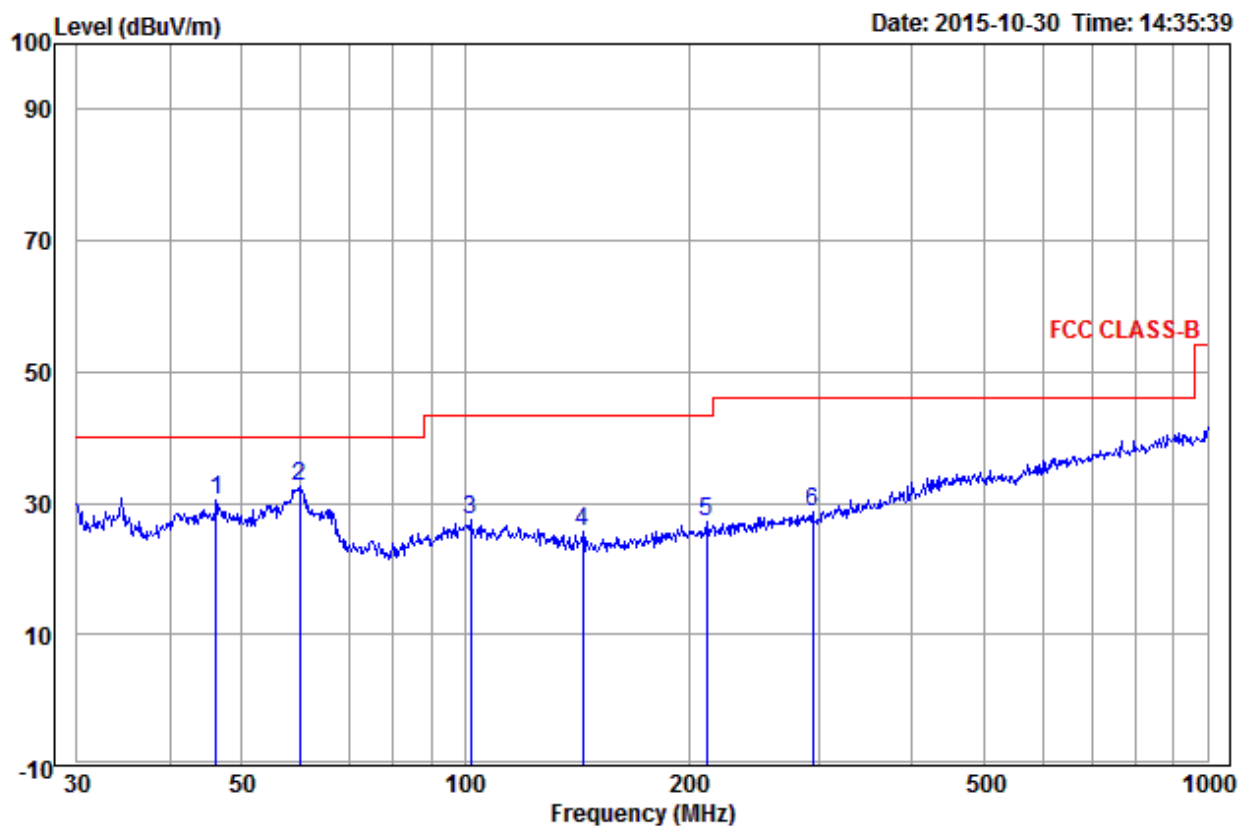

	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz		dB	dBuV	dBuV/m	dBuV/m	dB		
1	46.18	14.78	1.09	14.49	30.36	40.00	-9.64	Vertical	
2 pp	59.86	13.82	1.43	17.25	32.50	40.00	-7.50	Vertical	
3	101.64	13.06	1.57	12.70	27.33	43.50	-16.17	Vertical	
4	143.83	10.06	1.58	14.12	25.76	43.50	-17.74	Vertical	
5	211.53	11.80	2.25	13.14	27.19	43.50	-16.31	Vertical	
6	294.11	13.38	2.38	12.89	28.65	46.00	-17.35	Vertical	

Transmitter Emission above 1GHz

Test Frequency:		2402MHz						
Frequency (MHz)	Antenna Factor (dB/m)	Preamp Gain (dB)	Cable Loss (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Antenna Polaxis
1675.221	31.19	37.71	2.98	46.13	42.59	74	-31.41	H
3618.468	33.08	36.97	5.50	45.14	46.75	74	-27.25	H
4804.000	34.69	36.82	5.11	42.12	45.10	74	-28.90	H
5969.996	35.88	36.70	7.36	44.80	51.34	74	-22.66	H
7206.000	36.42	37.46	6.66	42.72	48.34	74	-25.66	H
9608.000	37.88	37.82	7.73	43.24	51.03	74	-22.97	H
1666.727	31.17	37.72	2.97	43.81	40.23	74	-33.77	V
4171.937	33.23	36.88	5.36	41.71	43.42	74	-30.58	V
4804.000	34.69	36.82	5.11	41.57	44.55	74	-29.45	V
6281.308	36.05	36.94	7.14	41.60	47.85	74	-26.15	V
7206.000	36.42	37.46	6.66	42.51	48.13	74	-25.87	V
9608.000	37.88	37.82	7.73	41.51	49.30	74	-24.70	V

Test Frequency:		2441MHz						
Frequency (MHz)	Antenna Factor (dB/m)	Preamp Gain (dB)	Cable Loss (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Antenna Polaxis
1666.727	31.17	37.72	2.97	45.01	41.43	74	-32.57	H
3702.192	33.02	36.95	5.49	45.67	47.23	74	-26.77	H
4884.000	34.86	36.81	5.08	43.09	46.22	74	-27.78	H
6281.308	36.05	36.94	7.14	44.11	50.36	74	-23.64	H
7323.000	36.43	37.43	6.77	43.91	49.68	74	-24.32	H
9764.000	38.05	37.85	7.60	43.11	50.91	74	-23.09	H
1666.727	31.17	37.72	2.97	44.01	40.43	74	-33.57	V
3702.192	33.02	36.95	5.49	44.4	45.96	74	-28.04	V
4884.000	34.86	36.81	5.08	42.91	46.04	74	-27.96	V
6281.308	36.05	36.94	7.14	44.00	50.25	74	-23.75	V
7323.000	36.43	37.43	6.77	43.69	49.46	74	-24.54	V
9764.000	38.05	37.85	7.60	43.00	50.80	74	-23.20	V

Test Frequency:		2480MHz						
Frequency (MHz)	Antenna Factor (dB/m)	Preamp Gain (dB)	Cable Loss (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Antenna Polaxis
1737.384	31.29	37.62	3.03	45.21	41.91	74	-32.09	H
3757.208	32.97	36.94	5.48	44.56	46.07	74	-27.93	H
4960.000	35.02	36.80	5.05	40.80	44.07	74	-29.93	H
6412.427	36.12	37.05	7.02	44.22	50.31	74	-23.69	H
7440.000	36.45	37.41	6.88	42.81	48.73	74	-25.27	H
9920.000	38.22	37.88	7.47	43.76	51.57	74	-22.43	H
1597.401	31.05	37.82	2.92	44.17	40.32	74	-33.68	V
3757.208	32.97	36.94	5.48	43.56	45.07	74	-28.93	V
4960.000	35.02	36.80	5.05	38.27	41.54	74	-32.46	V
6412.427	36.12	37.05	7.02	41.22	47.31	74	-26.69	V
7440.000	36.45	37.41	6.88	40.81	46.73	74	-27.27	V
9920.000	38.22	37.88	7.47	43.37	51.18	74	-22.82	V

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor


Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


3) Pretest the Voltage at 120V AC and 240V AC, Find the worst Voltage is 120V AC, only show the worst data is the test report.

PHOTOGRAPHS OF TEST SETUP

Test mode No.: E97

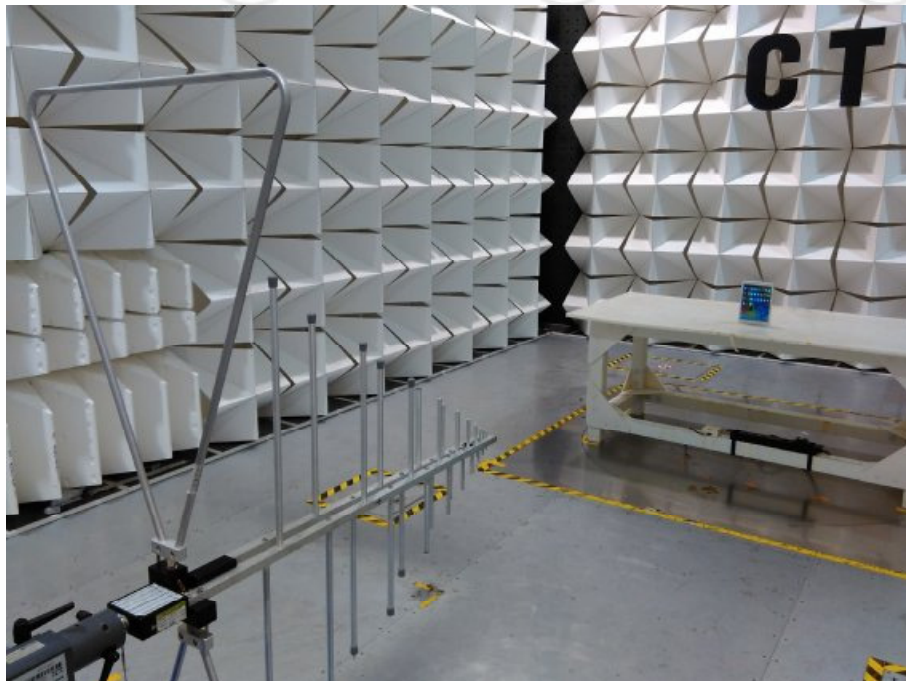

Radiated spurious emission Test Setup-1(Below 1GHz)

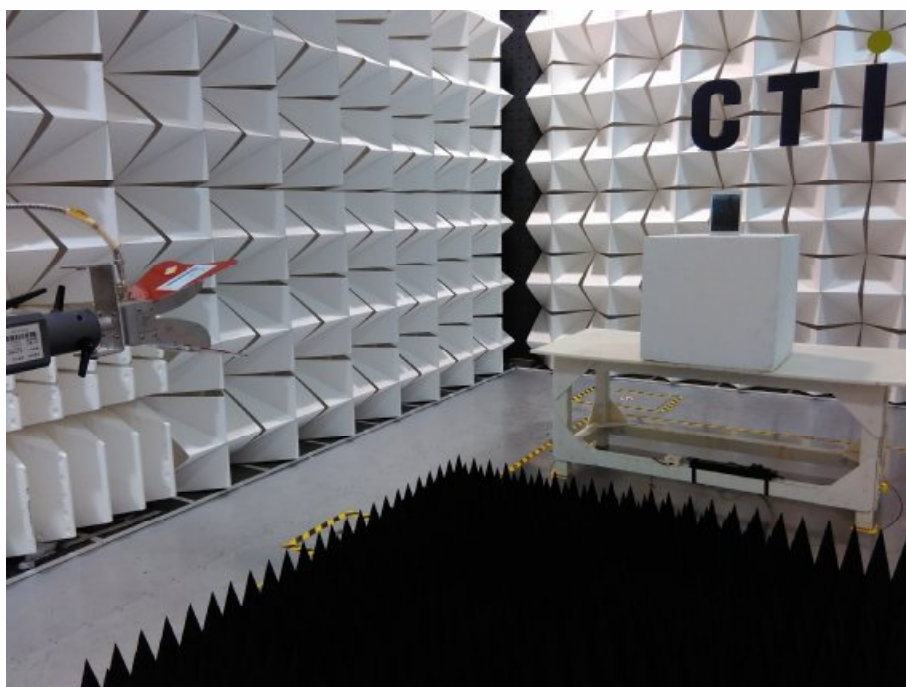

Radiated spurious emission Test Setup-2(Above 1GHz)



Conducted emission Test Setup

PHOTOGRAPHS OF EUT Constructional Details

Test mode No.: E97



View of product-1



View of product-2



View of product-3




View of product-4



View of product-5



View of product-6

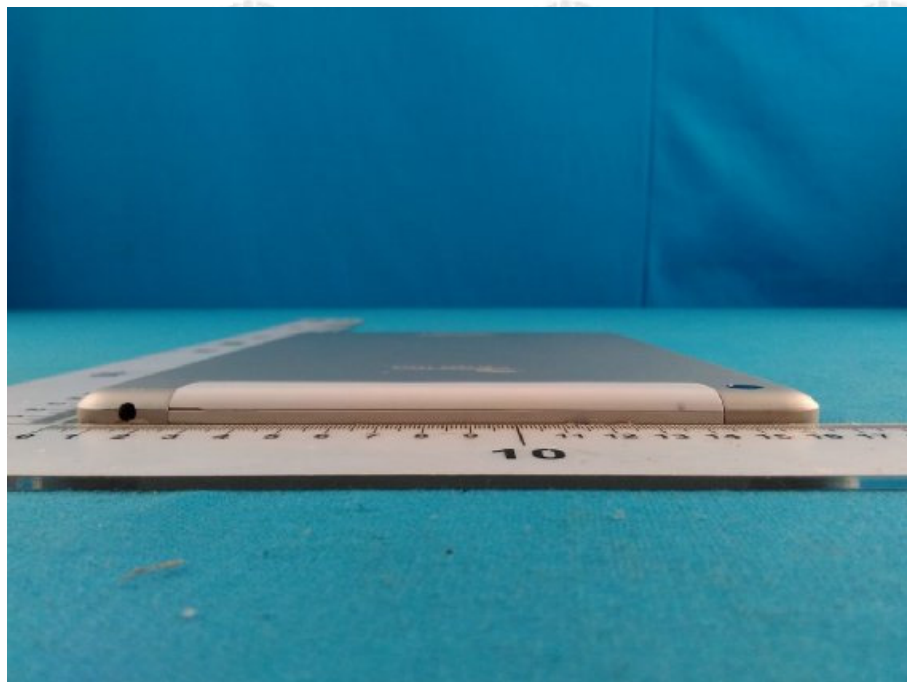

View of product-7




View of product-8




View of product-9




View of product-10

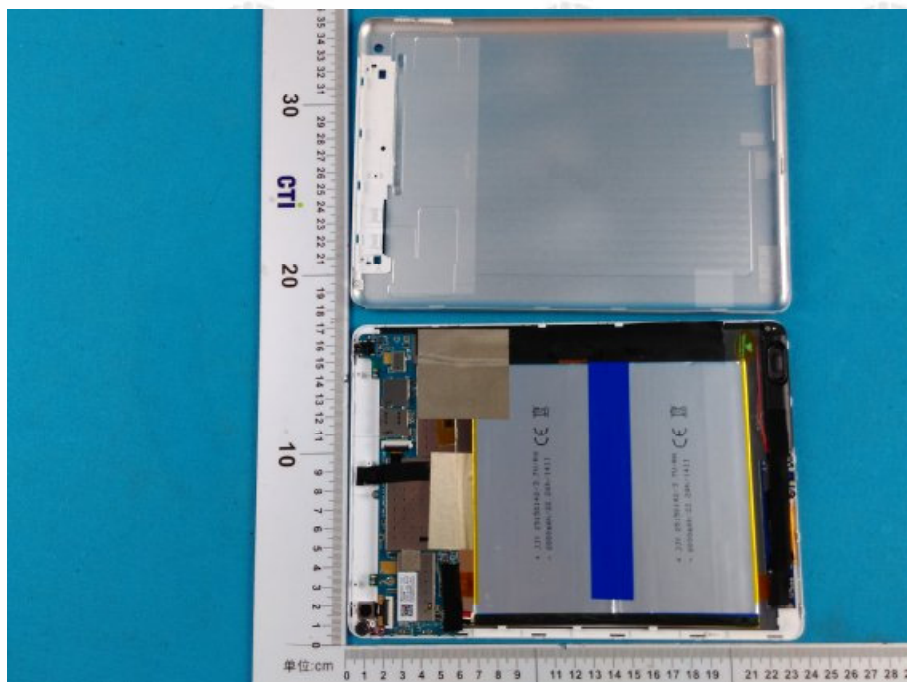


View of product-11

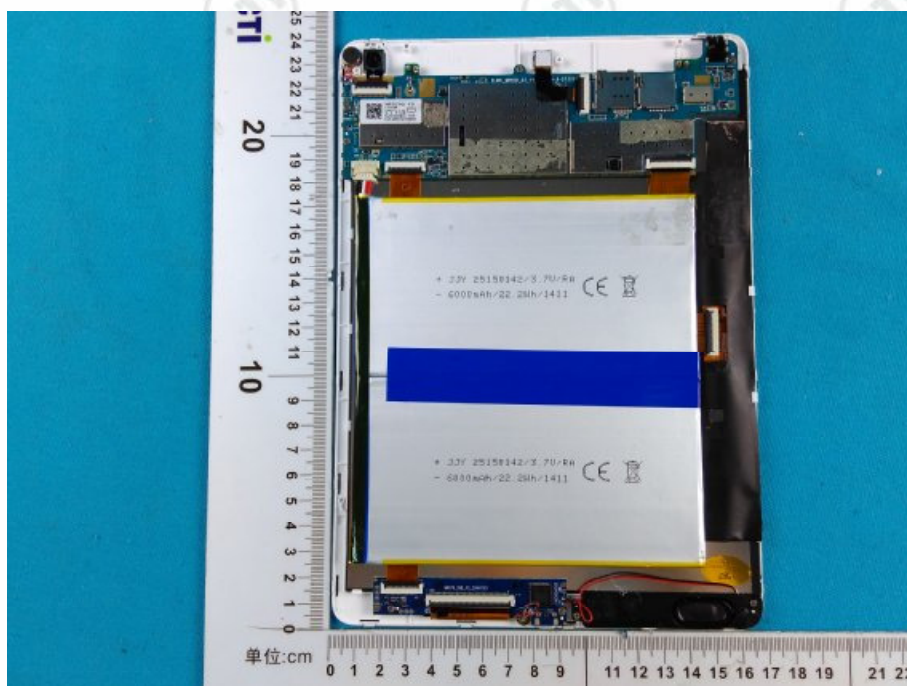


View of product-12

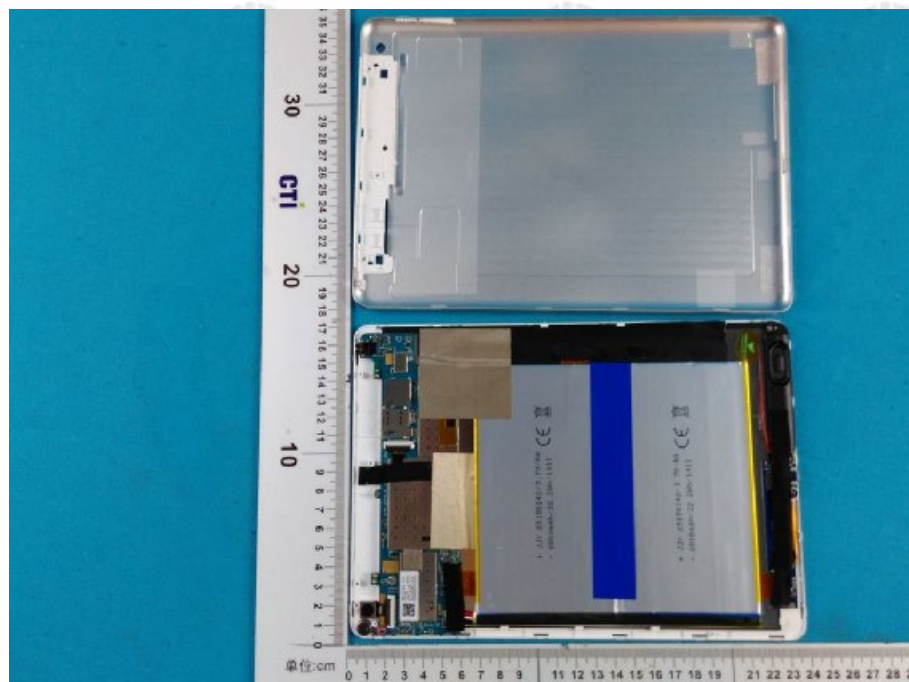

View of product-13

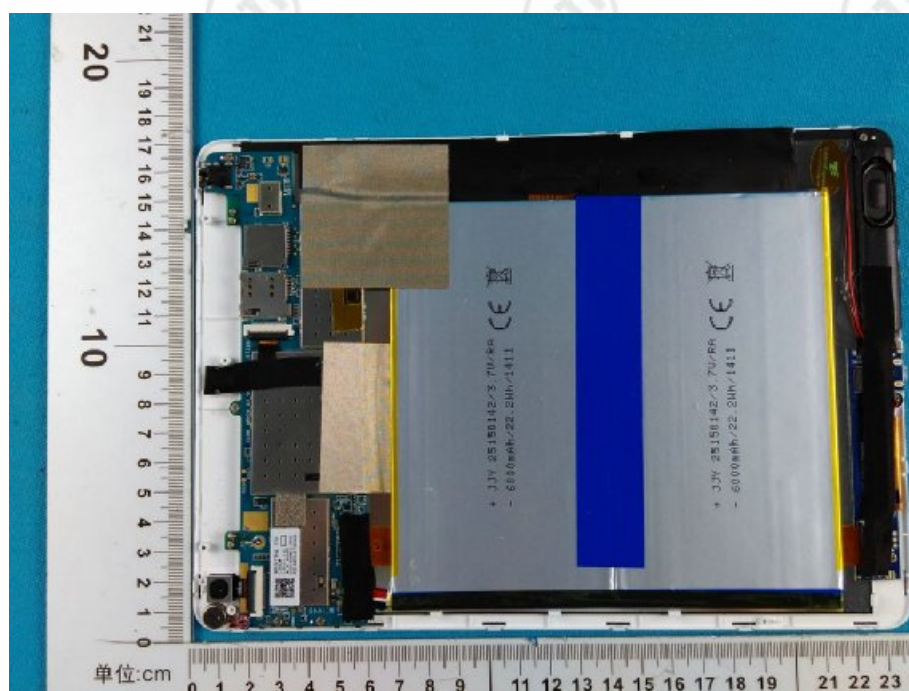

View of product-14

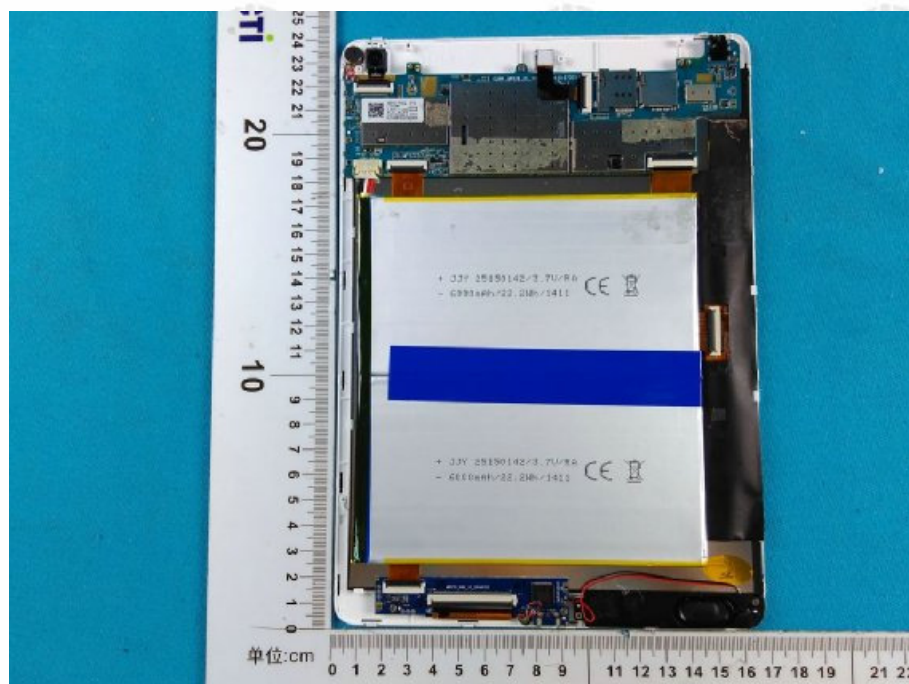


View of product-15




View of product-16




View of product-17

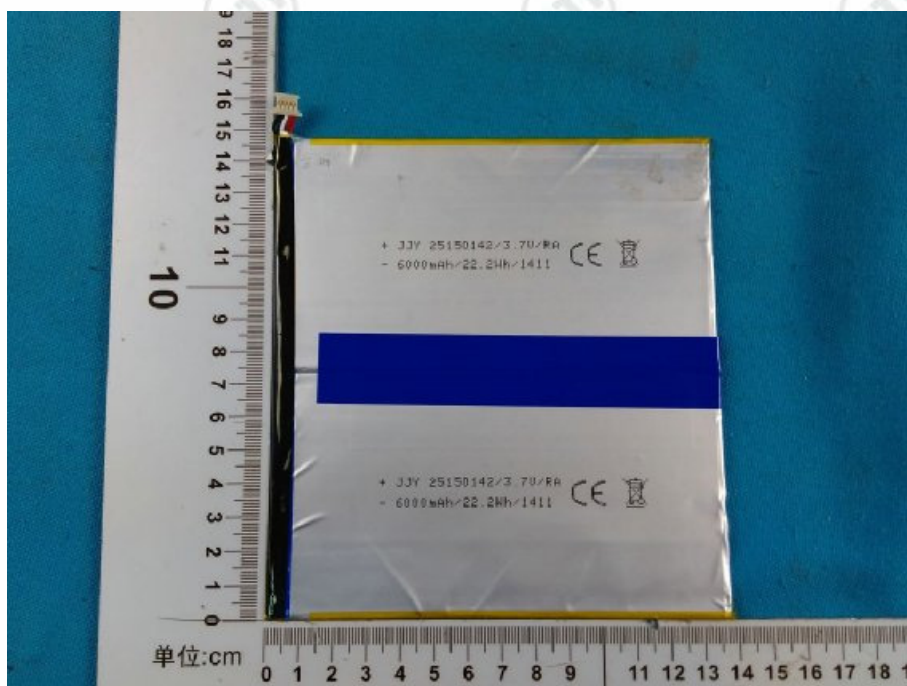


View of product-18

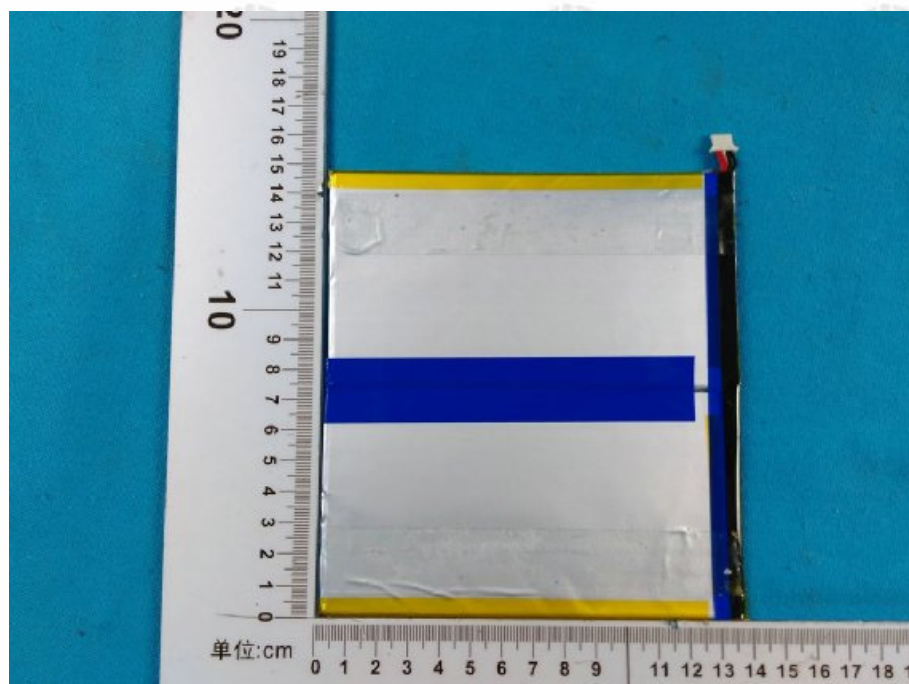

View of product-19

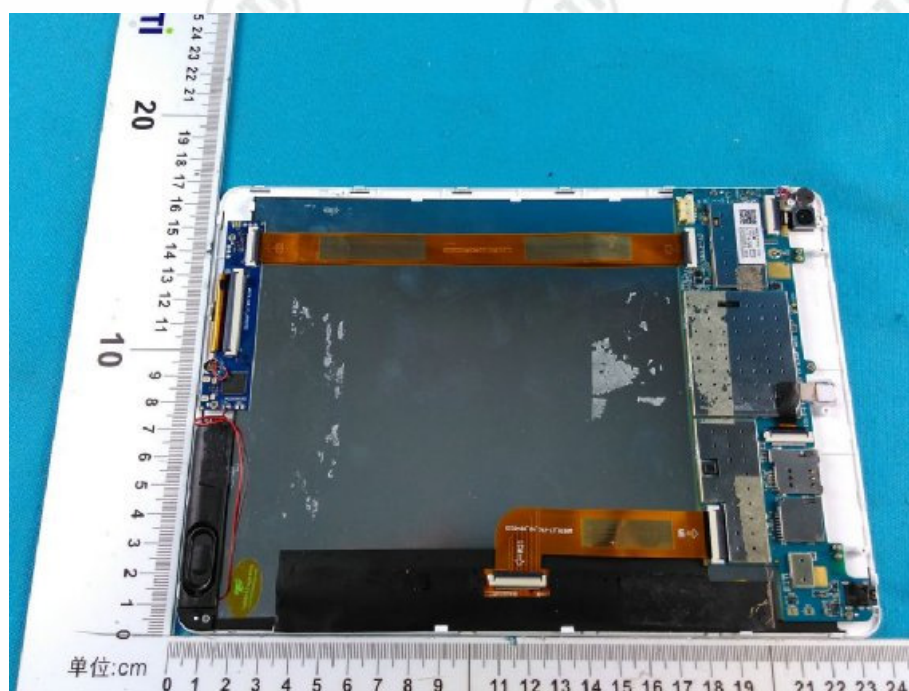


View of product-20

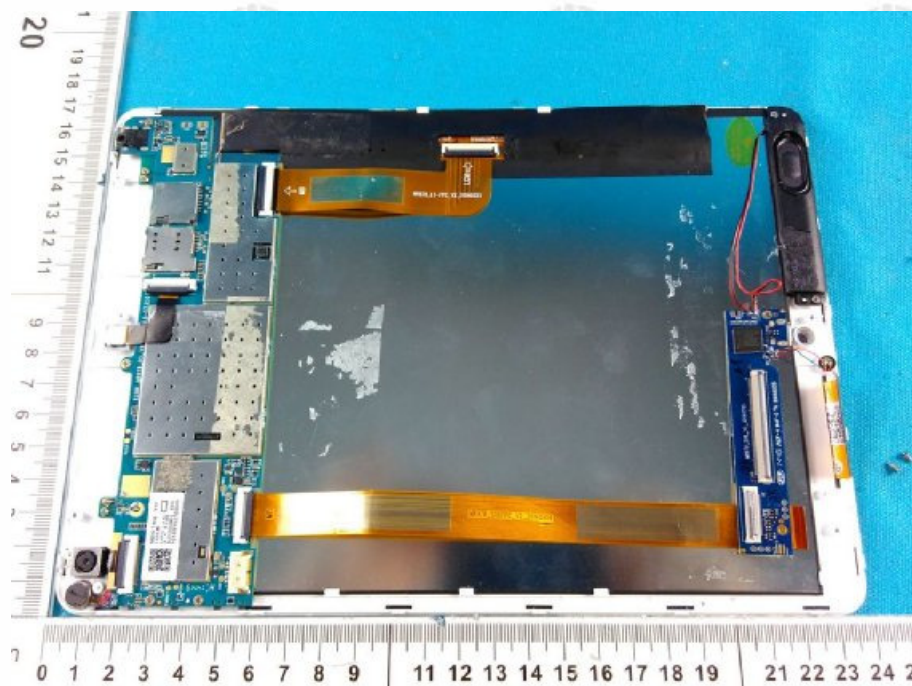


View of product-21



View of product-22

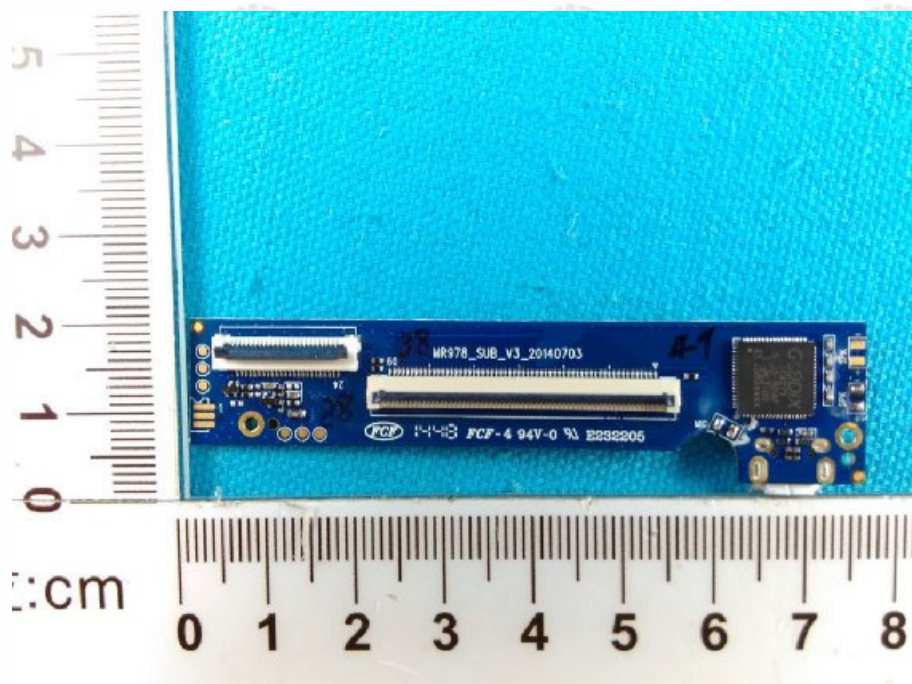

View of product-23

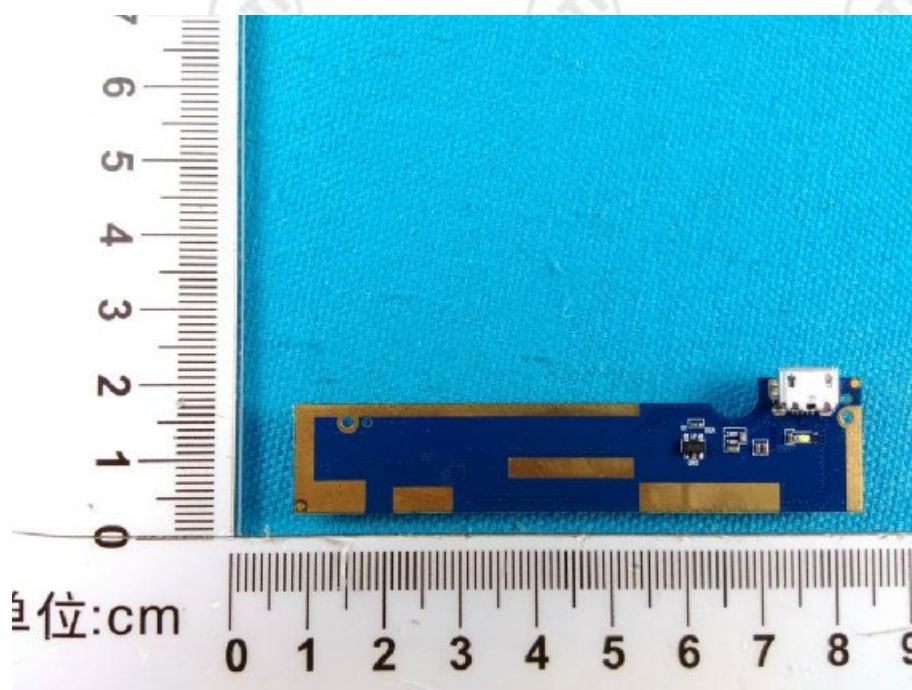


View of product-24



View of product-25




View of product-26

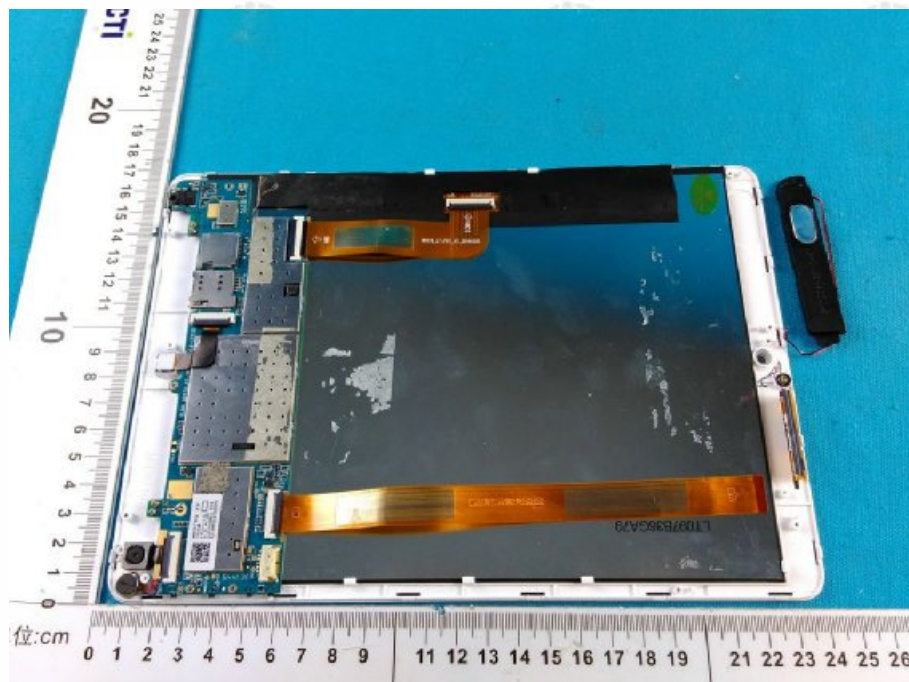

View of product-27




View of product-28

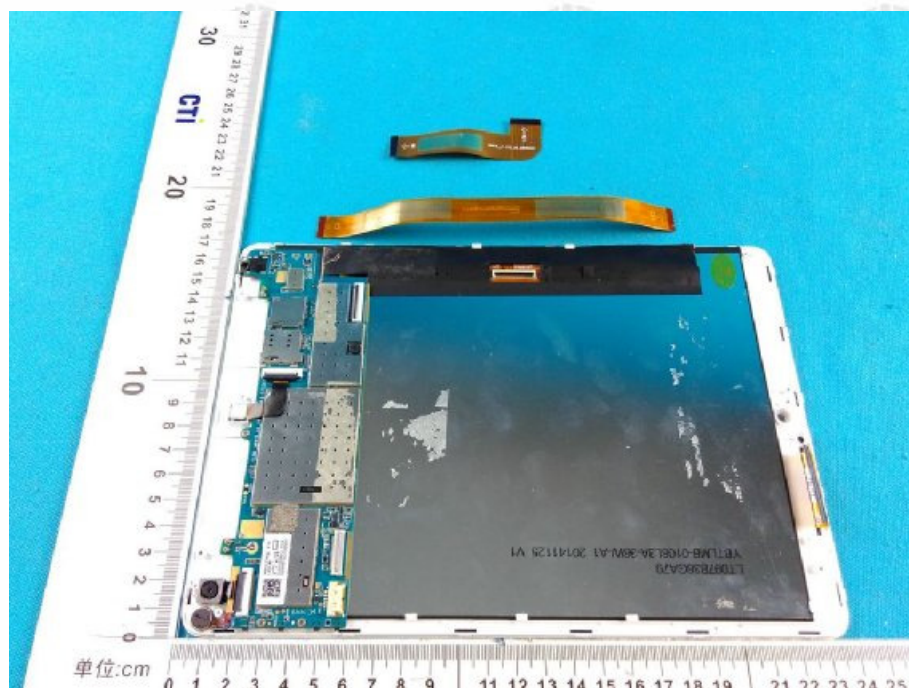

View of product-29



View of product-30

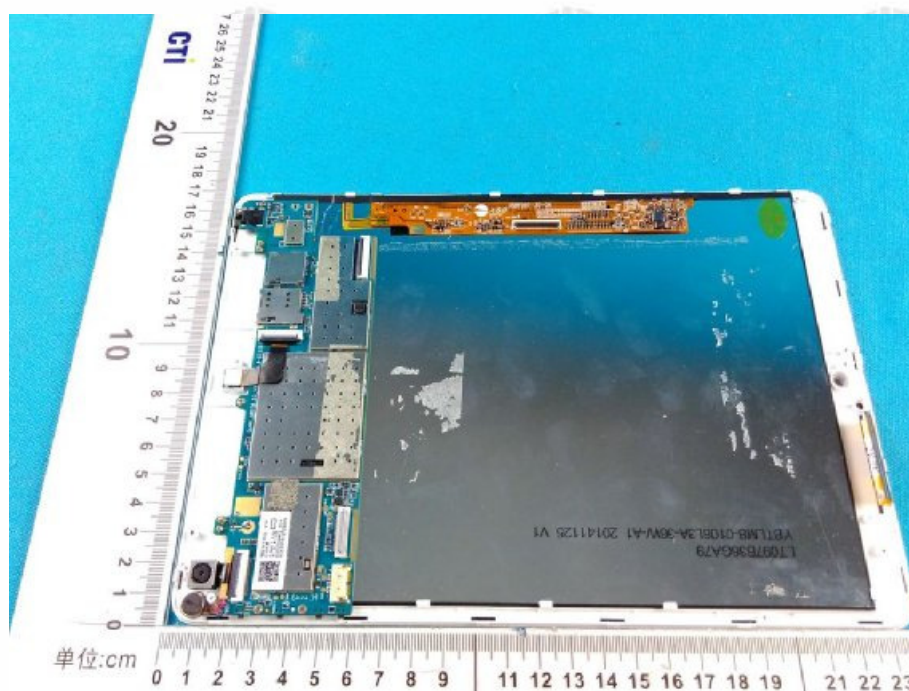


View of product-31




View of product-32




View of product-33

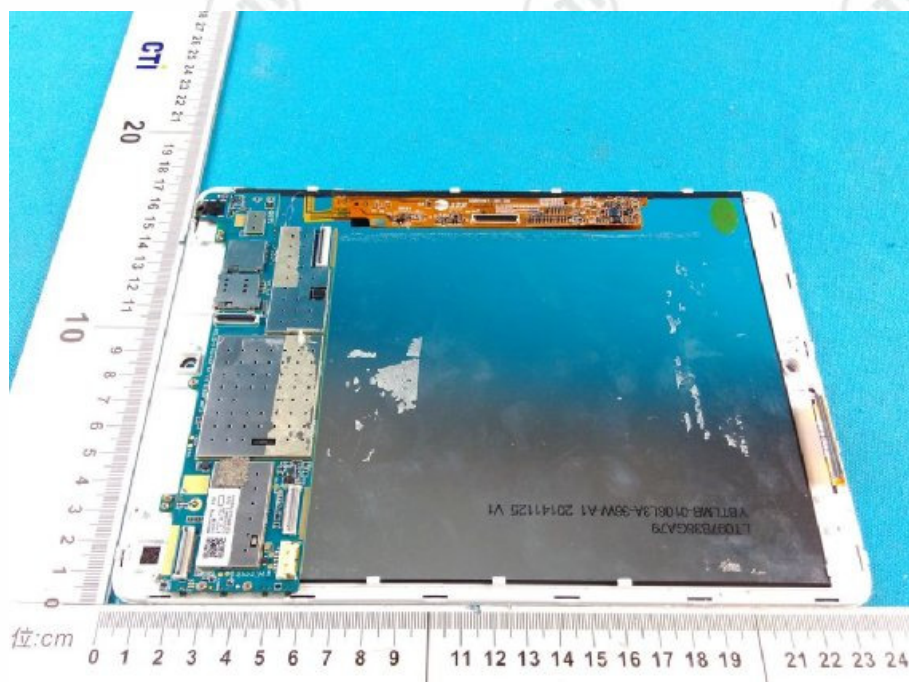


View of product-34

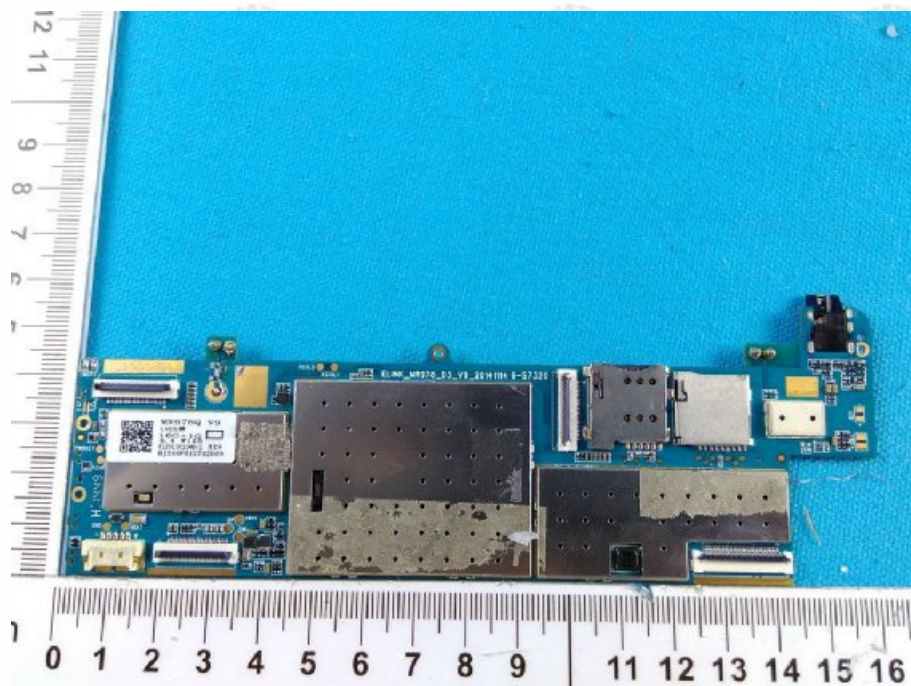


View of product-37

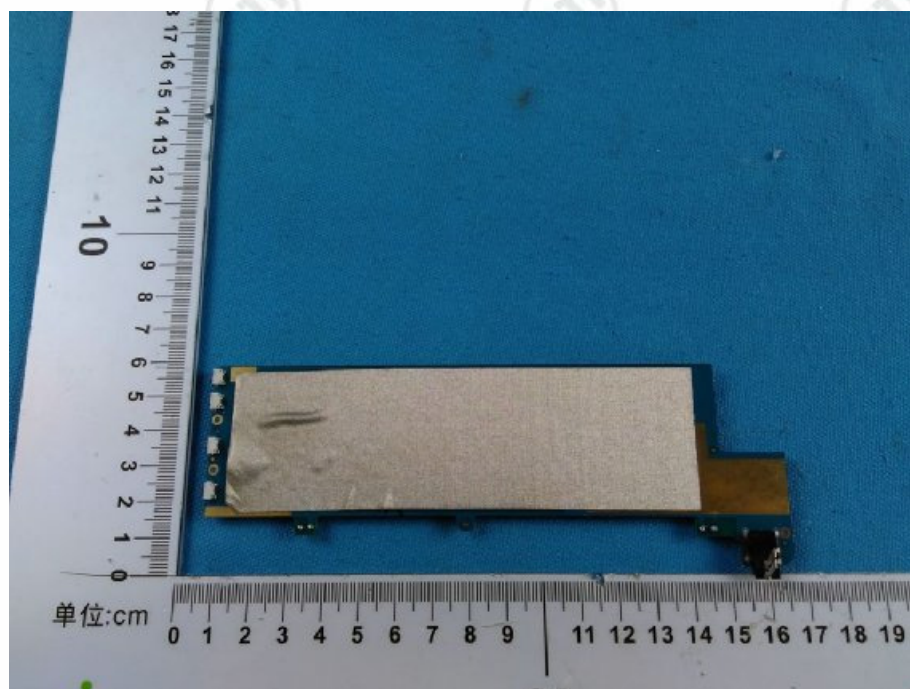


View of product-38

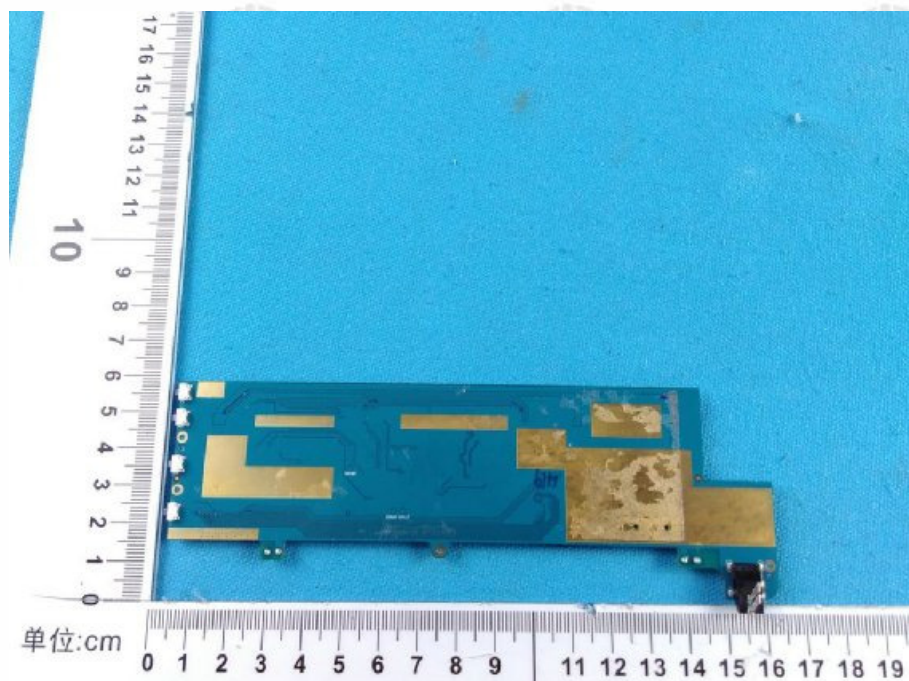

View of product-39

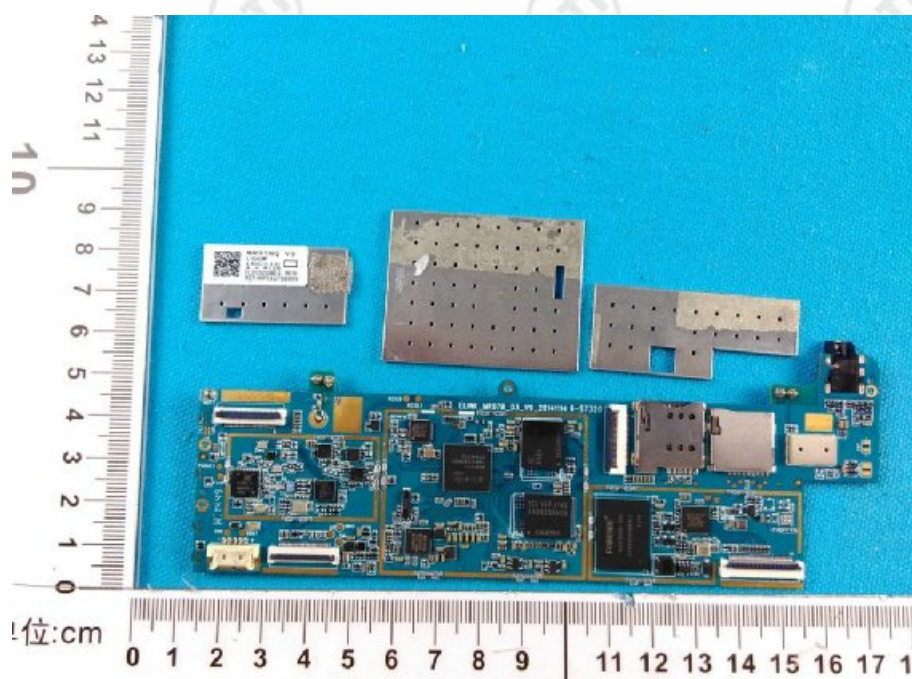


View of product-40

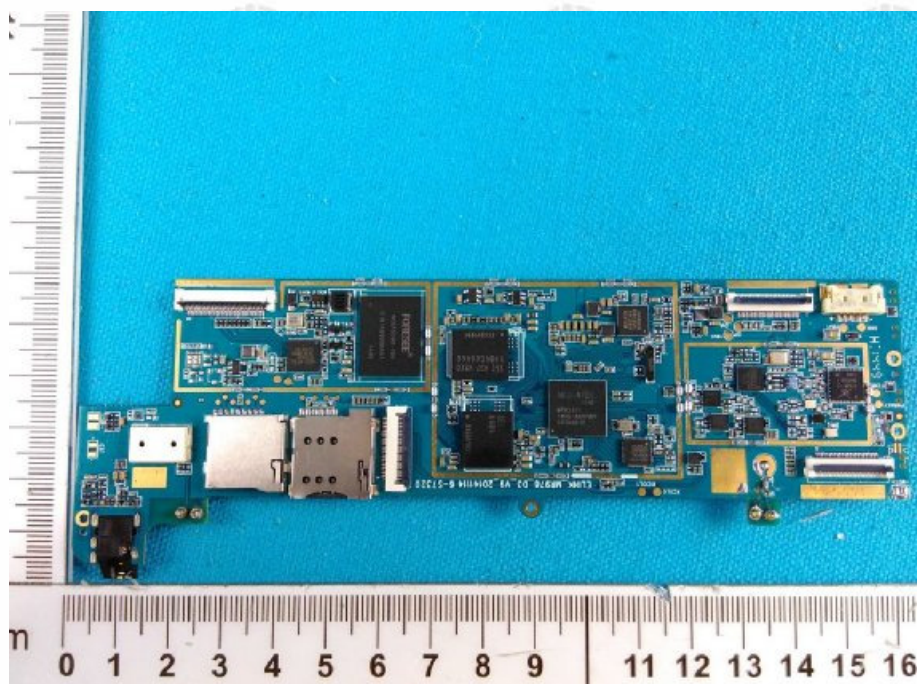


View of product-41




View of product-42(Adapter)

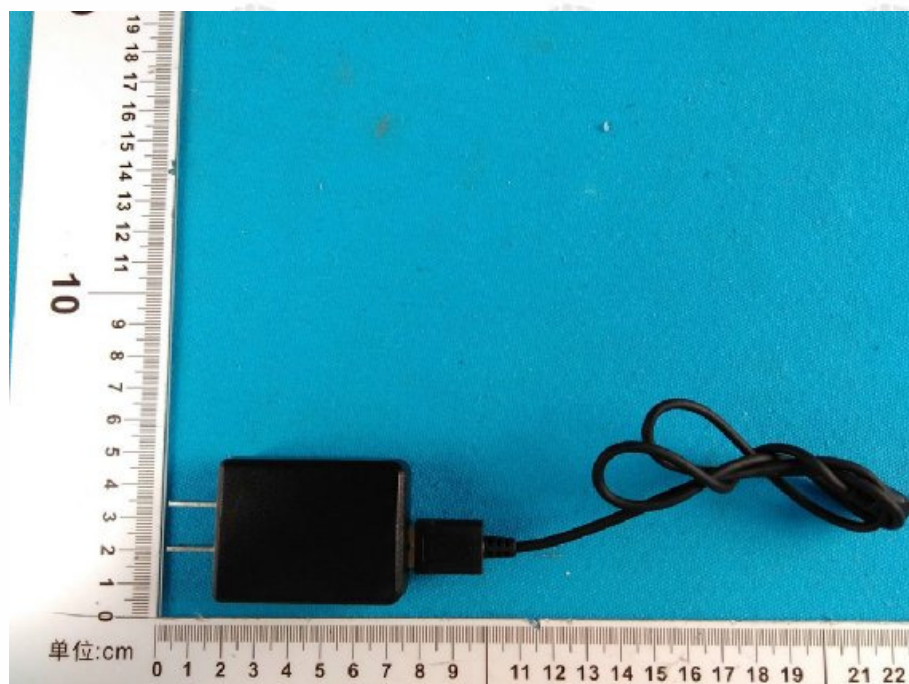


View of product-43(Adapter)

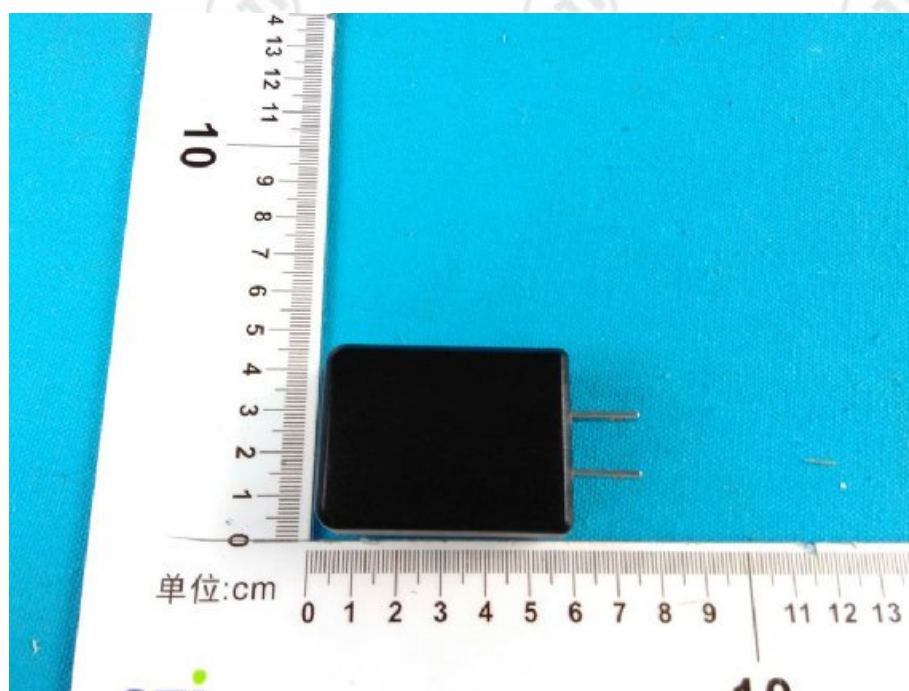


View of product-44(Adapter)

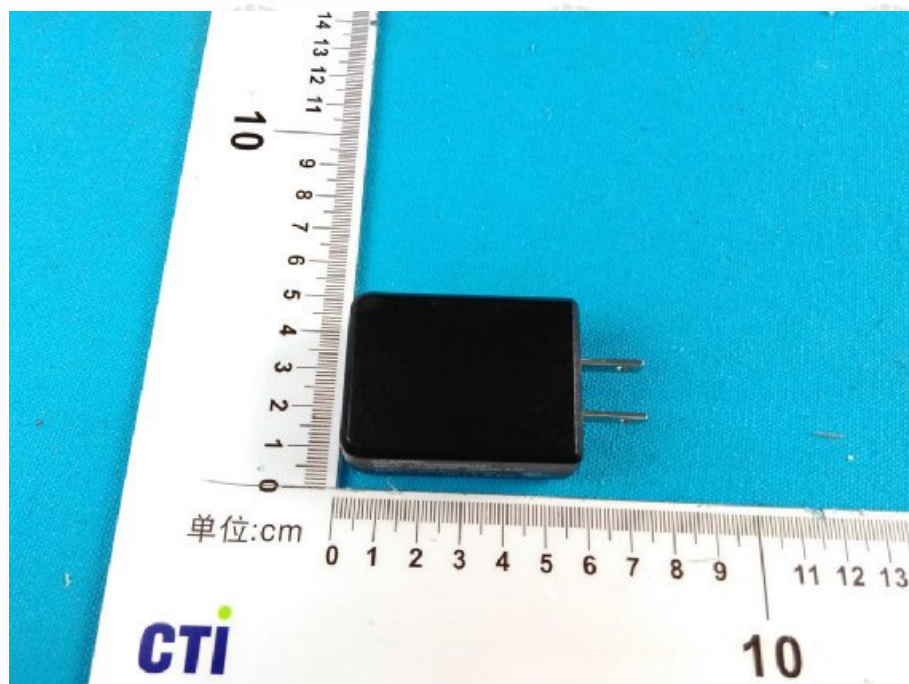


View of product-45(Adapter)

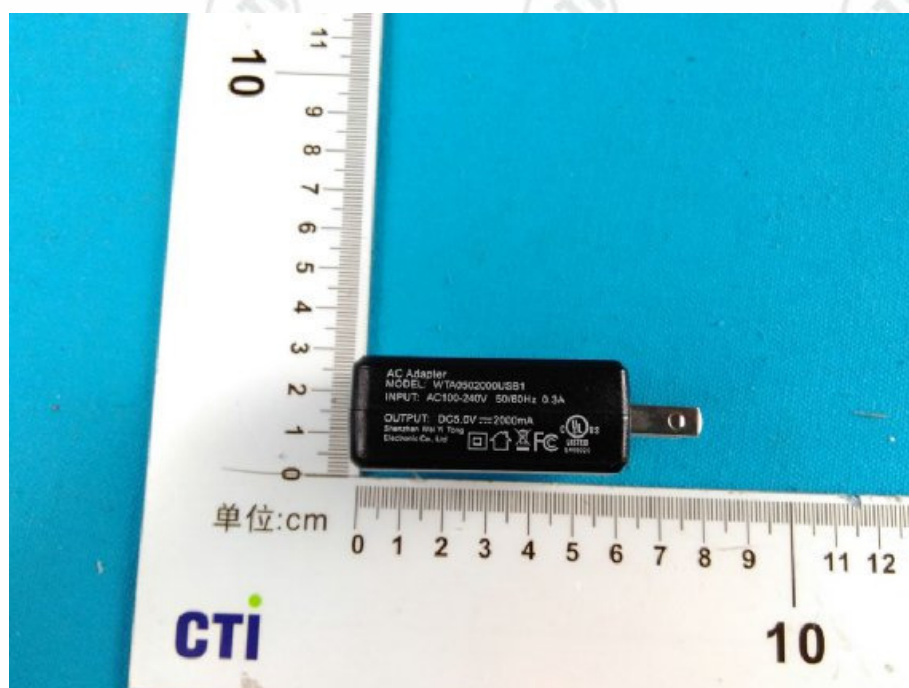


View of product-46(Adapter)

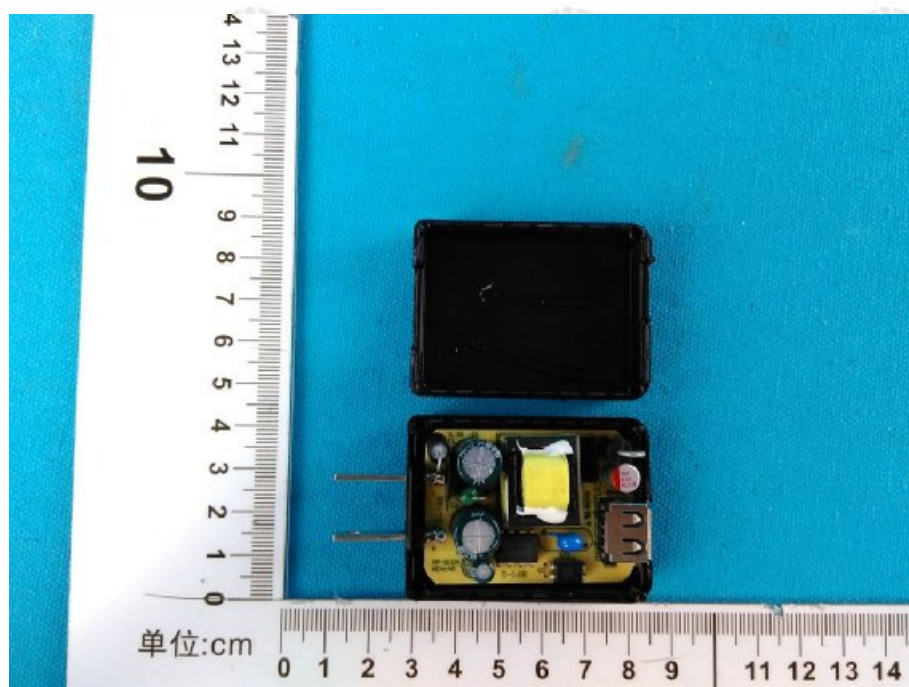


View of product-47(Adapter)

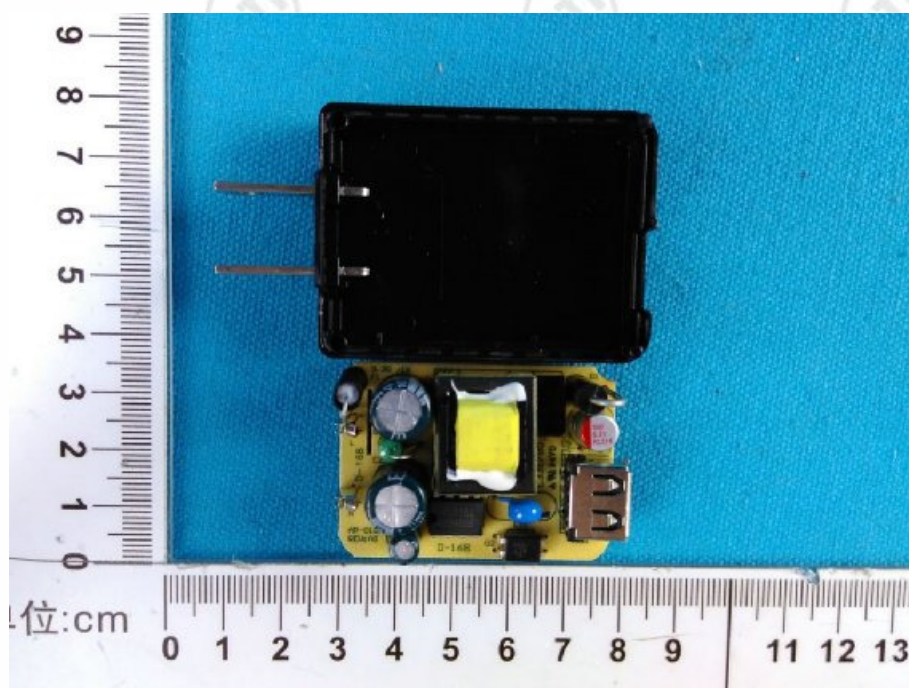

View of product-48(Adapter)

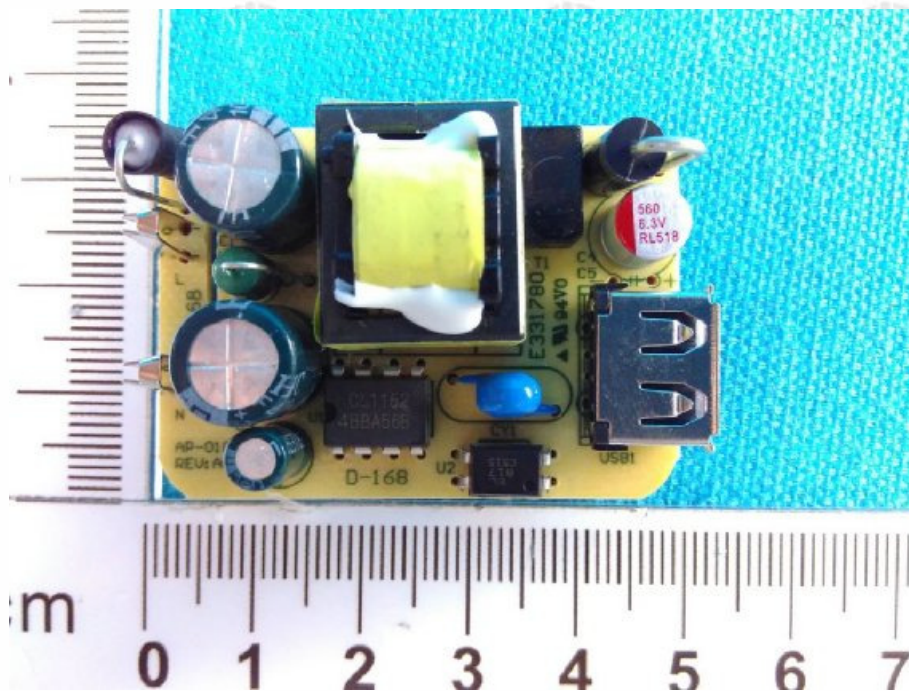

View of product-49(Adapter)

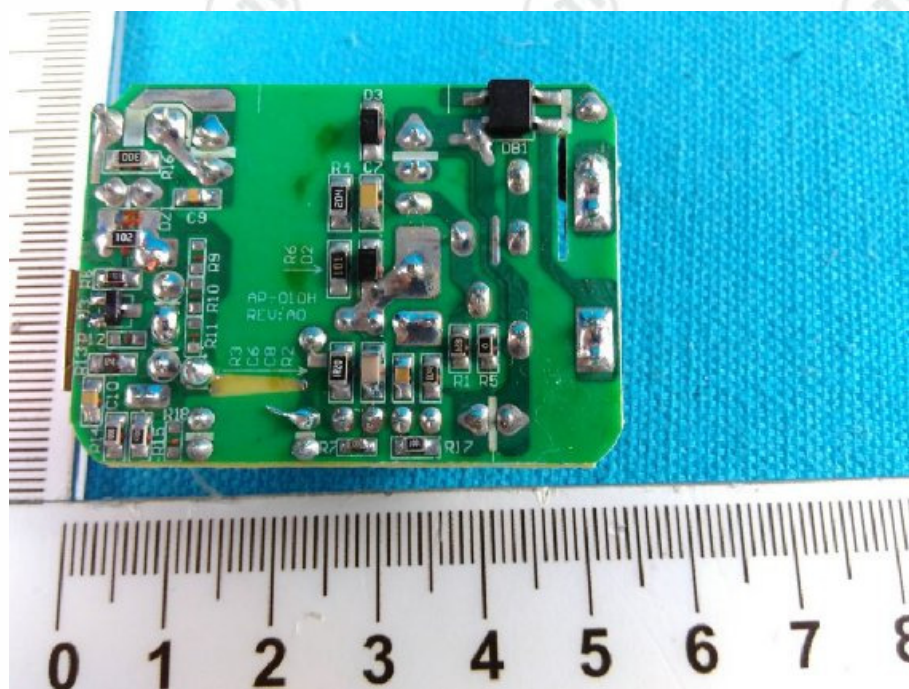

View of product-50(Adapter)

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.