


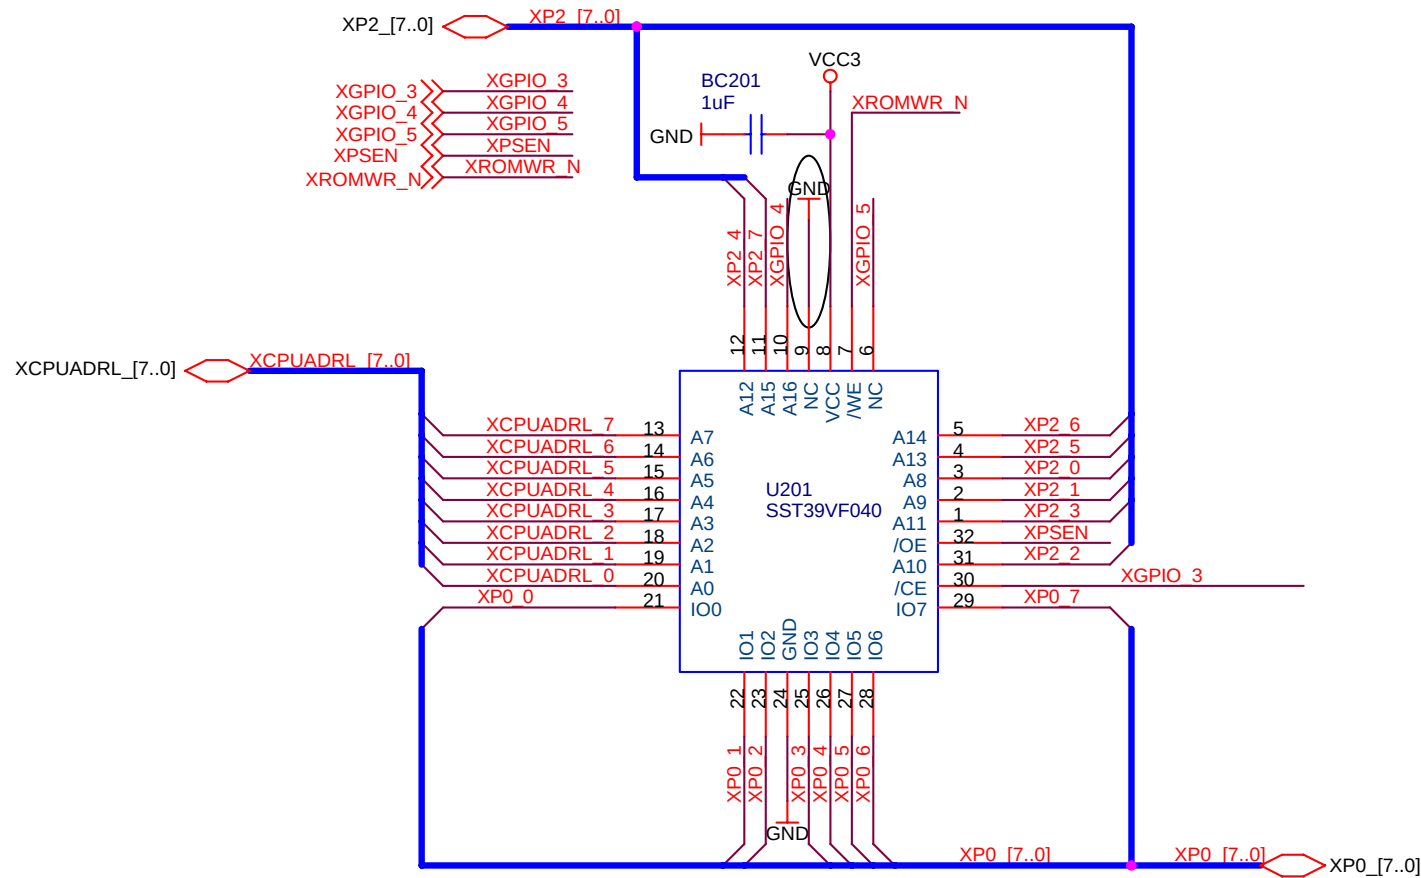
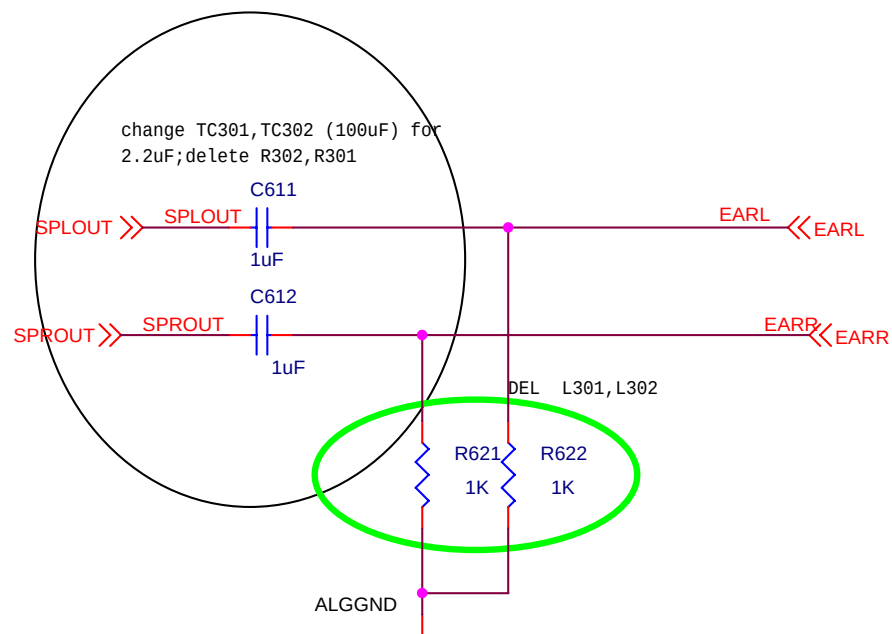




S1		
Title		
SPDA1000/2000 EVB4.0		
Size	Document Number	Rev
A	USB & ROM & TEST	1.0
Date:	Thursday, December 29, 2005	Sheet 2 of 6

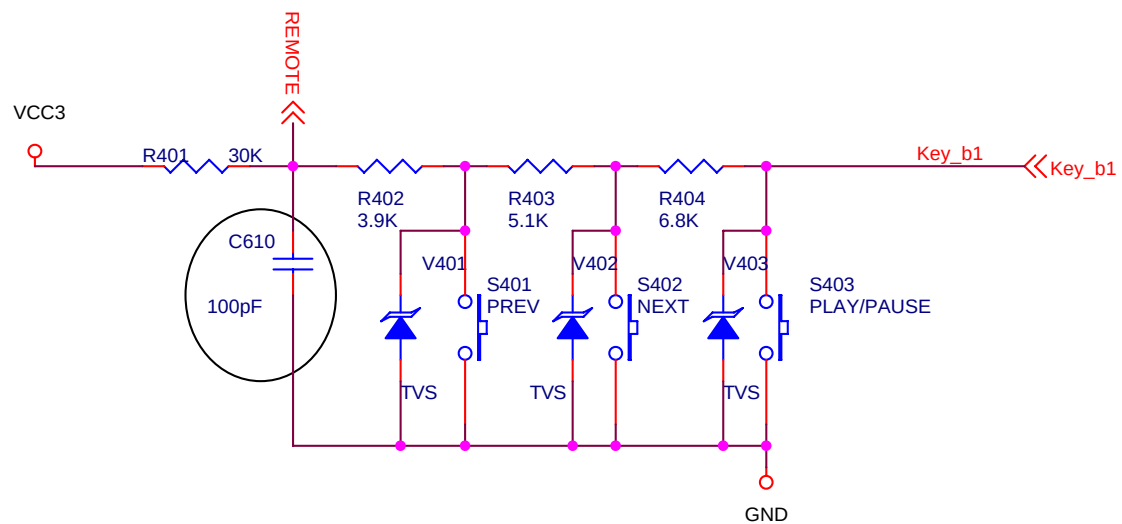




S1		
Title		
SPDA1000/2000 EVB4.0		
Size	Document Number	Rev
A	MIC & PHONE & LED & RESET	1.0
Date:	Thursday, December 29, 2005	Sheet 3 of 6



易方修改：这是FM接口考虑到HY1415、HY1417两个方案的兼容性，所以用FMD0、FMD1、FMD2、FMD3这4条数据线

Title <Title>			
Size A	Document Number <Doc>		Rev 1.0
Date:	Thursday, December 29, 2005	Sheet	4 of 6

1. SPCA1010正常处于Device状态，USB5_OUT常低；
2. USB3_OUT脉冲输出，提供USB电源上的3.3v间隙供电；
3. 当USB3_OUT输出High时，Device_DET为High，说明插上U盘；
4. 当USB3_OUT输出Low时，Host_DET为High，说明插上PC。

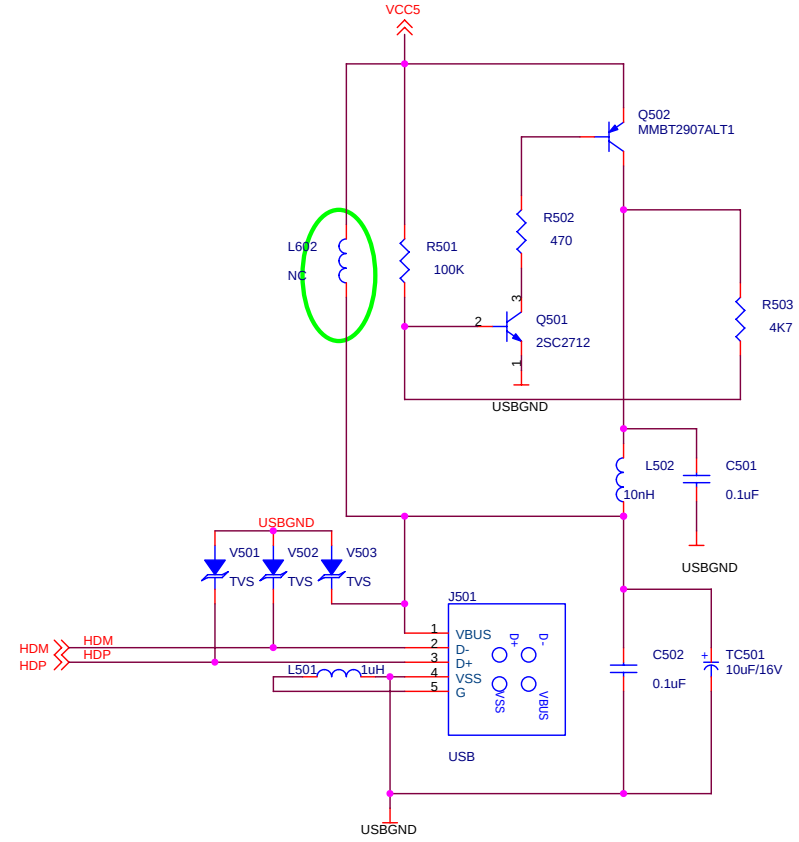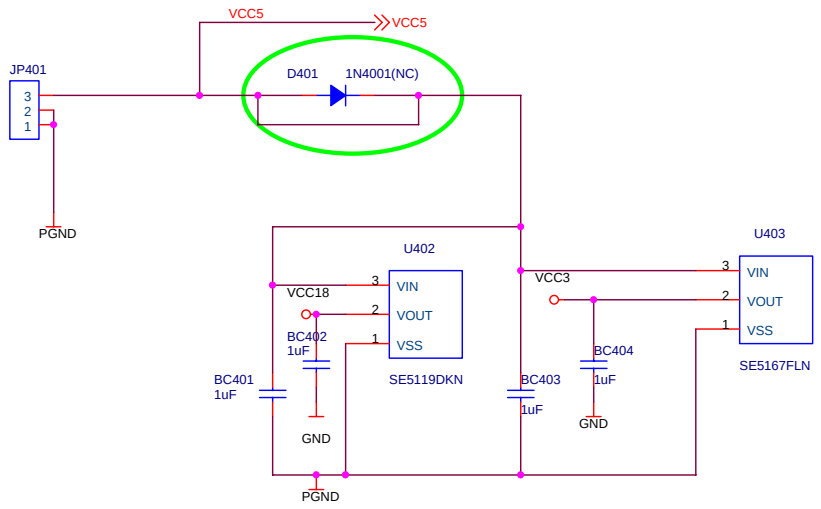

Title			<Title>
Size	Document Number		Rev
B	<Doc>		1.0
Date:	Thursday, December 29, 2005		Sheet 6 of 6

