PART NUMBER "A"	COUNTRY OF ORIGIN "B"
XX = CN	Made in China
XX = MY	Assembled in China with PCBA from Malaysia
XX = MX	Assembled in Mexico

PART NUMBER "A"	COUNTRY OF ORIGIN "B"
XX = CN	Made in China

NOTE: AC connector must be removed to replace batteries. Press tab to remove AC connector.

Clean annually. See User Guide for more info.

Wi-Fi

YYYY, MMM, DD

Smoke sensitivity : x.xx +/- x.xx %/ft OBS

F.P.O

38707

DSN: BHSC1714LH000770

CONFORMS TO UL STD 217, 9th ed

Multi-Criteria Smoke Alarm

ETL LISTED US

Intertek

XXXXXX

Model RGSAR-RW

Photoelectric Smoke Alarm w/ Voice, Wireless Interlink, & Wi-Fi, 120VAC (60Hz, 85mA Max) w / AA battery backup. Constant exposures to high or low temperatures or high humidity may reduce battery life. **SMOKE ALARM:** 3 Long beeps, repeating. **NOTE: Not a CO alarm, but can transmit a CO ALARM signal: 4 quick beeps, repeating. STANDBY:** AC power-green LED on. DC only-green LED blinks every 60s. **FAULT:** Amber LED blinks 1-4 times with 3 chirps every 60s. **LOW BATTERY:** Amber LED blinks every 6s with 1 chirp every 60s. **END OF UNIT LIFE:** Amber LED blinks twice with 2 chirps every 60s. **Temp Range:** 40° F (4.4° C) to 100° F (37.8° C). **Humidity Range:** Up to 95% relative humidity (RH), non-condensing.

Contains FCC ID SAK-ESP32S3 FCC ID: SAK-RGSARRW

L-000352-CN-00 Rev A

REPLACE BATTERIES AT LEAST ONCE A YEAR.

WARNING: USE ONLY BATTERIES SPECIFIED IN MARKING (Energizer E91, Gold Peak 15A,Golden Power GLR6A). **USE OF A DIFFERENT BATTERY MAY HAVE A DETRIMENTAL EFFECT ON ALARM OPERATION.** NOTE: Do not use lithium batteries in this unit. **Unit will not attach to mounting bracket without batteries installed.**

Made in China.

PART NUMBER "A"	COUNTRY OF ORIGIN "B"
XX = MY	Assembled in China with PCBA from Malaysia

NOTE: AC connector must be removed to replace batteries. Press tab to remove AC connector.

Clean annually. See User Guide for more info.

Wi-Fi

YYYY, MMM, DD

Smoke sensitivity : x.xx +/- x.xx %/ft OBS

F.P.O.

38707

DSN: BHSC1714LH000770

CONFORMS TO UL STD 217, 9th ed

Multi-Criteria Smoke Alarm

Intertek

XXXXXX

Model RGSAR-RW

Photoelectric Smoke Alarm w/ Voice, Wireless Interlink, & Wi-Fi, 120VAC (60Hz, 85mA Max) w / AA battery backup. Constant exposures to high or low temperatures or high humidity may reduce battery life. **SMOKE ALARM:** 3 Long beeps, repeating. **NOTE: Not a CO alarm, but can transmit a CO ALARM signal: 4 quick beeps, repeating. STANDBY:** AC power-green LED on. DC only-green LED blinks every 60s. **FAULT:** Amber LED blinks 1-4 times with 3 chirps every 60s. **LOW BATTERY:** Amber LED blinks every 6s with 1 chirp every 60s. **END OF UNIT LIFE:** Amber LED blinks twice with 2 chirps every 60s. **Temp Range:** 40° F (4.4° C) to 100° F (37.8° C). **Humidity Range:** Up to 95% relative humidity (RH), non-condensing.

Contains FCC ID SAK-ESP32S3 FCC ID: SAK-RGSARRW

REPLACE BATTERIES AT LEAST ONCE A YEAR.

WARNING: USE ONLY BATTERIES SPECIFIED IN MARKING (Energizer E91, Gold Peak 15A,Golden Power GLR6A). **USE OF A DIFFERENT BATTERY MAY HAVE A DETRIMENTAL EFFECT ON ALARM OPERATION.** NOTE: Do not use lithium batteries in this unit. **Unit will not attach to mounting bracket without batteries installed.**

Assembled in China with PCBA from Malaysia

L-000352-MY-00 Rev A

PART NUMBER "A"	COUNTRY OF ORIGIN "B"
XX = MX	Assembled in Mexico

NOTE: AC connector must be removed to replace batteries. Press tab to remove AC connector.

Clean annually. See User Guide for more info.

Wi-Fi

YYYY, MMM, DD

Smoke sensitivity : x.xx +/- x.xx %/ft OBS

F.P.C

38707

DSN: BHSC1714LH000770

CONFORMS TO UL STD 217, 9th ed

Multi-Criteria Smoke Alarm

ETL LISTED US

Intertek

XXXXXX

Model RGSAR-RW

Photoelectric Smoke Alarm w/ Voice, Wireless Interlink, & Wi-Fi, 120VAC (60Hz, 85mA Max) w / AA battery backup. Constant exposures to high or low temperatures or high humidity may reduce battery life. **SMOKE ALARM:** 3 Long beeps, repeating. **NOTE: Not a CO alarm, but can transmit a CO ALARM signal: 4 quick beeps, repeating. STANDBY:** AC power-green LED on. DC only-green LED blinks every 60s. **FAULT:** Amber LED blinks 1-4 times with 3 chirps every 60s. **LOW BATTERY:** Amber LED blinks every 6s with 1 chirp every 60s. **END OF UNIT LIFE:** Amber LED blinks twice with 2 chirps every 60s. **Temp Range:** 40° F (4.4° C) to 100° F (37.8° C). **Humidity Range:** Up to 95% relative humidity (RH), non-condensing.

Contains FCC ID SAK-ESP32S3 FCC ID: SAK-RGSARRW

REPLACE BATTERIES AT LEAST ONCE A YEAR.

WARNING: USE ONLY BATTERIES SPECIFIED IN MARKING (Energizer E91, Gold Peak 15A,Golden Power GLR6A). **USE OF A DIFFERENT BATTERY MAY HAVE A DETRIMENTAL EFFECT ON ALARM OPERATION.** NOTE: Do not use lithium batteries in this unit. **Unit will not attach to mounting bracket without batteries installed.**

Assembled in Mexico
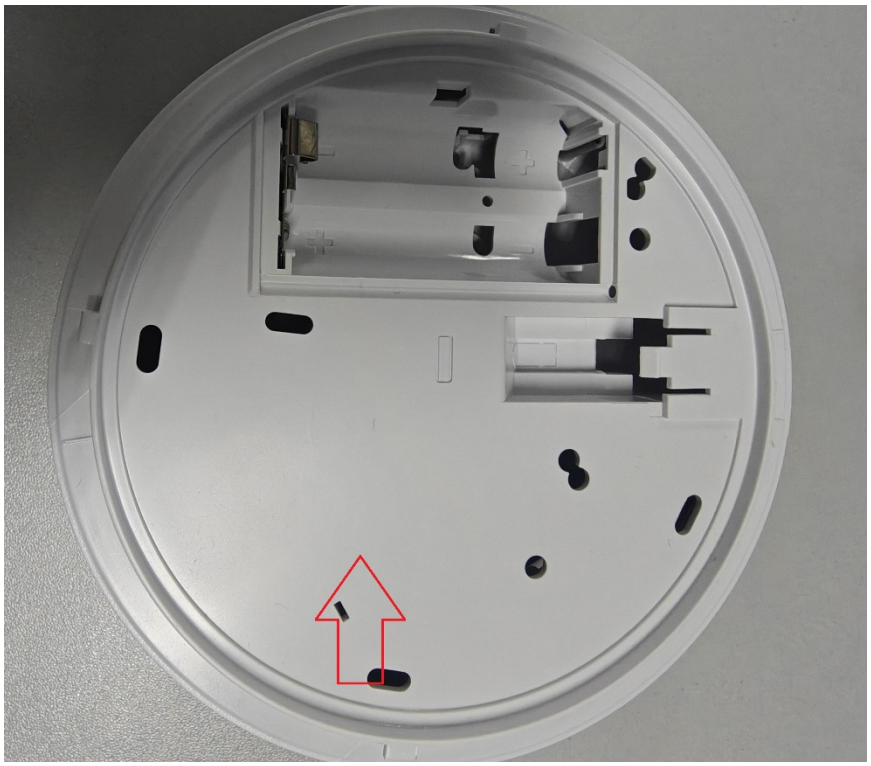
1-000352-MX-00 Rev A