

## Electromagnetic Emission

# FCC MEASUREMENT REPORT

### CERTIFICATION OF COMPLIANCE

### FCC Part 15 Certification Measurement

**PRODUCT** : SMPS  
**MODEL/TYPE NO** : ZM460-APS  
**FCC ID** : SAOZM460-APS  
**APPLICANT** : Zalman Tech Co., Ltd.  
#1007, Daeryung TechnoTown 3th, 448, Gasan-dong,  
Gumchun-gu, Seoul, Korea  
Attn. : Nam Jin , Lim / Engineer  
**FCC CLASSIFICATION** : Internal power supplies used with Class B personal computers  
**FCC RULE PART(S)** : FCC Part 15 Subpart B  
**FCC PROCEDURE** : Certification  
**TRADE NAME** : ZALMAN  
**TEST REPORT No.** : E05.0404.FCC.195N  
**DATES OF TEST** : March 28~April 04, 2005  
**DATES OF ISSUE** : April 04, 2005  
**TEST LABORATORY** : ETL Inc. ( FCC Registration Number : 95422)  
#584 Sangwhal-ri, Kanam-myon, Yaju-kun, Kyunggi-do,  
469-885, Korea  
Tel : (031) 885-0072 Fax : (031) 885-0074

This SMPS, Model ZM460-APS has been tested in accordance with the measurement procedures specified in ANSI C63.4-2001 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B:

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

*Yo Han, Park*

Yo Han, Park / Chief Engineer

**ETL Inc.**

**#584 Sangwhal-ri, Kanam-myon, Yaju-kun,  
Kyunggi-do, 469-885, Korea**



## Table of Contents

### FCC Measurement Report

1. Introduction
2. Product Information
3. Description of Tests
4. Test Condition
5. Test Results
  - 5.1 Summary of Test Results
  - 5.2 Conducted Emissions Measurement
  - 5.3 Radiated Emissions Measurement
6. Sample Calculation
7. List of test Equipment used for Measurement

### Appendix A. FCC ID Label and Location

### Appendix B. Test Setup Photographs

### Appendix C. External Photographs

### Appendix D. Internal Photographs

### Appendix E. Block Diagram

### Appendix F. User Manual

**Scope** – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

## General Information

**Applicant Name:** Zalman Tech Co., Ltd.

**Address :** #1007, Daeryung TechnoTown 3th, 448, Gasan-dong,  
Gumchun-gu, Seoul, Korea

**Attention :** Nam Jin ,Lim / Engineer

- **EUT Type :** SMPS
- **Model Number :** ZM460-APS
- **FCC ID :** SAOZM460-APS
- **S/N :** S5091000004
- **FCC Rule Part(s) :** FCC Part 15 Subpart B
- **Test Procedure :** ANSI C63.4-2001
- **FCC Classification :** Internal power supplies used with Class B personal computers
- **Dates of Tests :** March 28~April 04, 2005
- **Place of Tests :** ETL Inc.  
EMC Testing Lab. (FCC Registration Number : 95422)  
584, Sangwhal-Ri, Kanam-Myun, Yoju-Kun,  
Kyounggi-Do, Korea  
Tel : (031) 885-0072 Fax : (031) 885-0074
- **Test Report No. :** E05.0404.FCC.195N

## 1. INTRODUCTION

The measurement test for radiated and conducted emission test were conducted at the open area test site of E-RAE Testing Laboratory Inc. facility located at 584, Sangwhal-ri, Ganam-myun, Youju-kun, Kyungki-do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-2001 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2001 and registered to the Federal Communications Commission(Registration Number : 95422 ).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-2001) was used in determining radiated and conducted emissions from the Zalman Tech Co., Ltd. Model : ZM460-APS

## 2. PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test(EUT) is the Zalman Tech Co., Ltd. SMPS, ZM460-APS.

### 2.2 General Specification

| Form-factor    |            | ATX/ATX12V                                     |                |                    |
|----------------|------------|------------------------------------------------|----------------|--------------------|
| POWER          |            | 520. Watt max peak<br>460. Watt max Continuous |                |                    |
| Efficiency     |            | =75% at Full load                              |                |                    |
| Output voltage | Regulation | Min load(Amps)                                 | Max load(Amps) | Peak current(Amps) |
| +12V1DC        | ±5%        | 1                                              | 16             | 19                 |
| +12V2DC        | ±5%        | 1                                              | 18             | 22                 |
| +5VDC          | ±5%        | 0.5A                                           | 28.0A          |                    |
| +3.3VDC        | ±5%        | 0.3A                                           | 30.0A          |                    |
| -12VDC         | ±5%        | 0A                                             | 0.8A           |                    |
|                |            |                                                |                |                    |
| +5VSB          | ±5%        | 0A                                             | 2A             | 2.5A               |

## 3. DESCRIPTION OF TESTS

### 3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with § 12.2 in ANSI C63.4-2001 "Measurement of Information Technology Equipment". The measurement was performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\mu$ H LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

#### - Procedure of Test

The line-conducted facility is located inside a shielded room 1 m X 1.5 m wooden table 80 cm high is placed 40 cm away from the vertical wall and 1.5 m away from the side wall of the shielded room. Ground of two EMCO 3825/2 LISNs are bonded to the reference horizontal ground. The EUT is powered from the EMCO LISN and the support equipment is powered from the other EMCO LISN. Power to the LISNs is filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner  $\phi$  1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the EMCO LISN. Non-inductive bundling to a 1m length shortened all interconnecting cables more than 1m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the ESHS30 EMI Test Receiver to determine the frequency producing the max. emission from the EUT. The frequency producing the max. level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

## 3. DESCRIPTION OF TESTS

### 3.2 Radiated Emission Measurement

Radiated emission measurements were in accordance with § 12.2 in ANSI C63.4-2001 "Measurement of Information Technology Equipment". The measurements were performed over the frequency range of 30 MHz to 1 GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120 kHz.

#### - Procedure of Test

Preliminary measurements were made at 3 meter using broadband antennas, and spectrum analyzer to determined the frequency producing the max. emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000 MHz using SchwarzBeck Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 3-meters. The test equipment was placed on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the max. emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

## 4. TEST CONDITION

### 4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

### 4.2 EUT operation

| Operating Mode        | The worst operating condition |
|-----------------------|-------------------------------|
| Stand-by Mode         | X                             |
| Normal Operating Mode | O                             |

O : Worst case investigated during the Test

### 4.3 Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

#### EUT – SMPS

FCC ID : SAOZM460-APS  
Model Name : ZM460-APS  
Serial No. : S5091000004  
Manufacturer : Zalman Tech Co., Ltd.  
Power Supply Type : Switching  
Power Cord : Non-Shielded, Detachable, 1.5 m  
Data Cable : N/A

#### Support Unit 1 – Personal computer

FCC ID : N/A  
Model Name : N/A  
Serial No. : N/A  
Manufacturer : N/A  
Power Supply Type : Switching(EUT)  
Power Cord : Non-Shielded: 1.5 m  
Data Port : RGB IN:1, Parallel:1, RS-232:1, PS/2: 2, USB: 2,  
: Audio in:1, Audio out:1, MIC IN:1

#### Support Unit 2 – Keyboard (Chicony Electronics)

FCC ID : N/A (DoC)  
Model Name : KB-9963  
Serial No. : B26960GBUKO13F  
Manufacturer : Chicony Electronics  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Shielded, 1.5m

## Support Unit 3 – Mouse (LOGITECH)

FCC ID : DZL211029  
Model Name : M-S34  
Serial No. : LNA10212779  
Manufacturer : LOGITECH  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : None-Shielded, 1.2m

## Support Unit 5 – Serial Mouse (N/A)

FCC ID : JKGMUS5S01  
Model Name : MUS5S  
Serial No. : N/A  
Manufacturer : N/A  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Shielded, 1.2m

## Support Unit 6 – LCD Monitor (E-RAE)

FCC ID : N/A  
Model Name : ELM-150B  
Serial No. : N/A  
Manufacturer : E-RAE Electronics Industry Co., Ltd.  
Power Supply Type : AC 110V~220V  
Power Cord : Non-Shield, 1.5m  
Data Cable : Shielded, 1.5m

## Support Unit 7 – EAR MIC (JETECH)

FCC ID : N/A  
Model Name : JE101  
Serial No. : N/A  
Manufacturer : JETECH  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Shielded, 1.5m

## Support Unit 7 – PRINTER (INTERNATIONAL)

FCC ID : N/A  
Model Name : Color cap 330  
Serial No. : 11-03098  
Manufacturer : International Inc.  
Power Supply Type : AC 110V~220V  
Power Cord : Non-Shield, 1.5m  
Data Cable : Shielded, 1.5m

## 5. TEST RESULTS

### 5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

| Test Rule Parts | Measurement Required            | Result            |
|-----------------|---------------------------------|-------------------|
| 15.107          | Conducted Emissions Measurement | Passed by 18.4 dB |
| 15.109          | Radiated Emissions Measurement  | Passed by 3.7 dB  |

The data collected shows that the **Zalman Tech Co., Ltd. SMPS, ZM460-APS** complies with technical requirements of above rules part 15.107 and 15.109 Class B Limits and CISPR Publication 22.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

## 5. TEST RESULTS

### 5.2 Conducted Emissions Measurement

|                       |                                           |
|-----------------------|-------------------------------------------|
| EUT                   | SMPS / ZM460-APS (SN : S5091000004)       |
| Limit apply to        | FCC Part 15. 107                          |
| Test Date             | April 01, 2005                            |
| Operating Condition   | Normal Operating Mode                     |
| Environment Condition | Humidity Level : 39 %RH, Temperature : 26 |
| Result                | Passed by 18.4 dB                         |

### Conducted Emission Test Data


The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode ( 6dB Bandwidth : 9 kHz )

| Frequency<br>[MHz] | Reading<br>[dBμV] |         | Phase<br>[*H/**V] | Limit<br>[dBμV] |         | Margin<br>[dB] |         |
|--------------------|-------------------|---------|-------------------|-----------------|---------|----------------|---------|
|                    | Quasi-peak        | Average |                   | Quasi-peak      | Average | Quasi-peak     | Average |
| 0.150              | 47.40             |         | N                 | 66.00           |         | 18.60          |         |
| 0.167              | 45.90             |         | N                 | 65.10           |         | 19.20          |         |
| 0.182              | 41.60             |         | N                 | 64.40           |         | 22.80          |         |
| 0.210              | 41.30             |         | H                 | 63.20           |         | 21.90          |         |
| 0.256              | 36.70             |         | H                 | 61.60           |         | 24.90          |         |
| 0.374              | 37.70             |         | N                 | 58.40           |         | 20.70          |         |
| 0.514              | 37.10             |         | N                 | 56.00           |         | 18.90          |         |
| 0.666              | 37.60             |         | N                 | 56.00           |         | 18.40          |         |
| 0.718              | 37.50             |         | N                 | 56.00           |         | 18.50          |         |
| 0.809              | 37.50             |         | N                 | 56.00           |         | 18.50          |         |
| 0.922              | 37.60             |         | N                 | 56.00           |         | 18.40          |         |
| 1.226              | 37.30             |         | H                 | 56.00           |         | 18.70          |         |
| 9.979              | 34.30             |         | H                 | 60.00           |         | 25.70          |         |
| 12.181             | 34.30             |         | N                 | 60.00           |         | 25.70          |         |
| 16.221             | 32.70             |         | H                 | 60.00           |         | 27.30          |         |
| 20.262             | 35.80             |         | H                 | 60.00           |         | 24.20          |         |
| 24.363             | 36.00             |         | N                 | 60.00           |         | 24.00          |         |
| 28.383             | 31.80             |         | H                 | 60.00           |         | 28.20          |         |

#### NOTES :


- \* H : HOT Line , \*\*N : Neutral Line
- Margin value = Limit – Reading
- Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the CISPR 22 Class B
- If the Reading Quasi-Peak value is below the Average Limit, Do not test Average Mode.




Test Engineer: H. S. Lee

## 5. TEST RESULTS

### Line: HOT Line

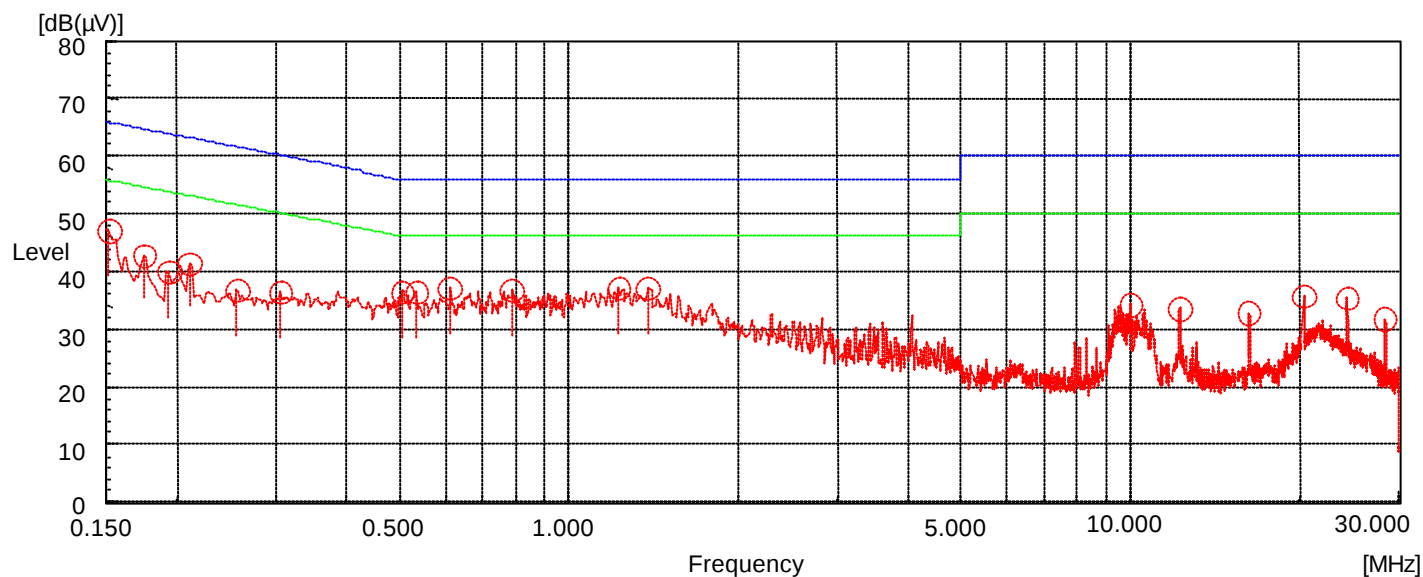

### Line: Neutral Line

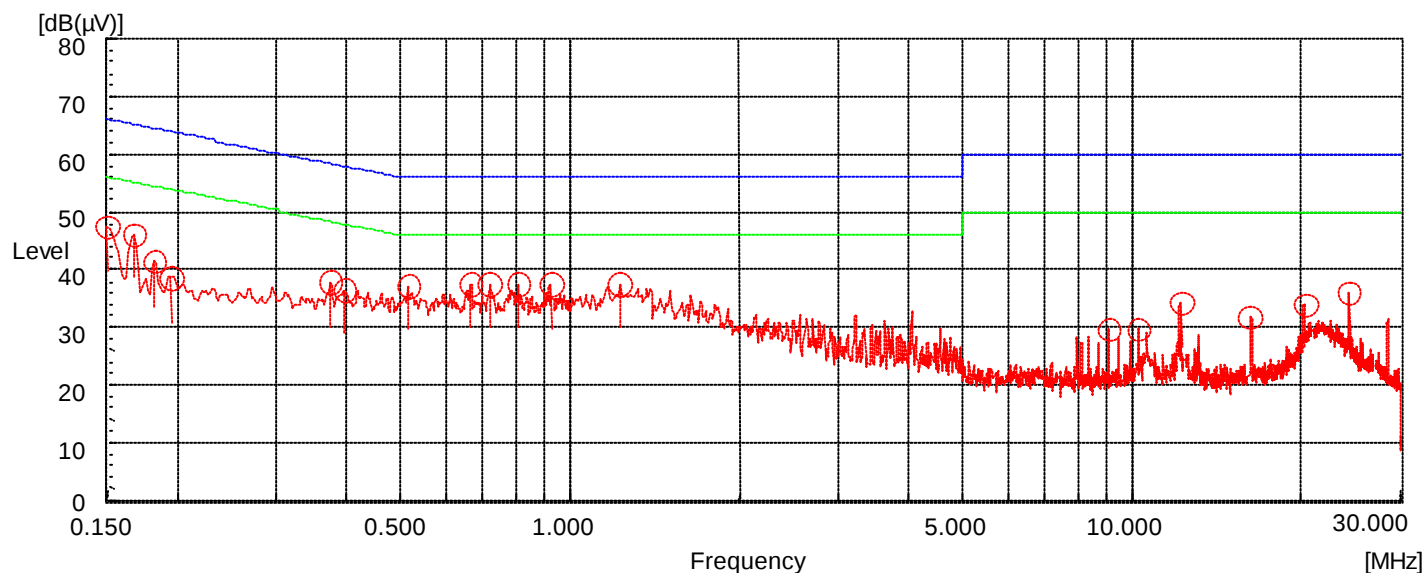

## 5. TEST RESULTS

### 5.3 Radiated Emissions Measurement

|                       |                                           |
|-----------------------|-------------------------------------------|
| EUT                   | SMPS / ZM460-APS (SN : S5091000004)       |
| Limit apply to        | FCC Part 15. 109                          |
| Test Date             | April 01, 2005                            |
| Operating Condition   | Normal Operating Mode                     |
| Environment Condition | Humidity Level : 24 %RH, Temperature : 16 |
| Result                | Passed by – 3.7 dB                        |

### Radiated Emission Test Data


The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth: 120 kHz)

| Frequency [MHz] | Reading [dBμV] | Polarization [*H/**V] | Ant.Factor [dB/m] | Cable Loss [dB] | Result [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------|-----------------------|-------------------|-----------------|-----------------|----------------|-------------|
| 66.82           | 16.51          | V                     | 10.42             | 2.17            | 29.10           | 40.00          | 10.90       |
| 134.99          | 12.75          | H                     | 13.10             | 3.15            | 29.00           | 43.50          | 14.50       |
| 135.67          | 15.70          | V                     | 13.15             | 3.16            | 32.00           | 43.50          | 11.50       |
| 299.97          | 20.94          | H                     | 13.16             | 4.90            | 39.00           | 46.00          | 7.00        |
| 501.50          | 9.04           | H                     | 17.25             | 6.71            | 33.00           | 46.00          | 13.00       |
| 798.44          | 5.07           | V                     | 22.85             | 8.88            | 36.80           | 46.00          | 9.20        |
| 832.02          | 4.82           | V                     | 22.06             | 9.22            | 36.10           | 46.00          | 9.90        |
| 906.25          | 10.02          | H                     | 22.24             | 10.04           | 42.30           | 46.00          | 3.70        |
| 915.09          | 9.59           | H                     | 22.42             | 10.09           | 42.10           | 46.00          | 3.90        |

#### NOTES :

1. \* H : Horizontal polarization , \*\* V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range 30 MHz ~ 1000 MHz according to the CISPR 22 Class B



Test Engineer: H. S. Lee

## 6. SAMPLE CALCULATION

### Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.  
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V) = 20 \log_{10} (\mu V) : \text{Equation 1}$$

$$dB\mu V = dBm + 107 : \text{Equation 2}$$

Example : @ 906.25 MHz

$$\text{Class B Limit} = 200 \mu V/m = 46 \text{ dB } \mu V/m$$

$$\text{Reading} = 10.02 \text{ dB } \mu V$$

$$\text{Antenna Factor + Cable Loss} = 22.24 + 10.04 = 32.28 \text{ dB } \mu V/m$$

$$\text{Total} = 42.30 \text{ dB } \mu V/m$$

$$\text{Margin} = 46 - 42.30 = 3.70 \text{ dB}$$

$$= 3.70 \text{ dB below Limit}$$

## 7. List of test equipments used for measurements

|                                     | Test Equipment          | Model      | Mfg.            | Serial No.  | Cal. Due Date |
|-------------------------------------|-------------------------|------------|-----------------|-------------|---------------|
| <input checked="" type="checkbox"/> | Spectrum Analyzer       | E7401A     | H.P             | US39110107  | 06-04-07      |
| <input checked="" type="checkbox"/> | Spectrum Analyzer       | R3261A     | Advantest       | 21720033    | 05-10-26      |
| <input checked="" type="checkbox"/> | Receiver                | ESVS 10    | R & S           | 835165/001  | 06-04-07      |
| <input checked="" type="checkbox"/> | EMI TEST Receiver       | ESPI       | Rohde & Schwarz | 0401901/002 | 05-07-01      |
| <input type="checkbox"/>            | Preamplifier            | HP 8347A   | HP              | 2834A00544  | 06-04-07      |
| <input checked="" type="checkbox"/> | LISN                    | 3825/2     | EMCO            | 9006-1669   | 06-04-07      |
| <input checked="" type="checkbox"/> | LISN                    | 3825/2     | EMCO            | 9208-1995   | 06-04-07      |
| <input checked="" type="checkbox"/> | TriLog Antenna          | VULB9160   | Schwarz Beck    | 3082        | 05-07-27      |
| <input type="checkbox"/>            | LogBicon                | VULB9165   | Schwarz Beck    | 2023        | 05-07-06      |
| <input type="checkbox"/>            | Dipole Antenna          | VHAP       | Schwarz Beck    | 964         | 05-06-10      |
| <input type="checkbox"/>            | Dipole Antenna          | VHAP       | Schwarz Beck    | 965         | 05-07-09      |
| <input type="checkbox"/>            | Dipole Antenna          | UHAP       | Schwarz Beck    | 949         | 05-07-09      |
| <input type="checkbox"/>            | Dipole Antenna          | UHAP       | Schwarz Beck    | 950         | 05-06-10      |
| <input type="checkbox"/>            | Broad band Horn Antenna | BBHA 9120D | Schwarz Beck    | 227         | 06-04-04      |
| <input checked="" type="checkbox"/> | Turn-Table              | DETT-03    | Daeil EMC       | -           | N/A           |
| <input checked="" type="checkbox"/> | Antenna Master          | DEAM-03    | Daeil EMC       | -           | N/A           |
| <input type="checkbox"/>            | Plotter                 | 7440A      | H.P             | 2725A 75722 | N/A           |
| <input checked="" type="checkbox"/> | Chamber                 | DTEC01     | DAETONG         | -           | N/A           |
| <input type="checkbox"/>            | Thermo Hygrograph       | 3-3122     | ISUZU           | 3312201     | 06-04-07      |
| <input type="checkbox"/>            | BaroMeter               | -          | Regulus         | -           | -             |