



RADIO TEST REPORT

Test Report No.: 26JE0237-HO-A

Applicant : BRIDGESTONE Co., Ltd.
Type of Equipment : HAND READER
Model No. : H211
Test standard : FCC Part 15 Subpart B Class B: 2006
FCC Part 15 Subpart C: 2006
FCC ID : SBDH211
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation.
4. The test results in this report are traceable to the national or international standards.

Date of test:

July 11, 2006

Tested by:

Yasuyuki Fukui
EMC Services

Approved by :

Naoki Sakamoto
Group Leader of
EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://ulapex.jp/emc/nvlap.htm>

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

CONTENTS	PAGE
SECTION 1: Client information	3
SECTION 2: Equipment under test (E.U.T.).....	3
SECTION 3: Test specification, procedures & results.....	4
SECTION 4: Operation of E.U.T. during testing	8
SECTION 5: Radiated emission (Fundamental and Spurious Emission and –26dB Bandwidth)....	9
APPENDIX 1: Photographs of test setup	10
Radiated Emission.....	10
Worst Case Position (EUT: X-axis)	11
APPENDIX 2: Test instruments	12
APPENDIX 3: Data of EMI test.....	13
Radiated Emission (FCC 15B Receiving).....	13
Radiated Emission below 30MHz (Fundamental and Spurious Emission).....	15
Radiated Emission above 30MHz (Spurious Emission).....	16
–26dB Bandwidth.....	17
99% Occupied Bandwidth.....	18

SECTION 1: Client information

Company Name : BRIDGESTONE Co., Ltd.
Address : 3-1-1, Ogawahigashi-Cho, Kodaira-Shi, Tokyo, 187-8531 Japan
Telephone Number : +81-42-342-6326
Facsimile Number : +81-42-342-6596
Contact Person : Toshihiro Miyazaki

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : HAND READER
Model No. : H211
Sample No. : 000013
Country of Manufacture : Japan
Rating : DC4.8V, 0.25A
Receipt Date of Sample : July 10, 2006
Condition of EUT : Production model
Modification of EUT : No modification by the test lab.

2.2 Product Description

Model No: H211 (referred to as the EUT in this report) is the HAND READER

Clock frequency : CPU Clock: 10MHz
CPU Sub Clock: 32.768kHz
Transmission Frequency Dividing Clock: 8MHz
Receiving Local Clock: 40.7125MHz
Equipment type : Transceiver

[Transmitter part]

Frequency of Operation : 125kHz
Type of Modulation : ASK
Mode of Operation : Simplex
Method of Frequency Generation : Crystal
Antenna : Ferrite Bar Antenna

[Receiver part]

Receiving frequency : 315MHz
Intermediate frequency : 10.7MHz
Antenna : Loop Antenna

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part15 Subpart B: 2006
FCC Part15 Subpart C: 2006

Title : FCC 47CFR Part15 Radio Frequency Device
Subpart B Unintentional Radiators

FCC 47CFR Part15 Radio Frequency Device
Subpart C Intentional Radiators
Section 15.205 Restricted bands of operation
Section 15.209 Radiated emission limits, general requirements

FCC 15.31 (e)

The test was performed with the New Battery (DC 4.8V) and the constant voltage was supplied to the EUT during the test. Therefore, the EUT complies with the requirement of Section 15.31 (e).

FCC 15.111(b)

The receiving antenna is mounted inside of the EUT and it is not removable. Therefore, the EUT complies with the requirement of Section 15.111(b).

FCC Part 15.203

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of Section 15.203.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

3.2 Procedures and results

[FCC Part 15 Subpart B]

Item	Test Procedure	Limits	Deviation	Worst margin *0)	Result
Conducted emission	ANSI C63.4: 2003 7. AC powerline conducted emission measurements	Class B	N/A *1)	N/A	N/A
Radiated emission	ANSI C63.4: 2003 8. Radiated emission measurements	Class B	N/A	18.7dB 49.148MHz, Vertical	Complied

*Note: UL Apex's EMI Work Procedure QPM05.

*0) The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

*These tests were performed without any deviations from test procedure except for additions or exclusions.

[FCC Part 15 Subpart C]

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin *0)	Results
1	Conducted Emission	<FCC> ANSI C63.4:2003 7. AC powerline conducted emission measurements <IC> RSS-Gen 7.2.2	<FCC> Section 15.207 <IC> RSS-Gen 7.2.2	-	N/A *1)	N/A	N/A
2	Electric Field Strength of Fundamental Emission	<FCC> ANSI C63.4:2003 13. Measurement of intentional radiators <IC> RSS-Gen 4.6, 4.9	<FCC> Section 15.209 <IC> RSS-210 2.6, 2.7	Radiated	N/A	37.0dB 0 deg. AV (Ant-Max)	Complied
3	Electric Field Strength of Spurious Emission	<FCC> ANSI C63.4:2003 13. Measurement of intentional radiators <IC> RSS-Gen 4.7, 4.9	<FCC> Section 15.205, 15.209 <IC> RSS-210 2.6, 2.7	Radiated	N/A	15.4dB 49.146MHz, Vertical	Complied
4	-26dB Bandwidth	<FCC> ANSI C63.4:2003 13. Measurement of intentional radiators <IC> -	<FCC> Reference data <IC> -	Radiated	N/A	N/A	N/A

Note: UL Apex's EMI Work Procedures No.QPM05 and QPM15.

*0) The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

*1) The test is not applicable since the EUT does not have AC Mains.

*These tests were performed without any deviations from test procedure except for additions or exclusions.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

3.3 Addition to standards

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	99% Occupied Band Width	RSS-Gen 4.4.1	RSS-Gen 4.4.1	Radiated	N/A	N/A	N/A

3.4 Uncertainty

Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test using Loop antenna is $\pm 4.41\text{dB}(3\text{m})/\pm 4.39\text{dB}(10\text{m})$.

The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is $\pm 4.59\text{dB}(3\text{m})/\pm 4.58\text{dB}(10\text{m})$.

The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is $\pm 4.62\text{dB}(3\text{m})/\pm 4.60\text{dB}(10\text{m})$.

The measurement uncertainty (with a 95% confidence level) for this test using Horn antenna is $\pm 5.27\text{dB}$.

The data listed in this test report has enough margin, more than the site margin.

Other test except Conducted Emission and Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test is $\pm 3.0\text{dB}$.

3.5 Test Location

UL Apex Co., Ltd. Head Office EMC Lab. *NVLAP Lab. code: 200572-0

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	IC4247A	19.2 x 11.2 x 7.7m	7.0 x 6.0m	Preparation room
No.2 semi-anechoic chamber	655103	IC4247A-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	IC4247A-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	IC4247A-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	-
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	N/A	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	2.0 x 2.0 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 5.4 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No. 3, and No.4 semi-anechoic chambers and No.7 shielded room.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

3.6 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.


SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

The mode is used :
1. 315MHz Receiving mode (FCC Part 15 Subpart B)
2. 125kHz Transmitting mode (FCC Part 15 Subpart C)

Justification : The system was configured in typical fashion (as a customer would normally use it) for testing.

4.2 Configuration and peripherals

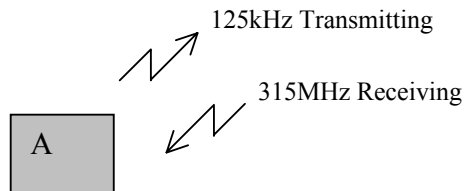

* Setup was taken into consideration and test data was taken under worse case conditions.

Description of EUT

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	HAND READER	H211	000013	YOKOWO CO., Ltd.	EUT

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 5: Radiated emission (Fundamental and Spurious Emission and -26dB Bandwidth)

Test Procedure

The Radiated Electric Field Strength intensity has been measured on No 3 semi anechoic chamber with a ground plane and at a distance of 3m.

Frequency : From 9kHz to 30MHz at distance 3m

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for each antenna angle 0deg. , 45deg. and 90deg.

Frequency : From 30MHz to 1GHz at distance 3m

The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with a QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver (below 1GHz) and the spectrum analyzer (above 1GHz).

	From 9kHz to 90kHz and From 110kHz to 150kHz	From 90kHz to 110kHz	From 150kHz to 490kHz	From 490kHz to 30MHz	From 30MHz to 1GHz	From 1GHz to 2GHz
Detector Type	PK/AV	QP	PK/AV	QP	QP	PK/AV
IF Bandwidth	200Hz	200Hz	9kHz	9kHz	120kHz	1MHz

- The carrier level (or, noise levels) was (or were) measured at each position of all three axes X, Y and Z, and the position that has the maximum noise was determined.

With the position, the noise levels of all the frequencies were measured.

* Part 15 Section 15.31 (f)(2) (9kHz-30MHz)

[Limit at 3m]=[Limit at 300m]-40 x log (3[m]/300[m])

[Limit at 3m]=[Limit at 30m]-40 x log (3[m]/30[m])

Test data : APPENDIX 3

Test result : Pass

Date: July 11, 2006

Test engineer: Yasuyuki Fukui

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)