

APPLICATION FOR CERTIFICATION

On Behalf of

Sonos, Inc

Zone Player

Model No. : ZP100

Contains TX module : FCC ID: SBVCR002

Prepared for : Sonos, Inc

223 E. De La Guerra St. Santa Barbara,
CA 93101, U.S.A.

Prepared by : Audix Corporation

Technical Division EMC Department
No. 53-11, Tin-Fu Tsun, Lin-Kou,
Taipei County, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2133

Fax: (02) 2609-9303

File Number : EM950684

Report Number : EM-F950171

Date of Test : May 18, 2006

Date of Report : May 24, 2006

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Tested Supporting System Details	5
1.3. Description of Test Facility	6
1.4. Measurement Uncertainty	6
2. RADIATED EMISSION MEASUREMENT	7
2.1. Test Equipment	7
2.2. Test Setup	7
2.3. Radiated Emission Limits (§15.209)	9
2.4. Operating Condition of EUT	9
2.5. Test Procedure	9
2.6. Radiated Emission Measurement Results.....	10
3. DEVIATION TO TEST SPECIFICATIONS	34
4. PHOTOGRAPHS	35
4.1. Photos of Radiated Measurement at Semi-Anechoic Chamber	35

TEST REPORT CERTIFICATION

Applicant : Sonos, Inc
Manufacturer : Inventec Electronics (M) Sdn Bhd.
EUT Description : Zone Player
Contains TX module : FCC ID: SBVCR002
(A) MODEL NO. : ZP100
(B) SERIAL NO. : N/A
(C) BRAND : SONOS
(D) POWER SUPPLY : ~115/230Vac, 50-60Hz, Switchable
(E) TEST VOLTAGE : AC 120V/60Hz

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART C, FEBRUARY 2006
AND ANSI C63.4/2003

(FCC CFR 47 Part 15C, §15.205, §15.209 and §15.247)

The device described above was tested by AUDIX CORPORATION to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C limits.

The measurement results are contained in this test report and AUDIX CORPORATION is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX CORPORATION.

Date of Test: May 18, 2006

Prepared by: Tina Huang Jun. 02, 2006
(Tina Huang/Assistant)

Test Engineer: Henning Chang 6.02.2006
(Henning Chang/Supervisor)

Approved & Authorized Signer: Ben Cheng Jun. 02, 2006
(Ben Cheng/Section Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	Zone Player This device is a digital music system using a wired or wireless connection.
Model Number	:	ZP100
Contains TX module	:	FCC ID: SBVCR002
Brand Name	:	SONOS
Applicant	:	Sonos, Inc 223 E. De La Guerra St. Santa Barbara, CA 93101, U.S.A.
Manufacturer	:	Inventec Electronics (M) Sdn. Bhd. Plot 102, Bayan Lepas Industrial Estate, 11900 Bayan Lepas, Penang, Malaysia.
Wireless LAN Card	:	HON HAI Precision Inc. Co., Ltd., M/N: AR5BMB5, Part No.: T60N874.06 IEEE 802.11g
Interfaces of EUT	:	• Speaker (Right/Left channel) • Analog Subwoofer Out (RCA x1) • Analog Audio Out (RCA x2) • Analog Audio In (RCA x2) • 10/100 Base-T Ethernet RJ45 x4 • AC In x1
AC Power Cord (2Pin)	:	Non-Shielded, Detachable, 2.0m
Date of Receipt of Sample	:	May 17, 2006
Date of Test	:	May 18, 2006

Remark:

The FCC reports to refer to the WiFi card as Sonos WiFi card FCC ID SBVCR002.

1.2. Tested Supporting System Details

1.2.1. PARTNER NOTEBOOK PC

Model Number	:	2378
Serial Number	:	N/A
FCC ID	:	By DoC
Manufacturer	:	IBM
Power Adapter	:	IBM, M/N 02K6808
		DC Cord: Non-Shielded, Undetachable, 1.0m
		AC Cord: Non-Shielded, Detachable, 1.8m
RJ45 LAN Cable *1EA	:	Non-Shielded, Detachable, 20m

1.2.2. PARTNER CONTROLLER

Model Number	:	CR100
Serial Number	:	N/A
FCC ID	:	By DoC
Manufacturer	:	Inventec Electronics (M) Sdn. Bhd.
I.T.E. Power Supply	:	UNIFIUE, M/N UIA324-06
		S/N 410-0215062, BSMI ID. D53003
		I/O: AC 100-240V, 50/60Hz, 0.6A
		O/P: DC 6V, 3.8A
		DC Cord: Shielded, Undetachable, 1.85m
		Bonded a ferrite core
AC Power Cord	:	Non-Shielded, Detachable, 2.0m

1.2.3. 8 OHM LOAD #1

Model Number	:	N/A
Serial Number	:	N/A
Manufacturer	:	Sonos
Audio Cable *1EA	:	Non-Shielded, Detachable, 2.1m

1.2.4. 8 OHM LOAD #2

Model Number	:	N/A
Serial Number	:	N/A
Manufacturer	:	Sonos
Audio Cable *1EA	:	Non-Shielded, Detachable, 2.1m

1.2.5. AUDIO INPUT/OUTPUT LOAD

Model Number	:	N/A
Serial Number	:	N/A
Manufacturer	:	Sonos
Audio Cable-In *1EA	:	Non-Shielded, Detachable, 1.8m
Audio Cable-Out *2EA	:	Non-Shielded, Detachable, 1.8m

1.2.6. ETHERNET TERMINATOR (100 OHM)

Model Number : N/A
 Serial Number : N/A
 Manufacturer : Sonos
 RJ45 LAN Cable *3EA : Non-Shielded, Detachable, 1.8m

1.3. Description of Test Facility

Name of Firm : **Audix Corporation**
Technical Division EMC Department
 No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
 Taipei County 24443, Taiwan, R.O.C.

Test Location & Facility (AC) : **Semi-Anechoic Chamber**
 No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
 Taipei County 24443, Taiwan, R.O.C.
 May 15, 2006 File on
 Federal Communication Commission
 Registration Number: 90993

NVLAP Lab. Code : 200077-0
 (NVLAP is a NATA accredited body under Mutual Recognition Agreement)

1.4. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Radiation Test (Distance: 3m)	30MHz~300MHz	±2.91dB
	300MHz~1000MHz	±2.94dB
	Above 1GHz	± 5.02dB

Remark : Uncertainty = $k_{uc}(y)$

2. RADIATED EMISSION MEASUREMENT

2.1. Test Equipment

The following test equipment was used during the radiated emission measurement:

2.1.1. For Frequency 30MHz~1000MHz (at Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8593EM	3826A00248	Sep. 26, 05'	Sep. 25, 06'
2.	Test Receiver	R & S	ESCS30	100265	Sep. 27, 05'	Sep. 25, 06'
3.	Pre-Amplifier	HP	8447D	2944A06305	Mar. 09, 06'	Mar. 08, 07'
4.	Biconical Antenna	CHASE	VBA6106A	1264	Nov. 11, 05'	Nov. 10, 06'
5.	Log Periodic Antenna	Schwarzbeck	UHALP9108-A	0139	Nov. 19, 05'	Nov. 18, 06'

2.1.2. For Frequency Above 1GHz (at Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8593EM	3826A00248	Sep. 26, 05'	Sep. 25, 06'
2.	Pre-Amplifier	HP	8449B	3008A01284	Jul. 05, 05'	Jul. 04, 06'
3.	3.5G High Pass Filter	HP	84300-80038	005	Jan. 11, 06'	Jan. 10, 07'
4.	Horn Antenna	EMCO	3115	9609-4927	Jul. 08, 05'	Jul. 07, 06'

2.2. Test Setup


2.2.1. Block Diagram of connection between EUT and simulators

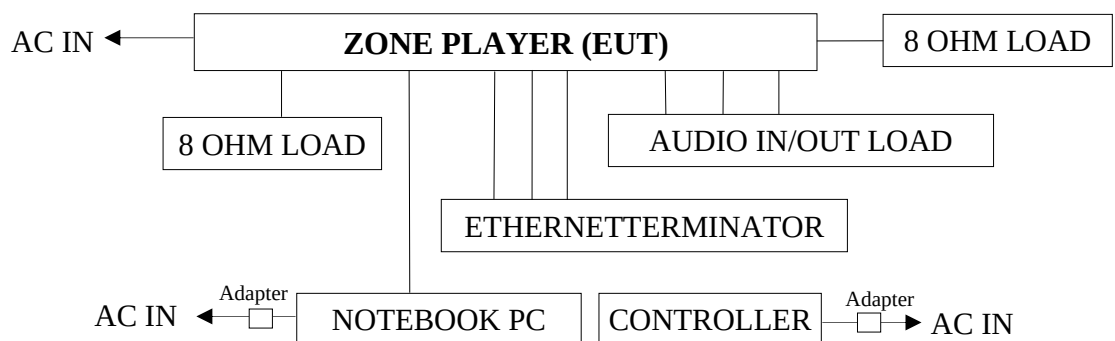

2.2.2. Semi-Anechoic Chamber (3m) Setup Diagram for 30-1000MHz

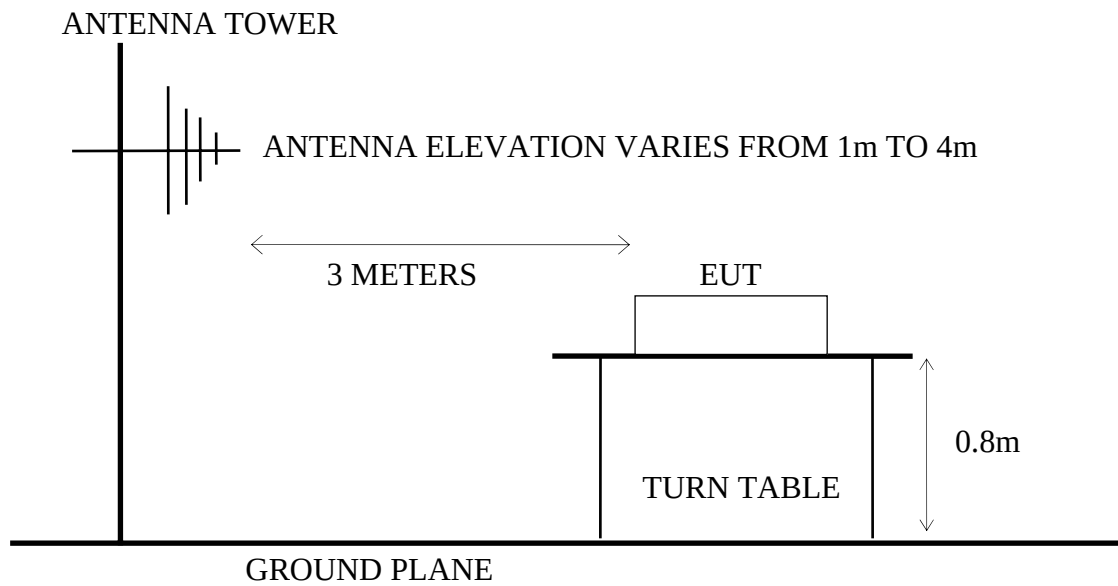

2.2.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

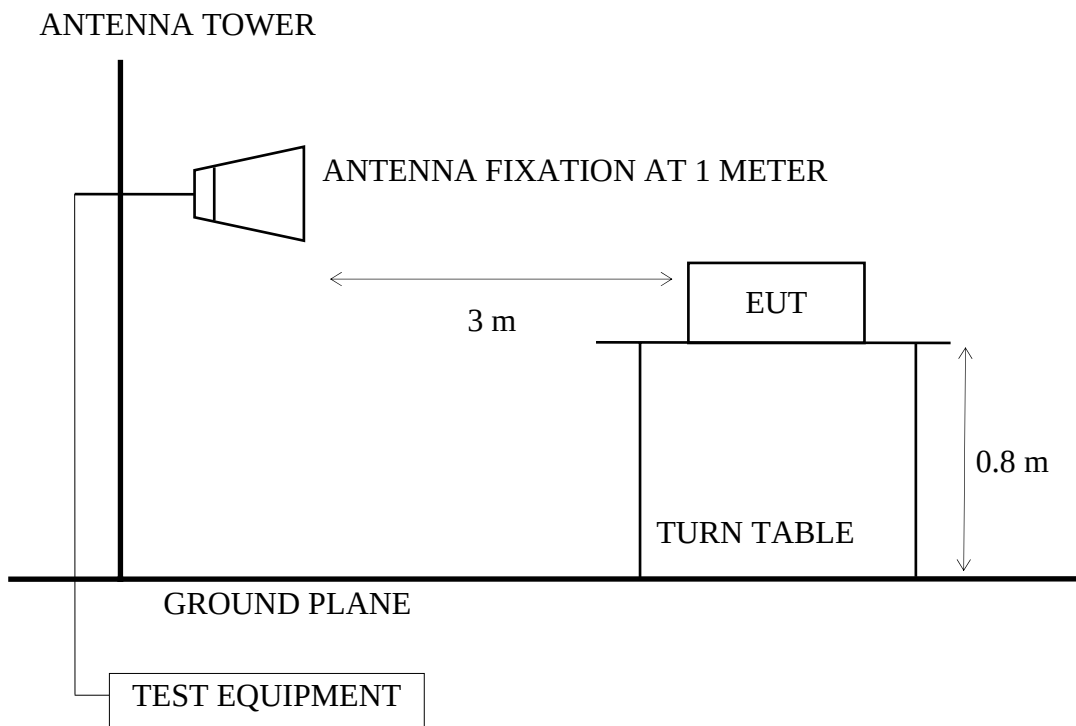

2.3. Radiated Emission Limits (§15.209)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average)	

- Remark :
- (1) Emission level ($\text{dB}\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (4) The limits in this table are based on CFR 47 Part 15.205(a)(b) and Part 15.209 (a).
 - (5) The over 1GHz limit, FCC limit is used based on CFR 47 Part 15.35 (b) and Part 15.205(b) & Part 15.209(e) and Part 15.207(c).

2.4. Operating Condition of EUT

- 2.4.1. Setup the EUT and simulator as shown on 2.2.
- 2.4.2. Turn on the power of all equipment.
- 2.4.3. Run the notebook PC (IBM ThinkPad) test software “dsp-write” to set EUT (Zone Player) transmitter channel through RJ45 Ethernet during the testing.

2.5. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which was mounted on a antenna tower. The antenna moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log-periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

The bandwidth of the R&S Test Receiver ESCS30 was set at 120kHz. (For 30MHz to 1000MHz)

The resolution bandwidth and video bandwidth of test spectrum analyzer is 1MHz for peak detection (PK) at frequency above 1GHz.

The resolution bandwidth of test spectrum analyzer is 1MHz and the video bandwidth is 10Hz for average detection (AV) at frequency above 1GHz.

The frequency range from 30MHz to 25GHz (Up to 10th harmonics from fundamental frequency) was checked.

2.6. Radiated Emission Measurement Results

PASSED. All the emissions not reported below are too low against the official limits.

EUT : Zone Player M/N : ZP100

Test Date : May 18, 2006 Temperature : 25°C Humidity : 51%

For Frequency Range 30MHz~1000MHz:

The EUT with following test modes were performed during this section testing and all the test results are listed in section 2.6.1.

No.	Test Mode	Test Frequency	Reference Test Data No.			
			30-300MHz		300-1000MHz	
			Horizontal	Vertical	Horizontal	Vertical
1.	Transmitting	2412MHz (CH1)	# 9	# 10	# 7	# 8
2.		2437MHz (CH6)	# 8	# 7	# 6	# 5
3.		2462MHz (CH11)	# 8	# 7	# 5	# 6
4.	Receiver	---	# 8	# 7	# 6	# 5

* Above all final readings were measured with Quasi-Peak detector.

For Frequency above 1GHz:

The EUT with following test modes were performed during this section testing and all the test results are listed in section 2.6.2.

No.	Test Mode	Test Frequency
1.	Transmitting	2412MHz (CH1)
2.		2437MHz (CH6)
3.		2462MHz (CH11)

* Above all final readings were measured with Peak detector and Average detector.

For Restricted Bands:


The EUT was tested in restricted bands and all the test results are listed in section 2.6.3. (The restricted bands defined in part 15.205(a))

No.	Test Mode	Reference Test Data No.				
		Frequency Range	Horizontal		Vertical	
1.	Transmitting	2412MHz (CH1)	Peak	# 1	Peak	# 2
			Average	# 4	Average	# 3
2.		2462MHz (CH11)	Peak	# 8	Peak	# 7
			Average	# 5	Average	# 6

2.6.1. 30MHz~ 1000MHz Frequency Range Measurement Result



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

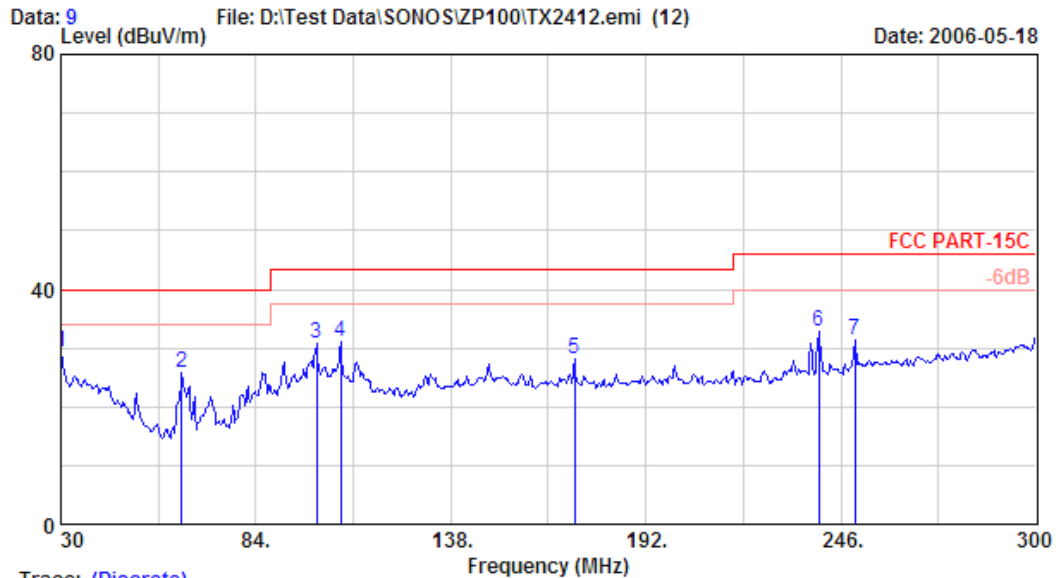


Site no. : A/C Chamber Data no. : 9
Dis. / Ant. : 3m VBA6106A Ant. pol. : HORIZONTAL
Limit : FCC PART-15C
Env. / Ins. : 8593EM 25°C/51% Engineer : Alvin Yang
EUT : Zone Player M/N:ZP100
Power Rating : 120Vac/60Hz
Test Mode : TX2412MHz

		Ant. Cable		Emission			
	Freq.	Factor	Loss	Reading	Level	Limits	Margin Remark
	(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
1	30.000	24.86	1.10	3.32	29.28	40.00	10.72
2	63.480	11.87	1.67	12.12	25.67	40.00	14.33
3	100.740	17.17	2.10	11.51	30.78	43.50	12.72
4	107.490	17.87	2.20	10.93	31.00	43.50	12.50
5	172.290	21.04	2.80	4.16	28.01	43.50	15.49
6	239.790	23.05	3.40	6.45	32.89	46.00	13.11
7	249.780	23.78	3.50	4.01	31.29	46.00	14.71

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

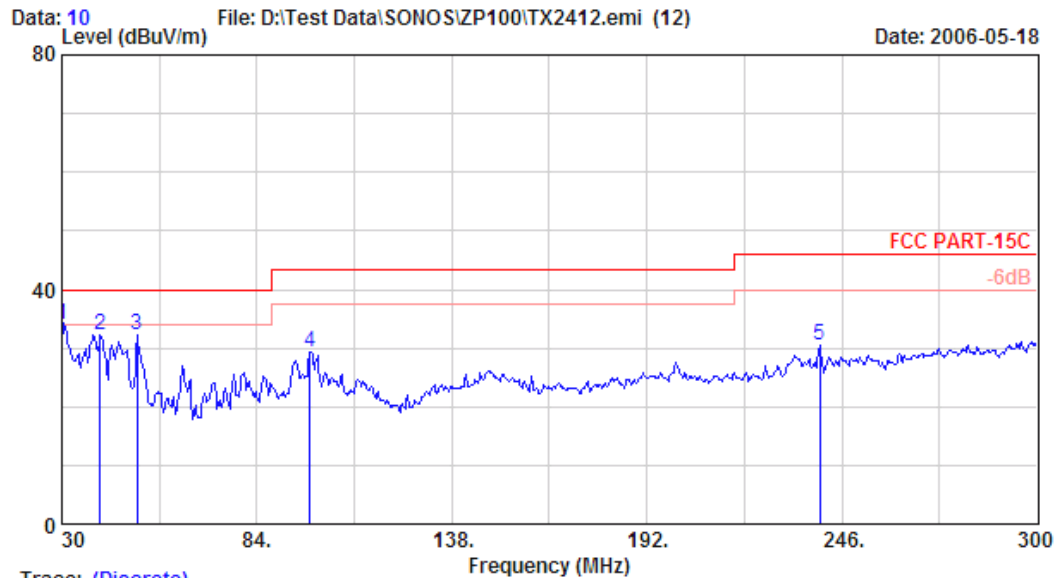

Trace: (Discrete)


Site no.	: A/C Chamber	Data no.	: 10
Dis. / Ant.	: 3m VBA6106A	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C	Engineer	: Alvin Yang
Env. / Ins.	: 8593EM 25°C/51%		
EUT	: Zone Player M/N:ZP100		
Power Rating	: 120Vac/60Hz		
Test Mode	: TX2412MHz		

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)	
1	30.000	23.60	1.10	9.17	33.87	40.00	6.13	
2	40.530	20.16	1.30	10.91	32.37	40.00	7.63	
3	50.790	15.69	1.50	14.94	32.13	40.00	7.87	
4	98.580	17.61	2.10	9.67	29.38	43.50	14.12	
5	239.790	24.27	3.40	2.82	30.48	46.00	15.52	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

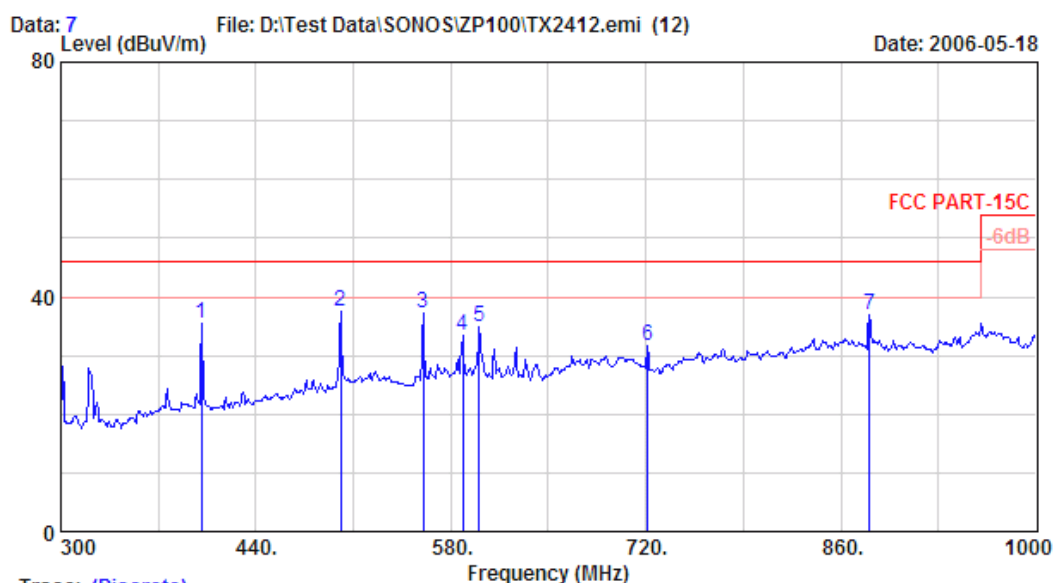


Site no.	: A/C Chamber	Data no.	: 7
Dis. / Ant.	: 3m UHALP9108-A(0139)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C	Engineer	: Alvin Yang
Env. / Ins.	: 8593EM 25°C/51%		
EUT	: Zone Player M/N:ZP100		
Power Rating	: 120Vac/60Hz		
Test Mode	: TX2412MHz		

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)	
1	400.800	17.63	4.80	13.13	35.56	46.00	10.44	
2	500.900	18.91	6.50	12.14	37.56	46.00	8.44	
3	560.400	20.03	6.70	10.45	37.18	46.00	8.82	
4	588.400	21.02	6.30	6.00	33.32	46.00	12.68	
5	600.300	21.31	6.30	7.21	34.82	46.00	11.18	
6	721.400	22.21	6.50	2.99	31.70	46.00	14.30	
7	880.300	25.34	7.30	4.27	36.91	46.00	9.09	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttemc@ttemc.com.tw

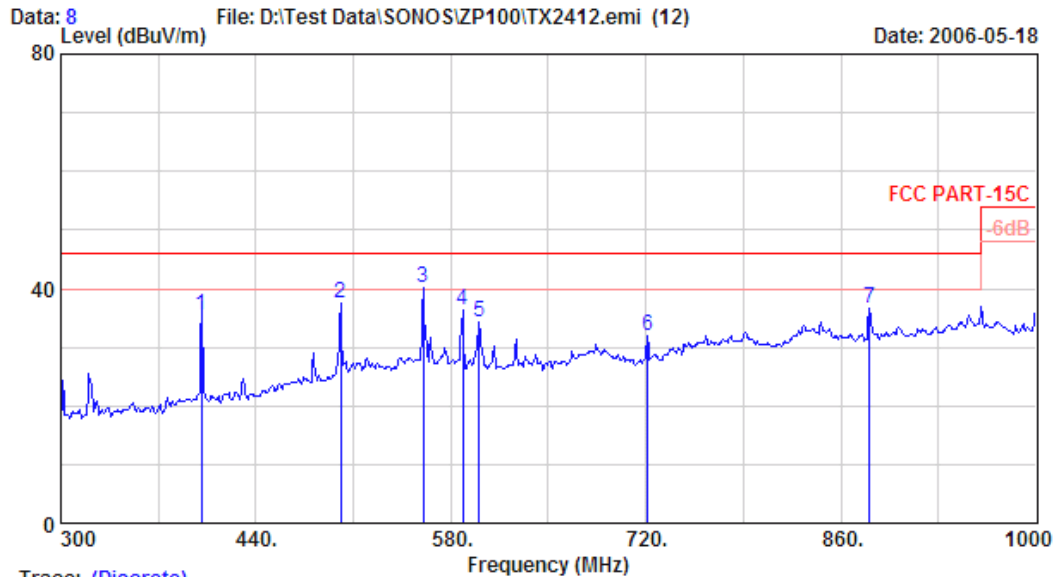

Trace: (Discrete)


Site no. : A/C Chamber Data no. : 8
Dis. / Ant. : 3m UHALP9108-A(0139) Ant. pol. : VERTICAL
Limit : FCC PART-15C
Env. / Ins. : 8593EM 25°C/51% Engineer : Alvin Yang
EUT : Zone Player M/N:ZP100
Power Rating : 120Vac/60Hz
Test Mode : TX2412MHz

	Ant.	Cable		Emission			
Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)	
1	400.800	17.54	4.80	13.22	35.56	46.00	10.44
2	500.900	19.84	6.50	11.06	37.40	46.00	8.60
3	560.400	22.08	6.70	11.38	40.16	46.00	5.84
4	588.400	21.52	6.30	8.38	36.20	46.00	9.80
5	600.300	21.65	6.30	6.27	34.22	46.00	11.78
6	721.400	22.11	6.50	3.30	31.91	46.00	14.09
7	880.300	25.31	7.30	4.11	36.72	46.00	9.28

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

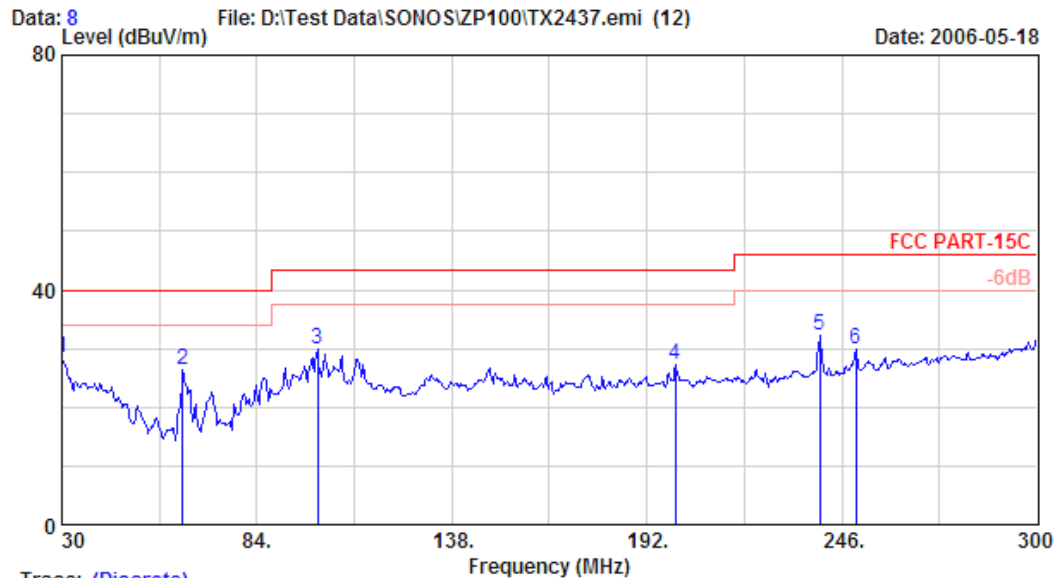

Trace: (Discrete)


Site no. : A/C Chamber	Data no. : 8
Dis. / Ant. : 3m VBA6106A	Ant. pol. : HORIZONTAL
Limit : FCC PART-15C	
Env. / Ins. : 8593EM 25°C/51%	Engineer : Alvin Yang
EUT : Zone Player M/N:ZP100	
Power Rating : 120Vac/60Hz	
Test Mode : TX2437MHz	

		Ant. Cable		Emission			
Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)	
1	30.000	24.86	1.10	2.54	28.50	40.00	11.50
2	63.480	11.87	1.67	12.76	26.31	40.00	13.69
3	100.740	17.17	2.10	10.76	30.03	43.50	13.47
4	199.830	22.08	3.00	2.15	27.23	43.50	16.27
5	239.790	23.05	3.40	5.88	32.32	46.00	13.68
6	249.780	23.78	3.50	2.71	29.99	46.00	16.01

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

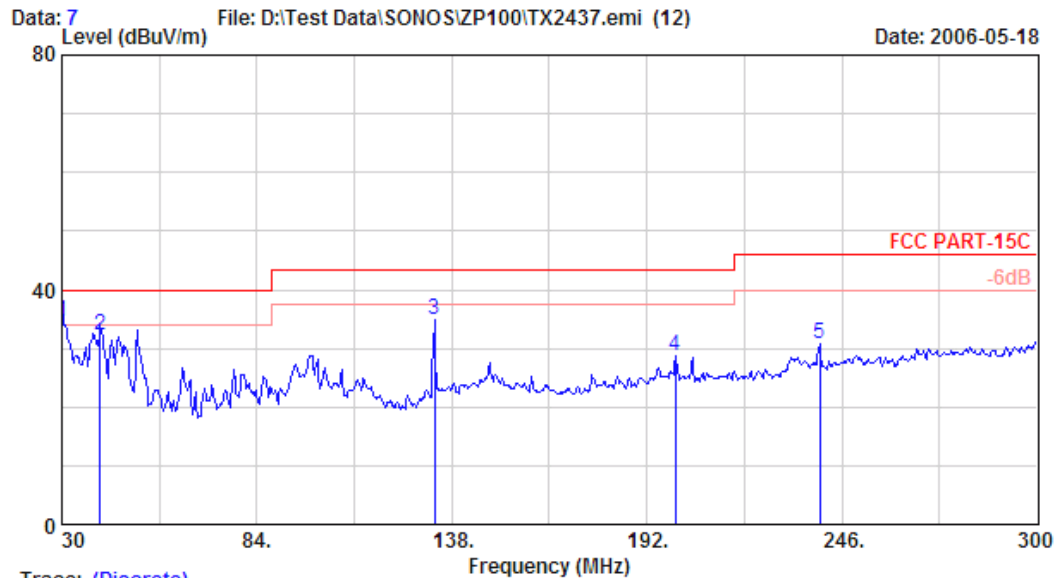

Trace: (Discrete)


Site no.	: A/C Chamber	Data no.	: 7
Dis. / Ant.	: 3m VBA6106A	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C	Engineer	: Alvin Yang
Env. / Ins.	: 8593EM 25°C/51%		
EUT	: Zone Player M/N:ZP100		
Power Rating	: 120Vac/60Hz		
Test Mode	: TX2437MHz		

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)	
1	30.000	23.60	1.10	36.36	34.56	40.00	5.44	
2	40.530	20.16	1.30	37.15	32.18	40.00	7.83	
3	133.140	19.13	2.40	39.38	34.82	43.50	8.68	
4	199.830	22.86	3.00	28.80	28.86	43.50	14.64	
5	239.790	24.27	3.40	28.94	30.85	46.00	15.15	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

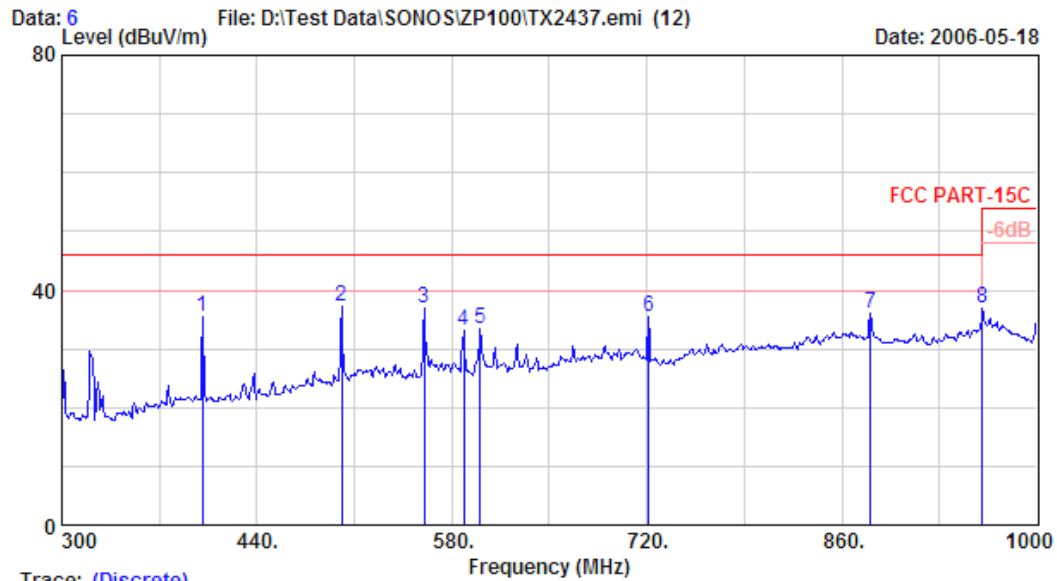

Trace: (Discrete)


Site no. : A/C Chamber	Data no. : 6
Dis. / Ant. : 3m UHALP9108-A(0139)	Ant. pol. : HORIZONTAL
Limit : FCC PART-15C	
Env. / Ins. : 8593EM 25°C/51%	Engineer : Alvin Yang
EUT : Zone Player M/N:ZP100	
Power Rating : 120Vac/60Hz	
Test Mode : TX2437MHz	

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)	
1	400.800	17.63	4.80	39.54	35.36	46.00	10.64	
2	500.900	18.91	6.50	38.64	37.26	46.00	8.74	
3	560.400	20.03	6.70	37.28	36.95	46.00	9.05	
4	588.400	21.02	6.30	32.88	33.03	46.00	12.97	
5	600.300	21.31	6.30	32.99	33.40	46.00	12.60	
6	721.400	22.21	6.50	34.22	35.56	46.00	10.44	
7	880.300	25.34	7.30	30.43	36.02	46.00	9.98	
8	960.800	26.46	7.60	29.73	36.97	54.00	17.03	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

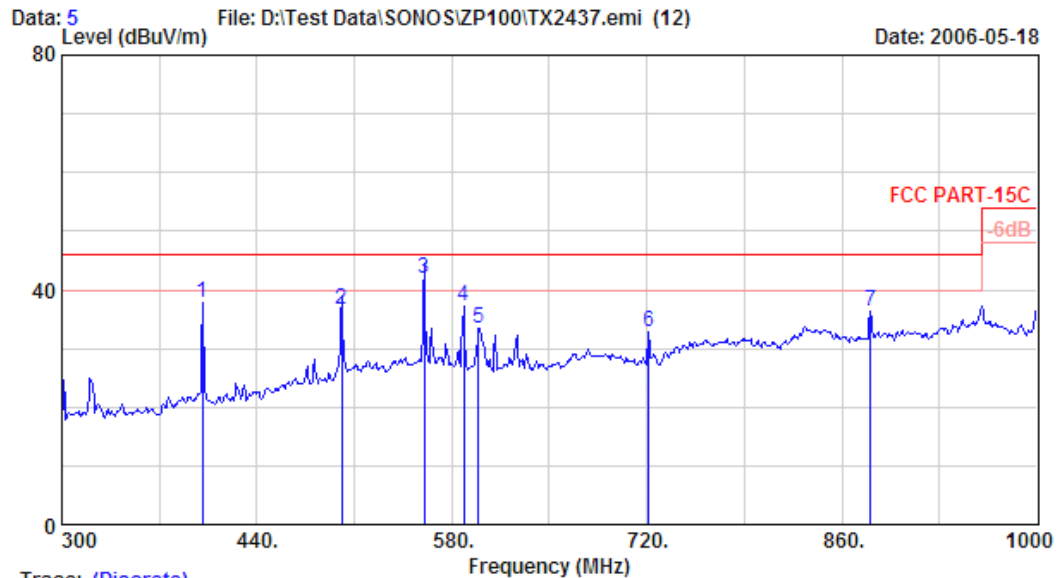

Trace: (Discrete)


Site no. : A/C Chamber	Data no. : 5
Dis. / Ant. : 3m UHALP9108-A(0139)	Ant. pol. : VERTICAL
Limit : FCC PART-15C	
Env. / Ins. : 8593EM 25°C/51%	Engineer : Alvin Yang
EUT : Zone Player M/N:ZP100	
Power Rating : 120Vac/60Hz	
Test Mode : TX2437MHz	

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	400.800	17.54	4.80	41.99	37.72	46.00	8.28	
2	500.900	19.84	6.50	37.10	36.64	46.00	9.36	
3	560.400	22.08	6.70	40.32	42.05	46.00	3.95	
4	588.400	21.52	6.30	36.54	37.19	46.00	8.81	
5	598.900	21.62	6.30	32.71	33.43	46.00	12.57	
6	721.400	22.11	6.50	31.60	32.84	46.00	13.16	
7	880.300	25.31	7.30	30.80	36.36	46.00	9.64	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

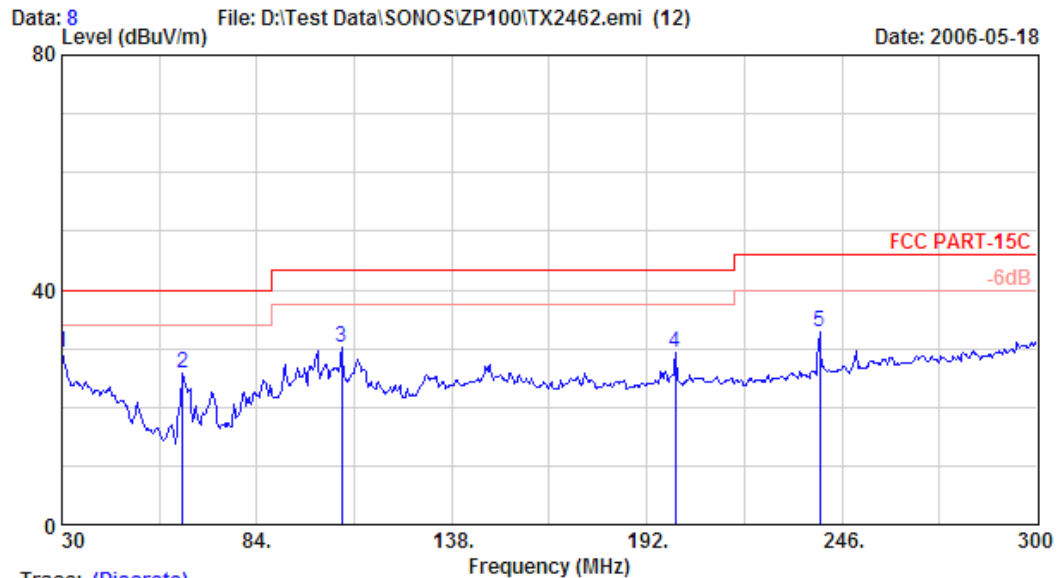

Trace: (Discrete)


Site no. : A/C Chamber	Data no. : 8
Dis. / Ant. : 3m VBA6106A	Ant. pol. : HORIZONTAL
Limit : FCC PART-15C	
Env. / Ins. : 8593EM 25°C/51%	Engineer : Alvin Yang
EUT : Zone Player M/N:ZP100	
Power Rating : 120Vac/60Hz	
Test Mode : TX2462MHz	

		Ant. Cable		Emission			
Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)	
1	30.000	24.86	1.10	3.49	29.45	40.00	10.55
2	63.480	11.87	1.67	12.24	25.79	40.00	14.21
3	107.490	17.87	2.20	10.21	30.28	43.50	13.22
4	199.830	22.08	3.00	4.19	29.27	43.50	14.23
5	239.790	23.05	3.40	6.36	32.80	46.00	13.20

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

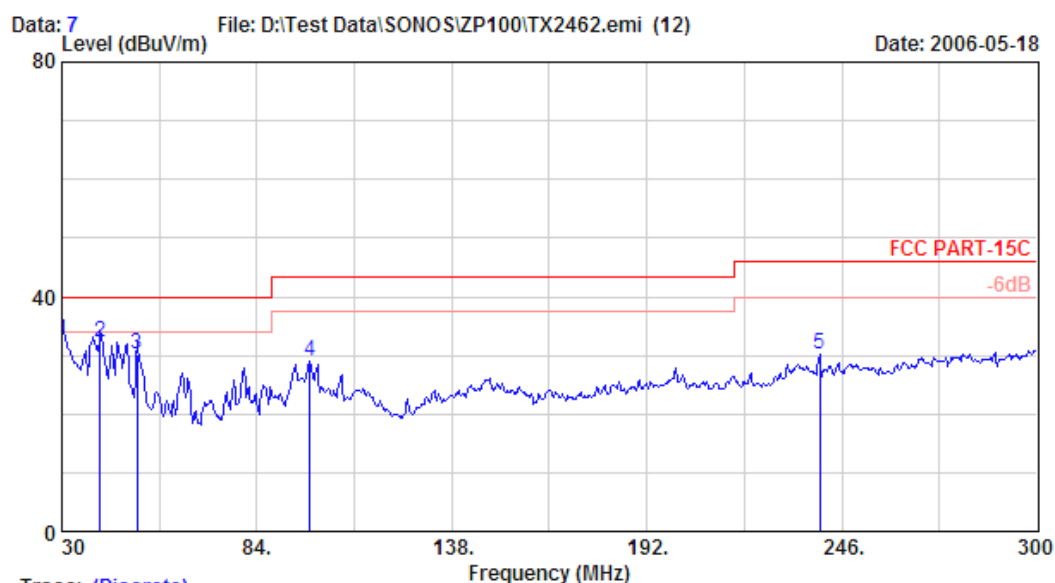

Trace: (Discrete)


Site no. : A/C Chamber	Data no. : 7
Dis. / Ant. : 3m VBA6106A	Ant. pol. : VERTICAL
Limit : FCC PART-15C	
Env. / Ins. : 8593EM 25°C/51%	Engineer : Alvin Yang
EUT : Zone Player M/N:ZP100	
Power Rating : 120Vac/60Hz	
Test Mode : TX2462MHz	

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	30.000	23.60	1.10	7.83	32.53	40.00	7.47	
2	40.530	20.16	1.30	10.90	32.36	40.00	7.64	
3	50.790	15.69	1.50	12.98	30.16	40.00	9.84	
4	98.580	17.61	2.10	9.25	28.96	43.50	14.54	
5	239.790	24.27	3.40	2.63	30.29	46.00	15.71	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

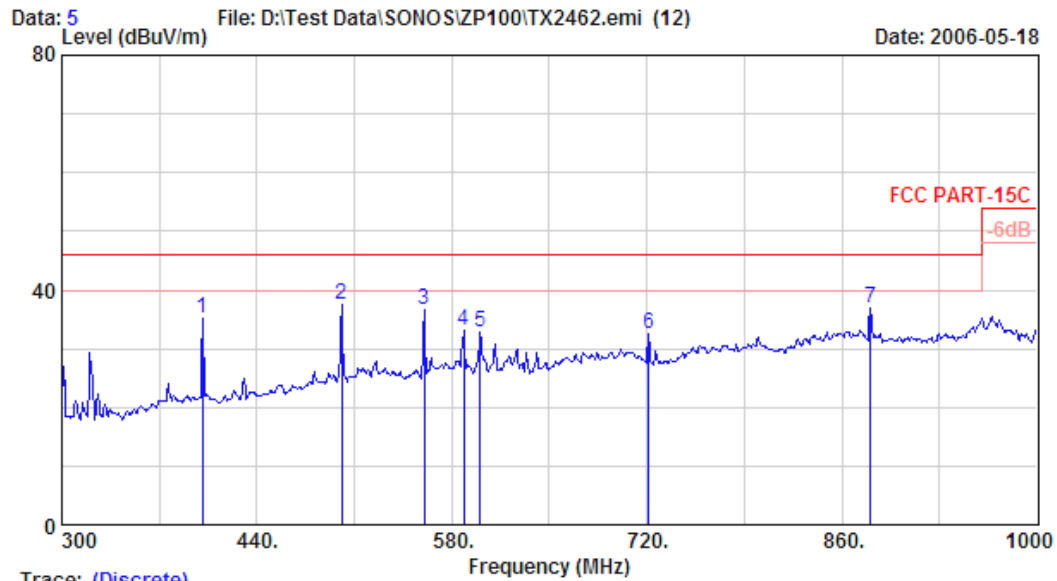

Trace: (Discrete)


Site no. : A/C Chamber	Data no. : 5
Dis. / Ant. : 3m UHALP9108-A(0139)	Ant. pol. : HORIZONTAL
Limit : FCC PART-15C	
Env. / Ins. : 8593EM 25°C/51%	Engineer : Alvin Yang
EUT : Zone Player M/N:ZP100	
Power Rating : 120Vac/60Hz	
Test Mode : TX2462MHz	

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)	
1	400.800	17.63	4.80	12.84	35.27	46.00	10.73	
2	500.900	18.91	6.50	11.98	37.40	46.00	8.60	
3	560.400	20.03	6.70	9.93	36.66	46.00	9.34	
4	588.400	21.02	6.30	5.79	33.10	46.00	12.90	
5	600.300	21.31	6.30	5.21	32.82	46.00	13.18	
6	721.400	22.21	6.50	3.89	32.60	46.00	13.40	
7	880.300	25.34	7.30	4.23	36.87	46.00	9.13	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

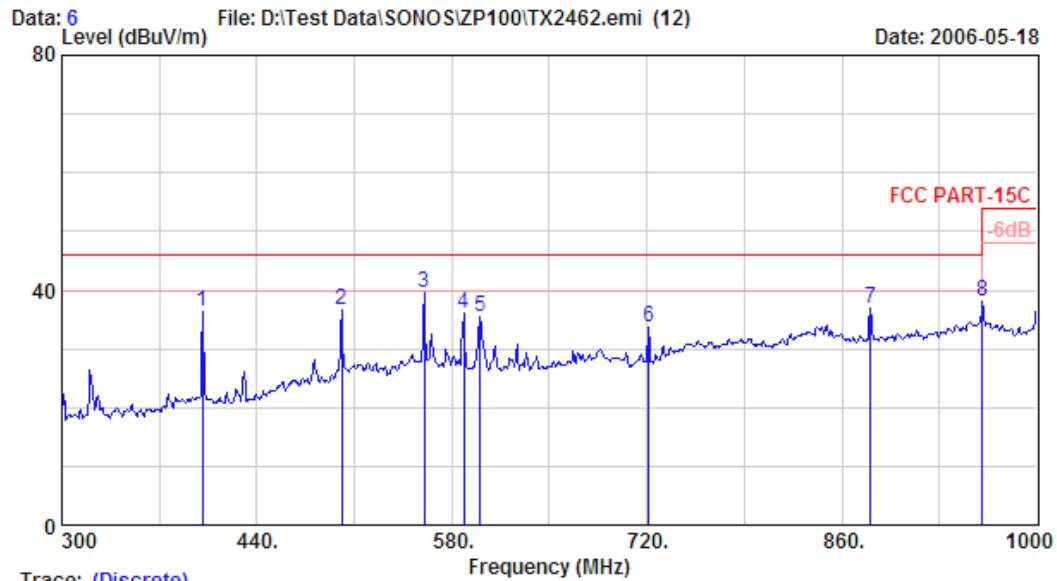

Trace: (Discrete)


Site no. : A/C Chamber	Data no. : 6
Dis. / Ant. : 3m UHALP9108-A(0139)	Ant. pol. : VERTICAL
Limit : FCC PART-15C	
Env. / Ins. : 8593EM 25°C/51%	Engineer : Alvin Yang
EUT : Zone Player M/N:ZP100	
Power Rating : 120Vac/60Hz	
Test Mode : TX2462MHz	

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)	
1	400.800	17.54	4.80	14.10	36.44	46.00	9.56	
2	500.900	19.84	6.50	10.26	36.60	46.00	9.40	
3	560.400	22.08	6.70	10.80	39.58	46.00	6.42	
4	588.400	21.52	6.30	8.18	36.00	46.00	10.00	
5	600.300	21.65	6.30	7.54	35.49	46.00	10.51	
6	721.400	22.11	6.50	5.04	33.65	46.00	12.35	
7	880.300	25.31	7.30	4.46	37.07	46.00	8.93	
8	960.800	27.14	7.60	3.44	38.18	54.00	15.82	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

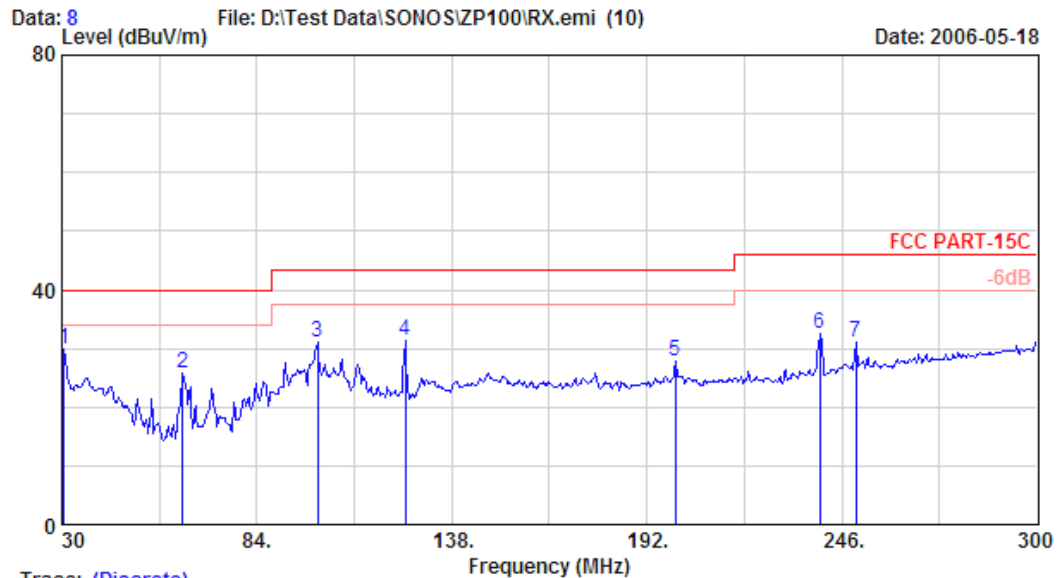

Trace: (Discrete)


Site no. : A/C Chamber	Data no. : 8
Dis. / Ant. : 3m VBA6106A	Ant. pol. : HORIZONTAL
Limit : FCC PART-15C	
Env. / Ins. : 8593EM 25°C/51%	Engineer : Alvin Yang
EUT : Zone Player M/N:ZP100	
Power Rating : 120Vac/60Hz	
Test Mode : RX	

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)	
1	30.540	24.76	1.10	4.12	29.99	40.00	10.01	
2	63.480	11.87	1.67	12.19	25.74	40.00	14.26	
3	100.740	17.17	2.10	11.81	31.08	43.50	12.42	
4	125.040	19.38	2.30	9.56	31.24	43.50	12.26	
5	199.830	22.08	3.00	2.64	27.72	43.50	15.78	
6	239.790	23.05	3.40	6.02	32.46	46.00	13.54	
7	249.780	23.78	3.50	3.66	30.94	46.00	15.06	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

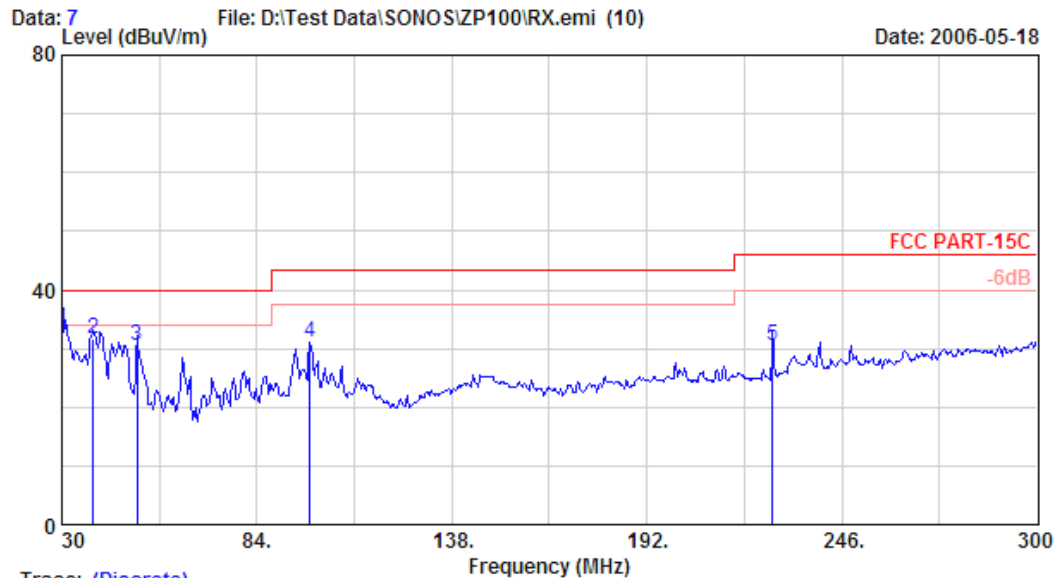

Trace: (Discrete)


Site no. : A/C Chamber	Data no. : 7
Dis. / Ant. : 3m VBA6106A	Ant. pol. : VERTICAL
Limit : FCC PART-15C	
Env. / Ins. : 8593EM 25°C/51%	Engineer : Alvin Yang
EUT : Zone Player M/N:ZP100	
Power Rating : 120Vac/60Hz	
Test Mode : RX	

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)	
1	30.000	23.60	1.10	8.74	33.44	40.00	6.56	
2	38.640	20.85	1.20	9.58	31.63	40.00	8.37	
3	50.790	15.69	1.50	13.28	30.46	40.00	9.54	
4	98.580	17.61	2.10	11.38	31.09	43.50	12.41	
5	226.830	22.71	3.30	4.34	30.36	46.00	15.64	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

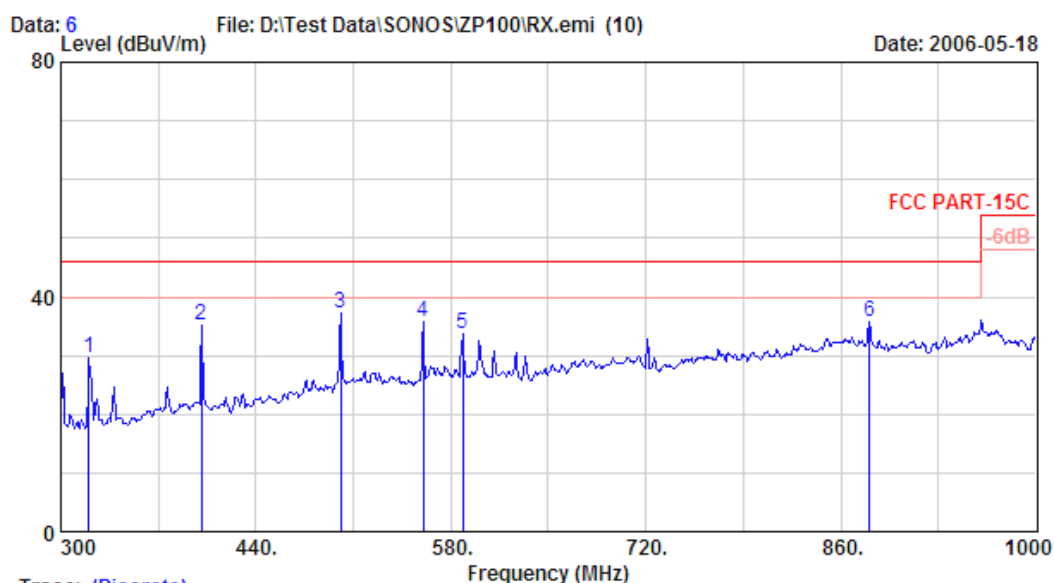

Trace: (Discrete)


Site no.	: A/C Chamber	Data no.	: 6
Dis. / Ant.	: 3m UHALP9108-A(0139)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C		
Env. / Ins.	: 8593EM 25°C/51%	Engineer	: Alvin Yang
EUT	: Zone Player M/N:ZP100		
Power Rating	: 120Vac/60Hz		
Test Mode	: RX		

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	320.300	14.99	4.20	10.36	29.54	46.00	16.46	
2	400.800	17.63	4.80	12.70	35.13	46.00	10.87	
3	500.900	18.91	6.50	11.93	37.35	46.00	8.65	
4	560.400	20.03	6.70	9.03	35.76	46.00	10.24	
5	588.400	21.02	6.30	6.49	33.80	46.00	12.20	
6	880.300	25.34	7.30	3.01	35.65	46.00	10.35	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

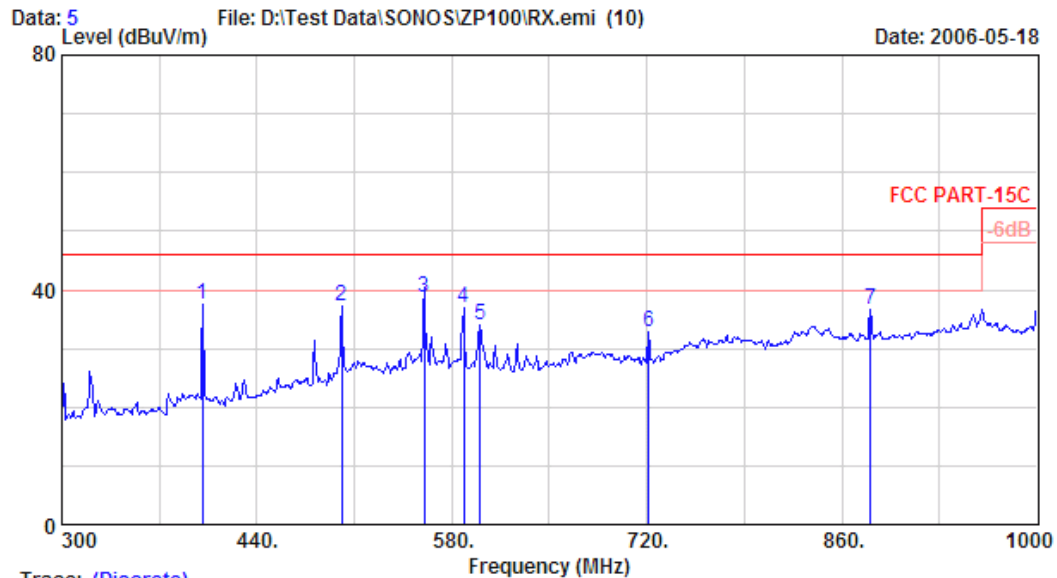

Trace: (Discrete)

Site no. : A/C Chamber	Data no. : 5
Dis. / Ant. : 3m UHALP9108-A(0139)	Ant. pol. : VERTICAL
Limit : FCC PART-15C	
Env. / Ins. : 8593EM 25°C/51%	Engineer : Alvin Yang
EUT : Zone Player M/N:ZP100	
Power Rating : 120Vac/60Hz	
Test Mode : RX	

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	400.800	17.54	4.80	15.31	37.65	46.00	8.35	
2	500.900	19.84	6.50	10.81	37.15	46.00	8.85	
3	560.400	22.08	6.70	9.80	38.58	46.00	7.42	
4	588.400	21.52	6.30	9.02	36.84	46.00	9.16	
5	600.300	21.65	6.30	5.92	33.87	46.00	12.13	
6	721.400	22.11	6.50	4.12	32.73	46.00	13.27	
7	880.300	25.31	7.30	3.96	36.57	46.00	9.43	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

2.6.2. Above 1GHz Frequency Range Measurement Results

Date of Test : May 18, 2006 Temperature : 25°C

EUT : Zone Player Humidity : 51%

Test Mode : Transmitting Mode, Frequency: 2412MHz (CH1)

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Horizontal dB μ V/m	Emission Level Horizontal dB μ V/m	Limits dB	Margin
Peak	2212.960	28.25	6.12	9.58	43.95	74.00	30.05
Average	2212.960	28.25	6.12	5.29	39.66	54.00	14.34
	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Vertical dB μ V/m	Emission Level Vertical dB μ V/m	Limits dB	Margin
Peak	2212.690	28.25	6.12	11.24	45.61	74.00	28.39
Average	2212.960	28.25	6.12	8.06	42.43	54.00	11.57

Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 25GHz, but the emissions level were too low against the official limit and not report.

Date of Test : May 18, 2006 Temperature : 25°CEUT : Zone Player Humidity : 51%Test Mode : Transmitting Mode, Frequency: 2437MHz (CH6)

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Horizontal dB μ V/m	Emission Level Horizontal dB μ V/m	Limits dB	Margin
Peak	2238.160	28.31	6.16	11.31	45.78	74.00	28.22
Average	2238.160	28.31	6.16	8.08	42.55	54.00	11.45
	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Vertical dB μ V/m	Emission Level Vertical dB μ V/m	Limits dB	Margin
Peak	2238.160	28.31	6.16	12.92	47.39	74.00	26.61
Average	2238.160	28.31	6.16	9.66	44.13	54.00	9.87

Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 25GHz, but the emissions level were too low against the official limit and not report.

Date of Test : May 18, 2006 Temperature : 25°CEUT : Zone Player Humidity : 51%Test Mode : Transmitting Mode, Frequency: 2462MHz (CH11)

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dBμV	Meter Reading Horizontal dBμV/m	Emission Level Horizontal dBμV/m	Limits dB	Margin
Peak	2258.320	28.35	6.17	6.78	41.30	74.00	32.70
Average	2258.320	28.35	6.17	7.01	41.53	54.00	12.47
	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dBμV	Meter Reading Vertical dBμV/m	Emission Level Vertical dBμV/m	Limits dB	Margin
Peak	1734.160	26.60	7.07	12.10	45.77	74.00	28.23
	2258.320	28.35	6.17	14.51	49.03	74.00	24.97
Average	1734.160	26.60	7.07	7.69	41.36	54.00	12.64
	2258.320	28.35	6.17	10.75	45.27	54.00	8.73

Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 25GHz, but the emissions level were too low against the official limit and not report.

2.6.3. Restricted Bands Measurement Results

Date of Test : May 18, 2006 Temperature : 25°C

EUT : Zone Player Humidity : 51%

Test Mode : Transmitting Mode, Frequency: 2412MHz (CH1)

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Horizontal dB μ V/m	Emission Level Horizontal dB μ V/m	Limits dB	Margin
Peak *	2389.940	28.59	6.34	16.95	51.88	74.00	22.12
Average *	2389.940	28.59	6.34	-0.14	34.79	54.00	19.21


- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Low frequency section (spurious in the restricted band 2310-2390MHz).
 3. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw




AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

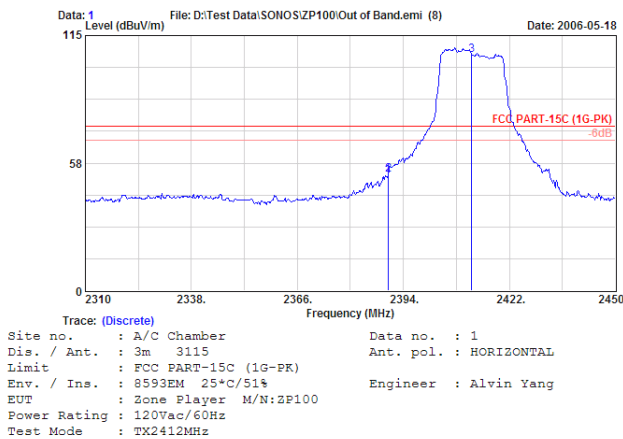

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	2389.940	28.59	6.34	16.95	51.88	74.00	22.12	Peak
2	2390.080	28.59	6.34	17.47	52.41	74.00	21.59	Peak
3	2412.060	28.64	6.36	71.28	106.29	74.00	-32.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

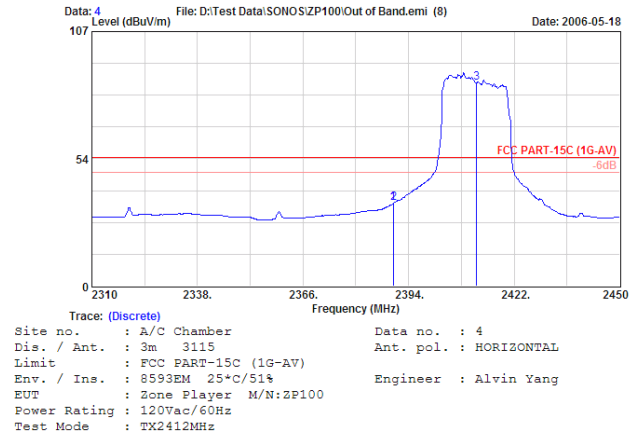

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	2389.940	28.59	6.34	-0.14	34.79	54.00	19.21	Average
2	2390.080	28.59	6.34	0.05	34.99	54.00	19.01	Average
3	2412.060	28.64	6.36	50.47	85.48	54.00	-31.48	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : May 18, 2006 Temperature : 25°C

EUT : Zone Player Humidity : 51%

Test Mode : Transmitting Mode, Frequency: 2412MHz (CH1)

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Vertical dB μ V/m	Emission Level Vertical dB μ V/m	Limits dB	Margin
Peak *	2389.660	28.59	6.34	21.29	56.22	74.00	17.78
Average *	2389.940	28.59	6.34	-3.33	31.60	54.00	22.40


- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Low frequency section (spurious in the restricted band 2310-2390MHz).
 3. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.



AUDIX Corp. EMC Laboratory
 No.33-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw




AUDIX Corp. EMC Laboratory
 No.33-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

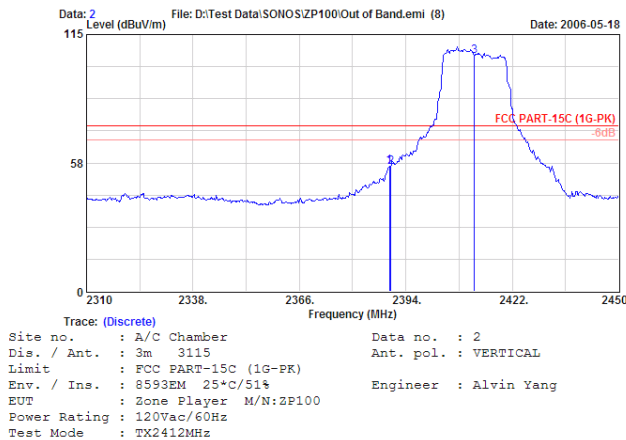

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	2389.660	28.59	6.34	21.29	56.23	74.00	17.77	Peak
2	2390.080	28.59	6.34	20.57	55.51	74.00	18.49	Peak
3	2412.060	28.64	6.36	70.37	105.38	74.00	-31.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

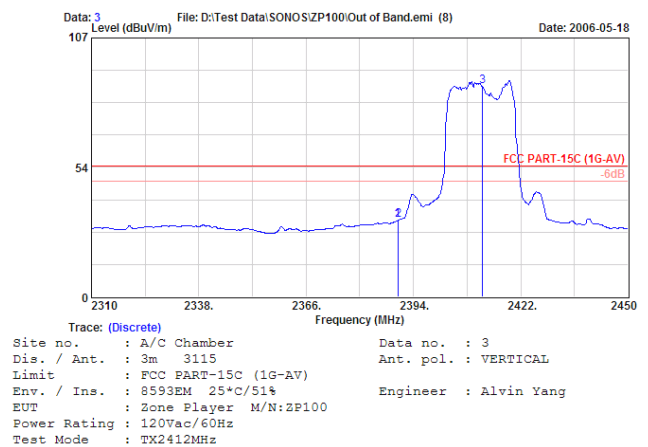

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	2389.940	28.59	6.34	-3.33	31.61	54.00	22.39	Average
2	2390.080	28.59	6.34	-3.23	31.71	54.00	22.29	Average
3	2412.060	28.64	6.36	51.81	86.82	54.00	-32.82	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : May 18, 2006 Temperature : 25°C

EUT : Zone Player Humidity : 51%

Test Mode : Transmitting Mode, Frequency: 2462MHz (CH11)

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Horizontal dB μ V/m	Emission Level Horizontal dB μ V/m	Limits dB	Margin
Peak *	2483.620	28.77	6.45	8.87	44.09	74.00	29.91
Average *	2483.620	28.77	6.45	-6.50	28.72	54.00	25.28


- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Low frequency section (spurious in the restricted band 2483.5-2500MHz).
 3. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw




AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

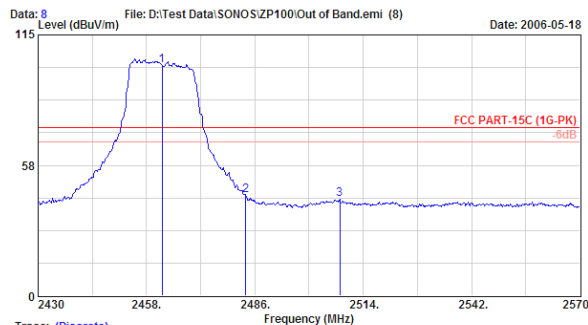

Site no. : A/C Chamber Data no. : 8
 Dis. / Ant. : 3m 3115 Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 25°C/51% Engineer : Alvin Yang
 EUT : Zone Player M/N:ZP100
 Power Rating : 120Vac/60Hz
 Test Mode : TX2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	2462.060	28.74	6.42	66.39	101.55	74.00	-27.55	Peak
2	2483.620	28.77	6.45	8.87	44.09	74.00	29.91	Peak
3	2507.980	28.83	6.48	7.39	42.71	74.00	31.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

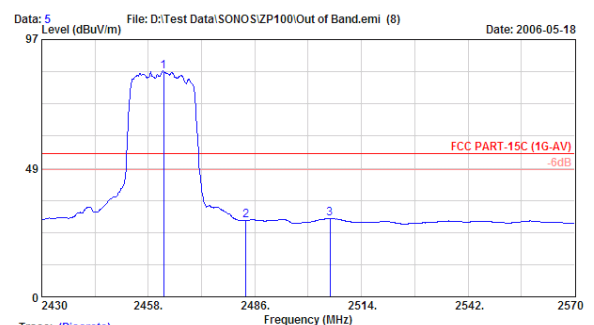

Site no. : A/C Chamber Data no. : 5
 Dis. / Ant. : 3m 3115 Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : 8593EM 25°C/51% Engineer : Alvin Yang
 EUT : Zone Player M/N:ZP100
 Power Rating : 120Vac/60Hz
 Test Mode : TX2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	2462.060	28.74	6.42	49.77	84.93	54.00	-30.93	Average
2	2483.620	28.77	6.45	-6.50	28.72	54.00	25.28	Average
3	2507.980	28.83	6.48	-5.87	29.44	54.00	24.56	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : May 18, 2006 Temperature : 25°C

EUT : Zone Player Humidity : 51%


Test Mode : Transmitting Mode, Frequency: 2462MHz (CH11)

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Vertical dB μ V/m	Emission Level Vertical dB μ V/m	Limits dB	Margin
Peak *	2484.180	28.77	6.45	21.25	56.47	74.00	17.53
Average *	2483.620	28.77	6.45	-6.20	29.02	54.00	24.98

- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Low frequency section (spurious in the restricted band 2483.5-2500MHz).
 3. ‘*’ The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

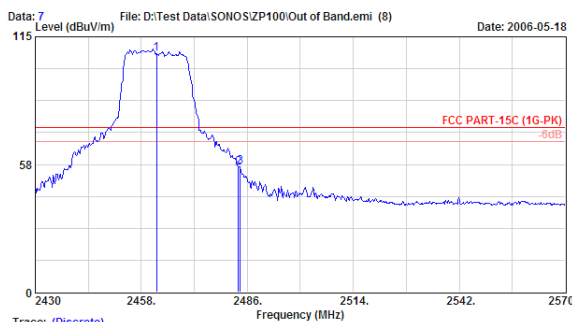


Site no. : A/C Chamber Data no. : 7
 Dis. / Ant. : 3m 3115 Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 25°C/51% Engineer : Alvin Yang
 EUT : Zone Player M/N:2P100
 Power Rating : 120Vac/60Hz
 Test Mode : TX2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	2462.060	28.74	6.42	72.40	107.56	74.00	-33.56	Peak
2	2483.620	28.77	6.45	20.93	56.16	74.00	17.84	Peak
3	2484.180	28.77	6.45	21.25	56.47	74.00	17.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

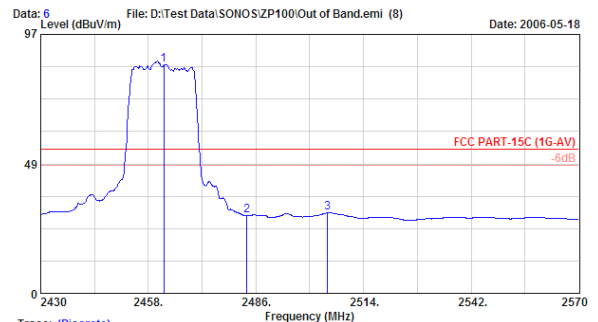

Site no. : A/C Chamber Data no. : 6
 Dis. / Ant. : 3m 3115 Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : 8593EM 25°C/51% Engineer : Alvin Yang
 EUT : Zone Player M/N:2P100
 Power Rating : 120Vac/60Hz
 Test Mode : TX2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	2462.060	28.74	6.42	50.60	85.76	54.00	-31.76	Average
2	2483.620	28.77	6.45	-6.20	29.02	54.00	24.98	Average
3	2504.620	28.83	6.47	-5.07	30.24	54.00	23.76	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


3. DEVIATION TO TEST SPECIFICATIONS

【NONE】


4. PHOTOGRAPHS

4.1. Photos of Radiated Measurement at Semi-Anechoic Chamber

4.1.1. Frequency Range 30MHz~1GHz

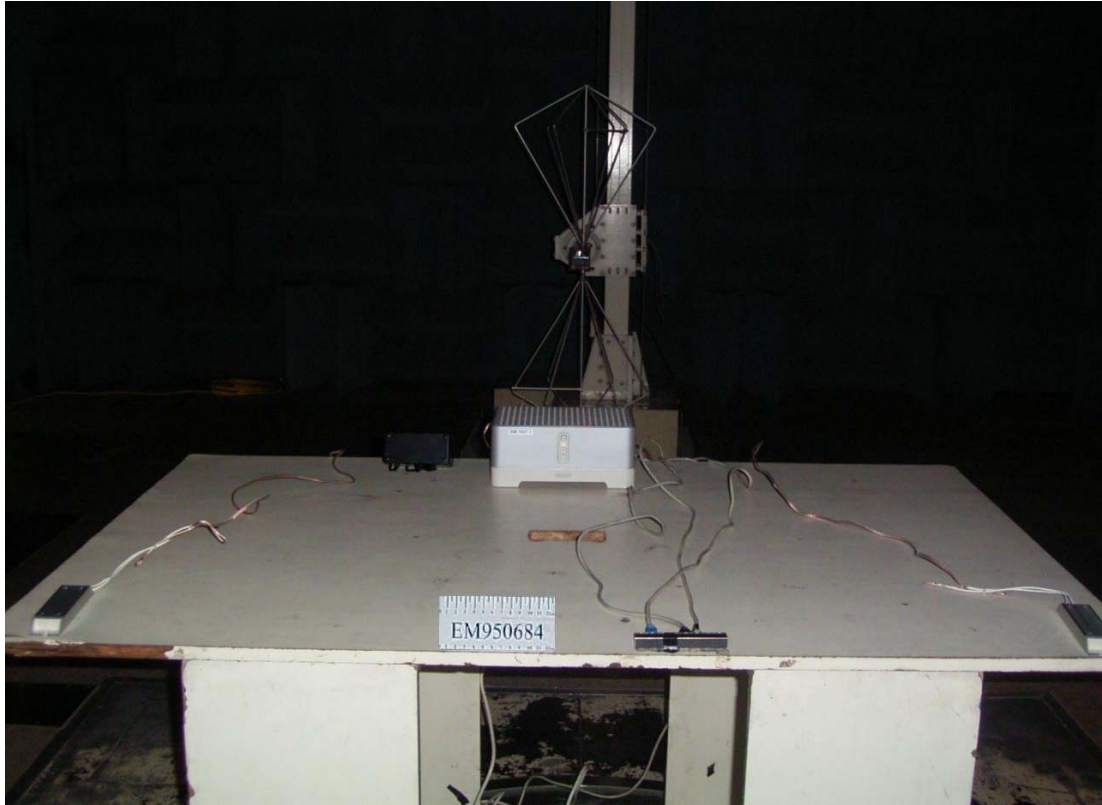


FRONT VIEW OF RADIATED MEASUREMENT

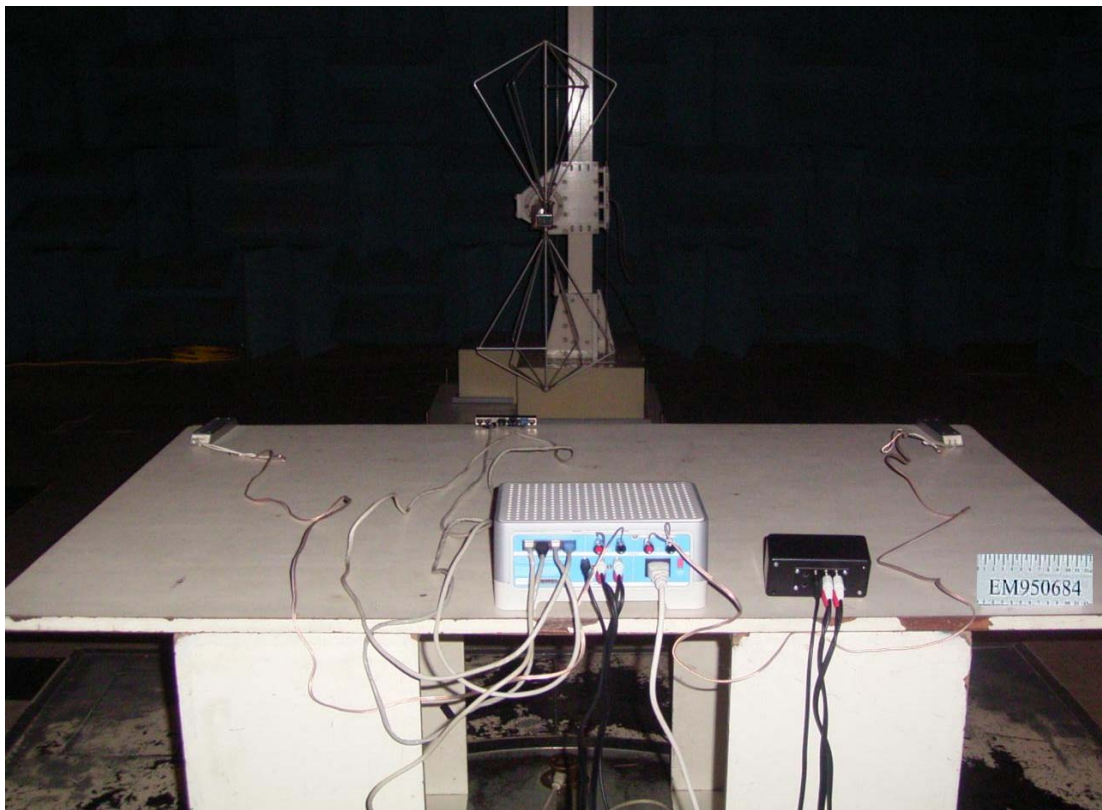


BACK VIEW OF RADIATED MEASUREMENT

4.1.2. Frequency Range: Above 1GHz

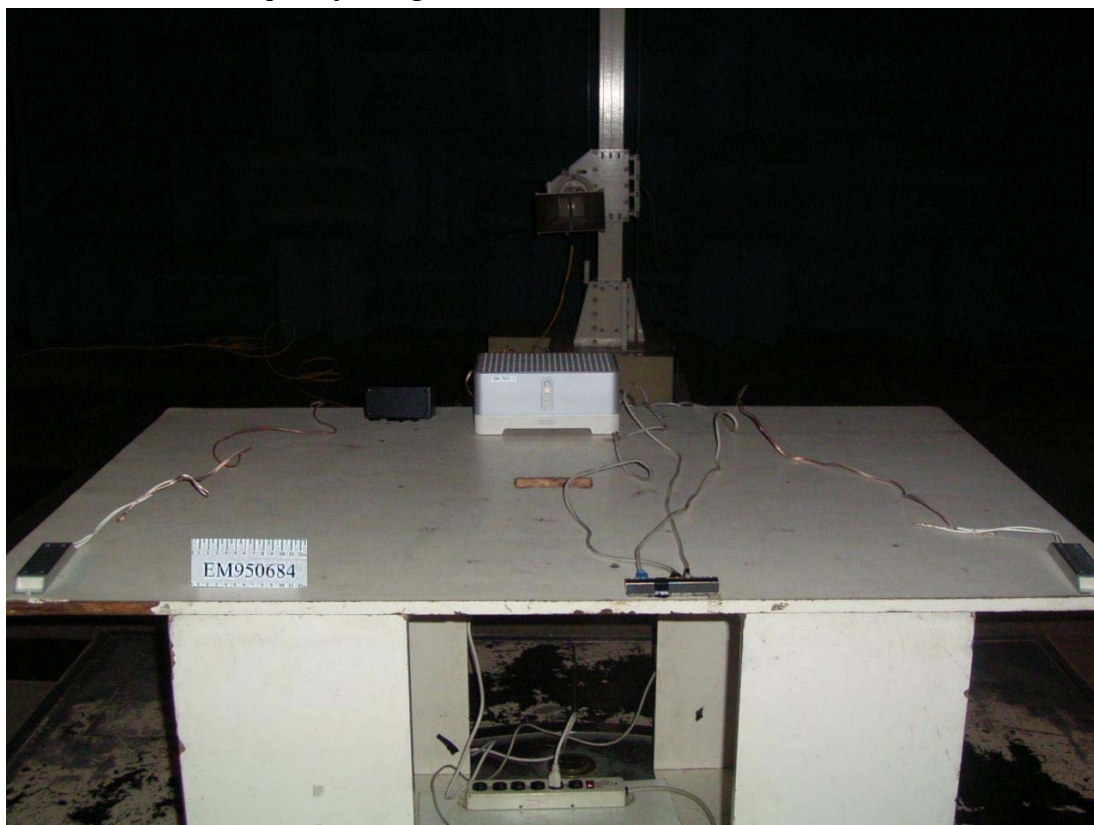

FRONT VIEW OF RADIATED MEASUREMENT

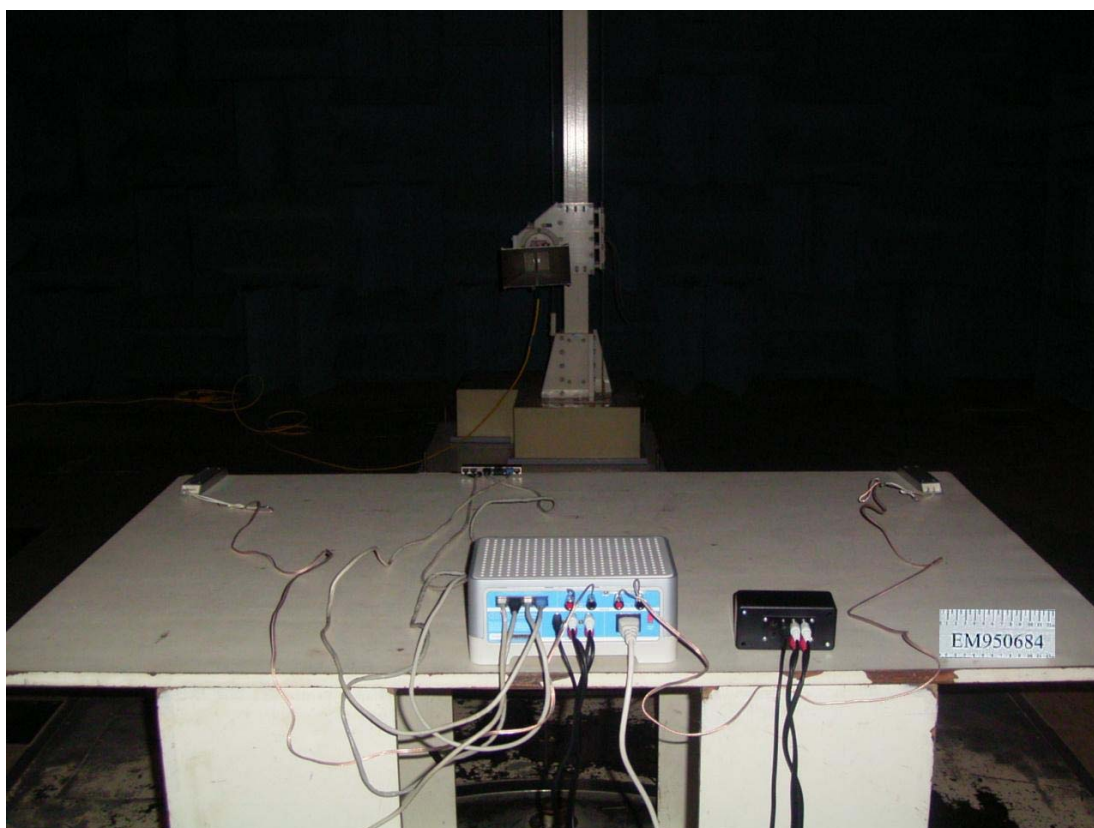

BACK VIEW OF RADIATED MEASUREMENT

PARTNER NOTEBOOK PC & CONTROLLER



VIEW OF RADIATED MEASUREMENT