

**FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 Issue 4**

TEST REPORT

For

Wireless Headphone

MODEL NUMBER: S52A

REPORT NUMBER: 4792176316-1-RF-3

ISSUE DATE: April 22, 2026

**FCC ID: SBVRM052
IC: 5373A-RM052**

Prepared for

**SONOS, INC.
301 COROMAR DR. GOLETA, CA 93117, USA**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

**Tel: +86 769 22038881
Fax: +86 769 33244054
Website: www.ul.com**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	April 22, 2026	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c) RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2020, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
Conducted Output Power	ANSI C63.10-2020, Clause 11.9.2.3.1	FCC Part 15.247 (b)(3) RSS-247 Clause 6.3.2	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2020, Clause 11.8.1	FCC Part 15.247 (a)(2) RSS-247 Clause 6.3.1 (a) RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2020, Clause 11.10.5	FCC Part 15.247 (e) RSS-247 Clause 6.3.1 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2020, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 6.6	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2020, Clause 11.12	FCC Part 15.247 (d) FCC Part 15.205/15.209 RSS-247 Clause 6.6 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2020, Clause 11.6	None; for reporting purposes only.	Pass

Note:

1. 1.For ISED, this report is also performed according to ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 standards.

2.For FCC, this report is also performed according to ANSI C63.10-2020 + Cor.1-2023.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <FCC 47 CFR PART 15 SUBPART C, ISED RSS-247 Issue 4> when <Simple Acceptance> decision rule is applied. Decision rule for statement of conformity: The measurement uncertainty is not taken into account for statement of conformity.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	7
2. TEST METHODOLOGY.....	8
3. FACILITIES AND ACCREDITATION.....	8
4. CALIBRATION AND UNCERTAINTY	9
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>9</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>9</i>
5. EQUIPMENT UNDER TEST	10
5.1. <i>DESCRIPTION OF EUT</i>	<i>10</i>
5.2. <i>CHANNEL LIST</i>	<i>10</i>
5.3. <i>MAXIMUM POWER</i>	<i>10</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>11</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>11</i>
5.6. <i>WORST-CASE CONFIGURATIONS.....</i>	<i>12</i>
5.7. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>12</i>
5.8. <i>SUPPORT UNITS FOR SYSTEM TEST</i>	<i>13</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	14
7. ANTENNA PORT TEST RESULTS	17
7.1. <i>CONDUCTED OUTPUT POWER</i>	<i>17</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</i>	<i>18</i>
7.3. <i>POWER SPECTRAL DENSITY</i>	<i>20</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION.....</i>	<i>22</i>
7.5. <i>DUTY CYCLE</i>	<i>24</i>
8. RADIATED TEST RESULTS.....	25
8.1. <i>RESTRICTED BANDEDGE-ANT1</i>	<i>33</i>
8.2. <i>RESTRICTED BANDEDGE-ANT2.....</i>	<i>47</i>
8.3. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-ANT1</i>	<i>61</i>
8.4. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-ANT2.....</i>	<i>67</i>
8.5. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ)-ANT1</i>	<i>73</i>
8.6. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ)-ANT2.....</i>	<i>85</i>
8.7. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)-ANT2 WORST CASE.....</i>	<i>97</i>
8.8. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)- ANT2 WORST CASE</i>	<i>100</i>
8.9. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ)- ANT2 WORST CASE</i>	<i>102</i>

8.10.	SPURIOUS EMISSIONS FOR SIMULTANEOUS TRANSMISSION	104
9.	ANTENNA REQUIREMENT	110
10.	AC POWER LINE CONDUCTED EMISSION	111
11.	TEST DATA-ANT1	115
11.1.	APPENDIX A: DTS BANDWIDTH.....	115
11.1.1.	Test Result.....	115
11.1.2.	Test Graphs	116
11.2.	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH.....	117
11.2.1.	Test Result.....	117
11.2.2.	Test Graphs	118
11.3.	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....	119
11.3.1.	Test Result.....	119
11.4.	APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY.....	120
11.4.1.	Test Result.....	120
11.4.2.	Test Graphs	121
11.5.	APPENDIX E: BAND EDGE MEASUREMENTS.....	122
11.5.1.	Test Result.....	122
11.5.2.	Test Graphs	123
11.6.	APPENDIX F: CONDUCTED SPURIOUS EMISSION	125
11.6.1.	Test Result.....	125
11.6.2.	Test Graphs	126
11.7.	APPENDIX G: DUTY CYCLE.....	127
11.7.1.	Test Result.....	127
11.7.2.	Test Graphs	128
12.	TEST DATA-ANT2	129
12.1.	APPENDIX A: DTS BANDWIDTH.....	129
12.1.1.	Test Result.....	129
12.1.2.	Test Graphs	130
12.2.	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH.....	131
12.2.1.	Test Result.....	131
12.2.2.	Test Graphs	132
12.3.	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....	133
12.3.1.	Test Result.....	133
12.4.	APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY.....	134
12.4.1.	Test Result.....	134
12.4.2.	Test Graphs	135
12.5.	APPENDIX E: BAND EDGE MEASUREMENTS.....	136
12.5.1.	Test Result.....	136
12.5.2.	Test Graphs	137
12.6.	APPENDIX F: CONDUCTED SPURIOUS EMISSION	139
12.6.1.	Test Result.....	139
12.6.2.	Test Graphs	140

12.7.	<i>APPENDIX G: DUTY CYCLE</i>	141
12.7.1.	Test Result.....	141
12.7.2.	Test Graphs	142

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: SONOS, INC.
Address: 301 COROMAR DR. GOLETA, CA 93117, USA

Manufacturer Information


Company Name: SONOS, INC.
Address: 301 COROMAR DR. GOLETA, CA 93117, USA

EUT Information

EUT Name: Wireless Headphone
Model: S52A
Sample Received Date: March 17, 2026
Sample Status: Normal
Sample ID: 9543703
Date of Tested: March 17, 2026 to April 22, 2026


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR PART 15 SUBPART C ISED RSS-247 Issue 4	Pass

Prepared By:



Fanny Huang
Project Engineer

Checked By:



Kebo Zhang
Operations Leader

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC 47 CFR PART 15 SUBPART C ISSED RSS-247 Issue 4, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, FCC 47 CFR Part 2, ANSI C63.10-2020 + Cor.1-2023, ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 and ISSED RSS-GEN Issue 5

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Wireless Headphone
Model	S52A

Frequency Range:	2412 MHz to 2462 MHz
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK)
Radio Technology:	IEEE 802.11b/g/n HT20
Normal Test Voltage	5 Vdc from USB port
Battery information	3.89 Vdc, 1060mAh/4.124Wh

5.2. CHANNEL LIST

Channel List For Bandwidth=20 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

5.3. MAXIMUM POWER

ANT1

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)	Maximum AVG EIRP (dBm)
b	2412 ~ 2462	1-11[11]	19.34	21.14
g	2412 ~ 2462	1-11[11]	17.32	19.12
n HT20	2412 ~ 2462	1-11[11]	16.44	18.24

ANT2

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)	Maximum AVG EIRP (dBm)
b	2412 ~ 2462	1-11[11]	19.39	22.60
g	2412 ~ 2462	1-11[11]	17.29	20.50
n HT20	2412 ~ 2462	1-11[11]	17.70	20.91

Note:

- Maximum conducted output power = measured value + cable loss (provided by UL) + cable loss (provided by UL or client)
- Maximum EIRP = maximum conducted output power + antenna gain

5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		artgui					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	20	20	20	/		
	2	20	20	20			
802.11g	1	17.5	17.5	16.5			
	2	17.5	17.5	16.5			
802.11n HT20	1	17	17	16			
	2	18	18	16			

5.6. WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11b/g/n HT2 only support SISO mode.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Based on ANSI C63.10-2020 section 5.6.2.2(b), for Harmonics and Spurious Emissions, all modes have been tested, only 802.11b mode and the worst-case power and PSD mode of OFDM were recorded in the report.

Worst-case power and PSD mode of OFDM: 802.11g-ANT1 and 802.11n HT20-ANT2.

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	Monopole Antenna	1.8
2	2412-2462	Monopole Antenna+parasitic Antenna	3.21

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	☒ 1TX, 1RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11g	☒ 1TX, 1RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	☒ 1TX, 1RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.

Note:

1. WLAN and BT can transmit simultaneously.
2. WLAN 2.4G & WLAN 5G can't transmit simultaneously.
3. EUT only support SISO mode.

5.8. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E42-80	R303U5AG
2	Adapter	SAMSUNG	ETA-U90CBC	5Vdc,2A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

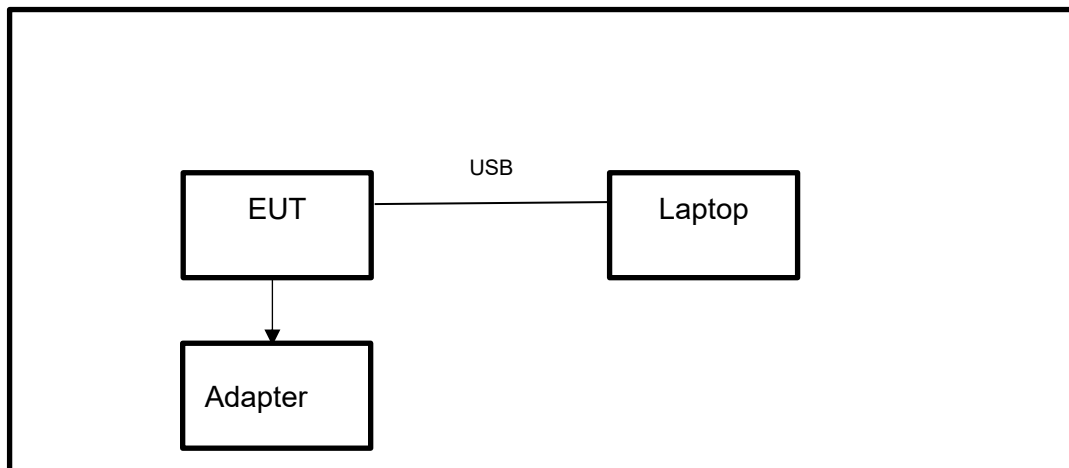

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Dec.26,2025	Dec.25,2026
Vector Signal Generator	R&S	SMBV100A	261637	Sep.12, 2025	Sep.11, 2026
Signal Generator	R&S	SMB100A	178553	Sep.12, 2025	Sep.11, 2026
Signal Analyzer	R&S	FSV40	101118	Sep.12, 2025	Sep.11, 2026
Software					
Description		Manufacturer	Name	Version	
For R&S TS 8997 Test System		Rohde & Schwarz	EMC 32	10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.12, 2025	Sep.11, 2026
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.12, 2025	Sep.11, 2026
DC power supply	TSSTAKASAGO	ZX-400L	409150160137	Sep.12, 2025	Sep.11, 2026
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.12, 2025	Sep.11, 2026
Attenuator	Aglient	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026
RF Control Unit	Tonscend	JS0806-2	23B80620666	Dec.26,2025	Dec.25,2026
Software					
Description	Manufacturer	Name			Version
Tonsend SRD Test Svsytem	Tonsend	JS1120-3 RF Test System			V3.2.22

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.12, 2025	Sep.11, 2026
Two-Line V-Network	R&S	ENV216	101983	Sep.12, 2025	Sep.11, 2026
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Sep.12, 2025	Sep.11, 2026
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.12, 2025	Sep.11, 2026
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.12, 2025	Sep.11, 2026
EMI Measurement Receiver	R&S	ESR26	101377	Sep.12, 2025	Sep.11, 2026
Horn Antenna	TDK	HRN-0118	130940	Dec.10, 2024	Dec.11, 2027
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.12, 2025	Sep.11, 2026
Horn Antenna	Schwarzbeck	BBHA9170	697	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.12, 2025	Sep.11, 2026
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Sep.12, 2025	Sep.11, 2026
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Sep.12, 2025	Sep.11, 2026
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Sep.16, 2025	Sep.15, 2026
Barometer	Yiyi	Baro	N/A	Sep.19, 2025	Sep.18, 2026
Attenuator	Agilent	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247(b)(3) ISED RSS-247 6.3.2	AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2020 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.3°C	Relative Humidity	61.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	March 25, 2026	Test By	Eason He
-----------	----------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix C

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247(a)(2) ISED RSS-247 6.3.1(a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2020 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 1 % to 5 % of the OBW but not less than 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

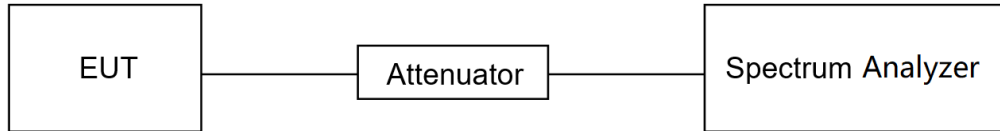TEST SETUP**TEST ENVIRONMENT**

Temperature	25.3℃	Relative Humidity	61.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	March 25, 2026	Test By	Eason He
-----------	----------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix A&B

7.3. POWER SPECTRAL DENSITY

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR §15.247 (e) ISED RSS-247 6.3.1 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.10.5.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms)
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$> 1.5 \times \text{OBW bandwidth}$
Trace	Employ trace averaging(rms)mode over a minimum of 100 traces
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

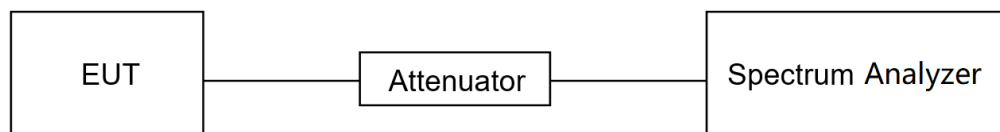

TEST ENVIRONMENT

Temperature	24.1℃	Relative Humidity	58.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	April 20, 2026	Test By	Eason He
-----------	----------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix D

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4		
Section	Test Item	Limit
FCC 47 CFR §15.247 (d) ISED RSS-247 6.6	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.11.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	$\geq 1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	No faster than coupled (auto) time

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	No faster than coupled (auto) time

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

TEST SETUP**TEST ENVIRONMENT**

Temperature	25.3℃	Relative Humidity	61.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	March 25, 2026	Test By	Eason He
-----------	----------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix E&F

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.3°C	Relative Humidity	61.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	March 25, 2026	Test By	Eason He
-----------	----------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix G

8. RADIATED TEST RESULTS

LIMITS

Please refer to FCC 47 CFR §15.205 and §15.209.

Please refer to ISSED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit ($\mu\text{V/m}$) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISSED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) ($\mu\text{A/m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.6
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC 47 CFR §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

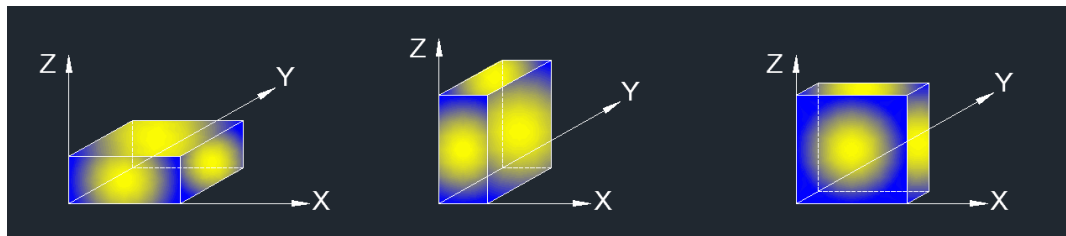

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.
9. We have verified that the test result of band edge on adjacent channels was better than Low channel and High channel, so only the worst data of low channel and high channel were recorded in this report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes and antennas have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes and antennas have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes and antennas have been tested, but only the worst data was recorded in the report.


TEST SETUP

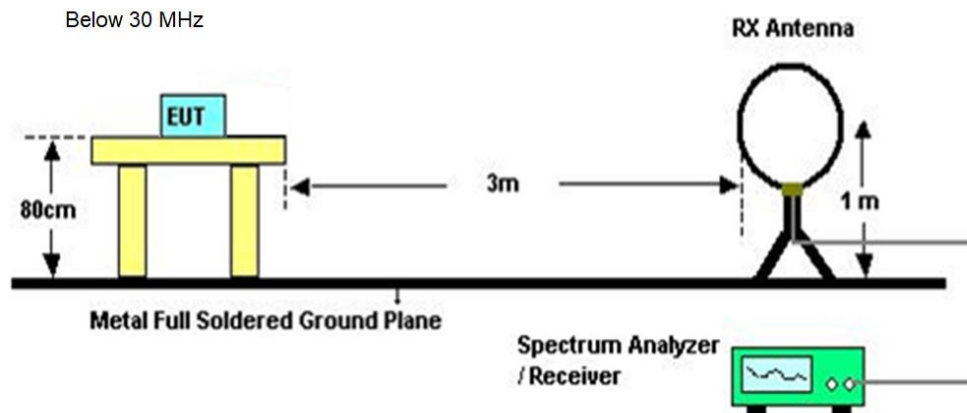

Below 1 GHz and above 30 MHz

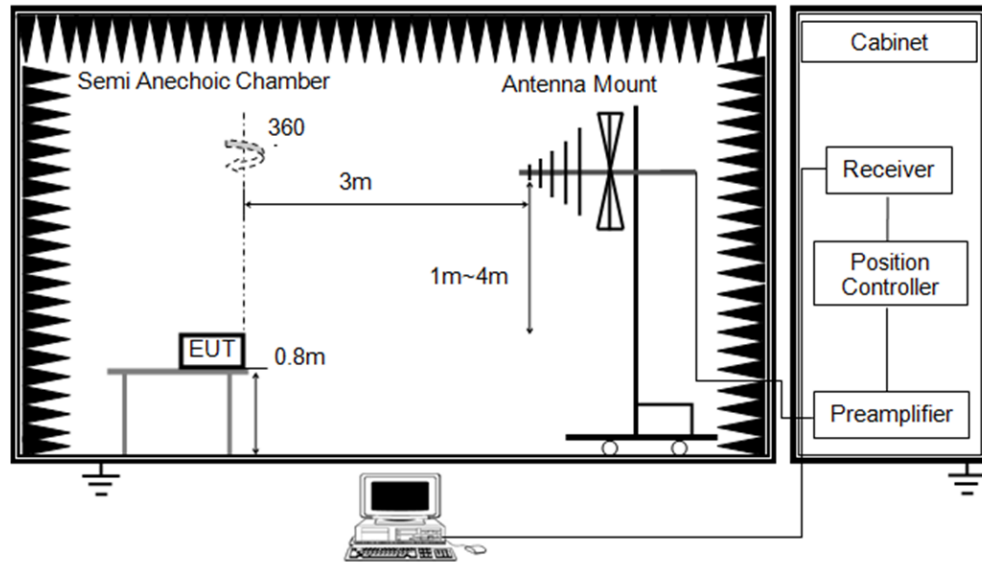

Above 1GHz

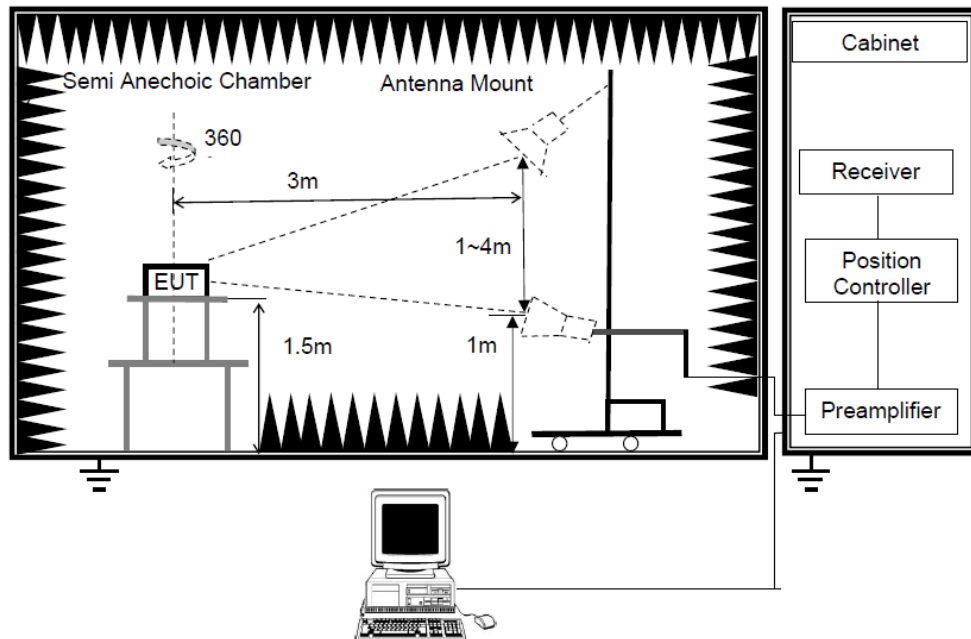

TEST ENVIRONMENT

Temperature	21.1℃	Relative Humidity	57.6%
Atmosphere Pressure	101kPa	Test Voltage	


TEST DATE / ENGINEER

Test Date	April 15, 2026	Test By	Mason Wang
-----------	----------------	---------	------------

TEST RESULTS


8.1. RESTRICTED BANDEDGE-ANT1

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

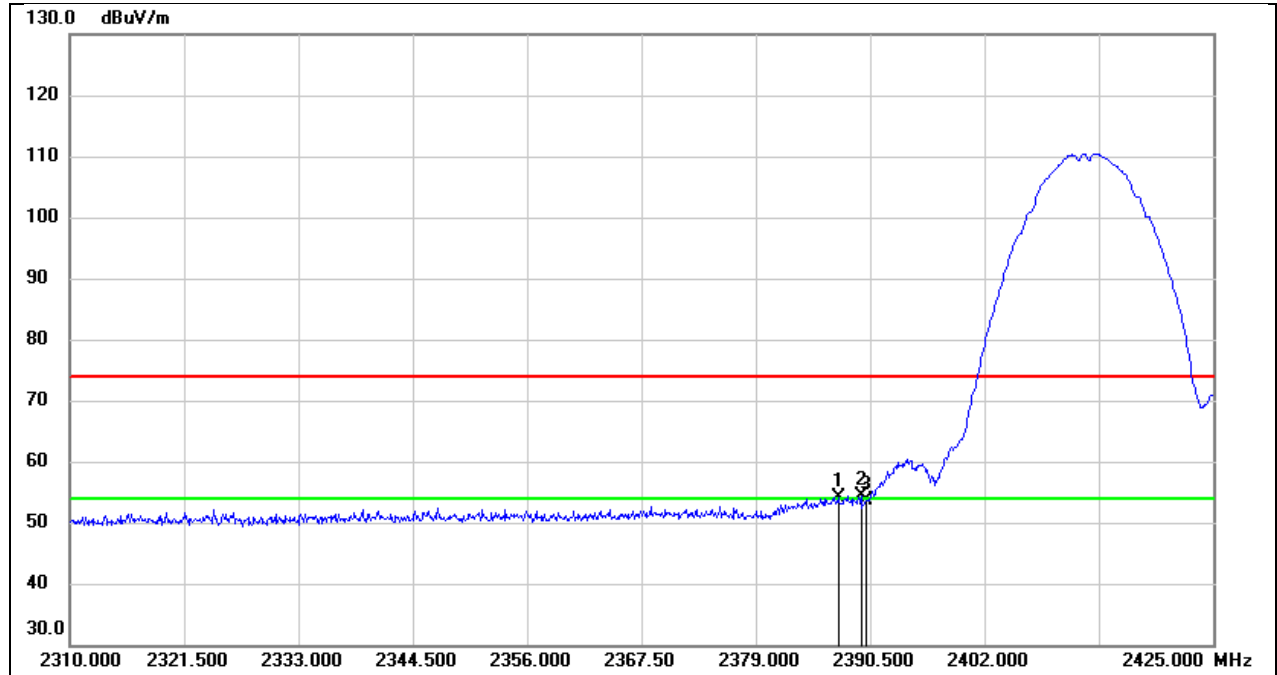


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.280	43.56	10.65	54.21	74.00	-19.79	peak
2	2389.580	43.74	10.66	54.40	74.00	-19.60	peak
3	2390.000	42.93	10.67	53.60	74.00	-20.40	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

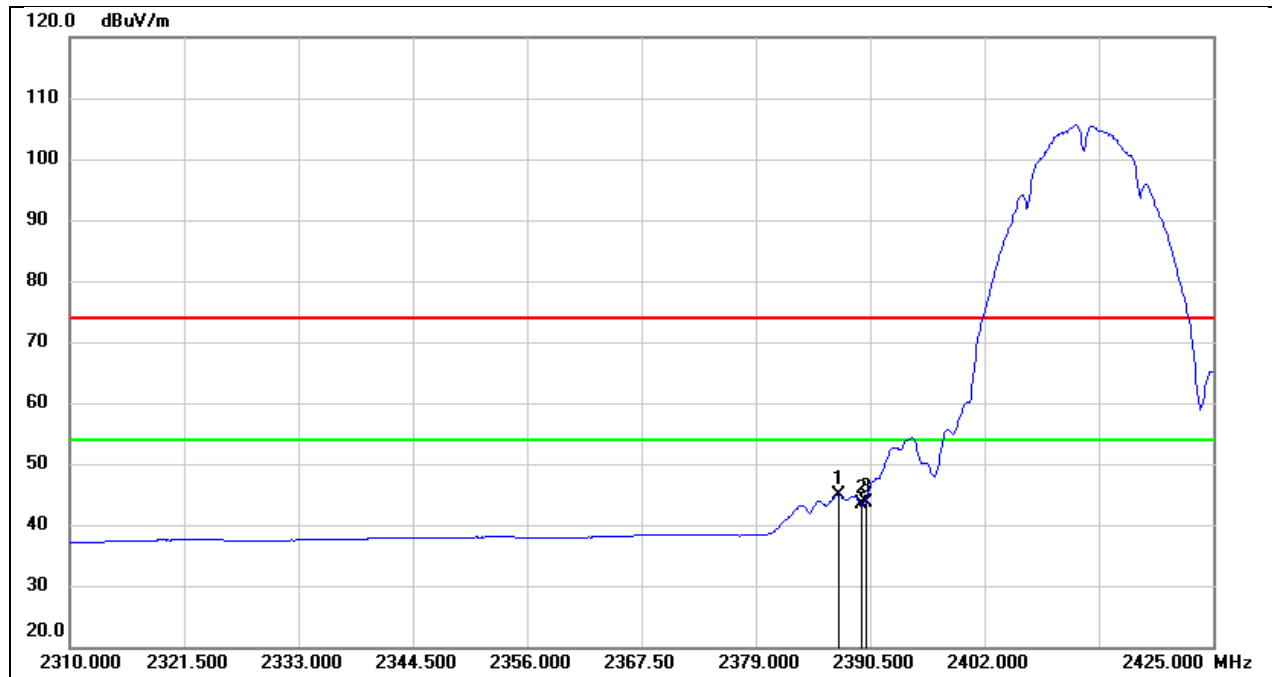


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.280	34.32	10.65	44.97	54.00	-9.03	AVG
2	2389.580	32.72	10.66	43.38	54.00	-10.62	AVG
3	2390.000	33.05	10.67	43.72	54.00	-10.28	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

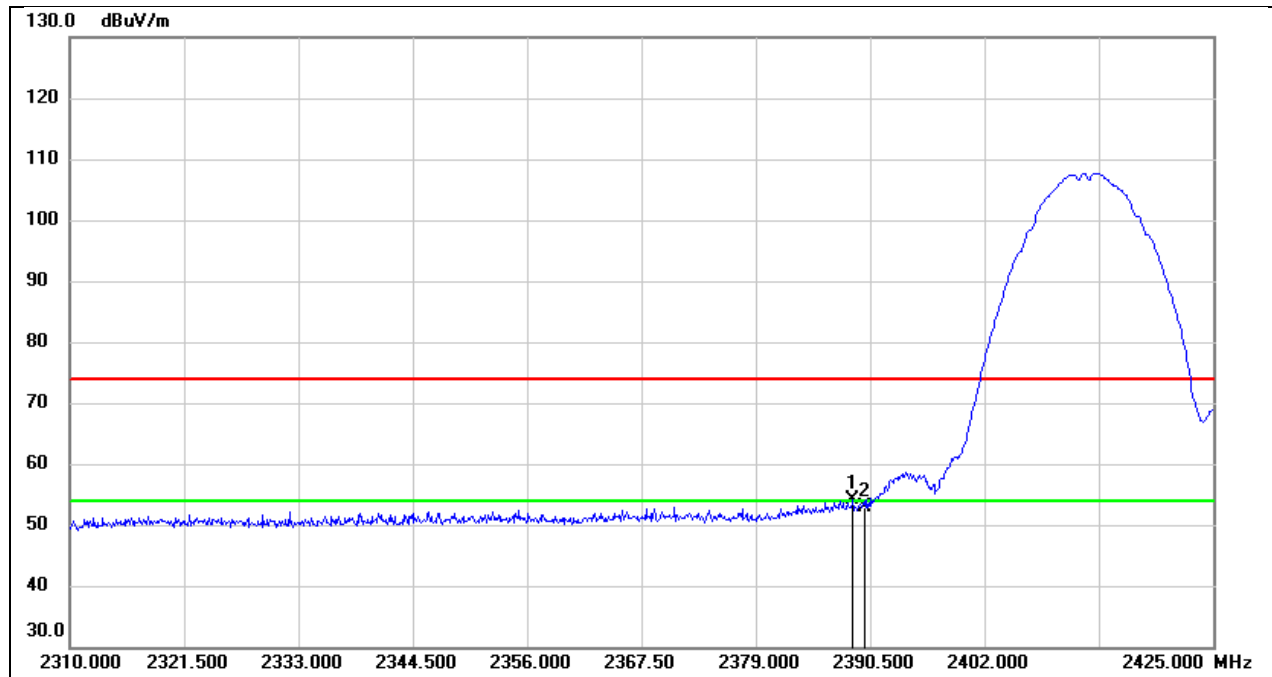


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.775	43.51	10.65	54.16	74.00	-19.84	peak
2	2390.000	42.26	10.67	52.93	74.00	-21.07	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

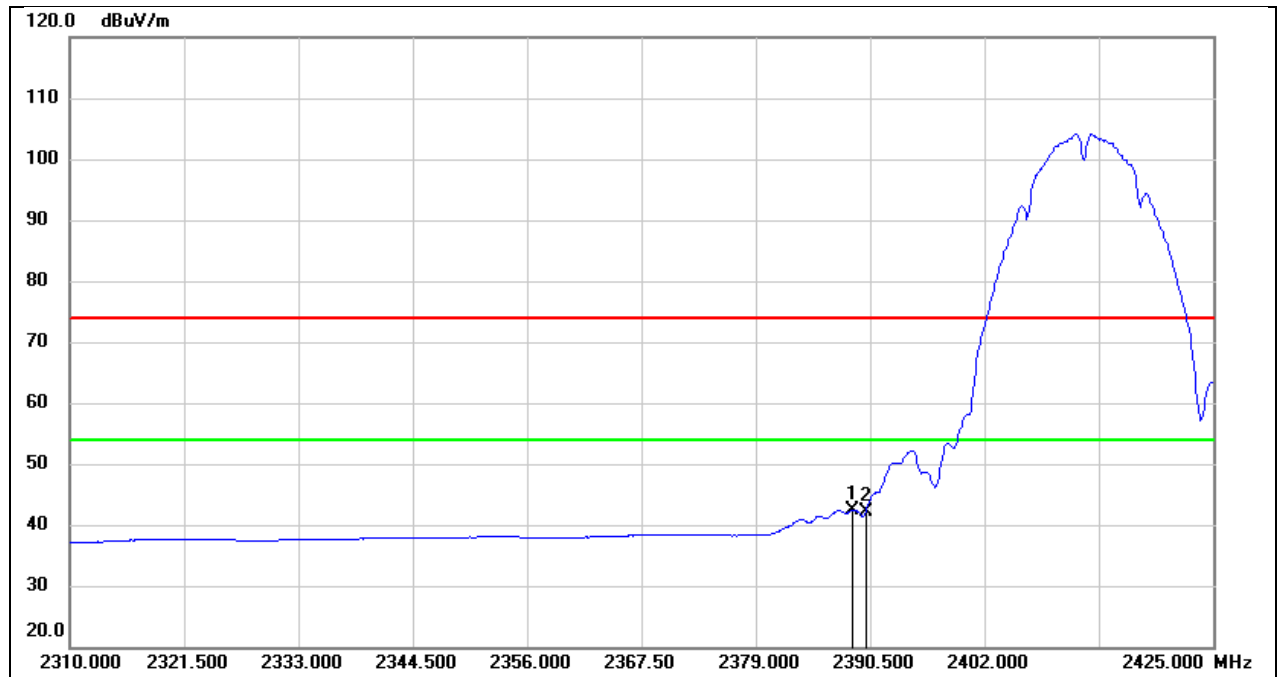


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.775	31.79	10.65	42.44	54.00	-11.56	AVG
2	2390.000	31.41	10.67	42.08	54.00	-11.92	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5 V

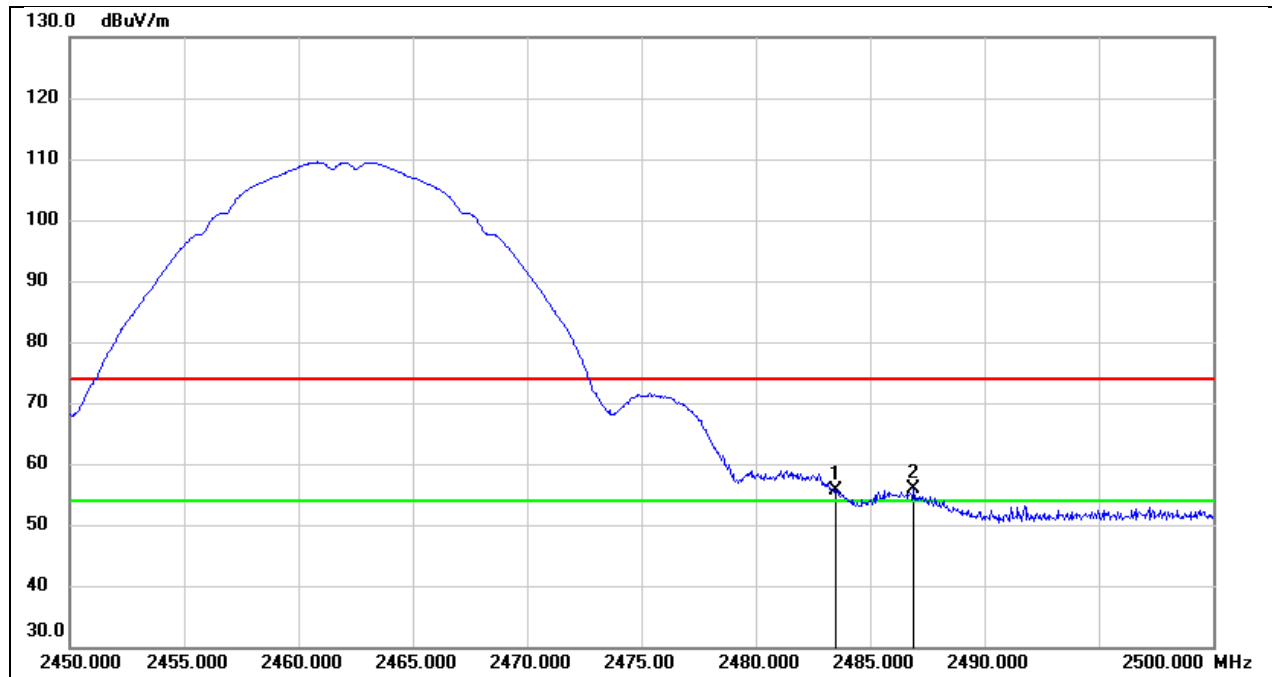


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	44.42	11.16	55.58	74.00	-18.42	peak
2	2486.900	44.63	11.17	55.80	74.00	-18.20	peak

Test Mode:	802.11b AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5 V

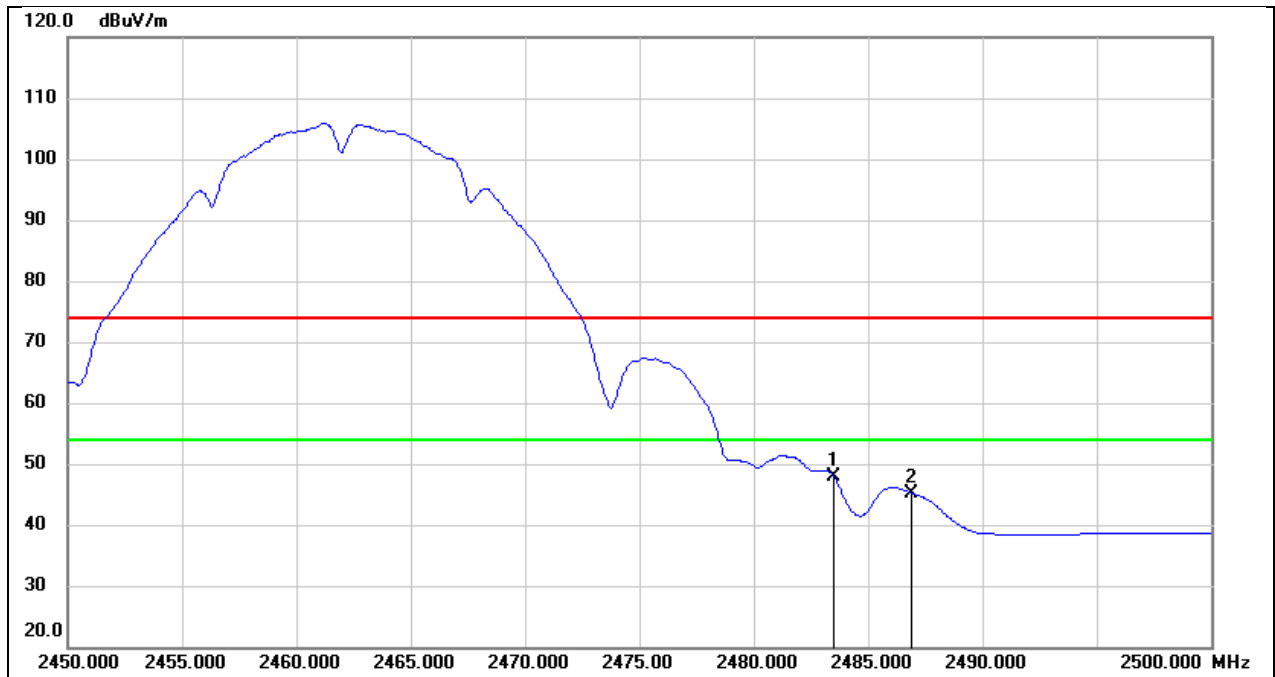


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.81	11.16	47.97	54.00	-6.03	AVG
2	2486.900	34.07	11.17	45.24	54.00	-8.76	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

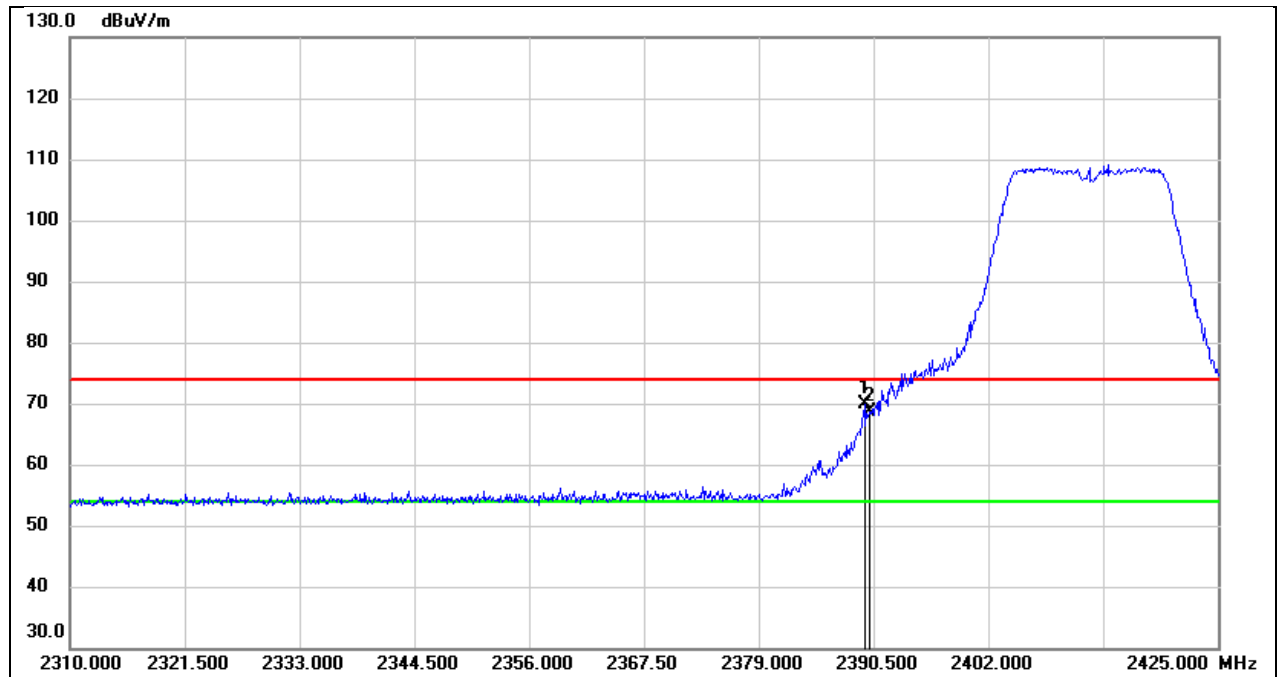


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.580	59.15	10.66	69.81	74.00	-4.19	peak
2	2390.000	58.04	10.67	68.71	74.00	-5.29	peak

Test Mode:	802.11g AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

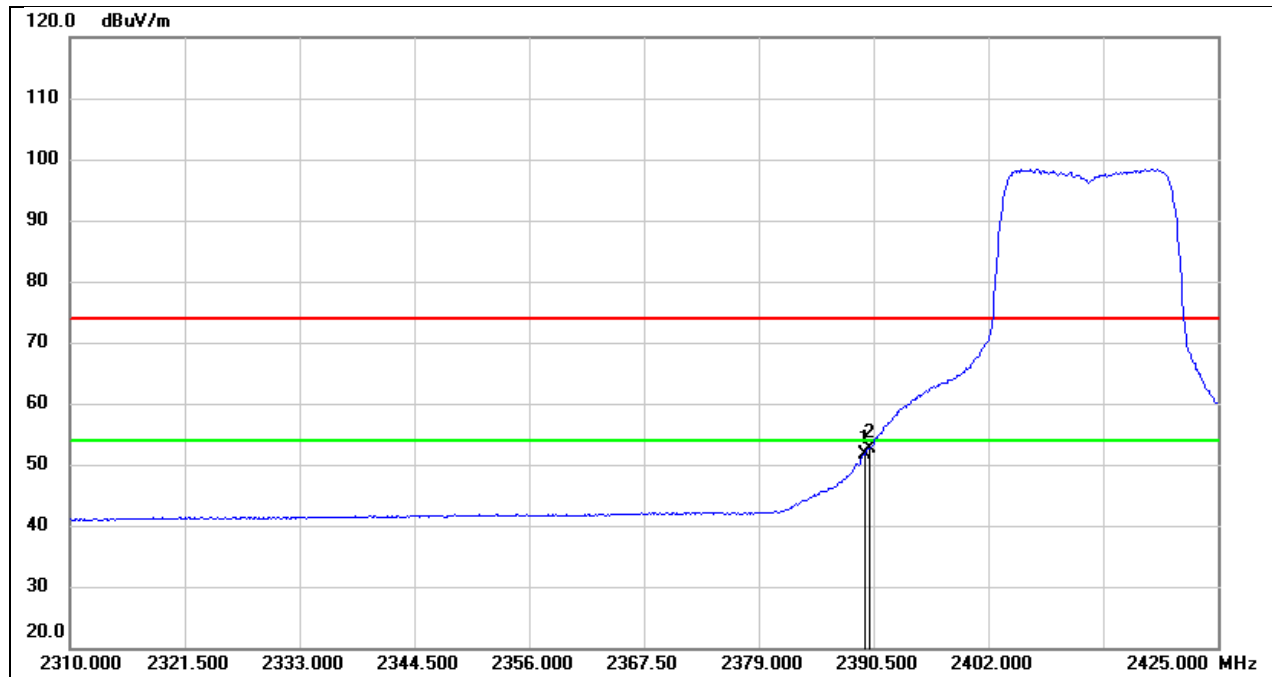


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.580	40.88	10.66	51.54	54.00	-2.46	AVG
2	2390.000	41.86	10.67	52.53	54.00	-1.47	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5 V

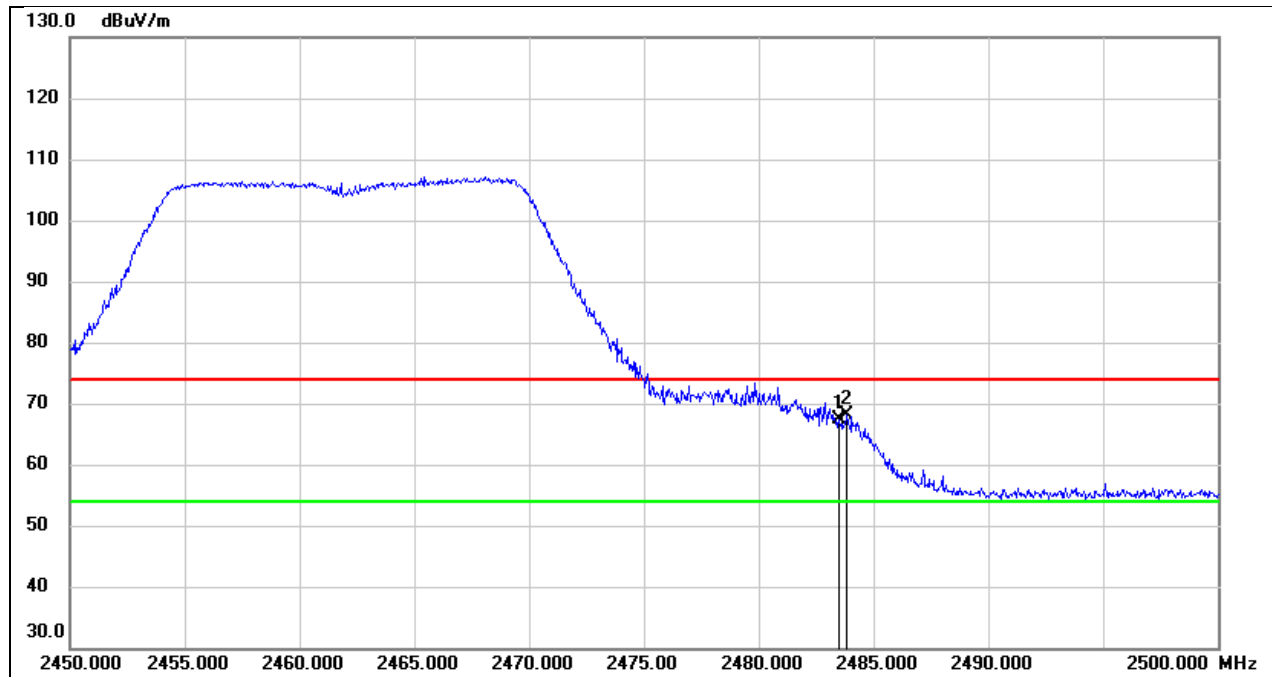


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.22	11.16	67.38	74.00	-6.62	peak
2	2483.850	56.98	11.16	68.14	74.00	-5.86	peak

Test Mode:	802.11g AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5 V

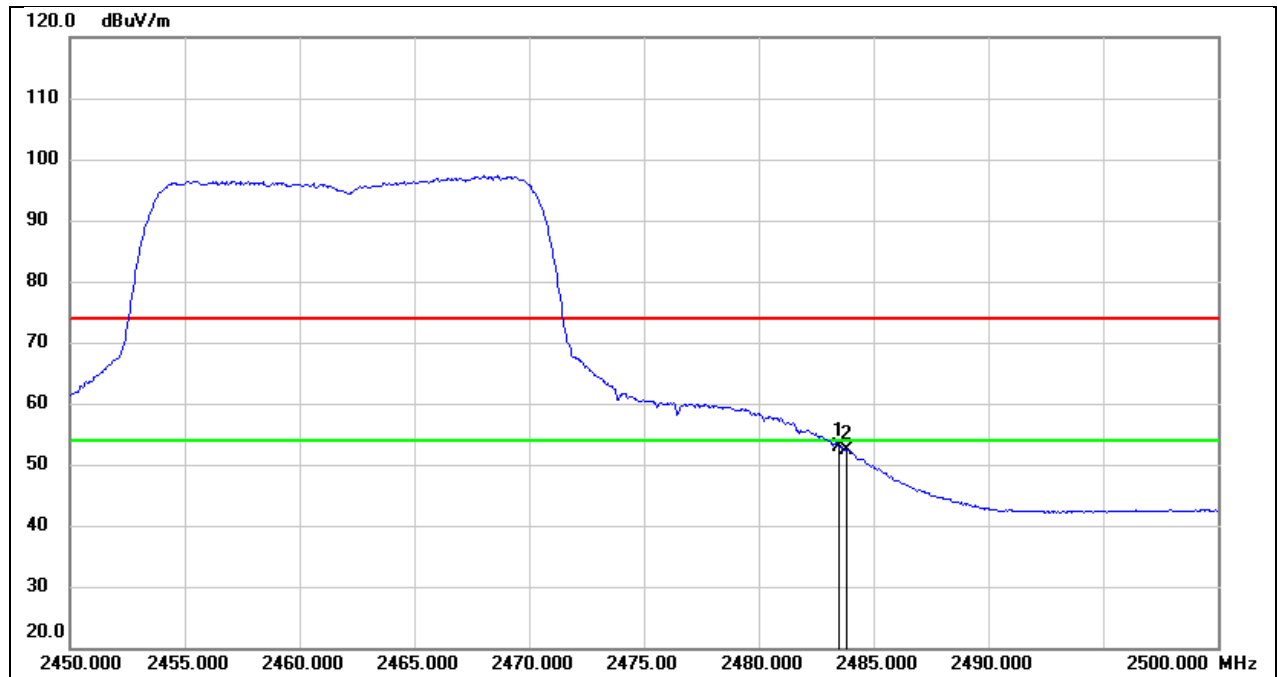


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	41.80	11.16	52.96	54.00	-1.04	AVG
2	2483.850	41.18	11.16	52.34	54.00	-1.66	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

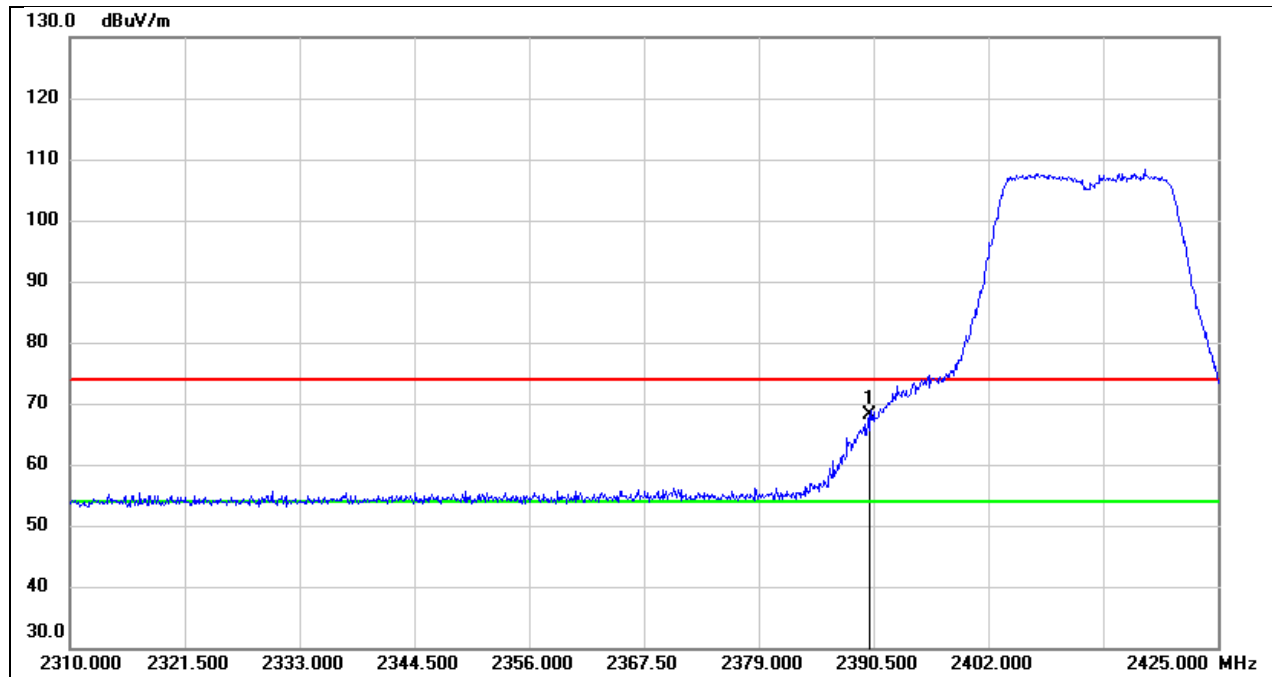


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	57.36	10.67	68.03	74.00	-5.97	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

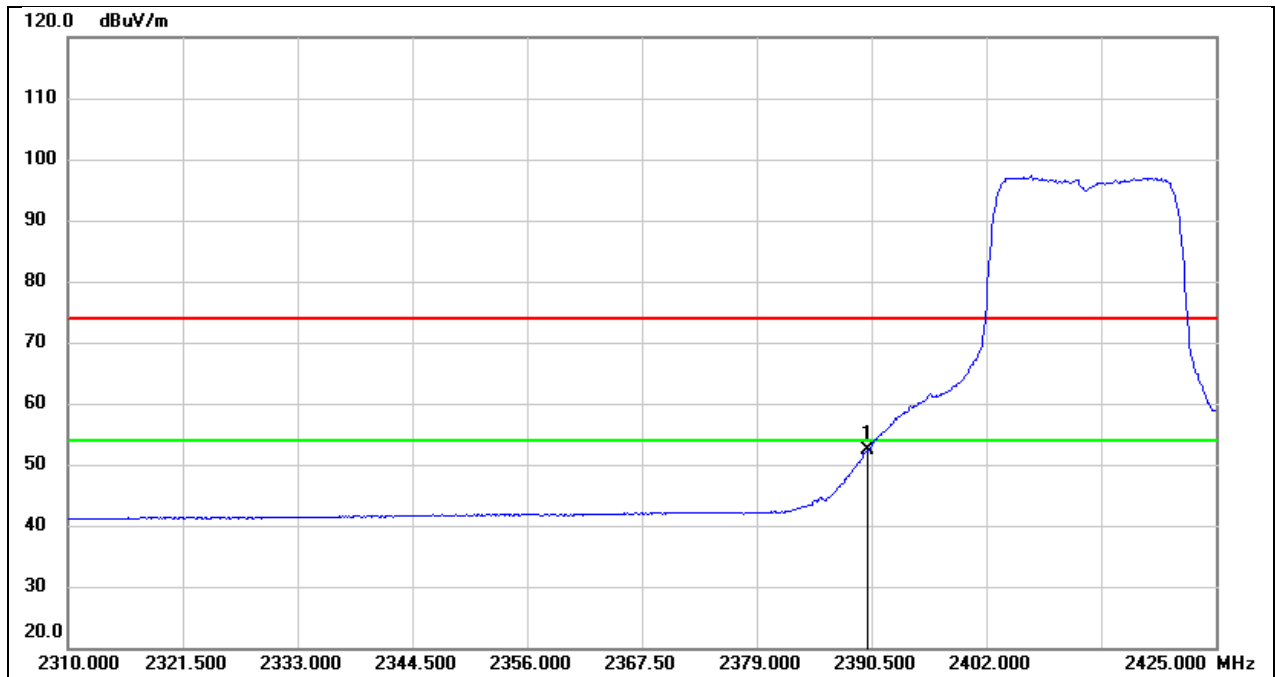


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	41.63	10.67	52.30	54.00	-1.70	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5 V

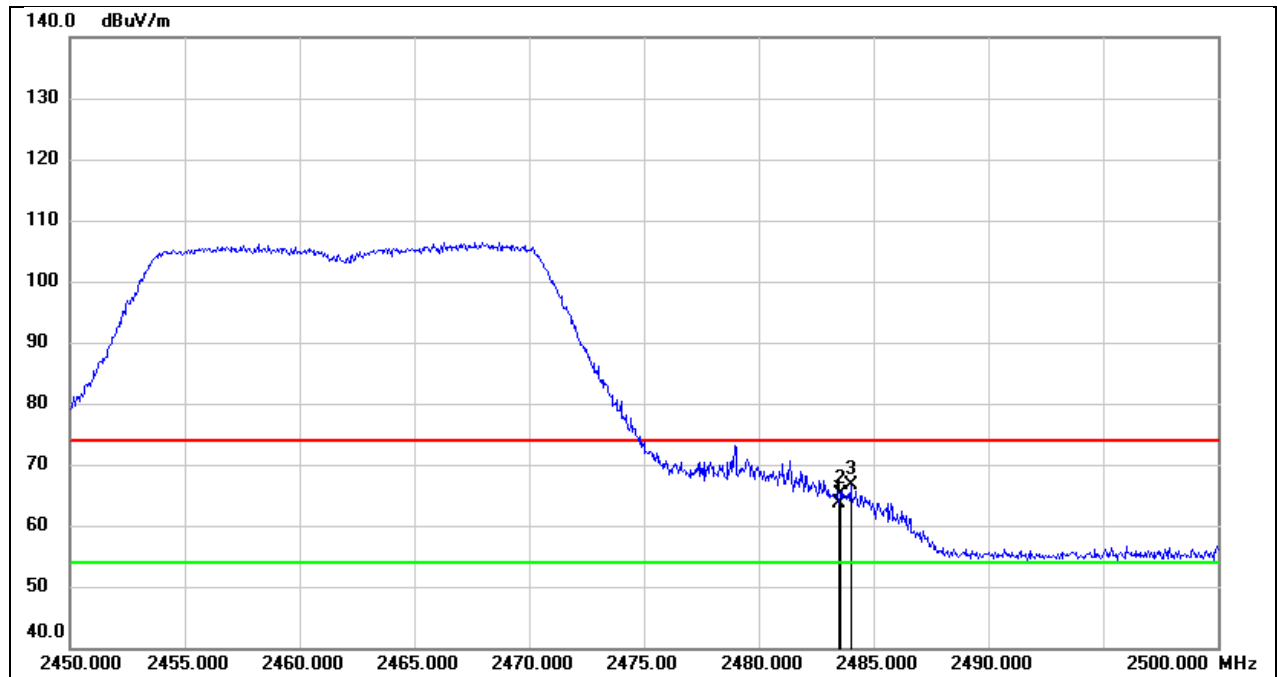

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	52.57	11.16	63.73	74.00	-10.27	peak
2	2483.550	53.97	11.16	65.13	74.00	-8.87	peak
3	2484.000	55.56	11.16	66.72	74.00	-7.28	peak


Test Mode:	802.11n HT20 AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5 V

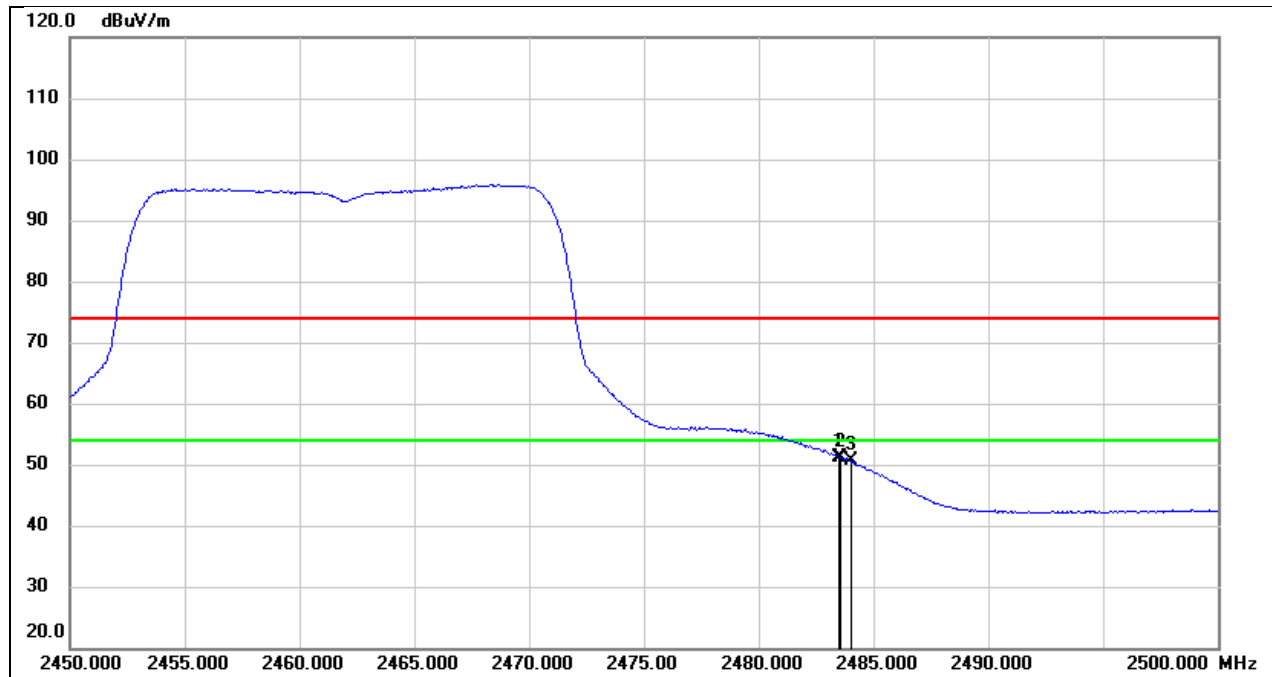

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	40.00	11.16	51.16	54.00	-2.84	AVG
2	2483.550	40.02	11.16	51.18	54.00	-2.82	AVG
3	2484.000	39.52	11.16	50.68	54.00	-3.32	AVG


8.2. RESTRICTED BANDEDGE-ANT2

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

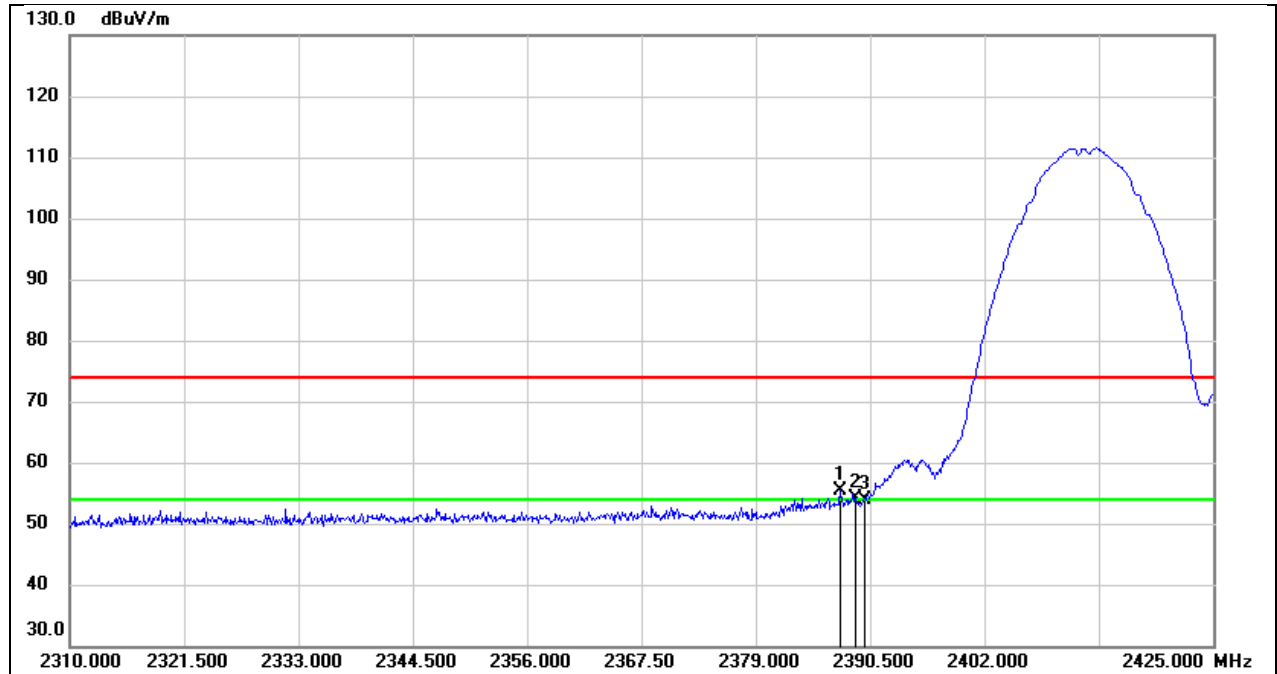


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.510	44.63	10.65	55.28	74.00	-18.72	peak
2	2389.005	43.49	10.65	54.14	74.00	-19.86	peak
3	2390.000	43.13	10.67	53.80	74.00	-20.20	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

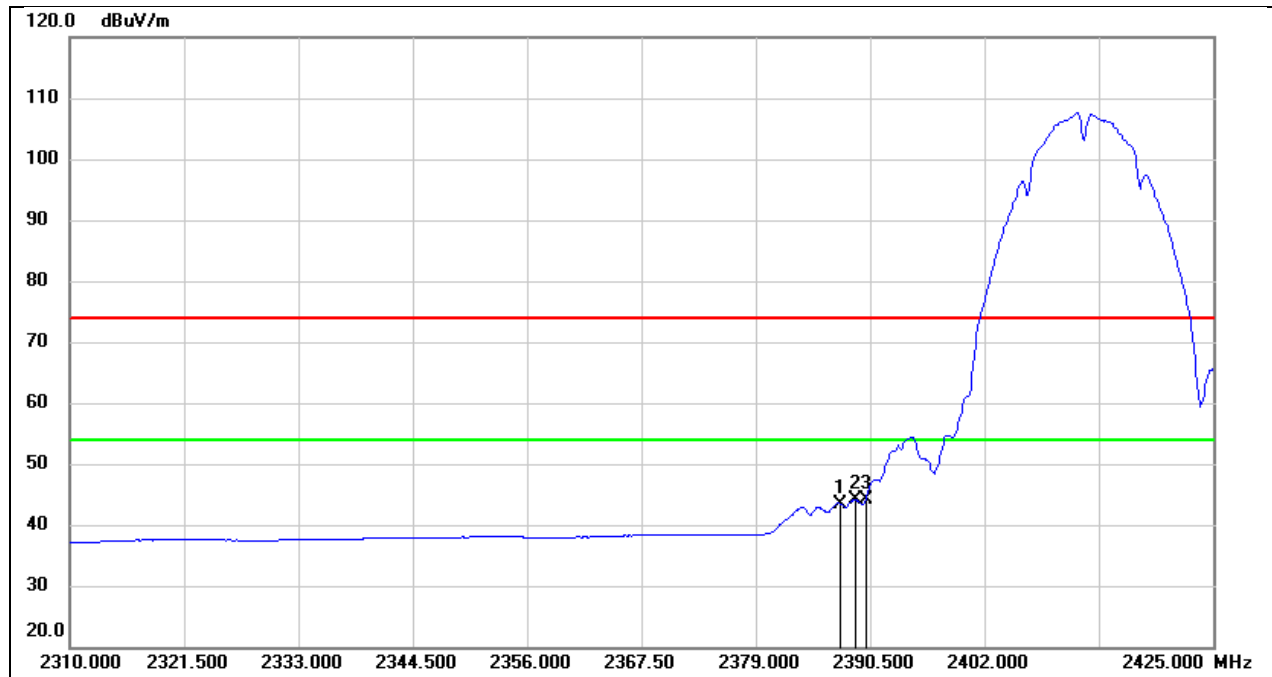


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.510	32.77	10.65	43.42	54.00	-10.58	AVG
2	2389.005	33.44	10.65	44.09	54.00	-9.91	AVG
3	2390.000	33.46	10.67	44.13	54.00	-9.87	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

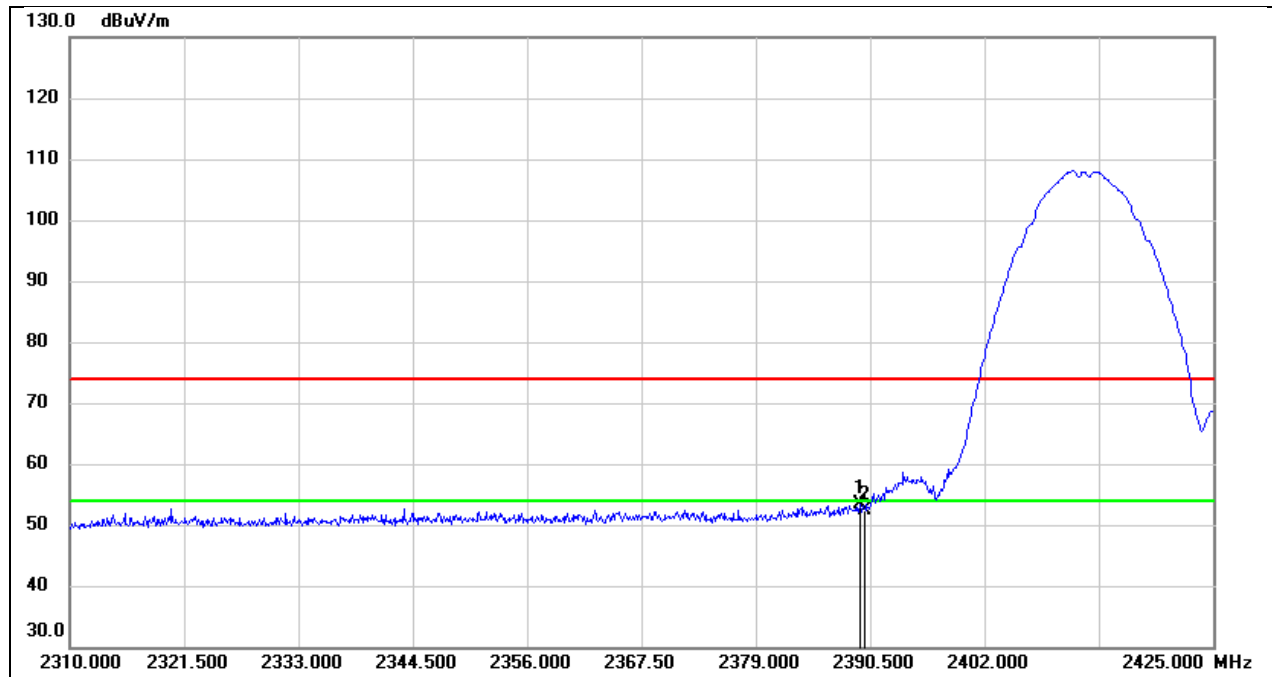


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.465	42.83	10.66	53.49	74.00	-20.51	peak
2	2390.000	41.70	10.67	52.37	74.00	-21.63	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

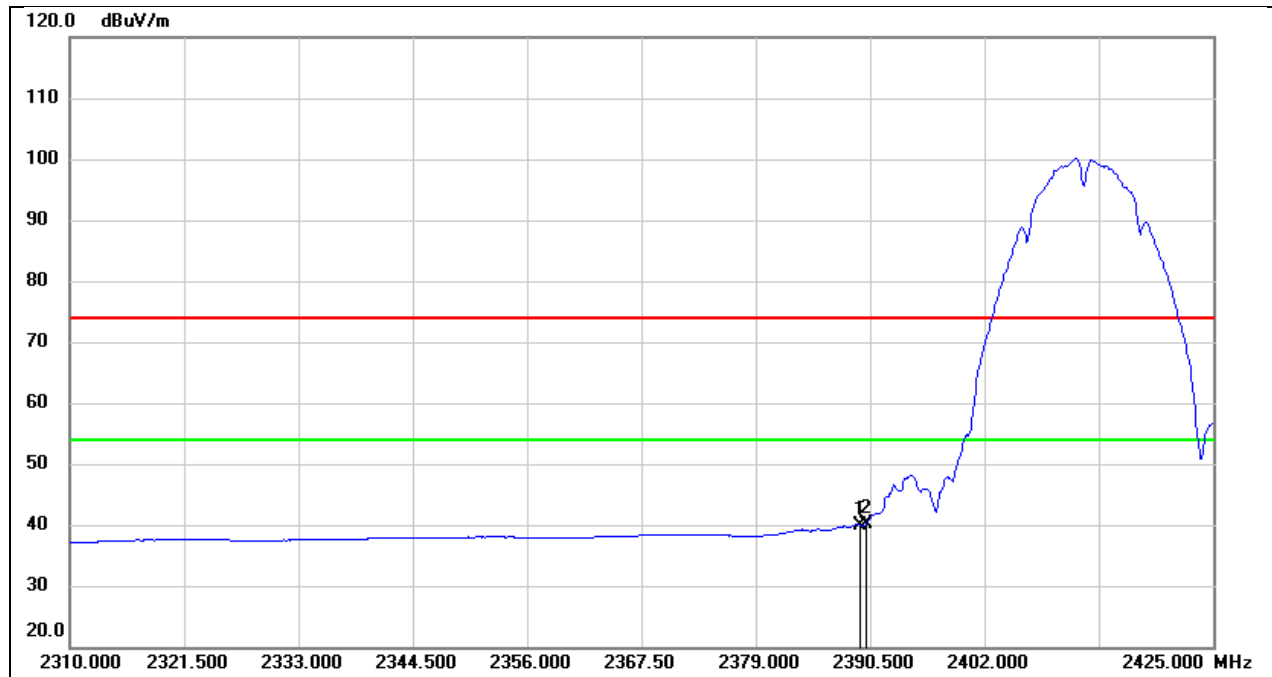


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.465	29.27	10.66	39.93	54.00	-14.07	AVG
2	2390.000	29.46	10.67	40.13	54.00	-13.87	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5 V

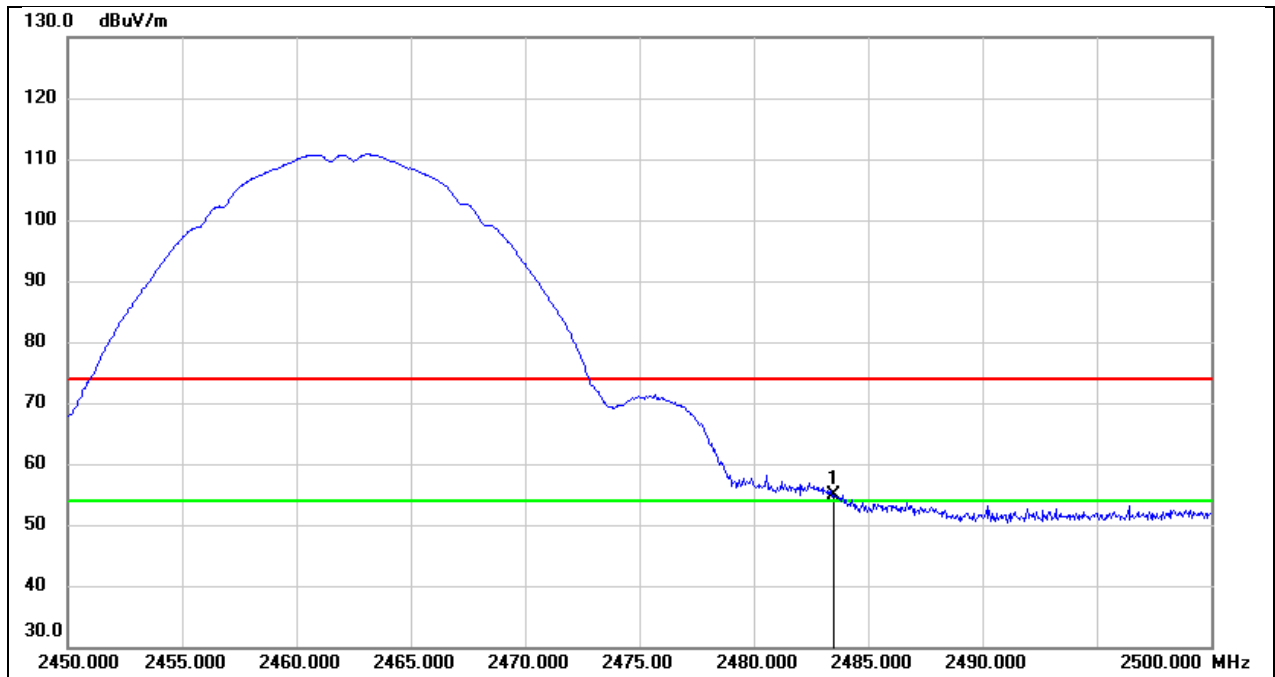


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	43.83	11.16	54.99	74.00	-19.01	peak

Test Mode:	802.11b AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5 V

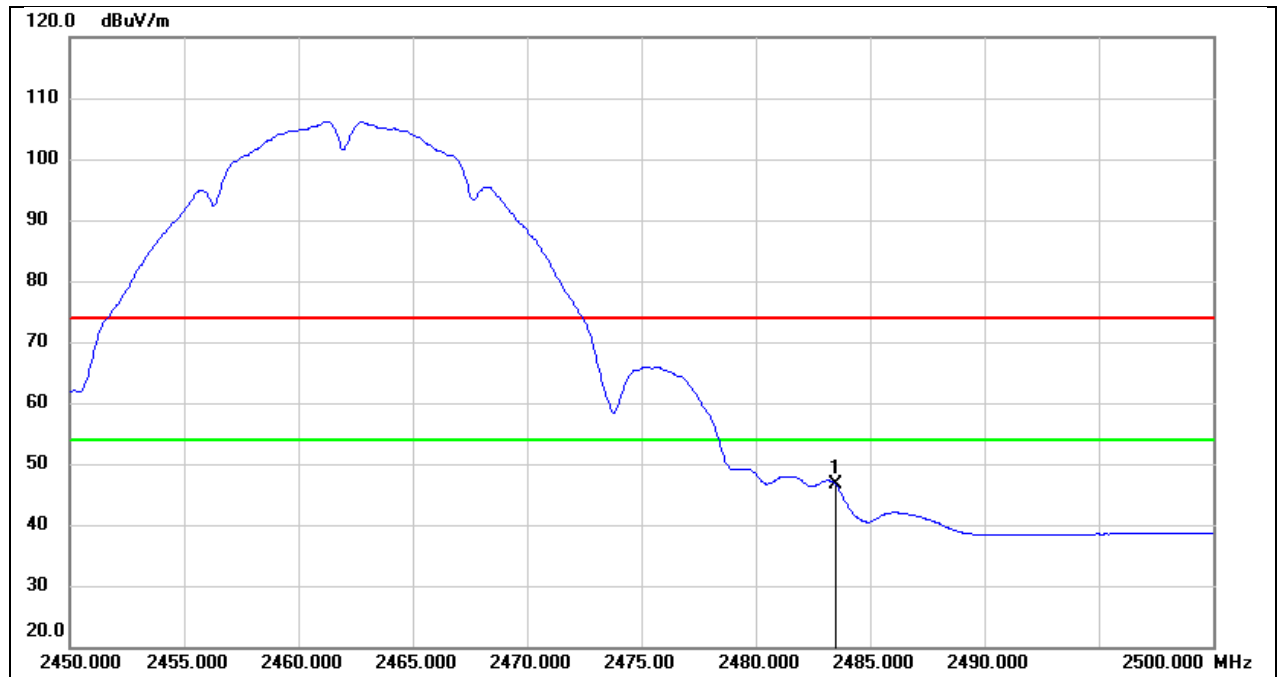


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.40	11.16	46.56	54.00	-7.44	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

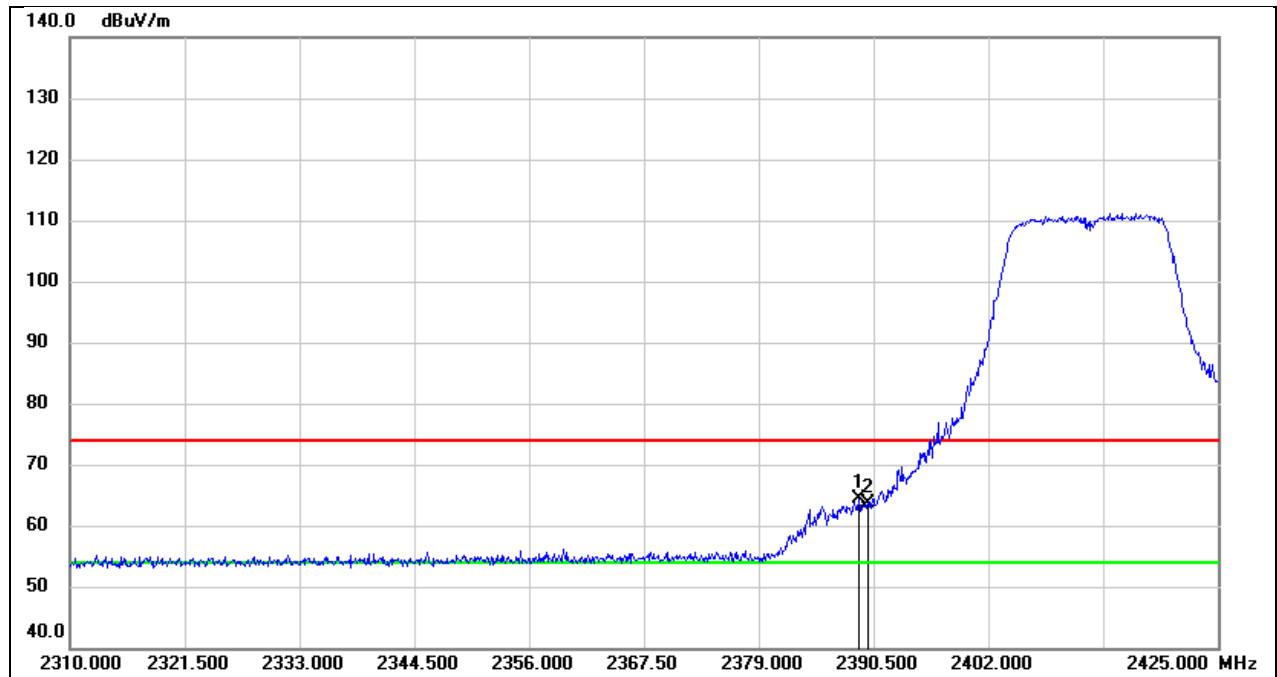


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.005	53.63	10.65	64.28	74.00	-9.72	peak
2	2390.000	52.93	10.67	63.60	74.00	-10.40	peak

Test Mode:	802.11g AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

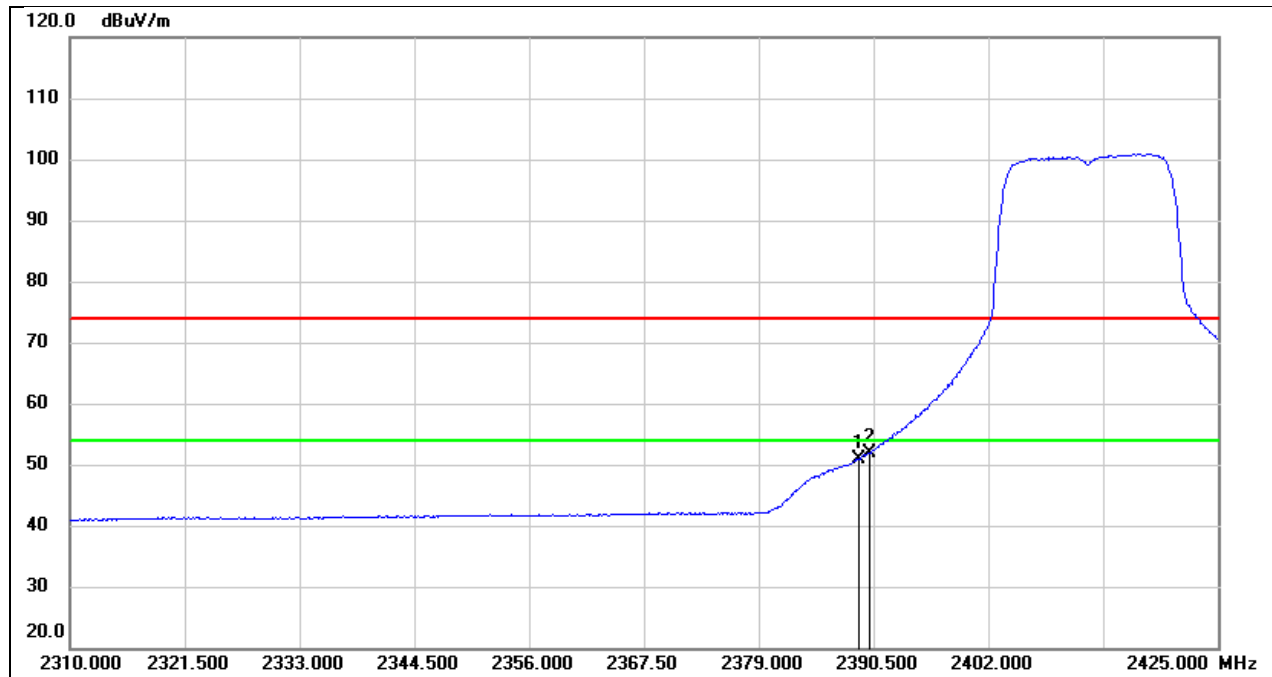


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.005	40.28	10.65	50.93	54.00	-3.07	AVG
2	2390.000	41.14	10.67	51.81	54.00	-2.19	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5 V

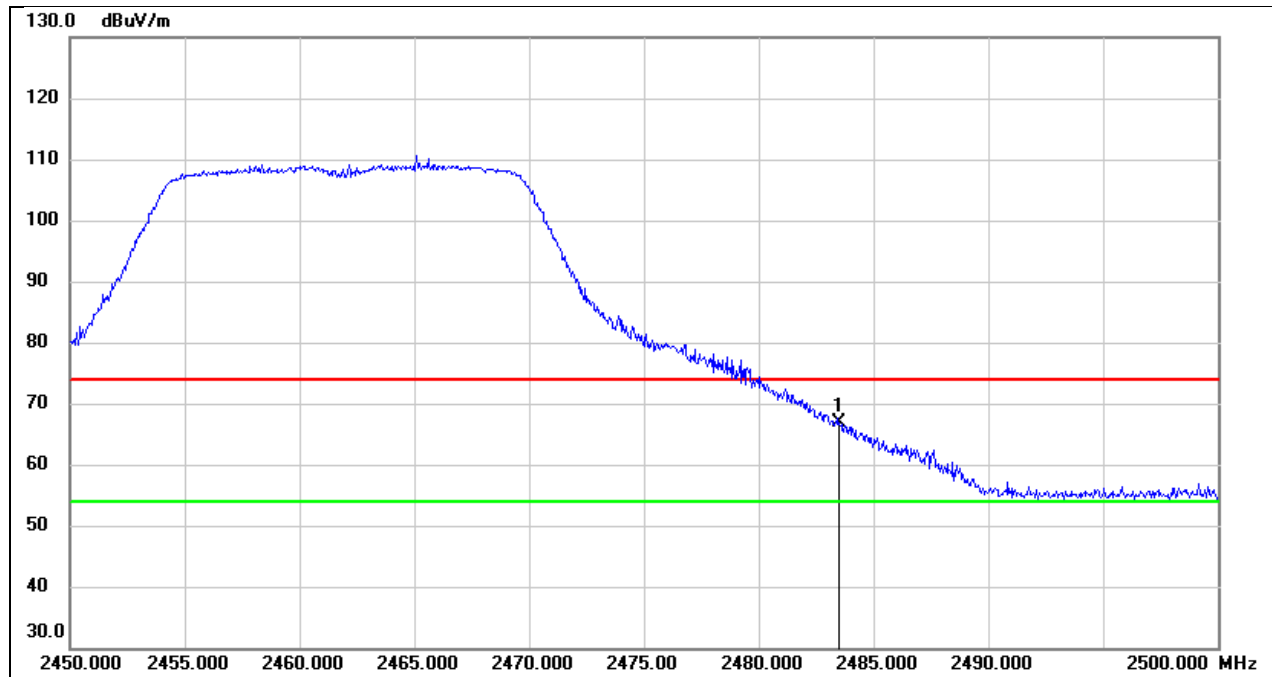


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.75	11.16	66.91	74.00	-7.09	peak

Test Mode:	802.11g AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5 V

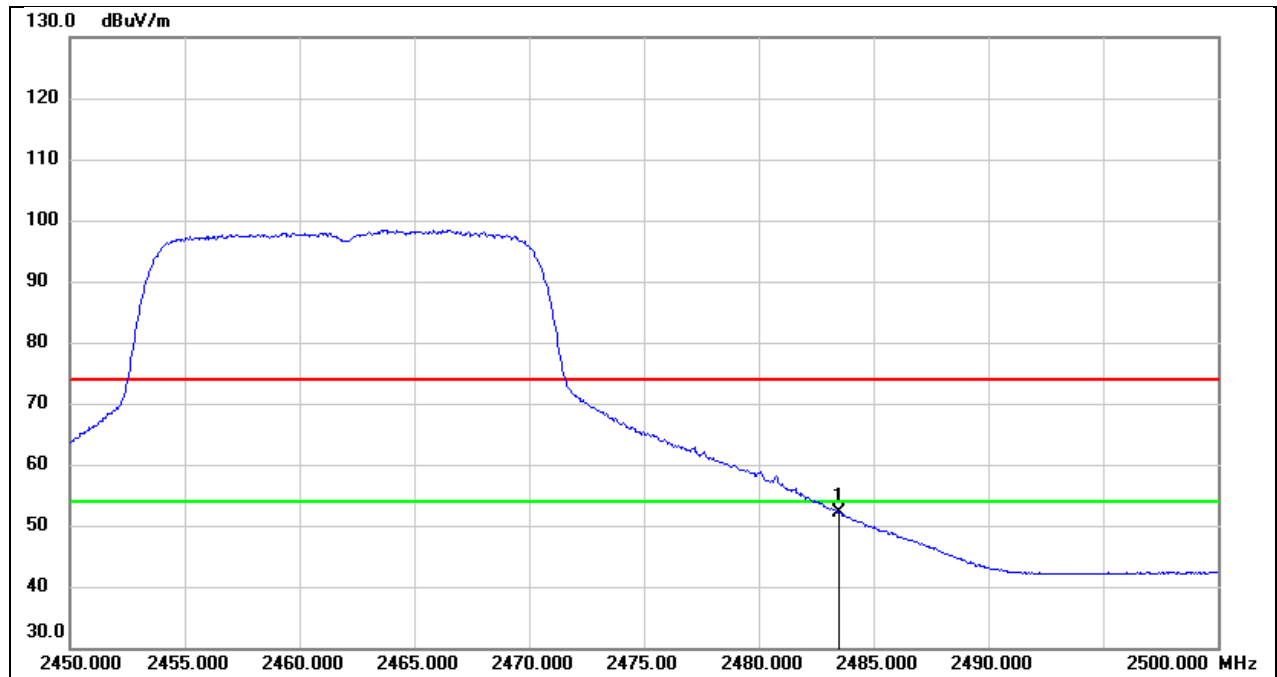


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	40.96	11.16	52.12	54.00	-1.88	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

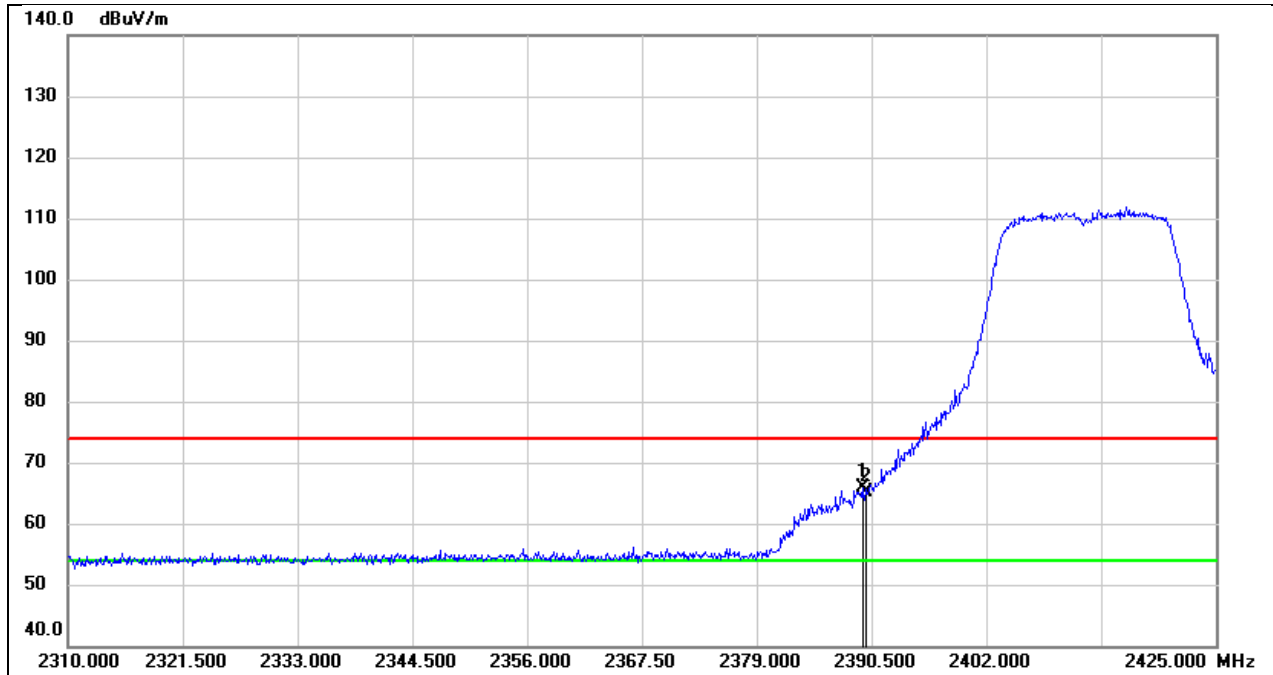


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.580	55.16	10.66	65.82	74.00	-8.18	peak
2	2390.000	54.38	10.67	65.05	74.00	-8.95	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

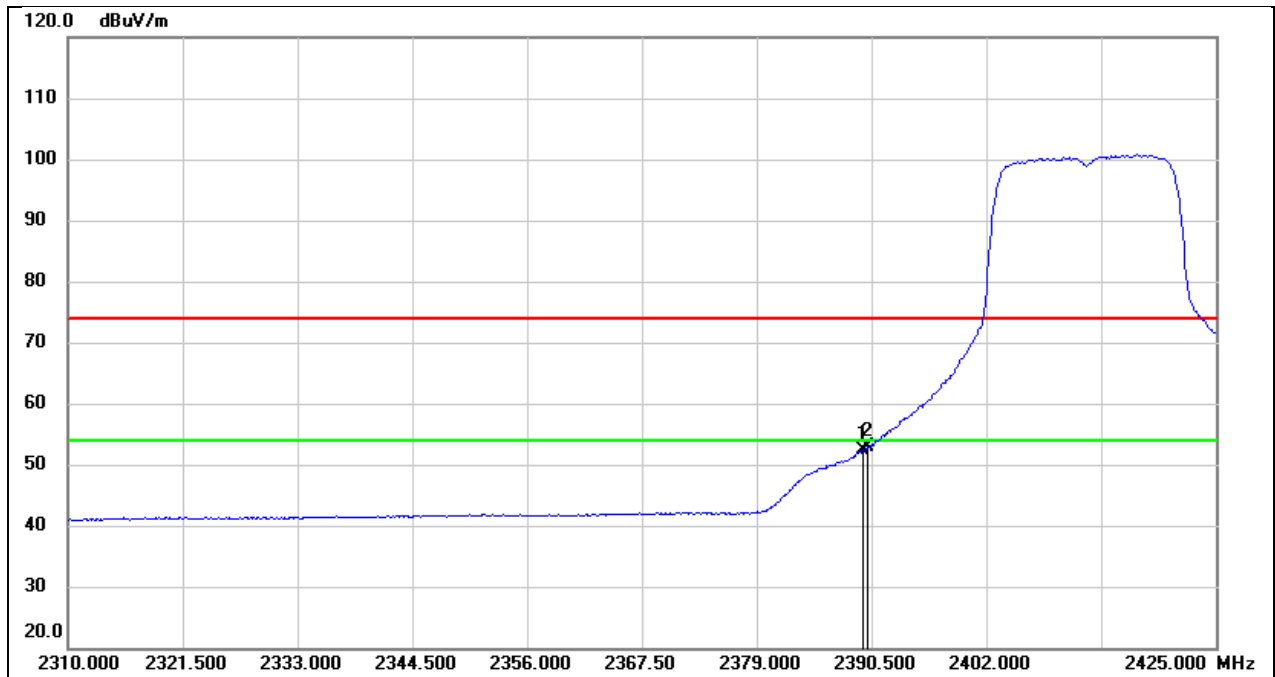


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.580	41.61	10.66	52.27	54.00	-1.73	AVG
2	2390.000	42.09	10.67	52.76	54.00	-1.24	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5 V

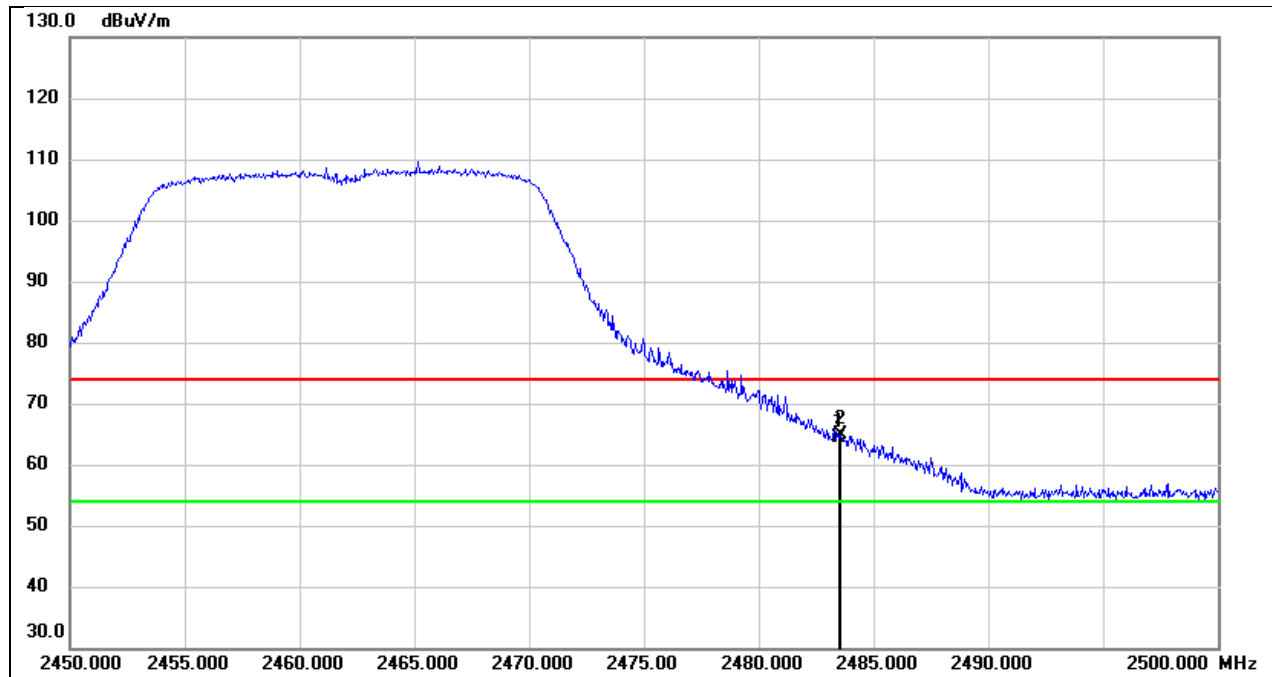

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	53.21	11.16	64.37	74.00	-9.63	peak
2	2483.550	53.72	11.16	64.88	74.00	-9.12	peak


Test Mode:	802.11n HT20 AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5 V

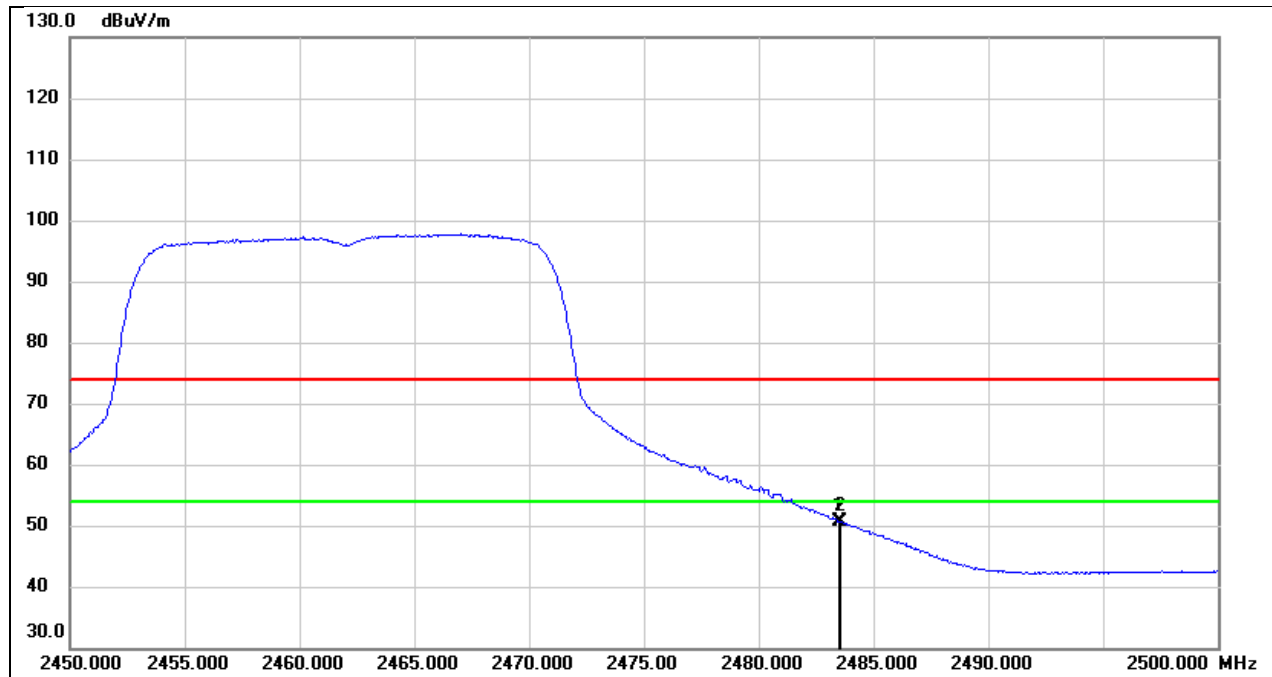

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	39.57	11.16	50.73	54.00	-3.27	AVG
2	2483.550	39.44	11.16	50.60	54.00	-3.40	AVG


8.3. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-ANT1

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

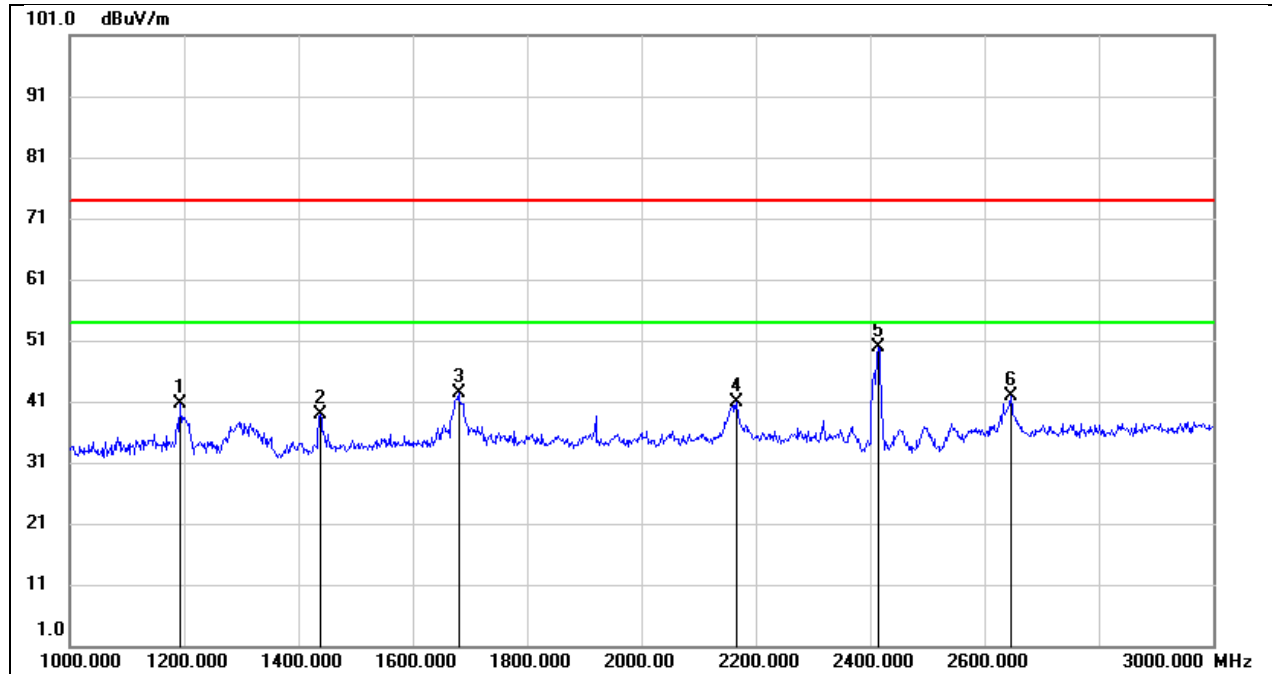


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1192.000	53.76	-13.04	40.72	74.00	-33.28	peak
2	1438.000	50.75	-11.92	38.83	74.00	-35.17	peak
3	1680.000	53.49	-11.02	42.47	74.00	-31.53	peak
4	2166.000	50.47	-9.71	40.76	74.00	-33.24	peak
5	2412.000	58.19	-8.39	49.80	/	/	fundamental
6	2646.000	49.37	-7.37	42.00	74.00	-32.00	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

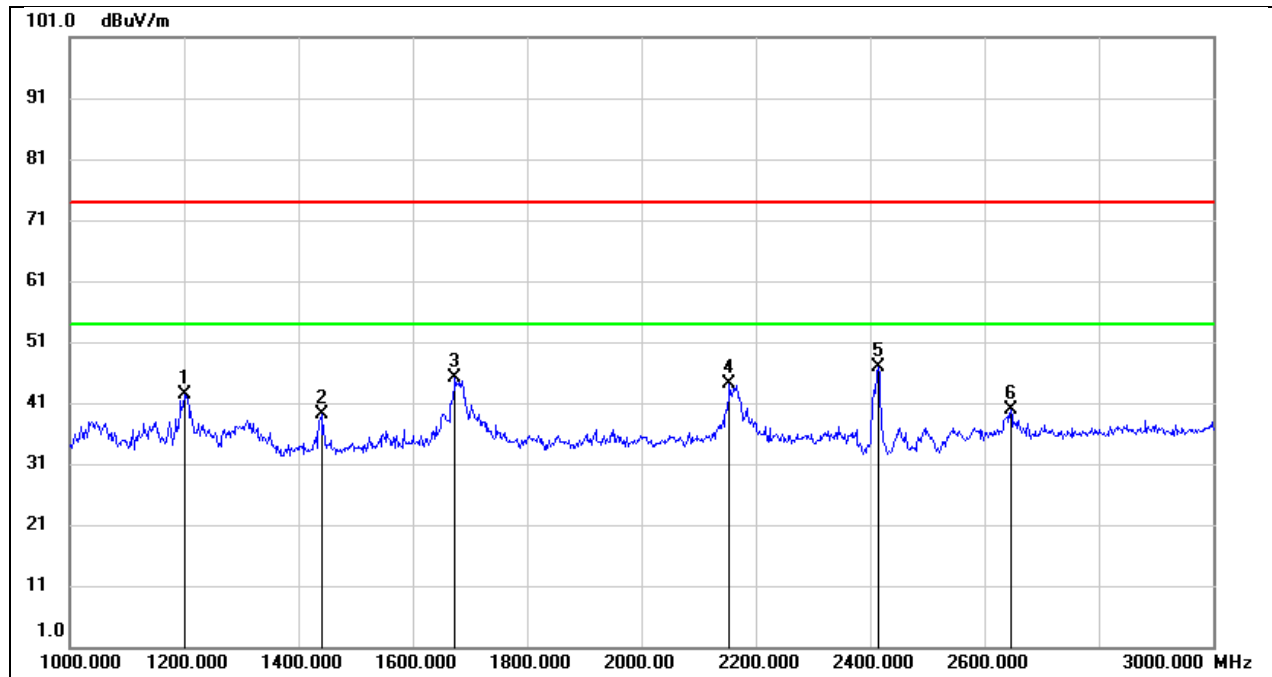


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1200.000	55.33	-13.01	42.32	74.00	-31.68	peak
2	1440.000	51.09	-11.91	39.18	74.00	-34.82	peak
3	1674.000	56.05	-11.04	45.01	74.00	-28.99	peak
4	2154.000	53.83	-9.71	44.12	74.00	-29.88	peak
5	2412.000	55.30	-8.39	46.91	/	/	fundamental
6	2646.000	47.28	-7.37	39.91	74.00	-34.09	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 5 V

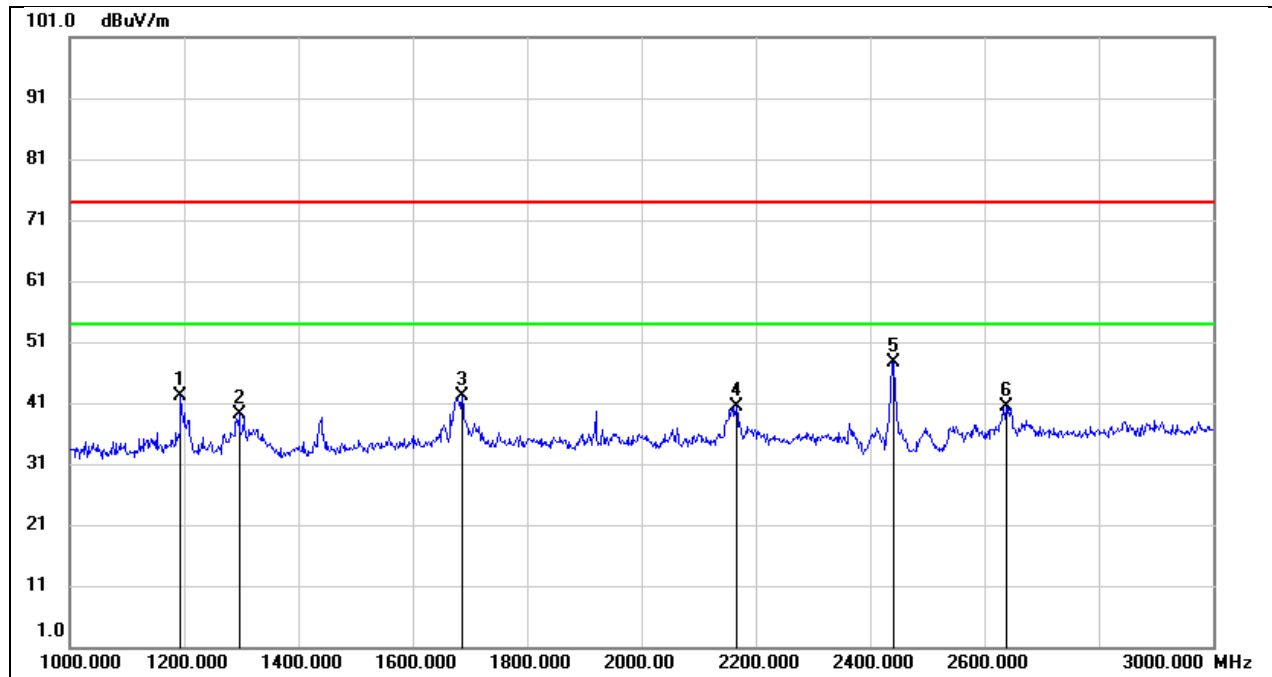


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1194.000	55.17	-13.04	42.13	74.00	-31.87	peak
2	1296.000	51.81	-12.57	39.24	74.00	-34.76	peak
3	1686.000	53.09	-11.00	42.09	74.00	-31.91	peak
4	2166.000	50.18	-9.71	40.47	74.00	-33.53	peak
5	2437.000	55.96	-8.27	47.69	/	/	fundamental
6	2638.000	47.74	-7.40	40.34	74.00	-33.66	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 5 V

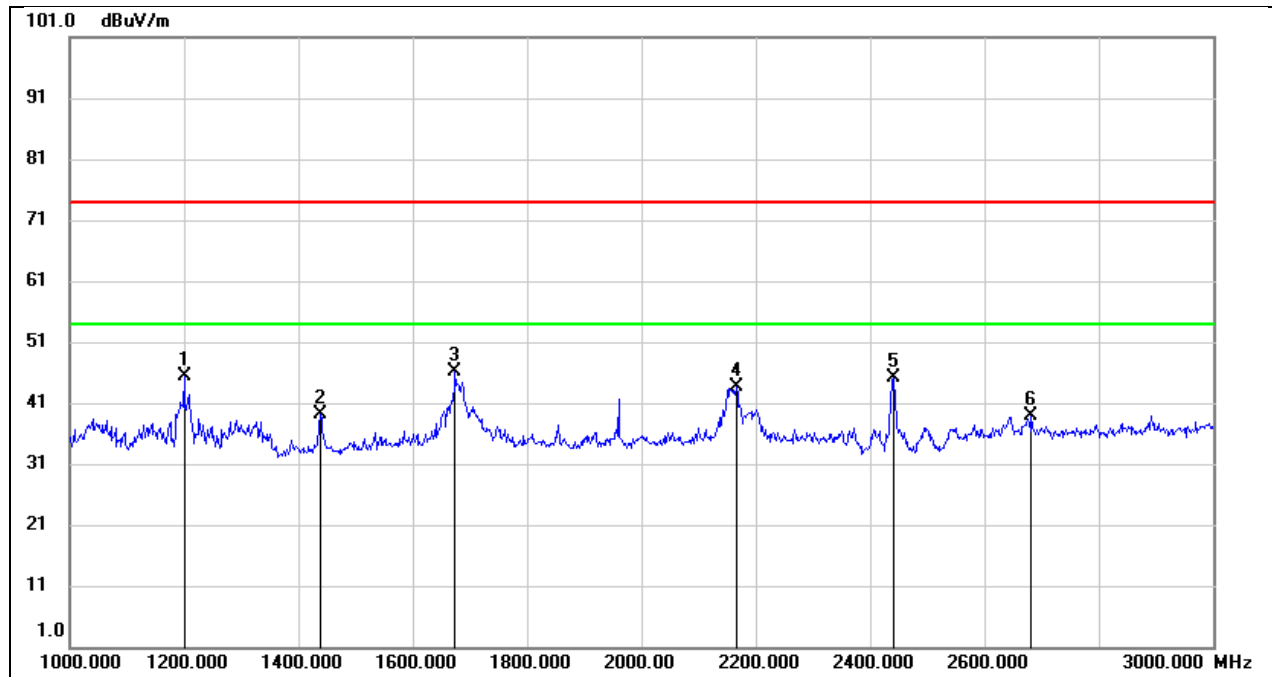


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1200.000	58.34	-13.01	45.33	74.00	-28.67	peak
2	1438.000	51.13	-11.92	39.21	74.00	-34.79	peak
3	1674.000	57.29	-11.04	46.25	74.00	-27.75	peak
4	2166.000	53.24	-9.71	43.53	74.00	-30.47	peak
5	2437.000	53.29	-8.27	45.02	/	/	fundamental
6	2682.000	46.12	-7.24	38.88	74.00	-35.12	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5 V

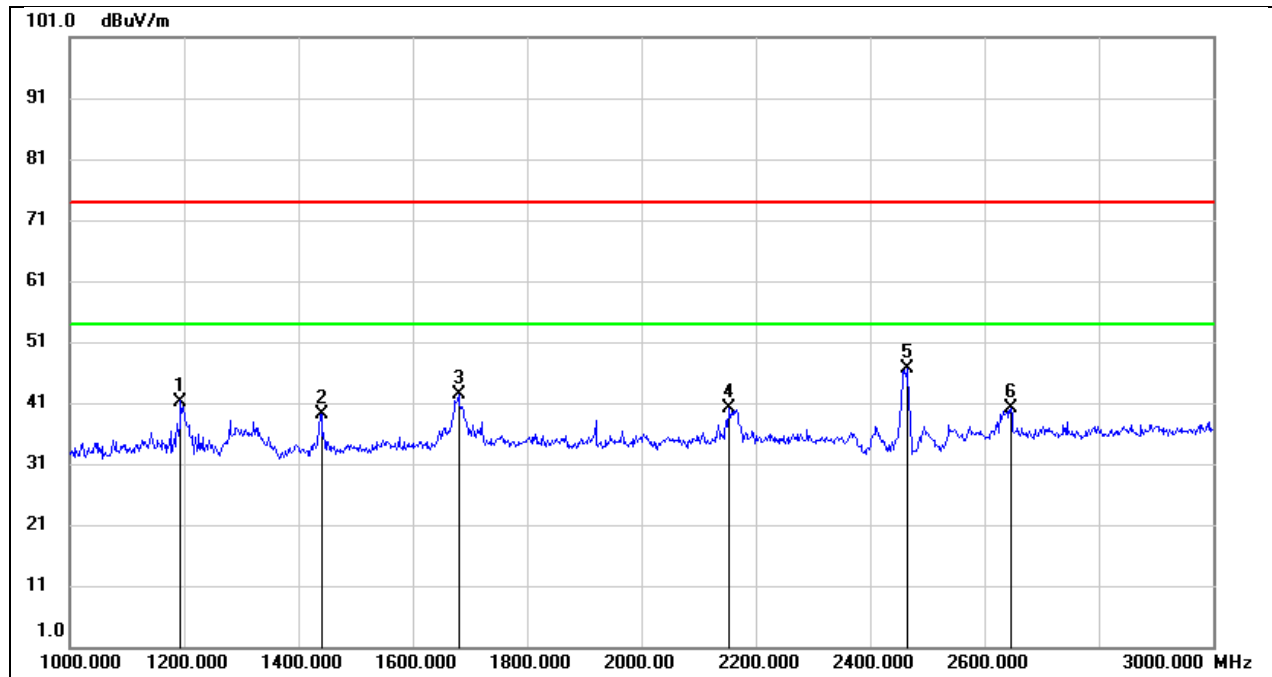

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1194.000	54.29	-13.04	41.25	74.00	-32.75	peak
2	1440.000	51.11	-11.91	39.20	74.00	-34.80	peak
3	1680.000	53.47	-11.02	42.45	74.00	-31.55	peak
4	2154.000	49.72	-9.71	40.01	74.00	-33.99	peak
5	2462.000	54.87	-8.16	46.71	/	/	fundamental
6	2646.000	47.60	-7.37	40.23	74.00	-33.77	peak


Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5 V

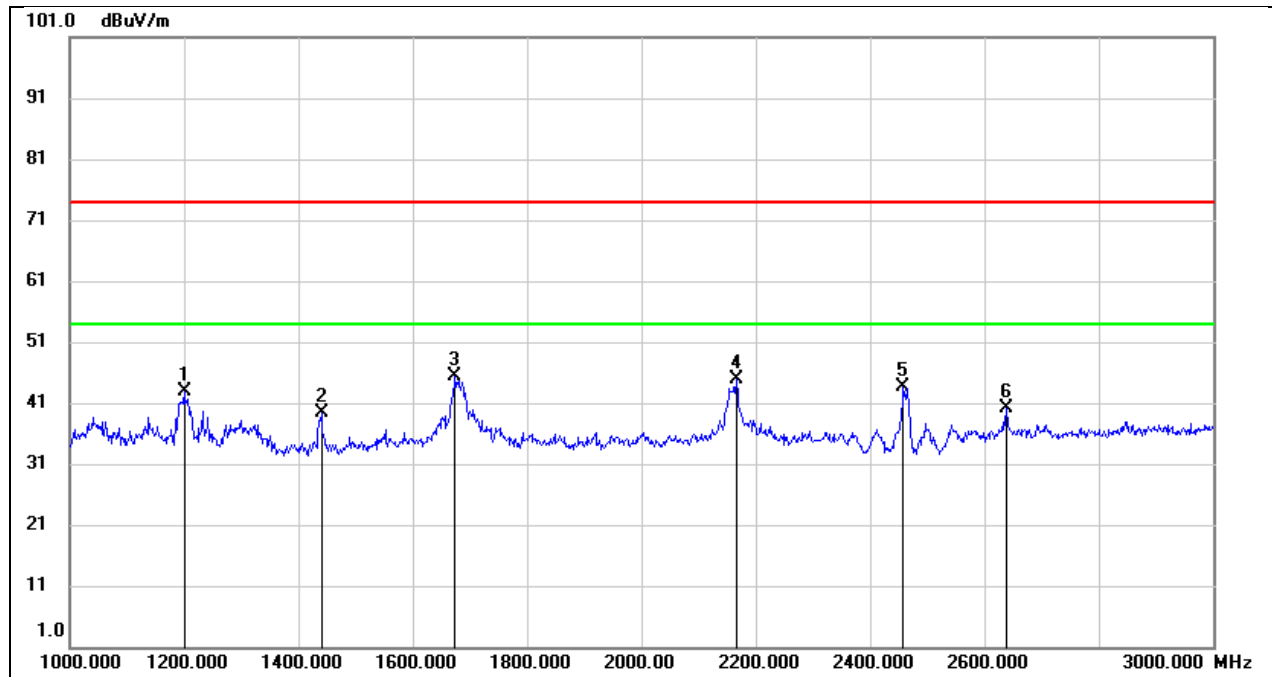

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1200.000	56.01	-13.01	43.00	74.00	-31.00	peak
2	1440.000	51.21	-11.91	39.30	74.00	-34.70	peak
3	1674.000	56.45	-11.04	45.41	74.00	-28.59	peak
4	2166.000	54.65	-9.71	44.94	74.00	-29.06	peak
5	2462.000	51.84	-8.18	43.66	/	/	fundamental
6	2638.000	47.44	-7.40	40.04	74.00	-33.96	peak


8.4. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-ANT2

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

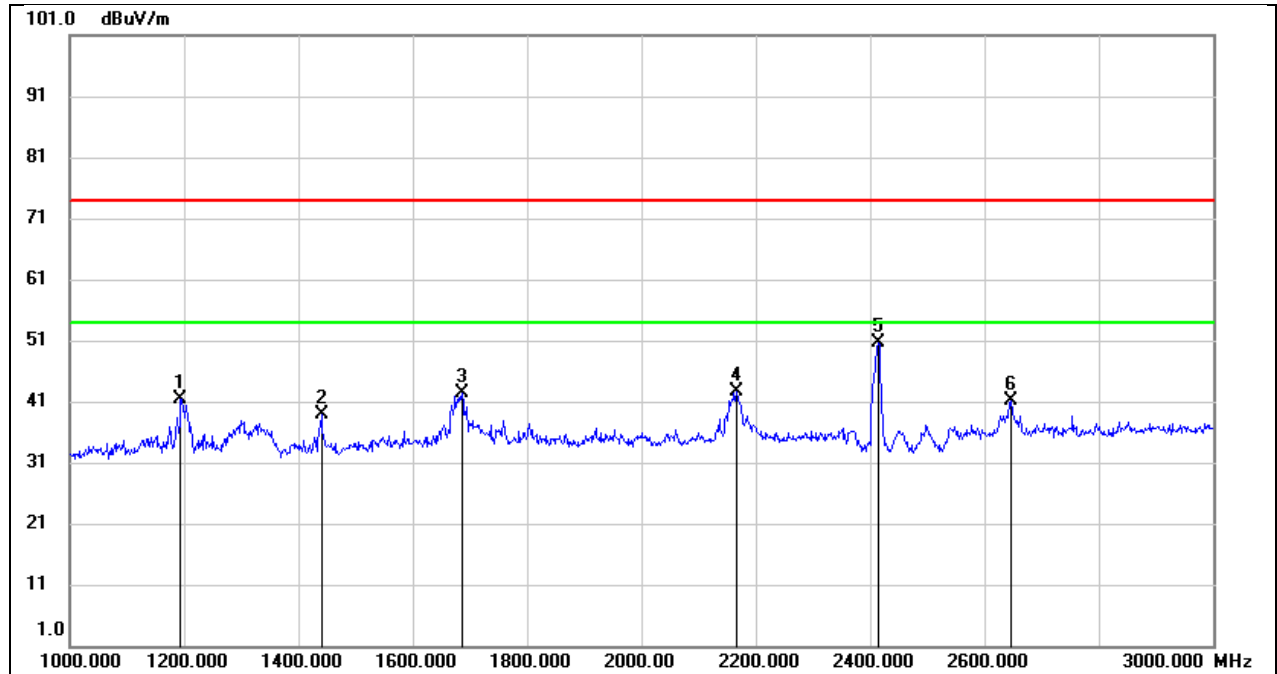


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1194.000	54.40	-13.04	41.36	74.00	-32.64	peak
2	1440.000	50.71	-11.91	38.80	74.00	-35.20	peak
3	1686.000	53.38	-11.00	42.38	74.00	-31.62	peak
4	2166.000	52.26	-9.71	42.55	74.00	-31.45	peak
5	2412.000	59.09	-8.39	50.70	/	/	fundamental
6	2646.000	48.46	-7.37	41.09	74.00	-32.91	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

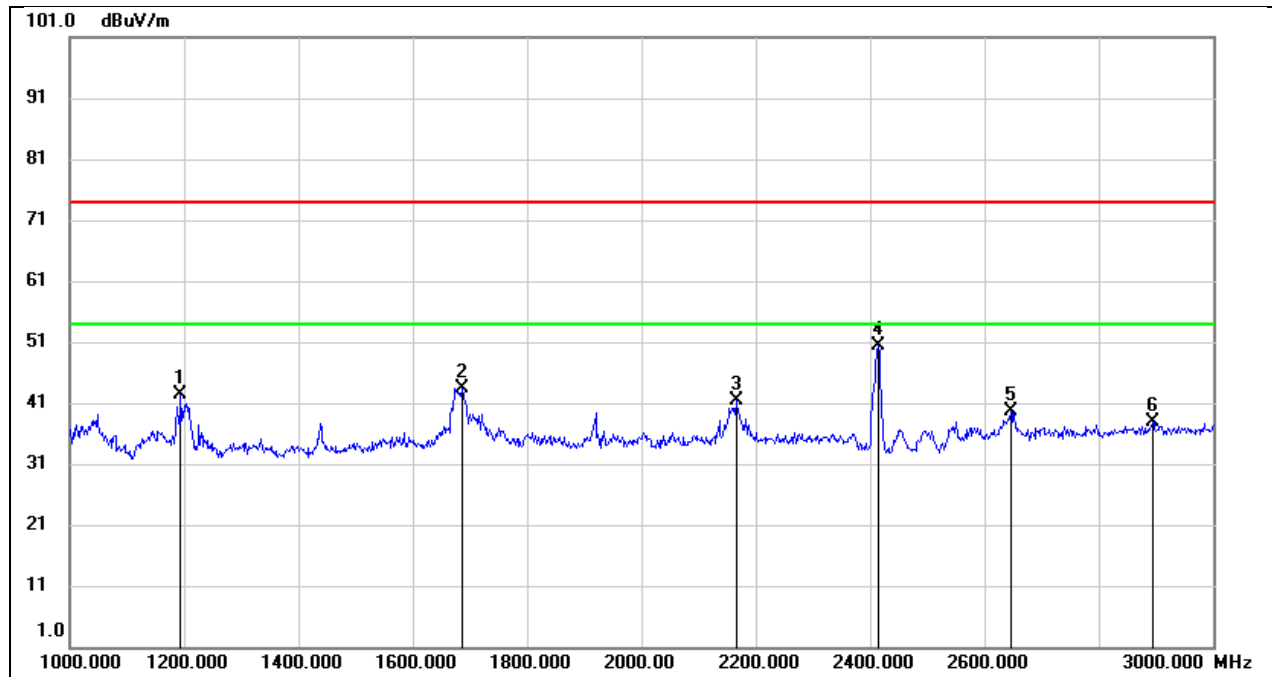


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1194.000	55.40	-13.04	42.36	74.00	-31.64	peak
2	1686.000	54.50	-11.00	43.50	74.00	-30.50	peak
3	2166.000	51.16	-9.71	41.45	74.00	-32.55	peak
4	2412.000	58.85	-8.39	50.46	/	/	fundamental
5	2646.000	46.95	-7.37	39.58	74.00	-34.42	peak
6	2894.000	44.38	-6.44	37.94	74.00	-36.06	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 5 V

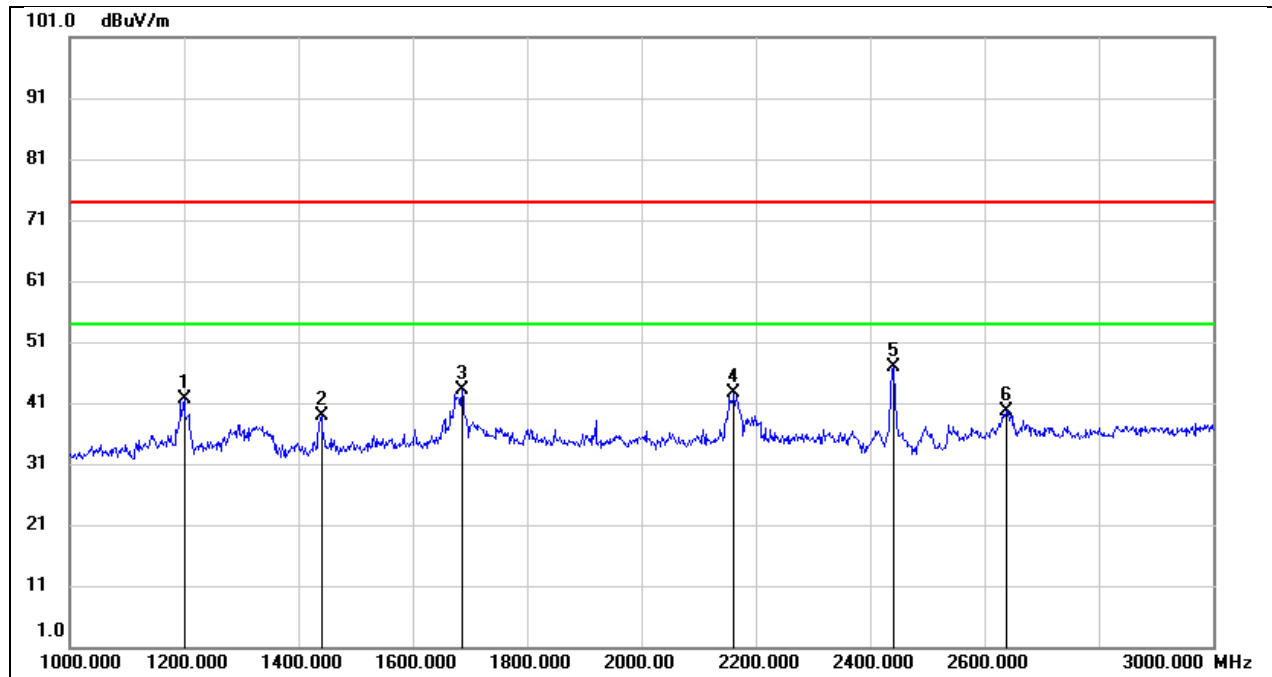


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1200.000	54.68	-13.01	41.67	74.00	-32.33	peak
2	1440.000	50.84	-11.91	38.93	74.00	-35.07	peak
3	1686.000	54.16	-11.00	43.16	74.00	-30.84	peak
4	2162.000	52.40	-9.71	42.69	74.00	-31.31	peak
5	2437.000	55.03	-8.27	46.76	/	/	fundamental
6	2638.000	47.03	-7.40	39.63	74.00	-34.37	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 5 V

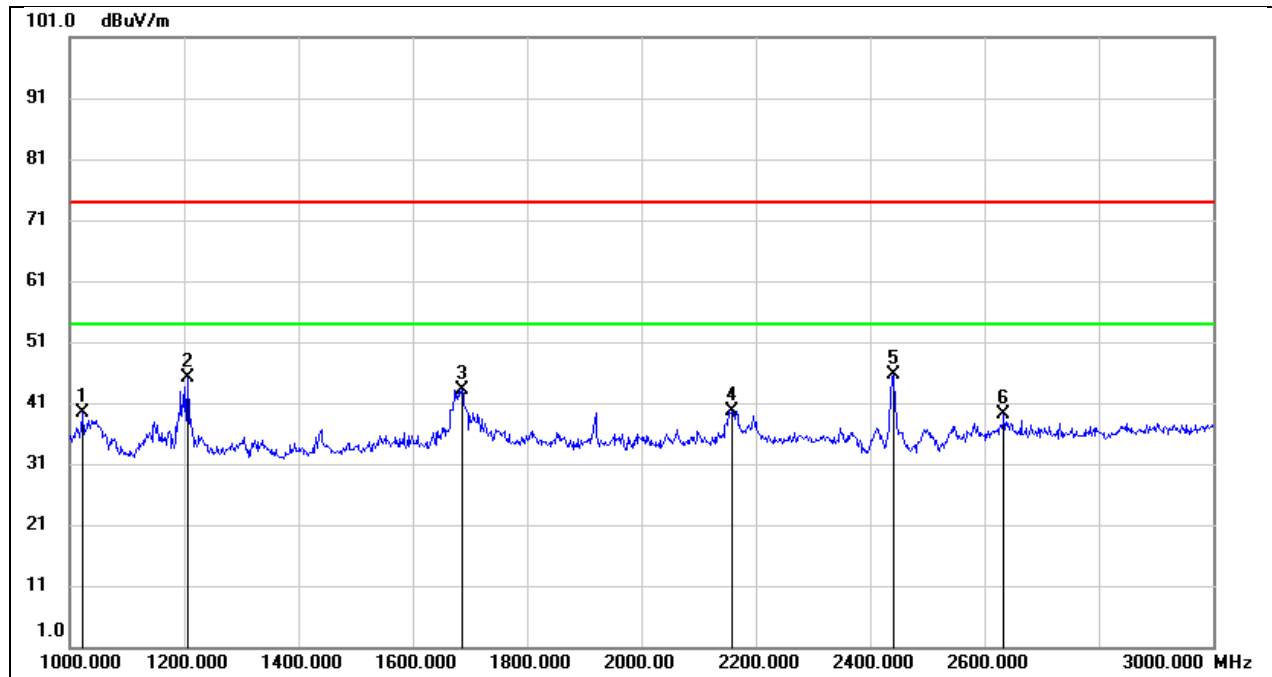


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1022.000	53.15	-13.80	39.35	74.00	-34.65	peak
2	1206.000	58.03	-12.98	45.05	74.00	-28.95	peak
3	1686.000	54.18	-11.00	43.18	74.00	-30.82	peak
4	2158.000	49.45	-9.71	39.74	74.00	-34.26	peak
5	2437.000	53.96	-8.27	45.69	/	/	fundamental
6	2634.000	46.51	-7.41	39.10	74.00	-34.90	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5 V

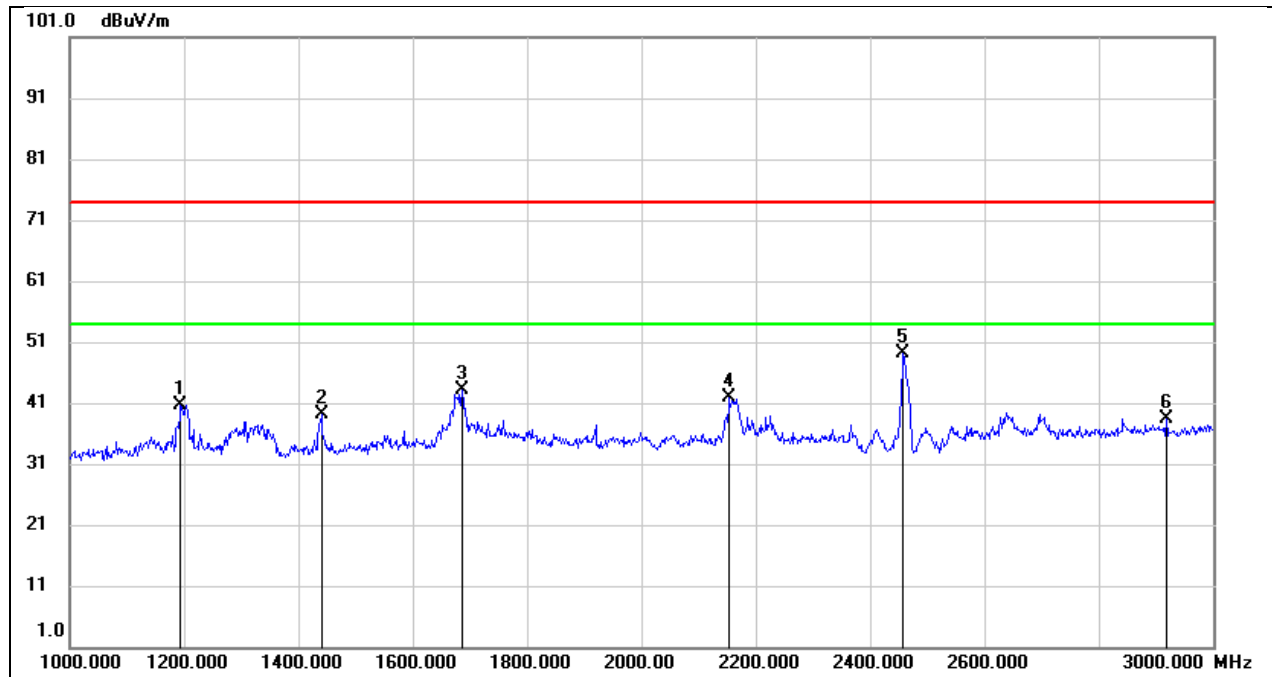

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1194.000	53.77	-13.04	40.73	74.00	-33.27	peak
2	1440.000	51.13	-11.91	39.22	74.00	-34.78	peak
3	1686.000	54.05	-11.00	43.05	74.00	-30.95	peak
4	2154.000	51.67	-9.71	41.96	74.00	-32.04	peak
5	2462.000	57.28	-8.18	49.10	/	/	fundamental
6	2918.000	44.81	-6.35	38.46	74.00	-35.54	peak


Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5 V

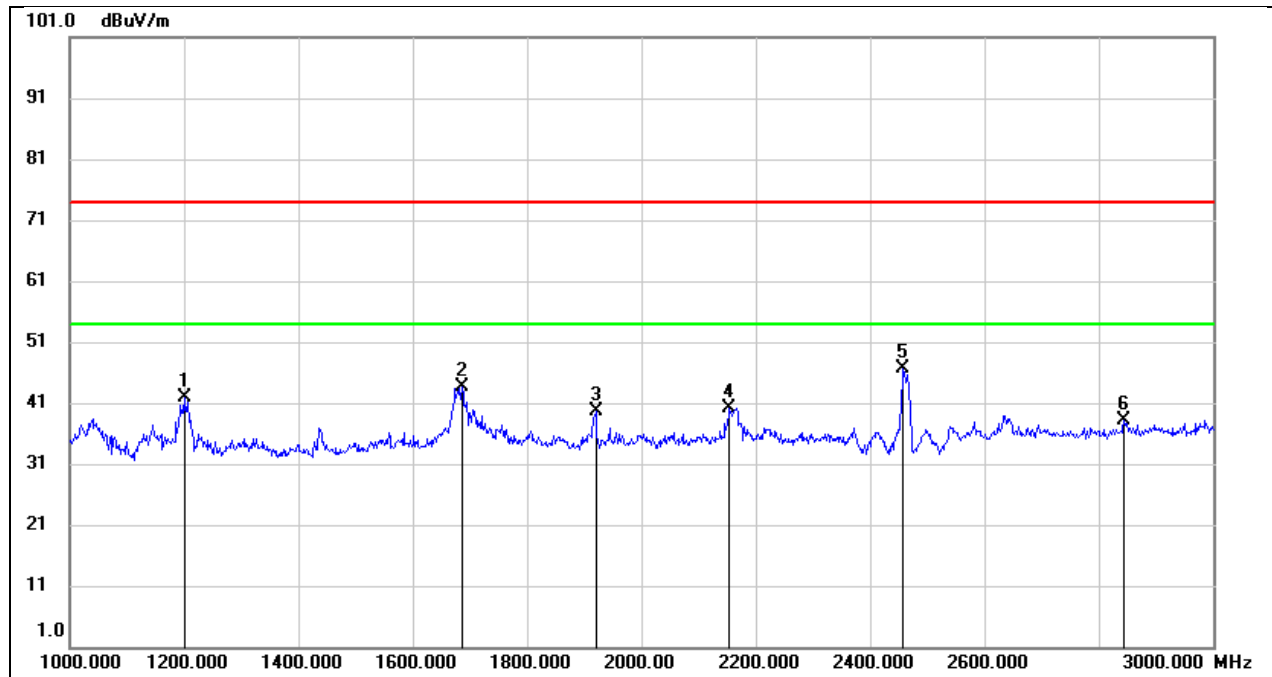

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1200.000	54.86	-13.01	41.85	74.00	-32.15	peak
2	1686.000	54.55	-11.00	43.55	74.00	-30.45	peak
3	1920.000	49.66	-10.06	39.60	74.00	-34.40	peak
4	2154.000	49.86	-9.71	40.15	74.00	-33.85	peak
5	2462.000	54.73	-8.18	46.55	/	/	fundamental
6	2844.000	44.82	-6.64	38.18	74.00	-35.82	peak


8.5. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)-ANT1

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

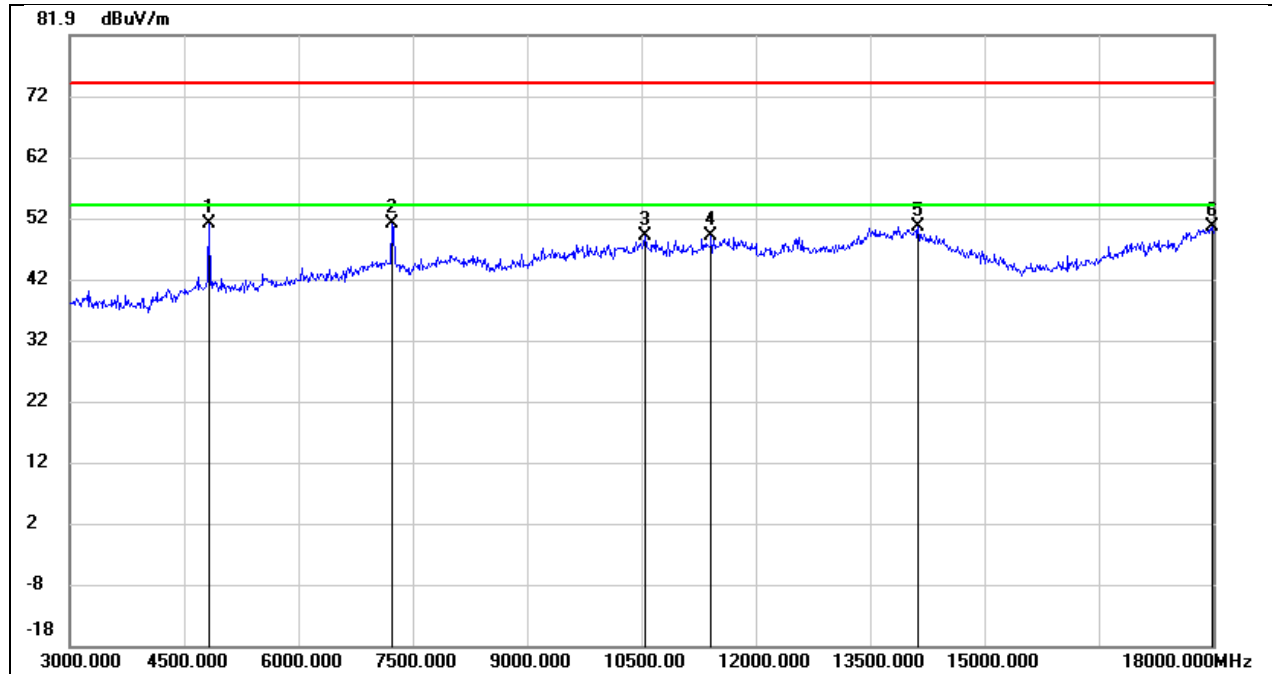


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	50.84	0.26	51.10	74.00	-22.90	peak
2	7230.000	44.32	6.72	51.04	74.00	-22.96	peak
3	10545.000	34.85	14.16	49.01	74.00	-24.99	peak
4	11415.000	32.40	16.55	48.95	74.00	-25.05	peak
5	14130.000	27.30	23.30	50.60	74.00	-23.40	peak
6	17985.000	22.68	27.88	50.56	74.00	-23.44	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

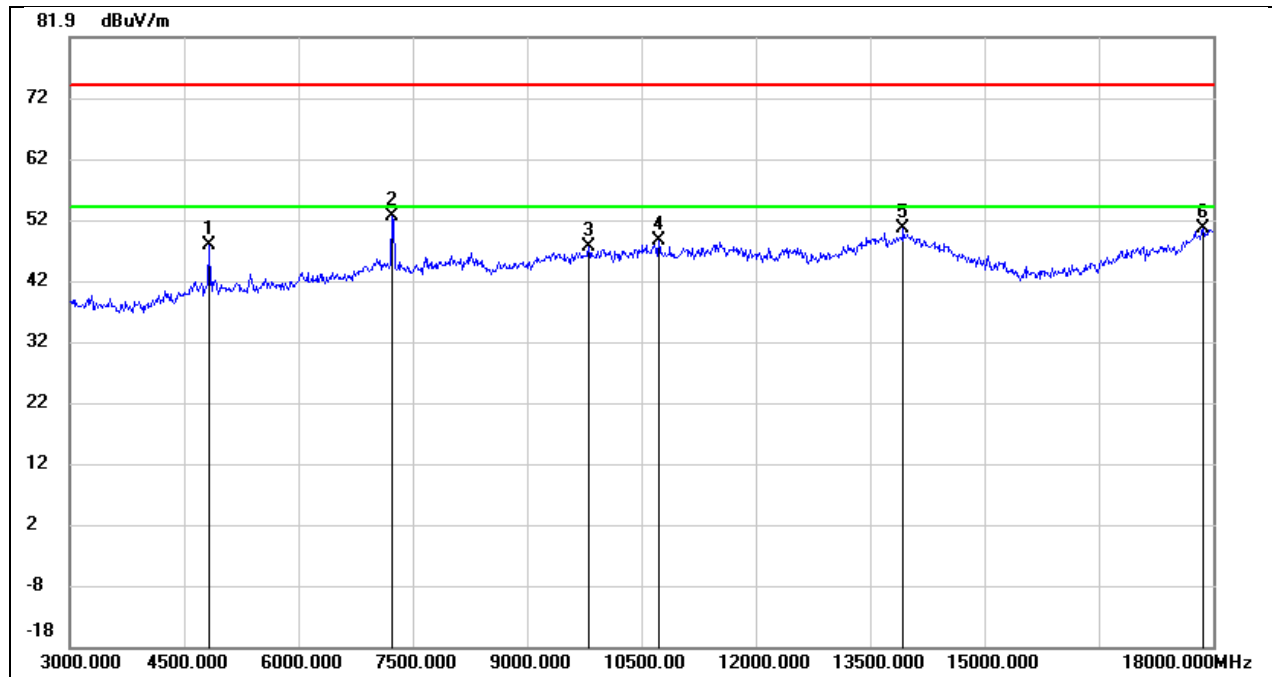


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	47.48	0.26	47.74	74.00	-26.26	peak
2	7230.000	45.69	6.72	52.41	74.00	-21.59	peak
3	9810.000	35.27	12.26	47.53	74.00	-26.47	peak
4	10725.000	33.91	14.66	48.57	74.00	-25.43	peak
5	13935.000	26.63	23.81	50.44	74.00	-23.56	peak
6	17865.000	23.38	27.13	50.51	74.00	-23.49	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 5 V

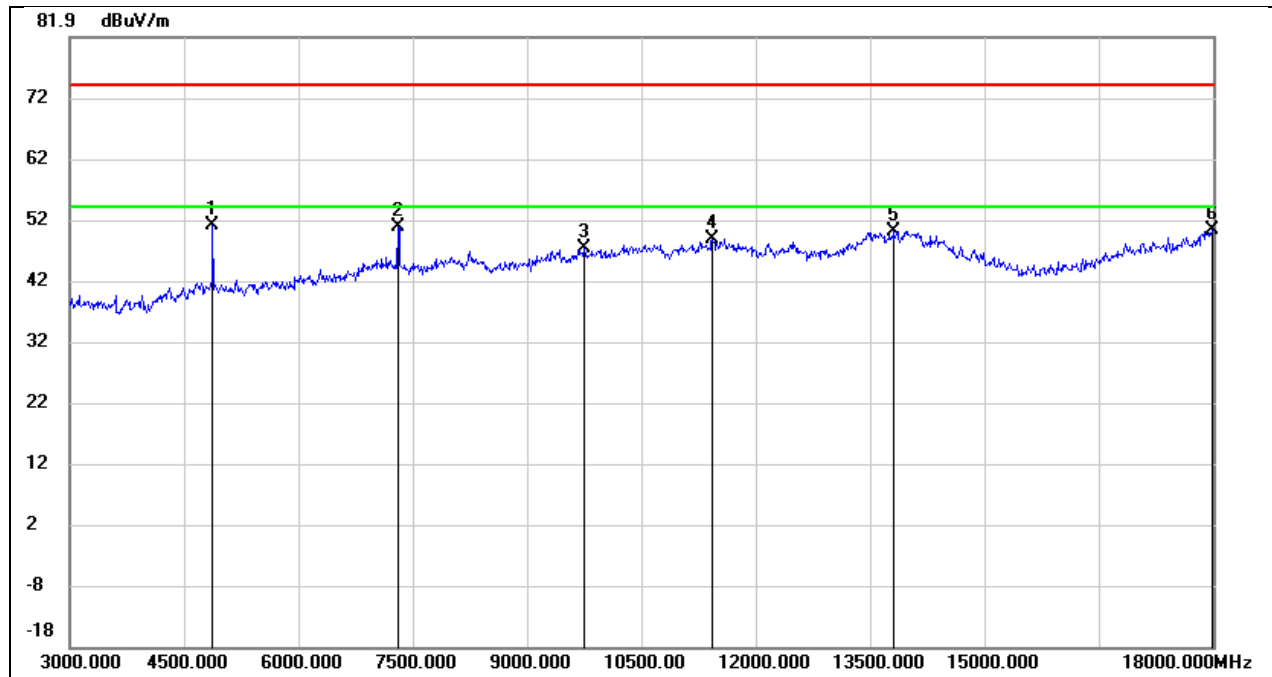


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	50.68	0.35	51.03	74.00	-22.97	peak
2	7305.000	44.23	6.65	50.88	74.00	-23.12	peak
3	9750.000	35.22	12.03	47.25	74.00	-26.75	peak
4	11430.000	32.14	16.60	48.74	74.00	-25.26	peak
5	13815.000	26.77	23.35	50.12	74.00	-23.88	peak
6	17985.000	22.50	27.88	50.38	74.00	-23.62	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 5 V

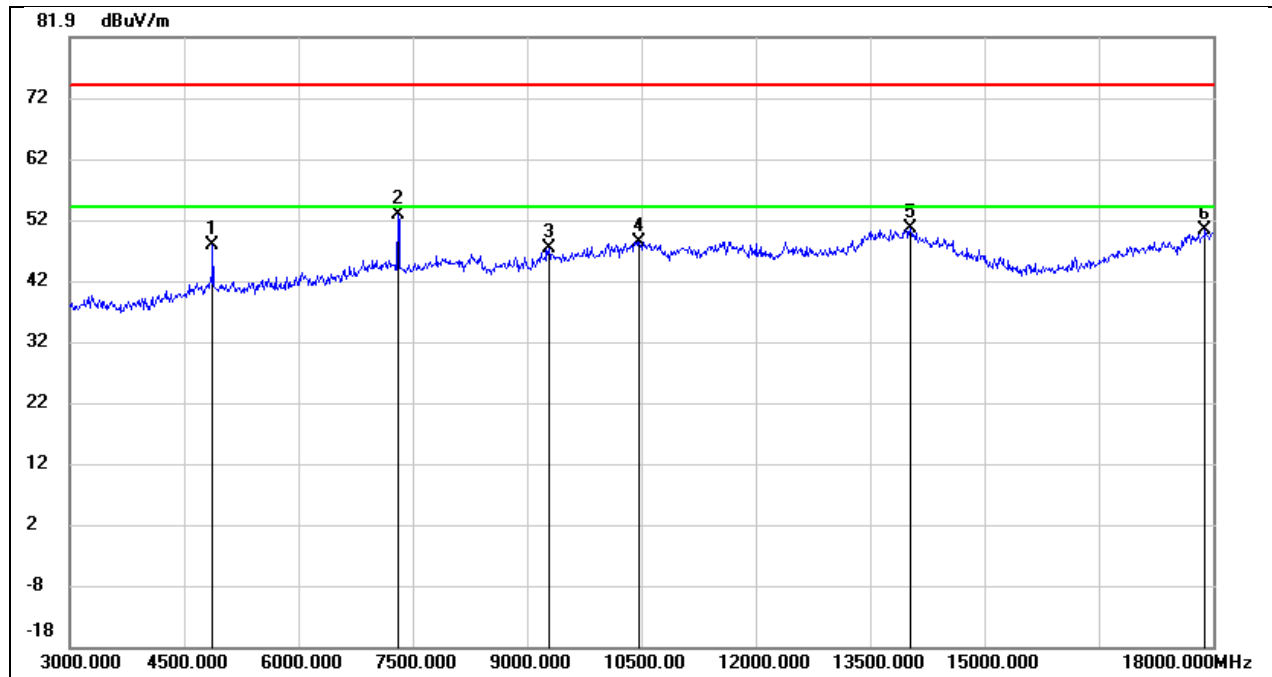


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	47.44	0.35	47.79	74.00	-26.21	peak
2	7305.000	46.16	6.65	52.81	74.00	-21.19	peak
3	9285.000	36.79	10.39	47.18	74.00	-26.82	peak
4	10470.000	34.43	13.96	48.39	74.00	-25.61	peak
5	14025.000	26.60	23.92	50.52	74.00	-23.48	peak
6	17895.000	23.01	27.32	50.33	74.00	-23.67	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5 V

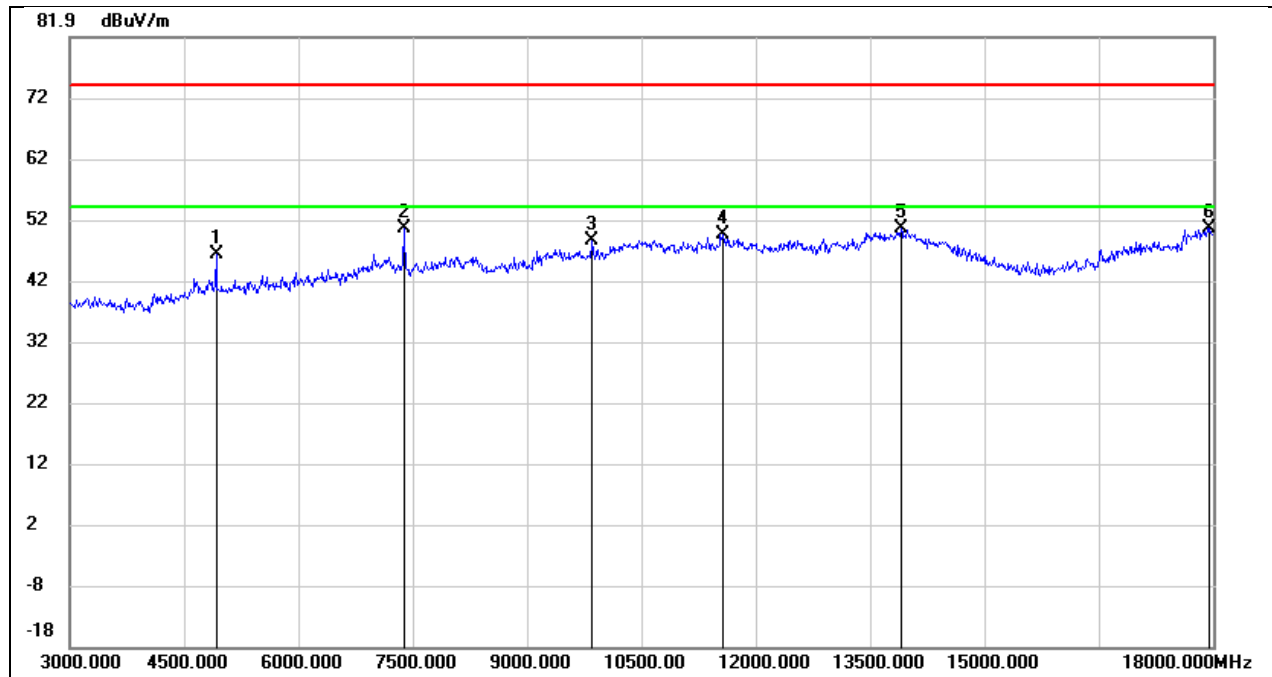


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	45.75	0.45	46.20	74.00	-27.80	peak
2	7380.000	43.98	6.59	50.57	74.00	-23.43	peak
3	9855.000	36.30	12.33	48.63	74.00	-25.37	peak
4	11565.000	32.54	17.03	49.57	74.00	-24.43	peak
5	13905.000	26.79	23.69	50.48	74.00	-23.52	peak
6	17955.000	22.93	27.69	50.62	74.00	-23.38	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5 V

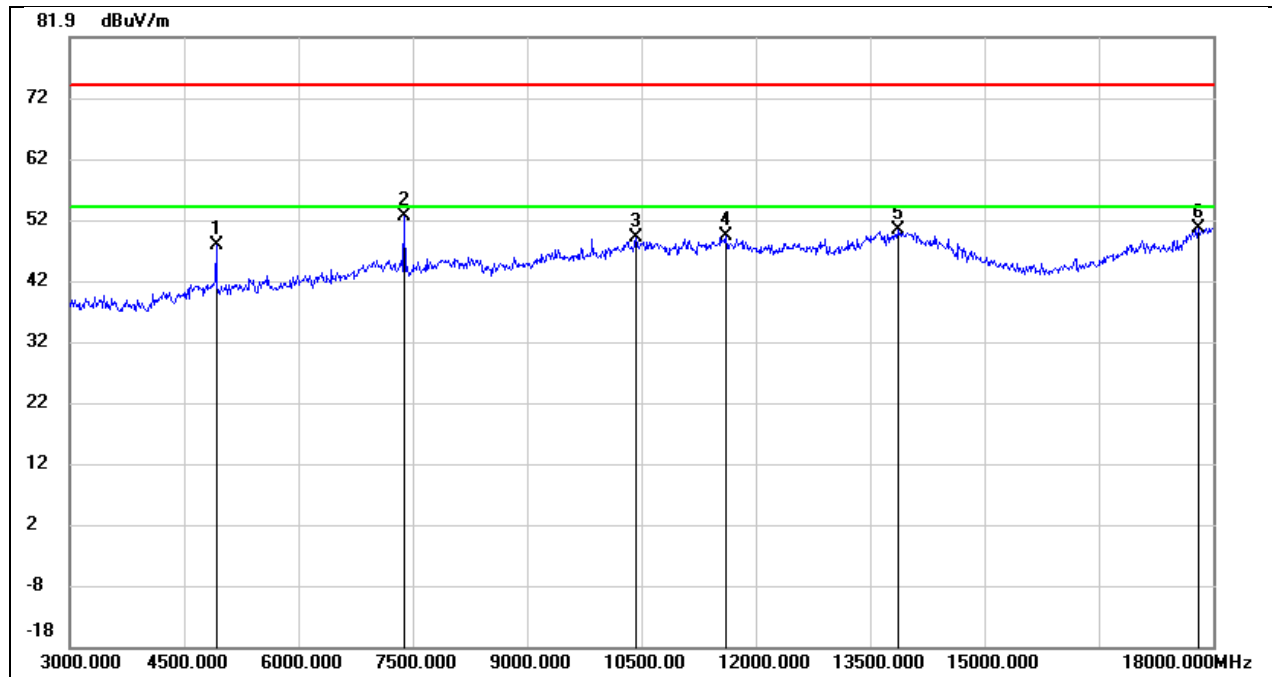


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	47.36	0.45	47.81	74.00	-26.19	peak
2	7380.000	45.84	6.59	52.43	74.00	-21.57	peak
3	10425.000	35.32	13.83	49.15	74.00	-24.85	peak
4	11610.000	32.20	17.18	49.38	74.00	-24.62	peak
5	13860.000	26.73	23.52	50.25	74.00	-23.75	peak
6	17805.000	23.81	26.75	50.56	74.00	-23.44	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

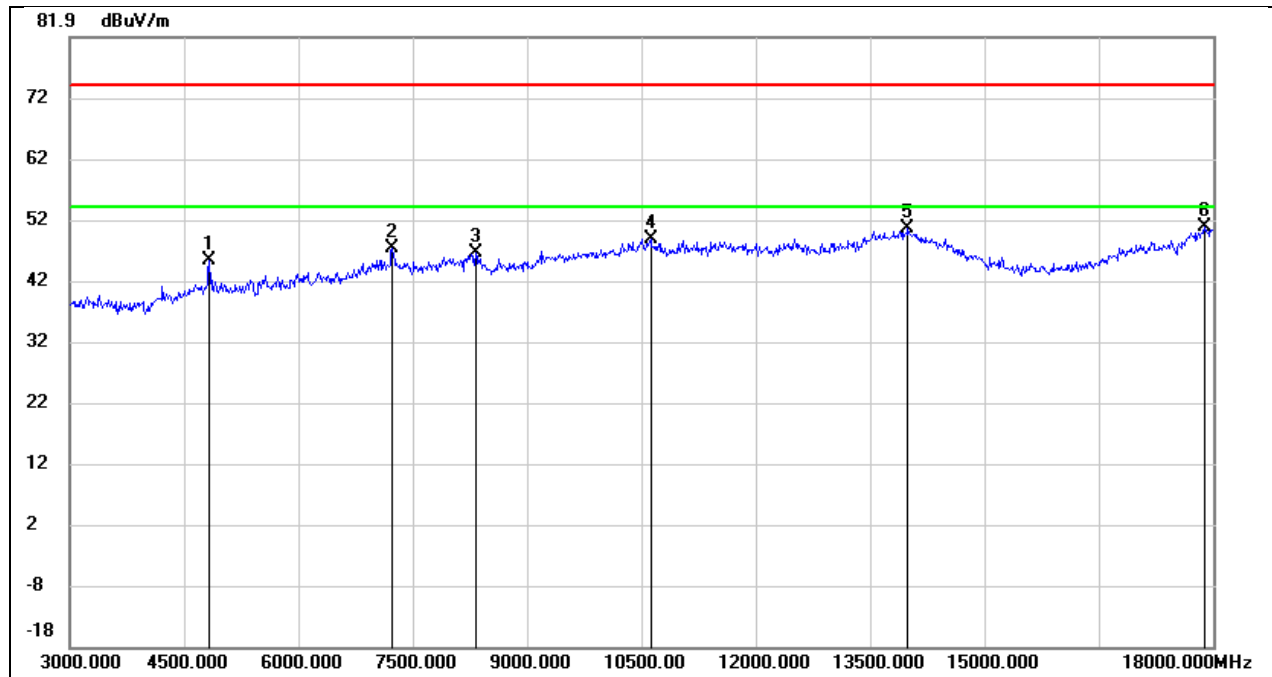


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	45.07	0.26	45.33	74.00	-28.67	peak
2	7230.000	40.67	6.72	47.39	74.00	-26.61	peak
3	8325.000	38.30	8.13	46.43	74.00	-27.57	peak
4	10620.000	34.50	14.36	48.86	74.00	-25.14	peak
5	13995.000	26.38	24.04	50.42	74.00	-23.58	peak
6	17880.000	23.58	27.23	50.81	74.00	-23.19	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

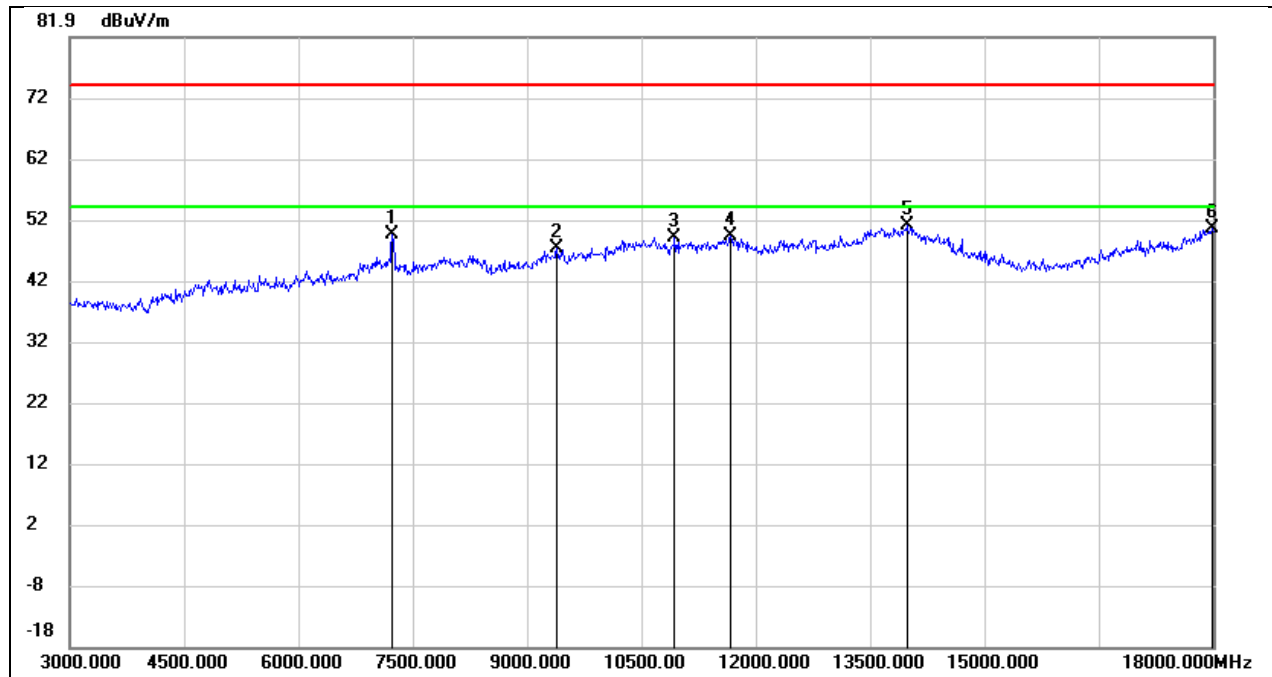


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7230.000	42.82	6.72	49.54	74.00	-24.46	peak
2	9390.000	36.51	10.73	47.24	74.00	-26.76	peak
3	10935.000	33.78	15.20	48.98	74.00	-25.02	peak
4	11670.000	31.82	17.36	49.18	74.00	-24.82	peak
5	13980.000	27.06	23.98	51.04	74.00	-22.96	peak
6	17985.000	22.75	27.88	50.63	74.00	-23.37	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 5 V

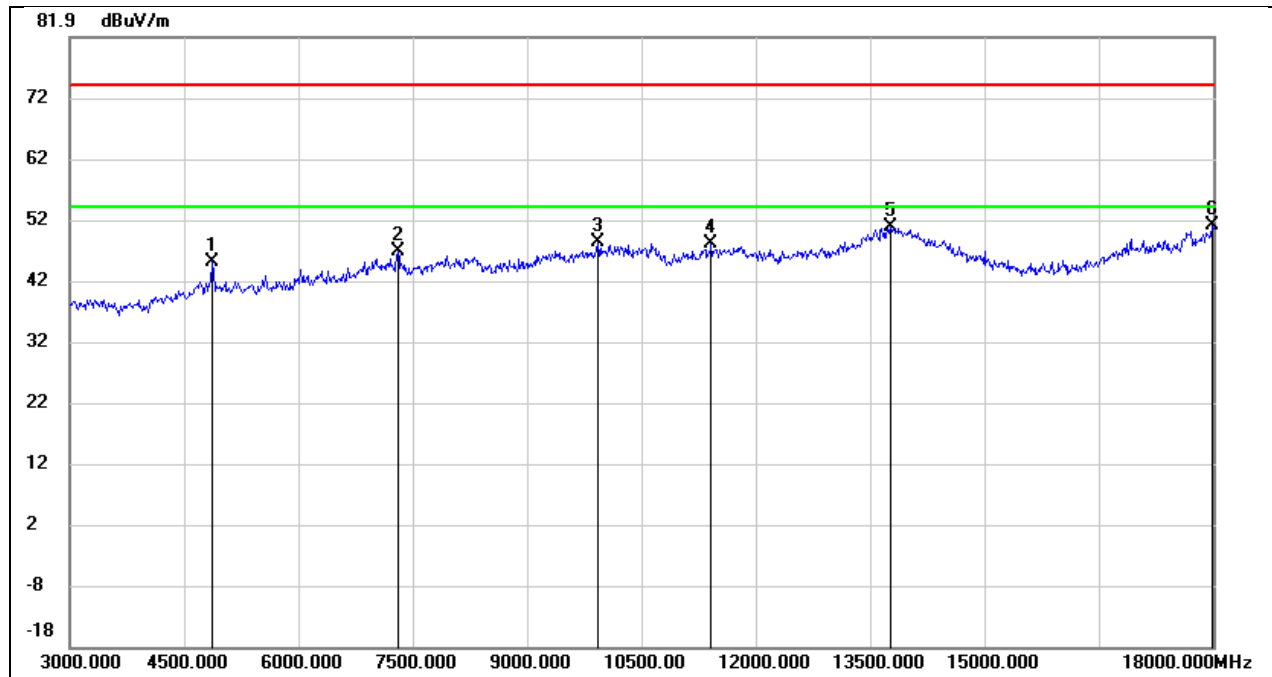


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.69	0.35	45.04	74.00	-28.96	peak
2	7305.000	40.03	6.65	46.68	74.00	-27.32	peak
3	9930.000	35.83	12.45	48.28	74.00	-25.72	peak
4	11415.000	31.41	16.55	47.96	74.00	-26.04	peak
5	13770.000	27.47	23.22	50.69	74.00	-23.31	peak
6	17985.000	23.06	27.88	50.94	74.00	-23.06	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 5 V

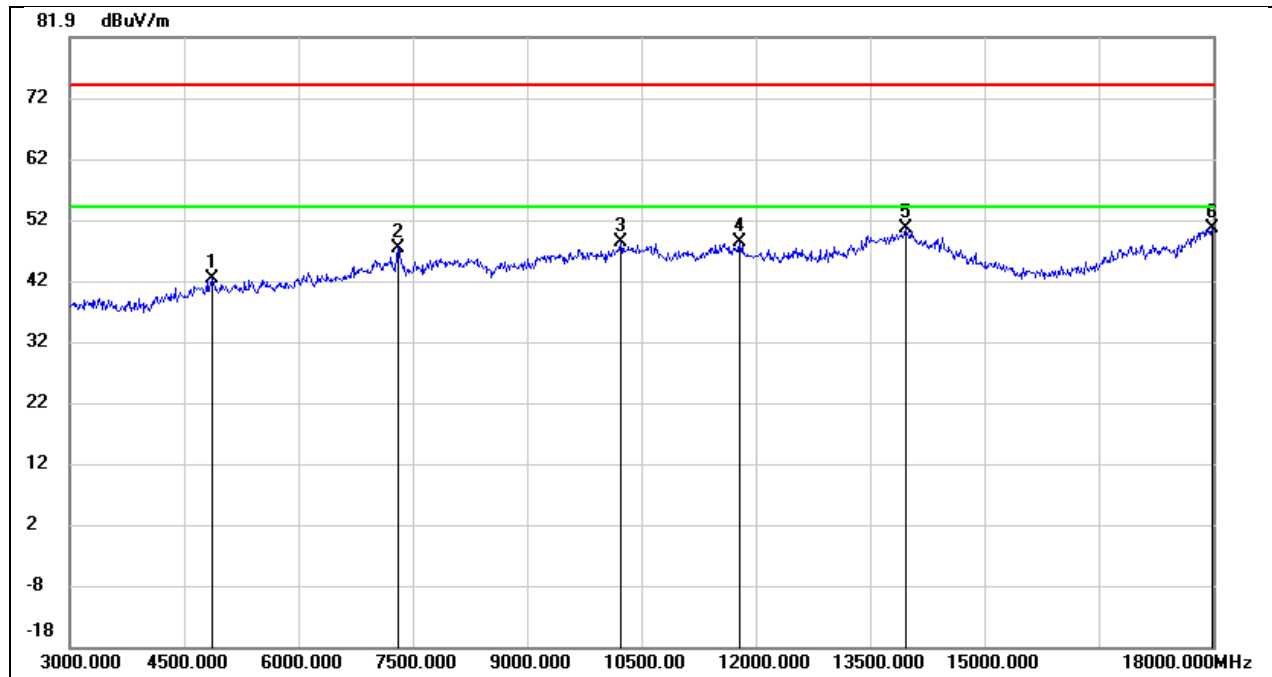


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	41.92	0.35	42.27	74.00	-31.73	peak
2	7305.000	40.58	6.65	47.23	74.00	-26.77	peak
3	10230.000	34.96	13.34	48.30	74.00	-25.70	peak
4	11790.000	30.52	17.71	48.23	74.00	-25.77	peak
5	13965.000	26.65	23.93	50.58	74.00	-23.42	peak
6	17985.000	22.66	27.88	50.54	74.00	-23.46	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5 V

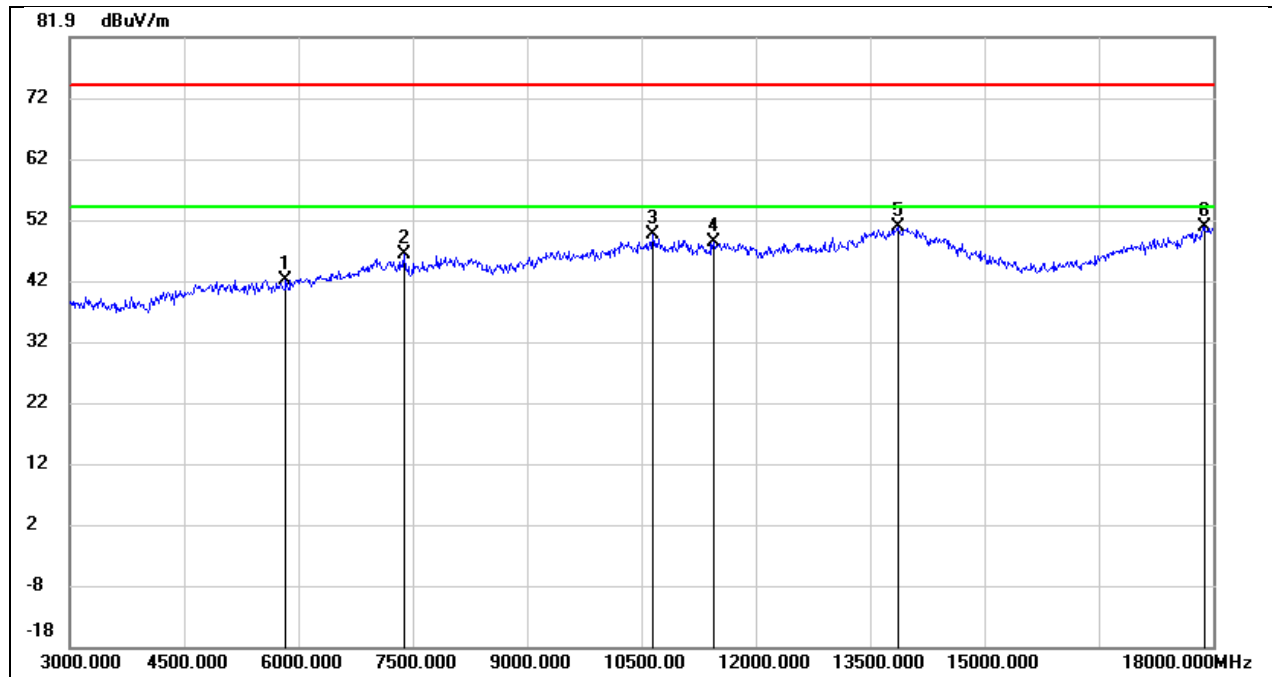

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5835.000	39.93	2.21	42.14	74.00	-31.86	peak
2	7380.000	39.66	6.59	46.25	74.00	-27.75	peak
3	10650.000	35.04	14.44	49.48	74.00	-24.52	peak
4	11445.000	31.53	16.65	48.18	74.00	-25.82	peak
5	13860.000	27.18	23.52	50.70	74.00	-23.30	peak
6	17880.000	23.64	27.23	50.87	74.00	-23.13	peak


Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5 V

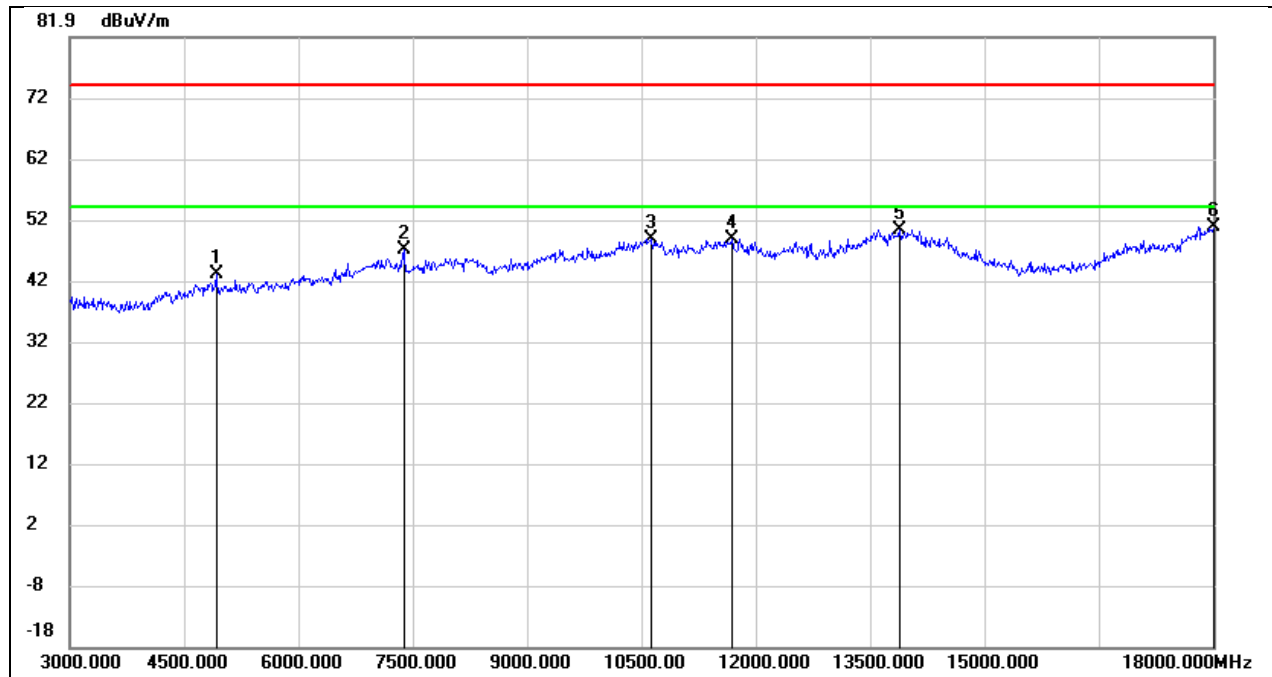

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	42.51	0.45	42.96	74.00	-31.04	peak
2	7380.000	40.36	6.59	46.95	74.00	-27.05	peak
3	10635.000	34.50	14.40	48.90	74.00	-25.10	peak
4	11685.000	31.39	17.41	48.80	74.00	-25.20	peak
5	13890.000	26.71	23.64	50.35	74.00	-23.65	peak
6	18000.000	22.75	27.98	50.73	74.00	-23.27	peak


8.6. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)-ANT2

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

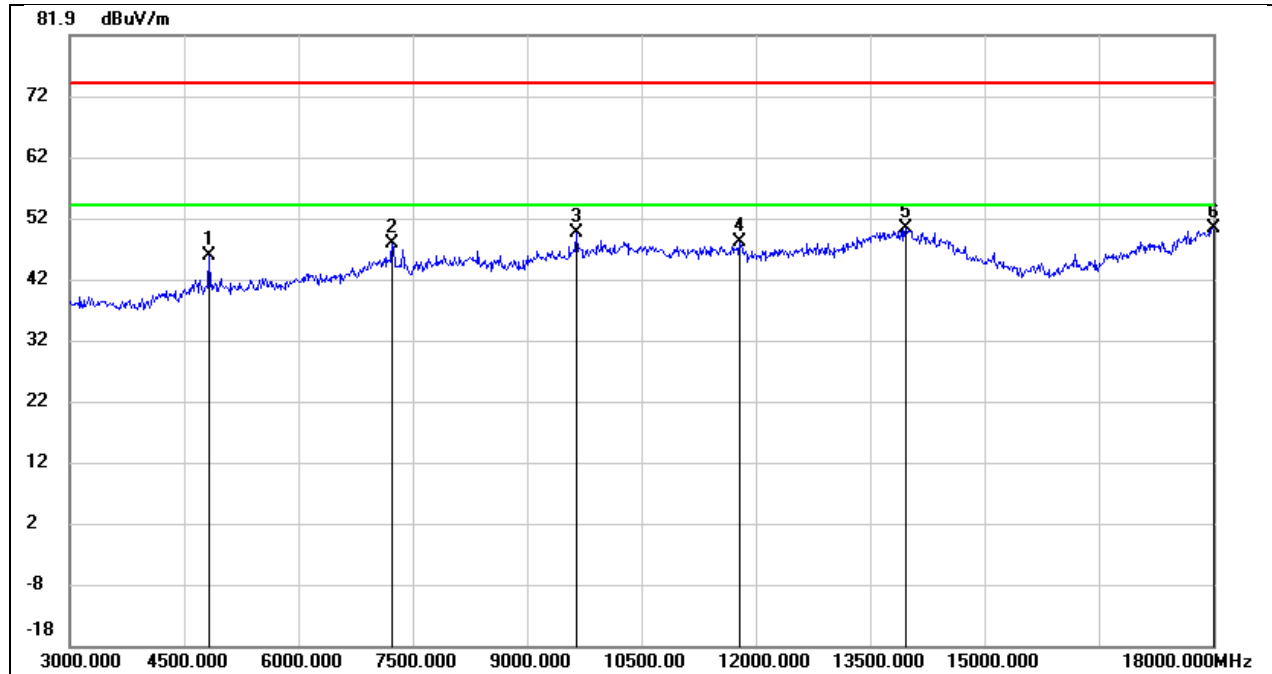


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	45.40	0.26	45.66	74.00	-28.34	peak
2	7230.000	41.10	6.72	47.82	74.00	-26.18	peak
3	9645.000	37.90	11.55	49.45	74.00	-24.55	peak
4	11790.000	30.38	17.71	48.09	74.00	-25.91	peak
5	13965.000	26.37	23.93	50.30	74.00	-23.70	peak
6	18000.000	22.39	27.98	50.37	74.00	-23.63	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

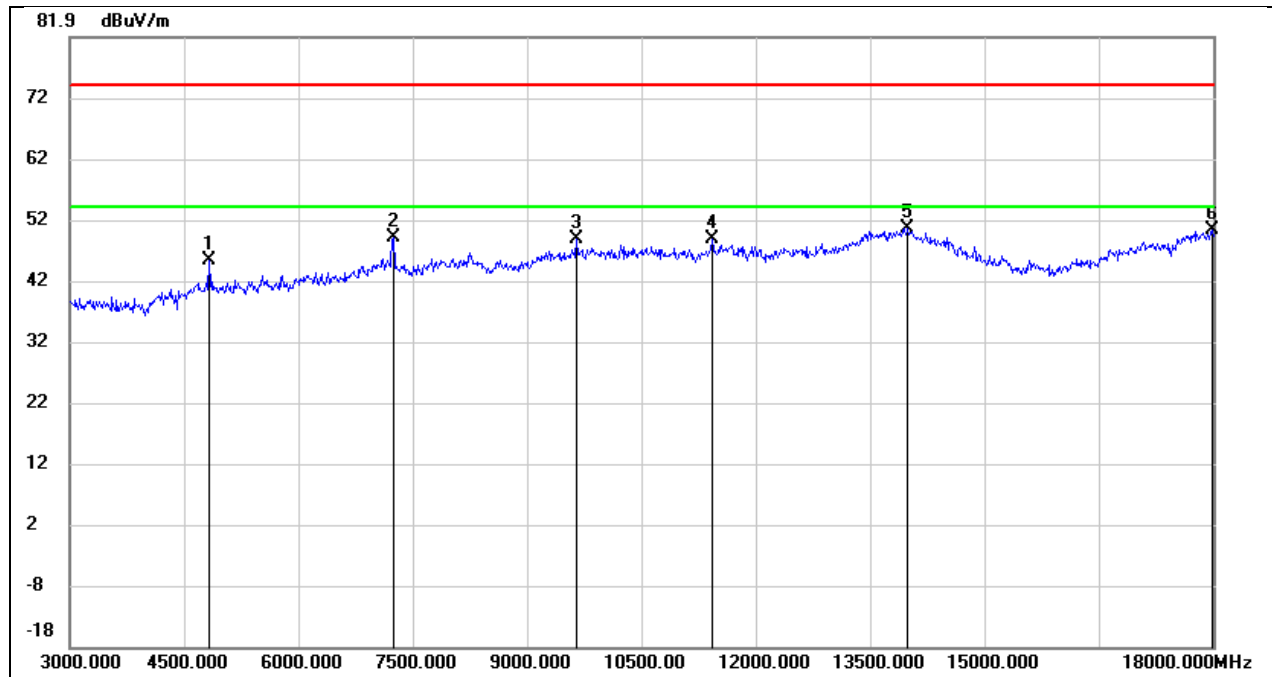


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	45.07	0.26	45.33	74.00	-28.67	peak
2	7245.000	42.34	6.71	49.05	74.00	-24.95	peak
3	9645.000	37.21	11.55	48.76	74.00	-25.24	peak
4	11430.000	32.19	16.60	48.79	74.00	-25.21	peak
5	13995.000	26.44	24.04	50.48	74.00	-23.52	peak
6	17985.000	22.47	27.88	50.35	74.00	-23.65	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 5 V

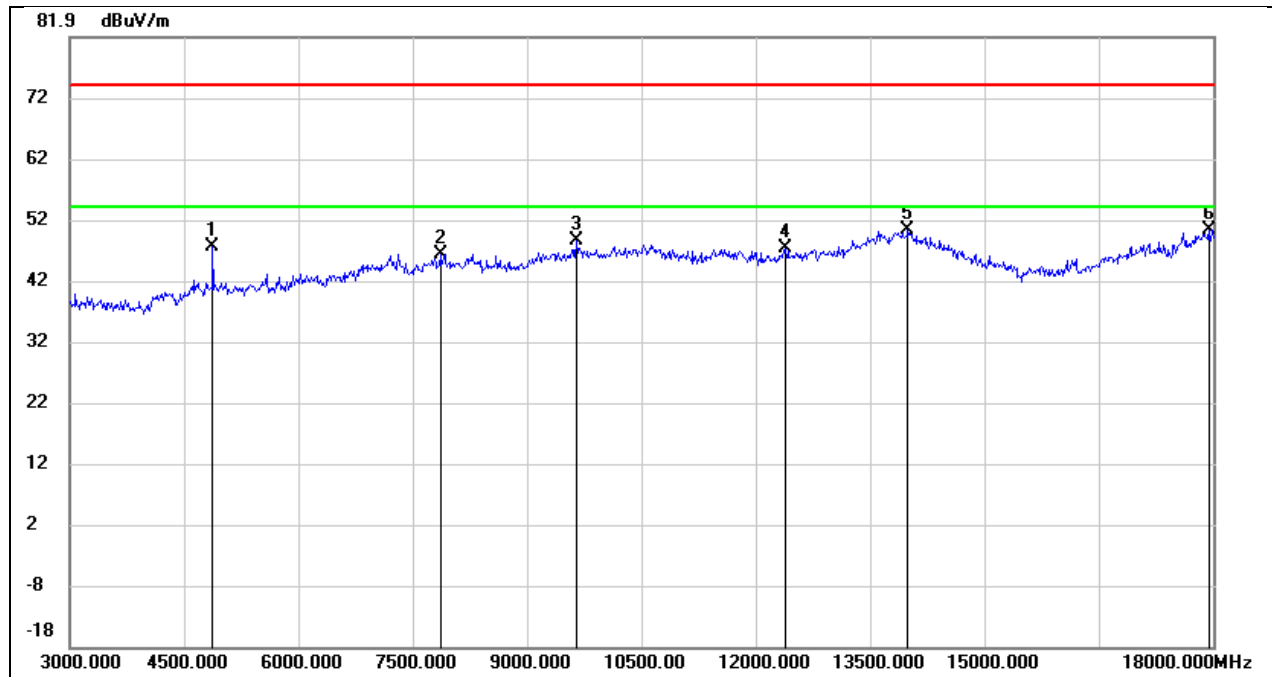


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	47.23	0.35	47.58	74.00	-26.42	peak
2	7860.000	38.74	7.63	46.37	74.00	-27.63	peak
3	9645.000	36.92	11.55	48.47	74.00	-25.53	peak
4	12390.000	28.43	18.95	47.38	74.00	-26.62	peak
5	13995.000	26.21	24.04	50.25	74.00	-23.75	peak
6	17940.000	22.67	27.61	50.28	74.00	-23.72	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 5 V

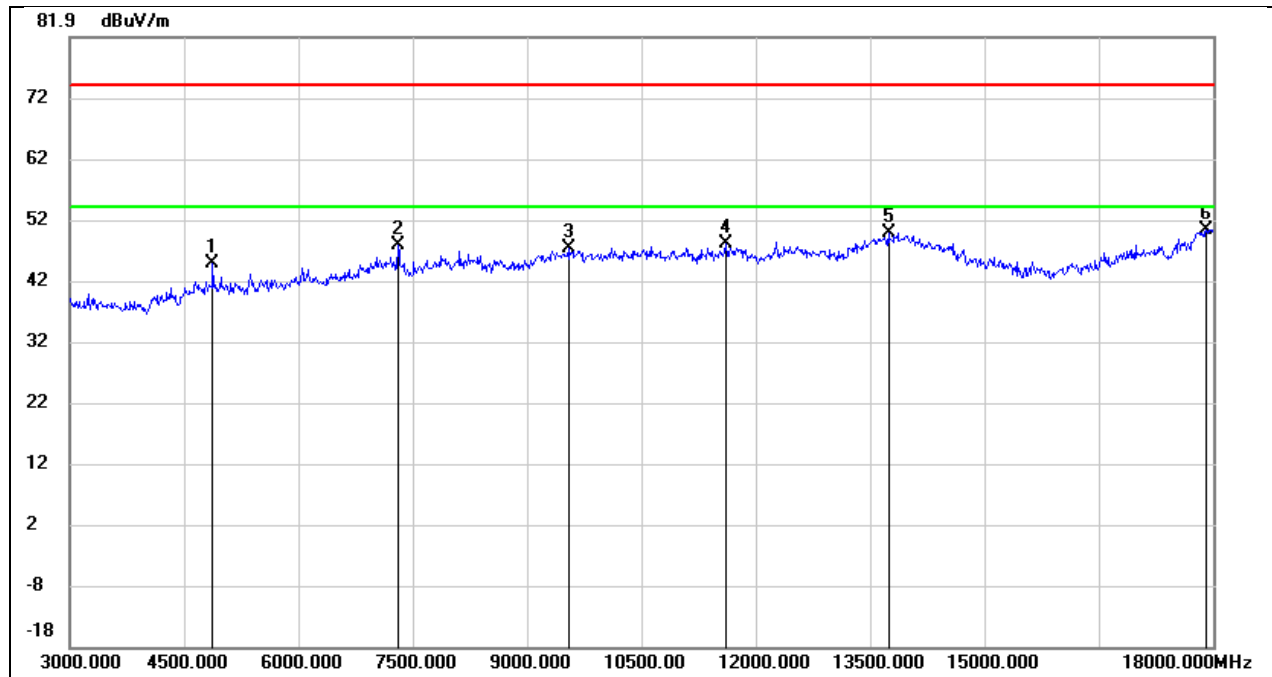


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.37	0.35	44.72	74.00	-29.28	peak
2	7305.000	41.19	6.65	47.84	74.00	-26.16	peak
3	9540.000	36.08	11.18	47.26	74.00	-26.74	peak
4	11610.000	30.76	17.18	47.94	74.00	-26.06	peak
5	13740.000	26.70	23.12	49.82	74.00	-24.18	peak
6	17910.000	22.91	27.41	50.32	74.00	-23.68	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5 V

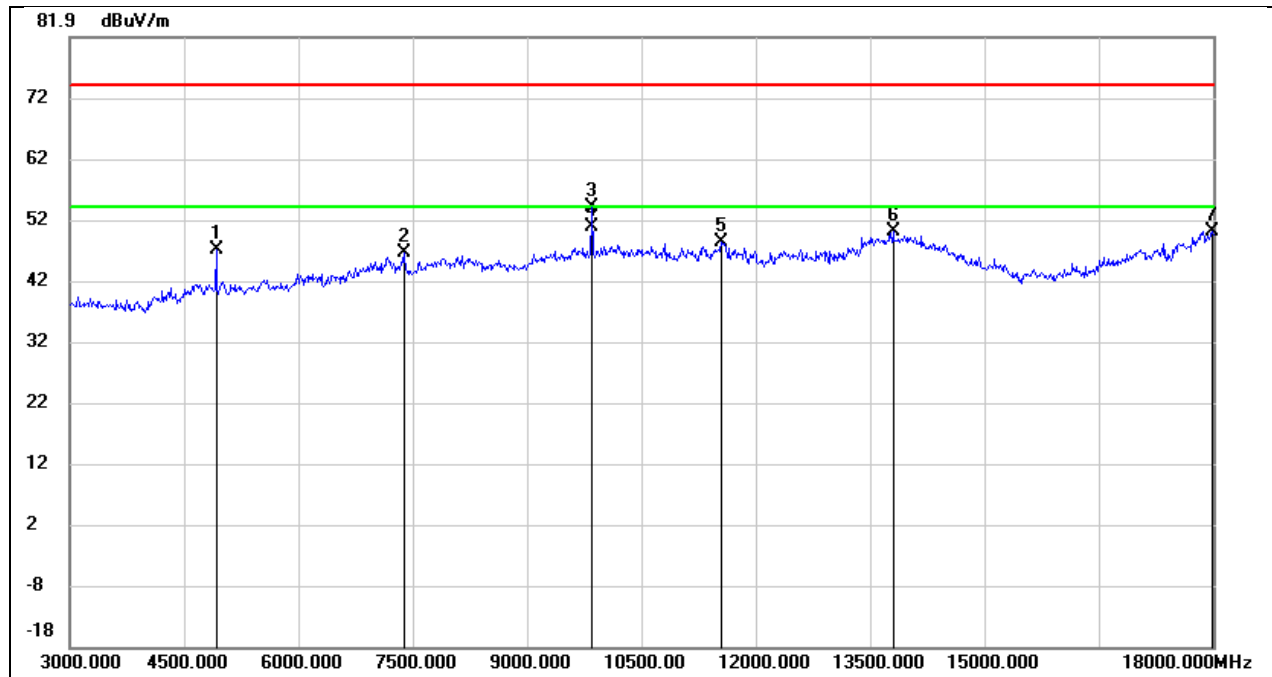


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	46.47	0.45	46.92	74.00	-27.08	peak
2	7380.000	39.96	6.59	46.55	74.00	-27.45	peak
3	9855.000	41.67	12.33	54.00	74.00	-20.00	peak
4	9855.000	38.51	12.33	50.84	54.00	-3.16	AVG
5	11550.000	31.18	16.99	48.17	74.00	-25.83	peak
6	13800.000	26.70	23.29	49.99	74.00	-24.01	peak
7	17985.000	22.25	27.88	50.13	74.00	-23.87	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5 V

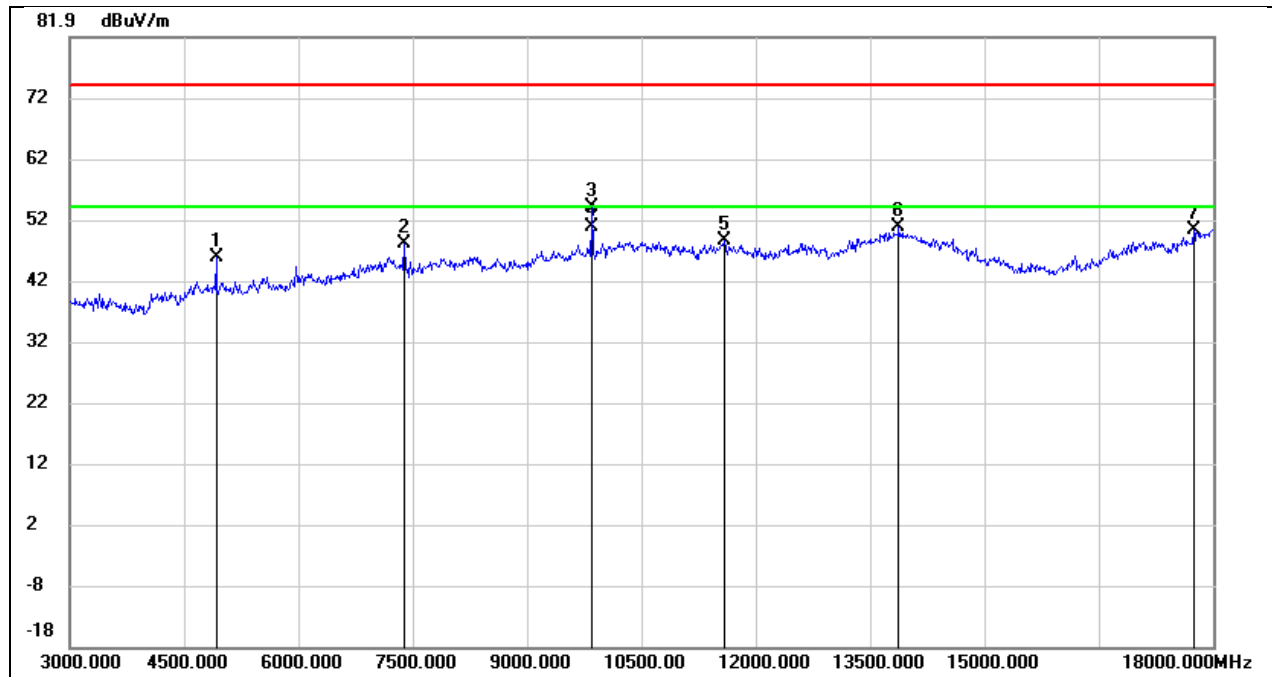


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	45.44	0.45	45.89	74.00	-28.11	peak
2	7380.000	41.52	6.59	48.11	74.00	-25.89	peak
3	9855.000	41.76	12.33	54.09	74.00	-19.91	peak
4	9855.000	38.39	12.33	50.72	54.00	-3.28	AVG
5	11595.000	31.41	17.13	48.54	74.00	-25.46	peak
6	13875.000	27.13	23.59	50.72	74.00	-23.28	peak
7	17745.000	23.94	26.39	50.33	74.00	-23.67	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

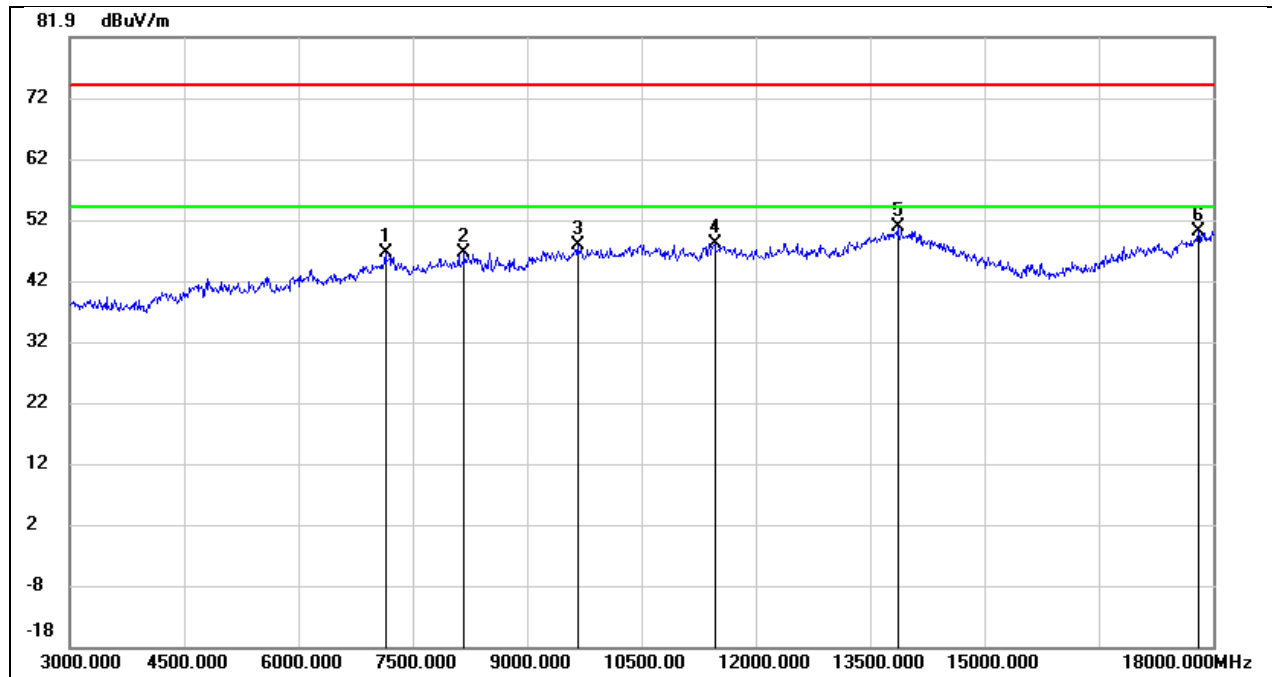


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7140.000	39.91	6.52	46.43	74.00	-27.57	peak
2	8175.000	38.44	8.04	46.48	74.00	-27.52	peak
3	9660.000	36.17	11.62	47.79	74.00	-26.21	peak
4	11460.000	31.36	16.70	48.06	74.00	-25.94	peak
5	13860.000	27.25	23.52	50.77	74.00	-23.23	peak
6	17805.000	23.30	26.75	50.05	74.00	-23.95	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

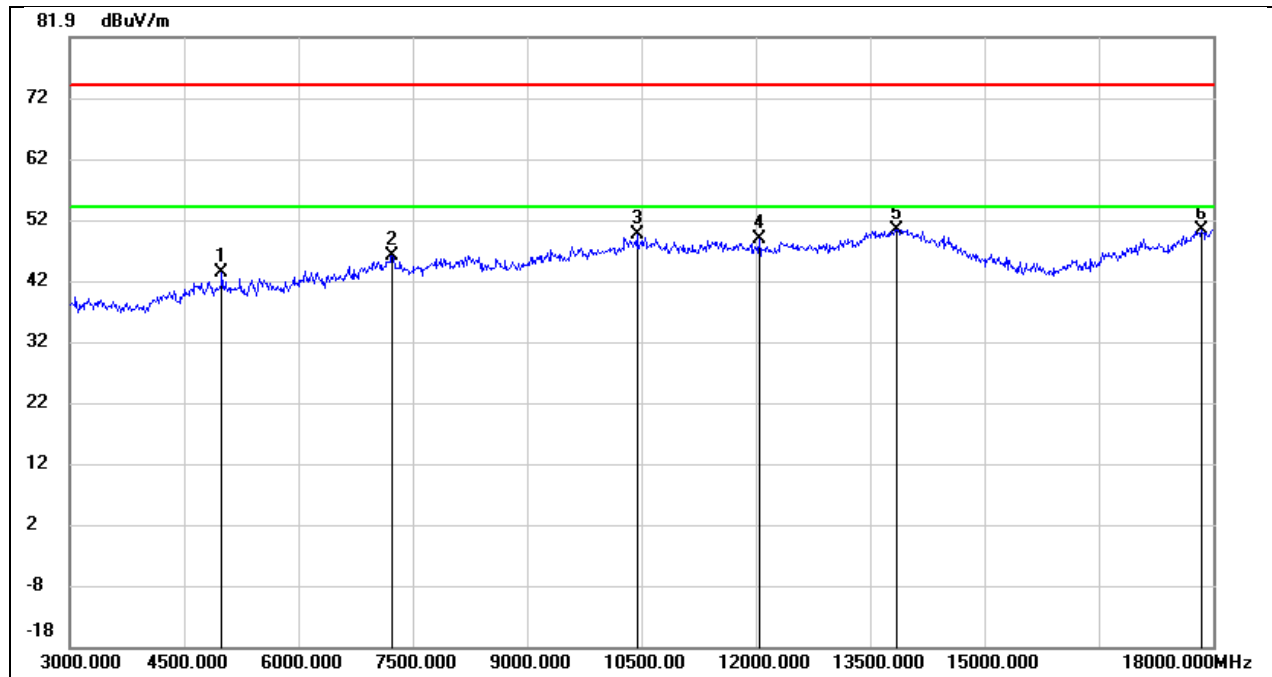


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4995.000	42.73	0.61	43.34	74.00	-30.66	peak
2	7230.000	39.40	6.72	46.12	74.00	-27.88	peak
3	10440.000	35.55	13.87	49.42	74.00	-24.58	peak
4	12045.000	30.48	18.37	48.85	74.00	-25.15	peak
5	13845.000	26.91	23.46	50.37	74.00	-23.63	peak
6	17850.000	23.35	27.04	50.39	74.00	-23.61	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 5 V

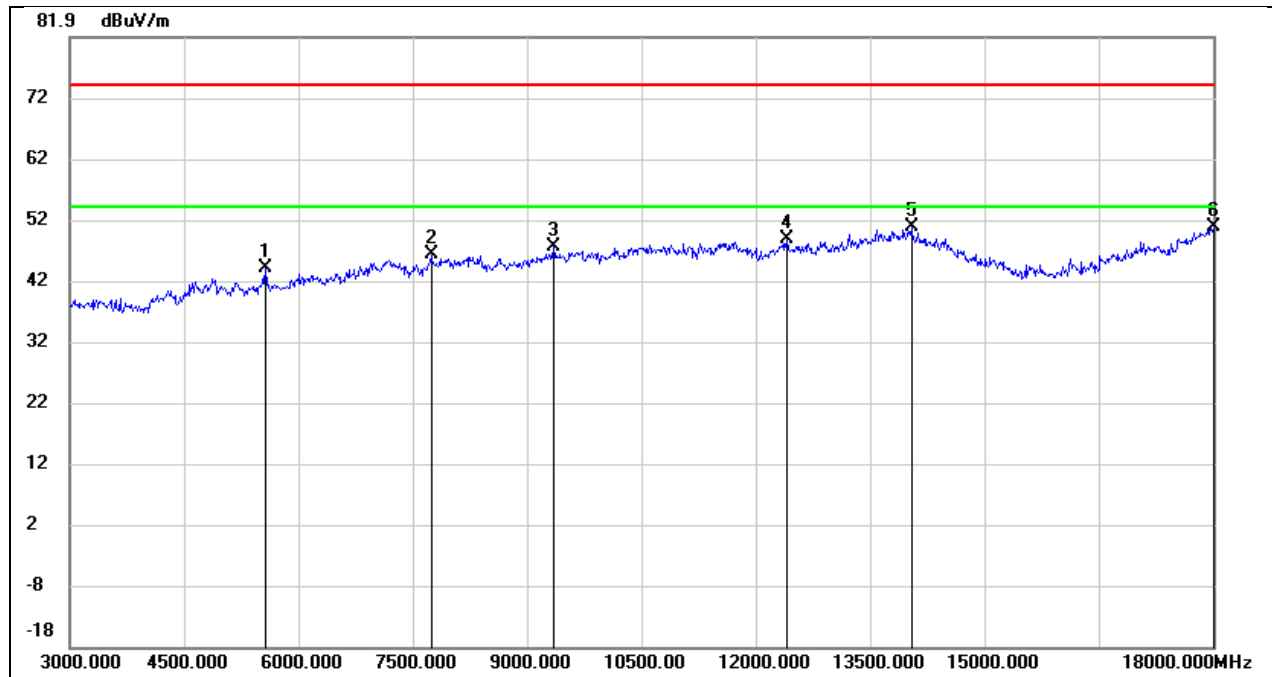


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5565.000	42.23	1.84	44.07	74.00	-29.93	peak
2	7740.000	39.04	7.34	46.38	74.00	-27.62	peak
3	9345.000	36.94	10.58	47.52	74.00	-26.48	peak
4	12405.000	29.69	18.97	48.66	74.00	-25.34	peak
5	14040.000	26.83	23.83	50.66	74.00	-23.34	peak
6	18000.000	22.70	27.98	50.68	74.00	-23.32	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 5 V

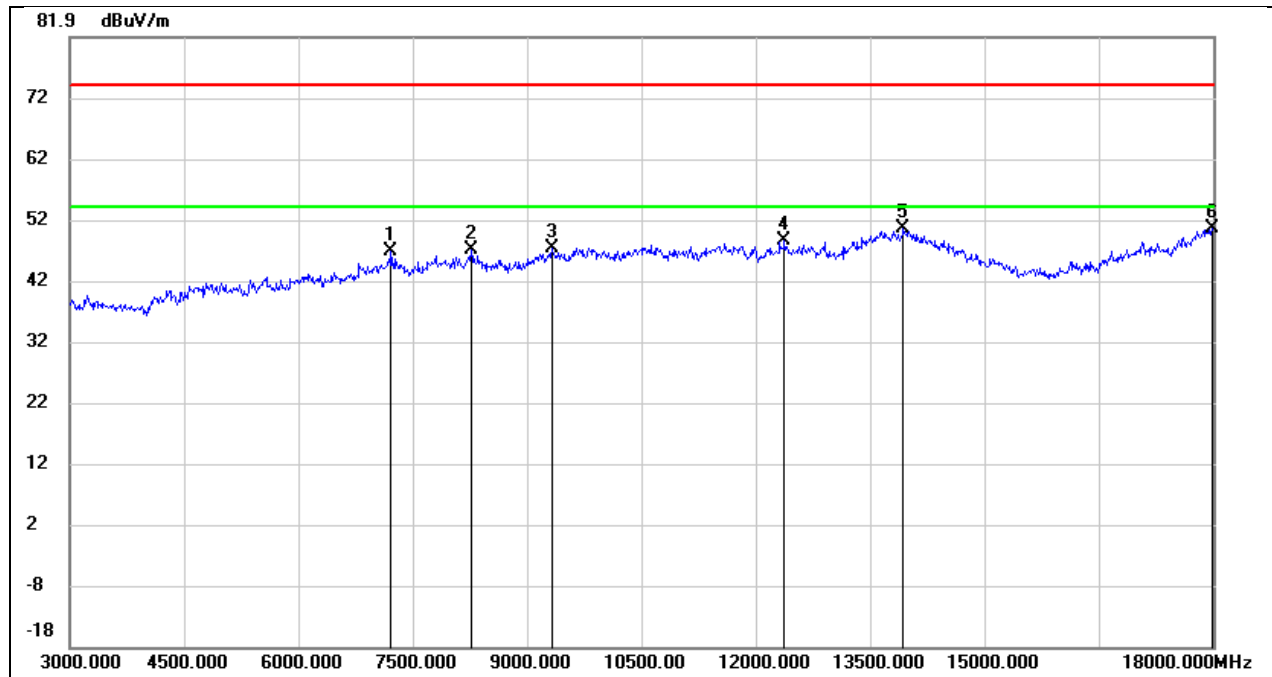


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7215.000	40.07	6.74	46.81	74.00	-27.19	peak
2	8265.000	38.87	8.10	46.97	74.00	-27.03	peak
3	9330.000	36.84	10.53	47.37	74.00	-26.63	peak
4	12375.000	29.51	18.93	48.44	74.00	-25.56	peak
5	13935.000	26.62	23.81	50.43	74.00	-23.57	peak
6	17985.000	22.71	27.88	50.59	74.00	-23.41	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5 V

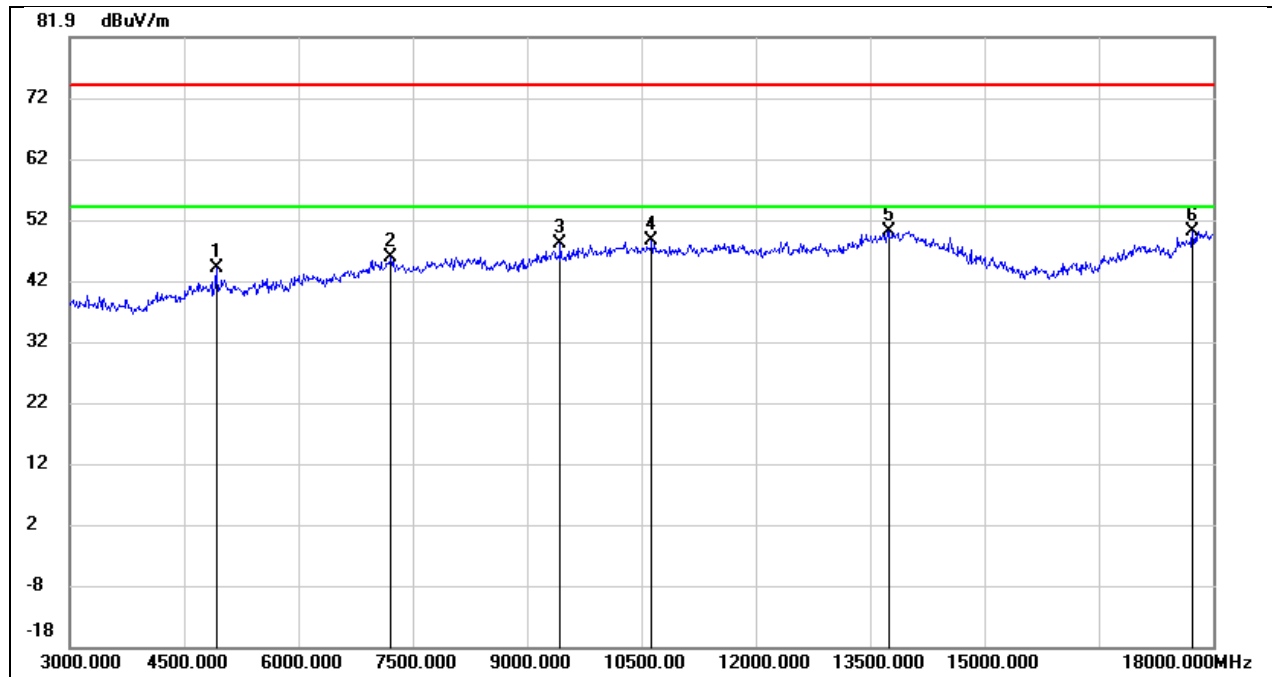

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	43.60	0.45	44.05	74.00	-29.95	peak
2	7215.000	39.05	6.74	45.79	74.00	-28.21	peak
3	9435.000	37.11	10.87	47.98	74.00	-26.02	peak
4	10635.000	34.15	14.40	48.55	74.00	-25.45	peak
5	13740.000	27.01	23.12	50.13	74.00	-23.87	peak
6	17730.000	23.75	26.29	50.04	74.00	-23.96	peak


Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5 V

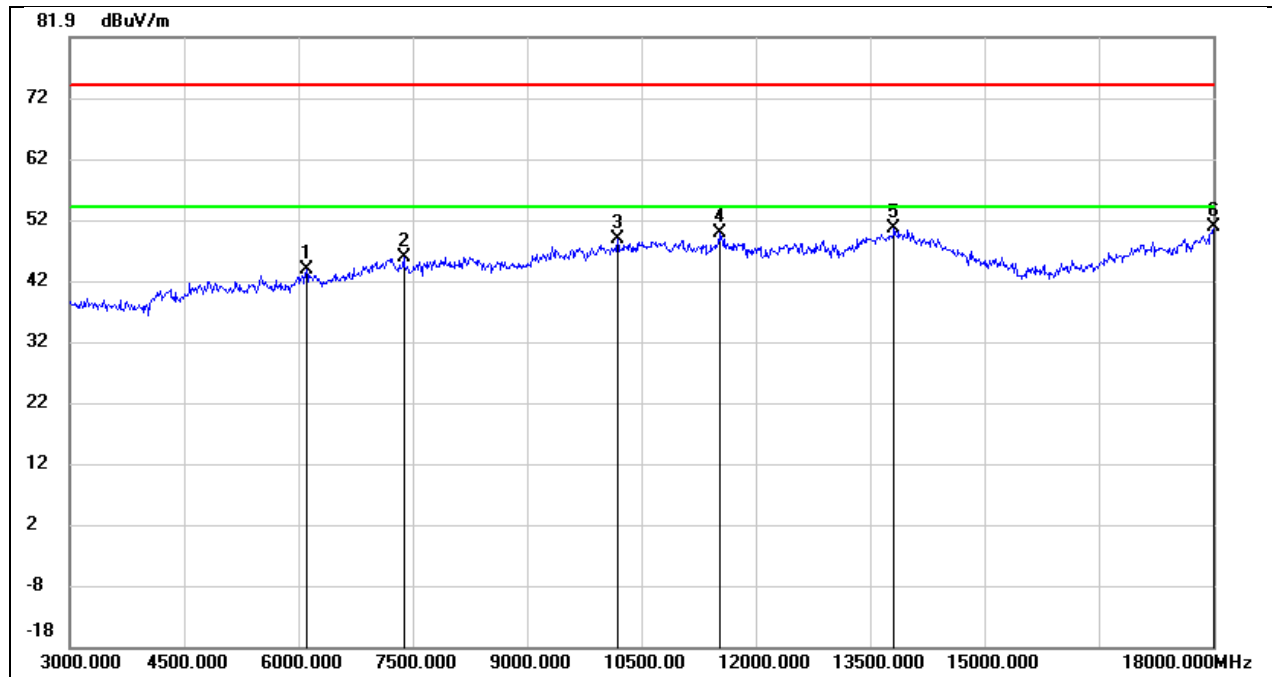

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6105.000	40.92	2.95	43.87	74.00	-30.13	peak
2	7380.000	39.07	6.59	45.66	74.00	-28.34	peak
3	10185.000	35.58	13.21	48.79	74.00	-25.21	peak
4	11520.000	32.82	16.89	49.71	74.00	-24.29	peak
5	13815.000	27.06	23.35	50.41	74.00	-23.59	peak
6	18000.000	22.73	27.98	50.71	74.00	-23.29	peak


8.7. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)-ANT2 WORST CASE

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

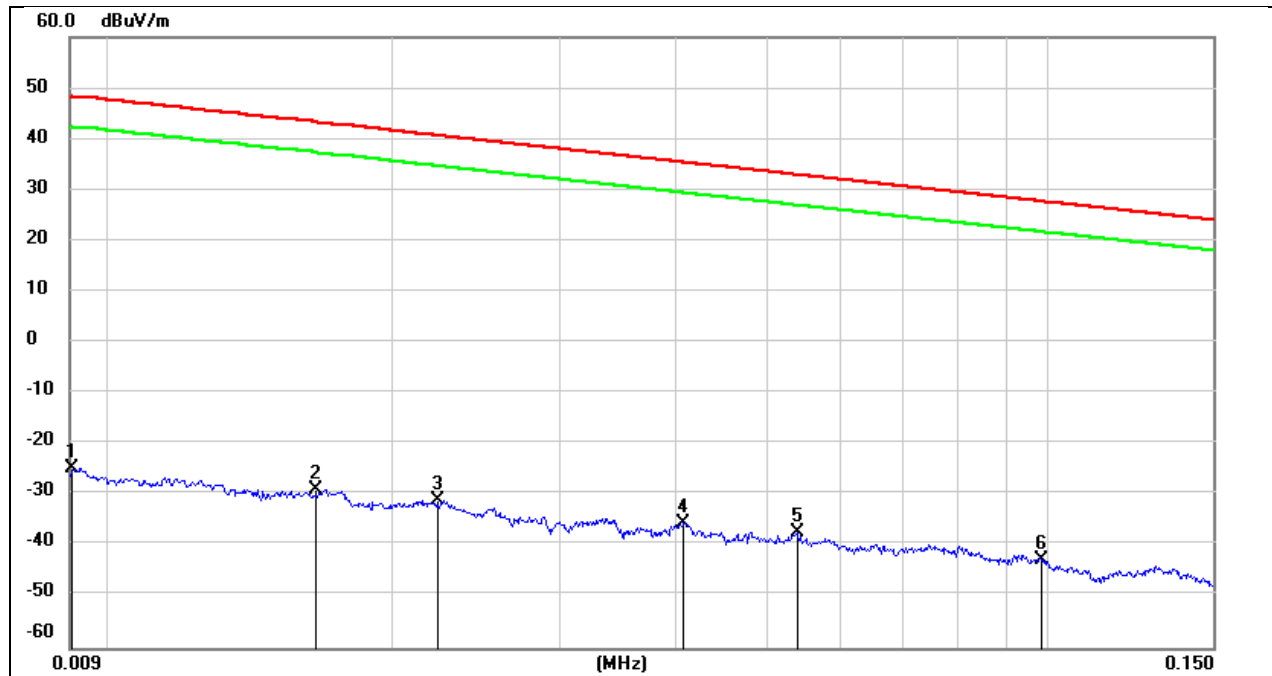


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0091	76.58	-101.33	-24.75	48.28	-76.25	-3.22	-73.03	peak
2	0.0165	72.39	-101.37	-28.98	43.25	-80.48	-8.25	-72.23	peak
3	0.0223	70.29	-101.35	-31.06	40.63	-82.56	-10.87	-71.69	peak
4	0.0408	65.89	-101.44	-35.55	35.39	-87.05	-16.11	-70.94	peak
5	0.0539	64.26	-101.50	-37.24	32.97	-88.74	-18.53	-70.21	peak
6	0.0985	59.05	-101.78	-42.73	27.73	-94.23	-23.77	-70.46	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

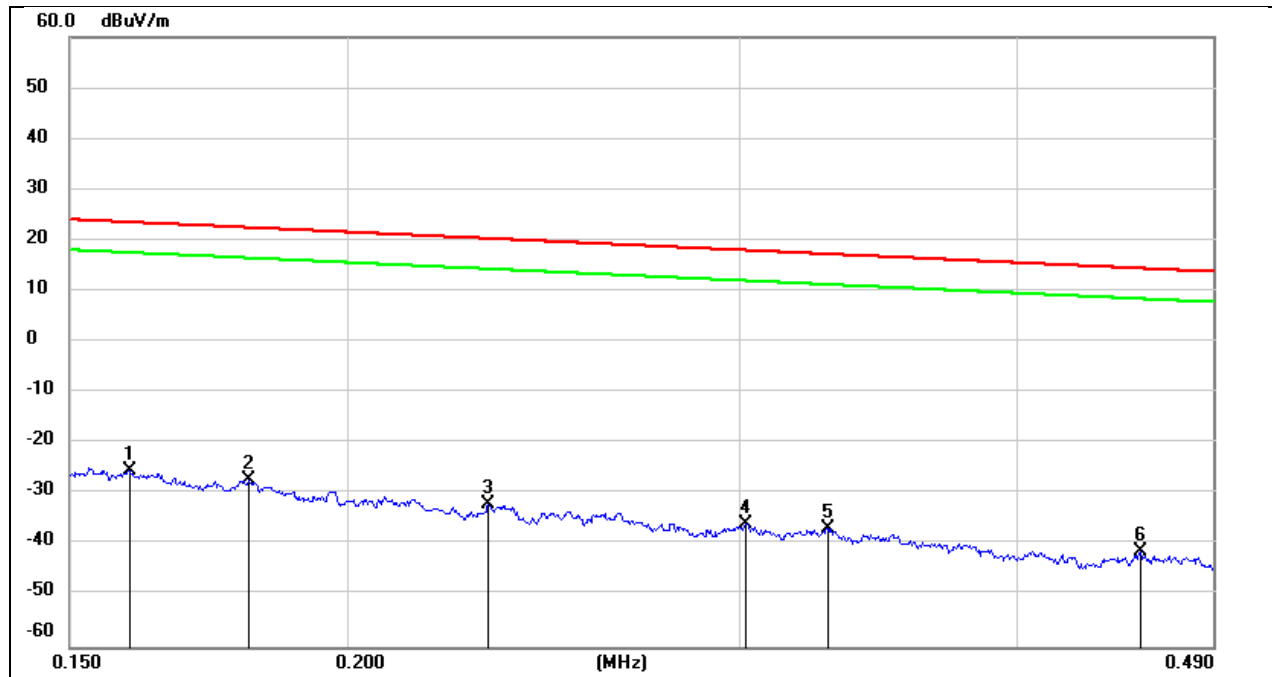

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuV/m)	ISED Limit (dBuV/m)	Margin (dB)	Remark
1	0.1595	76.36	-101.65	-25.29	23.55	-76.79	-27.95	-48.84	peak
2	0.1804	74.43	-101.68	-27.25	22.48	-78.75	-29.02	-49.73	peak
3	0.2313	69.69	-101.77	-32.08	20.32	-83.58	-31.18	-52.40	peak
4	0.3019	65.93	-101.85	-35.92	18.00	-87.42	-33.50	-53.92	peak
5	0.3286	65.21	-101.88	-36.67	17.27	-88.17	-34.23	-53.94	peak
6	0.4550	60.64	-102.02	-41.38	14.44	-92.88	-37.06	-55.82	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

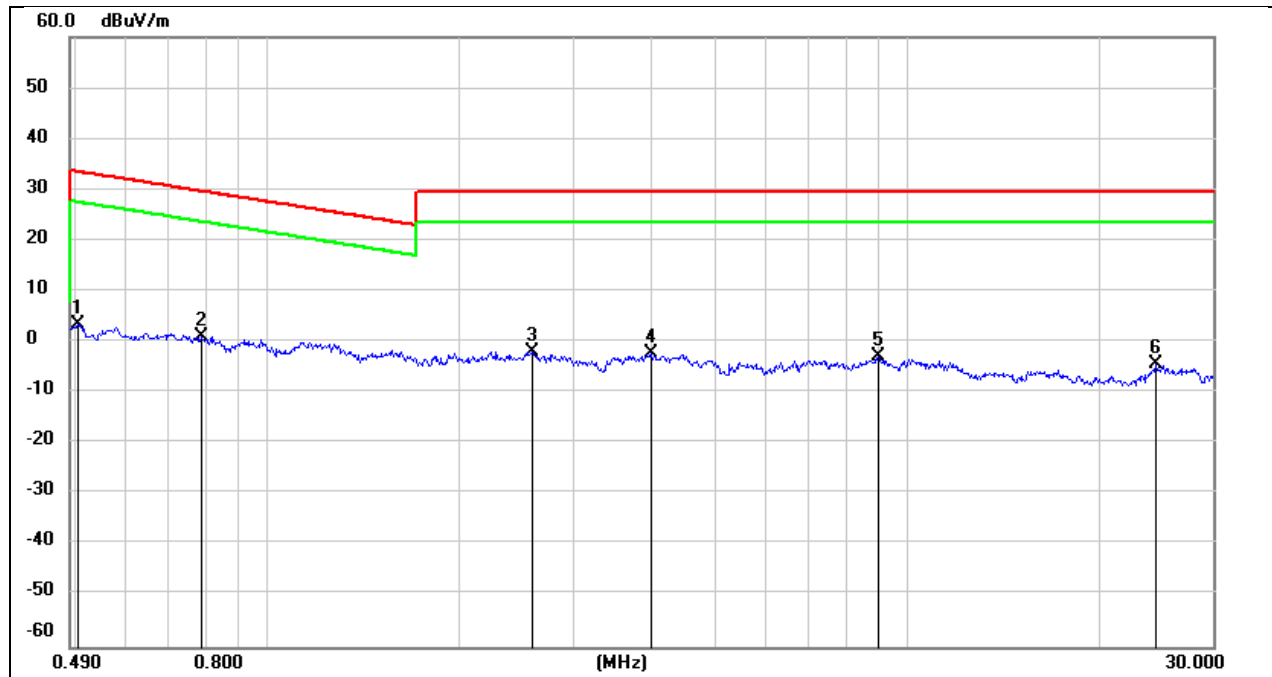

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5039	65.43	-62.07	3.36	33.56	-48.14	-17.94	-30.20	peak
2	0.7861	63.33	-62.14	1.19	29.69	-50.31	-21.81	-28.50	peak
3	2.5935	59.61	-61.68	-2.07	29.54	-53.57	-21.96	-31.61	peak
4	3.9721	58.96	-61.34	-2.38	29.54	-53.88	-21.96	-31.92	peak
5	8.9885	58.00	-60.94	-2.94	29.54	-54.44	-21.96	-32.48	peak
6	24.5106	56.08	-60.49	-4.41	29.54	-55.91	-21.96	-33.95	peak


8.8. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)- ANT2 WORST CASE

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

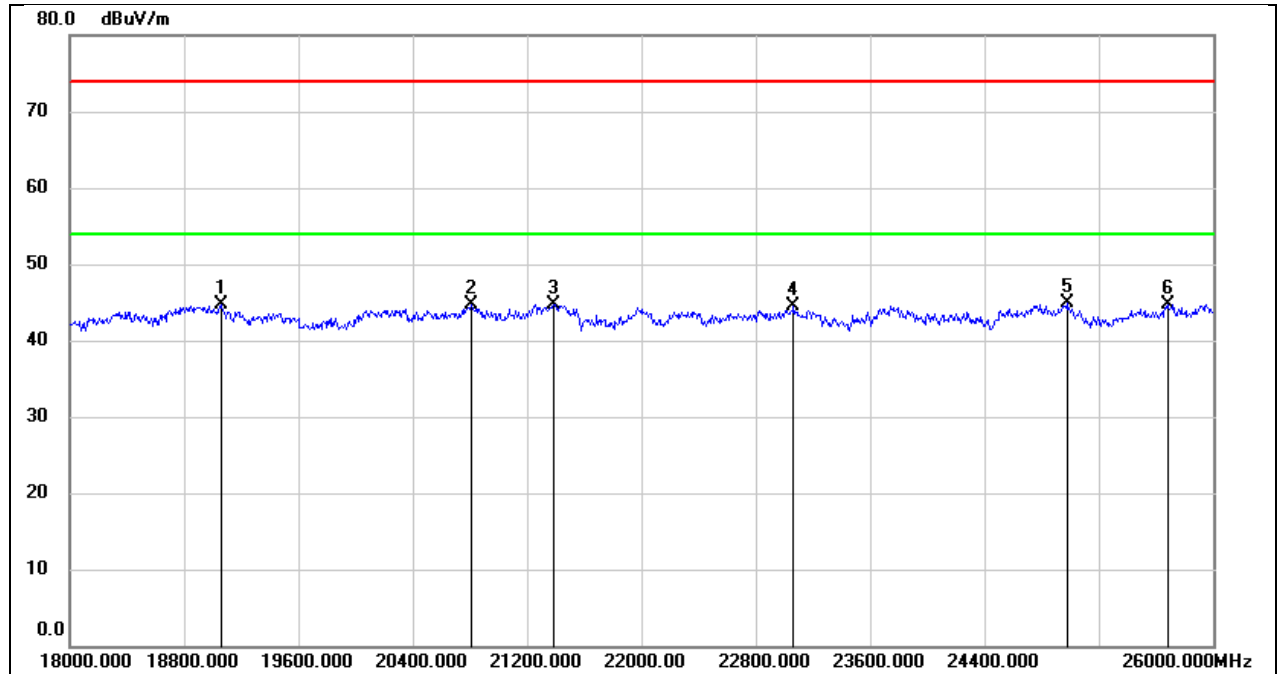

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19056.000	49.91	-5.30	44.61	74.00	-29.39	peak
2	20808.000	49.73	-5.07	44.66	74.00	-29.34	peak
3	21384.000	49.49	-4.72	44.77	74.00	-29.23	peak
4	23064.000	47.99	-3.42	44.57	74.00	-29.43	peak
5	24976.000	46.99	-2.11	44.88	74.00	-29.12	peak
6	25680.000	45.71	-0.93	44.78	74.00	-29.22	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

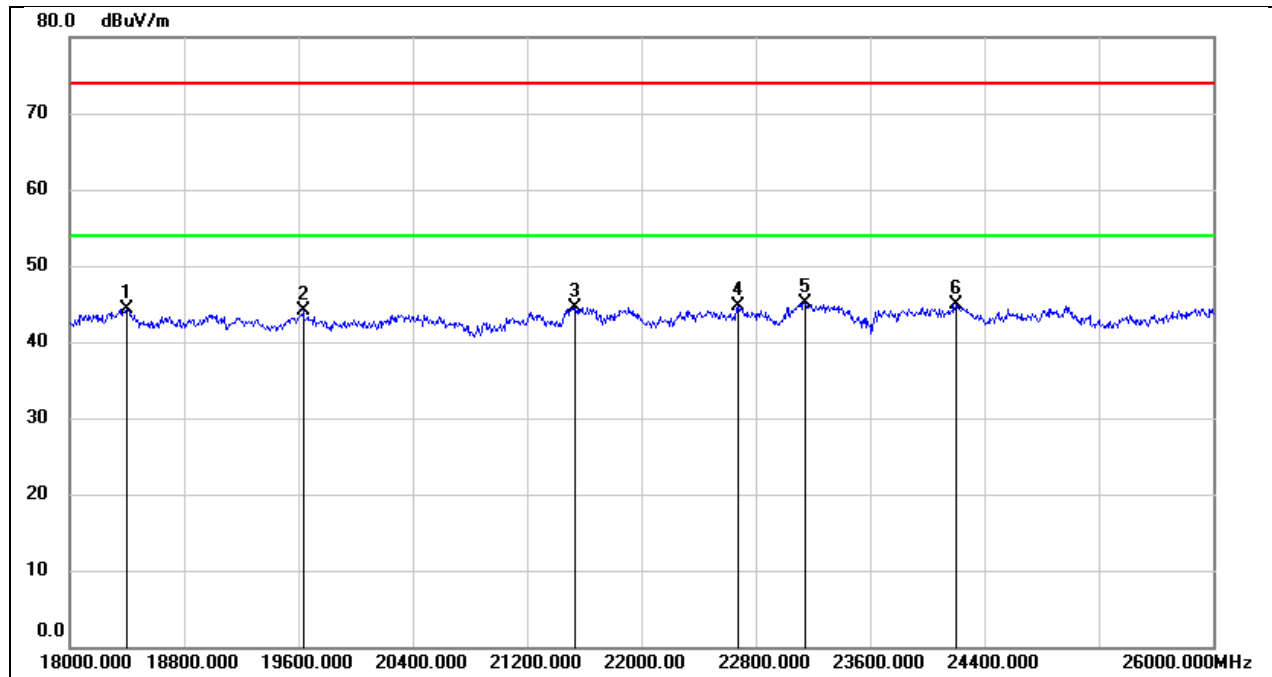

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18400.000	49.64	-5.37	44.27	74.00	-29.73	peak
2	19632.000	49.45	-5.40	44.05	74.00	-29.95	peak
3	21536.000	49.18	-4.64	44.54	74.00	-29.46	peak
4	22680.000	48.35	-3.74	44.61	74.00	-29.39	peak
5	23144.000	48.57	-3.40	45.17	74.00	-28.83	peak
6	24200.000	47.76	-2.81	44.95	74.00	-29.05	peak


8.9. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)- ANT2 WORST CASE

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

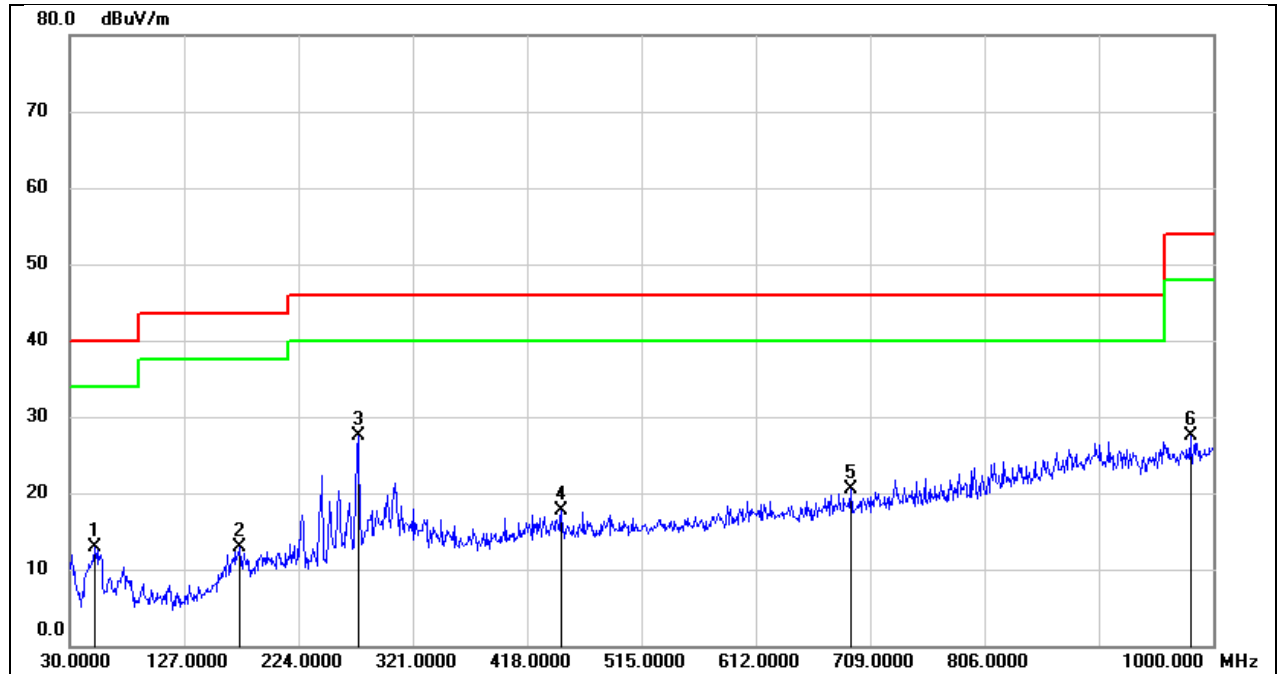

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	51.3400	28.08	-15.25	12.83	40.00	-27.17	peak
2	174.5300	25.05	-12.06	12.99	43.50	-30.51	peak
3	274.4400	40.43	-13.02	27.41	46.00	-18.59	peak
4	447.1000	25.57	-7.95	17.62	46.00	-28.38	peak
5	692.5100	24.68	-4.24	20.44	46.00	-25.56	peak
6	980.6000	27.58	-0.07	27.51	54.00	-26.49	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

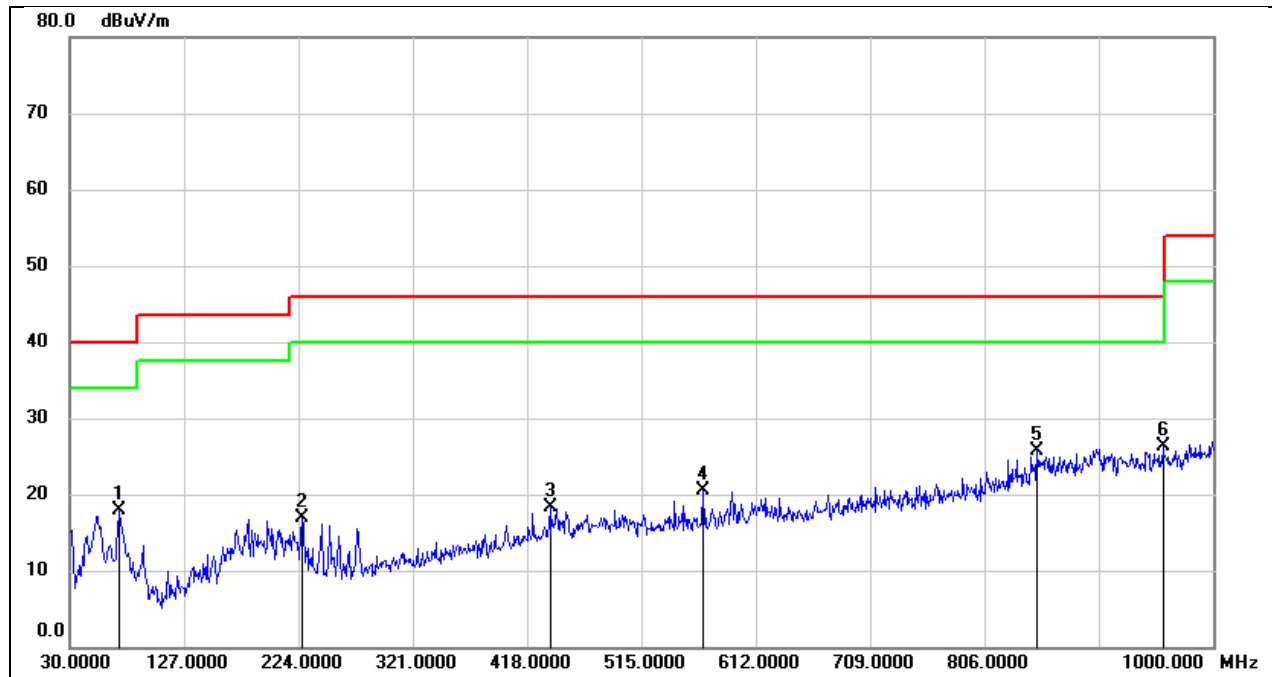

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	71.7100	33.49	-15.51	17.98	40.00	-22.02	peak
2	226.9100	30.40	-13.49	16.91	46.00	-29.09	peak
3	437.4000	26.54	-8.28	18.26	46.00	-27.74	peak
4	567.3800	26.84	-6.34	20.50	46.00	-25.50	peak
5	850.6200	27.01	-1.35	25.66	46.00	-20.34	peak
6	957.3200	26.73	-0.50	26.23	46.00	-19.77	peak

8.10. SPURIOUS EMISSIONS FOR SIMULTANEOUS TRANSMISSION

SPURIOUS EMISSIONS (BT GFSK MID CHANNEL & WIFI 2.4G 802.11b ANT2 LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

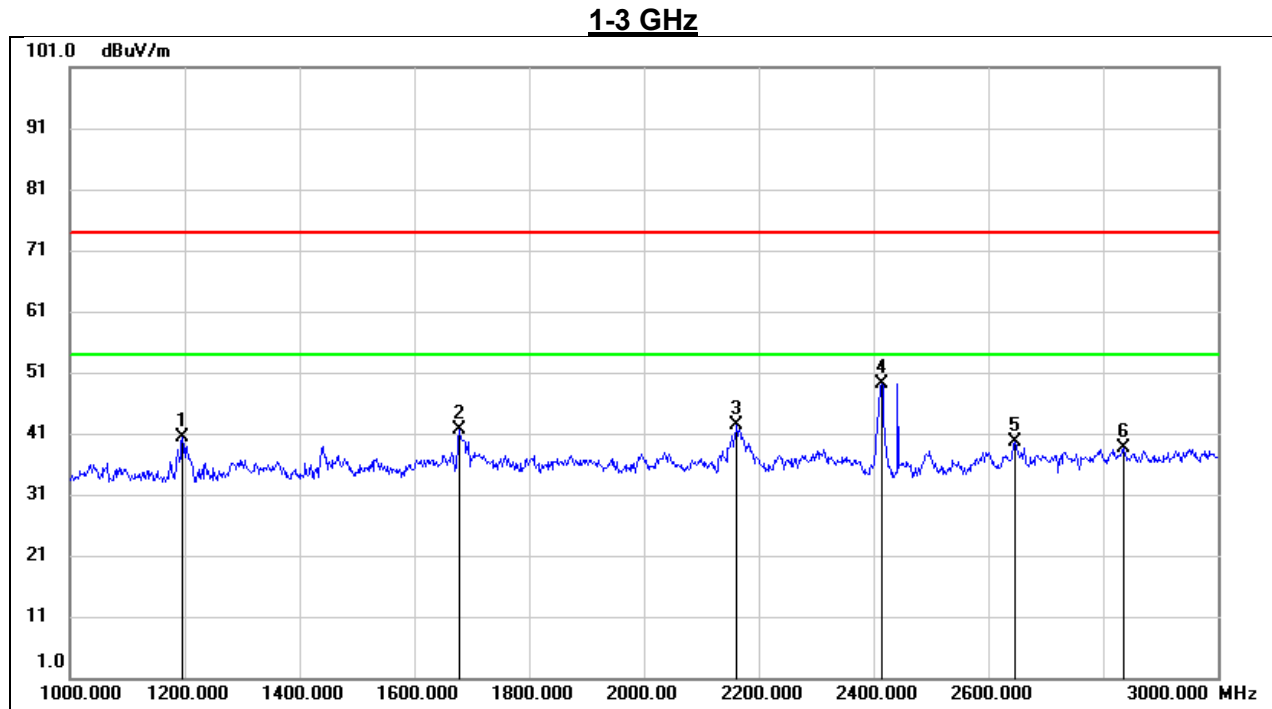


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1196.000	53.35	-13.03	40.32	74.00	-33.68	peak
2	1678.000	52.67	-11.02	41.65	74.00	-32.35	peak
3	2162.000	52.13	-9.71	42.42	74.00	-31.58	fundamental
4	2412.000	57.59	-8.39	49.20	/	/	f
5	2646.000	46.96	-7.37	39.59	74.00	-34.41	peak
6	2836.000	45.32	-6.67	38.65	74.00	-35.35	peak

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

3-18 GHz

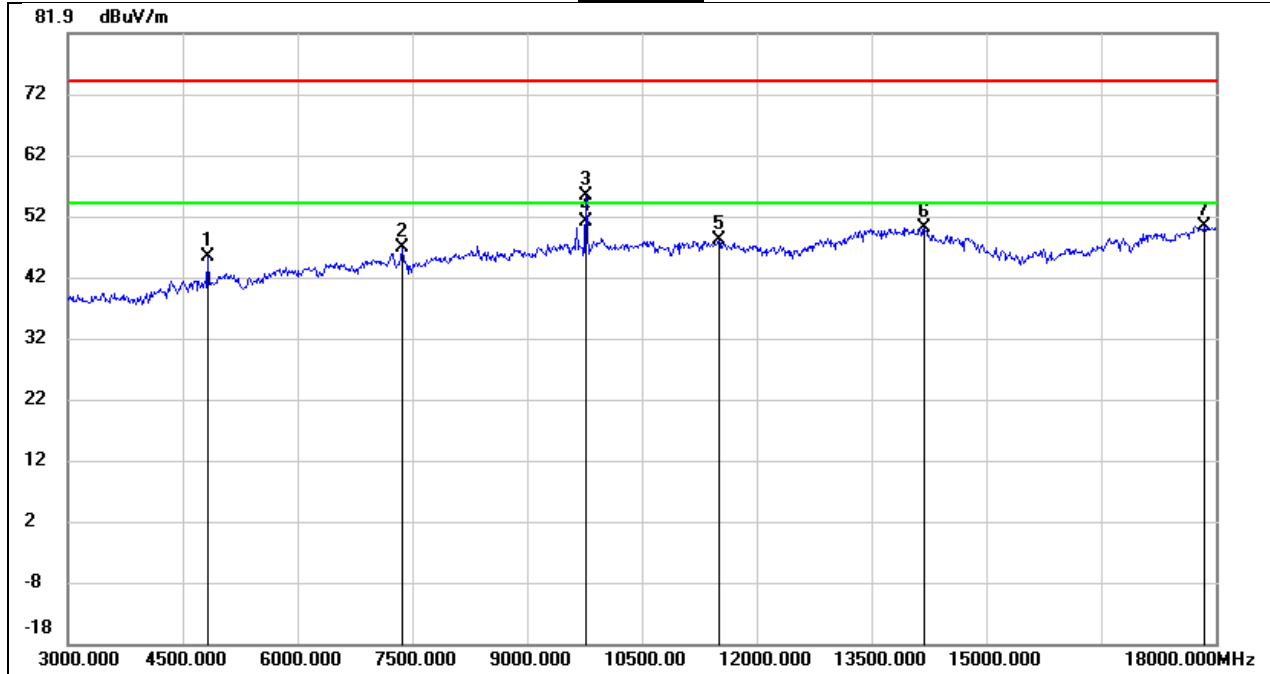


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	44.90	0.26	45.16	74.00	-28.84	peak
2	7365.000	40.20	6.61	46.81	74.00	-27.19	peak
3	9765.000	43.22	12.09	55.31	74.00	-18.69	peak
4	9765.000	38.99	12.09	51.08	54.00	-2.92	AVG
5	11505.000	31.22	16.84	48.06	74.00	-25.94	peak
6	14190.000	27.13	22.95	50.08	74.00	-23.92	peak
7	17850.000	23.33	27.04	50.37	74.00	-23.63	peak

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

SPURIOUS EMISSIONS (BT GFSK MID CHANNEL & WIFI 2.4G 802.11b ANT2 LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

1-3 GHz

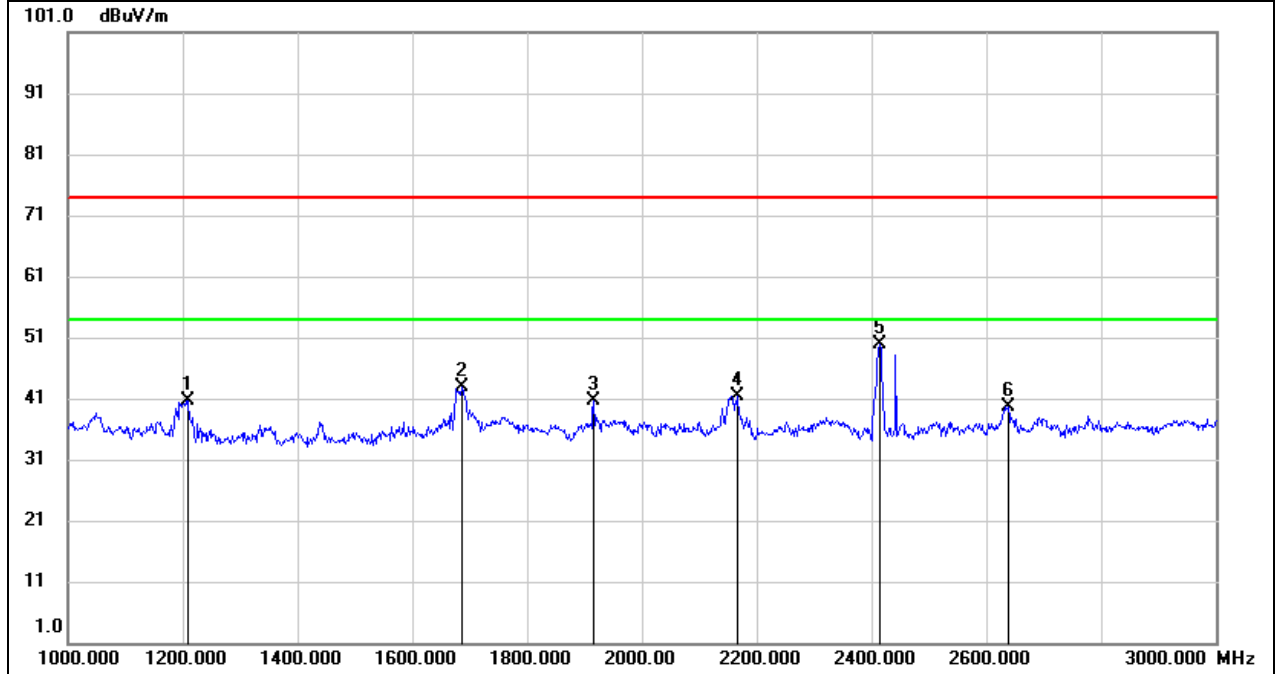


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1210.000	53.70	-12.96	40.74	74.00	-33.26	peak
2	1686.000	54.00	-11.00	43.00	74.00	-31.00	peak
3	1916.000	50.78	-10.08	40.70	74.00	-33.30	peak
4	2166.000	51.16	-9.71	41.45	74.00	-32.55	peak
5	2412.000	58.35	-8.39	49.96	/	/	fundamental
6	2638.000	47.10	-7.40	39.70	74.00	-34.30	peak

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

3-18 GHz

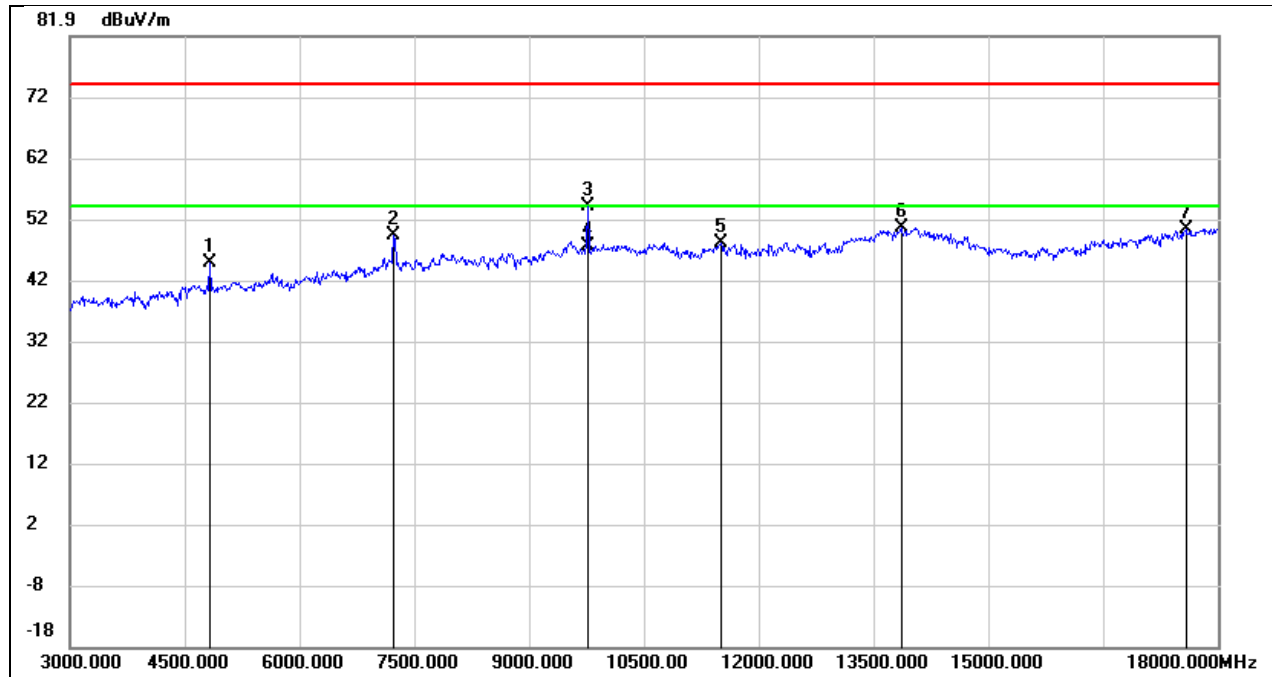


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	44.57	0.26	44.83	74.00	-29.17	peak
2	7230.000	42.63	6.72	49.35	74.00	-24.65	peak
3	9765.000	41.98	12.09	54.07	74.00	-19.93	peak
4	9765.000	35.49	12.09	47.58	54.00	-6.42	AVG
5	11505.000	31.30	16.84	48.14	74.00	-25.86	peak
6	13860.000	27.02	23.52	50.54	74.00	-23.46	peak
7	17580.000	25.02	25.36	50.38	74.00	-23.62	peak

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

**RESTRICTED BANDEDGE (BT 8DPSK LOW CHANNEL & WIFI 2.4G 802.11n HT20 ANT2
LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)**

PEAK

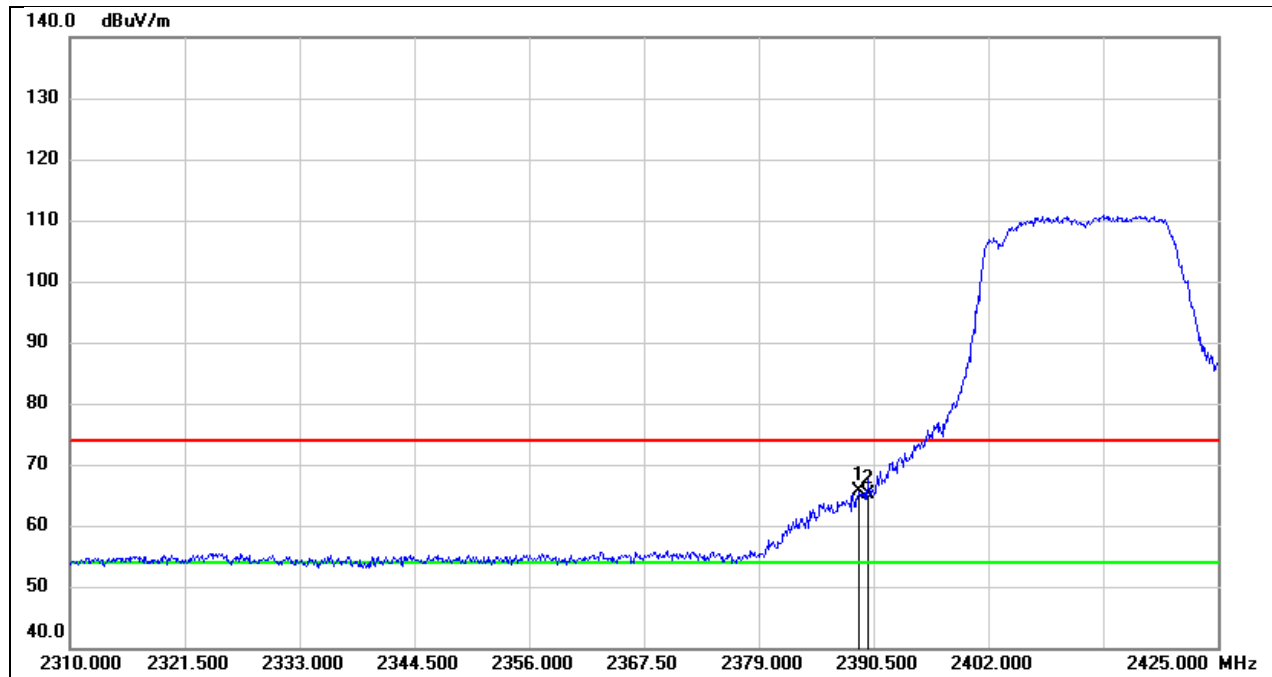


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.005	54.89	10.65	65.54	74.00	-8.46	peak
2	2390.000	54.38	10.67	65.05	74.00	-8.95	peak

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
6. All modes have been tested, but only the worst data was recorded in the report.

AVG

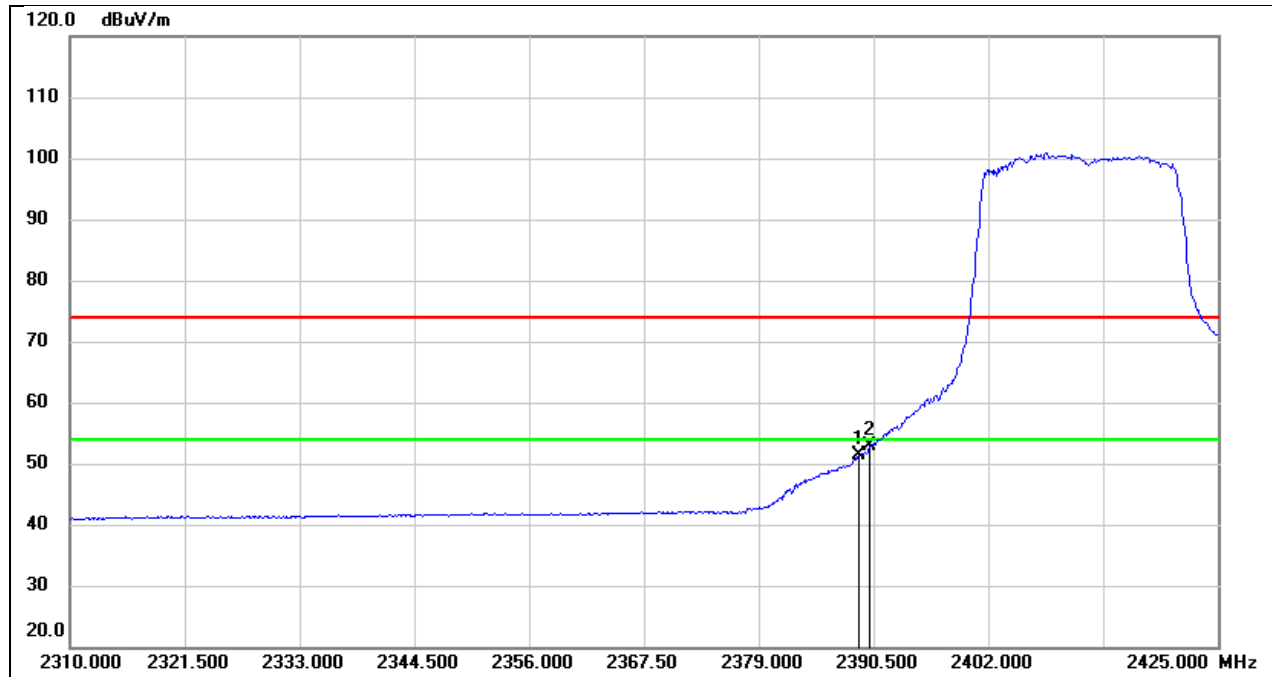

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.005	40.61	10.65	51.26	54.00	-2.74	AVG
2	2390.000	42.09	10.67	52.76	54.00	-1.24	AVG

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.5.
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
6. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
7. All modes have been tested, but only the worst data was recorded in the report.

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to FCC 47 CFR §15.207 (a) and ISSED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2020. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

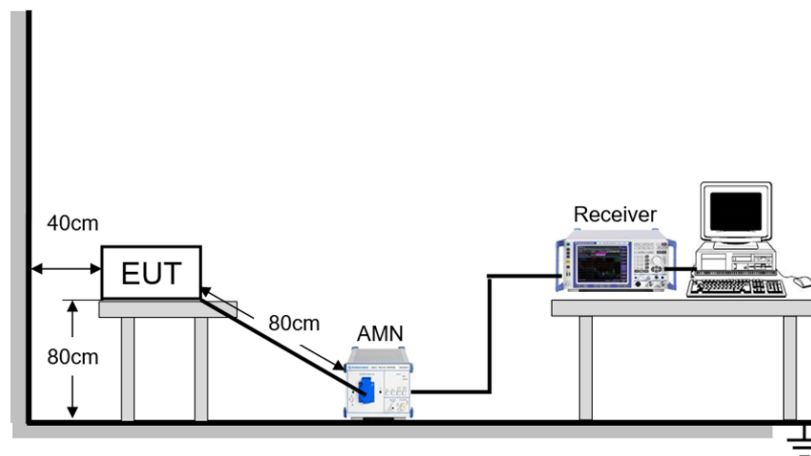

TEST ENVIRONMENT


Temperature	24.1℃	Relative Humidity	57%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	April 17, 2026	Test By	Fanny Huang
-----------	----------------	---------	-------------

TEST RESULTS

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Line		

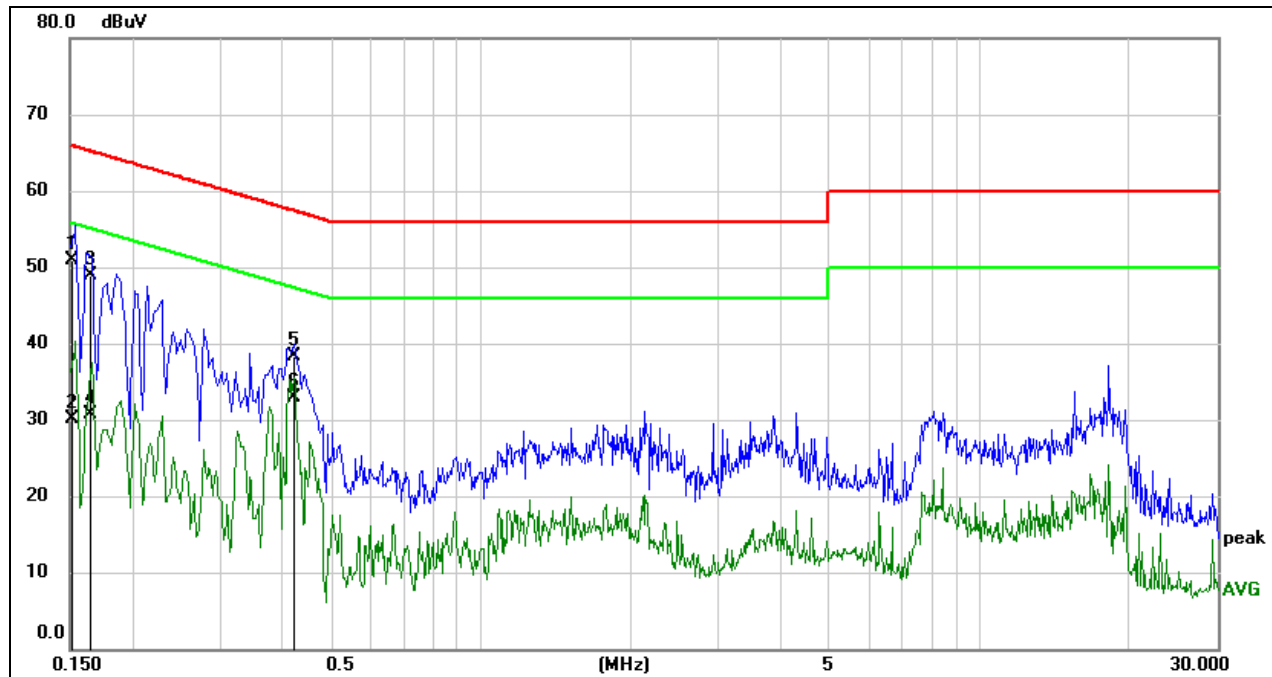


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1508	41.18	9.74	50.92	65.96	-15.04	QP
2	0.1508	20.46	9.74	30.20	55.96	-25.76	AVG
3	0.1650	39.18	9.71	48.89	65.21	-16.32	QP
4	0.1650	20.94	9.71	30.65	55.21	-24.56	AVG
5	0.4223	28.73	9.64	38.37	57.40	-19.03	QP
6	0.4223	23.25	9.64	32.89	47.40	-14.51	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Neutral		

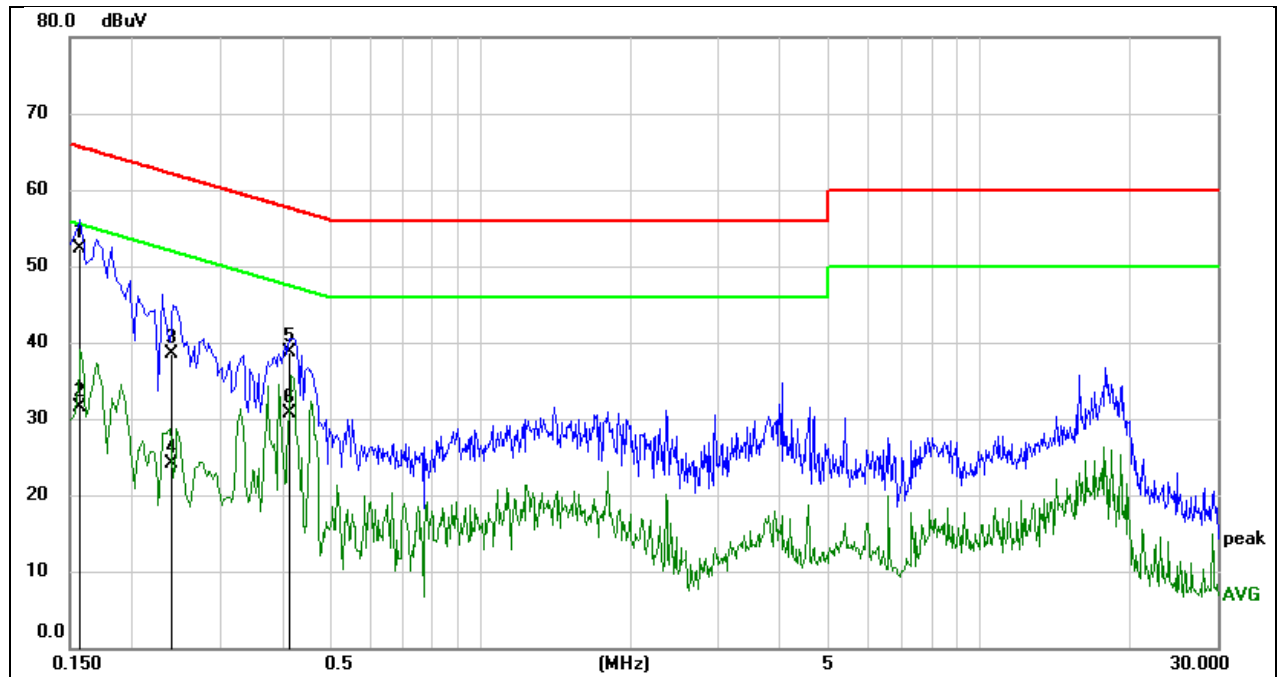

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1561	42.59	9.64	52.23	65.67	-13.44	QP
2	0.1561	21.81	9.64	31.45	55.67	-24.22	AVG
3	0.2386	28.80	9.64	38.44	62.14	-23.70	QP
4	0.2386	14.54	9.64	24.18	52.14	-27.96	AVG
5	0.4139	28.99	9.64	38.63	57.57	-18.94	QP
6	0.4139	21.02	9.64	30.66	47.57	-16.91	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.


11. TEST DATA-ANT1

11.1. APPENDIX A: DTS BANDWIDTH

11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.600	2407.920	2416.520	≥0.5	PASS
		2437	8.680	2432.440	2441.120	≥0.5	PASS
		2462	8.640	2457.920	2466.560	≥0.5	PASS
11G	Ant1	2412	16.320	2403.840	2420.160	≥0.5	PASS
		2437	16.400	2428.760	2445.160	≥0.5	PASS
		2462	16.400	2453.840	2470.240	≥0.5	PASS
11N20SISO	Ant1	2412	17.520	2403.280	2420.800	≥0.5	PASS
		2437	17.560	2428.200	2445.760	≥0.5	PASS
		2462	17.520	2453.280	2470.800	≥0.5	PASS

11.1.2. Test Graphs

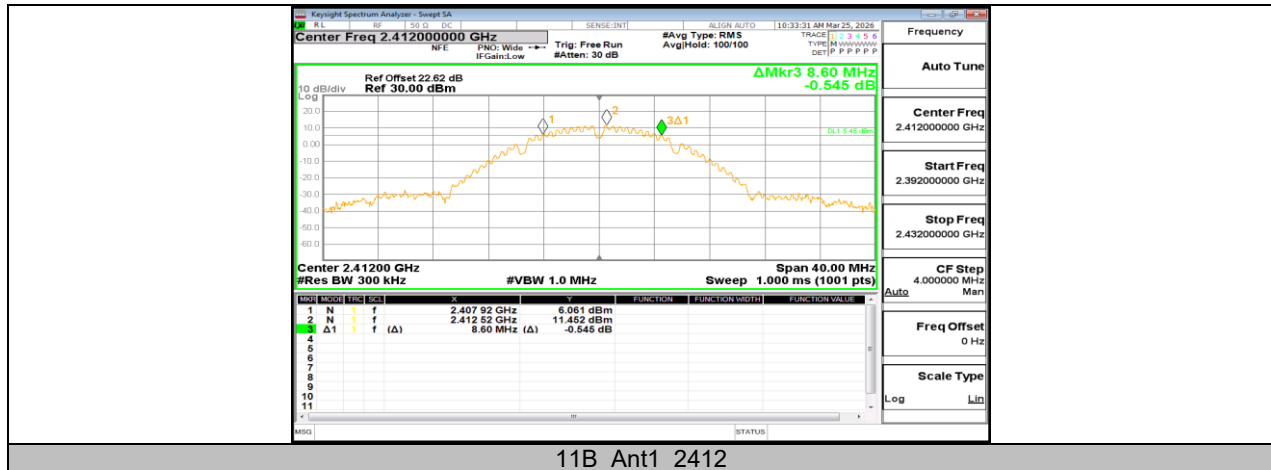


Note:

1. Only the worst data plots were reported to show setting parameter compliance with testing method/procedure.
2. RBW setting to 300kHz is used in 802.11b/g/n HT20 modes.

11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH**11.2.1. Test Result**

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant1	2412	13.576	2405.3018	2418.8778	PASS
		2437	13.664	2430.1267	2443.7907	PASS
		2462	13.536	2455.2805	2468.8165	PASS
11G	Ant1	2412	16.821	2403.6254	2420.4464	PASS
		2437	16.773	2428.5902	2445.3632	PASS
		2462	16.729	2453.6508	2470.3798	PASS
11N20SISO	Ant1	2412	17.940	2403.0534	2420.9934	PASS
		2437	17.856	2428.0751	2445.9311	PASS
		2462	17.895	2453.0605	2470.9555	PASS

11.2.2. Test Graphs

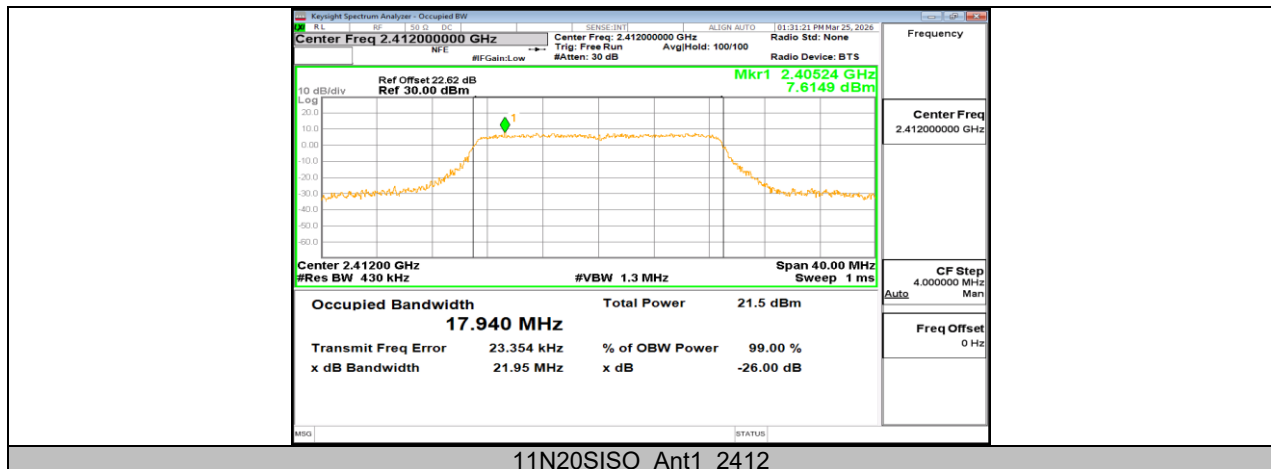

Note:

1. Only the worst data plots were reported to show setting parameter compliance with testing method/procedure.
2. RBW setting to 430kHz is used in 802.11b/g/n HT20 modes.

11.3. APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER

11.3.1. Test Result

Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	19.34	≤30.00	PASS
		2437	18.94	≤30.00	PASS
		2462	19.00	≤30.00	PASS
11G	Ant1	2412	17.32	≤30.00	PASS
		2437	17.02	≤30.00	PASS
		2462	15.80	≤30.00	PASS
11N20SISO	Ant1	2412	16.21	≤30.00	PASS
		2437	16.44	≤30.00	PASS
		2462	15.14	≤30.00	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor


2. The Duty Cycle Factor (refer to section 7.5) had already compensated to the test data.

11.4. APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY**11.4.1. Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-9.60	≤8.00	PASS
		2437	-9.38	≤8.00	PASS
		2462	-10.30	≤8.00	PASS
11G	Ant1	2412	-16.66	≤8.00	PASS
		2437	-16.81	≤8.00	PASS
		2462	-18.22	≤8.00	PASS
11N20SISO	Ant1	2412	-17.66	≤8.00	PASS
		2437	-17.56	≤8.00	PASS
		2462	-18.99	≤8.00	PASS

Note: 1. The Duty Cycle Factor (refer to section 7.5) had already compensated to the test data.

11.4.2. Test Graphs

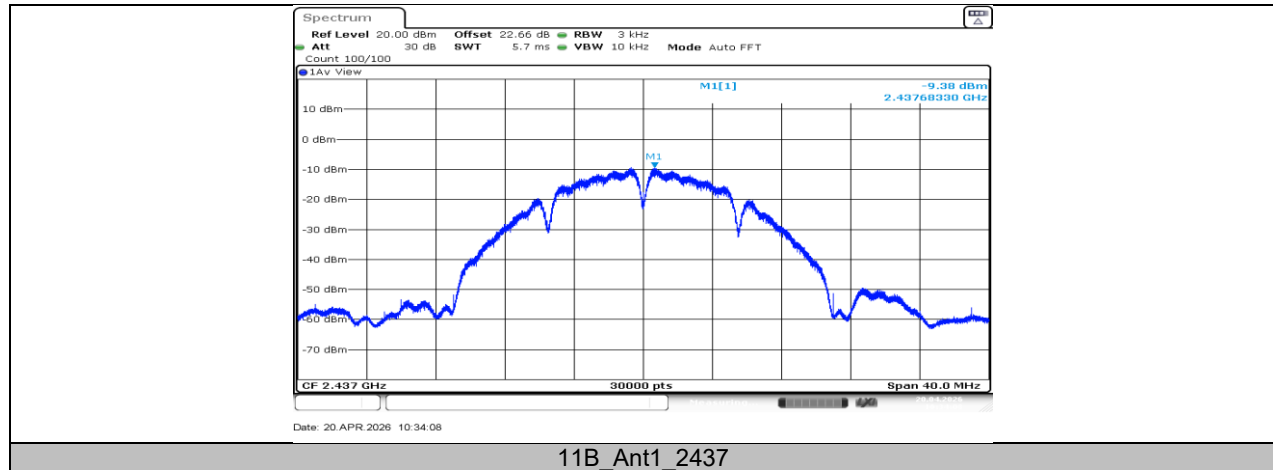

Note:

1. Only the worst data plots were reported to show setting parameter compliance with testing method/procedure.
2. For all modes, RBW setting to 3kHz is used on PSD measurement.
3. Span is set to 40MHz for 802.11b/g/n HT20 modes.

11.5. APPENDIX E: BAND EDGE MEASUREMENTS**11.5.1. Test Result**

Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	10.42	-30.8	≤-19.58	PASS
		High	2462	10.83	-39.08	≤-19.17	PASS
11G	Ant1	Low	2412	4.59	-30.56	≤-25.41	PASS
		High	2462	4.12	-37.48	≤-25.88	PASS
11N20SISO	Ant1	Low	2412	4.39	-30.66	≤-25.61	PASS
		High	2462	4.53	-38.64	≤-25.47	PASS

11.5.2. Test Graphs





11.6. APPENDIX F: CONDUCTED SPURIOUS EMISSION

11.6.1. Test Result

Test Mode	Antenna	Frequency[MHz]	FreqRange [Mhz]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	10.94	---	PASS
			30~1000	-50.45	≤-19.06	PASS
			1000~26500	-41.17	≤-19.06	PASS
		2437	Reference	10.09	---	PASS
			30~1000	-51.24	≤-19.91	PASS
			1000~26500	-41.12	≤-19.91	PASS
		2462	Reference	10.38	---	PASS
			30~1000	-50.86	≤-19.62	PASS
			1000~26500	-40.26	≤-19.62	PASS
11G	Ant1	2412	Reference	3.10	---	PASS
			30~1000	-49.45	≤-26.9	PASS
			1000~26500	-41.06	≤-26.9	PASS
		2437	Reference	4.55	---	PASS
			30~1000	-51.29	≤-25.45	PASS
			1000~26500	-39.49	≤-25.45	PASS
		2462	Reference	3.96	---	PASS
			30~1000	-51.01	≤-26.04	PASS
			1000~26500	-40.88	≤-26.04	PASS
11N20SISO	Ant1	2412	Reference	4.54	---	PASS
			30~1000	-48.62	≤-25.46	PASS
			1000~26500	-40.78	≤-25.46	PASS
		2437	Reference	4.09	---	PASS
			30~1000	-50.95	≤-25.91	PASS
			1000~26500	-41.54	≤-25.91	PASS
		2462	Reference	3.87	---	PASS
			30~1000	-50.44	≤-26.13	PASS
			1000~26500	-41.72	≤-26.13	PASS

11.6.2. Test Graphs



Note:

1. Only the worst data plots were reported to show setting parameter compliance with testing method/procedure.
2. RBW setting to 100kHz is used in all modes on Conducted Spurious Emission test.

11.7. APPENDIX G: DUTY CYCLE

11.7.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B	12.19	12.25	0.9951	99.51	0.02	N/A	0.01
11G	2.03	2.08	0.9760	97.60	0.11	0.49	0.5
11N20SISO	1.89	1.94	0.9742	97.42	0.11	0.53	1

Note:

Duty Cycle Correction Factor = $10 \log (1/x)$.

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW $\leq$ RBW/100 (i.e., 10 kHz) but not less than 10 Hz.

11.7.2. Test Graphs




12. TEST DATA-ANT2

12.1. APPENDIX A: DTS BANDWIDTH

12.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant2	2412	8.600	2407.920	2416.520	≥0.5	PASS
		2437	8.600	2432.480	2441.080	≥0.5	PASS
		2462	8.600	2457.920	2466.520	≥0.5	PASS
11G	Ant2	2412	16.400	2403.800	2420.200	≥0.5	PASS
		2437	16.360	2428.800	2445.160	≥0.5	PASS
		2462	16.440	2453.800	2470.240	≥0.5	PASS
11N20SISO	Ant2	2412	17.640	2403.200	2420.840	≥0.5	PASS
		2437	17.520	2428.200	2445.720	≥0.5	PASS
		2462	17.560	2453.240	2470.800	≥0.5	PASS

12.1.2. Test Graphs

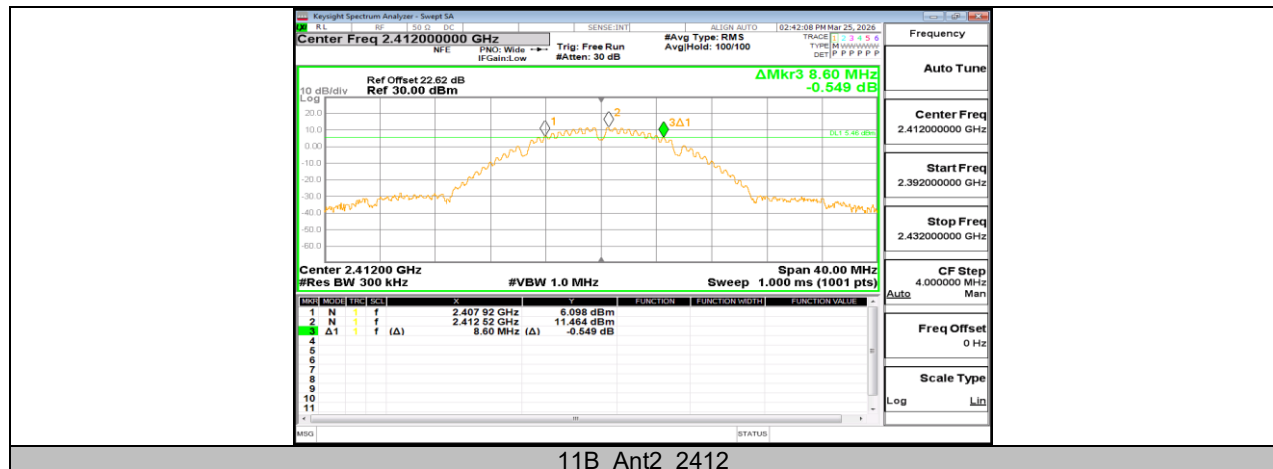


Note:

1. Only the worst data plots were reported to show setting parameter compliance with testing method/procedure.
2. RBW setting to 300kHz is used in 802.11b/g/n HT20 modes.

12.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH**12.2.1. Test Result**

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant2	2412	13.580	2405.2984	2418.8784	PASS
		2437	13.637	2430.1427	2443.7797	PASS
		2462	13.549	2455.2713	2468.8203	PASS
11G	Ant2	2412	16.806	2403.6172	2420.4232	PASS
		2437	16.754	2428.6207	2445.3747	PASS
		2462	16.813	2453.6169	2470.4299	PASS
11N20SISO	Ant2	2412	17.905	2403.0922	2420.9972	PASS
		2437	17.867	2428.0642	2445.9312	PASS
		2462	17.876	2453.0790	2470.9550	PASS

12.2.2. Test Graphs

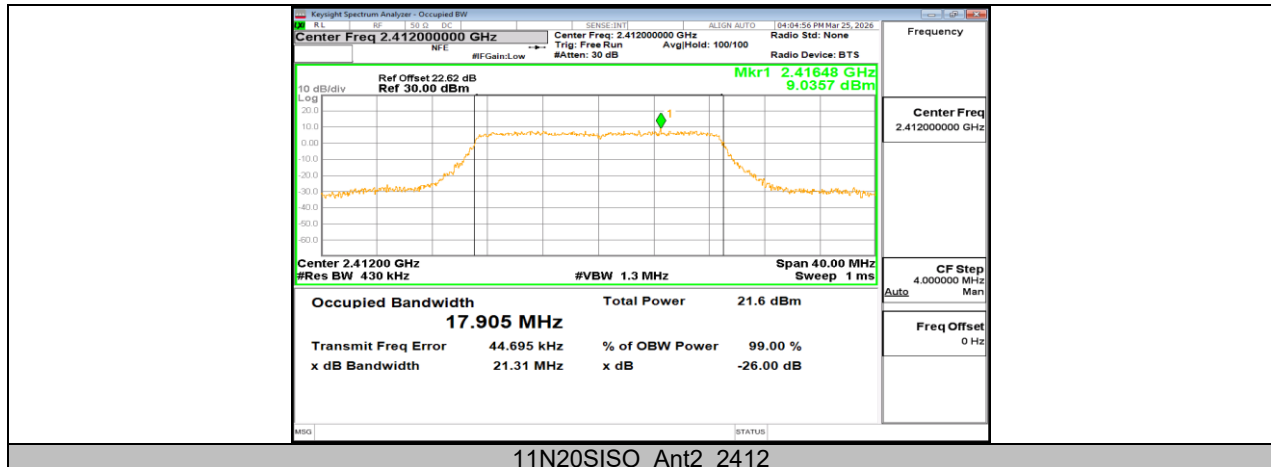

Note:

1. Only the worst data plots were reported to show setting parameter compliance with testing method/procedure.
2. RBW setting to 430kHz is used in 802.11b/g/n HT20 modes.

12.3. APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER**12.3.1. Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant2	2412	19.39	≤30.00	PASS
		2437	19.12	≤30.00	PASS
		2462	18.96	≤30.00	PASS
11G	Ant2	2412	17.18	≤30.00	PASS
		2437	17.29	≤30.00	PASS
		2462	16.20	≤30.00	PASS
11N20SISO	Ant2	2412	17.65	≤30.00	PASS
		2437	17.70	≤30.00	PASS
		2462	15.08	≤30.00	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor


2. The Duty Cycle Factor (refer to section 7.5) had already compensated to the test data.

12.4. APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY**12.4.1. Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant2	2412	-9.55	≤8.00	PASS
		2437	-8.88	≤8.00	PASS
		2462	-8.96	≤8.00	PASS
11G	Ant2	2412	-16.97	≤8.00	PASS
		2437	-16.86	≤8.00	PASS
		2462	-17.99	≤8.00	PASS
11N20SISO	Ant2	2412	-16.41	≤8.00	PASS
		2437	-16.69	≤8.00	PASS
		2462	-18.70	≤8.00	PASS

Note: 1. The Duty Cycle Factor (refer to section 7.5) had already compensated to the test data.

12.4.2. Test Graphs

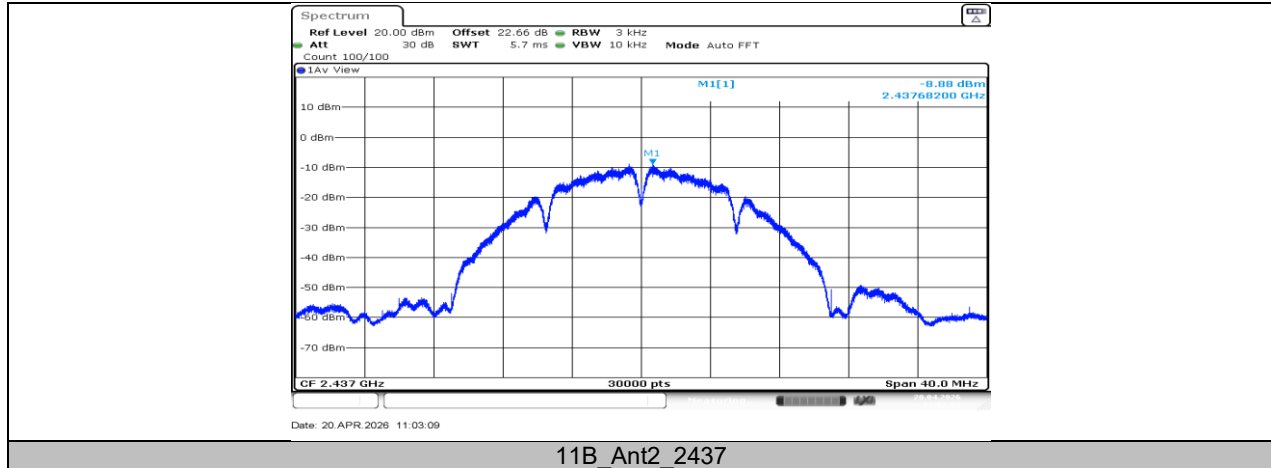

Note:

1. Only the worst data plots were reported to show setting parameter compliance with testing method/procedure.
2. For all modes, RBW setting to 3kHz is used on PSD measurement.
3. Span is set to 40MHz for 802.11b/g/n HT20 modes.


12.5. APPENDIX E: BAND EDGE MEASUREMENTS

12.5.1. Test Result


Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant2	Low	2412	10.57	-30.98	≤-19.43	PASS
		High	2462	10.05	-37.18	≤-19.96	PASS
11G	Ant2	Low	2412	3.97	-30.19	≤-26.03	PASS
		High	2462	4.13	-38.63	≤-25.87	PASS
11N20SISO	Ant2	Low	2412	4.78	-31	≤-25.22	PASS
		High	2462	4.55	-37.81	≤-25.45	PASS

12.5.2. Test Graphs




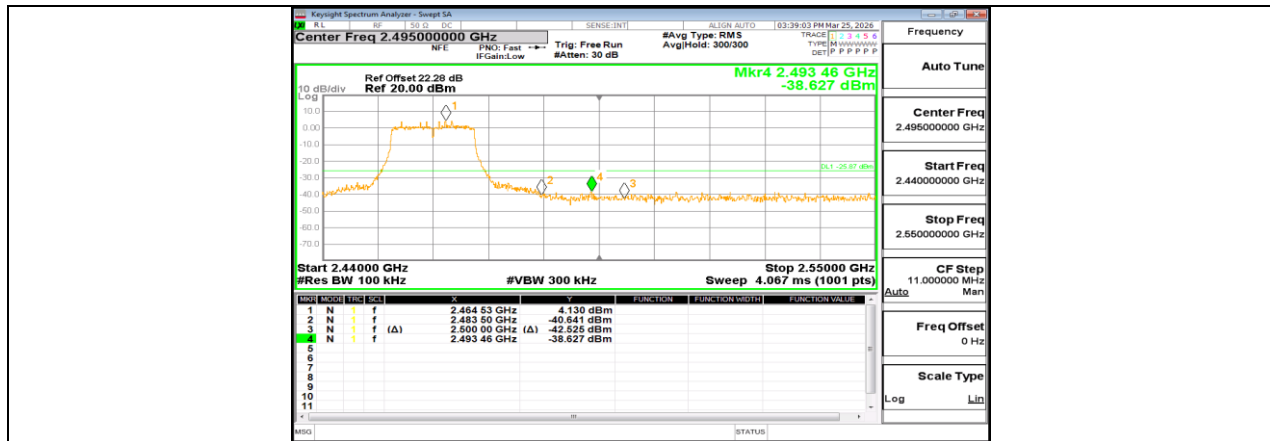

11G Ant2 High 2462

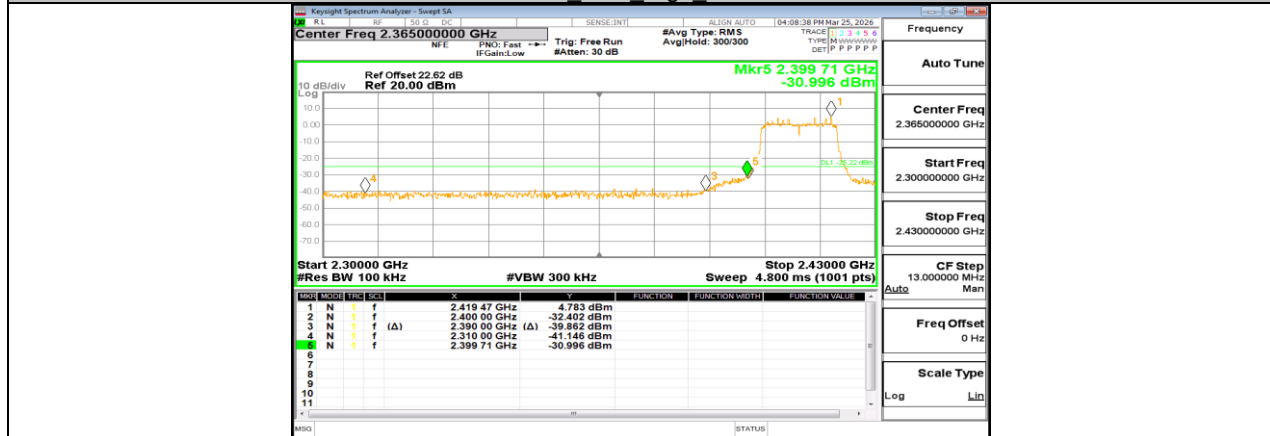

11N20SISO Ant2 Low 2412

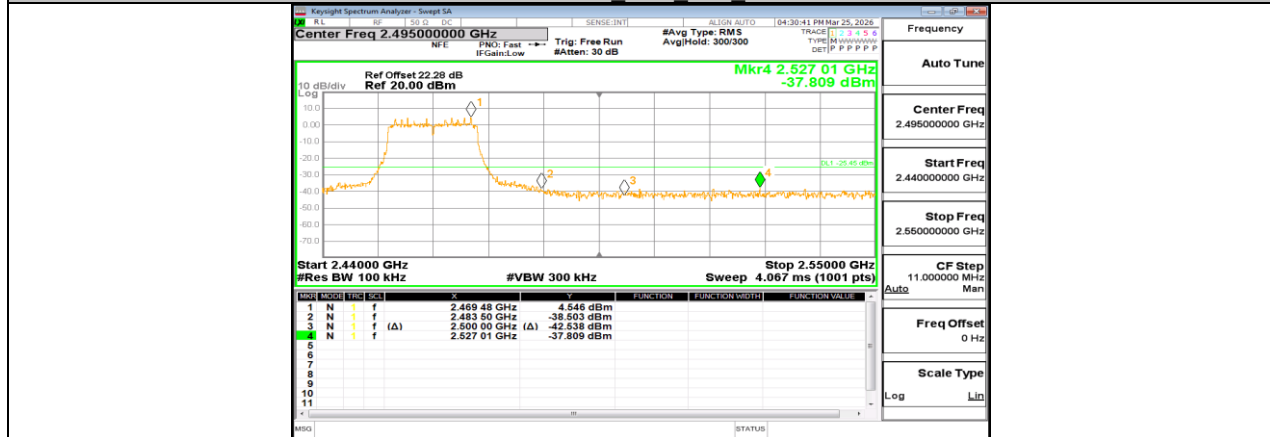


11N20SISO Ant2 High 2462

12.6. APPENDIX F: CONDUCTED SPURIOUS EMISSION

12.6.1. Test Result

Test Mode	Antenna	Frequency[MHz]	FreqRange [Mhz]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant2	2412	Reference	11.12	---	PASS
			30~1000	-50.15	≤-18.88	PASS
			1000~26500	-41.04	≤-18.88	PASS
		2437	Reference	10.38	---	PASS
			30~1000	-50.25	≤-19.62	PASS
			1000~26500	-41.17	≤-19.62	PASS
		2462	Reference	10.29	---	PASS
			30~1000	-50.44	≤-19.71	PASS
			1000~26500	-41.04	≤-19.71	PASS
11G	Ant2	2412	Reference	2.41	---	PASS
			30~1000	-50.31	≤-27.59	PASS
			1000~26500	-39.55	≤-27.59	PASS
		2437	Reference	3.79	---	PASS
			30~1000	-50.86	≤-26.21	PASS
			1000~26500	-41.12	≤-26.21	PASS
		2462	Reference	3.65	---	PASS
			30~1000	-50.36	≤-26.35	PASS
			1000~26500	-41.37	≤-26.35	PASS
11N20SISO	Ant2	2412	Reference	4.28	---	PASS
			30~1000	-50.34	≤-25.72	PASS
			1000~26500	-40.33	≤-25.72	PASS
		2437	Reference	3.60	---	PASS
			30~1000	-51.65	≤-26.4	PASS
			1000~26500	-41.42	≤-26.4	PASS
		2462	Reference	3.42	---	PASS
			30~1000	-50.21	≤-26.58	PASS
			1000~26500	-41.23	≤-26.58	PASS

12.6.2. Test Graphs

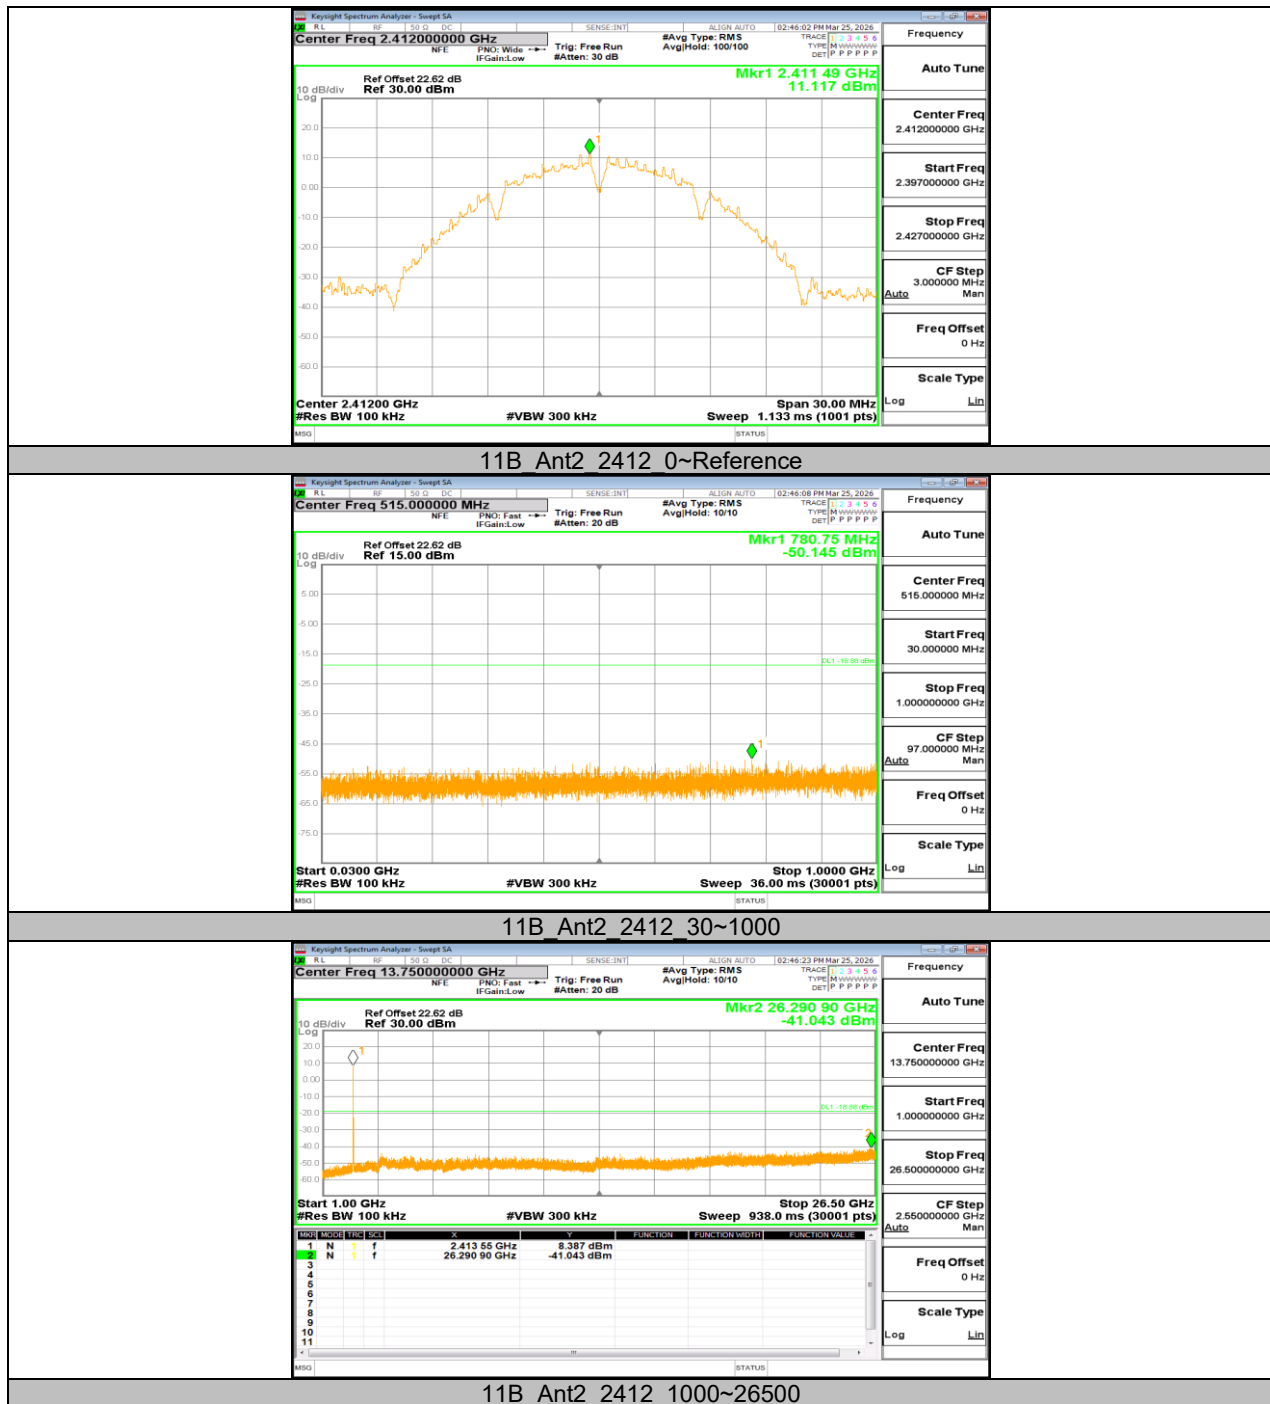

Note:

- Only the worst data plots were reported to show setting parameter compliance with testing method/procedure.
- RBW setting to 100kHz is used in all modes on Conducted Spurious Emission test.

12.7. APPENDIX G: DUTY CYCLE**12.7.1. Test Result**

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B	12.19	12.24	0.9959	99.59	0.02	N/A	0.01
11G	2.03	2.08	0.9760	97.60	0.11	0.49	0.5
11N20SISO	1.89	1.94	0.9742	97.42	0.11	0.53	1

Note:

Duty Cycle Correction Factor = $10 \log (1/x)$.

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW $\leq$ RBW/100 (i.e., 10 kHz) but not less than 10 Hz.

12.7.2. Test Graphs



END OF REPORT