






11AC80SISO-Ant1-5775-PASS

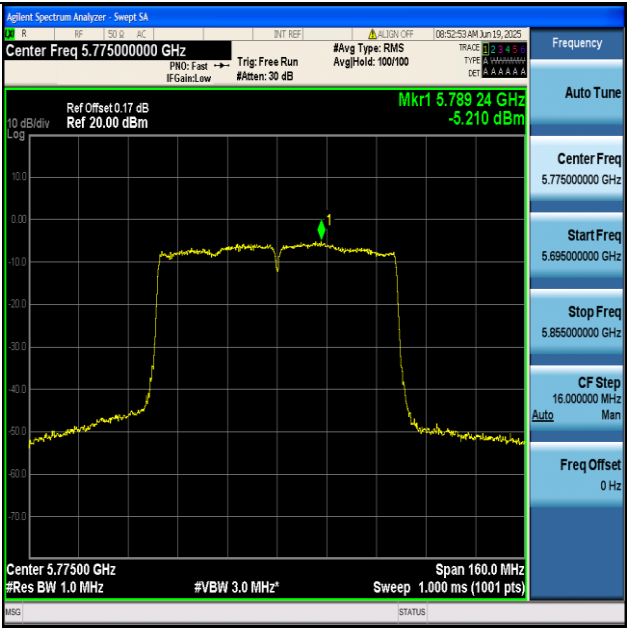


11AX20SISO-Ant1-5180-PASS

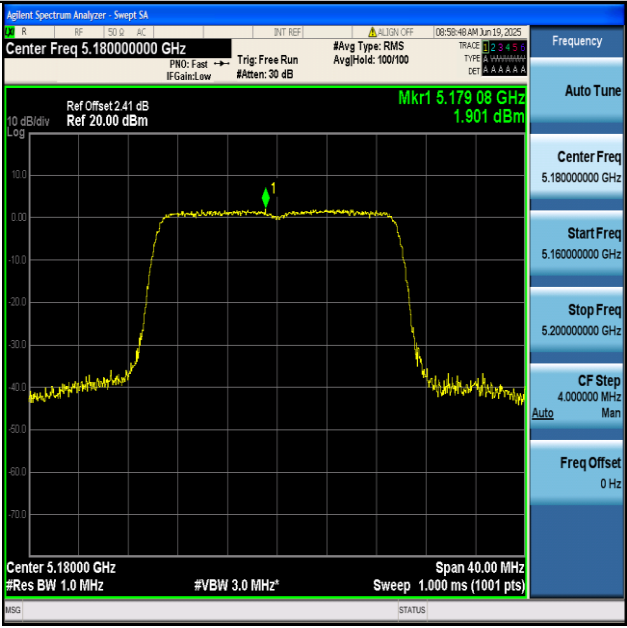


11AX20SISO-Ant1-5200-PASS

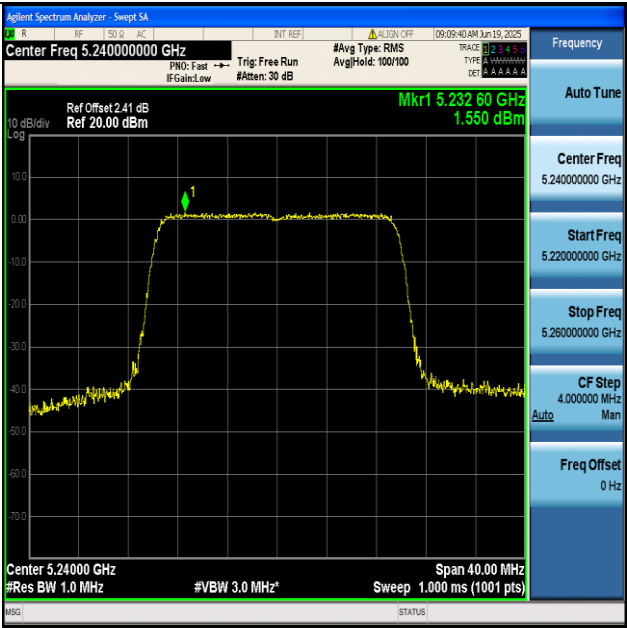


11AX20SISO-Ant1-5240-PASS

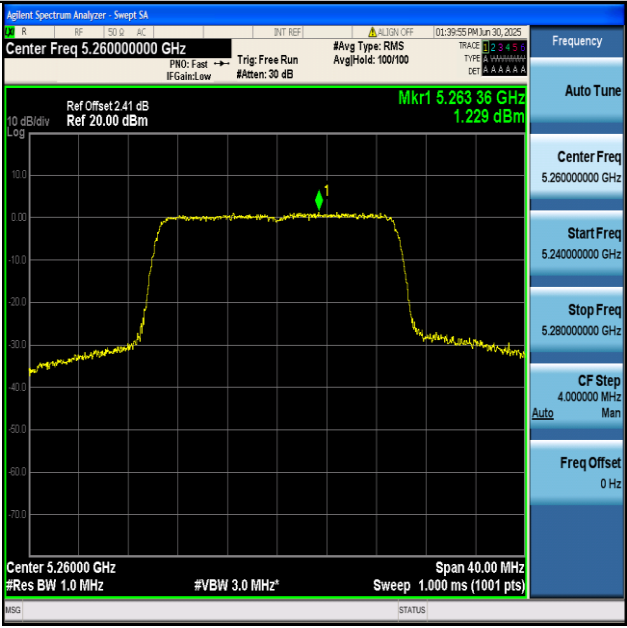


11AX20SISO-Ant1-5260-PASS

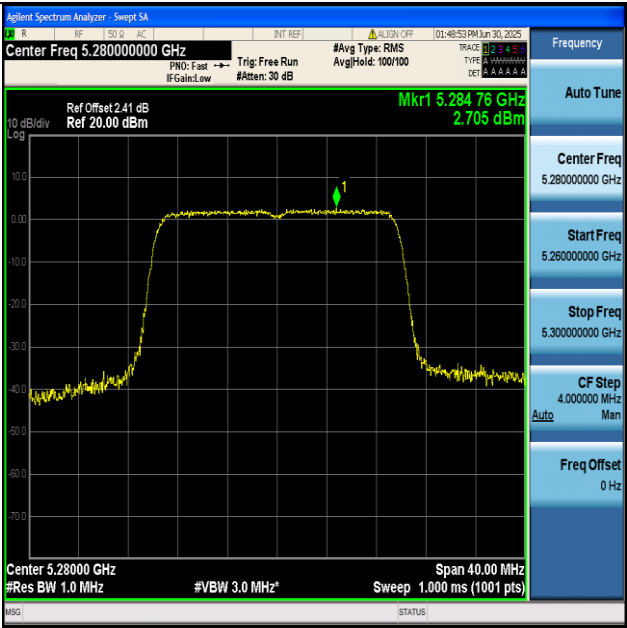


11AX20SISO-Ant1-5280-PASS

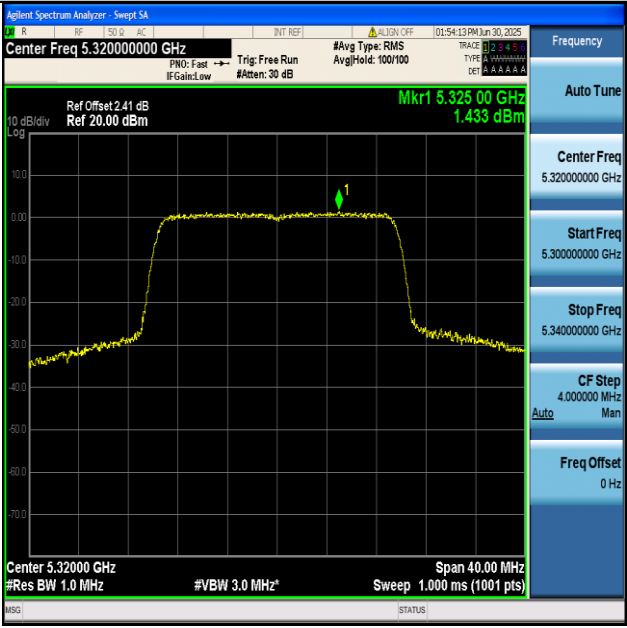


11AX20SISO-Ant1-5320-PASS

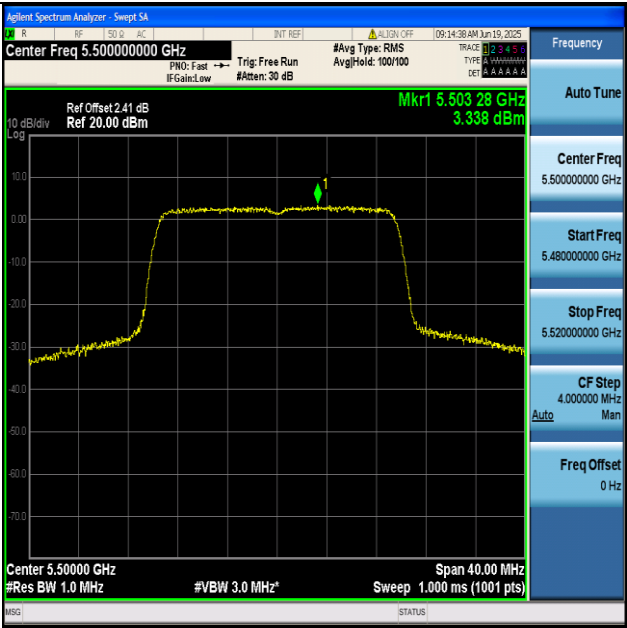


11AX20SISO-Ant1-5500-PASS

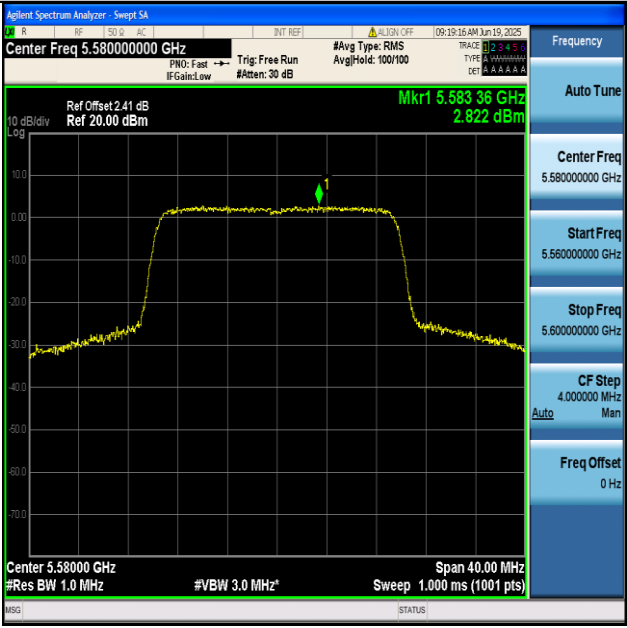


11AX20SISO-Ant1-5580-PASS

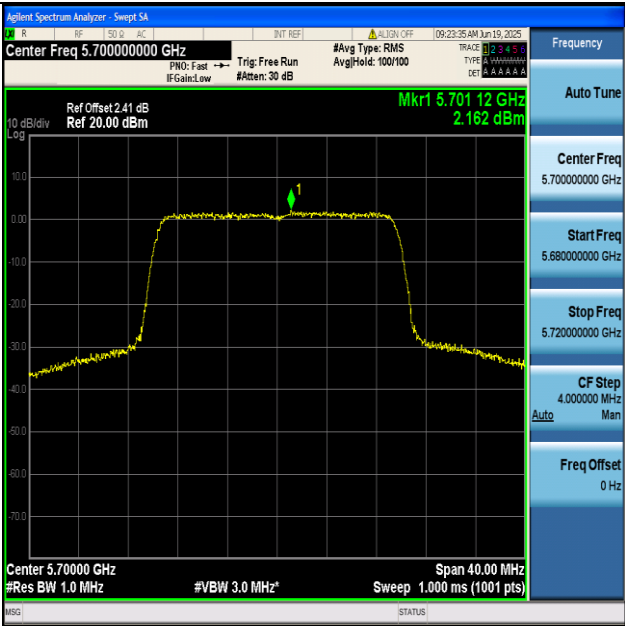


11AX20SISO-Ant1-5700-PASS

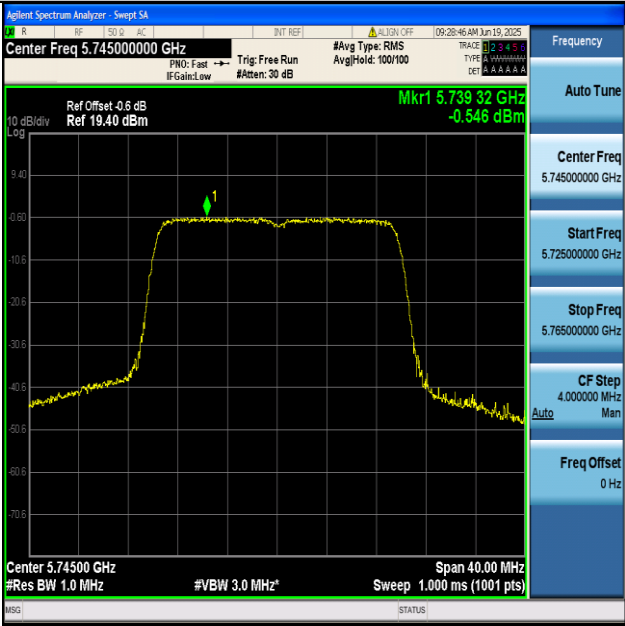

11AX20SISO-Ant1-5745-PASS

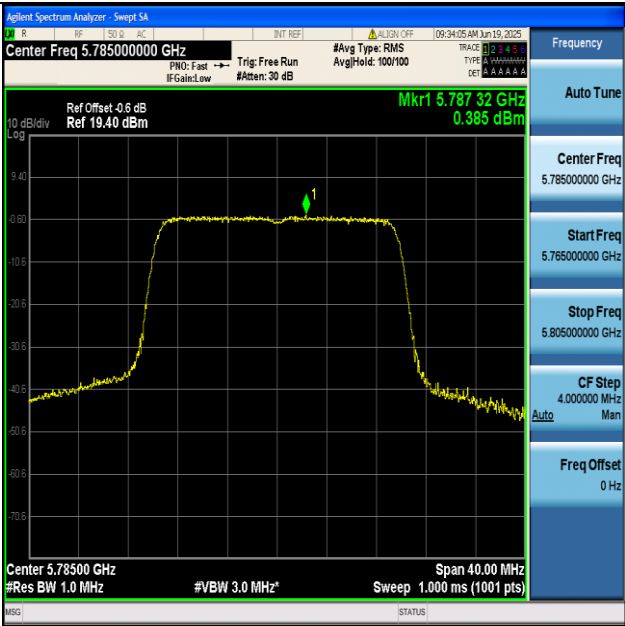


11AX20SISO-Ant1-5785-PASS

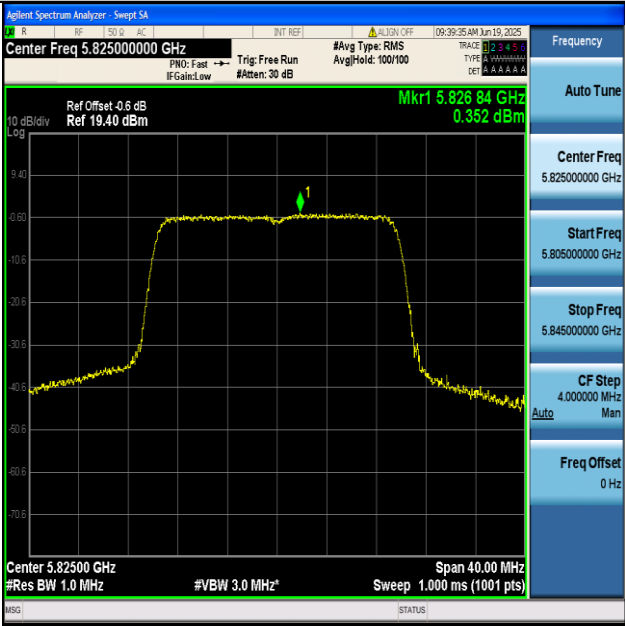


11AX20SISO-Ant1-5825-PASS



11AX40SISO-Ant1-5190-PASS

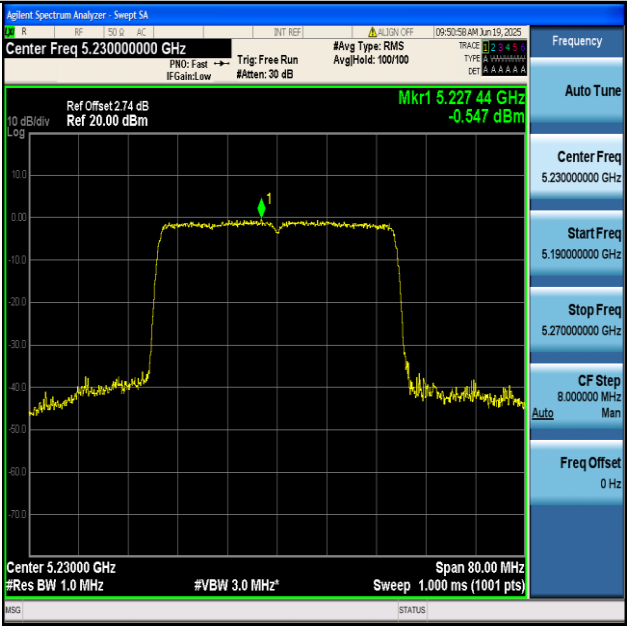

11AX40SISO-Ant1-5230-PASS

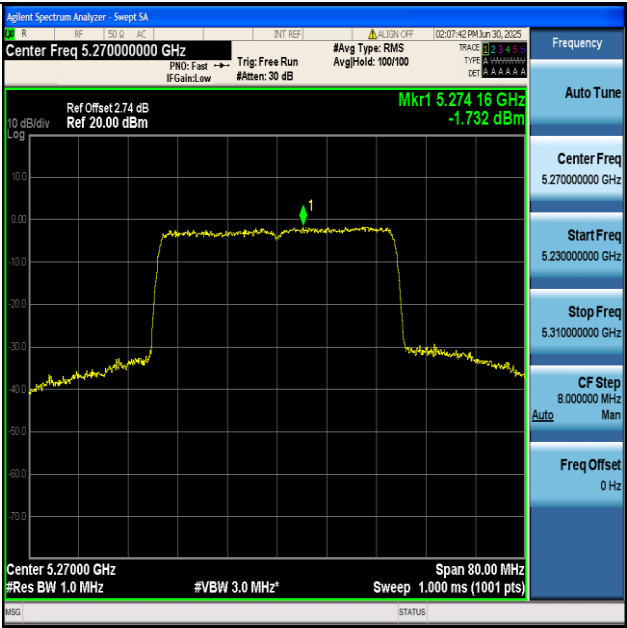


11AX40SISO-Ant1-5270-PASS



11AX40SISO-Ant1-5310-PASS




11AX40SISO-Ant1-5510-PASS

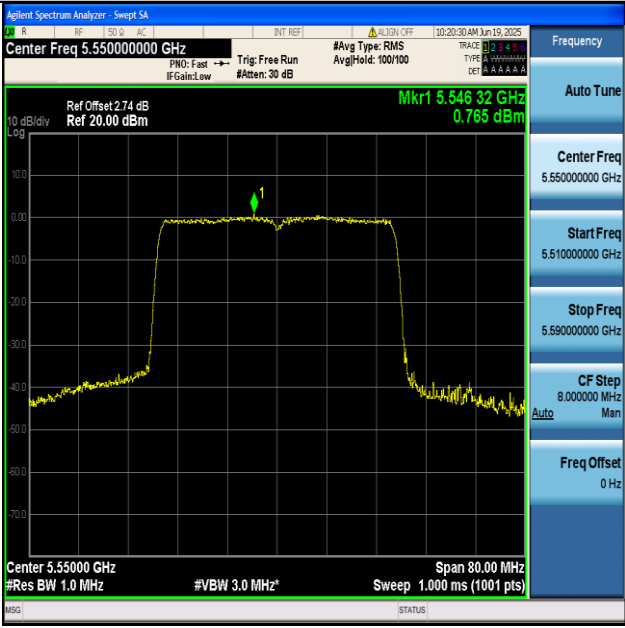


11AX40SISO-Ant1-5550-PASS




11AX40SISO-Ant1-5670-PASS

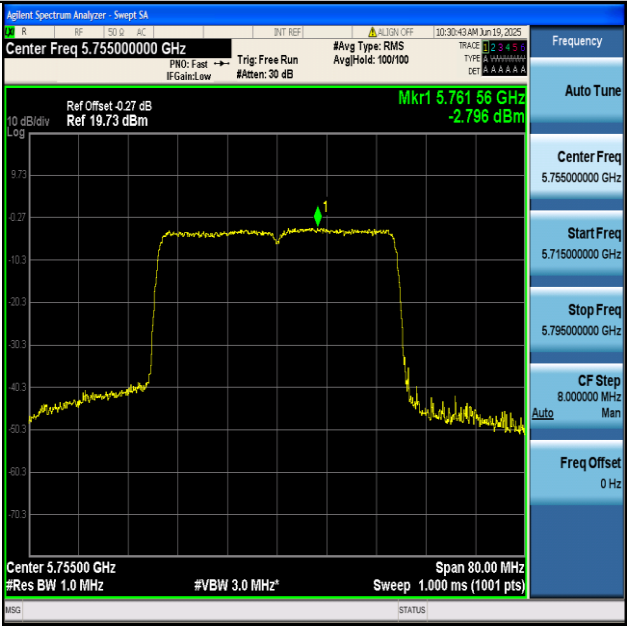


11AX40SISO-Ant1-5755-PASS

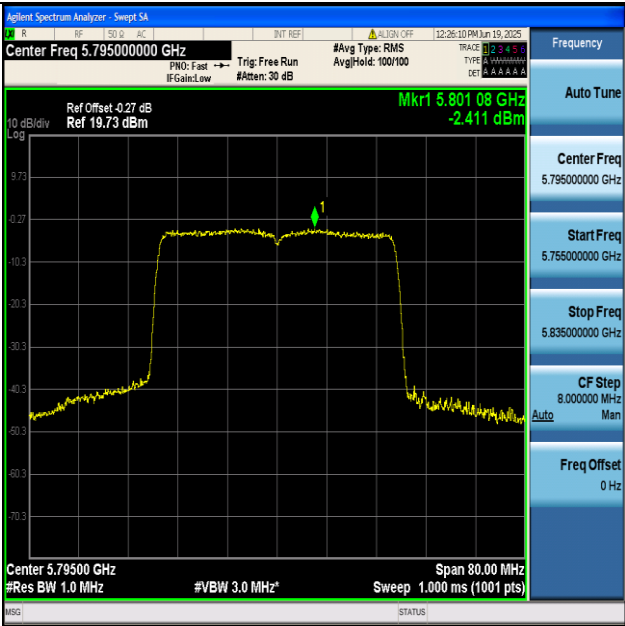

11AX40SISO-Ant1-5795-PASS

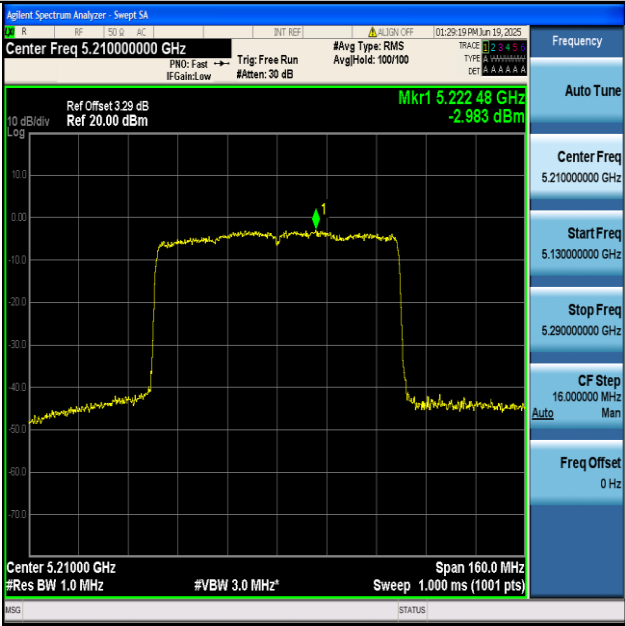

11AX80SISO-Ant1-5210-PASS

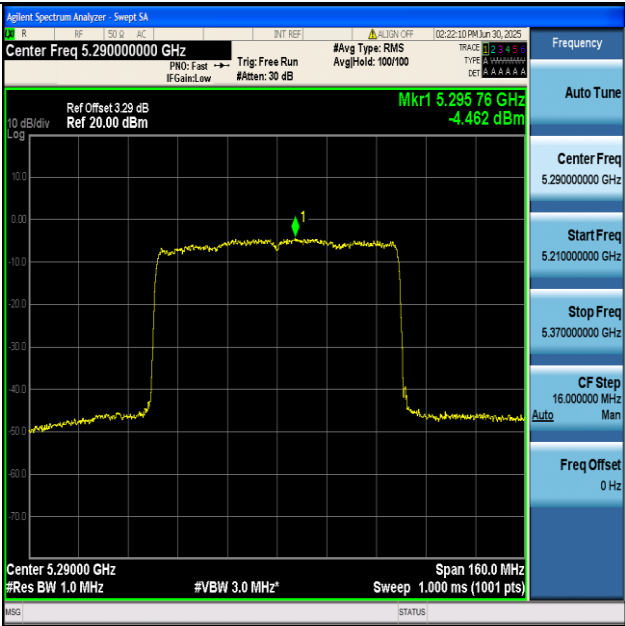


11AX80SISO-Ant1-5290-PASS



11AX80SISO-Ant1-5530-PASS




11AX80SISO-Ant1-5610-PASS

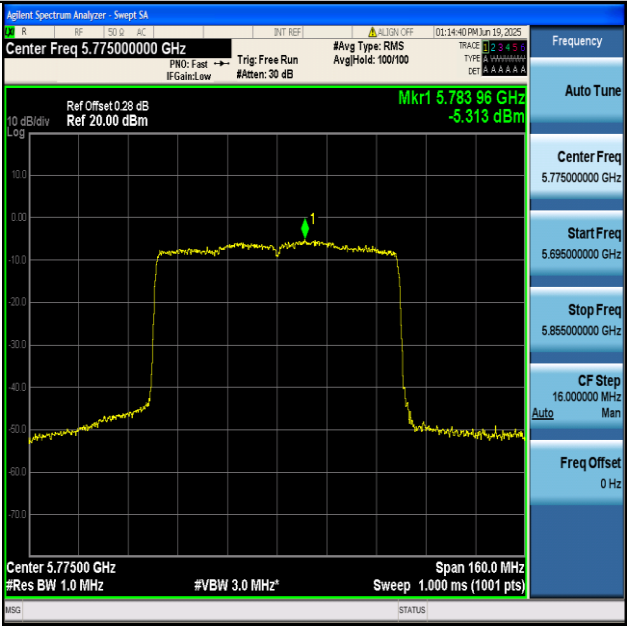

11AX80SISO-Ant1-5775-PASS

Appendix G: Radiated Emission Band Edge

Test Report

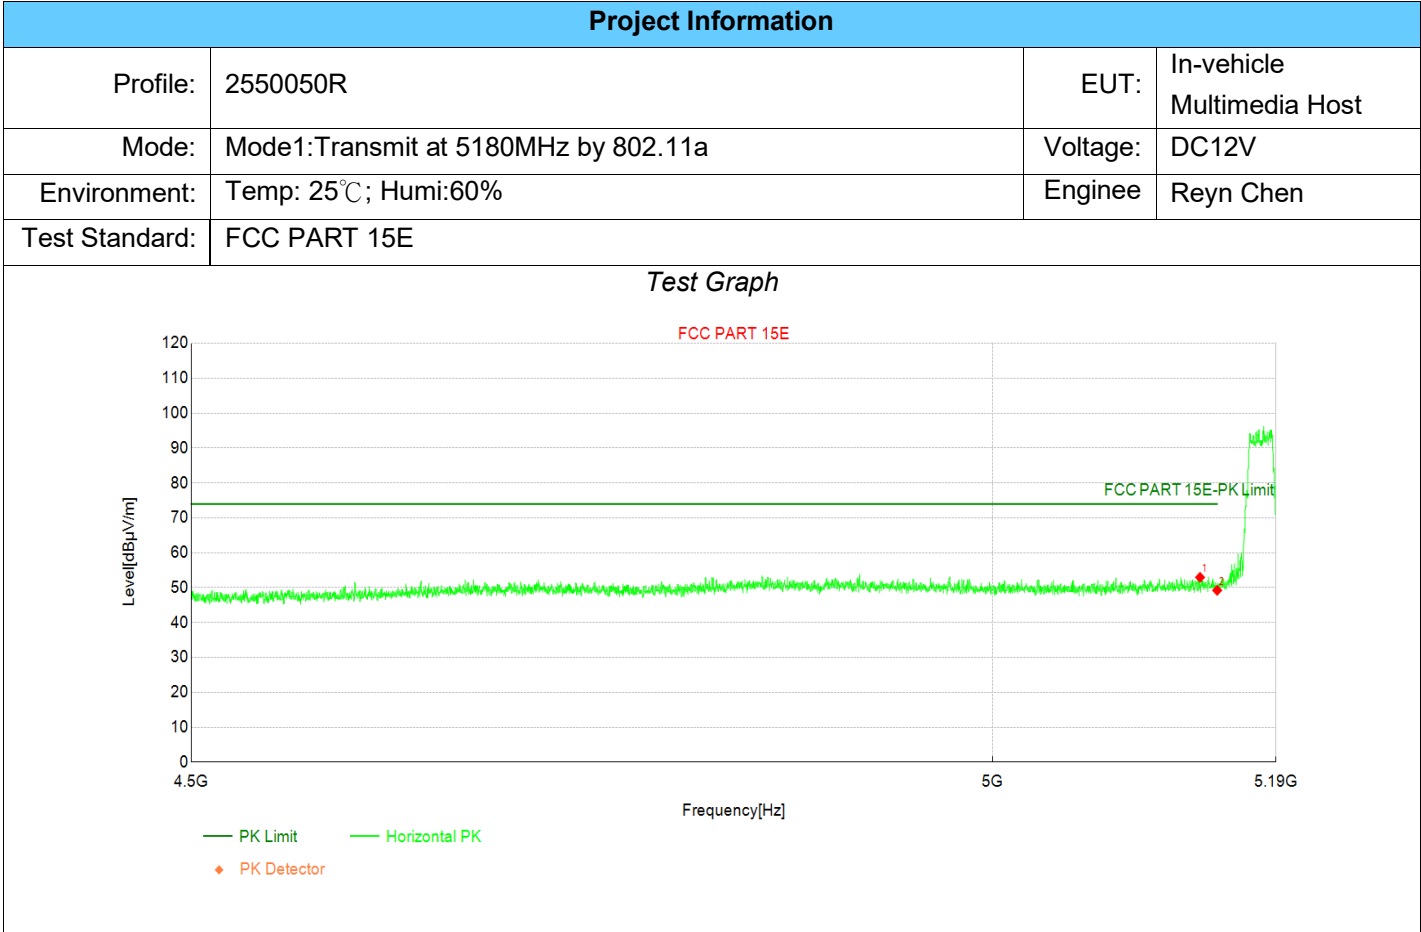


Suspected Data List									
NO	Freque ncy [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdi ct
1	5138.42	37.92	52.96	15.04	74.00	21.04	PK	Horizo	PASS
2	5150.00	34.13	49.24	15.11	74.00	24.76	PK	Horizo	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode1:Transmit at 5180MHz by 802.11a	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

Test Graph

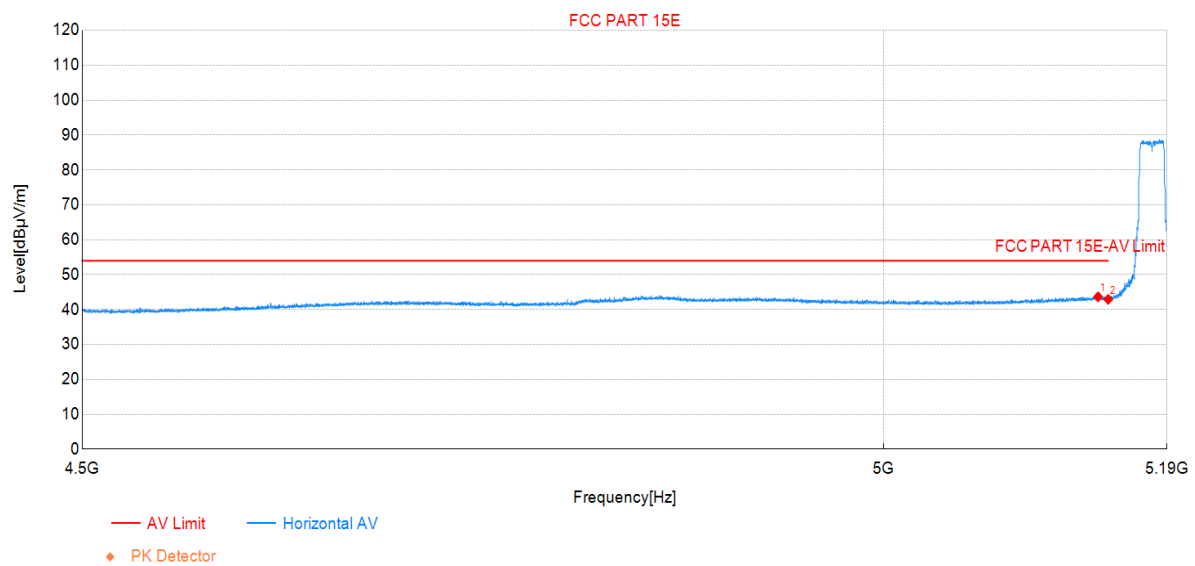


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5143.17	28.57	43.64	15.07	54.00	10.36	AV	Horizo	PASS
2	5150.00	27.81	42.92	15.11	54.00	11.08	AV	Horizo	PASS


Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode1:Transmit at 5180MHz by 802.11a	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

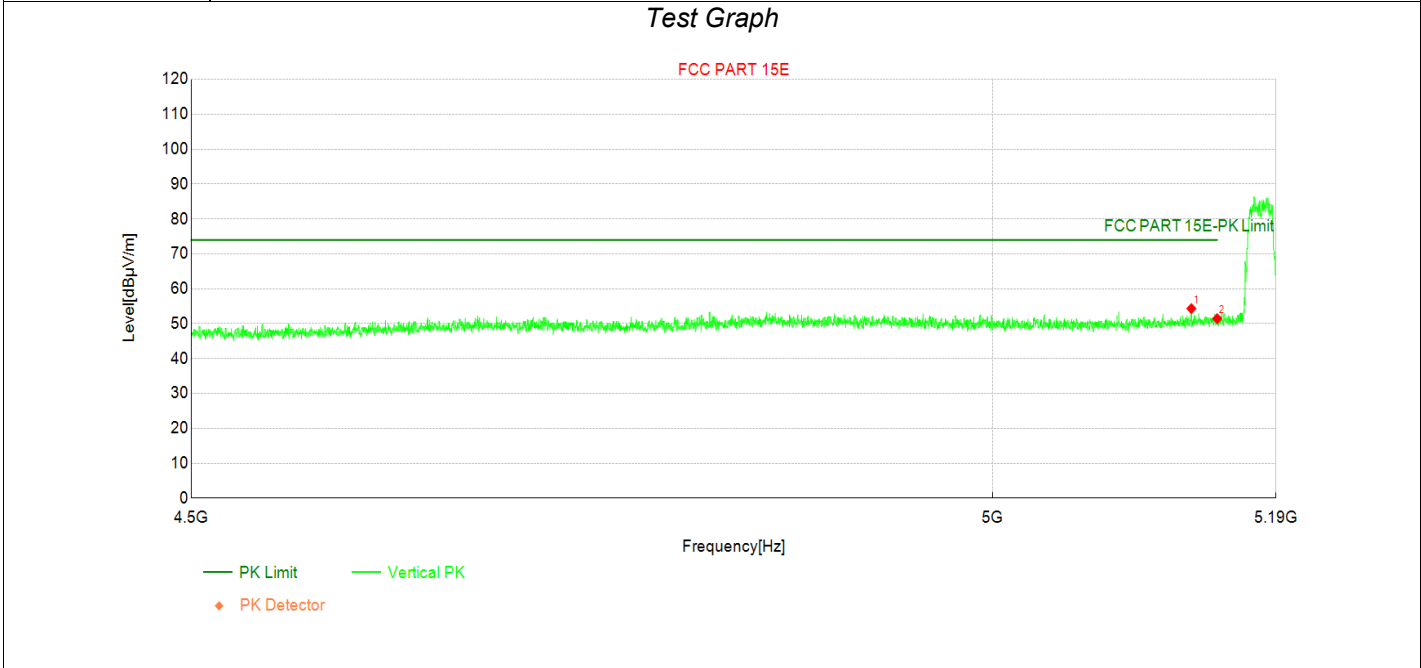

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5132.56	39.31	54.32	15.01	74.00	19.68	PK	Vertic	PASS
2	5150.00	36.33	51.44	15.11	74.00	22.56	PK	Vertic	PASS

Test Report

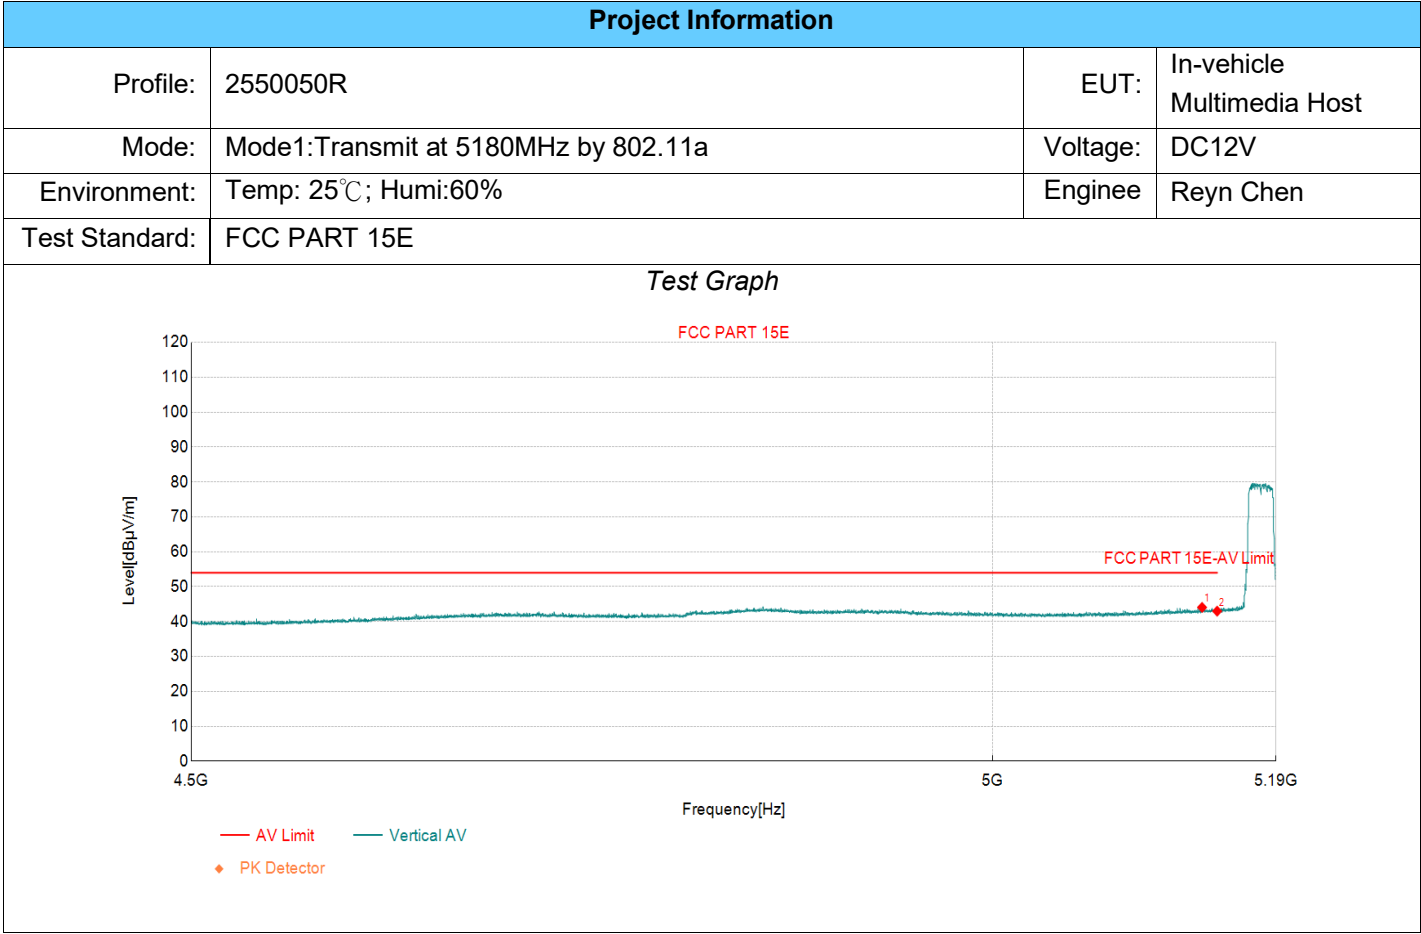


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5139.80	29.01	44.06	15.05	54.00	9.94	AV	Vertic	PASS
2	5150.00	27.87	42.98	15.11	54.00	11.02	AV	Vertic	PASS

Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode1:Transmit at 5320MHz by 802.11a	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

Test Graph

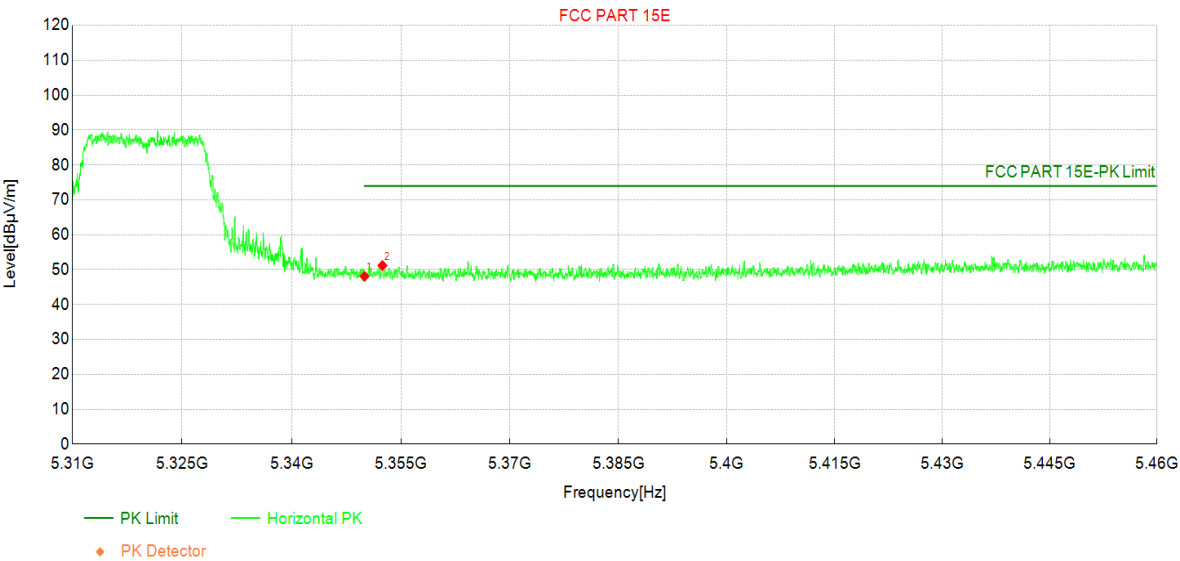


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	32.38	48.09	15.71	74.00	25.91	PK	Horizo	PASS
2	5352.47	35.48	51.19	15.71	74.00	22.81	PK	Horizo	PASS

Test Report


Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode1:Transmit at 5320MHz by 802.11a	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

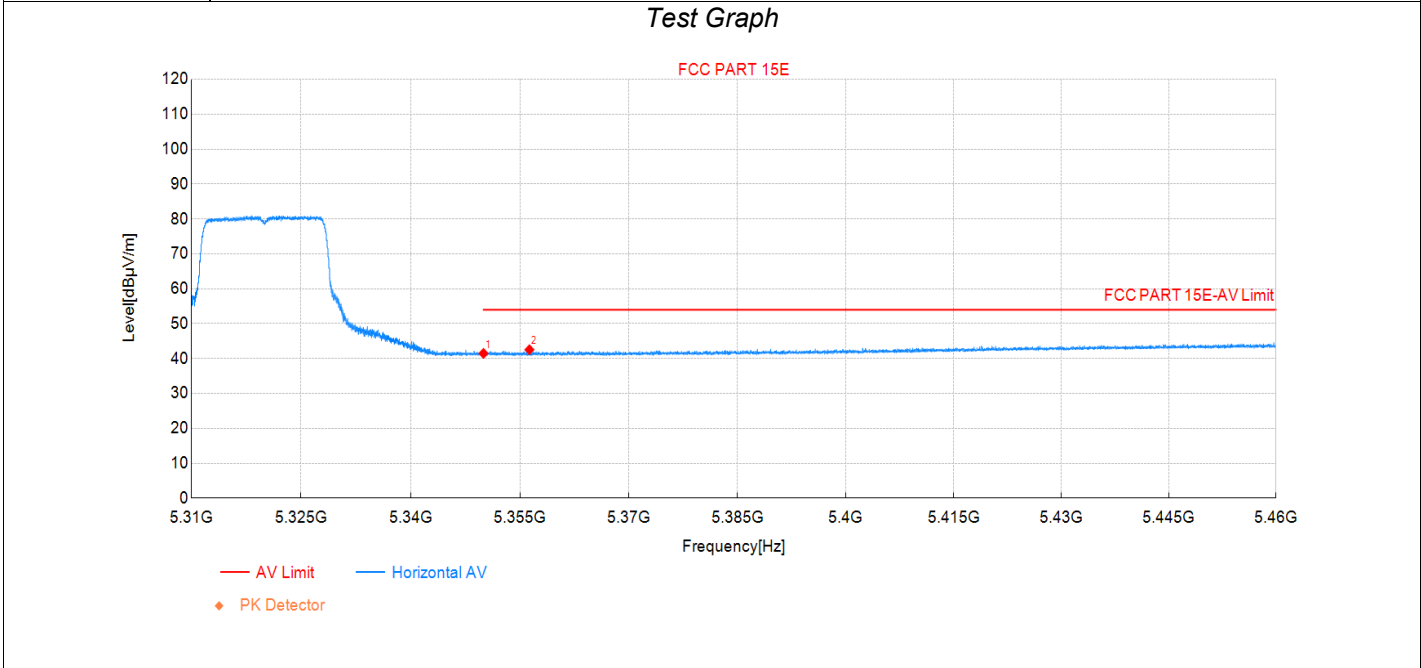

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	25.77	41.48	15.71	54.00	12.52	AV	Horizo	PASS
2	5356.31	26.84	42.54	15.70	54.00	11.46	AV	Horizo	PASS

Test Report


Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode1:Transmit at 5320MHz by 802.11a	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

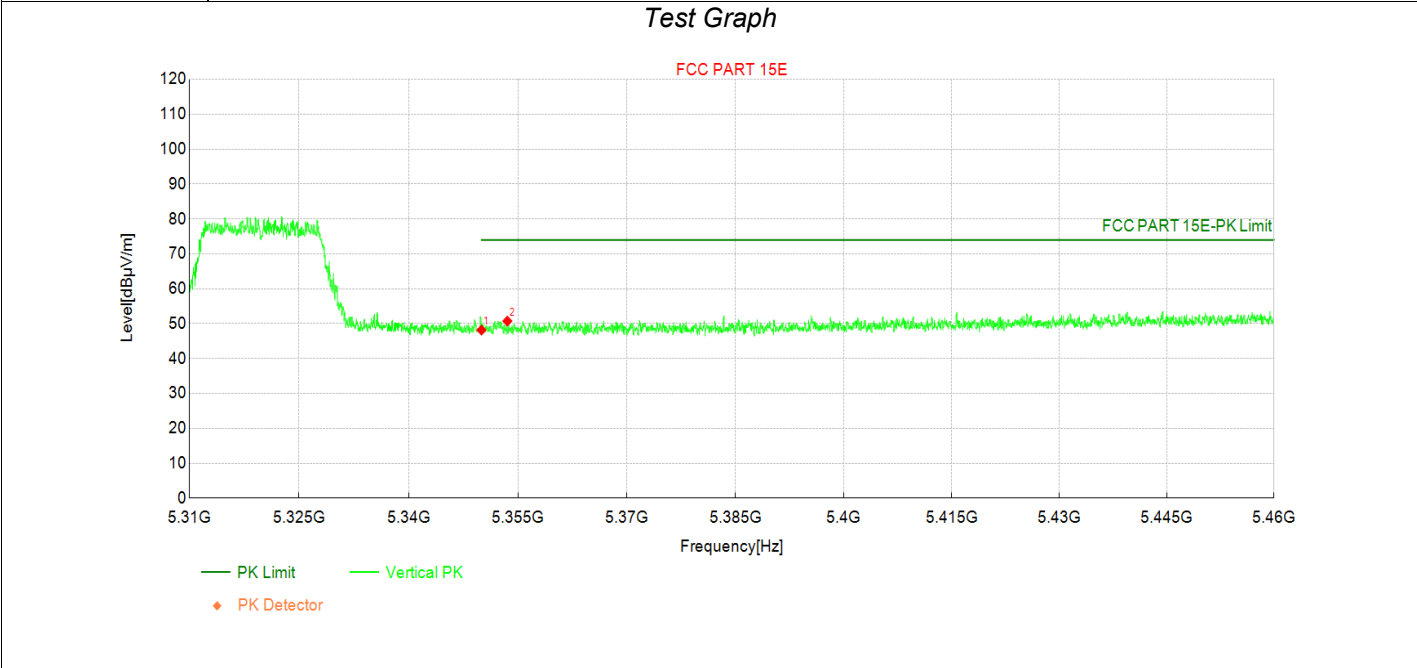

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	32.46	48.17	15.71	74.00	25.83	PK	Vertic	PASS
2	5353.56	35.03	50.74	15.71	74.00	23.26	PK	Vertic	PASS

Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode1:Transmit at 5320MHz by 802.11a	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

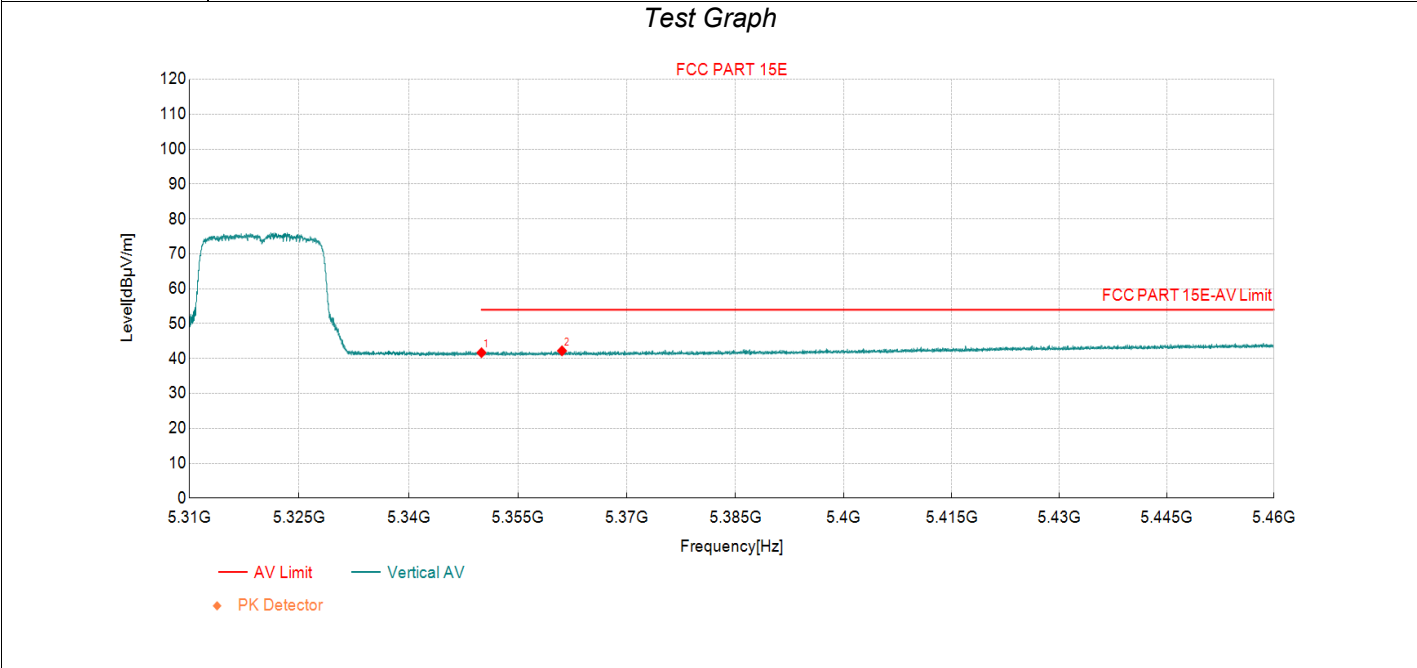


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	25.97	41.68	15.71	54.00	12.32	AV	Vertic	PASS
2	5361.08	26.52	42.21	15.69	54.00	11.79	AV	Vertic	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode1:Transmit at 5500MHz by 802.11a	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Enginee	Reyn Chen
Test Standard:	FCC Part15 E		

Test Graph

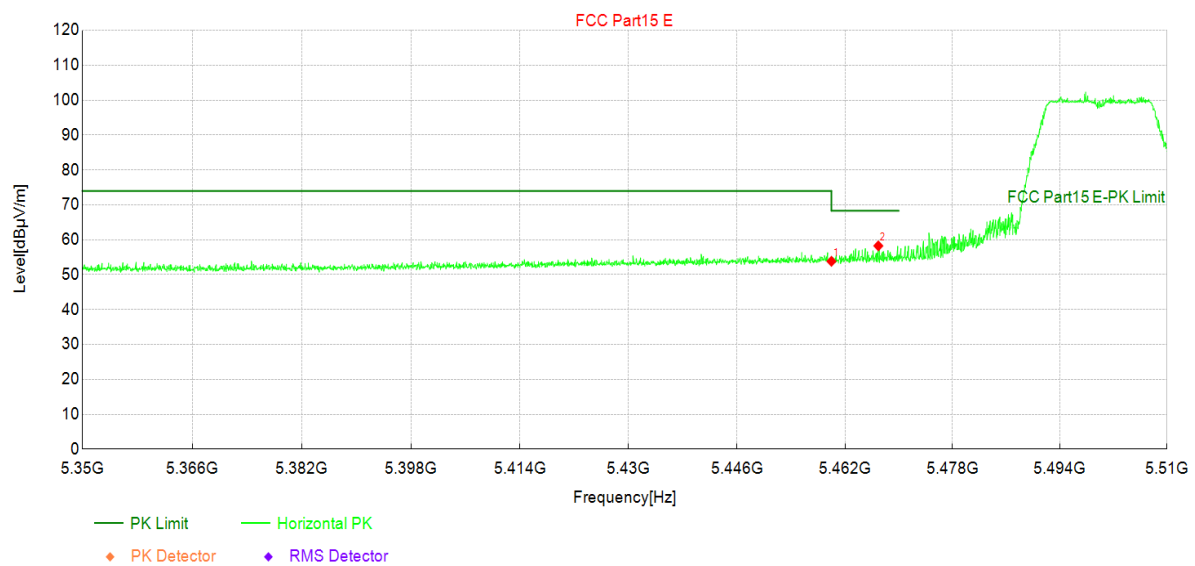

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	37.48	53.82	16.34	68.30	14.48	PK	Horizo	PASS
2	5466.96	41.83	58.25	16.42	68.30	10.05	PK	Horizo	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode1:Transmit at 5500MHz by 802.11a	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		


Test Graph

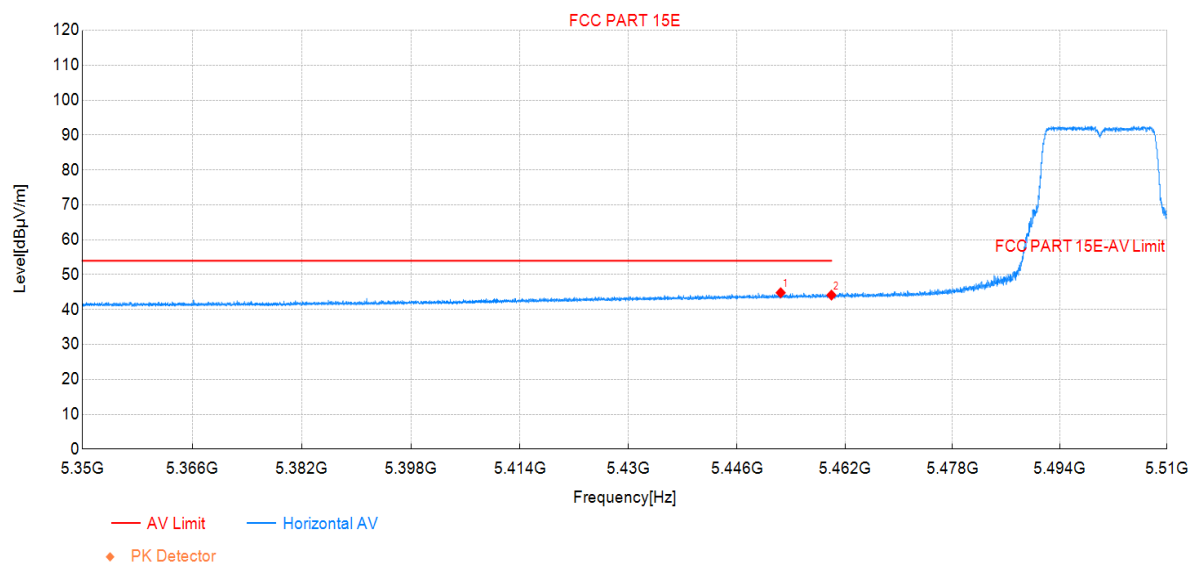

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5452.48	28.57	44.82	16.25	54.00	9.18	AV	Horizo	PASS
2	5460.00	27.81	44.15	16.34	54.00	9.85	AV	Horizo	PASS


Test Report

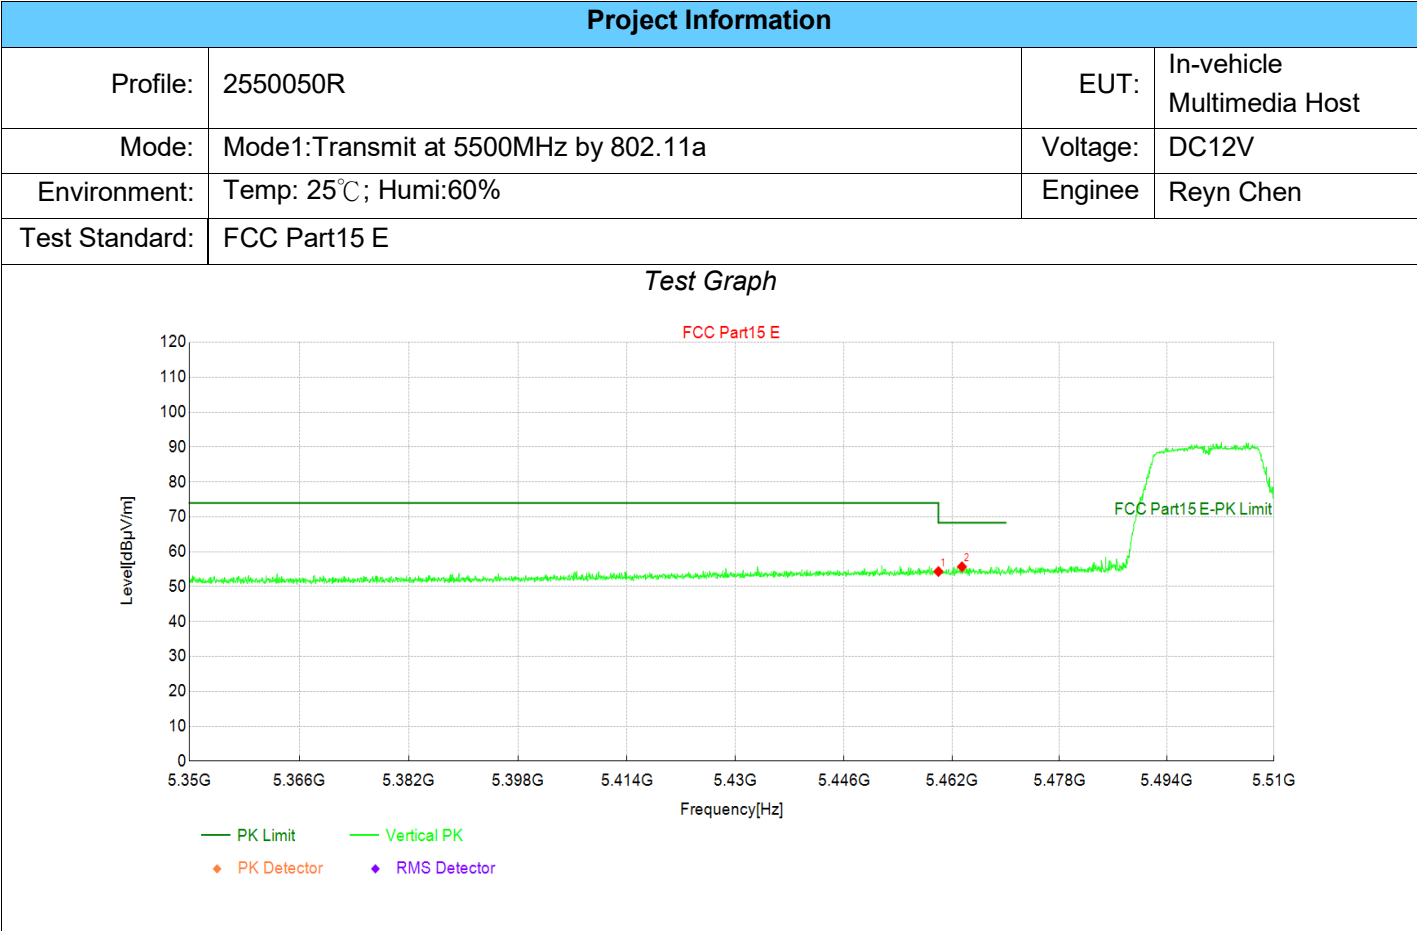

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	37.99	54.33	16.34	68.30	13.97	PK	Vertic	PASS
2	5463.49	39.32	55.70	16.38	68.30	12.60	PK	Vertic	PASS


Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode1:Transmit at 5500MHz by 802.11a	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

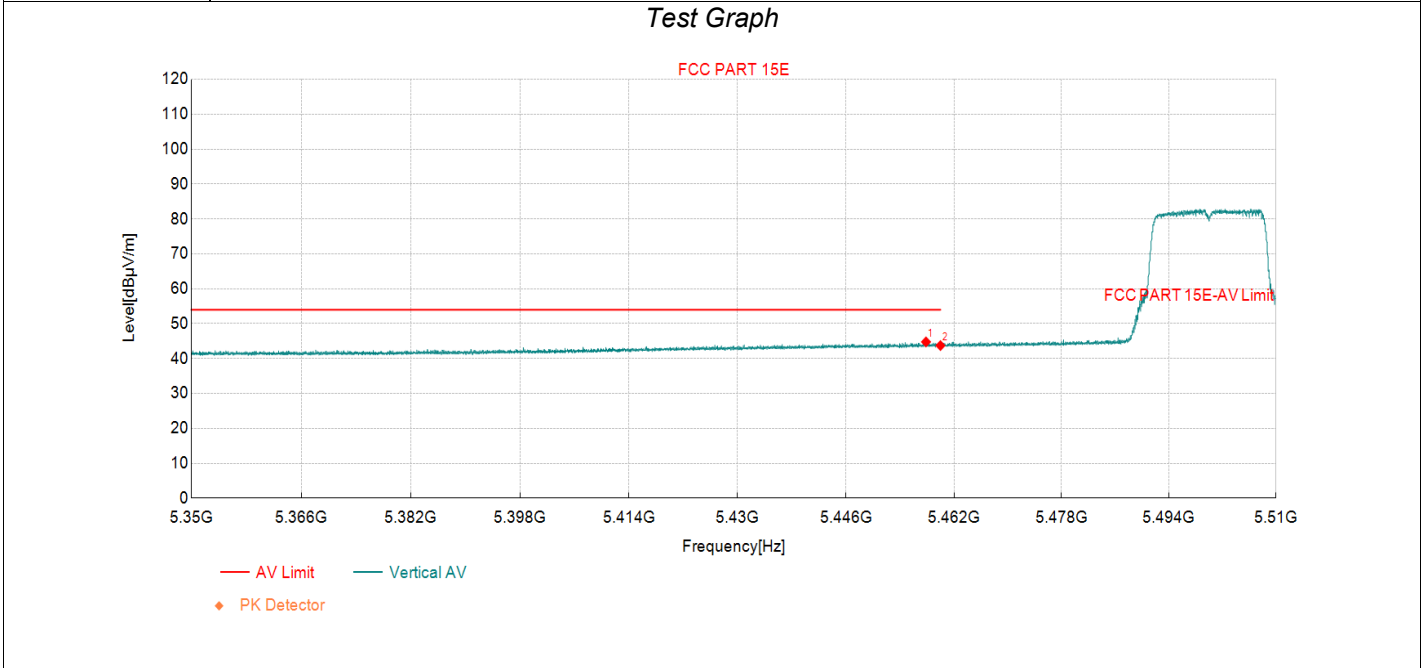

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5457.86	28.47	44.78	16.31	54.00	9.22	AV	Vertic	PASS
2	5460.00	27.38	43.72	16.34	54.00	10.28	AV	Vertic	PASS

Test Report

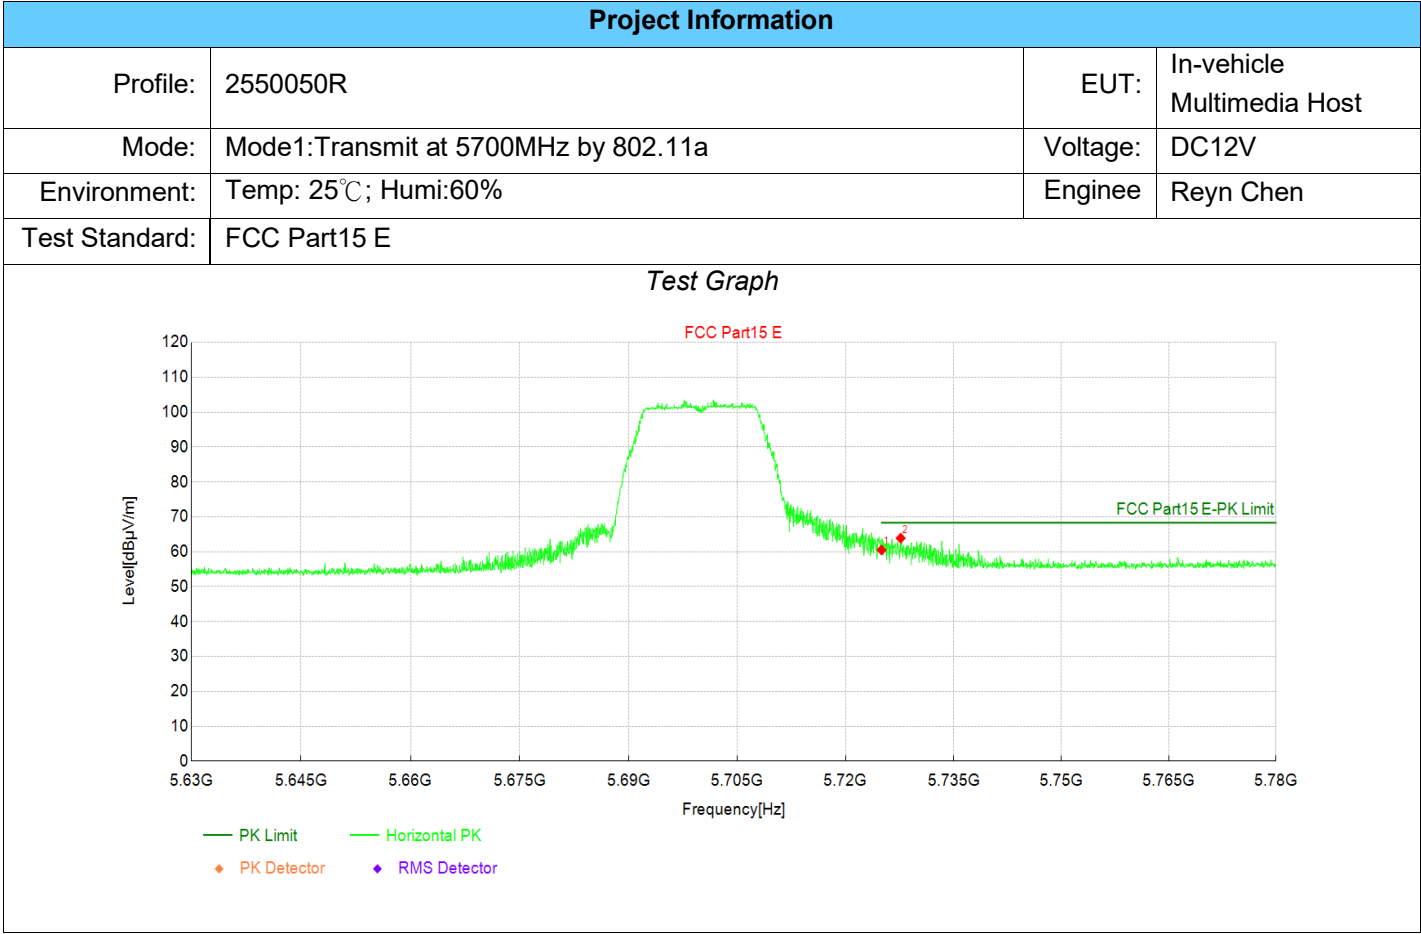


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5725.00	41.84	60.51	18.67	68.30	7.79	PK	Horizo	PASS
2	5727.65	45.22	63.88	18.66	68.30	4.42	PK	Horizo	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode1:Transmit at 5700MHz by 802.11a	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Enginee	Reyn Chen
Test Standard:	FCC Part15 E		

Test Graph

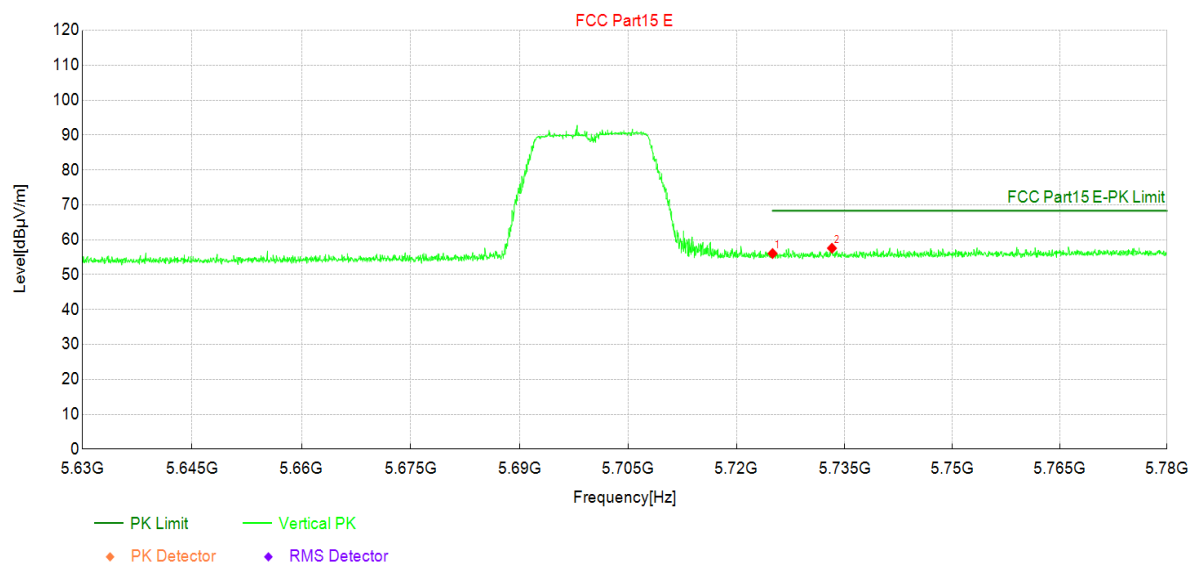

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5725.00	37.39	56.06	18.67	68.30	12.24	PK	Vertic	PASS
2	5733.25	38.92	57.58	18.66	68.30	10.72	PK	Vertic	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode2:Transmit at 5180MHz by 802.11ax(20MHz)	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		


Test Graph

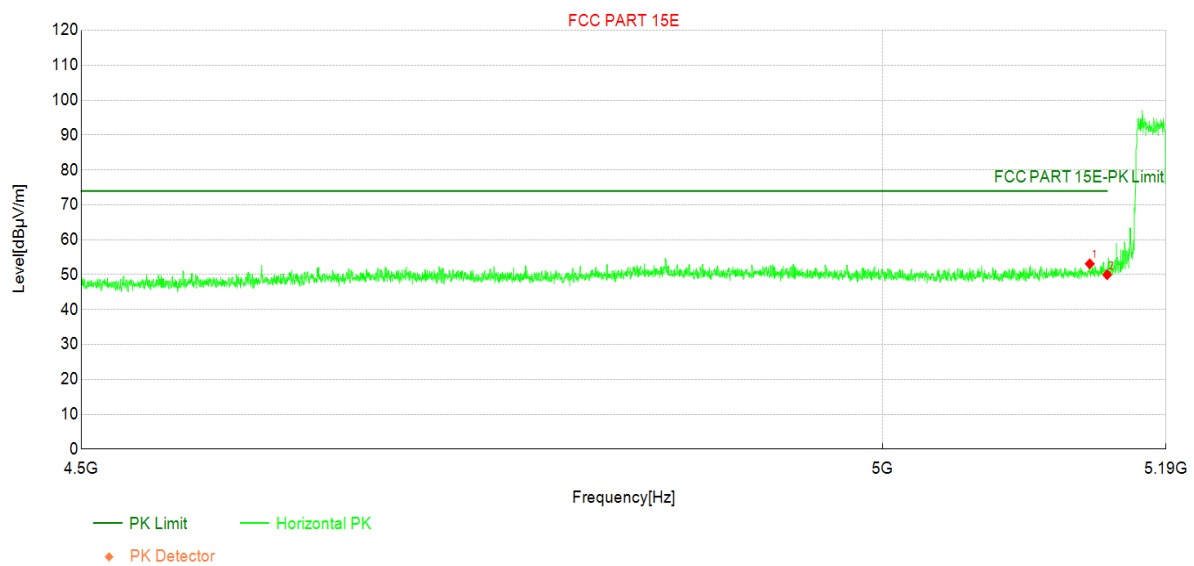

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5138.25	38.06	53.10	15.04	74.00	20.90	PK	Horizo	PASS
2	5150.00	34.88	49.99	15.11	74.00	24.01	PK	Horizo	PASS

Test Report

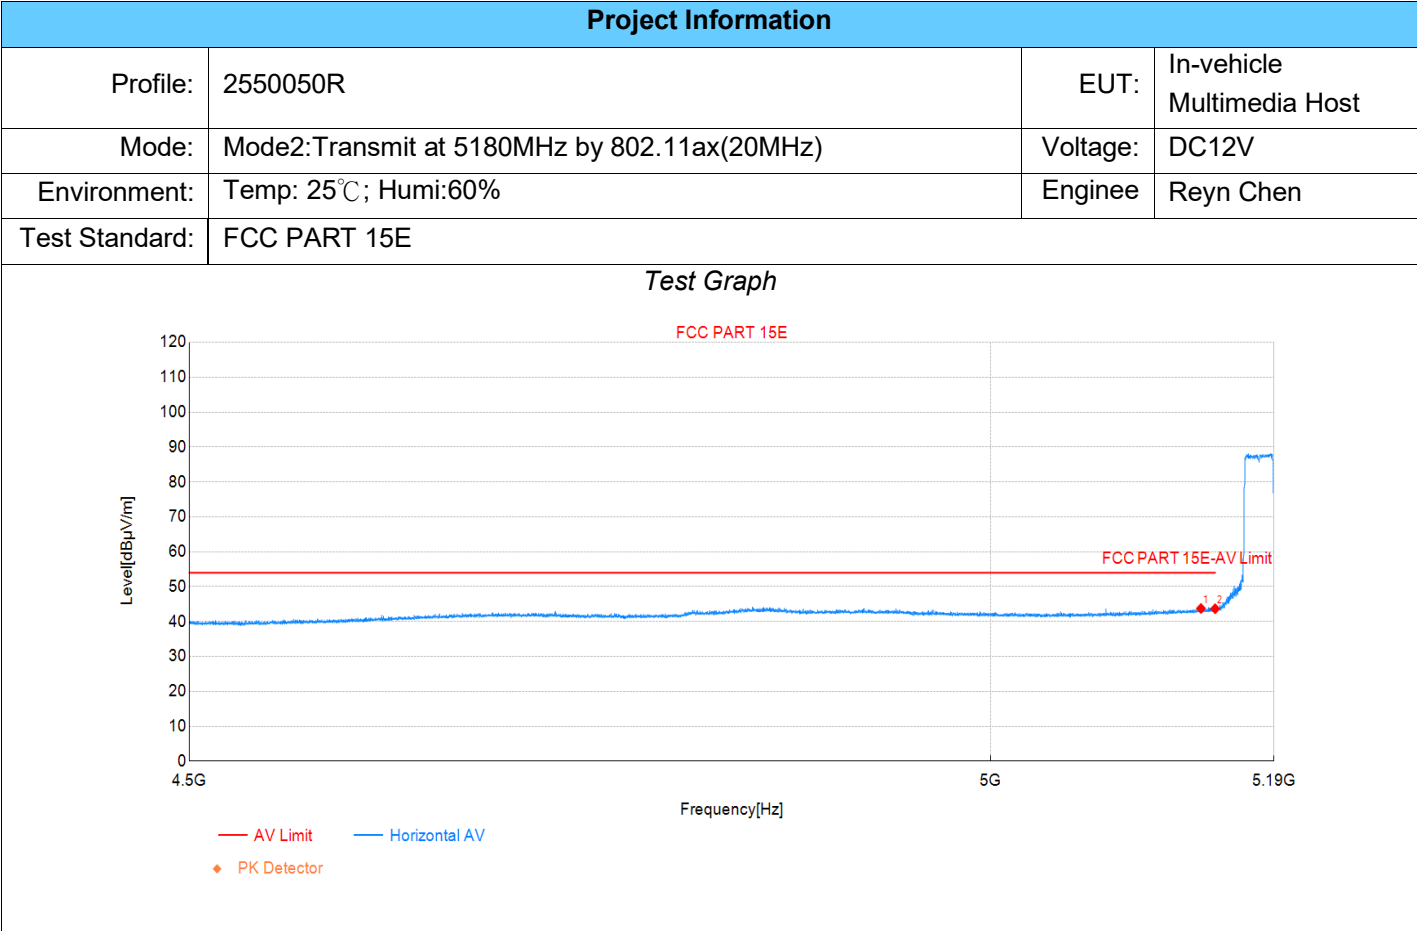


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5140.41	28.71	43.76	15.05	54.00	10.24	AV	Horizo	PASS
2	5150.00	28.57	43.68	15.11	54.00	10.32	AV	Horizo	PASS

Test Report

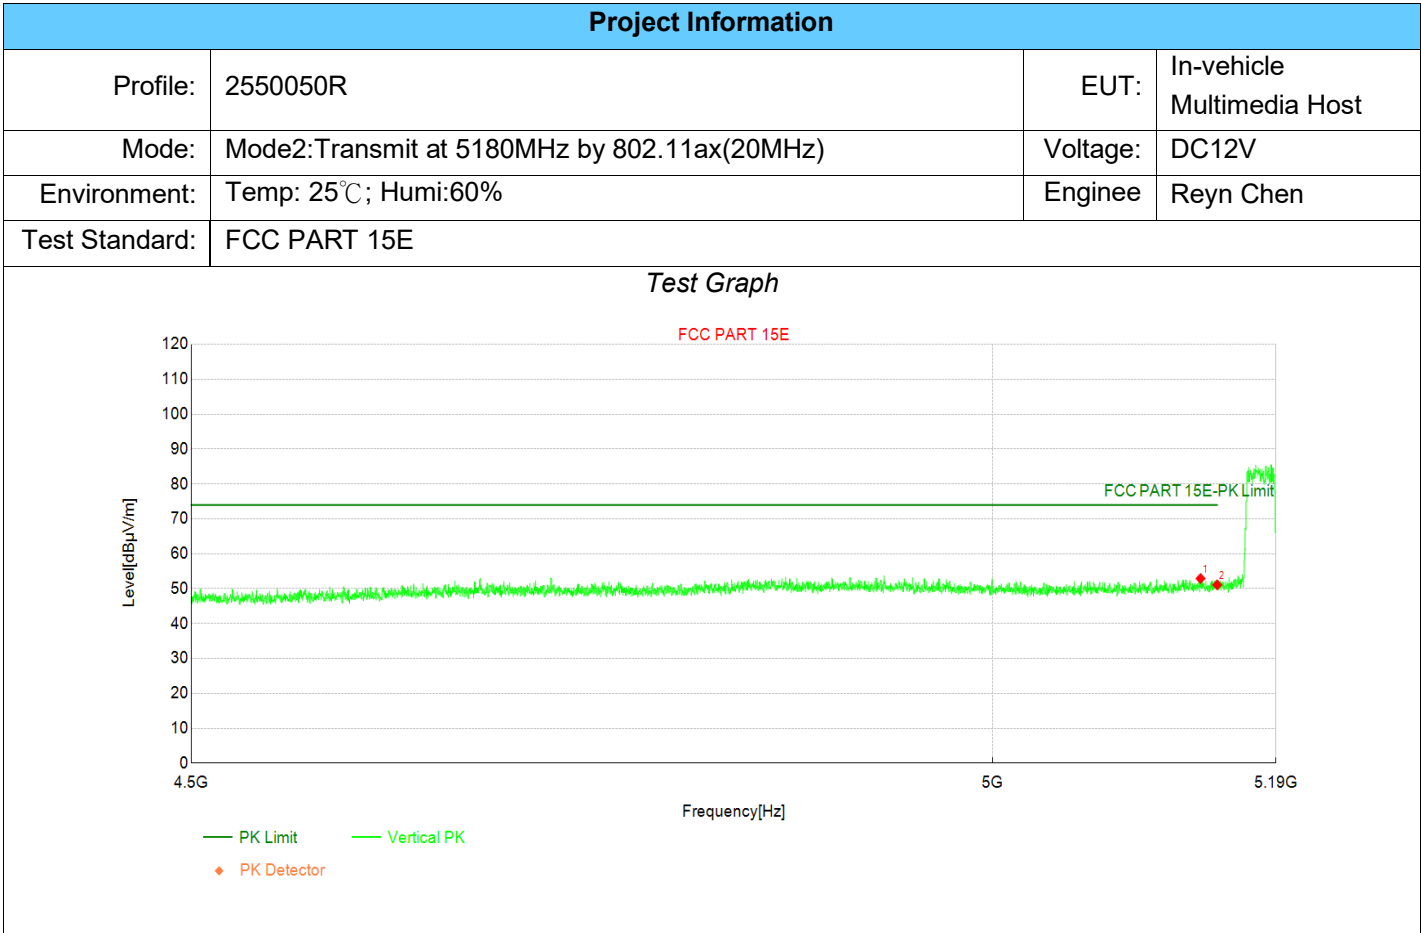

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5138.77	37.87	52.91	15.04	74.00	21.09	PK	Vertic	PASS
2	5150.00	35.99	51.10	15.11	74.00	22.90	PK	Vertic	PASS


Test Report

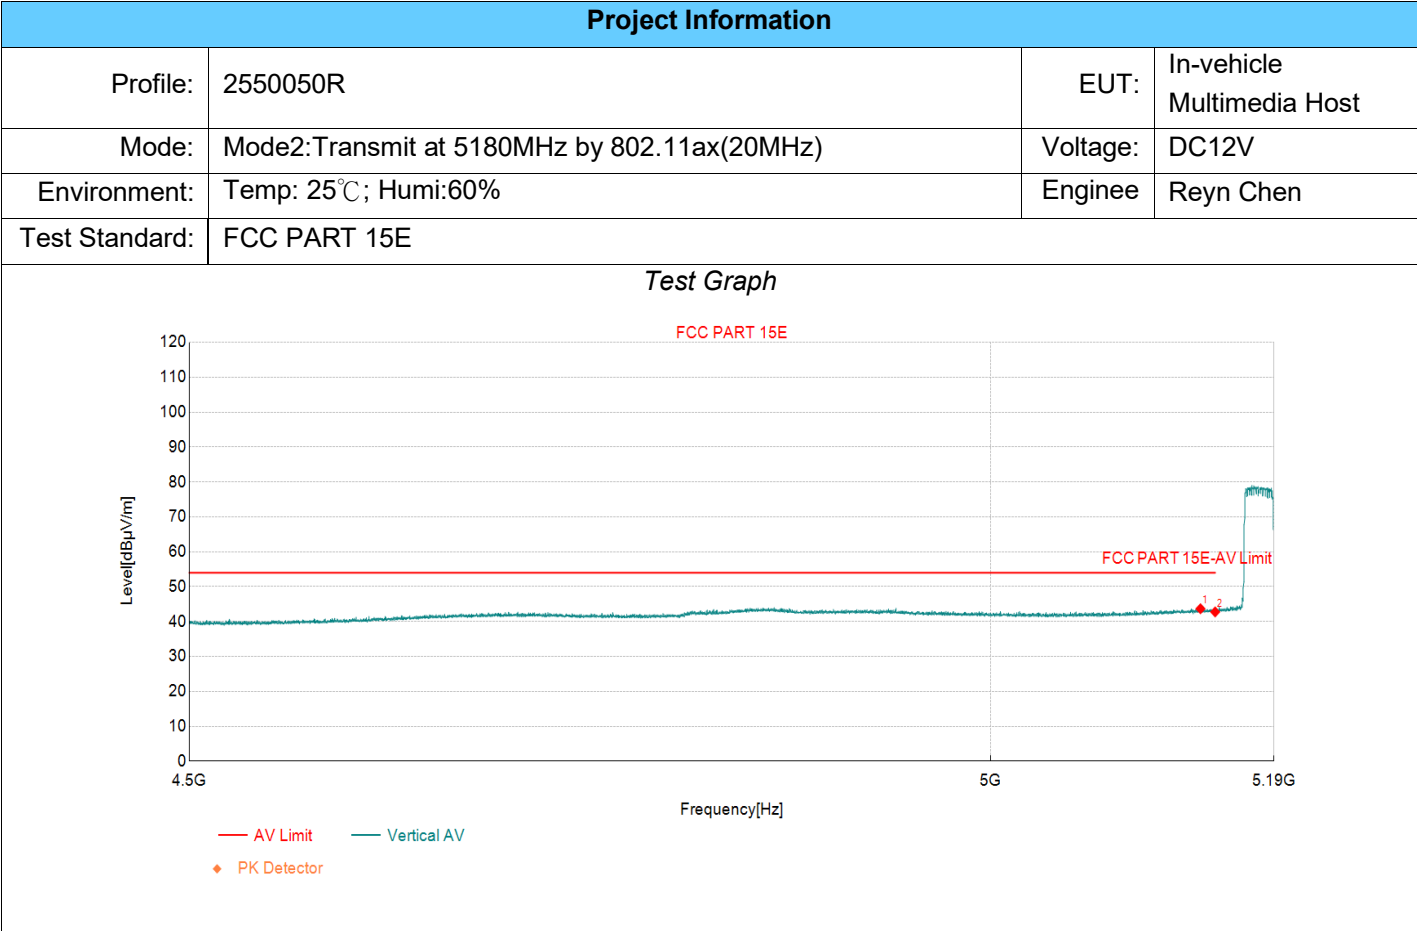

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5140.06	28.62	43.67	15.05	54.00	10.33	AV	Vertic	PASS
2	5150.00	27.65	42.76	15.11	54.00	11.24	AV	Vertic	PASS


Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode2:Transmit at 5320MHz by 802.11ax(20MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

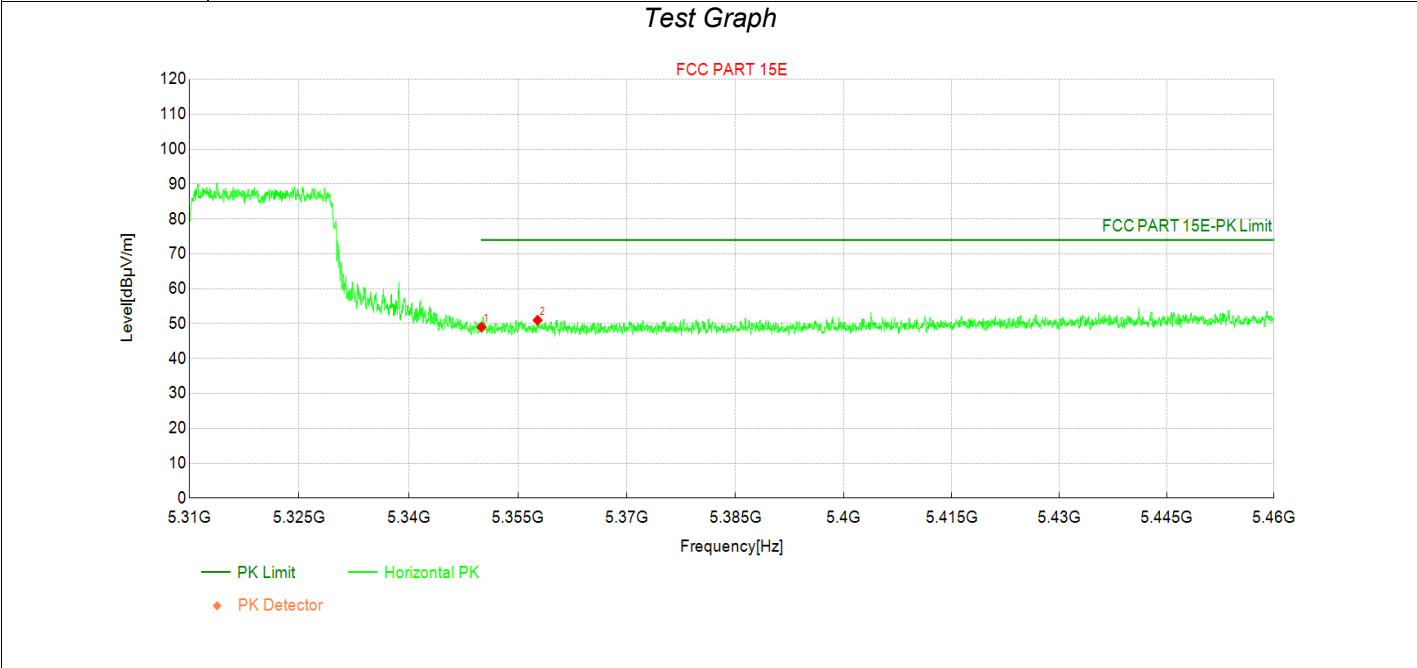

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	33.30	49.01	15.71	74.00	24.99	PK	Horizo	PASS
2	5357.72	35.30	51.00	15.70	74.00	23.00	PK	Horizo	PASS


Test Report

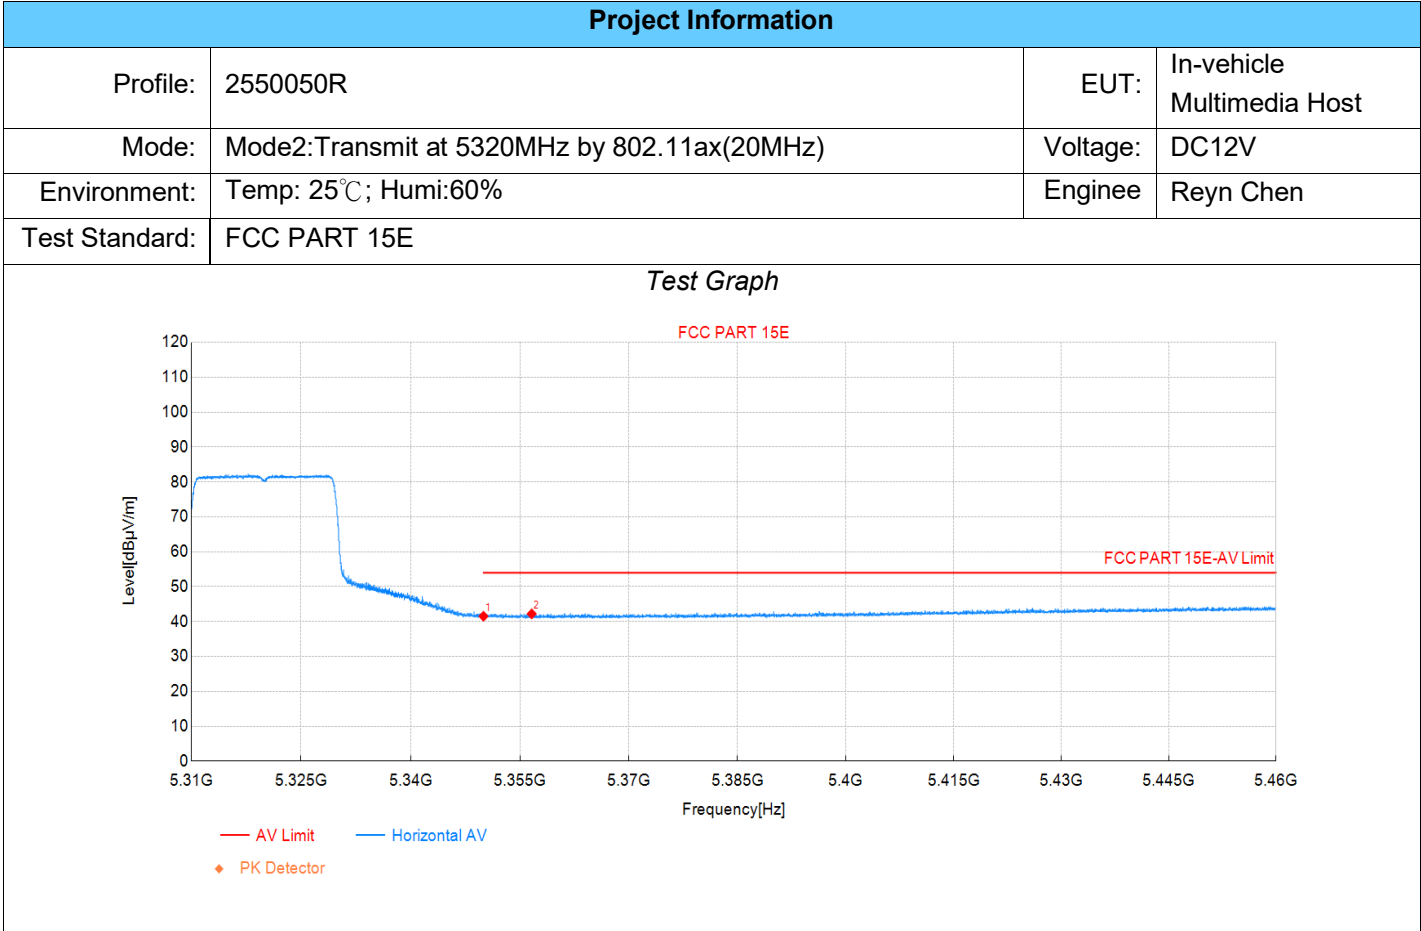

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	25.81	41.52	15.71	54.00	12.48	AV	Horizo	PASS
2	5356.63	26.51	42.21	15.70	54.00	11.79	AV	Horizo	PASS

Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode2:Transmit at 5320MHz by 802.11ax(20MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

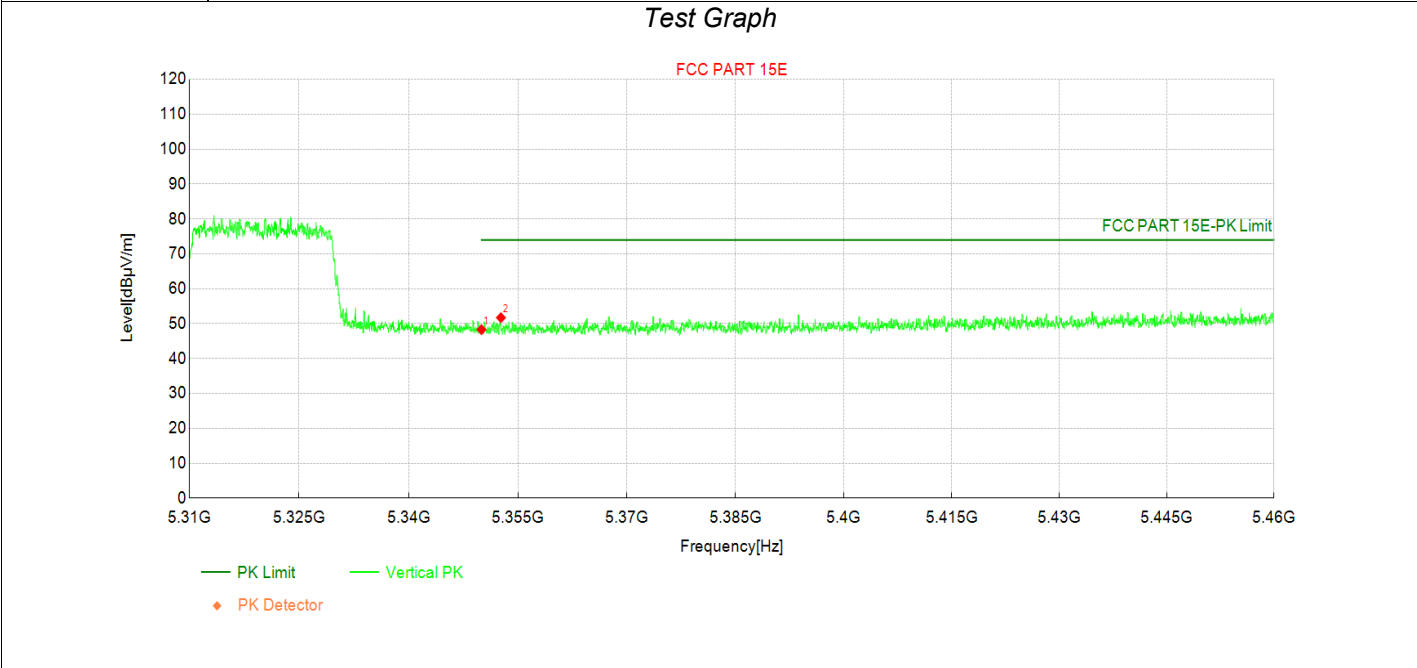


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	32.59	48.30	15.71	74.00	25.70	PK	Vertic	PASS
2	5352.68	36.00	51.71	15.71	74.00	22.29	PK	Vertic	PASS

Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode2:Transmit at 5320MHz by 802.11ax(20MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		


Test Graph

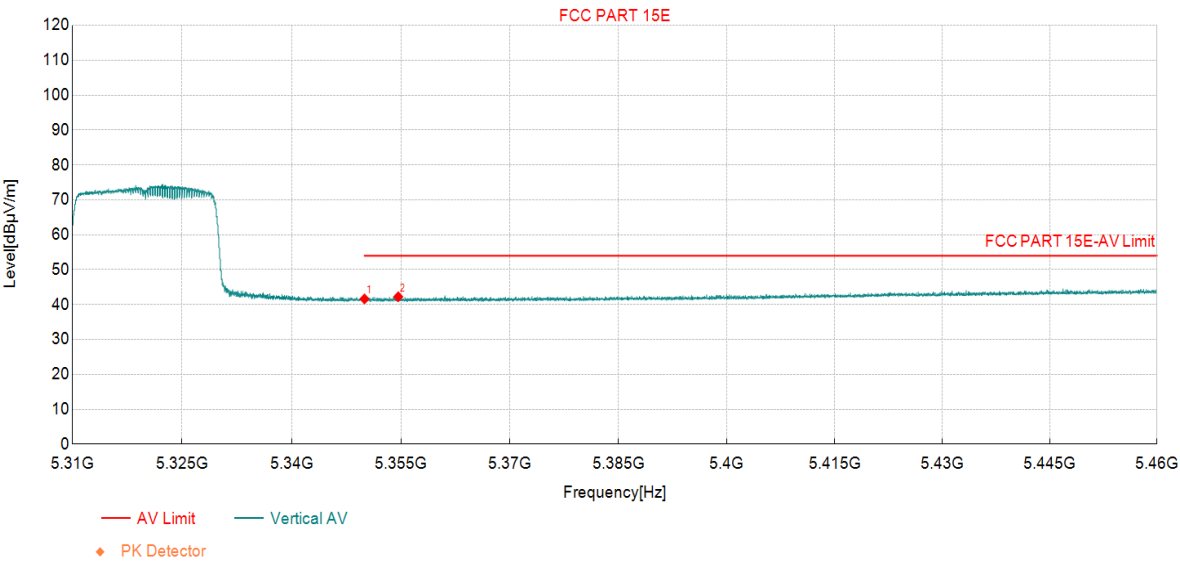

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	25.91	41.62	15.71	54.00	12.38	AV	Vertic	PASS
2	5354.64	26.53	42.23	15.70	54.00	11.77	AV	Vertic	PASS


Test Report

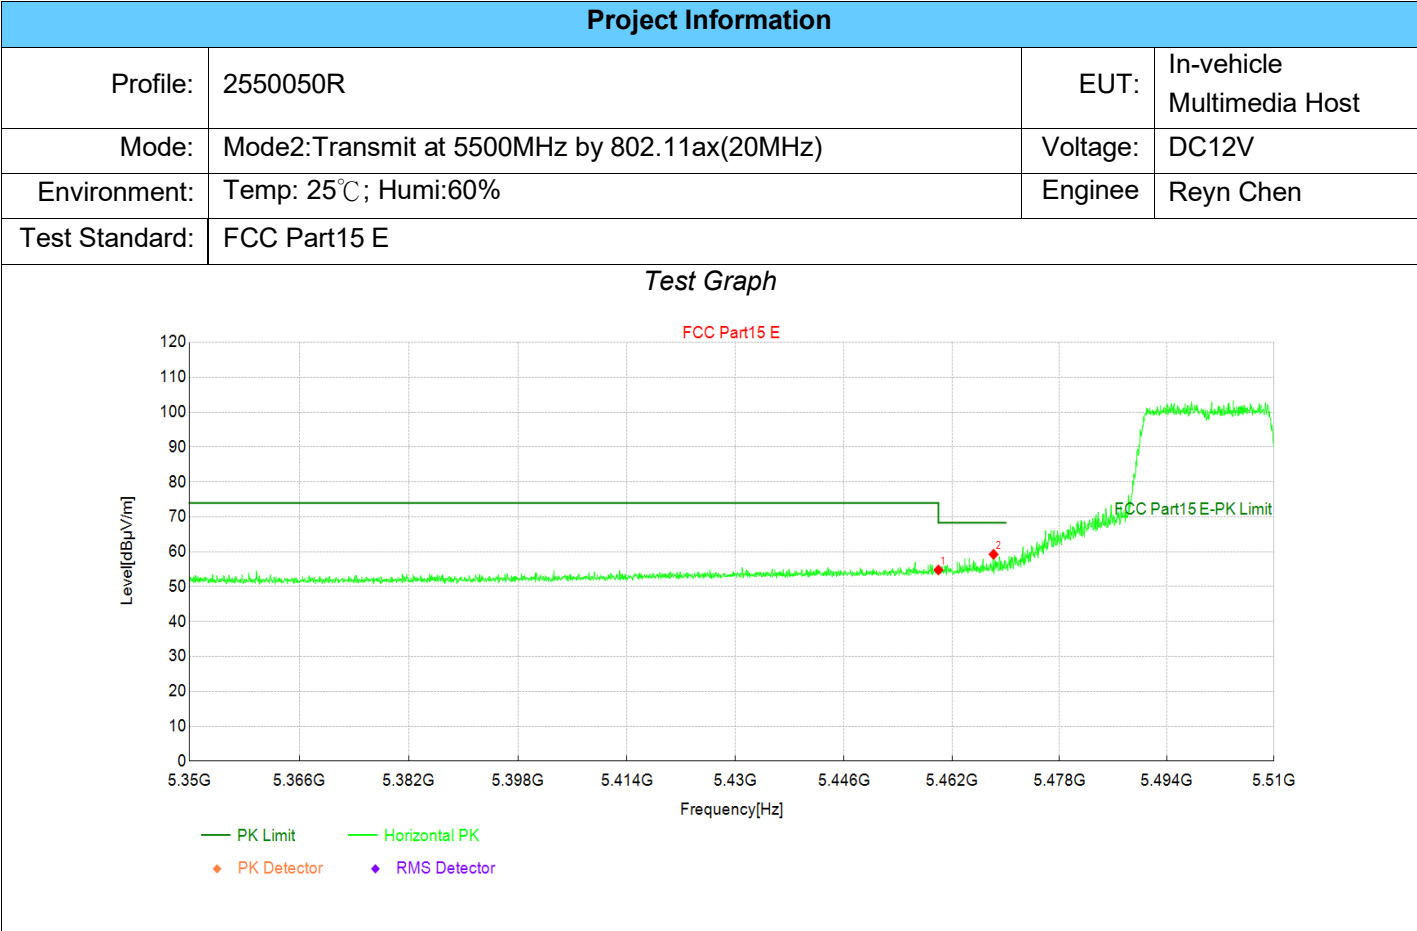

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	38.45	54.79	16.34	68.30	13.51	PK	Horizo	PASS
2	5468.19	42.82	59.26	16.44	68.30	9.04	PK	Horizo	PASS


Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode2:Transmit at 5500MHz by 802.11ax(20MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

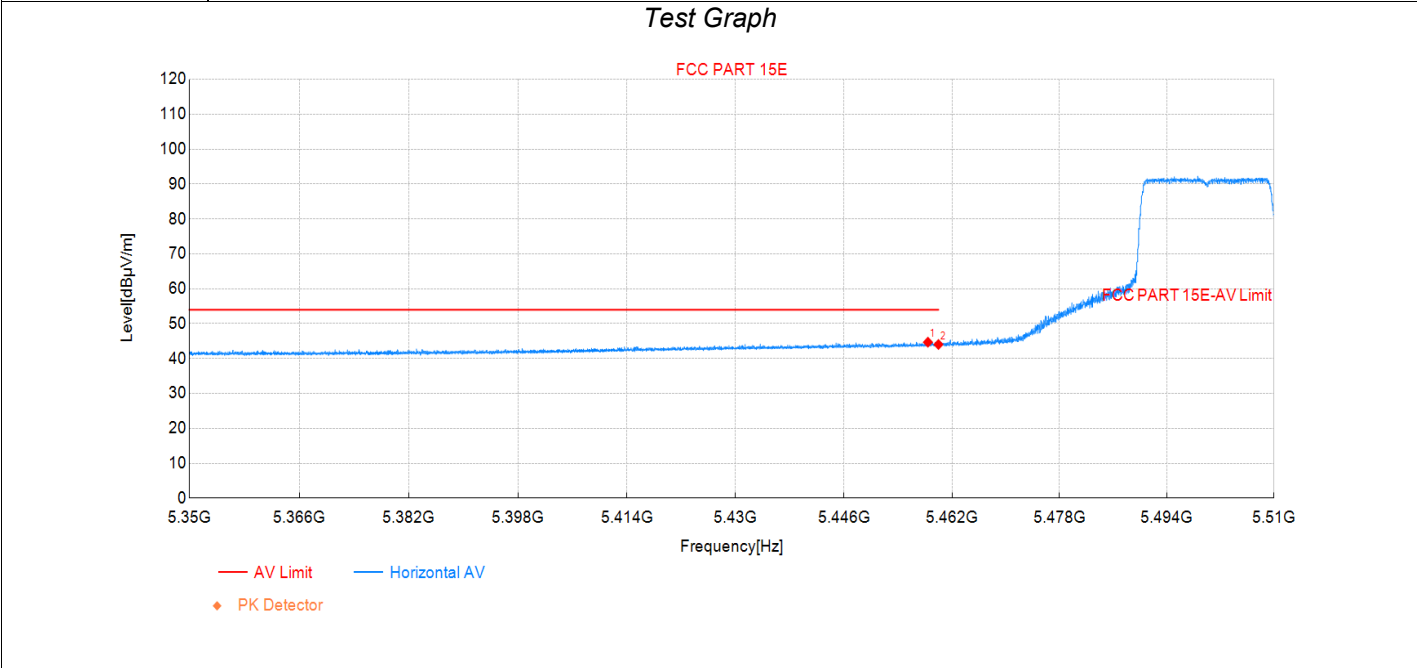


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5458.44	28.37	44.69	16.32	54.00	9.31	AV	Horizo	PASS
2	5460.00	27.70	44.04	16.34	54.00	9.96	AV	Horizo	PASS

Test Report

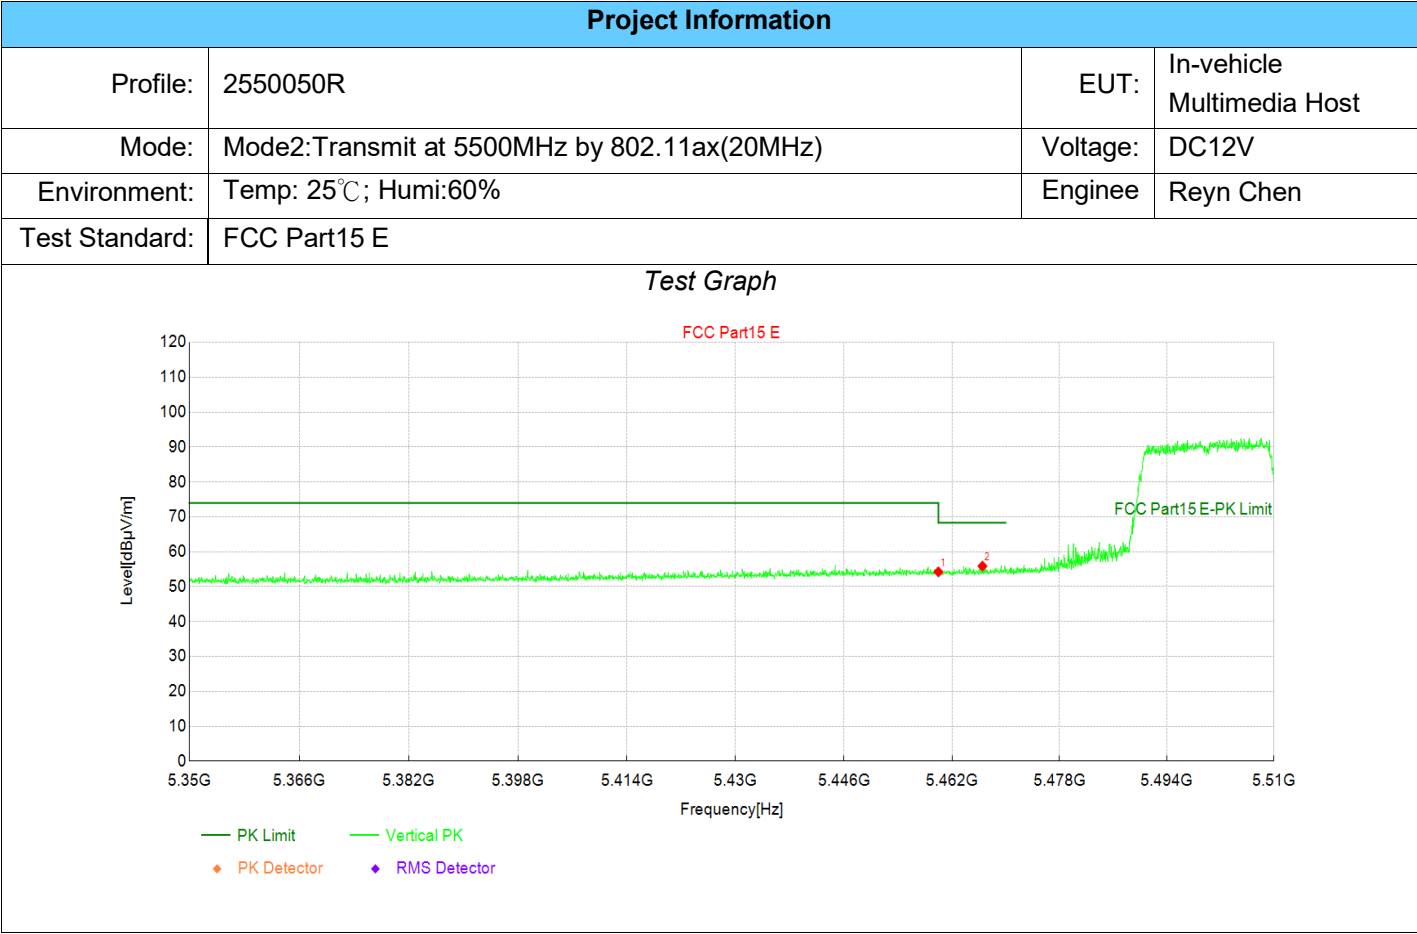


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	37.89	54.23	16.34	68.30	14.07	PK	Vertic	PASS
2	5466.53	39.48	55.89	16.41	68.30	12.41	PK	Vertic	PASS

Test Report

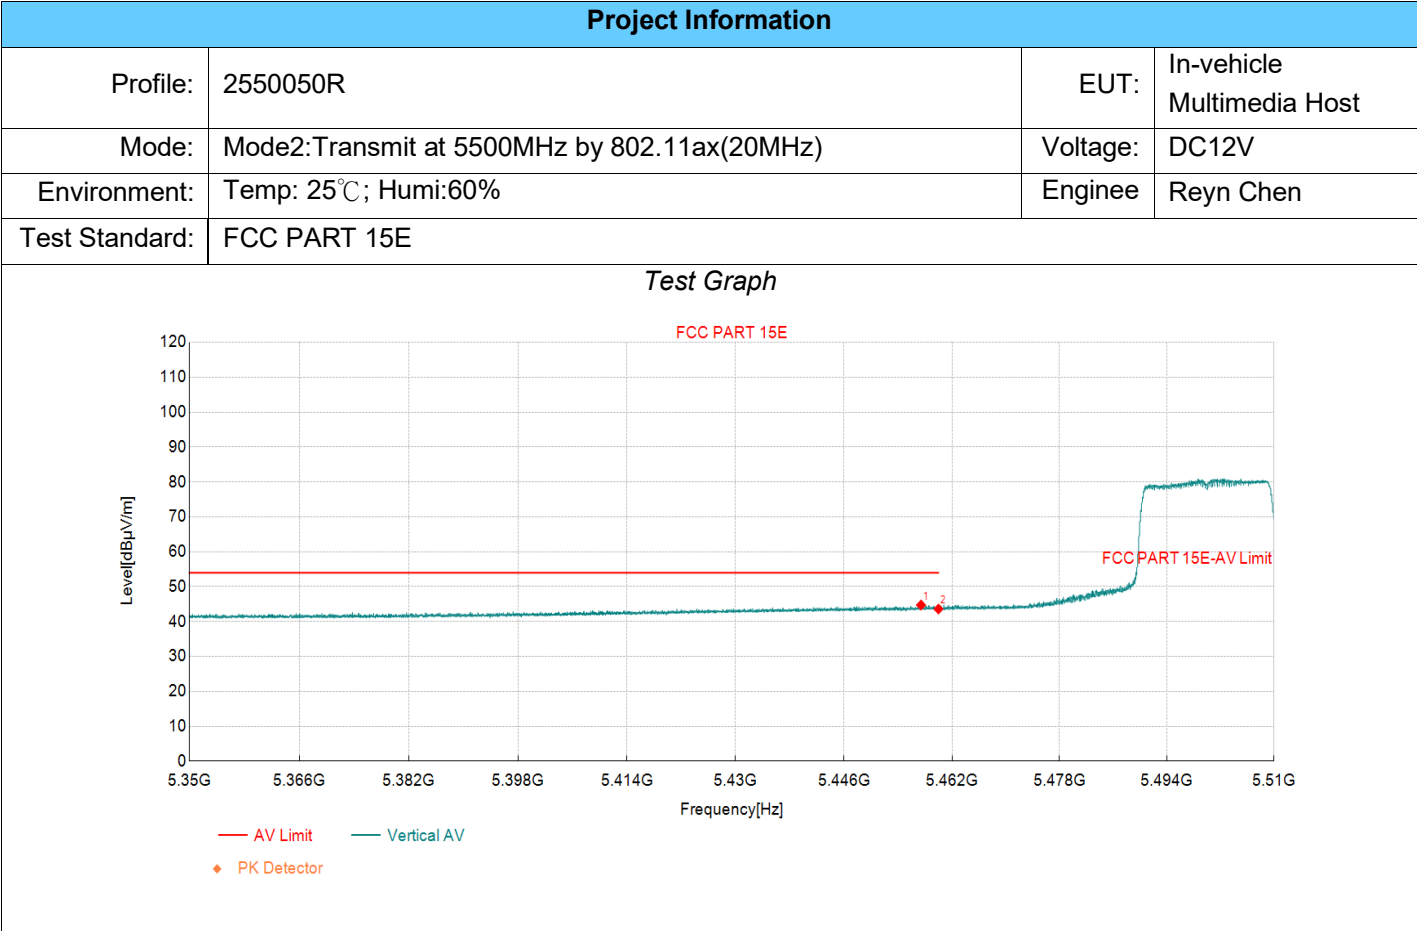


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5457.42	28.41	44.72	16.31	54.00	9.28	AV	Vertic	PASS
2	5460.00	27.25	43.59	16.34	54.00	10.41	AV	Vertic	PASS

Test Report

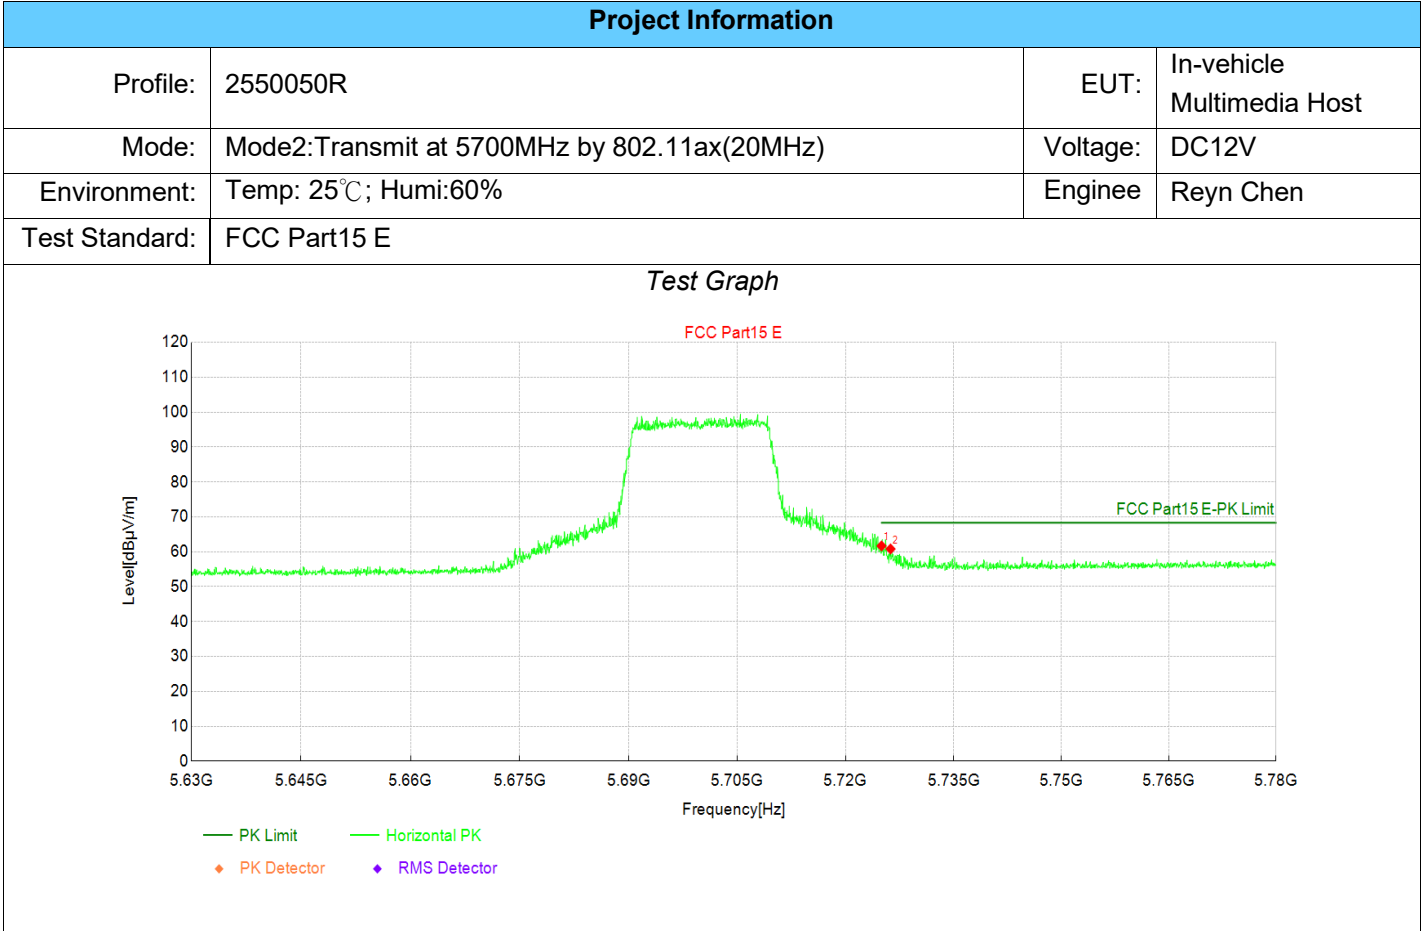


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5725.00	43.00	61.67	18.67	68.30	6.63	PK	Horizo	PASS
2	5726.25	42.14	60.80	18.66	68.30	7.50	PK	Horizo	PASS

Test Report

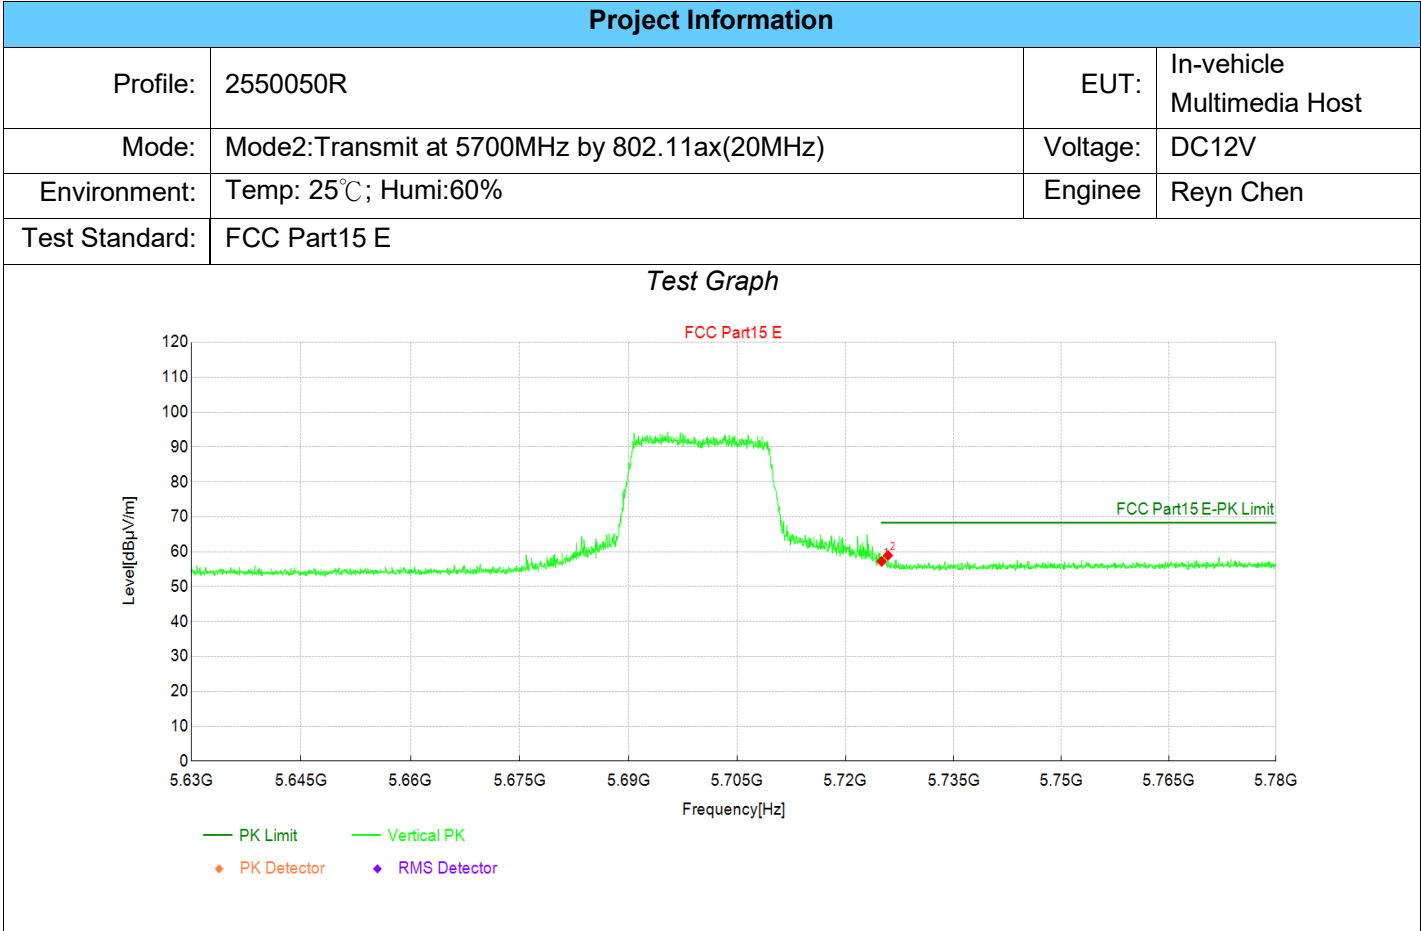


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5725.00	38.58	57.25	18.67	68.30	11.05	PK	Vertic	PASS
2	5725.90	40.28	58.95	18.67	68.30	9.35	PK	Vertic	PASS

Test Report

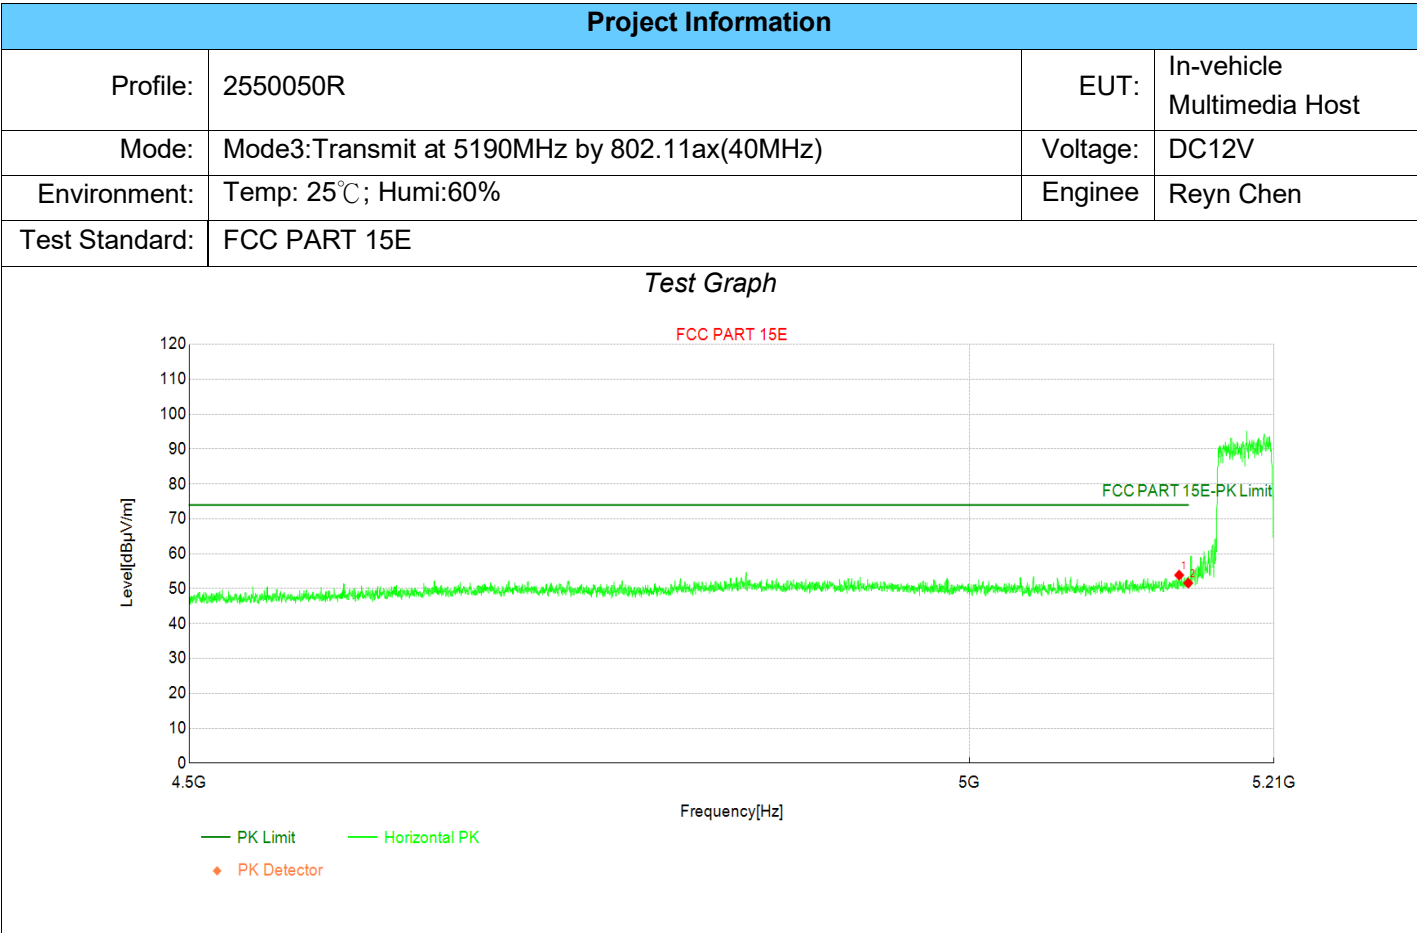


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5143.70	38.80	53.87	15.07	74.00	20.13	PK	Horizo	PASS
2	5150.00	36.49	51.60	15.11	74.00	22.40	PK	Horizo	PASS

Test Report

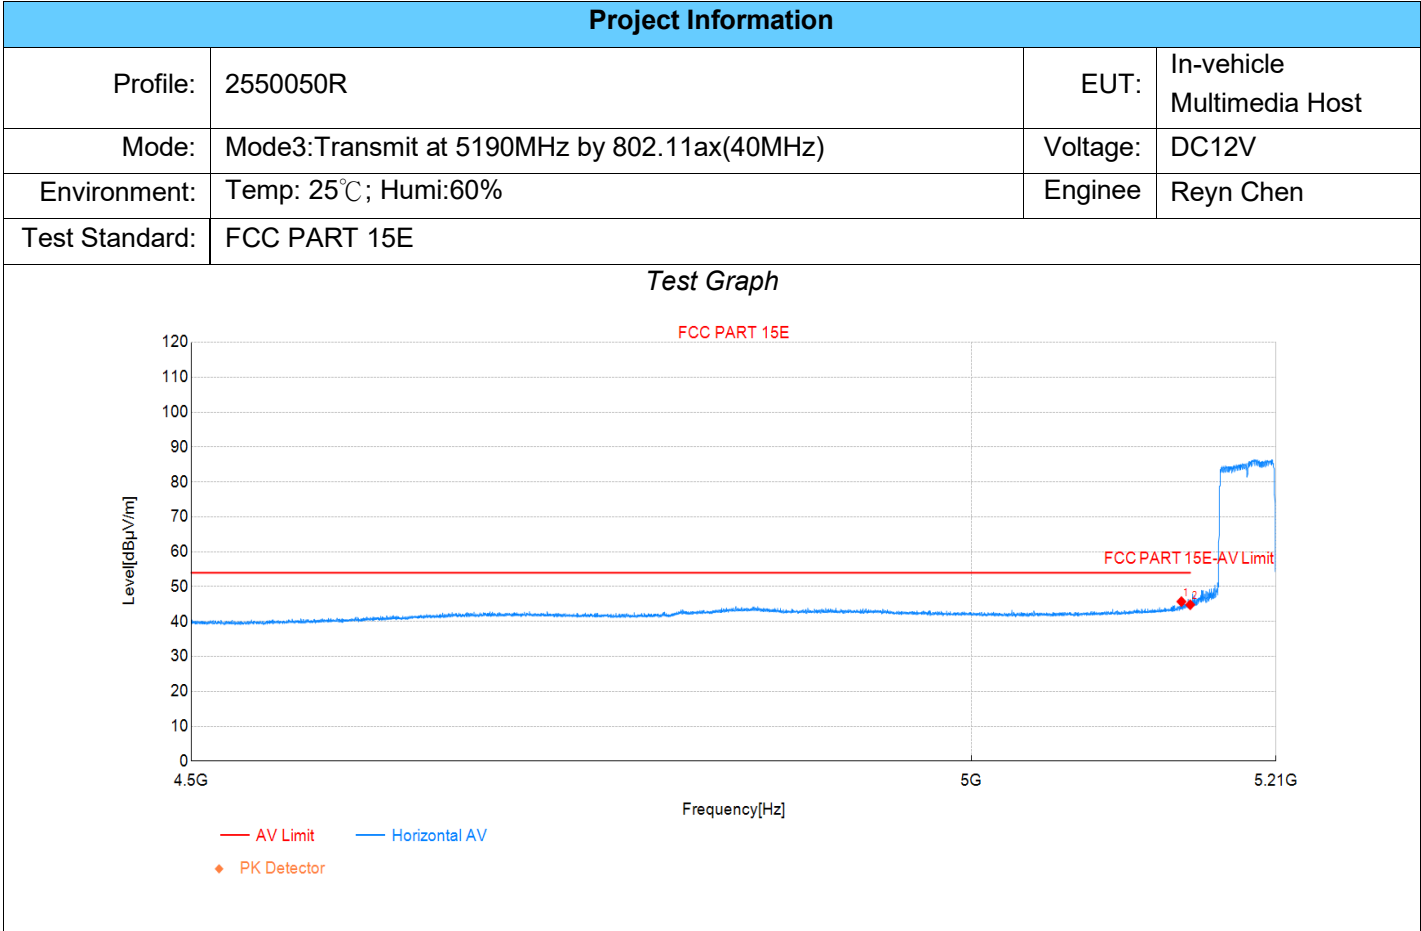


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5143.88	30.64	45.71	15.07	54.00	8.29	AV	Horizo	PASS
2	5150.00	29.71	44.82	15.11	54.00	9.18	AV	Horizo	PASS

Test Report

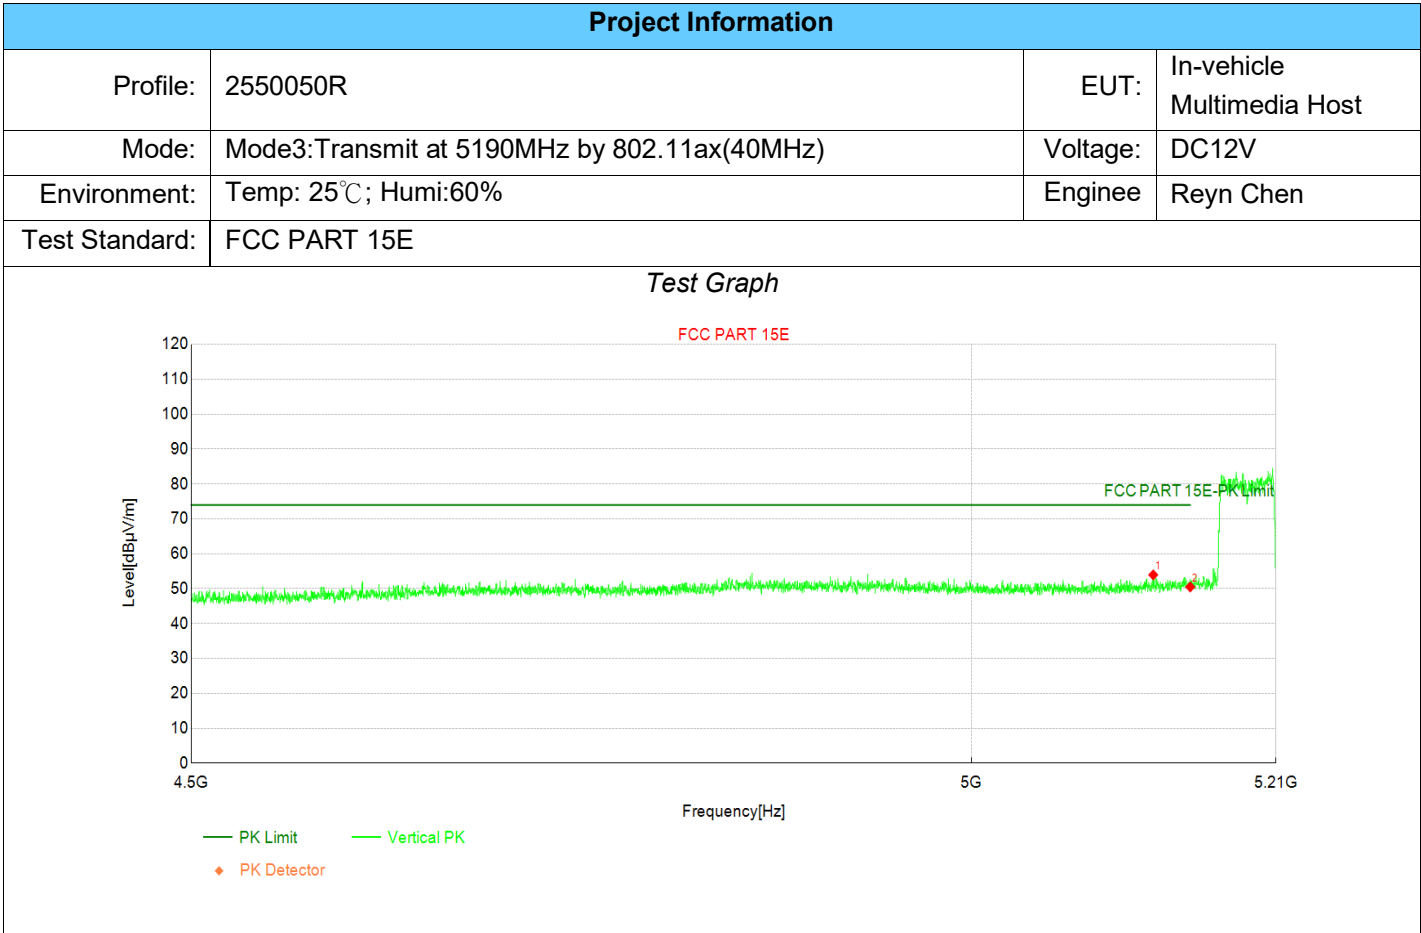

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5124.36	38.99	53.95	14.96	74.00	20.05	PK	Vertic	PASS
2	5150.00	35.39	50.50	15.11	74.00	23.50	PK	Vertic	PASS

Test Report

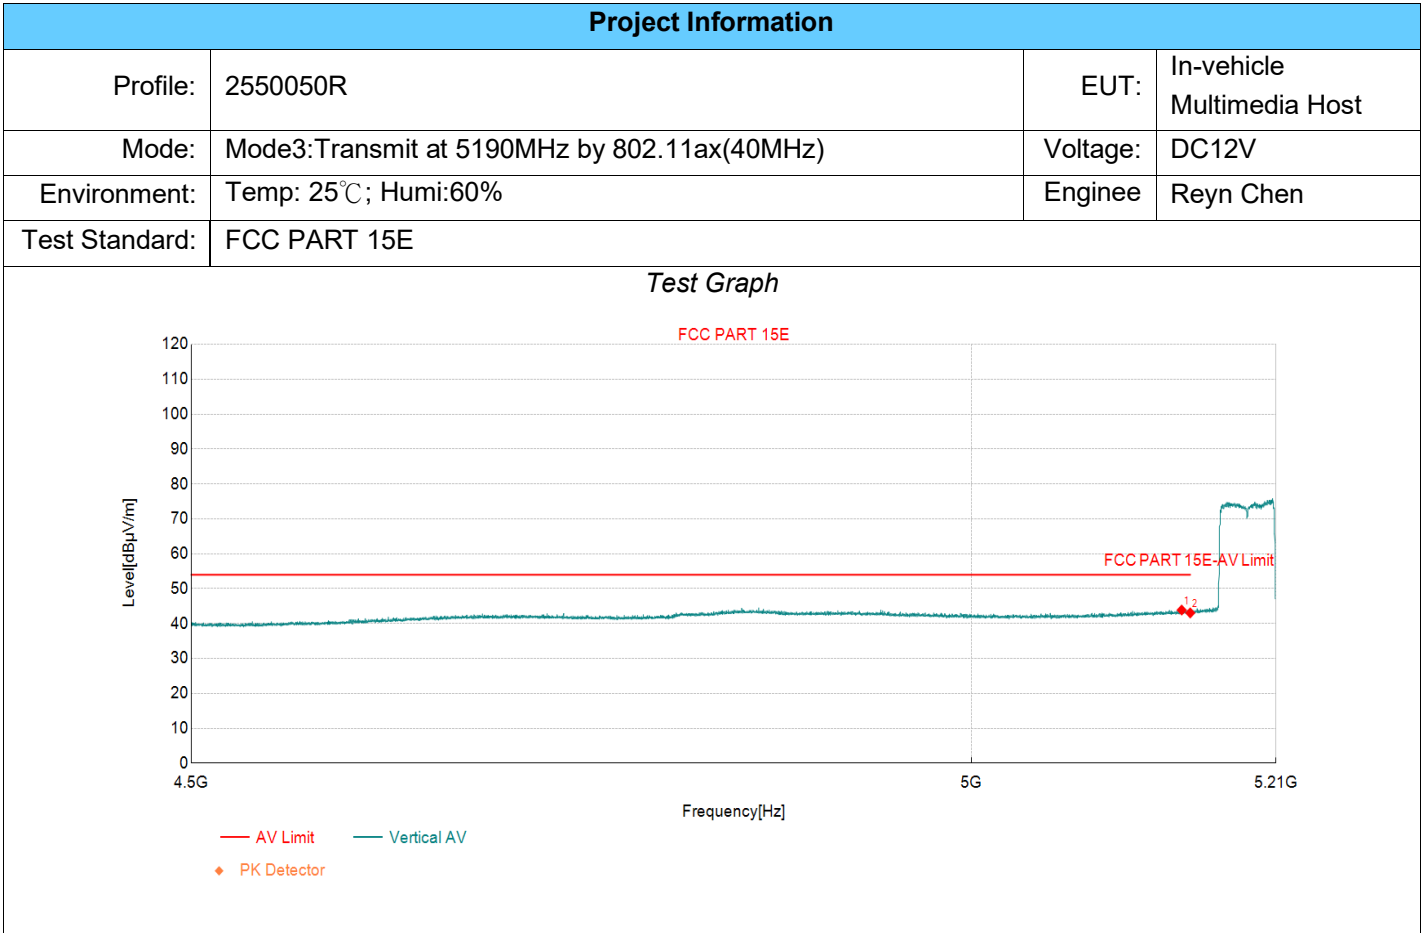


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5144.06	28.79	43.87	15.08	54.00	10.13	AV	Vertic	PASS
2	5150.00	27.93	43.04	15.11	54.00	10.96	AV	Vertic	PASS

Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode3:Transmit at 5310MHz by 802.11ax(40MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		


Test Graph

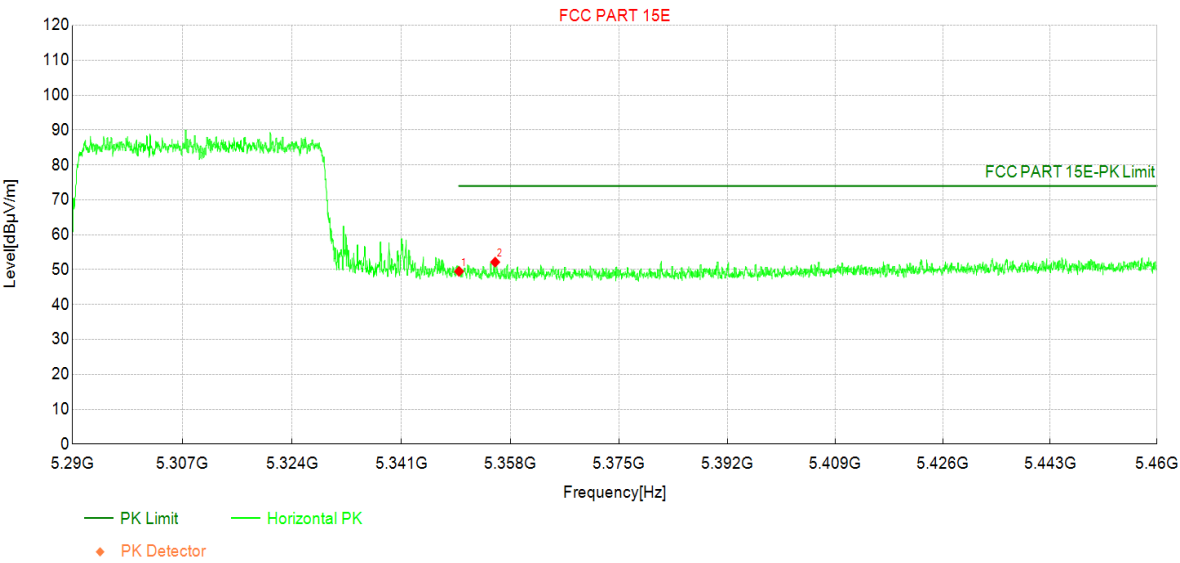

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	33.80	49.51	15.71	74.00	24.49	PK	Horizo	PASS
2	5355.64	36.45	52.15	15.70	74.00	21.85	PK	Horizo	PASS

Test Report

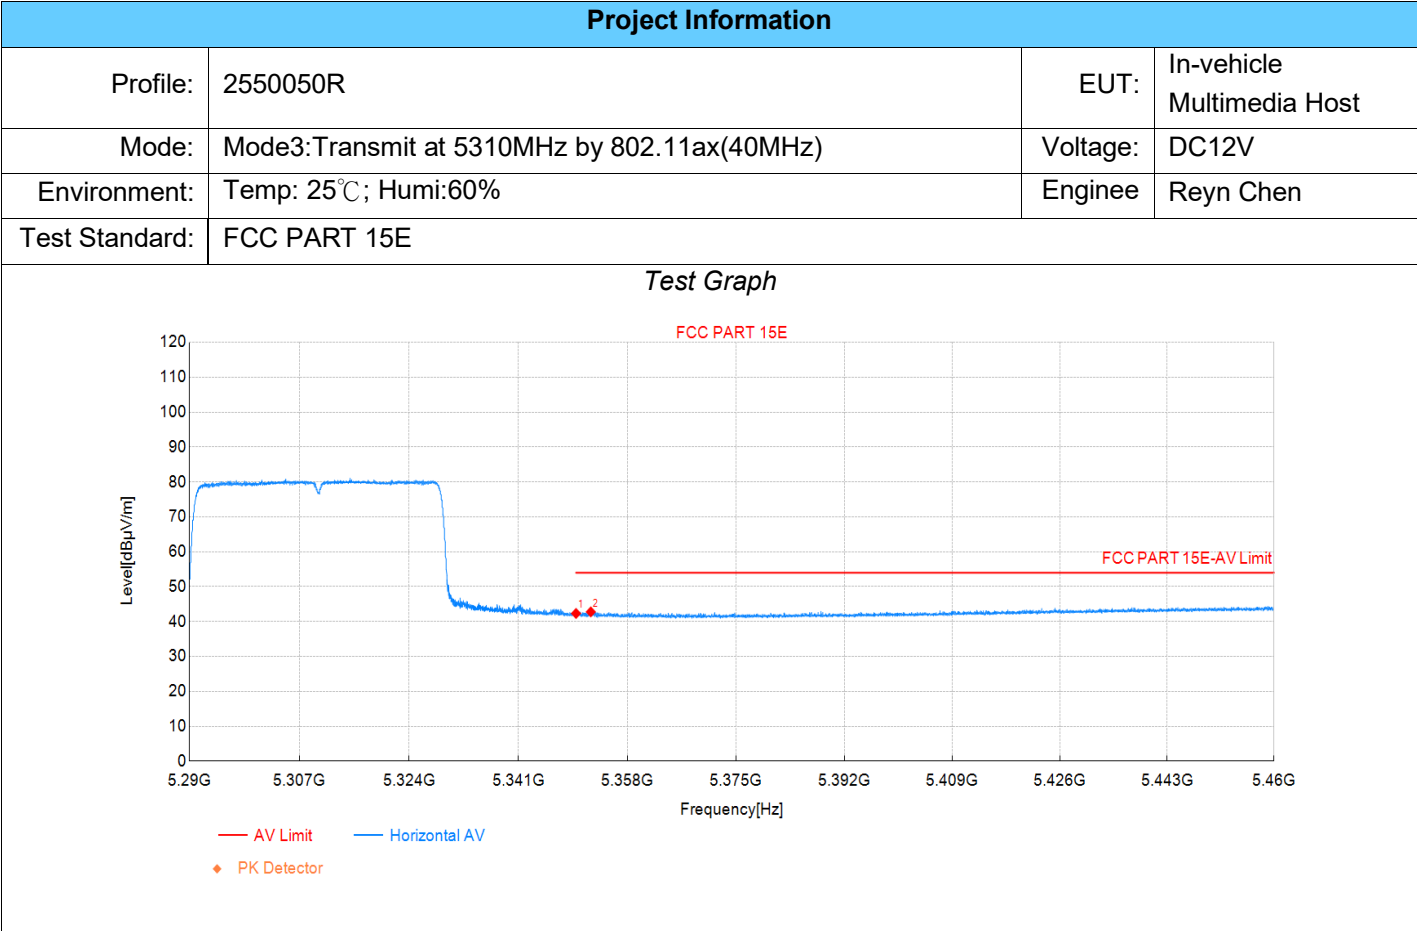


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	26.62	42.33	15.71	54.00	11.67	AV	Horizo	PASS
2	5352.31	27.06	42.77	15.71	54.00	11.23	AV	Horizo	PASS

Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode3:Transmit at 5310MHz by 802.11ax(40MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		


Test Graph

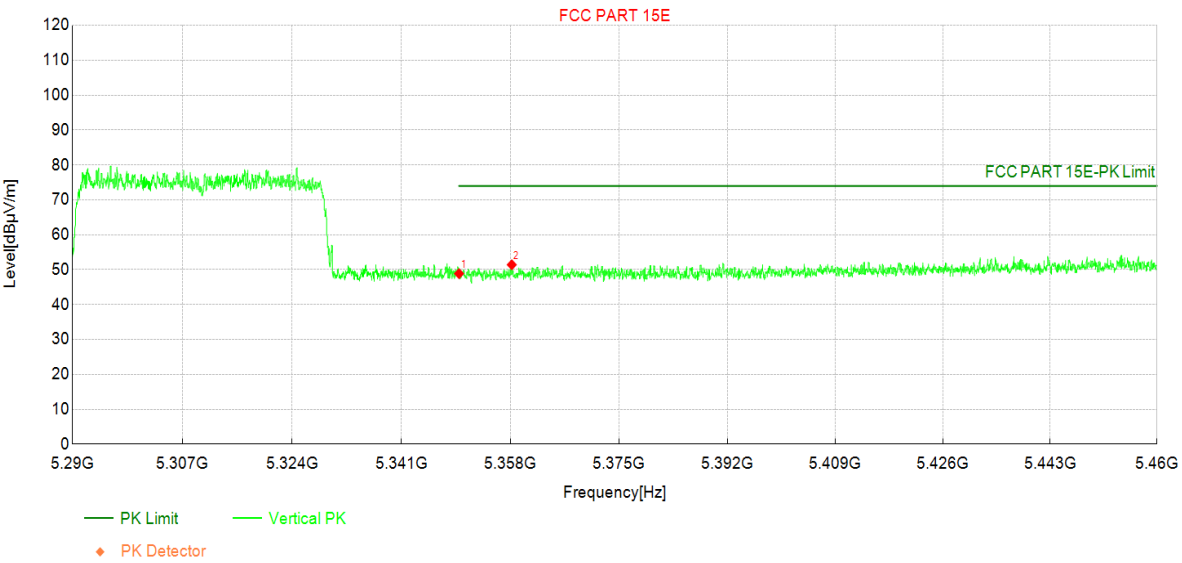

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	33.15	48.86	15.71	74.00	25.14	PK	Vertic	PASS
2	5358.23	35.70	51.40	15.70	74.00	22.60	PK	Vertic	PASS

Test Report

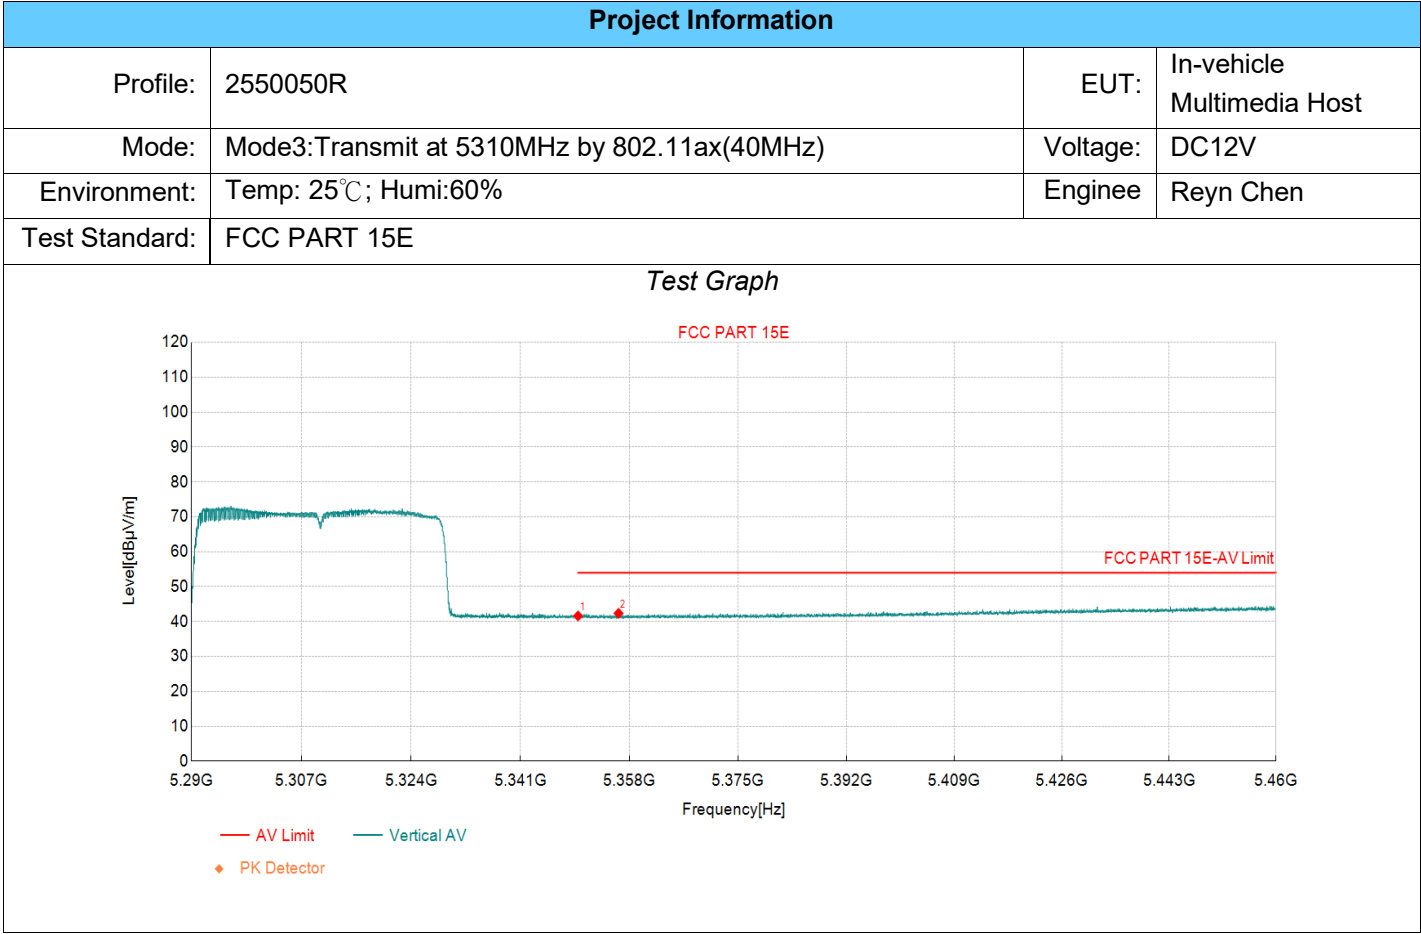


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	25.90	41.61	15.71	54.00	12.39	AV	Vertic	PASS
2	5356.32	26.65	42.35	15.70	54.00	11.65	AV	Vertic	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode3:Transmit at 5510MHz by 802.11ax(40MHz)	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC Part15 E		

Test Graph

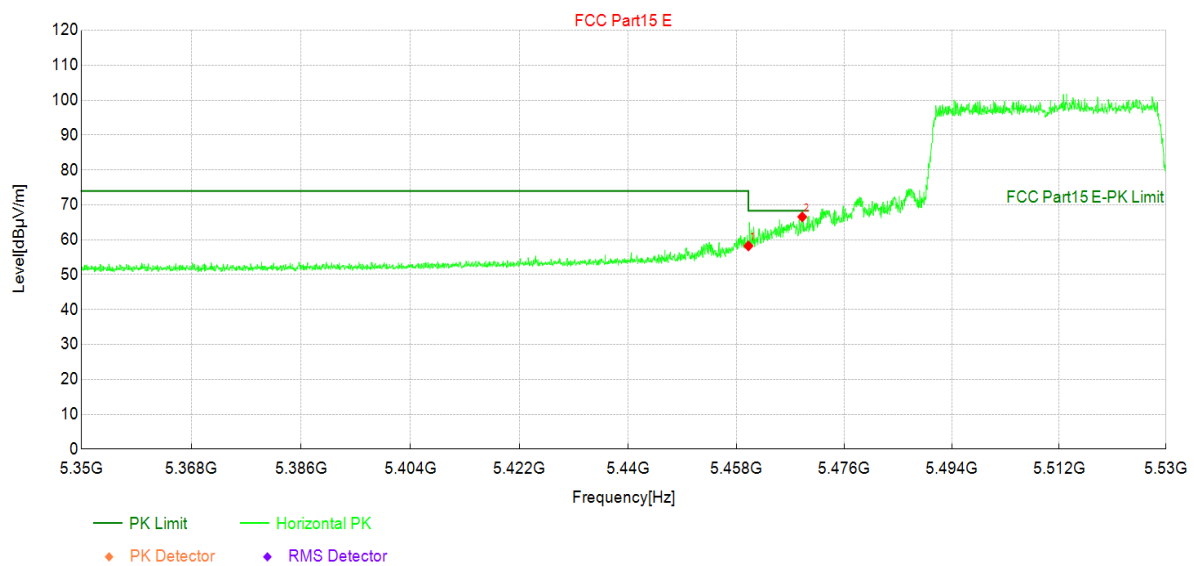


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	41.89	58.23	16.34	68.30	10.07	PK	Horizo	PASS
2	5468.98	50.11	66.55	16.44	68.30	1.75	PK	Horizo	PASS

Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode3:Transmit at 5510MHz by 802.11ax(40MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		


Test Graph

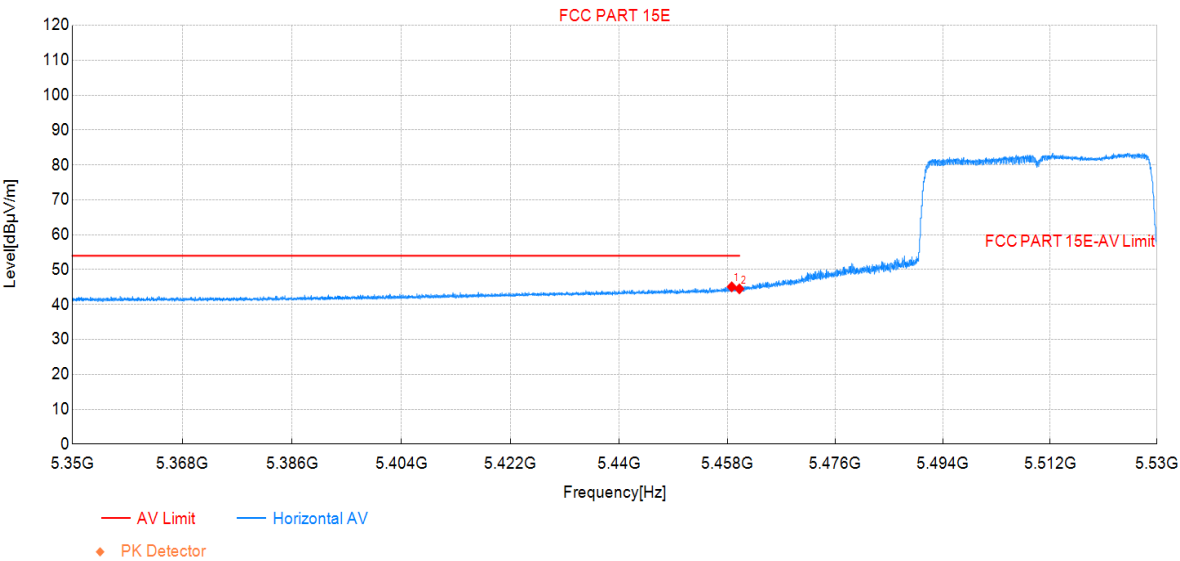

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5458.72	28.74	45.07	16.33	54.00	8.93	AV	Horizo	PASS
2	5460.00	28.16	44.50	16.34	54.00	9.50	AV	Horizo	PASS

Test Report

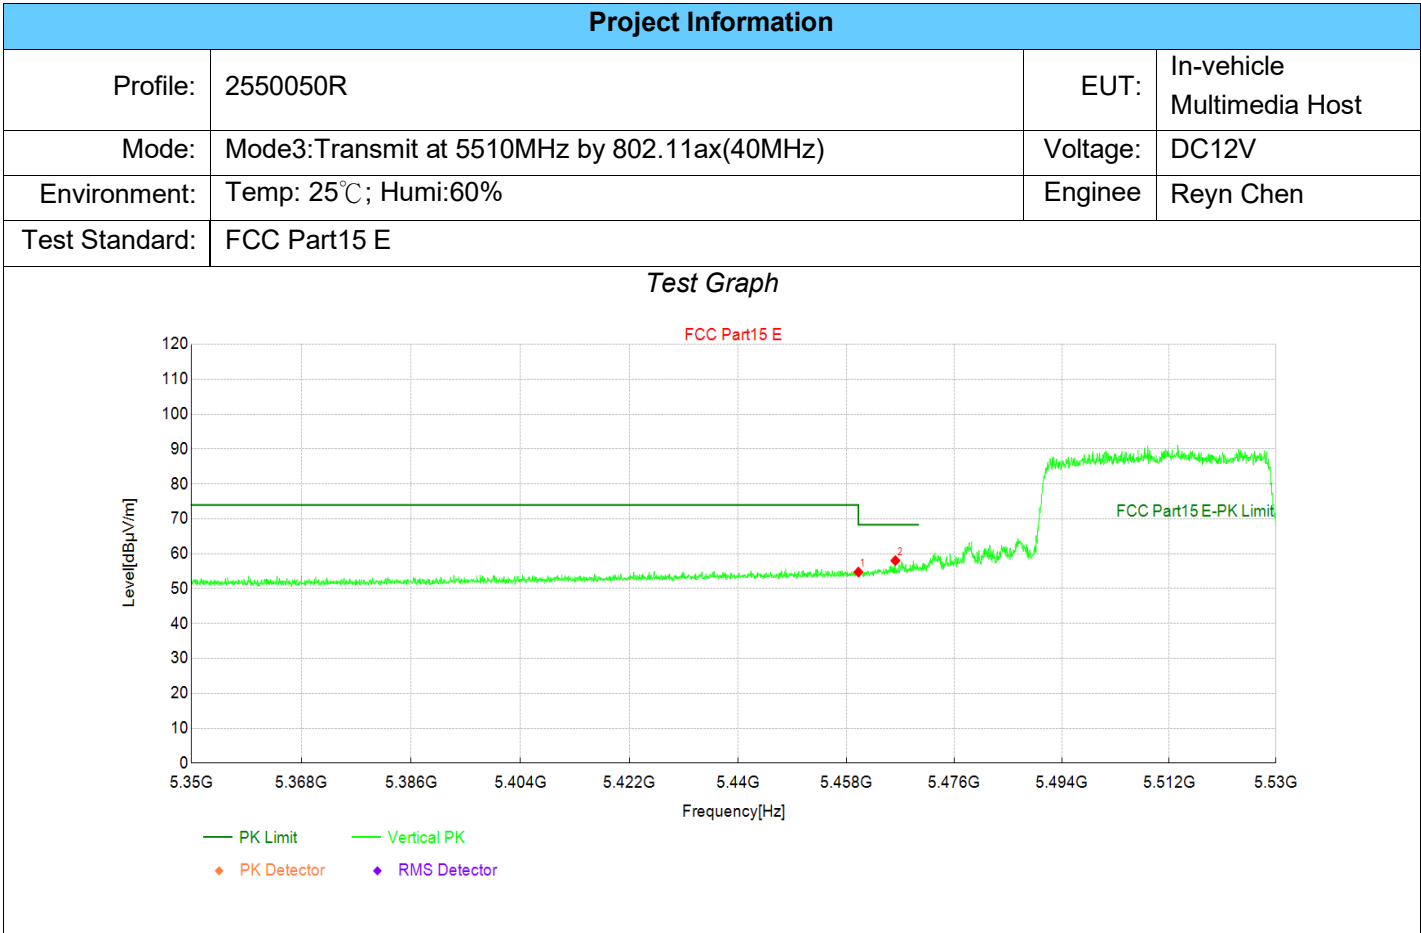


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	38.42	54.76	16.34	68.30	13.54	PK	Vertic	PASS
2	5466.16	41.62	58.03	16.41	68.30	10.27	PK	Vertic	PASS

Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode3:Transmit at 5510MHz by 802.11ax(40MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		


Test Graph

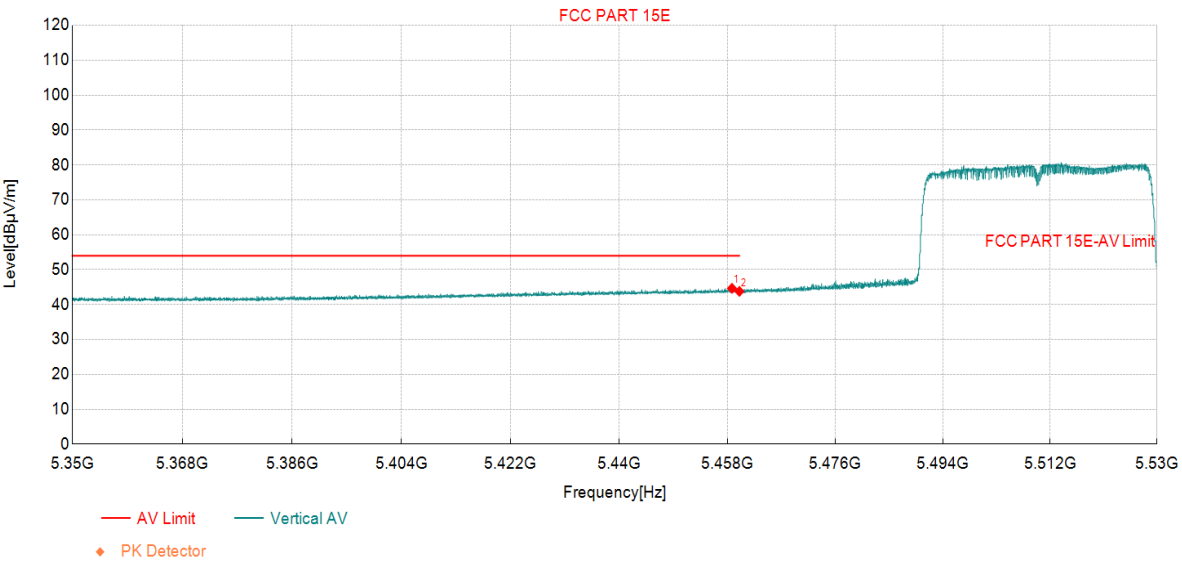

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5458.77	28.32	44.65	16.33	54.00	9.35	AV	Vertic	PASS
2	5460.00	27.44	43.78	16.34	54.00	10.22	AV	Vertic	PASS

Test Report

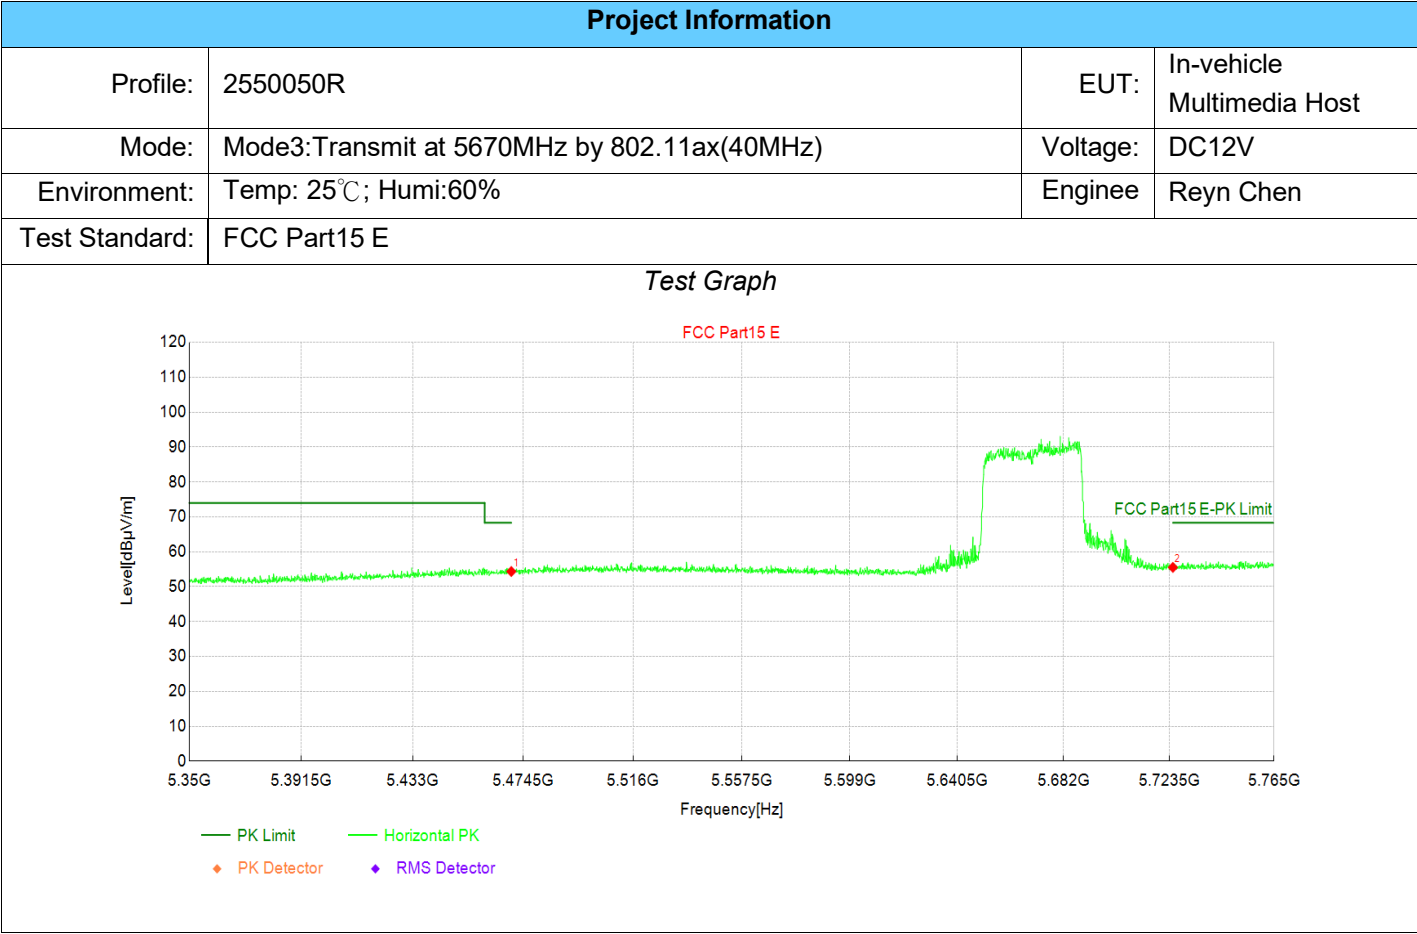


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5470.00	37.89	54.34	16.45	68.30	13.96	PK	Horizo	PASS
2	5725.00	36.85	55.52	18.67	68.30	12.78	PK	Horizo	PASS

Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode3:Transmit at 5670MHz by 802.11ax(40MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Enginee	Reyn Chen
Test Standard:	FCC PART 15E		


Test Graph

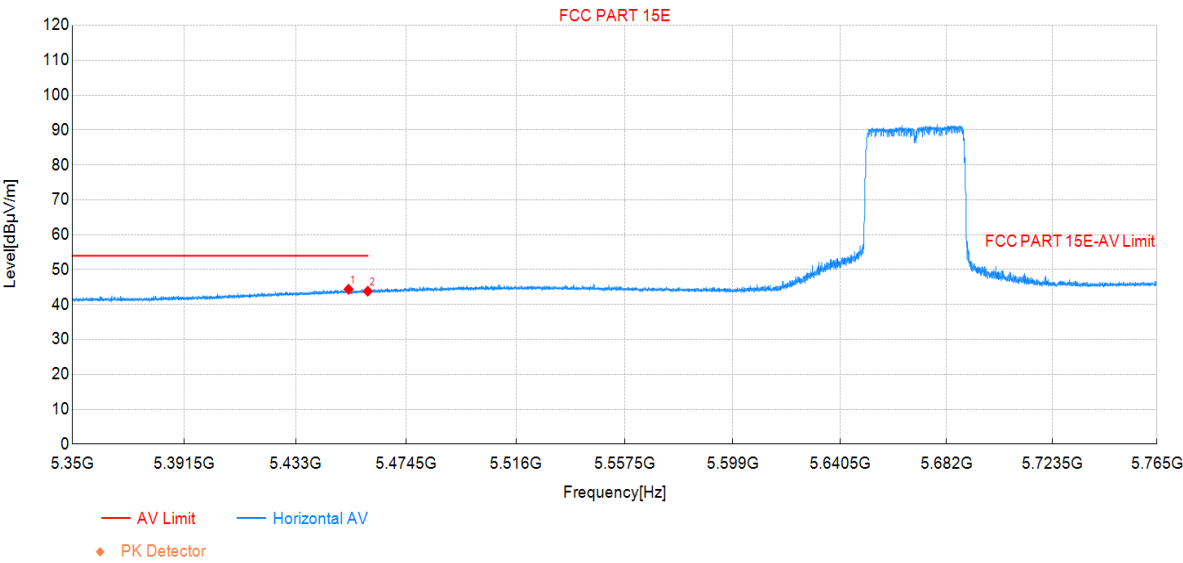

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5452.76	28.12	44.38	16.26	54.00	9.62	AV	Horizo	PASS
2	5460.00	27.49	43.83	16.34	54.00	10.17	AV	Horizo	PASS


Test Report

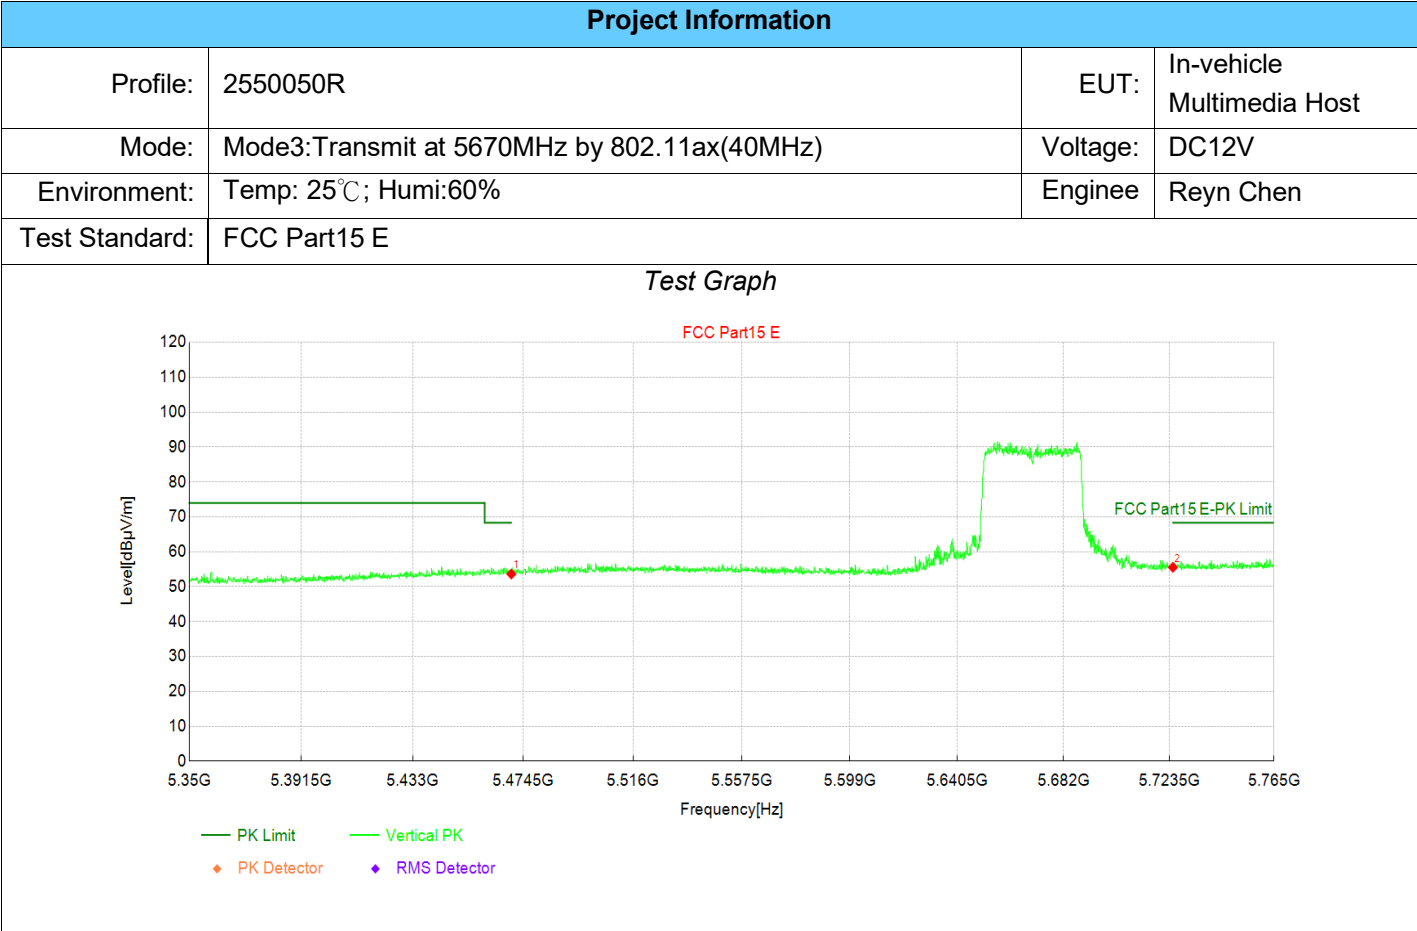

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5470.00	37.18	53.63	16.45	68.30	14.67	PK	Vertic	PASS
2	5725.00	36.86	55.53	18.67	68.30	12.77	PK	Vertic	PASS

Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode3:Transmit at 5670MHz by 802.11ax(40MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Enginee	Reyn Chen
Test Standard:	FCC PART 15E		

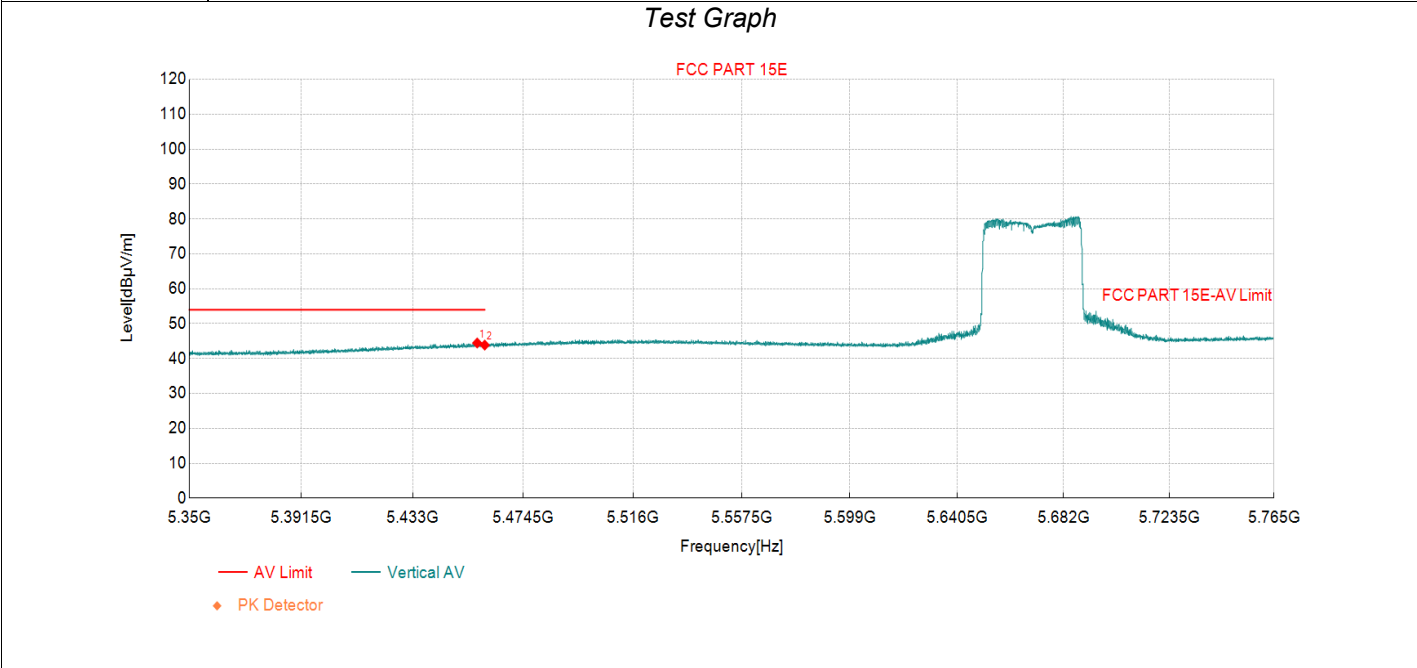


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5457.17	28.15	44.46	16.31	54.00	9.54	AV	Vertic	PASS
2	5460.00	27.52	43.86	16.34	54.00	10.14	AV	Vertic	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode4:Transmit at 5210MHz by 802.11ax(80MHz)	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		


Test Graph

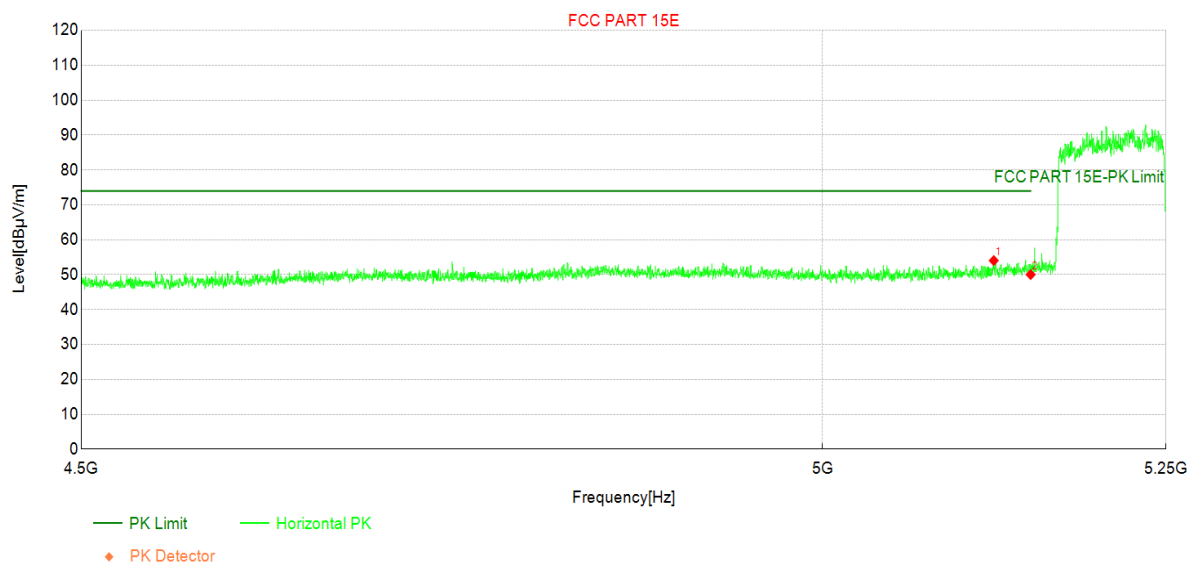

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5123.06	39.09	54.04	14.95	74.00	19.96	PK	Horizo	PASS
2	5150.00	34.92	50.03	15.11	74.00	23.97	PK	Horizo	PASS

Test Report

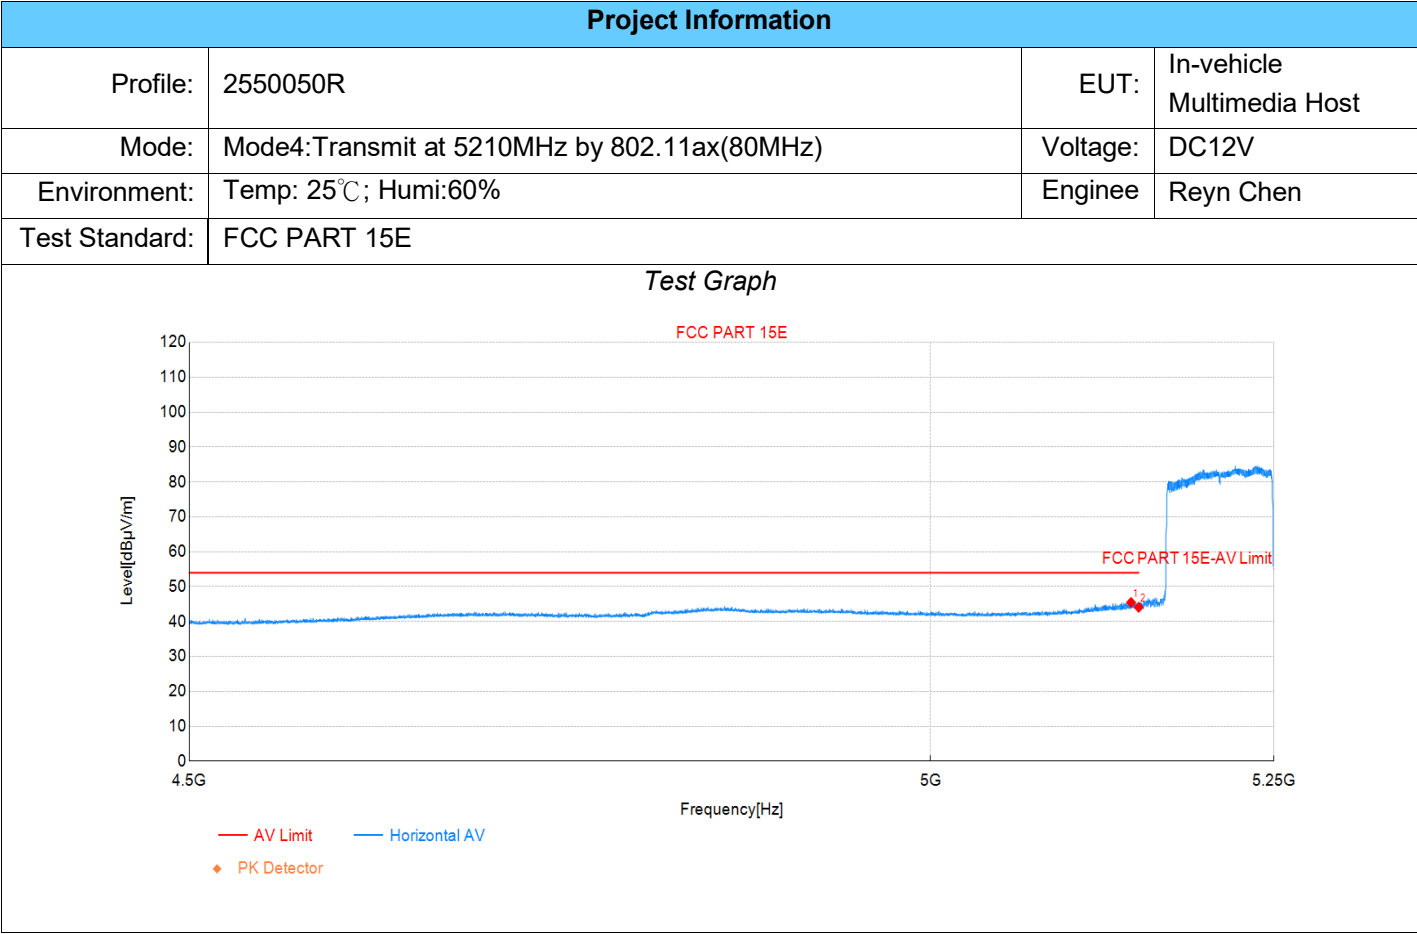


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5144.44	30.42	45.50	15.08	54.00	8.50	AV	Horizo	PASS
2	5150.00	28.98	44.09	15.11	54.00	9.91	AV	Horizo	PASS

Test Report

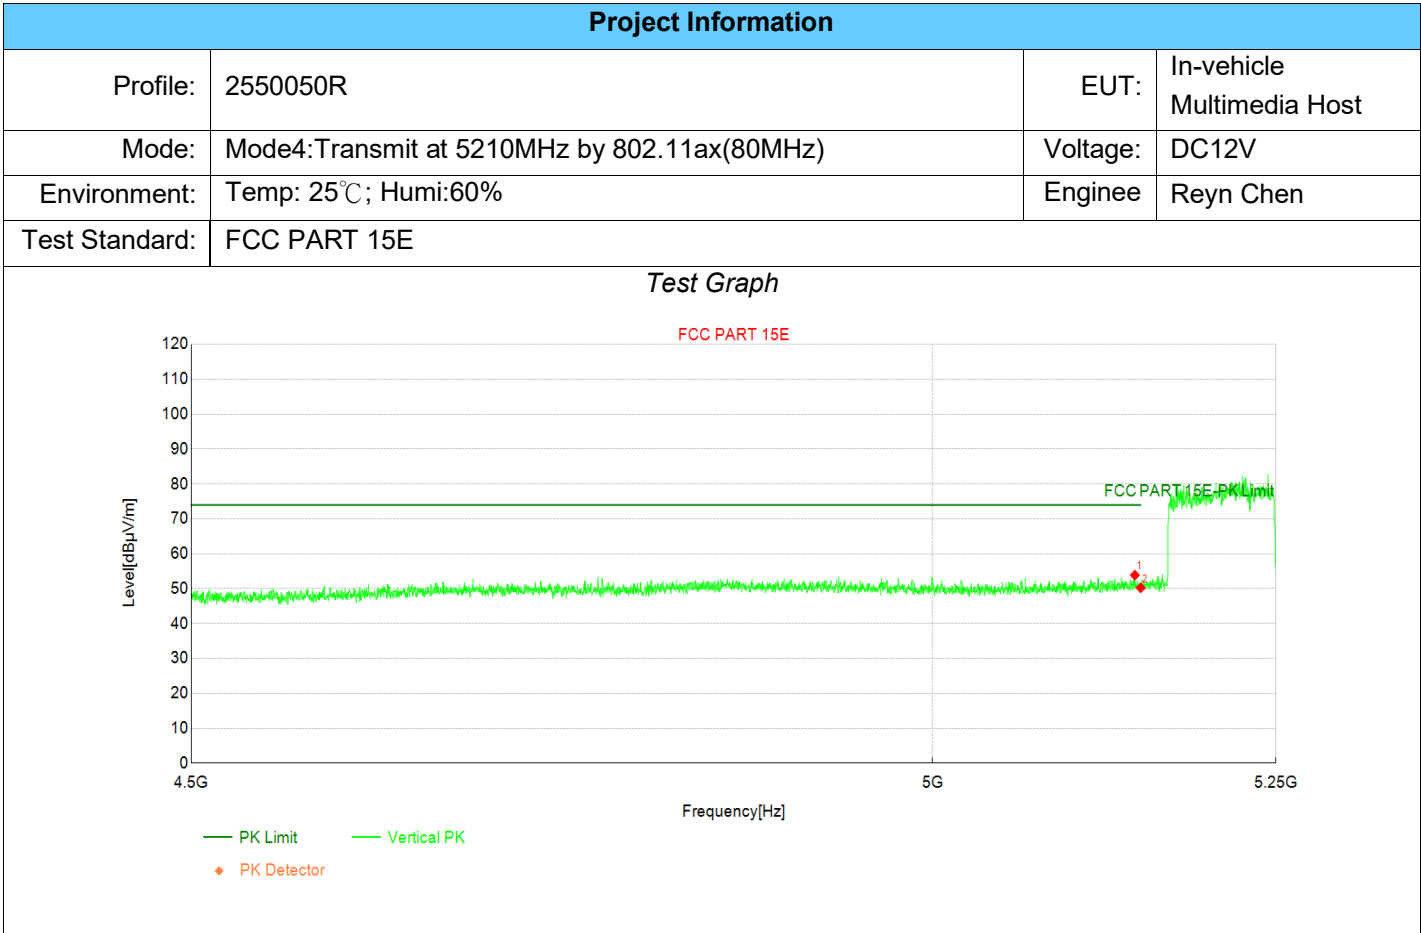

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5145.75	38.79	53.88	15.09	74.00	20.12	PK	Vertic	PASS
2	5150.00	35.15	50.26	15.11	74.00	23.74	PK	Vertic	PASS

Test Report

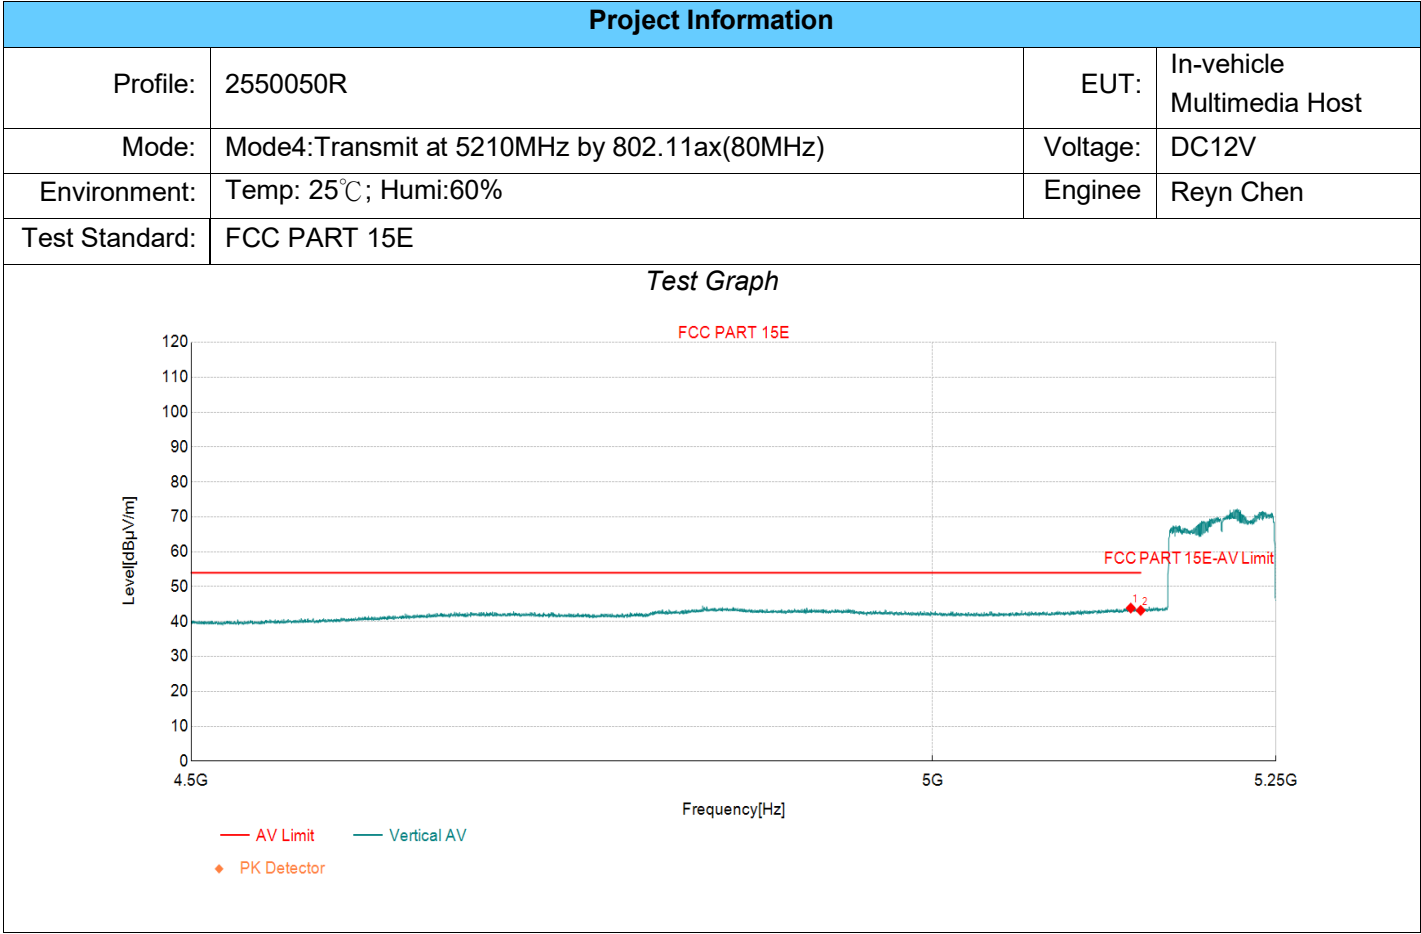


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5142.75	28.79	43.86	15.07	54.00	10.14	AV	Vertic	PASS
2	5150.00	28.08	43.19	15.11	54.00	10.81	AV	Vertic	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode4:Transmit at 5290MHz by 802.11ax(80MHz)	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

Test Graph

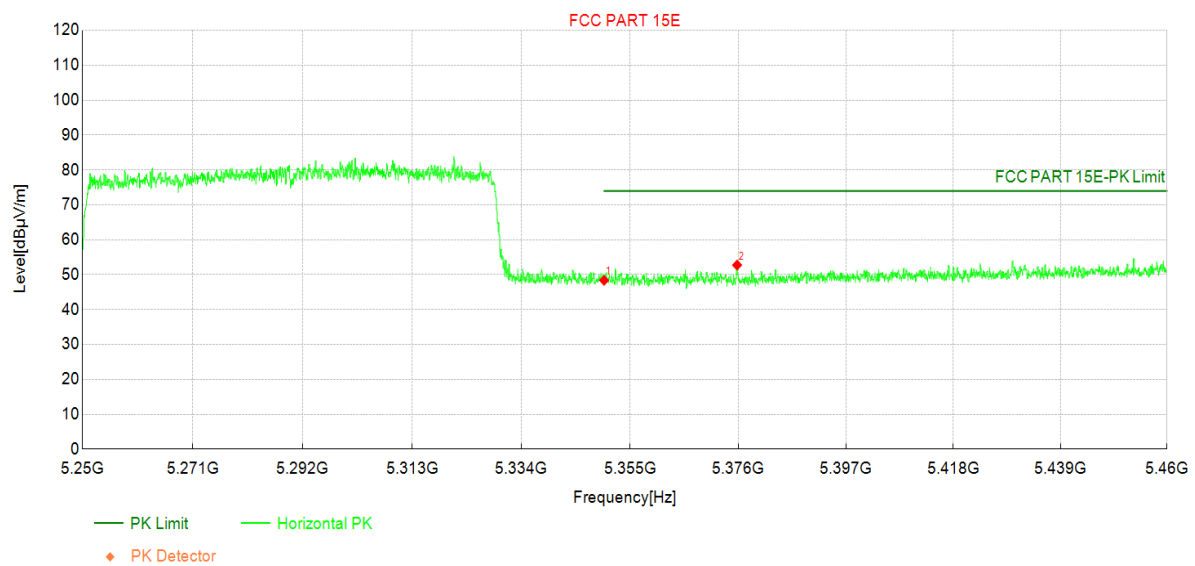


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	32.67	48.38	15.71	74.00	25.62	PK	Horizo	PASS
2	5375.79	37.08	52.75	15.67	74.00	21.25	PK	Horizo	PASS

Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode4:Transmit at 5290MHz by 802.11ax(80MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Enginee	Reyn Chen
Test Standard:	FCC PART 15E		

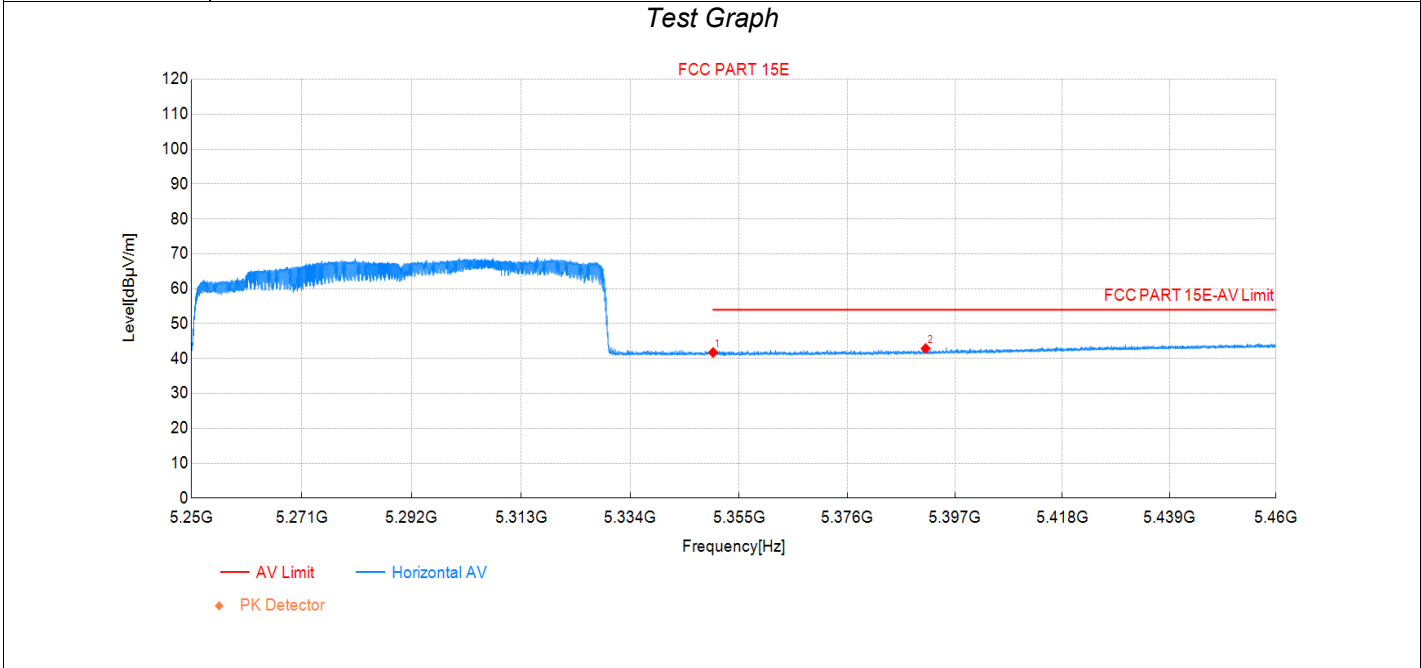


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	26.03	41.74	15.71	54.00	12.26	AV	Horizo	PASS
2	5391.28	27.22	42.88	15.66	54.00	11.12	AV	Horizo	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode4:Transmit at 5290MHz by 802.11ax(80MHz)	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

Test Graph

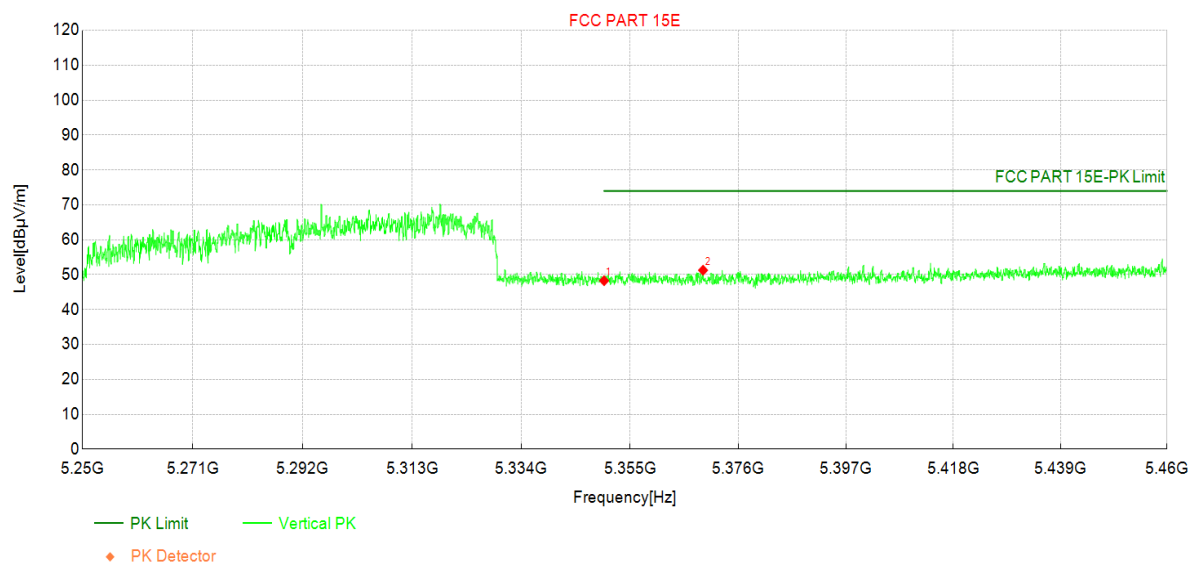


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	32.56	48.27	15.71	74.00	25.73	PK	Vertic	PASS
2	5369.18	35.58	51.26	15.68	74.00	22.74	PK	Vertic	PASS

Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode4:Transmit at 5290MHz by 802.11ax(80MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

Test Graph

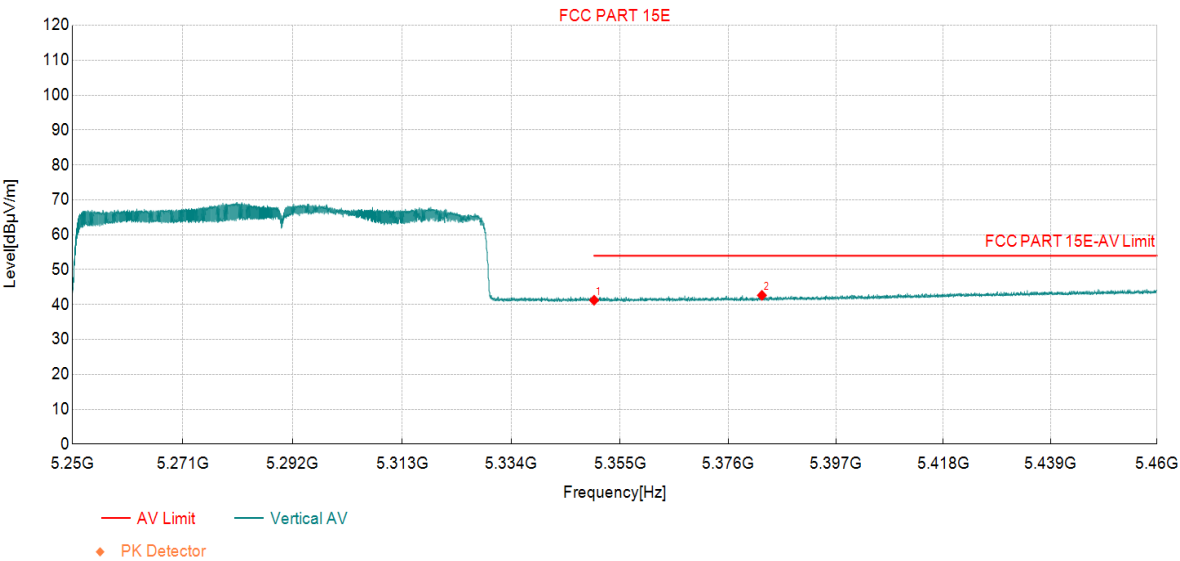


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	25.54	41.25	15.71	54.00	12.75	AV	Vertic	PASS
2	5382.56	26.96	42.63	15.67	54.00	11.37	AV	Vertic	PASS


Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode4:Transmit at 5530MHz by 802.11ax(80MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Enginee	Reyn Chen
Test Standard:	FCC Part15 E		

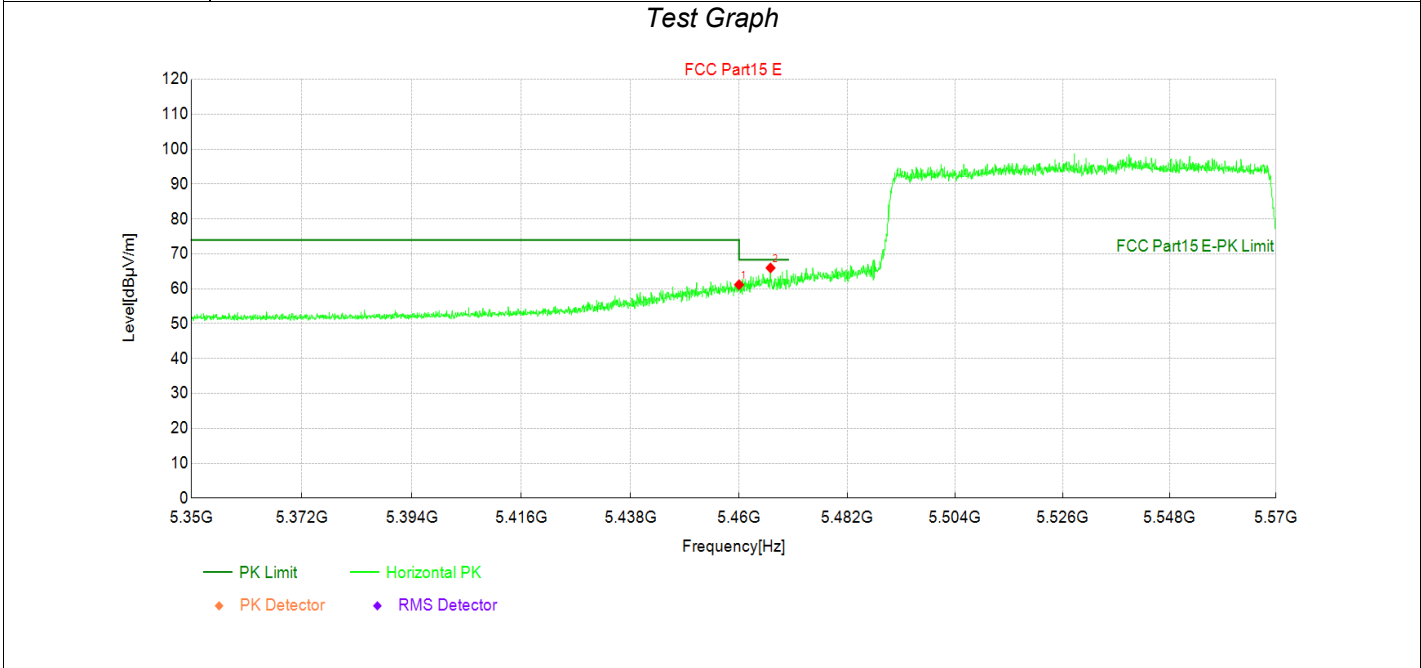

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	44.81	61.15	16.34	68.30	7.15	PK	Horizo	PASS
2	5466.38	49.56	65.97	16.41	68.30	2.33	PK	Horizo	PASS


Test Report

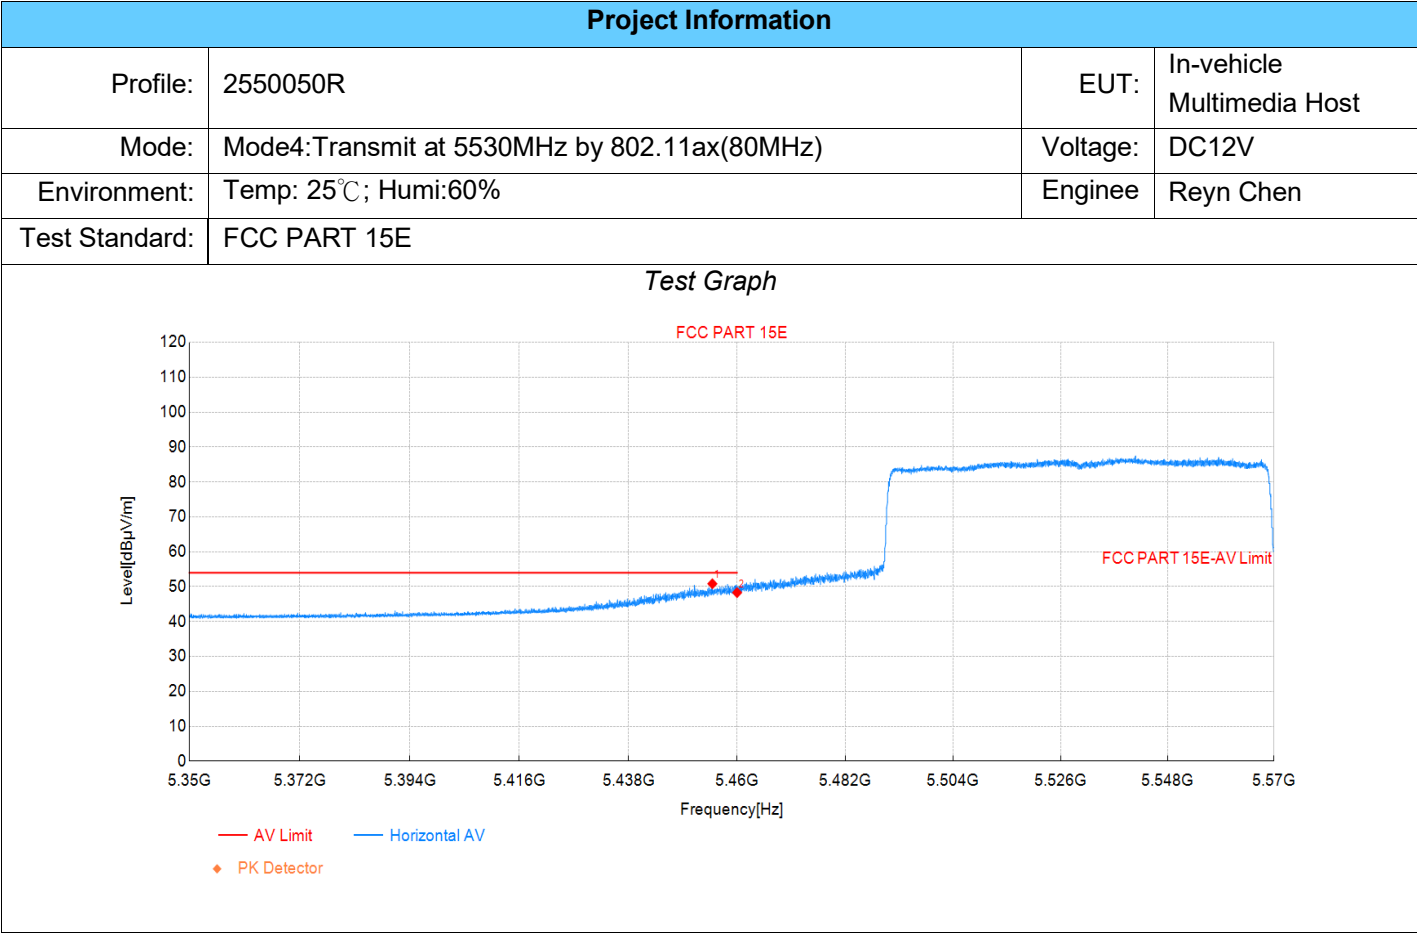

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5455.00	34.54	50.83	16.29	54.00	3.17	AV	Horizo	PASS
2	5460.00	31.95	48.29	16.34	54.00	5.71	AV	Horizo	PASS

Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode4:Transmit at 5530MHz by 802.11ax(80MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Enginee	Reyn Chen
Test Standard:	FCC Part15 E		

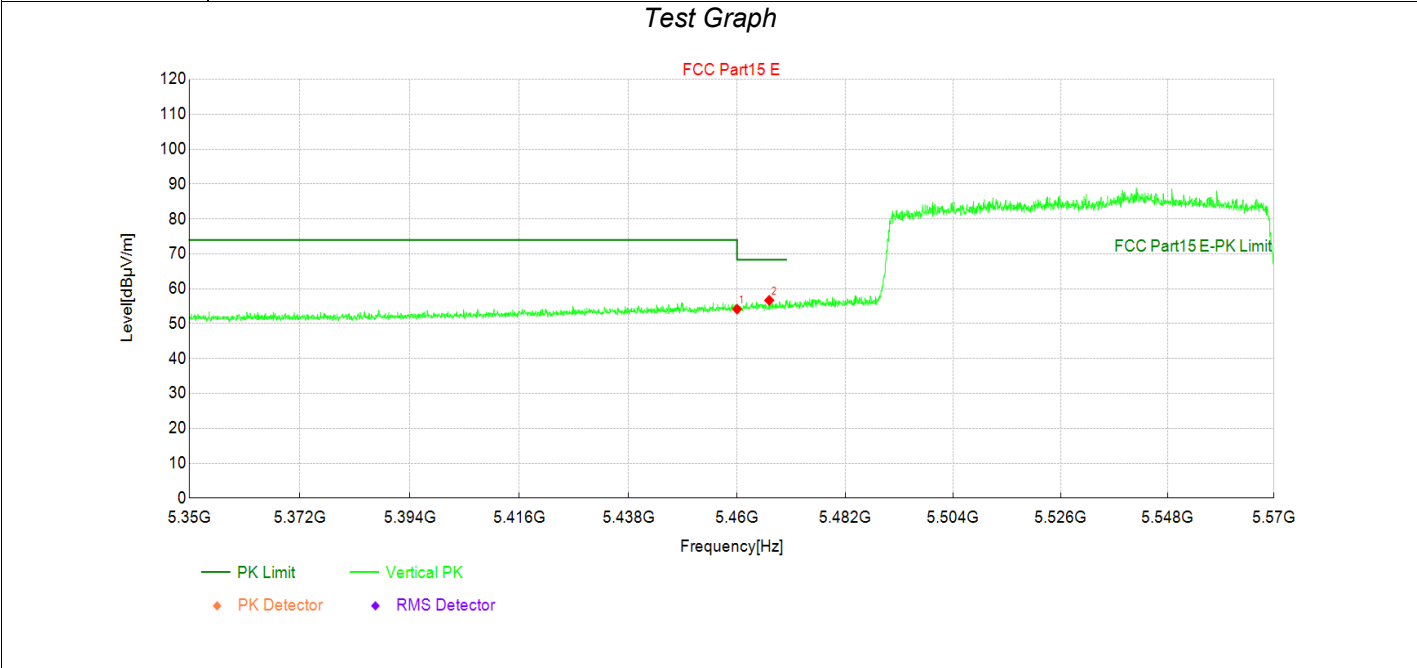


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	37.81	54.15	16.34	68.30	14.15	PK	Vertic	PASS
2	5466.53	40.28	56.69	16.41	68.30	11.61	PK	Vertic	PASS

Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode4:Transmit at 5530MHz by 802.11ax(80MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		


Test Graph

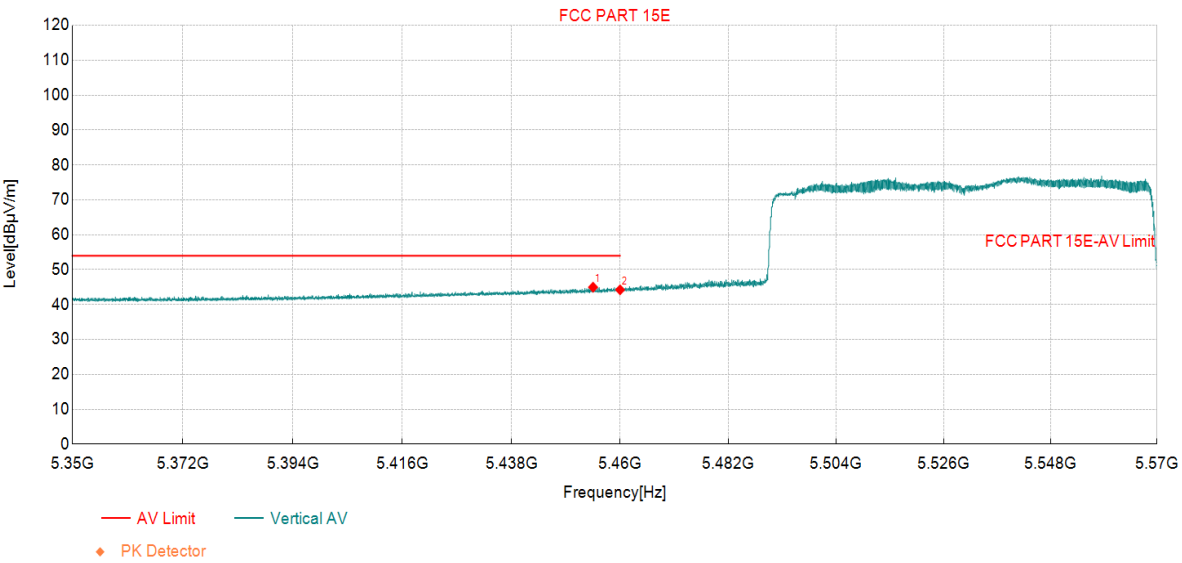

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5454.53	28.69	44.97	16.28	54.00	9.03	AV	Vertic	PASS
2	5460.00	27.88	44.22	16.34	54.00	9.78	AV	Vertic	PASS


Test Report

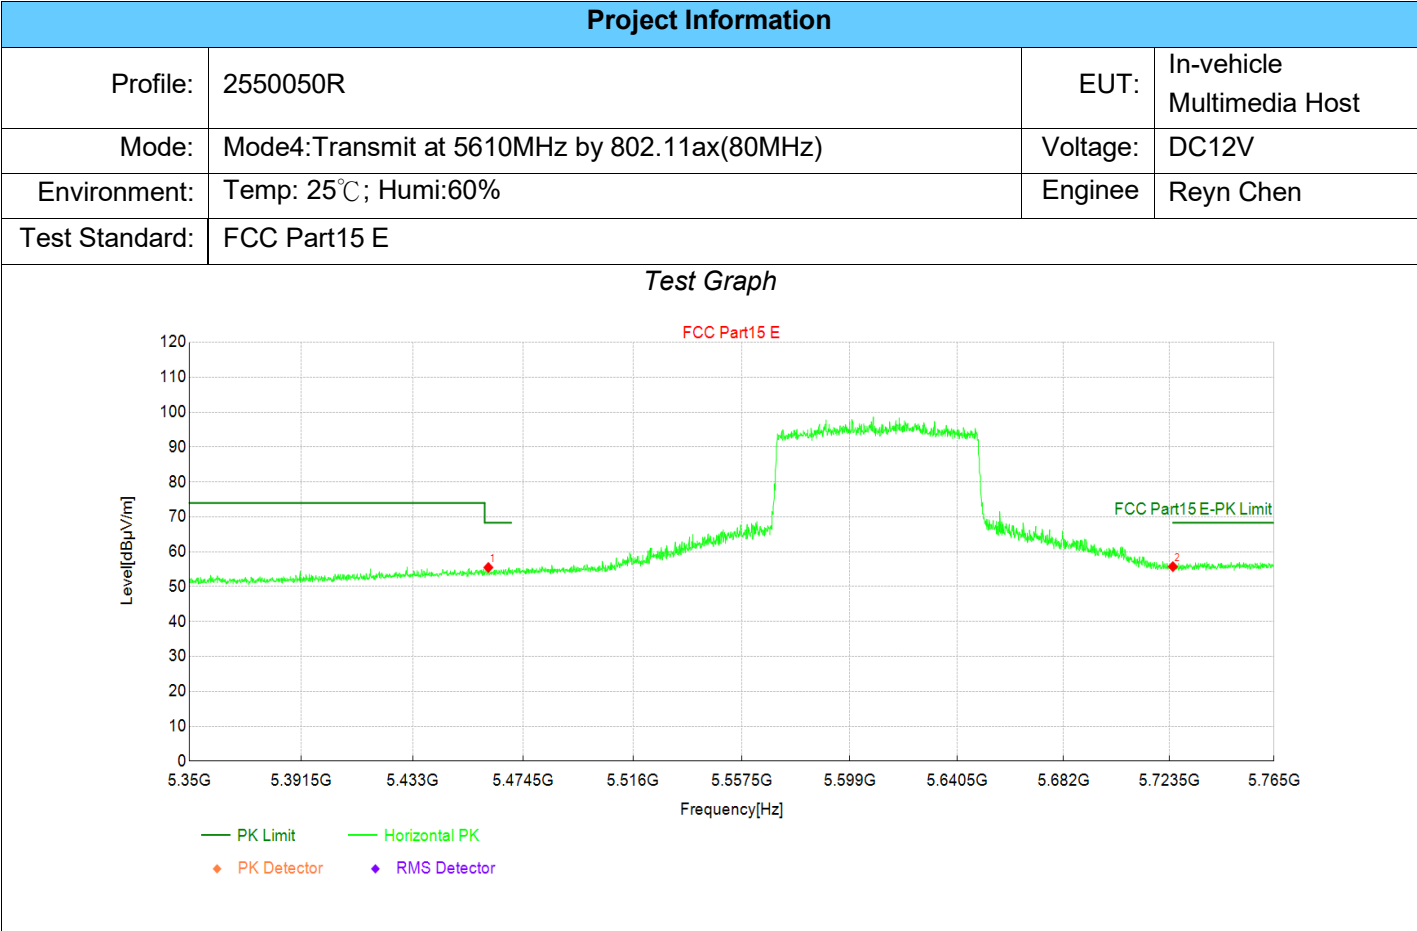

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5461.36	39.14	55.49	16.35	68.30	12.81	PK	Horizo	PASS
2	5725.00	37.07	55.74	18.67	68.30	12.56	PK	Horizo	PASS


Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode4:Transmit at 5610MHz by 802.11ax(80MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Enginee	Reyn Chen
Test Standard:	FCC PART 15E		

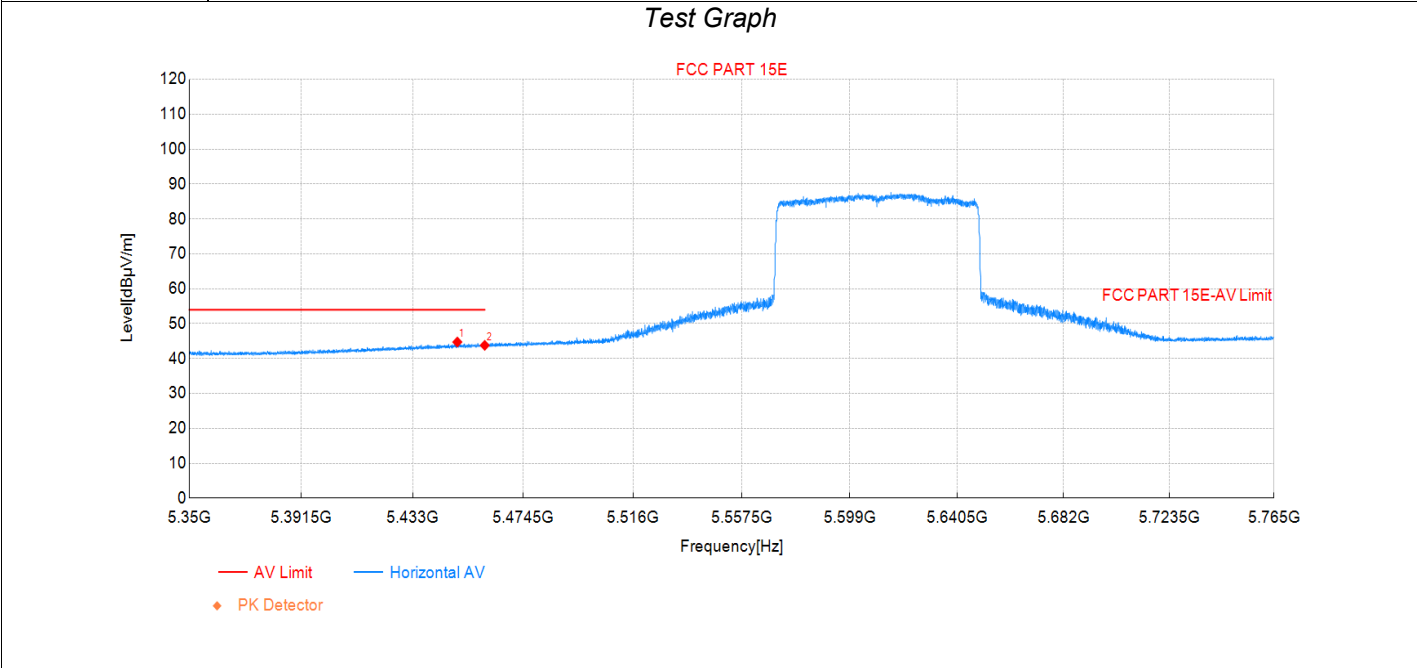

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5449.70	28.52	44.74	16.22	54.00	9.26	AV	Horizo	PASS
2	5460.00	27.44	43.78	16.34	54.00	10.22	AV	Horizo	PASS


Test Report

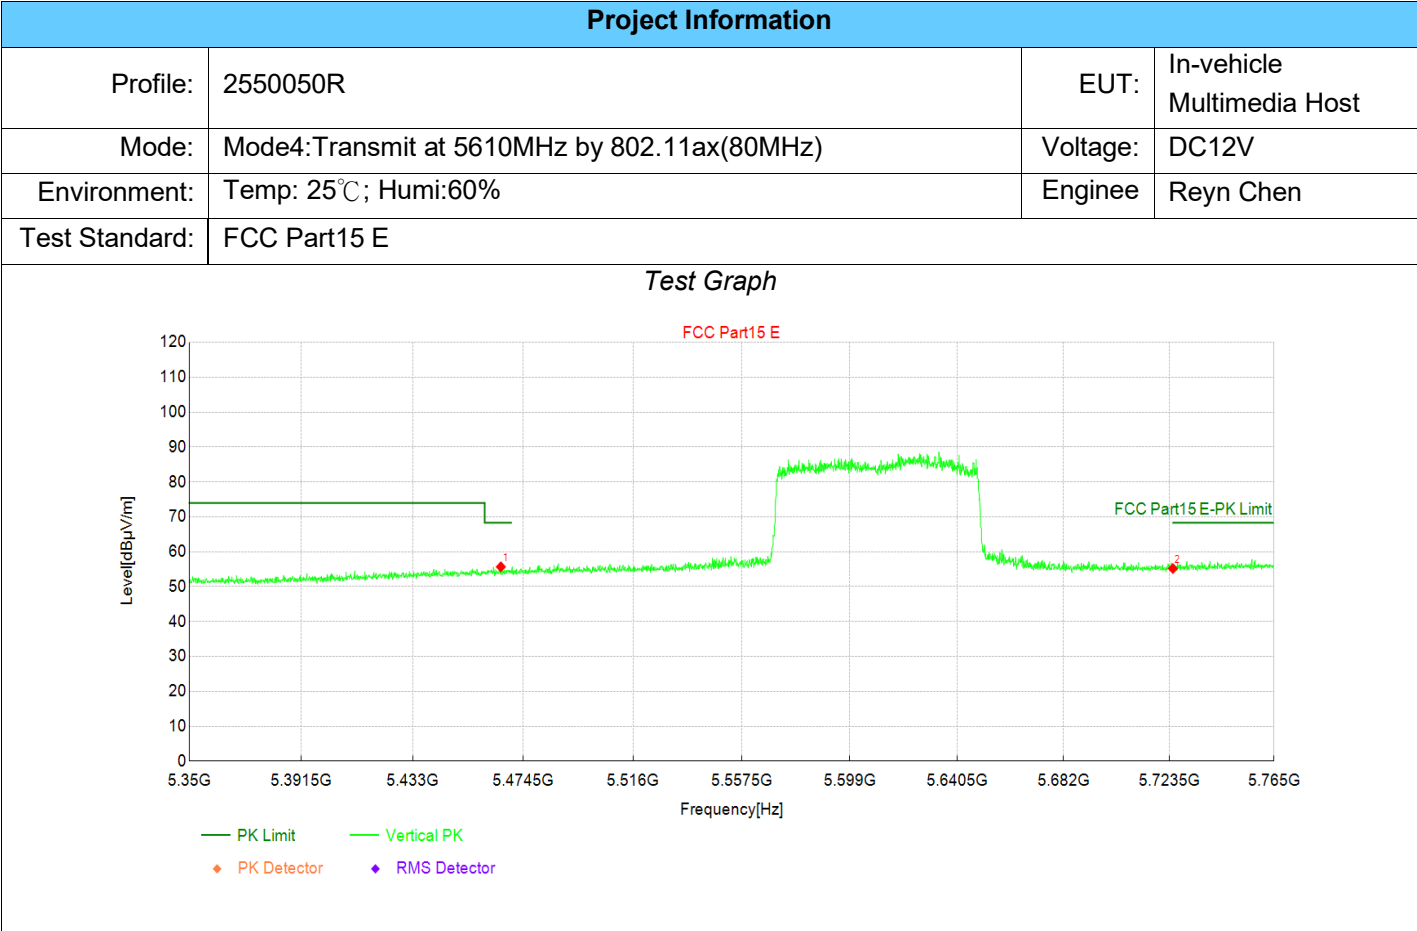

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5466.06	39.27	55.68	16.41	68.30	12.62	PK	Vertic	PASS
2	5725.00	36.53	55.20	18.67	68.30	13.10	PK	Vertic	PASS

Test Report

Project Information			
Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode4:Transmit at 5610MHz by 802.11ax(80MHz)	Voltage:	DC12V
Environment:	Temp: 25℃; Humi:60%	Enginee	Reyn Chen
Test Standard:	FCC PART 15E		

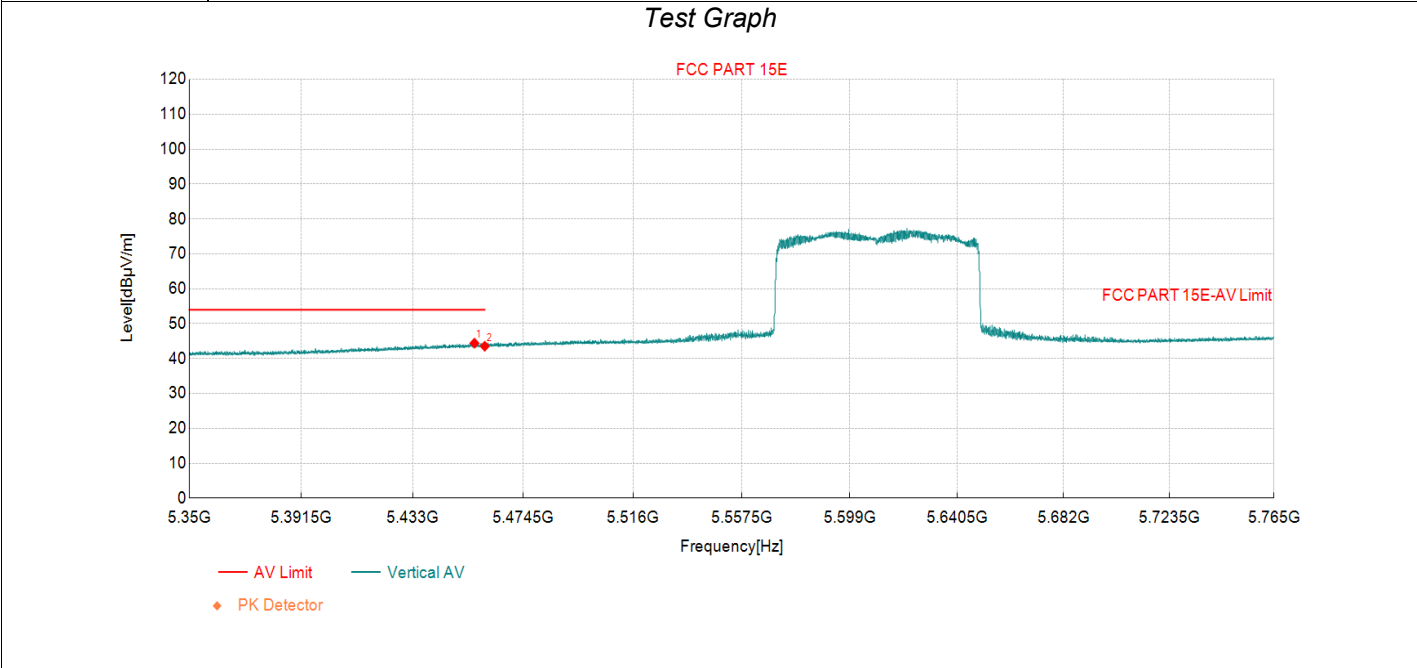


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5456.14	28.10	44.40	16.30	54.00	9.60	AV	Vertic	PASS
2	5460.00	27.19	43.53	16.34	54.00	10.47	AV	Vertic	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode1:Transmit at 5745MHz by 802.11a	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

Test Graph

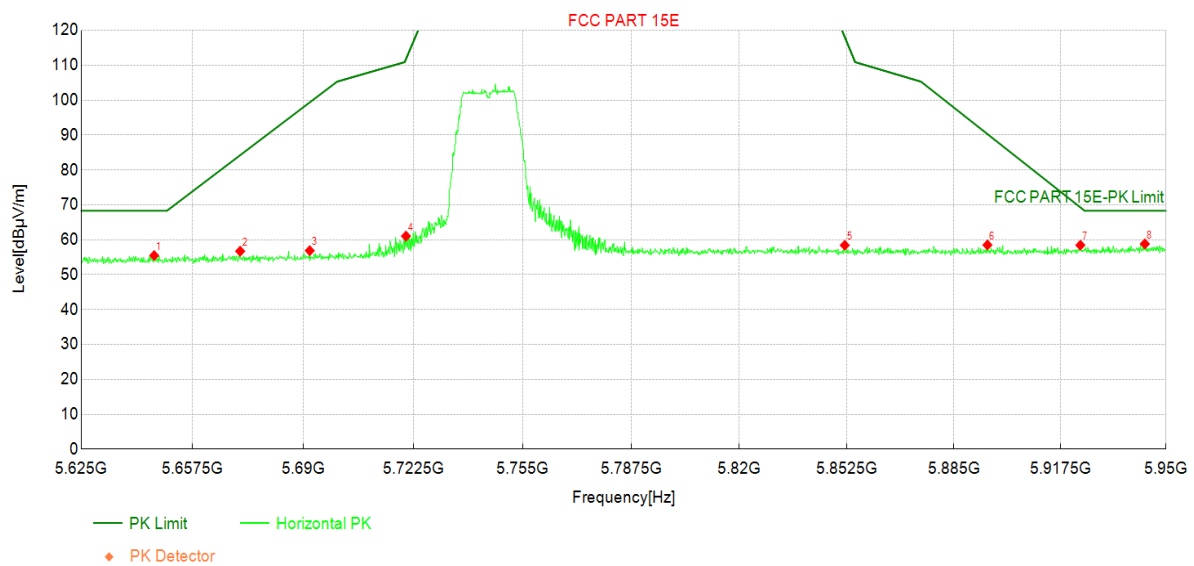

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5646.29	37.30	55.48	18.18	68.30	12.82	PK	Horizo	PASS
2	5671.48	38.30	56.72	18.42	84.23	27.51	PK	Horizo	PASS
3	5691.95	38.25	56.88	18.63	99.36	42.48	PK	Horizo	PASS
4	5720.39	42.36	61.04	18.68	111.78	50.74	PK	Horizo	PASS
5	5851.85	39.45	58.41	18.96	118.08	59.67	PK	Horizo	PASS
6	5895.24	39.20	58.50	19.30	90.29	31.79	PK	Horizo	PASS
7	5923.68	38.92	58.44	19.52	69.28	10.84	PK	Horizo	PASS
8	5943.50	39.14	58.81	19.67	68.30	9.49	PK	Horizo	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode1:Transmit at 5745MHz by 802.11a	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Enginee	Reyn Chen
Test Standard:	FCC PART 15E		

Test Graph

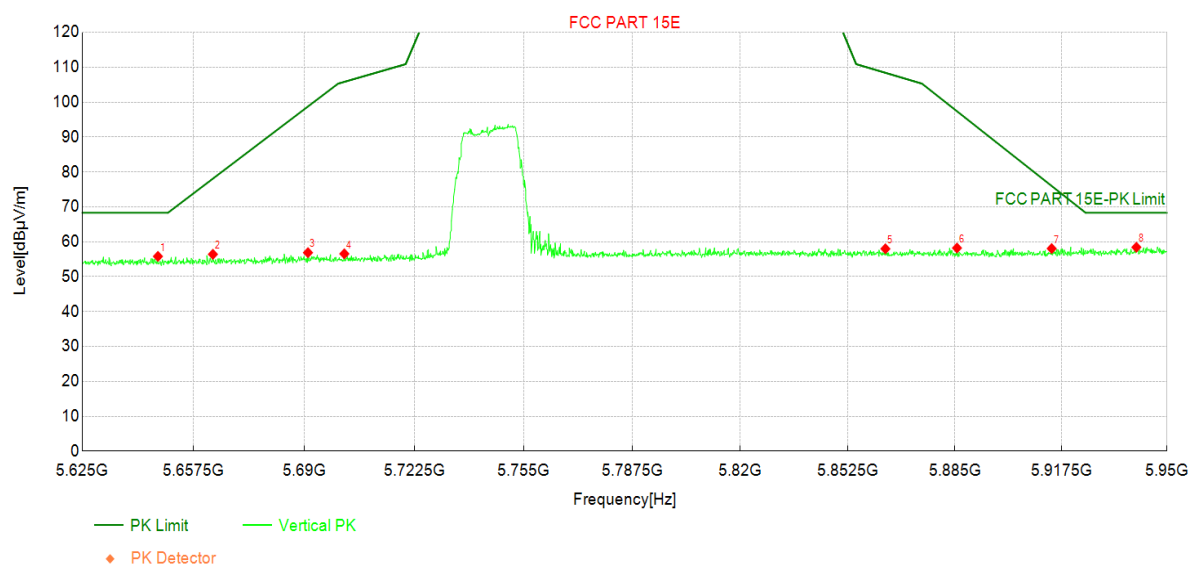

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5647.10	37.63	55.81	18.18	68.30	12.49	PK	Vertic	PASS
2	5663.19	38.06	56.41	18.35	78.09	21.68	PK	Vertic	PASS
3	5691.14	38.26	56.88	18.62	98.77	41.89	PK	Vertic	PASS
4	5701.86	37.84	56.54	18.70	105.82	49.28	PK	Vertic	PASS
5	5863.88	38.93	57.98	19.05	108.41	50.43	PK	Vertic	PASS
6	5885.65	38.98	58.21	19.23	97.39	39.18	PK	Vertic	PASS
7	5914.58	38.60	58.05	19.45	75.99	17.94	PK	Vertic	PASS
8	5940.58	38.78	58.43	19.65	68.30	9.87	PK	Vertic	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode1:Transmit at 5825MHz by 802.11a	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

Test Graph

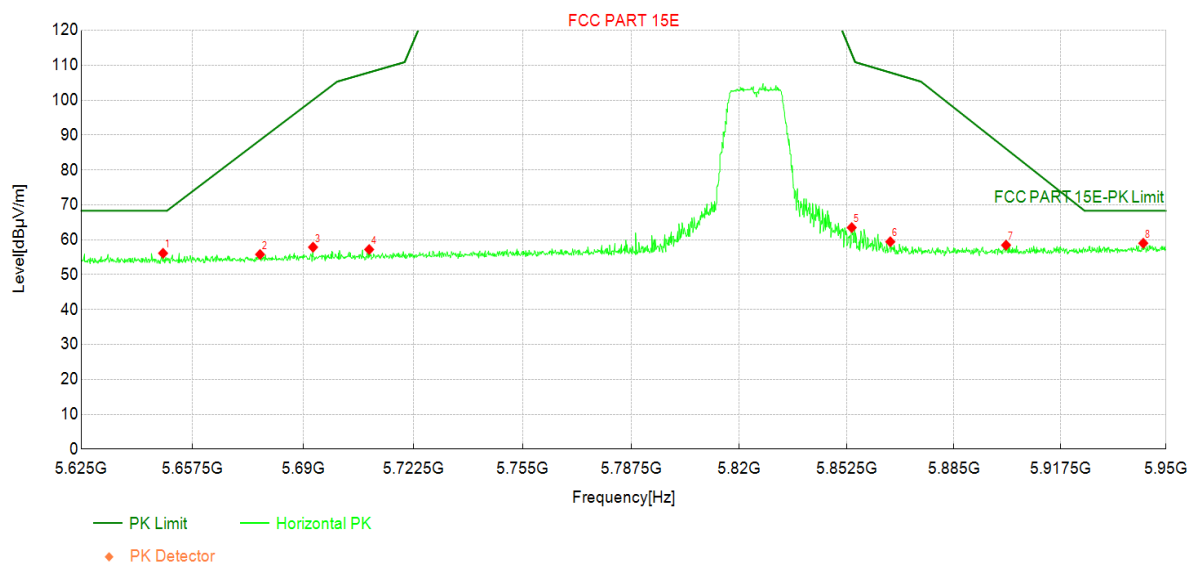

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5648.89	37.93	56.13	18.20	68.30	12.17	PK	Horizo	PASS
2	5677.33	37.31	55.80	18.49	88.56	32.76	PK	Horizo	PASS
3	5692.93	39.22	57.86	18.64	100.08	42.22	PK	Horizo	PASS
4	5709.50	38.52	57.21	18.69	107.96	50.75	PK	Horizo	PASS
5	5853.96	44.52	63.49	18.97	113.26	49.77	PK	Horizo	PASS
6	5865.66	40.36	59.42	19.06	107.91	48.49	PK	Horizo	PASS
7	5900.93	39.12	58.46	19.34	86.08	27.62	PK	Horizo	PASS
8	5943.01	39.34	59.01	19.67	68.30	9.29	PK	Horizo	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode1:Transmit at 5825MHz by 802.11a	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

Test Graph

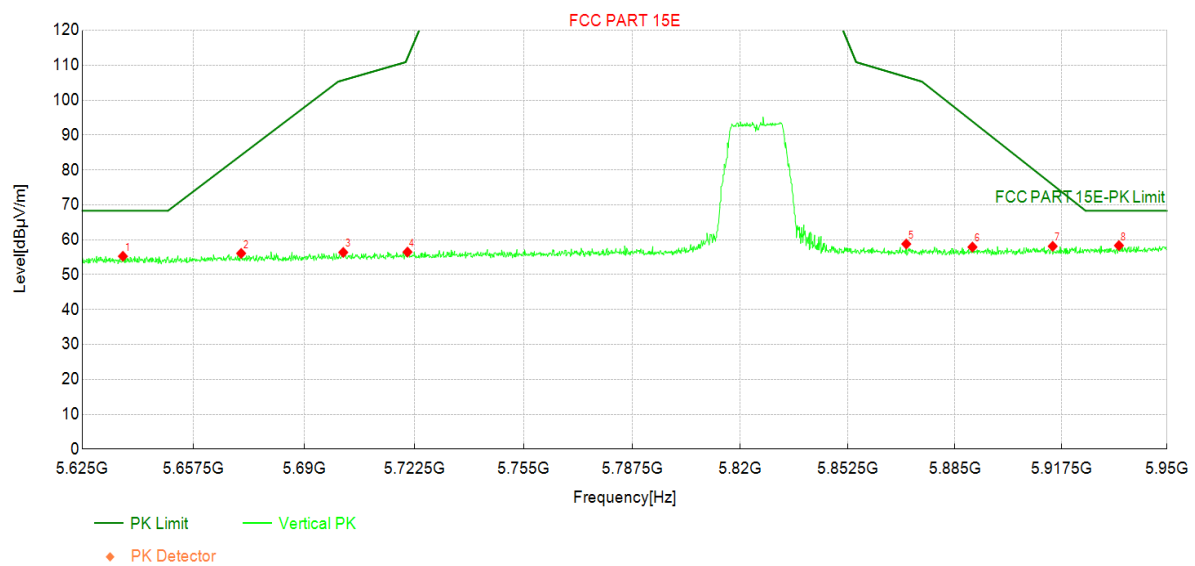

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5636.86	37.19	55.26	18.07	68.30	13.04	PK	Vertic	PASS
2	5671.48	37.68	56.10	18.42	84.23	28.13	PK	Vertic	PASS
3	5701.54	37.68	56.38	18.70	105.73	49.35	PK	Vertic	PASS
4	5720.55	37.80	56.48	18.68	112.15	55.67	PK	Vertic	PASS
5	5870.21	39.69	58.79	19.10	106.64	47.85	PK	Vertic	PASS
6	5890.36	38.63	57.90	19.27	93.90	36.00	PK	Vertic	PASS
7	5914.90	38.69	58.14	19.45	75.75	17.61	PK	Vertic	PASS
8	5935.21	38.73	58.34	19.61	68.30	9.96	PK	Vertic	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode2:Transmit at 5745MHz by 802.11ax(20MHz)	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

Test Graph

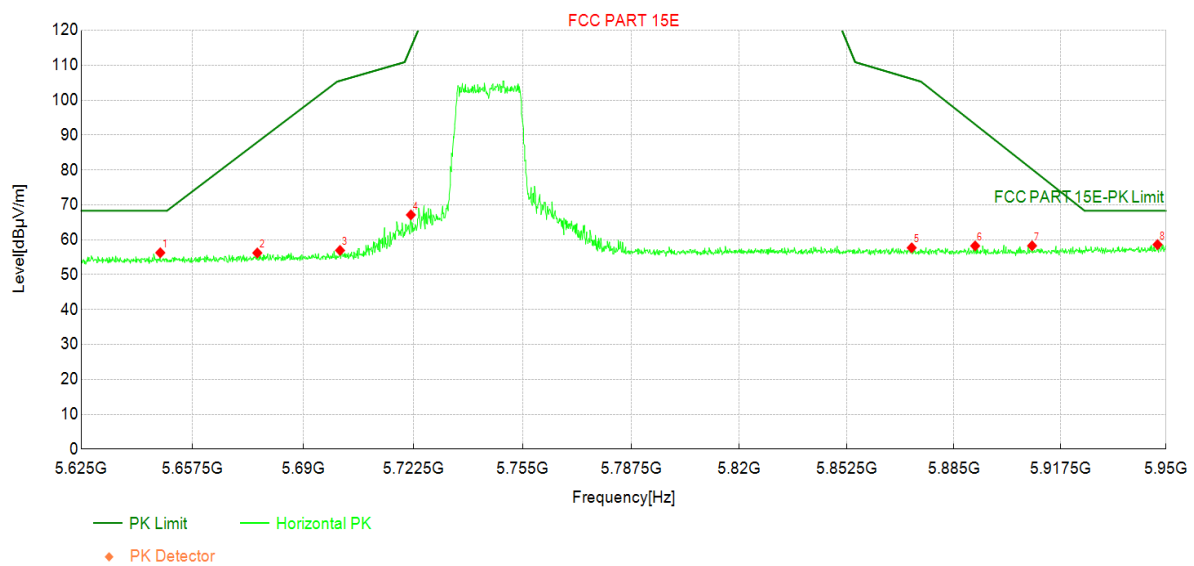

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5648.08	38.09	56.28	18.19	68.30	12.02	PK	Horizo	PASS
2	5676.51	37.73	56.21	18.48	87.96	31.75	PK	Horizo	PASS
3	5700.89	38.24	56.95	18.71	105.55	48.60	PK	Horizo	PASS
4	5721.85	48.46	67.13	18.67	115.12	47.99	PK	Horizo	PASS
5	5872.16	38.58	57.70	19.12	106.09	48.39	PK	Horizo	PASS
6	5891.50	38.97	58.24	19.27	93.06	34.82	PK	Horizo	PASS
7	5908.89	38.86	58.27	19.41	80.19	21.92	PK	Horizo	PASS
8	5947.40	38.90	58.60	19.70	68.30	9.70	PK	Horizo	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode2:Transmit at 5745MHz by 802.11ax(20MHz)	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

Test Graph

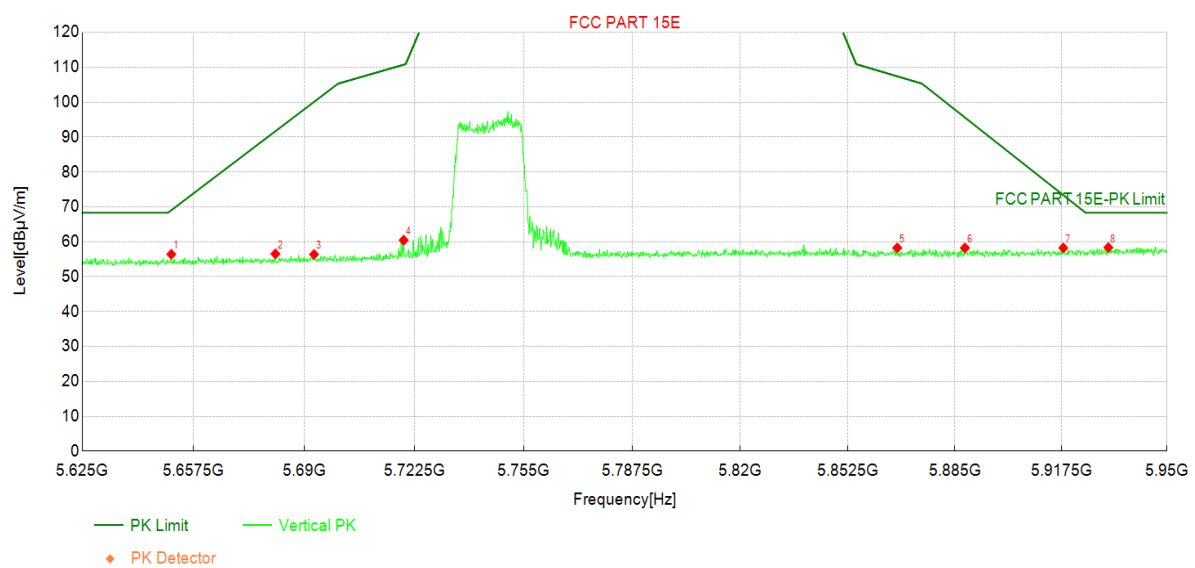

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5651.00	38.20	56.42	18.22	69.04	12.62	PK	Vertic	PASS
2	5681.55	37.99	56.52	18.53	91.68	35.16	PK	Vertic	PASS
3	5692.93	37.73	56.37	18.64	100.08	43.71	PK	Vertic	PASS
4	5719.41	41.78	60.45	18.67	110.74	50.29	PK	Vertic	PASS
5	5867.45	39.16	58.24	19.08	107.41	49.17	PK	Vertic	PASS
6	5888.09	38.99	58.23	19.24	95.58	37.35	PK	Vertic	PASS
7	5918.15	38.75	58.23	19.48	73.35	15.12	PK	Vertic	PASS
8	5931.96	38.76	58.34	19.58	68.30	9.96	PK	Vertic	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode2:Transmit at 5825MHz by 802.11ax(20MHz)	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

Test Graph

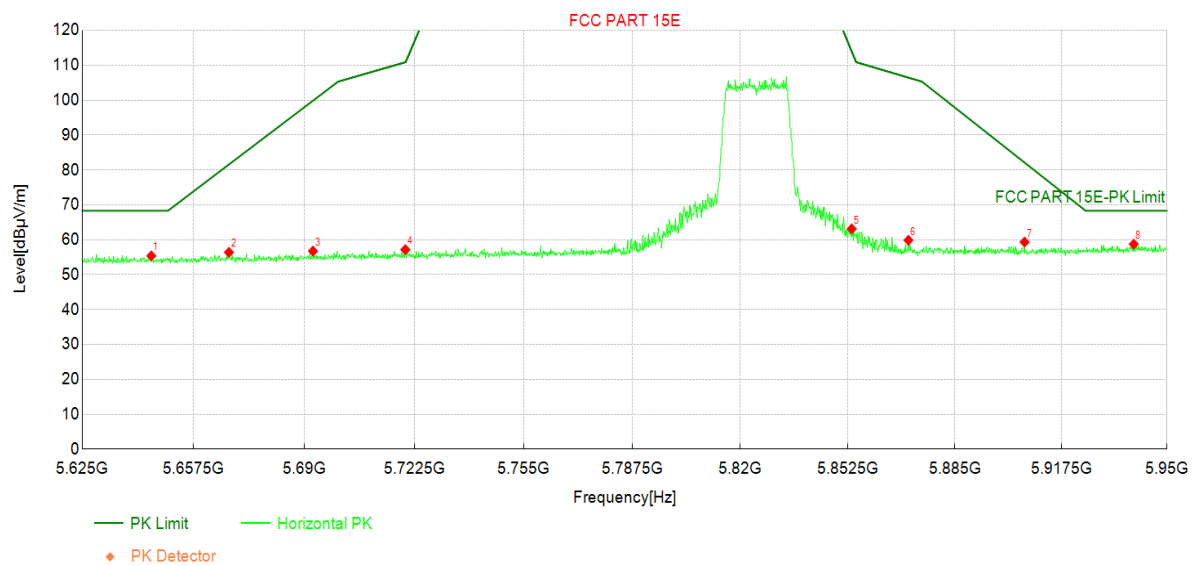

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5645.15	37.22	55.38	18.16	68.30	12.92	PK	Horizo	PASS
2	5667.90	38.00	56.39	18.39	81.58	25.19	PK	Horizo	PASS
3	5692.60	38.12	56.75	18.63	99.84	43.09	PK	Horizo	PASS
4	5719.90	38.50	57.18	18.68	110.87	53.69	PK	Horizo	PASS
5	5853.64	44.14	63.11	18.97	114.01	50.90	PK	Horizo	PASS
6	5870.86	40.77	59.87	19.10	106.46	46.59	PK	Horizo	PASS
7	5906.29	39.97	59.35	19.38	82.11	22.76	PK	Horizo	PASS
8	5939.76	39.10	58.74	19.64	68.30	9.56	PK	Horizo	PASS

Test Report

Project Information

Profile:	2550050R	EUT:	In-vehicle Multimedia Host
Mode:	Mode2:Transmit at 5825MHz by 802.11ax(20MHz)	Voltage:	DC12V
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15E		

Test Graph

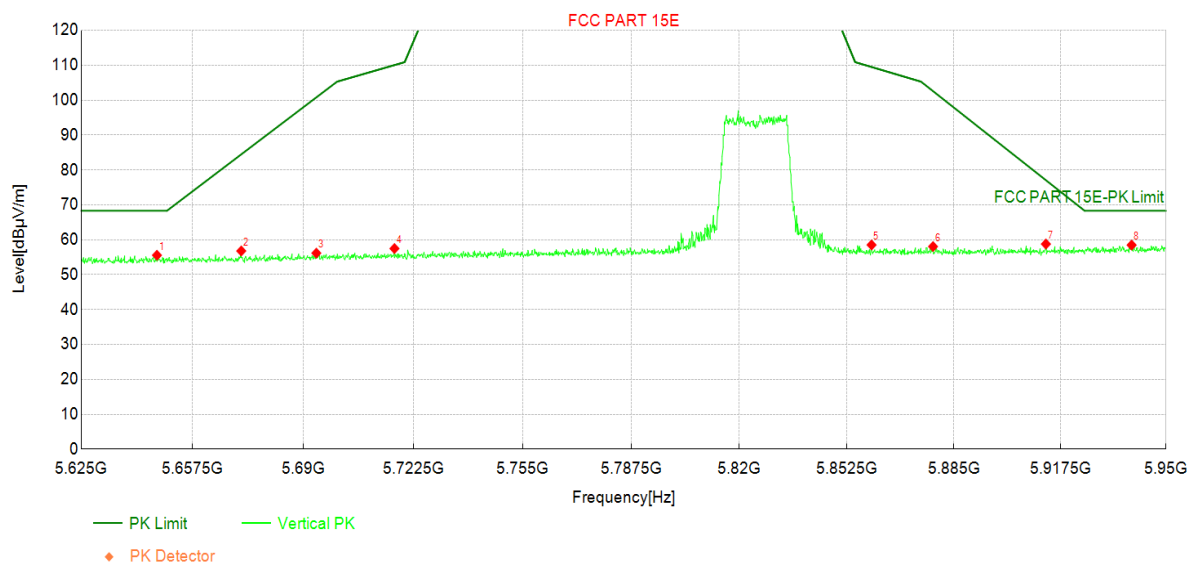

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5647.10	37.38	55.56	18.18	68.30	12.74	PK	Vertic	PASS
2	5671.80	38.36	56.79	18.43	84.47	27.68	PK	Vertic	PASS
3	5693.90	37.52	56.17	18.65	100.80	44.63	PK	Vertic	PASS
4	5716.98	38.80	57.48	18.68	110.05	52.57	PK	Vertic	PASS
5	5859.98	39.50	58.52	19.02	109.51	50.99	PK	Vertic	PASS
6	5878.66	38.88	58.05	19.17	102.58	44.53	PK	Vertic	PASS
7	5913.11	39.34	58.78	19.44	77.07	18.29	PK	Vertic	PASS
8	5939.44	38.84	58.48	19.64	68.30	9.82	PK	Vertic	PASS