




- NOTES:
1. MATERIAL: BRADY NAMEPLATE B-423 POLYESTER SELF ADHESIVE CSA ACCEPTED. ALTERNATE MAT'L: 3M FM041902 POLYESTER LABEL STOCK FOR THERMAL PRINTERS WITH P1480 ADHESIVE. DPM UV CLEAR GLOSS LAMINATE. SERIAL NUMBER AND VER BACKGROUND COLOR: WHITE BACKGROUND COLOR: GRAY PMS 422 ALL TEXT COLOR: BLACK PMS PROCESS BLACK C
 2. FINAL ARTWORK TO BE APPROVED BY SENSUS, (LOGO ARTWORK TO BE SUPPLIED BY SENSUS).
 3. SERIAL NUMBER FIELD TO BE SEQUENTIALLY NUMBERED. THE FIRST 2 DIGITS IN THE SERIAL NUMBER FIELD ARE ALWAYS THE LETTERS "CL" FOLLOWED BY 8 SEQUENTIAL NUMBERS. NUMBERS SUPPLIED BY SENSUS FOR EACH ORDER.
 4. THE 2-D SERIAL NUMBER FIELD IS TO BE THE EXACT SAME NUMBER AS THE SERIAL NUMBER ON EACH LABEL, EXCEPT WITHOUT THE "CL" PREFIX. THE 2-D SERIAL NUMBER IS 8 DIGITS IN LENGTH REFERENCE DOCUMENT UI-1368 AND UI-1486.
 5. VERSION NUMBER TO BE ALPHA CHARACTER AND SUPPLIED BY SENSUS FOR EACH VERSION CHANGE AND PRINTED AT CEM.
 6. WHERE APPLICABLE USE BRADY LABEL 0.2"X0.5" FOR VERSION.
 7. THE 2-D SERIAL NUMBER FIELD IS TO BE A DATA MATRIX BARCODE.

CONFIDENTIAL AND PROPRIETARY: All rights reserved. This document is confidential, proprietary and copyrighted. It shall not be reproduced, disseminated or otherwise made available to third parties or otherwise used without our prior written consent. Unlawful use – also in parts or in revised form - may be pursued under civil and criminal law.		5396310139243		SENSUS PART NUMBER		DESCRIPTION	

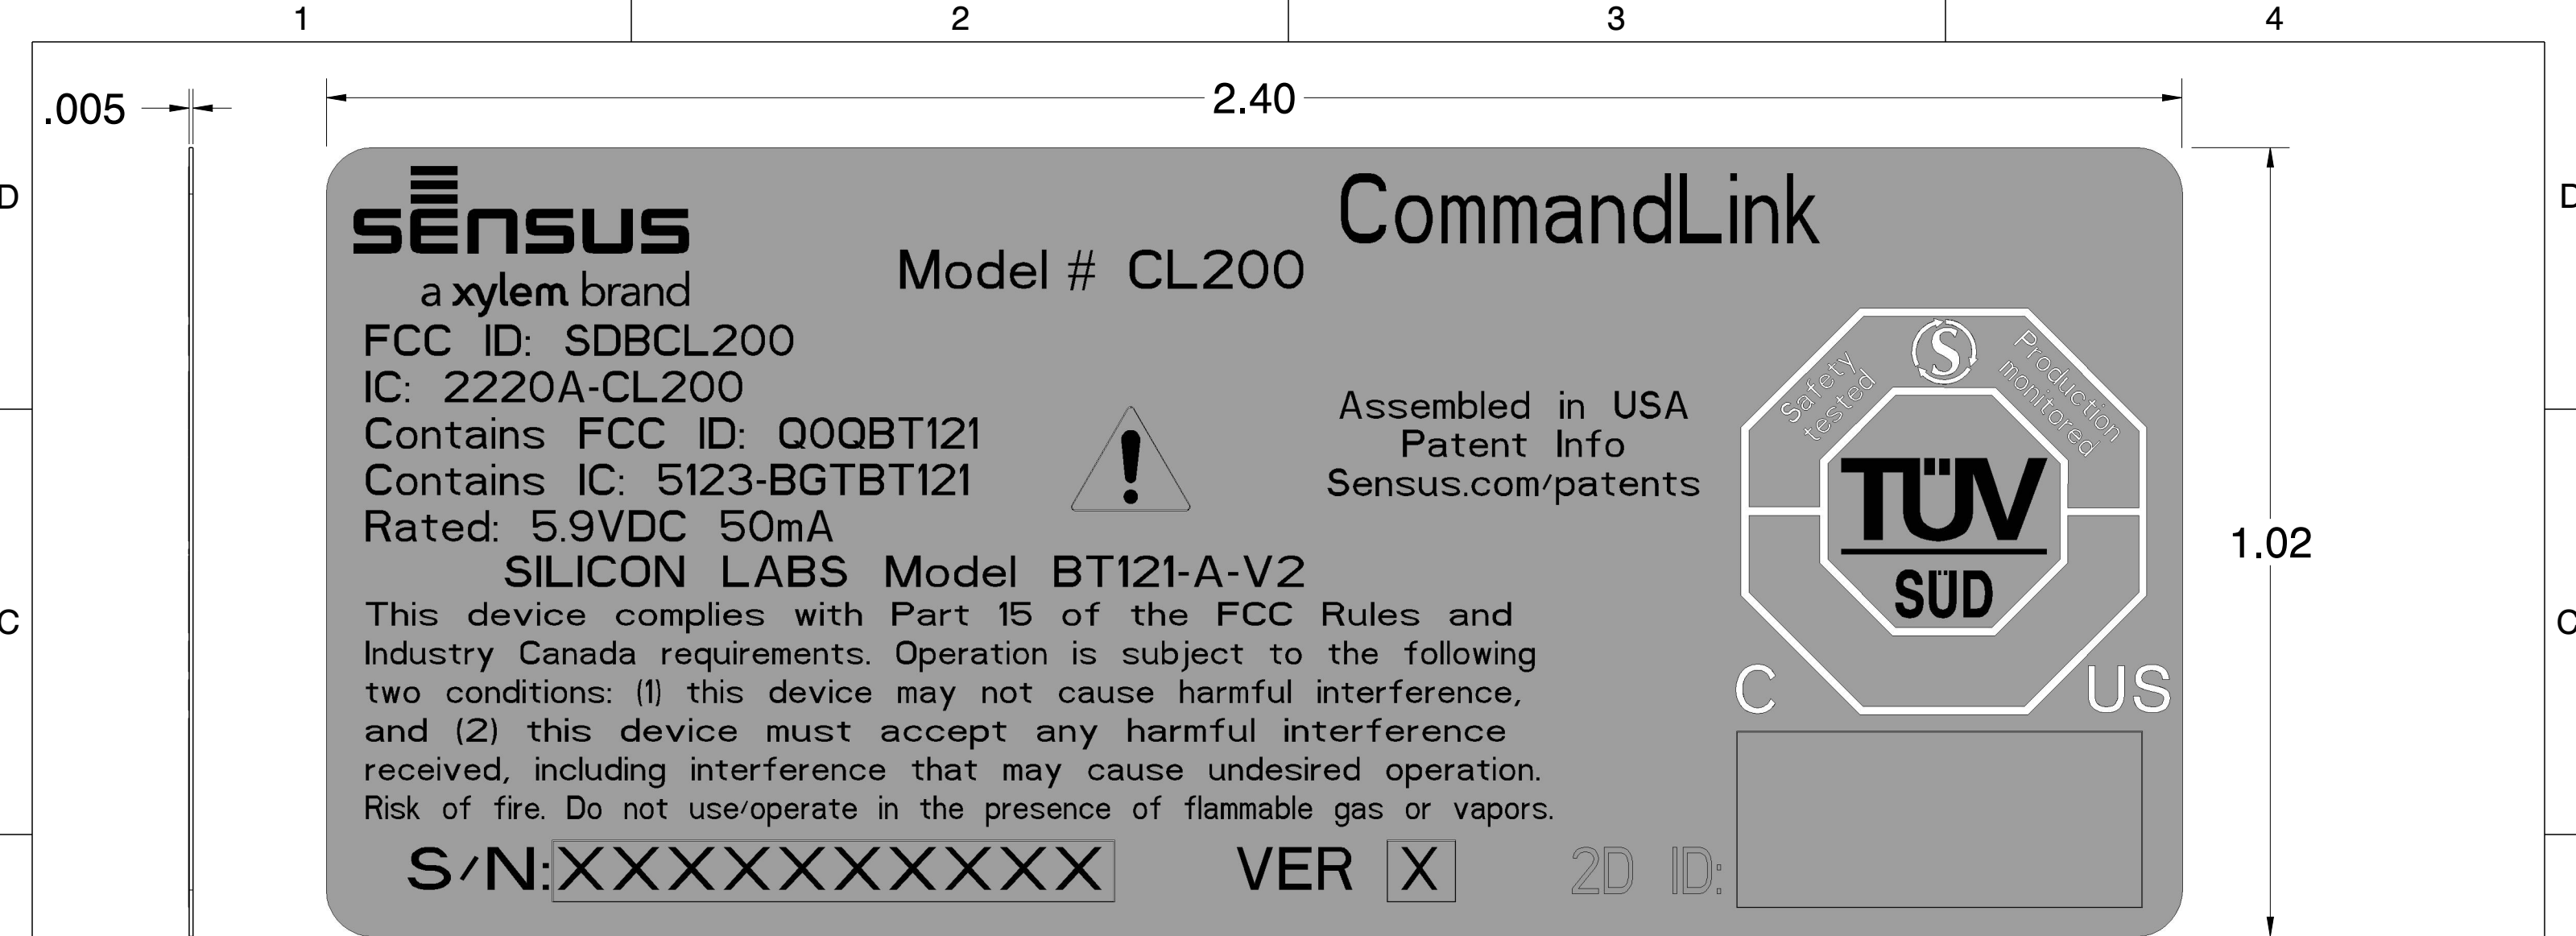

CommandLine
Model A-100-001
Power Supply Unit
Input: 100-240VAC, 50/60Hz
Output: 12VDC, 10A
Power: 120W
Efficiency: >85%
Regulation: <1%
Ripple: <10mV
Protection: Overload, Short Circuit, Over Temperature
Dimensions: 100mm x 60mm x 30mm
Weight: 150g
CE Marked
RoHS Compliant
TUN
E