

# SENSUS METERING SYSTEMS INC. **TEST REPORT**

**SCOPE OF WORK**

RADIO TESTING – COMMANDLINK II (CL201)

**REPORT NUMBER**

106360716ATL-009

**ISSUE DATE**

09 January 2026

**REVISED DATE**

09 February 2026

**PAGES**

68



**DOCUMENT CONTROL NUMBER**

Non-Specific Radio Report Shell Rev. January 2025

© 2025 INTERTEK

**RADIO TEST REPORT****Report Number:** 106360716ATL-009**Project Number:** G106360716**Report Issue Date:** 09 January 2026**Report Revision Date:** 09 February 2026**Model(s) Tested:** CL201**FCC ID:** SDBCL201**IC:** 2220A-CL201

**Standards:** 47 CFR Part 24 Subpart D  
47 CFR Part 90 Subpart I  
47 CFR Part 101 Subpart C  
RSS-119, Issue 12  
RSS-134, Issue 2  
ANSI C63.26-2015  
RSS-GEN, Issue 5

**Test Location**

Intertek  
1950 Evergreen Blvd., Suite 100  
Duluth, GA 30096 USA  
FCC Designation: US1046  
ISED CAB Designator: US0128

**Client**

Sensus Metering Systems Inc.  
639 Davis Drive  
Morrisville, NC 27560 USA

Report prepared by



Jeremy Pickens / Senior Staff Engineer

Report reviewed by



Michael Carlson / Staff Engineer

*This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.*

**Table of Contents**

|           |                                                                            |                  |
|-----------|----------------------------------------------------------------------------|------------------|
| <b>1</b>  | <b><i>Introduction and Conclusion .....</i></b>                            | <b><i>4</i></b>  |
| <b>2</b>  | <b><i>Test Summary .....</i></b>                                           | <b><i>4</i></b>  |
| <b>3</b>  | <b><i>Client Information .....</i></b>                                     | <b><i>5</i></b>  |
| <b>4</b>  | <b><i>Description of Equipment Under Test and Variant Models .....</i></b> | <b><i>5</i></b>  |
| <b>5</b>  | <b><i>System Setup and Method .....</i></b>                                | <b><i>7</i></b>  |
| <b>6</b>  | <b><i>RF Output Power .....</i></b>                                        | <b><i>9</i></b>  |
| <b>7</b>  | <b><i>Out of Band Unwanted Emissions .....</i></b>                         | <b><i>13</i></b> |
| <b>8</b>  | <b><i>Occupied Bandwidth .....</i></b>                                     | <b><i>28</i></b> |
| <b>9</b>  | <b><i>Spurious Emissions at Antenna Terminals .....</i></b>                | <b><i>42</i></b> |
| <b>10</b> | <b><i>Field Strength of Spurious Emissions .....</i></b>                   | <b><i>48</i></b> |
| <b>11</b> | <b><i>Frequency Stability .....</i></b>                                    | <b><i>57</i></b> |
| <b>12</b> | <b><i>Measurement Uncertainty .....</i></b>                                | <b><i>67</i></b> |
| <b>13</b> | <b><i>Revision History .....</i></b>                                       | <b><i>68</i></b> |

## 1 Introduction and Conclusion

The tests indicated in Section 2 were performed on the product constructed as described in Section 4. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested **complies** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested. Intertek does not make any claims of compliance for samples or variants which were not tested.

## 2 Test Summary

| Section | Test Description                        | Test Specification                                                        |                                                                   | Result    |
|---------|-----------------------------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------|-----------|
|         |                                         | FCC Rule Part                                                             | ISED RSS                                                          |           |
| 6       | RF Output Power                         | 2.1046<br>24.132<br>90.204<br>101.113(a)                                  | RSS-GEN S6.12<br>RSS-119 S5.4<br>RSS-134 S4.3(a),(b)              | Compliant |
| 7       | Out of Band Unwanted Emissions          | 2.1051<br>24.133(a)(1),(2)<br>90.210(i)<br>101.111(a)(5)<br>101.111(a)(6) | RSS-Gen S6.13<br>RSS-119 S5.8.3<br>RSS-119 S5.8.6<br>RSS-134 S4.4 | Compliant |
| 8       | Occupied Bandwidth                      | 2.1049<br>24.131<br>90.209(b)(5)<br>101.109                               | RSS-GEN S6.7<br>RSS-119 S5.5<br>RSS-134 S4.1                      | Compliant |
| 9       | Spurious Emissions at Antenna Terminals | 2.1051<br>24.133(a)(1),(2)<br>90.210(i)<br>101.111(a)(5)<br>101.111(a)(6) | RSS-Gen S6.13<br>RSS-119 S5.8.3<br>RSS-119 S5.8.6<br>RSS-134 S4.4 | Compliant |
| 10      | Field Strength of Spurious Emissions    | 2.1053<br>24.133(a)(1),(2)<br>90.210(i)<br>101.111(a)(5)<br>101.111(a)(6) | RSS-Gen S6.13<br>RSS-119 S5.8.3<br>RSS-119 S5.8.6<br>RSS-134 S4.4 | Compliant |
| 11      | Frequency Stability                     | 2.1055<br>24.135<br>90.213<br>101.107                                     | RSS-GEN S6.11<br>RSS-119 S5.3<br>RSS-134 S4.5                     | Compliant |

### 3 Client Information

This evaluation was performed at the request of:

**Client:** Sensus Metering Systems Inc.  
639 Davis Drive  
Morrisville, NC 27560 USA

**Contact:** Tyler Leeson

**Email:** [Tyler.Leeson@xylem.com](mailto:Tyler.Leeson@xylem.com)

### 4 Description of Equipment Under Test and Variant Models

**Manufacturer:** Sensus Metering Systems Inc.  
639 Davis Drive  
Morrisville, NC 27560 USA

| Equipment Under Test |                              |                     |                                                |
|----------------------|------------------------------|---------------------|------------------------------------------------|
| Description          | Manufacturer                 | Model Number (HVIN) | Serial Number                                  |
| CommandLink II       | Sensus Metering Systems Inc. | CL201               | 50300907 <sup>1</sup><br>50300903 <sup>2</sup> |

- 1) Antenna port conducted measurements
- 2) Radiated spurious emissions measurements

|                            |                   |
|----------------------------|-------------------|
| <b>Receive Date:</b>       | 03 September 2025 |
| <b>Received Condition:</b> | Good              |
| <b>Type:</b>               | Production        |

| Description of Equipment Under Test                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The CommandLink® II wireless interface provides access to a complete suite of functional controls within a gas, water, or electric SmartPoint® transceiver. This Bluetooth® enabled device, coupled with a handheld, can perform activations, deactivation, meter read, on demand reads and audits of the SmartPoint module. |

| Certification Purpose |
|-----------------------|
| New certification.    |

| Equipment Under Test Power Configuration |               |                 |                  |
|------------------------------------------|---------------|-----------------|------------------|
| Rated Voltage                            | Rated Current | Rated Frequency | Number of Phases |
| 5.9Vdc                                   | 0.5A          | NA              | NA               |

#### Operating modes of the EUT

| No. | Descriptions of EUT Exercising                                                                                                                                                                                      |
|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Using CommandLink II Utility software, commands were sent over a USB adapter. The EUT was configured to transmit modulated signals at max power at the following defined test channels (per 47CFR 2.1046 – 2.1057). |


| Test Channels |          |                      |                                  |                      |
|---------------|----------|----------------------|----------------------------------|----------------------|
| FCC Rule Part | ISED RSS | Frequency Band (MHz) | Channel Location                 | Test Frequency (MHz) |
| 90            | RSS-119  | 896.0 – 901.0        | One near top and one near bottom | 896.0125             |
| 24D           | RSS-134  | 901.0 – 902.0        |                                  | 901.9875             |
| 101           | RSS-119  | 928.85 – 929.0       | Middle                           | 928.925              |
| 24D           | RSS-134  | 930.0 – 931.0        | Middle                           | 930.5                |
| 101           | RSS-119  | 932.0 – 932.5        | Middle                           | 932.25               |
| 90            | RSS-119  | 935.0 – 940.0        | One near bottom                  | 935.0125             |
| 24D           | RSS-134  | 940.0 – 941.0        | One near bottom                  | 940.0125             |
| 101           | RSS-119  | 941.0 – 941.5        | One near top                     | 941.4875             |
| NA            | RSS-119  | 952.0 – 953.0        | Middle                           | 952.5                |
| 101           | NA       | 959.85 – 960.0       | Middle                           | 959.925              |

Software used by the EUT

| No. | Description of Control Software |
|-----|---------------------------------|
| 1   | CommandLink II Utility v1.0.3.2 |

| Radio/Receiver Characteristics                             |                   |
|------------------------------------------------------------|-------------------|
| Frequency Range                                            | 896-960MHz        |
| Modulation Type(s)                                         | 2-GFSK, ASK       |
| Maximum Output Power (Conducted):                          | 20.06dBm (0.101W) |
| Power Setting                                              | Max               |
| MIMO Information (# of Transmit and Receive antenna ports) | 1 (SISO)          |
| Equipment Type                                             | Full Device       |
| Antenna Type and Gain                                      | PIFA (2dBi)       |

Note: The worst-case modulation for radiated and conducted spurious emissions was determined to be mPass 5k. The worst-case orientation for radiated field strength measurements was the Z-Axis.

|                                                                                                   |                                                                                                   |                                                                                                     |
|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| <p>X-Axis</p>  | <p>Y-Axis</p>  | <p>Z-Axis</p>  |
|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|

| Emissions Designators                                                                                                                                |                                                                                                                                                      |                                     |            |            |
|------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|------------|------------|
| Frequency (MHz)                                                                                                                                      | Rule Part / RSS                                                                                                                                      | Mode                                | Designator | Modulation |
| 896.0-901.0<br>901.0-902.0<br>928.85-929.0<br>930.0-931.0<br>932.0-932.5<br>935.0-940.0<br>940.0-941.0<br>941.0-941.5<br>952.0-953.0<br>959.85-960.0 | 90 / RSS-119<br>24D / RSS-134<br>101 / RSS-119<br>24D / RSS-134<br>101 / RSS-119<br>90 / RSS-119<br>24D / RSS-134<br>101 / RSS-119<br>RSS-119<br>101 | MPass (5kbps)                       | 5K90F1D    | 2-GFSK     |
|                                                                                                                                                      |                                                                                                                                                      | MPass (10kbps) <sup>1</sup>         | 11K8F1D    | 2-GFSK     |
|                                                                                                                                                      |                                                                                                                                                      | MPass (12.5k)                       | 14K8F1D    | 2-GFSK     |
|                                                                                                                                                      |                                                                                                                                                      | Amplitude Shift Keying <sup>1</sup> | 10K3F2D    | ASK        |

1) Note: MPass 10kbps and ASK modulations are not used in the frequency band 935-940MHz

## 5 System Setup and Method

| Cables |             |            |           |          |               |
|--------|-------------|------------|-----------|----------|---------------|
| ID     | Description | Length (m) | Shielding | Ferrites | Termination   |
| 1      | DC Power    | 1.2        | None      | None     | AC/DC Adapter |

| System Configuration |                              |              |                                                |
|----------------------|------------------------------|--------------|------------------------------------------------|
| Description          | Manufacturer                 | Model Number | Serial Number                                  |
| CommandLink II       | Sensus Metering Systems Inc. | CL201        | 50300907 <sup>1</sup><br>50300903 <sup>2</sup> |
| AC/DC Adapter        | Wall Industries, Inc.        | GPSU15U-1    | Not Labeled                                    |
| DC Power Supply      | Kikusui                      | PAS60-18     | ML000349                                       |


1) Antenna port conducted measurements

2) Radiated spurious emissions measurements


### 5.1 Method

Configuration as required by ANSI C63.26.

### 5.2 EUT Block Diagram – Radiated Measurements

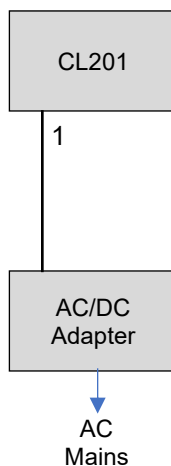

### 5.3 EUT Block Diagram – Conducted Measurements

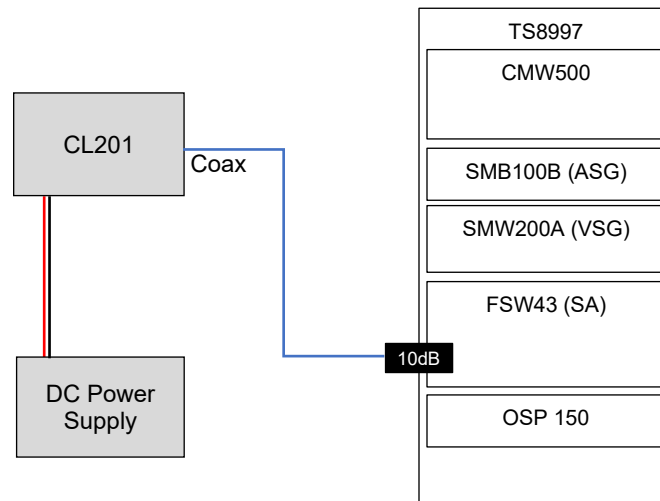

## 6 RF Output Power

### 6.1 Method

The methods defined in ANSI C63.26, Section 5.2.4.3 were applied for measuring the average output power. The antenna port was connected directly to a spectrum analyzer through a cable and attenuator. The attenuation was accounted for by applying an offset to the spectrum analyzer. For ASK measurements, IF triggering was enabled to ensure measurements were only applied across the maximum on times of the transmission.

#### TEST SITE: RF Bench

The RF bench consists of a Rohde & Schwarz TS8997 automated test system coupled with a temperature/humidity environmental chamber. Where applicable, 2.4 and 5GHz radio measurements are automated using the Rohde & Schwarz EMC32 test software. The TS8997 system houses a switch matrix (OSP), along with a spectrum analyzer, vector network analyzer, and analog signal generator.

### 6.2 Test Equipment

| Asset     | Description                          | Manufacturer    | Model          | Serial    | Cal Date   | Cal Due    |
|-----------|--------------------------------------|-----------------|----------------|-----------|------------|------------|
| 212165    | Temperature/Humidity/Pressure Sensor | Extech          | SD700          | 110344    | 04/29/2025 | 04/29/2026 |
| 213500    | Analog Signal Generator (8kHz-40GHz) | Rohde & Schwarz | SMB100B        | 106096    | 05/08/2025 | 05/08/2027 |
| 213502    | Spectrum Analyzer (2Hz-43.5GHz)      | Rohde & Schwarz | FSW43          | 102972    | 08/01/2024 | 08/01/2026 |
| 213506-01 | RF Test Cable                        | Huber+Suhner    | Enviroflex 400 | 213506-01 | VBV        | VBV        |
| 213507-10 | 10dB SMA Attenuator                  | Tojoin          | 10dB           | 241120    | VBV        | VBV        |

#### Software Utilized

| Name         | Manufacturer    | Version             |
|--------------|-----------------|---------------------|
| RSCCommander | Rohde & Schwarz | 2.4.2 64-bit (2023) |

### 6.3 Results

The sample tested was found to Comply. The manufacturer's tune up tolerance is 19.5dBm +/- 1dB for FSK modulation and 18.5dBm +/-1dB for ASK modulation.

### 6.4 Test Data - FSK

| FCC Rule Part / RSS | Frequency (MHz) | AVG Power (dBm) | Antenna Gain (dBi) | EIRP (dBm) | ERP (dBm) | FCC ERP/EIRP Limit (dBm) | ISED ERP Limit (dBm) |
|---------------------|-----------------|-----------------|--------------------|------------|-----------|--------------------------|----------------------|
| 90 / RSS-119        | 896.0125        | 20.06           | 2.0                | 22.06      | 19.91     | 50.00                    | 47.78                |
| 24D / RSS-134       | 901.9875        | 19.77           | 2.0                | 21.77      | 19.62     | 38.45                    | 38.45                |
| 101 / RSS-119       | 928.925         | 19.22           | 2.0                | 21.22      | 19.07     | 47.00                    | 44.77                |
| 24D / RSS-134       | 930.5           | 19.19           | 2.0                | 21.19      | 19.04     | 38.45                    | 38.45                |
| 101 / RSS-119       | 932.25          | 19.15           | 2.0                | 21.15      | 19        | 47.00                    | 44.77                |
| 90 / RSS-119        | 935.0125        | 19.12           | 2.0                | 21.12      | 18.97     | 50.00                    | 47.78                |
| 24D / RSS-134       | 940.0125        | 19.09           | 2.0                | 21.09      | 18.94     | 38.45                    | 38.45                |
| 101 / RSS-119       | 941.4875        | 19.08           | 2.0                | 21.08      | 18.93     | 44.00                    | 44.77                |
| RSS-119             | 952.5           | 19.00           | 2.0                | 21.00      | 18.85     | --                       | 44.77                |
| 101                 | 959.925         | 18.93           | 2.0                | 20.93      | 18.78     | 44.00                    | --                   |


**Calculation:**  $P_{EIRP} = \text{AVG Power} + \text{Antenna Gain (dBi)}$  (Part 101)  
 $P_{ERP} = \text{AVG Power} + \text{Antenna Gain (dBi)} - 2.15$  (Parts 24/90 / RSS-119/134)  
 2.15 is the conversion from EIRP to ERP

## 6.5 Test Data – ASK


| FCC Rule Part / RSS | Frequency (MHz) | AVG Power (dBm) | Antenna Gain (dBi) | EIRP (dBm) | ERP (dBm) | FCC ERP/EIRP Limit (dBm) | ISED ERP Limit (dBm) |
|---------------------|-----------------|-----------------|--------------------|------------|-----------|--------------------------|----------------------|
| 24D / RSS-134       | 901.9875        | 18.97           | 2.0                | 20.97      | 18.82     | 38.45                    | 38.45                |
| 101 / RSS-119       | 928.925         | 18.28           | 2.0                | 20.28      | 18.13     | 47.00                    | 44.77                |
| 24D / RSS-134       | 930.5           | 18.26           | 2.0                | 20.26      | 18.11     | 38.45                    | 38.45                |
| 101 / RSS-119       | 932.25          | 18.22           | 2.0                | 20.22      | 18.07     | 47.00                    | 44.77                |
| 24D / RSS-134       | 940.0125        | 18.14           | 2.0                | 20.14      | 17.99     | 38.45                    | 38.45                |
| 101 / RSS-119       | 941.4875        | 18.13           | 2.0                | 20.13      | 17.98     | 44.00                    | 44.77                |
| RSS-119             | 952.5           | 18.04           | 2.0                | 20.04      | 17.89     | --                       | 44.77                |
| 101                 | 959.925         | 17.98           | 2.0                | 19.98      | 17.83     | 44.00                    | --                   |

**Calculation:**  $P_{EIRP} = \text{AVG Power} + \text{Antenna Gain (dBi)} \text{ (Part 101)}$   
 $P_{ERP} = \text{AVG Power} + \text{Antenna Gain (dBi)} - 2.15 \text{ (Parts 24/90)}$   
 2.15 is the conversion from EIRP to ERP

### Worst-Case Sample Plots mPass 5k - FCC Part 90 / RSS-119

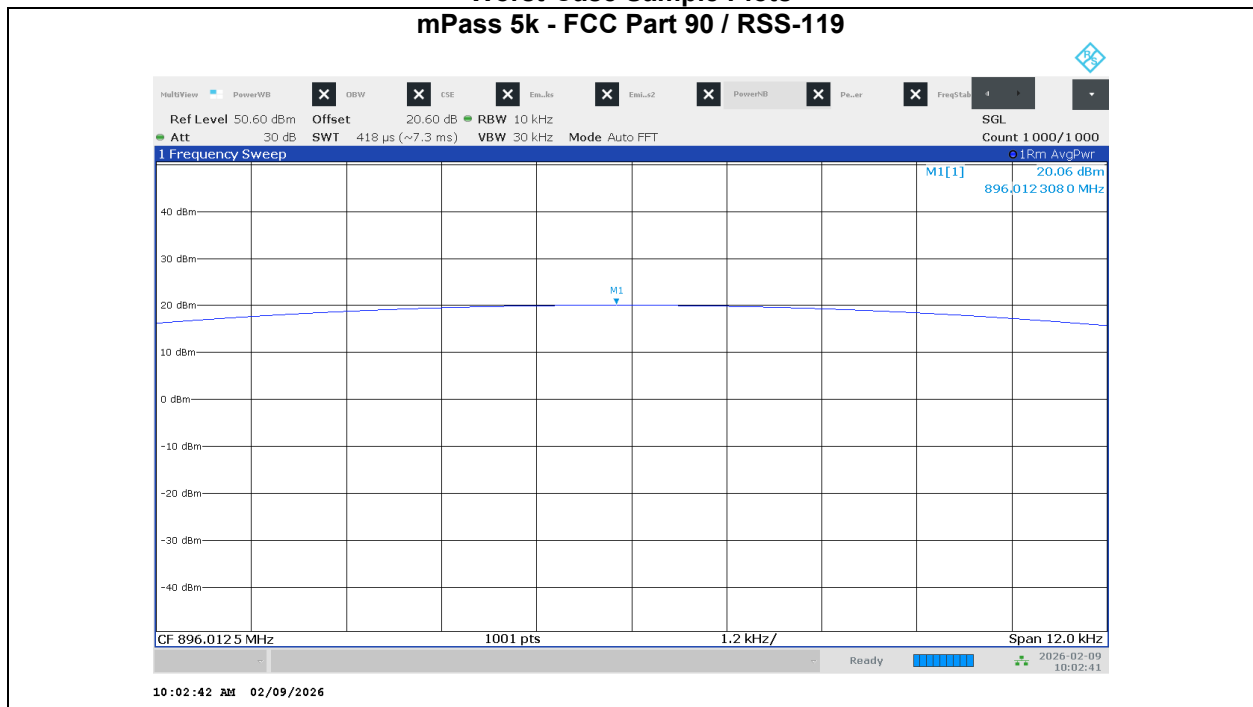


### mPass 5k - FCC Part 24 / RSS-134

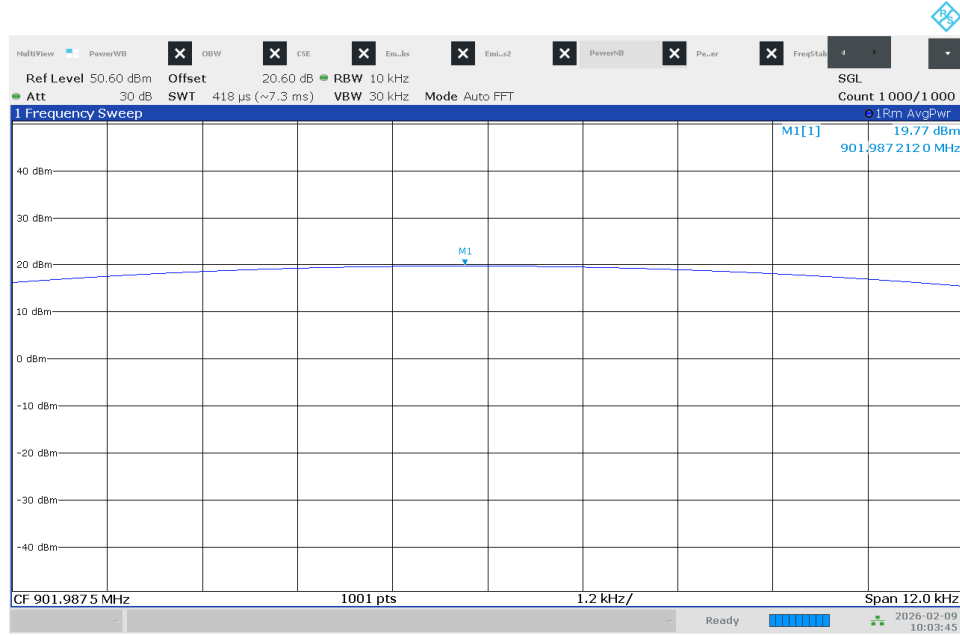


10:03:46 AM 02/09/2026

### ASK - FCC Part 24 / RSS-134

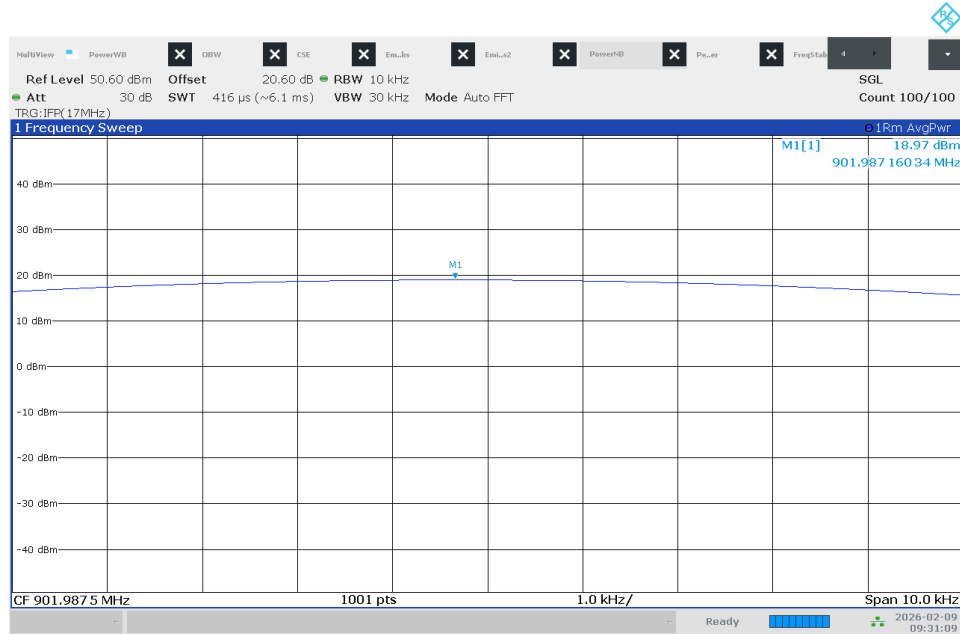

09:31:10 AM 02/09/2026

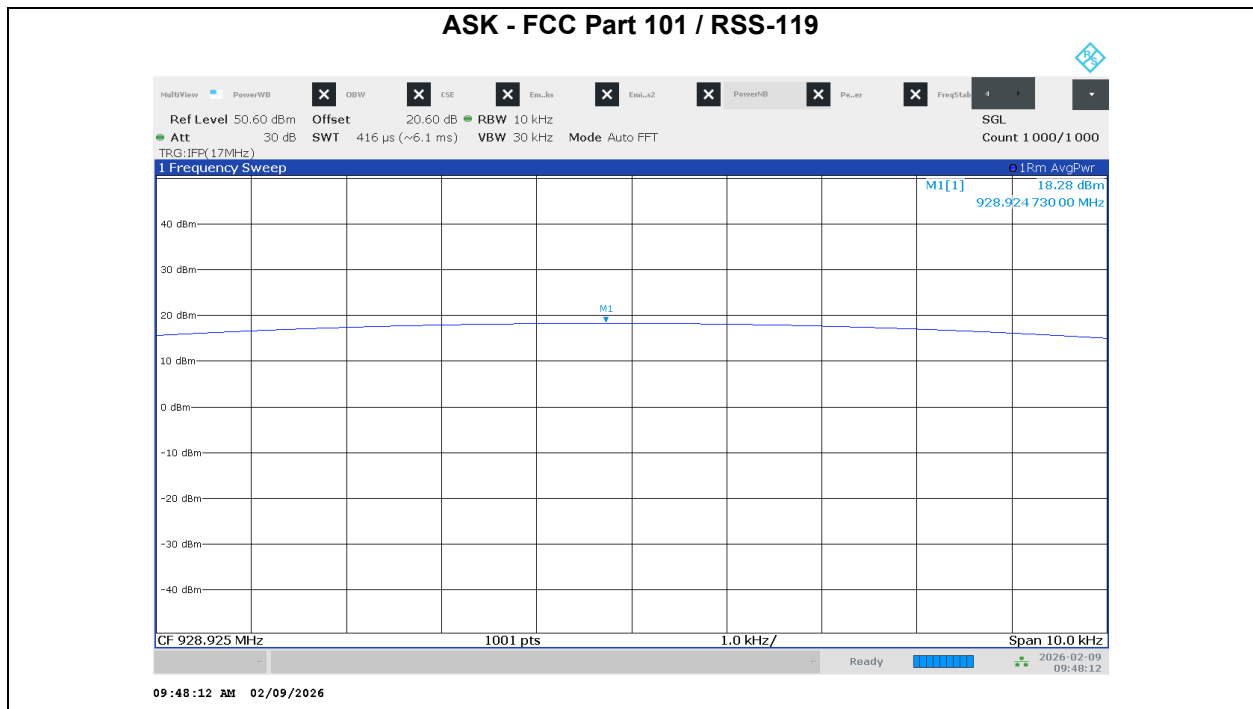

Test Personnel: Jeremy Pickens

Test Date: 09 February 2026

Reference Standard: ANSI C63.26

Ambient Temperature: 18.0°C

Relative Humidity: 15.7%

Atmospheric Pressure: 99.1kPa

## 7 Out of Band Unwanted Emissions

### 7.1 Method

The methods defined in ANSI C63.26, Section 5.7.3 were applied for measuring the out of band emissions. The antenna port was connected directly to a spectrum analyzer through a cable and attenuator. The attenuation was accounted for by applying an offset to the spectrum analyzer. For FCC, RSS-119 Mask G, and RSS-134 testing, the spectrum analyzer was configured with a 300Hz Resolution Bandwidth (RBW). For RSS-119 Mask D measurements, the spectrum analyzer was configured with a 100Hz RBW. For all masks, the Video Bandwidth (VBW) was configured to at least 3 times the RBW.

For modulations/bands where the channel spacing may be 12.5kHz or 25kHz, only the plots for 12.5kHz spacing were tested as worst-case.

#### TEST SITE: RF Bench

The RF bench consists of a Rohde & Schwarz TS8997 automated test system coupled with a temperature/humidity environmental chamber. Where applicable, 2.4 and 5GHz radio measurements are automated using the Rohde & Schwarz EMC32 test software. The TS8997 system houses a switch matrix (OSP), along with a spectrum analyzer, vector network analyzer, and analog signal generator.

### 7.2 Test Equipment

| Asset     | Description                          | Manufacturer    | Model          | Serial    | Cal Date   | Cal Due    |
|-----------|--------------------------------------|-----------------|----------------|-----------|------------|------------|
| 212165    | Temperature/Humidity/Pressure Sensor | Extech          | SD700          | 110344    | 04/29/2025 | 04/29/2026 |
| 213500    | Analog Signal Generator (8kHz-40GHz) | Rohde & Schwarz | SMB100B        | 106096    | 05/08/2025 | 05/08/2027 |
| 213502    | Spectrum Analyzer (2Hz-43.5GHz)      | Rohde & Schwarz | FSW43          | 102972    | 08/01/2024 | 08/01/2026 |
| 213506-01 | RF Test Cable                        | Huber+Suhner    | Enviroflex 400 | 213506-01 | VBV        | VBV        |
| 213507-10 | 10dB SMA Attenuator                  | Tojoin          | 10dB           | 241120    | VBV        | VBV        |
| 213507-20 | 20dB SMA Attenuator                  | Tojoin          | 20dB           | 241123    | VBV        | VBV        |

#### Software Utilized


| Name         | Manufacturer    | Version             |
|--------------|-----------------|---------------------|
| RSCCommander | Rohde & Schwarz | 2.4.2 64-bit (2023) |

### 7.3 Results


The sample tested was found to Comply.

## 7.4 Test Data – Part 24.133(a)(1)/(a)(2) and RSS-134 S4.4.1(a)/(b), S4.4.2(a)/(b)


901.9875MHz – 12.5kHz Channel Spacing – mPass 5k Mode

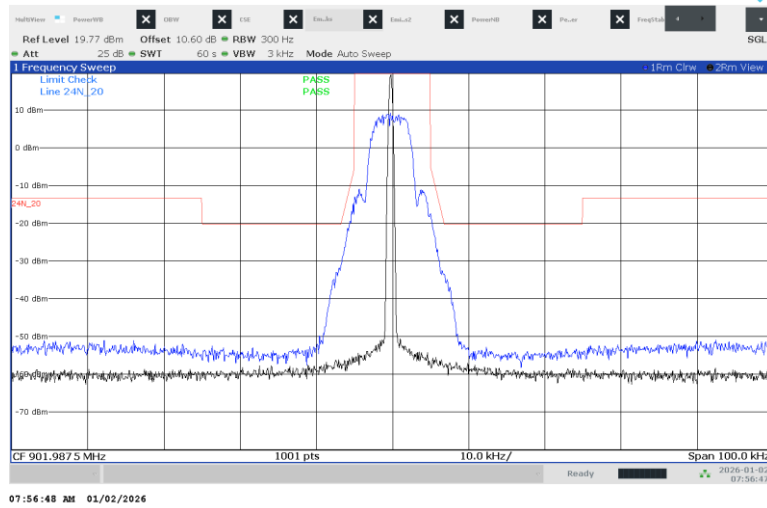


901.9875MHz – 25kHz Channel Spacing – mPass 10k Mode

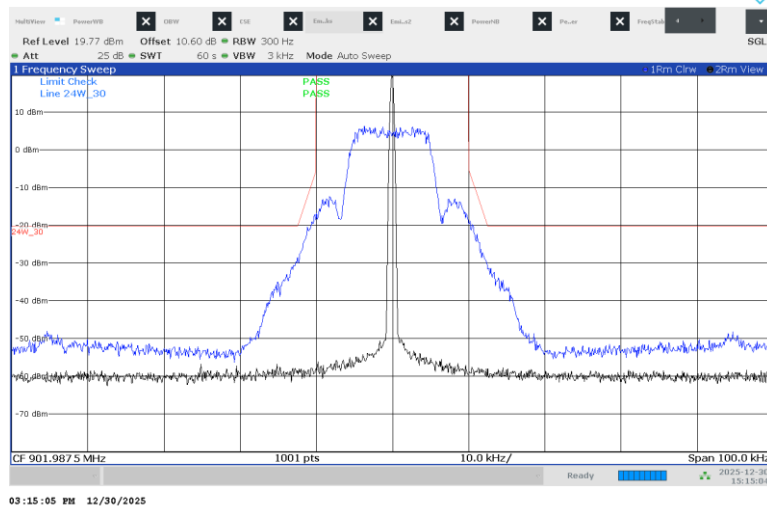


901.9875MHz – 25kHz Channel Spacing – mPass 12.5k Mode

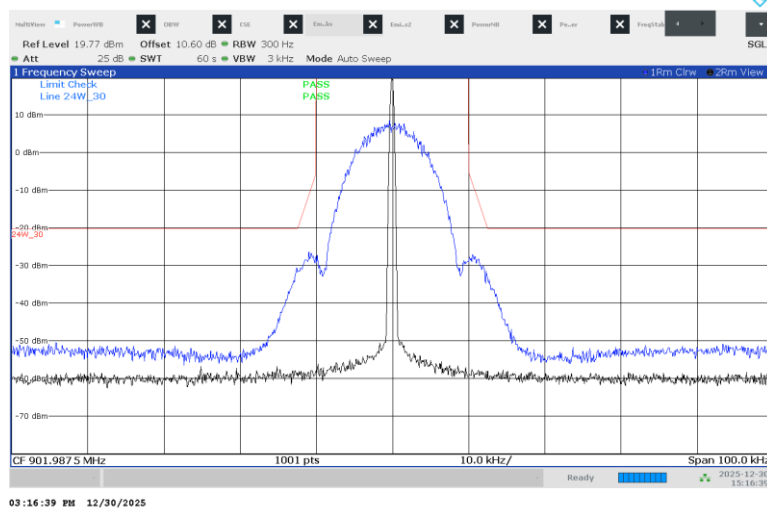


901.9875MHz – 25kHz Channel Spacing – ASK Mode

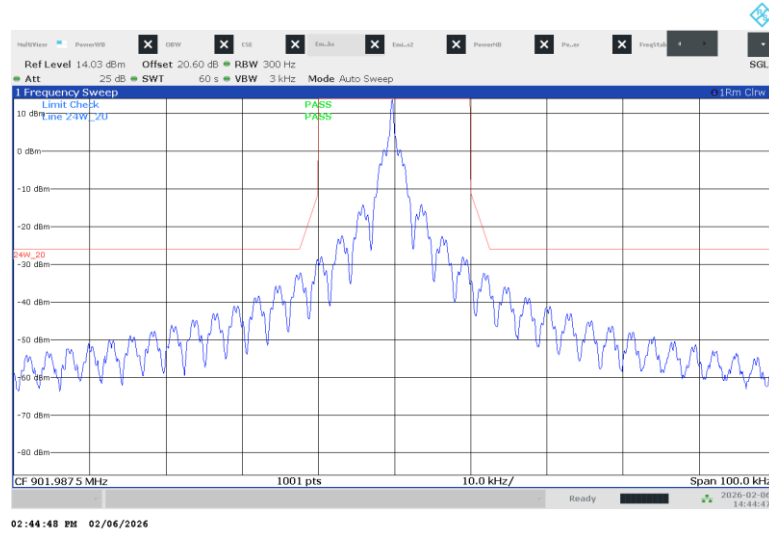


930.5MHz – 12.5kHz Channel Spacing – mPass 5k Mode

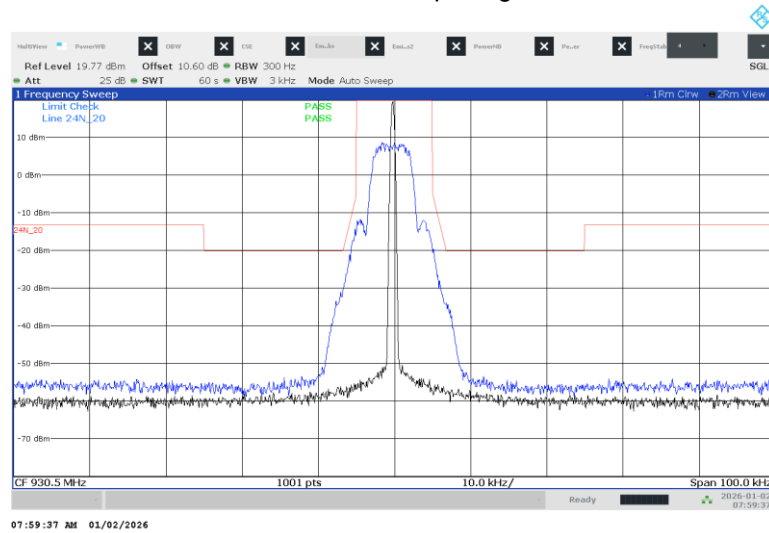


930.5MHz – 25kHz Channel Spacing – mPass 10k Mode

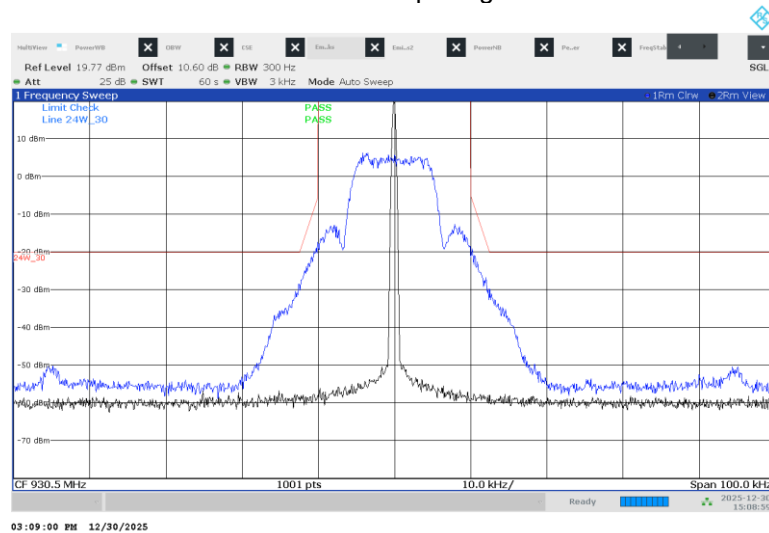


930.5MHz – 25kHz Channel Spacing – mPass 12.5k Mode

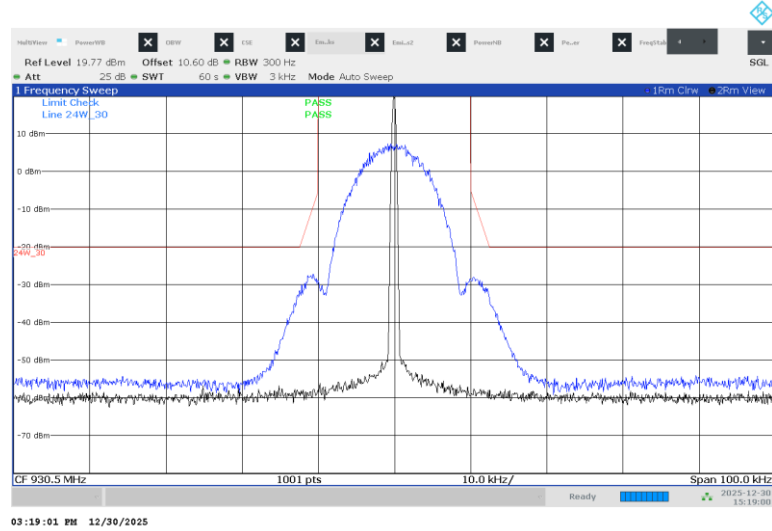


930.5MHz – 25kHz Channel Spacing – ASK Mode

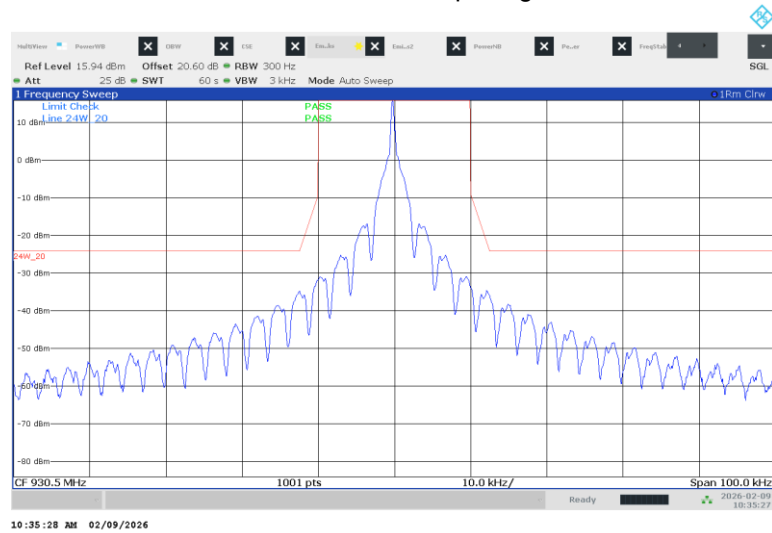


940.0125MHz – 12.5kHz Channel Spacing – mPass 5k Mode

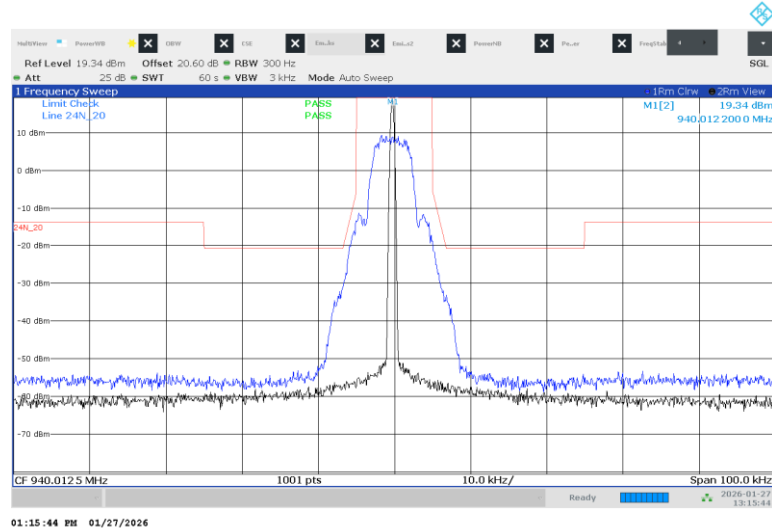


940.0125MHz – 25kHz Channel Spacing – mPass 5k Mode

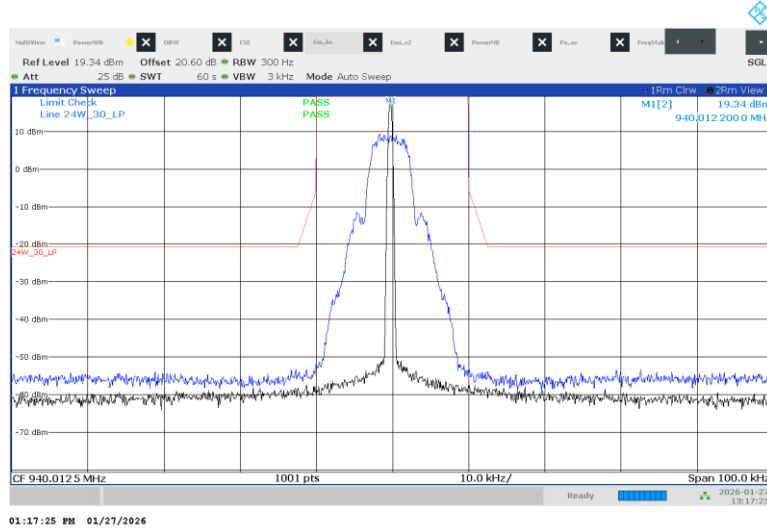


940.0125MHz – 25kHz Channel Spacing – mPass 10k Mode

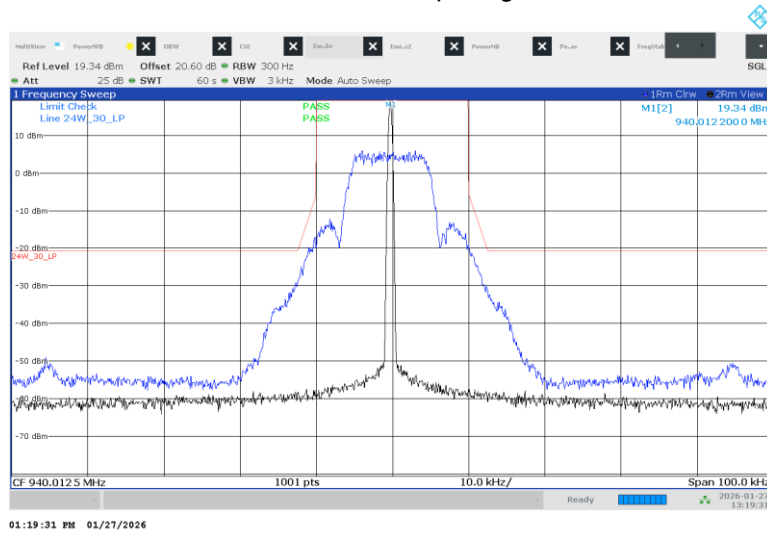

940.0125MHz – 25kHz Channel Spacing – mPass 12.5k Mode

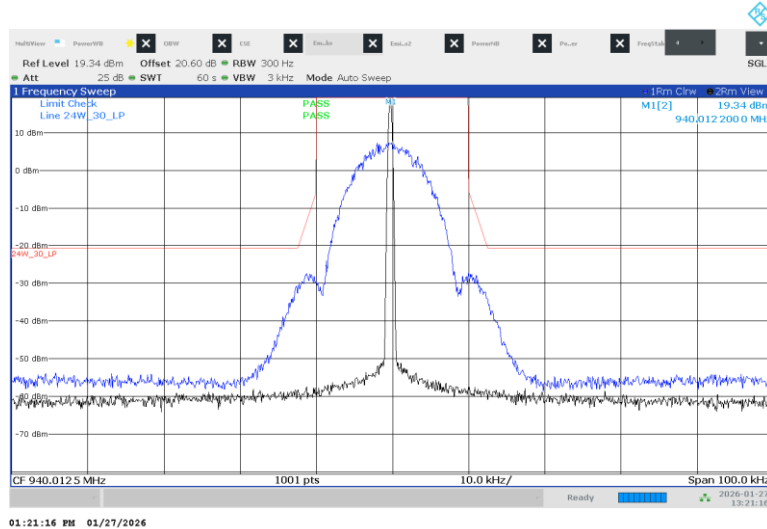


940.0125MHz – 25kHz Channel Spacing – ASK Mode

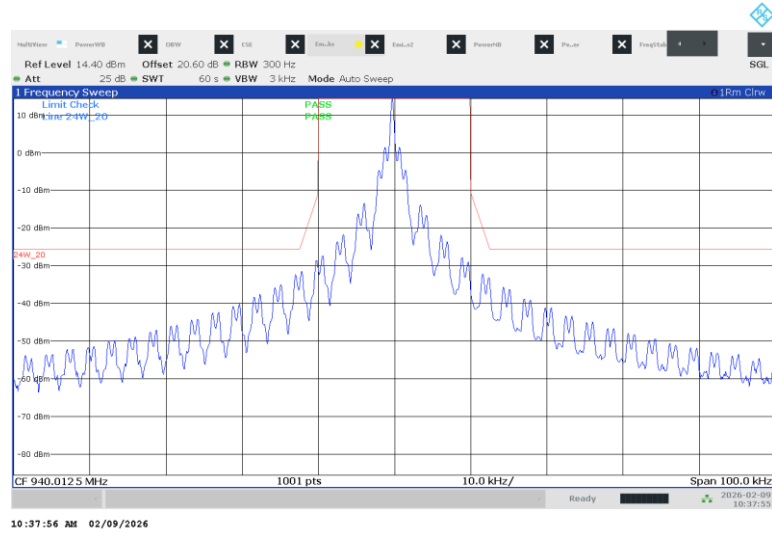


## 7.5 Test Data – Part 90.210(i) and RSS-119 S5.8.8


896.0125MHz – 25kHz Channel Spacing – mPass 5k Mode

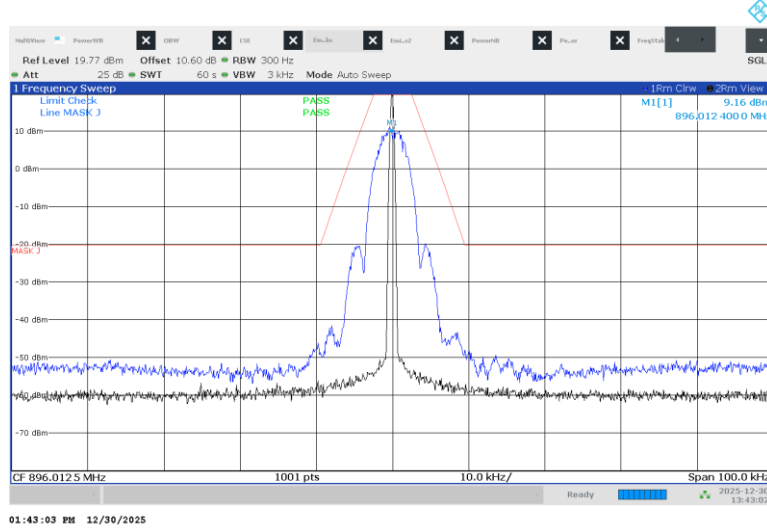


896.0125MHz – 25kHz Channel Spacing – mPass 10k Mode

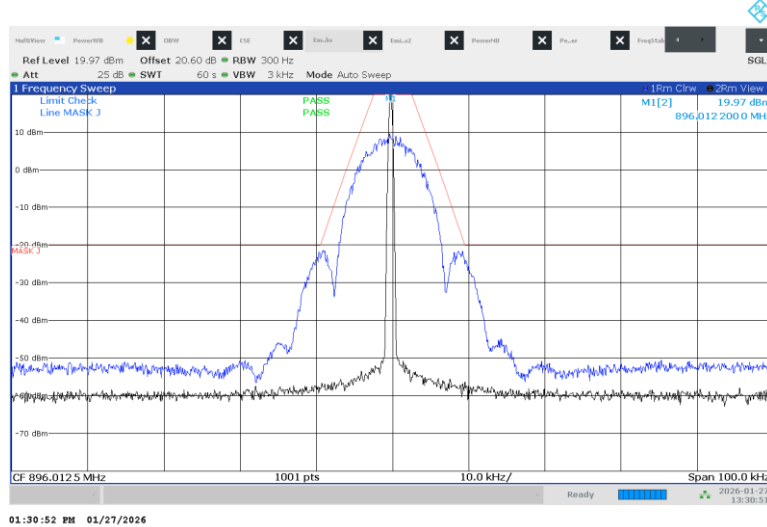


896.0125MHz – 25kHz Channel Spacing – mPass 12.5k Mode

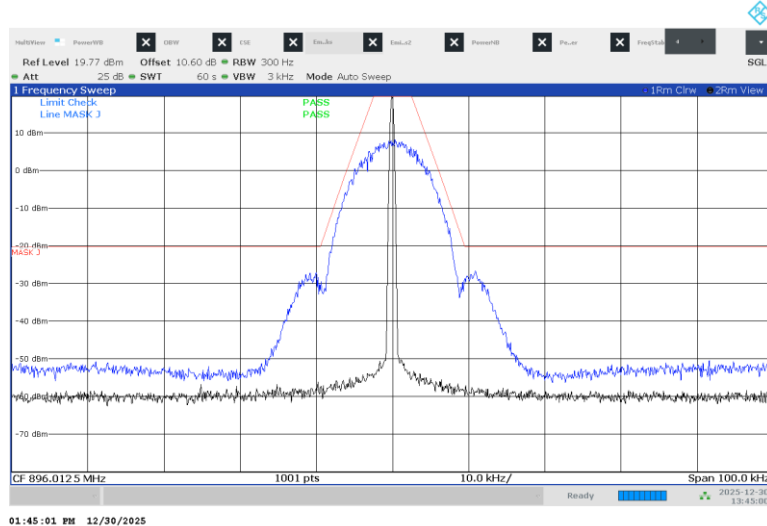

## 935.0125MHz – 25kHz Channel Spacing – mPass 5k Mode

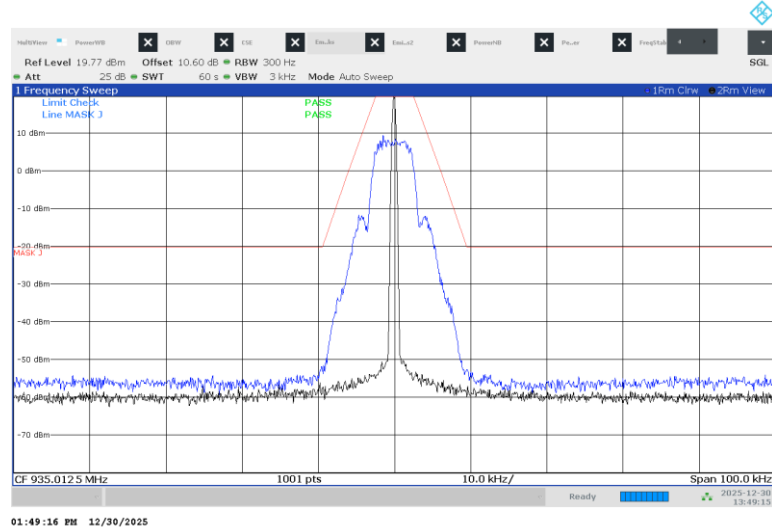


## 935.0125MHz – 25kHz Channel Spacing – mPass 12.5k Mode

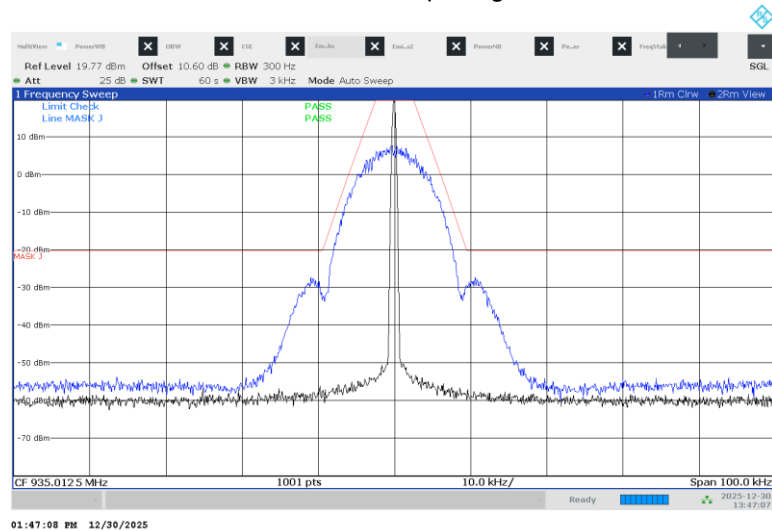


## 7.6 Test Data – Parts 101.111(a)(5)/101.111(a)(6) and RSS-119 S5.8.6 (Mask G)


928.925MHz – 25kHz Channel Spacing – mPass 5k Mode

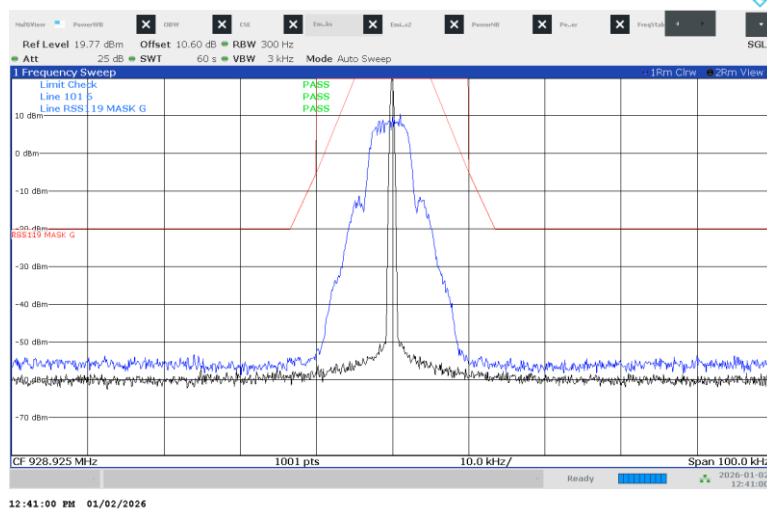


928.925MHz – 25kHz Channel Spacing – mPass 10k Mode

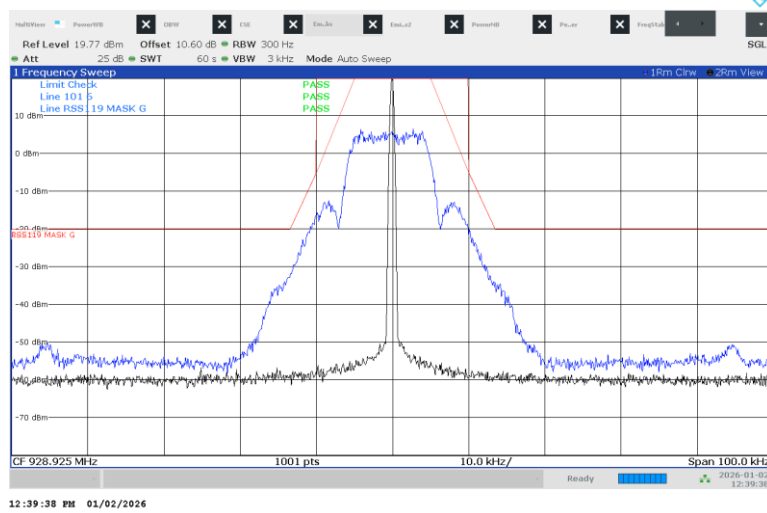


928.925MHz – 25kHz Channel Spacing – mPass 12.5k Mode

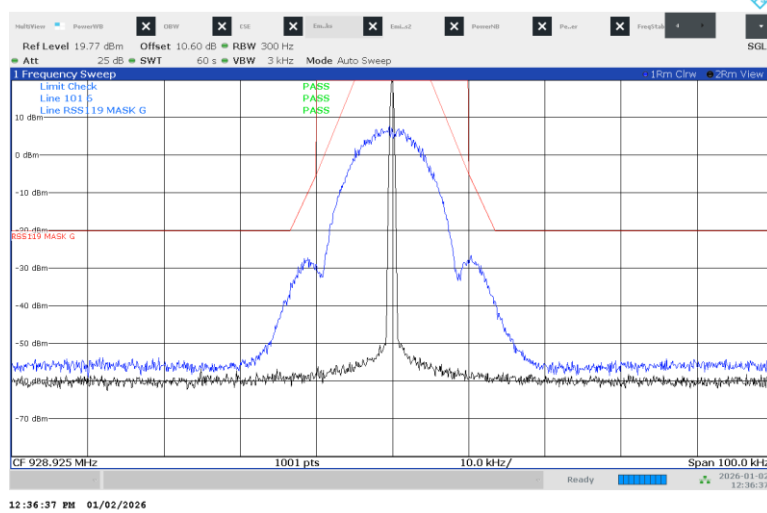


## 928.925MHz – 25kHz Channel Spacing – ASK Mode

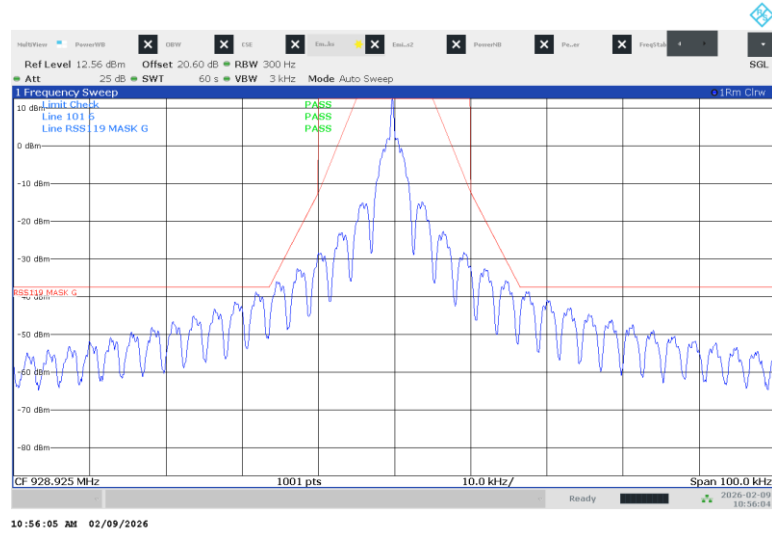


## 932.25MHz – 25kHz Channel Spacing – mPass 5k Mode

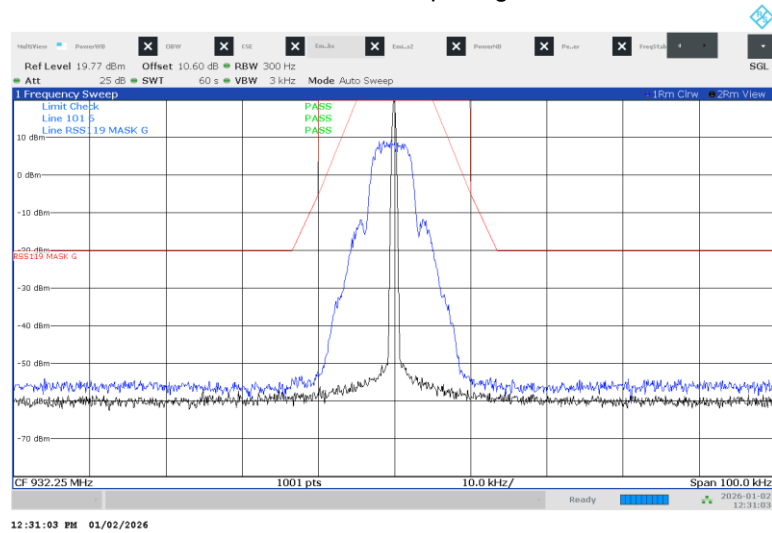


## 932.25MHz – 25kHz Channel Spacing – mPass 10k Mode

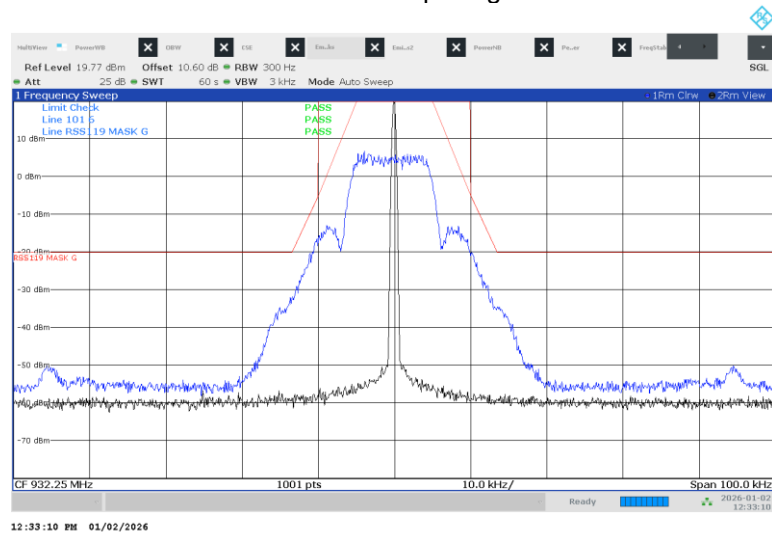


932.25MHz – 25kHz Channel Spacing – mPass 12.5k Mode

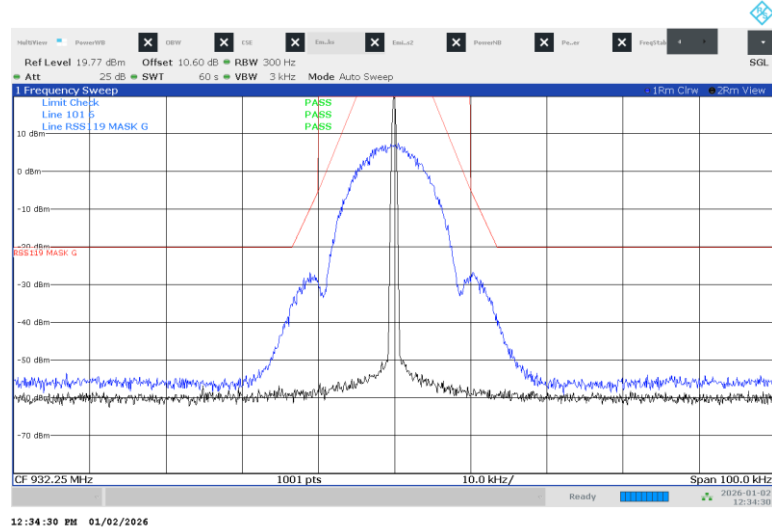


932.25MHz – 25kHz Channel Spacing – ASK Mode

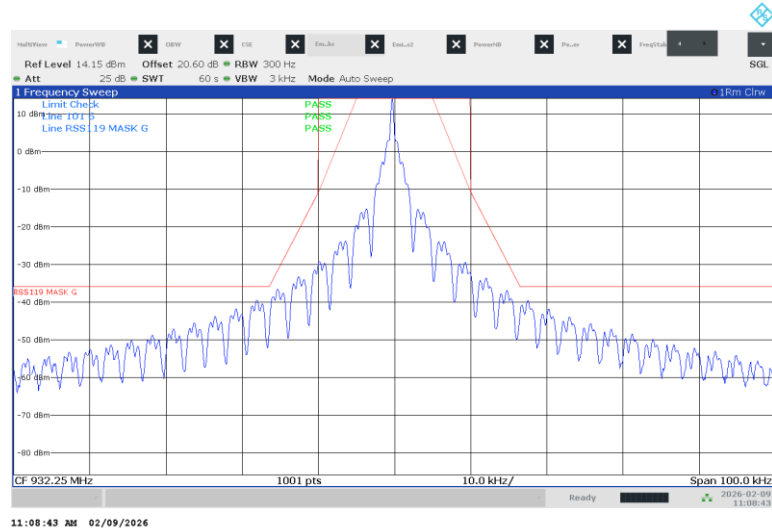


941.4875MHz – 25kHz Channel Spacing – mPass 5k Mode

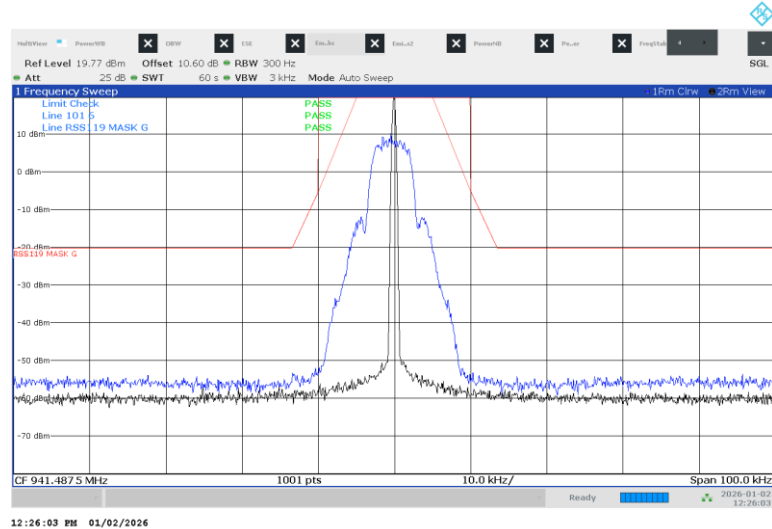


941.4875MHz – 25kHz Channel Spacing – mPass 10k Mode

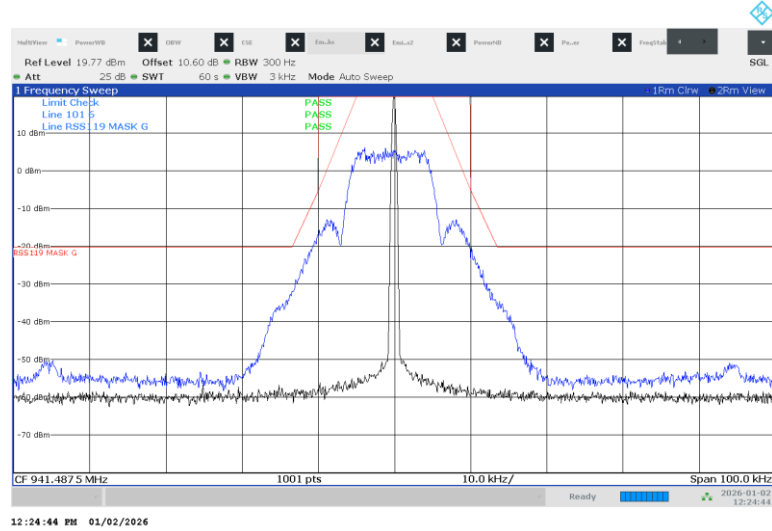


941.4875MHz – 25kHz Channel Spacing – mPass 12.5k Mode

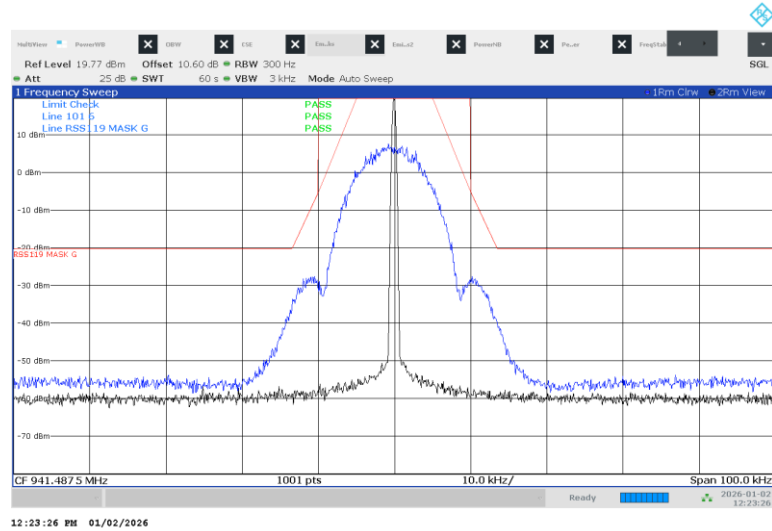


941.4875MHz – 25kHz Channel Spacing – ASK Mode

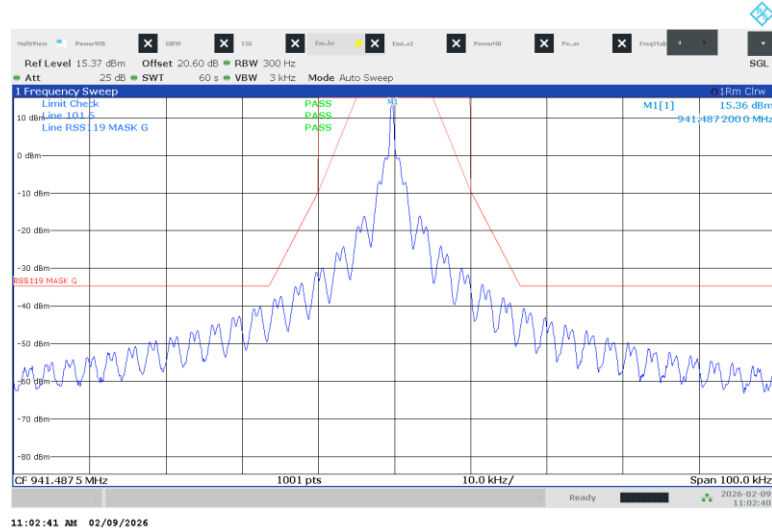


952.5MHz – 25kHz Channel Spacing – mPass 5k Mode

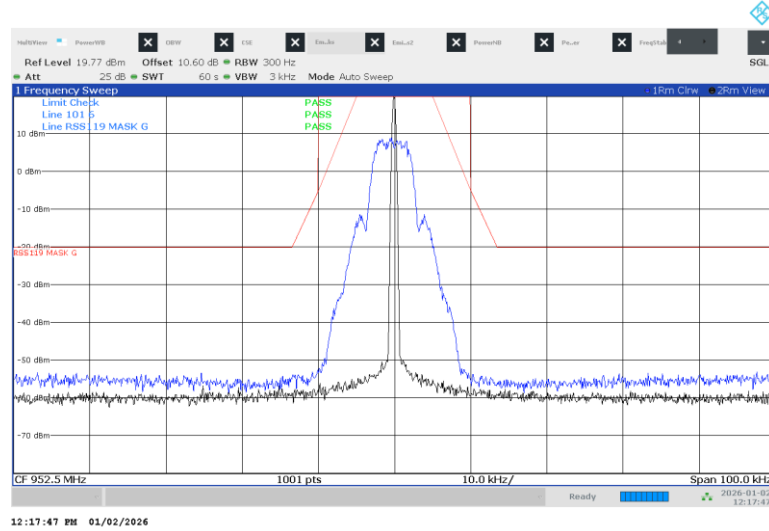


952.5MHz – 25kHz Channel Spacing – mPass 10k Mode

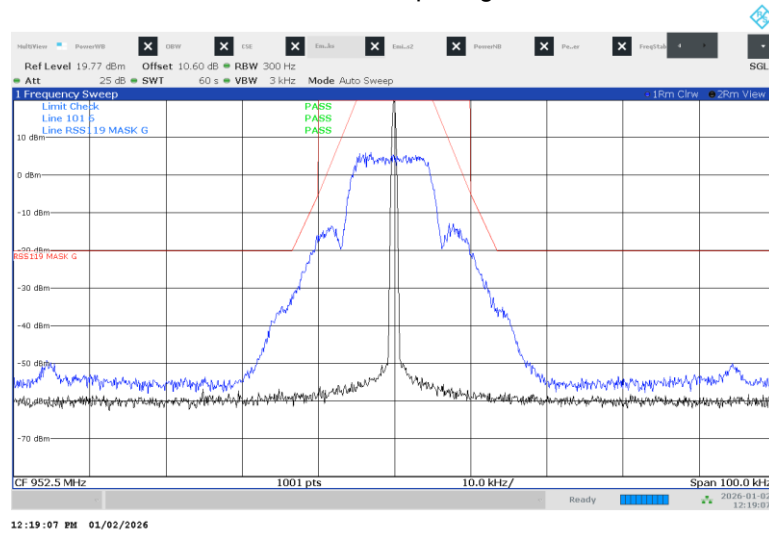


952.5MHz – 25kHz Channel Spacing – mPass 12.5k Mode

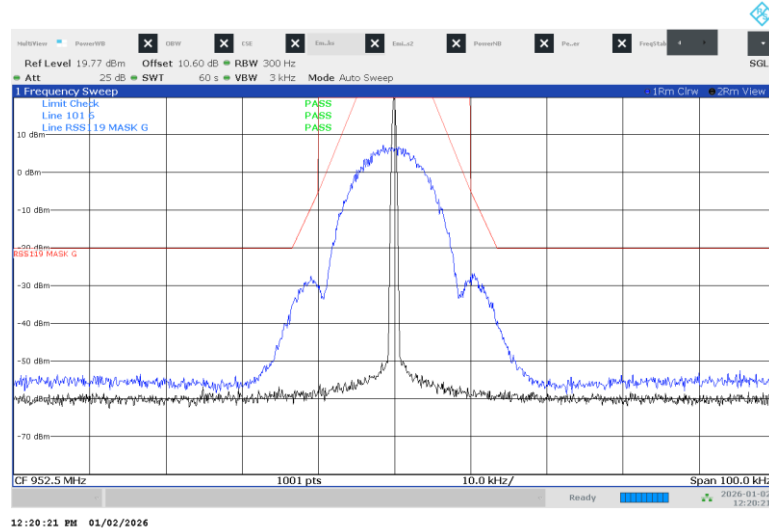


952.5MHz – 25kHz Channel Spacing – ASK Mode

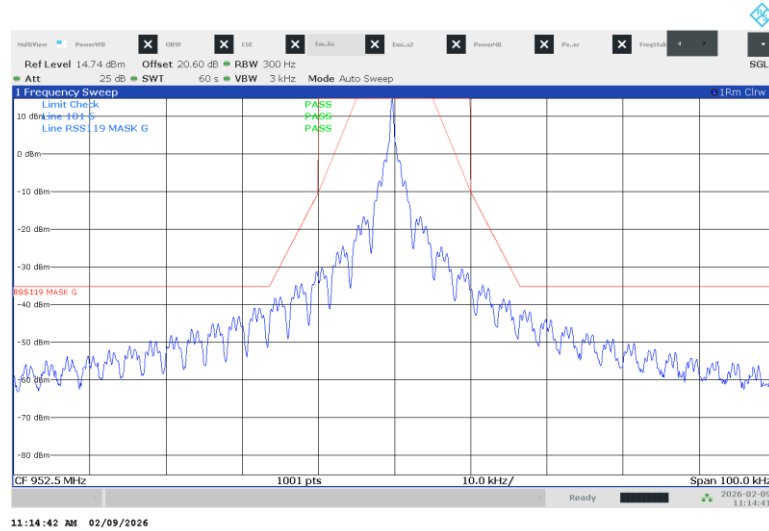


959.925MHz – 25kHz Channel Spacing – mPass 5k Mode

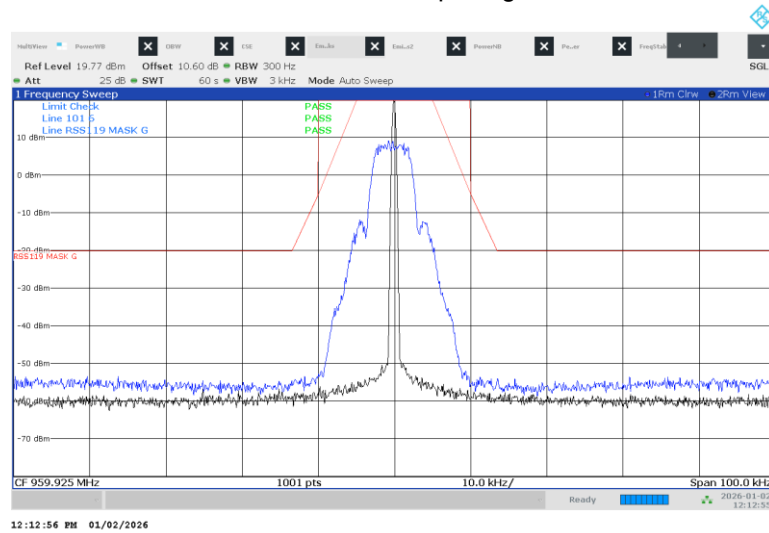


959.925MHz – 25kHz Channel Spacing – mPass 10k Mode

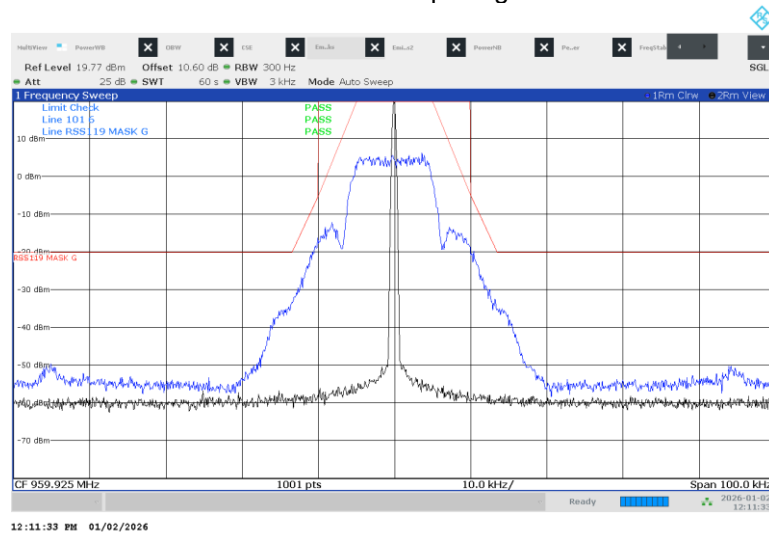

959.925MHz – 25kHz Channel Spacing – mPass 12.5k Mode

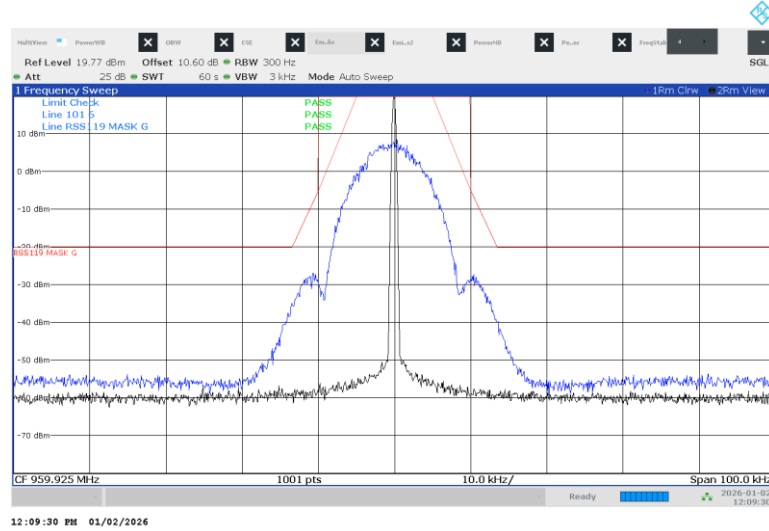

959.925MHz – 25kHz Channel Spacing – ASK Mode

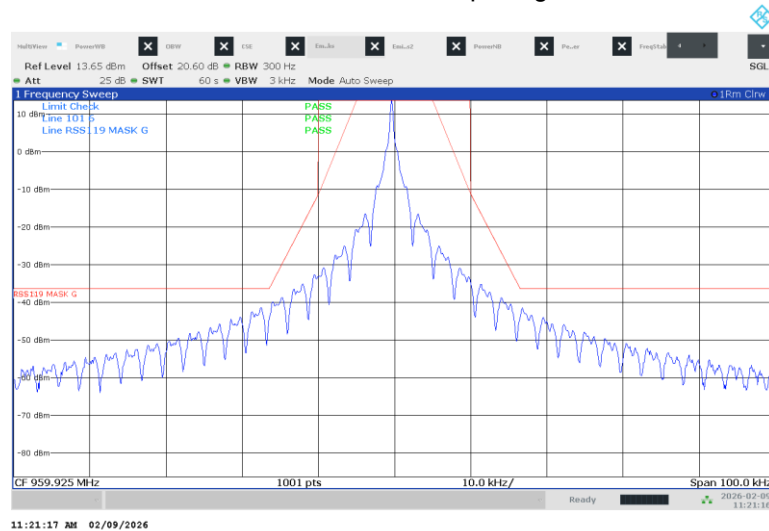

Test Personnel: Jeremy Pickens

Test Date: 30 December 2025 / 27 January 2026  
/ 09 February 2026

Reference Standard: ANSI C63.26

Ambient Temperature: 17.9 – 19.1°C

Relative Humidity: 14.7 – 25.5%

Atmospheric Pressure: 98.7 – 99.1kPa

## 8 Occupied Bandwidth

### 8.1 Method

The methods defined in ANSI C63.26, Section 5.4.4 were applied for measuring the 99% Occupied (Power) Bandwidth (OBW). The antenna port was connected directly to a spectrum analyzer through a cable and attenuator. The attenuation was accounted for by applying an offset to the spectrum analyzer. The spectrum analyzer was configured with a 3dB Resolution Bandwidth (RBW) between 1% and 5% of the anticipated occupied bandwidth, the Video Bandwidth (VBW) was set to at least 3 x RBW, and the span was configured to at least 1.5 times the OBW. The 99% OBW function of the spectrum analyzer was used to take the measurements.

#### TEST SITE: RF Bench

The RF bench consists of a Rohde & Schwarz TS8997 automated test system coupled with a temperature/humidity environmental chamber. Where applicable, 2.4 and 5GHz radio measurements are automated using the Rohde & Schwarz EMC32 test software. The TS8997 system houses a switch matrix (OSP), along with a spectrum analyzer, vector network analyzer, and analog signal generator.

### 8.2 Test Equipment

| Asset     | Description                          | Manufacturer    | Model          | Serial    | Cal Date   | Cal Due    |
|-----------|--------------------------------------|-----------------|----------------|-----------|------------|------------|
| 212165    | Temperature/Humidity/Pressure Sensor | Extech          | SD700          | 110344    | 04/29/2025 | 04/29/2026 |
| 213500    | Analog Signal Generator (8kHz-40GHz) | Rohde & Schwarz | SMB100B        | 106096    | 05/08/2025 | 05/08/2027 |
| 213502    | Spectrum Analyzer (2Hz-43.5GHz)      | Rohde & Schwarz | FSW43          | 102972    | 08/01/2024 | 08/01/2026 |
| 213506-01 | RF Test Cable                        | Huber+Suhner    | Enviroflex 400 | 213506-01 | VBV        | VBV        |
| 213507-10 | 10dB SMA Attenuator                  | Tojoin          | 10dB           | 241120    | VBV        | VBV        |
| 213507-20 | 20dB SMA Attenuator                  | Tojoin          | 20dB           | 241123    | VBV        | VBV        |

#### Software Utilized

| Name  | Manufacturer    | Version  |
|-------|-----------------|----------|
| EMC32 | Rohde & Schwarz | 11.70.00 |


### 8.3 Results

The sample tested was found to Comply.


**8.4 Test Data**

| Frequency (MHz) | Mode        | 99% Bandwidth (kHz) |
|-----------------|-------------|---------------------|
| 896.0125        | mPass 5k    | 5.11                |
| 896.0125        | mPass 10k   | 10.359              |
| 896.0125        | mPass 12.5k | 11.93               |
| 901.9875        | mPass 5k    | 5.78                |
| 901.9875        | mPass 10k   | 11.92               |
| 901.9875        | mPass 12.5k | 11.96               |
| 901.9875        | ASK         | 4.56                |
| 928.925         | mPass 5k    | 5.76                |
| 928.925         | mPass 10k   | 11.90               |
| 928.925         | mPass 12.5k | 11.86               |
| 928.925         | ASK         | 6.83                |
| 930.5           | mPass 5k    | 5.82                |
| 930.5           | mPass 10k   | 11.91               |
| 930.5           | mPass 12.5k | 11.88               |
| 930.5           | ASK         | 6.19                |
| 932.25          | mPass 5k    | 5.78                |
| 932.25          | mPass 10k   | 11.93               |
| 932.25          | mPass 12.5k | 11.87               |
| 932.25          | ASK         | 3.95                |
| 935.0125        | mPass 5k    | 5.79                |
| 935.0125        | mPass 12.5k | 12.02               |
| 941.4875        | mPass 5k    | 5.78                |
| 941.4875        | mPass 10k   | 11.80               |
| 941.4875        | mPass 12.5k | 11.95               |
| 941.4875        | ASK         | 4.30                |
| 952.5           | mPass 5k    | 5.77                |
| 952.5           | mPass 10k   | 11.83               |
| 952.5           | mPass 12.5k | 11.91               |
| 952.5           | ASK         | 4.90                |
| 959.925         | mPass 5k    | 5.82                |
| 959.925         | mPass 10k   | 11.84               |
| 959.925         | mPass 12.5k | 11.83               |
| 959.925         | ASK         | 7.66                |


### 896.0125 - mPass 5k

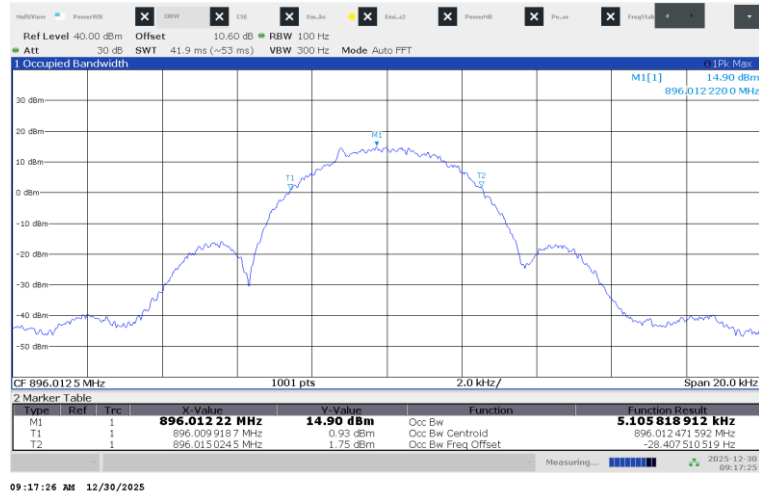


### 896.0125 - mPass 10k

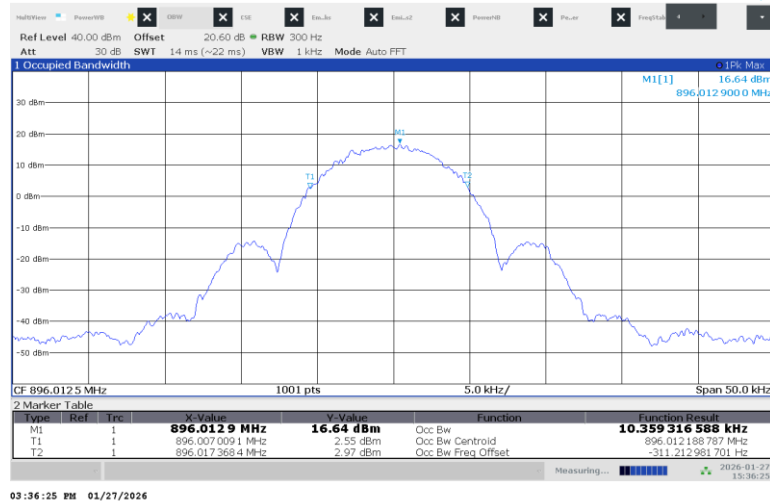

### 896.0125 - mPass 12.5k

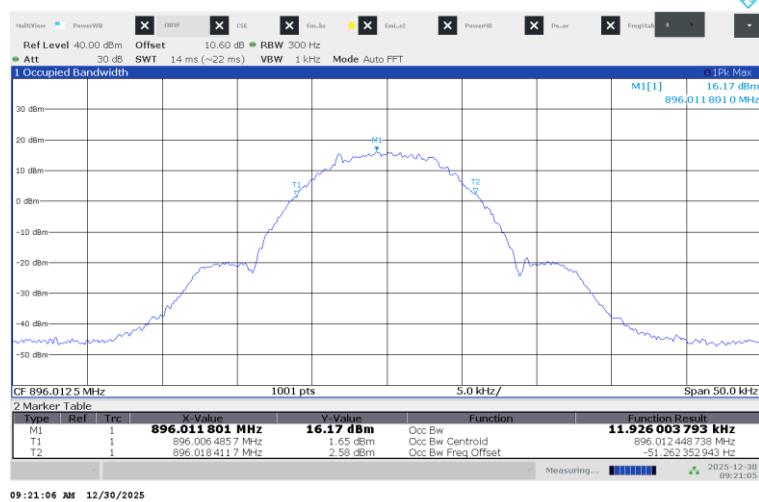

## 901.9875 - mPass 5k

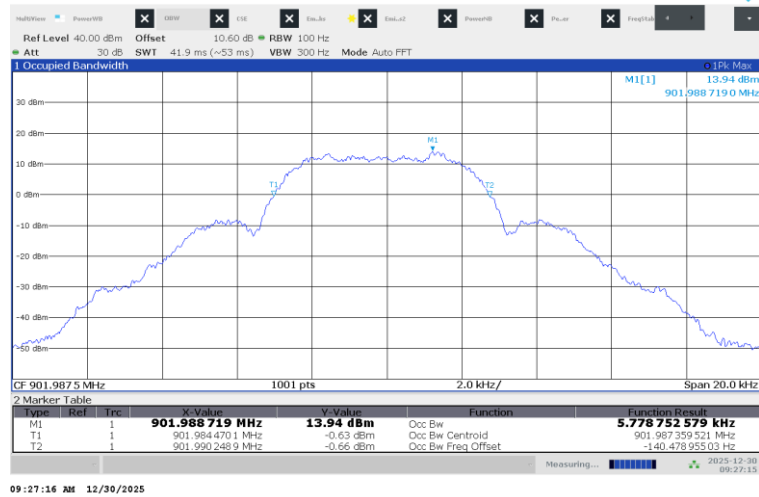


## 901.9875 - mPass 10k




## 901.9875 - mPass 12.5k




## 901.9875 - ASK

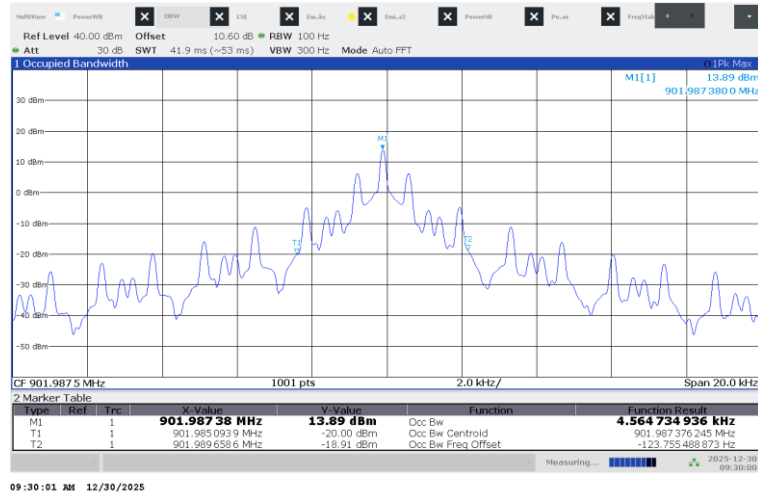


## 928.925 - mPass 5k

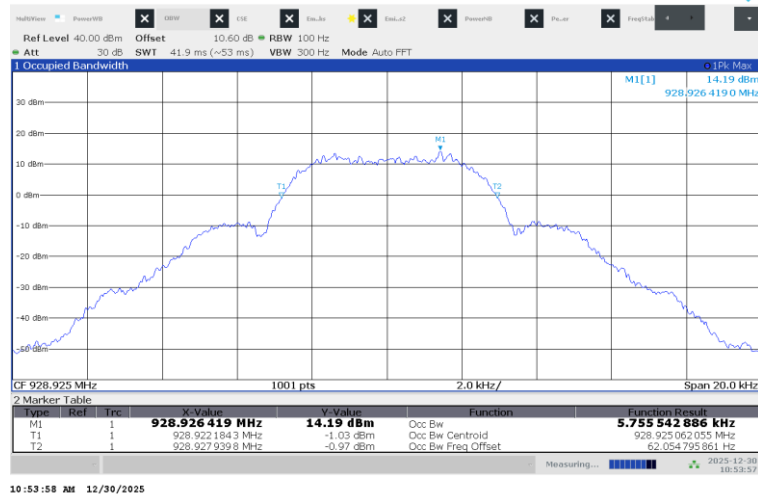

## 928.925 - mPass 10k

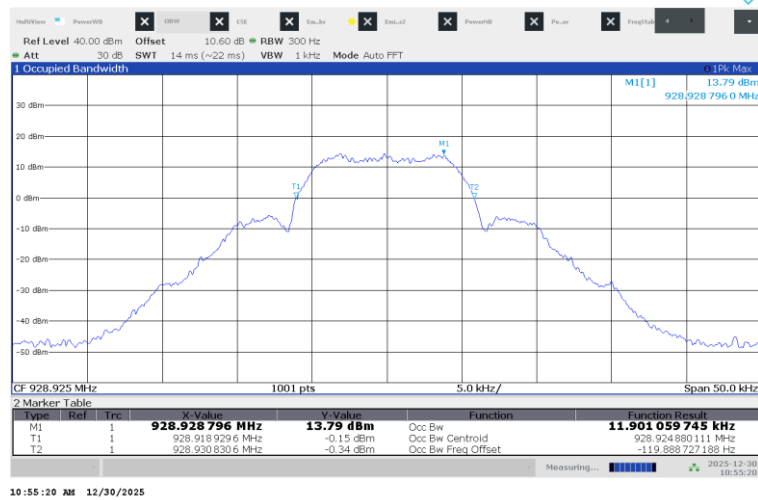


## 928.925 - mPass 12.5k

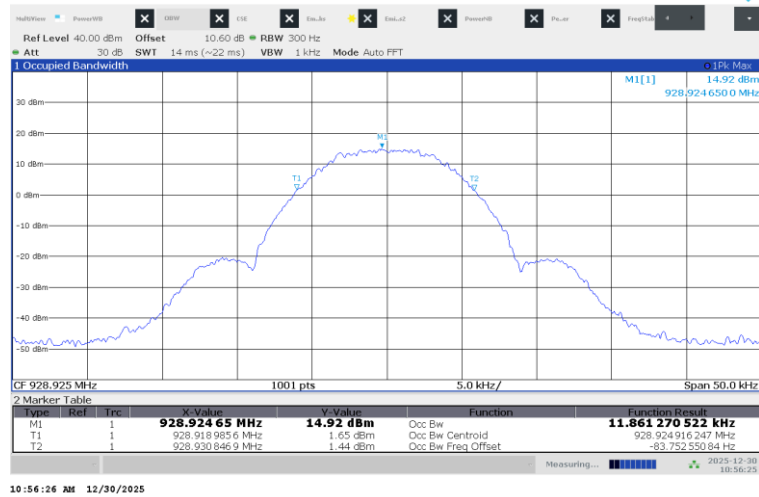


## 928.925 - ASK




## 930.5 - mPass 5k

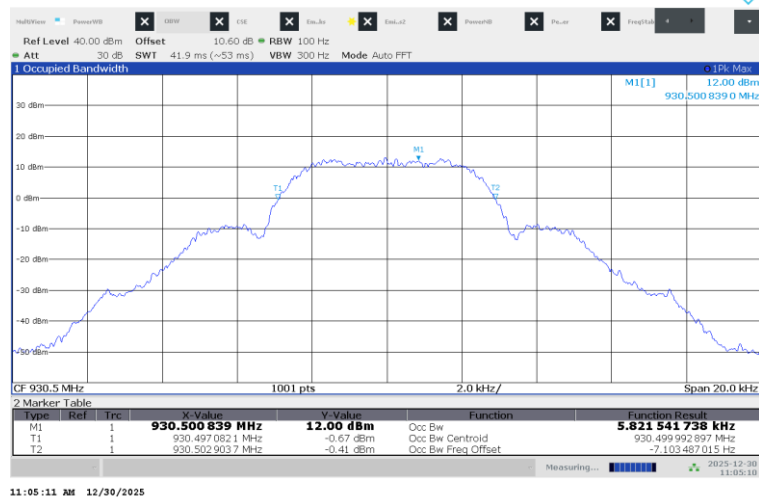

## 930.5 - mPass 10k

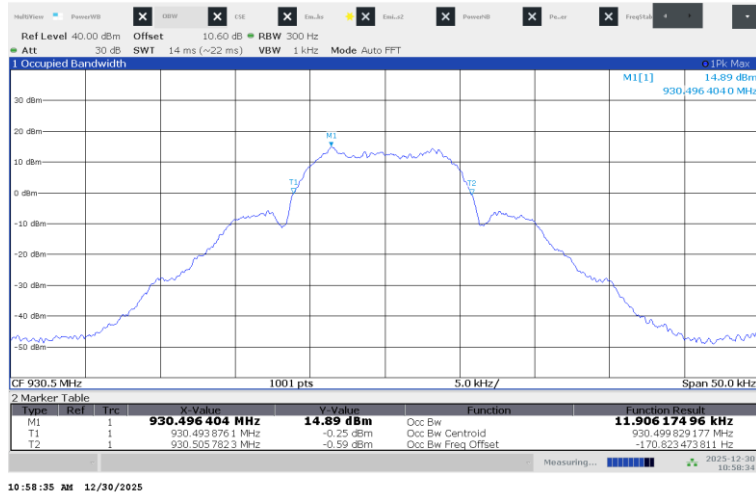


## 930.5 - mPass 12.5k

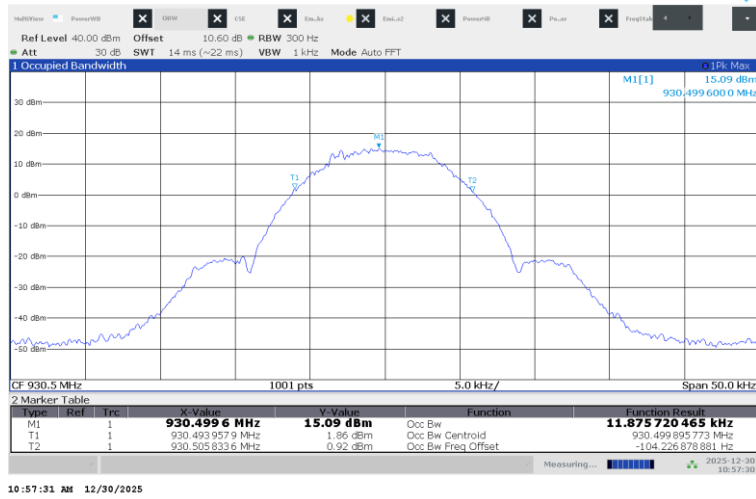


## 930.5 - ASK




### 932.25 - mPass 5k

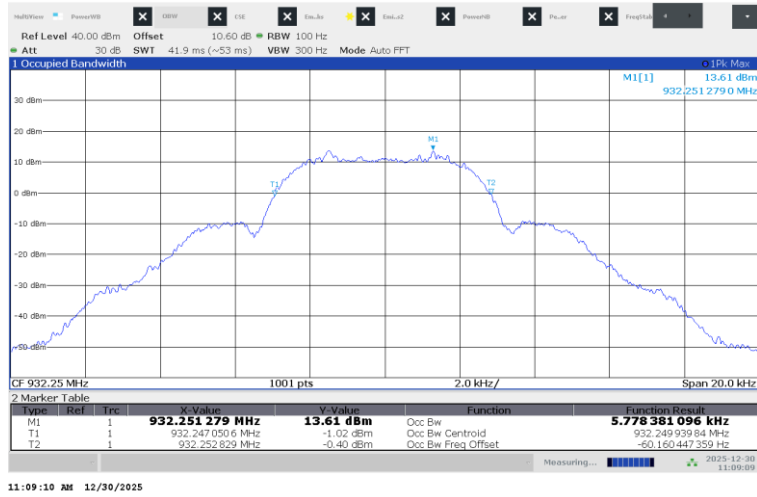


### 932.25 - mPass 10k

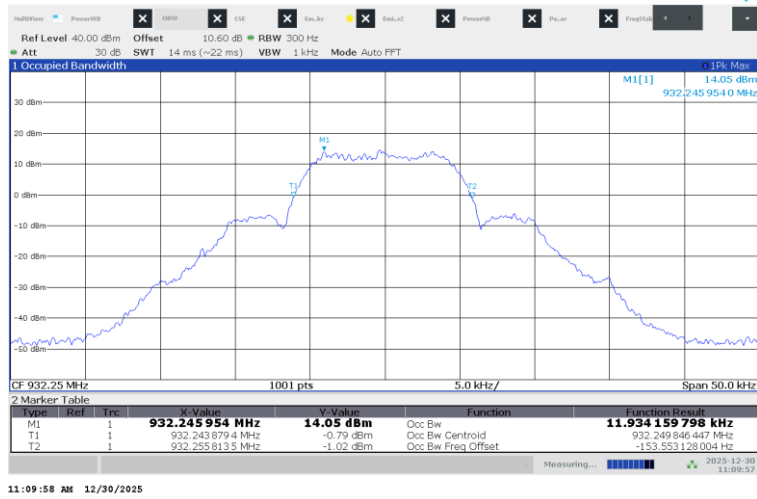


### 932.25 - mPass 12.5k

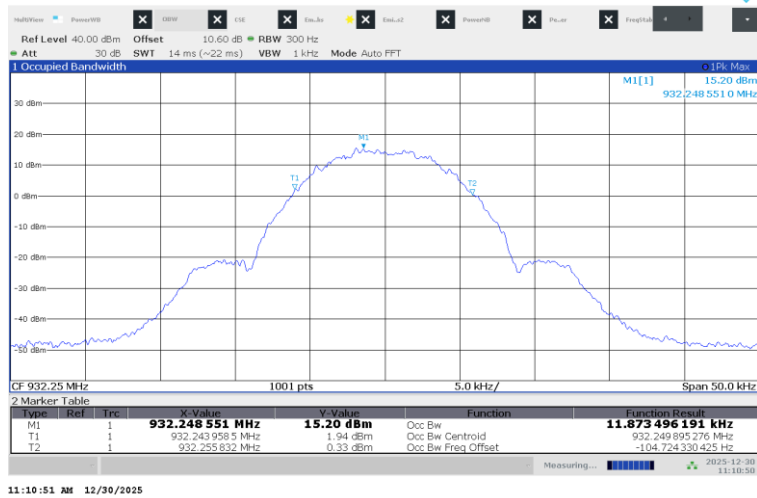

### 932.25 - ASK

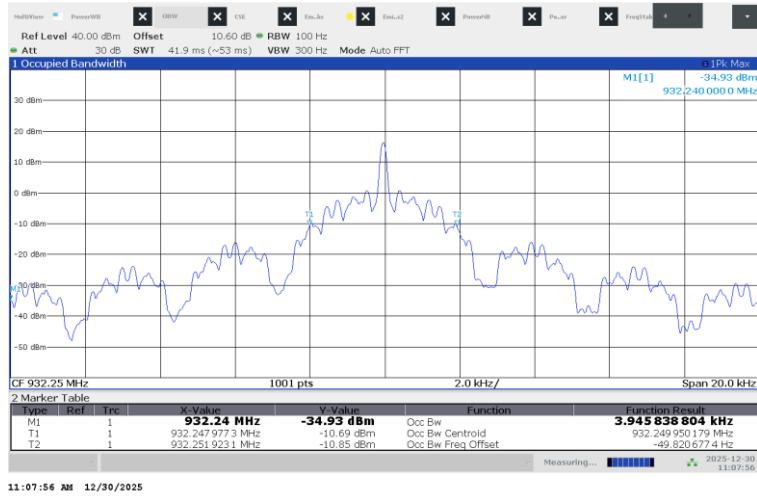


### 935.0125 - mPass 5k

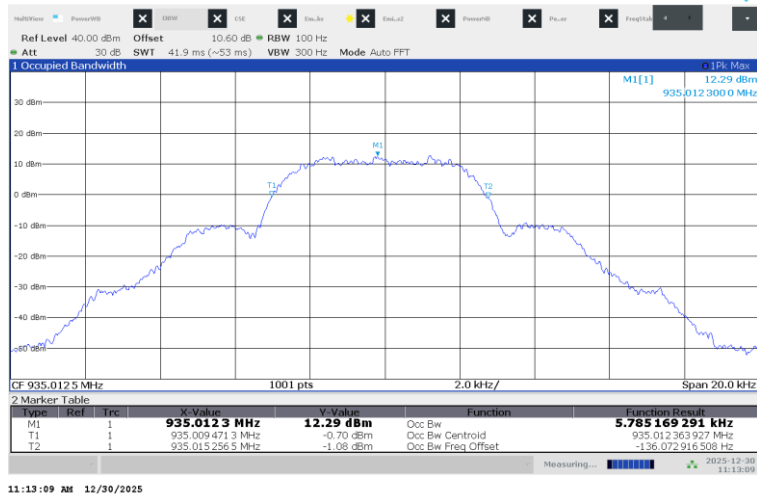


### 935.0125 - mPass 10k

### 935.0125 - mPass 12.5k

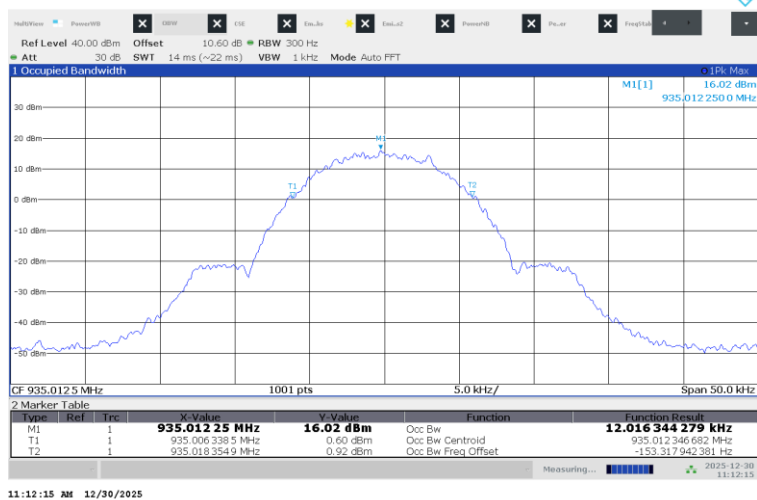


## 941.4875 - mPass 5k

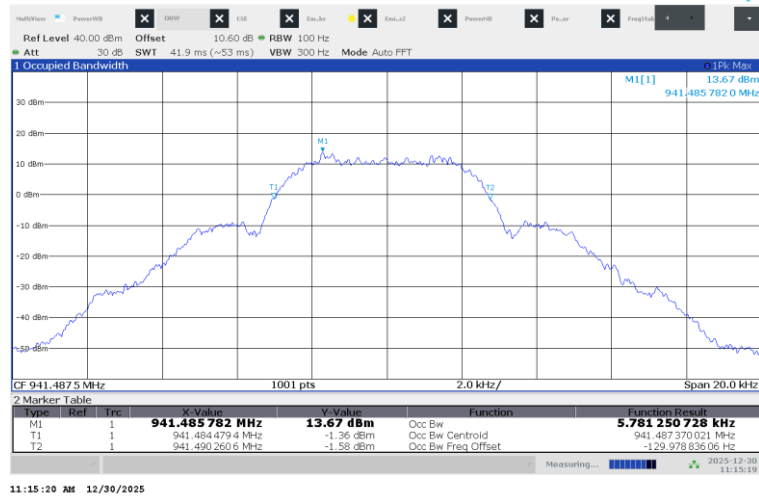

## 941.4875 - mPass 10k




## 941.4875 - mPass 12.5k

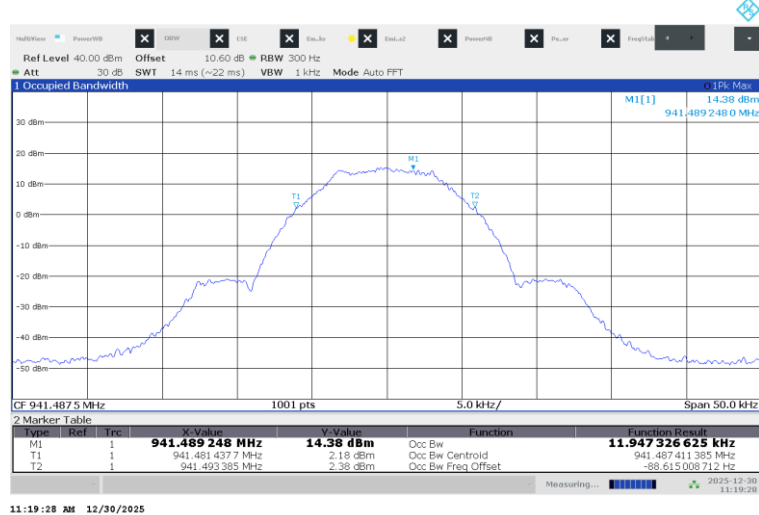


## 941.4875 - ASK




## 952.5 - mPass 5k

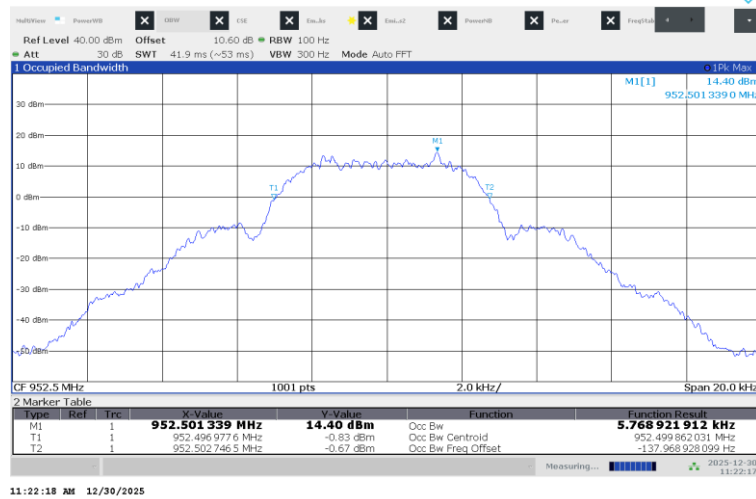


## 952.5 - mPass 10k

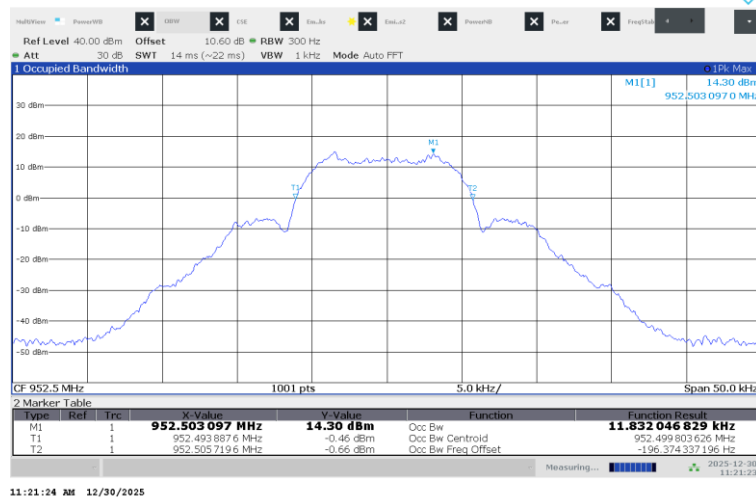


### 952.5 - mPass 12.5k

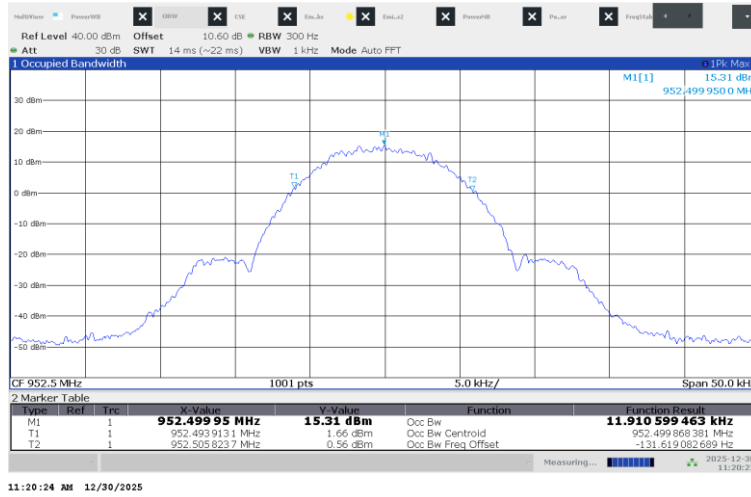


### 952.5 - ASK

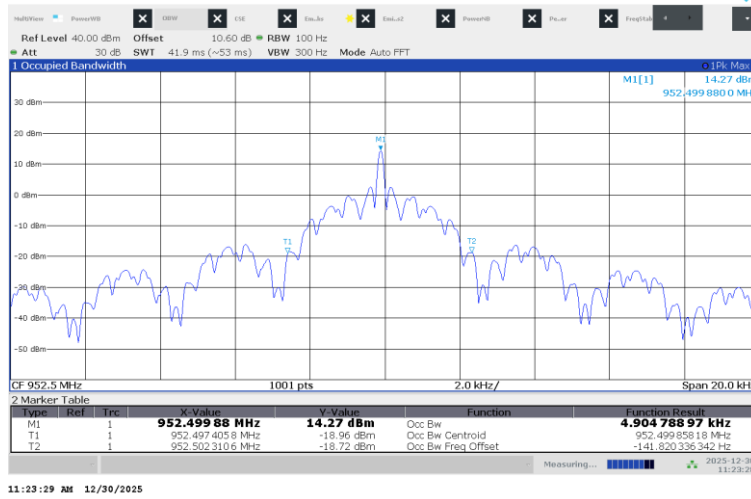


### 959.925 - mPass 5k

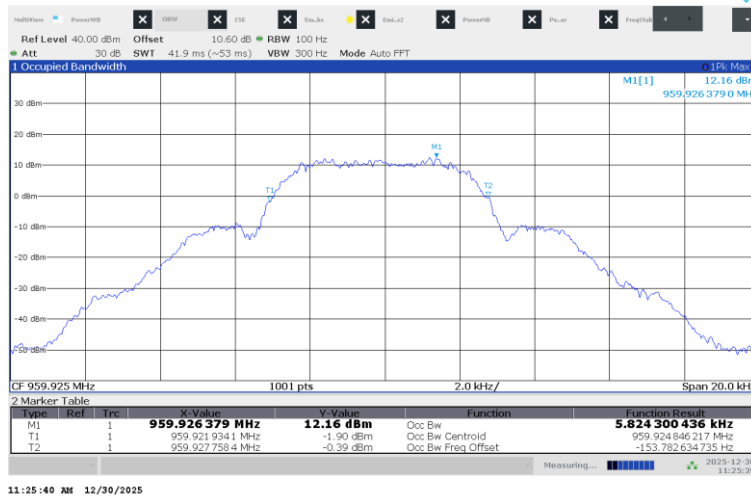

### 959.925 - mPass 10k

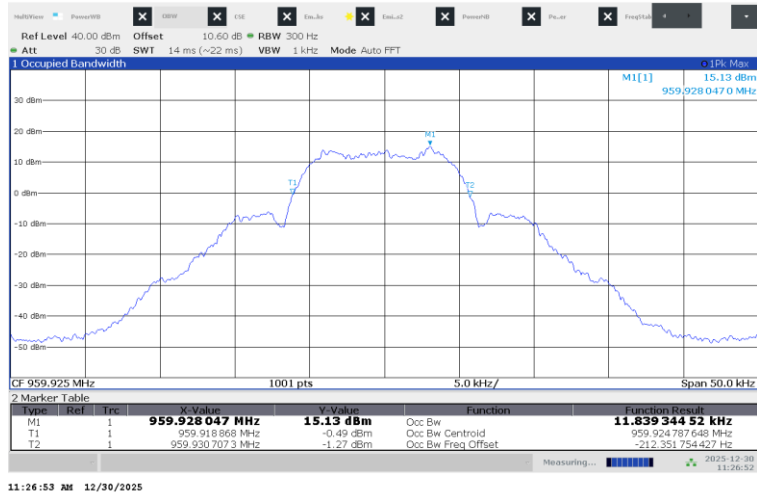

### 959.925 - mPass 12.5k

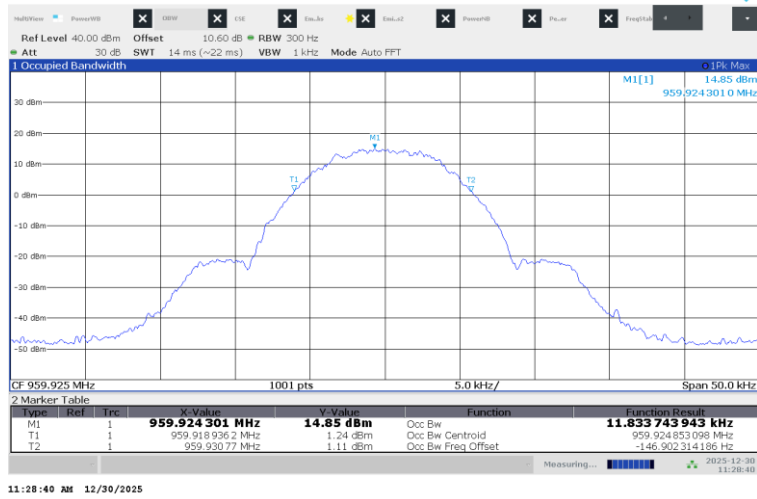

### 959.925 - ASK



Test Personnel: Jeremy Pickens 

Test Date: 30 December 2025 / 27 January 2026

Ambient Temperature: 17.9 – 19.1°C

Reference Standard: ANSI C63.26

Relative Humidity: 14.7 - 25.5%

Atmospheric Pressure: 98.7 – 99.1kPa

## 9 Spurious Emissions at Antenna Terminals

### 9.1 Method

The methods defined in ANSI C63.26, Section 5.7.4 were applied for measuring the out of band emissions. The antenna port was connected directly to a spectrum analyzer through a cable and attenuator. The total attenuation was accounted for by applying an offset to the spectrum analyzer for the attenuator and a transducer function for the cable loss. The spectrum analyzer was configured with the following Resolution Bandwidth (RBW) settings:

| Frequency Range (MHz) | RBW     |
|-----------------------|---------|
| 0.009 – 0.150         | 1 kHz   |
| 0.150 – 30            | 10 kHz  |
| 30 – 1000             | 100 kHz |
| 1000 – 10000          | 1 MHz   |

### TEST SITE: RF Bench

The RF bench consists of a Rohde & Schwarz TS8997 automated test system coupled with a temperature/humidity environmental chamber. Where applicable, 2.4 and 5GHz radio measurements are automated using the Rohde & Schwarz EMC32 test software. The TS8997 system houses a switch matrix (OSP), along with a spectrum analyzer, vector network analyzer, and analog signal generator.

### 9.2 Test Equipment

| Asset     | Description                          | Manufacturer    | Model          | Serial    | Cal Date   | Cal Due    |
|-----------|--------------------------------------|-----------------|----------------|-----------|------------|------------|
| 212165    | Temperature/Humidity/Pressure Sensor | Extech          | SD700          | 110344    | 04/29/2025 | 04/29/2026 |
| 213500    | Analog Signal Generator (8kHz-40GHz) | Rohde & Schwarz | SMB100B        | 106096    | 05/08/2025 | 05/08/2027 |
| 213502    | Spectrum Analyzer (2Hz-43.5GHz)      | Rohde & Schwarz | FSW43          | 102972    | 08/01/2024 | 08/01/2026 |
| 213506-01 | RF Test Cable                        | Huber+Suhner    | Enviroflex 400 | 213506-01 | VBU        | VBU        |
| 213507-10 | 10dB SMA Attenuator                  | Tojoin          | 10dB           | 241120    | VBU        | VBU        |


### Software Utilized

| Name         | Manufacturer    | Version             |
|--------------|-----------------|---------------------|
| RSCCommander | Rohde & Schwarz | 2.4.2 64-bit (2023) |


### 9.3 Results

The sample tested was found to Comply.


## 9.4 Test Data

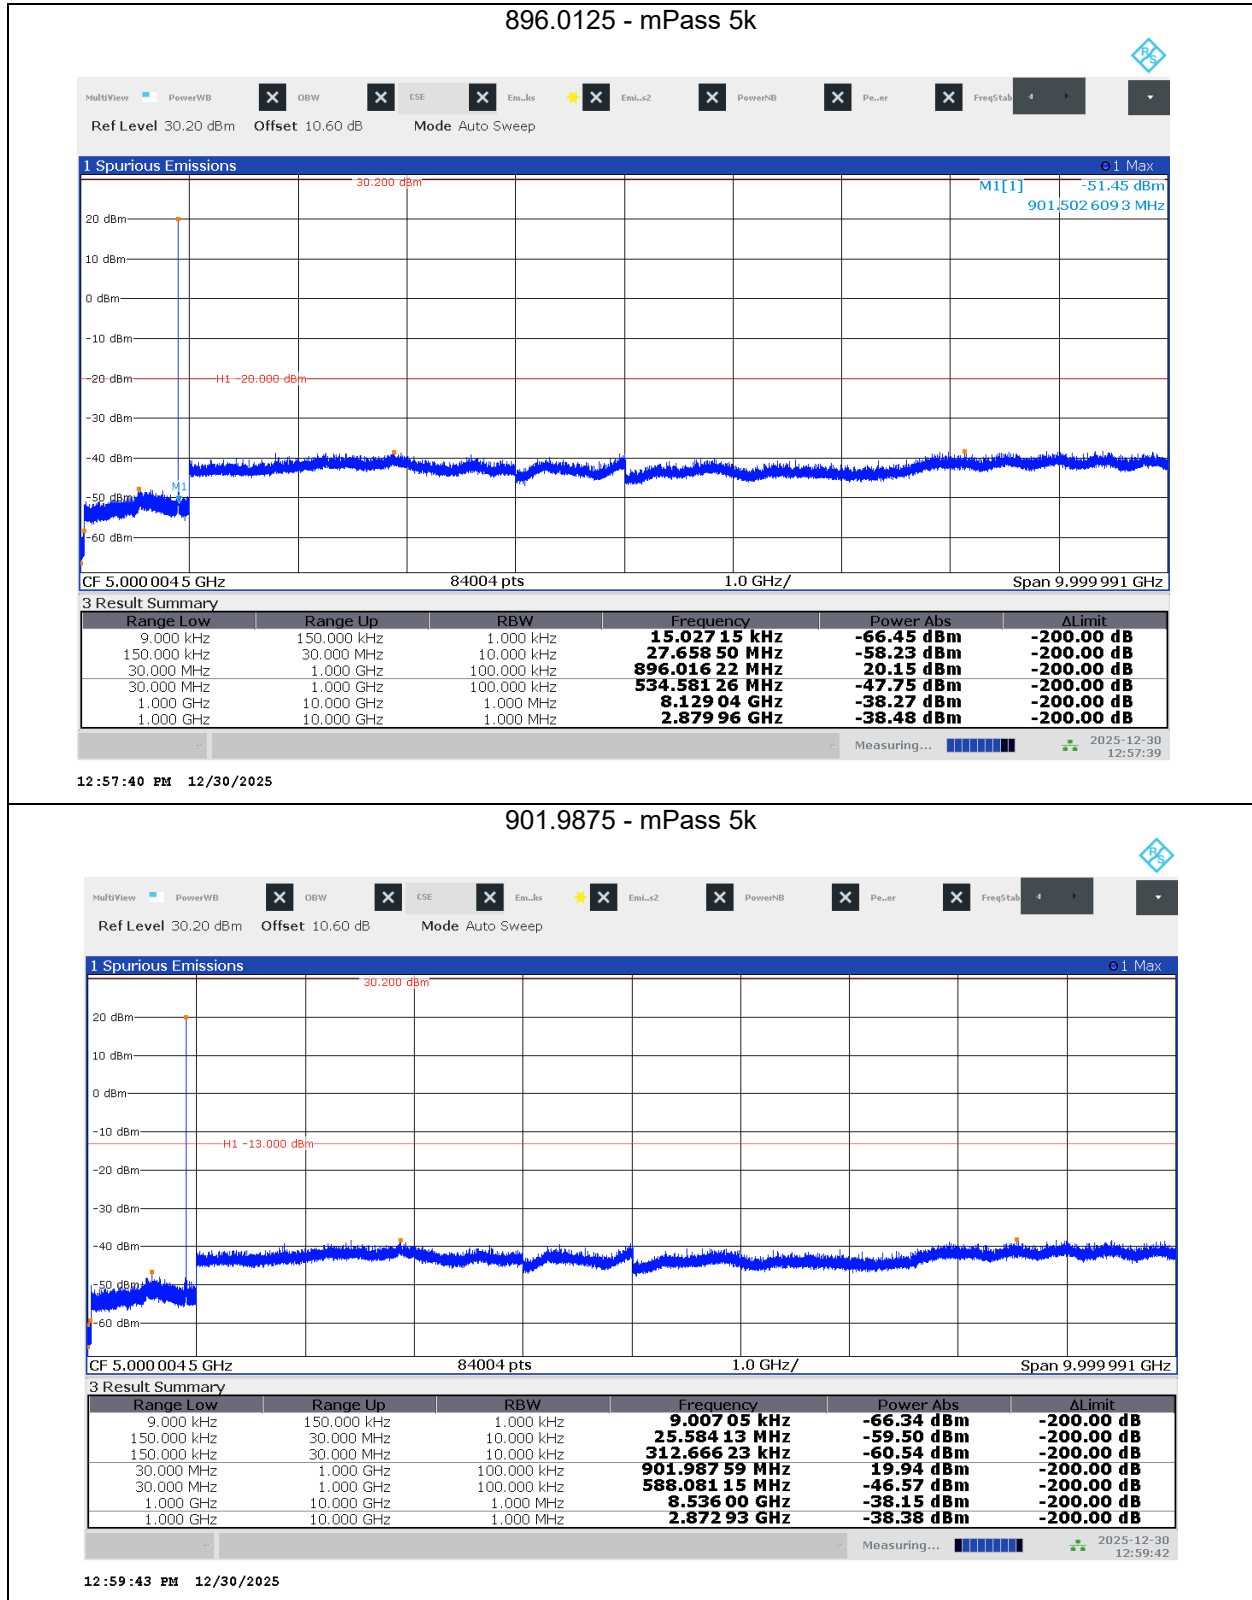


928.925 - mPass 5k

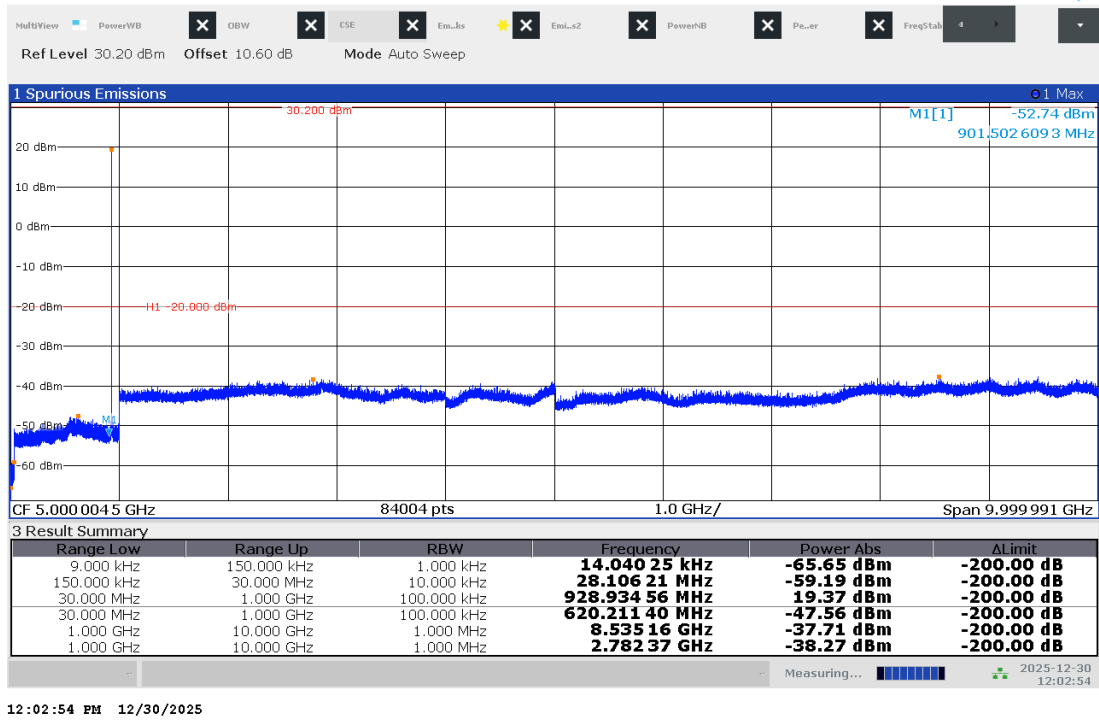


930.5 - mPass 5k

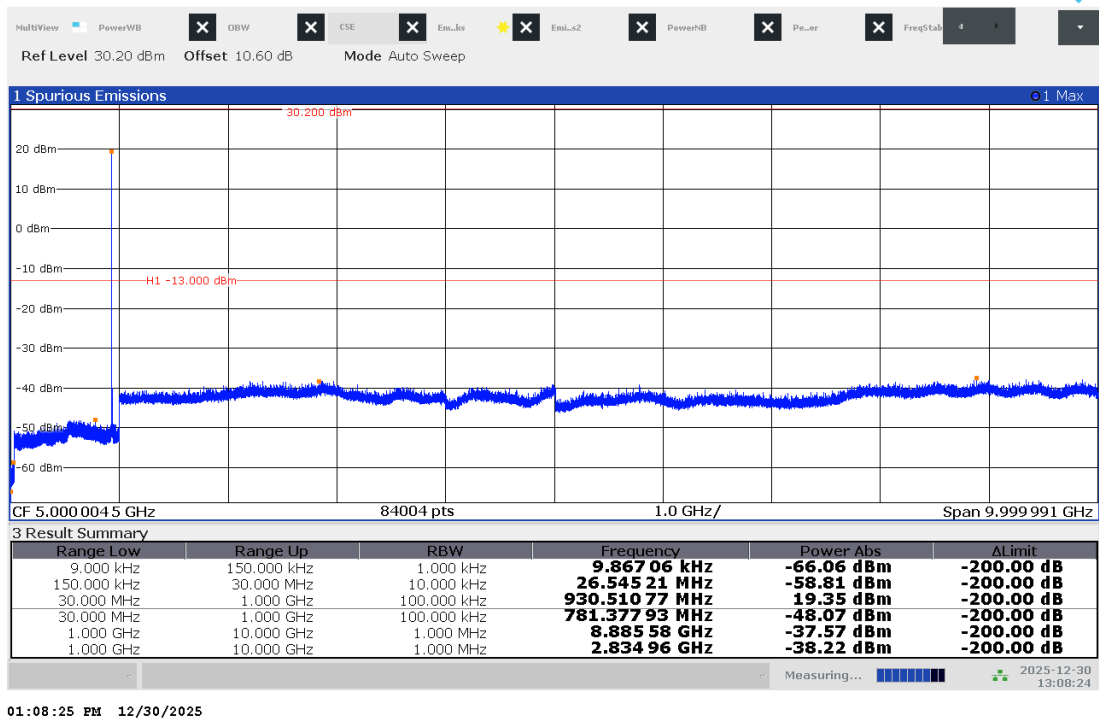


932.25 - mPass 5k

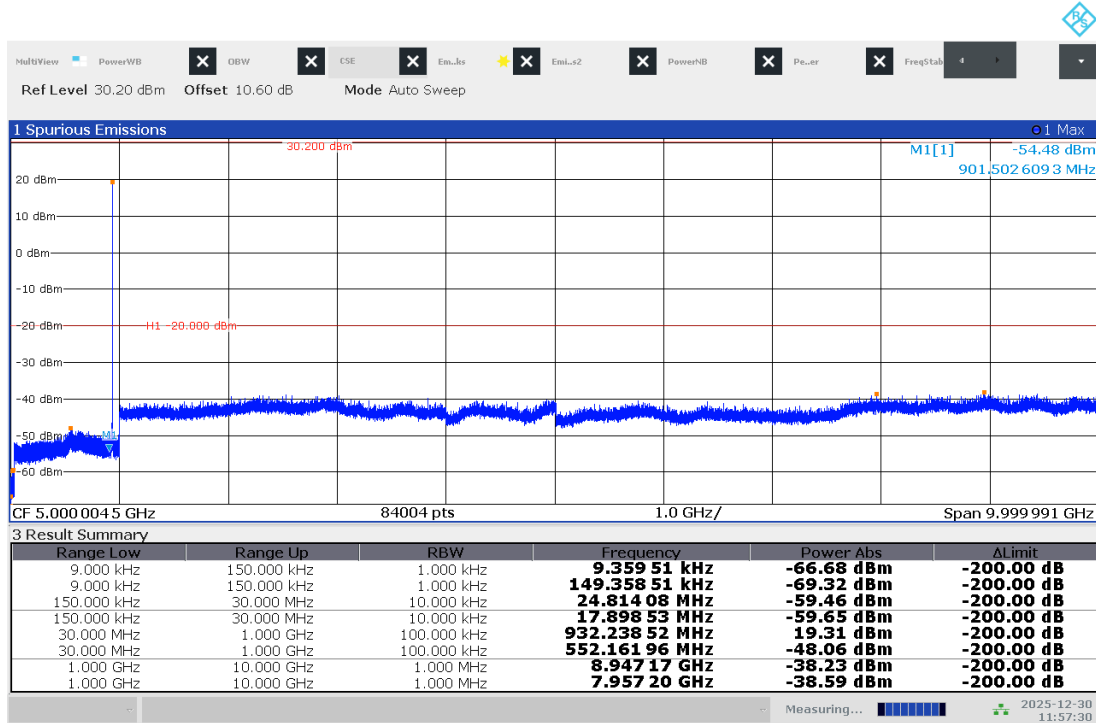

935.0125 - mPass 5k

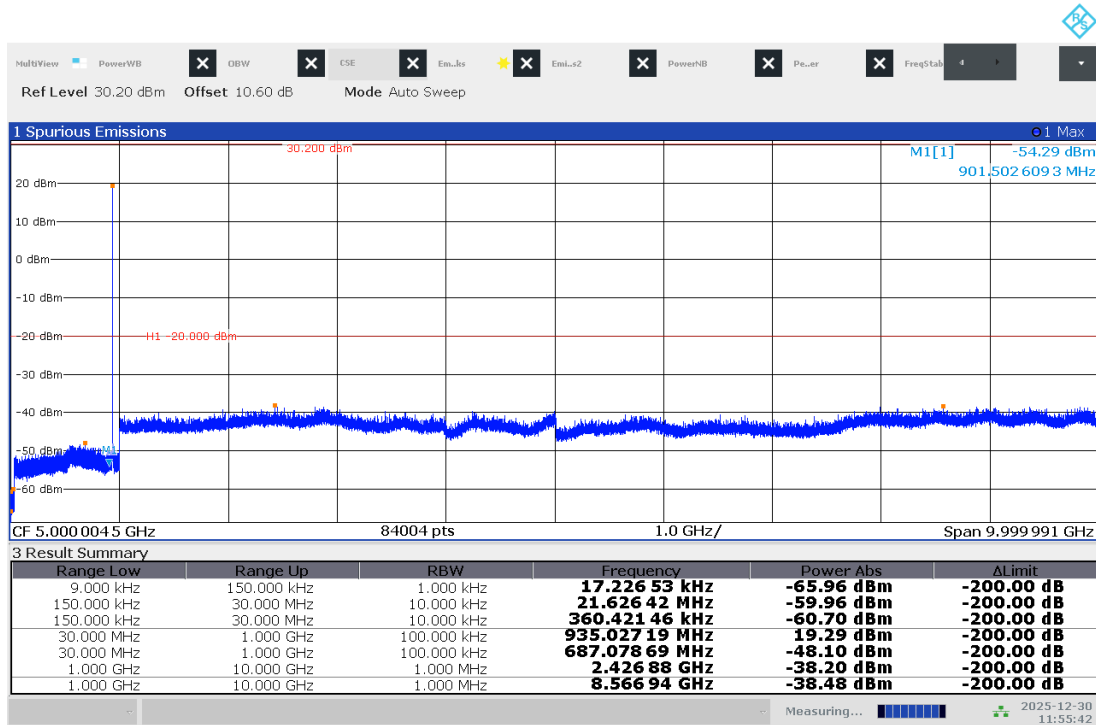


## 941.4875 - mPass 5k

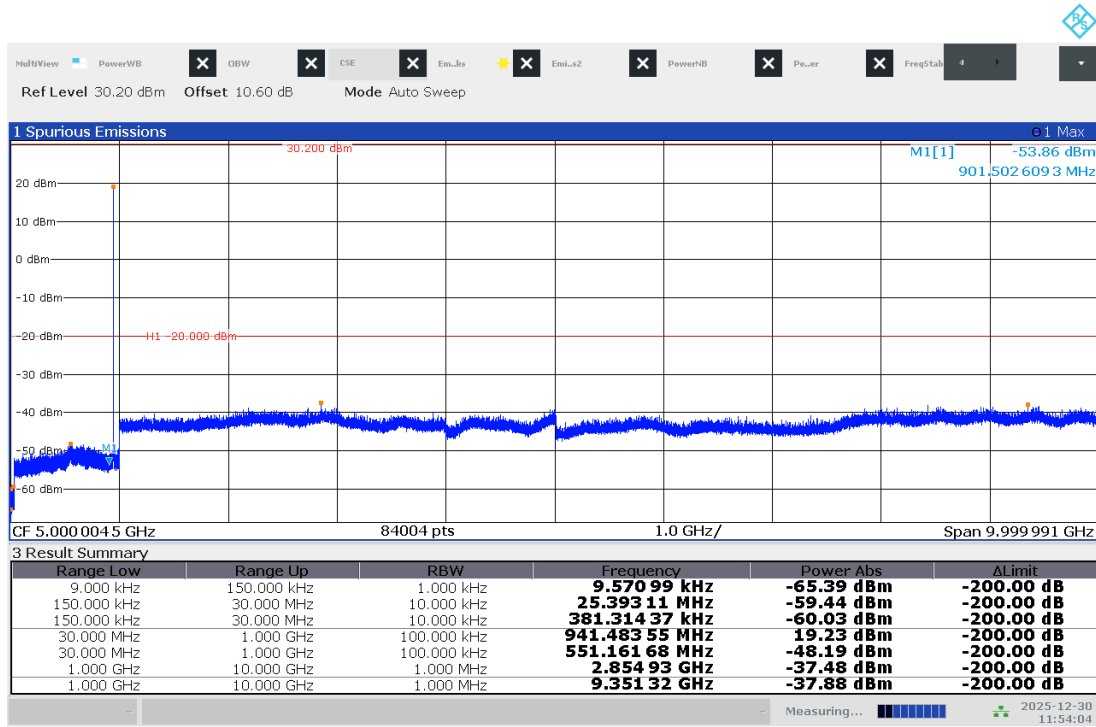

11:54:05 AM 12/30/2025

## 952.5 - mPass 5k

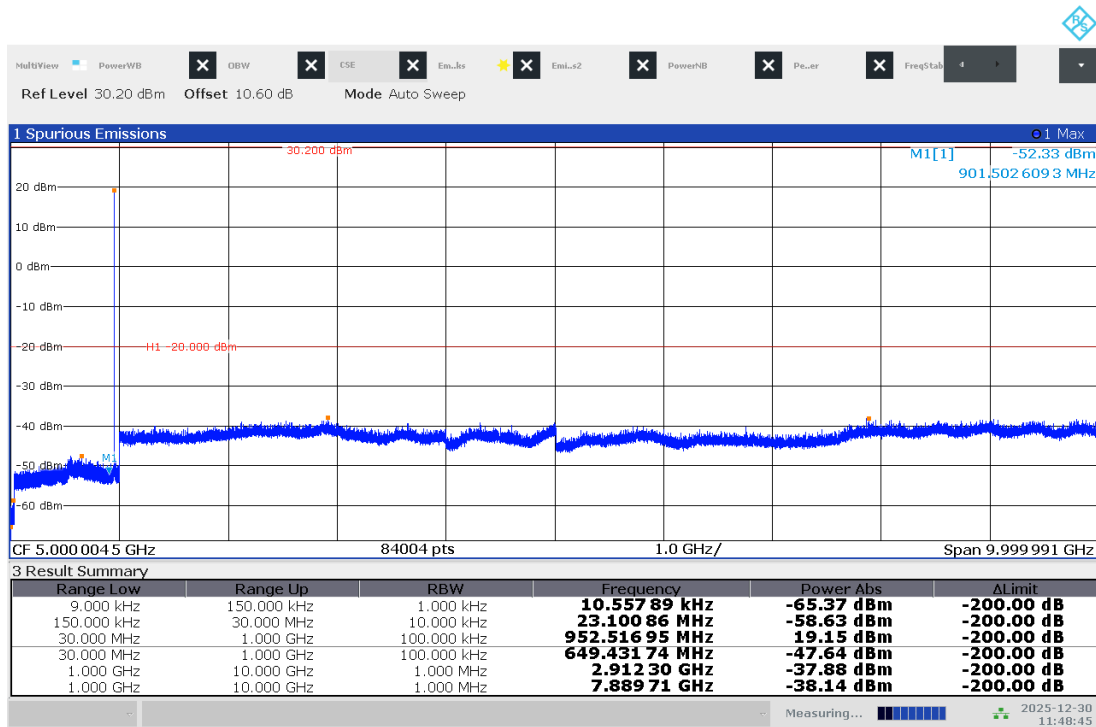

11:48:46 AM 12/30/2025



## 10 Field Strength of Spurious Emissions

### 10.1 Method

The field strength methods defined in ANSI C63.26, Section 5.5.4 were applied for measuring the radiated spurious emissions. The EUT was tested at a height of 0.8m for measurements below 1GHz and at 1.5 meters for measurements above 1GHz. Radiated field strength pre-scans were performed at a distance of 3 meters using a bandwidth of 200Hz (9kHz to 150kHz), 10kHz (15kHz-30MHz), 100kHz (30MHz-1GHz), and 1MHz above 1GHz. The video bandwidth (VBW) was set to at least 3 times the RBW. The results were compared to the EIRP limits by applying a 95.2dB conversion to the applicable limit (e.g. -13dBm + 95.2 = 82.2dBμV/m at 3 meters). For tabular data, the resulting field strength measurements were converted to EIRP using the same 95.2dB correction and compared to the applicable EIRP limit.

#### TEST SITE: 10 Meter Chamber

**10 Meter Semi-Anechoic Chamber** The test site for radiated emissions is located at 1950 Evergreen Blvd, Suite 100, Duluth, Georgia 30096. It is a 10-meter semi-anechoic chamber manufactured by Panashield. Embedded in the floor is a 3-meter diameter turntable.

#### Sample Calculation

The field strength was calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\begin{aligned}\text{Correction} &= \text{AF} + \text{CF} - \text{AG} \\ \text{FS} &= \text{RA} + \text{Correction}\end{aligned}$$

Where

- FS = Field Strength in dBμV/m
- RA = Receiver Amplitude (including preamplifier) in dBμV
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 66.41 dBμV is obtained. The correction factor is calculated by adding the antenna factor of 26.26 dB and cable factor of 1.9 dB. The amplifier gain of 40.11 dB is subtracted, giving a correction factor of -11.95 dB/m. The correction factor is then added to the receiver amplitude resulting a field strength of 54.46dBμV/m.

$$\begin{aligned}\text{RA} &= 66.41 \text{ dB}\mu\text{V} \\ \text{Correction} &= -11.95 \text{ dB/m} \\ \text{FS} &= 54.46 \text{ dB}\mu\text{V/m}\end{aligned}$$

To convert from field strength to EIRP, the following equations were used

$$\text{EIRP} = (\text{E} \times \text{d})^2 / 30$$

Where:

- E = field strength in V/m
- d = measurement distance in m
- EIRP = equivalent isotropically radiated power in W

Working in dB units:

$$\text{EIRP}_{\text{dBm}} = \text{E}_{\text{dB}\mu\text{V/m}} + 20\log(\text{d}_m) - 104.77$$

For d = 3:

$$\text{EIRP}_{\text{dBm}} = \text{E}_{\text{dB}\mu\text{V/m}} - 95.2$$

#### Example

$$\begin{aligned}\text{FS} &= 54.46 \text{ dB}\mu\text{V/m} \\ \text{EIRP}_{\text{dBm}} &= 54.46 - 95.2 = -40.74 \text{ dBm}\end{aligned}$$

## 10.2 Test Equipment

| Asset     | Description                          | Manufacturer       | Model              | Serial    | Cal Date   | Cal Due    |
|-----------|--------------------------------------|--------------------|--------------------|-----------|------------|------------|
| 200074    | Preamplifier, 10 MHz to 2000 MHz     | Mini-Circuits      | ZKL-2              | D011105   | 01/24/2025 | 01/24/2026 |
| 200162    | EMI Receiver (20Hz-40GHz)            | Rohde & Schwarz    | ESU 40             | 100314    | 10/07/2025 | 10/07/2026 |
| 211262    | Controller - Turntable and Mast      | Sunol              | SC99V              | SC99V-1   | VBU        | VBU        |
| 211264    | Mast - Antenna                       | Sunol              | TWR95              | NNN2      | VBU        | VBU        |
| 211386    | Antenna, BiLog, 20-2000MHz           | Chase              | CBL6112B           | 2622      | 06/30/2025 | 06/30/2026 |
| 212166    | Temperature/Pressure/Humidity Sensor | Extech             | SD700              | 110392    | 04/02/2025 | 04/02/2026 |
| 213103    | High Pass Filter - Rated 1GHz        | Micro-Tronics      | HPM50108           | 140       | 06/18/2025 | 06/18/2026 |
| 213451    | Omni -directional Comb Generator     | Com-Power          | CGO-520            | 281266    | VBU        | VBU        |
| 213453    | Preamplifier 500MHz-18GHz            | Com-Power          | PAM-118A           | 18040030  | 10/20/2025 | 10/20/2026 |
| BOX-HORN1 | Antenna, Horn, <18 GHz               | EMCO               | 3115               | 9512-4632 | 06/25/2025 | 06/25/2026 |
| MM5       | RF cable (9kHz to 18GHz)             | Maury Microwave    | UC-N-MM-118        | 163203    | 04/01/2025 | 04/01/2026 |
| MM36      | RF cable (9kHz to 18GHz)             | Maury Microwave    | UC-N-MM-36         | 16 32 10  | 06/18/2025 | 06/18/2026 |
| MP10      | RF cable (9kHz to 18GHz)             | Fairview Microwave | FMCA1282-394       | MP10      | 06/18/2025 | 06/18/2026 |
| MP12      | RF cable (9kHz to 18GHz)             | Fairview Microwave | SCE180060505-700CM | MP12      | 01/23/2025 | 01/23/2026 |
| MP14      | RF cable (9kHz to 18GHz)             | Megaphase          | EC29-N1N1-276-H    | 20938802  | 09/19/2025 | 09/19/2026 |


## Software Utilized


| Name    | Manufacturer | Version   |
|---------|--------------|-----------|
| BAT EMC | NEXIO        | 3.19.1.18 |


## 10.3 Results


The sample tested was found to Comply.


## 10.4 Plots/Data

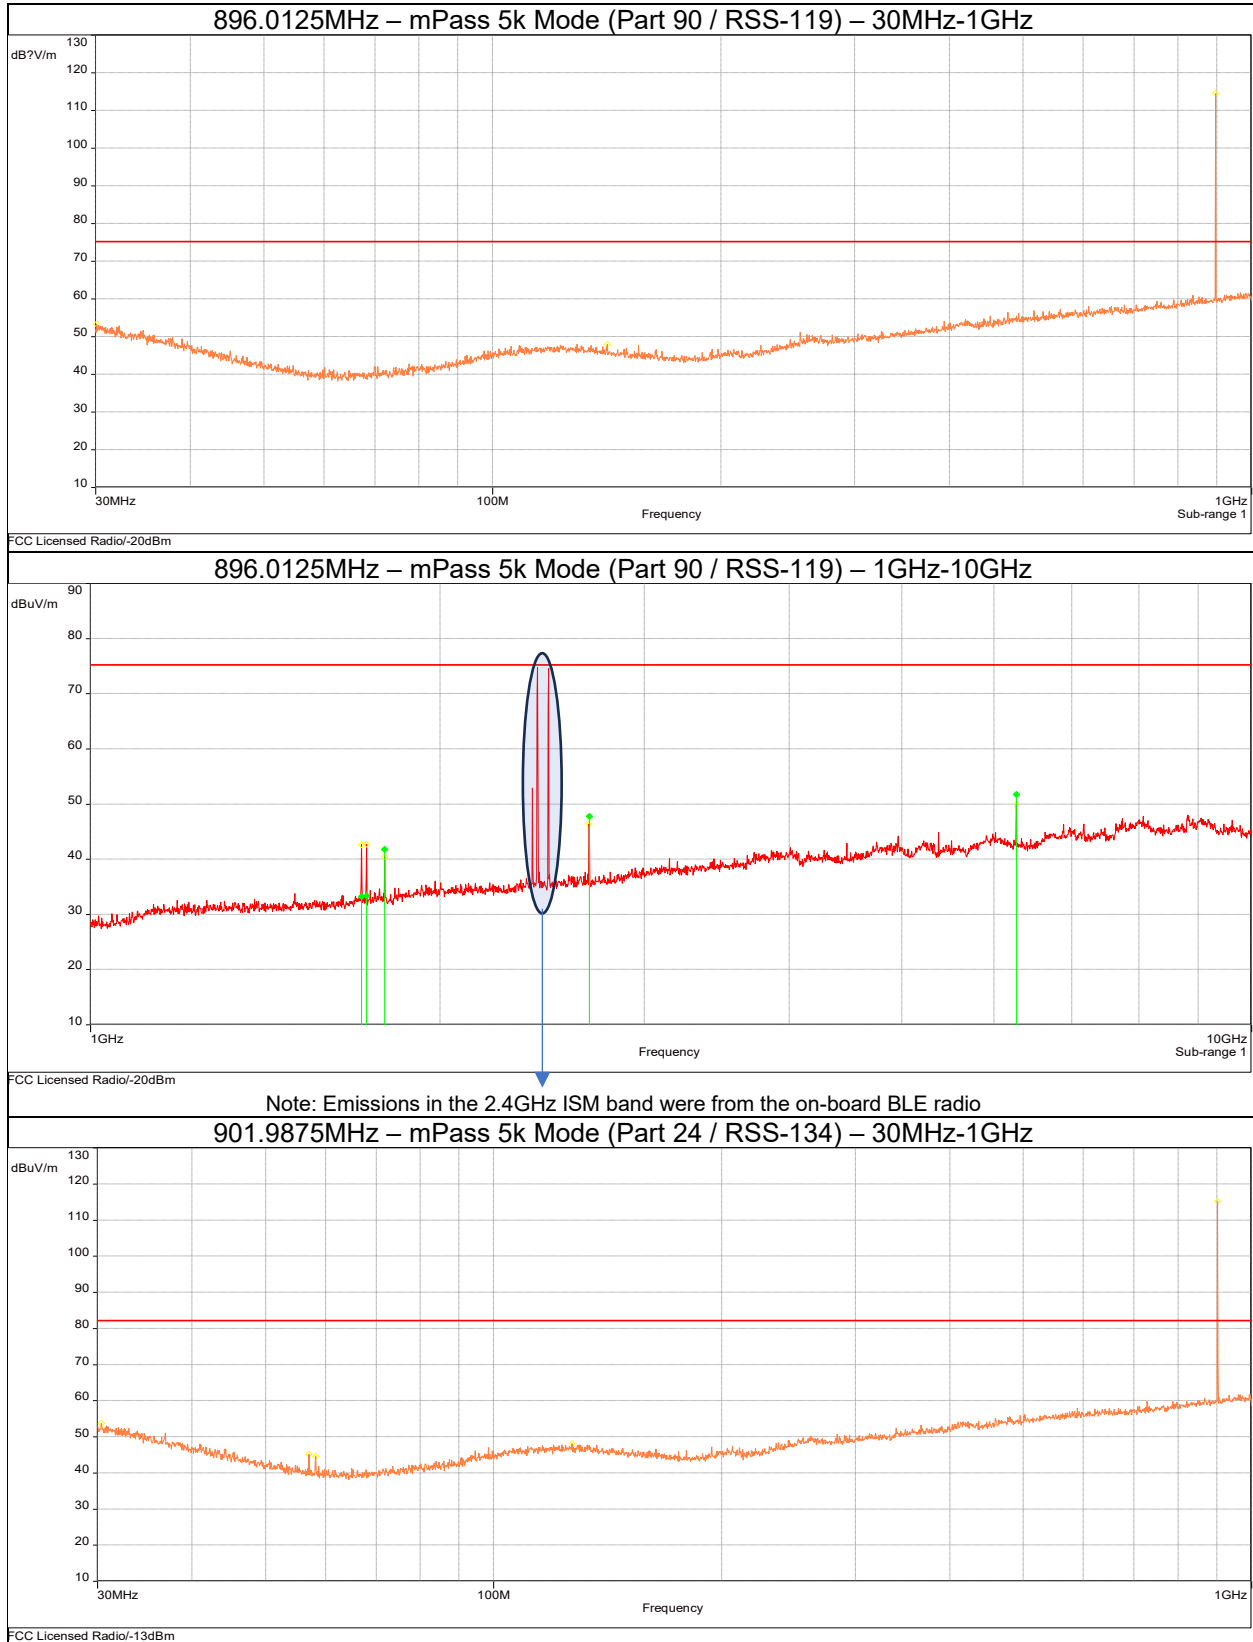


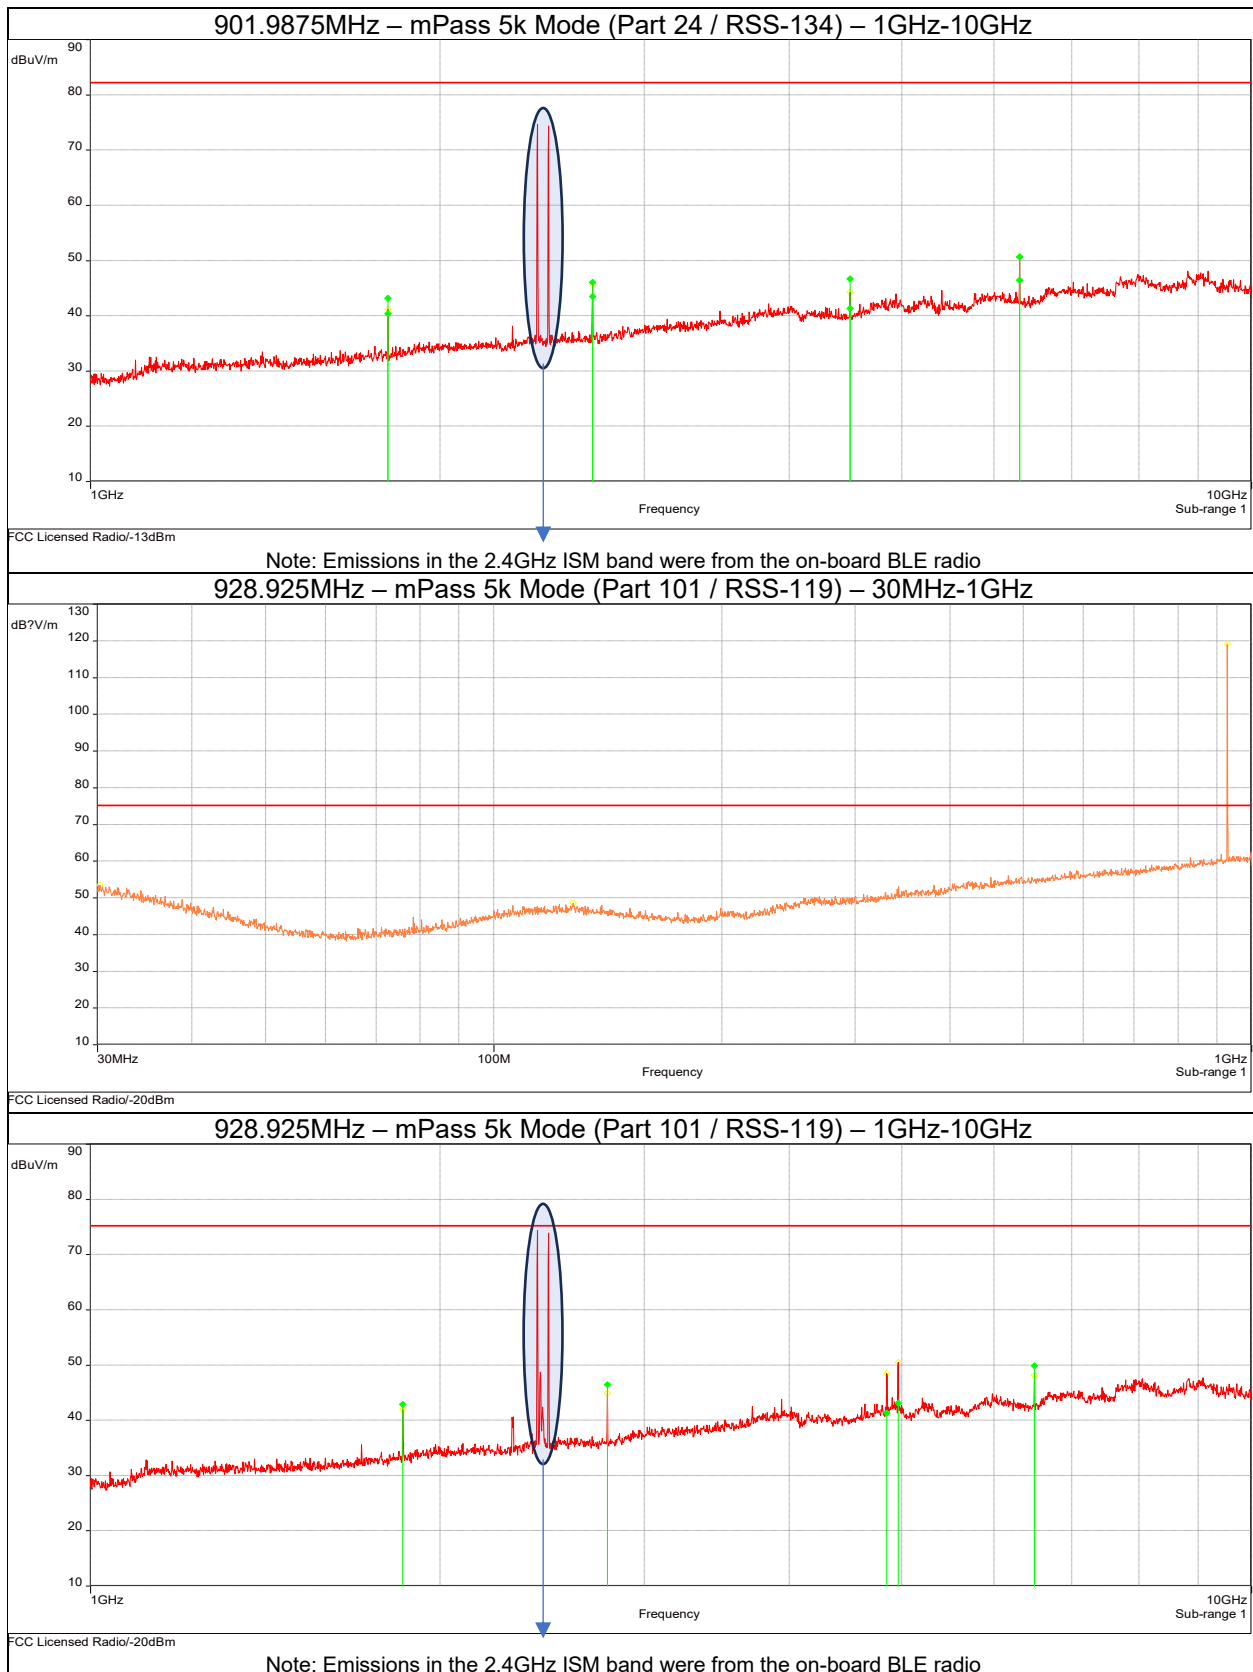

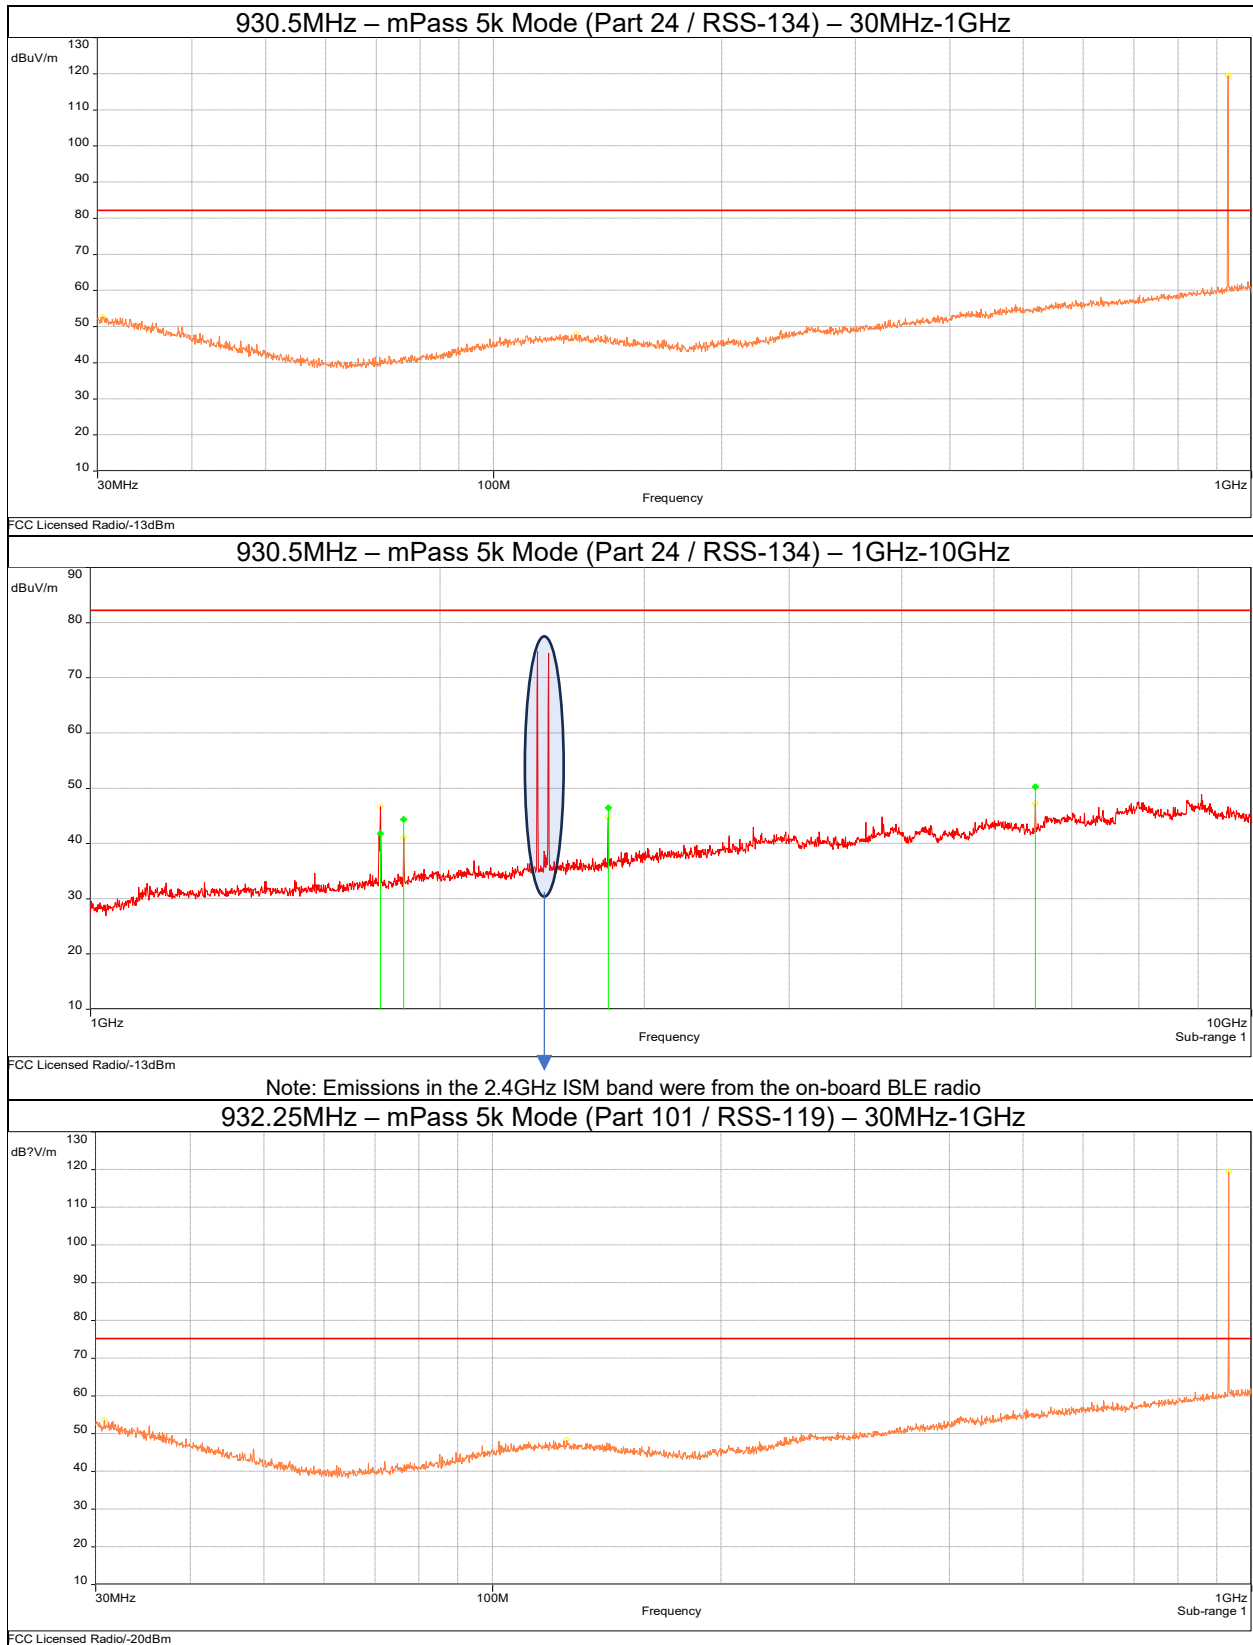

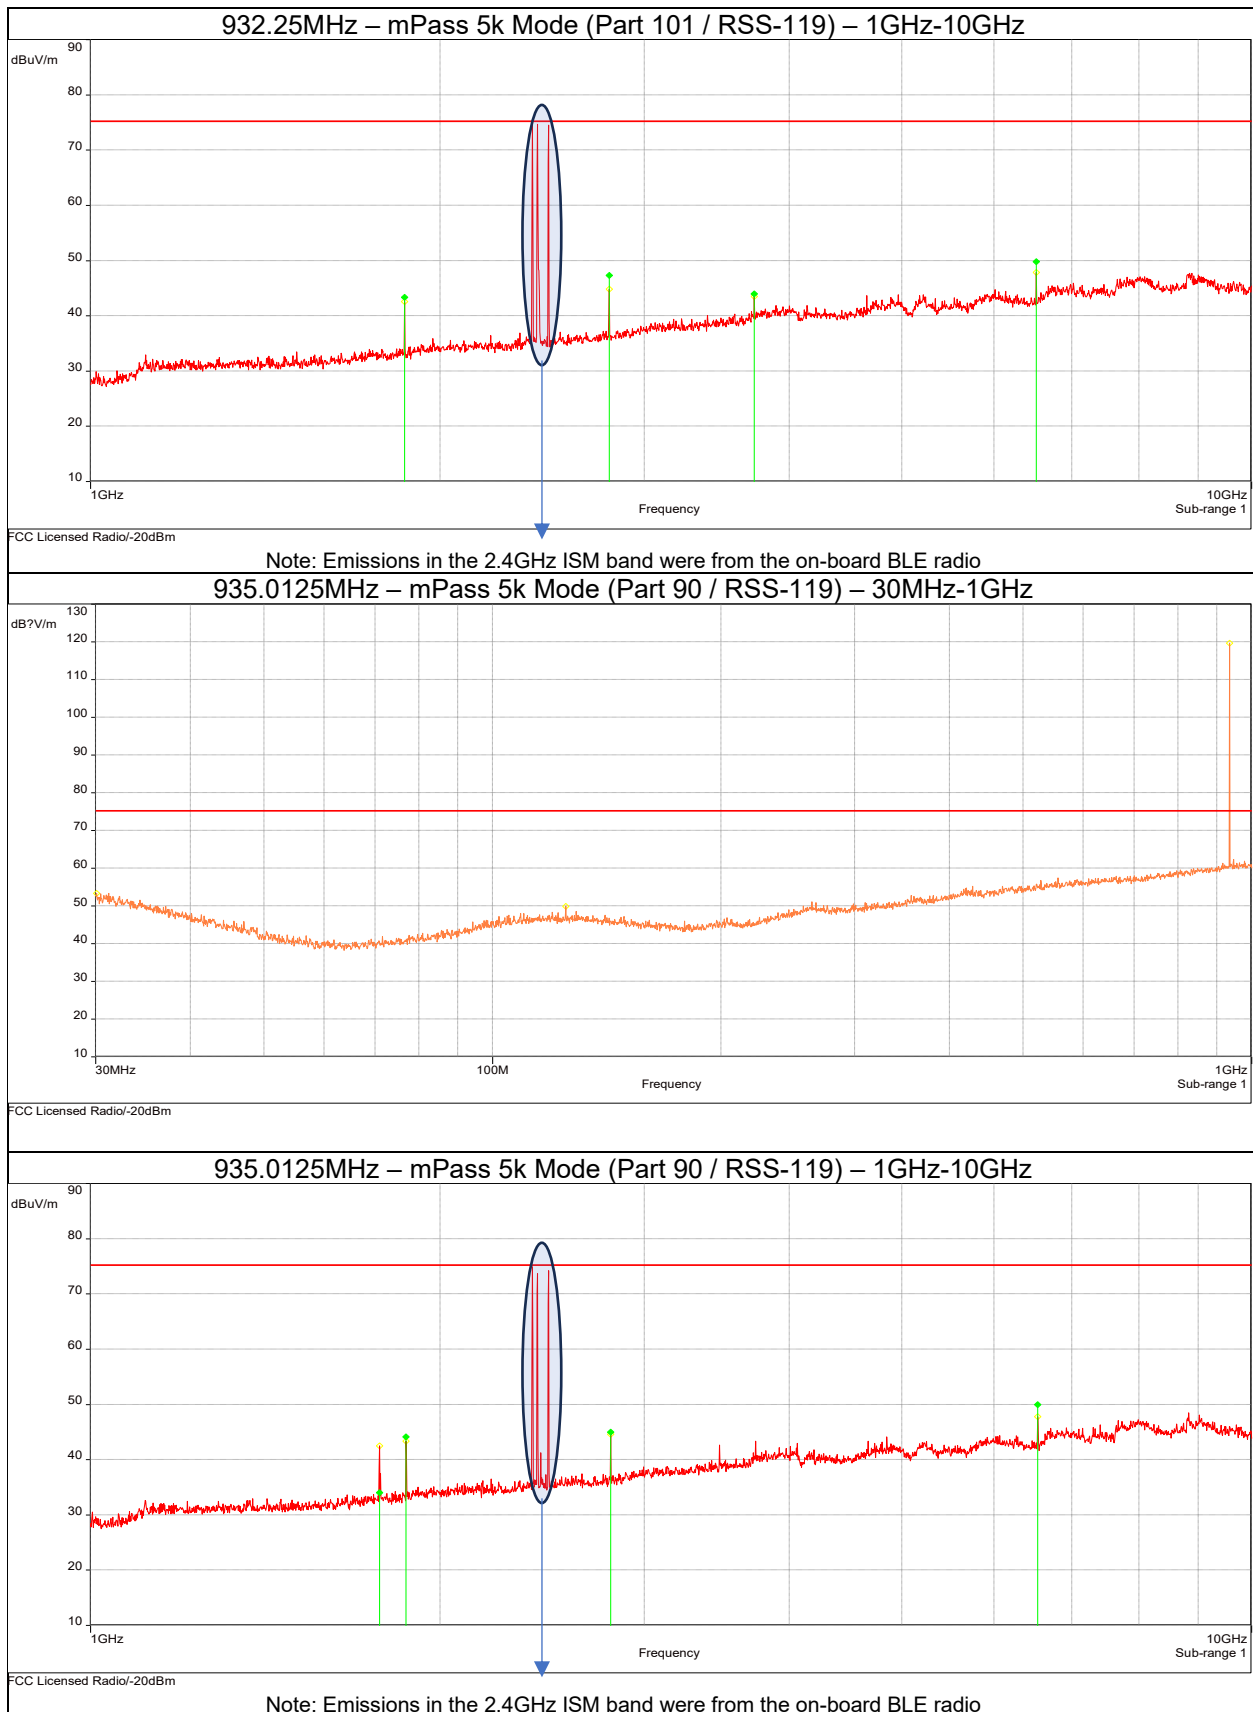

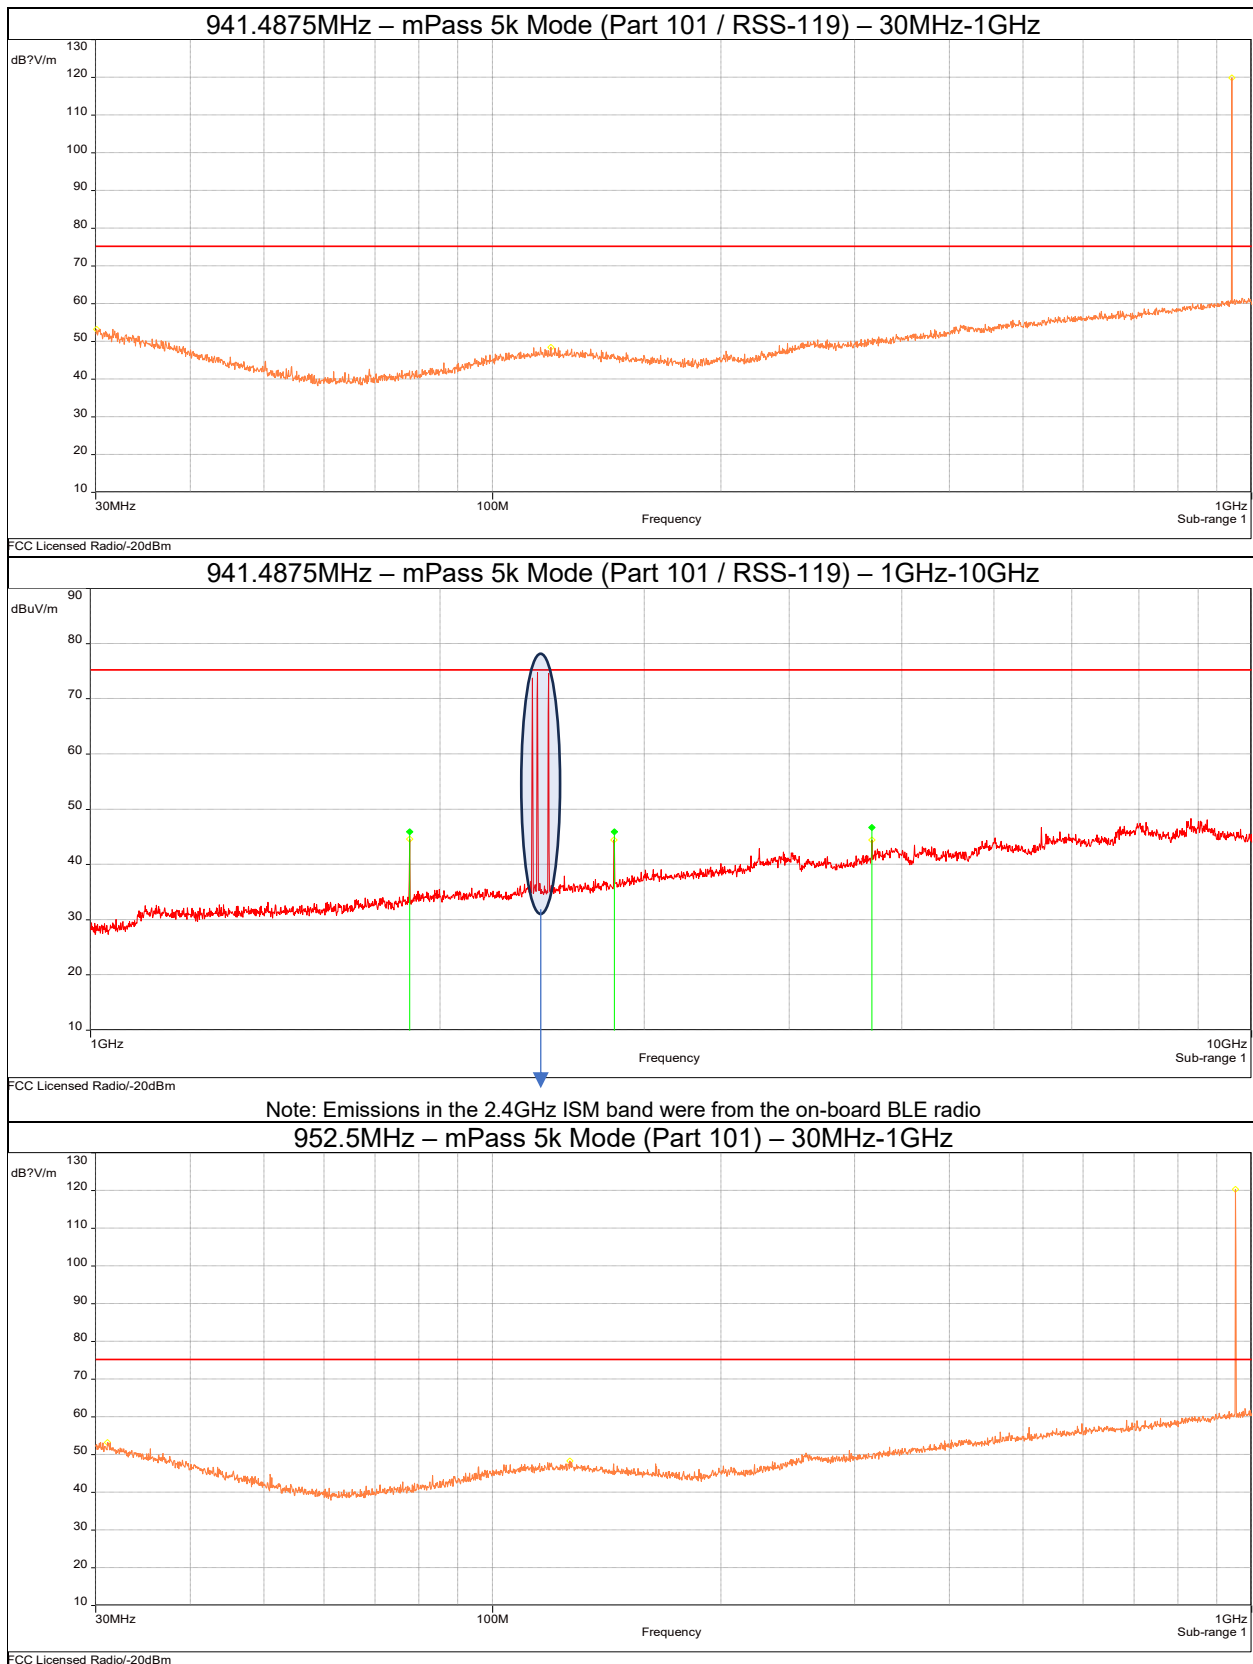

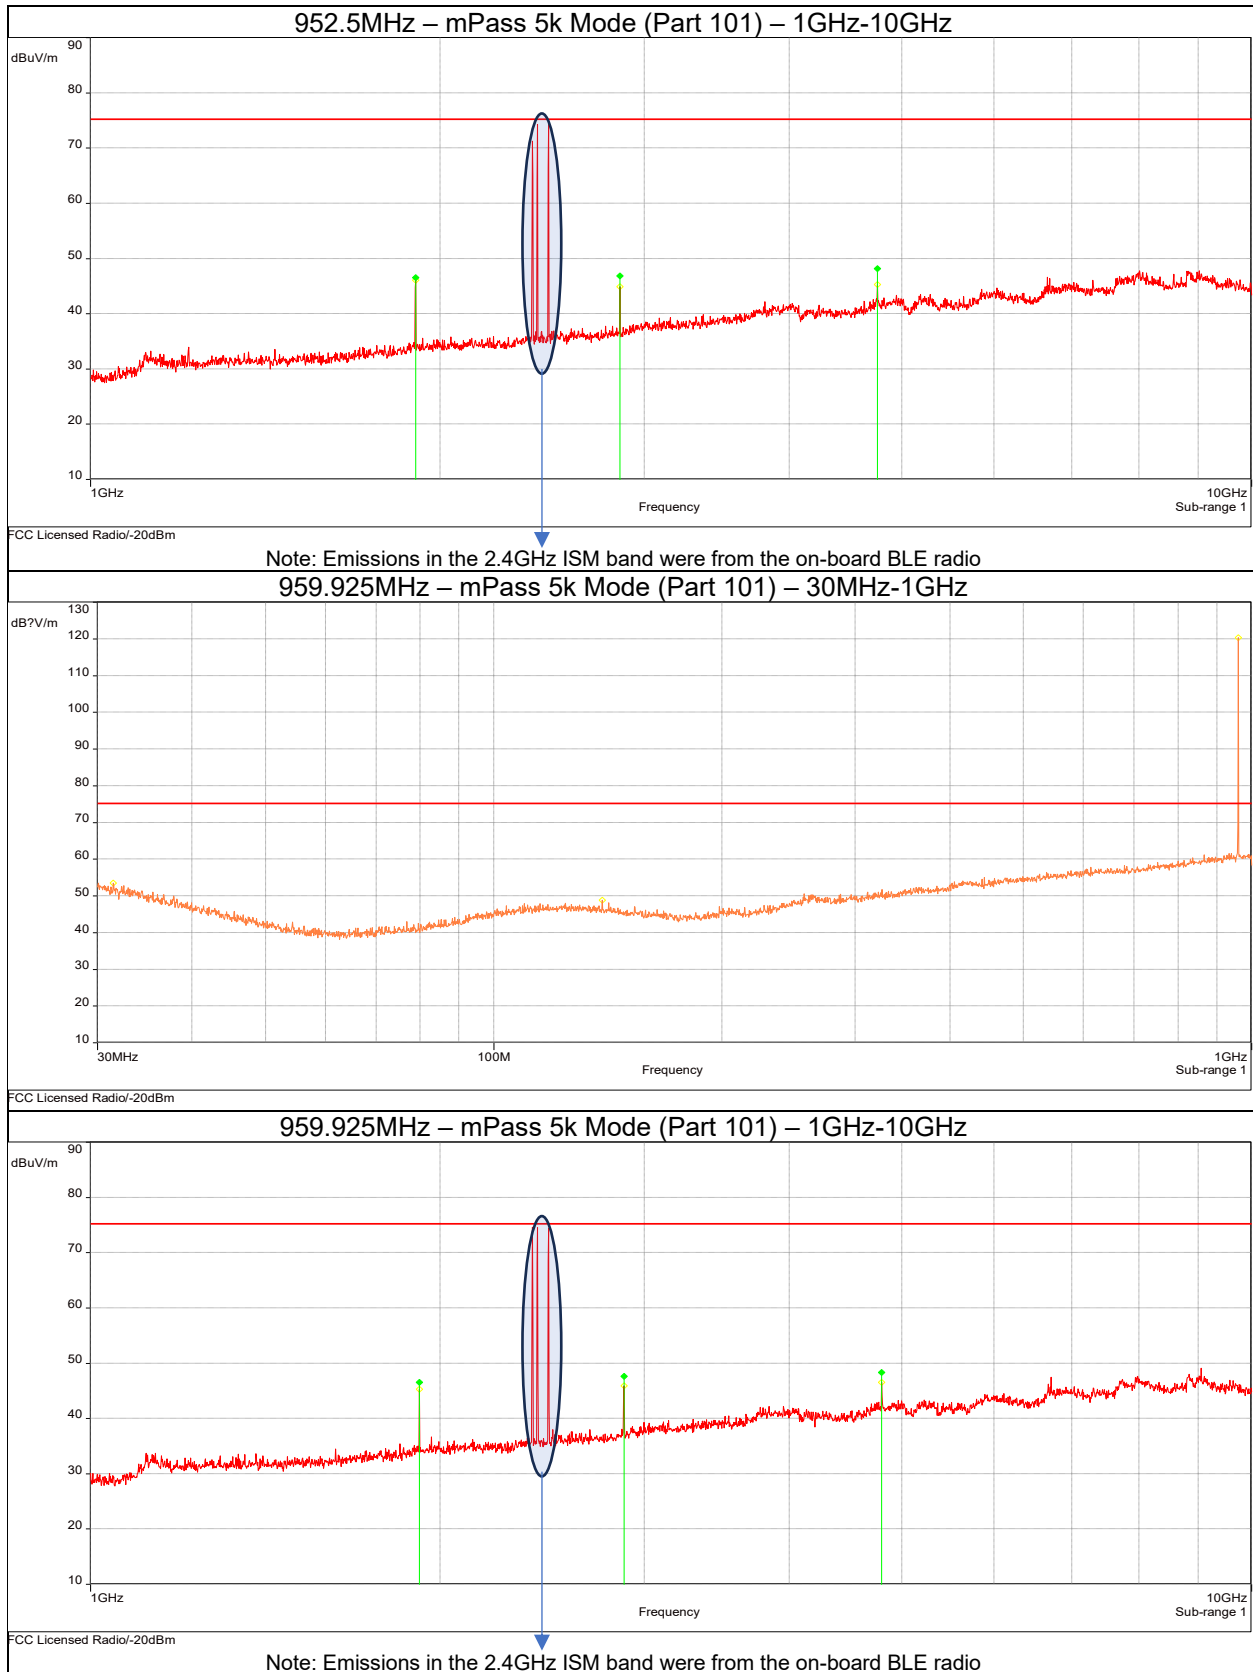

| Tabular Data |                    |                 |                |                   |                         |                       |            |             |             |
|--------------|--------------------|-----------------|----------------|-------------------|-------------------------|-----------------------|------------|-------------|-------------|
| Mode         | TX Frequency (MHz) | Frequency (MHz) | Reading (dBμV) | Correction (dB/m) | Field Strength (dBμV/m) | Free Space Conversion | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| mPass 5k     | 896.0125           | 1711.108        | 45.51          | -12.29            | 33.22                   | 95.2                  | -61.98     | -20         | -41.98      |
| mPass 5k     | 896.0125           | 1728.671        | 45.49          | -12.04            | 33.45                   | 95.2                  | -61.75     | -20         | -41.75      |
| mPass 5k     | 896.0125           | 1792.029        | 53.69          | -11.88            | 41.81                   | 95.2                  | -53.39     | -20         | -33.39      |
| mPass 5k     | 896.0125           | 2688.037        | 57.74          | -9.93             | 47.81                   | 95.2                  | -47.39     | -20         | -27.39      |
| mPass 5k     | 896.0125           | 6272.096        | 54.37          | -2.62             | 51.75                   | 95.2                  | -43.45     | -20         | -23.45      |
| mPass 5k     | 901.9875           | 1803.979        | 55.13          | -11.95            | 43.18                   | 95.2                  | -52.02     | -13         | -39.02      |
| mPass 5k     | 901.9875           | 2705.963        | 56.01          | -9.91             | 46.1                    | 95.2                  | -49.1      | -13         | -36.1       |
| mPass 5k     | 901.9875           | 4509.929        | 53.02          | -6.3              | 46.72                   | 95.2                  | -48.48     | -13         | -35.48      |
| mPass 5k     | 901.9875           | 6313.902        | 53.27          | -2.59             | 50.68                   | 95.2                  | -44.52     | -13         | -31.52      |
| mPass 5k     | 928.925            | 1857.851        | 54.34          | -11.44            | 42.9                    | 95.2                  | -52.3      | -20         | -32.3       |
| mPass 5k     | 928.925            | 2786.776        | 56.22          | -9.72             | 46.5                    | 95.2                  | -48.7      | -20         | -28.7       |
| mPass 5k     | 928.925            | 4851.488        | 46.69          | -5.33             | 41.36                   | 95.2                  | -53.84     | -20         | -33.84      |
| mPass 5k     | 928.925            | 4960.500        | 48.26          | -5.14             | 43.12                   | 95.2                  | -52.08     | -20         | -32.08      |
| mPass 5k     | 928.925            | 6502.486        | 52.52          | -2.62             | 49.9                    | 95.2                  | -45.3      | -20         | -25.3       |
| mPass 5k     | 930.5              | 1777.000        | 53.54          | -11.75            | 41.79                   | 95.2                  | -53.41     | -13         | -40.41      |
| mPass 5k     | 930.5              | 1861.005        | 55.76          | -11.42            | 44.34                   | 95.2                  | -50.86     | -13         | -37.86      |
| mPass 5k     | 930.5              | 2791.501        | 56.18          | -9.7              | 46.48                   | 95.2                  | -48.72     | -13         | -35.72      |
| mPass 5k     | 930.5              | 6513.488        | 52.84          | -2.58             | 50.26                   | 95.2                  | -44.94     | -13         | -31.94      |
| mPass 5k     | 932.25             | 1864.500        | 54.73          | -11.4             | 43.33                   | 95.2                  | -51.87     | -20         | -31.87      |
| mPass 5k     | 932.25             | 2796.751        | 56.98          | -9.68             | 47.3                    | 95.2                  | -47.9      | -20         | -27.9       |
| mPass 5k     | 932.25             | 3729.002        | 50.95          | -6.98             | 43.97                   | 95.2                  | -51.23     | -20         | -31.23      |
| mPass 5k     | 932.25             | 6525.761        | 52.35          | -2.54             | 49.81                   | 95.2                  | -45.39     | -20         | -25.39      |
| mPass 5k     | 935.0125           | 1773.914        | 45.74          | -11.72            | 34.02                   | 95.2                  | -61.18     | -20         | -41.18      |
| mPass 5k     | 935.0125           | 1870.025        | 55.48          | -11.36            | 44.12                   | 95.2                  | -51.08     | -20         | -31.08      |
| mPass 5k     | 935.0125           | 2805.037        | 54.64          | -9.64             | 45                      | 95.2                  | -50.2      | -20         | -30.2       |
| mPass 5k     | 935.0125           | 6545.099        | 52.44          | -2.48             | 49.96                   | 95.2                  | -45.24     | -20         | -25.24      |
| mPass 5k     | 941.4875           | 1882.975        | 57.16          | -11.22            | 45.94                   | 95.2                  | -49.26     | -20         | -29.26      |
| mPass 5k     | 941.4875           | 2824.463        | 55.53          | -9.57             | 45.96                   | 95.2                  | -49.24     | -20         | -29.24      |
| mPass 5k     | 941.4875           | 4707.446        | 52.37          | -5.7              | 46.67                   | 95.2                  | -48.53     | -20         | -28.53      |
| mPass 5k     | 952.5              | 1905.000        | 57.63          | -11.05            | 46.58                   | 95.2                  | -48.62     | -20         | -28.62      |
| mPass 5k     | 952.5              | 2857.494        | 56.33          | -9.5              | 46.83                   | 95.2                  | -48.37     | -20         | -28.37      |
| mPass 5k     | 952.5              | 4762.491        | 53.81          | -5.66             | 48.15                   | 95.2                  | -47.05     | -20         | -27.05      |
| mPass 5k     | 959.925            | 1919.848        | 57.61          | -11.05            | 46.56                   | 95.2                  | -48.64     | -20         | -28.64      |
| mPass 5k     | 959.925            | 2879.776        | 57.02          | -9.42             | 47.6                    | 95.2                  | -47.6      | -20         | -27.6       |
| mPass 5k     | 959.925            | 4799.633        | 53.93          | -5.6              | 48.33                   | 95.2                  | -46.87     | -20         | -26.87      |

Test Personnel: Jean Rene  
Jeremy Pickens  
Troy Ihle

Test Date: 05 - 06 January 2026

Ambient Temperature: 20.4 – 20.7°C

Reference Standard: ANSI C63.26

Relative Humidity: 43.4 – 48.5%

Atmospheric Pressure: 98.3 – 98.5kPa

Note: Only the worst-case modulation was evaluated for each band.

## 11 Frequency Stability

### 11.1 Method

The methods defined in ANSI C63.26, Section 5.6.3 were applied for measuring the Frequency Stability. The DUT was placed within a temperature chamber, and the antenna port was connected directly to a spectrum analyzer through a cable and attenuator. For each band tested, the DUT was configured to transmit a CW signal. Frequency measurements were made over the temperature range -30°C to +50°C. The nominal operating voltage was 5.9Vdc, so frequency was also measured at 85% and 115% of the nominal voltage at +20°C. For each temperature measured, a period of time sufficient to stabilize all components was allowed.

#### TEST SITE: RF Bench

The RF bench consists of a Rohde & Schwarz TS8997 automated test system coupled with a temperature/humidity environmental chamber. Where applicable, 2.4 and 5GHz radio measurements are automated using the Rohde & Schwarz EMC32 test software. The TS8997 system houses a switch matrix (OSP), along with a spectrum analyzer, vector network analyzer, and analog signal generator.

### 11.2 Test Equipment

| Asset     | Description                        | Manufacturer    | Model        | Serial       | Cal Date   | Cal Due    |
|-----------|------------------------------------|-----------------|--------------|--------------|------------|------------|
| 211992    | Digital thermometer - Two channel. | General Tool    | DT80-2       | 140402566    | 02/27/2025 | 02/27/2026 |
| 213502    | Spectrum Analyzer (2Hz-43.5GHz)    | Rohde & Schwarz | FSW43        | 102972       | 08/01/2024 | 08/01/2026 |
| 213505    | Temperature/Humidity Chamber       | Sanwood         | SMC-64-LL    | 10301        | VBU        | VBU        |
| 213503-01 | Megaphase                          | OSP DUT Cable 1 | KC12-K1K1-80 | 20815001 001 | VBU        | VBU        |
| 213507-10 | 10dB SMA Attenuator                | Tojoin          | 10dB         | 241120       | VBU        | VBU        |


#### Software Utilized

| Name  | Manufacturer    | Version  |
|-------|-----------------|----------|
| EMC32 | Rohde & Schwarz | 11.70.00 |

### 11.3 Results

The sample tested was found to Comply.


# 11.4 Test Data

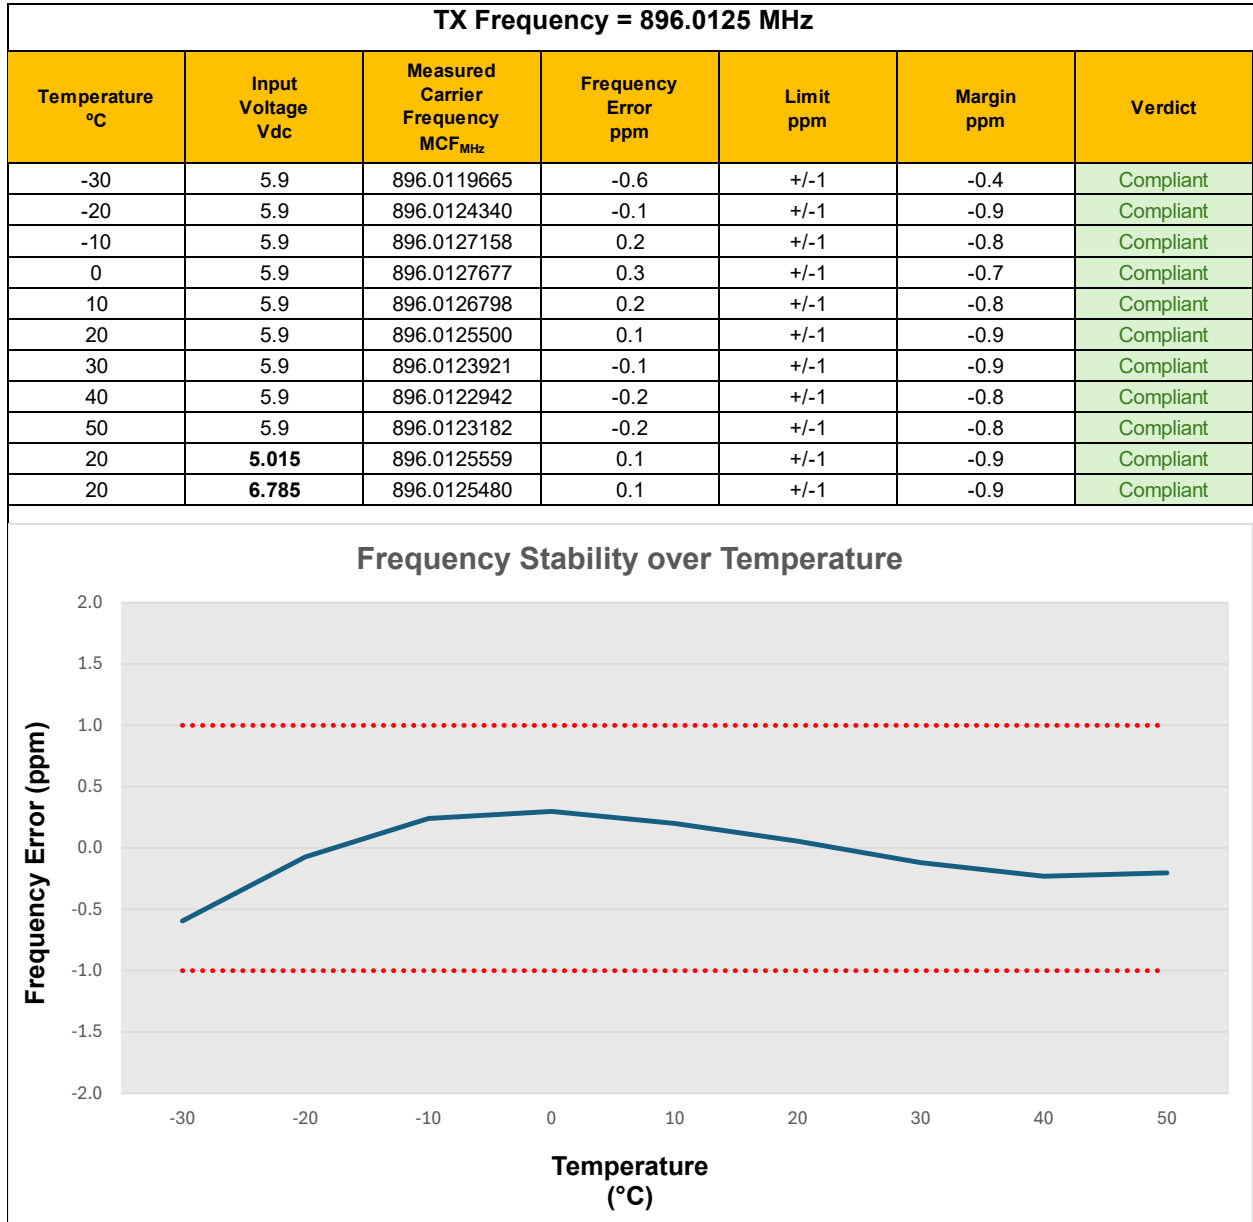

## TX Frequency = 901.9875 MHz

| Temperature °C | Input Voltage Vdc | Measured Carrier Frequency MCF <sub>MHz</sub> | Frequency Error ppm | Limit ppm | Margin ppm | Verdict   |
|----------------|-------------------|-----------------------------------------------|---------------------|-----------|------------|-----------|
| -30            | 5.9               | 901.9868127                                   | -0.8                | +/-1      | -0.2       | Compliant |
| -20            | 5.9               | 901.9872346                                   | -0.3                | +/-1      | -0.7       | Compliant |
| -10            | 5.9               | 901.9875394                                   | 0.0                 | +/-1      | -1.0       | Compliant |
| 0              | 5.9               | 901.9874397                                   | -0.1                | +/-1      | -0.9       | Compliant |
| 10             | 5.9               | 901.9874432                                   | -0.1                | +/-1      | -0.9       | Compliant |
| 20             | 5.9               | 901.9873038                                   | -0.2                | +/-1      | -0.8       | Compliant |
| 30             | 5.9               | 901.9871245                                   | -0.4                | +/-1      | -0.6       | Compliant |
| 40             | 5.9               | 901.9870667                                   | -0.5                | +/-1      | -0.5       | Compliant |
| 50             | 5.9               | 901.9872265                                   | -0.3                | +/-1      | -0.7       | Compliant |
| 20             | <b>5.015</b>      | 901.9873088                                   | -0.2                | +/-1      | -0.8       | Compliant |
| 20             | <b>6.785</b>      | 901.9873053                                   | -0.2                | +/-1      | -0.8       | Compliant |


Frequency Stability over Temperature

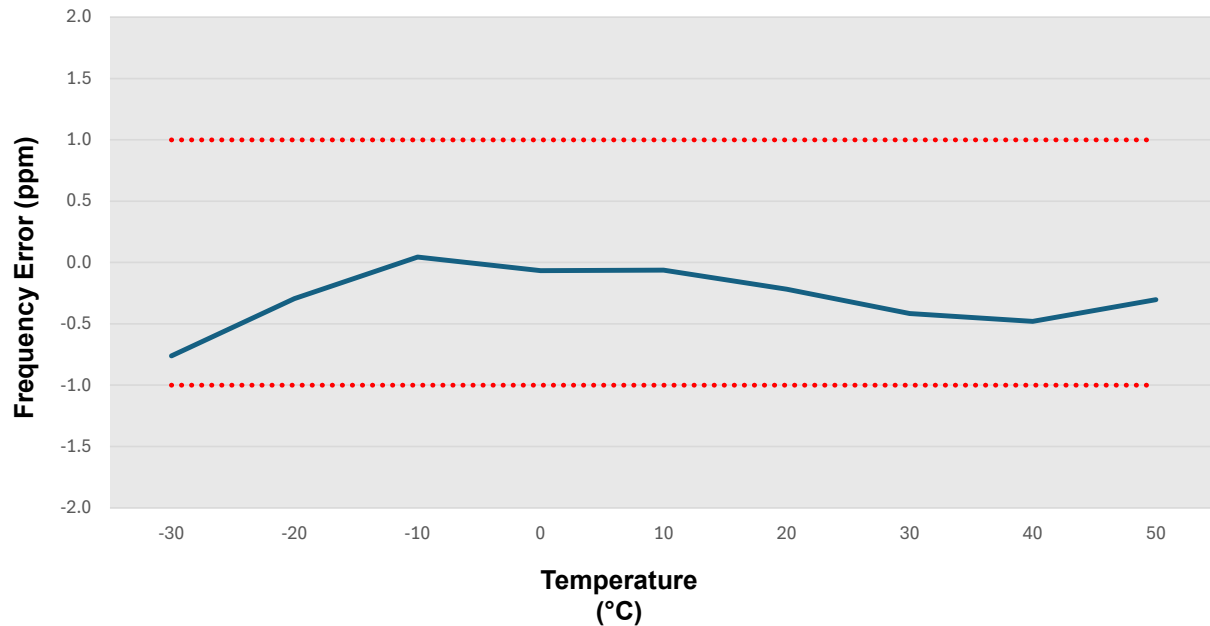

## TX Frequency = 928.925 MHz

| Temperature °C | Input Voltage Vdc | Measured Carrier Frequency MCF <sub>MHz</sub> | Frequency Error ppm | Limit ppm | Margin ppm | Verdict   |
|----------------|-------------------|-----------------------------------------------|---------------------|-----------|------------|-----------|
| -30            | 5.9               | 928.9244460                                   | -0.6                | +/-1      | -0.4       | Compliant |
| -20            | 5.9               | 928.9248920                                   | -0.1                | +/-1      | -0.9       | Compliant |
| -10            | 5.9               | 928.9251818                                   | 0.2                 | +/-1      | -0.8       | Compliant |
| 0              | 5.9               | 928.9252557                                   | 0.3                 | +/-1      | -0.7       | Compliant |
| 10             | 5.9               | 928.9251638                                   | 0.2                 | +/-1      | -0.8       | Compliant |
| 20             | 5.9               | 928.9250360                                   | 0.0                 | +/-1      | -1.0       | Compliant |
| 30             | 5.9               | 928.9248641                                   | -0.1                | +/-1      | -0.9       | Compliant |
| 40             | 5.9               | 928.9247622                                   | -0.3                | +/-1      | -0.7       | Compliant |
| 50             | 5.9               | 928.9247802                                   | -0.2                | +/-1      | -0.8       | Compliant |
| 20             | <b>5.015</b>      | 928.9250400                                   | 0.0                 | +/-1      | -1.0       | Compliant |
| 20             | <b>6.785</b>      | 928.9250320                                   | 0.0                 | +/-1      | -1.0       | Compliant |


Frequency Stability over Temperature

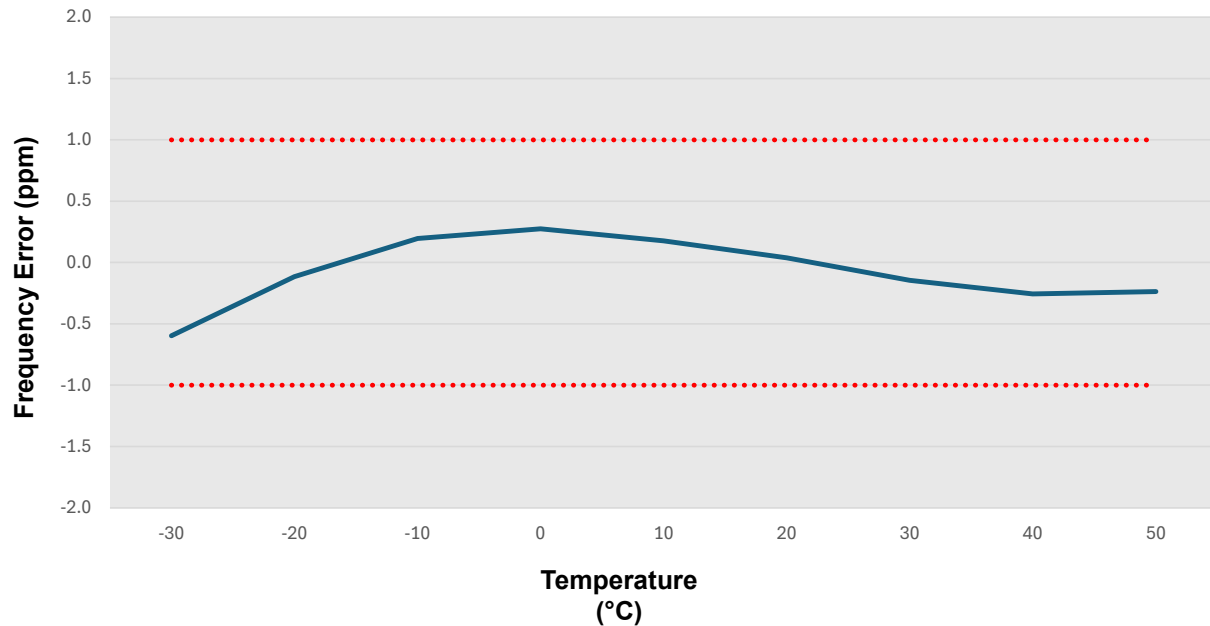

## TX Frequency = 930.5 MHz

| Temperature °C | Input Voltage Vdc | Measured Carrier Frequency MCF <sub>MHz</sub> | Frequency Error ppm | Limit ppm | Margin ppm | Verdict   |
|----------------|-------------------|-----------------------------------------------|---------------------|-----------|------------|-----------|
| -30            | 5.9               | 930.4994565                                   | -0.6                | +/-1      | -0.4       | Compliant |
| -20            | 5.9               | 930.4998960                                   | -0.1                | +/-1      | -0.9       | Compliant |
| -10            | 5.9               | 930.5001838                                   | 0.2                 | +/-1      | -0.8       | Compliant |
| 0              | 5.9               | 930.5002478                                   | 0.3                 | +/-1      | -0.7       | Compliant |
| 10             | 5.9               | 930.5001538                                   | 0.2                 | +/-1      | -0.8       | Compliant |
| 20             | 5.9               | 930.5000320                                   | 0.0                 | +/-1      | -1.0       | Compliant |
| 30             | 5.9               | 930.4998541                                   | -0.2                | +/-1      | -0.8       | Compliant |
| 40             | 5.9               | 930.4997522                                   | -0.3                | +/-1      | -0.7       | Compliant |
| 50             | 5.9               | 930.4997842                                   | -0.2                | +/-1      | -0.8       | Compliant |
| 20             | <b>5.015</b>      | 930.5000320                                   | 0.0                 | +/-1      | -1.0       | Compliant |
| 20             | <b>6.785</b>      | 930.5000280                                   | 0.0                 | +/-1      | -1.0       | Compliant |


## Frequency Stability over Temperature

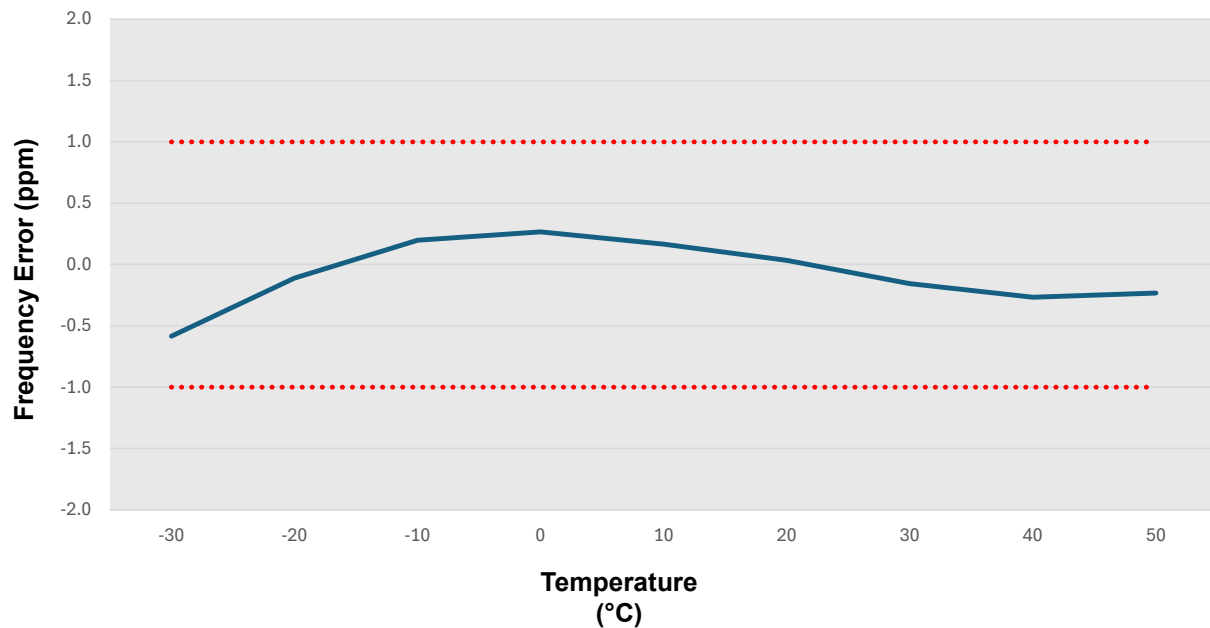

## TX Frequency = 932.25 MHz

| Temperature °C | Input Voltage Vdc | Measured Carrier Frequency MCF <sub>MHz</sub> | Frequency Error ppm | Limit ppm | Margin ppm | Verdict   |
|----------------|-------------------|-----------------------------------------------|---------------------|-----------|------------|-----------|
| -30            | 5.9               | 932.2494326                                   | -0.6                | +/-1      | -0.4       | Compliant |
| -20            | 5.9               | 932.2498840                                   | -0.1                | +/-1      | -0.9       | Compliant |
| -10            | 5.9               | 932.2501658                                   | 0.2                 | +/-1      | -0.8       | Compliant |
| 0              | 5.9               | 932.2502418                                   | 0.3                 | +/-1      | -0.7       | Compliant |
| 10             | 5.9               | 932.2501459                                   | 0.2                 | +/-1      | -0.8       | Compliant |
| 20             | 5.9               | 932.2500240                                   | 0.0                 | +/-1      | -1.0       | Compliant |
| 30             | 5.9               | 932.2498442                                   | -0.2                | +/-1      | -0.8       | Compliant |
| 40             | 5.9               | 932.2497423                                   | -0.3                | +/-1      | -0.7       | Compliant |
| 50             | 5.9               | 932.2497762                                   | -0.2                | +/-1      | -0.8       | Compliant |
| 20             | 5.015             | 932.2500220                                   | 0.0                 | +/-1      | -1.0       | Compliant |
| 20             | 6.785             | 932.2500180                                   | 0.0                 | +/-1      | -1.0       | Compliant |


Frequency Stability over Temperature

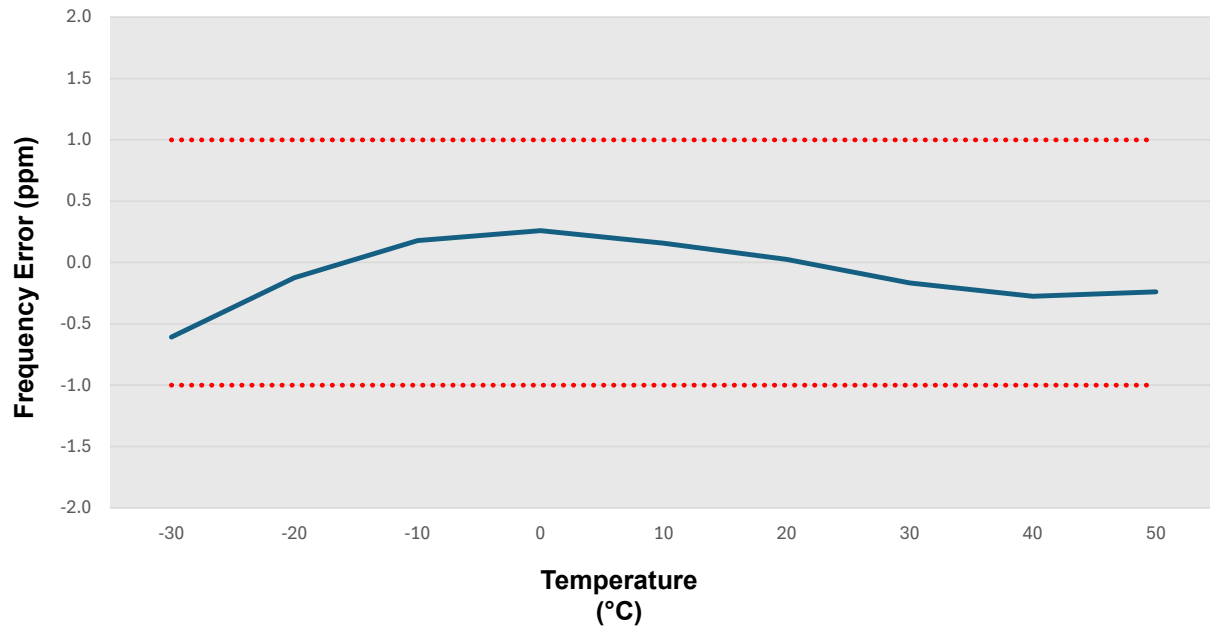


## TX Frequency = 935.0125 MHz

| Temperature °C | Input Voltage Vdc | Measured Carrier Frequency MCF <sub>MHz</sub> | Frequency Error ppm | Limit ppm | Margin ppm | Verdict   |
|----------------|-------------------|-----------------------------------------------|---------------------|-----------|------------|-----------|
| -30            | 5.9               | 935.0119346                                   | -0.6                | +/-1      | -0.4       | Compliant |
| -20            | 5.9               | 935.0123560                                   | -0.2                | +/-1      | -0.8       | Compliant |
| -10            | 5.9               | 935.0126638                                   | 0.2                 | +/-1      | -0.8       | Compliant |
| 0              | 5.9               | 935.0127378                                   | 0.3                 | +/-1      | -0.7       | Compliant |
| 10             | 5.9               | 935.0126419                                   | 0.2                 | +/-1      | -0.8       | Compliant |
| 20             | 5.9               | 935.0125220                                   | 0.0                 | +/-1      | -1.0       | Compliant |
| 30             | 5.9               | 935.0123402                                   | -0.2                | +/-1      | -0.8       | Compliant |
| 40             | 5.9               | 935.0122383                                   | -0.3                | +/-1      | -0.7       | Compliant |
| 50             | 5.9               | 935.0122702                                   | -0.2                | +/-1      | -0.8       | Compliant |
| 20             | <b>5.015</b>      | 935.0125200                                   | 0.0                 | +/-1      | -1.0       | Compliant |
| 20             | <b>6.785</b>      | 935.0125180                                   | 0.0                 | +/-1      | -1.0       | Compliant |

## Frequency Stability over Temperature

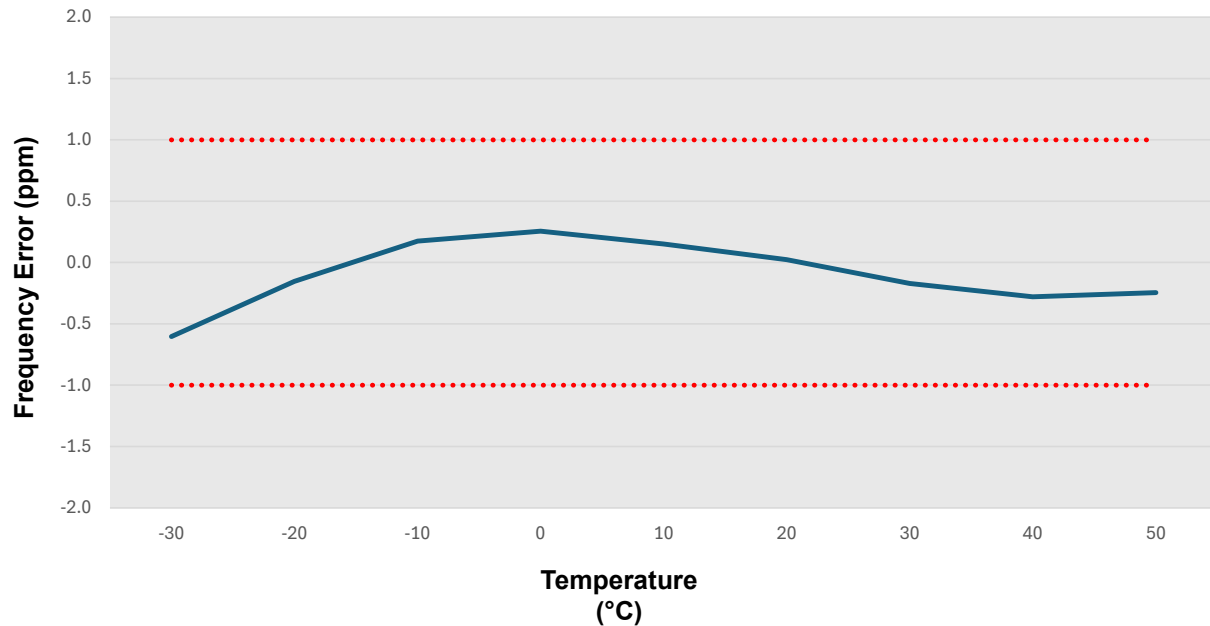


| TX Frequency = 941.4875 MHz |                   |                                               |                     |           |            |           |
|-----------------------------|-------------------|-----------------------------------------------|---------------------|-----------|------------|-----------|
| Temperature °C              | Input Voltage Vdc | Measured Carrier Frequency MCF <sub>MHz</sub> | Frequency Error ppm | Limit ppm | Margin ppm | Verdict   |
| -30                         | 5.9               | 941.4869026                                   | -0.6                | +/-1      | -0.4       | Compliant |
| -20                         | 5.9               | 941.4873500                                   | -0.2                | +/-1      | -0.8       | Compliant |
| -10                         | 5.9               | 941.4876399                                   | 0.1                 | +/-1      | -0.9       | Compliant |
| 0                           | 5.9               | 941.4877078                                   | 0.2                 | +/-1      | -0.8       | Compliant |
| 10                          | 5.9               | 941.4876119                                   | 0.1                 | +/-1      | -0.9       | Compliant |
| 20                          | 5.9               | 941.4874900                                   | 0.0                 | +/-1      | -1.0       | Compliant |
| 30                          | 5.9               | 941.4873082                                   | -0.2                | +/-1      | -0.8       | Compliant |
| 40                          | 5.9               | 941.4872063                                   | -0.3                | +/-1      | -0.7       | Compliant |
| 50                          | 5.9               | 941.4872403                                   | -0.3                | +/-1      | -0.7       | Compliant |
| 20                          | <b>5.015</b>      | 941.4874920                                   | 0.0                 | +/-1      | -1.0       | Compliant |
| 20                          | <b>6.785</b>      | 941.4874860                                   | 0.0                 | +/-1      | -1.0       | Compliant |

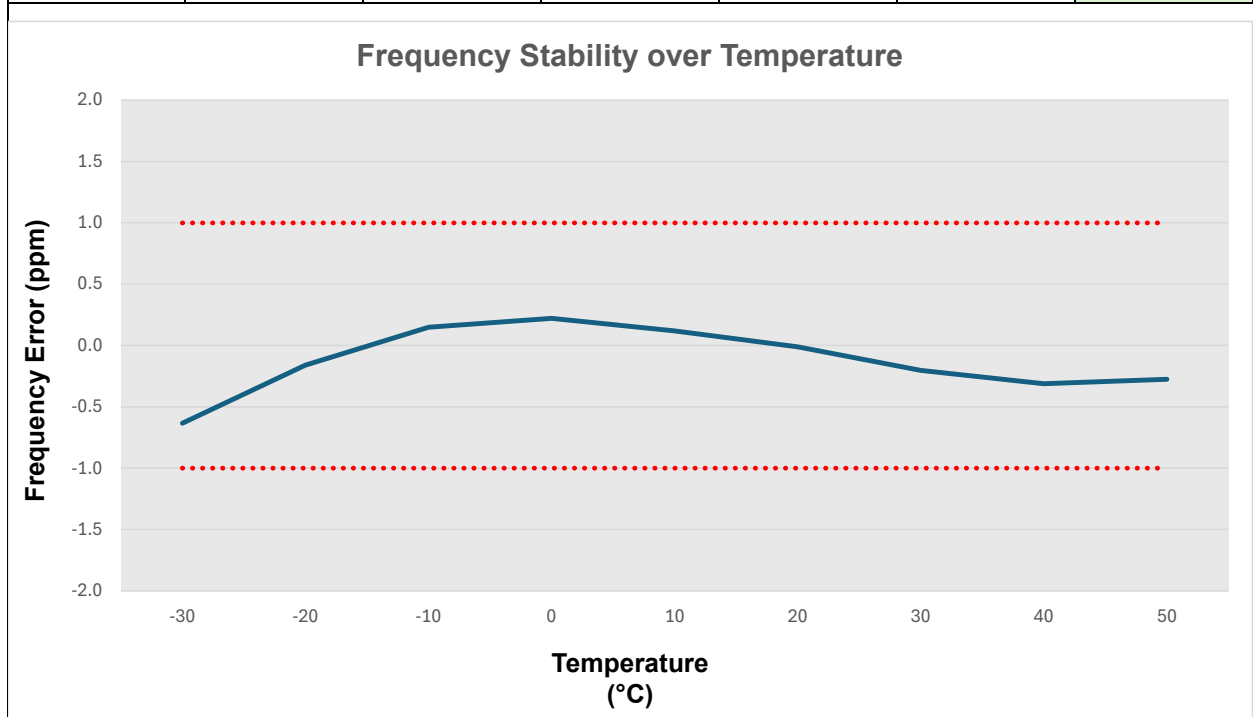


## TX Frequency = 952.5 MHz

| Temperature °C | Input Voltage Vdc | Measured Carrier Frequency MCF <sub>MHz</sub> | Frequency Error ppm | Limit ppm | Margin ppm | Verdict   |
|----------------|-------------------|-----------------------------------------------|---------------------|-----------|------------|-----------|
| -30            | 5.9               | 952.4994486                                   | -0.6                | +/-1      | -0.4       | Compliant |
| -20            | 5.9               | 952.4998960                                   | -0.1                | +/-1      | -0.9       | Compliant |
| -10            | 5.9               | 952.5001878                                   | 0.2                 | +/-1      | -0.8       | Compliant |
| 0              | 5.9               | 952.5002637                                   | 0.3                 | +/-1      | -0.7       | Compliant |
| 10             | 5.9               | 952.5001658                                   | 0.2                 | +/-1      | -0.8       | Compliant |
| 20             | 5.9               | 952.5000360                                   | 0.0                 | +/-1      | -1.0       | Compliant |
| 30             | 5.9               | 952.4998560                                   | -0.2                | +/-1      | -0.8       | Compliant |
| 40             | 5.9               | 952.4997522                                   | -0.3                | +/-1      | -0.7       | Compliant |
| 50             | 5.9               | 952.4997882                                   | -0.2                | +/-1      | -0.8       | Compliant |
| 20             | <b>5.015</b>      | 952.5000380                                   | 0.0                 | +/-1      | -1.0       | Compliant |
| 20             | <b>6.785</b>      | 952.5000340                                   | 0.0                 | +/-1      | -1.0       | Compliant |

## Frequency Stability over Temperature

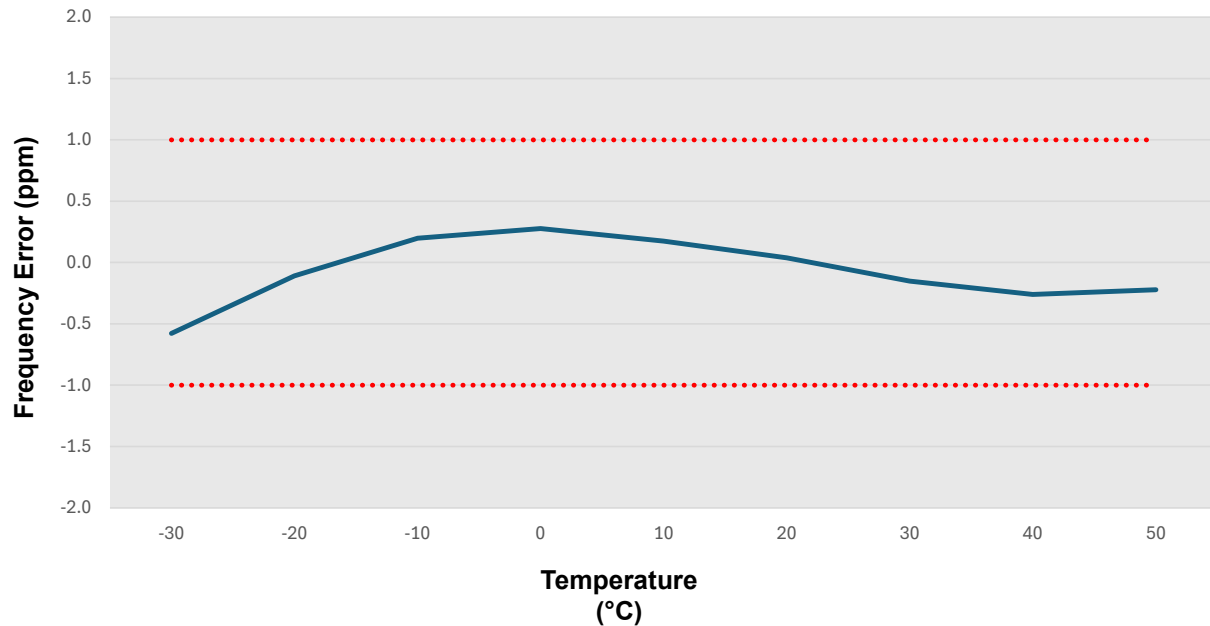

| TX Frequency = 959.925 MHz |                   |                                               |                     |           |            |           |
|----------------------------|-------------------|-----------------------------------------------|---------------------|-----------|------------|-----------|
| Temperature °C             | Input Voltage Vdc | Measured Carrier Frequency MCF <sub>MHz</sub> | Frequency Error ppm | Limit ppm | Margin ppm | Verdict   |
| -30                        | 5.9               | 959.9244246                                   | -0.6                | +/-1      | -0.4       | Compliant |
| -20                        | 5.9               | 959.9248500                                   | -0.2                | +/-1      | -0.8       | Compliant |
| -10                        | 5.9               | 959.9251459                                   | 0.2                 | +/-1      | -0.8       | Compliant |
| 0                          | 5.9               | 959.9252118                                   | 0.2                 | +/-1      | -0.8       | Compliant |
| 10                         | 5.9               | 959.9251219                                   | 0.1                 | +/-1      | -0.9       | Compliant |
| 20                         | 5.9               | 959.9249580                                   | 0.0                 | +/-1      | -1.0       | Compliant |
| 30                         | 5.9               | 959.9248060                                   | -0.2                | +/-1      | -0.8       | Compliant |
| 40                         | 5.9               | 959.9246983                                   | -0.3                | +/-1      | -0.7       | Compliant |
| 50                         | 5.9               | 959.9247283                                   | -0.3                | +/-1      | -0.7       | Compliant |
| 20                         | <b>5.015</b>      | 959.9249760                                   | 0.0                 | +/-1      | -1.0       | Compliant |
| 20                         | <b>6.785</b>      | 959.9249820                                   | 0.0                 | +/-1      | -1.0       | Compliant |

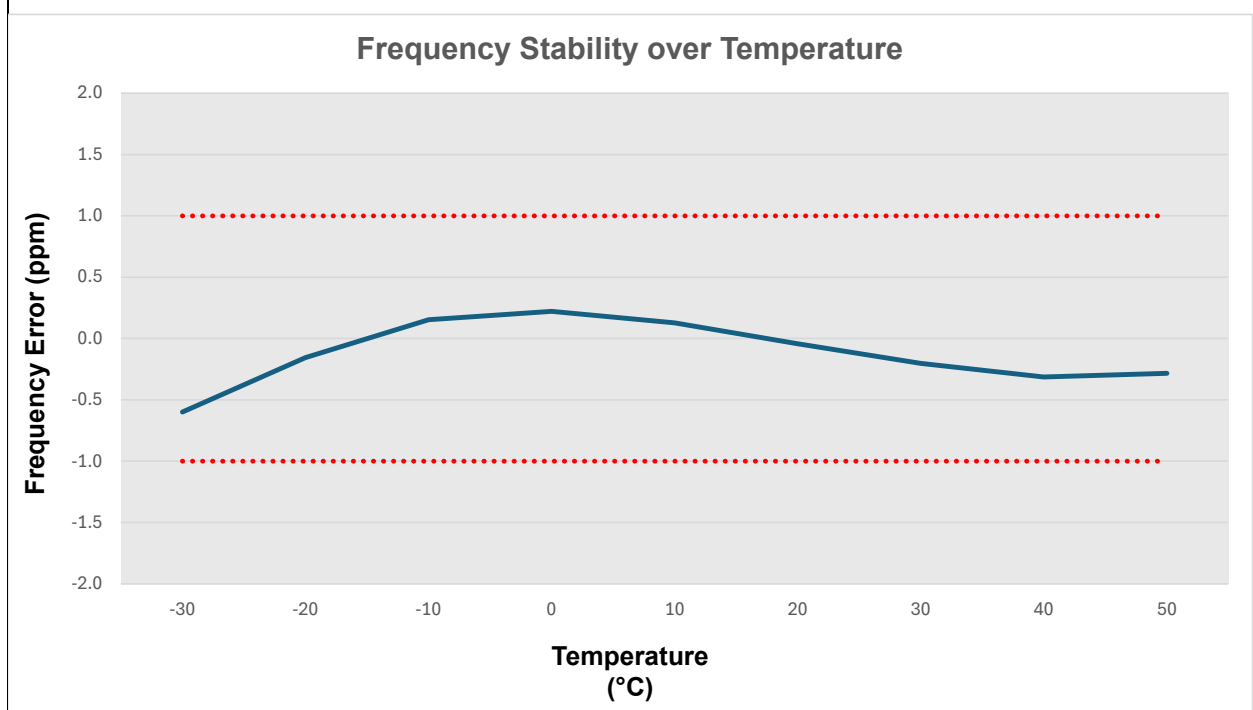

Test Personnel: Jeremy Pickens 

Test Date: 02 January 2026

Ambient Temperature: 20.2°C

Reference Standard: ANSI C63.26

Relative Humidity: 38.2%

Atmospheric Pressure: 98.4kPa

**12 Measurement Uncertainty**

| <b>Parameter</b>                 | <b>Expanded Uncertainty for Normal k factor<br/>equal to 2</b> |
|----------------------------------|----------------------------------------------------------------|
| Radio Frequency                  | 0.07 PPM                                                       |
| Total RF Power (Conducted)       | 0.65 dB                                                        |
| Power Density (Conducted)        | 0.65 dB                                                        |
| RF Spurious (Conducted)          | 1.8 dB                                                         |
| Radiated Emissions (9kHz-30MHz)  | 4.7 dB                                                         |
| Radiated Emissions (30MHz-1GHz)  | 4.1 dB                                                         |
| Radiated Emissions (1GHz-18GHz)  | 4.5dB                                                          |
| Radiated Emissions (18GHz-40GHz) | 4.7 dB                                                         |
| AC Line Conducted Emissions      | 2.8 dB                                                         |
| Temperature                      | 0.7°                                                           |
| Humidity                         | 3.9%                                                           |

**13 Revision History**

| Revision Level | Date             | Prepared By | Reviewed By | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------|------------------|-------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0              | 09 January 2026  | JOP         | MC          | Original Issue                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 1              | 27 January 2026  | JOP         | MC          | <ul style="list-style-type: none"> <li>• Corrected calculations in 6.4 and 6.5 to reflect average measurements</li> <li>• Added missing emissions masks for 940.0125MHz and 896.0125MHz</li> <li>• Added missing OBW data for 896.0125MHz</li> <li>• Added RSS power limits to output power tables</li> <li>• Updated RSE calculations to match emissions table more clearly</li> <li>• Added clarification in plots showing emissions from the BLE radio</li> </ul> |
| 2              | 09 February 2026 | JOP         | MC          | <ul style="list-style-type: none"> <li>• Updated power measurements to enable IF triggering for ASK modulation and added additional sample plots.</li> <li>• Updated ASK mask plots to adjust the reference level appropriately.</li> </ul>                                                                                                                                                                                                                          |
|                |                  |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                |                  |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                |                  |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

**END OF REPORT**