



Certification Test Report

FCC ID: SDBEZL01

IC: 2220A-EZL01

FCC Rule Part: CFR 47 Part 24 Subpart D, Part 101 Subpart C
ISED Canada's Radio Standards Specification: RSS-119, RSS-134

TÜV SÜD Report Number: RD72129866.100

Applicant: Sensus Metering Systems, Inc.
Model: 5396390010001

Test Begin Date: July 24, 2017
Test End Date: September 18, 2017

Report Issue Date: September 20, 2017



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code AT-1921

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

Prepared by:

A handwritten signature in black ink, appearing to read "Jean Tezil".

Jean Tezil
EMC Engineer
TÜV SÜD America, Inc.

Reviewed by:

A handwritten signature in black ink, appearing to read "Randle Sherian".

Randle Sherian
EMC Manager
TÜV SÜD America, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of TÜV SÜD America Inc.. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 66 pages

Table of Contents

1.0 GENERAL -----	3
1.1 PURPOSE -----	3
1.2 PRODUCT DESCRIPTION -----	3
1.3 TEST METHODOLOGY -----	3
1.4 EMISSION DESIGNATORS -----	5
2.0 TEST FACILITIES -----	6
2.1 LOCATION -----	6
2.2 LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS -----	6
2.3 RADIATED & CONDUCTED EMISSIONS TEST SITE DESCRIPTION -----	7
3.0 APPLICABLE STANDARD REFERENCES -----	9
4.0 LIST OF TEST EQUIPMENT -----	10
5.0 SUPPORT EQUIPMENT -----	11
6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM -----	11
7.0 SUMMARY OF TESTS -----	12
7.1 RF POWER OUTPUT -----	12
7.2 OUT OF BAND UNWANTED EMISSIONS -----	13
7.3 99% BANDWIDTH -----	31
7.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS -----	40
7.5 FIELD STRENGTH OF SPURIOUS EMISSIONS -----	53
8.0 MEASUREMENT UNCERTAINTY -----	66
9.0 CONCLUSION -----	66

1.0 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 2 Subpart J, Part 24 Subpart D and Part 101 Subpart C of the FCC's Code of Federal Regulations, and ISSED Canada Radio Standards Specifications RSS-119 and RSS-134.

1.2 Product Description

The EasyLink is a Full Duplex Capable XCVR intended for use in drive-by applications. The device is intended to extend the capabilities of the existing Flexnet VGB to allow reading of Itron ERT endpoints. The device incorporates a Flexnet Collector and a ERT Collector into a single enclosure. The device also contains a pre-approved Bluetooth transceiver, FCC ID: T9J-RN42.

Flexnet Antenna: OMNI PCTEL MUF9115 / 3.41dBi

ERT Antenna: OMNI Laird B8965CN / 3dBi

Minimum antenna cable length: 12 Ft

Manufacturer Information:

Sensus Metering Systems, Inc.

639 Davis Drive

Morrisville, NC 27560

Test Sample Serial Numbers:

TX Radiated	RF Conducted/Frequency Stability
EZ111 (MAC ID: 0006667F1F1D)	EZ117 (MAC ID: 0006667F1D32)

Test Sample Condition: The test samples were provided in good working order with no visible defects.

1.3 Test Methodology

1.3.1 Configurations and Justification

The FLEXNET 900MHz transmitter was evaluated for radiated and RF conducted measurements for all modulation types. Where applicable, data is provided for the unit having the worst-case emissions.

The EUT was tested standalone, and a power supply was used to power the EUT.

The client provided software to exercise the EUT.

The FLEXNET 900MHz transceiver and the ERT transceiver are capable of simultaneous transmission. Therefore, an investigation of the intermodulation products has been performed and the results meet the requirements.

1.3.2 In-Band Testing Methodology

The EUT is designed to operate in multiple bands under the requirements of CFR 47 Parts 24 and 101. The following is a list of the frequency bands of operation sorted based on the FCC rule parts in which the band is associated.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)
24D	940.0 - 941.0
101	941.0 - 941.5
101	952.0 – 953.0
101	959.85 - 960.0
101	952-960

Based on the requirements set forth in accordance 47 CFR 2.1046-2.1057 as stated above, the methodology in selecting the places to test in the available bands of operation is outlined in the following table.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)	Location in the Range of Operation	Approx. Test Freq.
24D	940.0 - 941.0	1 near top and 1 near bottom	940.0125
101	941.0 - 941.5		941.4875
101	952.0 – 953.0	Middle	952.5000
101	959.85 – 960.0	Middle	959.9250
101	952-960	1 near top and 1 near bottom	952
			960

1.4 Emission Designators

The Easylink transmitter produces six distinct modulation types. The emission designators for the modulation types used by the Easylink transmitter calculated using the baud rate defined in the Theory of Operation are as follows:

EMISSIONS DESIGNATORS

Mode	Emission Designator	Modulation
MPass 4-FSK (10 kbps)	8K75F1D	4-FSK
MPass 4-FSK (20 kbps)	17K5F1D	4-FSK
MPass 2-FSK (12.5 kbps)	14K8F1D	2-FSK
MPass 2-FSK (5 kbps)	5K90F1D	2-FSK
MPass 2-FSK (10 kbps)	11K8F1D	2-FSK
ERT Wakeup Tone	11K0A2D	Tone

2.0 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

TÜV SÜD America Inc.
2320 Presidential Drive, Suite 101
Durham, NC 27703
Phone: (919) 381-4235

FCC Registered Test Site Number: 637011
ISED Canada Test Site Registration Number: 20446

2.2 Laboratory Accreditations/Recognitions/Certifications

TÜV SÜD America Inc. (Durham) is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board/ANAB accreditation program, and has been issued certificate number AT-1921 in recognition of this accreditation. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

2.3 Radiated & Conducted Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of an 18' x 28' x 18' shielded enclosure. The chamber is lined with Samwha Electronics Co. LTD Ferrite Absorber, model number SFA300 (HSN-1). The ferrite tile is 10cm x 10 cm and weighs approximately 1.4lbs. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber. On top of the ferrite tiles is DMAS HT-45 (Dutch Microwave Absorber Solutions) hybrid absorber on all walls except the wall behind the antenna mast which has a shorter DMAS HT-25 absorber.

The turntable is 1.50m in diameter and is located 150cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using short #6 copper wire. The turntable is an aluminum, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the turntable. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane.

Behind the turntable is a 2' x 6' x 1.5' deep shielded pit used for support equipment if necessary. The pit is equipped with 2 - 4" PVC chase from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

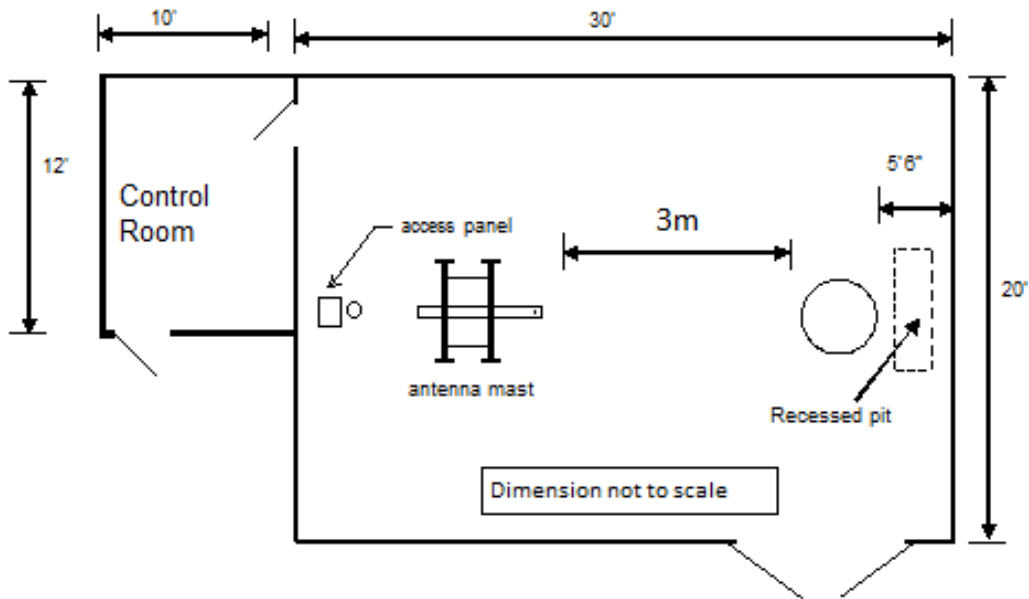


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

2.3.2 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 10' sheet galvanized steel horizontal ground reference plane (GRP) bonded every 6" to an 8' X 8' aluminum vertical ground plane.

A diagram of the room is shown below in figure 2.3.2-1:

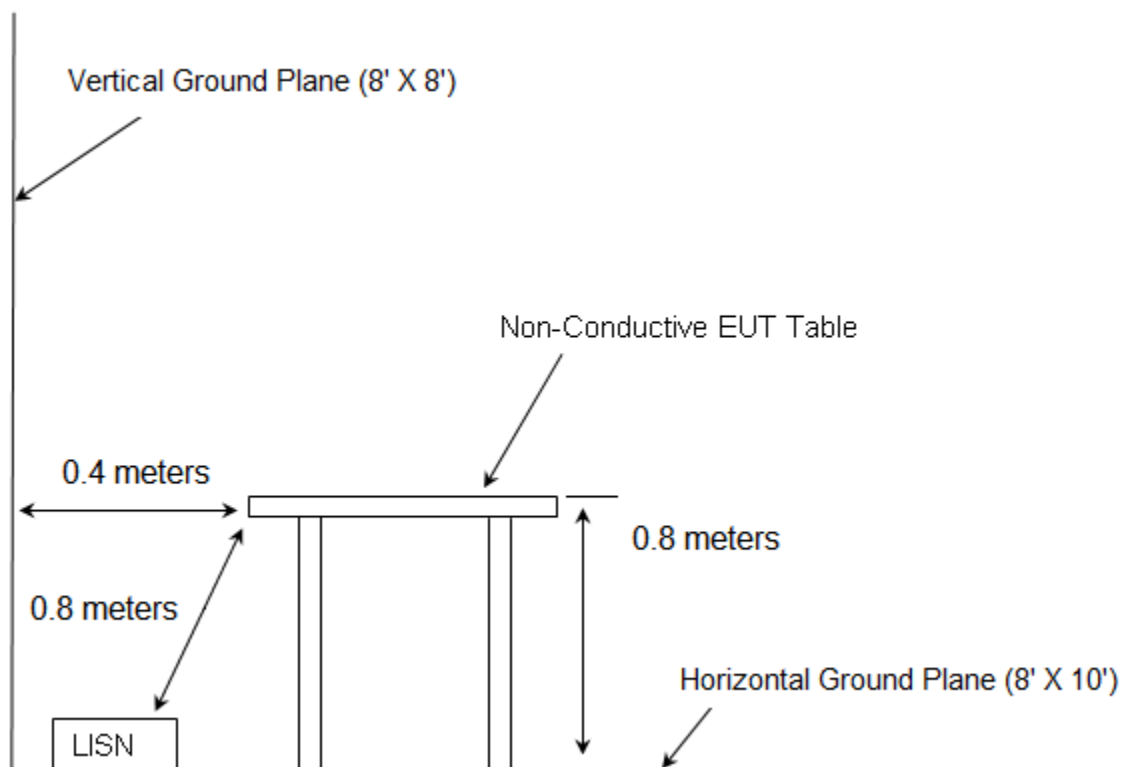


Figure 2.3.2-1: AC Mains Conducted EMI Site

3.0 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.26-2015: Compliance Testing of Transmitters Used in Licensed Radio Services
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures - 2017
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 24, Subpart D: Personal Communications Services – 2017
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 101, Subpart C: Fixed Microwave Services -2017
- ❖ ISED Canada Radio Standards Specification: RSS-119 - Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.41-960 MHz, Issue 12, May 2015
- ❖ ISED Canada Radio Standards Specification: RSS-134 - 900 MHz Narrow Band Personal Communication Service, Issue 2, February 2016
- ❖ ISED Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, November 2014.

4.0 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

Asset ID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
277	EMCO	93146	Antennas	9904-5199	9/12/2016	9/12/2018
426	Thermotron	S-8 Mini Max	Environmental Chamber	25-2888-10	7/14/2017	1/14/2018
626	EMCO	3110B	Antennas	9411-1945	3/21/2017	3/21/2019
3006	Rohde & Schwarz	TS-PR18	Amplifiers	122006	1/11/2017	1/11/2018
3008	Rohde & Schwarz	NRP2	Meter	103131	2/6/2017	2/6/2018
3009	Rohde & Schwarz	NRP-Z81	Meter	102397	2/6/2017	2/6/2018
3012	Rohde & Schwarz	EMC32-EB	Software	100731	NCR	NCR
3013	Agilent	53132A	Meters	MY40007729	1/11/2017	1/11/2018
3014	EMCO	3115	Antennas	9901-5653	3/3/2017	3/3/2019
3016	Fei Teng Wireless Technology	HA-07M18G-NF	Antennas	2013120203	1/26/2016	1/26/2018
3020	Rohde & Schwarz	SMB100A	Signal Generators	175943	1/10/2017	1/10/2018
3029	Micro-Tronics	HPM50108	Filter	134	1/13/2017	1/13/2018
3031	Hasco, Inc.	HLL335-S1-S1-96	Cables	3074	9/20/2016	9/20/2017
3038	Florida RF Labs	NMSE-290AW-60.0-NMSE	Cable Set	1448	1/3/2017	1/3/2018
3039	Florida RF Labs	NMSE-290AW-396.0-NMSE	Cable Set	1447	1/3/2017	1/3/2018
3042	Aeroflex Inmet	18N10W-10	Attenuator	1444	1/16/2017	1/16/2018
3045	Aeroflex Inmet	18N10W-20	Attenuator	1437	1/3/2017	1/3/2018
3054	Mountain View Cable	BMS-RG400-36.0-BMS	Cables	3054	1/3/2017	1/3/2018
3055	Rohde & Schwarz	3005	Cables	3055	1/3/2017	1/3/2018
3060	Weinschel Corp.	47-20-33	Attenuator	BJ0583	9/2/2015	9/2/2018
3072	ACS	3072	Electronic Load	ACS1	NCR	NCR
3073	ACS	3073	Electronic Load	ACS2	NCR	NCR
3085	Rohde & Schwarz	FSW43	Spectrum Analyzer	103997	6/9/2017	6/9/2018
RE619	Rhode & Schwarz	ESU26	Spectrum Analyzer	100190	5/12/2017	5/12/2019

NCR = No Calibration Required

Asset 3012: Software Version: EMC32-B is 9.15

Asset 3020: Firmware Rev: 2.20.382.113

Asset 3085: Instrument Firmware 2.41 SP1

5.0 SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Sensus	EASYLINK	EZ-111, EZ-117
2	Power Supply	Bk Precision	1694	258C12210

Table 5-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	Power	2.1 m	No	1 to 2
B	Power cord	1.8 m	No	2 to AC Mains

6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

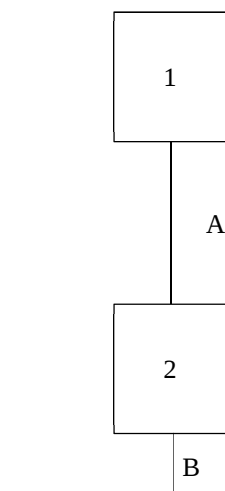


Figure 6-1: EUT Test Setup

7.0 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 RF Power Output

7.1.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.2.3.2)

The RF output of the equipment under test was directly connected to the input of a wide band RF power meter through 40dB of passive attenuation. The results are shown below.

Part 24.132, 101.113 (a), and ISED Canada RSS-134 4.3(a), (b) and RSS-119 5.4 – Power Output

7.1.2 Measurement Results

Performed by: Jean Tezil

Table 7.1.2-1: Peak Output Power - FlexNet

FCC Rule Part	Frequency (MHz)	Output Power High (dBm)	Output Power High (Watts)	Output Power Low (dBm)	Output Power Low (Watts)
24D	940.0125	37.13	5.16	32.17	1.65
101	941.4875	37.44	5.55	31.47	1.40
101	952.5000	38.07	6.41	32.06	1.61
101	959.9250	37.81	6.04	31.74	1.49

Table 7.1.2-1: Peak Output Power - ERT

FCC Rule Part	Frequency (MHz)	Output Power High (dBm)	Output Power High (Watts)	Output Power Low (dBm)	Output Power Low (Watts)
101	952	37.32	5.40	32.61	1.82
101	960	37.12	5.15	32.51	1.78

7.2 Out of Band Unwanted Emissions

7.2.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.7.3)

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through 40dB of passive attenuation. The spectrum analyzer resolution and video bandwidths were set to 300 Hz and 3000 Hz respectively. The internal correction factors of the spectrum analyzer were employed to correct for any cable or attenuator losses. Results of the test are shown below for all modes of operation.

7.2.2 Measurement Results – Emission Masks

Performed by: Jean Tezil

HIGH POWER

Part 24.133 a(1), a(2), ISED Canada RSS-134 4.4.1 (a), (b), 4.4.2 (a),(b) – Emission Limits

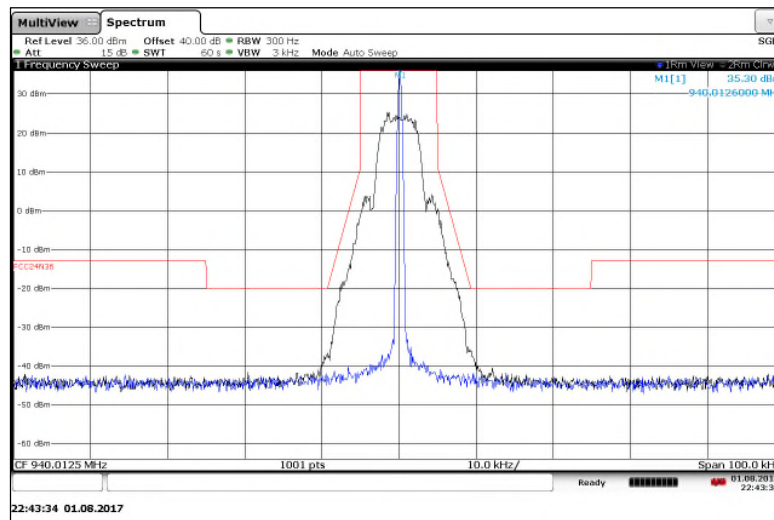


Figure 7.2.2-1: 940.0125 MHz – 12.5 kHz Channel Spacing – m2pass 5k Mode

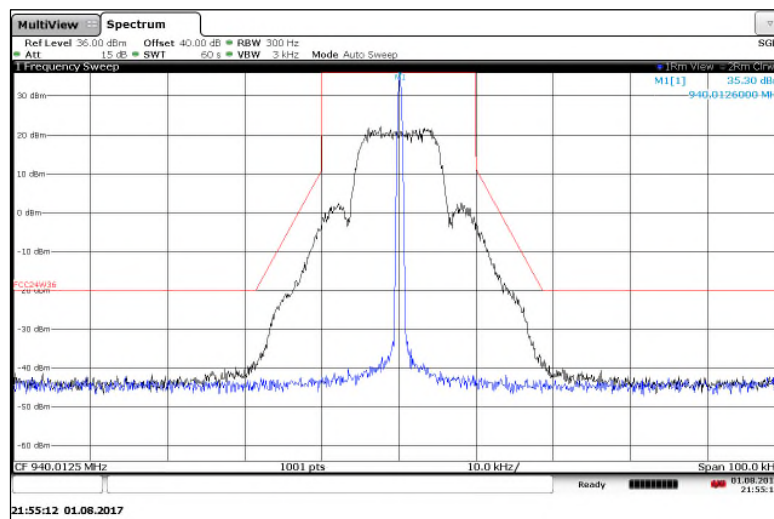


Figure 7.2.2-2: 940.0125 MHz – 25 kHz Channel Spacing – m2pass 10k Mode

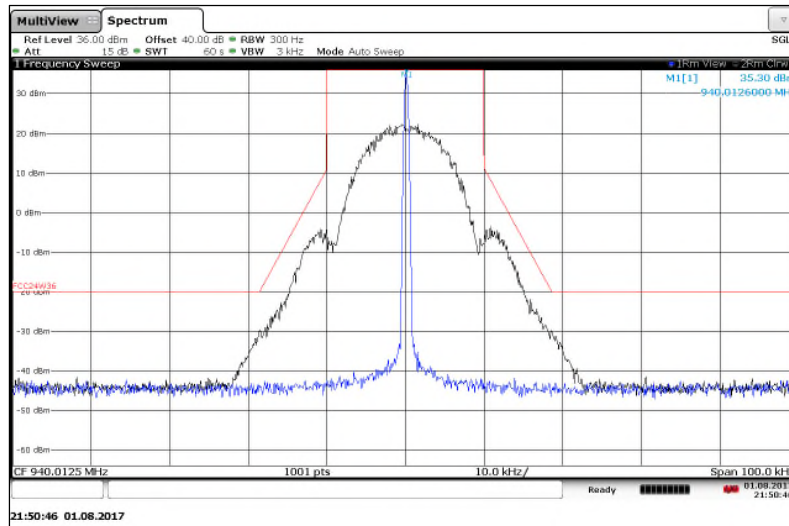


Figure 7.2.2-3: 940.0125 MHz – 25 kHz Channel Spacing – m2pass 12.5k Mode

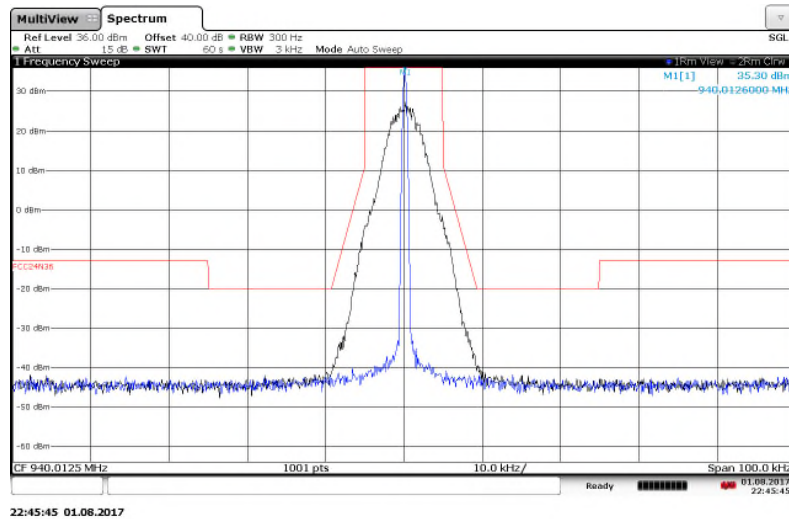


Figure 7.2.2-4: 940.0125 MHz – 12.5 kHz Channel Spacing – m4pass 10k Mode

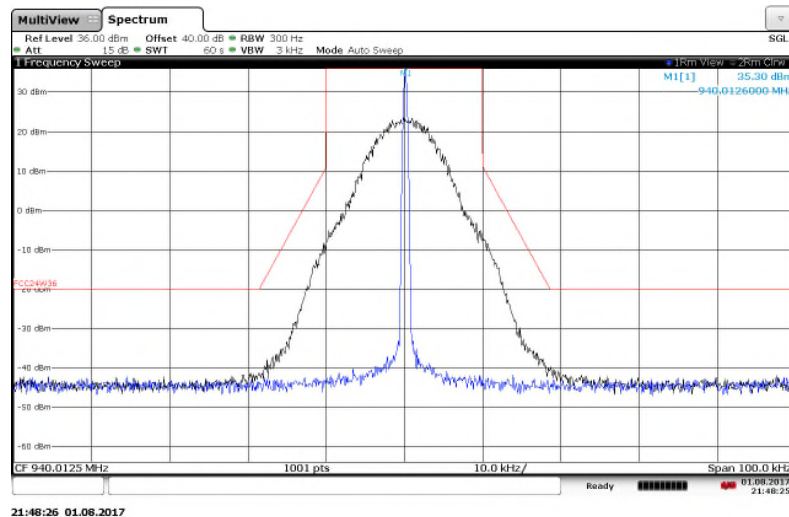


Figure 7.2.2-5: 940.0125 MHz – 25 kHz Channel Spacing – m4pass 20k Mode

Part 101.111 a(5), a(6), RSS-119 5.8.6 (FCC Part 101.11 a(5) a(6) provides worst case)

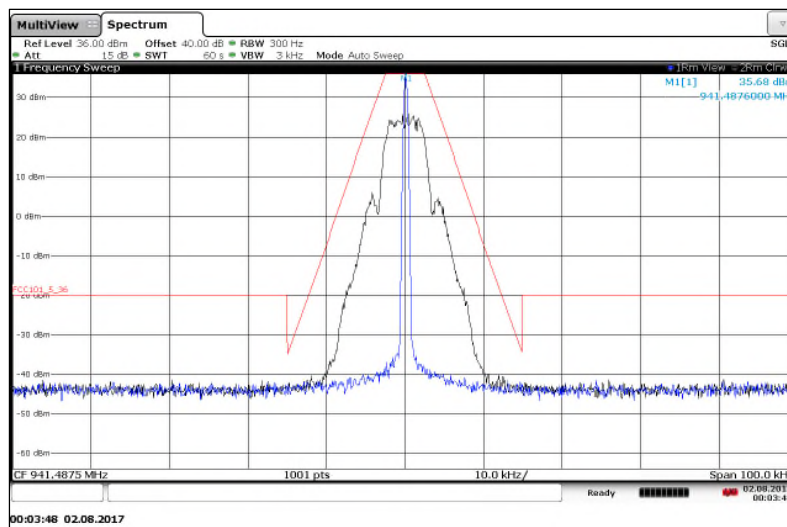


Figure 7.2.2-6: 941.4875 MHz – 12.5 kHz Channel Spacing – m2pass 5k Mode

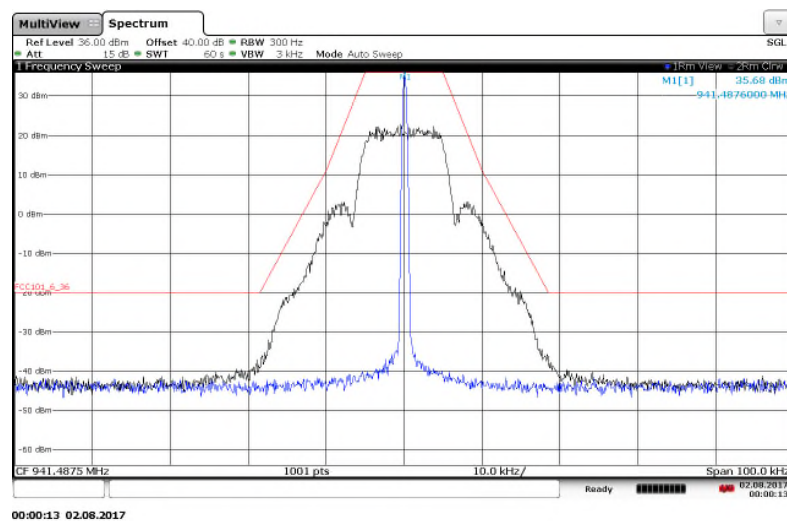


Figure 7.2.2-7: 941.4875 MHz – 25 kHz Channel Spacing – m2pass 10k Mode

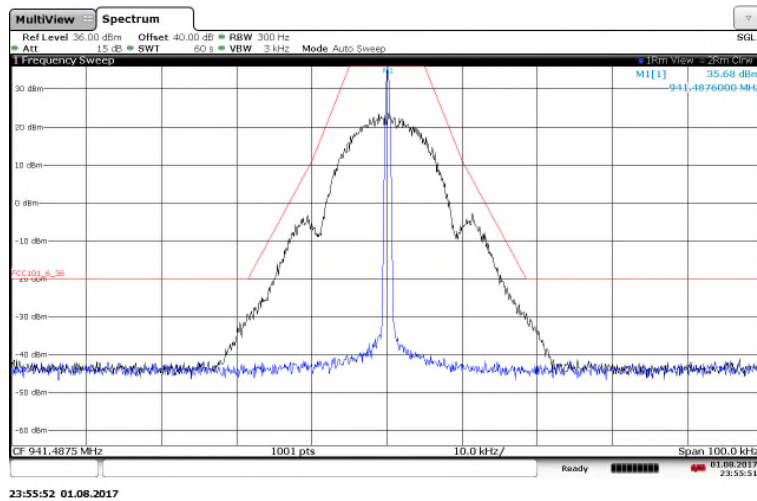


Figure 7.2.2-8: 941.4875 MHz – 25 kHz Channel Spacing – m2pass 12.5k Mode

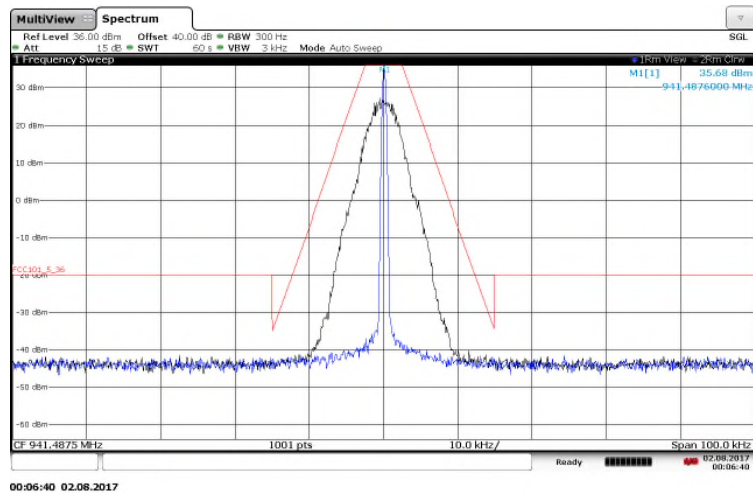


Figure 7.2.2-9: 941.4875 MHz – 12.5 kHz Channel Spacing – m4pass 10k Mode

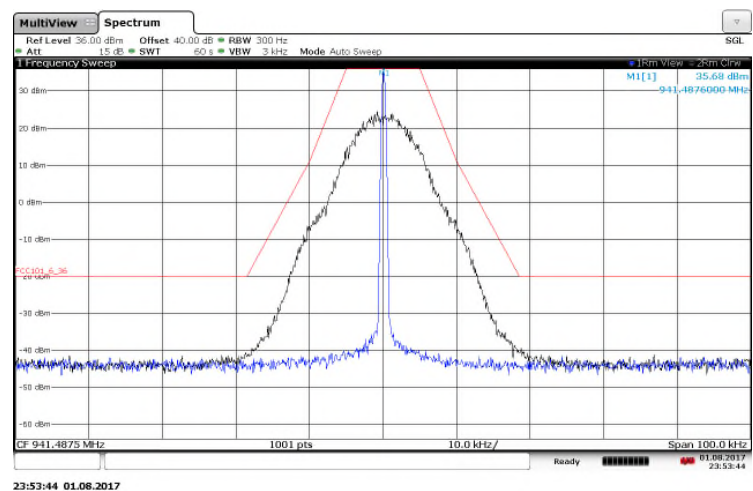


Figure 7.2.2-10: 941.4875 MHz – 25 kHz Channel Spacing – m4pass 20k Mode

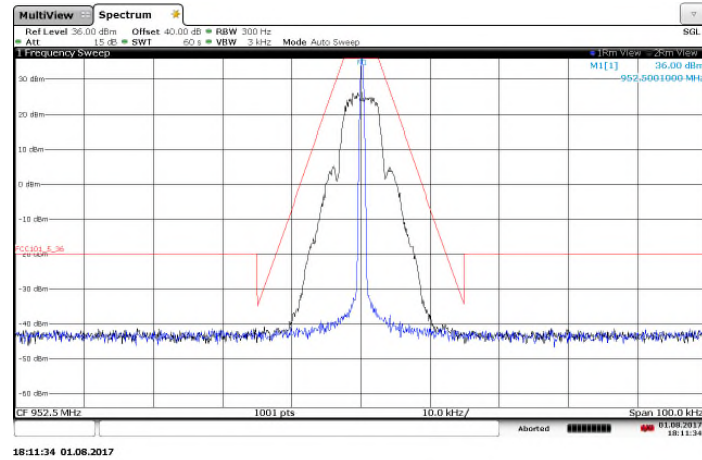


Figure 7.2.2-11: 952.5 MHz – 12.5 kHz Channel Spacing – m2pass 5k Mode

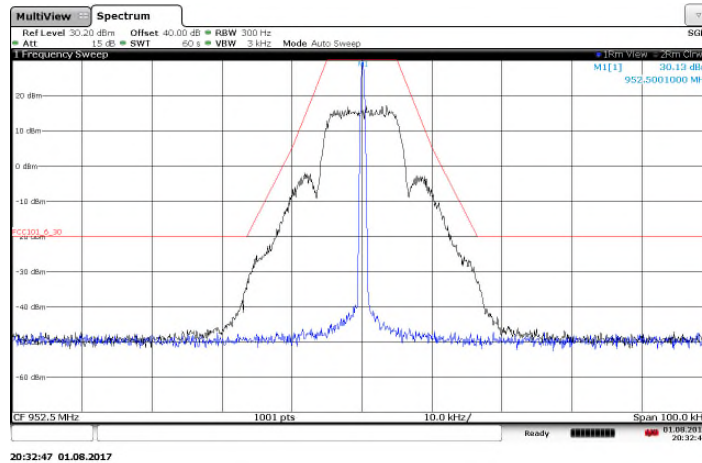


Figure 7.2.2-12: 952.5 MHz – 25 kHz Channel Spacing – m2pass 10k Mode

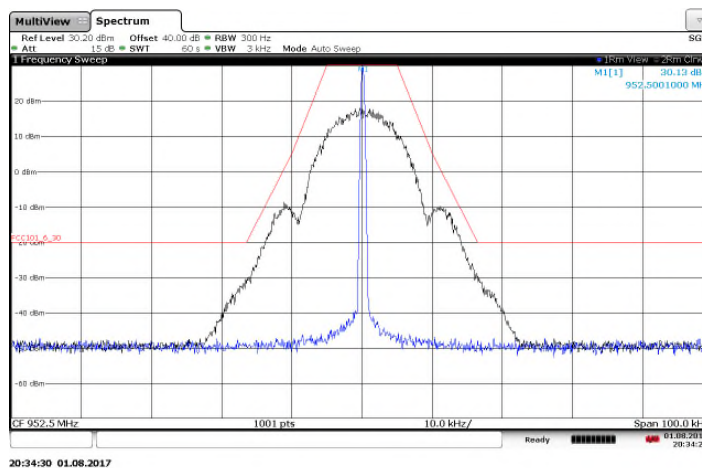


Figure 7.2.2-13: 952.5 MHz – 25 kHz Channel Spacing – m2pass 12.5k Mode

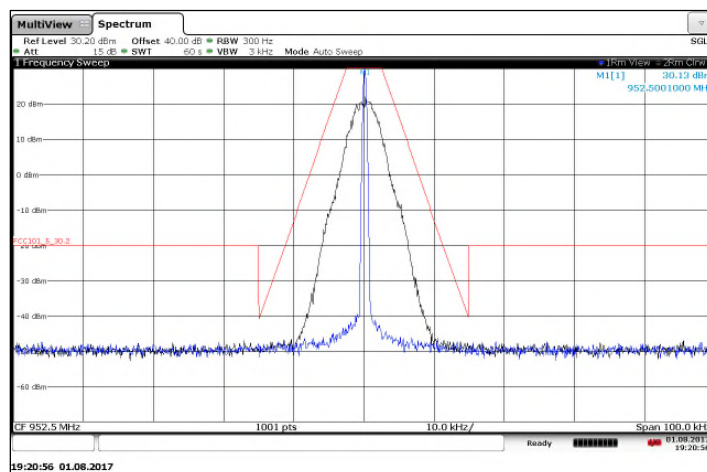


Figure 7.2.2-14: 952.5 MHz – 12.5 kHz Channel Spacing – m4pass 10k Mode

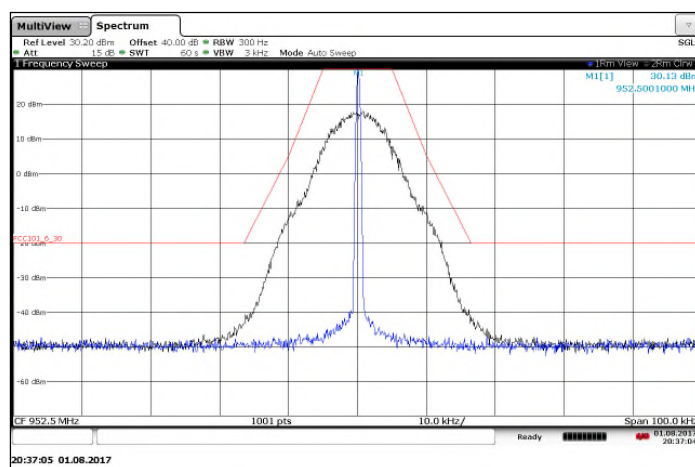


Figure 7.2.2-15: 952.5 MHz – 25 kHz Channel Spacing – m4pass 20k Mode

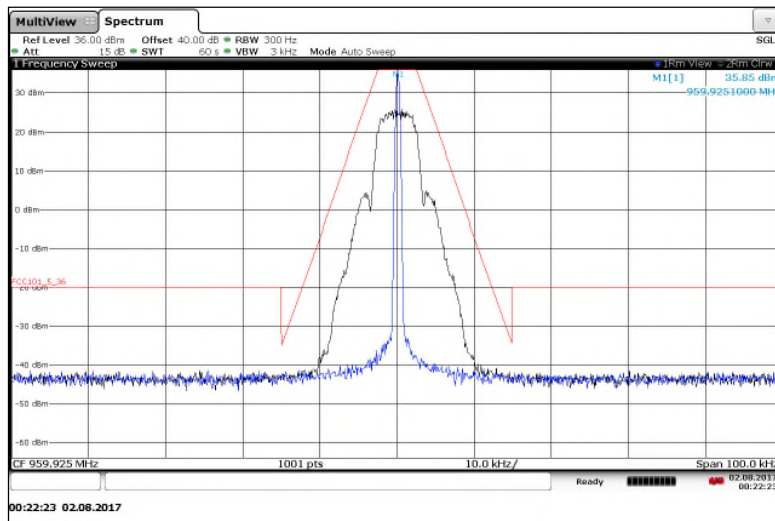


Figure 7.2.2-16: 959.925 MHz – 12.5 kHz Channel Spacing – m2pass 5k Mode

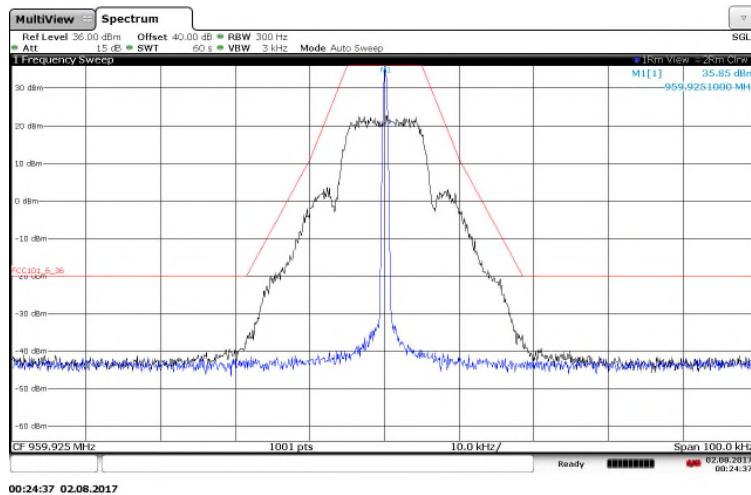


Figure 7.2.2-17: 959.925 MHz – 25 kHz Channel Spacing – m2pass 10k Mode

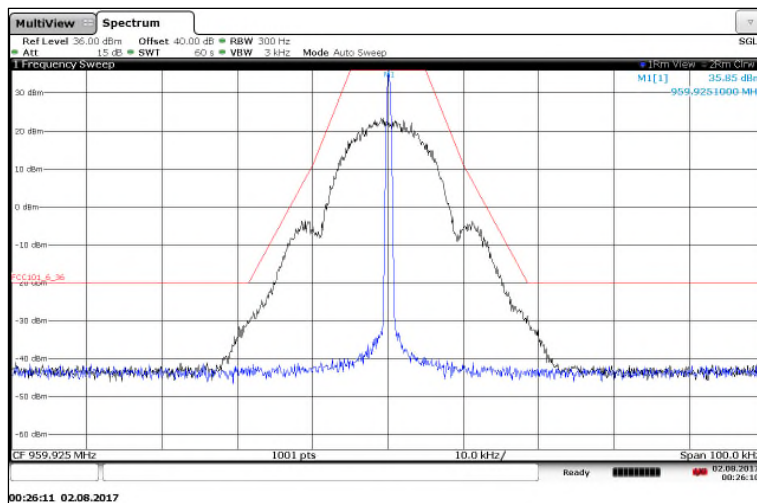


Figure 7.2.2-18: 959.925 MHz – 25 kHz Channel Spacing – m2pass 12.5k Mode

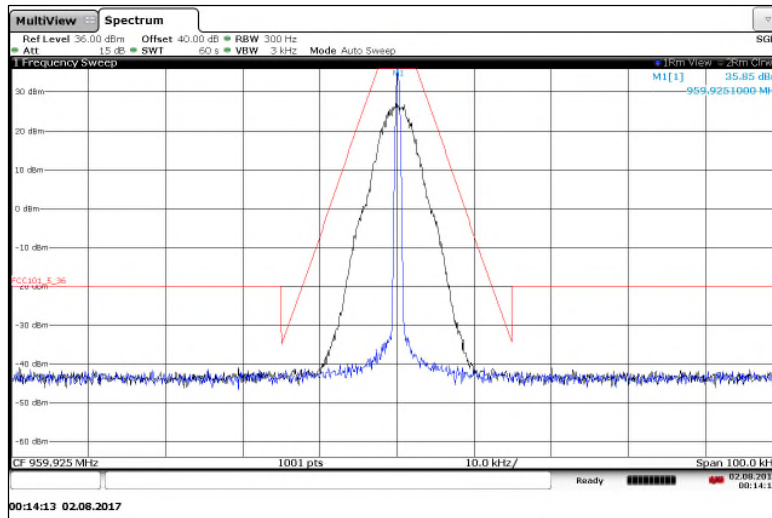


Figure 7.2.2-19: 959.925 MHz – 12.5 kHz Channel Spacing – m4pass 10k Mode

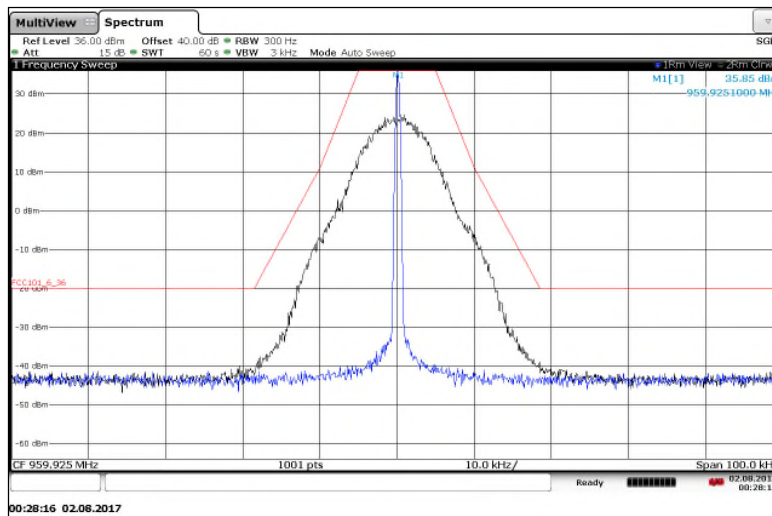


Figure 7.2.2-20: 959.925 MHz – 25 kHz Channel Spacing – m4pass 20k Mode

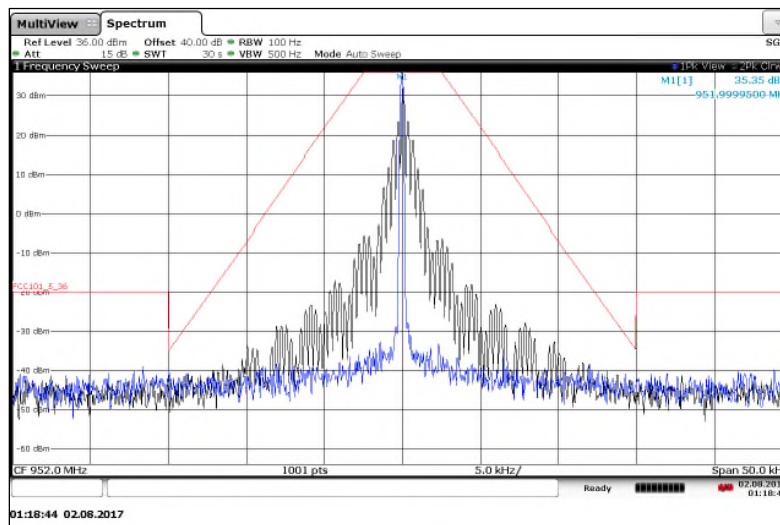


Figure 7.2.2-21: 952 MHz –ERT Tone – FCC 101.111.a.5

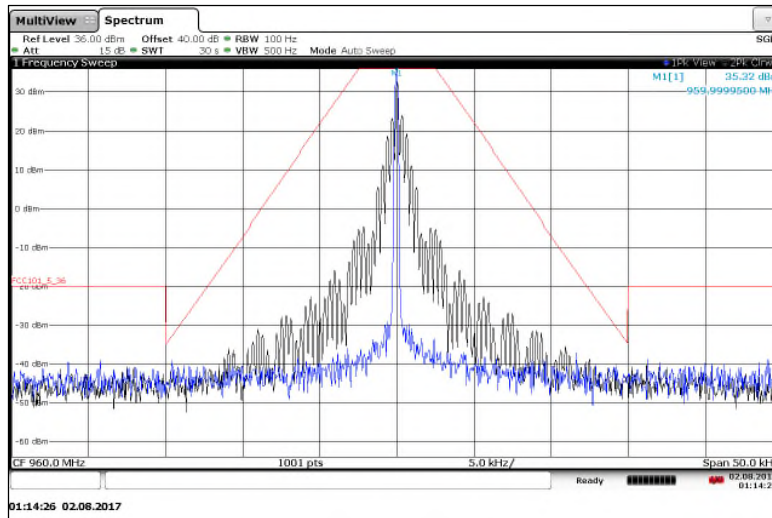


Figure 7.2.2-22: 960 MHz -ERT Tone FCC 101.111.a.5

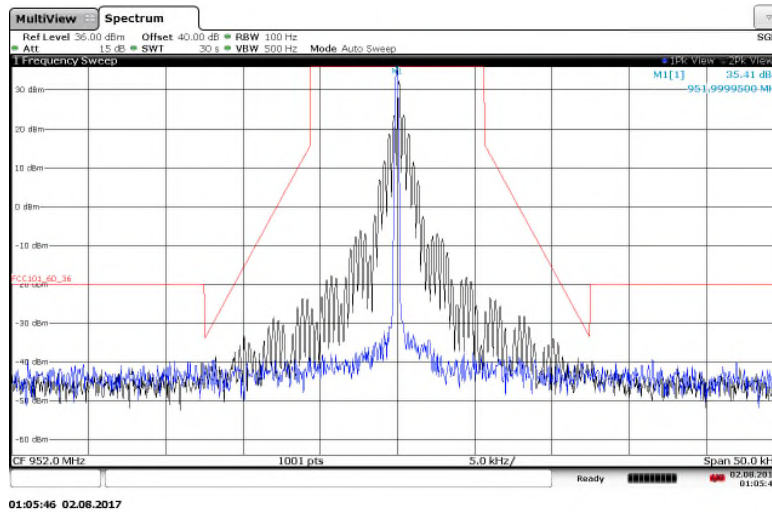


Figure 7.2.2-23: 952 MHz -ERT Tone - RSS-119 mask D

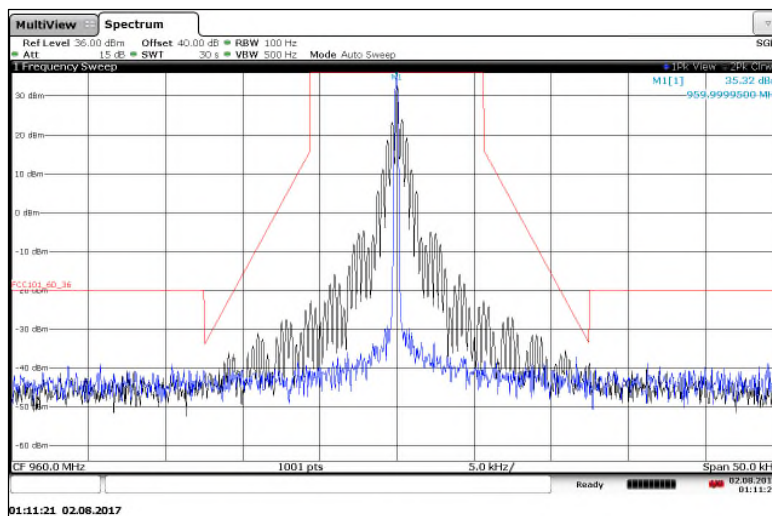
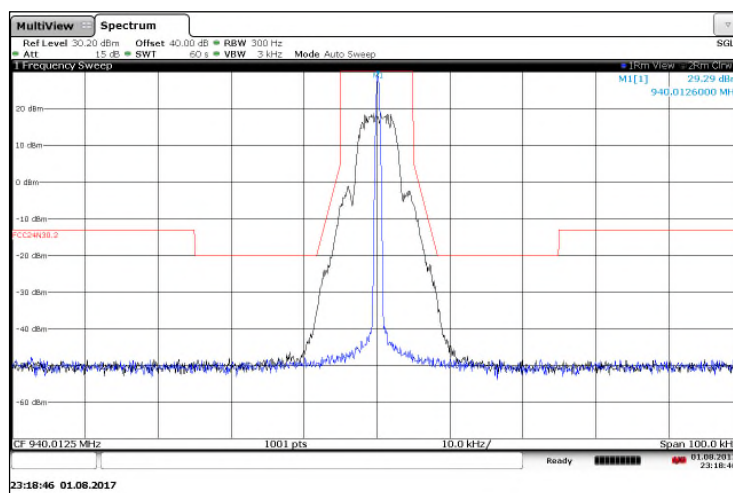
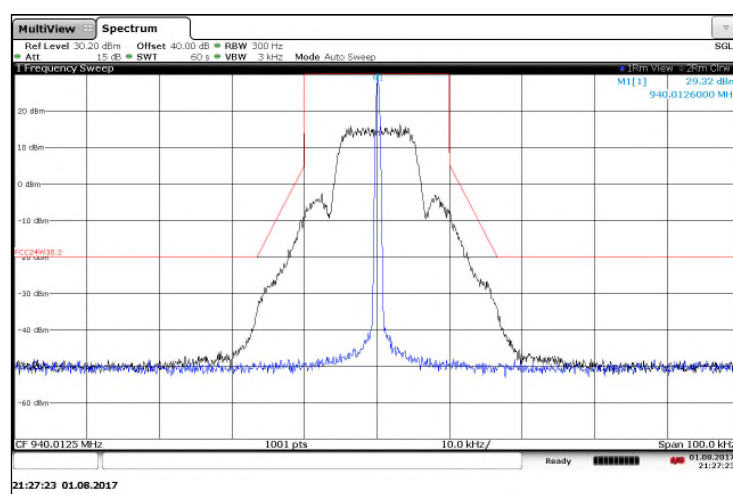


Figure 7.2.2-24: 960 MHz -ERT Tone - RSS-119 mask D

LOW POWER**Part 24.133 a(1), a(2), ISED Canada RSS-134 4.4.1 (a), (b), 4.4.2 (a),(b) – Emission Limits****Figure 7.2.2-25: 940.0125 MHz – 12.5 kHz Channel Spacing – m2pass 5k Mode****Figure 7.2.2-26: 940.0125 MHz – 25 kHz Channel Spacing – m2pass 10k Mode**

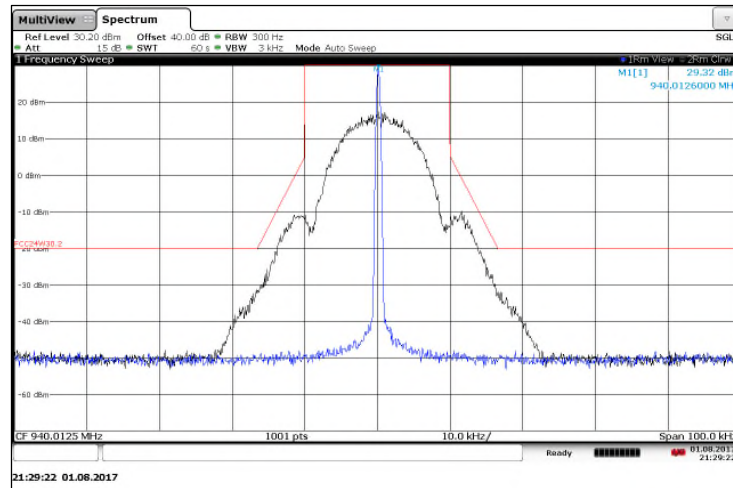


Figure 7.2.2-27: 940.0125 MHz – 25 kHz Channel Spacing – m2pass 12.5k Mode

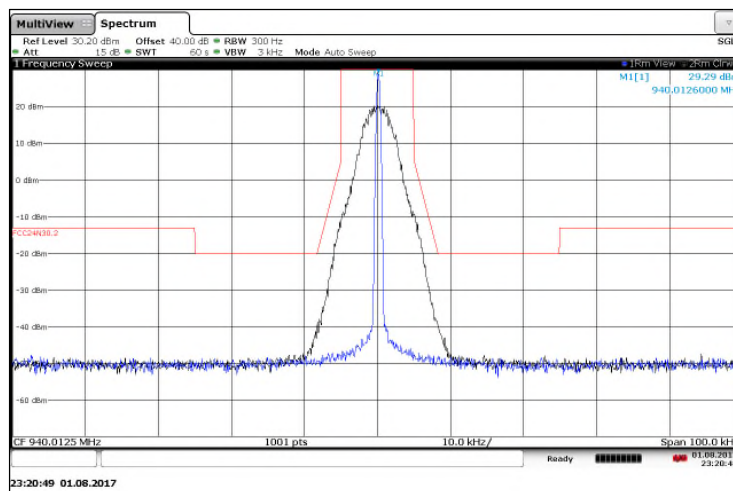


Figure 7.2.2-28: 940.0125 MHz – 12.5 kHz Channel Spacing – m4pass 10k Mode

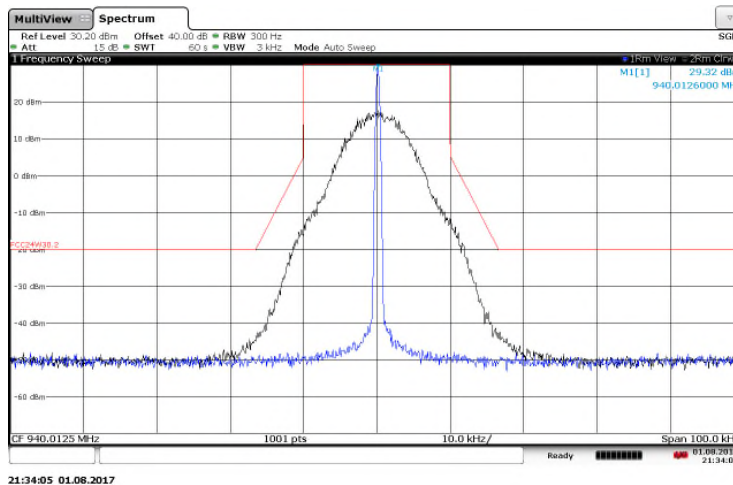
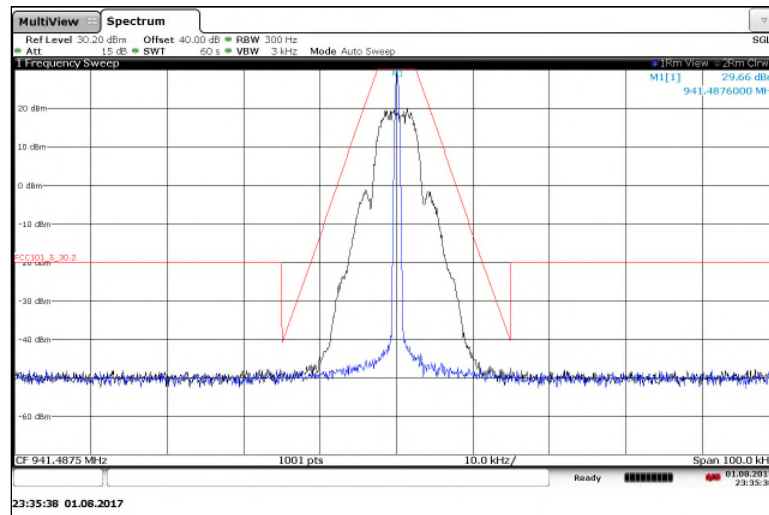
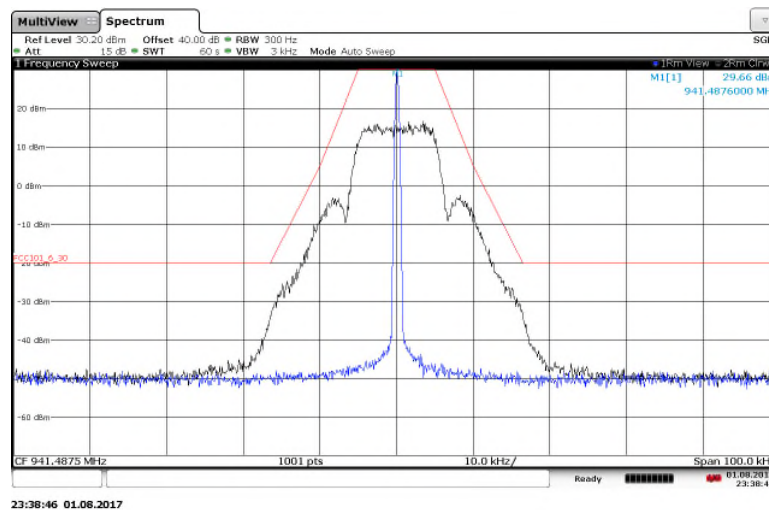
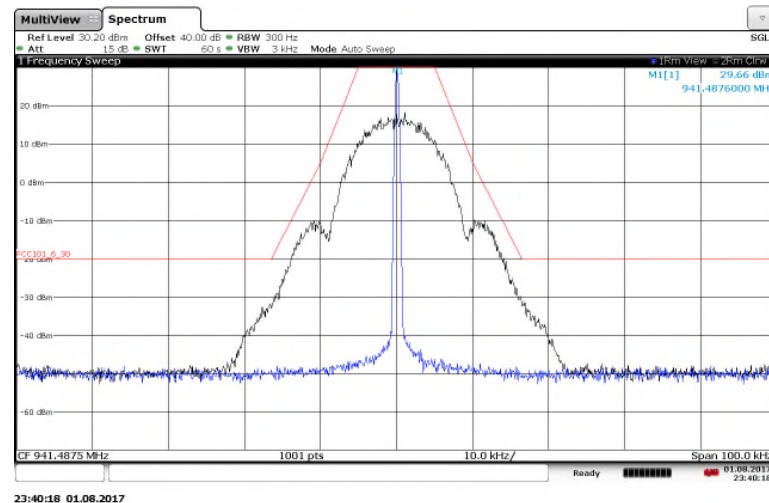


Figure 7.2.2-29: 940.0125 MHz – 25 kHz Channel Spacing – m4pass 20k Mode

Part 101.111 a(5), a(6), RSS-119 5.8.6 (FCC Part 101.11 a(5) a(6) provides worst case)**Figure 7.2.2-30: 941.4875 MHz – 12.5 kHz Channel Spacing – m2pass 5k Mode****Figure 7.2.2-31: 941.4875 MHz – 25 kHz Channel Spacing – m2pass 10k Mode****Figure 7.2.2-32: 941.4875 MHz – 25 kHz Channel Spacing – m2pass 12.5k Mode**

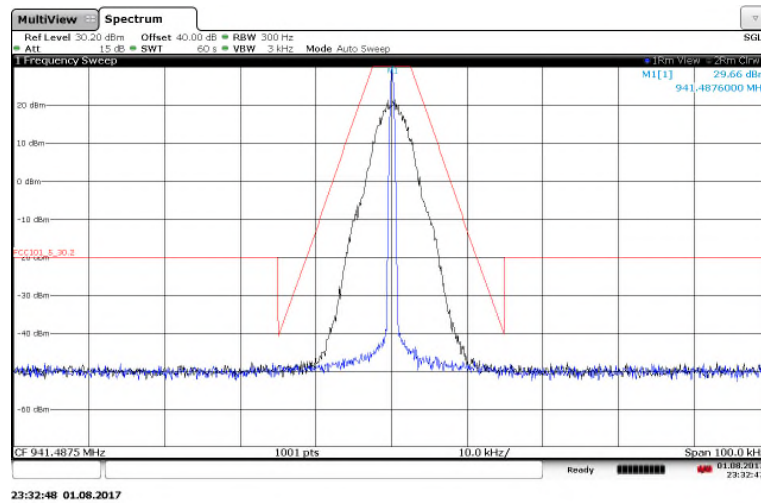


Figure 7.2.2-33: 941.4875 MHz – 12.5 kHz Channel Spacing – m4pass 10k Mode

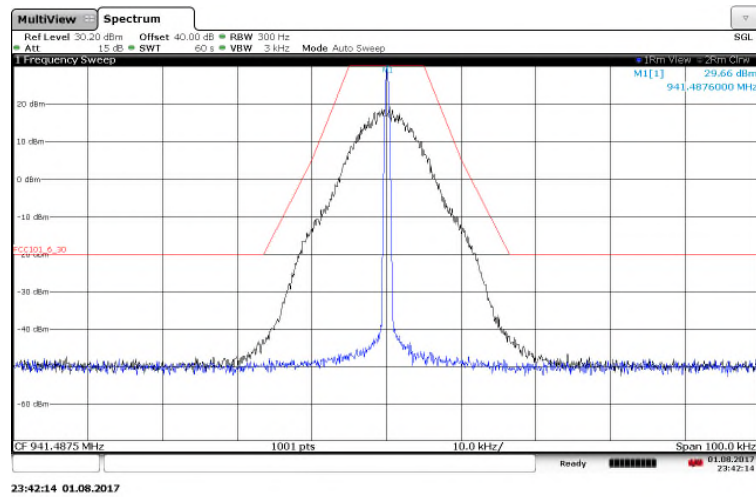


Figure 7.2.2-34: 941.4875 MHz – 25 kHz Channel Spacing – m4pass 20k Mode

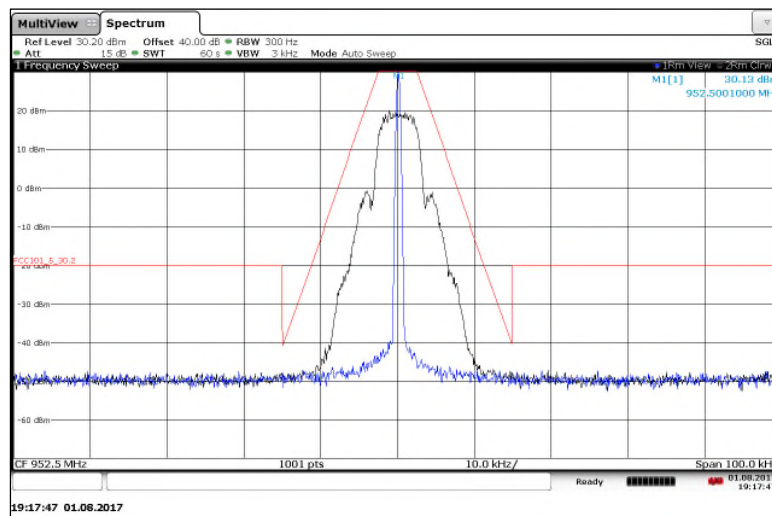


Figure 7.2.2-35: 952.5 MHz – 12.5 kHz Channel Spacing – m2pass 5k Mode

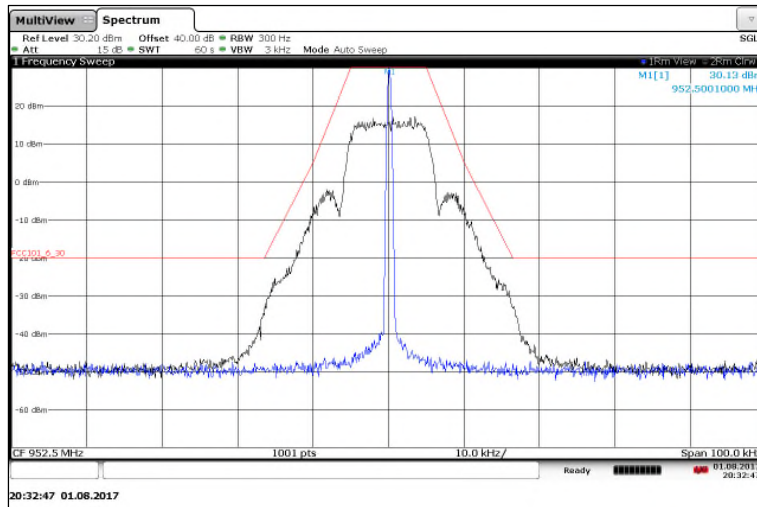


Figure 7.2.2-36: 952.5 MHz – 25 kHz Channel Spacing – m2pass 10k Mode

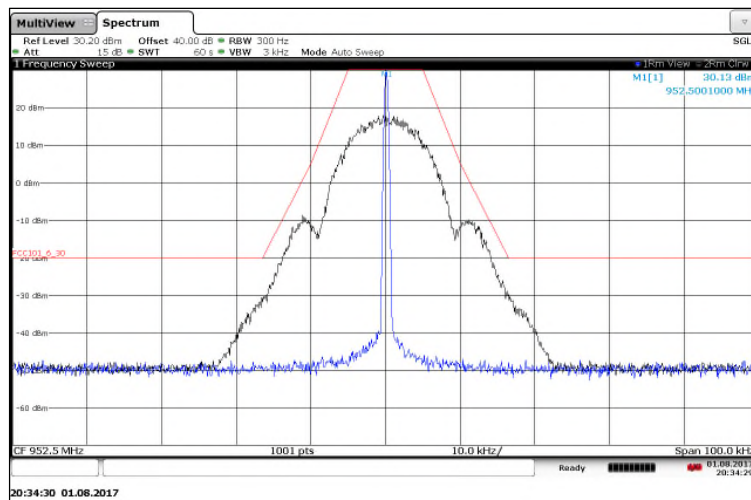


Figure 7.2.2-37: 952.5 MHz – 25 kHz Channel Spacing – m2pass 12.5k Mode

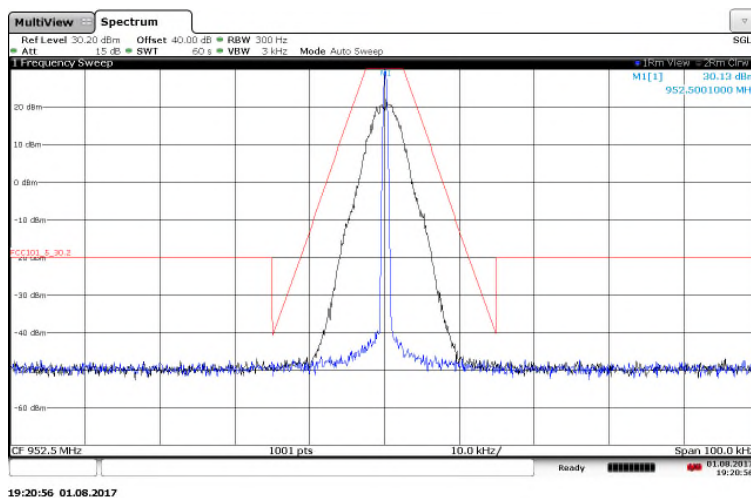


Figure 7.2.2-38: 952.5 MHz – 12.5 kHz Channel Spacing – m4pass 10k Mode

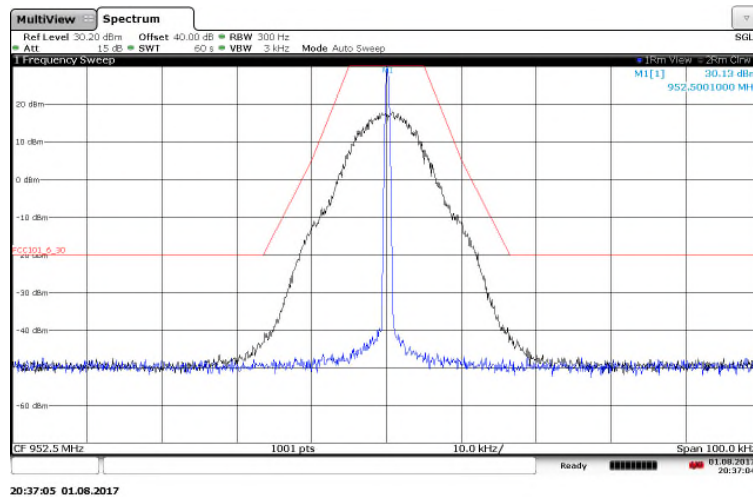


Figure 7.2.2-39: 952.5 MHz – 25 kHz Channel Spacing – m4pass 20k Mode

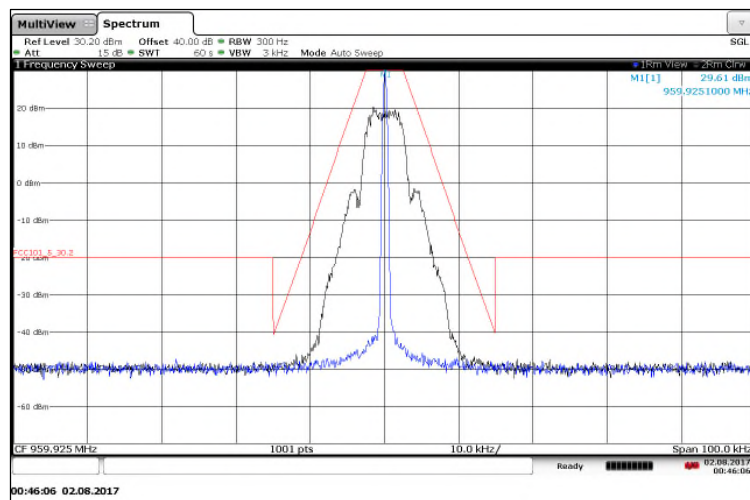


Figure 7.2.2-40: 959.925 MHz – 12.5 kHz Channel Spacing – m2pass 5k Mode

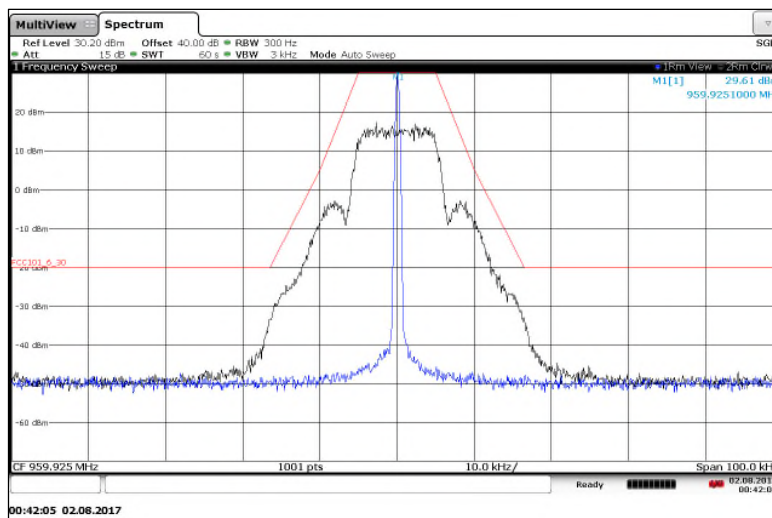


Figure 7.2.2-41: 959.925 MHz – 25 kHz Channel Spacing – m2pass 10k Mode

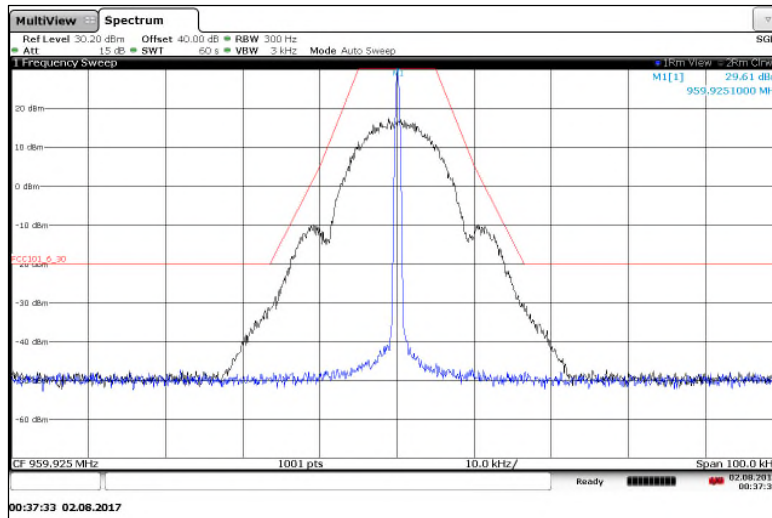


Figure 7.2.2-42: 959.925 MHz – 25 kHz Channel Spacing – m2pass 12.5k Mode

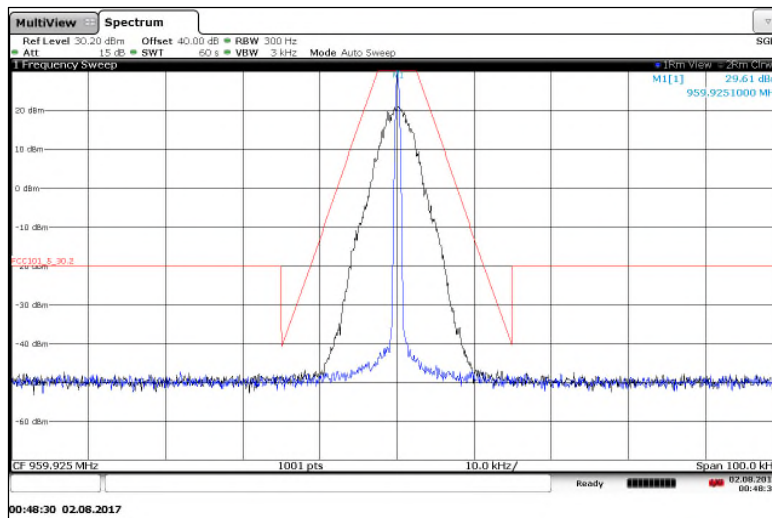


Figure 7.2.2-43: 959.925 MHz – 12.5 kHz Channel Spacing – m4pass 10k Mode

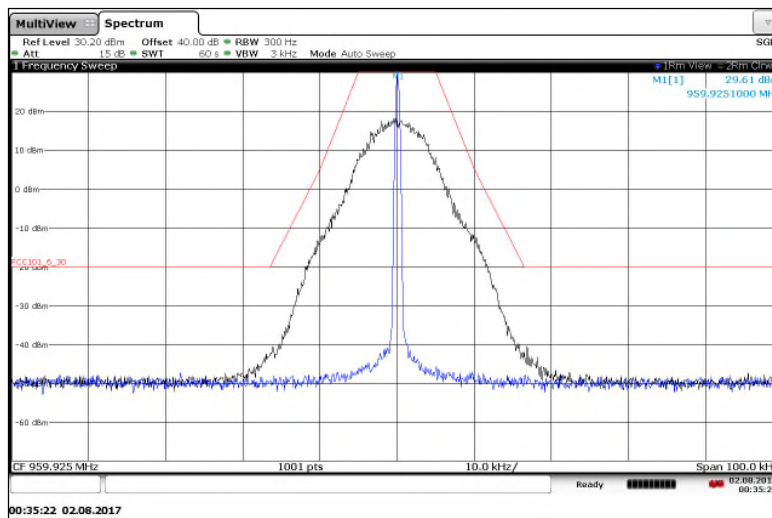


Figure 7.2.2-44: 959.925 MHz – 25 kHz Channel Spacing – m4pass 20k Mode

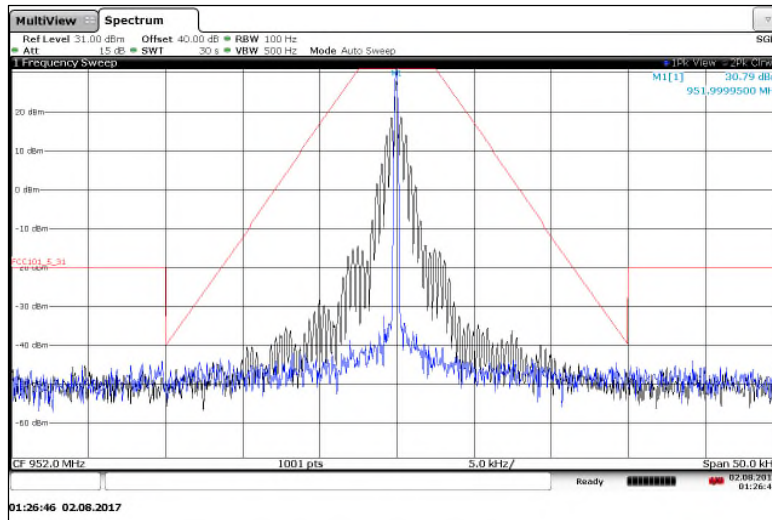


Figure 7.2.2-45: 952 MHz –ERT Tone – FCC 101.111.a.5

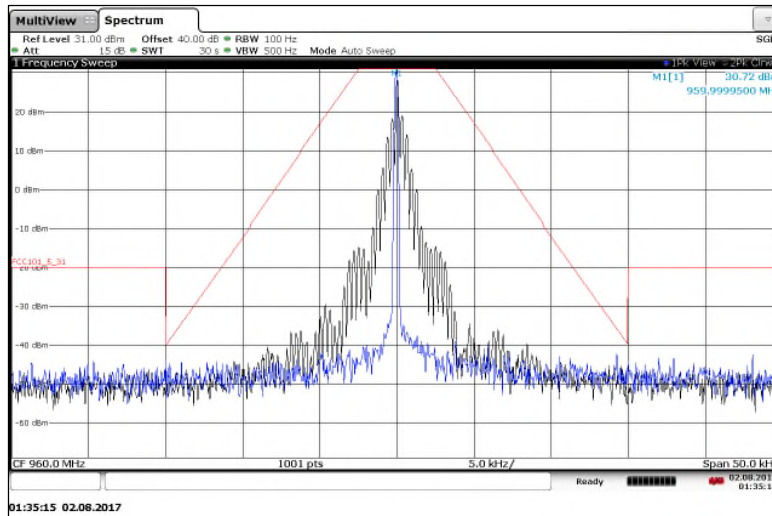


Figure 7.2.2-46: 960 MHz –ERT Tone FCC 101.111.a.5

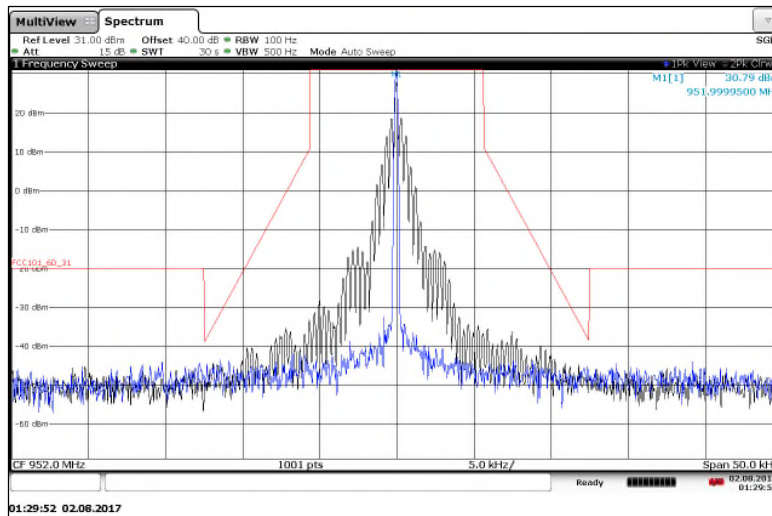


Figure 7.2.2-47: 952 MHz –ERT Tone - RSS-119 mask D

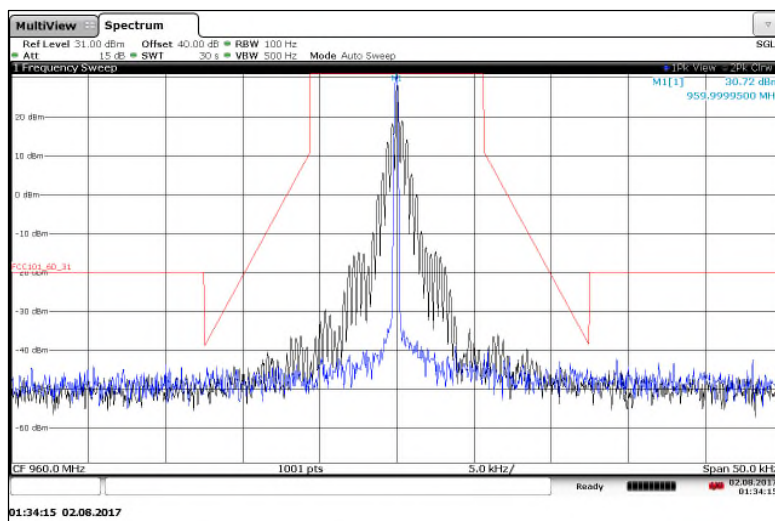


Figure 7.2.2-48: 960 MHz –ERT Tone - RSS-119 mask D

7.3 99% Bandwidth

7.3.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.4.4)

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through 40dB of passive attenuation. The internal correction factors of the spectrum analyzer were employed to correct for any cable and attenuator losses.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts. The nominal IF filter 3 dB bandwidth (RBW) is in the range of 1% to 5% of the OBW, and the VBW was set $\geq 3 \times$ RBW. The reference level was set to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. The measurements were made using the spectrum analyzer's 99% BW function.

7.3.2 Measurement Results

Performed by: Jean Tezil

Frequency (MHz)	ISED Canada Rule Part	Mode of Operation	99% Bandwidth (kHz)
940.0125	RSS-134	M2pass 5k	5.82
940.0125	RSS-134	M2pass 10k	11.64
940.0125	RSS-134	M2pass 12.5k	13.52
940.0125	RSS-134	M4pass 10k	6.06
940.0125	RSS-134	M4pass 20k	12.18
941.4875	RSS-119	M2pass 5k	5.80
941.4875	RSS-119	M2pass 10k	11.65
941.4875	RSS-119	M2pass 12.5k	13.54
941.4875	RSS-119	M4pass 10k	6.05
941.4875	RSS-119	M4pass 20k	11.93
952.5000	RSS-119	M2pass 5k	5.80
952.5000	RSS-119	M2pass 10k	11.67
952.5000	RSS-119	M2pass 12.5k	13.62
952.5000	RSS-119	M4pass 10k	6.06
952.5000	RSS-119	M4pass 20k	11.92
959.9250	RSS-119	M2pass 5k	5.78
959.9250	RSS-119	M2pass 10k	11.79
959.9250	RSS-119	M2pass 12.5k	13.59
959.9250	RSS-119	M4pass 10k	6.04
959.9250	RSS-119	M4pass 20k	12.01
952	RSS-119	ERT Tone	1.94
960	RSS-119	ERT Tone	1.87

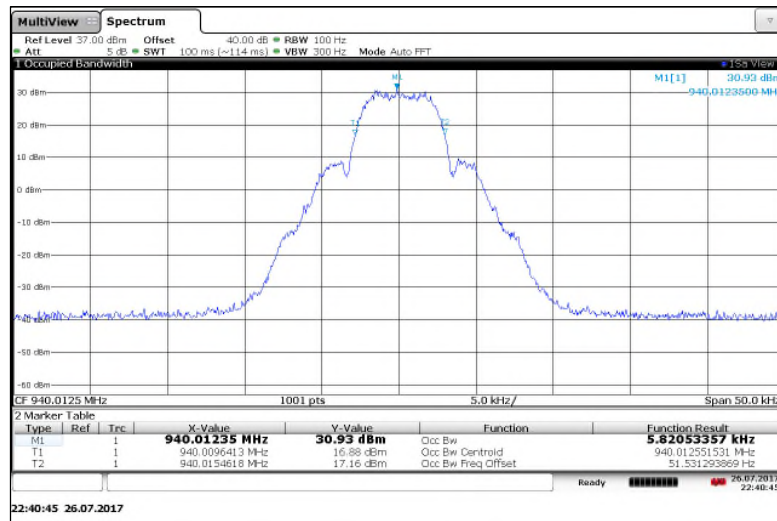
ISED Canada RSS-GEN 6.6, ISED Canada RSS-134

Figure 7.3.2-1: 940.0125 MHz – M2pass 5k Mode

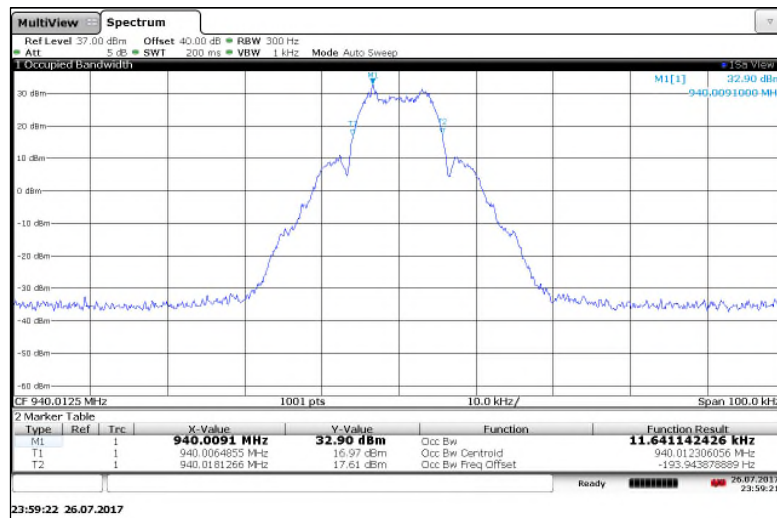


Figure 7.3.2-2: 940.0125 MHz – M2pass 10k Mode

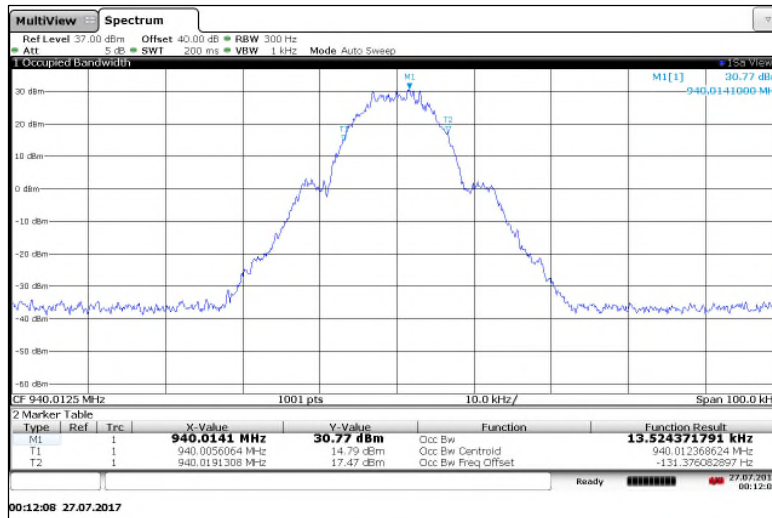


Figure 7.3.2-3: 940.0125 MHz – M2pass 12.5k Mode

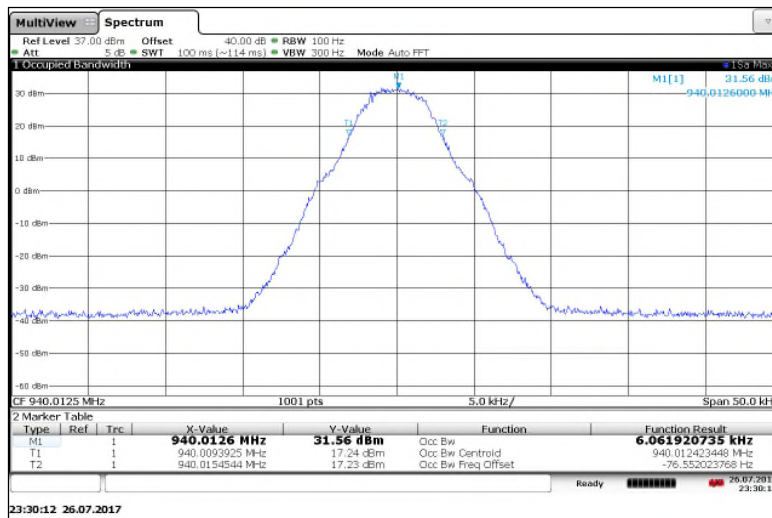


Figure 7.3.2-4: 940.0125 MHz – M4pass 10k Mode

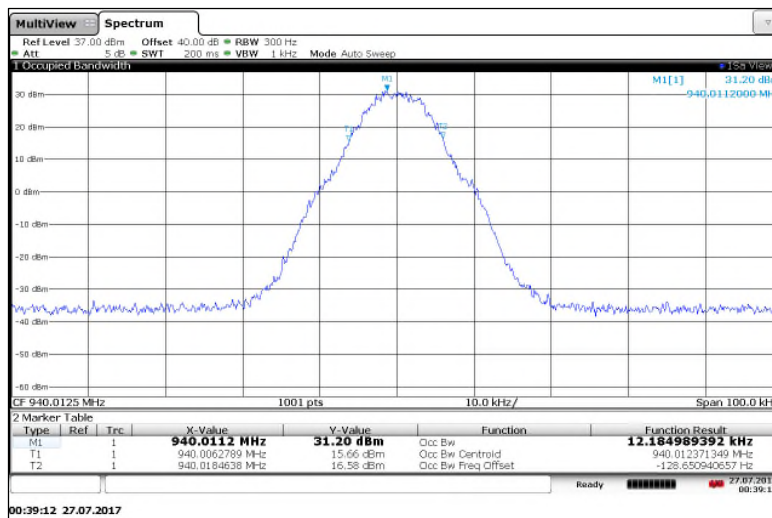


Figure 7.3.2-5: 940.0125 MHz – M4pass 20k Mode

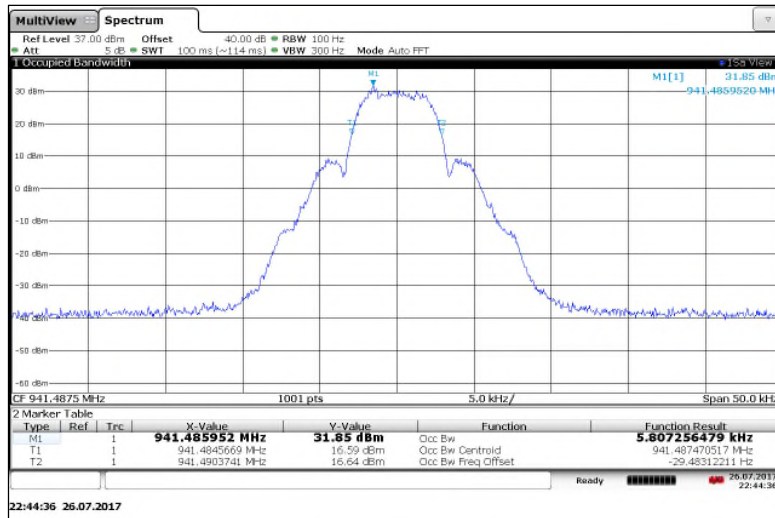
ISED Canada RSS-GEN 6.6, ISED Canada RSS-119

Figure 7.3.2-6: 941.4875 MHz – M2pass 5k Mode

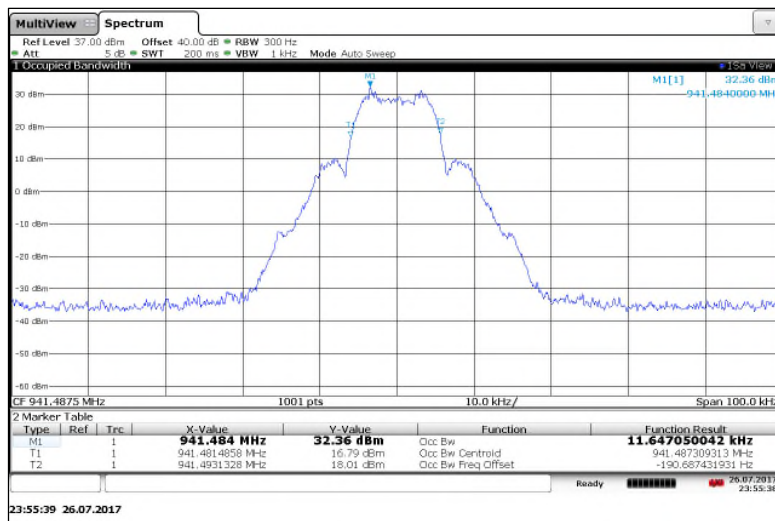


Figure 7.3.2-7: 941.4875 MHz – M2pass 10k Mode

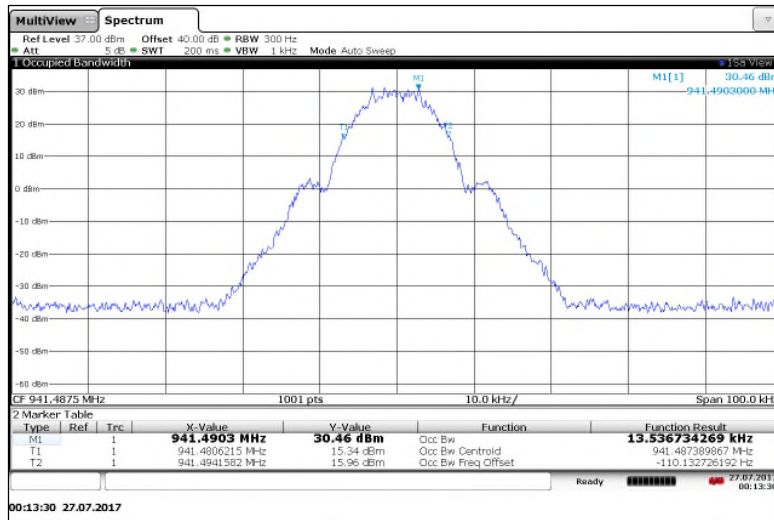


Figure 7.3.2-8: 941.4875 MHz – M2pass 12.5k Mode

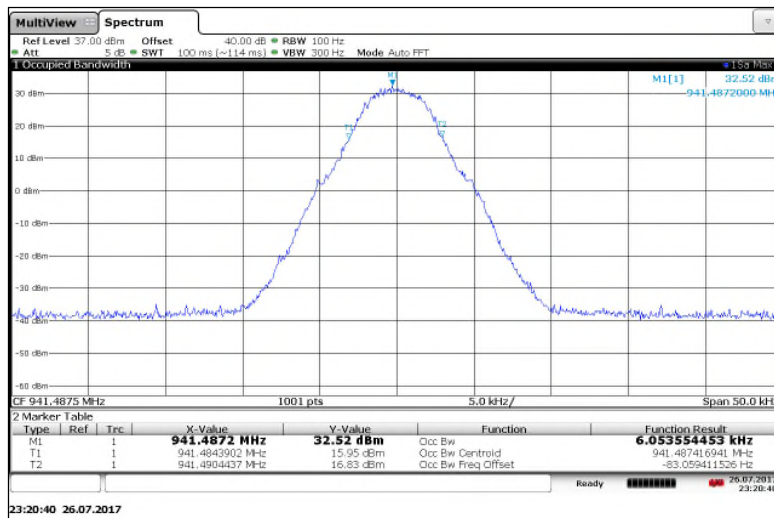


Figure 7.3.2-9: 941.4875 MHz – M4pass 10k Mode

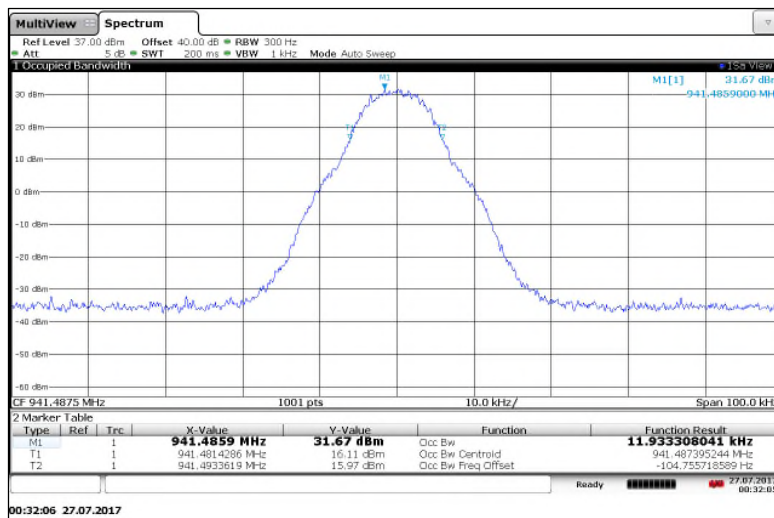


Figure 7.3.2-10: 941.4875 MHz – M4pass 20k Mode

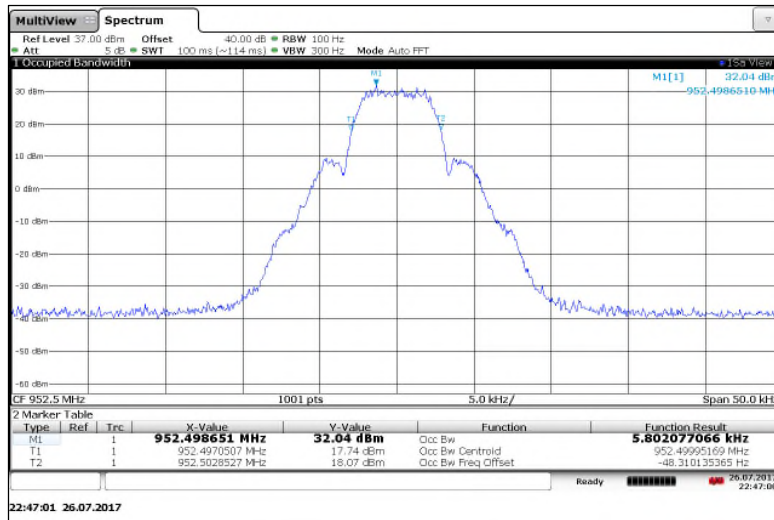


Figure 7.3.2-11: 952.5 MHz – M2pass 5k Mode

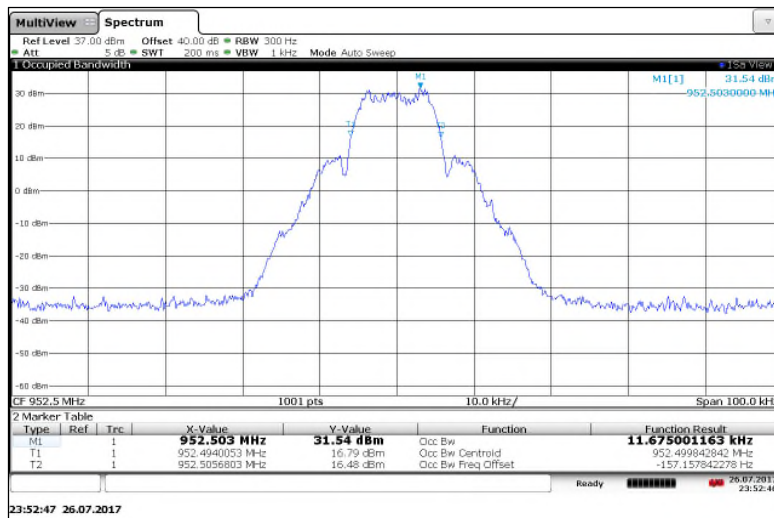


Figure 7.3.2-12: 952.5 MHz – M2pass 10k Mode

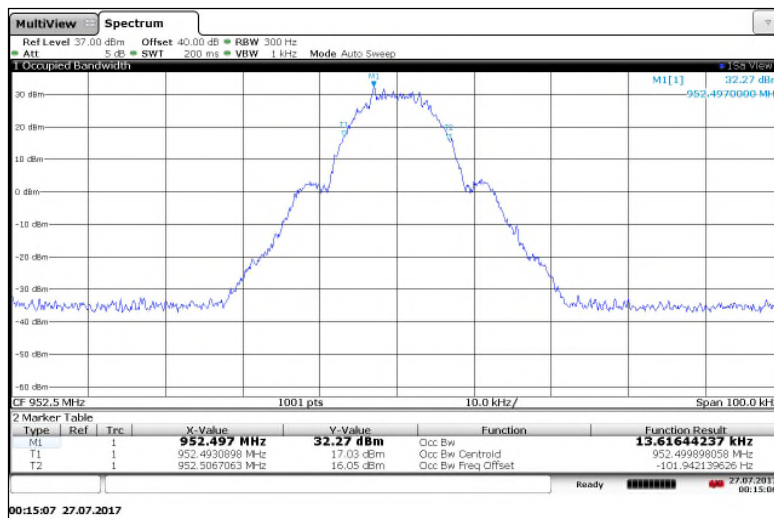


Figure 7.3.2-13: 952.5 MHz – M2pass 12.5k Mode

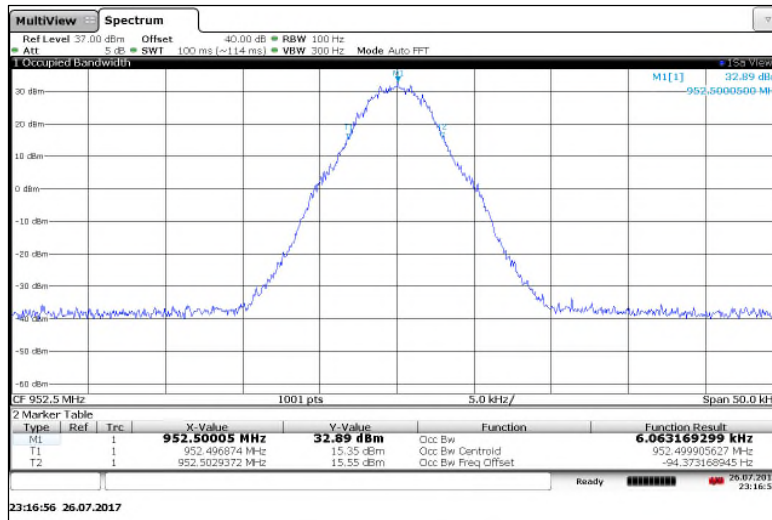


Figure 7.3.2-14: 952.5 MHz – M4pass 10k Mode

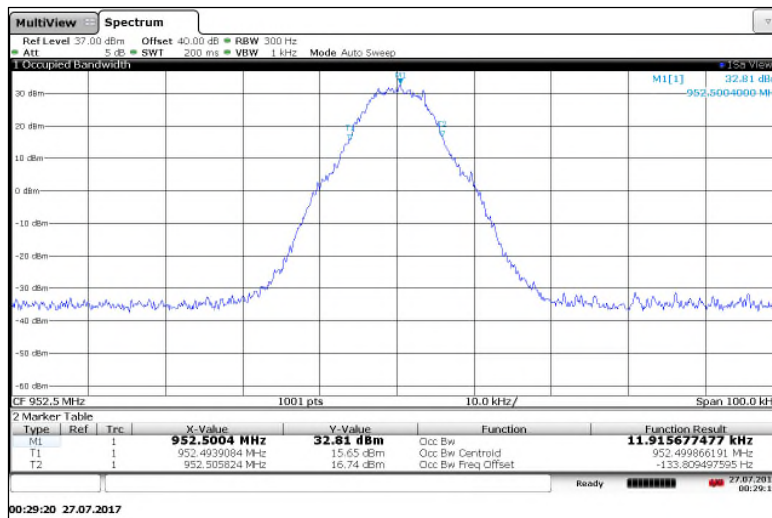


Figure 7.3.2-15: 952.5 MHz – M4pass 20k Mode

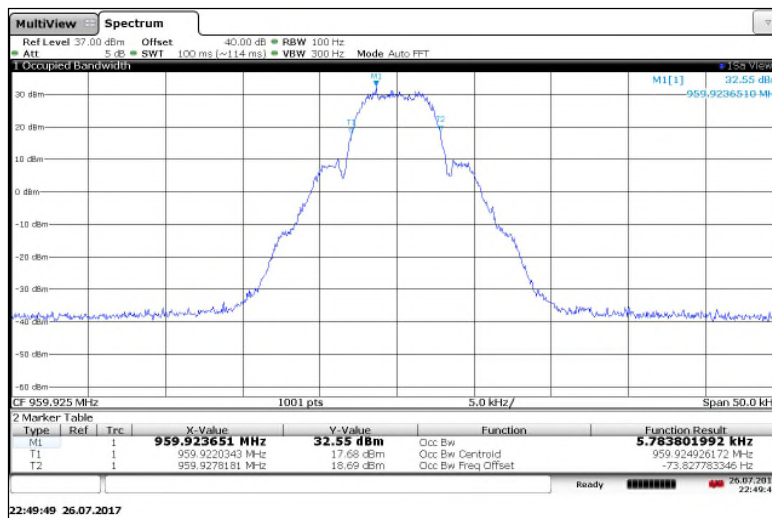


Figure 7.3.2-16: 959.925 MHz– m2pass 5k Mode

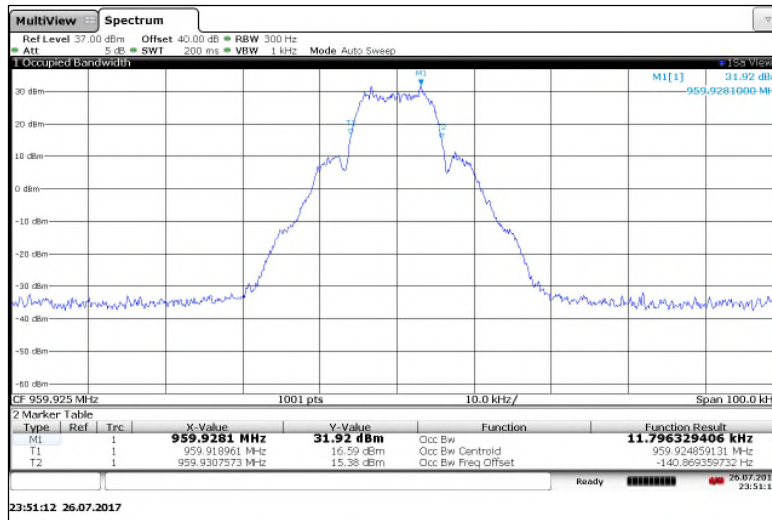


Figure 7.3.2-17: 959.925 MHz– m2pass 10k Mode

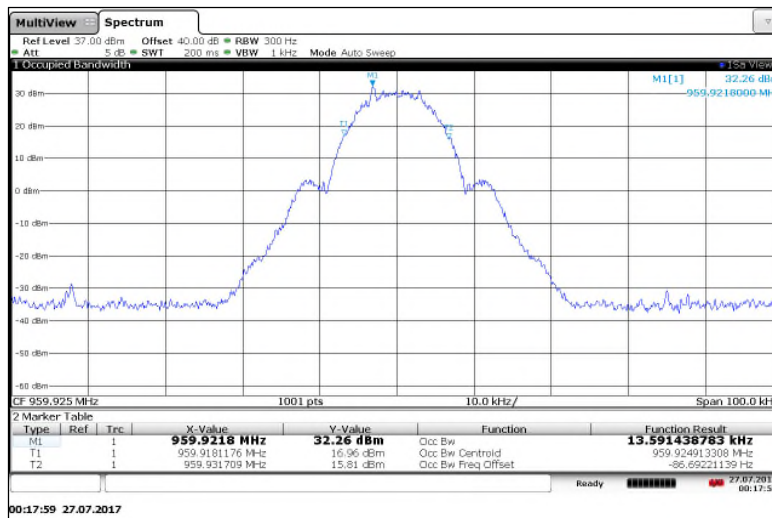


Figure 7.3.2-18: 959.925 MHz– m2pass 12.5k Mode

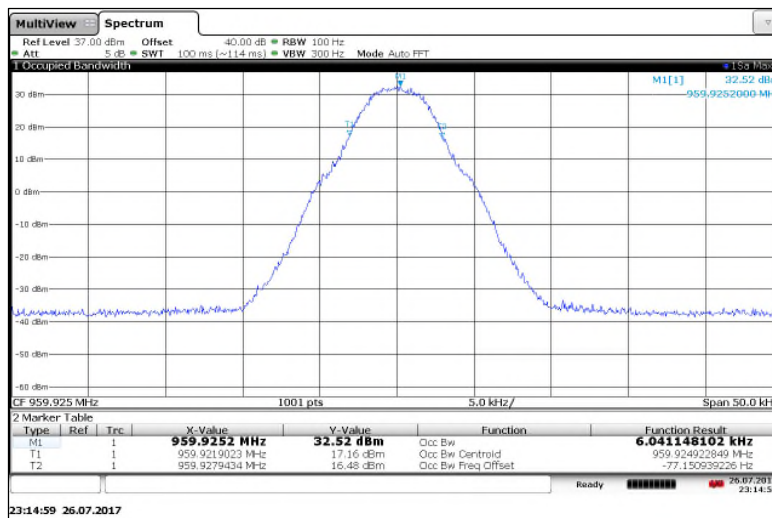


Figure 7.3.2-19: 959.925 MHz– m4pass 10k Mode

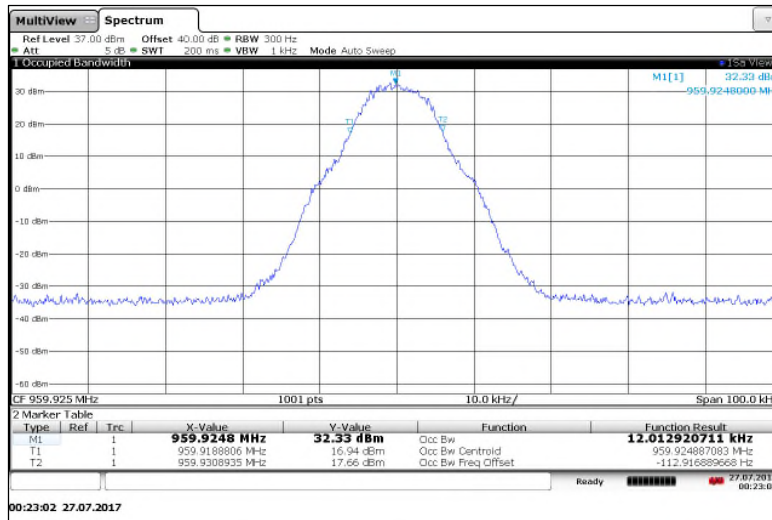


Figure 7.3.2-20: 959.925 MHz– m4pass 20k Mode

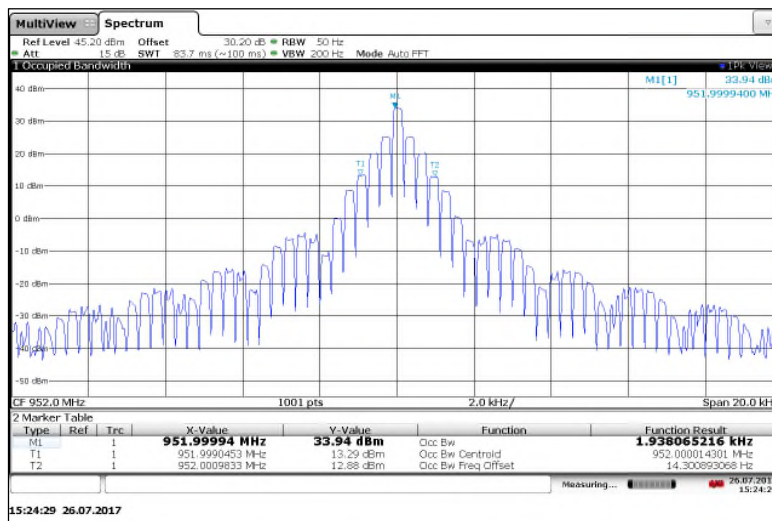


Figure 7.3.2-21: 952 MHz– ERT Tone

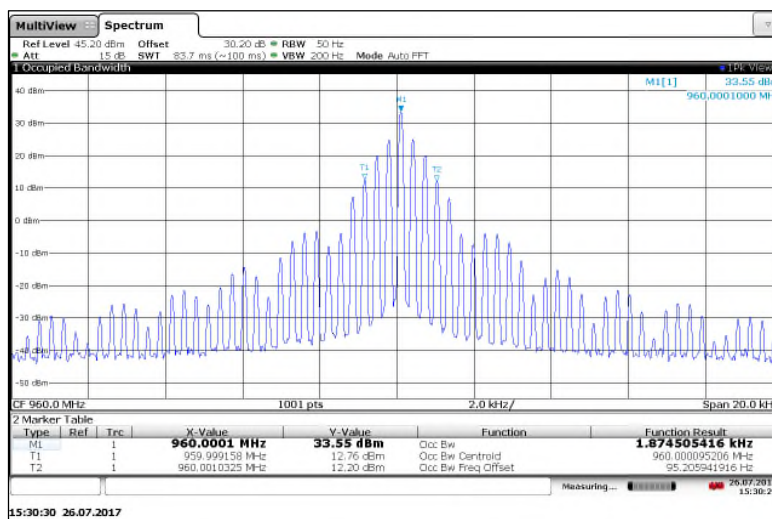


Figure 7.3.2-22: 960 MHz– ERT Tone

7.4 Spurious Emissions at Antenna Terminals

7.4.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.7.4)

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through 40dB of passive attenuation below 1GHz, 20.9dB of passive attenuation with a 900MHz high pass filter above 1GHz. The spectrum analyzer resolution bandwidth was set to 100 kHz below 1000 MHz and 1 MHz above 1000MHz. The internal correction factors of the spectrum analyzer were employed to correct for any cable, attenuator or filter losses. The spectrum was investigated in accordance to CFR 47 Part 2.1057. There were no significant emissions from 9 kHz or lowest frequency generated to 30MHz. Results are shown below.

7.4.2 Measurement Results

Performed by: Jean Tezil

High Power

Part 24.133 a(1), a(2), ISED Canada RSS-134 4.4.1 (a), (b), 4.4.2 (a), (b)

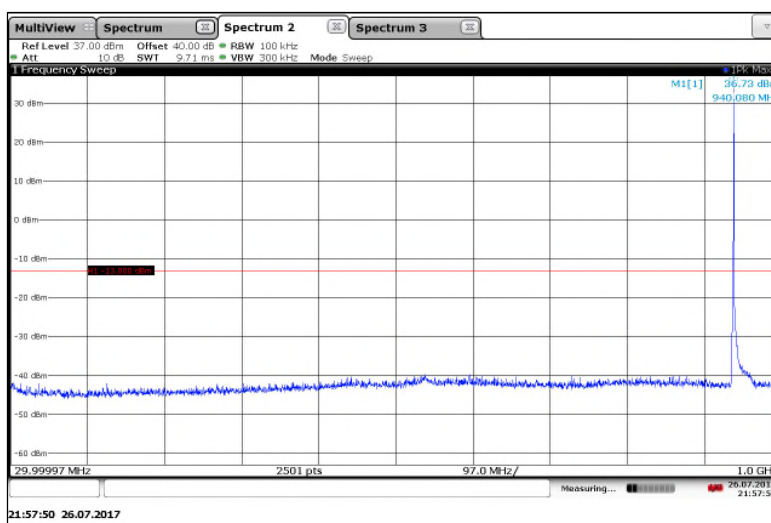


Figure 7.4.2-1: 940.0125 MHz – 30MHz to 1GHz – M2pass5k mode

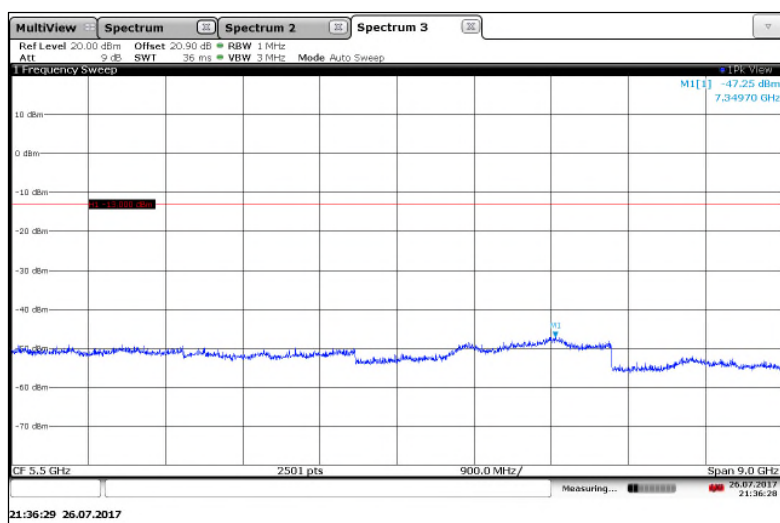
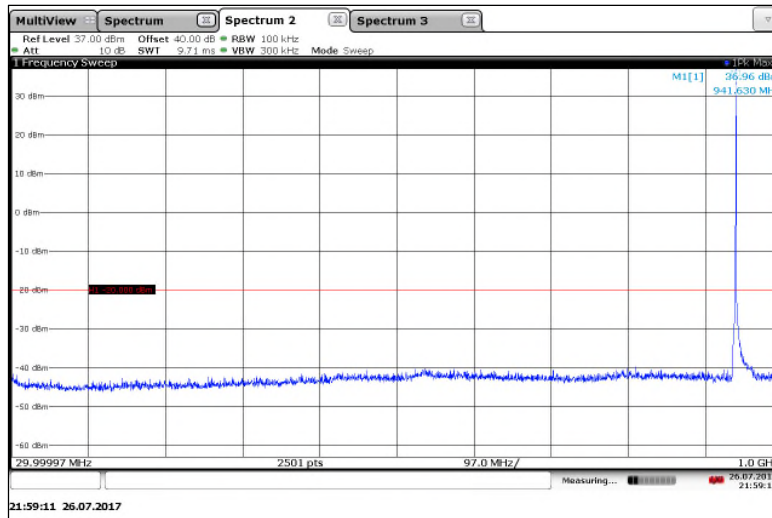
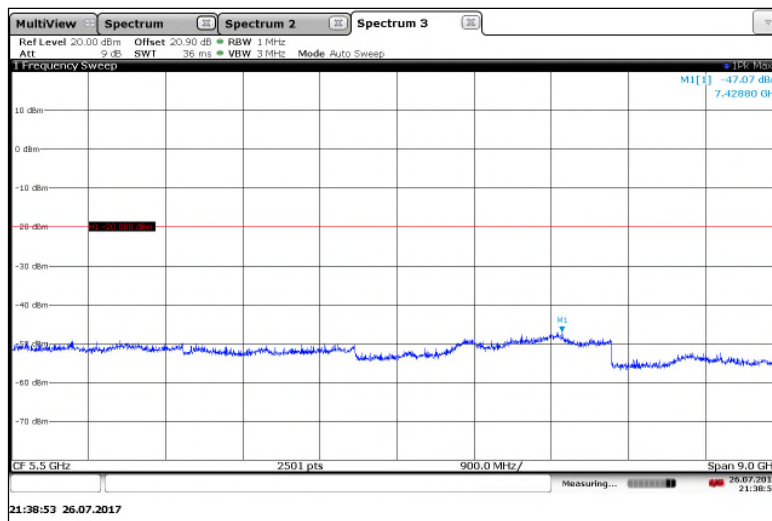


Figure 7.4.2-2: 940.0125 MHz – 1GHz to 10GHz – M2pass5k mode

Part 101.111 a(6), RSS-119 5.8.6**Figure 7.4.2-3: 941.4875 MHz – 30MHz to 1GHz – M2pass5k mode****Figure 7.4.2-4: 941.4875 MHz – 1GHz to 10GHz – M2pass5k mode**

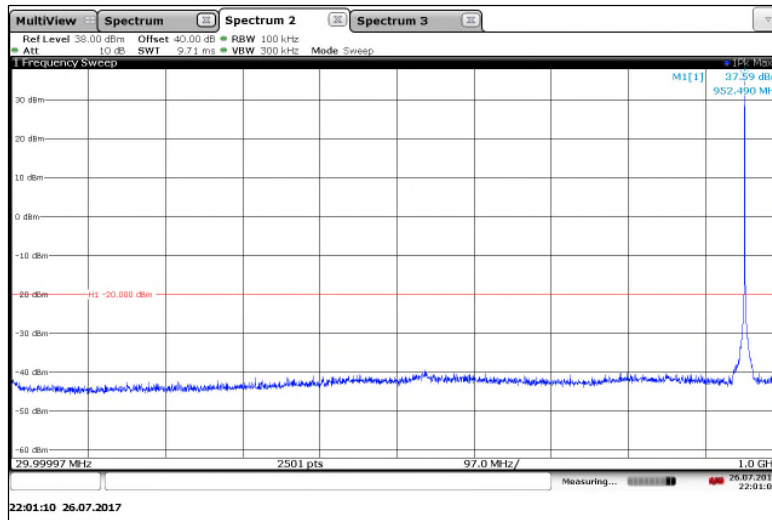


Figure 7.4.2-5: 952.5 MHz – 30MHz to 1GHz – M2pass5k mode

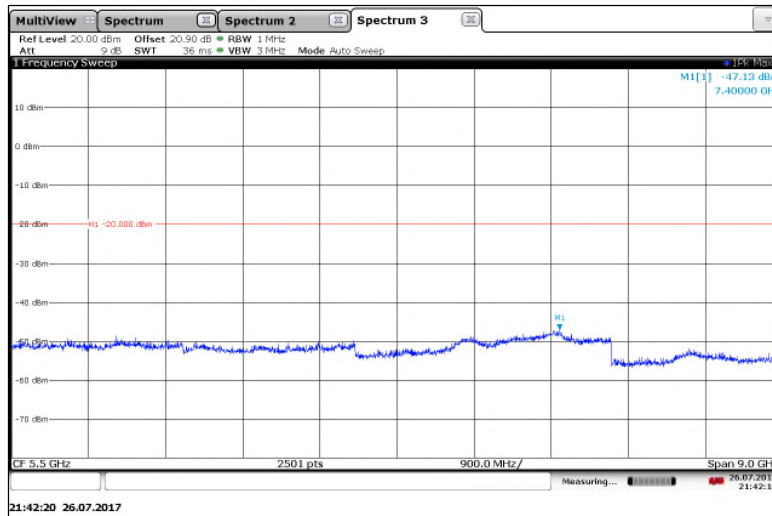


Figure 7.4.2-6: 952.5 MHz – 1GHz to 10GHz – M2pass5k mode

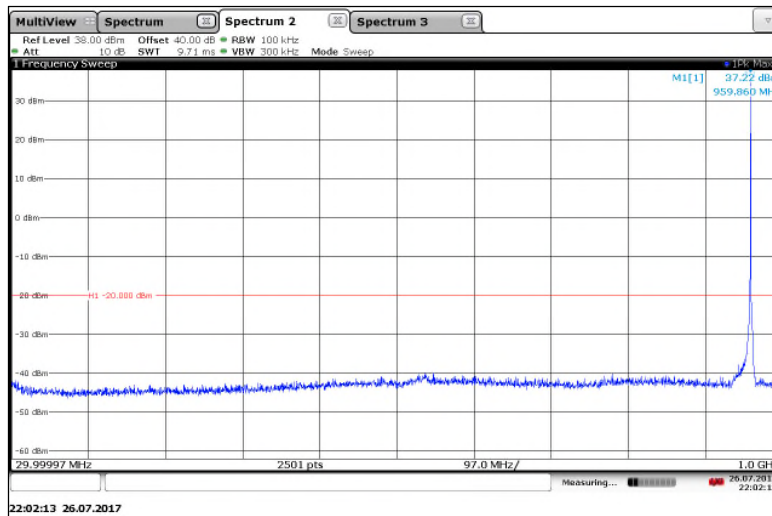


Figure 7.4.2-7: 959.925 MHz – 30MHz to 1GHz – M2pass5k mode

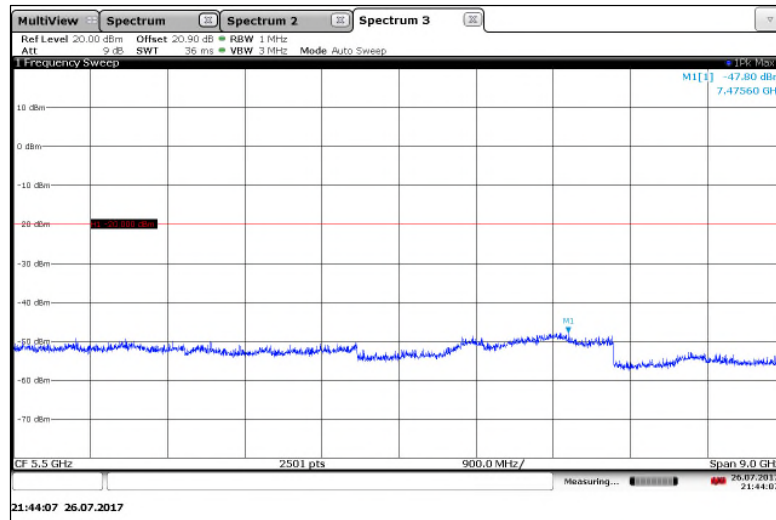


Figure 7.4.2-8: 959.925 MHz – 1GHz to 10GHz – M2pass5k mode

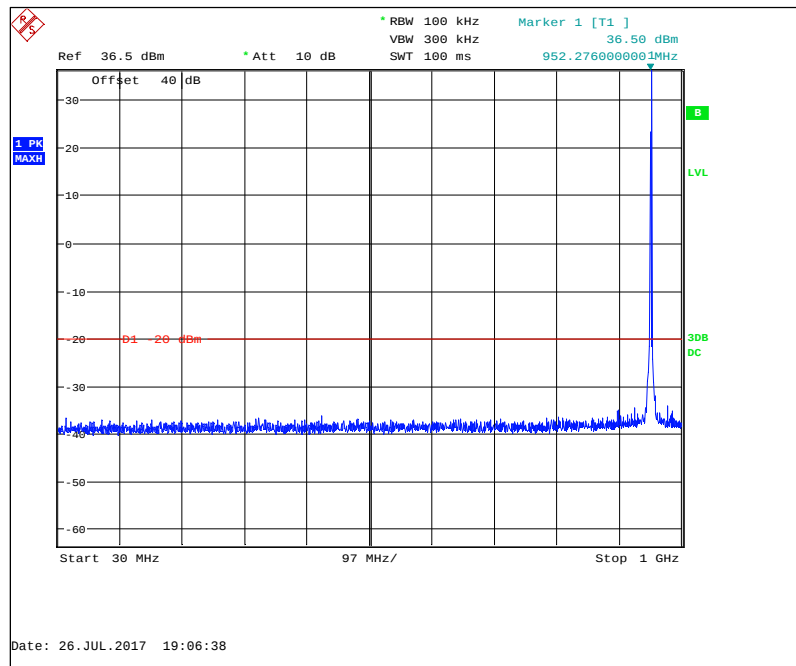


Figure 7.4.2-9: 952 MHz – 30MHz to 1GHz – ERT Tone

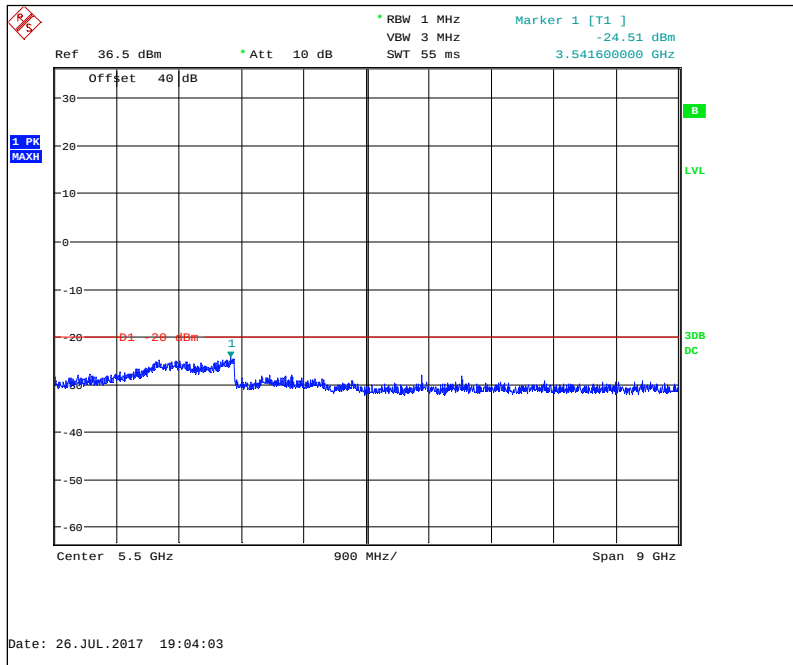


Figure 7.4.2-10: 952 MHz – 1GHz to 10GHz – ERT Tone

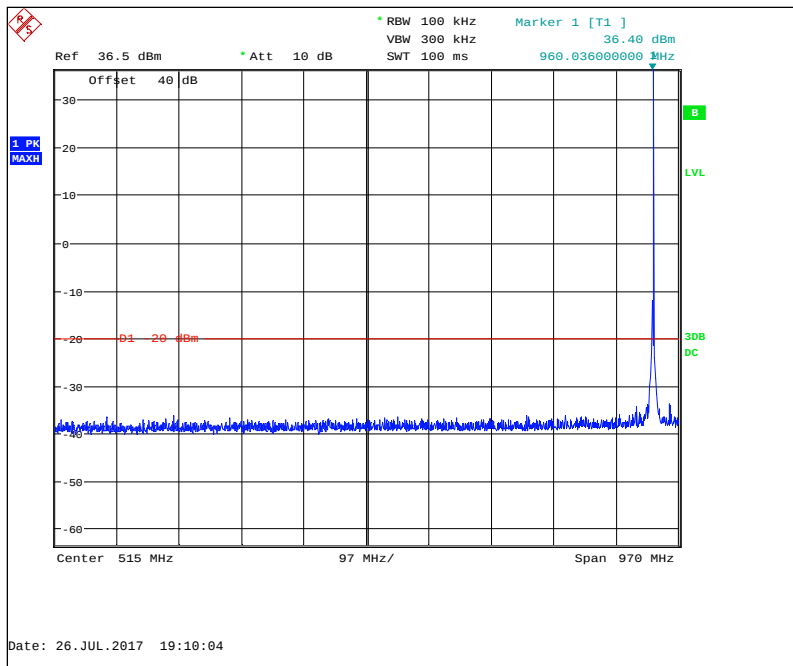


Figure 7.4.2-11: 960 MHz – 30MHz to 1GHz – ERT Tone

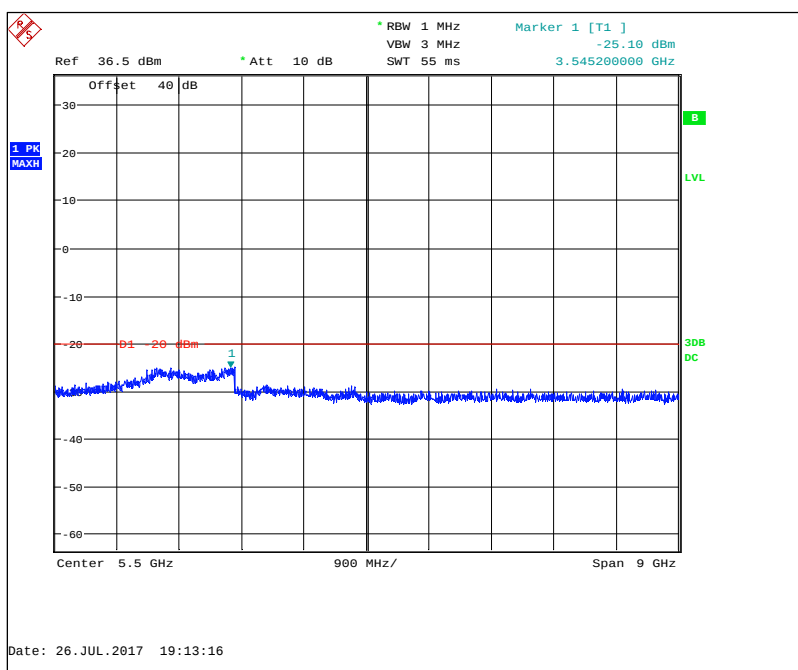


Figure 7.4.2-12: 960 MHz – 1GHz to 10GHz – ERT Tone

Low Power

Part 24.133 a(1), a(2), ISED Canada RSS-134 4.4.1 (a), (b), 4.4.2 (a), (b)

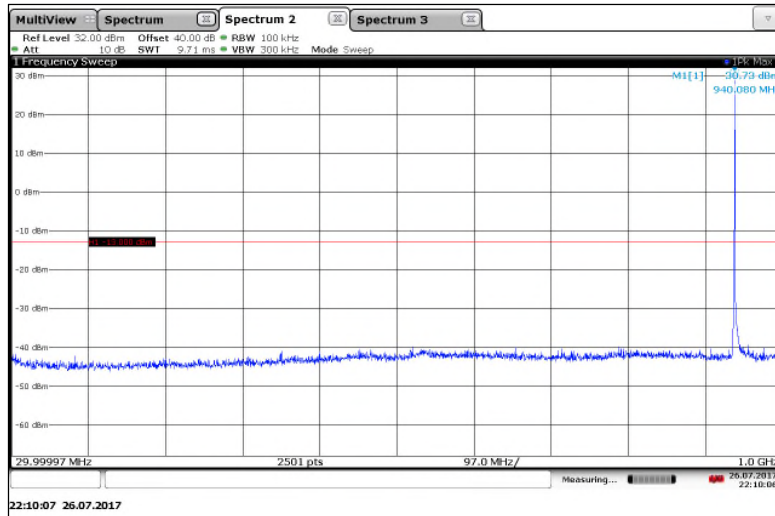


Figure 7.4.2-13: 940.0125 MHz – 30MHz to 1GHz – M2pass5k mode

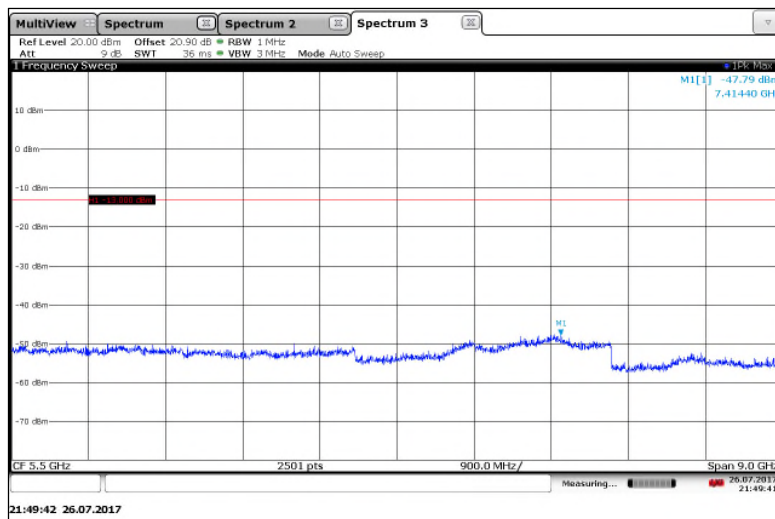


Figure 7.4.2-14: 940.0125 MHz – 1GHz to 10GHz – M2pass5k mode

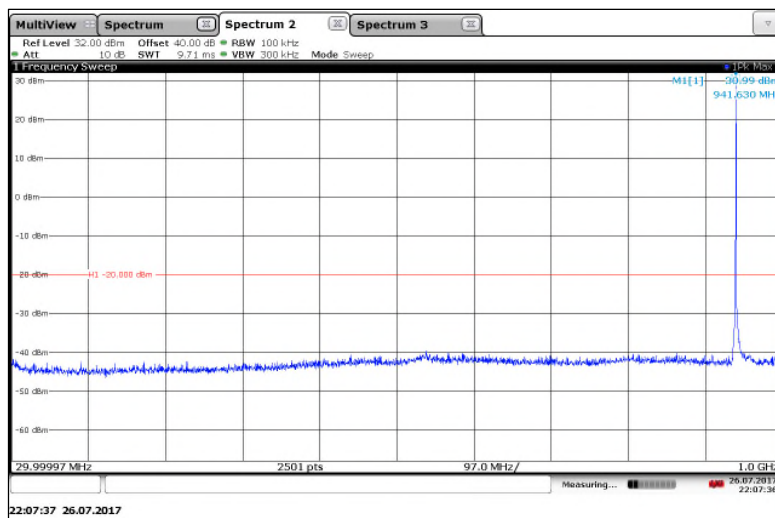
Part 101.111 a(6), RSS-119 5.8.6

Figure 7.4.2-15: 941.4875 MHz – 30MHz to 1GHz – M2pass5k mode

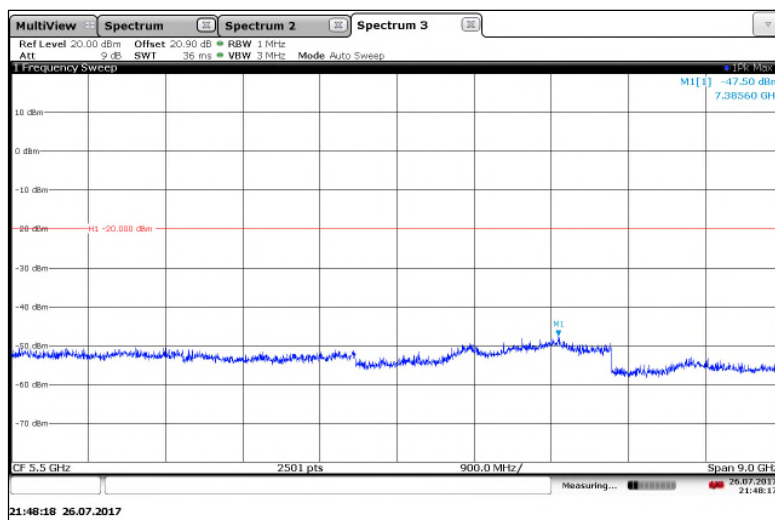


Figure 7.4.2-16: 941.4875 MHz – 1GHz to 10GHz – M2pass5k mode

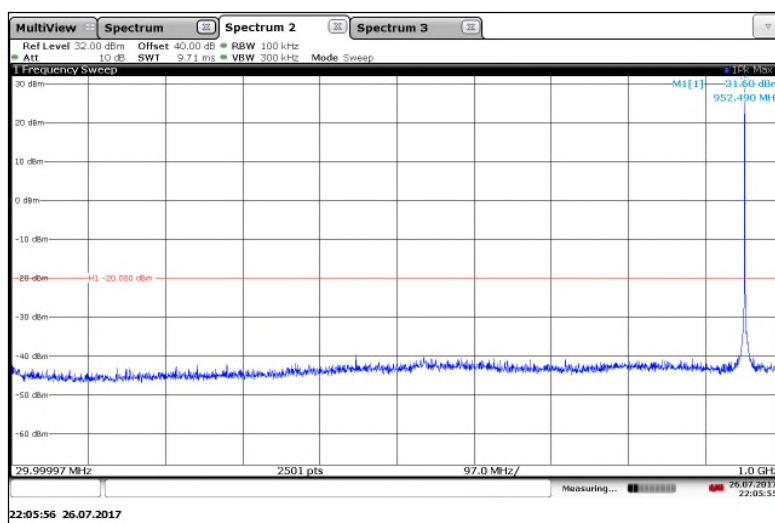


Figure 7.4.2-17: 952.5 MHz – 30MHz to 1GHz – M2pass5k mode

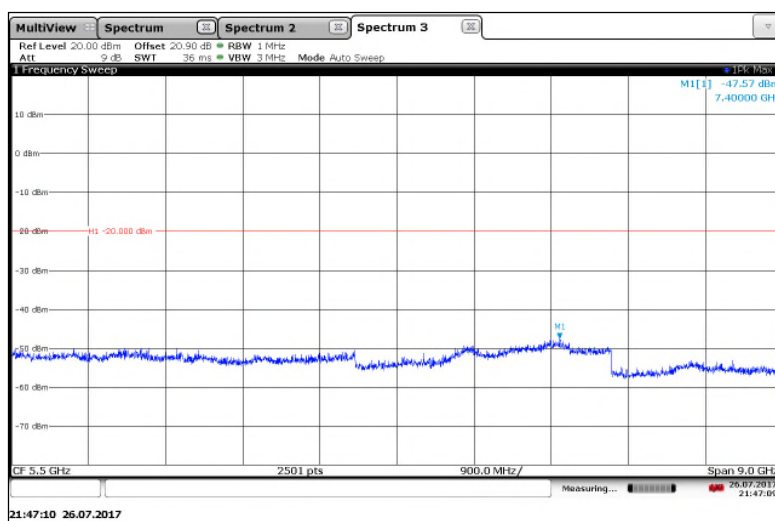


Figure 7.4.2-18: 952.5 MHz – 1GHz to 10GHz – M2pass5k mode

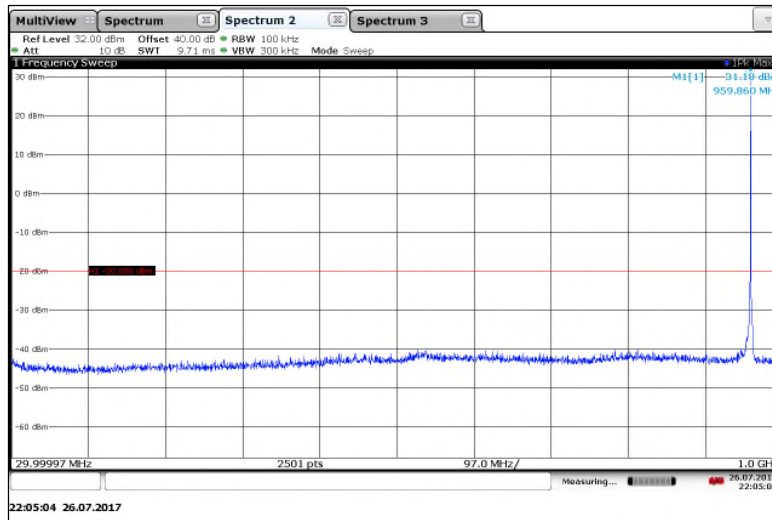


Figure 7.4.2-19: 959.925 MHz – 30MHz to 1GHz – M2pass5k mode

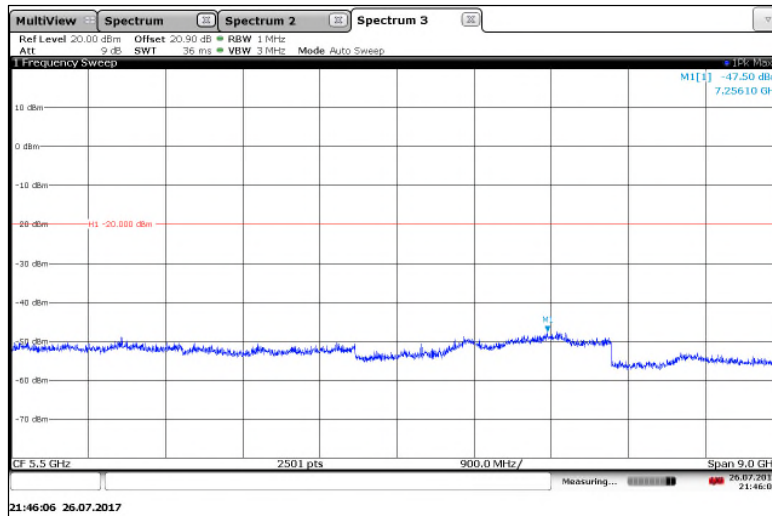


Figure 7.4.2-20: 959.925 MHz – 1GHz to 10GHz – M2pass5k mode

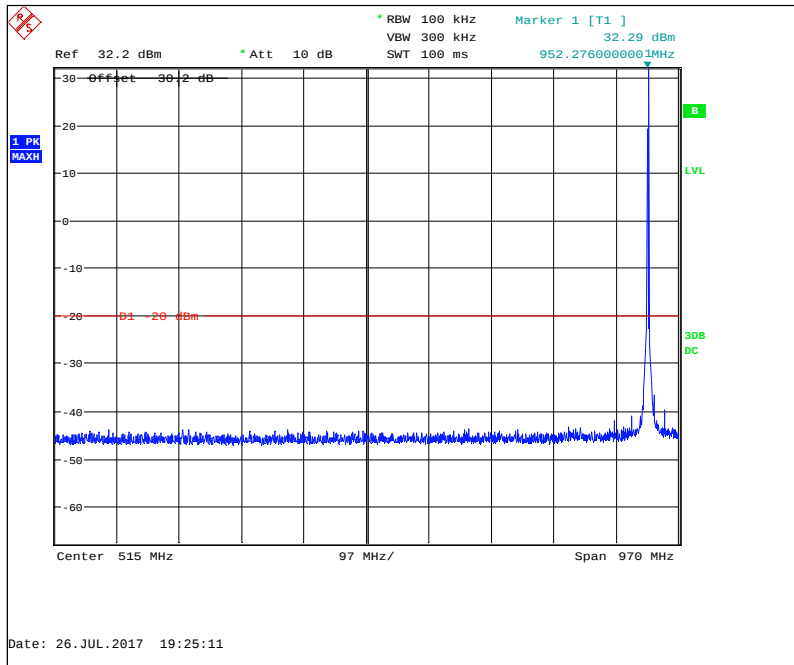


Figure 7.4.2-21: 952 MHz – 30MHz to 1GHz – ERT Tone

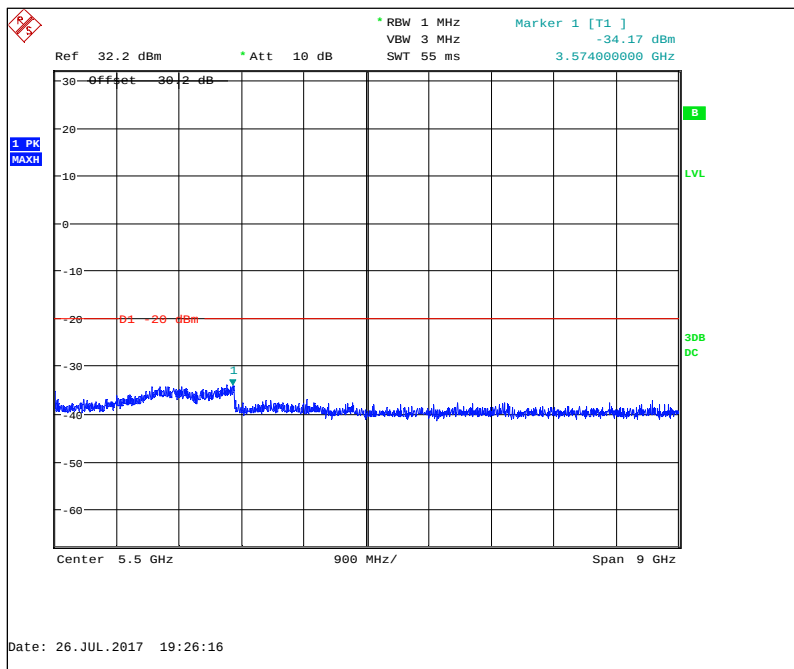


Figure 7.4.2-22: 952 MHz – 1GHz to 10GHz – ERT Tone

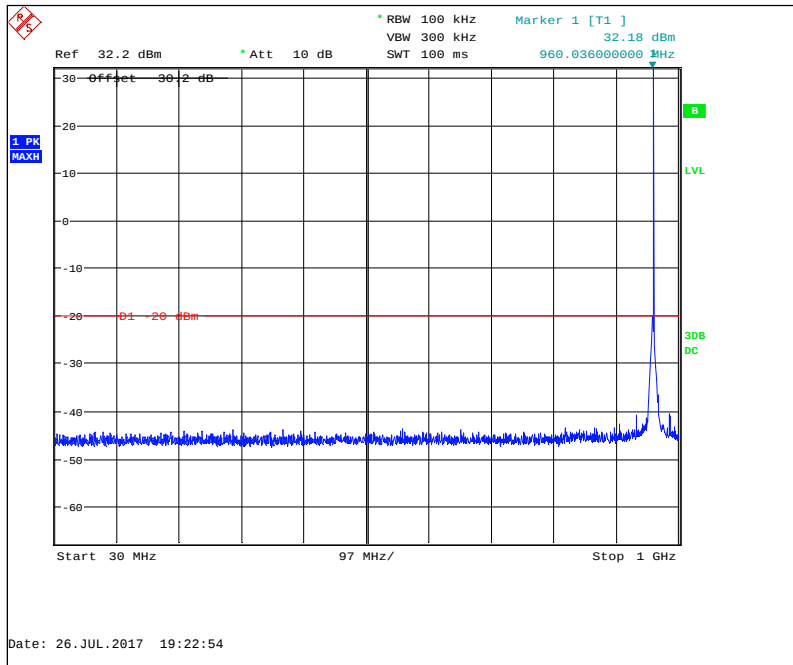


Figure 7.4.2-23: 960 MHz – 30MHz to 1GHz – ERT Tone

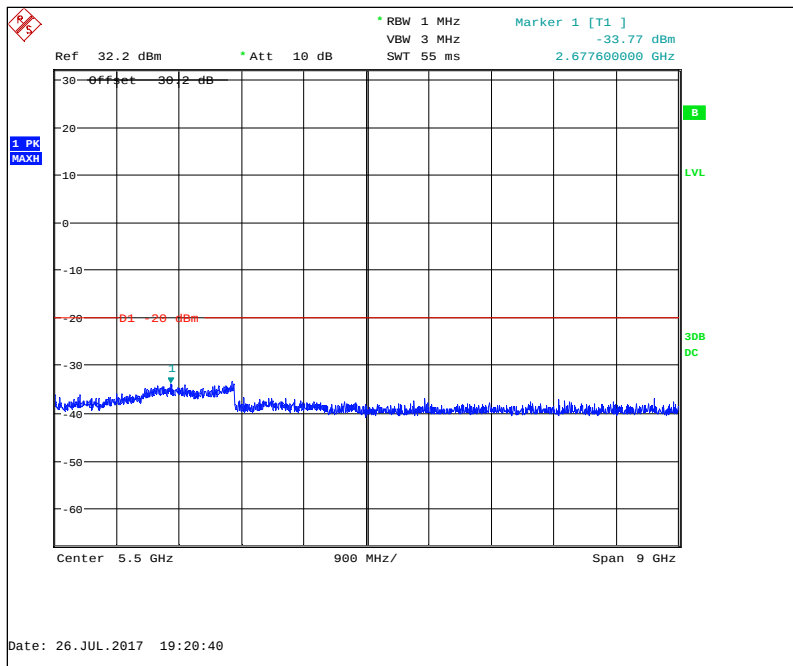


Figure 7.4.2-24: 960 MHz – 1GHz to 10GHz – ERT Tone

7.5 Field Strength of Spurious Emissions

7.5.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.5.2.3.1)

The equipment under test is placed in the Semi-Anechoic Chamber (described in section 2.3.1) on a table at the turntable center. Below 1 GHz the table height was 80cm and above 1 GHz the table height was 1.5m. For each spurious emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° and the maximum reading on the spectrum analyzer is recorded. This was repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. The signal generator's frequency is set to that of the spurious emission recorded from the equipment under test. The antenna mast is raised and lowered from one (1) to four (4) meters to obtain a maximum reading on the spectrum analyzer. The output of the signal generator is then adjusted until the reading on the spectrum analyzer matches that obtained from the equipment under test. The signal generator level is recorded. The power in dBm of each spurious emission is calculated by correcting the signal generator level for the cable loss and gain of the substitution antenna referenced to a dipole. The spectrum was investigated in accordance to CFR 47 Part 2.1057.

The magnitude of all spurious emissions not reported were attenuated below the noise floor of the measurement system and therefore not specified in this report. Results are shown below.

7.5.2 Measurement Results

Performed by: Charles Callis

High Power

Part 24.133 a(1), a(2), RSS-134 4.4.1 (a), (b), 4.4.2 (a), (b)

Table 7.5.2-1: Field Strength of Spurious Emissions – 940.0125 MHz – m2pass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1880.025	64.1	H	-38.69	-13.00	25.69
1880.025	62.2	V	-39.89	-13.00	26.89
2820.0375	60.1	H	-40.14	-13.00	27.14
2820.0375	59.1	V	-39.94	-13.00	26.94
3760.05	49.8	H	-46.54	-13.00	33.54
3760.05	56.6	V	-39.64	-13.00	26.64
4700.0625	60.1	H	-32.43	-13.00	19.43
4700.0625	65.9	V	-27.90	-13.00	14.90
5640.075	68.5	H	-22.45	-13.00	9.45
5640.075	69.8	V	-22.55	-13.00	9.55
6580.0875	47.6	H	-45.18	-13.00	32.18
6580.0875	47.9	V	-45.08	-13.00	32.08

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Part 101.111 a(5) & (6), RSS-119 5.8.6**Table 7.5.2-2: Field Strength of Spurious Emissions – 941.4875 MHz – m2pass 5k Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1882.975	64.2	H	-38.79	-20.00	18.79
1882.975	58.6	V	-43.59	-20.00	23.59
2824.4625	56.8	H	-43.34	-20.00	23.34
2824.4625	56.2	V	-43.24	-20.00	23.24
3765.95	48.2	H	-48.44	-20.00	28.44
3765.95	55.2	V	-41.24	-20.00	21.24
4707.4375	60.6	H	-31.92	-20.00	11.92
4707.4375	65.9	V	-27.42	-20.00	7.42
5648.925	65.8	H	-25.63	-20.00	5.63
5648.925	67.6	V	-24.83	-20.00	4.83
6590.4125	44.7	H	-49.69	-20.00	29.69
6590.4125	45.4	V	-48.59	-20.00	28.59
7531.9	41.0	H	-54.53	-20.00	34.53
7531.9	43.3	V	-51.93	-20.00	31.93

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-3: Field Strength of Spurious Emissions – 952.5 MHz – m2pass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1905	64.9	H	-37.59	-20.00	17.59
1905	62.6	V	-38.79	-20.00	18.79
2857.5	60.3	H	-39.65	-20.00	19.65
2857.5	56.7	V	-43.15	-20.00	23.15
3810	47.9	H	-50.14	-20.00	30.14
3810	54.1	V	-43.44	-20.00	23.44
4762.5	56.4	H	-37.45	-20.00	17.45
4762.5	62.2	V	-32.45	-20.00	12.45
5715	57.4	H	-35.71	-20.00	15.71
5715	58.1	V	-35.51	-20.00	15.51
6667.5	54.3	H	-36.42	-20.00	16.42
6667.5	54.1	V	-37.72	-20.00	17.72
7620	40.6	H	-56.32	-20.00	36.32
7620	42.2	V	-52.62	-20.00	32.62

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-4: Field Strength of Spurious Emissions – 959.925 MHz – m2pass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1919.85	63.4	H	-40.09	-20.00	20.09
1919.85	58.7	V	-43.79	-20.00	23.79
2879.775	55.7	H	-44.86	-20.00	24.86
2879.775	53.2	V	-47.26	-20.00	27.26
3839.7	45.3	H	-53.74	-20.00	33.74
3839.7	50.9	V	-47.24	-20.00	27.24
4799.625	47.1	H	-48.63	-20.00	28.63
4799.625	52.6	V	-43.03	-20.00	23.03
5759.55	56.1	H	-37.03	-20.00	17.03
5759.55	58.5	V	-35.33	-20.00	15.33
6719.475	52.0	H	-39.34	-20.00	19.34
6719.475	55.3	V	-36.64	-20.00	16.64
7679.4	41.8	H	-54.24	-20.00	34.24
7679.4	42.0	V	-54.34	-20.00	34.34

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-3: Field Strength of Spurious Emissions – 952 MHz – ERT Tone

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1904	55.9	H	-47.69	-20.00	27.69
1904	55.4	V	-46.79	-20.00	26.79
2856	52.6	H	-48.45	-20.00	28.45
2856	48.1	V	-53.95	-20.00	33.95
3808	50.2	H	-46.54	-20.00	26.54
3808	54.2	V	-42.84	-20.00	22.84
4760	53.4	H	-40.94	-20.00	20.94
4760	53.3	V	-42.34	-20.00	22.34
5712	56.5	H	-36.22	-20.00	16.22
5712	59.0	V	-34.22	-20.00	14.22
6664	47.9	H	-43.82	-20.00	23.82
6664	51.5	V	-39.82	-20.00	19.82

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-4: Field Strength of Spurious Emissions – 960 MHz – ERT Tone

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1920	63.7	H	-39.09	-20.00	19.09
1920	57.5	V	-44.89	-20.00	24.89
2880	49.6	H	-51.96	-20.00	31.96
2880	45.7	V	-57.56	-20.00	37.56
3840	47.4	H	-49.64	-20.00	29.64
3840	51.7	V	-45.94	-20.00	25.94
4800	51.5	H	-42.54	-20.00	22.54
4800	48.0	V	-49.34	-20.00	29.34
5760	54.2	H	-38.33	-20.00	18.33
5760	53.7	V	-39.73	-20.00	19.73
6720	50.9	H	-39.74	-20.00	19.74
6720	49.5	V	-42.14	-20.00	22.14

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Low Power

Part 24.133 a(1), a(2), RSS-134 4.4.1 (a), (b), 4.4.2 (a), (b)

Table 7.5.2-1: Field Strength of Spurious Emissions – 940.0125 MHz – m2pass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1880.025	60.90	H	-42.29	-13.00	29.29
1880.025	59.3	V	-43.09	-13.00	30.09
2820.0375	55.7	H	-44.94	-13.00	31.94
2820.0375	52.3	V	-48.04	-13.00	35.04
3760.05	48	H	-49.24	-13.00	36.24
3760.05	54	V	-42.74	-13.00	29.74
4700.0625	54.2	H	-38.98	-13.00	25.98
4700.0625	59.2	V	-35.10	-13.00	22.10
5640.075	64.3	H	-26.75	-13.00	13.75
5640.075	65.5	V	-26.85	-13.00	13.85
6580.0875	45.1	H	-48.59	-13.00	35.59
6580.0875	46.1	V	-47.58	-13.00	34.58

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Part 101.111 a(5) & (6), RSS-119 5.8.6**Table 7.5.2-2: Field Strength of Spurious Emissions – 941.4875 MHz – m2pass 5k Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1882.975	61.0	H	-42.19	-20.00	22.19
1882.975	59.0	V	-43.09	-20.00	23.09
2824.4625	55.7	H	-44.64	-20.00	24.64
2824.4625	52.1	V	-48.04	-20.00	28.04
3765.95	45.5	H	-52.44	-20.00	32.44
3765.95	52.4	V	-44.64	-20.00	24.64
4707.4375	54.3	H	-38.82	-20.00	18.82
4707.4375	59.5	V	-34.12	-20.00	14.12
5648.925	62.0	H	-29.53	-20.00	9.53
5648.925	63.2	V	-29.33	-20.00	9.33
6590.4125	41.9	H	-54.69	-20.00	34.69
6590.4125	43.5	V	-51.59	-20.00	31.59
7531.9	41.3	H	-55.53	-20.00	35.53
7531.9	44.3	V	-50.13	-20.00	30.13

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-3: Field Strength of Spurious Emissions – 952.5 MHz – m2pass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1905	59.6	H	-43.29	-20.00	23.29
1905	53.5	V	-48.89	-20.00	28.89
2857.5	53.8	H	-46.85	-20.00	26.85
2857.5	51.2	V	-49.45	-20.00	29.45
3810	46.0	H	-52.64	-20.00	32.64
3810	52.5	V	-45.34	-20.00	25.34
4762.5	51.7	H	-43.05	-20.00	23.05
4762.5	56.7	V	-38.45	-20.00	18.45
5715	56.9	H	-36.31	-20.00	16.31
5715	58.5	V	-35.11	-20.00	15.11
6667.5	48.1	H	-43.92	-20.00	23.92
6667.5	48.6	V	-44.32	-20.00	24.32
7620	39.6	H	-57.82	-20.00	37.82
7620	41.8	V	-53.62	-20.00	33.62

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-4: Field Strength of Spurious Emissions – 959.925 MHz – m2pass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1919.85	56.7	H	-47.39	-20.00	27.39
1919.85	53.3	V	-49.89	-20.00	29.89
2879.775	49.7	H	-52.36	-20.00	32.36
2879.775	48.1	V	-53.76	-20.00	33.76
3839.7	44.5	H	-55.64	-20.00	35.64
3839.7	50.0	V	-48.44	-20.00	28.44
4799.625	44.8	H	-52.43	-20.00	32.43
4799.625	48.7	V	-48.13	-20.00	28.13
5759.55	53.8	H	-39.63	-20.00	19.63
5759.55	56.9	V	-37.13	-20.00	17.13
6719.475	46.3	H	-46.54	-20.00	26.54
6719.475	48.5	V	-45.04	-20.00	25.04
7679.4	40.5	H	-57.34	-20.00	37.34
7679.4	41.1	V	-55.34	-20.00	35.34

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-3: Field Strength of Spurious Emissions – 952 MHz – ERT Tone

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1904	52.3	H	-51.69	-20.00	31.69
1904	51.9	V	-50.99	-20.00	30.99
2856	48.5	H	-53.65	-20.00	33.65
2856	45.7	V	-58.05	-20.00	38.05
3808	49.1	H	-47.94	-20.00	27.94
3808	52.5	V	-44.94	-20.00	24.94
4760	50.1	H	-44.94	-20.00	24.94
4760	48.1	V	-48.94	-20.00	28.94
5712	56.0	H	-36.82	-20.00	16.82
5712	58.9	V	-34.42	-20.00	14.42
6664	43.7	H	-50.12	-20.00	30.12
6664	47.3	V	-45.02	-20.00	25.02

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-4: Field Strength of Spurious Emissions – 960 MHz – ERT Tone

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1920	57.5	H	-45.69	-20.00	25.69
1920	52.1	V	-51.29	-20.00	31.29
2880	46.6	H	-55.86	-20.00	35.86
2880	43.2	V	-61.86	-20.00	41.86
3840	47.7	H	-49.24	-20.00	29.24
3840	50.5	V	-47.44	-20.00	27.44
4800	46.2	H	-50.14	-20.00	30.14
4800	44.0	V	-55.54	-20.00	35.54
5760	52.4	H	-40.43	-20.00	20.43
5760	52.2	V	-41.43	-20.00	21.43
6720	43.4	H	-50.64	-20.00	30.64
6720	43.9	V	-50.14	-20.00	30.14

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

7.6 Frequency Stability

7.6.1 Measurement Procedure (ANSI C63.26 Section 5.6.3)

The equipment under test is placed inside an environmental chamber. The RF output is directly coupled to the input of the measurement equipment and a power supply is attached to the primary supply voltage.

Frequency measurements were made at the extremes of the of temperature range -30° C to +50° C and at intervals of 10° C at normal supply voltage. A period of time sufficient to stabilize all components of the equipment was allowed at each frequency measurement. The equipment operates at 12 Vdc. Measurements were made to the equipment under test at a temperature of 20° C and at 85% and 115% variation of 12Vdc. The maximum variation of frequency was recorded.


7.6.2 Measurement Results

Performed by: Randle Sherian

Part 24.135, RSS-134 (4.5)

Figure 7.6.2-9: Frequency Stability – 940.0125 MHz

Frequency Stability				
		Frequency (MHz):	940.0125	
		Deviation Limit (PPM):	1.0ppm	
Temperature	Frequency	Frequency Error	Voltage	Voltage
C	MHz	(PPM)	(%)	(VDC)
-30 C	940.012783	0.301	100%	12.00
-20 C	940.012870	0.394	100%	12.00
-10 C	940.012790	0.309	100%	12.00
0 C	940.012691	0.203	100%	12.00
10 C	940.012683	0.195	100%	12.00
20 C	940.012611	0.118	100%	12.00
30 C	940.012655	0.165	100%	12.00
40 C	940.012642	0.151	100%	12.00
50 C	940.012611	0.118	100%	12.00
20 C	940.012632	0.140	115%	13.80
20 C	940.012652	0.162	85%	10.20

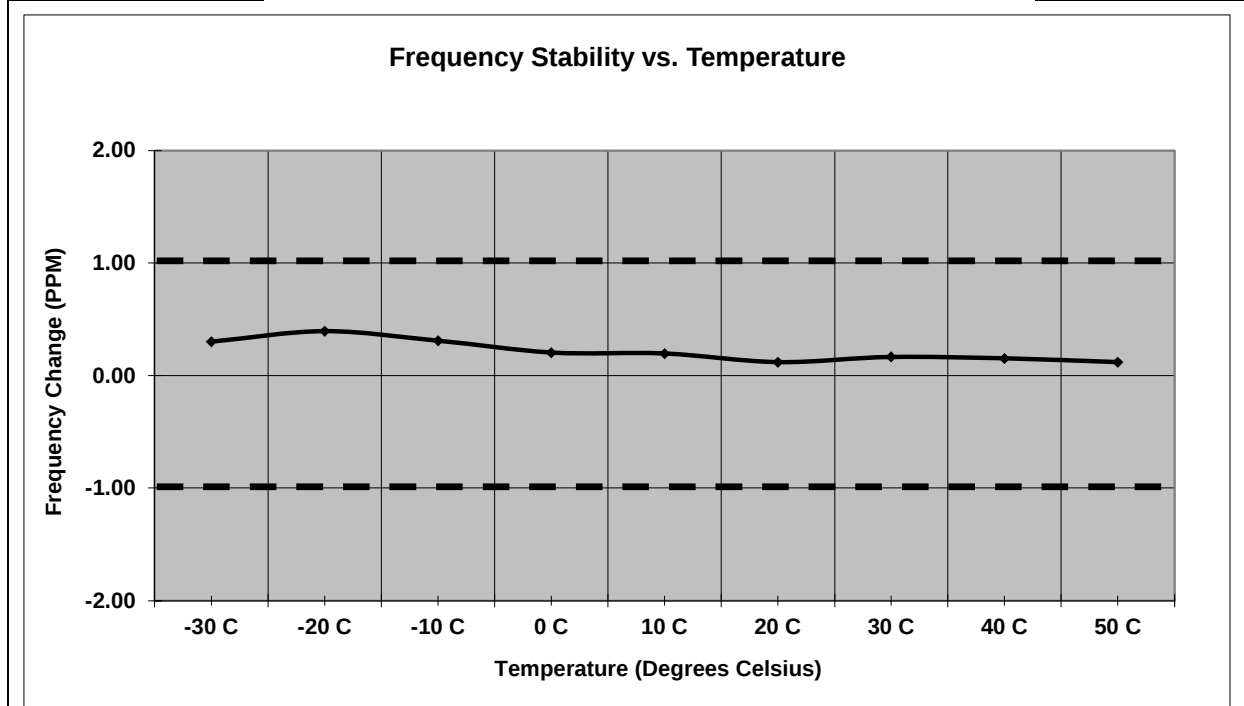

Part 101.107, RSS-119 5.3

Figure 7.6.2-9: Frequency Stability – 952 MHz


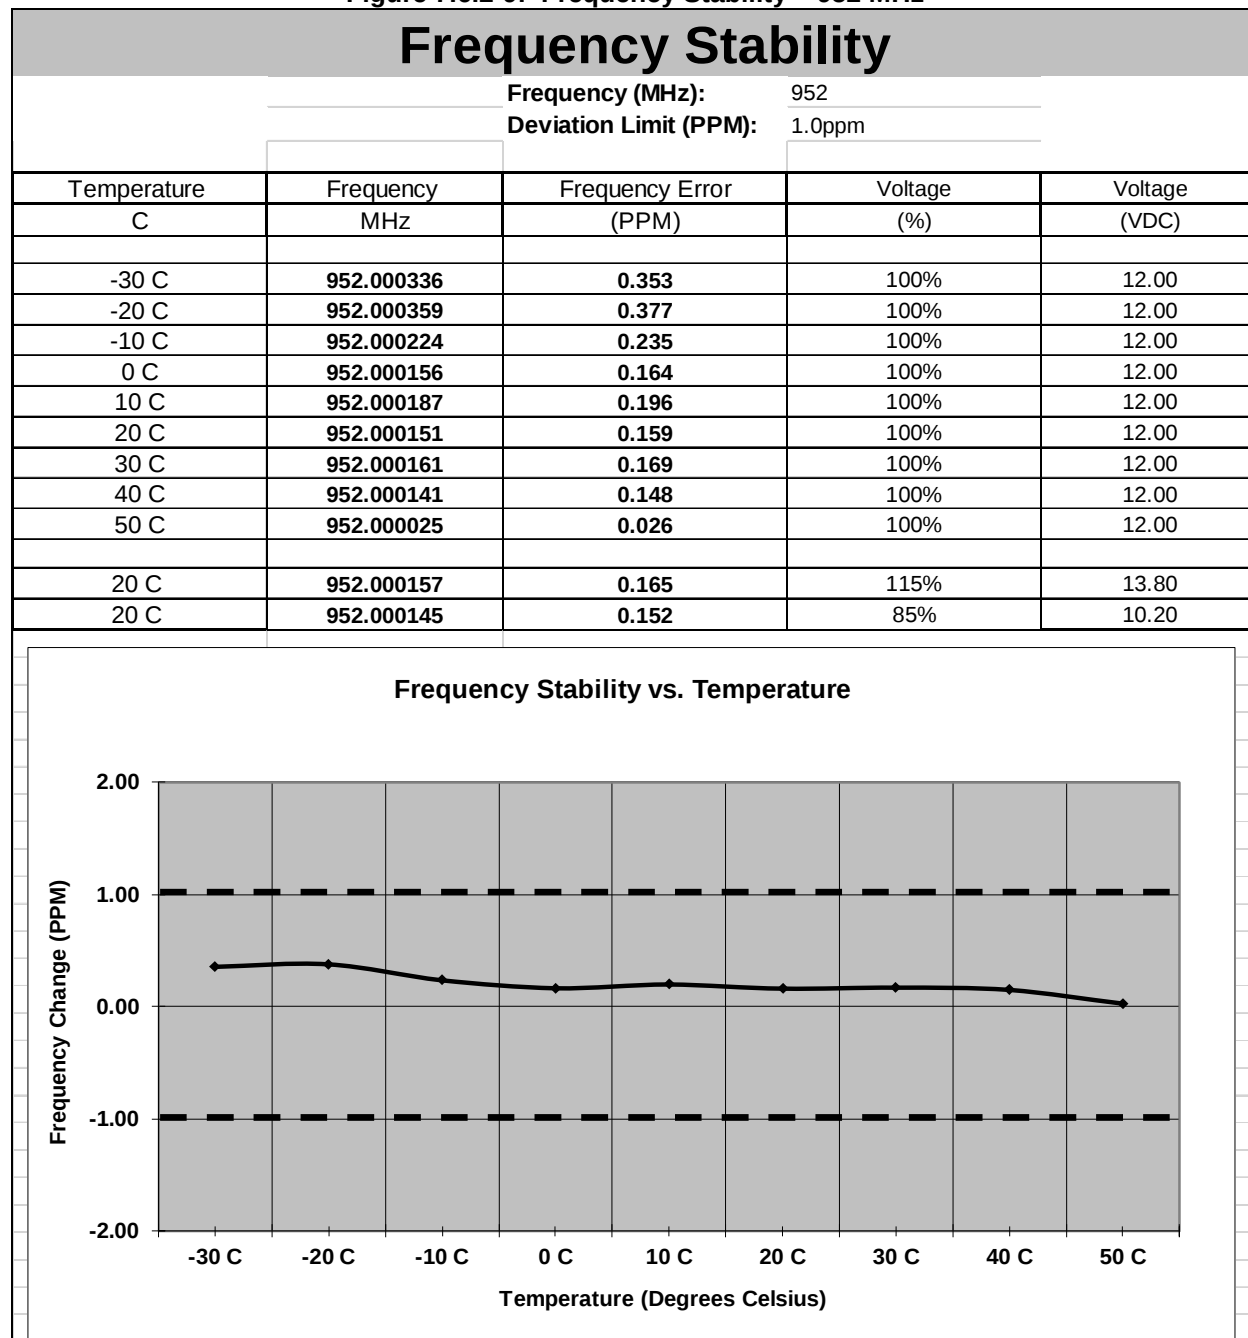


Figure 7.6.2-9: Frequency Stability – 959.925 MHz

Frequency Stability				
Frequency (MHz):		959.925		
Deviation Limit (PPM):		1.0ppm		
Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	959.925294	0.306	100%	12.00
-20 C	959.925330	0.344	100%	12.00
-10 C	959.925331	0.345	100%	12.00
0 C	959.925141	0.147	100%	12.00
10 C	959.925175	0.182	100%	12.00
20 C	959.925151	0.157	100%	12.00
30 C	959.925154	0.160	100%	12.00
40 C	959.925137	0.143	100%	12.00
50 C	959.924900	-0.104	100%	12.00
20 C	959.925147	0.153	115%	13.80
20 C	959.925153	0.159	85%	10.20

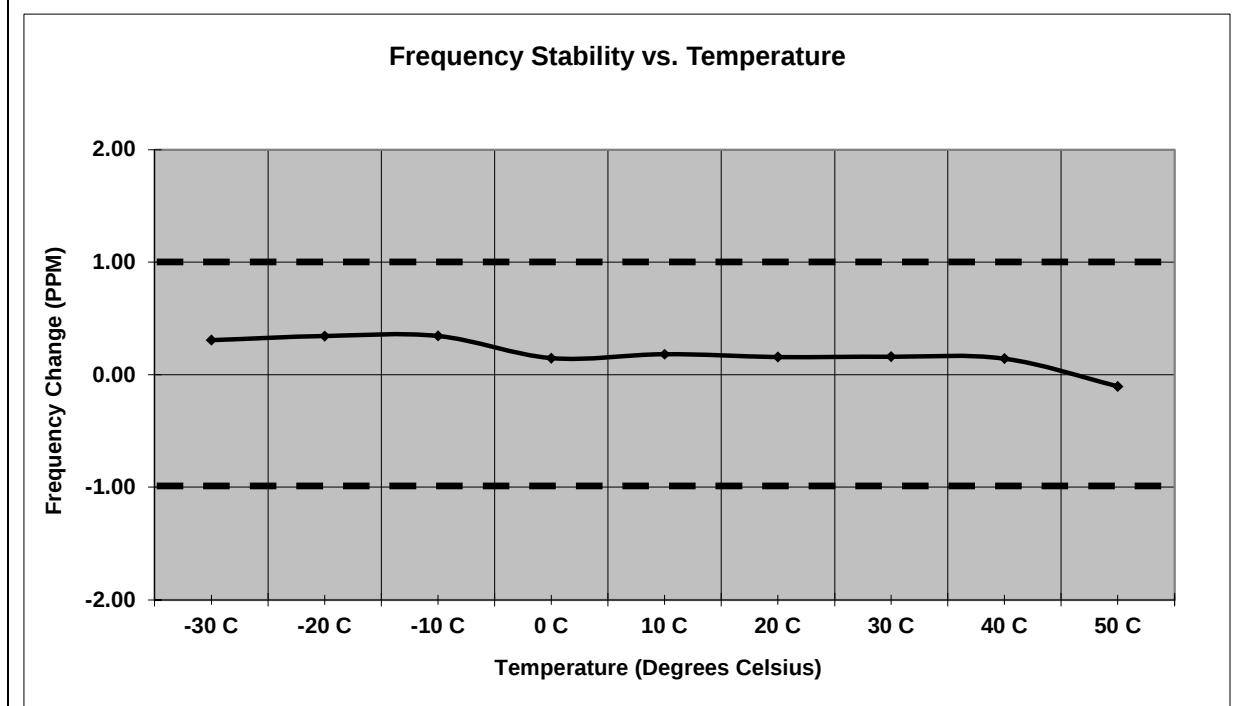

8.0 MEASUREMENT UNCERTAINTY

The expanded laboratory measurement uncertainty figures (U_{Lab}) provided below correspond to an expansion factor (coverage factor) $k = 1.96$ which provide confidence levels of 95%.

Parameter	U_{lab}
Occupied Channel Bandwidth	$\pm 0.004\%$
RF Conducted Output Power	$\pm 0.689 \text{ dB}$
Power Spectral Density	$\pm 0.5 \text{ dB}$
Antenna Port Conducted Emissions	$\pm 2.717 \text{ dB}$
Radiated Emissions	$\pm 5.877 \text{ dB}$
Temperature	$\pm 0.860 \text{ }^{\circ}\text{C}$
Radio Frequency	$\pm 2.832 \times 10^{-8}$
AC Power Line Conducted Emissions	± 2.85

9.0 CONCLUSION

In the opinion of TÜV SÜD America Inc. the model 5396390010001, manufactured by Sensus Metering Systems, Inc., meets all the requirements of FCC Part 24D and Part 101 as well as ISED Canada RSS-119 and RSS-134 where applicable.

End Report