

KTFT-UX200 (BODY)

SAM II Phantom; Flat Section; Position: (90°, 90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $\sigma = 1.46 \text{ mho/m}$ $\epsilon_r = 50.8$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.734 mW/g, SAR (10g): 0.428 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: 0.01 dB

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Body / Antenna: In

Mode: PCS CDMA / Channel: 25 (1851.25MHz)

Conducted Power: 24.0 dBm

Liquid Temperature: 21.7 °C

Date Tested: April 16, 2005

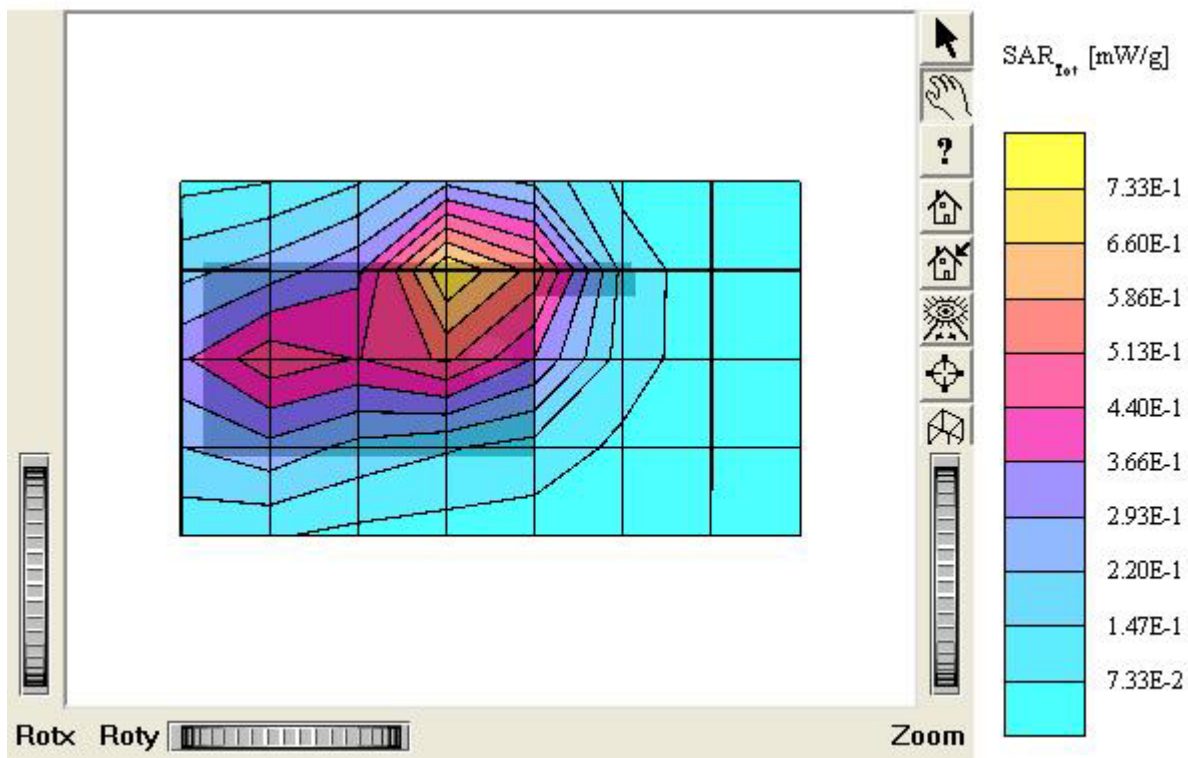

KTFT-UX200 (BODY)

SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $\sigma = 1.46 \text{ mho/m}$ $\epsilon_r = 50.8 \rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.263 mW/g, SAR (10g): 0.155 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.00 dB

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Body / Antenna: Out

Mode: PCS CDMA / Channel: 25 (1851.25MHz)

Conducted Power: 24.0 dBm

Liquid Temperature: 21.7 °C

Date Tested: April 16, 2005

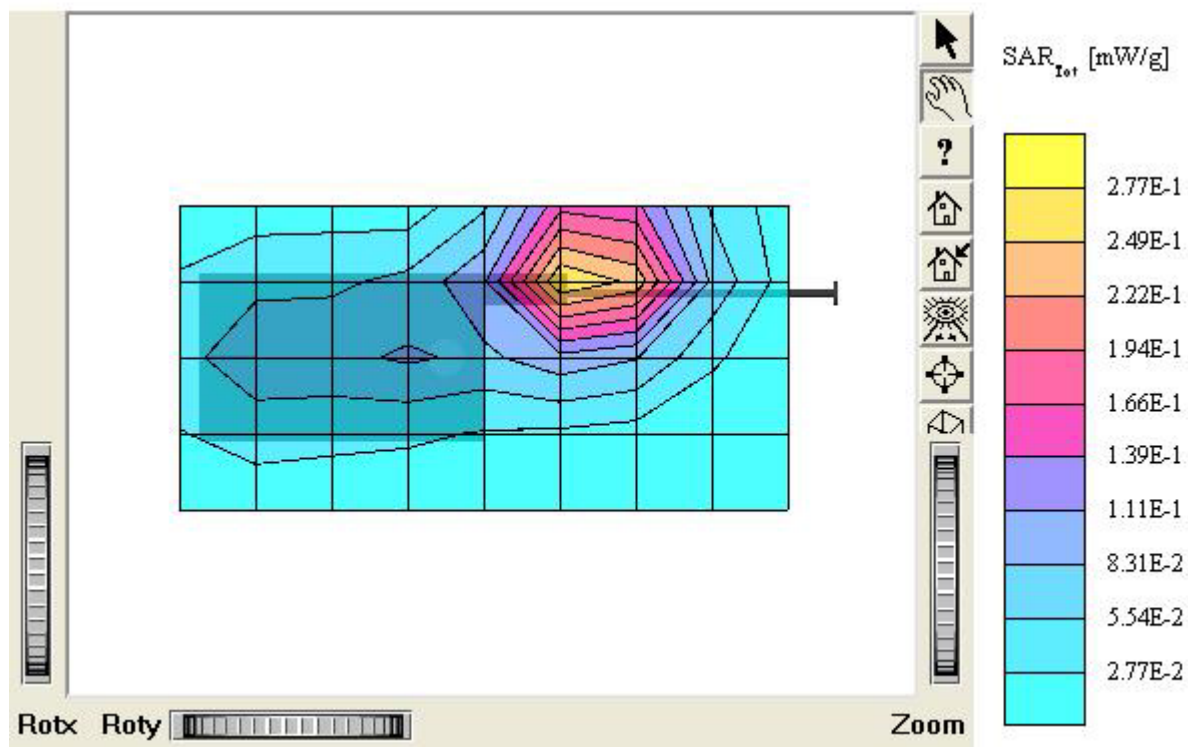

KTFT-UX200 (BODY)

SAM II Phantom, Flat Section; Position: (90°, 90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60, 4.60, 4.60); Crest factor: 1.0; Body 1900 MHz: $\sigma = 1.46 \text{ mho/m}$, $\epsilon_r = 50.8$, $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.288 mW/g, SAR (10g): 0.168 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.04 dB

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Body / Antenna: In

Mode: PCS CDMA / Channel: 600 (1880 MHz)

Conducted Power: 24.0 dBm

Liquid Temperature: 21.7 °C

Date Tested: April 16, 2005

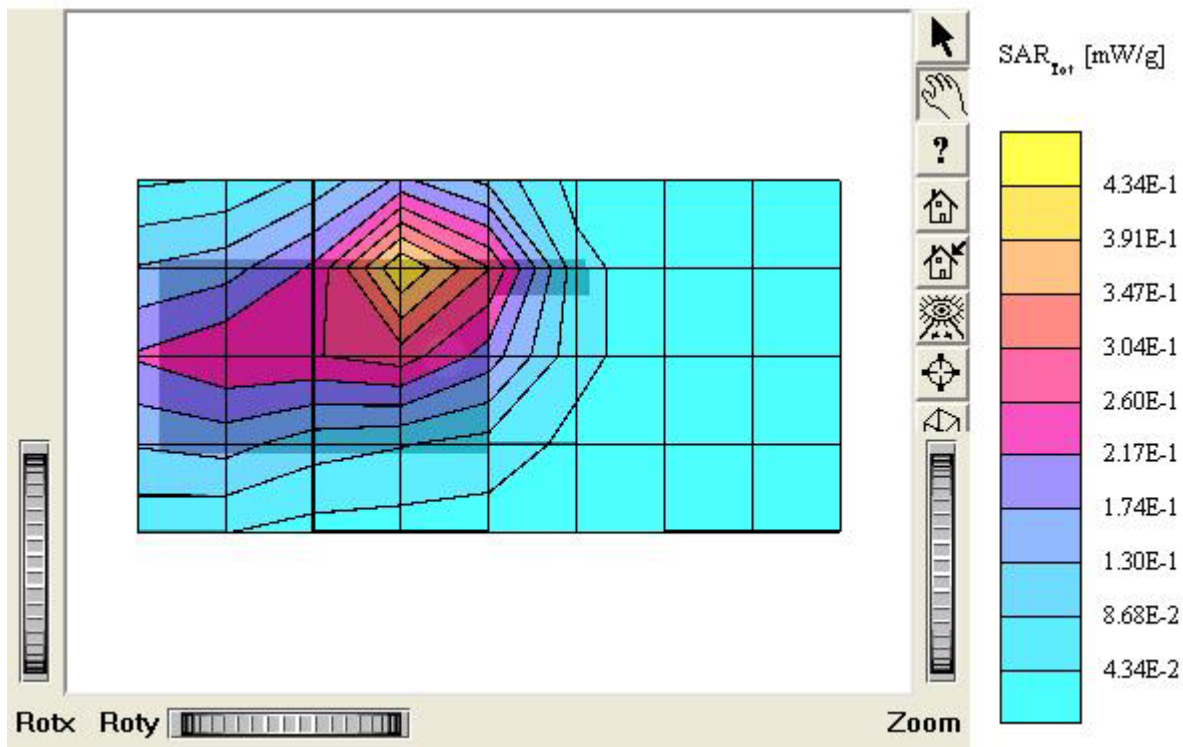

KTFT-UX200 (BODY)

SAM II Phantom; Flat Section; Position: (90°, 90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $\sigma = 1.46 \text{ mho/m}$, $\epsilon_r = 50.8$, $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.146 mW/g, SAR (10g): 0.0860 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: 0.01 dB

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Body / Antenna: Out

Mode: PCS CDMA / Channel: 600 (1880 MHz)

Conducted Power: 24.0 dBm

Liquid Temperature: 21.7 °C

Date Tested: April 16, 2005

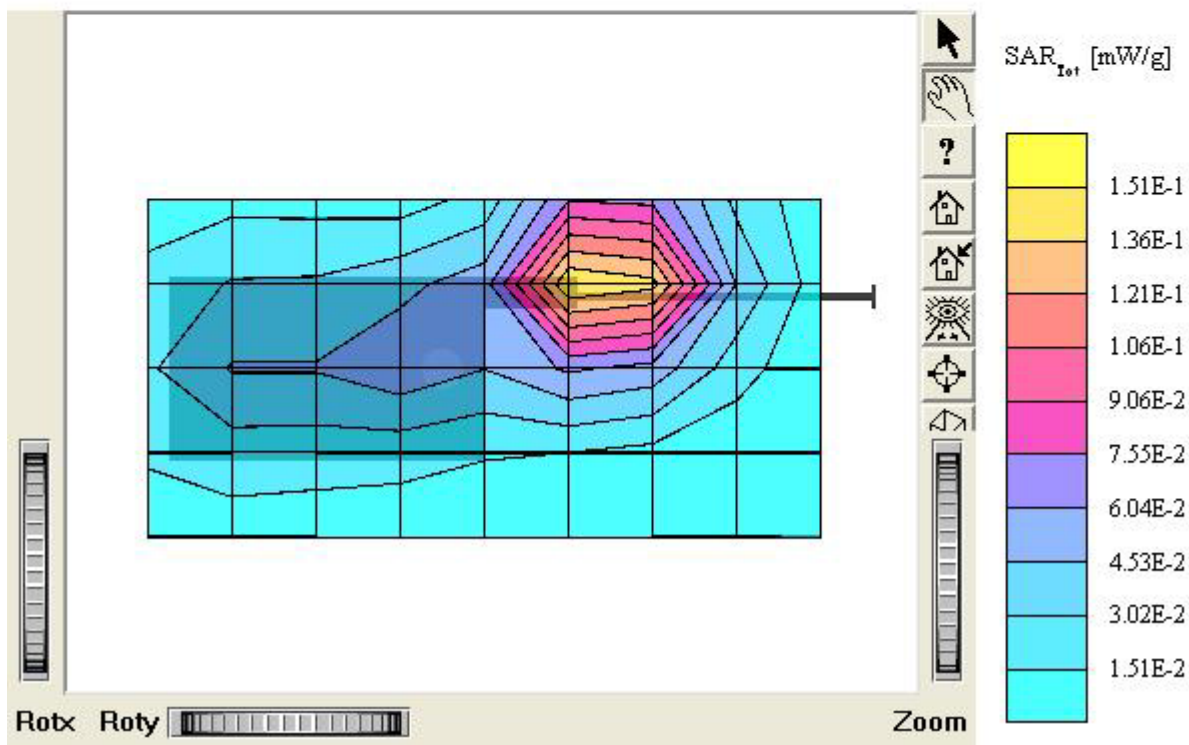

KTFT-UX200 (BODY)

SAM II Phantom; Flat Section; Position: (90°, 90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $\sigma = 1.46 \text{ mho/m}$, $\epsilon_r = 50.8$, $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.529 mW/g, SAR (10g): 0.308 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.05 dB

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Body / Antenna: In

Mode: PCS CDMA / Channel: 1175 (1908.75 MHz)

Conducted Power: 24.0 dBm

Liquid Temperature: 21.7 °C

Date Tested: April 16, 2005

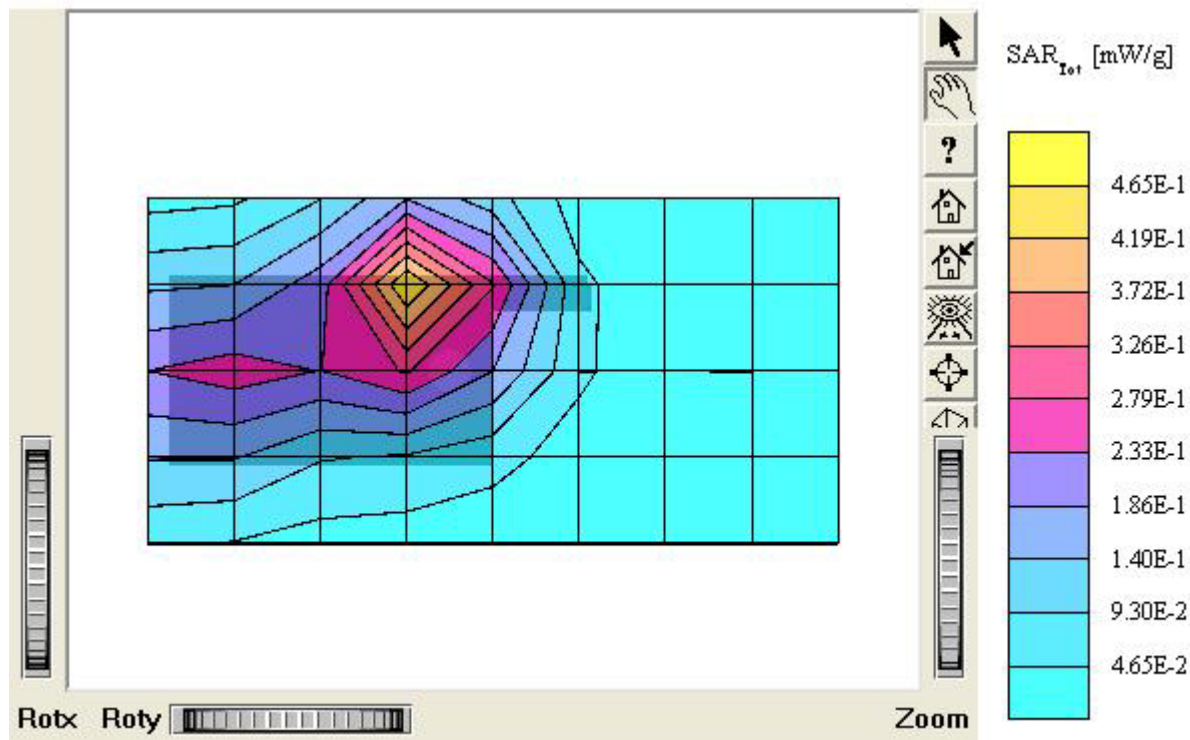

KTFT-UX200 (BODY)

SAM II Phantom; Flat Section; Position: (90°, 90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $\sigma = 1.46 \text{ mho/m}$ $\epsilon_r = 50.8$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.238 mW/g, SAR (10g): 0.140 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.26 dB

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Body / Antenna: Out

Mode: PCS CDMA / Channel: 1175 (1908.75 MHz)

Conducted Power: 24.0 dBm

Liquid Temperature: 21.7 °C

Date Tested: April 16, 2005

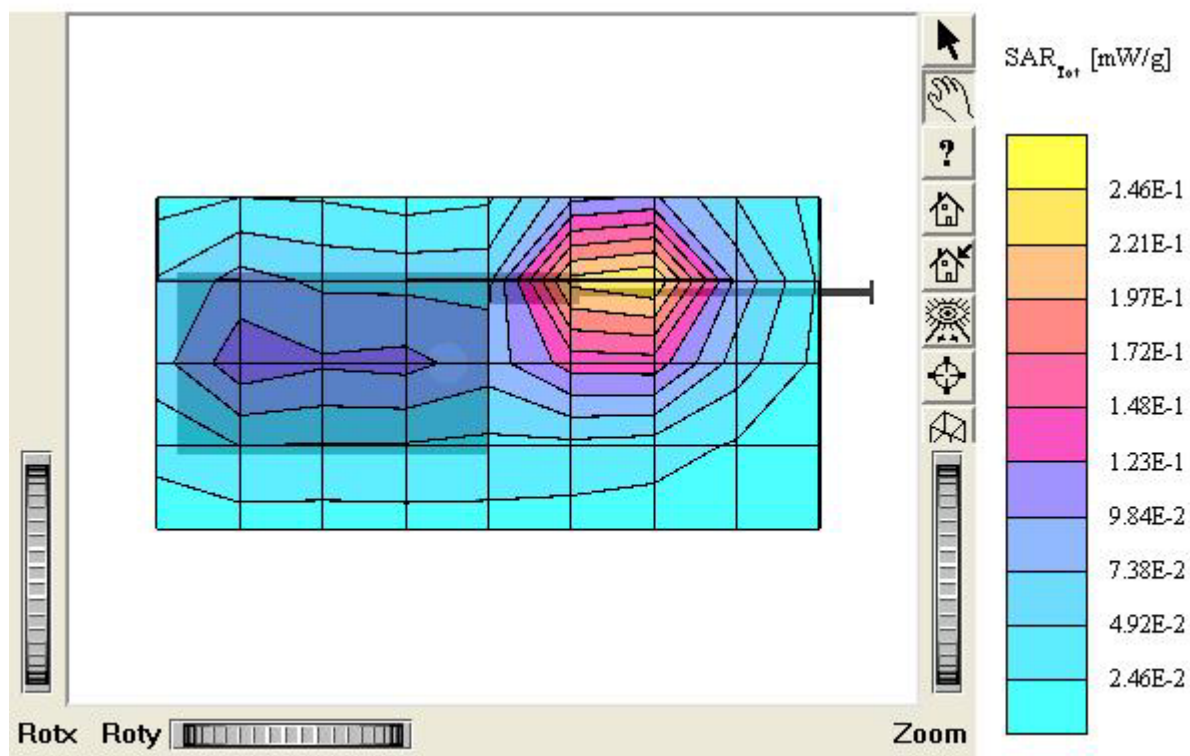

KTFT-UX200

SAM I Phantom; Section; Position: ; Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.89 \text{ mho/m}$ $\epsilon_r = 41.0$ $\rho =$ 1.00 g/cm³

:

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Right Touch / Antenna: Out

Mode: AMPS / Channel: 991 (824.04MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.7 °C

Date Tested: April 14, 2005

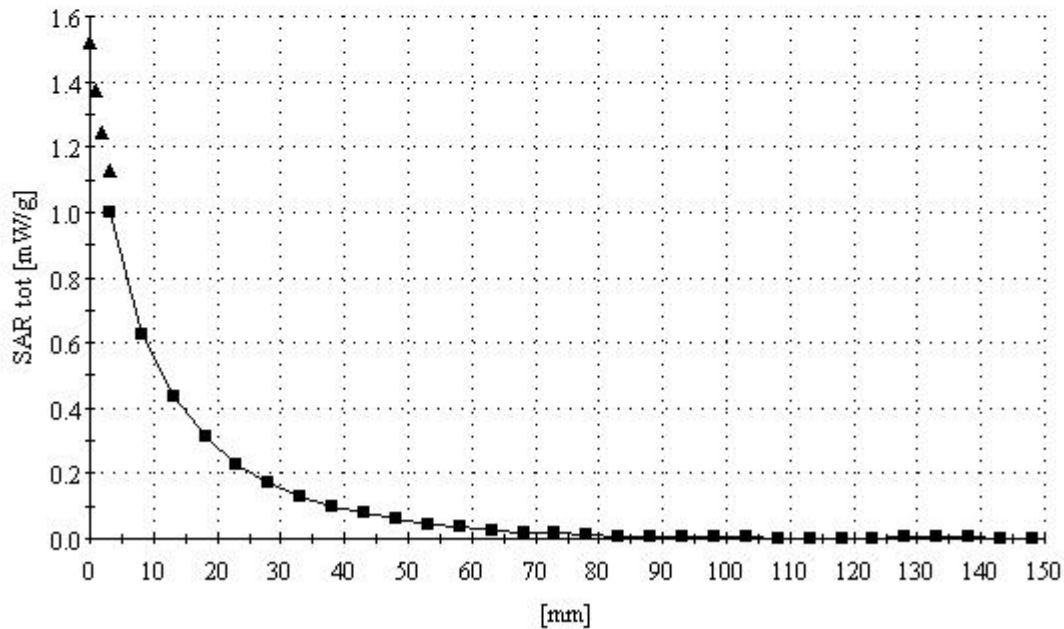

KTFT-UX200

SAM I Phantom; Section; Position: ; Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88 \text{ mho/m}$ $\epsilon_r = 41.9$ $\rho = 1.00 \text{ g/cm}^3$

:

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Right / touch / Antenna: Out

Mode: CDMA / Channel: 777 (848.31MHz)

Conducted Power: 25.5 dBm

Liquid Temperature: 21.4 °C

Date Tested: April 15, 2005

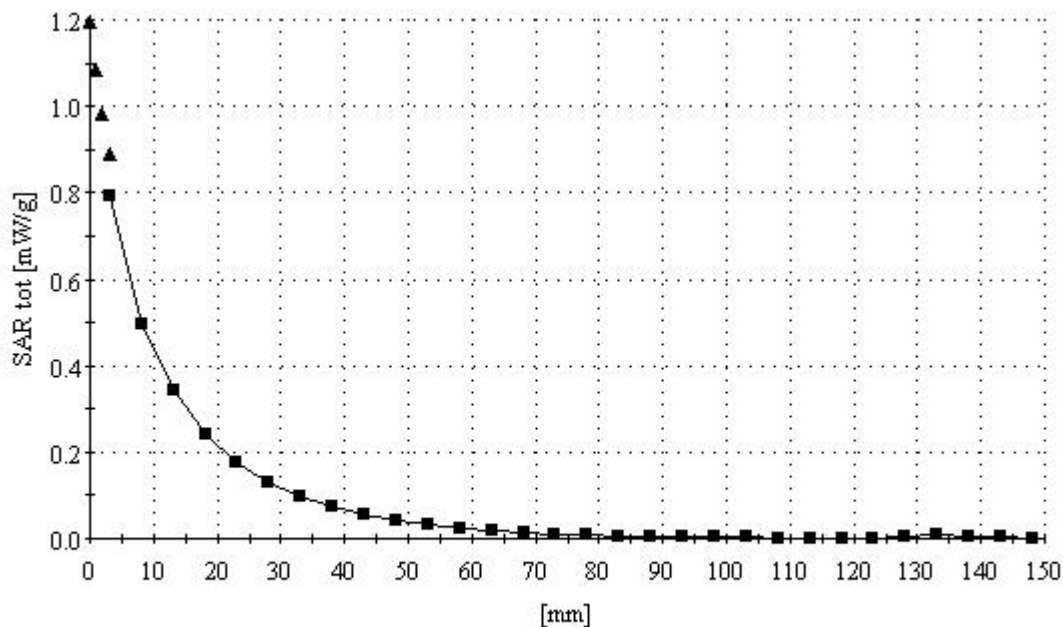

KTFT-UX200

SAM II Phantom; Section; Position: ; Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44 \text{ mho/m}$ $\epsilon_r = 38.7$ $\rho = 1.00 \text{ g/cm}^3$

:

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Right / touch / Antenna: In

Mode: PCS CDMA / Channel: 25 (1851.25MHz)

Conducted Power: 24.0 dBm

Liquid Temperature: 21.7 °C

Date Tested: April 16, 2005

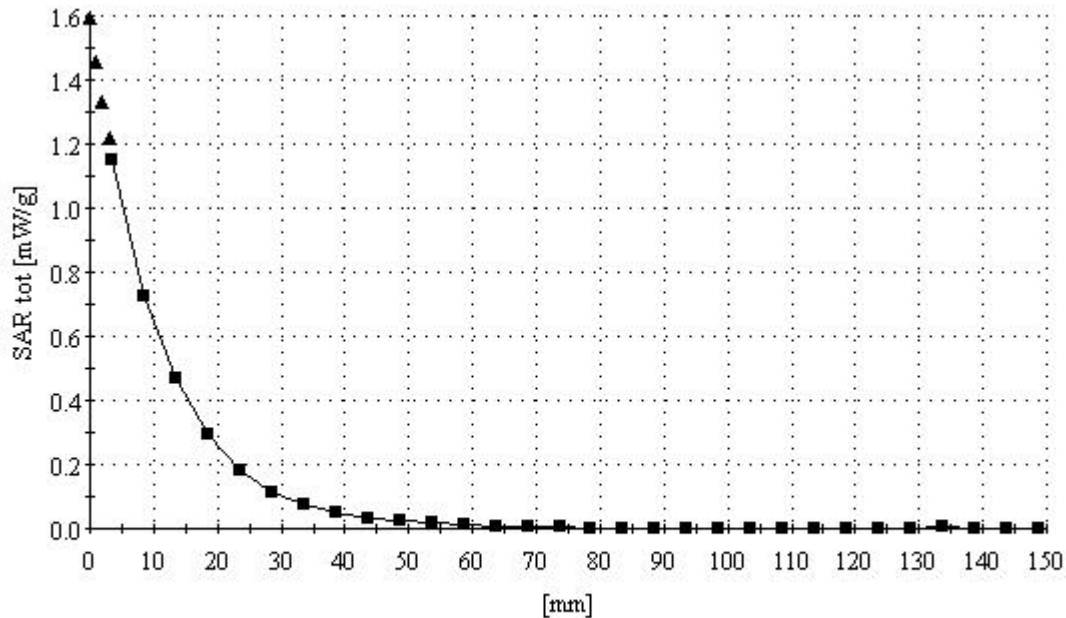

KTFT-UX200 (BODY)

SAM I Phantom; Section; Position: ; Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz: $\sigma = 0.97 \text{ mho/m}$ $\epsilon_r = 53.9$ $\rho = 1.00 \text{ g/cm}^3$

:

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd..


Test Position: Body / Antenna: Out

Mode: AMPS / Channel: 799 (848.97MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.7 °C

Date Tested: April 14, 2005

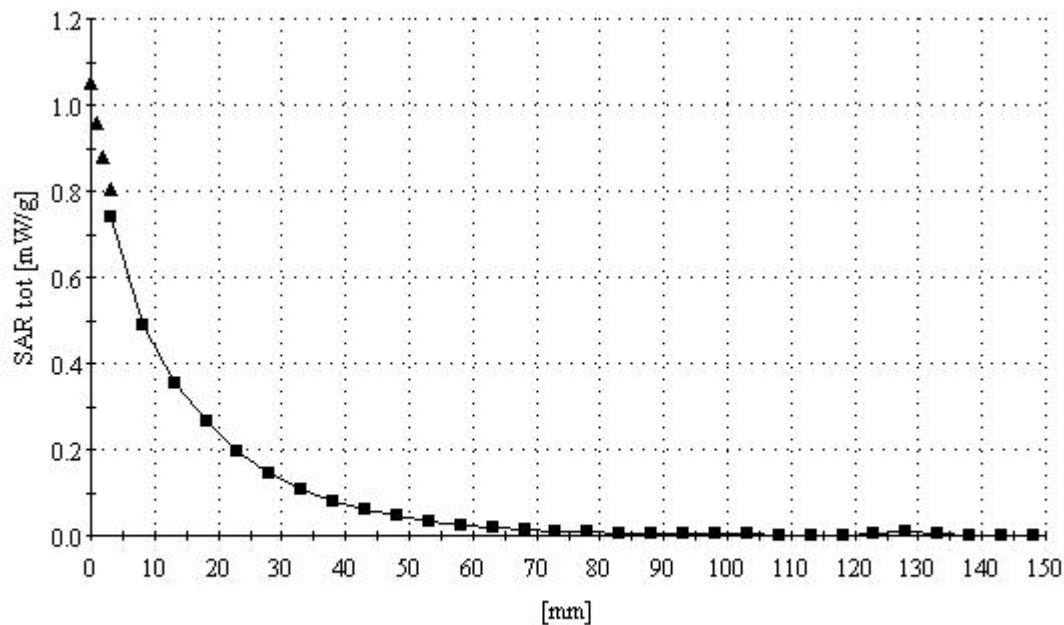

KTFT-UX200 (BODY)

SAM I Phantom; Section; Position: ; Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz: $\sigma = 0.98 \text{ mho/m}$ $\epsilon_r = 53.9$ $\rho = 1.00 \text{ g/cm}^3$

:

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Body / Antenna: Out

Mode: CDMA / Channel: 777 (848.31MHz)

Conducted Power: 25.5 dBm

Liquid Temperature: 21.4 °C

Date Tested: April 15, 2005

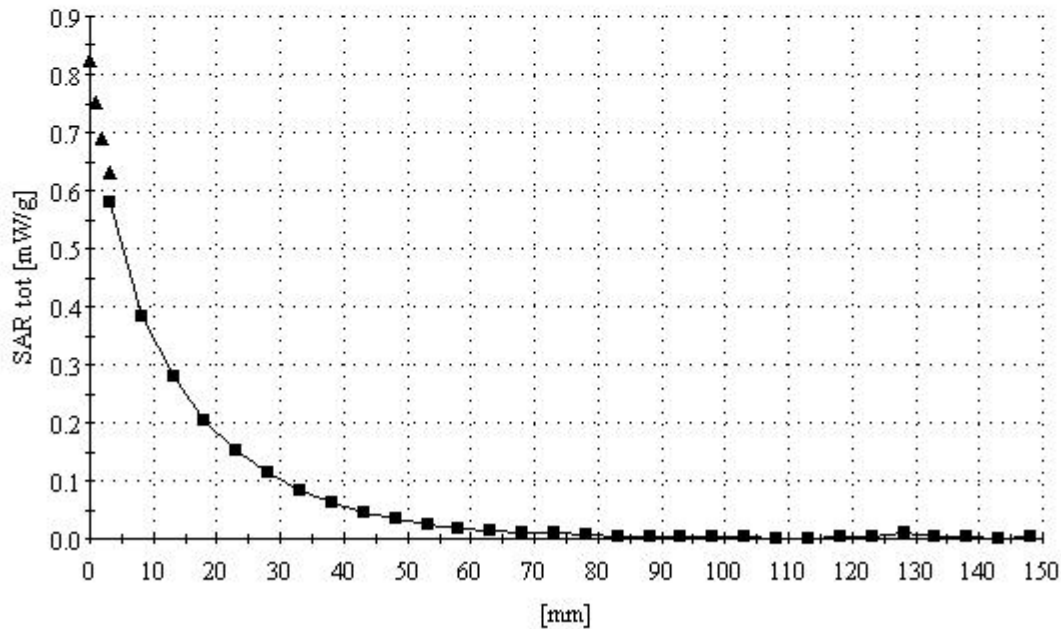

KTFT-UX200 (BODY)

SAM II Phantom; Section; Position: ; Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $\sigma = 1.46 \text{ mho/m}$ $\epsilon_r = 50.8$ $\rho = 1.00 \text{ g/cm}^3$

:

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.

Test Position: Body / Antenna: In

Mode: PCS CDMA / Channel: 25 (1851.25MHz)

Conducted Power: 24.0 dBm

Liquid Temperature: 21.7 °C

Date Tested: April 16, 2005

