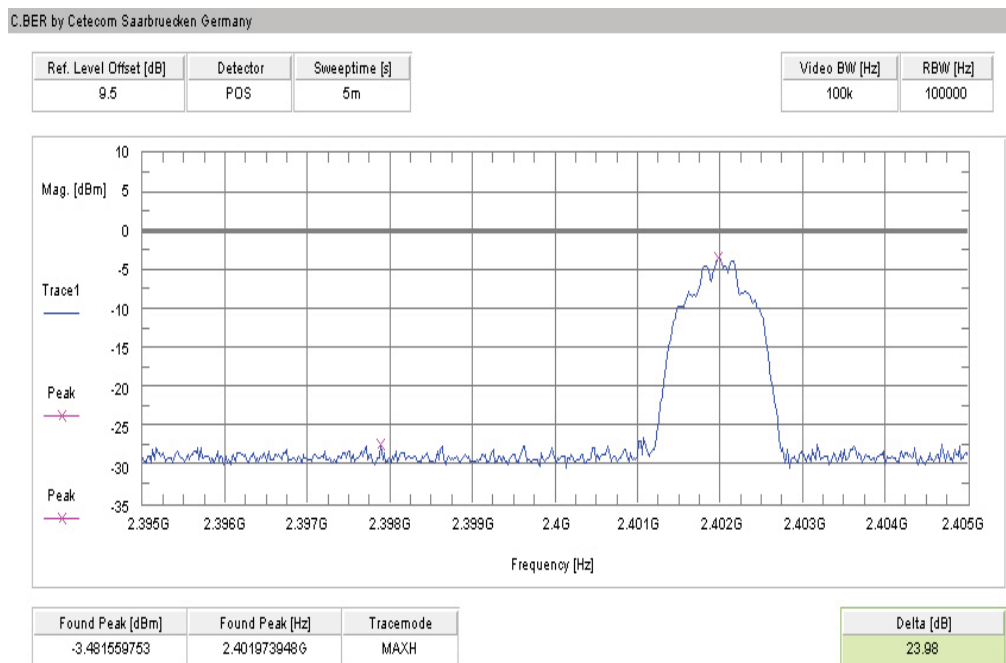
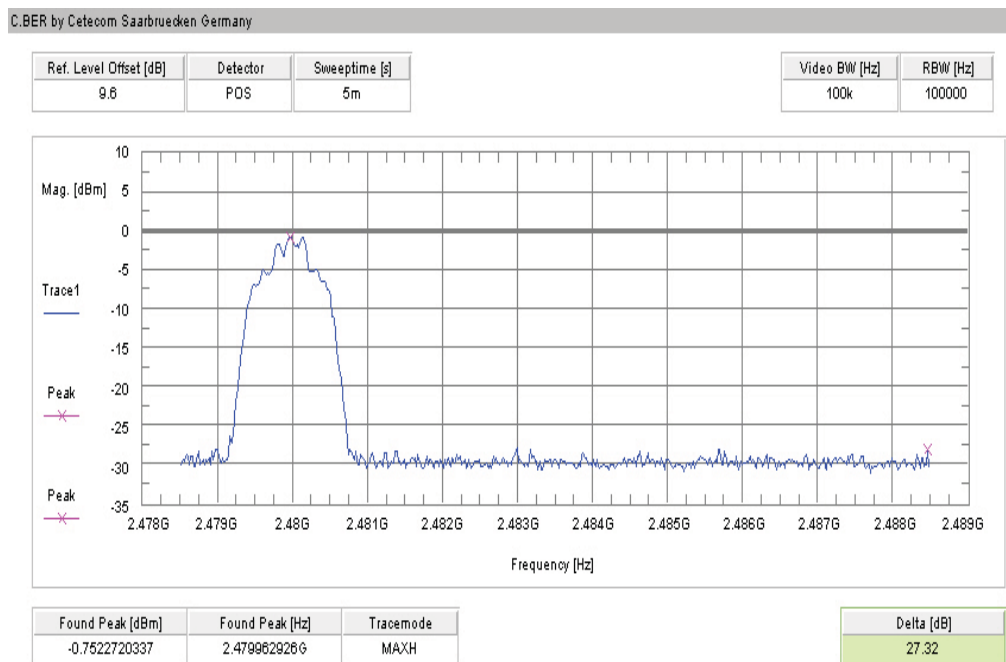
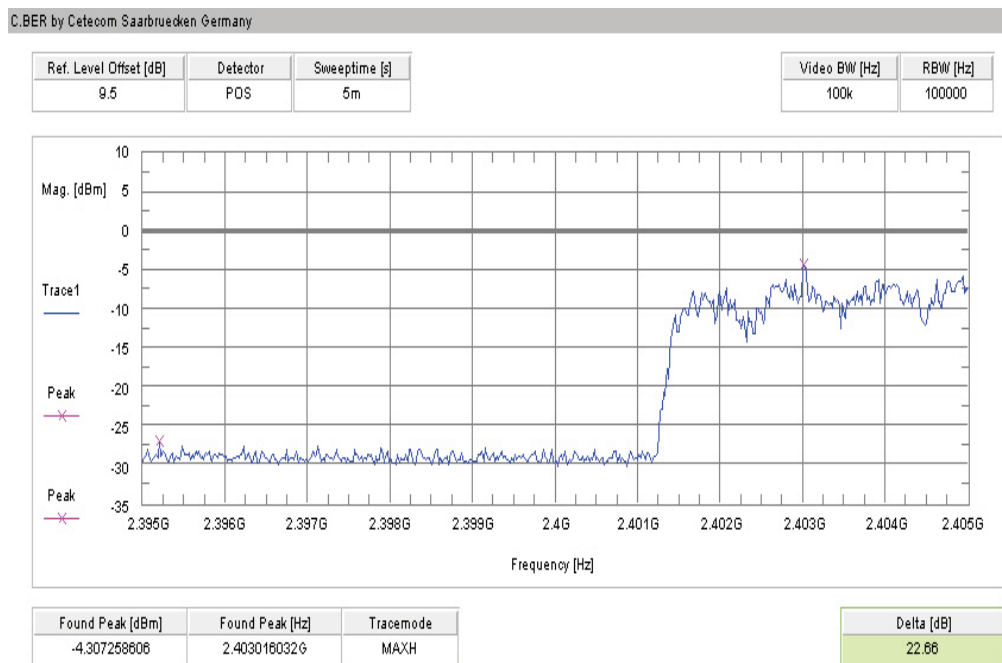
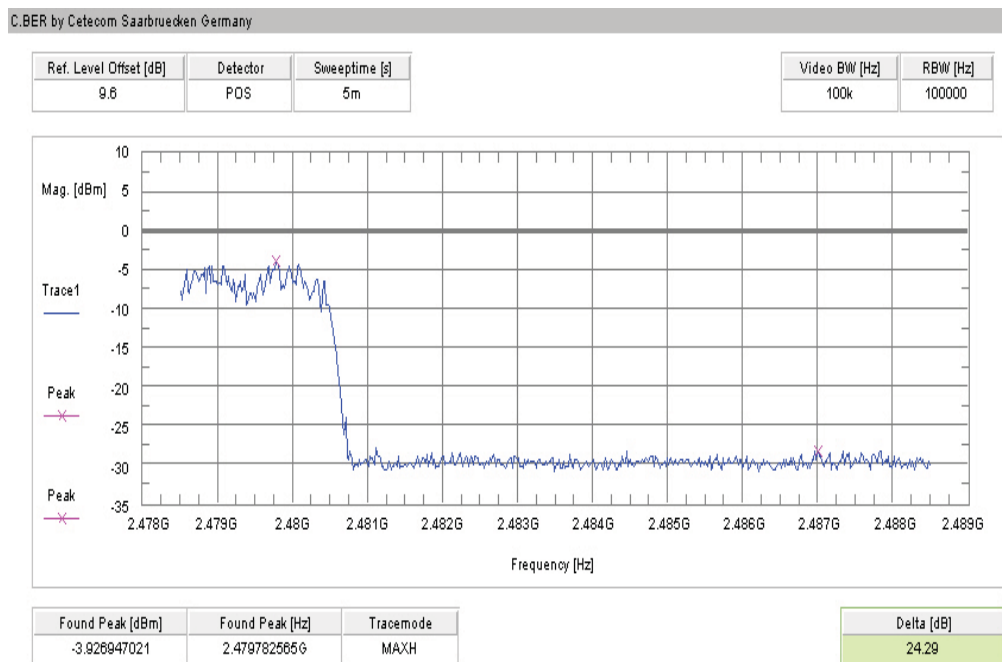
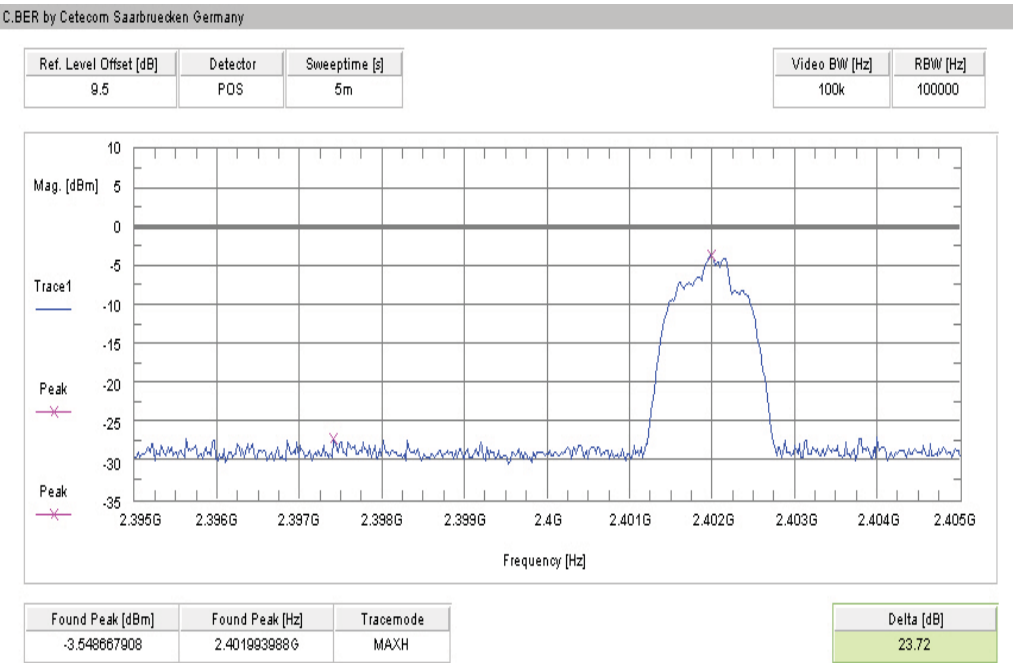


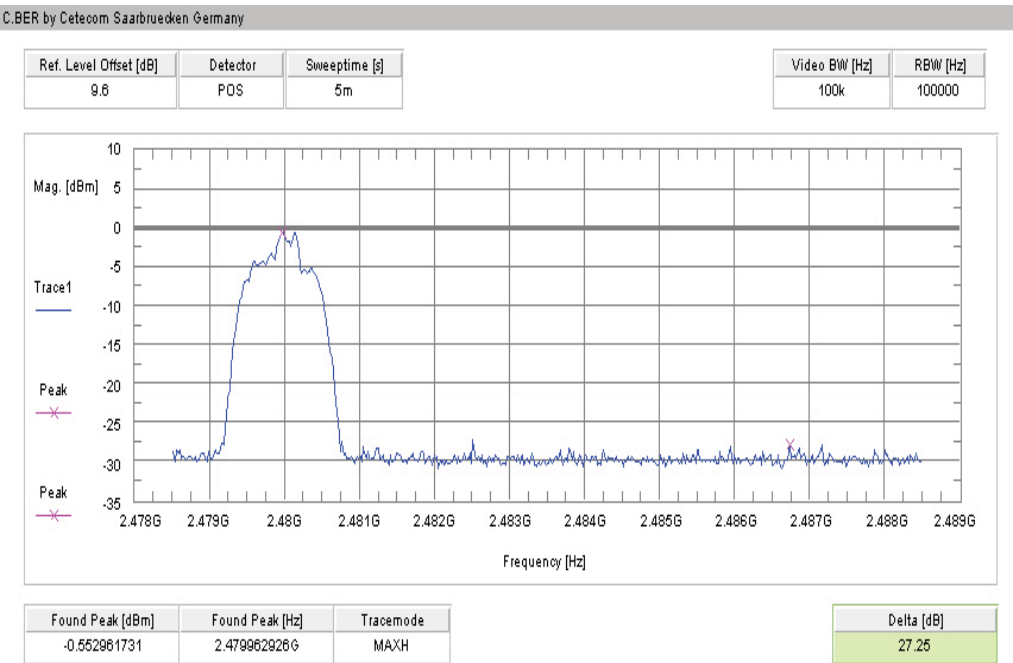
Plot 7: Lower band edge – hopping off, Pi/4 DQPSK modulation**Plot 8: Upper band edge – hopping off, Pi/4 DQPSK modulation**

Plot 9: Lower band edge – hopping on, 8DPSK modulation**Plot 10: Upper band edge – hopping on, 8DPSK modulation**

Plot 11: Lower band edge – hopping off, 8DPSK modulation



Plot 12: Upper band edge – hopping off, 8DPSK modulation



10.8 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to single channel mode and the transmit channel is channel 00 for the lower restricted band and channel 78 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3m.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	1 MHz Peak / 10 Hz AVG
Resolution bandwidth:	1 MHz
Span:	Lower Band: 2370 – 2400 MHz Upper Band: 2480 – 2500 MHz
Trace-Mode:	Max Hold

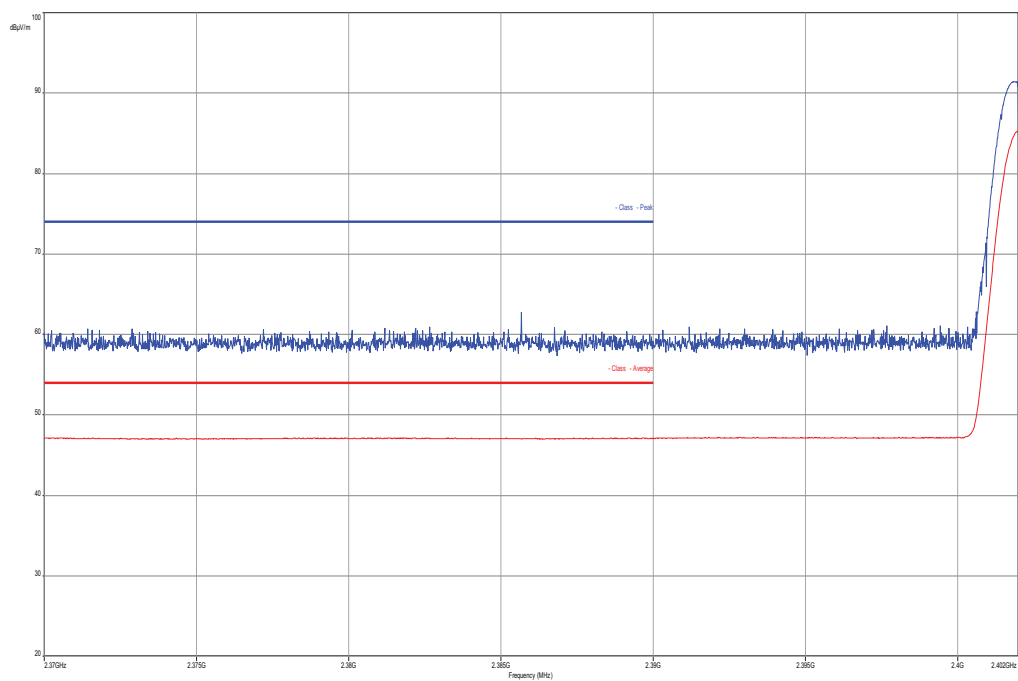
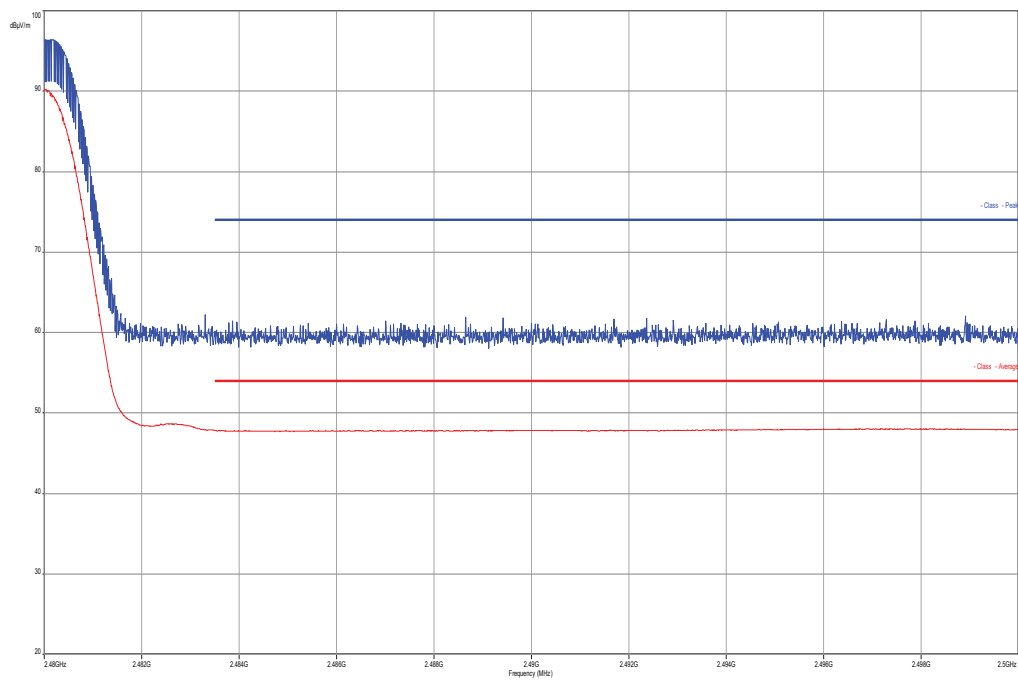
Limits:

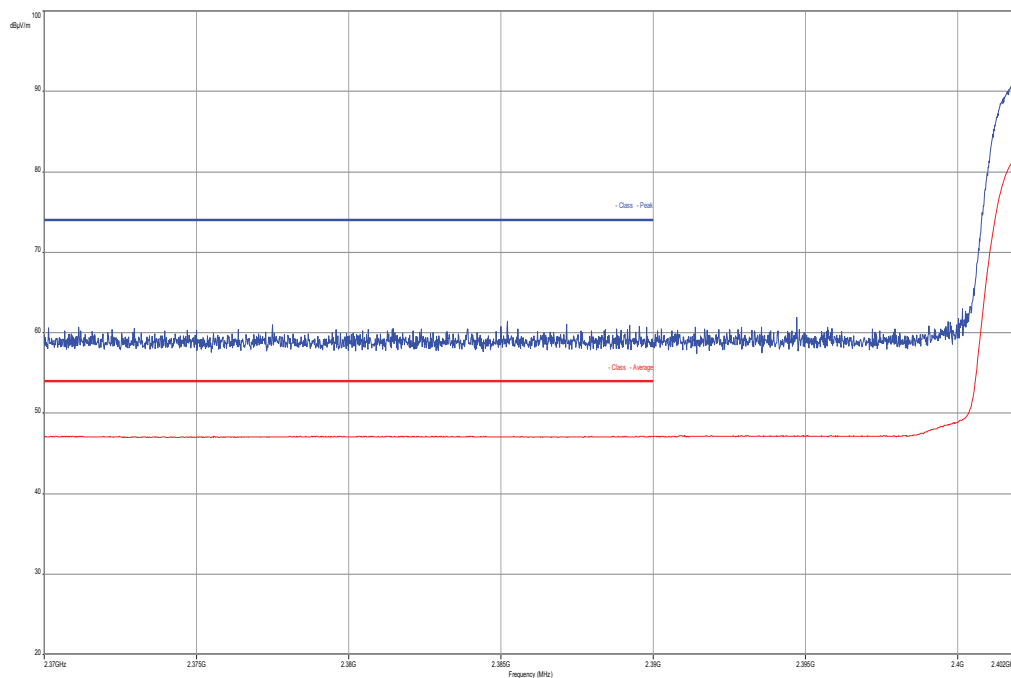
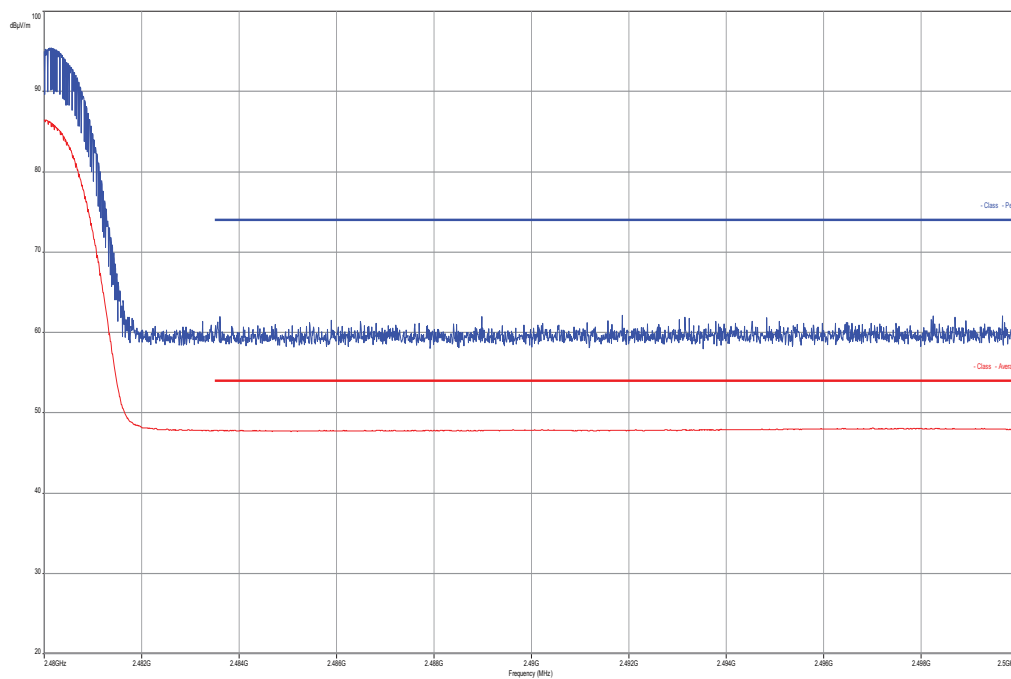
FCC	IC
Band edge compliance radiated	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).	
54 dB μ V/m AVG 74 dB μ V/m Peak	

Results:

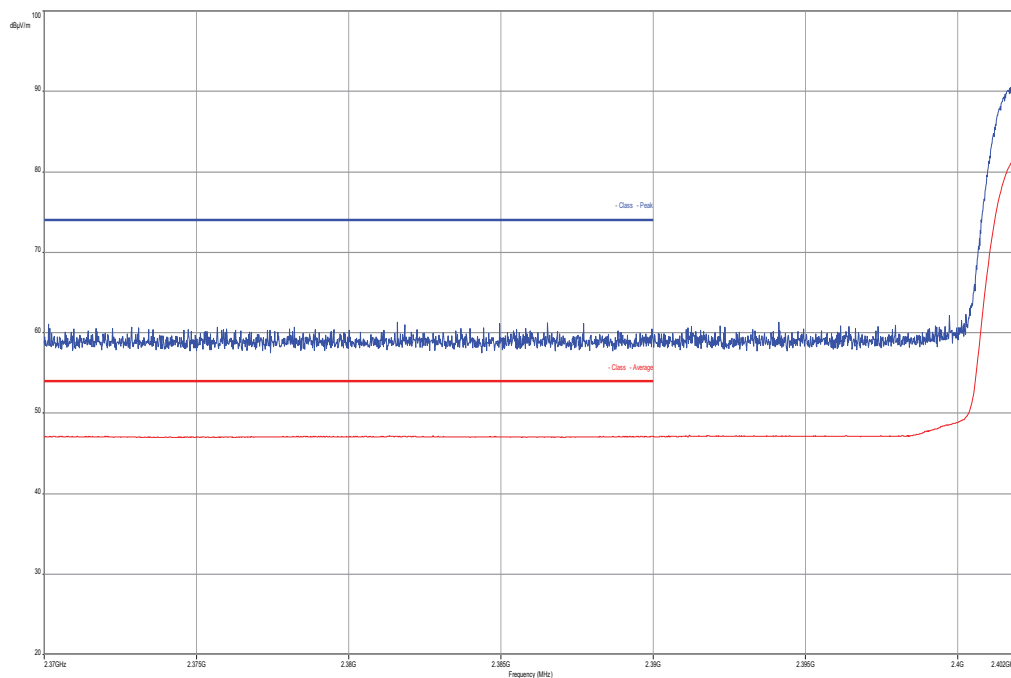
Scenario Modulation	Band edge compliance radiated [dB μ V/m]		
	GFSK	Pi/4 DQPSK	8DPSK
Lower restricted band	< 54 AVG / < 74 PP	< 54 AVG / < 74 PP	< 54 AVG / < 74 PP
Upper restricted band	< 54 AVG / < 74 PP	< 54 AVG / < 74 PP	< 54 AVG / < 74 PP
Measurement uncertainty	± 3 dB		

Result: Passed

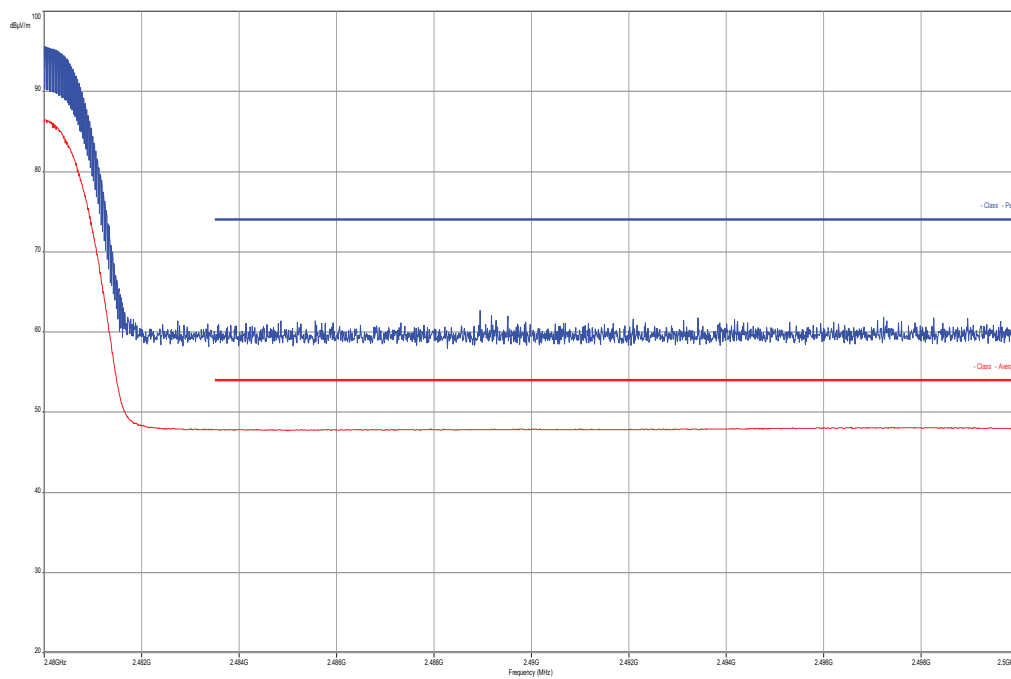
Plots:**Plot 1:** Lower band edge, GFSK modulation, vertical & horizontal polarization**Plot 2:** Upper band edge, GFSK modulation, vertical & horizontal polarization

Plot 3: Lower band edge, Pi/4 DQPSK modulation, vertical & horizontal polarization**Plot 4:** Upper band edge, Pi/4 DQPSK modulation, vertical & horizontal polarization

Plot 5: Lower band edge, 8 DPSK modulation, vertical & horizontal polarization



Plot 6: Upper band edge, 8 DPSK modulation, vertical & horizontal polarization



10.9 TX spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit channel is channel 00, channel 39 and channel 78. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	F < 1 GHz: 300 kHz F > 1 GHz: 300 kHz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 100 kHz
Span:	9 kHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
TX spurious emissions conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	

Results:

TX spurious emissions conducted					
GFSK - mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2402		0.0	30 dBm	> 20	Operating frequency
No peaks detected			-20 dBc		complies
2441		2.2	30 dBm	> 20	Operating frequency
No peaks detected			-20 dBc		complies
2480		3.2	30 dBm	> 20	Operating frequency
No peaks detected			-20 dBc		complies
Measurement uncertainty		± 3 dB			

Result: Passed**Results:**

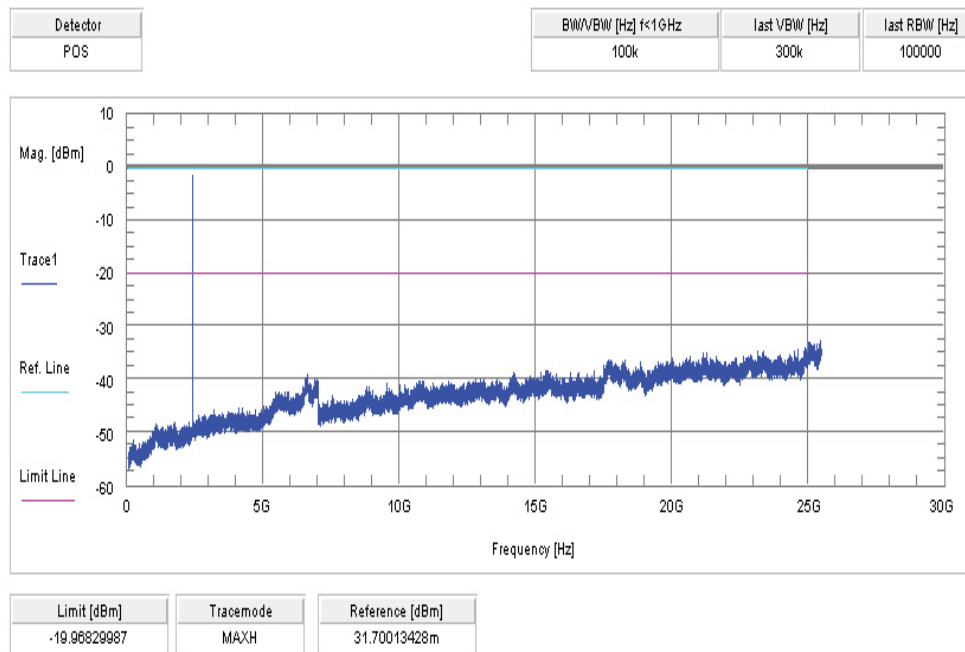
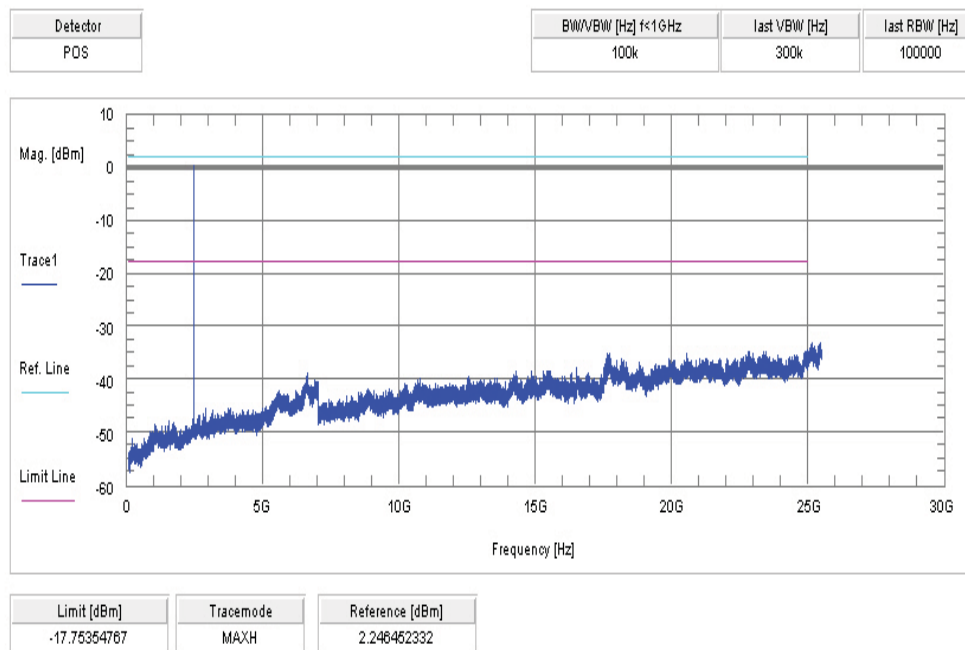
TX spurious emissions conducted					
Pi/4-DQPSK - mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2402		-2.5	30 dBm	> 20	Operating frequency
No peaks detected			-20 dBc		complies
2441		-0.7	30 dBm	> 20	Operating frequency
No peaks detected			-20 dBc		complies
2480		0.4	30 dBm	> 20	Operating frequency
No peaks detected			-20 dBc		complies
Measurement uncertainty		± 3dB			

Result: Passed

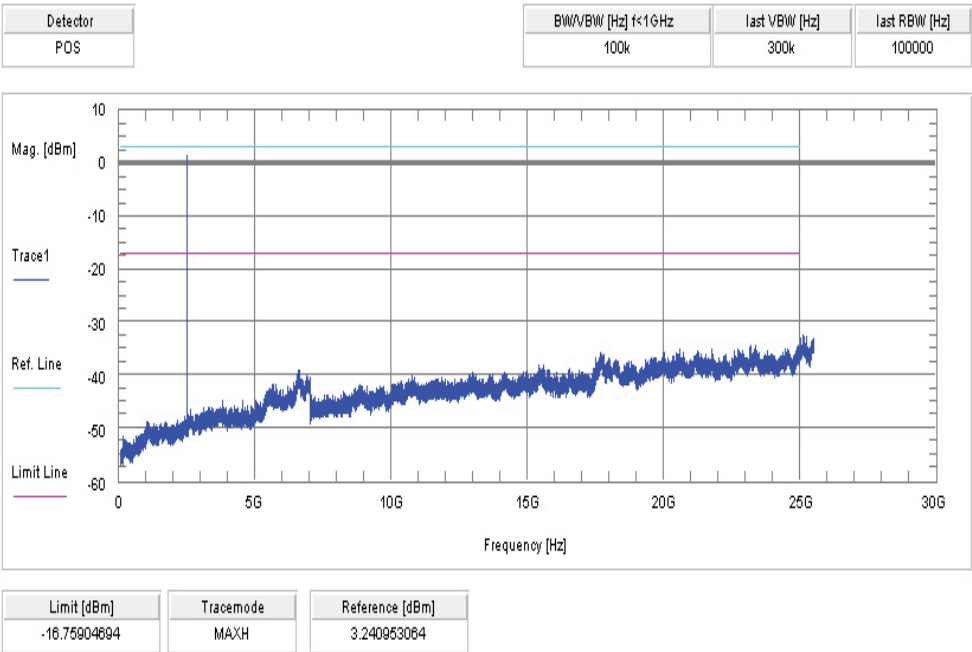
Results:

TX spurious emissions conducted					
8DPSK - mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2402		-2.4	30 dBm	> 20	Operating frequency
No peaks detected			-20 dBc		complies
2441		-0.6	30 dBm	> 20	Operating frequency
No peaks detected			-20 dBc		complies
2480		0.6	30 dBm	> 20	Operating frequency
No peaks detected			-20 dBc		complies
Measurement uncertainty		± 3dB			

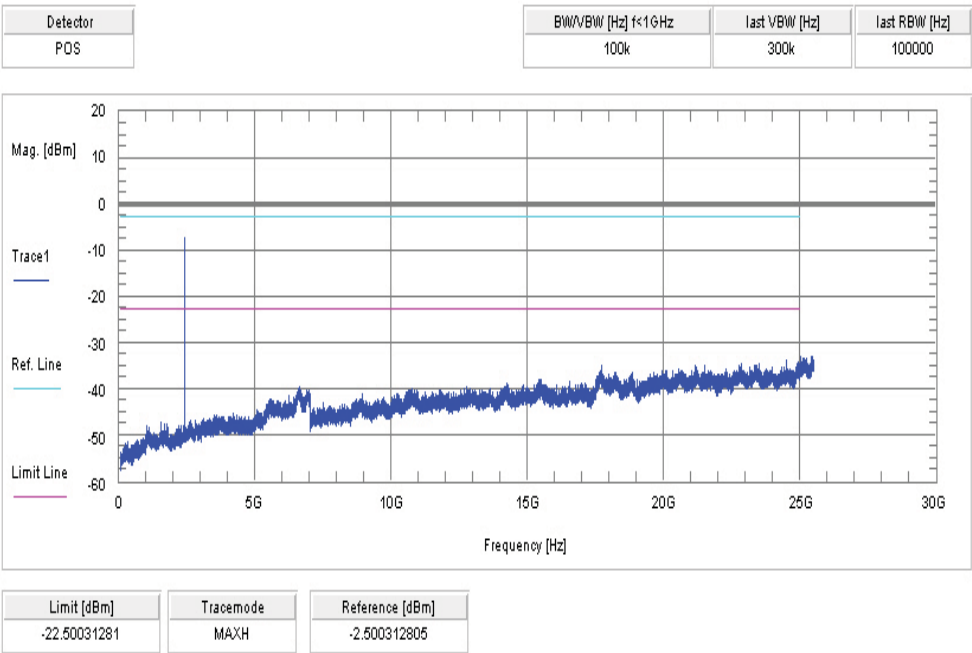
Result: Passed

Plots:**Plot 1:** lowest channel – 2402 MHz, GFSK modulation**Plot 2:** middle channel – 2441 MHz, GFSK modulation

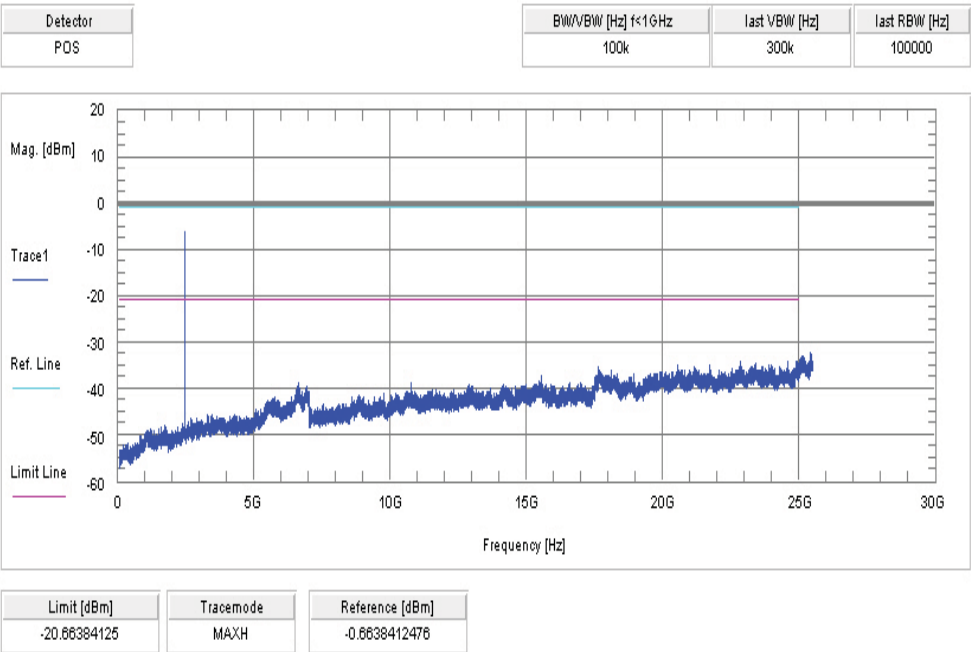
Plot 3: highest channel – 2480 MHz, GFSK modulation



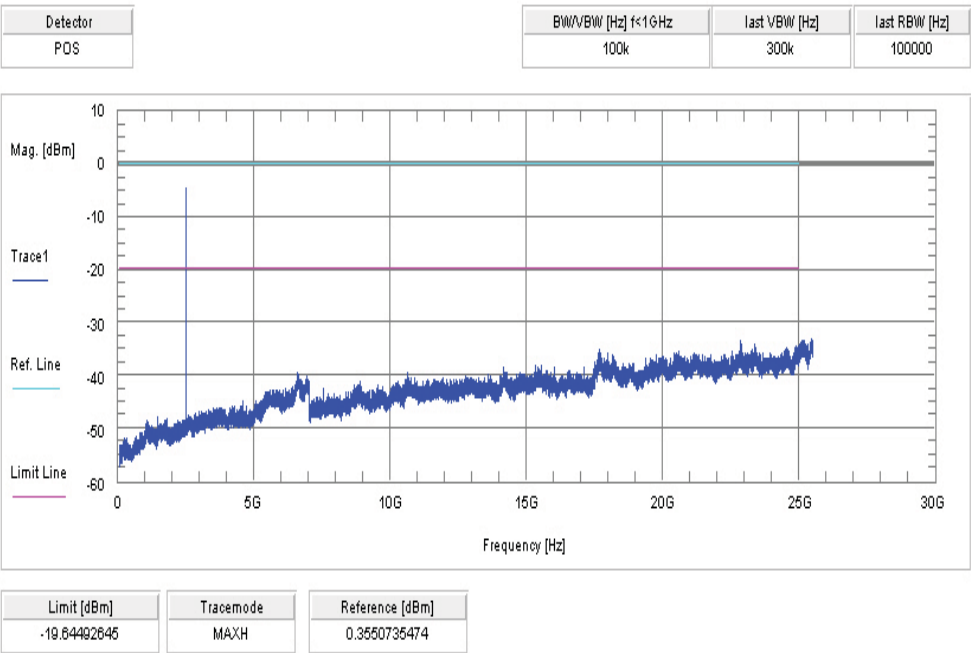
Plot 4: lowest channel – 2402 MHz, Pi / DQPSK modulation

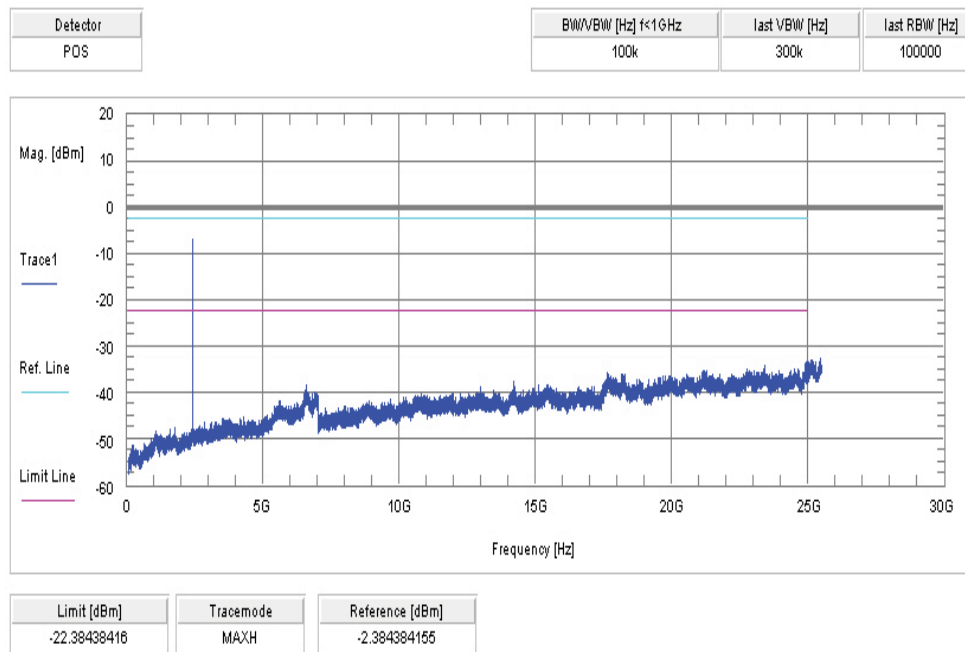
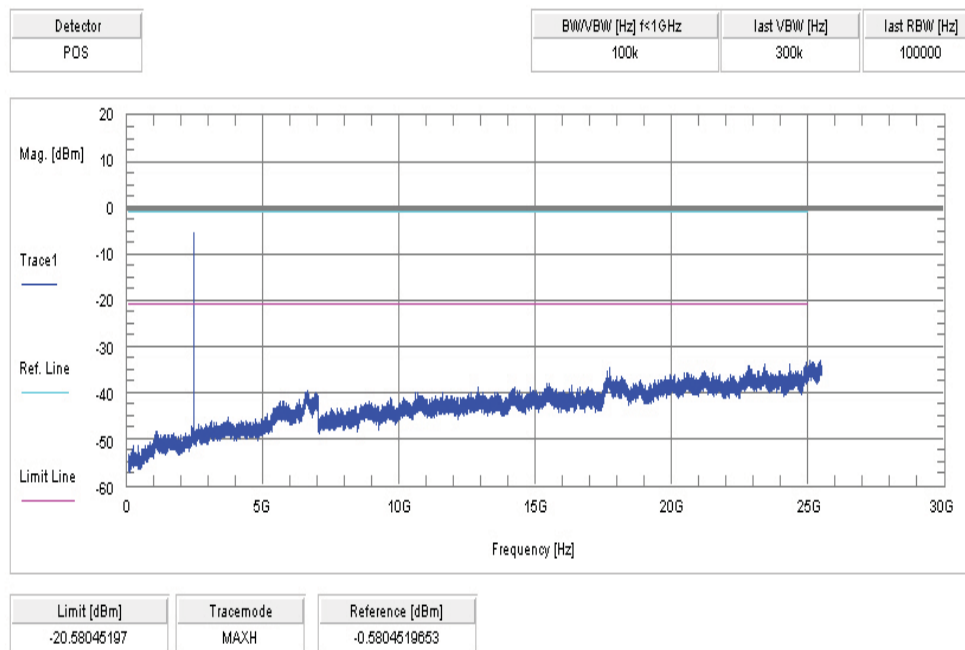


Plot 5: middle channel – 2441 MHz, Pi / DQPSK modulation

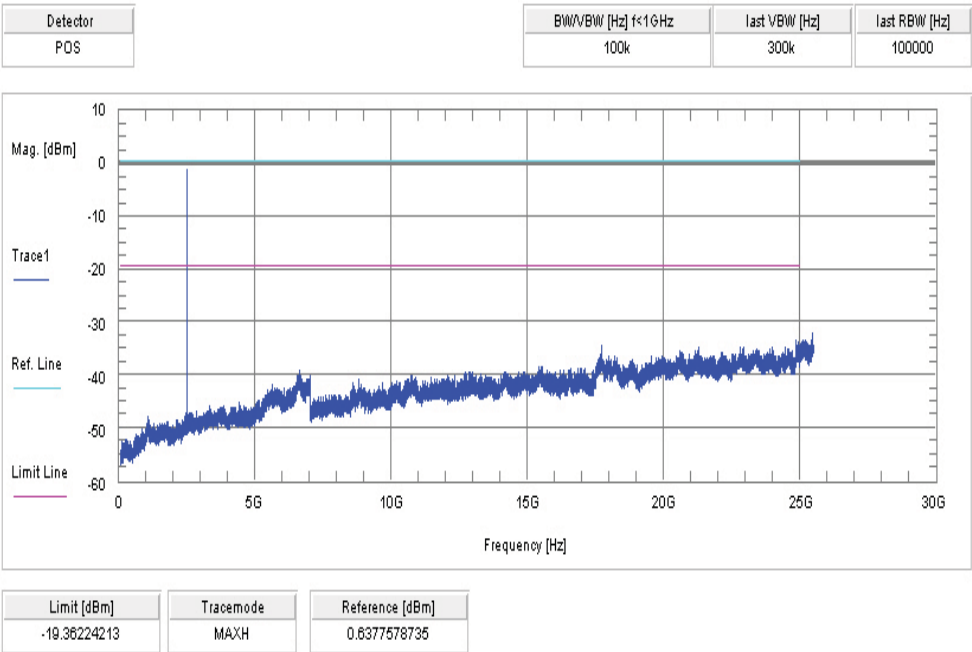


Plot 6: highest channel – 2480 MHz, Pi / DQPSK modulation



Plot 7: lowest channel – 2402 MHz, 8 DPSK modulation**Plot 8:** middle channel – 2441 MHz, 8 DPSK modulation

Plot 9: highest channel – 2480 MHz, 8 DPSK modulation



10.10 TX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit channel is channel 00, channel 39 and channel 78. The measurement is performed in the mode with the highest output power.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	3 x RBW Remeasurement: 10 Hz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold
Measured Modulation:	☒ GFSK ☐ Pi/4 DQPSK ☐ 8DPSK

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

Limits:

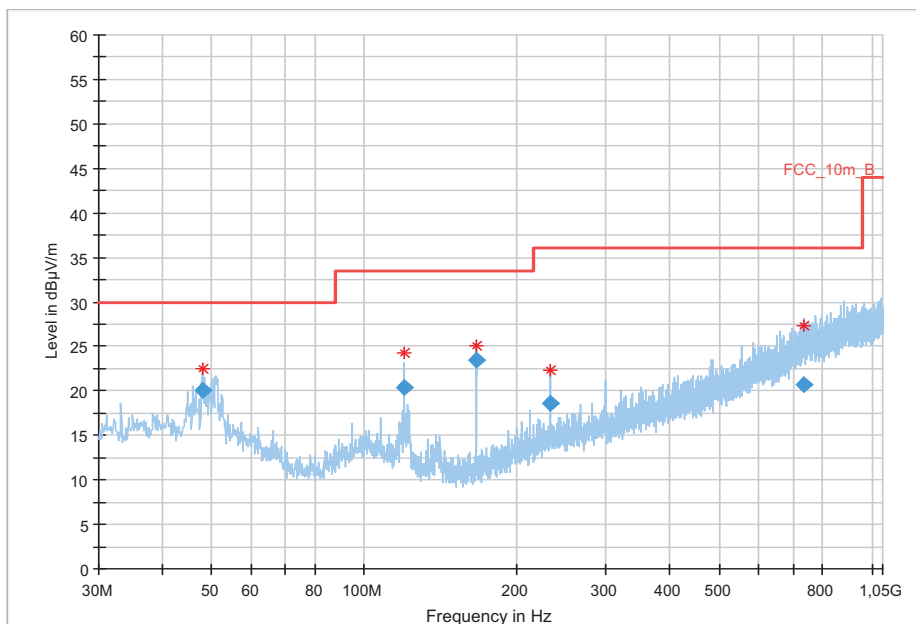
FCC		IC
TX spurious emissions radiated		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
§15.209		
Frequency (MHz)	Field strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results:

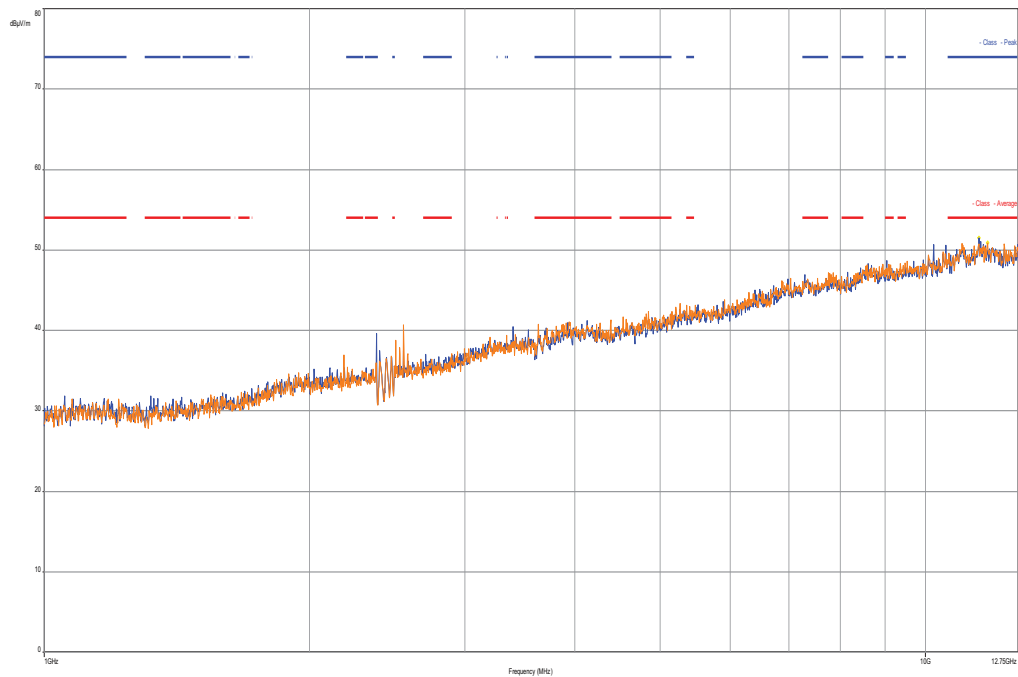
TX spurious emissions radiated [dB μ V/m]								
2402 MHz			2441 MHz			2480 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
15201.4	Peak	34.1						
19220.1	Peak	30.4						
Measurement uncertainty			± 3 dB					

Result: Passed

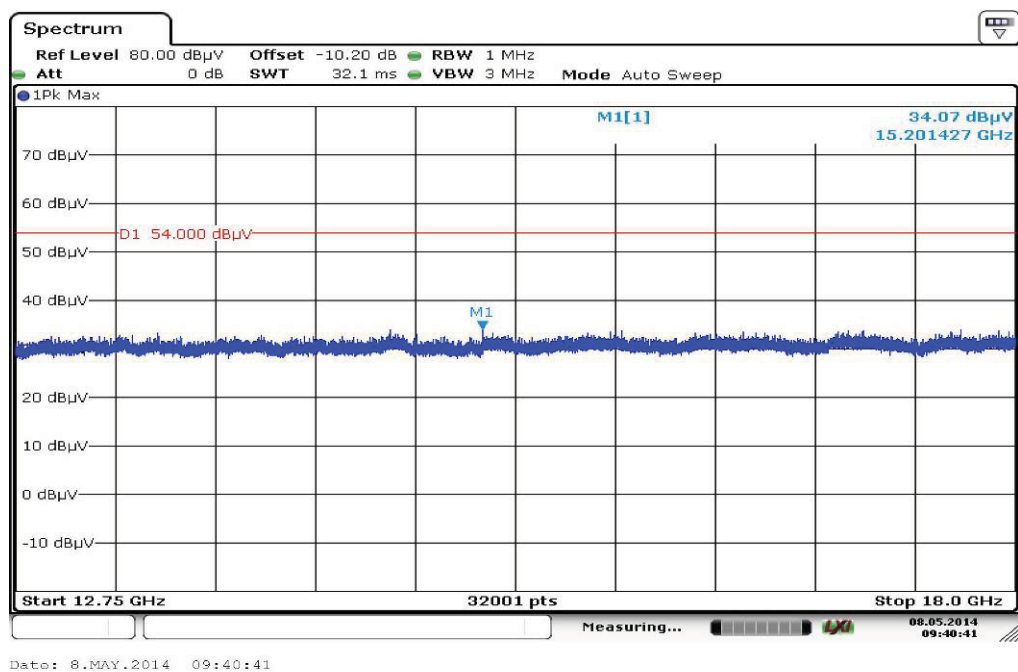
Note: The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

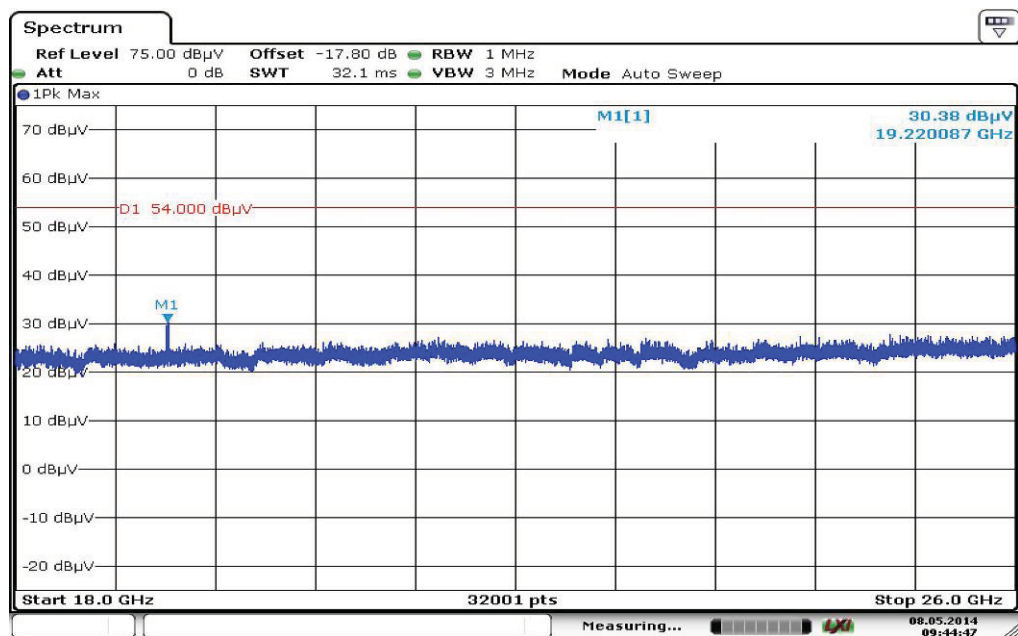
Plots:
Plot 1: 30 MHz to 1 GHz, TX mode, channel 00, vertical & horizontal polarization


Frequency (MHz)	Quasi Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
48.036000	20.01	30.00	9.99	1000.0	120.000	105.0	V	94.0	13.3
120.014100	20.36	33.50	13.14	1000.0	120.000	170.0	V	190.0	10.2
166.578000	23.45	33.50	10.05	1000.0	120.000	98.0	V	100.0	9.6
233.226600	18.63	36.00	17.37	1000.0	120.000	116.0	V	280.0	12.8
735.502800	20.63	36.00	15.37	1000.0	120.000	170.0	H	271.0	23.3

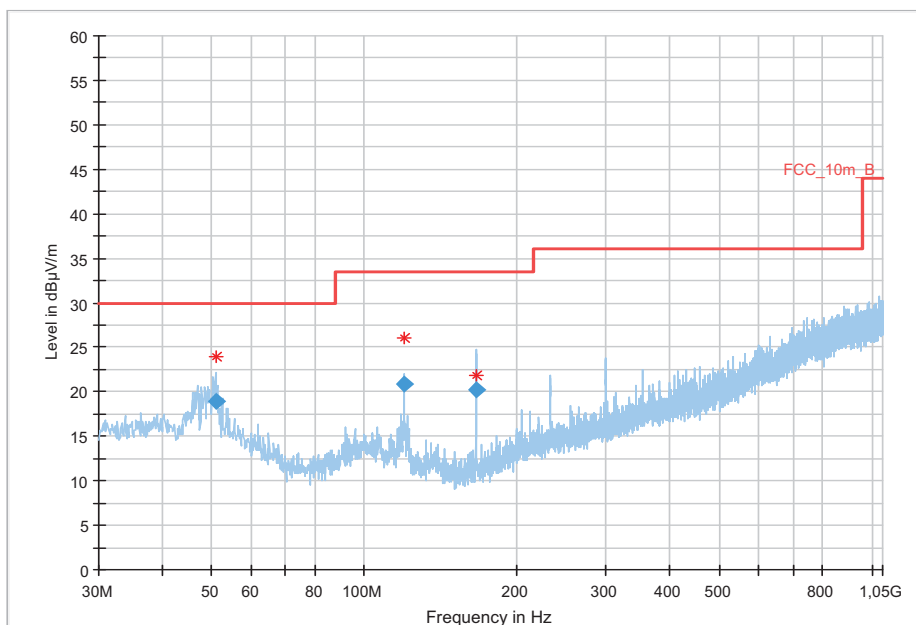
Plot 2: 1 GHz to 12.75 GHz, TX mode, channel 00, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

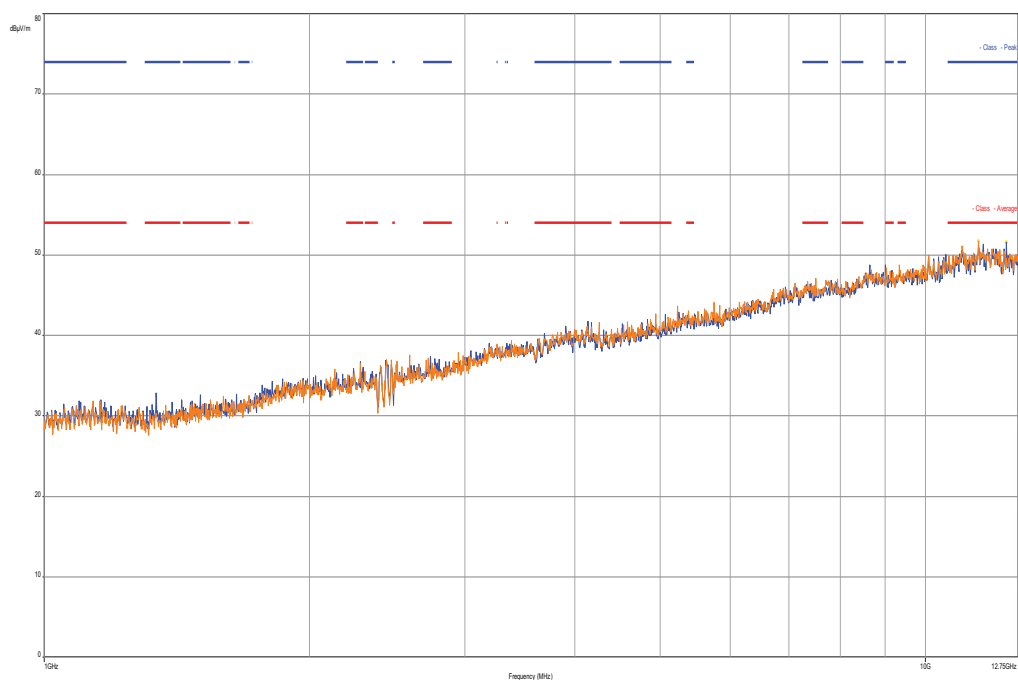
Plot 3: 12.75 GHz to 18 GHz, TX mode, channel 00, vertical & horizontal polarization

Plot 4: 18 GHz to 26 GHz, TX mode, channel 00, vertical & horizontal polarization

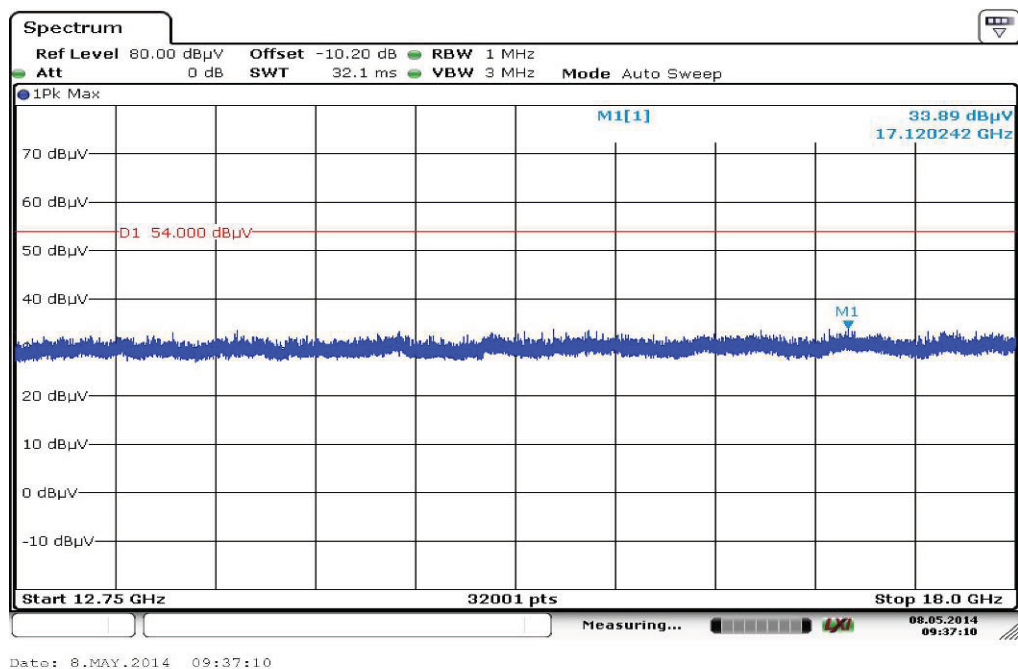
Date: 8.MAY.2014 09:44:47

Plot 5: 30 MHz to 1 GHz, TX mode, channel 39, vertical & horizontal polarization


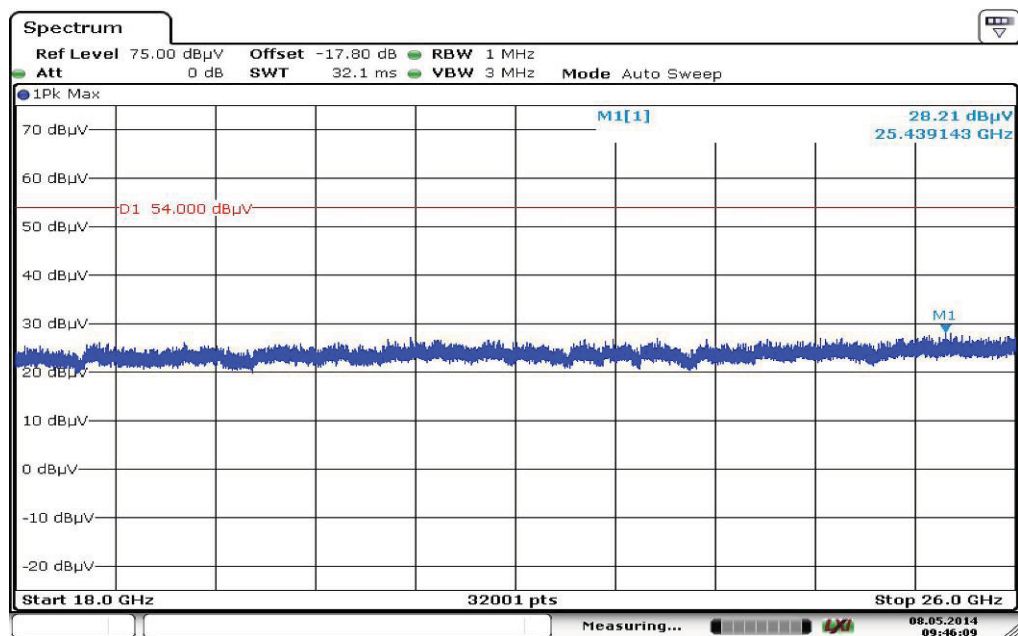
Frequency (MHz)	Quasi Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
51.031350	18.97	30.00	11.03	1000.0	120.000	98.0	V	261.0	13.3
120.009750	20.88	33.50	12.62	1000.0	120.000	105.0	V	171.0	10.2
166.016700	20.28	33.50	13.22	1000.0	120.000	127.0	V	100.0	9.6

Plot 6: 1 GHz to 12.75 GHz, TX mode, channel 39, vertical & horizontal polarization

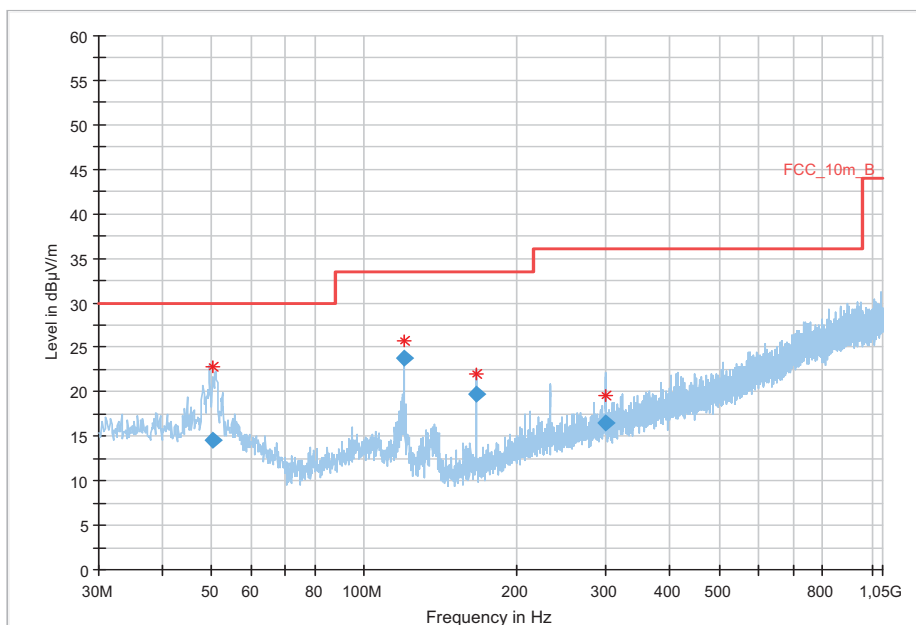
The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 7: 12.75 GHz to 18 GHz, TX mode, channel 39, vertical & horizontal polarization

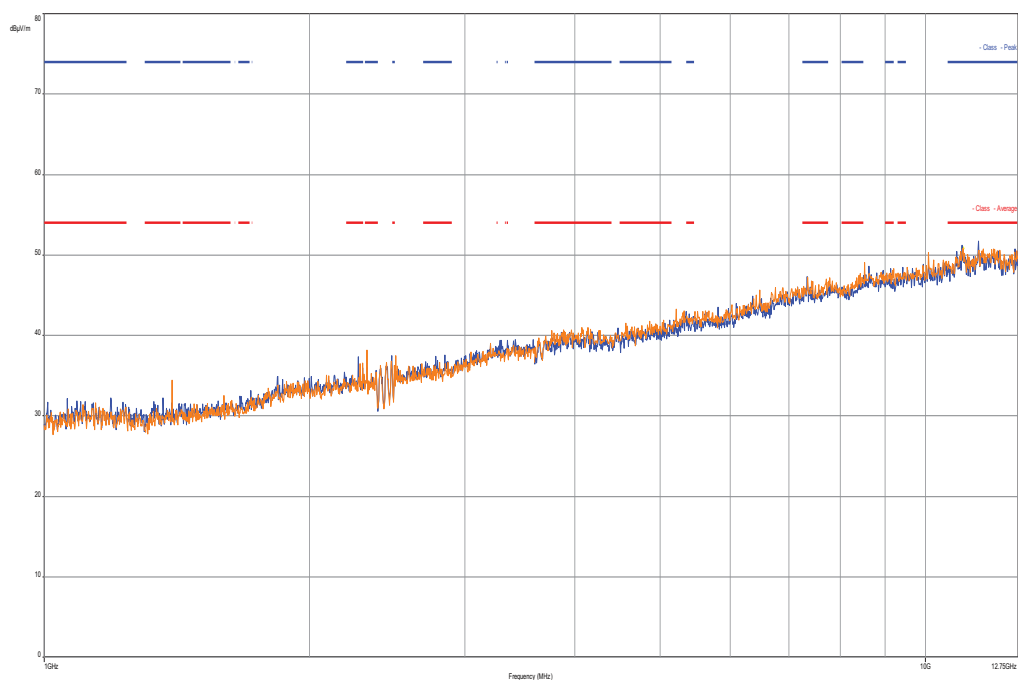
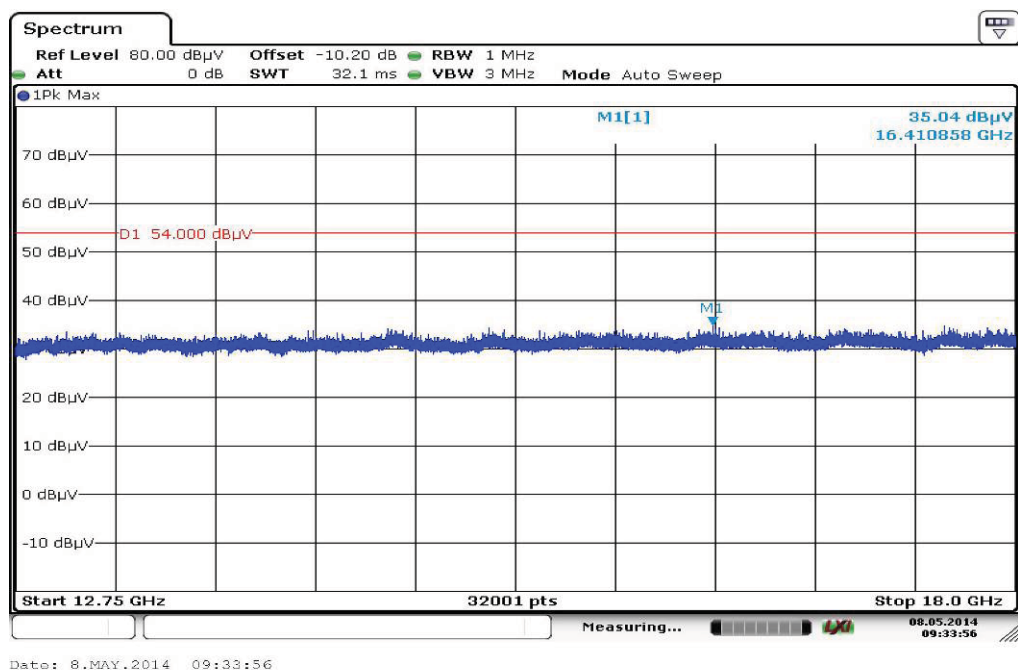
Plot 8: 18 GHz to 26 GHz, TX mode, channel 39, vertical & horizontal polarization

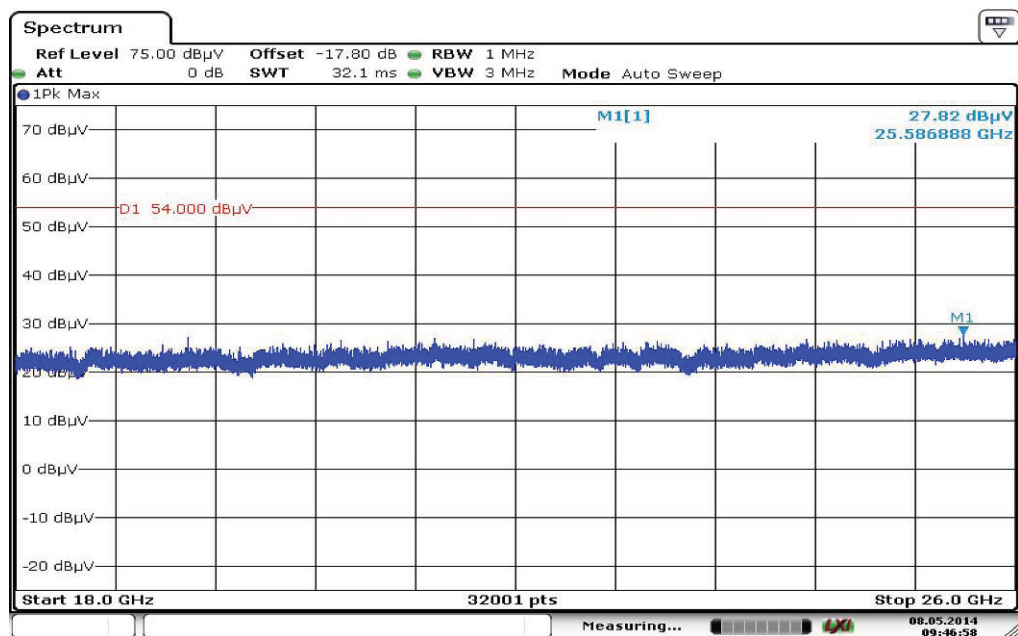


Date: 8.MAY.2014 09:46:09

Plot 9: 30 MHz to 1 GHz, TX mode, channel 78, vertical & horizontal polarization

Frequency (MHz)	Quasi Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
50.231550	14.57	30.00	15.43	1000.0	120.000	105.0	V	273.0	13.4
119.998800	23.70	33.50	9.80	1000.0	120.000	106.0	V	190.0	10.2
166.551600	19.75	33.50	13.75	1000.0	120.000	98.0	V	10.0	9.6
299.848800	16.55	36.00	19.45	1000.0	120.000	98.0	V	1.0	14.5

Plot 10: 1 GHz to 12.75 GHz, TX mode, channel 78, vertical & horizontal polarization**Plot 11:** 12.75 GHz to 18 GHz, TX mode, channel 78, vertical & horizontal polarization

Plot 12: 18 GHz to 26 GHz, TX mode, channel 78, vertical & horizontal polarization

Date: 8.MAY.2014 09:46:58

10.11 RX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in idle/receive mode. The EUT is detached so all oscillators are active.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi peak
Sweep time:	Auto
Video bandwidth:	3 x RBW Remeasurement: 10 Hz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

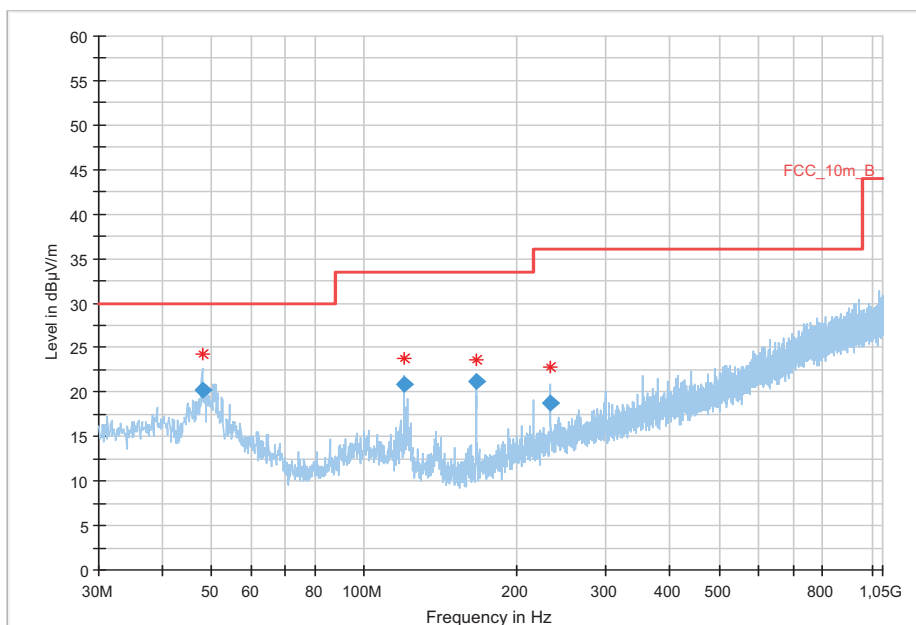
FCC		IC
RX Spurious Emissions Radiated		
Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results:

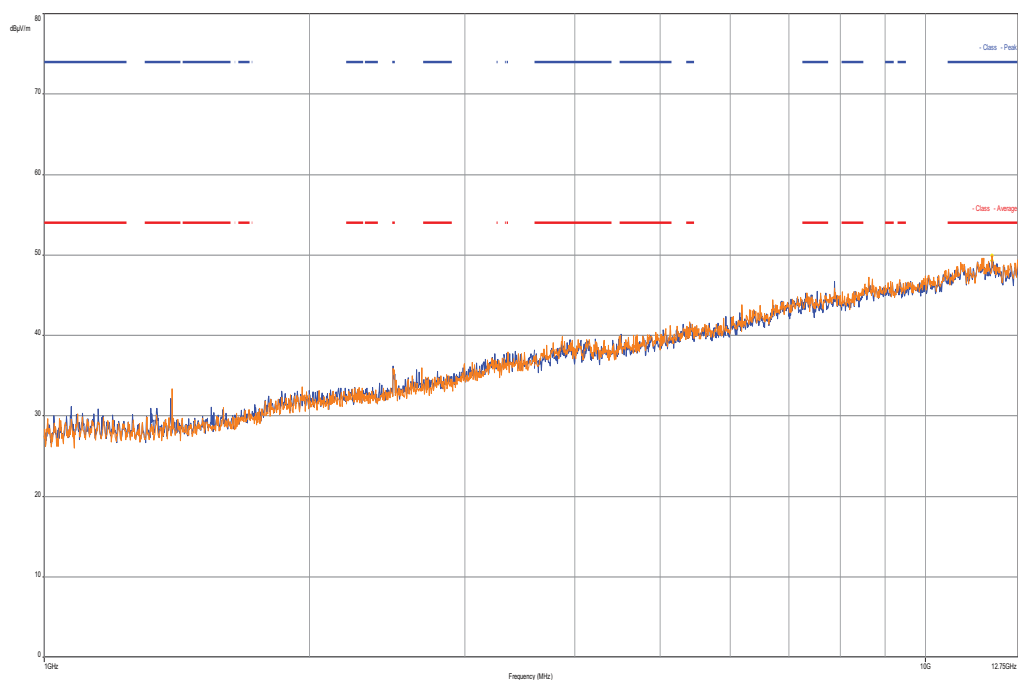
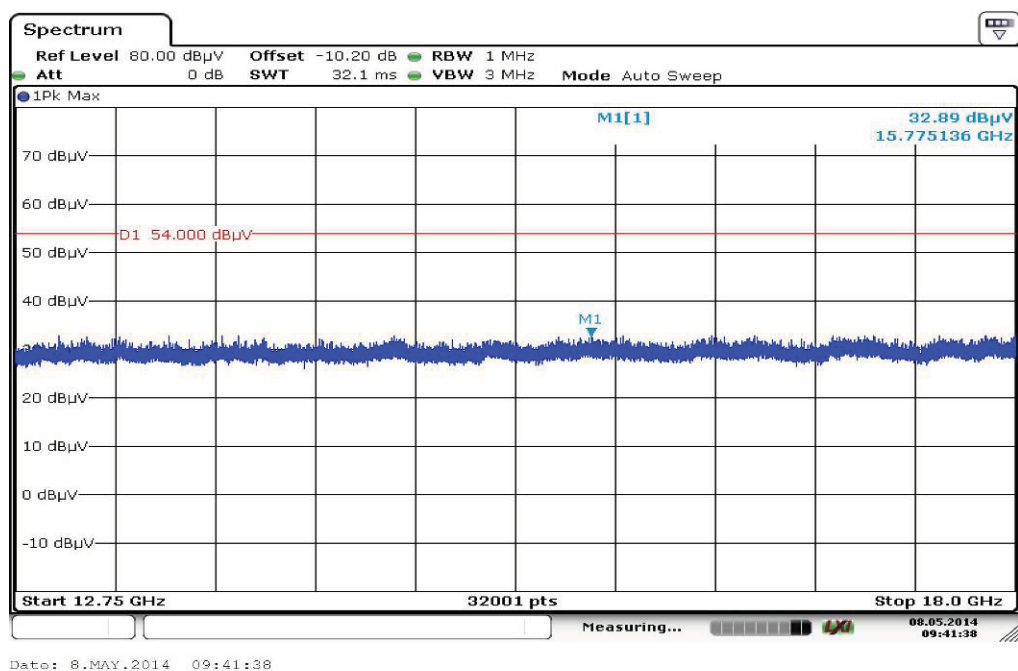
RX spurious emissions radiated [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
Measurement uncertainty	± 3 dB	

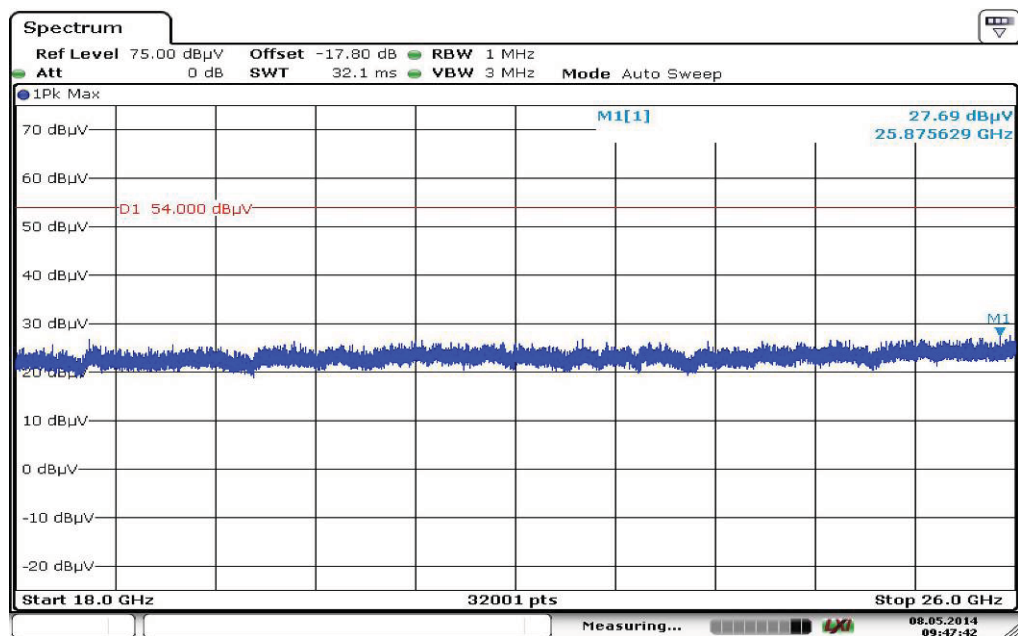
Result: Passed

Note: The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

Plots:**Plot 1:** 30 MHz to 1 GHz, RX mode, vertical & horizontal polarization

Frequency (MHz)	Quasi Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
47.975100	20.21	30.00	9.79	1000.0	120.000	134.0	V	88.0	13.3
119.986050	20.88	33.50	12.62	1000.0	120.000	98.0	V	171.0	10.2
166.008000	21.12	33.50	12.38	1000.0	120.000	98.0	V	100.0	9.6
232.388250	18.74	36.00	17.26	1000.0	120.000	131.0	V	280.0	12.8

Plot 2: 1 GHz to 12.75 GHz, RX mode, vertical & horizontal polarization**Plot 3:** 12.75 GHz to 18 GHz, RX mode, vertical & horizontal polarization

Plot 4: 18 GHz to 26 GHz, RX mode, vertical & horizontal polarization

Date: 8.MAY.2014 09:47:42

10.12 Spurious emissions radiated < 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit channel is channel 39. This measurement is representative for all channels and modes. If peaks are found channel 00 and channel 78 will be measured too. The measurement is performed in the mode with the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter		
Detector:	Peak / Quasi peak	
Sweep time:	Auto	
Video bandwidth:	F < 150 kHz:	200 Hz
	F > 150 kHz:	9 kHz
Resolution bandwidth:	F < 150 kHz:	1 kHz
	F > 150 kHz:	100 kHz
Span:	9 kHz to 30 MHz	
Trace-Mode:	Max Hold	

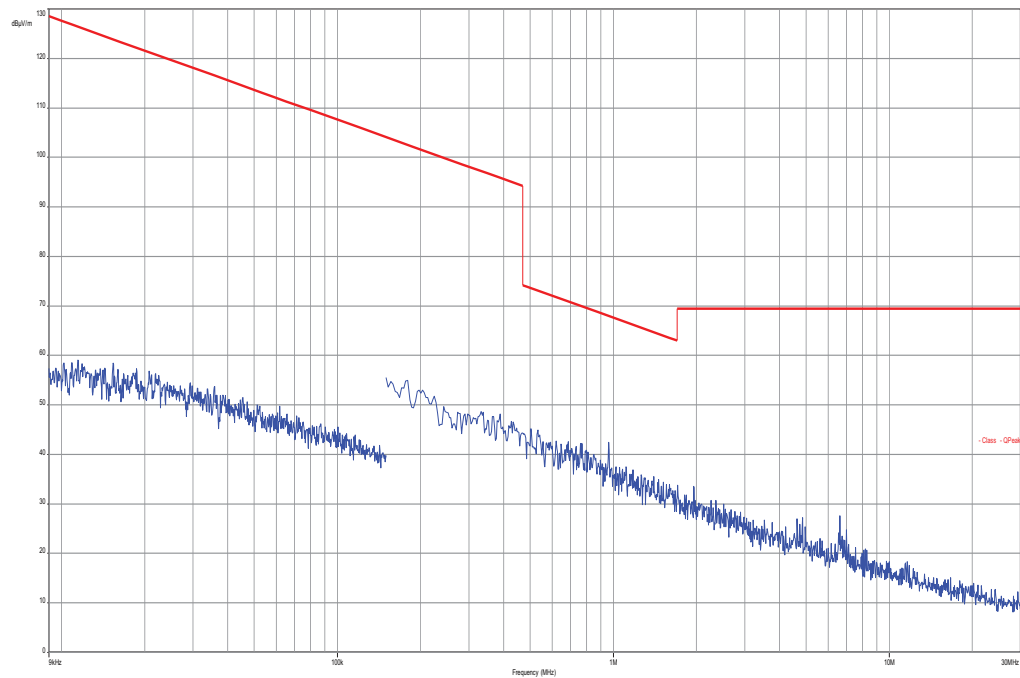
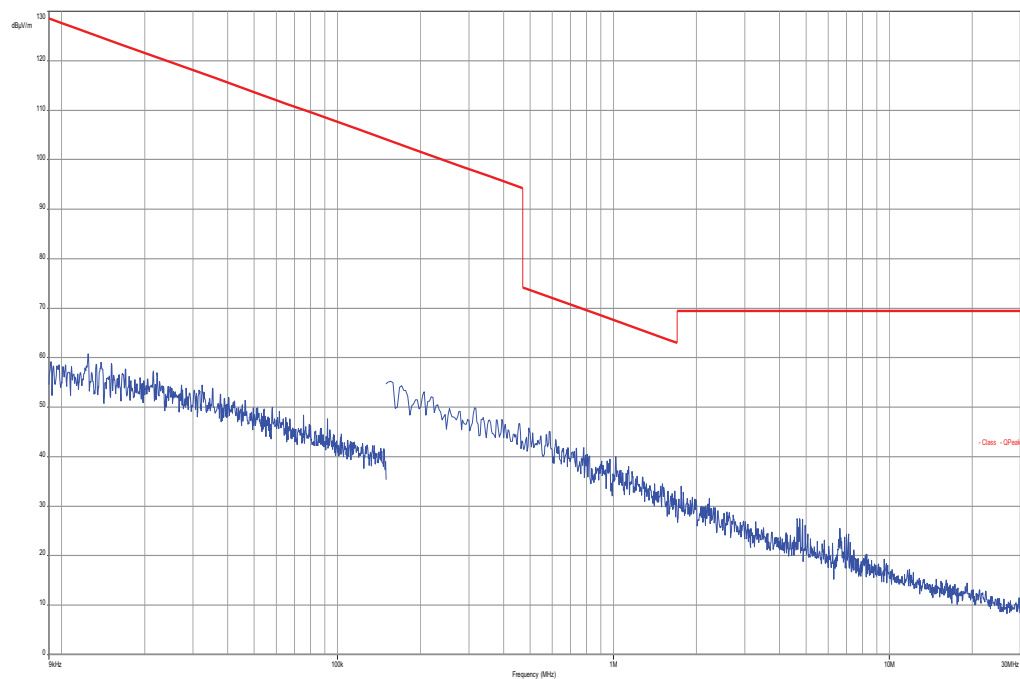
Limits:

FCC		IC
TX spurious emissions radiated < 30 MHz		
Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Results:

TX spurious emissions radiated < 30 MHz [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
No peaks detected		
Measurement uncertainty	± 3 dB	

Result: Passed

Plots:**Plot 1: 9 kHz to 30 MHz, TX mode****Plot 4: 9 kHz to 30 MHz, RX mode**

10.13 Spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit channel is channel 39. This measurement is representative for all channels and modes. If peaks are found channel 00 and channel 78 will be measured too. The measurement is performed in the mode with the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi peak / average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

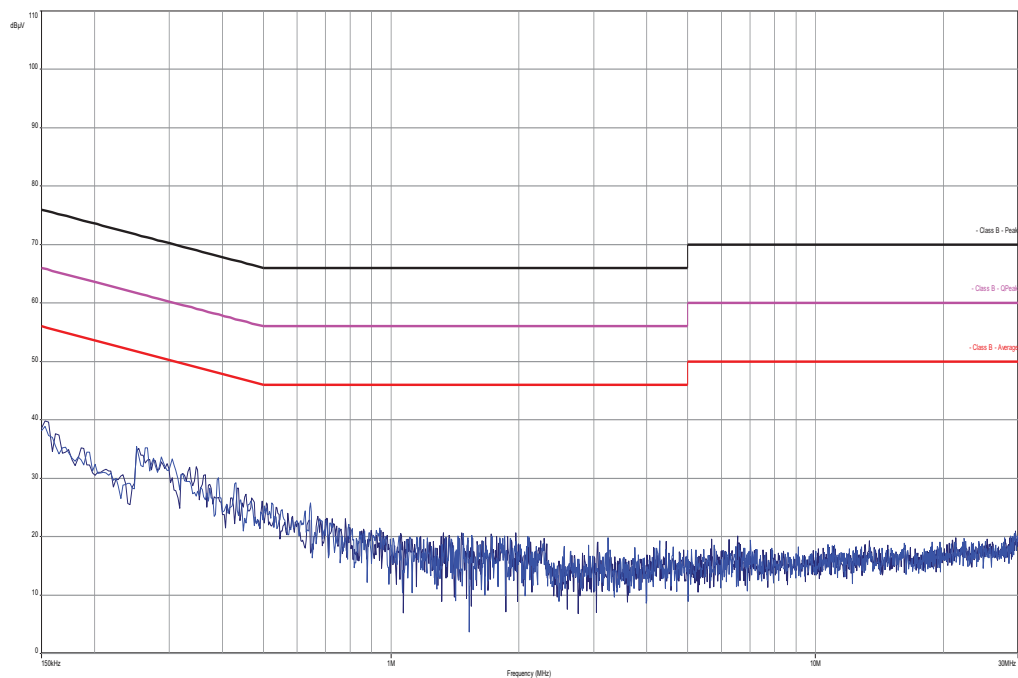
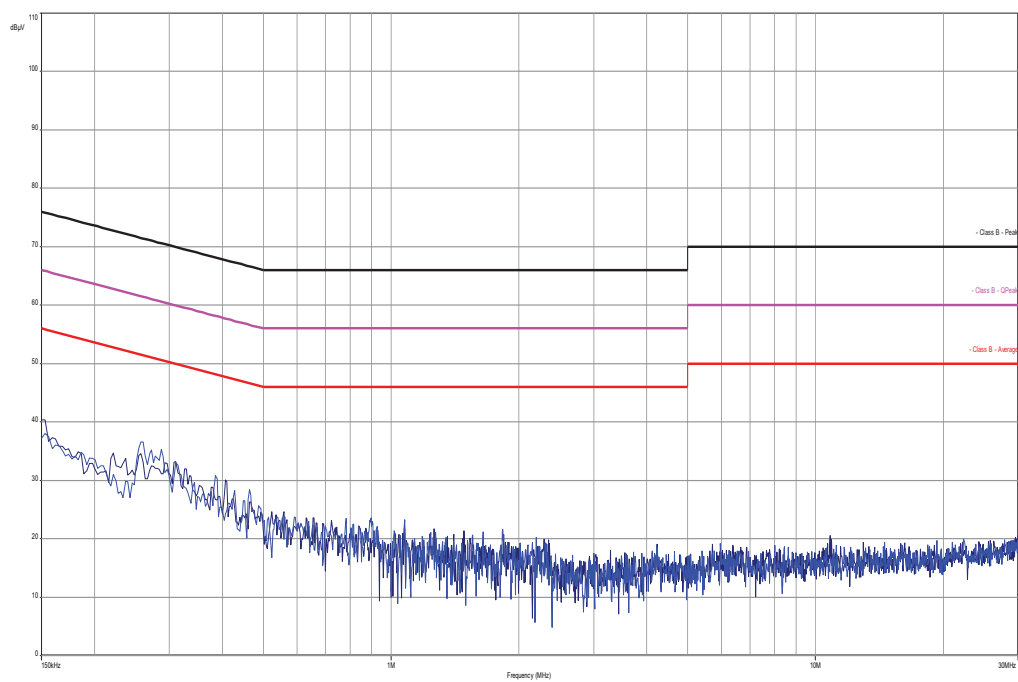
FCC		IC
TX spurious emissions conducted < 30 MHz		
Frequency (MHz)	Quasi-peak (dBμV/m)	Average (dBμV/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

*Decreases with the logarithm of the frequency

Results:

TX spurious emissions conducted < 30 MHz [dBμV/m]		
F [MHz]	Detector	Level [dBμV/m]
No peaks detected		
Measurement uncertainty	± 3 dB	

Result: Passed

Plots:**Plot 1: 150 kHz to 30 MHz, TX mode****Plot 2: 150 kHz to 30 MHz, RX mode**

11 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
11	9	Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210	Ve	30.01.2014	30.01.2016
2	9	Isolating Transformer	MPL IEC625 Bus Regeltrennt ravo	Erli	91350	300001155	ne		
3	n. a.	Switch / Control Unit	3488A	HP Meßtechnik		300001691	ne		
4	n. a.	Power Supply DC	NGPE 40/40	R&S	388	400000078	vIKI!	21.08.2012	21.08.2014
5	n. a.	Power Sensor 50 Ohms, 10 MHz - 18 GHz, 1 nW - 20 mW	NRV-Z1	R&S	833894/011	300002681-0010	k	22.08.2012	22.08.2014
6	n. a.	Hygro-Thermometer	-/-, 5-45°C, 20-100%rF	Thies Clima	-/-	400000080	izw	29.10.2013	29.10.2015
7	n. a.	Vector Signal Generator, 300 kHz to 2.2 GHz	SMIQ03B	R&S	835541/055	300002681-0001	k	18.08.2011	18.08.2014
8	n. a.	Signal Generator 0.01/2 - 20 GHz, Frequ. Resol. 0.1Hz	SMP02	R&S	835133/011	300002681-0003	k	12.08.2011	12.08.2014
9	n. a.	Dual Channel Power Meter	NRVD	R&S	835430/044	300002681-0004	k	22.08.2012	22.08.2014
10	n. a.	Signal Analyzer 20Hz-26,5GHz-150 to + 30 DBM	FSIQ26	R&S	835540/018	300002681-0005	k	30.01.2014	30.01.2016
11	n. a.	Frequency Standard (Rubidium Frequency Standard)	MFS (Rubidium)	R&S (Datum)	002	300002681-0009	Ve	21.08.2012	21.08.2014
12	n. a.	Directional Coupler	101020010	Krytar	70215	300002840	ev		
13	n. a.	DC-Blocker	8143	Inmet Corp.	none	300002842	ne		
14	n. a.	Powersplitter	6005-3	Inmet Corp.		300002841	ev		
15	n. a.	Temperature Test Chamber	VT 4002	Heraeus Voetsch	58566046820 010	300003019	Ve	26.09.2013	26.09.2015
16	n. a.	CBT (Bluetooth Tester + EDR Signalling)	CBT 1153.9000 K35	R&S	100185	300003416	vIKI!	21.08.2012	21.08.2014
17	n. a.	Spectrum Analyzer 9kHz to 30GHz - 140...+30dBm	FSP30	R&S	100886	300003575	k	22.08.2012	22.08.2014
18	n. a.	NRP Power meter Display and control unit AC sup	NRP + NRP-Z81	R&S	100212 + 100010	300003780	vIKI!	22.01.2014	22.01.2016
19	n. a.	CBT-K57 Software-Option for CBT/CBT32	CBT-K57	R&S	101051	300003910	ne		
20	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
21	n. a.	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	27.01.2014	27.01.2015
22	n. a.	Antenna Tower	Model 2175	ETS-	64762	300003745	izw		

				LINDGREN					
23	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
24	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
25	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	22.04.2014	21.04.2016
26	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO Elektronik	9709-5290	300000212	k	23.07.2013	23.07.2015
27	n. a.	Highpass Filter	WHK1.1/15 G-10SS	Wainwright	37	400000148	ne		
28	n. a.	Highpass Filter	WHKX7.0/1 8G-8SS	Wainwright	18	300003789	ne		
29	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	22.01.2014	22.01.2015
30	n. a.	Broadband Amplifier 0.5-18 GHz	CBLU5184 540	CERNEX	22050	300004482	ev		
31	n. a.	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne		
32	n. a.	Messrechner und Monitor	Intel Core i3 3220/3,3 GHz, Prozessor		2V2403033A 5421	300004591	ne		
33	n. a.	NEXIO EMV-Software	BAT EMC	EMCO		300004682	ne		

Agenda: Kind of Calibration

k calibration / calibrated
 ne not required (k, ev, izw, zw not required)
 ev periodic self verification
 Ve long-term stability recognized
 vki! Attention: extended calibration interval
 NK! Attention: not calibrated

EK limited calibration
 zw cyclical maintenance (external cyclical maintenance)
 izw internal cyclical maintenance
 g blocked for accredited testing
 *) next calibration ordered / currently in progress

12 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A Document history

Version	Applied changes	Date of release
	Initial release	2014-05-19

Annex B Further information**Glossary**

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Annex C Accreditation Certificate

Front side of certificate

Back side of certificate



Deutsche Akkreditierungsstelle GmbH

Befehlens gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV
Unterzeichnerin der Multilateralen Abkommen
von EA, ILAC und IAF zur gegenseitigen Anerkennung

Akkreditierung



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

CETECOM ICT Services GmbH
Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

Drahtgebundene Kommunikation einschließl. xDSL
VoIP und DECT
Akustik
Funk einschließl. WLAN
Short Range Devices (SRD)
RFID
WiMax und Richtfunk
Mobilfunk (GSM / GPRS, Over the Air (OTA) Performance)
Elektromagnetische Verträglichkeit (EMV) einschließl. Automotive
Produktsicherheit
SAR und Hearing Aid Compatibility (HAC)
Umweltsimulation
Smart Card Terminals
Bluetooth
Wi-Fi Services

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 07.03.2014 mit der
Akkreditierungsnummer D-PL-12676-01 und ist gültig 17.01.2018. Sie besteht aus diesem Deckblatt, der
Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 77 Seiten.

Registrierungsnummer der Urkunde: D-PL-12676-01-00

Frankfurt am Main, 07.03.2014

Zurücksendung der Urkunde

Im Auftrag D-PL-12676-01-00
Hildegard Kretz

Deutsche Akkreditierungsstelle GmbH

Standort Berlin
Spittelmarkt 10
10117 Berlin

Standort Frankfurt am Main
Gartenstraße 6
60504 Frankfurt am Main

Standort Braunschweig
Bundesallee 100
38116 Braunschweig

Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen
Zustimmung der Deutschen Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate
Weiterverbreitung des Deckblattes durch die umseitig genannte Konformitätsbewertungsstelle in
unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt,
die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstellen (AkkStelleG) vom
31. Juli 2009 (BGBl. I S. 2675) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments
und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung
im Zusammenhang mit der Vermarktung von Produkten (Abt. L 218 vom 9. Juli 2008, S. 30).
Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der
Europäischen Organisation für Akkreditation (EA), des International Accreditation Forum (IAF) und
der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen
erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:
EA: www.european-accreditation.org
ILAC: www.ilac.org
IAF: www.iaf.eu

Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>