

EMI TEST REPORT



Report Number : KSQ-FCC040909

FCCID : SIIMT-5100J

Appendix B - User's Manual

Please see attached document(s).

MT-5100J

Mobile EFT POS Hardware Operational User Manual

- This user manual contains proprietary information that is protected by copyright. All rights are reserved. No part of this user manual may be reproduced, photocopied, transcribed or transmitted in whatsoever from without the prior permission of the manufacturer.

FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) this device may not cause harmful interference, and (2) this device must accept any interference received including interference that may cause undesired operation.

INFORMATION TO THE USER

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARNING

THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.


DoPa Modem

- EasyCheck Mobile EFT POS is customized to fit to DoPa MAX 2896F for TDMA mobile data communication in Japan Territory.
- DoPa MAX 2896F is manufactured by Fujitsu Corporation and is distributed by NTT DoCoMo in Japan.
- Manufacturing responsibility for DoPa MAX 2896F belongs to Fujitsu Corporation in Japan. And NTT DoCoMo Japan complies communication regulations and other communication laws in Japan.


Unpacking

After opening EASY-CHECK Mobile EFT POS box, make sure the following items are provided with the Mobile EFT POS. If you find that any of these items is missing or appears damaged, please contact your dealer or call to Help Desk immediately.


EASY-CHECK (MT-5100J)

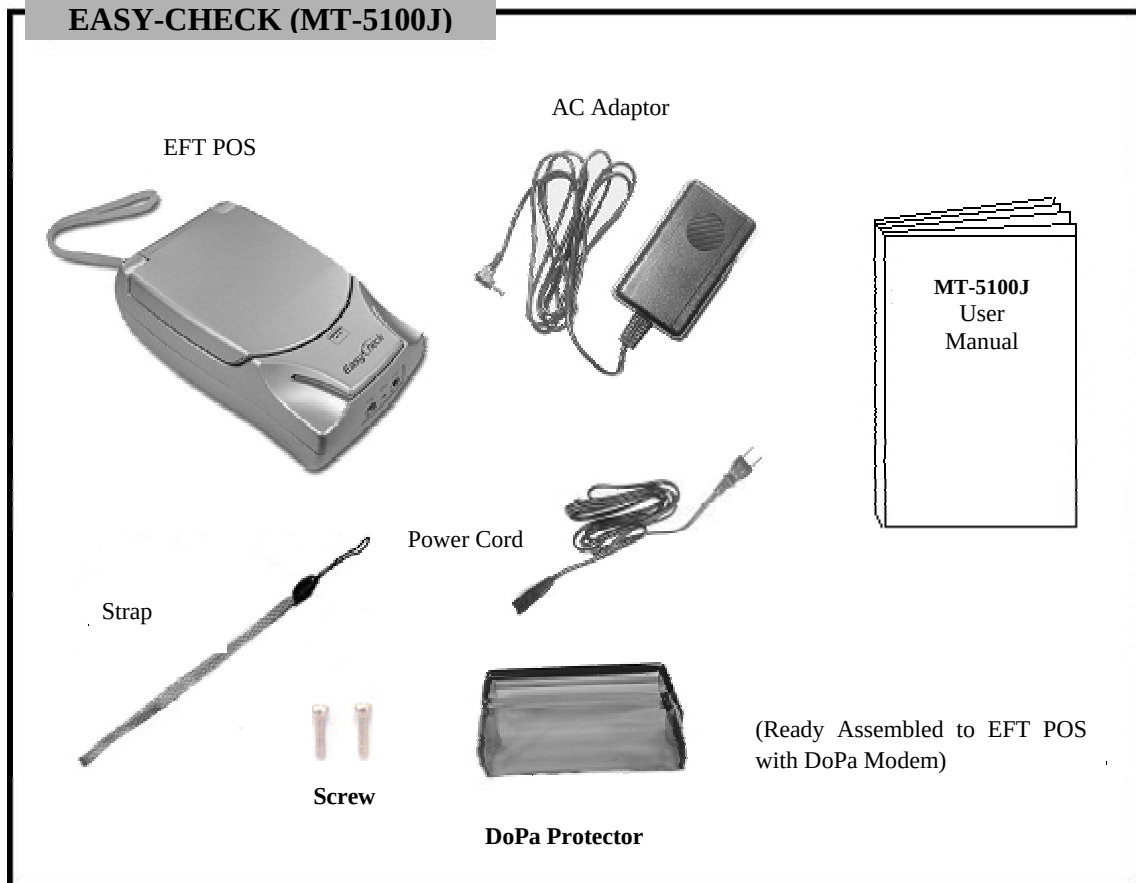

PCMCIA (DoPa MAX 289F)

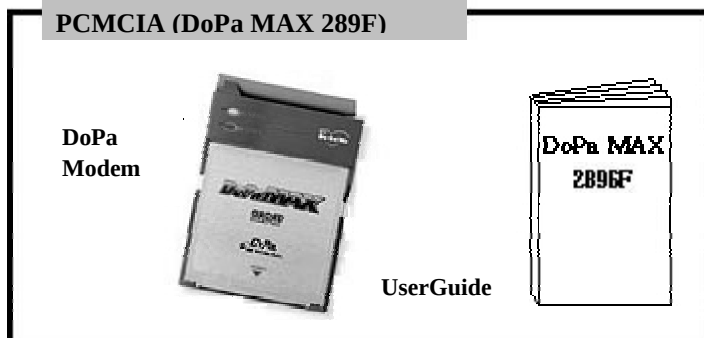

Roll Paper

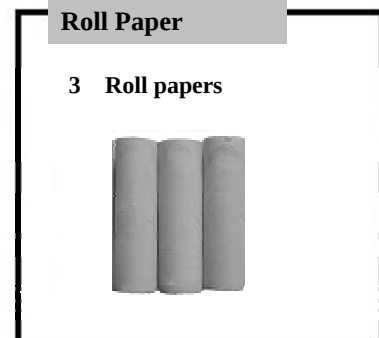

EFT POS & DoPa Modem Set-up.

Please set-up EFT POS & DoPa Modem on following instructions. If you find any problems , please call to help desk or contact the dealer with the EFT POS & DoPa Modem.

Please make sure that you do following set-up process on a stable and secure surface

SETUP-1

How to check Battery Balance and to Regarge

電源
ON

ON Push 'ON' key to power on. You can see battery cheker upper-right LCD


- ▶ Do not need recharge → Go to Set-up-2
- ▶ Need recharge → Operate as following diagram to recharge.

You can keep going on next step set-up with recharging. GO to next step, Set-up-2



All functions of EASY-CHECK is working with recharging process using AC adaptor.

단, 코드가 읽히는 등의 사고 위험성이 있으므로 충분히 주의하여 주십시오.

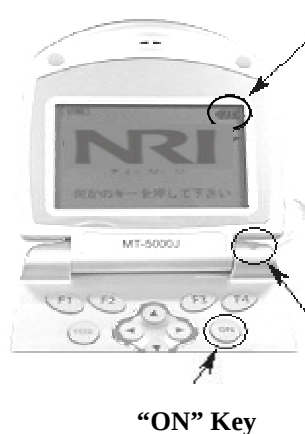

Battery Checker

"ON" Key


Recharging LED
(Colors : Recharging "Orange", Completed "Green")

"Battery Checker" appears only when power on status	
	Full
	Short
	Need Recharge

How to Recharge Battery



It takes around 3 hrs for full battery recharge

Please Connect AC Adaptor to AC Adaptor Jack

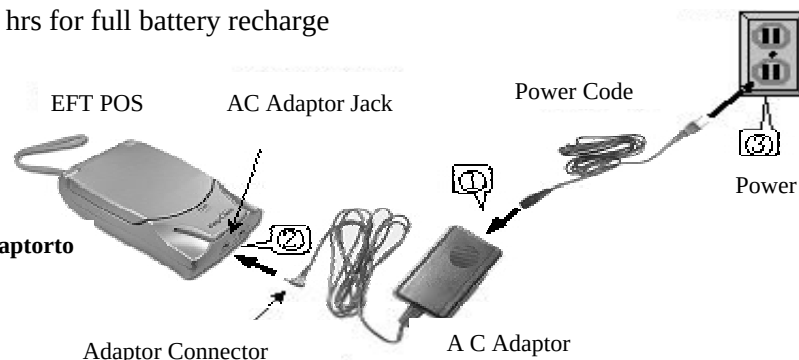

Turn off the EFT POS, and then insert DoPa modem into the slot of EFT POS as following instructions.

- 1) To insert DoPa Modem into the slot of EFT POS smoothly as directed arrow.
- 2) Once DoPa Modem is fully inserted into the slot of EFT POS, you could feel the feeling of end edge of slot, like photo 2.

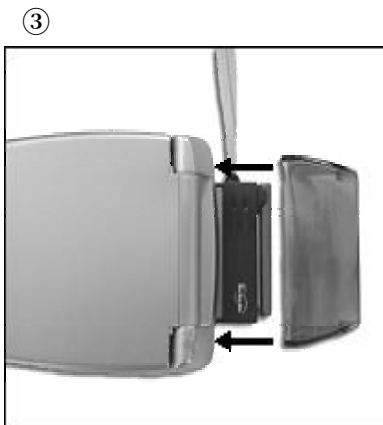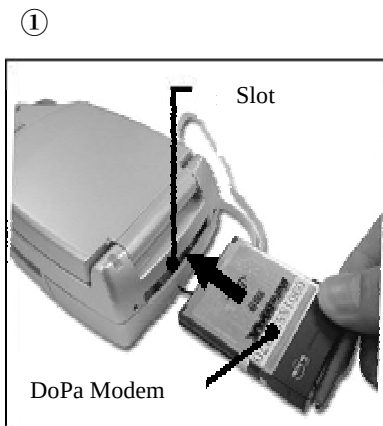

- 3) After connection of DaPa Modem, cover DoPa Modem by protector and fix it using screw and screw driver.



Please use and store EFT POS with protector on.
To slip out the DoPa Modem, reverse above instruction.



Please turn off EFT POS whenever connecting and disconnecting DoPa Modem.