

FCC RADIO TEST REPORT

FCC ID: SJ8-WS26

Product: Solar Powered Dual-Lens WiFi Camera

Trade Mark: N/A

Model No.: WS26

Family Model: N/A

Report No.: N25070103606E

Issue Date: Sept. 29, 2025

Prepared for

RDI Technology (Shenzhen) Co., Ltd.

BUILDING 1#, YONGYUE ROAD 7#, EAST BAISHIXIA, FUYONG,
BAOAN, SHENZHEN, PRC.

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street,
Baoan District, Shenzhen, Guangdong, People's Republic of China

Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : RDI Technology (Shenzhen) Co., Ltd.

Address : BUILDING 1#, YONGYUE ROAD 7#, EAST BAISHIXIA, FUYONG,
BAOAN, SHENZHEN, PRC.

Manufacturer's Name : RDI Technology (Shenzhen) Co., Ltd.

Address : BUILDING 1#, YONGYUE ROAD 7#, EAST BAISHIXIA, FUYONG,
BAOAN, SHENZHEN, PRC.

Product description

Product name : Solar Powered Dual-Lens WiFi Camera

Trademark : N/A

Model and/or type reference : WS26

Family Model : N/A

Test Sample Number : S2507100068-1#

Standards : FCC Part15.407

Test procedure : ANSIC63.10-2020+Cor.1-2023
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB 905462 D03 Client Without DFS New Rules v01r02
KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests : Jul. 01, 2025 ~ Sept. 29, 2025

Date of Issue : Sept. 29, 2025

Test Result : **Pass**

Prepared By : 
Mary Hu
(Project Engineer)

Reviewed By : 
Aaron Cheng
(Supervisor)

Approved By : 
Alex Li
(Manager)

Table of Contents

	Page
1. SUMMARY OF TEST RESULTS	7
1.1 FACILITIES AND ACCREDITATIONS	8
1.2 MEASUREMENT UNCERTAINTY	8
2. GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	11
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	13
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	14
3. EMC EMISSION TEST	16
3.1 CONDUCTED EMISSION MEASUREMENT	16
3.1.1 APPLICABLE STANDARD	16
3.1.2 CONFORMANCE LIMIT	16
3.1.3 TEST CONFIGURATION	16
3.1.4 TEST PROCEDURE	17
3.2 RADIATED EMISSION MEASUREMENT	26
3.2.1 APPLICABLE STANDARD	26
3.2.2 CONFORMANCE LIMIT	26
3.2.3 MEASURING INSTRUMENTS	26
3.2.4 TEST CONFIGURATION	27
3.2.5 TEST PROCEDURE	28
3.2.6 TEST RESULTS (9KHZ – 30 MHZ)	29
3.2.7 TEST RESULTS (30MHZ – 1GHZ)	30
3.2.9 TEST RESULTS (18GHZ-40GHZ)	42
4 POWER SPECTRAL DENSITY TEST	53
4.1 APPLIED PROCEDURES / LIMIT	53
4.2 TEST PROCEDURE	54
4.3 DEVIATION FROM STANDARD	54
4.4 TEST SETUP	54
4.5 EUT OPERATION CONDITIONS	54
4.6 TEST RESULTS	55
5. 26DB & 99% EMISSION BANDWIDTH	56
5.1 APPLIED PROCEDURES / LIMIT	56
5.2 TEST PROCEDURE	56
5.3 EUT OPERATION CONDITIONS	57
5.4 TEST RESULTS	57

Table of Contents

	Page
6. MINIMUM 6 DB BANDWIDTH	58
6.1 APPLIED PROCEDURES / LIMIT	58
6.2 EST PROCEDURE	58
6.3 DEVIATION FROM STANDARD	58
6.4 TEST SETUP	58
6.5 EUT OPERATION CONDITIONS	58
6.6 TEST RESULTS	59
7. MAXIMUM CONDUCTED OUTPUT POWER	60
7.1 PPLIED PROCEDURES / LIMIT	60
7.6 TEST RESULTS	62
8. OUT OF BAND EMISSIONS	63
8.1 APPLICABLE STANDARD	63
8.2 TEST PROCEDURE	63
8.3 DEVIATION FROM STANDARD	63
8.4 TEST SETUP	63
8.5 EUT OPERATION CONDITIONS	64
8.6 TEST RESULTS	65
9. FREQUENCY STABILITY MEASUREMENT	66
9.1 LIMIT	66
9.2 TEST PROCEDURES	66
9.3 TEST SETUP LAYOUT	66
9.4 EUT OPERATION DURING TEST	66
9.5 TEST RESULTS	67
10. DYNAMIC FREQUENCY SELECTION(DFS)	79
10.1 APPLICABILITY OF DFS REQUIREMENTS	79
10.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE NOTEBOOKING	79
10.3 DFS RESPONSE REQUIREMENT VALUES	80
10.4 SHORT PULSE RADAR TEST WAVEFORMS	80
10.5 CALIBRATION SETUP AND DFS TEST RESULTS	81
10.6 CONDUCTED CALIBRATION SETUP	81
10.7 RADAR WAVEFORM CALIBRATION RESULT	81
10.8 IN-SERVICE NOTEBOOKING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD	82
10.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME	

Table of Contents

	Page
AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST	83
11. ANTENNA REQUIREMENT	84
11.1 STANDARD REQUIREMENT	84
11.2 EUT ANTENNA	84

Revision History

Report No.	Version	Description	Issued Date
N25070103606E	Rev.01	Initial issue of report	Sept. 29, 2025

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4) 15.407(b)(8)(9)	Spurious Radiated Emissions	PASS	
15.407 (a)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4)	Band Edge	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.407(g)	Frequency Stability Measurement	PASS	
15.407(h)	Dynamic Frequency Selection(DFS)	PASS	
15.203	Antenna Requirement	PASS	
15.407(c)	Automatically discontinue transmission	PASS	(Note 3)

NOTE:

- (1)" N/A" denotes test is not applicable in this Test Report
- (2) This device operates with a duty cycle greater than 99%
- (3) The product is a client device, and the data transmission is limited by the AP.
When the information to be sent is missing or the operation fails,
the device will automatically stop sending and directly connect to the AP correctly again.

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at
No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong,
People's Republic of China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier:CN0074

FCC- Accredited : Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District,
Shenzhen, Guangdong, People's Republic of China

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(9KHz~30MHz)	$\pm 6\text{dB}$
5	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
6	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
7	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
8	Temperature	$\pm 0.5^{\circ}\text{C}$
9	Humidity	$\pm 2\%$
10	Radio Frequency	$\pm 0.2\text{ppm}$
11	Occupied bandwidth	$\pm 3.7\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Solar Powered Dual-Lens WiFi Camera	
Trade Mark	N/A	
Model Name	WS26	
Family Model	N/A	
Model Difference	N/A	
FCC ID	SJ8-WS26	
Product Description	Mode Supported	☒ 802.11a/n/ac/ax (20MHz channel bandwidth) ☒ 802.11n/ac/ax (40MHz channel bandwidth)
	Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps; 802.11n (20MHz): MCS0-15, up to 144Mbps 802.11n (40MHz): MCS0-15, up to 300Mbps 802.11ac (20MHz): MCS0-8, up to 173.4Mbps 802.11ac (40MHz): MCS0-9, up to 400Mbps 802.11ax (20MHz): MCS0-11, up to 286.8Mbps 802.11ax (40MHz): MCS0-11, up to 573.5Mbps
	Modulation	802.11a: OFDM (BPSK / QPSK / 16QAM/64QAM) 802.11n: OFDM (QPSK/BPSK/16QAM/64QAM) 802.11ac: OFDM (QPSK/BPSK/16QAM/64QAM/256QAM) 802.11ax: OFDMA (QPSK/BPSK/16QAM/64QAM/256QAM/1024QAM)
	Operating Frequency Range	☒ U-NII-1: 5150 MHz ~5250MHz ☒ U-NII-2A: 5250MHz~5350MHz ☒ U-NII-2C: 5470MHz~5725MHz ☒ U-NII-3: 5725 MHz ~5850 MHz
	Function:	☐ Outdoor AP ☐ Indoor AP ☐ Fixed P2P ☒ Client
	DFS type:	☐ master devices ☐ Slave devices with radar detection ☒ Slave devices without radar detection
	Support TPC	☐ YES ☒ NO
	Antenna Type	External Antenna
	Antenna Gain	1.62 dBi
	Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.	
Adapter	N/A	
Battery	DC 3.7V, 7800mAh, 28.86Wh	
Rating	DC 3.7V from Battery or DC 5V from Type-C port.	
Connecting I/O Port(s)	Please refer to the User's Manual	
HW Version	V517P	
FW version:	V5.5.24.0	
SW Version	V5.5.24.0	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- Frequency and Channel list:

Band	20MHz		40MHz	
	Channel	Frequency	Channel	Frequency
U-NII-1	36	5180 MHz	38	5190 MHz
	40	5200 MHz	46	5230 MHz
	44	5220 MHz		
	48	5240 MHz		
U-NII-2A	52	5260 MHz	54	5270 MHz
	56	5280 MHz	62	5310 MHz
	60	5300 MHz		
	64	5320 MHz		
U-NII-2C	100	5500 MHz	102	5510 MHz
	104	5520 MHz	110	5550 MHz
	108	5540 MHz	118	5590 MHz
	112	5560 MHz	126	5630 MHz
	116	5580 MHz	134	5670 MHz
	120	5600 MHz		
	124	5620 MHz		
	128	5640 MHz		
	132	5660 MHz		
	136	5680 MHz		
U-NII-3	140	5700 MHz		
	149	5745 MHz	151	5755 MHz
	153	5765 MHz	159	5795 MHz
	157	5785 MHz		
	161	5805 MHz		
	165	5825 MHz		

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a/n/ac/ax20 CH36/ CH40/CH48/CH52/CH56/CH64/CH100/CH120 /CH140/CH149/CH157/CH165
Mode 3	802.11n40/ac/ax40 CH38/CH46/CH54/CH62/CH102/CH118/CH134 /CH151/CH159


For Conducted Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a/n/ac/ax20 CH36/ CH40/CH48/CH52/CH56/CH64/CH100/CH120 /CH140/CH149/CH157/CH165
Mode 3	802.11n40/ac/ax40 CH38/CH46/CH54/CH62/CH102/CH118/CH134 /CH151/CH159

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

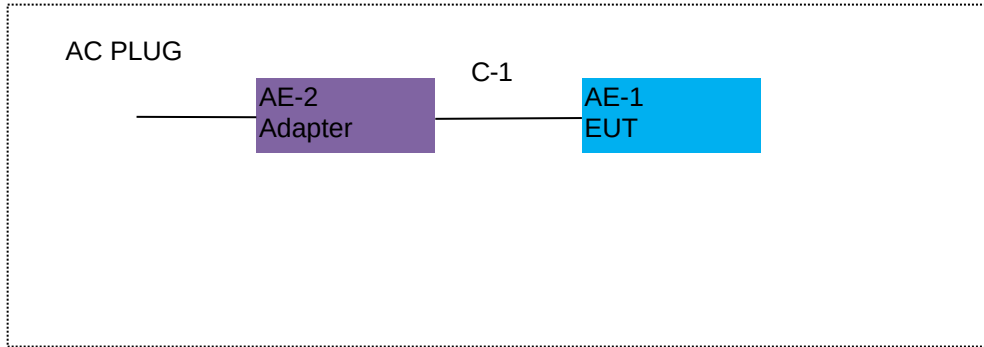

For Radiated Test Cases

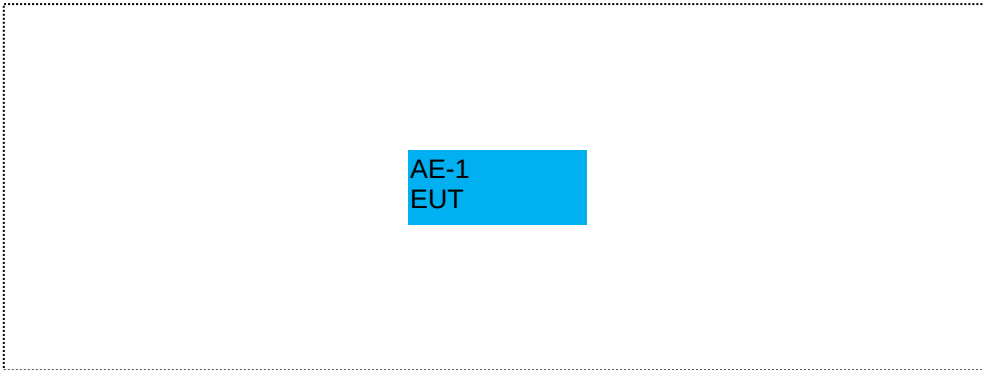

For Conducted Test Cases

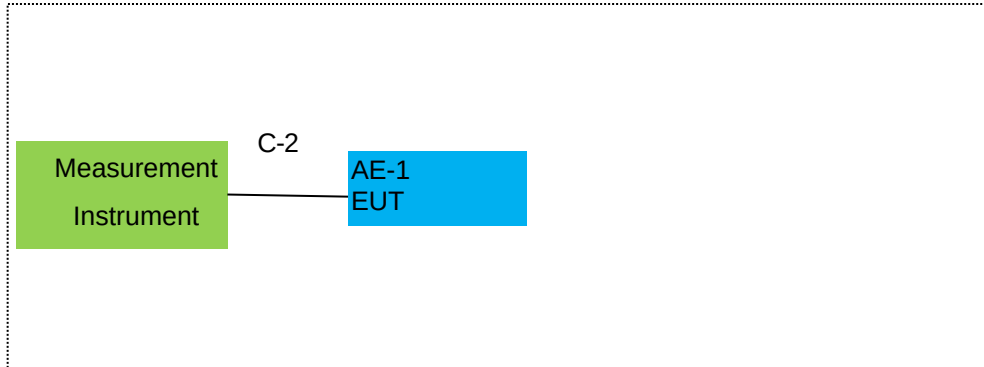

Note:1.The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Solar Powered Dual-Lens WiFi Camera	WS26	N/A	EUT
AE-2	Adapter	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB Cable	YES	NO	1.0m
C-2	RF Cable	YES	NO	0.1m

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4440A	MY41000130	2025.04.24	2026.04.23	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2025.04.17	2026.04.16	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2025.04.17	2026.04.16	1 year
4	Test Receiver	R&S	ESPI7	101318	2025.04.17	2026.04.16	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2025.04.17	2026.04.16	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2024.05.12	2027.05.11	3 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2024.05.12	2027.05.11	3 year
9	Amplifier	EMC	EMC051835SE	980246	2025.04.17	2026.04.16	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2024.05.17	2027.05.16	3 year
11	Power Meter	DARE	RPR3006W	15I00041SN084	2025.04.17	2026.04.16	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2023.05.06	2026.05.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2023.05.06	2026.05.05	3 year
14	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2023.05.06	2026.05.05	3 year
15	Filter	TRILTHIC	2400MHz	29	2024.04.26	2027.04.25	3 year
16	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2025.04.17	2026.04.16	1 year
2	LISN	R&S	ENV216	101313	2025.04.16	2026.04.15	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2025.04.16	2026.04.15	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2024.04.26	2027.04.25	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2023.05.06	2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Aux Equipment & Test Cable which is scheduled for calibration every 2 or 3 years.

Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFtest	MTS 8310 2.4GHz/5GHz	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	RadiatedTest
3	Farad	EZ-EMC_CE	AIT-03A	AC Conducted Test

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

3.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.1.3 TEST CONFIGURATION

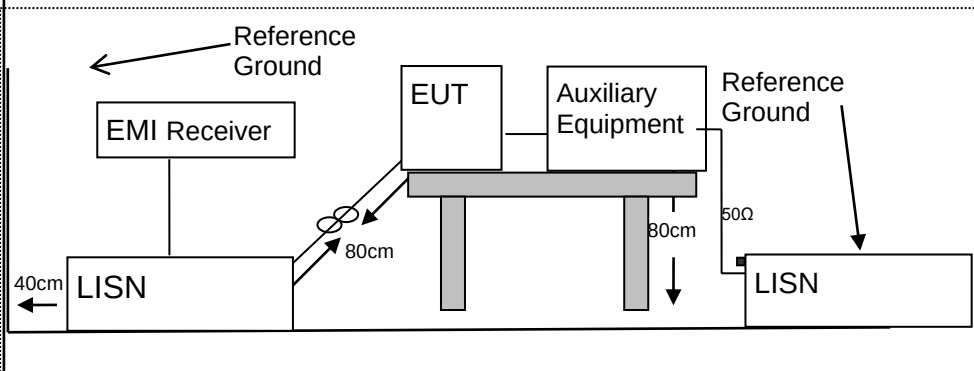

3.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name :	WS26
Temperature :	23.4℃	Relative Humidity :	66.4%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.5740	34.88	10.87	45.75	56.00	-10.25	QP
0.5740	20.21	10.87	31.08	46.00	-14.92	AVG
0.7539	31.20	11.25	42.45	56.00	-13.55	QP
0.7539	18.12	11.25	29.37	46.00	-16.63	AVG
1.1060	29.58	11.98	41.56	56.00	-14.44	QP
1.1060	15.63	11.98	27.61	46.00	-18.39	AVG
2.1780	30.94	9.82	40.76	56.00	-15.24	QP
2.1780	15.82	9.82	25.64	46.00	-20.36	AVG
3.4380	28.64	9.90	38.54	56.00	-17.46	QP
3.4380	14.08	9.90	23.98	46.00	-22.02	AVG
14.8100	28.32	12.74	41.06	60.00	-18.94	QP
14.8100	15.44	12.74	28.18	50.00	-21.82	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

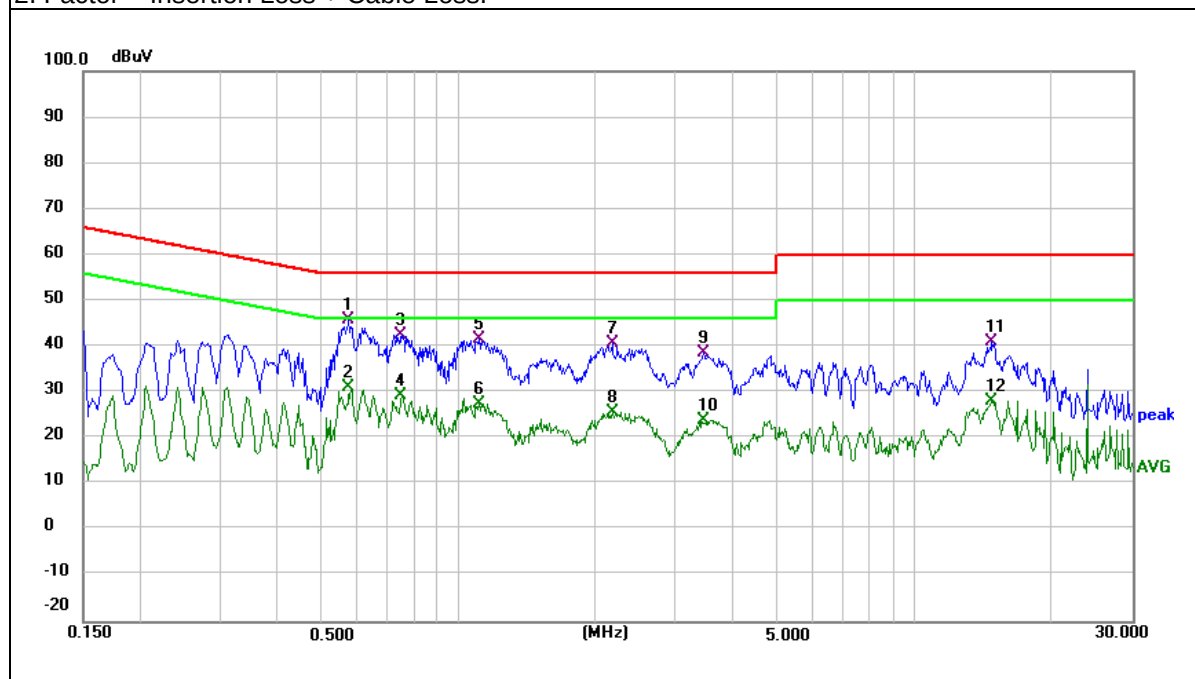


EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name :	WS26
Temperature :	23.4℃	Relative Humidity :	66.4%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.5700	37.20	10.88	48.08	56.00	-7.92	QP
0.5700	28.83	10.88	39.71	46.00	-6.29	AVG
1.1380	29.73	12.07	41.80	56.00	-14.20	QP
1.1380	20.31	12.07	32.38	46.00	-13.62	AVG
1.6540	26.25	13.12	39.37	56.00	-16.63	QP
1.6540	16.69	13.12	29.81	46.00	-16.19	AVG
2.0500	29.76	9.84	39.60	56.00	-16.40	QP
2.0500	19.99	9.84	29.83	46.00	-16.17	AVG
2.5100	29.58	9.88	39.46	56.00	-16.54	QP
2.5100	20.50	9.88	30.38	46.00	-15.62	AVG
15.7700	24.15	12.71	36.86	60.00	-23.14	QP
15.7700	14.22	12.71	26.93	50.00	-23.07	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

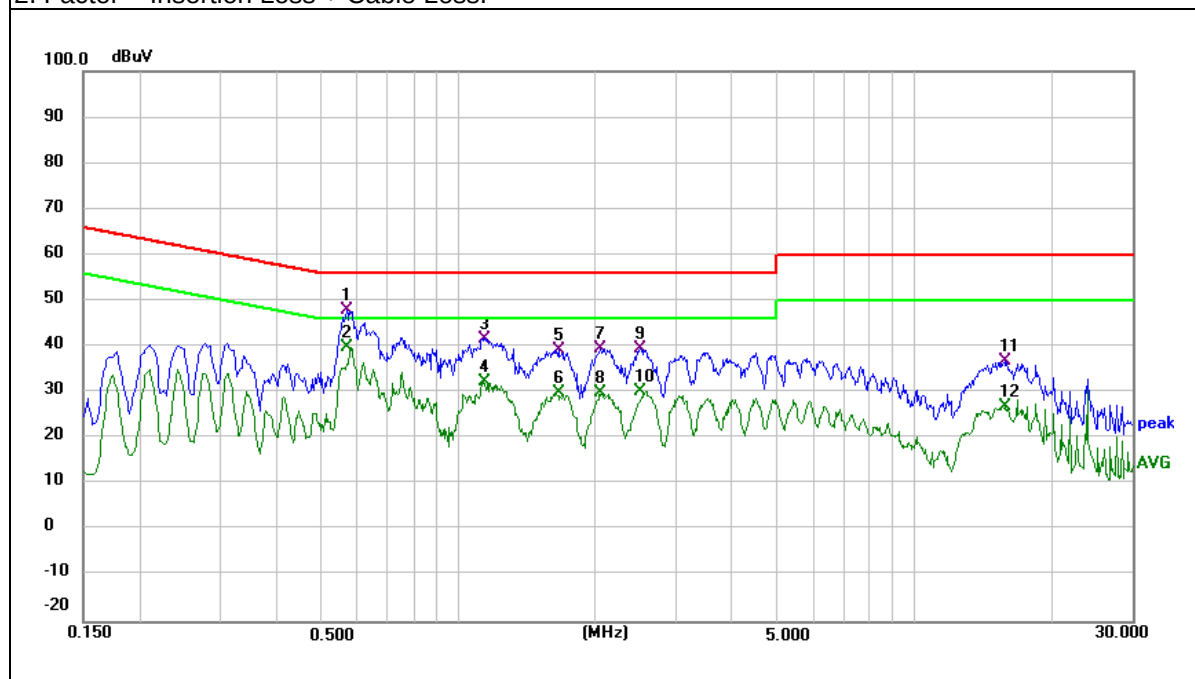


EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name :	WS26
Temperature :	23.4℃	Relative Humidity :	66.4%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.3G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.5580	34.76	10.85	45.61	56.00	-10.39	QP
0.5580	22.63	10.85	33.48	46.00	-12.52	AVG
0.9020	29.08	11.55	40.63	56.00	-15.37	QP
0.9020	15.34	11.55	26.89	46.00	-19.11	AVG
2.3060	28.09	9.83	37.92	56.00	-18.08	QP
2.3060	13.67	9.83	23.50	46.00	-22.50	AVG
3.4900	24.94	9.90	34.84	56.00	-21.16	QP
3.4900	13.05	9.90	22.95	46.00	-23.05	AVG
14.3460	28.70	12.55	41.25	60.00	-18.75	QP
14.3460	20.40	12.55	32.95	50.00	-17.05	AVG
24.0020	28.64	12.38	41.02	60.00	-18.98	QP
24.0020	25.43	12.38	37.81	50.00	-12.19	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

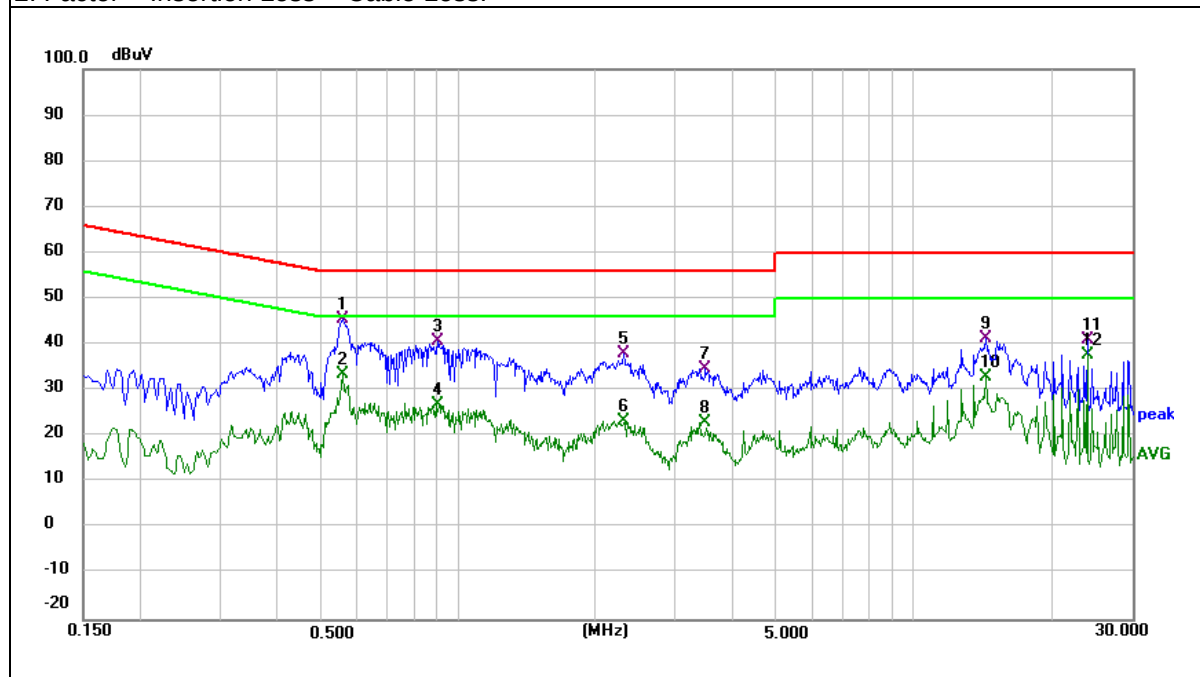


EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name :	WS26
Temperature :	23.4℃	Relative Humidity :	66.4%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.3G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.5581	32.72	10.86	43.58	56.00	-12.42	QP
0.5581	22.90	10.86	33.76	46.00	-12.24	AVG
0.9580	26.36	11.70	38.06	56.00	-17.94	QP
0.9580	15.86	11.70	27.56	46.00	-18.44	AVG
1.2900	23.18	12.38	35.56	56.00	-20.44	QP
1.2900	12.15	12.38	24.53	46.00	-21.47	AVG
1.5300	21.41	12.87	34.28	56.00	-21.72	QP
1.5300	9.56	12.87	22.43	46.00	-23.57	AVG
14.3420	27.67	12.46	40.13	60.00	-19.87	QP
14.3420	19.55	12.46	32.01	50.00	-17.99	AVG
24.0020	26.87	12.40	39.27	60.00	-20.73	QP
24.0020	24.47	12.40	36.87	50.00	-13.13	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

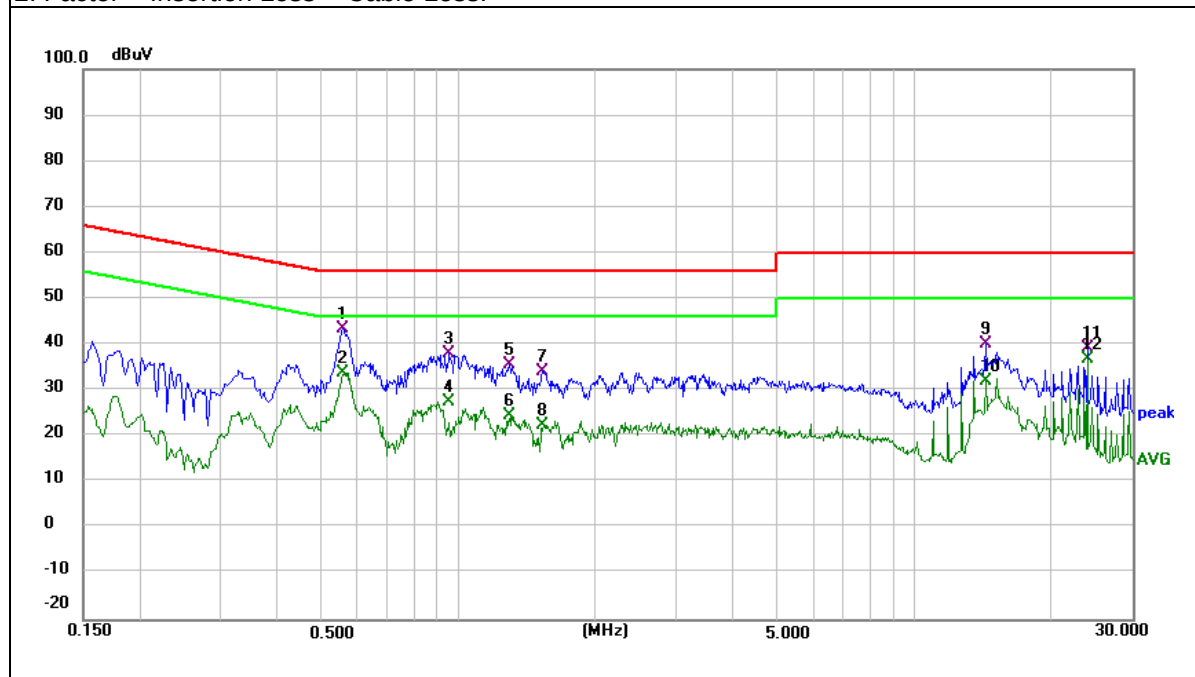


EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name :	WS26
Temperature :	23.4℃	Relative Humidity :	66.4%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.6G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.5660	32.15	10.87	43.02	56.00	-12.98	QP
0.5660	18.27	10.87	29.14	46.00	-16.86	AVG
0.8820	13.44	11.51	24.95	46.00	-21.05	AVG
0.9140	27.13	11.57	38.70	56.00	-17.30	QP
1.1380	24.66	12.04	36.70	56.00	-19.30	QP
1.1380	11.82	12.04	23.86	46.00	-22.14	AVG
2.1340	25.17	9.82	34.99	56.00	-21.01	QP
2.1340	12.59	9.82	22.41	46.00	-23.59	AVG
15.0820	25.27	12.81	38.08	60.00	-21.92	QP
15.1460	14.01	12.80	26.81	50.00	-23.19	AVG
24.0020	23.94	12.38	36.32	60.00	-23.68	QP
24.0020	20.60	12.38	32.98	50.00	-17.02	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

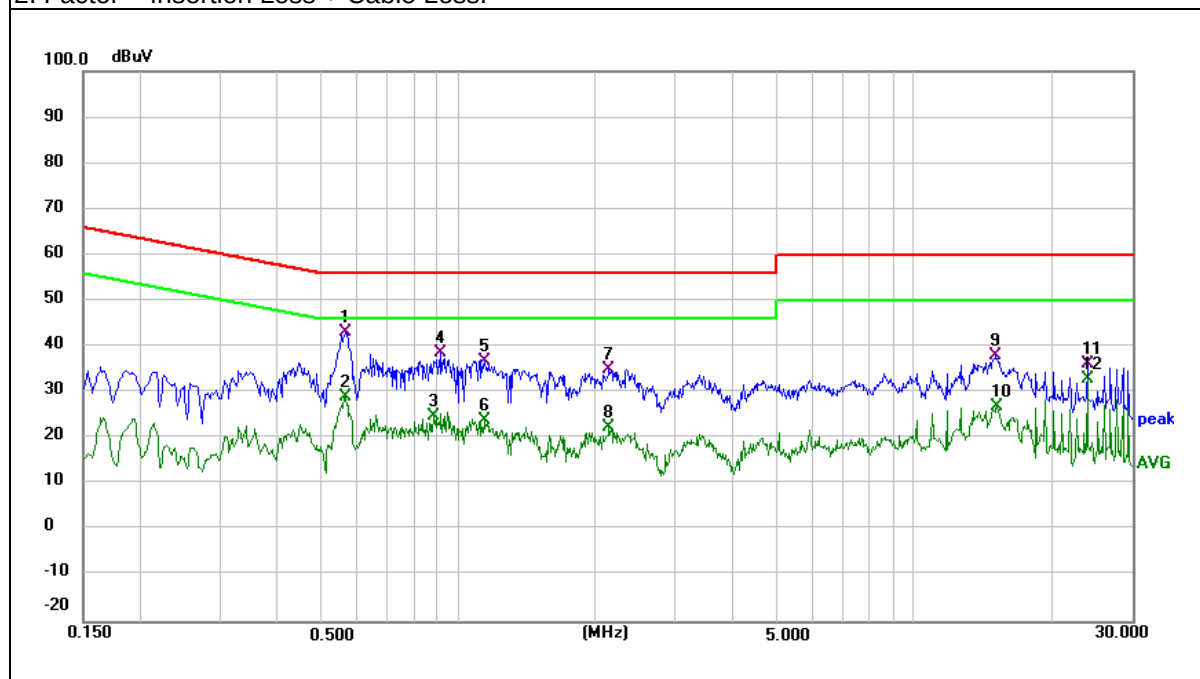


EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name :	WS26
Temperature :	23.4℃	Relative Humidity :	66.4%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.6G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.5660	32.60	10.88	43.48	56.00	-12.52	QP
0.5660	23.64	10.88	34.52	46.00	-11.48	AVG
0.9100	22.77	11.60	34.37	56.00	-21.63	QP
0.9100	12.47	11.60	24.07	46.00	-21.93	AVG
1.5940	20.23	13.00	33.23	56.00	-22.77	QP
1.5940	11.86	13.00	24.86	46.00	-21.14	AVG
2.1700	23.16	9.85	33.01	56.00	-22.99	QP
2.1700	12.40	9.85	22.25	46.00	-23.75	AVG
15.1500	30.33	12.84	43.17	60.00	-16.83	QP
15.1500	20.97	12.84	33.81	50.00	-16.19	AVG
24.0020	28.57	12.40	40.97	60.00	-19.03	QP
24.0020	26.38	12.40	38.78	50.00	-11.22	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

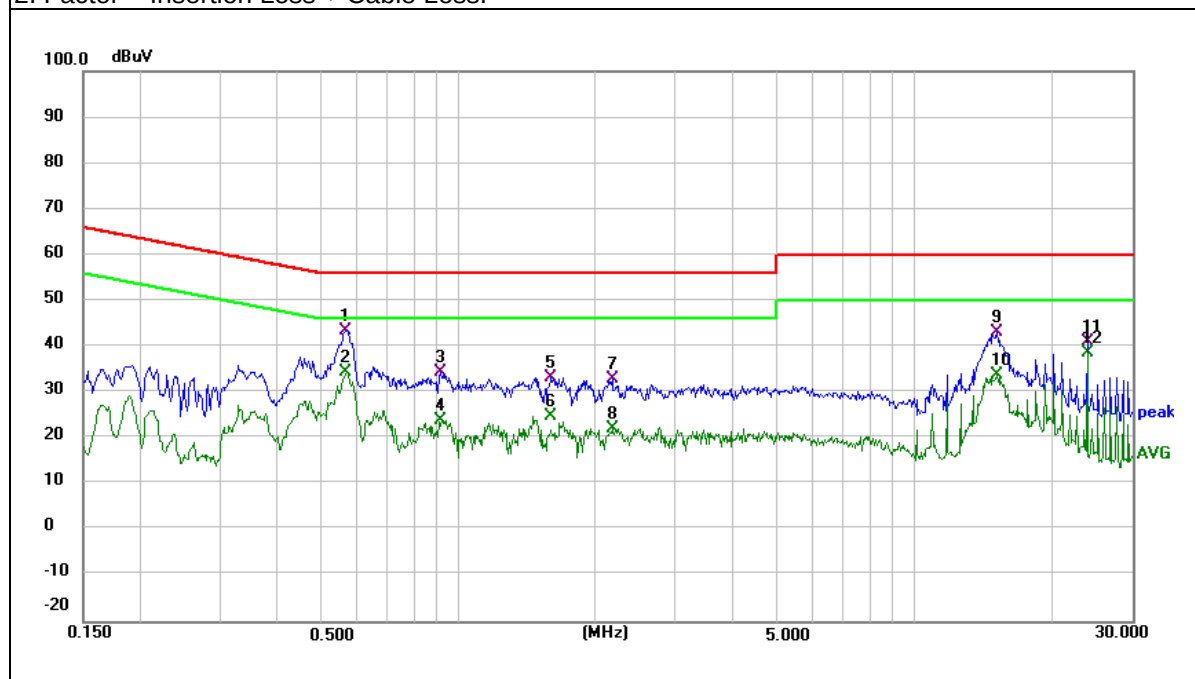


EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name :	WS26
Temperature :	23.4 °C	Relative Humidity :	66.4%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.5820	32.90	10.89	43.79	56.00	-12.21	QP
0.5820	20.65	10.89	31.54	46.00	-14.46	AVG
0.7700	30.88	11.29	42.17	56.00	-13.83	QP
0.7700	17.53	11.29	28.82	46.00	-17.18	AVG
1.1420	30.05	12.04	42.09	56.00	-13.91	QP
1.1420	16.73	12.04	28.77	46.00	-17.23	AVG
2.0940	31.46	9.81	41.27	56.00	-14.73	QP
2.0940	17.31	9.81	27.12	46.00	-18.88	AVG
4.8780	27.29	9.99	37.28	56.00	-18.72	QP
4.8780	14.04	9.99	24.03	46.00	-21.97	AVG
14.9100	26.99	12.78	39.77	60.00	-20.23	QP
14.9100	14.74	12.78	27.52	50.00	-22.48	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

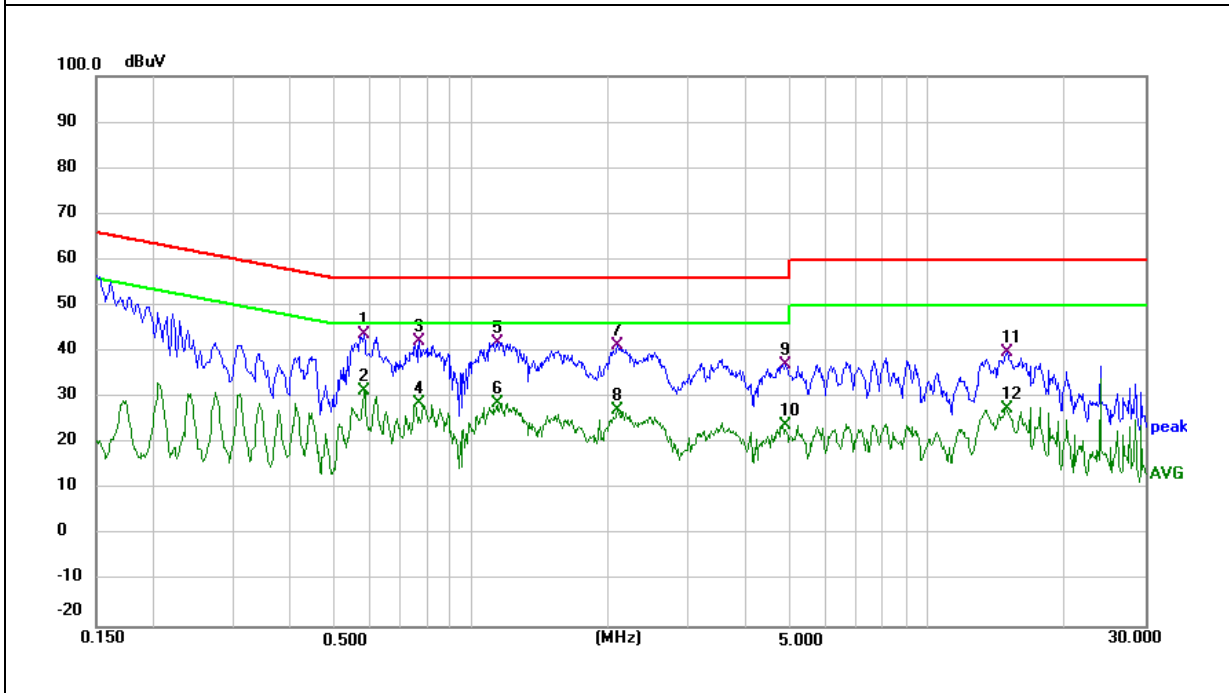


EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name :	WS26
Temperature :	23.4 °C	Relative Humidity :	66.4%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2660	37.43	10.24	47.67	61.24	-13.57	QP
0.2660	23.70	10.24	33.94	51.24	-17.30	AVG
0.5780	35.72	10.90	46.62	56.00	-9.38	QP
0.5780	29.77	10.90	40.67	46.00	-5.33	AVG
1.1420	29.95	12.07	42.02	56.00	-13.98	QP
1.1420	20.10	12.07	32.17	46.00	-13.83	AVG
2.1020	29.19	9.85	39.04	56.00	-16.96	QP
2.1020	19.65	9.85	29.50	46.00	-16.50	AVG
15.3260	27.21	12.80	40.01	60.00	-19.99	QP
15.3260	18.77	12.80	31.57	50.00	-18.43	AVG
24.0020	26.75	12.40	39.15	60.00	-20.85	QP
24.0020	24.04	12.40	36.44	50.00	-13.56	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

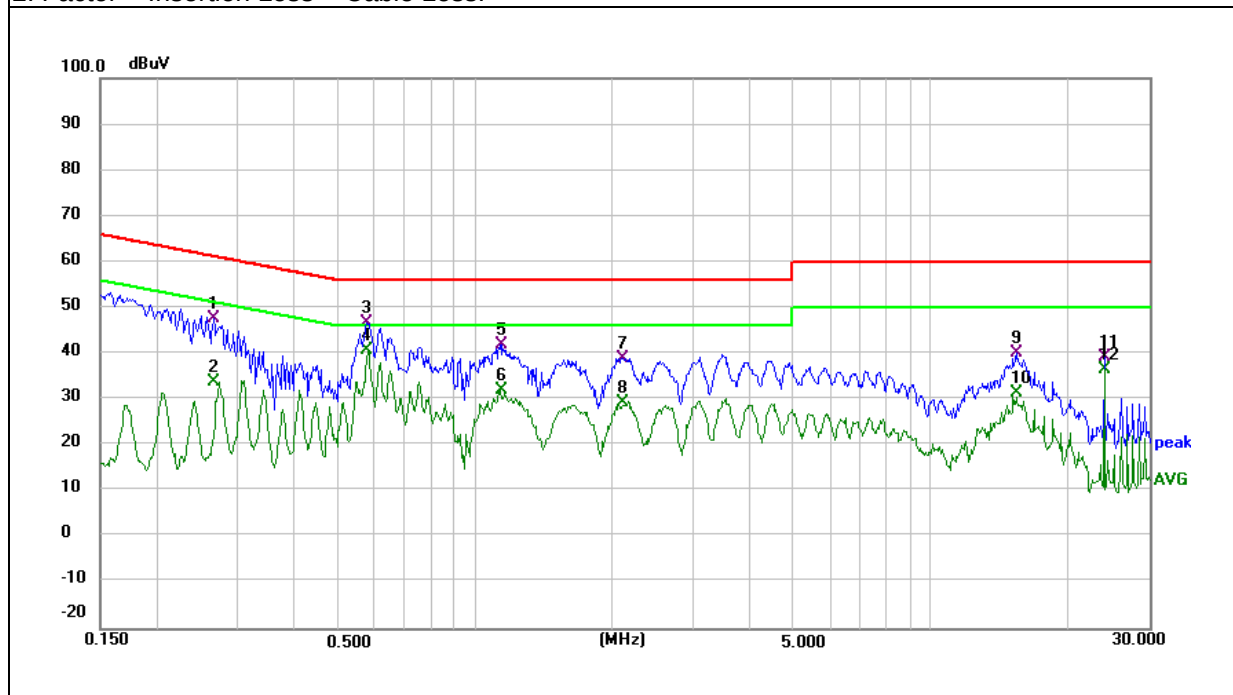

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 APPLICABLE STANDARD

According to FCC Part 15.407 and 15.209

3.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407: radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

3.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

3.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

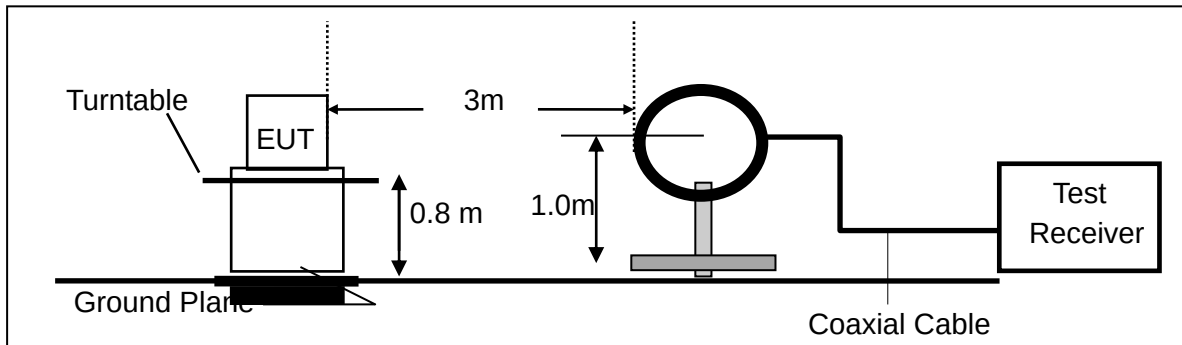

(b) For radiated emissions from 30MHz to 1000MHz

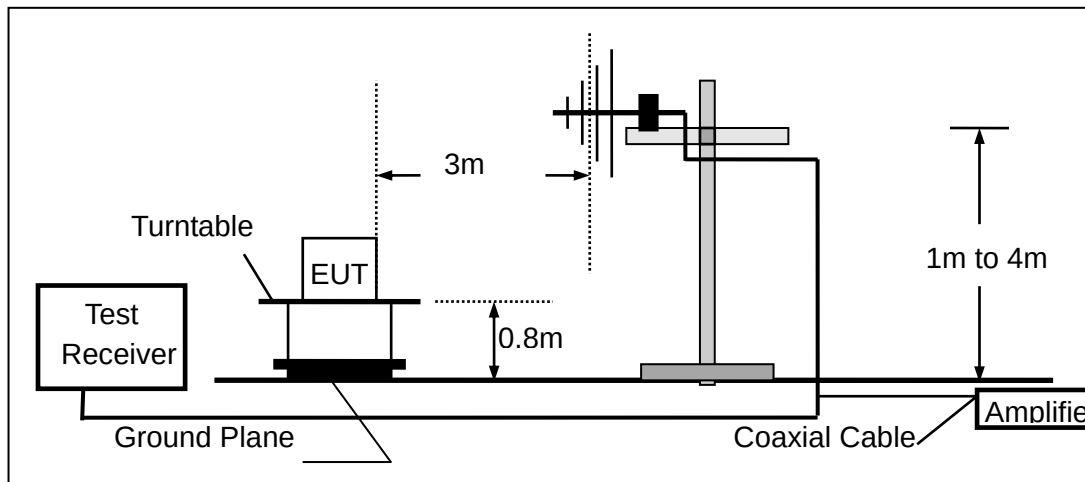

(c) For radiated emissions above 1000MHz

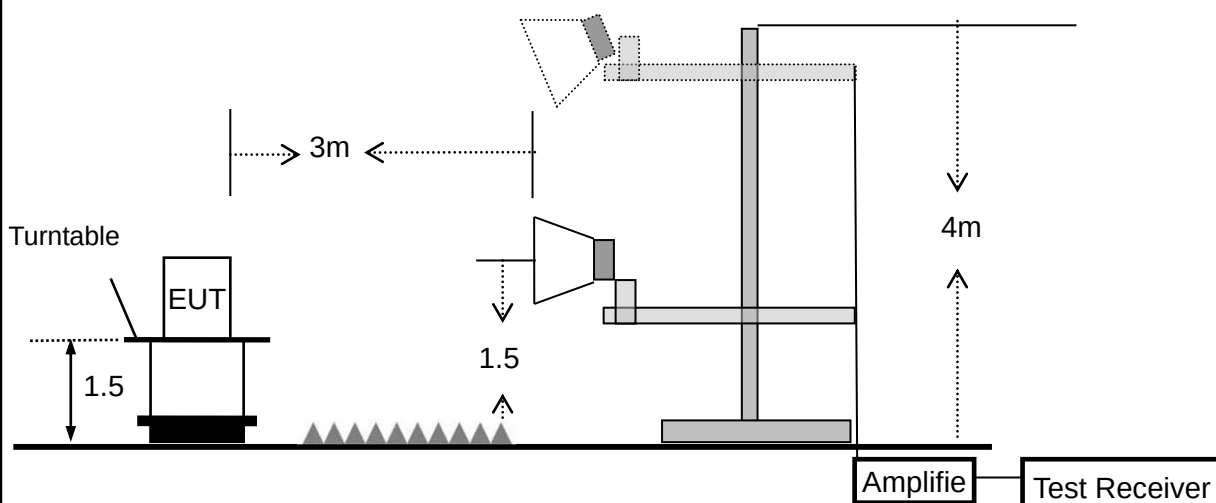

3.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

3.2.6 TEST RESULTS (9KHZ – 30 MHZ)

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name :	WS26
Temperature :	26 °C	Relative Humidity :	54%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


3.2.7 TEST RESULTS (30MHZ – 1GHZ)

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	24.7°C	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX(5.2G)- 802.11a (Mid CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	125.8863	22.79	15.12	37.91	43.50	-5.59	QP
V	194.4533	21.89	16.96	38.85	43.50	-4.65	QP
V	249.4250	18.16	19.10	37.26	46.00	-8.74	QP
V	305.6800	14.45	20.47	34.92	46.00	-11.08	QP
V	501.1790	15.24	24.76	40.00	46.00	-6.00	QP
V	651.9415	16.33	27.08	43.41	46.00	-2.59	QP

Remark:


Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

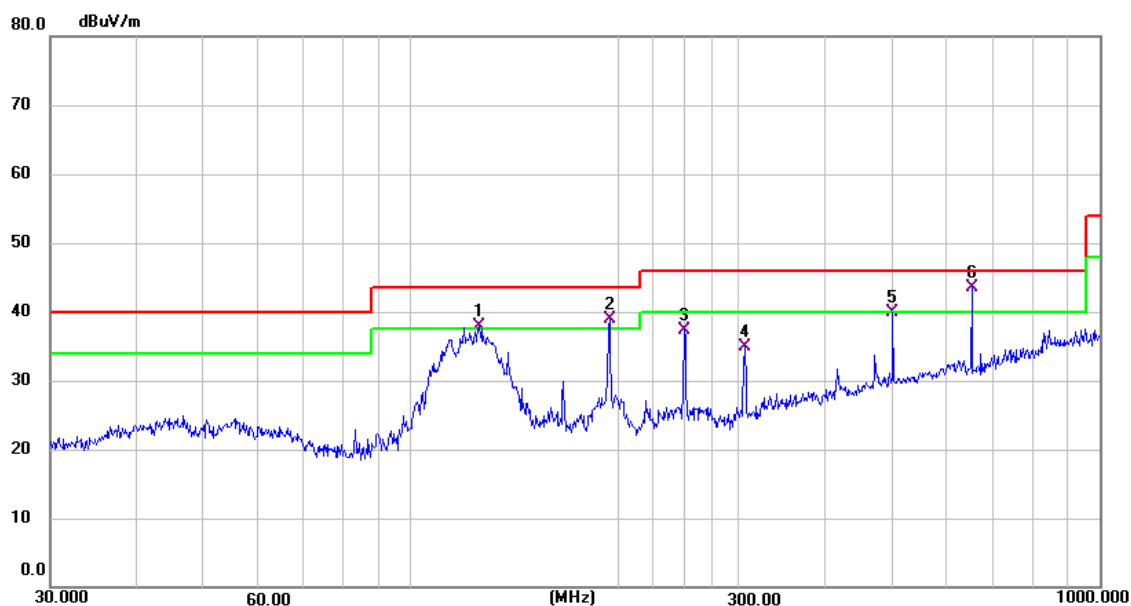

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	55.2207	7.78	19.80	27.58	40.00	-12.42	QP
H	138.8734	16.58	14.73	31.31	43.50	-12.19	QP
H	194.4533	16.57	16.96	33.53	43.50	-9.97	QP
H	250.3010	21.09	19.14	40.23	46.00	-5.77	QP
H	305.6800	15.07	20.47	35.54	46.00	-10.46	QP
H	701.7610	13.54	27.83	41.37	46.00	-4.63	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

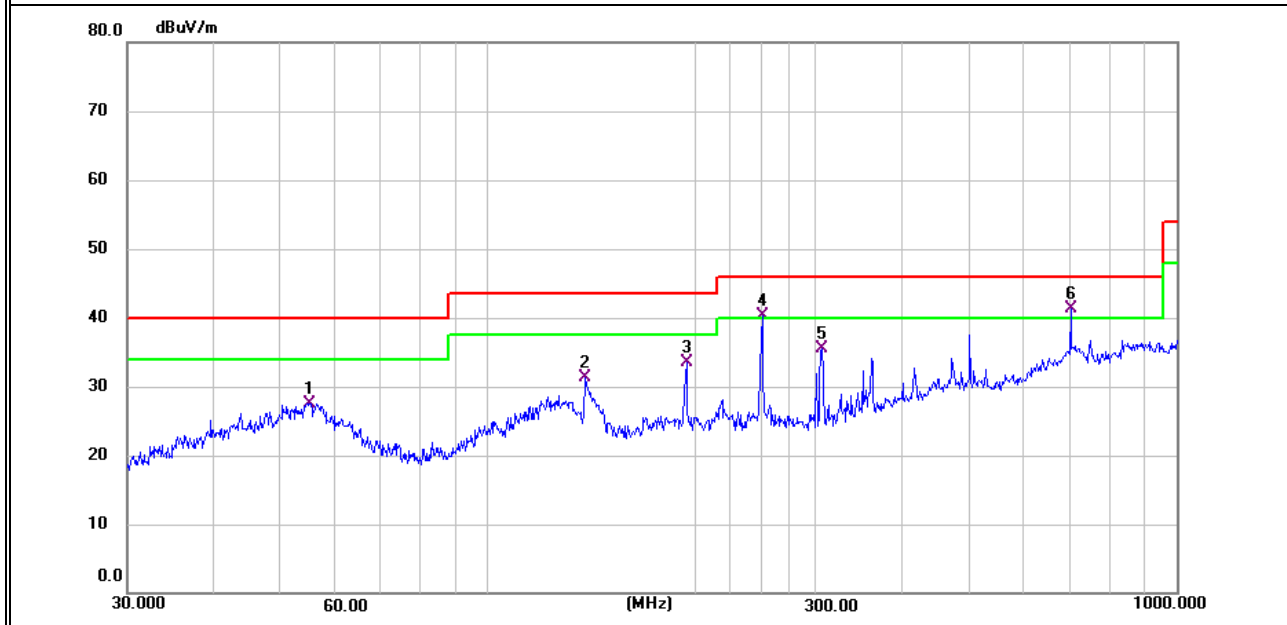

Note(1)“802.11a” mode is the worst mode.


(2)Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	24.7℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX(5.3G)- 802.11n20 (Mid CH)		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	125.0065	23.12	15.64	38.76	43.50	-4.74	QP
V	194.4533	22.39	16.96	39.35	43.50	-4.15	QP
V	249.4250	18.66	19.10	37.76	46.00	-8.24	QP
V	305.6800	14.95	20.47	35.42	46.00	-10.58	QP
V	501.1790	17.74	24.76	42.50	46.00	-3.50	QP
V	651.9415	16.33	27.08	43.41	46.00	-2.59	QP

Remark:


Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

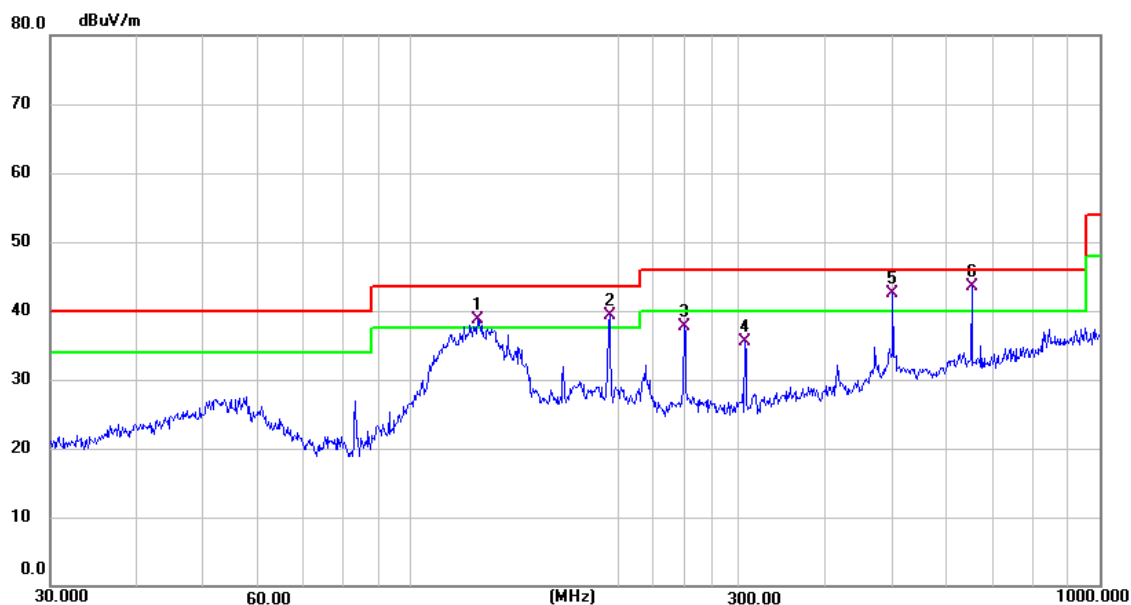

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	121.9753	12.15	16.23	28.38	43.50	-15.12	QP
H	194.4533	19.57	16.96	36.53	43.50	-6.97	QP
H	250.3010	21.59	19.14	40.73	46.00	-5.27	QP
H	305.6800	15.57	20.47	36.04	46.00	-9.96	QP
H	501.1790	13.24	24.76	38.00	46.00	-8.00	QP
H	701.7610	13.54	27.83	41.37	46.00	-4.63	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

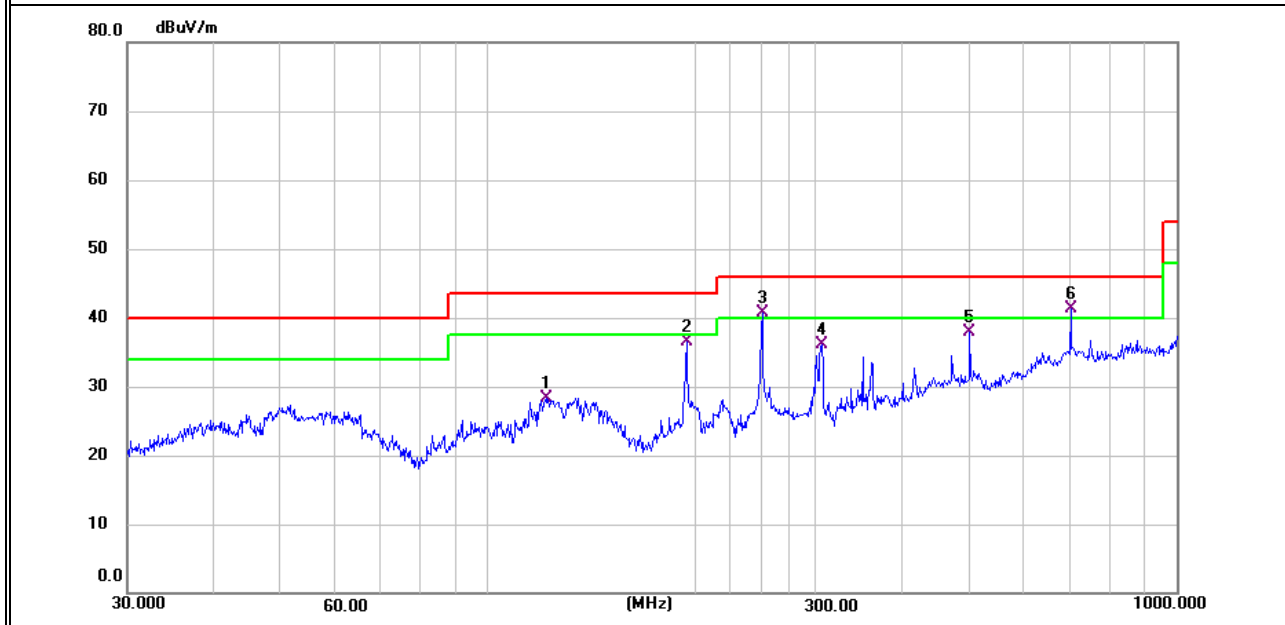

Note(1)“802.11n20” mode is the worst mode.


(2)Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	24.7℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX(5.6G)- 802.11n20 (Mid CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	53.8817	7.72	19.76	27.48	40.00	-12.52	QP
V	122.4040	13.05	15.96	29.01	43.50	-14.49	QP
V	194.4533	17.07	16.96	34.03	43.50	-9.47	QP
V	250.3010	20.59	19.14	39.73	46.00	-6.27	QP
V	501.1790	14.74	24.76	39.50	46.00	-6.50	QP
V	701.7610	13.04	27.83	40.87	46.00	-5.13	QP

Remark:


Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

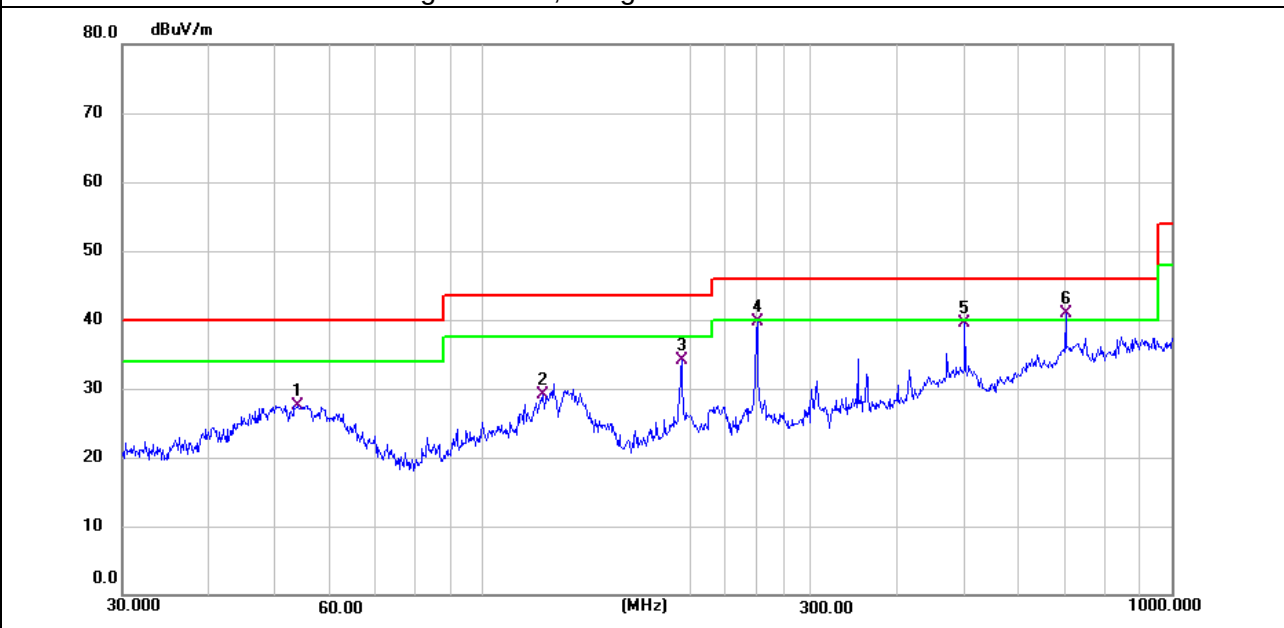

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	135.5061	15.58	14.72	30.30	43.50	-13.20	QP
H	194.4533	18.07	16.96	35.03	43.50	-8.47	QP
H	250.3010	22.59	19.14	41.73	46.00	-4.27	QP
H	360.4476	14.65	21.41	36.06	46.00	-9.94	QP
H	501.1790	12.24	24.76	37.00	46.00	-9.00	QP
H	701.7610	14.04	27.83	41.87	46.00	-4.13	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

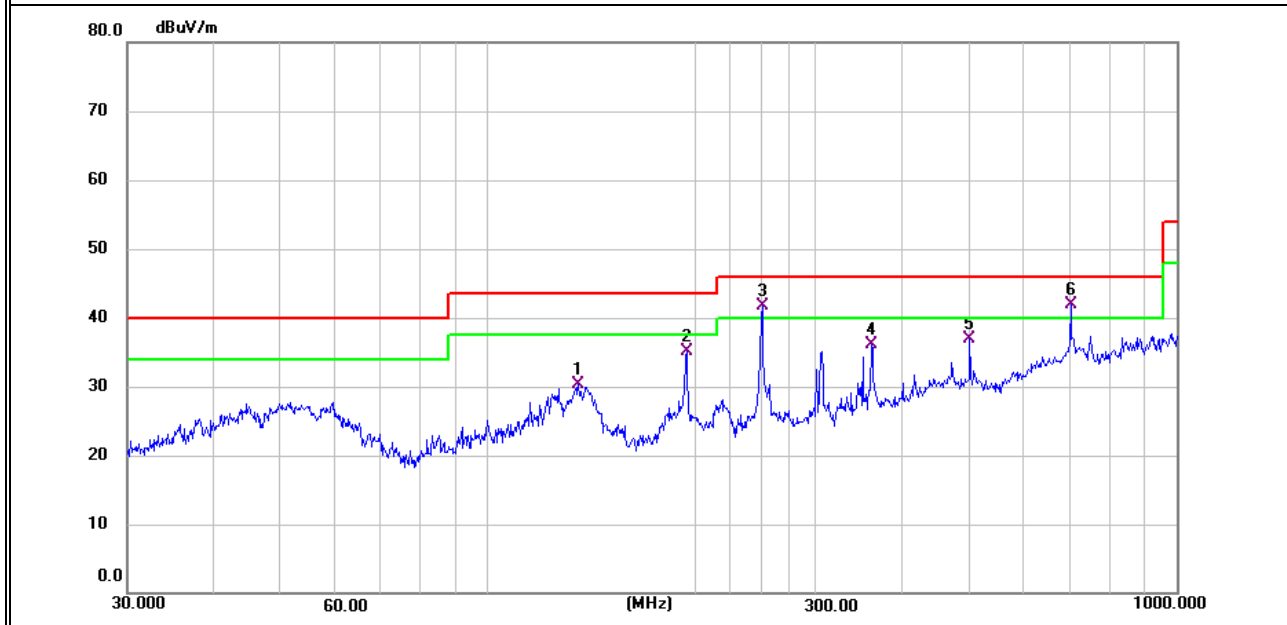

Note(1)“802.11n20” mode is the worst mode.


(2)Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	24.7℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX(5.8G)- 802.11a (Mid CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	83.2296	13.95	15.07	29.02	40.00	-10.98	QP
V	122.4040	19.87	15.96	35.83	43.50	-7.67	QP
V	138.3873	23.06	14.52	37.58	43.50	-5.92	QP
V	194.4533	21.46	16.96	38.42	43.50	-5.08	QP
V	249.4250	14.09	19.10	33.19	46.00	-12.81	QP
V	875.2470	5.63	30.07	35.70	46.00	-10.30	QP

Remark:


Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

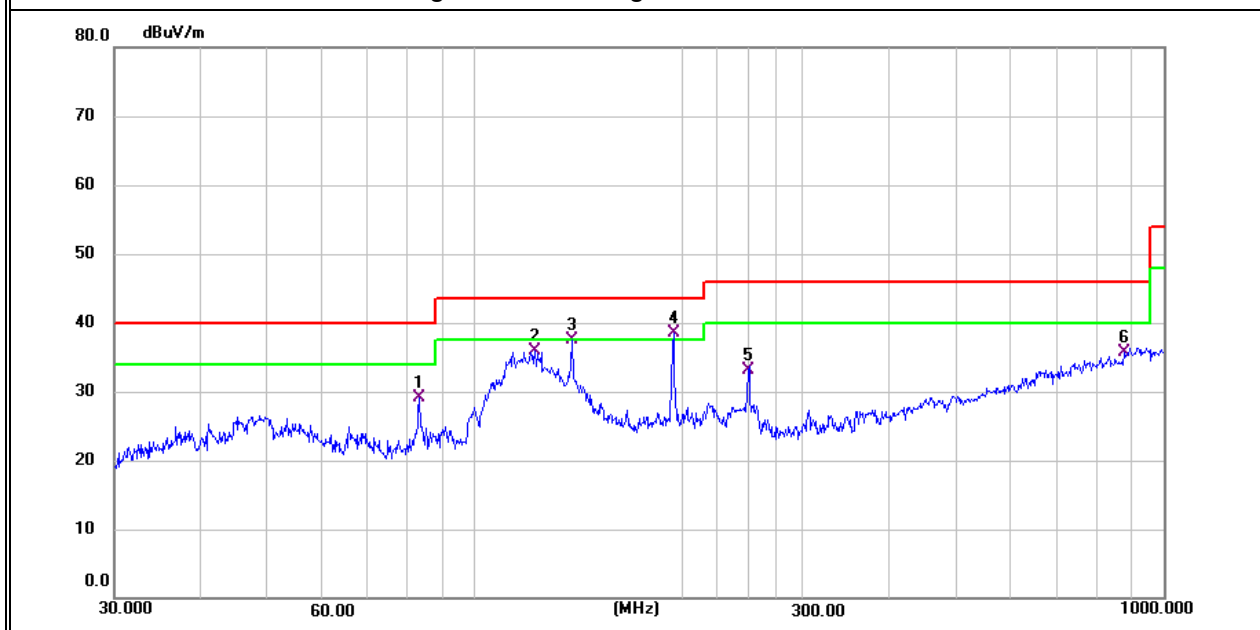

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	58.4074	7.53	19.38	26.91	40.00	-13.09	QP
H	138.8734	20.65	14.73	35.38	43.50	-8.12	QP
H	194.4533	15.10	16.96	32.06	43.50	-11.44	QP
H	250.3010	19.18	19.14	38.32	46.00	-7.68	QP
H	305.6800	16.34	20.47	36.81	46.00	-9.19	QP
H	501.1790	11.03	24.76	35.79	46.00	-10.21	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

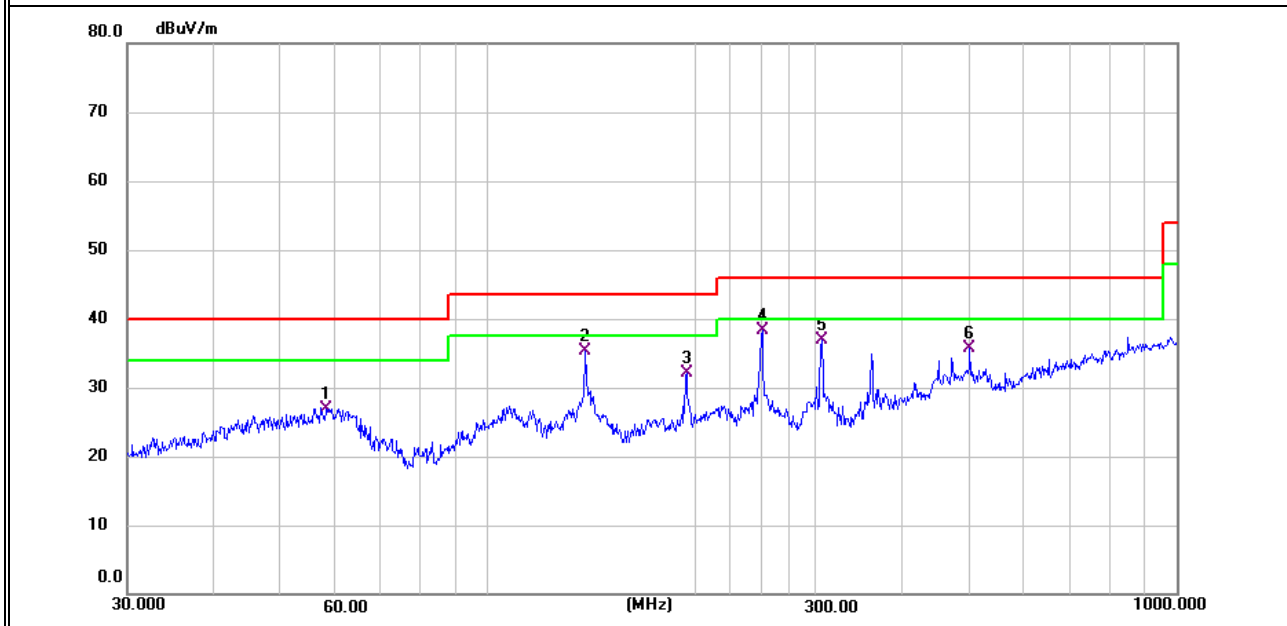

Note(1) "802.11a" mode is the worst mode.

(2) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

3.2.8 TEST RESULTS (1GHz-18GHz)

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V,
Test Mode :	TX(5.2G) - 802.11a mode		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	3695.07	64.25	5.94	35.40	44.00	61.59	74.00	-12.41	Pk
Vertical	3695.07	44.96	5.94	35.40	44.00	42.30	54.00	-11.70	AV
Vertical	10361.12	61.47	8.46	39.75	44.50	65.18	68.20	-3.02	Pk
Vertical	15540.32	63.08	10.12	38.80	44.10	67.90	74.00	-6.10	Pk
Vertical	15540.32	42.27	10.12	38.80	42.70	48.49	54.00	-5.51	AV
Horizontal	3713.60	65.51	5.94	35.18	44.00	62.63	74.00	-11.37	Pk
Horizontal	3713.60	46.75	5.94	35.18	44.00	43.87	54.00	-10.13	AV
Horizontal	10361.72	61.71	8.46	38.71	44.50	64.38	68.20	-3.82	Pk
Horizontal	15540.81	60.24	10.12	38.38	44.10	64.64	74.00	-9.36	Pk
Horizontal	15540.81	43.84	10.12	38.38	44.10	48.24	54.00	-5.76	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	3624.83	60.64	6.48	36.35	44.05	59.42	74.00	-14.58	Pk
Vertical	3624.83	44.67	6.48	36.35	44.05	43.45	54.00	-10.55	AV
Vertical	10401.05	60.94	8.47	37.88	44.51	62.78	68.20	-5.42	Pk
Vertical	15601.64	62.01	10.12	38.80	44.10	66.83	74.00	-7.17	Pk
Vertical	15601.64	41.51	10.12	38.80	42.70	47.73	54.00	-6.27	AV
Horizontal	4202.60	61.04	6.48	36.37	44.05	59.84	74.00	-14.16	Pk
Horizontal	4202.60	46.63	6.48	36.37	44.05	45.43	54.00	-8.57	AV
Horizontal	10401.30	63.05	8.47	38.64	44.50	65.66	68.20	-2.54	Pk
Horizontal	15601.20	62.45	10.12	38.38	44.10	66.85	74.00	-7.15	Pk
Horizontal	15601.20	44.03	10.12	38.38	44.10	48.43	54.00	-5.57	AV
High Channel (5240 MHz)-Above 1G									
Vertical	4598.24	65.78	7.10	37.24	43.50	66.62	74.00	-7.38	Pk
Vertical	4598.24	46.40	7.10	37.24	43.50	47.24	54.00	-6.76	AV
Vertical	10480.97	61.84	8.46	37.68	44.50	63.48	68.20	-4.72	Pk
Vertical	15720.78	64.62	10.12	38.80	44.10	69.44	74.00	-4.56	Pk
Vertical	15720.78	42.02	10.12	38.80	42.70	48.24	54.00	-5.76	AV
Horizontal	4589.79	63.33	7.10	37.24	43.50	64.17	74.00	-9.83	Pk
Horizontal	4589.79	44.39	7.10	37.24	43.50	45.23	54.00	-8.77	AV
Horizontal	10482.47	65.16	8.46	38.57	44.50	67.69	68.20	-0.51	Pk
Horizontal	15720.87	61.51	10.12	38.38	44.10	65.91	74.00	-8.09	Pk
Horizontal	15720.87	45.76	10.12	38.38	44.10	50.16	54.00	-3.84	AV

Note:"802.11a" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported. Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V,
Test Mode :	TX(5.3G) - 802.11n20 mode		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5260 MHz)-Above 1G									
Vertical	4633.78	66.43	5.44	35.40	44.00	63.27	74.00	-10.73	Pk
Vertical	4633.78	46.41	5.74	35.40	44.00	43.56	54.00	-10.44	AV
Vertical	10520.92	62.51	8.26	39.75	44.50	66.02	68.20	-2.18	Pk
Vertical	15781.53	64.90	10.12	38.80	44.10	69.71	74.00	-4.29	Pk
Vertical	15781.53	43.29	9.62	38.80	42.70	49.02	54.00	-4.98	AV
Horizontal	4367.03	67.89	5.57	35.18	44.00	64.64	74.00	-9.36	Pk
Horizontal	4367.03	47.15	5.74	35.18	44.00	44.07	54.00	-9.93	AV
Horizontal	10521.14	62.35	8.38	38.71	44.50	64.95	68.20	-3.25	Pk
Horizontal	15780.84	59.89	9.88	38.38	44.10	64.05	74.00	-9.95	Pk
Horizontal	15780.84	42.82	9.94	38.38	44.10	47.04	54.00	-6.96	AV
middle Channel (5280 MHz)-Above 1G									
Vertical	4123.13	63.04	6.08	36.35	44.05	61.42	74.00	-12.58	Pk
Vertical	4123.13	45.32	6.39	36.35	44.05	44.01	54.00	-9.99	AV
Vertical	10561.15	63.04	8.28	37.88	44.51	64.69	68.20	-3.51	Pk
Vertical	15840.58	64.15	9.79	38.8	44.10	68.63	74.00	-5.37	Pk
Vertical	15840.58	42.99	9.70	38.8	42.70	48.78	54.00	-5.22	AV
Horizontal	3869.80	62.32	6.11	36.37	44.05	60.75	74.00	-13.25	Pk
Horizontal	3869.80	49.41	6.27	36.37	44.05	48.00	54.00	-6.00	AV
Horizontal	10561.25	57.88	8.33	38.64	44.50	60.35	68.20	-7.85	Pk
Horizontal	15840.64	64.25	9.99	38.38	44.10	68.52	74.00	-5.48	Pk
Horizontal	15840.64	43.44	9.81	38.38	44.10	47.53	54.00	-6.47	AV
High Channel (5320 MHz)-Above 1G									
Vertical	5367.88	65.73	6.96	37.24	43.50	66.43	74.00	-7.57	Pk
Vertical	5367.88	46.48	7.07	37.24	43.50	47.29	54.00	-6.71	AV
Vertical	10641.67	62.34	8.14	37.68	44.50	63.66	68.20	-4.54	Pk
Vertical	15961.18	63.85	10.11	38.8	44.10	68.66	74.00	-5.34	Pk
Vertical	15961.18	41.80	9.64	38.8	42.70	47.54	54.00	-6.46	AV
Horizontal	5438.01	63.44	7.05	37.24	43.50	64.23	74.00	-9.77	Pk
Horizontal	5438.01	44.00	7.05	37.24	43.50	44.78	54.00	-9.22	AV
Horizontal	10641.14	64.47	8.20	38.57	44.50	66.74	68.20	-1.46	Pk
Horizontal	15961.36	63.16	9.81	38.38	44.10	67.25	74.00	-6.75	Pk
Horizontal	15961.36	45.30	9.96	38.38	44.10	49.54	54.00	-4.46	AV

Note:"802.11n20" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported. Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V,
Test Mode :	TX(5.6G) - 802.11n20 mode		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5500MHz)-Above 1G									
Vertical	5434.07	67.40	5.61	35.40	44.00	64.41	74.00	-9.59	Pk
Vertical	5434.07	48.86	5.76	35.40	44.00	46.02	54.00	-7.98	AV
Vertical	11000.60	62.13	8.24	39.75	44.50	65.63	74.00	-8.37	Pk
Vertical	11000.60	45.37	8.35	39.75	44.50	48.98	54.00	-5.02	AV
Vertical	16500.48	53.97	10.05	38.80	44.10	58.72	68.20	-9.48	Pk
Horizontal	5126.80	63.43	5.78	35.18	44.00	60.39	74.00	-13.61	Pk
Horizontal	5126.80	45.73	5.66	35.18	44.00	42.57	54.00	-11.43	AV
Horizontal	11001.50	60.13	8.22	38.71	44.50	62.57	74.00	-11.43	Pk
Horizontal	11001.50	45.48	8.14	38.71	44.50	47.83	54.00	-6.17	AV
Horizontal	16500.73	59.72	10.04	38.38	44.10	64.04	68.20	-4.16	Pk
middle Channel (5600 MHz)-Above 1G									
Vertical	4934.45	66.07	6.29	36.35	44.05	64.65	74.00	-9.35	Pk
Vertical	4934.45	47.47	6.24	36.35	44.05	46.01	54.00	-7.99	AV
Vertical	11202.27	62.94	8.24	37.88	44.51	64.56	74.00	-9.44	Pk
Vertical	11202.27	47.10	8.13	37.88	44.51	48.60	54.00	-5.40	AV
Vertical	16800.82	61.27	9.71	38.80	44.10	65.68	68.20	-2.52	Pk
Horizontal	4766.62	62.88	6.44	36.37	44.05	61.65	74.00	-12.35	Pk
Horizontal	4766.62	46.43	6.13	36.37	44.05	44.88	54.00	-9.12	AV
Horizontal	11200.89	63.61	8.31	38.64	44.50	66.05	74.00	-7.95	Pk
Horizontal	11200.89	46.43	8.04	38.64	44.50	48.62	54.00	-5.38	AV
Horizontal	16800.74	59.15	10.09	38.38	44.10	63.52	68.20	-4.68	Pk
High Channel (5700MHz)-Above 1G									
Vertical	5647.94	64.08	6.79	37.24	43.50	64.60	74.00	-9.40	Pk
Vertical	5647.94	42.49	6.79	37.24	43.50	43.01	54.00	-10.99	AV
Vertical	11400.92	62.13	8.10	37.68	44.50	63.41	74.00	-10.59	Pk
Vertical	11400.92	44.02	8.23	37.68	44.50	45.43	54.00	-8.57	AV
Vertical	17101.38	58.72	9.70	38.80	44.10	63.12	68.20	-5.08	Pk
Horizontal	5434.04	63.49	6.74	37.24	43.50	63.98	74.00	-10.02	Pk
Horizontal	5434.04	44.40	6.74	37.24	43.50	44.88	54.00	-9.12	AV
Horizontal	11401.12	62.46	8.25	38.57	44.50	64.79	74.00	-9.21	Pk
Horizontal	11401.12	43.25	8.35	38.57	44.50	45.67	54.00	-8.33	AV
Horizontal	17100.98	60.79	9.70	38.38	44.10	64.76	68.20	-3.44	Pk

Note:"802.11n20" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported. Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V,
Test Mode :	TX (5.8G) -- 802.11a mode		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)- Above 1G									
Vertical	5122.89	65.70	5.94	35.40	44.00	63.04	74.00	-10.96	Pk
Vertical	5122.89	48.29	5.94	35.40	44.00	45.63	54.00	-8.37	AV
Vertical	11491.48	61.41	8.46	39.75	44.50	65.12	74.00	-8.88	Pk
Vertical	11491.48	45.38	8.46	39.75	44.50	49.09	54.00	-4.91	AV
Vertical	17236.41	54.56	10.12	38.80	44.10	59.38	68.20	-8.82	Pk
Horizontal	5167.39	61.95	5.94	35.18	44.00	59.07	74.00	-14.93	Pk
Horizontal	5167.39	44.35	5.94	35.18	44.00	41.47	54.00	-12.53	AV
Horizontal	11491.40	62.63	8.46	38.71	44.50	65.30	74.00	-8.70	Pk
Horizontal	11491.40	45.20	8.46	38.71	44.50	47.87	54.00	-6.13	AV
Horizontal	17236.40	53.79	10.12	38.38	44.10	58.19	68.20	-10.01	Pk
middle Channel (5785 MHz)- Above 1G									
Vertical	5433.87	65.03	6.48	36.35	44.05	63.81	74.00	-10.19	Pk
Vertical	5433.87	45.47	6.48	36.35	44.05	44.25	54.00	-9.75	AV
Vertical	11571.26	62.19	8.47	37.88	44.51	64.03	74.00	-9.97	Pk
Vertical	11571.26	45.77	8.47	37.88	44.51	47.61	54.00	-6.39	AV
Vertical	17356.71	58.90	10.12	38.80	44.10	63.72	68.20	-4.48	Pk
Horizontal	4867.67	62.40	6.48	36.37	44.05	61.20	74.00	-12.80	Pk
Horizontal	4867.67	45.12	6.48	36.37	44.05	43.92	54.00	-10.08	AV
Horizontal	11571.46	65.16	8.47	38.64	44.50	67.77	74.00	-6.23	Pk
Horizontal	11571.46	46.12	8.47	38.64	44.50	48.73	54.00	-5.27	AV
Horizontal	17355.81	60.03	10.12	38.38	44.10	64.43	68.20	-3.77	Pk
High Channel (5825 MHz)- Above 1G									
Vertical	5244.16	64.42	7.10	37.24	43.50	65.26	74.00	-8.74	Pk
Vertical	5244.16	43.60	7.10	37.24	43.50	44.44	54.00	-9.56	AV
Vertical	11652.61	64.50	8.46	37.68	44.50	66.14	74.00	-7.86	Pk
Vertical	11652.61	45.30	8.46	37.68	44.50	46.94	54.00	-7.06	AV
Vertical	17473.52	60.92	10.12	38.80	44.10	65.74	68.20	-2.46	Pk
Horizontal	5285.19	62.58	7.10	37.24	43.50	63.42	74.00	-10.58	Pk
Horizontal	5285.19	44.83	7.10	37.24	43.50	45.67	54.00	-8.33	AV
Horizontal	11652.18	62.88	8.46	38.57	44.50	65.41	74.00	-8.59	Pk
Horizontal	11652.18	43.72	8.46	38.57	44.50	46.25	54.00	-7.75	AV
Horizontal	17475.45	60.26	10.12	38.38	44.10	64.66	68.20	-3.54	Pk

Note:"802.11a" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


3.2.9 TEST RESULTS (18GHz-40GHz)

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	25.3 °C	Relative Humidity :	52%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5.2G)-802.11a ;TX (5.3G)-802.11n20 TX (5.6G)-802.11n20;TX (5.8G)-802.11a		


All the modulation modes have been tested, and the worst result was report as below:

Low Channel (5180 MHz)-Above 1G

Horizontal

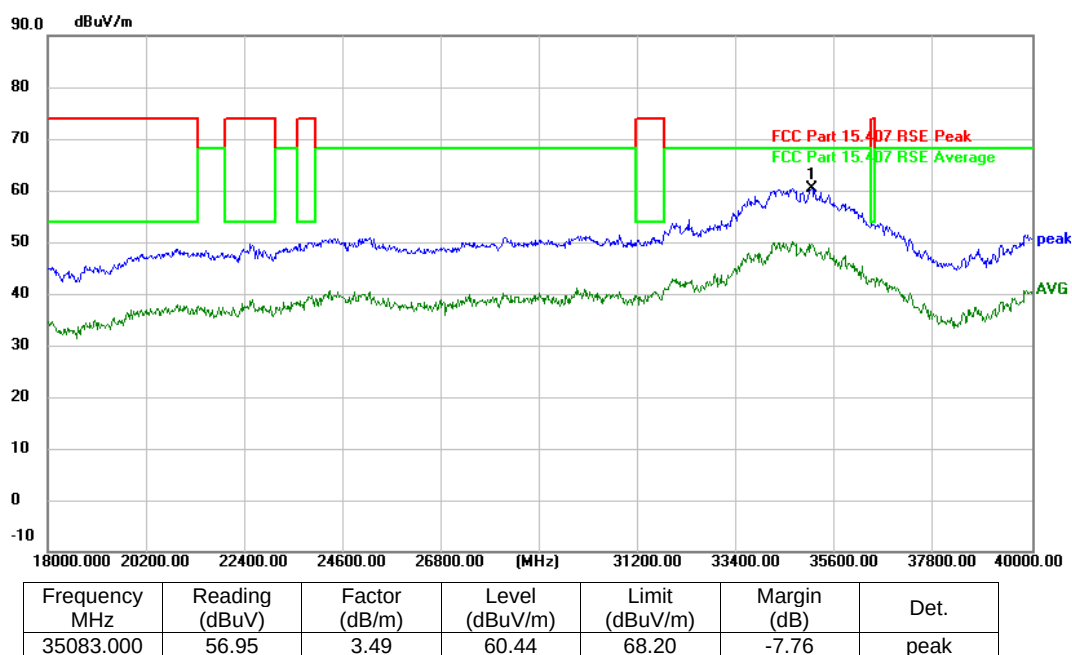


Vertical

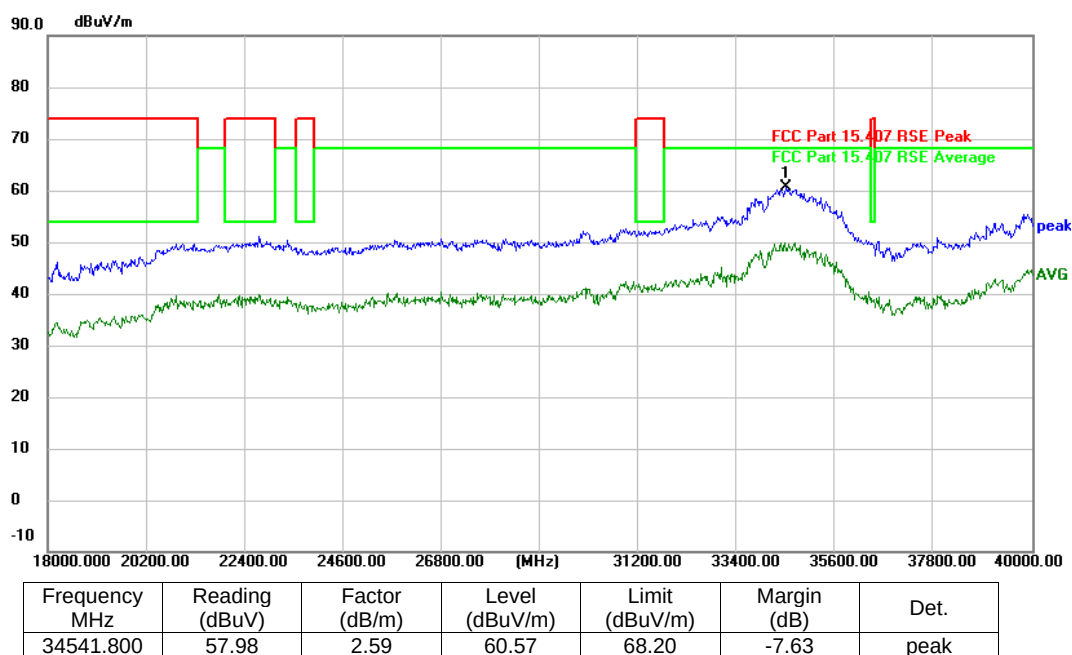


High Channel (5240 MHz)-Above 1G

Horizontal

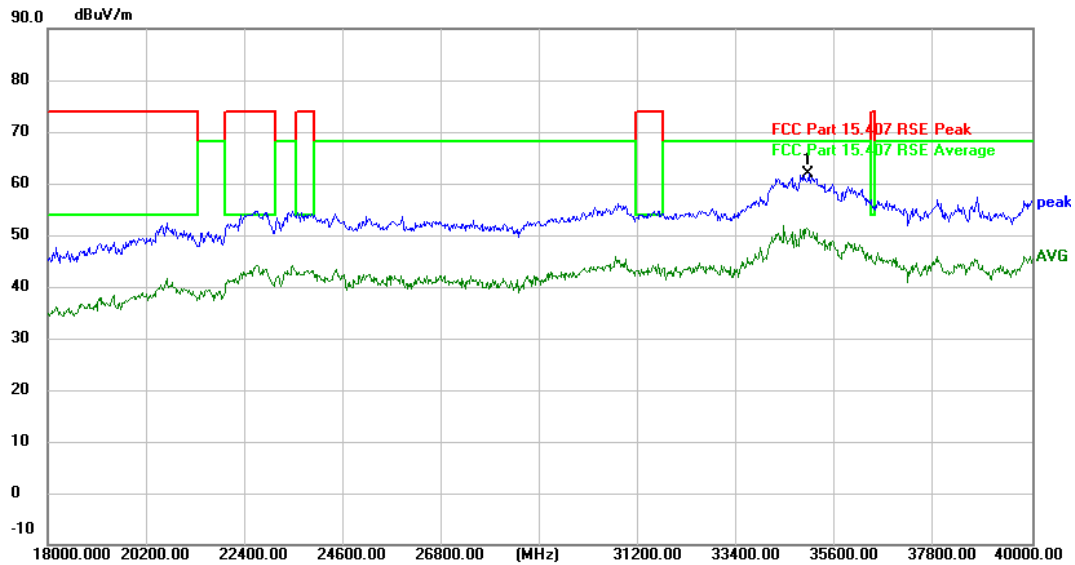

Frequency MHz	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
35024.333	58.13	3.71	61.84	68.20	-6.36	peak

Vertical

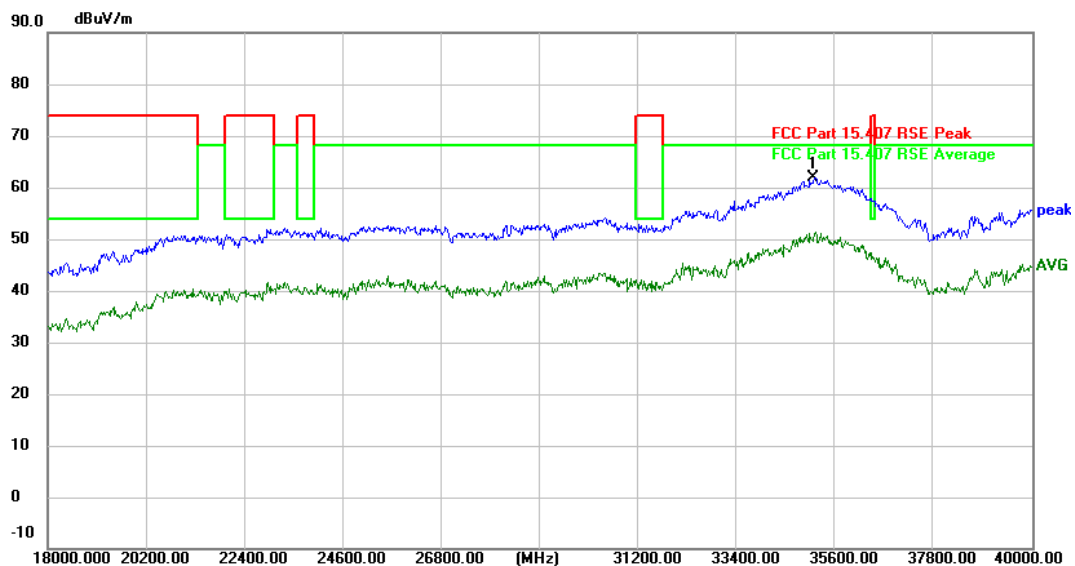


Frequency MHz	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
35158.533	58.77	3.21	61.98	68.20	-6.22	peak

Note:802.11a mode is the worst mode.


Low Channel (5260 MHz)-Above 1G

Horizontal

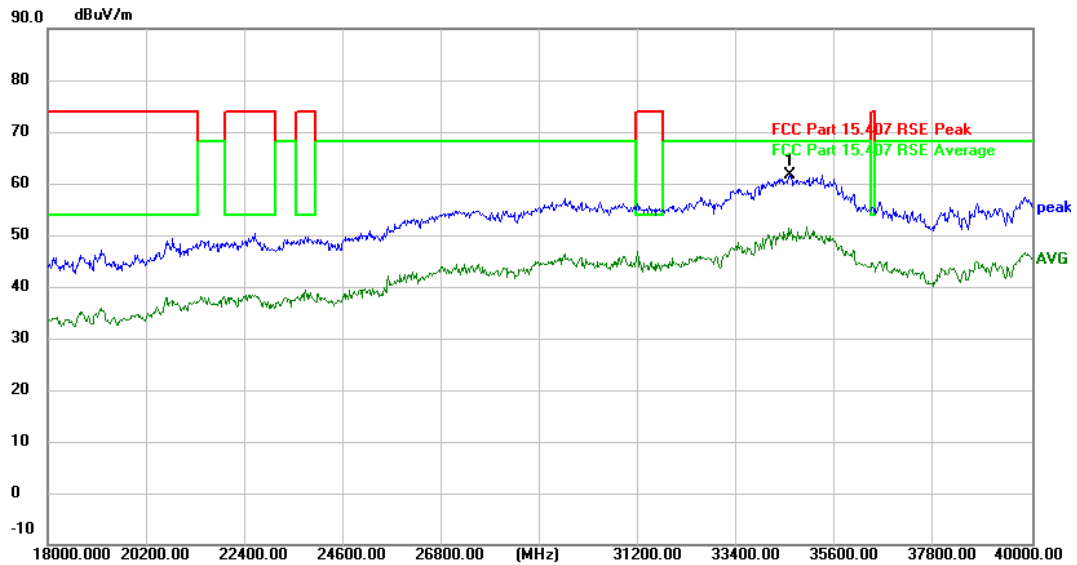

Frequency MHz	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
34614.400	58.80	2.74	61.54	68.20	-6.66	peak


Vertical

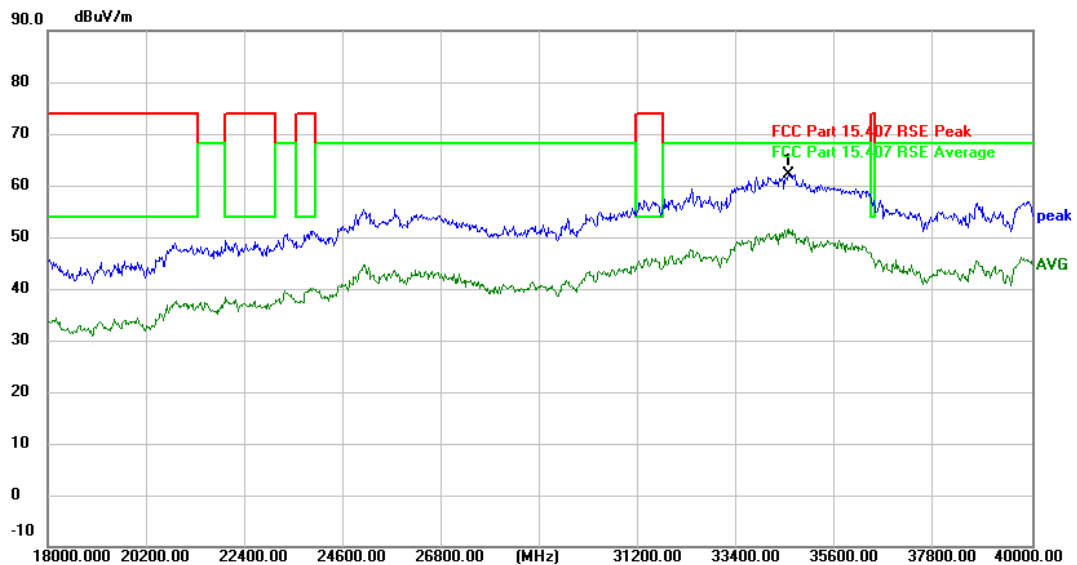

Frequency MHz	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
34579.200	59.47	2.68	62.15	68.20	-6.05	peak


High Channel (5320 MHz)-Above 1G

Horizontal

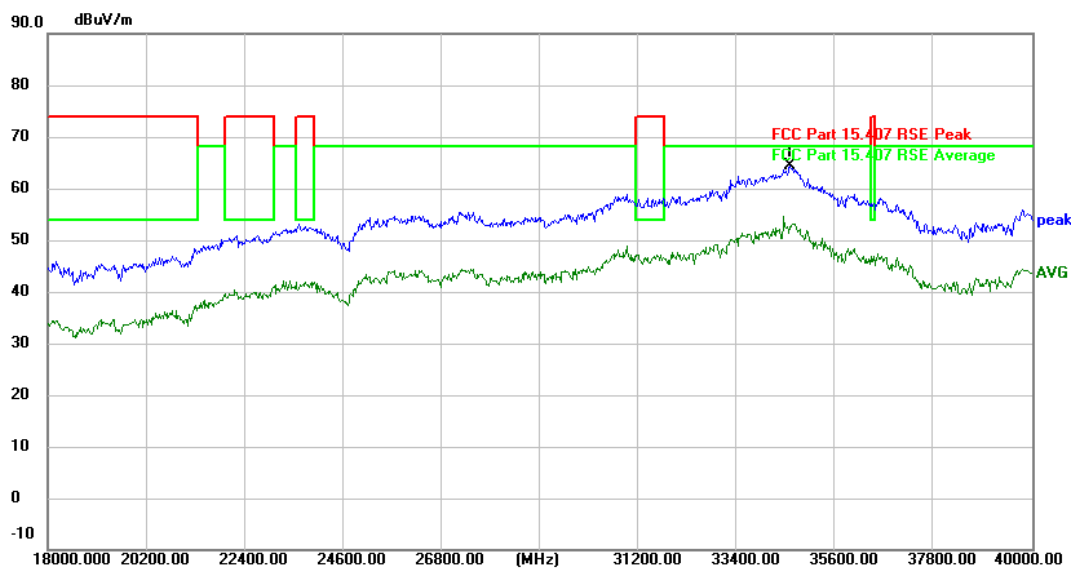

Frequency MHz	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
34609.267	61.63	2.74	64.37	68.20	-3.83	peak

Vertical

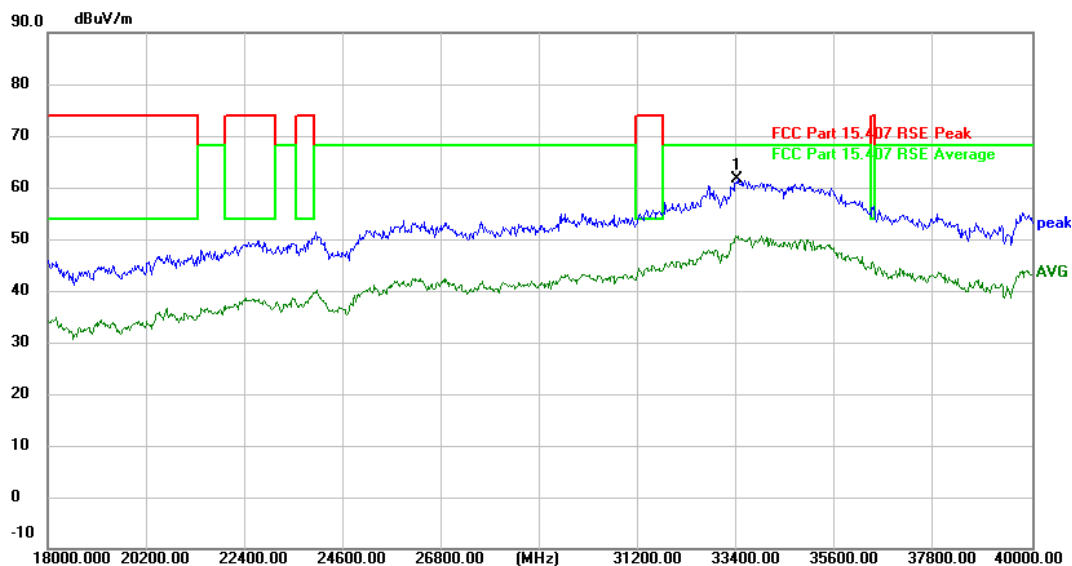


Frequency MHz	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
33433.733	62.66	-0.93	61.73	68.20	-6.47	peak

Note: 802.11n20 mode is the worst mode.


Low Channel (5500 MHz)-Above 1G

Horizontal

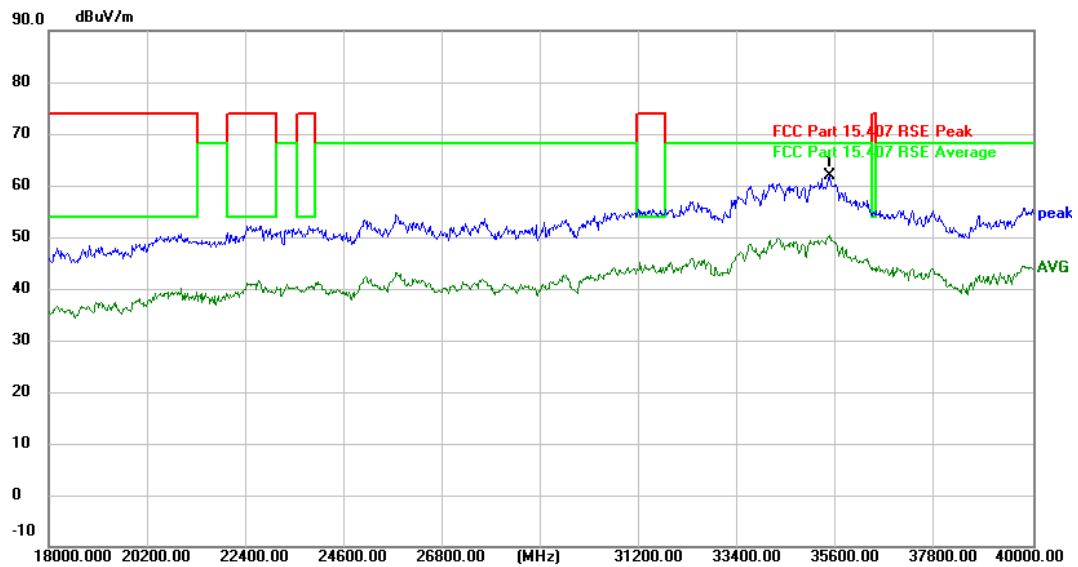

Frequency MHz	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
35458.467	59.24	2.71	61.95	68.20	-6.25	peak


Vertical

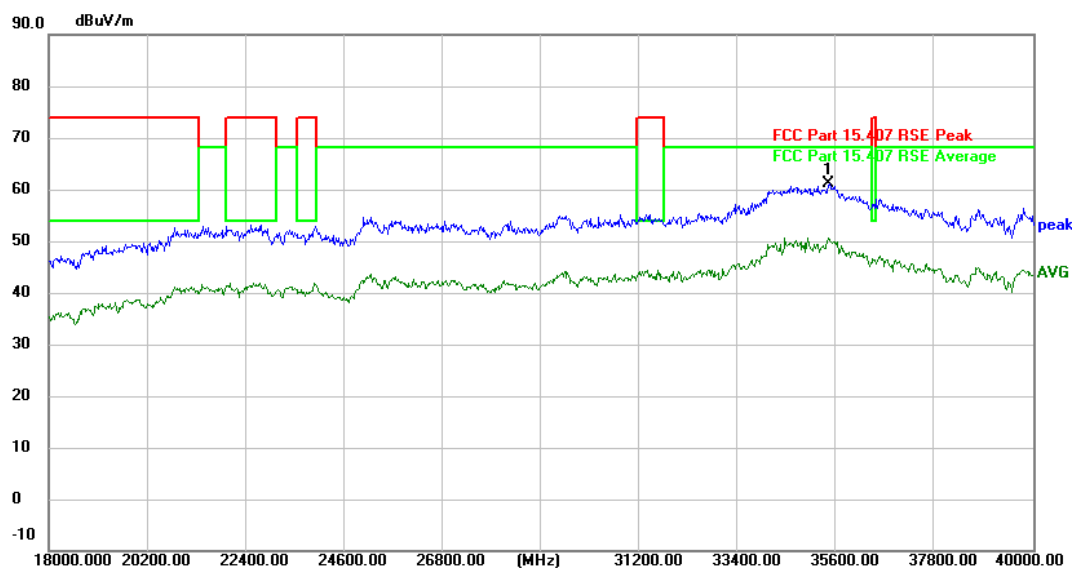

Frequency MHz	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
35455.533	58.53	2.71	61.24	68.20	-6.96	peak


High Channel (5700 MHz)-Above 1G

Horizontal

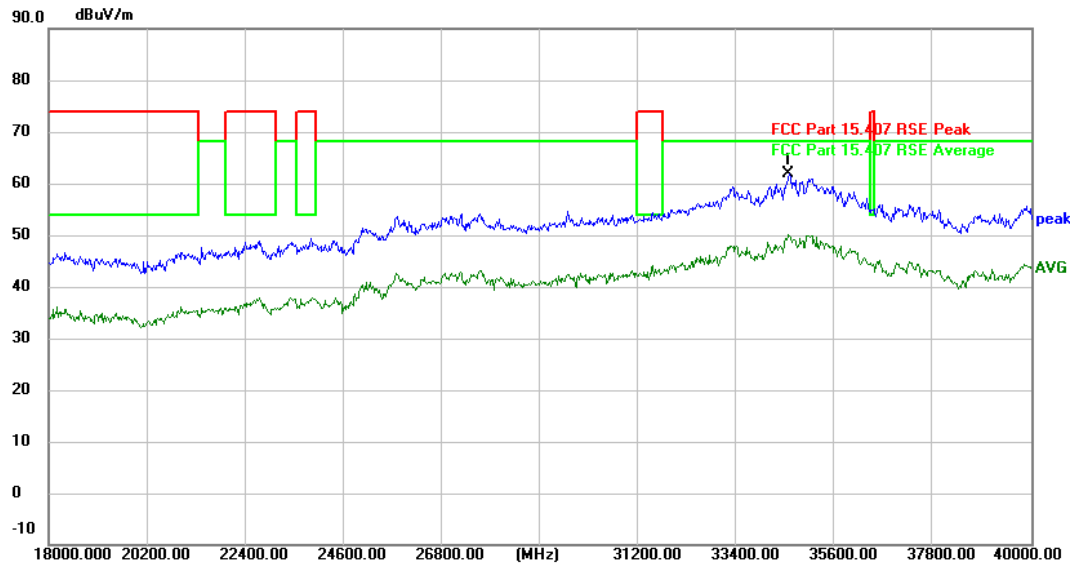

Frequency MHz	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
34597.533	59.24	2.71	61.95	68.20	-6.25	peak

Vertical

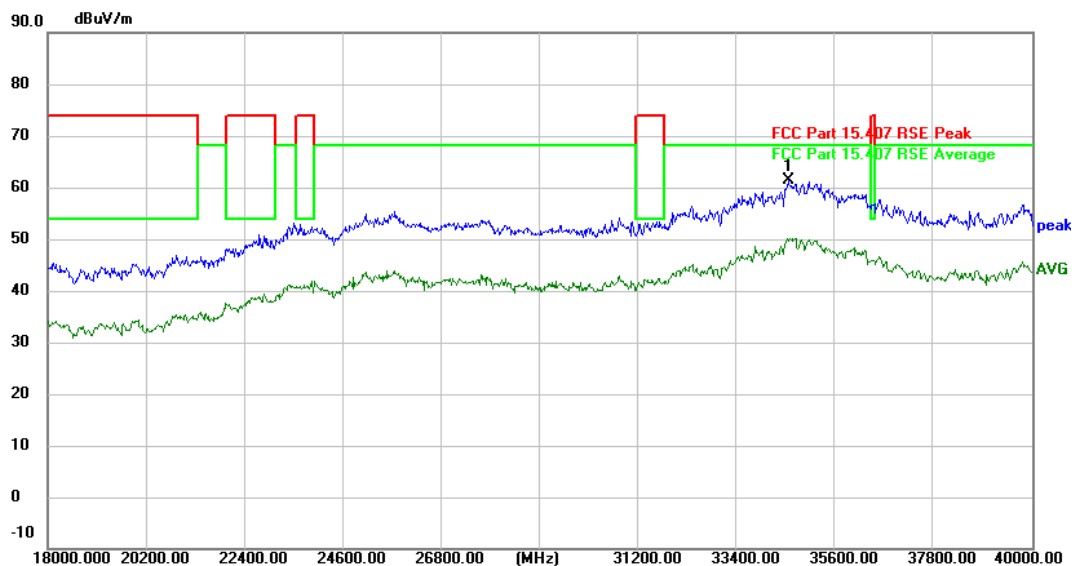


Frequency MHz	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
34570.400	58.75	2.65	61.40	68.20	-6.80	peak

Note:802.11n20 mode is the worst mode.


Low Channel (5745 MHz)-Above 1G

Horizontal

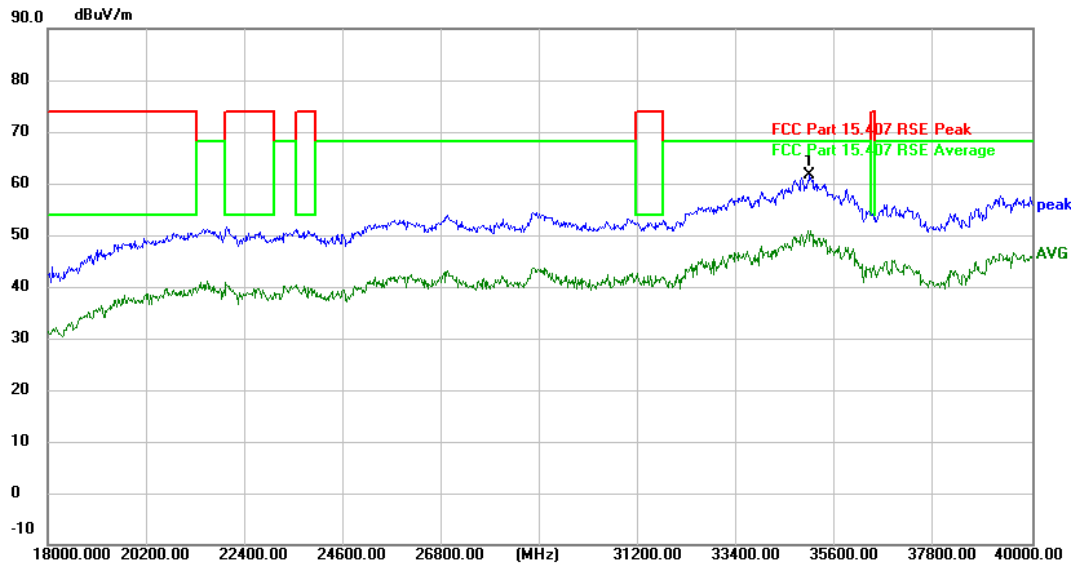

Frequency MHz	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
35036.800	57.94	3.66	61.60	68.20	-6.60	peak


Vertical

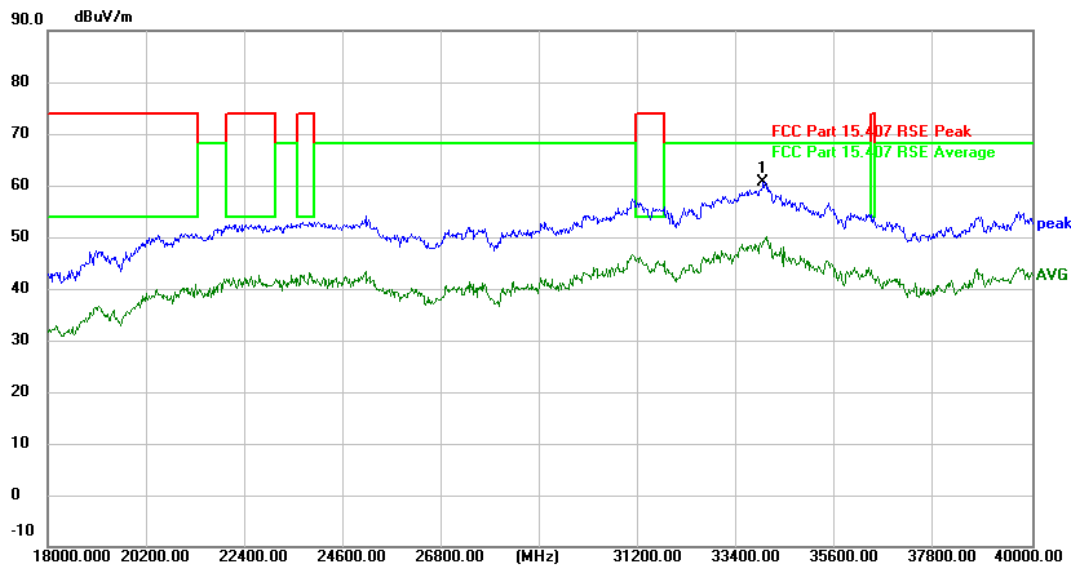

Frequency MHz	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
33999.133	59.96	0.70	60.66	68.20	-7.54	peak


High Channel (5825 MHz)-Above 1G

Horizontal

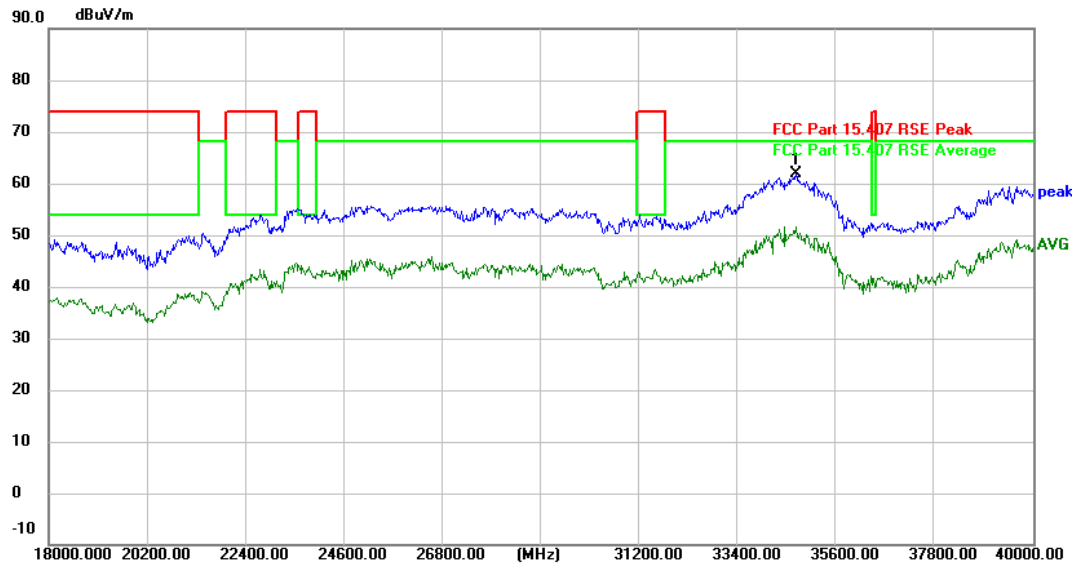

Frequency MHz	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
34722.200	58.82	2.98	61.80	68.20	-6.40	peak

Vertical

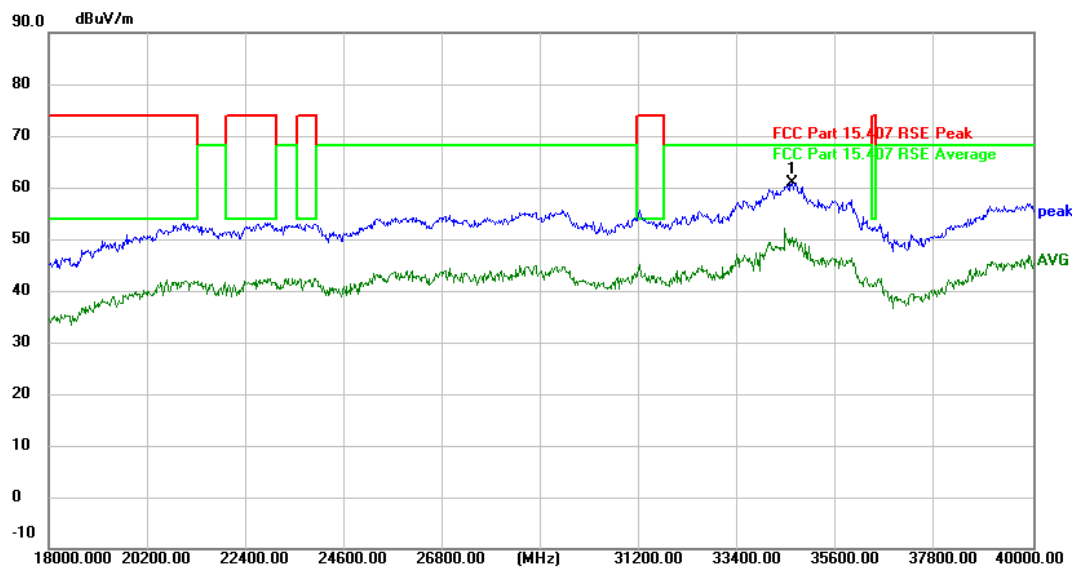

Frequency MHz	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
34618.067	58.09	2.75	60.84	68.20	-7.36	peak

Note: 802.11a mode is the worst mode.

3.2.10 Spurious Emission in Restricted Band 4.5GHz~5.150 GHz& 5.350GHz~5460GHz

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5.2G)-802.11a		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
802.11a									
4500	59.13	5.2	35.6	44.2	55.73	74	-18.27	Pk	Horizontal
4500	49.61	5.2	35.6	44.2	46.21	54	-7.79	AV	Horizontal
4500	61.57	5.2	35.6	44.2	58.17	74	-15.83	Pk	Vertical
4500	48.21	5.2	35.6	44.2	44.81	54	-9.19	AV	Vertical
5150	71.74	5.36	35.66	44.22	68.54	74	-5.46	Pk	Horizontal
5150	51.51	5.36	35.66	44.22	48.31	54	-5.69	AV	Horizontal
5150	58.54	5.36	35.66	44.22	55.34	74	-18.66	Pk	Vertical
5150	40.24	5.36	35.66	44.22	37.04	54	-16.96	AV	Vertical
5350	67.85	5.68	35.68	44.22	64.99	74	-9.01	Pk	Vertical
5350	50.08	5.68	35.68	44.22	47.22	54	-6.78	AV	Vertical
5350	63.34	5.68	35.68	44.22	60.48	74	-13.52	Pk	Horizontal
5350	48.27	5.68	35.68	44.22	45.41	54	-8.59	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11a " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5.3G)-802.11n20		

All the modulation modes have been tested, The report just record the worst data mode.

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel (5320 MHz)-Above 1G									
Horizontal	5350	66.63	6.96	37.24	43.50	67.33	74.00	-6.67	Pk
Horizontal	5350	45.92	7.07	37.24	43.50	46.73	54.00	-7.27	AV
Vertical	5350	68.11	7.05	37.24	43.50	68.90	74.00	-5.10	Pk
Vertical	5350	49.33	7.05	37.24	43.50	50.12	54.00	-3.88	AV

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11n20 " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5.6G)-802.11n20		

All the modulation modes have been tested, The report just record the worst data mode.

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel (5500 MHz)-Above 1G									
Vertical	5460	68.65	5.61	35.40	44.00	65.66	74.00	-8.34	Pk
Vertical	5460	52.28	5.76	35.40	44.00	49.45	54.00	-4.55	AV
Horizontal	5460	65.11	5.78	35.18	44.00	62.07	74.00	-11.93	Pk
Horizontal	5460	50.72	5.66	35.18	44.00	47.56	54.00	-6.44	AV

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11n20 " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

4 POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,

4.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP

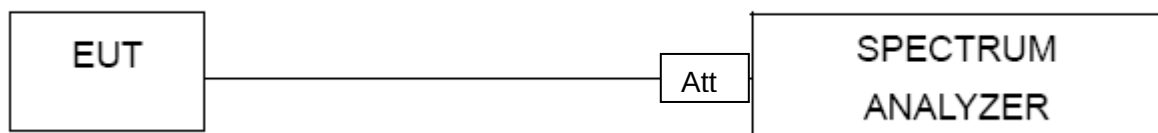

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name :	WS26
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C (5470-5725MHz), Band 3 (5745-5825MHz)		

Test data reference attachment.

5. 26DB & 99% EMISSION BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

5.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

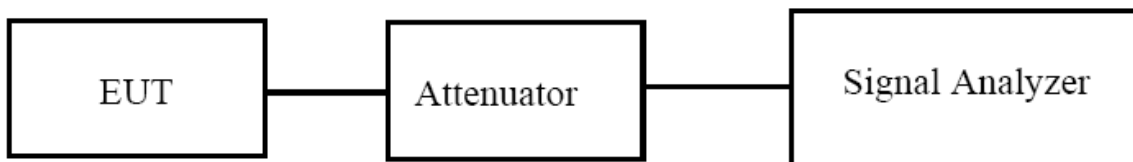

5.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.4 TEST RESULTS

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name :	WS26
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C(5470-5725MHz), Band 3(5725-5850MHz)		

Test data reference attachment.

6. MINIMUM 6 DB BANDWIDTH

6.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

6.2 EST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

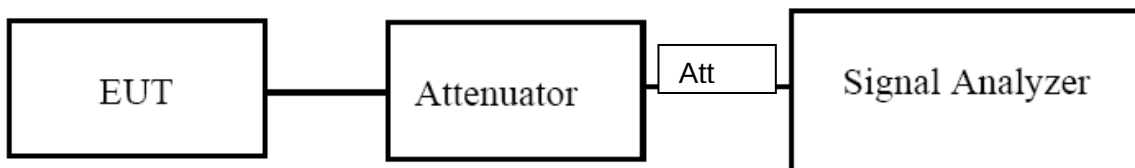

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name :	WS26
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5G) Mode Frequency Band 3 (5725-5850MHz)		

Test data reference attachment.

7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5250~5350	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5470~5725	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5725~5850	1W


7.2 TEST PROCEDURE

- Method PM-G is measurement using a gated RF average power meter. Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

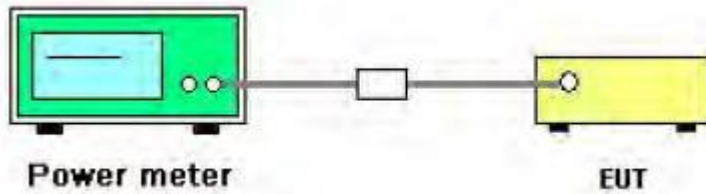

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name :	WS26
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5G) Mode Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz) Band 2C, (5470-5725MHz), Band 3 (5725-5850MHz)		

Test data reference attachment.

8. OUT OF BAND EMISSIONS

8.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(10) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.


8.2 TEST PROCEDURE

The testing per ANSI C63.10 Section 12.7.4.2

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

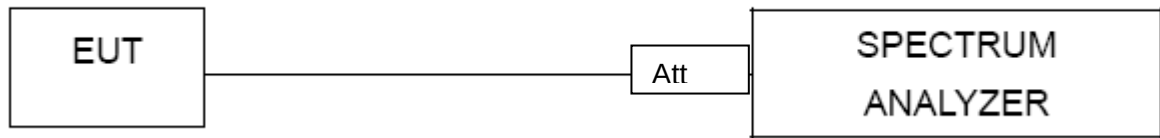

8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name :	WS26
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V

Test data reference attachment.

9. Frequency Stability Measurement


9.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

9.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm
- t6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is -20°C~70°C.

9.3 TEST SETUP LAYOUT

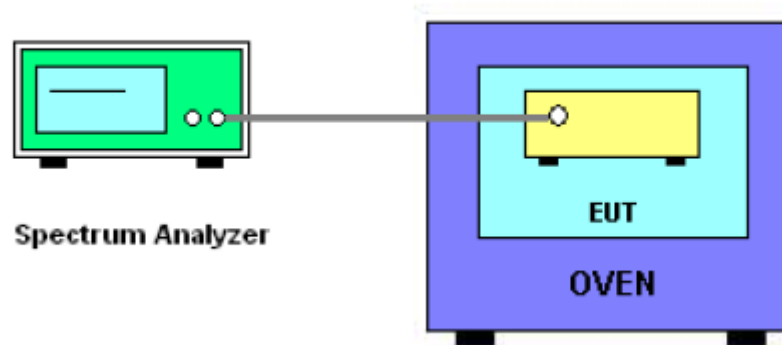

9.4 EUT OPERATION DURING TEST

1. The EUT was programmed to be in continuously un-modulation transmitting mode.

9.5 TEST RESULTS

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.7	5180.0195	5180	0.0195	3.7657
		V max (V)	4.26	5180.0275	5180	0.0275	5.3078
		V min (V)	3.15	5180.0181	5180	0.0181	3.5021
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5180.0411	5180	0.0411	7.9381
		T (°C)	-10	5180.0320	5180	0.0320	6.1788
		T (°C)	0	5180.0303	5180	0.0303	5.8516
		T (°C)	10	5180.0232	5180	0.0232	4.4699
		T (°C)	20	5180.0095	5180	0.0095	1.8327
		T (°C)	30	5180.0373	5180	0.0373	7.2072
		T (°C)	40	5180.0387	5180	0.0387	7.4753
		T (°C)	50	5180.0239	5180	0.0239	4.6100
		T (°C)	60	5180.0147	5180	0.0147	2.8371
		T (°C)	70	5180.0349	5180	0.0349	6.7431
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.7	5200.0347	5200	0.0347	6.6700
		V max (V)	4.26	5200.0049	5200	0.0049	0.9412
		V min (V)	3.15	5200.0249	5200	0.0249	4.7837
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5200.0389	5200	0.0389	7.4767
		T (°C)	-10	5200.0166	5200	0.0166	3.1972
		T (°C)	0	5200.0058	5200	0.0058	1.1162
		T (°C)	10	5200.0334	5200	0.0334	6.4173
		T (°C)	20	5200.0030	5200	0.0030	0.5818
		T (°C)	30	5200.0313	5200	0.0313	6.0112
		T (°C)	40	5200.0326	5200	0.0326	6.2723
		T (°C)	50	5200.0095	5200	0.0095	1.8178
		T (°C)	60	5200.0318	5200	0.0318	6.1112
		T (°C)	70	5200.0173	5200	0.0173	3.3203
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.7	5240.0129	5240	0.0129	2.4537
		V max (V)	4.26	5240.0122	5240	0.0122	2.3327
		V min (V)	3.15	5240.0291	5240	0.0291	5.5610
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5240.0173	5240	0.0173	3.3076
		T (°C)	-10	5240.0299	5240	0.0299	5.6996
		T (°C)	0	5240.0138	5240	0.0138	2.6423
		T (°C)	10	5240.0218	5240	0.0218	4.1643
		T (°C)	20	5240.0399	5240	0.0399	7.6078
		T (°C)	30	5240.0269	5240	0.0269	5.1412
		T (°C)	40	5240.0086	5240	0.0086	1.6417
		T (°C)	50	5240.0072	5240	0.0072	1.3651
		T (°C)	60	5240.0290	5240	0.0290	5.5425
		T (°C)	70	5240.0102	5240	0.0102	1.9513
Limits				Within 5150-5250MHz			
Result				Complies			

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency Band 2A (5250-5350MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.7	5260.0082	5260	0.0082	1.5566
		V max (V)	4.26	5260.0392	5260	0.0392	7.4495
		V min (V)	3.15	5260.0148	5260	0.0148	2.8049
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5260.0322	5260	0.0322	6.1250
		T (°C)	-10	5260.0188	5260	0.0188	3.5741
		T (°C)	0	5260.0195	5260	0.0195	3.7028
		T (°C)	10	5260.0146	5260	0.0146	2.7723
		T (°C)	20	5260.0144	5260	0.0144	2.7410
		T (°C)	30	5260.0229	5260	0.0229	4.3454
		T (°C)	40	5260.0239	5260	0.0239	4.5446
		T (°C)	50	5260.0344	5260	0.0344	6.5442
		T (°C)	60	5260.0124	5260	0.0124	2.3556
		T (°C)	70	5260.0256	5260	0.0256	4.8663
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.7	5280.0332	5280	0.0332	6.3136
		V max (V)	4.26	5280.0222	5280	0.0222	4.2177
		V min (V)	3.15	5280.0097	5280	0.0097	1.8458
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5280.0077	5280	0.0077	1.4721
		T (°C)	-10	5280.0306	5280	0.0306	5.8262
		T (°C)	0	5280.0076	5280	0.0076	1.4539
		T (°C)	10	5280.0349	5280	0.0349	6.6309
		T (°C)	20	5280.0059	5280	0.0059	1.1206
		T (°C)	30	5280.0301	5280	0.0301	5.7136
		T (°C)	40	5280.0172	5280	0.0172	3.2628
		T (°C)	50	5280.0301	5280	0.0301	5.7175
		T (°C)	60	5280.0380	5280	0.0380	7.2196
		T (°C)	70	5280.0217	5280	0.0217	4.1247
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.7	5320.0322	5320	0.0322	6.1134
		V max (V)	4.26	5320.0281	5320	0.0281	5.3389
		V min (V)	3.15	5320.0102	5320	0.0102	1.9457
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5320.0335	5320	0.0335	6.3631
		T (°C)	-10	5320.0281	5320	0.0281	5.3360
		T (°C)	0	5320.0260	5320	0.0260	4.9427
		T (°C)	10	5320.0231	5320	0.0231	4.3998
		T (°C)	20	5320.0373	5320	0.0373	7.0938
		T (°C)	30	5320.0271	5320	0.0271	5.1550
		T (°C)	40	5320.0121	5320	0.0121	2.2969
		T (°C)	50	5320.0132	5320	0.0132	2.5019
		T (°C)	60	5320.0150	5320	0.0150	2.8587
		T (°C)	70	5320.0231	5320	0.0231	4.3997
Limits				Within 5250-5350MHz			
Result				Complies			

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency Band 2C (5470-5725MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.7	5500.0289	5500	0.0289	5.2595
		V max (V)	4.26	5500.0258	5500	0.0258	4.6836
		V min (V)	3.15	5500.0112	5500	0.0112	2.0348
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5500.0120	5500	0.0120	2.1833
		T (°C)	-10	5500.0292	5500	0.0292	5.3133
		T (°C)	0	5500.0299	5500	0.0299	5.4397
		T (°C)	10	5500.0294	5500	0.0294	5.3381
		T (°C)	20	5500.0314	5500	0.0314	5.7070
		T (°C)	30	5500.0161	5500	0.0161	2.9360
		T (°C)	40	5500.0200	5500	0.0200	3.6327
		T (°C)	50	5500.0167	5500	0.0167	3.0273
		T (°C)	60	5500.0290	5500	0.0290	5.2694
		T (°C)	70	5500.0040	5500	0.0040	0.7354
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.7	5600.0193	5600	0.0193	3.5171
		V max (V)	4.26	5600.0061	5600	0.0061	1.1023
		V min (V)	3.15	5600.0204	5600	0.0204	3.7058
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5600.0405	5600	0.0405	7.3688
		T (°C)	-10	5600.0182	5600	0.0182	3.3101
		T (°C)	0	5600.0134	5600	0.0134	2.4430
		T (°C)	10	5600.0250	5600	0.0250	4.5523
		T (°C)	20	5600.0155	5600	0.0155	2.8170
		T (°C)	30	5600.0175	5600	0.0175	3.1793
		T (°C)	40	5600.0309	5600	0.0309	5.6233
		T (°C)	50	5600.0163	5600	0.0163	2.9637
		T (°C)	60	5600.0329	5600	0.0329	5.9843
		T (°C)	70	5600.0216	5600	0.0216	3.9231
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.7	5700.0225	5700	0.0225	4.1000
		V max (V)	4.26	5700.0483	5700	0.0483	8.7842
		V min (V)	3.15	5700.0085	5700	0.0085	1.5444
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5700.0193	5700	0.0193	3.5171
		T (°C)	-10	5700.0163	5700	0.0163	2.9677
		T (°C)	0	5700.0185	5700	0.0185	3.3702
		T (°C)	10	5700.0129	5700	0.0129	2.3376
		T (°C)	20	5700.0224	5700	0.0224	4.0697
		T (°C)	30	5700.0128	5700	0.0128	2.3278
		T (°C)	40	5700.0198	5700	0.0198	3.6077
		T (°C)	50	5700.0196	5700	0.0196	3.5652
		T (°C)	60	5700.0316	5700	0.0316	5.7465
		T (°C)	70	5700.0077	5700	0.0077	1.3960
Limits				Within 5470-5725MHz			
Result				Complies			

EUT :	Solar Powered Dual-Lens WiFi Camera	Model Name. :	WS26
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency(5745-5850MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.7	5745.0144	5745	0.0144	2.5029
		V max (V)	4.26	5745.0332	5745	0.0332	5.7847
		V min (V)	3.15	5745.0219	5745	0.0219	3.8089
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5745.0180	5745	0.0180	3.1335
		T (°C)	-10	5745.0250	5745	0.0250	4.3564
		T (°C)	0	5745.0204	5745	0.0204	3.5544
		T (°C)	10	5745.0180	5745	0.0180	3.1371
		T (°C)	20	5745.0342	5745	0.0342	5.9531
		T (°C)	30	5745.0162	5745	0.0162	2.8274
		T (°C)	40	5745.0216	5745	0.0216	3.7579
		T (°C)	50	5745.0131	5745	0.0131	2.2789
		T (°C)	60	5745.0111	5745	0.0111	1.9388
		T (°C)	70	5745.0215	5745	0.0215	3.7432
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.7	5785.0315	5785	0.0315	5.4814
		V max (V)	4.26	5785.0385	5785	0.0385	6.6965
		V min (V)	3.15	5785.0172	5785	0.0172	3.0024
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5785.0279	5785	0.0279	4.8539
		T (°C)	-10	5785.0304	5785	0.0304	5.2970
		T (°C)	0	5785.0107	5785	0.0107	1.8598
		T (°C)	10	5785.0182	5785	0.0182	3.1683
		T (°C)	20	5785.0180	5785	0.0180	3.1349
		T (°C)	30	5785.0303	5785	0.0303	5.2770
		T (°C)	40	5785.0140	5785	0.0140	2.4311
		T (°C)	50	5785.0187	5785	0.0187	3.2478
		T (°C)	60	5785.0405	5785	0.0405	7.0494
		T (°C)	70	5785.0154	5785	0.0154	2.6749
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.7	5825.0163	5825	0.0163	2.8327
		V max (V)	4.26	5825.0131	5825	0.0131	2.2772
		V min (V)	3.15	5825.0311	5825	0.0311	5.4085
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5825.0084	5825	0.0084	1.4703
		T (°C)	-10	5825.0294	5825	0.0294	5.1188
		T (°C)	0	5825.0343	5825	0.0343	5.9643
		T (°C)	10	5825.0214	5825	0.0214	3.7320
		T (°C)	20	5825.0421	5825	0.0421	7.3228
		T (°C)	30	5825.0377	5825	0.0377	6.5611
		T (°C)	40	5825.0060	5825	0.0060	1.0395
		T (°C)	50	5825.0264	5825	0.0264	4.5900
		T (°C)	60	5825.0269	5825	0.0269	4.6857
		T (°C)	70	5825.0141	5825	0.0141	2.4547
Limits				Within 5745-5850MHz			
Result				Complies			

10. DYNAMIC FREQUENCY SELECTION(DFS)

10.1 APPLICABILITY OF DFS REQUIREMENTS

EUT is client and operates as client without radar detection function.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes
Client Beacon Test	N/A	Yes	Yes

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

10.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE NOTEBOOKING

Maximum Transmit Power	Value (see notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain.	

10.3 DFS RESPONSE REQUIREMENT VALUES

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

10.4 SHORT PULSE RADAR TEST WAVEFORMS

As the EUT is a Client Device with no Radar Detection, only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	60%	30
1	1	Test A Test B	$\text{Roundup}\left(\frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}}\right)$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.


If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

10.5 CALIBRATION SETUP AND DFS TEST RESULTS

Radar Waveform Calibration Procedure

- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is $-62\text{dBm} + 3.69\text{dBi} = -58.31\text{dBm}$ that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} + 3.69\text{dBi} + 1\text{dB} = -57.31\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

10.6 CONDUCTED CALIBRATION SETUP

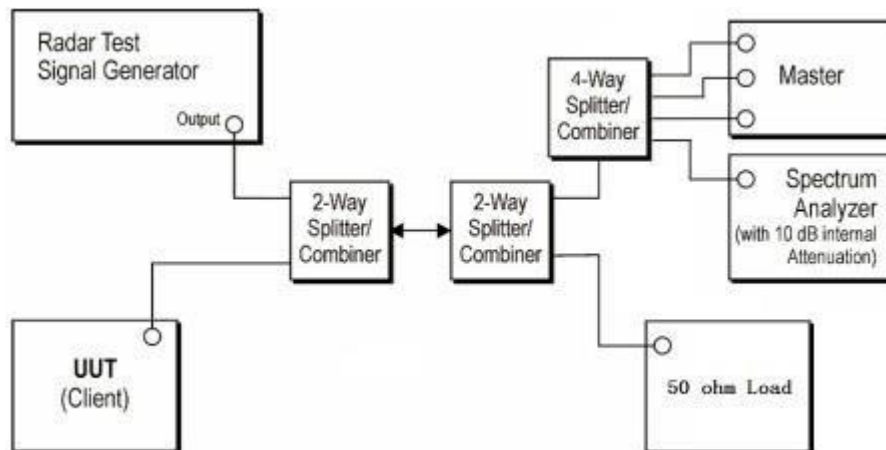

Wireless AP	Manufacturer	ASUSTek Computer Inc
	Model NO.	AX5400
	FCC ID	MSQ-RTAXJ300

Note:1. The Slave device associated with the EUT during these tests does not have radar detection capability.

2. WLAN traffic is generated by using the iperf software to send packets from the Master IP address to the Slave IP address.

3. The time required for the master and slave devices to fully start up is 120s.

4. EUT does not support TPC.


10.7 RADAR WAVEFORM CALIBRATION RESULT

Test data reference attachment.

10.8 IN-SERVICE NOTEBOOKING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD

TEST CONFIGURATION:

Setup for Client with injection at the Master

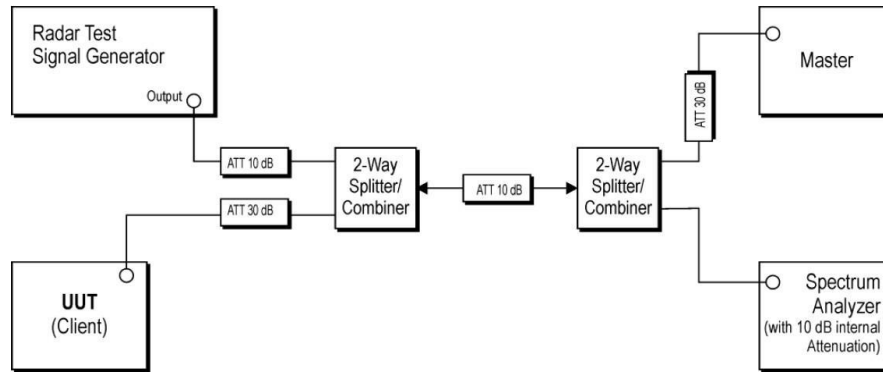

TEST PROCEDURE:

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS Notebooking system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is Streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom In 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

TEST MODE:

Mode	Frequency (MHz)
ac80	5290
ac80	5530
n40	5310
n40	5510
a	5320
a	5500

10.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST

Test data reference attachment.

11. ANTENNA REQUIREMENT

11.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

11.2 EUT ANTENNA

The EUT antenna is External Antenna. It comply with the standard requirement.

END OF REPORT