

FCC Radio Test Report

FCC ID: SJ8BC240

Original Grant

Report No. : TB-FCC177924
Applicant : RDI Technology (Shenzhen) Co., Ltd
Equipment Under Test (EUT)
EUT Name : Wireless Camera
Model No. : BC240
Series Model No. : N/A
Brand Name : CasaCam
Sample ID : 20201215-15-1# & 20201215-15-2#
Receipt Date : 2020-12-18
Test Date : 2020-12-19 to 2021-01-08
Issue Date : 2021-01-08
Standards : FCC Part 15, Subpart C 15.247
Test Method : ANSI C63.10: 2013
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,
The EUT technically complies with the FCC requirements

Test/Witness Engineer : Rebecca
Engineer Supervisor : Ivan Su
Engineer Manager : Ray Lai



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

//CONTENTS	2
1. GENERAL INFORMATION ABOUT EUT	5
1.1 Client Information	5
1.2 General Description of EUT (Equipment Under Test)	5
1.3 Block Diagram Showing the Configuration of System Tested	6
1.4 Description of Support Units	7
1.5 Description of Test Mode	7
1.6 Description of Test Software Setting	8
1.7 Measurement Uncertainty	8
1.8 Test Facility	9
2. TEST SUMMARY	10
3. TEST SOFTWARE	10
4. TEST EQUIPMENT	11
5. CONDUCTED EMISSION TEST	12
5.1 Test Standard and Limit	12
5.2 Test Setup	12
5.3 Test Procedure	13
5.4 Deviation From Test Standard	13
5.5 EUT Operating Mode	13
5.6 Test Data	13
6. RADIATED EMISSION TEST	14
6.1 Test Standard and Limit	14
6.2 Test Setup	15
6.3 Test Procedure	16
6.4 Deviation From Test Standard	17
6.5 EUT Operating Condition	17
6.6 Test Data	17
7. RESTRICTED BANDS AND BAND-EDGE TEST	18
7.1 Test Standard and Limit	18
7.2 Test Setup	18
7.3 Test Procedure	19
7.4 Deviation From Test Standard	19
7.5 EUT Operating Condition	19
7.6 Test Data	19
8. NUMBER OF HOPPING CHANNEL	20
8.1 Test Standard and Limit	20
8.2 Test Setup	20
8.3 Test Procedure	20
8.4 Deviation From Test Standard	20
8.5 EUT Operating Condition	20

8.6 Test Data.....	20
9. AVERAGE TIME OF OCCUPANCY.....	21
9.1 Test Standard and Limit.....	21
9.2 Test Setup.....	21
9.3 Test Procedure.....	21
9.4 EUT Operating Condition	21
9.4 Deviation From Test Standard.....	21
9.5 Test Data.....	21
10. CHANNEL SEPARATION AND BANDWIDTH TEST	22
10.1 Test Standard and Limit	22
10.2 Test Setup.....	22
10.3 Test Procedure.....	22
10.4 Deviation From Test Standard.....	22
10.5 EUT Operating Condition	22
10.6 Test Data.....	22
11. PEAK OUTPUT POWER TEST.....	23
11.1 Test Standard and Limit	23
11.2 Test Setup.....	23
11.3 Test Procedure.....	23
11.4 Deviation From Test Standard.....	23
11.5 EUT Operating Condition	23
11.6 Test Data.....	23
12. ANTENNA REQUIREMENT.....	24
12.1 Standard Requirement.....	24
12.2 Deviation From Test Standard.....	24
12.3 Antenna Connected Construction	24
12.4 Result.....	24
ATTACHMENT A-- CONDUCTED EMISSION TEST DATA	25
ATTACHMENT B-- RADIATED EMISSION TEST DATA	27
ATTACHMENT C-- RESTRICTED BANDS REQUIREMENT TEST DATA.....	32
ATTACHMENT D-- NUMBER OF HOPPING CHANNEL TEST DATA.....	38
ATTACHMENT E-- AVERAGE TIME OF OCCUPANCY TEST DATA.....	39
ATTACHMENT F-- CHANNEL SEPARATION AND BANDWIDTH TEST DATA.....	41
ATTACHMENT G-- PEAK OUTPUT POWER TEST DATA	45

Revision History

Report No.	Version	Description	Issued Date
TB-FCC177924	Rev.01	Initial issue of report	2021-01-08

1. General Information about EUT

1.1 Client Information

Applicant	:	RDI Technology (Shenzhen) Co., Ltd
Address	:	101 to 401, Building 1, and Building 2, No. 7 Yongyue Road, East Baishixia, Fuyong, Baoan, Shenzhen, PRC
Manufacturer	:	RDI Technology (Shenzhen) Co., Ltd
Address	:	101 to 401, Building 1, and Building 2, No. 7 Yongyue Road, East Baishixia, Fuyong, Baoan, Shenzhen, PRC

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	Wireless Camera	
Models No.	:	BC240	
Model Difference	:	N/A	
Product Description	:	Operation Frequency:	2408MHz~2468MHz
		Number of Channel:	16 Channels See Note 2
		Max Peak Output Power:	19.129dBm
		Antenna Gain:	2dBi Dipole Antenna
		Modulation Type:	GFSK (4Mbps)
Power Rating	:	DC 5V from Adapter (Model:CS6F050100FUF) Input: AC 100-240V~50/60Hz, 200mA Output: DC 5.0V, 1.0A	
Software Version	:	N/A	
Hardware Version	:	N/A	
Remark	:	The adapter and antenna gain provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.	

Note:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.


(2) Channel List:

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2408	07	2432	13	2456
02	2412	08	2436	14	2460
03	2416	09	2440	15	2464
04	2420	10	2444	16	2468
05	2424	11	2448		
06	2428	12	2452		
Note: Test frequencies are lowest channel: 2403.5 MHz, middle channel: 2439.5 MHz and highest channel: 2468 MHz.					

(3) The Antenna information about the equipment is provided by the applicant.

1.3 Block Diagram Showing the Configuration of System Tested

Adapter & TX Mode

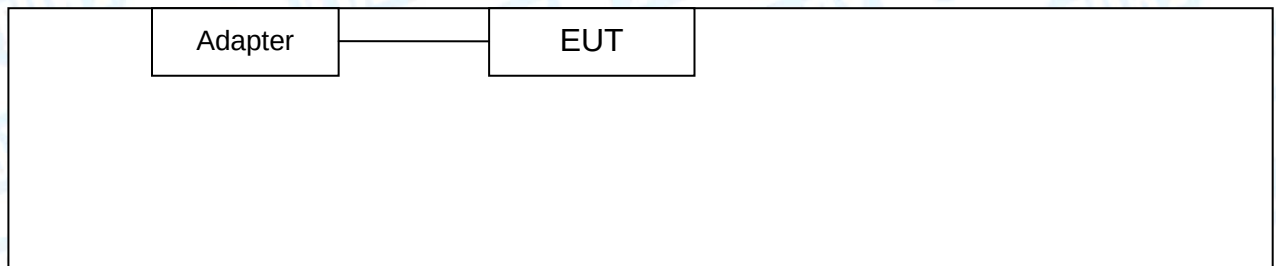

1.4 Description of Support Units

The EUT has been tested as an independent unit.

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+ TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX GFSK Mode
Mode 2	TX Mode(GFSK) Channel 01/09/16

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate. We have pretested all the test modes above.
According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:
TX Mode: GFSK (2Mbps)
- (2) The EUT is considered a Mobile unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on X-plane as the normal use. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of Bluetooth mode.

Test Software Version	Control by pressing the button		
Frequency	2406 MHz	2440 MHz	2468 MHz
GFSK	DEF	DEF	DEF

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	± 3.50 dB ± 3.10 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.50 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB

1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01. FCC Accredited Test Site Number: 854351.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A.

2. Test Summary

FCC Part 15 Subpart C(15.247)/ RSS 247 Issue 2					
Standard Section		Test Item	Test Sample(s)	Judgment	Remark
FCC	IC				
15.203		Antenna Requirement	20201215-15-2#	PASS	N/A
15.207	RSS-GEN 7.2.2	Conducted Emission	20201215-15-1#	PASS	N/A
15.205	RSS-Gen 7.2.3	Restricted Bands	20201215-15-2#	PASS	N/A
15.247(a)(1)	RSS 247 5.1 (2)	Hopping Channel Separation	20201215-15-2#	PASS	N/A
15.247(a)(1)	RSS 247 5.1 (4)	Dwell Time	20201215-15-2#	PASS	N/A
15.247(b)(1)	RSS 247 5.4 (2)	Peak Output Power	20201215-15-2#	PASS	N/A
15.247(b)(1)	RSS 247 5.1 (4)	Number of Hopping Frequency	20201215-15-2#	PASS	N/A
15.247(d)	RSS 247 5.5	Band Edge	20201215-15-1#	PASS	N/A
15.247(c)& 15.209	RSS 247 5.5	Radiated Spurious Emission	20201215-15-1#	PASS	N/A
15.247(a)	RSS 247 5.1 (1)	99% Occupied Bandwidth & 20dB Bandwidth	20201215-15-2#	PASS	N/A
Note: N/A is an abbreviation for Not Applicable.					

3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
RF Conducted Measurement	MTS-8310	MWRfTest	V2.0.0.0

4. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul. 06, 2020	Jul. 05, 2021
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 06, 2020	Jul. 05, 2021
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 06, 2020	Jul. 05, 2021
LISN	Rohde & Schwarz	ENV216	101131	Jul. 06, 2020	Jul. 05, 2021
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 06, 2020	Jul. 05, 2021
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 06, 2020	Jul. 05, 2021
Spectrum Analyzer	Rohde & Schwarz	FSVR	102197	Jul. 06, 2020	Jul. 05, 2021
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	BBHA 9170	BBHA9170582	Mar.01, 2020	Feb. 28, 2022
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jul. 07, 2020	Jul. 06, 2021
Pre-amplifier	Sonoma	310N	185903	Mar.01, 2020	Feb. 28, 2021
Pre-amplifier	HP	8449B	3008A00849	Mar.01, 2020	Feb. 28, 2021
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar.01, 2020	Feb. 28, 2021
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 06, 2020	Jul. 05, 2021
Spectrum Analyzer	Rohde & Schwarz	ESCI	100010/007	Jul. 06, 2020	Jul. 05, 2021
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 11, 2020	Sep. 10, 2021
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 11, 2020	Sep. 10, 2021
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 11, 2020	Sep. 10, 2021
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 11, 2020	Sep. 10, 2021

5. Conducted Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard

FCC Part 15.207/RSS-GEN 8.8

5.1.2 Test Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.2 Test Setup

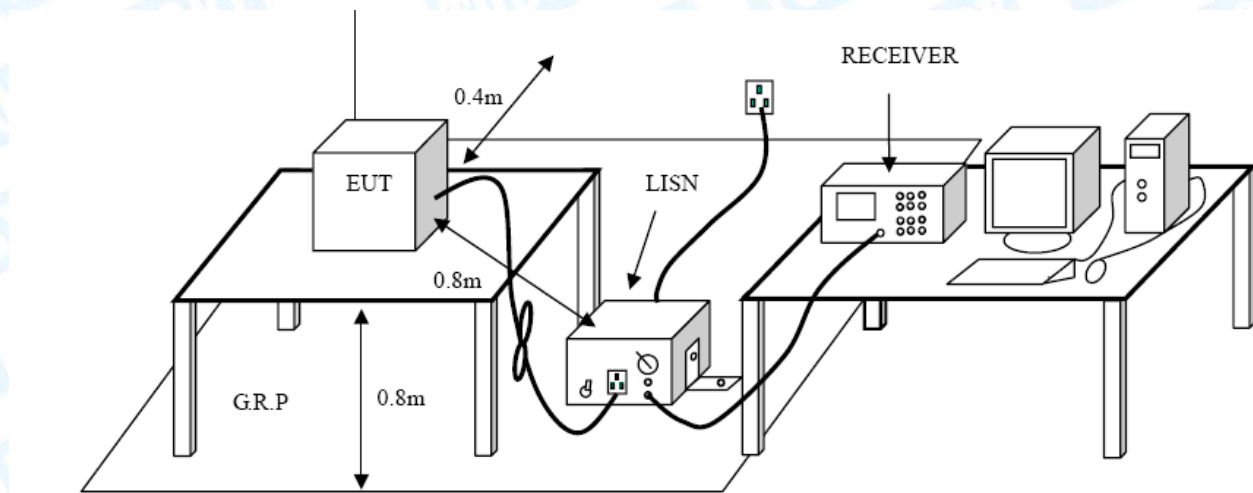

5.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

5.4 Deviation From Test Standard

No deviation

5.5 EUT Operating Mode

Please refer to the description of test mode.

5.6 Test Data

Please refer to the Attachment A.

6. Radiated Emission Test

6.1 Test Standard and Limit

6.1.1 Test Standard

FCC Part 15.209/RSS-GEN 8.9

6.1.2 Test Limit

Radiated Emission Limit (9 kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance Meters(at 3m)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m)


6.2 Test Setup

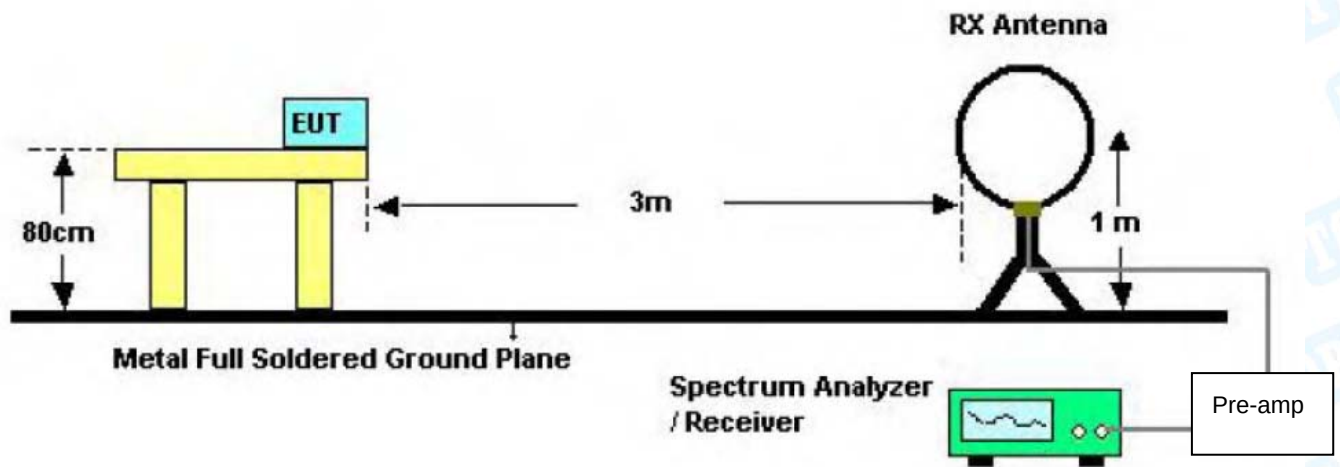

Below 30MHz Test Setup

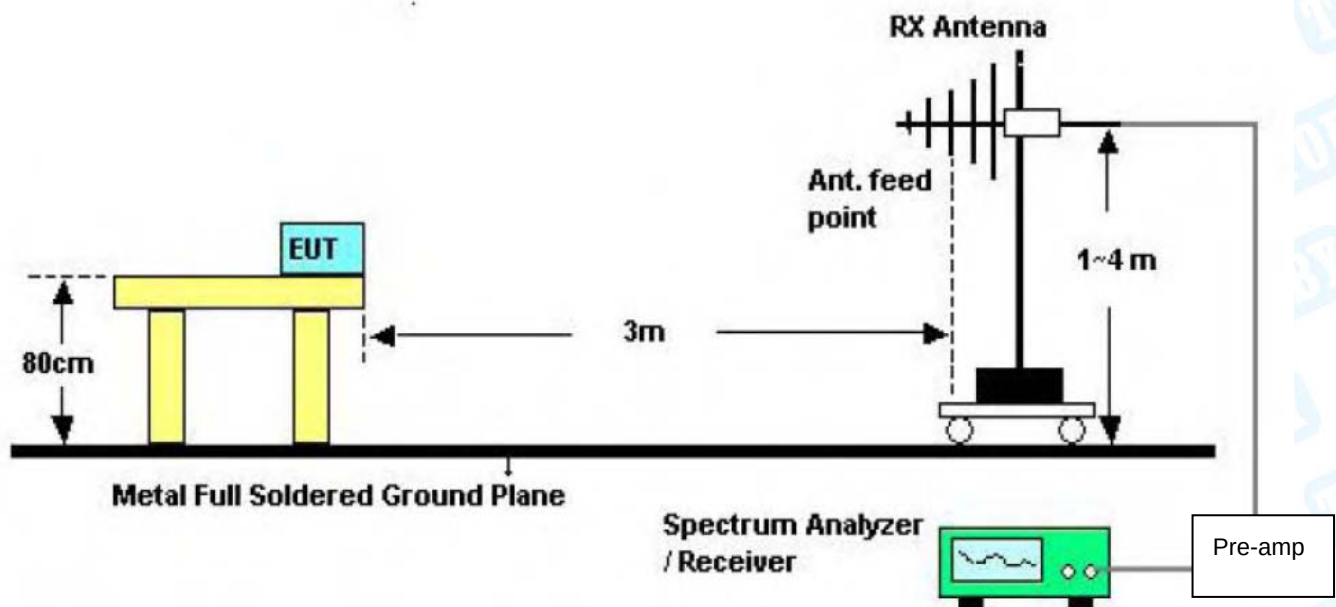

Below 1000MHz Test Setup

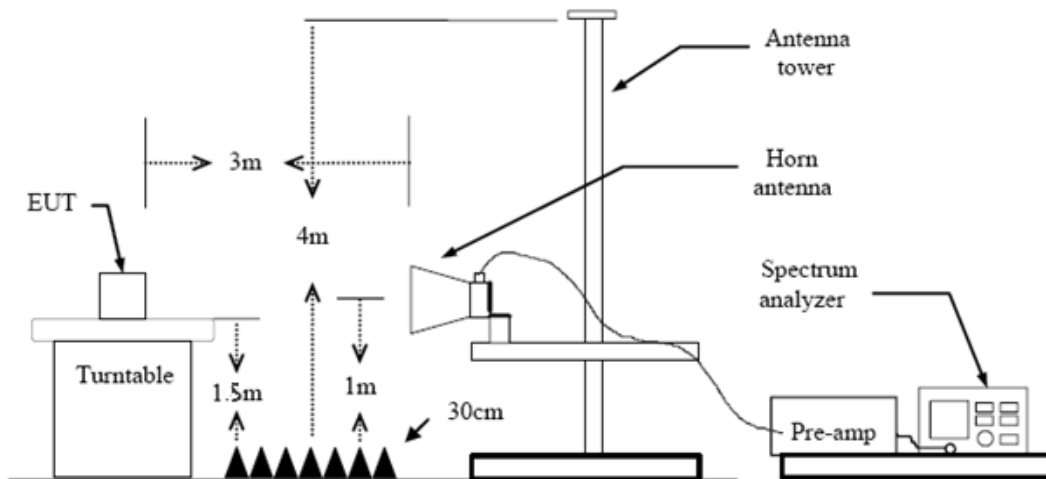

Above 1GHz Test Setup

6.3 Test Procedure

- (1) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency Below 1GHz. The EUT was placed on a rotating 0.8m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

6.4 Deviation From Test Standard

No deviation

6.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

6.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Please refer to the Attachment B.

7. Restricted Bands and Band-edge test

7.1 Test Standard and Limit

7.1.1 Test Standard

FCC Part 15.209&15.205


RSS-GEN 8.9&8.10

7.1.2 Test Limit

Restricted Frequency Band (MHz)	Distance Meters(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Note: All restriction bands have been tested, only the worst case is reported.

7.2 Test Setup

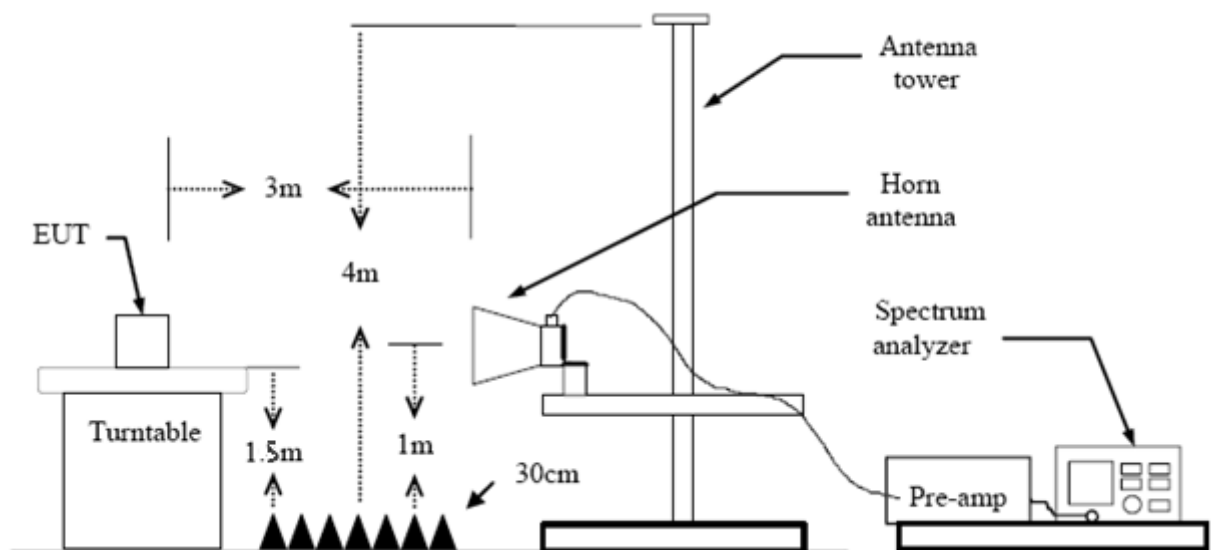

7.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with AVG Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

7.4 Deviation From Test Standard

No deviation

7.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

7.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

All restriction bands have been tested, only the worst case is reported.

Please refer to the Attachment C.


8. Number of Hopping Channel

8.1 Test Standard and Limit

- 8.1.1 Test Standard
FCC Part 15.247 (a)(1)
- 8.1.2 Test Limit

Section	Test Item	Limit
15.247	Number of Hopping Channel	>15

8.2 Test Setup



8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 KHz, VBW=100 KHz, Sweep time= Auto.

8.4 Deviation From Test Standard

No deviation

8.5 EUT Operating Condition

The EUT was set to the Hopping Mode by the Customer.

8.6 Test Data

Please refer to the Attachment D.

9. Average Time of Occupancy

9.1 Test Standard and Limit


9.1.1 Test Standard

FCC Part 15.247 (a)(1) / RSS 247 5.1(d)

9.1.2 Test Limit

Test Item	Limit
Average Time of Occupancy	0.4 sec

9.2 Test Setup



9.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100KHz, VBW=300KHz.
- (3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for packet transmitting.
- (8) Measure the maximum time duration of one single pulse.

9.4 EUT Operating Condition

The average time of occupancy on any channel within the Period can be calculated with formulas:

The Dwell Time = Burst Width * Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation: $0.4 \text{ [s]} * \text{hopping number} = 0.4 \text{ [s]} * 20 \text{ [ch]} = 8.0 \text{ [s*ch]}$;

The burst width, which is directly measured, refers to the duration on one channel hop.

The maximum number of hopping channels in 8.0s $= 3 * (8.0 / 0.24) = 100$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

The EUT was set to the Hopping Mode by the Customer.

9.4 Deviation From Test Standard

No deviation

9.5 Test Data

Please refer to the Attachment E.

10. Channel Separation and Bandwidth Test

10.1 Test Standard and Limit


10.1.1 Test Standard

FCC Part 15.247/RSS 247 5.1(b)

10.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Bandwidth	≤ 1 MHz (20dB bandwidth)	2400~2483.5
Channel Separation	> 25 KHz or $>$ two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

10.2 Test Setup



10.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
Channel Separation: RBW=100 kHz, VBW=100 kHz.
Bandwidth: RBW=30 kHz, VBW=100 kHz.
- (3) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (4) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:30 kHz, and Video Bandwidth:100 kHz. Sweep Time set auto.

10.4 Deviation From Test Standard

No deviation

10.5 EUT Operating Condition

The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Bandwidth Test.

10.6 Test Data

Please refer to the Attachment F.

11. Peak Output Power Test

11.1 Test Standard and Limit


11.1.1 Test Standard

FCC Part 15.247 (b) (1)/RSS 247 5.4(b)

11.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125 mW(21dBm)	2400~2483.5

11.2 Test Setup



11.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.
RBW=3 MHz, VBW=3 MHz for bandwidth more than 1MHz.

11.4 Deviation From Test Standard

No deviation

11.5 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

11.6 Test Data

Please refer to the Attachment G.

12. Antenna Requirement

12.1 Standard Requirement

12.1.1 Standard

FCC Part 15.203

12.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

12.2 Deviation From Test Standard

No deviation

12.3 Antenna Connected Construction

The gains of the antenna used for transmitting is 2dBi, and the antenna connector is de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.


12.4 Result

The EUT antenna is a Dipole Antenna. It complies with the standard requirement.

Antenna Type
☒ Permanent attached antenna
☐ Unique connector antenna
☐ Professional installation antenna

Attachment A-- Conducted Emission Test Data

Temperature:	24.8°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Terminal:	Line		
Test Mode:	TX GFSK Mode 2408MHz		
Remark:	All channels have been tested and Shows only the worst channels.		

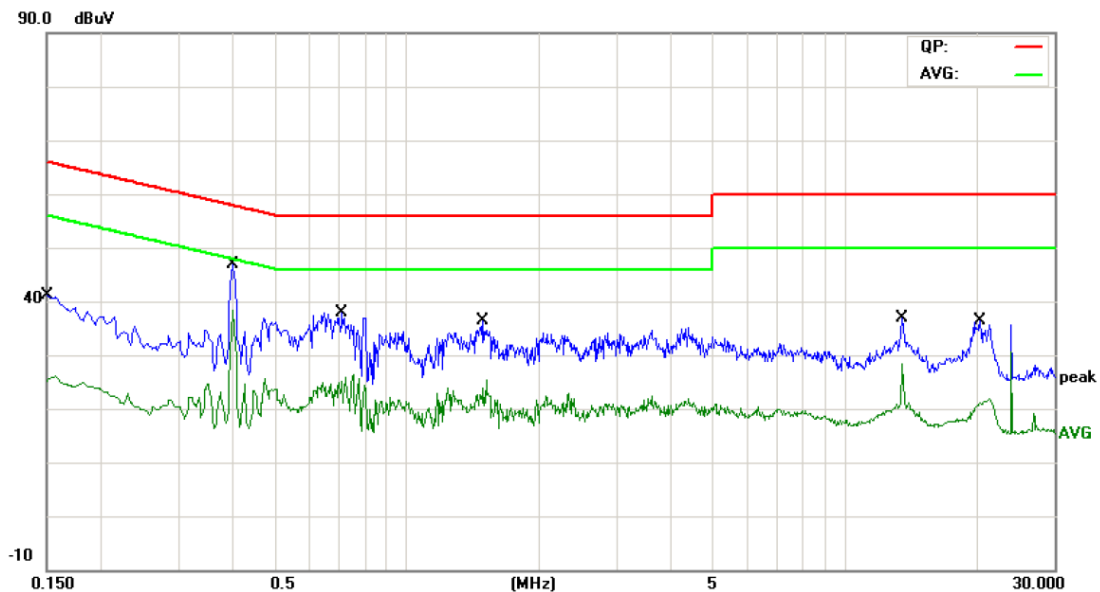


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	27.45	9.70	37.15	65.99	-28.84	QP
2		0.1500	14.65	9.70	24.35	55.99	-31.64	AVG
3		0.3980	35.23	9.70	44.93	57.89	-12.96	QP
4	*	0.3980	27.50	9.70	37.20	47.89	-10.69	AVG
5		0.7100	21.78	9.70	31.48	56.00	-24.52	QP
6		0.7100	11.33	9.70	21.03	46.00	-24.97	AVG
7		1.4900	22.05	9.75	31.80	56.00	-24.20	QP
8		1.4900	12.63	9.75	22.38	46.00	-23.62	AVG
9		13.4780	21.47	9.94	31.41	60.00	-28.59	QP
10		13.4780	13.84	9.94	23.78	50.00	-26.22	AVG
11		20.3220	14.54	10.01	24.55	60.00	-35.45	QP
12		20.3220	7.30	10.01	17.31	50.00	-32.69	AVG

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)

Temperature:	24.8°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Terminal:	Neutral		
Test Mode:	TX GFSK Mode 2408MHz		
Remark:	All channels have been tested and Shows only the worst channels.		

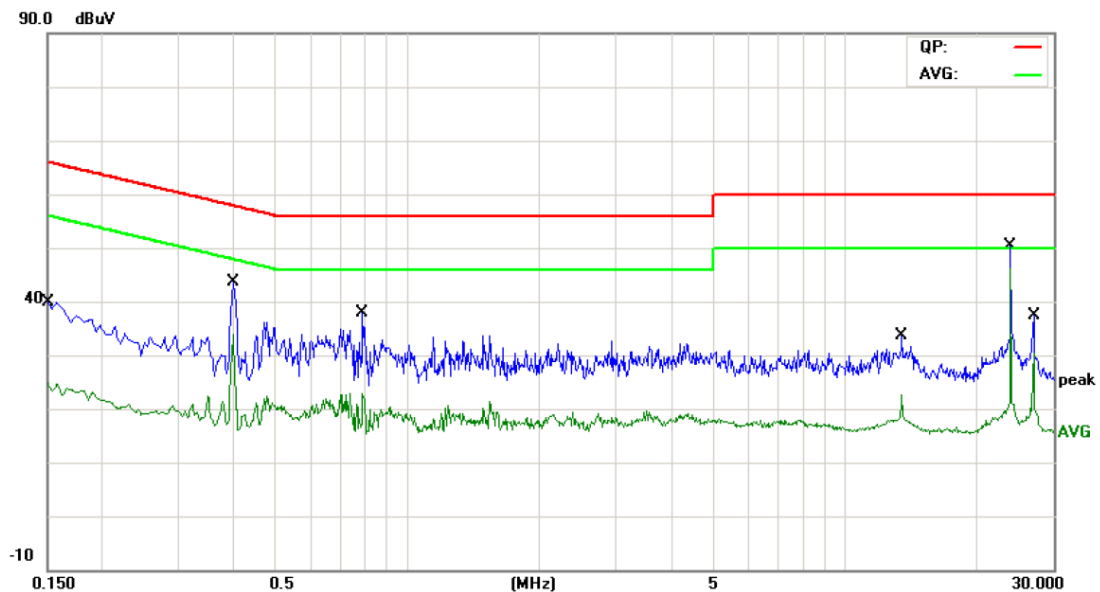

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	26.65	9.80	36.45	65.99	-29.54	QP
2		0.1500	13.35	9.80	23.15	55.99	-32.84	AVG
3		0.3980	29.68	9.80	39.48	57.89	-18.41	QP
4		0.3980	24.00	9.80	33.80	47.89	-14.09	AVG
5		0.7900	17.51	9.80	27.31	56.00	-28.69	QP
6		0.7900	9.36	9.80	19.16	46.00	-26.84	AVG
7		13.4940	16.85	9.97	26.82	60.00	-33.18	QP
8		13.4940	10.93	9.97	20.90	50.00	-29.10	AVG
9		24.0020	39.30	10.10	49.40	60.00	-10.60	QP
10	*	24.0020	35.69	10.10	45.79	50.00	-4.21	AVG
11		27.0180	23.35	10.14	33.49	60.00	-26.51	QP
12		27.0180	15.84	10.14	25.98	50.00	-24.02	AVG

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)

2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)

Attachment B-- Radiated Emission Test Data


9KHz~30MHz

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

30MHz~1GHz

Temperature:	23.5℃	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2408MHz		
Remark:	Only worse case is reported		

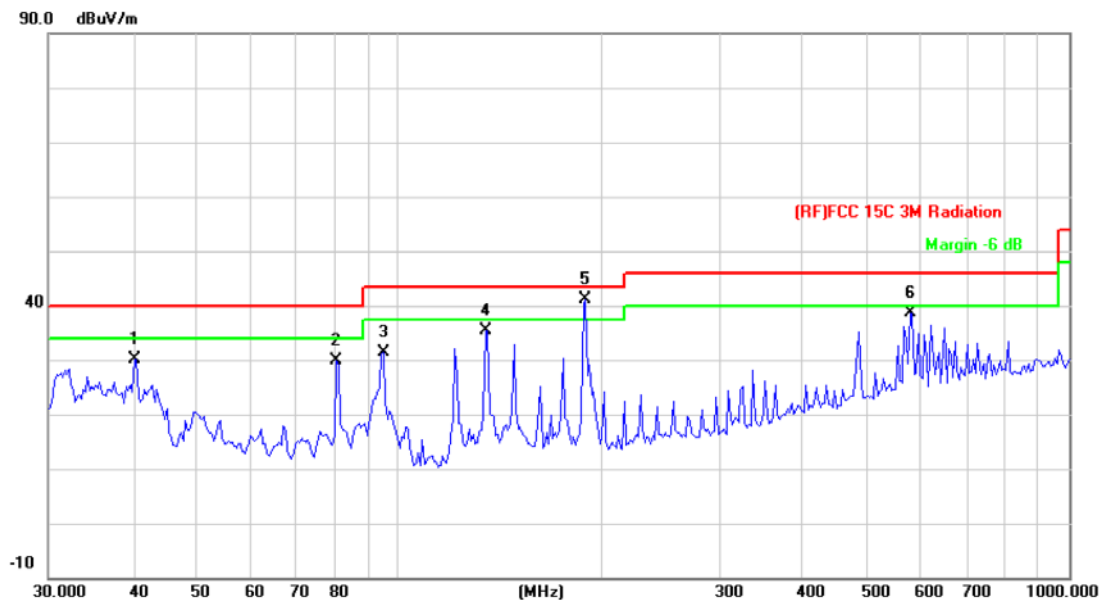


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		40.2757	49.37	-19.13	30.24	40.00	-9.76	peak
2		80.6442	52.19	-22.43	29.76	40.00	-10.24	peak
3		94.7601	53.22	-21.91	31.31	43.50	-12.19	peak
4		134.5592	57.82	-22.35	35.47	43.50	-8.03	peak
5	*	189.7385	60.88	-19.80	41.08	43.50	-2.42	peak
6		578.6699	47.18	-8.57	38.61	46.00	-7.39	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.5°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2408MHz		
Remark:	Only worse case is reported		

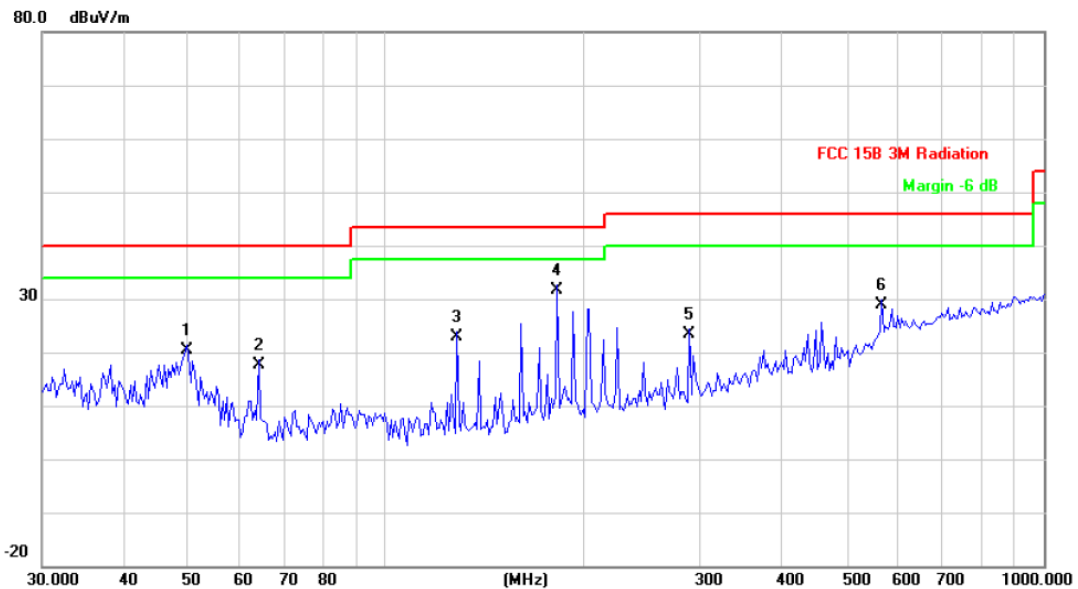

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		49.7068	43.69	-23.25	20.44	40.00	-19.56	QP
2		63.9828	41.66	-24.09	17.57	40.00	-22.43	QP
3		128.1130	45.26	-22.42	22.84	43.50	-20.66	QP
4	*	181.9202	51.75	-20.06	31.69	43.50	-11.81	QP
5		289.0021	39.53	-16.23	23.30	46.00	-22.70	QP
6		566.6223	37.55	-8.60	28.95	46.00	-17.05	QP

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = QuasiPeak (dBuV/m)-Limit QPK(dBuV/m)

Above 1GHz (Only worse case is reported)

Temperature:	23.5℃	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2408MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		4815.894	48.52	13.10	61.62	74.00	-12.38 peak
2	*	4816.202	38.36	13.11	51.47	54.00	-2.53 AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.5℃	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2408MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4815.818	37.42	13.10	50.52	54.00	-3.48	AVG
2		4816.054	47.77	13.10	60.87	74.00	-13.13	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.5℃	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2440MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4879.932	48.28	13.57	61.85	74.00	-12.15	peak
2	*	4880.368	34.82	13.57	48.39	54.00	-5.61	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.5℃	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2440MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4880.020	35.95	13.57	49.52	54.00	-4.48	AVG
2		4880.186	48.30	13.57	61.87	74.00	-12.13	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.5℃	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2468MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		4936.020	48.72	13.98	62.70	74.00	-11.30 peak
2	*	4936.038	35.85	13.98	49.83	54.00	-4.17 AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.5℃	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2468MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4936.198	34.86	13.98	48.84	54.00	-5.16	AVG
2		4936.270	48.54	13.98	62.52	74.00	-11.48	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)


2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Attachment C-- Restricted Bands Requirement Test Data

(1) Radiation Test

Temperature:	23.5°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2408MHz		
Remark:	Only worse case is reported		

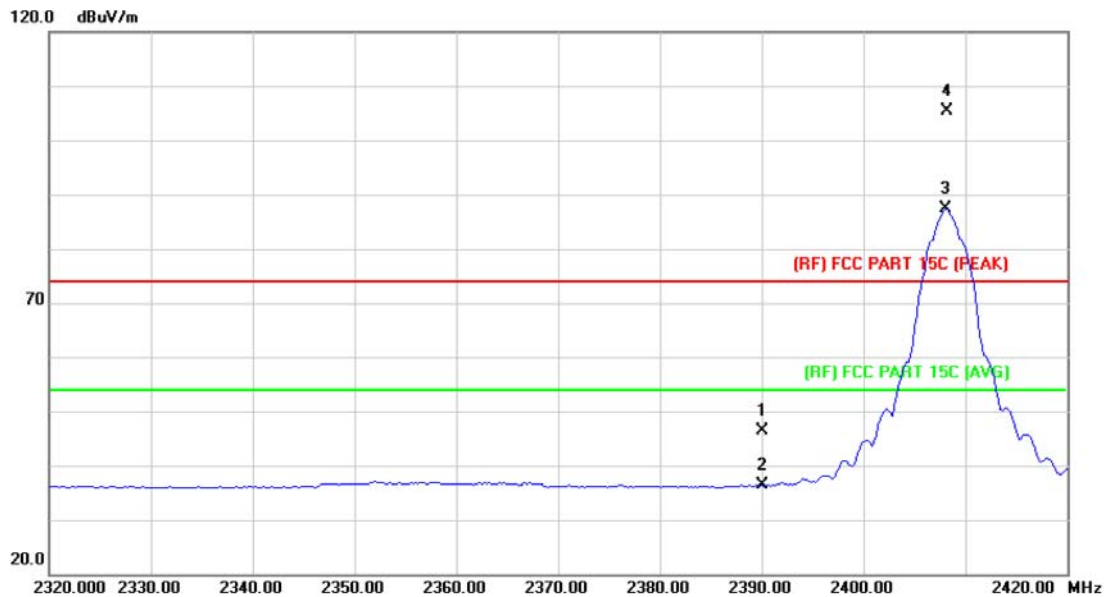


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		2390.000	45.07	1.28	46.35	74.00	-27.65 peak
2		2390.000	35.20	1.28	36.48	54.00	-17.52 AVG
3	*	2408.000	85.97	1.36	87.33	Fundamental Frequency AVG	
4	X	2408.201	103.95	1.37	105.32	Fundamental Frequency peak	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

Temperature:	23.5℃	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2408MHz		
Remark:	Only worse case is reported		

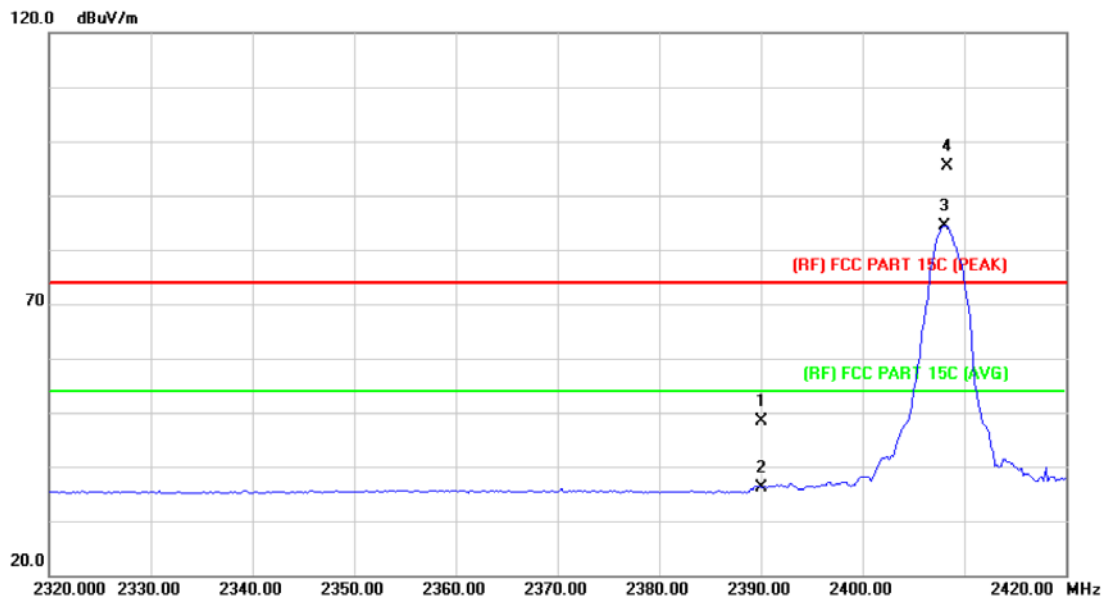


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	47.09	1.28	48.37	74.00	-25.63	peak
2		2390.000	34.87	1.28	36.15	54.00	-17.85	AVG
3	*	2408.000	83.12	1.36	84.48	Fundamental Frequency		AVG
4	X	2408.356	93.95	1.37	95.32	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.5℃	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2468 MHz		
Remark:	Only worse case is reported		

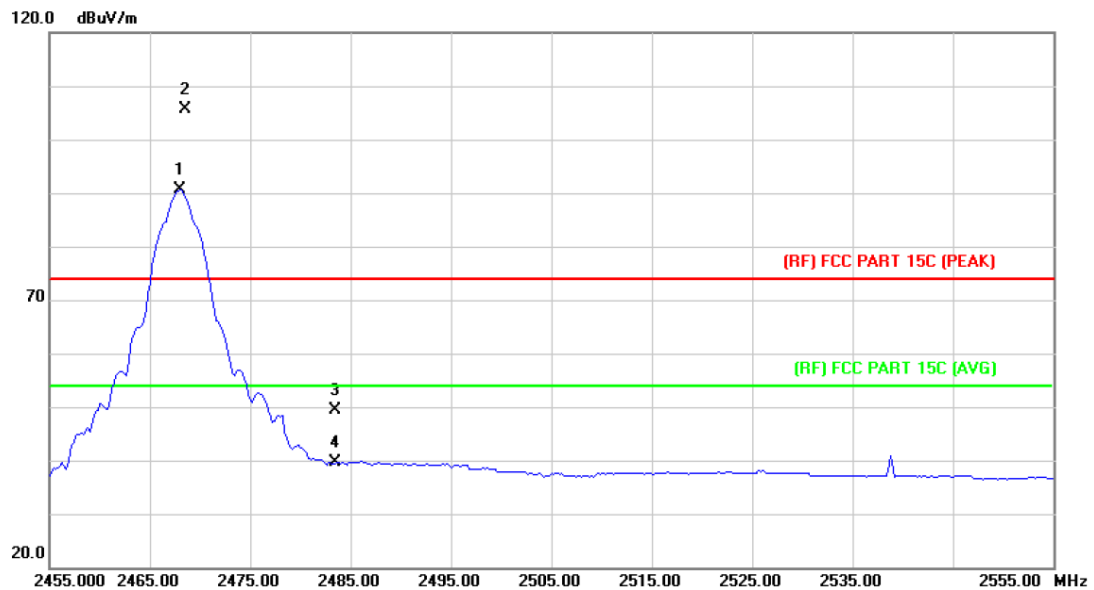


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2468.000	88.79	1.78	90.57	Fundamental Frequency		AVG
2	X	2468.512	103.79	1.78	105.57	Fundamental Frequency		peak
3		2483.500	47.45	1.88	49.33	74.00	-24.67	peak
4		2483.500	37.76	1.88	39.64	54.00	-14.36	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.5℃	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2468 MHz		
Remark:	Only worse case is reported		

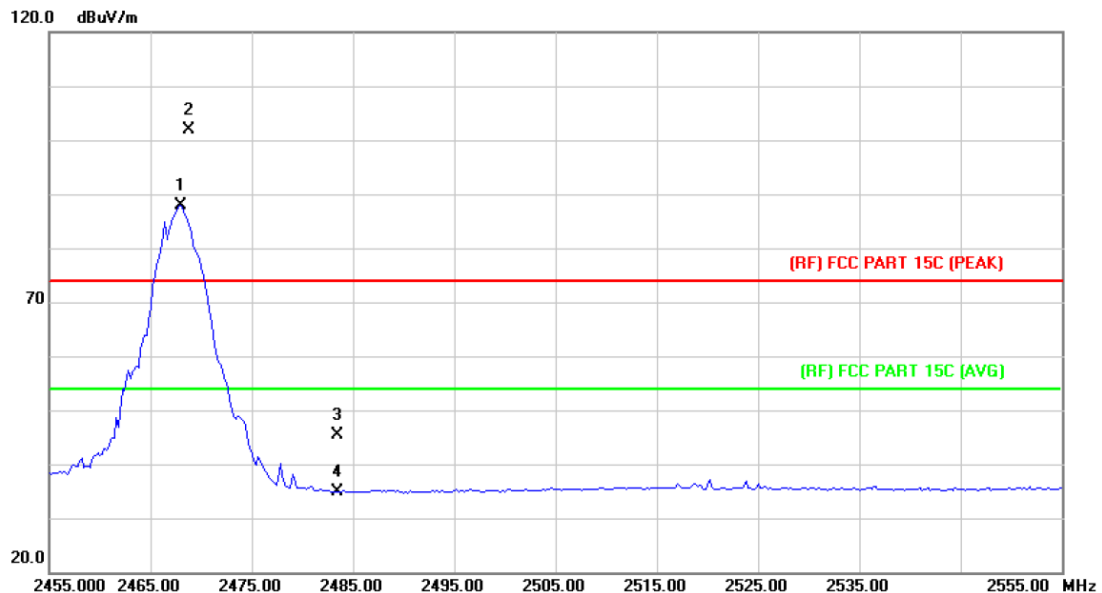



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2468.000	86.09	1.78	87.87	Fundamental Frequency		AVG
2	X	2468.856	100.09	1.78	101.87	Fundamental Frequency		peak
3		2483.500	43.45	1.88	45.33	74.00	-28.67	peak
4		2483.500	33.06	1.88	34.94	54.00	-19.06	AVG

Remark:



1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

(2) Conducted Band Edge Test

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX Mode 2408MHz/2468 MHz		
Remark:	Only worse case is reported		

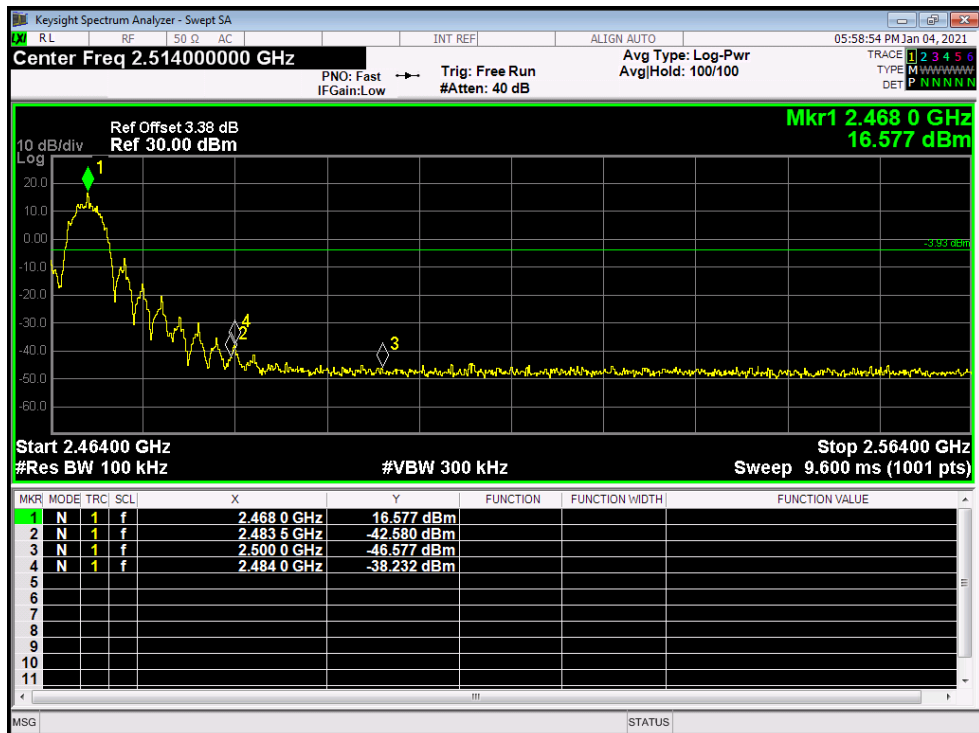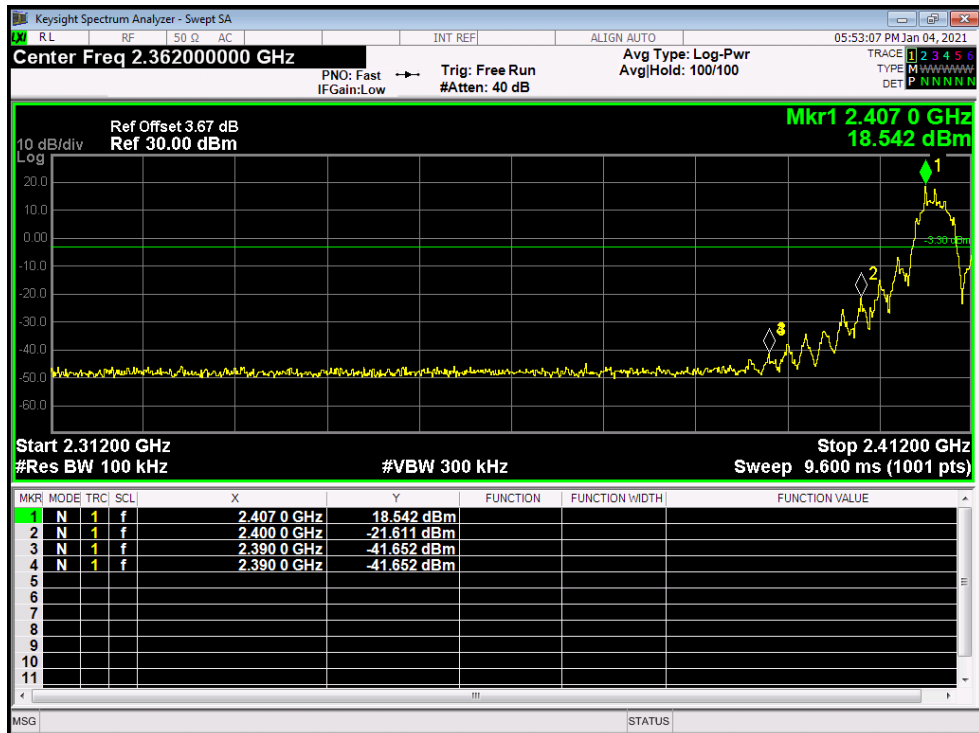


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	Hopping Mode		
Remark:	Only worse case is reported		

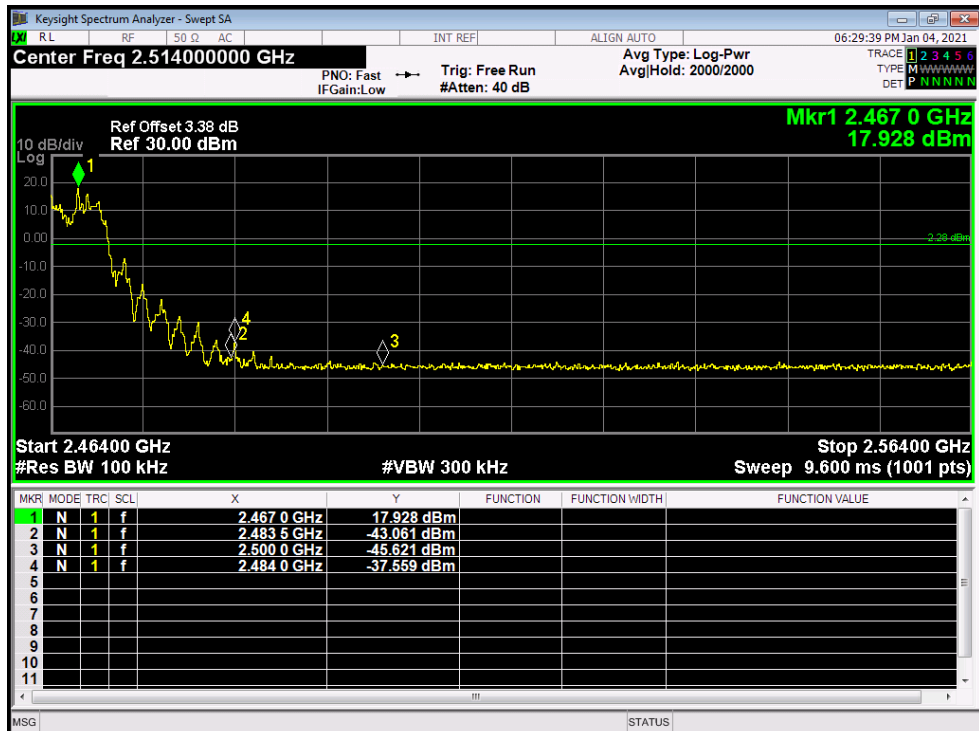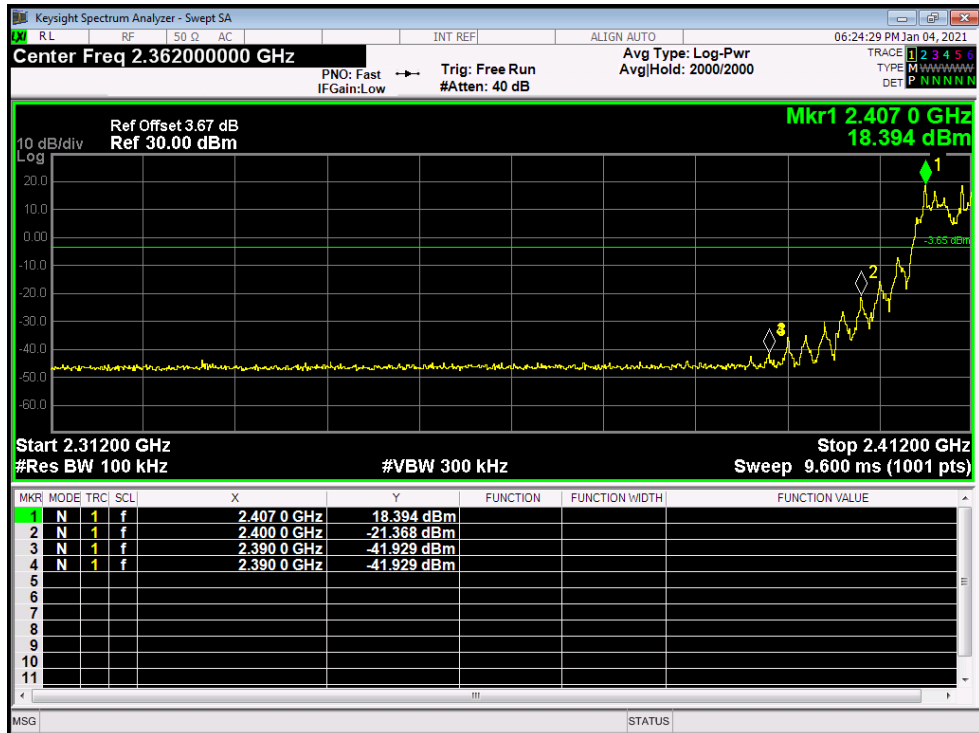

Attachment D-- Number of Hopping Channel Test Data

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	Hopping Mode		
Frequency Range	Test Mode	Quantity of Hopping Channel	Limit
2408MHz~2468MHz	GFSK	16	>15
GFSK Mode			

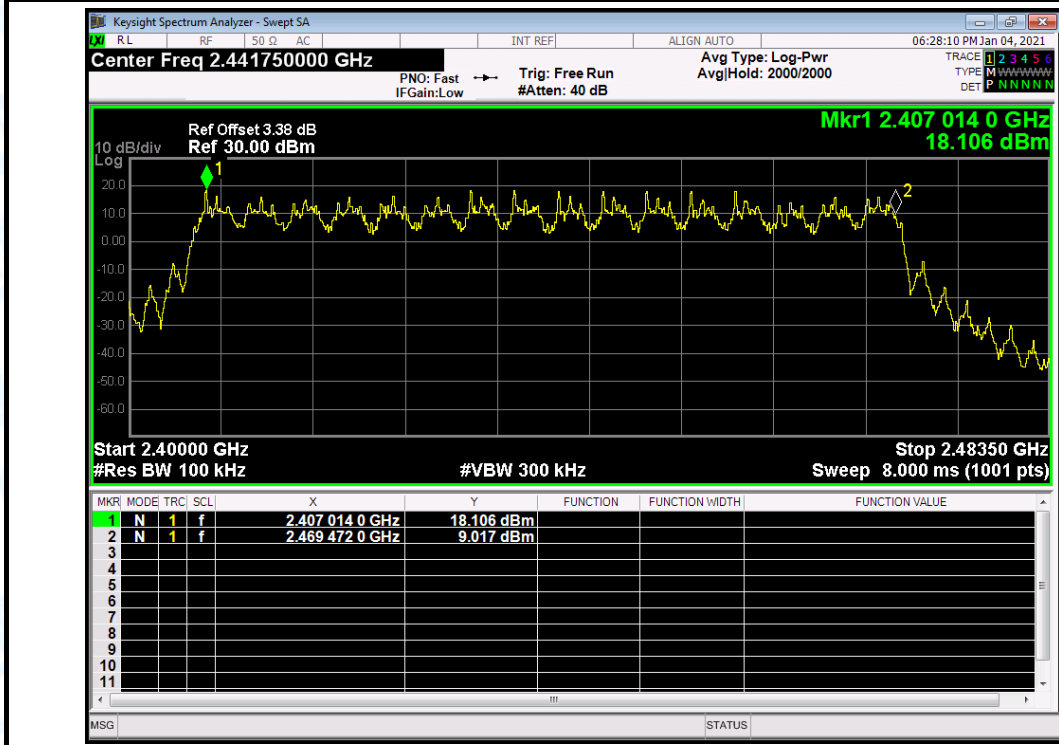


Attachment E-- Average Time of Occupancy Test Data


Temperature:		25℃		Relative Humidity:		55%	
Test Voltage:		AC 120V/60Hz					
Test Mode:		Hopping Mode (GFSK)					
Remark:		The number of total hopping frequencies up to 16.					
Test Mode	Channel (MHz)	Reading Time (ms)	Total hops (N)	Test Result (ms)	Limit (ms)	Result	
GFSK	2408	29.42	12	350.76	400	PASS	

The Dwell Time = Burst Width * Total Hops. The detailed calculations are showed as follows:
The duration for dwell time calculation: 0.4 [s] * hopping number = 0.4 [s] * 16 [ch] =6.4[s*ch];
The burst width, which is directly measured, refers to the duration on one channel hop.
The maximum number of hopping channels in 6.4s is 12.
Reading Time=29.42ms*12=350.76ms


Hopping Channels in 6.4s

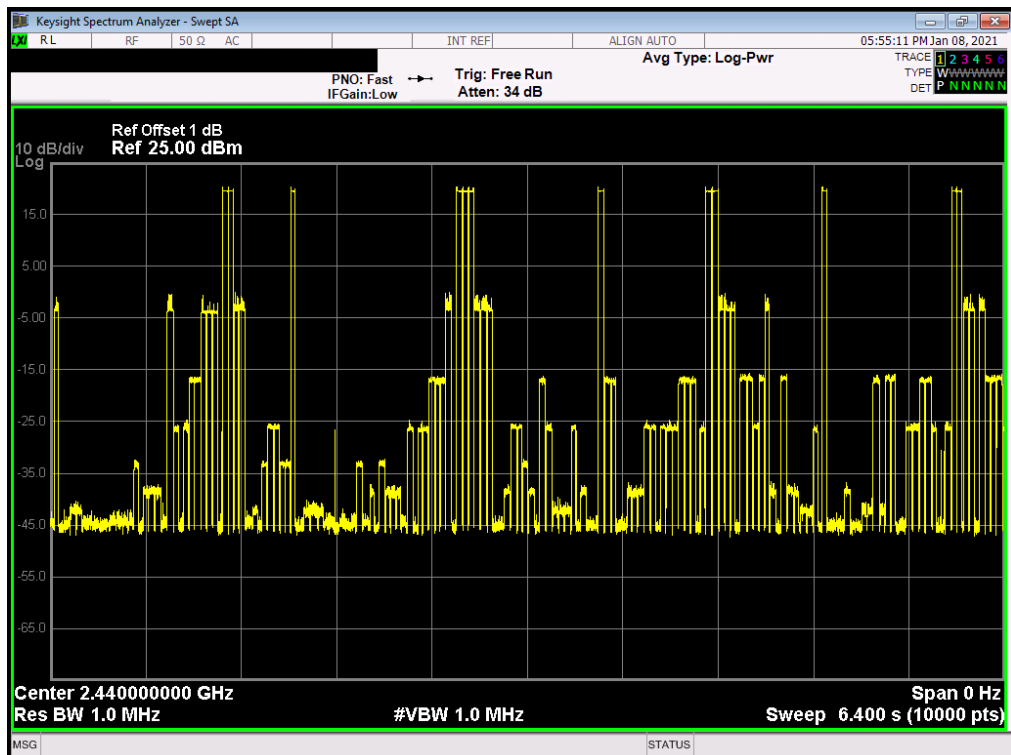

GFSK Hopping Mode

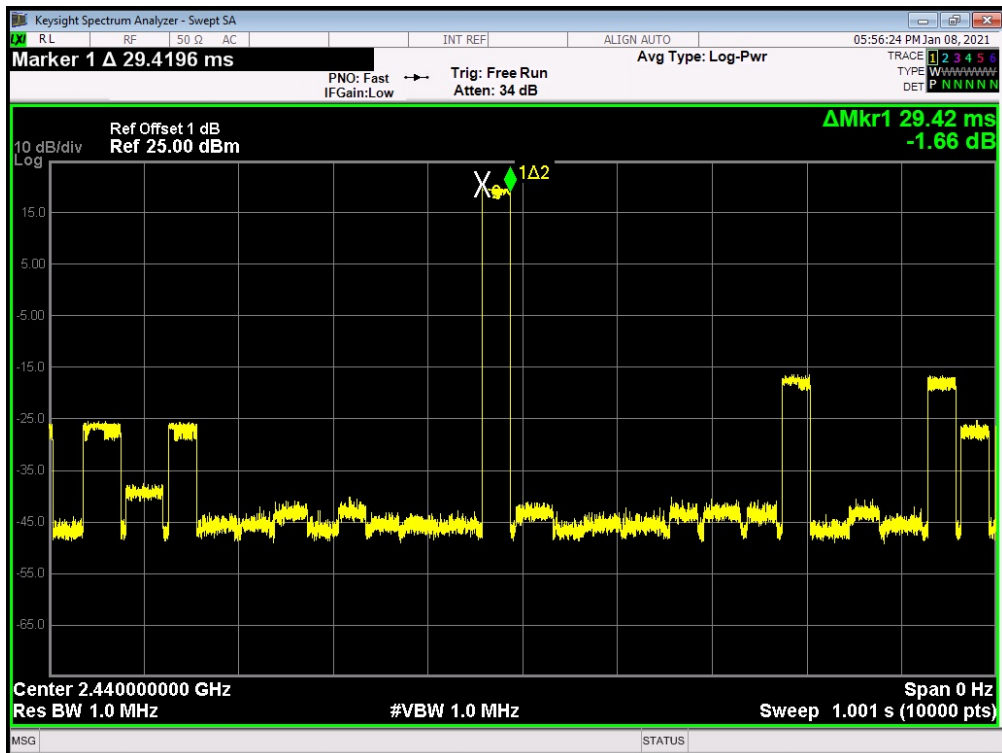


Attachment F-- Channel Separation and Bandwidth Test Data

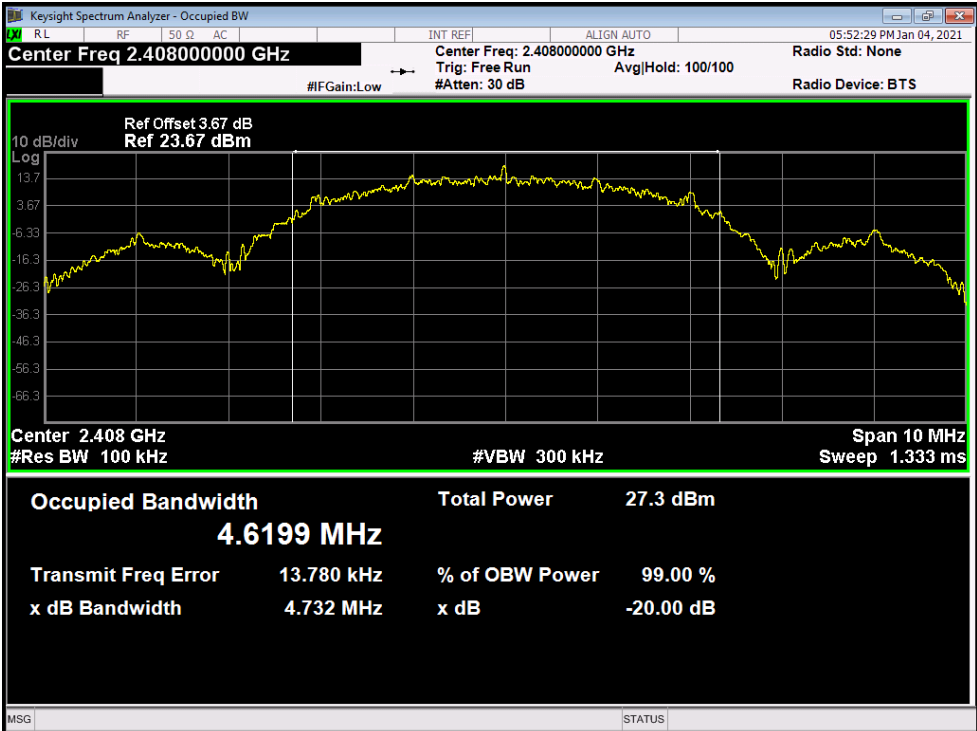Temperature:	25°C	Relative Humidity:	55%																
Test Voltage:	AC 120V/60Hz																		
Test Mode:	TX Mode (GFSK)																		
Channel frequency (MHz)	99% OBW (kHz)	20dB Bandwidth (kHz)	20dB Bandwidth *2/3 (kHz)																
2408	4619.9	4732	3154.67																
2440	4574.0	4677	3118.00																
2468	4600.4	4706	3137.33																
GFSK TX Mode																			
2408 MHz																			
 <table> <tr> <td colspan="2">Occupied Bandwidth</td><td>Total Power</td><td>27.3 dBm</td></tr> <tr> <td colspan="2">4.6199 MHz</td><td></td><td></td></tr> <tr> <td>Transmit Freq Error</td><td>13.780 kHz</td><td>% of OBW Power</td><td>99.00 %</td></tr> <tr> <td>x dB Bandwidth</td><td>4.732 MHz</td><td>x dB</td><td>-20.00 dB</td></tr> </table>				Occupied Bandwidth		Total Power	27.3 dBm	4.6199 MHz				Transmit Freq Error	13.780 kHz	% of OBW Power	99.00 %	x dB Bandwidth	4.732 MHz	x dB	-20.00 dB
Occupied Bandwidth		Total Power	27.3 dBm																
4.6199 MHz																			
Transmit Freq Error	13.780 kHz	% of OBW Power	99.00 %																
x dB Bandwidth	4.732 MHz	x dB	-20.00 dB																


GFSK TX Mode

2440 MHz

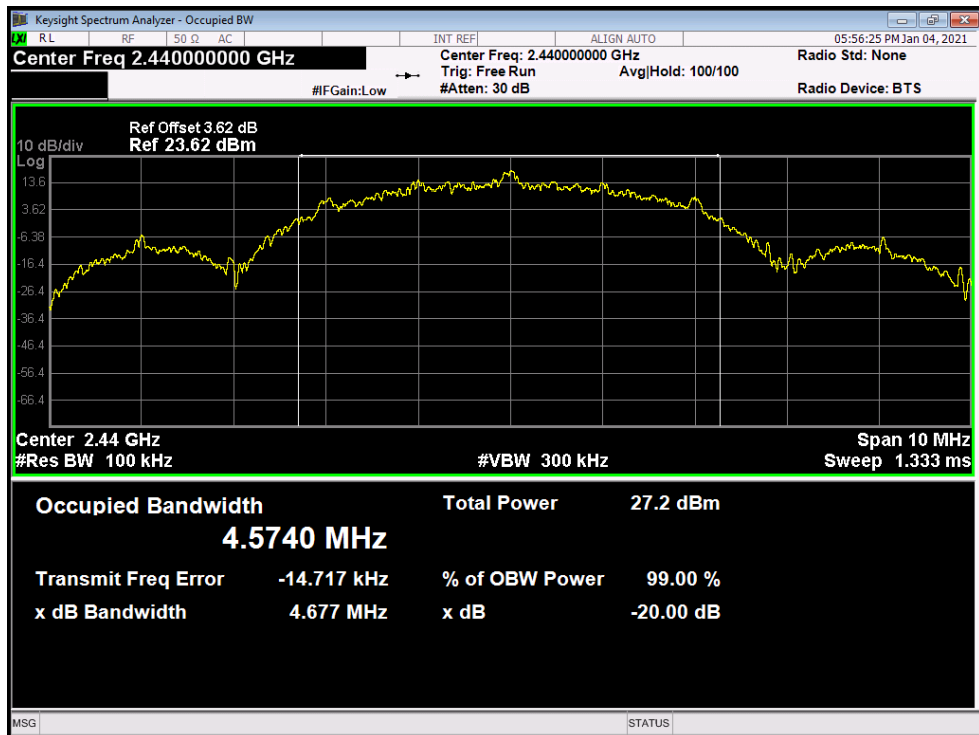

GFSK TX Mode

2468 MHz

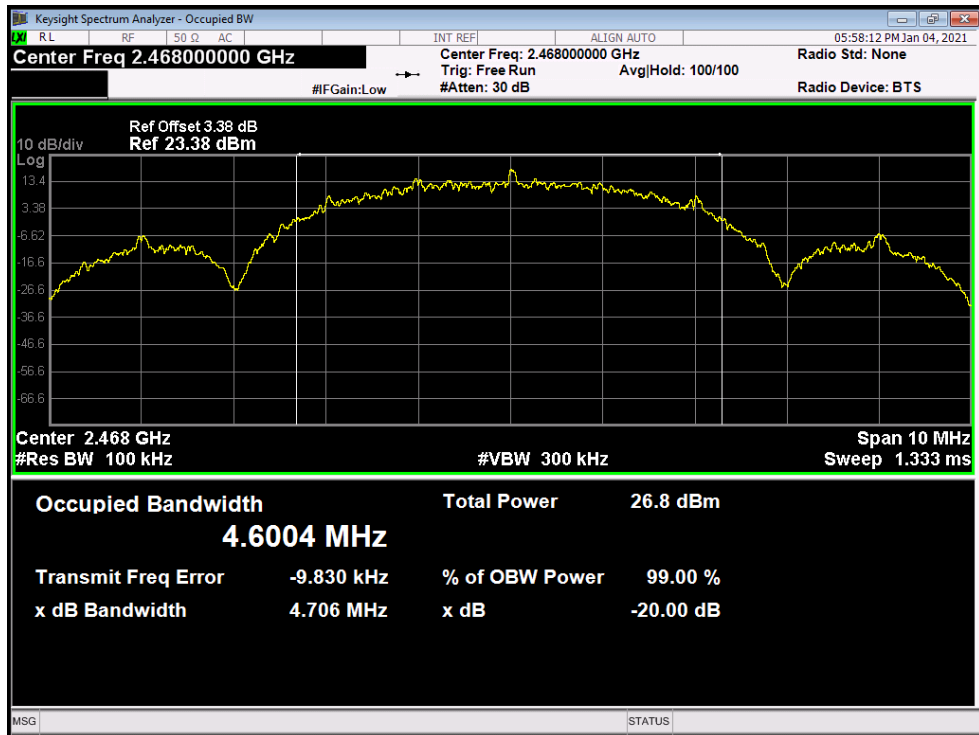


Channel Separation Test data:

Temperature:	25℃	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	Hopping Mode (GFSK)		
Remark:	We test all channel and worse case recorded in the report.		
Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit (kHz)	
2408	4005	3154.67	
2440	4005	3118.00	
2468	4005	3137.33	
Hopping Mode			
2408 MHz			



2440MHz

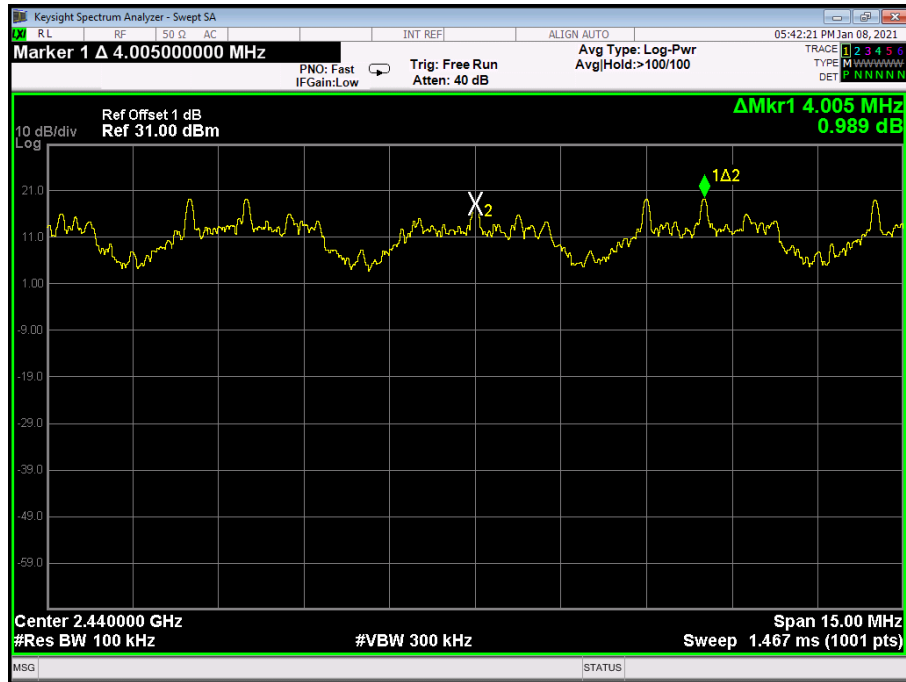

2468MHz



Attachment G-- Peak Output Power Test Data

Temperature:	25℃	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX Mode (GFSK)		
Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)	
2408	19.129	21	
2440	18.816		
2468	18.447		
GFSK TX Mode			
2408 MHz			

Keysight Spectrum Analyzer - Swept SA

RL

RF

50 Ω

AC

INT REF

ALIGN AUTO

05:52:15 PM Jan 04, 2021

Center Freq 2.408000000 GHz

PNO: Fast

IFGain: Low

Trig: Free Run

#Atten: 40 dB

Avg Type: Log-Pwr

Avg|Hold: 100/100

TRACE 1 2 3 4 5 6

TYPE M W W W W W W W

DET P N N N N N

10 dB/div


Log

Ref Offset 3.67 dB

Ref 30.00 dBm

Mkr1 2.406958 GHz

19.129 dBm

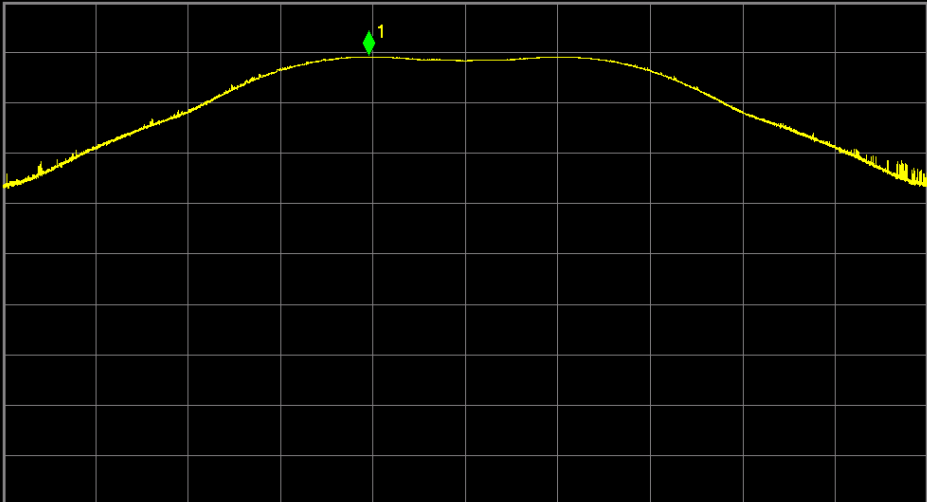

Center 2.408000 GHz

#Res BW 2.0 MHz

#VBW 6.0 MHz

Span 10.00 MHz

Sweep 1.333 ms (10001 pts)

MSG

STATUS

GFSK TX Mode

2440 MHz



GFSK TX Mode

2468MHz



-----END OF REPORT-----