FCC TEST REPORT

REPORT NO.: RF950911H02A
MODEL NO.: CS-W02G2
RECEIVED: Sep. 11, 2006
TESTED: Oct. 02 to 03, 2006
ISSUED: Dec. 08, 2006

APPLICANT: Planex Communications Inc.

ADDRESS: 7F, No.108, Min-Chyuan Rd., Hsin-Tien, Taipei Hsien, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien, Taiwan, R.O.C.

This test report consists of 62 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

0536

No. 2177-01

Table of Contents

1 CERTIFICATION 4
2 SUMMARY OF TEST RESULTS 5
3 GENERAL INFORMATION 6
3.1 GENERAL DESCRIPTION OF EUT 6
3.2 DESCRIPTION OF TEST MODES 7
3.3 TEST MODE APPLICABLITY AND TESTED CHANNEL DETAIL: 8
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS 10
3.5 DESCRIPTION OF SUPPORT UNITS 11
3.6 CONFIGURATION OF SYSTEM UNDER TEST 12
4 TEST TYPES AND RESULTS 13
4.1 CONDUCTED EMISSION MEASUREMENT 13
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 13
4.1.2 TEST INSTRUMENTS 13
4.1.3 TEST PROCEDURES 14
4.1.4 TEST SETUP 14
4.1.5 EUT OPERATING CONDITIONS 15
4.1.6 TEST RESULTS 16
4.2 RADIATED EMISSION MEASUREMENT 18
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT 18
4.2.2 TEST INSTRUMENTS 19
4.2.3 TEST PROCEDURES 20
4.2.4 TEST SETUP 21
4.2.5 EUT OPERATING CONDITIONS 21
4.2.6 TEST RESULTS 22
4.2.7 TEST RESULTS - DSSS 23
4.2.8 TEST RESULTS - OFDM 26
4.3 6dB BANDWIDTH MEASUREMENT 29
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT 29
4.3.2 TEST INSTRUMENTS 29
4.3.3 TEST PROCEDURE 30
4.3.4 TEST SETUP 30
4.3.5 EUT OPERATING CONDITIONS 30
4.3.6 TEST RESULTS –DSSS 31
4.3.7 TEST RESULTS-OFDM 34
4.4 MAXIMUM PEAK OUTPUT POWER 37
4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT 37
4.4.2 TEST INSTRUMENTS 37
4.4.3 TEST PROCEDURES 38

4.4.4 TEST SETUP 38
4.4.5 EUT OPERATING CONDITIONS 38
4.4.6 TEST RESULTS – DSSS 39
4.4.7 TEST RESULTS –OFDM 40
4.5 POWER SPECTRAL DENSITY MEASUREMENT 41
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT 41
4.5.2 TEST INSTRUMENTS 41
4.5.3 TEST PROCEDURE 42
4.5.4 TEST SETUP 42
4.5.5 EUT OPERATING CONDITIONS 42
4.5.6 TEST RESULTS –DSSS 43
4.5.7 TEST RESULTS –OFDM 46
4.6 BAND EDGES MEASUREMENT 49
4.6.1 LIMITS OF BAND EDGES MEASUREMENT 49
4.6.2 TEST INSTRUMENTS 49
4.6.3 TEST PROCEDURE 49
4.6.4 EUT OPERATING CONDITION 49
4.6.5 TEST RESULTS – DSSS 50
4.6.6 TEST RESULTS – OFDM 54
4.7 ANTENNA REQUIREMENT 58
4.7.1 STANDARD APPLICABLE 58
4.7.2 ANTENNA CONNECTED CONSTRUCTION 58
5 PHOTOGRAPHS OF THE TEST CONFIGURATION 59
6 INFORMATION ON THE TESTING LABORATORIES 61
APPENDIX-A A-1

1 CERTIFICATION

PRODUCT : IEEE 802.11b/g Wireless IP Network Camera
BRAND NAME : PCI
MODEL NO. : CS-W02G2
TESTED: Oct. 02 to 03, 2006
APPLICANT : Planex Communications Inc.
TEST ITEM: R&D SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment (Model: CS-W02G2) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : _____ , **DATE:** Dec. 08, 2006
(Midoli Peng)

TECHNICAL ACCEPTANCE : _____ , **DATE:** Dec. 08, 2006
Responsible for RF
(Hank Chung)

APPROVED BY : _____ , **DATE:** Dec. 08, 2006
(May Chen, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	**Test Type and Limit**	**Result**	**REMARK**
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is –17.22dB at 0.209 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is –1.51dB at 2483.5MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	IEEE 802.11b/g Wireless IP Network Camera
MODEL NO.	CS-W02G2
FCC ID	SJ9-CS-W02G2
POWER SUPPLY	DC 5V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
CHANNEL SPACING	5MHz
OUTPUT POWER	802.11b: 60.117mW 802.11g: 36.224mW
ANTENNA TYPE	Dipole Antenna with 2dBi antenna gain
DATA CABLE	UTP cable (unshielded, 1.0m)
I/O PORT	LAN Port x1
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT must be supplied with a power adapter and as following:

Brand:	SINCHO INTERNATIONAL INC.
Model No.:	SW12-050U
Input power :	100-240VAC, 50-60Hz , 260mA
Output power :	5V, 2A, 12VA MAX, 2.0m without core

2. The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b devices to the network. With its high-speed data transmissions of up to 54Mbps.

3. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g normal mode: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.3 TEST MODE APPLICABLITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	NA

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz
RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	11	DSSS	CCK	11

Radiated Emission Test (Above 1 GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

Bandedge Measurement:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6

Antenna Port Conducted Measurement:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an IEEE 802.11b/g Wireless IP Network Camera. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All tests have been performed and recorded as per the above standards.

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	Dell	PP01L	TW-0791UH-12800-0 CK-3735	DoC
2	HUB	AVSYS	110H8	01-20E-000002	DoC

No.	Signal cable description
1	NA
2	NA

Note: 1. All power cords of the above support units are unshielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

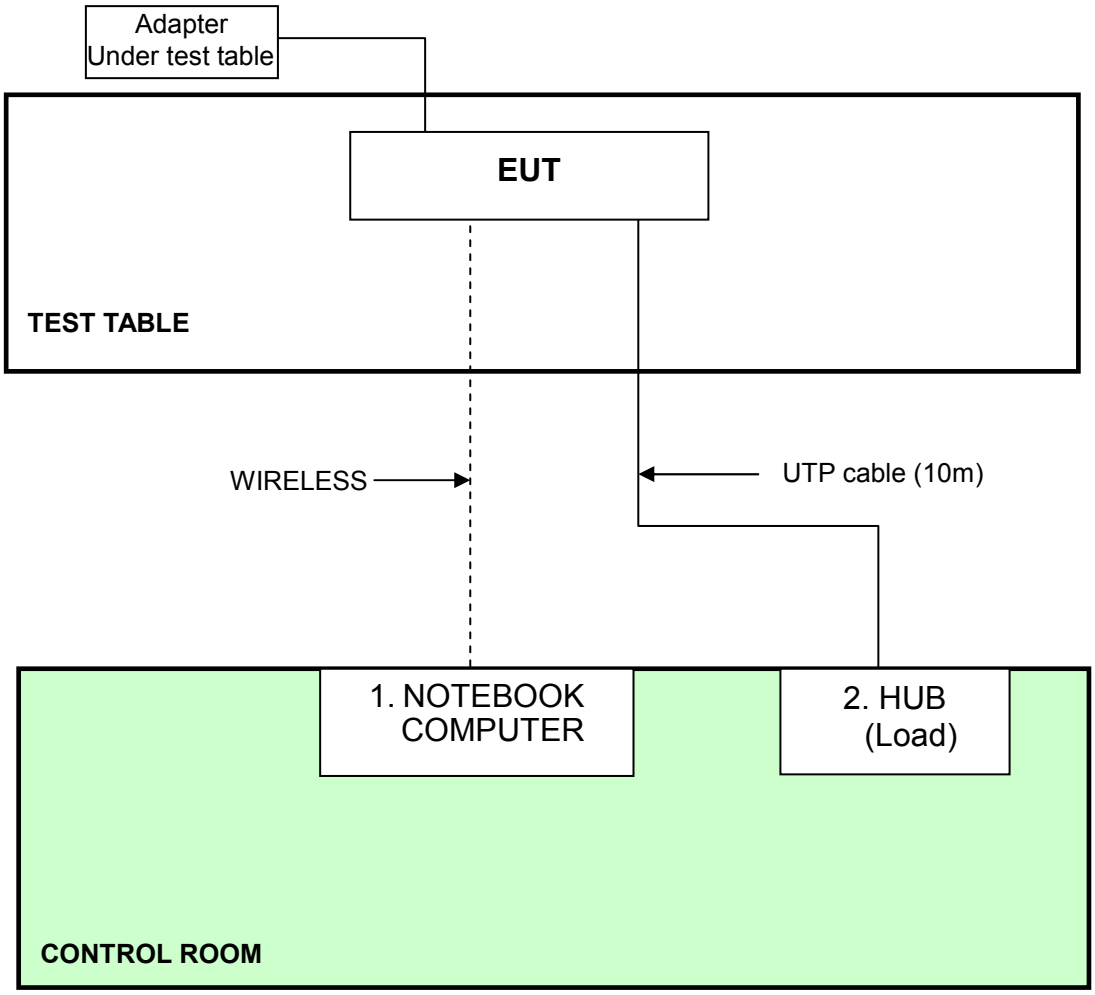

NOTE: 1. Support units 1-2 were kept in the control room during the test.
2. Please refer to the photos of test configuration in Item 5 also.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Feb. 10, 2007
Line-Impedance Stabilization Network(for EUT)	ESH3-Z5	848773/004	Oct. 24, 2006
Line-Impedance Stabilization Network(for Peripheral)	ENV-216	100072	Oct. 24, 2006
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 19, 2007
Terminator	50	1	Oct. 08, 2006
Software	ADT_Cond_V7.3.2	NA	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.

4.1.3 TEST PROCEDURES

a. The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.

b. Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.

c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

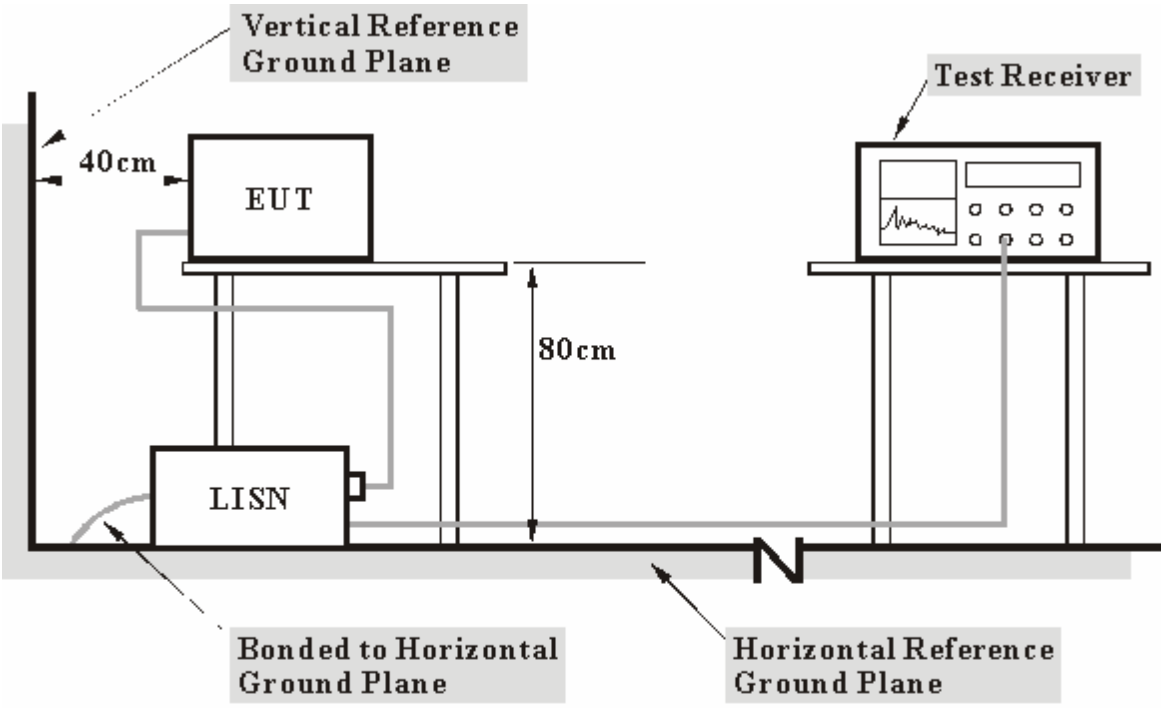

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.5 EUT OPERATING CONDITIONS

1. Turn on the power of all equipment.
2. NB runs “ping.exe” test program to enable all functions of the EUT via wireless.

4.1.6 TEST RESULTS

MODULATION TYPE	OFDM	**CHANNEL**	Channel 11
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**6dB BANDWIDTH**	9 kHz
PHASE	Line (L)	**TRANSFER RATE**	6Mbps
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 972hPa	**TESTED BY**	Lori Chiu

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	0.10	41.48	-	41.58	-	63.42	53.42	-21.84	-
2	0.306	0.10	31.64	-	31.74	-	60.07	50.07	-28.33	-
3	0.506	0.12	31.67	-	31.79	-	56.00	46.00	-24.21	-
4	4.141	0.47	24.55	-	25.02	-	56.00	46.00	-30.98	-
5	10.402	0.57	28.84	-	29.41	-	60.00	50.00	-30.59	-
6	16.012	0.81	29.23	-	30.04	-	60.00	50.00	-29.96	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

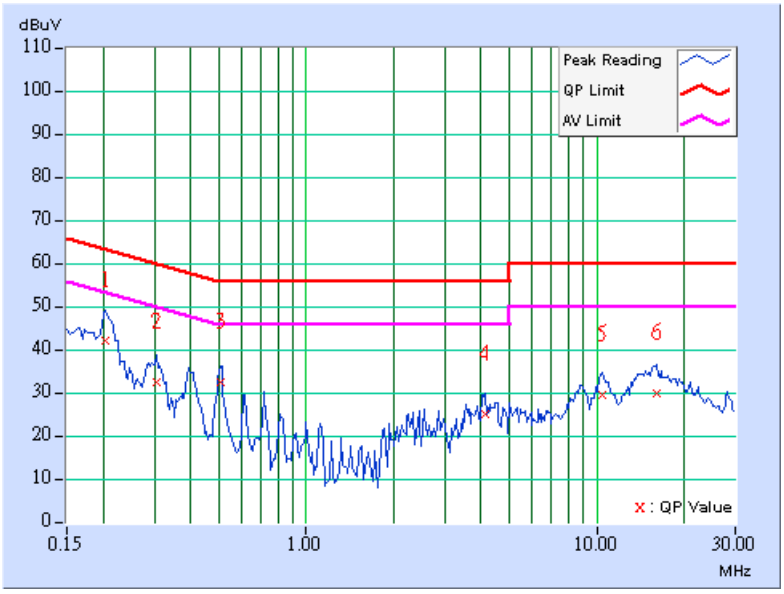

MODULATION TYPE	OFDM	**CHANNEL**	Channel 11
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**6dB BANDWIDTH**	9 kHz
PHASE	Neutral (N)	**TRANSFER RATE**	6Mbps
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 972hPa	**TESTED BY**	Lori Chiu

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	**0.209**	**0.10**	**45.94**	**-**	**46.04**	**-**	**63.26**	**53.26**	**-17.22**	**-**
2	0.306	0.10	33.88	-	33.98	-	60.07	50.07	-26.09	-
3	0.505	0.12	32.48	-	32.60	-	56.00	46.00	-23.40	-
4	5.594	0.47	24.44	-	24.91	-	60.00	50.00	-35.09	-
5	8.785	0.46	28.72	-	29.18	-	60.00	50.00	-30.82	-
6	14.785	0.62	29.34	-	29.96	-	60.00	50.00	-30.04	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

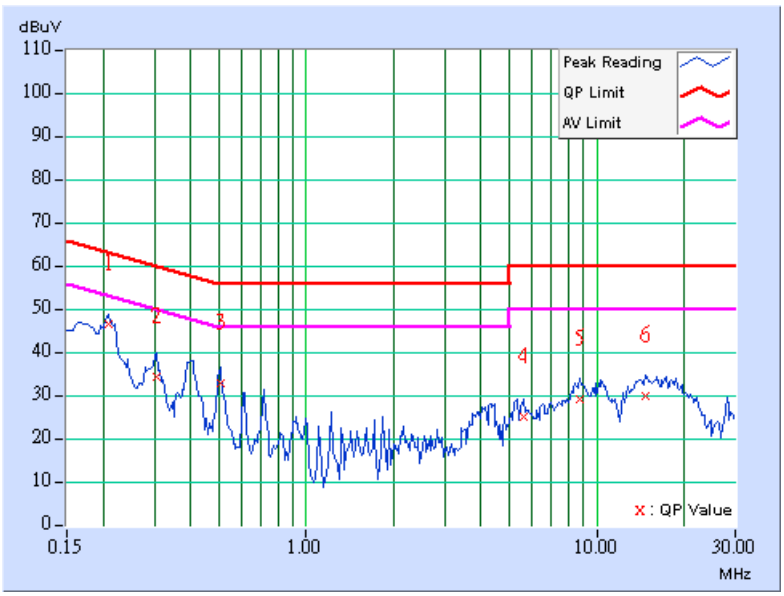

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 03, 2007
HP Pre_Amplifier	8449B	3008A01922	Oct. 02, 2007
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	Sep. 19, 2007
CHASE Broadband Antenna	VULB9168	138	Dec. 11, 2006
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 27, 2006
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 05, 2007
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 08, 2009
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 08, 2009
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek)	SF102	22054-2	Nov. 16, 2006
RF Cable(RICHTEC)	9913-30M N-N Cable	STCCAB-30M-1 GHz	Jul. 15, 2007
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Biconical and Periodic Antenna)and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824A-3.
7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Radiated emissions (30MHz-1GHz)	2.98 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB
Radiated emissions (18GHz ~40GHz)	1.88 dB

4.2.3 TEST PROCEDURES

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

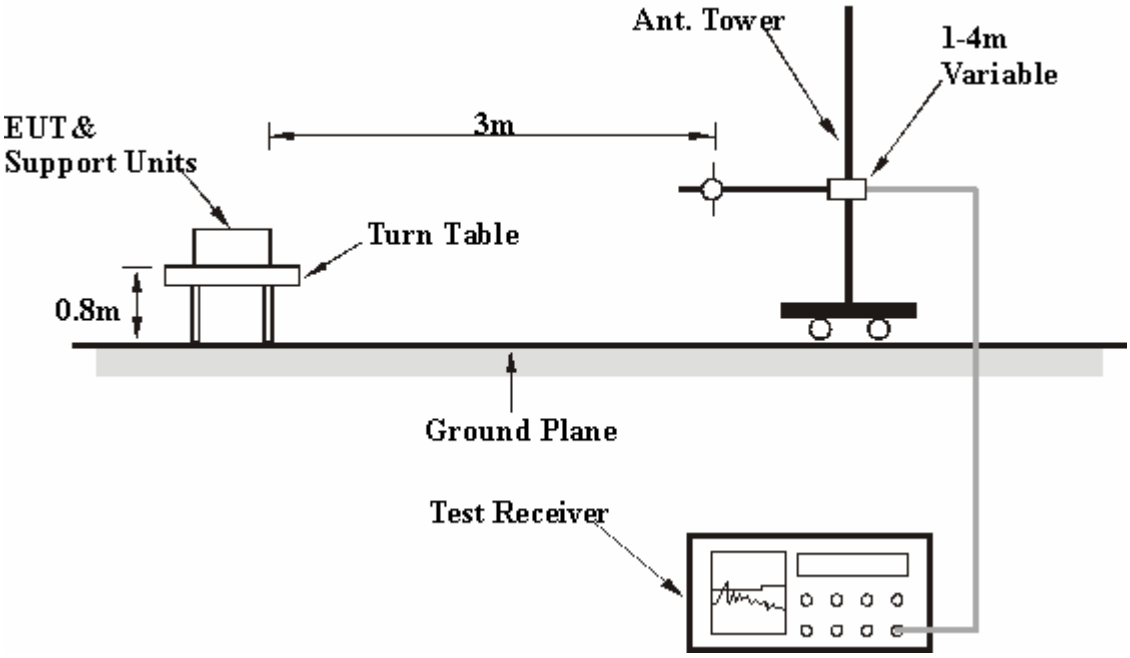

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.6 TEST RESULTS

Below 1GHz Worst-Case Data

MODULATION TYPE	DSSS	**CHANNEL**	Channel 11
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**FREQUENCY RANGE**	30-1000 MHz
ENVIRONMENTAL CONDITIONS	27deg. C, 59%RH, 972hPa	**TRANSFER RATE**	11Mbps
TESTED BY	Tony Chen	**DETECTOR FUNCTION**	Quasi-Peak, 120kHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	239.99	30.60 QP	46.00	-15.40	1.09 H	294	17.30	13.30
2	350.00	30.00 QP	46.00	-16.00	1.14 H	21	12.60	17.40
3	593.99	34.00 QP	46.00	-12.00	1.14 H	54	9.70	24.30
4	671.98	29.70 QP	46.00	-16.30	1.10 H	345	4.40	25.40
5	692.99	33.90 QP	46.00	-12.10	1.26 H	41	8.20	25.70
6	750.00	27.70 QP	46.00	-18.30	1.61 H	49	0.40	27.30
7	791.98	28.50 QP	46.00	-17.50	1.59 H	217	1.00	27.50
8	857.99	30.30 QP	46.00	-15.70	1.58 H	349	1.80	28.50
9	874.96	29.20 QP	46.00	-16.80	1.00 H	28	0.50	28.60
10	899.96	30.20 QP	46.00	-15.80	1.00 H	291	1.30	28.80
11	923.99	32.80 QP	46.00	-13.20	1.00 H	46	3.50	29.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.93	31.20 QP	40.00	-8.80	1.14 V	151	16.70	14.50
2	350.00	31.00 QP	46.00	-15.00	1.02 V	206	13.70	17.40
3	593.99	33.90 QP	46.00	-12.10	1.02 V	34	9.50	24.30
4	671.98	29.50 QP	46.00	-16.50	1.03 V	192	4.20	25.40
5	692.99	34.30 QP	46.00	-11.70	1.00 V	348	8.60	25.70
6	750.00	27.90 QP	46.00	-18.10	1.00 V	95	0.60	27.30
7	791.99	36.30 QP	46.00	-9.70	1.21 V	330	8.80	27.50
8	857.99	35.10 QP	46.00	-10.90	1.15 V	1	6.60	28.50
9	874.96	30.20 QP	46.00	-15.80	1.46 V	170	1.50	28.60
10	899.96	29.40 QP	46.00	-16.60	1.04 V	219	0.60	28.80
11	923.99	33.40 QP	46.00	-12.60	1.06 V	89	4.10	29.30

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2.7 TEST RESULTS - DSSS

802.11b DSSS modulation

MODE	Channel 1	**FREQUENCY RANGE**	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**DETECTOR FUNCTION & BANDWIDTH**	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 65%RH, 972hPa	**TESTED BY**	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.00	54.35 PK	74.00	-19.65	1.13 H	7	23.15	31.20
1	2386.00	46.03 AV	54.00	-7.97	1.13 H	7	14.83	31.20
2	*2412.00	101.13 PK			1.13 H	7	69.82	31.31
2	*2412.00	93.49 AV			1.13 H	7	62.18	31.31
3	3216.00	47.99 PK	74.00	-26.01	1.02 H	303	15.04	32.95
3	3216.00	43.80 AV	54.00	-10.20	1.02 H	303	10.85	32.95
4	4824.00	45.19 PK	74.00	-28.81	1.22 H	248	8.19	37.00
4	4824.00	33.85 AV	54.00	-20.15	1.22 H	248	-3.15	37.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.00	60.59 PK	74.00	-13.41	1.22 V	75	29.39	31.20
1	2386.00	51.63 AV	54.00	-2.37	1.22 V	75	20.43	31.20
2	*2412.00	113.73 PK			1.19 V	134	82.42	31.31
2	*2412.00	105.98 AV			1.19 V	134	74.67	31.31
3	3216.00	47.54 PK	74.00	-26.46	1.28 V	214	14.59	32.95
3	3216.00	43.08 AV	54.00	-10.92	1.28 V	214	10.13	32.95
4	4824.00	46.34 PK	74.00	-27.66	1.03 V	318	9.34	37.00
4	4824.00	36.63 AV	54.00	-17.37	1.03 V	318	-0.37	37.00

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. " * " : Fundamental frequency

MODE	Channel 6	**FREQUENCY RANGE**	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**DETECTOR FUNCTION & BANDWIDTH**	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 65%RH, 972hPa	**TESTED BY**	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	100.82 PK			1.11 H	7	69.42	31.40
1	*2437.00	93.15 AV			1.11 H	7	61.75	31.40
2	3249.00	46.51 PK	74.00	-27.49	1.16 H	232	13.52	32.99
2	3249.00	40.61 AV	54.00	-13.39	1.16 H	232	7.62	32.99
3	4874.00	44.87 PK	74.00	-29.13	1.16 H	360	7.73	37.14
3	4874.00	33.70 AV	54.00	-20.30	1.16 H	360	-3.44	37.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.04 PK			1.17 V	330	81.64	31.40
1	*2437.00	105.12 AV			1.17 V	330	73.72	31.40
2	3249.00	46.44 PK	74.00	-27.56	1.48 V	281	13.45	32.99
2	3249.00	40.71 AV	54.00	-13.29	1.48 V	281	7.72	32.99
3	4874.00	44.98 PK	74.00	-29.02	1.06 V	104	7.84	37.14
3	4874.00	34.64 AV	54.00	-19.36	1.06 V	104	-2.50	37.14

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * “ : Fundamental frequency

MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 65%RH, 972hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.71 PK			1.07 H	360	70.21	31.50
1	*2462.00	94.14 AV			1.07 H	360	62.64	31.50
2	2488.00	53.16 PK	74.00	-20.84	1.07 H	360	21.56	31.60
2	2488.00	45.01 AV	54.00	-8.99	1.07 H	360	13.41	31.60
3	3282.00	46.54 PK	74.00	-27.46	1.18 H	16	13.51	33.03
3	3282.00	39.91 AV	54.00	-14.09	1.18 H	16	6.88	33.03
4	4924.00	46.16 PK	74.00	-27.84	1.11 H	136	8.89	37.27
4	4924.00	33.06 AV	54.00	-20.94	1.11 H	136	-4.21	37.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.10 PK			1.16 V	133	81.60	31.50
1	*2462.00	105.60 AV			1.16 V	133	74.10	31.50
2	2487.00	60.13 PK	74.00	-13.87	1.16 V	132	28.53	31.60
2	2487.00	51.50 AV	54.00	-2.50	1.16 V	132	19.90	31.60
3	3282.00	47.30 PK	74.00	-26.70	1.01 V	277	14.27	33.03
3	3282.00	42.33 AV	54.00	-11.67	1.01 V	277	9.30	33.03
4	4924.00	46.90 PK	74.00	-27.10	1.02 V	10	9.63	37.27
4	4924.00	36.09 AV	54.00	-17.91	1.02 V	10	-1.18	37.27

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. " * " : Fundamental frequency

4.2.8 TEST RESULTS - OFDM

802.11g Normal OFDM modulation

MODE	Channel 1	**FREQUENCY RANGE**	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**DETECTOR FUNCTION & BANDWIDTH**	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 65%RH, 972hPa	**TESTED BY**	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.67 PK	74.00	-14.33	1.42 H	312	28.45	31.22
1	2390.00	46.14 AV	54.00	-7.86	1.42 H	312	14.92	31.22
2	*2412.00	100.09 PK			1.42 H	312	68.78	31.31
2	*2412.00	90.74 AV			1.42 H	312	59.43	31.31
3	3216.00	48.42 PK	74.00	-25.58	1.00 H	304	15.47	32.95
3	3216.00	43.90 AV	54.00	-10.10	1.00 H	304	10.95	32.95
4	4824.00	46.49 PK	74.00	-27.51	1.00 H	0	9.49	37.00
4	4824.00	32.53 AV	54.00	-21.47	1.00 H	0	-4.47	37.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.01 PK	74.00	-4.99	1.14 V	237	37.79	31.22
1	2390.00	52.09 AV	54.00	-1.91	1.14 V	237	20.87	31.22
2	*2412.00	110.04 PK			1.36 V	277	78.73	31.31
2	*2412.00	101.07 AV			1.36 V	277	69.76	31.31
3	3216.00	47.73 PK	74.00	-26.27	1.25 V	208	14.78	32.95
3	3216.00	42.23 AV	54.00	-11.77	1.25 V	208	9.28	32.95
4	4824.00	44.69 PK	74.00	-29.31	1.14 V	0	7.69	37.00
4	4824.00	33.60 AV	54.00	-20.40	1.14 V	0	-3.40	37.00

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. " * " : Fundamental frequency

MODE	Channel 6	**FREQUENCY RANGE**	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**DETECTOR FUNCTION & BANDWIDTH**	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 65%RH, 972hPa	**TESTED BY**	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	100.47 PK			1.10 H	360	69.07	31.40
1	*2437.00	90.74 AV			1.10 H	360	59.34	31.40
2	3249.00	45.75 PK	74.00	-28.25	1.39 H	18	12.76	32.99
2	3249.00	39.97 AV	54.00	-14.03	1.39 H	18	6.98	32.99

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.51 PK			1.17 V	180	79.11	31.40
1	*2437.00	101.35 AV			1.17 V	180	69.95	31.40
2	3249.00	46.02 PK	74.00	-27.98	1.26 V	315	13.03	32.99
2	3249.00	39.90 AV	54.00	-14.10	1.26 V	315	6.91	32.99

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * “ : Fundamental frequency

MODE	Channel 11	**FREQUENCY RANGE**	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**DETECTOR FUNCTION & BANDWIDTH**	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 65%RH, 972hPa	**TESTED BY**	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.07 PK			1.03 H	360	68.57	31.50
1	*2462.00	90.51 AV			1.03 H	360	59.01	31.50
2	2483.50	58.03 PK	74.00	-15.97	1.06 H	360	26.44	31.59
2	2483.50	45.89 AV	54.00	-8.11	1.06 H	360	14.30	31.59
3	3282.00	45.43 PK	74.00	-28.57	1.16 H	17	12.40	33.03
3	3282.00	39.86 AV	54.00	-14.14	1.16 H	17	6.83	33.03

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.03 PK			1.14 V	28	78.53	31.50
1	*2462.00	100.09 AV			1.14 V	28	68.59	31.50
2	2483.50	70.83 PK	74.00	-3.17	1.16 V	30	39.24	31.59
2	**2483.50**	**52.49 AV**	**54.00**	**-1.51**	**1.16 V**	**30**	**20.90**	**31.59**
3	3282.00	46.23 PK	74.00	-27.77	1.06 V	278	13.20	33.03
3	3282.00	41.66 AV	54.00	-12.34	1.06 V	278	8.63	33.03

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. " * " : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.6 TEST RESULTS –DSSS

802.11b DSSS modulation

MODULATION TYPE	CCK	**TRANSFER RATE**	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**ENVIRONMENTAL CONDITIONS**	20deg. C, 60%RH, 972hPa
TESTED BY	Morgan Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.48	0.5	PASS
6	2437	12.12	0.5	PASS
11	2462	12.64	0.5	PASS

CH1

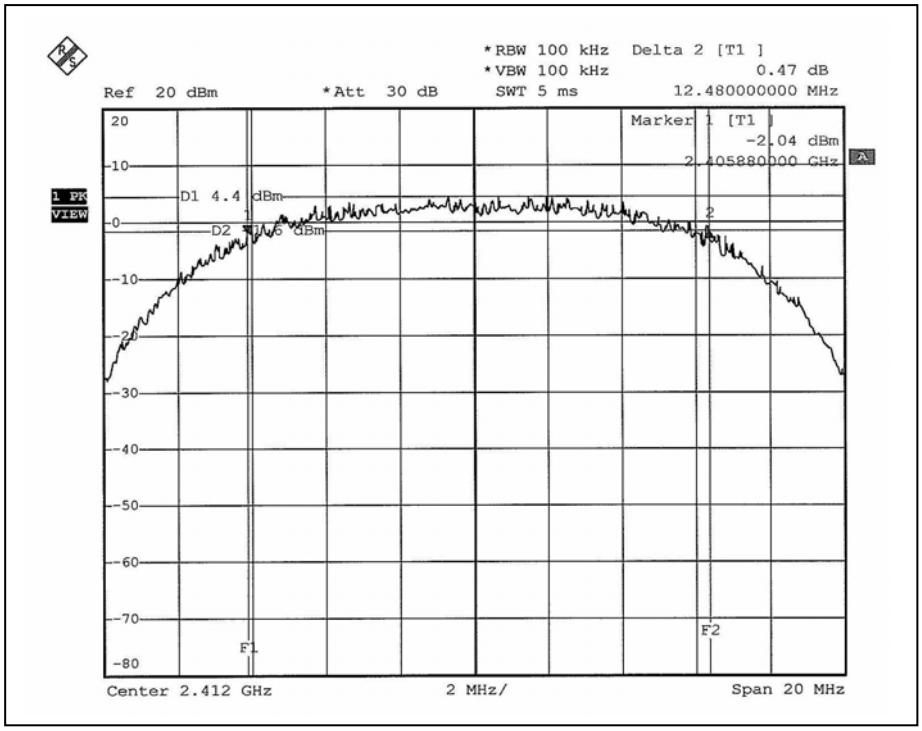
*RBW 100 kHz
*VBW 100 kHz
Delta 2 [T1]
0.47 dB
Ref 20 dBm
*Att 30 dB
SWT 5 ms
12.480000000 MHz
Marker 1 [T1]
-2.04 dBm
2.405880000 GHz
1 PK
VIEW
D1 4.4 dBm
D2 3.96 dBm
F1
F2
Center 2.412 GHz
2 MHz/
Span 20 MHz

CH6

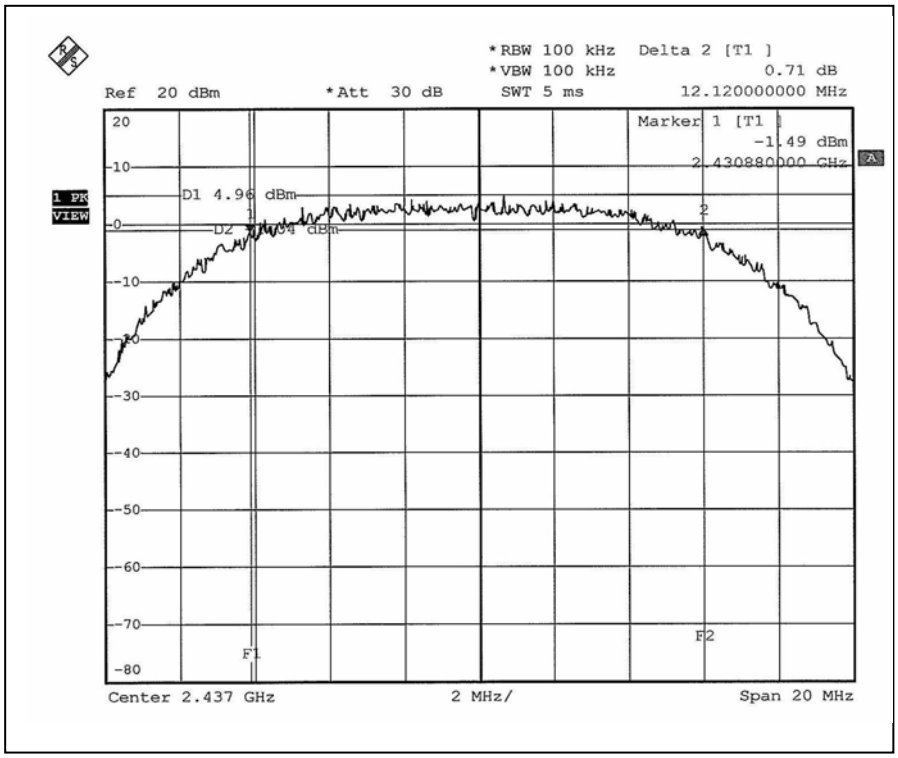
*RBW 100 kHz
*VBW 100 kHz
Delta 2 [T1]
0.71 dB
Ref 20 dBm
*Att 30 dB
SWT 5 ms
12.120000000 MHz
Marker 1 [T1]
-1.49 dBm
2.430880000 GHz
1 PK
VIEW
D1 4.96 dBm
D2 4.24 dBm
F1
F2
Center 2.437 GHz
2 MHz/
Span 20 MHz

CH11

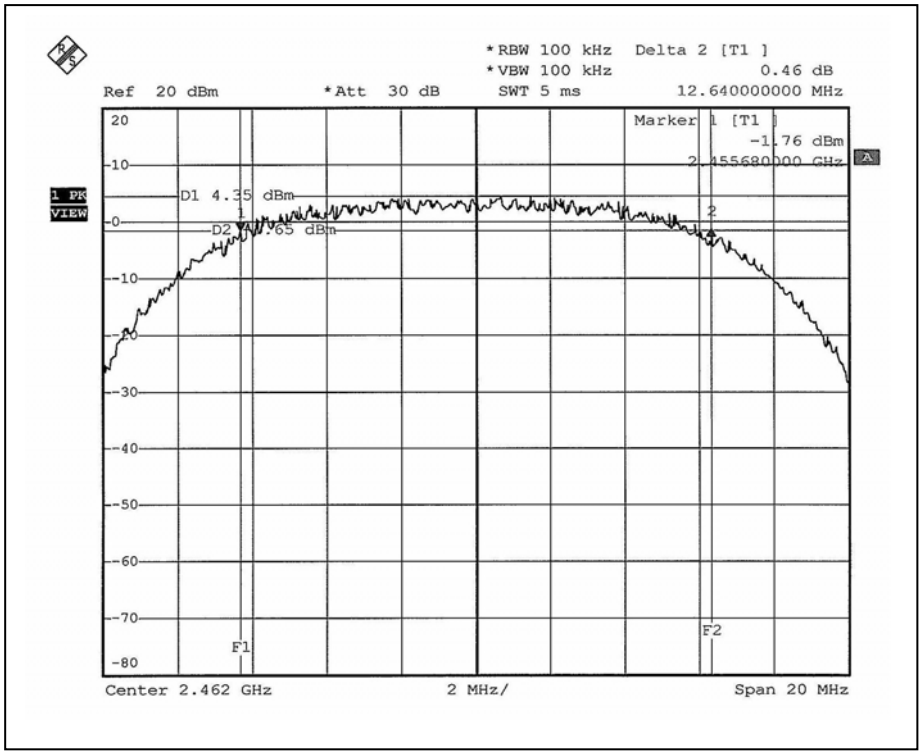
*RBW 100 kHz
*VBW 100 kHz
SWT 5 ms
Delta 2 [T1]
0.46 dB
12.640000000 MHz
Ref 20 dBm
*Att 30 dB
Marker 1 [T1]
-1.76 dBm
2.455680000 GHz
1 PK
VIEW
D1 4.35 dBm
D2 -7.65 dBm
F1
F2
Center 2.462 GHz
2 MHz/
Span 20 MHz

4.3.7 TEST RESULTS-OFDM

802.11g OFDM modulation

MODULATION TYPE	BPSK	**TRANSFER RATE**	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**ENVIRONMENTAL CONDITIONS**	20deg. C, 60%RH, 972hPa
TESTED BY	Morgan Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.40	0.5	PASS
6	2437	16.48	0.5	PASS
11	2462	16.44	0.5	PASS

CH1

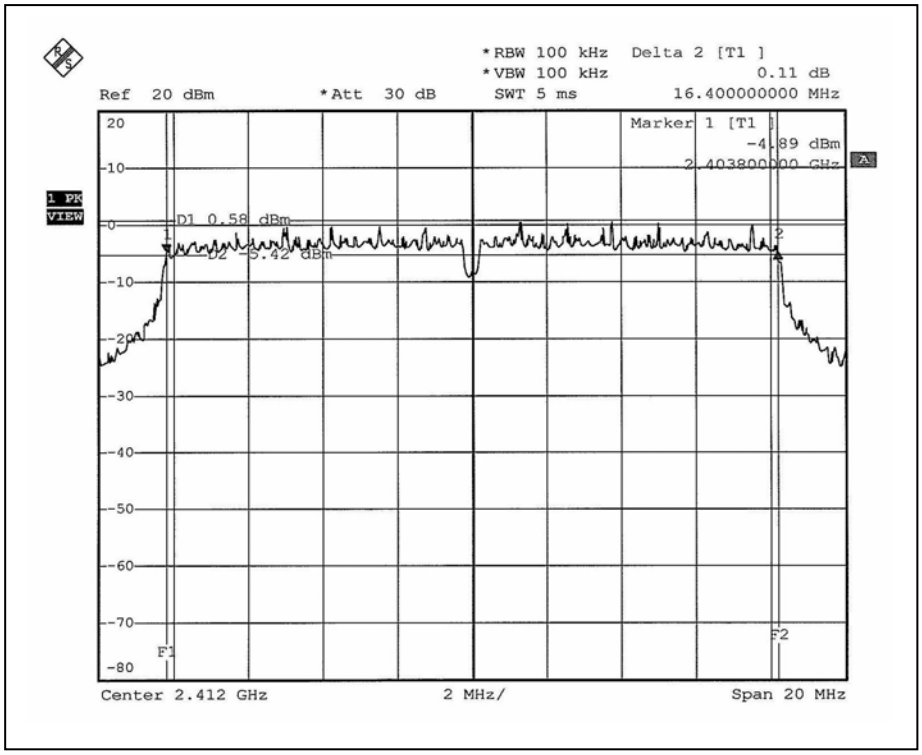
*RBW 100 kHz
*VBW 100 kHz
SWT 5 ms
Delta 2 [T1]
0.11 dB
16.400000000 MHz
Ref 20 dBm
*Att 30 dB
Marker 1 [T1]
-4.89 dBm
2.403800000 GHz
1 PK
VIEW
D1 0.58 dBm
D2 -5.42 dBm
F1
F2
Center 2.412 GHz
2 MHz/
Span 20 MHz

CH6

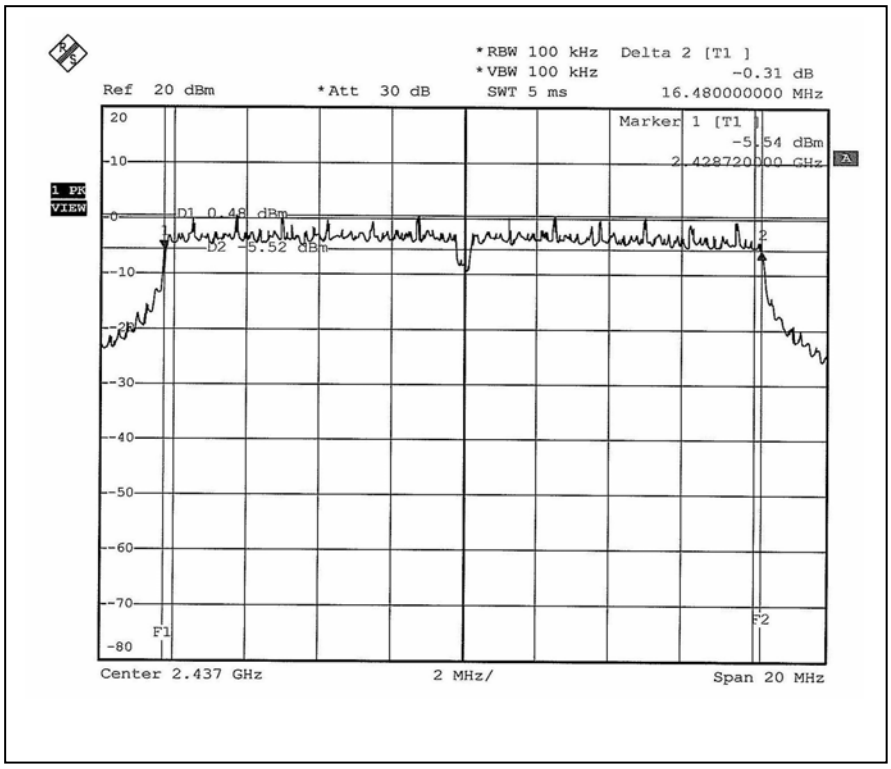
*RBW 100 kHz
*VBW 100 kHz
SWT 5 ms
Delta 2 [T1]
-0.31 dB
16.480000000 MHz
Ref 20 dBm
*Att 30 dB
Marker 1 [T1]
-5.54 dBm
2.428720000 GHz
1 PK
VIEW
D1 0.48 dBm
D2 -5.52 dBm
F1
F2
Center 2.437 GHz
2 MHz/
Span 20 MHz

CH11

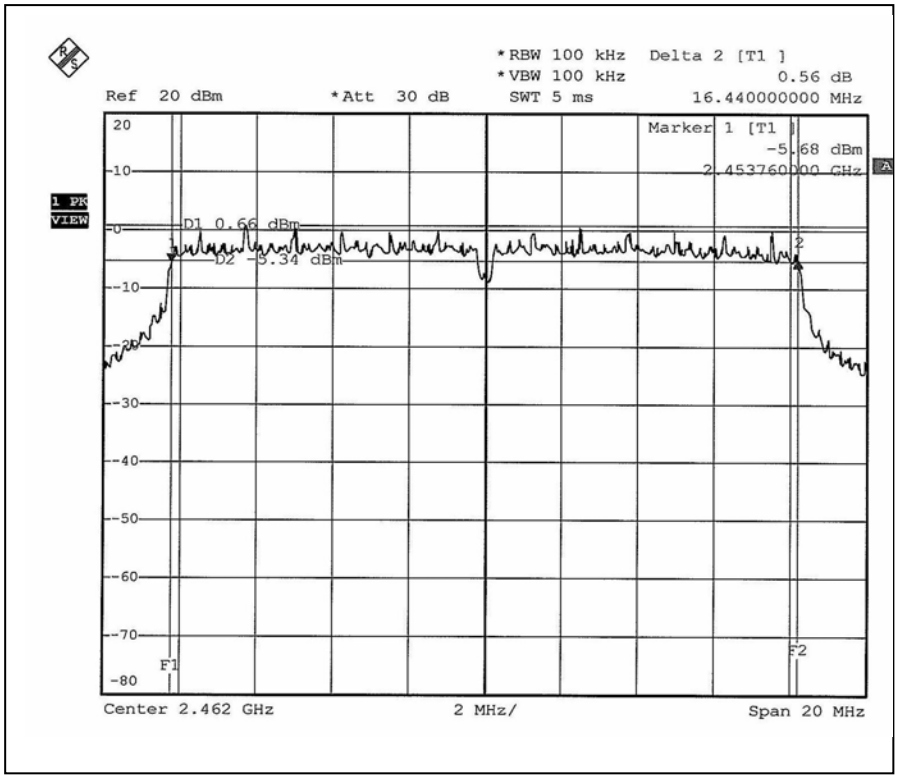
*RBW 100 kHz
*VBW 100 kHz
SWT 5 ms
Delta 2 [T1]
0.56 dB
16.440000000 MHz
Ref 20 dBm
*Att 30 dB
Marker 1 [T1]
-5.68 dBm
2.453760000 GHz
1 PK
VIEW
D1 0.66 dBm
D2 -5.34 dBm
F1
F2
Center 2.462 GHz
2 MHz/
Span 20 MHz

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Dec. 07, 2006
TEKTRONIX OSCILLOSCOPE	TDS380	B016335	Jul. 04, 2007
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:
The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

4.4.6 TEST RESULTS – DSSS

802.11b DSSS modulation

MODULATION TYPE	CCK	**TRANSFER RATE**	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	**ENVIRONMENTAL CONDITIONS**	20deg. C, 60%RH, 972hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	60.117	17.79	30	PASS
6	2437	59.566	17.75	30	PASS
11	2462	59.704	17.76	30	PASS

4.4.7 TEST RESULTS –OFDM

802.11g OFDM modulation

MODULATION TYPE	BPSK	**TRANSFER RATE**	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	**ENVIRONMENTAL CONDITIONS**	20deg. C, 60%RH, 972hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	36.224	15.59	30	PASS
6	2437	35.975	15.56	30	PASS
11	2462	36.141	15.58	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded.
The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS

Same as 4.3.5

4.5.6 TEST RESULTS –DSSS

802.11b DSSS modulation

MODULATION TYPE	CCK	**TRANSFER RATE**	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	**ENVIRONMENTAL CONDITIONS**	26deg. C, 66%RH, 972hPa
TESTED BY	Match Tsui		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-8.52	8	PASS
6	2437	-8.78	8	PASS
11	2462	-8.85	8	PASS

CH1

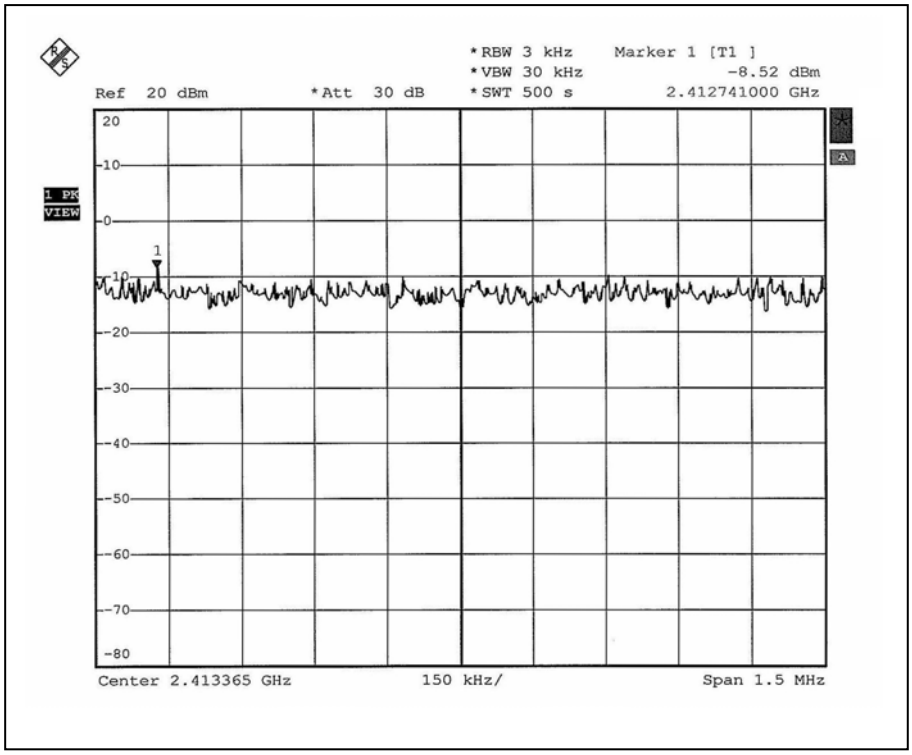
*RBW 3 kHz
*VBW 30 kHz
*SWT 500 s
Marker 1 [T1]
-8.52 dBm
2.412741000 GHz
Ref 20 dBm
*Att 30 dB
1 PK
VIEW
Center 2.413365 GHz
150 kHz/
Span 1.5 MHz

CH6

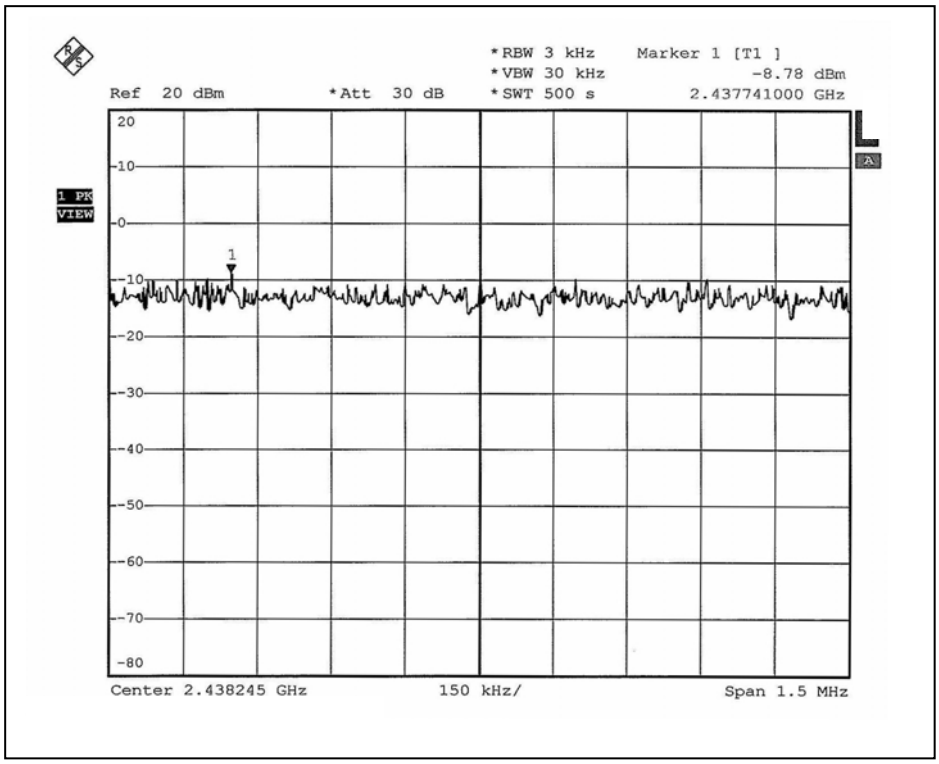
*RBW 3 kHz
*VBW 30 kHz
*SWT 500 s
Marker 1 [T1]
-8.78 dBm
2.437741000 GHz
Ref 20 dBm
*Att 30 dB
1 PK
VIEW
Center 2.438245 GHz
150 kHz/
Span 1.5 MHz

CH11

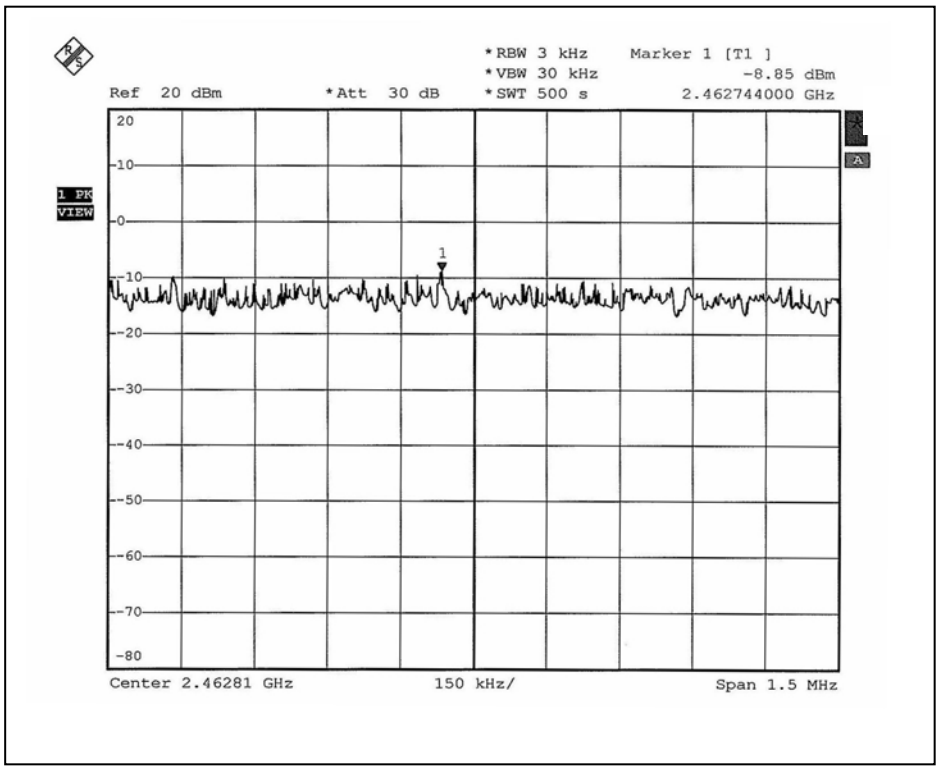
*RBW 3 kHz
*VBW 30 kHz
*SWT 500 s
Marker 1 [T1]
-8.85 dBm
2.462744000 GHz
Ref 20 dBm
*Att 30 dB
1 PK
VIEW
20
10
0
-10
-20
-30
-40
-50
-60
-70
-80
1
Center 2.46281 GHz
150 kHz/
Span 1.5 MHz

4.5.7 TEST RESULTS –OFDM

802.11g OFDM modulation

MODULATION TYPE	BPSK	**TRANSFER RATE**	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	**ENVIRONMENTAL CONDITIONS**	27deg. C, 66%RH, 972hPa
TESTED BY	Match Tsui		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-11.78	8	PASS
6	2437	-11.95	8	PASS
11	2462	-11.62	8	PASS

CH1

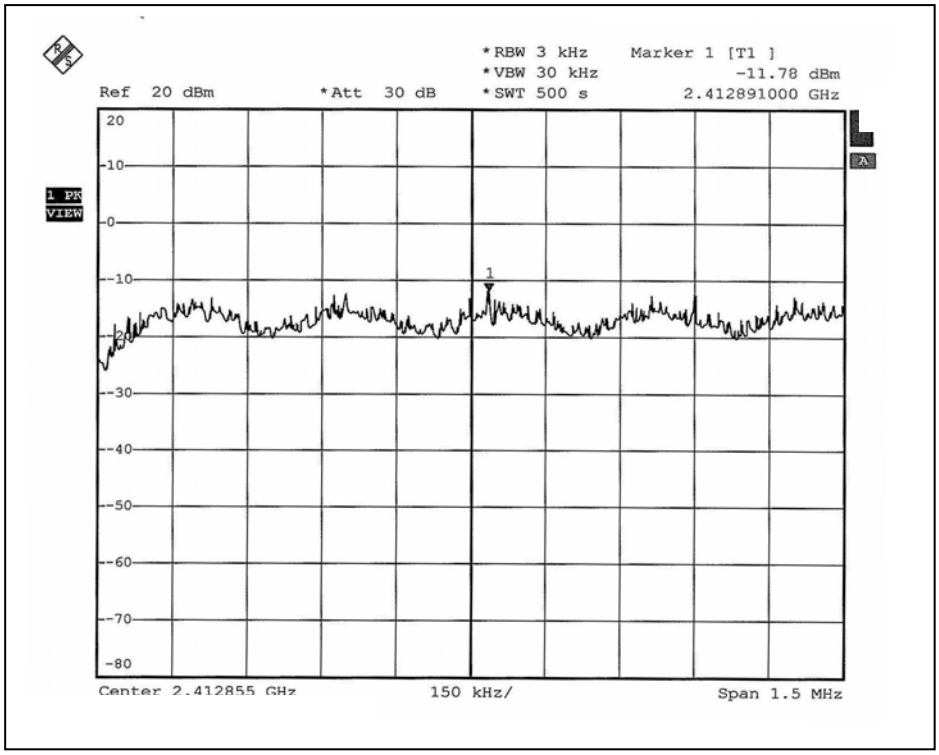
*RBW 3 kHz
*VBW 30 kHz
*SWT 500 s
Marker 1 [T1]
-11.78 dBm
2.412891000 GHz
Ref 20 dBm
*Att 30 dB
1 PK
VIEW
20
-10
-0
--10
--30
--40
--50
--60
--70
-80
Center 2.412855 GHz
150 kHz/
Span 1.5 MHz

CH6

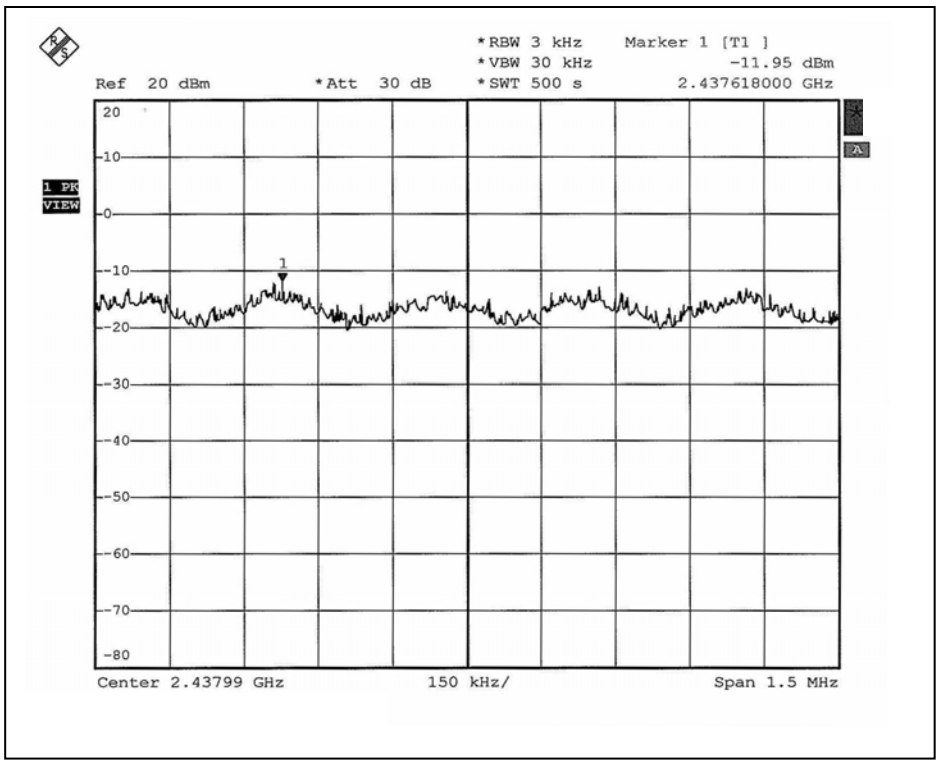
*RBW 3 kHz
*VBW 30 kHz
*SWT 500 s
Marker 1 [T1]
-11.95 dBm
2.437618000 GHz
Ref 20 dBm
*Att 30 dB
1 PK
VIEW
20
-10
-0
--10
--20
--30
--40
--50
--60
--70
-80
Center 2.43799 GHz
150 kHz/
Span 1.5 MHz

CH11

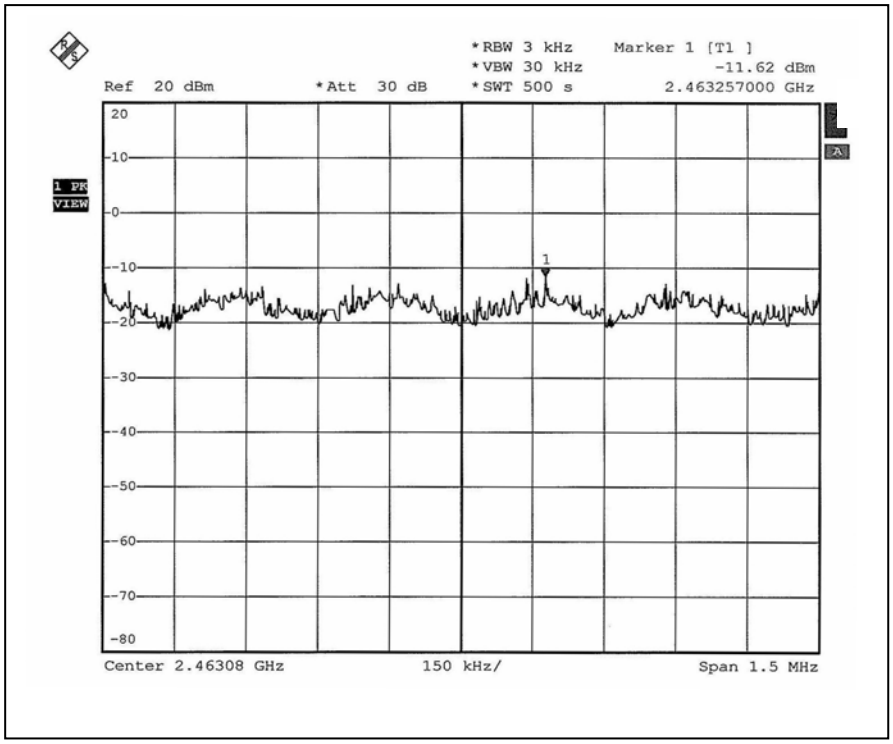
*RBW 3 kHz
*VBW 30 kHz
*SWT 500 s
Marker 1 [T1]
-11.62 dBm
2.463257000 GHz
Ref 20 dBm
*Att 30 dB
1 PK
VIEW
20
10
0
-10
-20
-30
-40
-50
-60
-70
-80
1
Center 2.46308 GHz
150 kHz/
Span 1.5 MHz

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 1MHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW spectrum analyzer to 1 MHz and set VBW spectrum analyzer to 10 Hz with suitable frequency span including 1 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.5

4.6.5 TEST RESULTS – DSSS

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):
The band edge emission plot of DSSS technique on the following first page show 56.7dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 113.73dBuV/m, so the maximum field strength in restrict band is 113.73-56.7=57.03dBuV/m which is under 74 dBuV/m limit.

The band edge emission plot of DSSS technique on the following first page shows 53.91dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 113.1dBuV/m, so the maximum field strength in restrict band is 113.1-53.91=59.19dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):
The band edge emission plot of DSSS technique on the following second page shows 58.11dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 105.98dBuV/m, so the maximum field strength in restrict band is 105.98-58.11=47.87dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of DSSS technique on the following second page shows 58.33dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 105.6dBuV/m, so the maximum field strength in restrict band is 105.6-58.33=47.27dBuV/m which is under 54 dBuV/m limit.

CH1

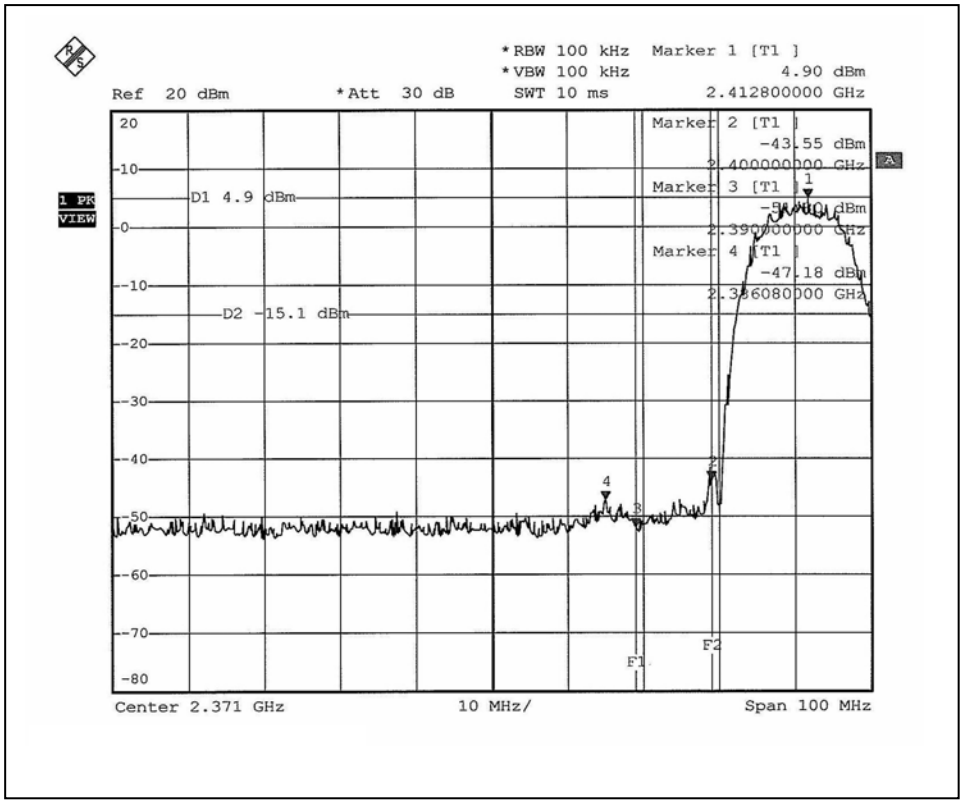
*RBW 100 kHz
*VBW 100 kHz
SWT 10 ms
Marker 1 [T1]
4.90 dBm
2.412800000 GHz
Ref 20 dBm
*Att 30 dB
Marker 2 [T1]
-43.55 dBm
2.400000000 GHz
Marker 3 [T1]
2.390000000 GHz
Marker 4 [T1]
-47.18 dBm
2.386080000 GHz
D1 4.9 dBm
D2 -15.1 dBm
1 PK
VIEW
F1
F2
Center 2.371 GHz
10 MHz/
Span 100 MHz

CH11

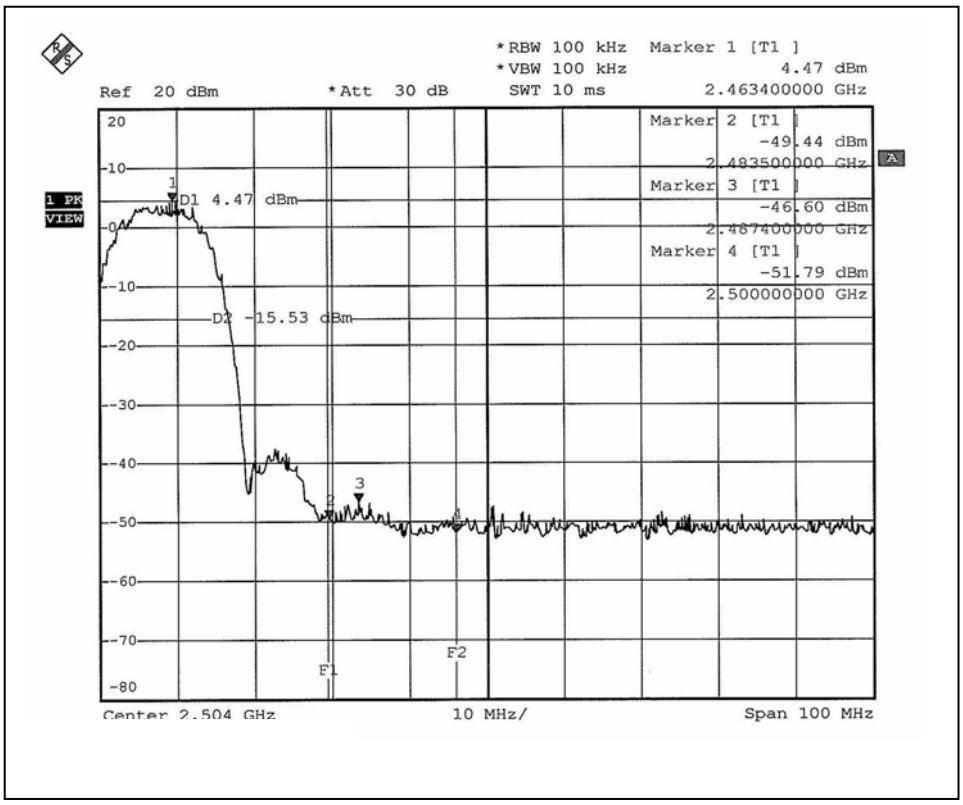
*RBW 100 kHz
*VBW 100 kHz
SWT 10 ms
Marker 1 [T1]
4.47 dBm
2.463400000 GHz
Ref 20 dBm
*Att 30 dB
Marker 2 [T1]
-49.44 dBm
2.483500000 GHz
Marker 3 [T1]
-46.60 dBm
2.487400000 GHz
Marker 4 [T1]
-51.79 dBm
2.500000000 GHz
D1 4.47 dBm
D2 -15.53 dBm
1 PK
VIEW
F1
F2
Center 2.504 GHz
10 MHz/
Span 100 MHz

CH1

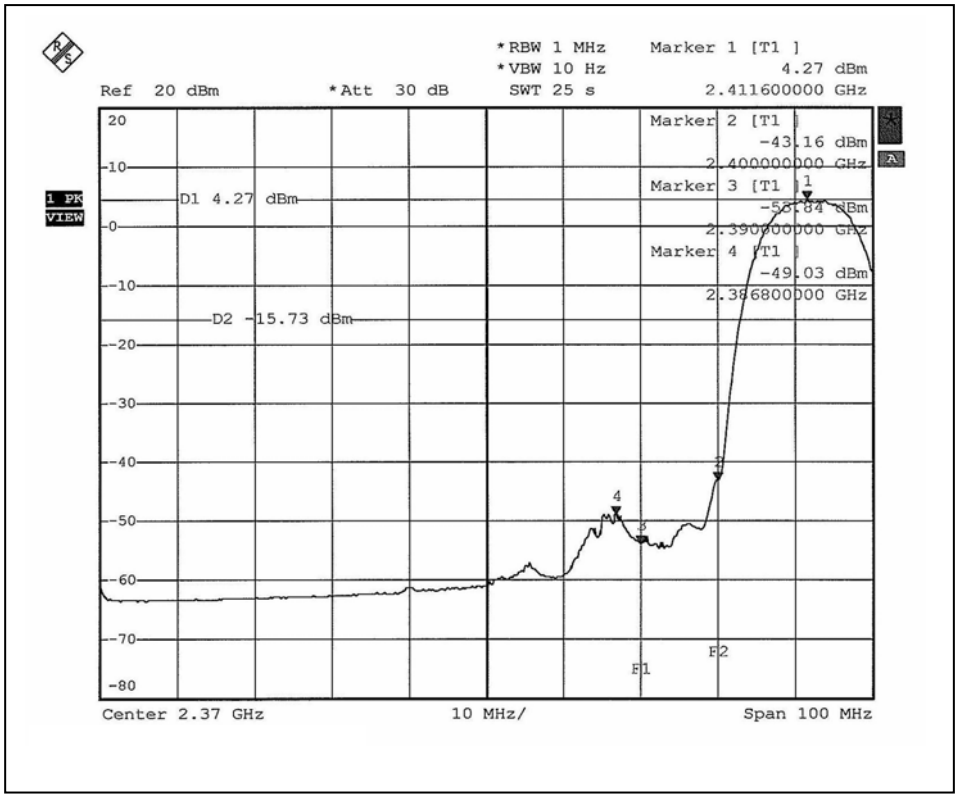
*RBW 1 MHz
*VBW 10 Hz
SWT 25 s
Marker 1 [T1]
4.27 dBm
2.411600000 GHz
Ref 20 dBm
*Att 30 dB
Marker 2 [T1]
-43.16 dBm
2.400000000 GHz
Marker 3 [T1]
-58.84 dBm
2.390000000 GHz
Marker 4 [T1]
-49.03 dBm
2.386800000 GHz
1 PK
VIEW
D1 4.27 dBm
D2 -15.73 dBm
F1
F2
Center 2.37 GHz
10 MHz/
Span 100 MHz

CH11

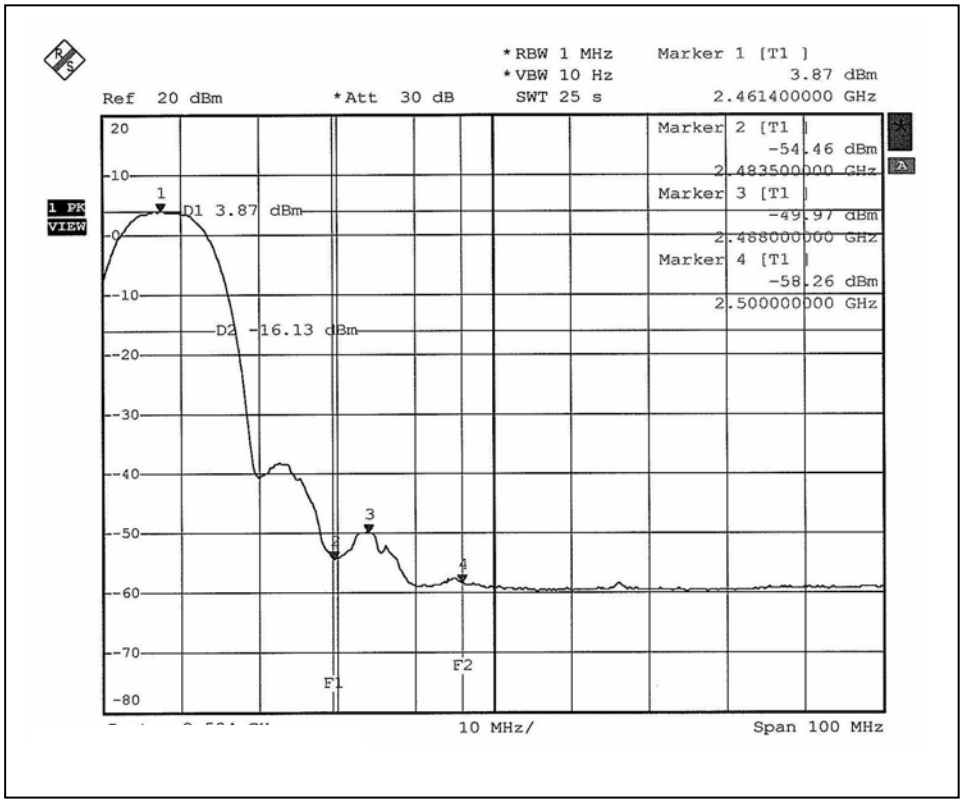
*RBW 1 MHz
*VBW 10 Hz
SWT 25 s
Marker 1 [T1]
3.87 dBm
2.461400000 GHz
Ref 20 dBm
*Att 30 dB
Marker 2 [T1]
-54.46 dBm
2.483500000 GHz
Marker 3 [T1]
-49.97 dBm
2.488000000 GHz
Marker 4 [T1]
-58.26 dBm
2.500000000 GHz
1 PK
VIEW
D1 3.87 dBm
D2 -16.13 dBm
F1
F2
10 MHz/
Span 100 MHz

CH1

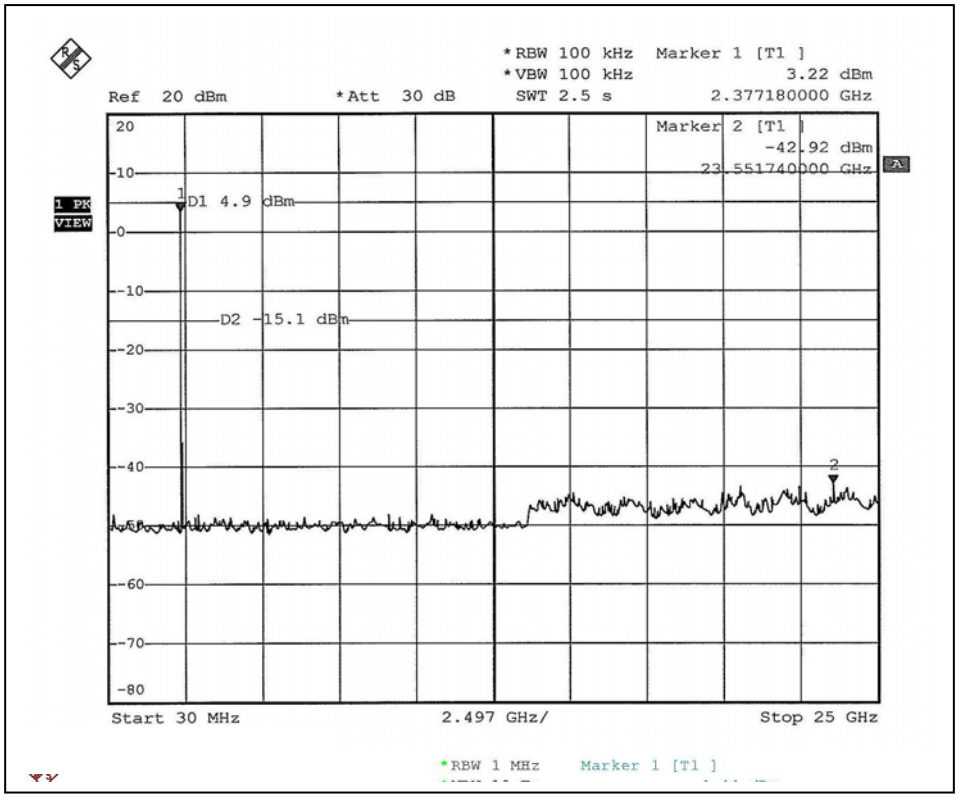
*RBW 100 kHz
*VBW 100 kHz
SWT 2.5 s
Marker 1 [T1]
3.22 dBm
2.377180000 GHz
Ref 20 dBm
*Att 30 dB
Marker 2 [T1]
-42.92 dBm
23.551740000 GHz
1 PK
VIEW
D1 4.9 dBm
D2 -15.1 dBm
Start 30 MHz
2.497 GHz/
Stop 25 GHz
*RBW 1 MHz
Marker 1 [T1]

CH11

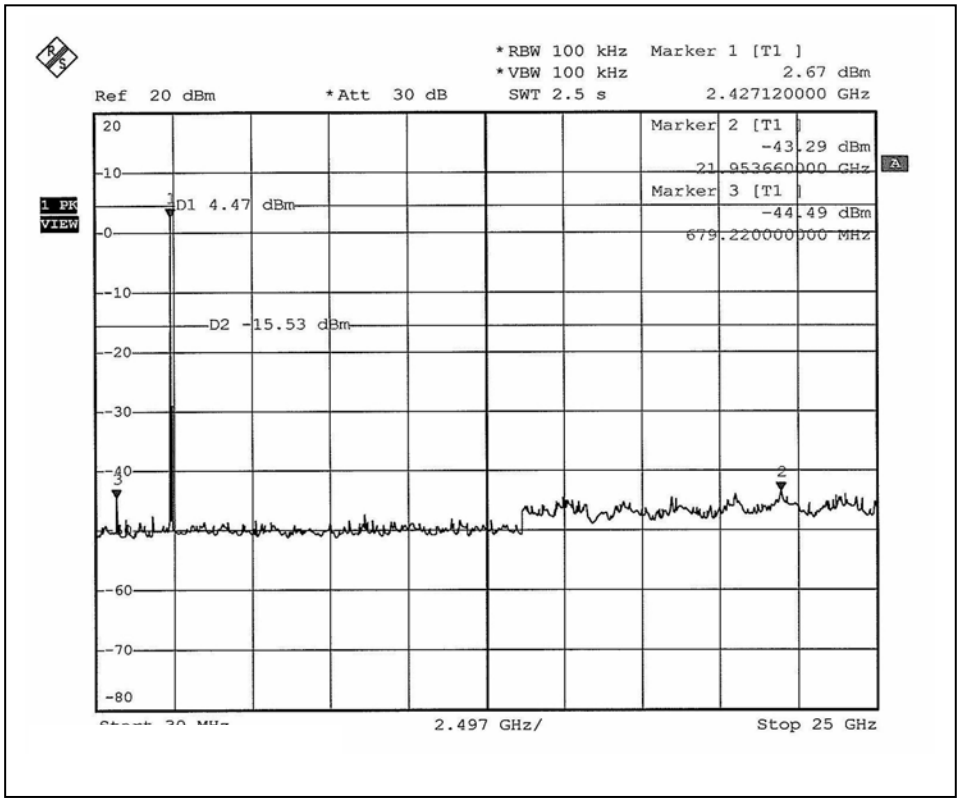
*RBW 100 kHz
*VBW 100 kHz
SWT 2.5 s
Marker 1 [T1]
2.67 dBm
2.427120000 GHz
Ref 20 dBm
*Att 30 dB
Marker 2 [T1]
-43.29 dBm
21.953660000 GHz
Marker 3 [T1]
-44.49 dBm
679.220000000 MHz
1 PK
VIEW
D1 4.47 dBm
D2 -15.53 dBm
2.497 GHz/
Stop 25 GHz

4.6.6 TEST RESULTS – OFDM

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):
The band edge emission plot of OFDM technique on the following first page show 47.57dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 110.04dBuV/m, so the maximum field strength in restrict band is 110.04-47.57=62.47dBuV/m which is under 74 dBuV/m limit.

The band edge emission plot of OFDM technique on the following first page shows 46.45dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 110.03dBuV/m, so the maximum field strength in restrict band is 110.03-46.45=63.85dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):
The band edge emission plot of OFDM technique on the following second page shows 50.33dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 101.7dBuV/m, so the maximum field strength in restrict band is 101.7-50.33=51.37dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of OFDM technique on the following second page shows 48.73dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 100.09dBuV/m, so the maximum field strength in restrict band is 100.09-48.73=51.36dBuV/m which is under 54 dBuV/m limit.

CH1

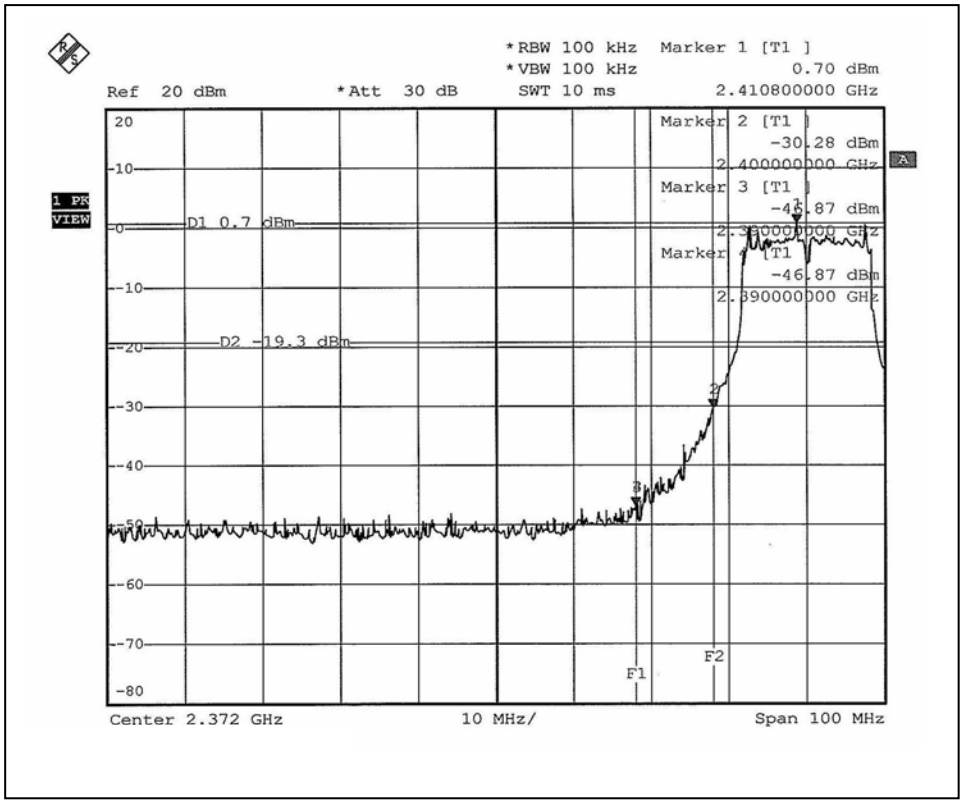
*RBW 100 kHz
*VBW 100 kHz
SWT 10 ms
Marker 1 [T1]
0.70 dBm
2.410800000 GHz
Ref 20 dBm
*Att 30 dB
Marker 2 [T1]
-30.28 dBm
2.400000000 GHz
Marker 3 [T1]
-45.87 dBm
2.380000000 GHz
Marker 4 [T1]
-46.87 dBm
2.390000000 GHz
1 PK
VIEW
D1 0.7 dBm
D2 -19.3 dBm
F1
F2
Center 2.372 GHz
10 MHz/
Span 100 MHz

CH11

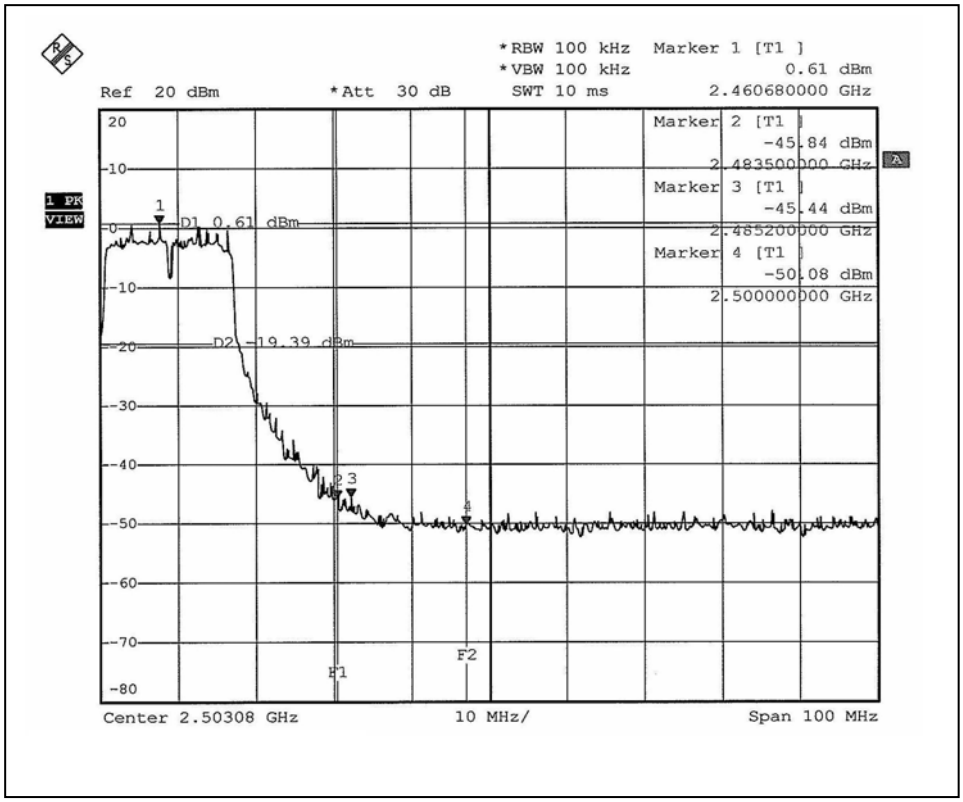
*RBW 100 kHz
*VBW 100 kHz
SWT 10 ms
Marker 1 [T1]
0.61 dBm
2.460680000 GHz
Ref 20 dBm
*Att 30 dB
Marker 2 [T1]
-45.84 dBm
2.483500000 GHz
Marker 3 [T1]
-45.44 dBm
2.485200000 GHz
Marker 4 [T1]
-50.08 dBm
2.500000000 GHz
1 PK
VIEW
D1 0.61 dBm
D2 -19.39 dBm
F1
F2
Center 2.50308 GHz
10 MHz/
Span 100 MHz

CH1

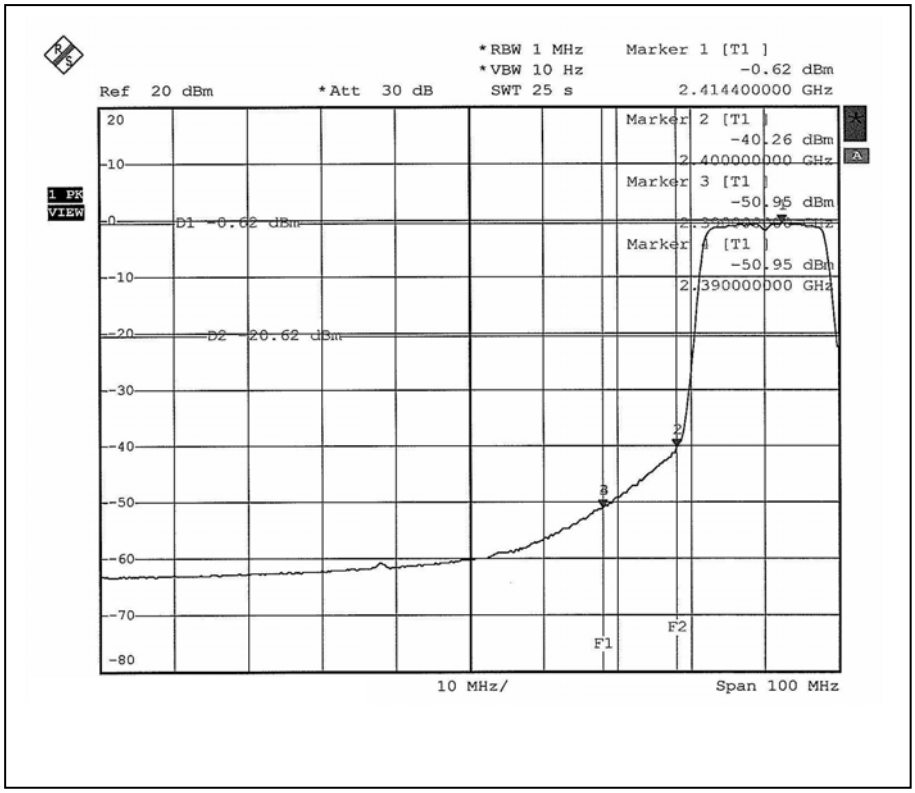
*RBW 1 MHz
*VBW 10 Hz
SWT 25 s
Marker 1 [T1]
-0.62 dBm
2.414400000 GHz
Ref 20 dBm
*Att 30 dB
Marker 2 [T1]
-40.26 dBm
2.400000000 GHz
Marker 3 [T1]
-50.95 dBm
Marker 4 [T1]
-50.95 dBm
2.390000000 GHz
1 PK
VIEW
D1 -0.62 dBm
D2 -20.62 dBm
F1
F2
10 MHz/
Span 100 MHz

CH11

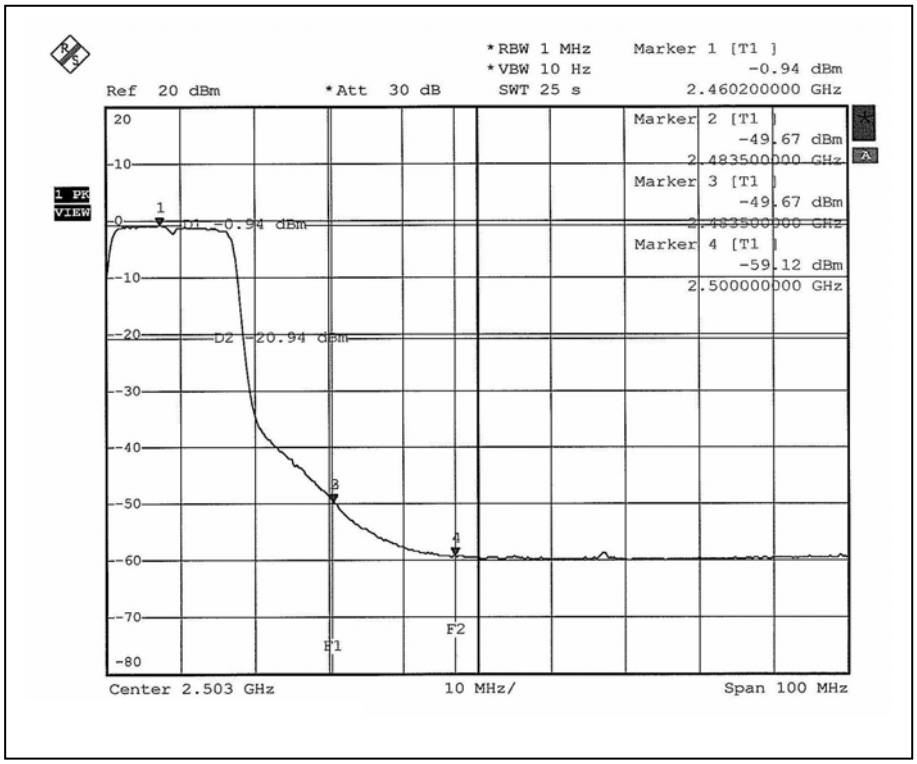
*RBW 1 MHz
*VBW 10 Hz
SWT 25 s
Marker 1 [T1]
-0.94 dBm
2.460200000 GHz
Ref 20 dBm
*Att 30 dB
Marker 2 [T1]
-49.67 dBm
2.483500000 GHz
Marker 3 [T1]
-49.67 dBm
Marker 4 [T1]
-59.12 dBm
2.500000000 GHz
1 PK
VIEW
D1 -0.94 dBm
D2 -20.94 dBm
F1
F2
Center 2.503 GHz
10 MHz/
Span 100 MHz

CH1

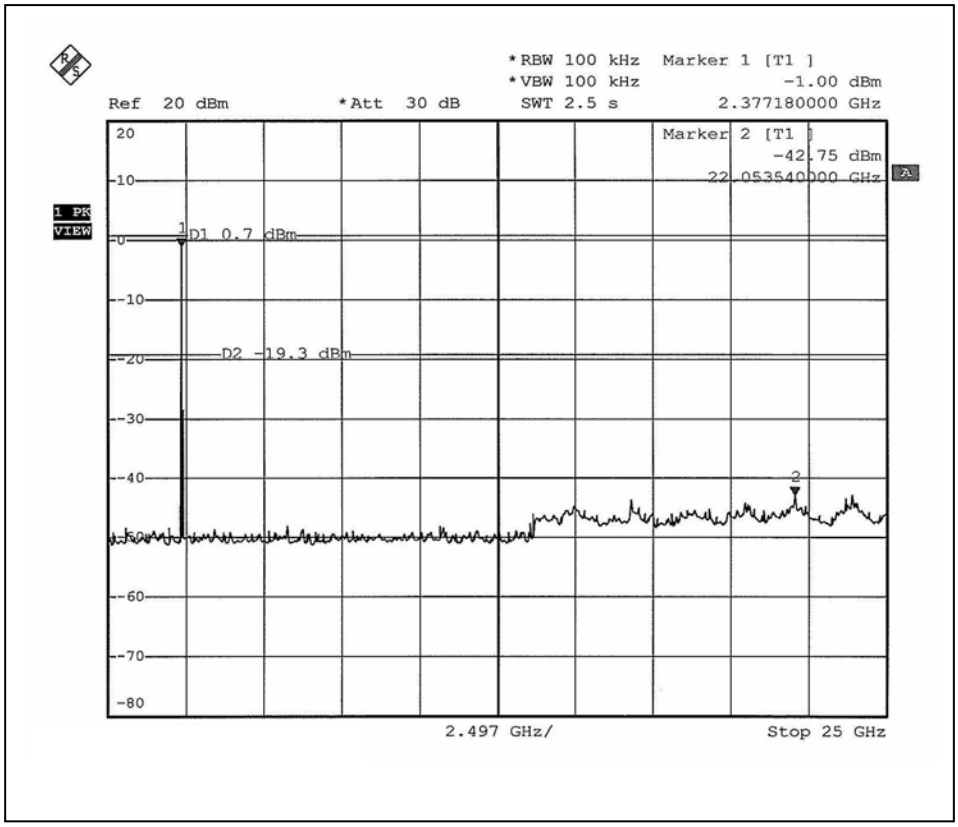
*RBW 100 kHz
*VBW 100 kHz
Marker 1 [T1]
-1.00 dBm
Ref 20 dBm
*Att 30 dB
SWT 2.5 s
2.377180000 GHz
Marker 2 [T1]
-42.75 dBm
22.053540000 GHz
1 PK
VIEW
D1 0.7 dBm
D2 -19.3 dBm
2.497 GHz/
Stop 25 GHz

CH11

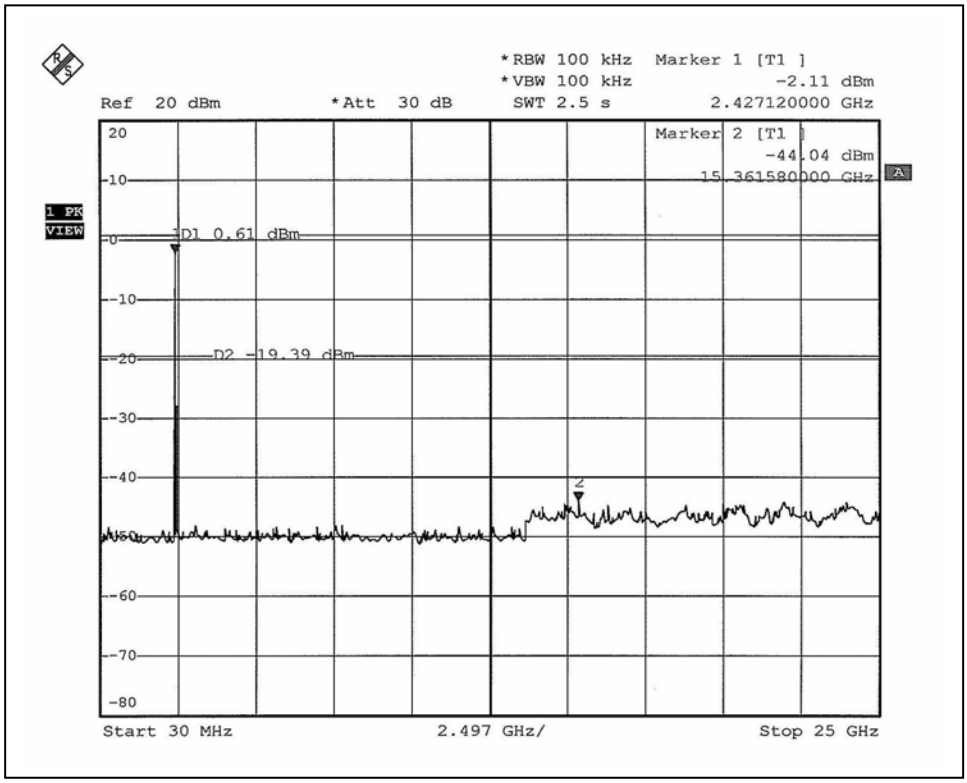
*RBW 100 kHz
*VBW 100 kHz
Marker 1 [T1]
-2.11 dBm
Ref 20 dBm
*Att 30 dB
SWT 2.5 s
2.427120000 GHz
Marker 2 [T1]
-44.04 dBm
15.361580000 GHz
1 PK
VIEW
D1 0.61 dBm
D2 -19.39 dBm
Start 30 MHz
2.497 GHz/
Stop 25 GHz

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with I-PEX connector. The maximum Gain of the antenna is 2dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST

RADIATED EMISSION TEST

6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	CNLA, BSMI, NCC
Netherlands	Telefication
Singapore	PSB, GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Email: service@adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.