

Qwizdom Inc.

Q5 RF

January 25, 2005

Report No. PROU0011

Report Prepared By



www.nwemc.com

1-888-EMI-CERT

© 2005 Northwest EMC, Inc

EMC Test Report

Certificate of Test
Issue Date: January 25, 2005
Qwizdom Inc
Q5 RF

Specification	Emissions		
	Test Method	Pass	Fail
FCC 15.247(a)(2) Occupied Bandwidth:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(b)(3) Output Power:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(d) Band Edge Compliance:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(d) Out of Band Emissions:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(d) Spurious Radiated Emissions:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(e) Power Spectral Density:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.207 AC Power Line Conducted Emissions:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Modifications made to the product

See the Modifications section of this report

Test Facility

The measurement facilities used to collect the data is located at:

Northwest EMC, Inc.
22975 NW Evergreen Parkway, Suite 400; Hillsboro, OR 97124
Phone: (503) 844-4066
Fax: 844-3826

The sites have been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

Approved By:



Don Facteau, IS Manager

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.

Revision Number	Description	Date	Page Number
00	None		

FCC: Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities, have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



NVLAP: Northwest EMC, Inc. is recognized under the United States Department of Commerce, National Institute of Standards and Technology, National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada.



Industry Canada: Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



CAB: Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement



TÜV Product Service: Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0401C



TÜV Rheinland: Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



NEMKO: Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



Technology International: Assessed in accordance with ISO Guide 25 defining the general international requirements for the competence of calibration and testing laboratories and with ITI assessment criteria LACO196. Based upon that assessment Interference Technology International, Ltd., has granted approval for specifications implementing the EU Directive on EMC (89/336/EEC and amendments). The scope of the approval was provided on a Schedule of Assessment supplied with the certificate and is available upon request.



Australia/New Zealand: The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body. (NVLAP)



VCCI: Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Nos. - Hillsboro: C-1071 and R-1025, Irvine: C-2094 and R-1943, Newberg: C-1877 and R-1760, Sultan: R-871, C-1784 and R-1761*)



BSMI: Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.



GOST: Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

How important is it to understand performance criteria?

It is the responsibility of the test laboratory to observe the results of the tests that are performed and to accurately report those results. As the responsible party (manufacturer, importer, etc) it is your responsibility to take those results, compare them against the specifications and standards, then, if appropriate make a declaration of conformity. As the responsible party it makes sense that you are fully aware of the requirements, how your device performs when tested to those requirements, and what information is being used to declare conformity.

To better assist you in making those conformity decisions, Northwest EMC has adopted a very simple, yet very clear performance assessment procedure. The following criteria is used when performing immunity or susceptibility tests:

Performance Criteria 1:

- ❑ The EUT exhibited no change in performance when operating as specified by the manufacturer. In this case no changes were observed during the test.
- ❑ In most cases this would be equivalent to Performance Criteria A. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, no changes were observed. Basically nothing happened.

Performance Criteria 2:

- ❑ The EUT exhibited a change in performance when operating as specified by the manufacturer. In this case the equipment recovered without any operator intervention, once the test signal was removed. The data sheets will detail the exact phenomena observed.
- ❑ In most cases this would be equivalent to Performance Criteria B. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, changes were observed. The EUT was able to recover from those changes without any operator intervention, once the test signal was removed.

Performance Criteria 3:

- ❑ The EUT exhibited a change in performance when operating as specified by the manufacturer. In this case the equipment required some operator intervention in order to recover. This intervention may be in the form of changing EUT settings, or even resetting the system. The data sheets will detail the exact phenomena observed.
- ❑ In most cases this would be equivalent to Performance Criteria C. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, changes were observed. The EUT required some sort of operator intervention to recover. There was no permanent damage and the EUT appeared to function normally after completion test.

Performance Criteria 4:

- ❑ The EUT exhibited a change in performance when operating as specified by the manufacturer. In this case the equipment was damaged and would not recover. The data sheets will detail the exact phenomena observed.
- ❑ In most cases there is no specific criterion to compare this to, it typically ends the test. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, changes were observed. There was no recovery; the equipment would no longer function as intended.

Each of the standards and specifications has unique performance criteria. In order to make an accurate assessment, one must compare the test results provided with the specific performance criteria. **To ensure that a responsible party is compliant with the specifications, one must read and understand those specifications. Provided below is a sample performance criteria, taken from EN 61000-6-1.**

EN 61000-6-1 Performance Criteria

Performance Criteria A: *The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.*

Performance Criteria B: *The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.*

Performance Criteria C: *Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of controls.*

How should a device perform in order for a declaration of conformity to be made?

As already stated, it is the responsible party that must interpret and understand the results in such a way that a declaration of conformity is made. Having said that, we are often asked to render our opinion as to how a device should perform. Our recommendation simply follows the standards, as can be referenced below. Most of the standards and specifications offer the same performance criterion shown below as their requirements.

Test	Performance Criteria typically specified by the Standard	Equivalent Northwest EMC Performance Criteria
ESD	Performance Criteria B	Performance Criteria 1 or 2
Radiated RF	Performance Criteria A	Performance Criteria 1
EFT/Burst	Performance Criteria B	Performance Criteria 1 or 2
Surge	Performance Criteria B	Performance Criteria 1 or 2
Conducted RF	Performance Criteria A	Performance Criteria 1
Magnetic Field	Performance Criteria A	Performance Criteria 1
Voltage Dips and Variations	Performance Criteria B & C	Performance Criteria 1, 2, or 3

What is measurement uncertainty?


When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. The following statement of measurement uncertainty is used to reflect the accuracy of the measured result as compared with its “true” value. In the case of transient tests (ESD, EFT, Surge, Voltage Dips and Interruptions), the test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements.

The following documents were the basis for determining the uncertainty levels of our measurements:

- “ISO Guide to the Expression of Uncertainty in Measurements”, October 1993
- “NIS81: The Treatment of Uncertainty in EMC Measurements”, May 1994
- “IEC CISPR 16-3 A1 f1 Ed.1: Radio-interference measurements and statistical techniques”, December 2000

How might measurement uncertainty be applied to test results?

If the diamond marks the measured value for the test and the vertical bars bracket the range of + and – measurement uncertainty, then test results can be interpreted from the diagram below.

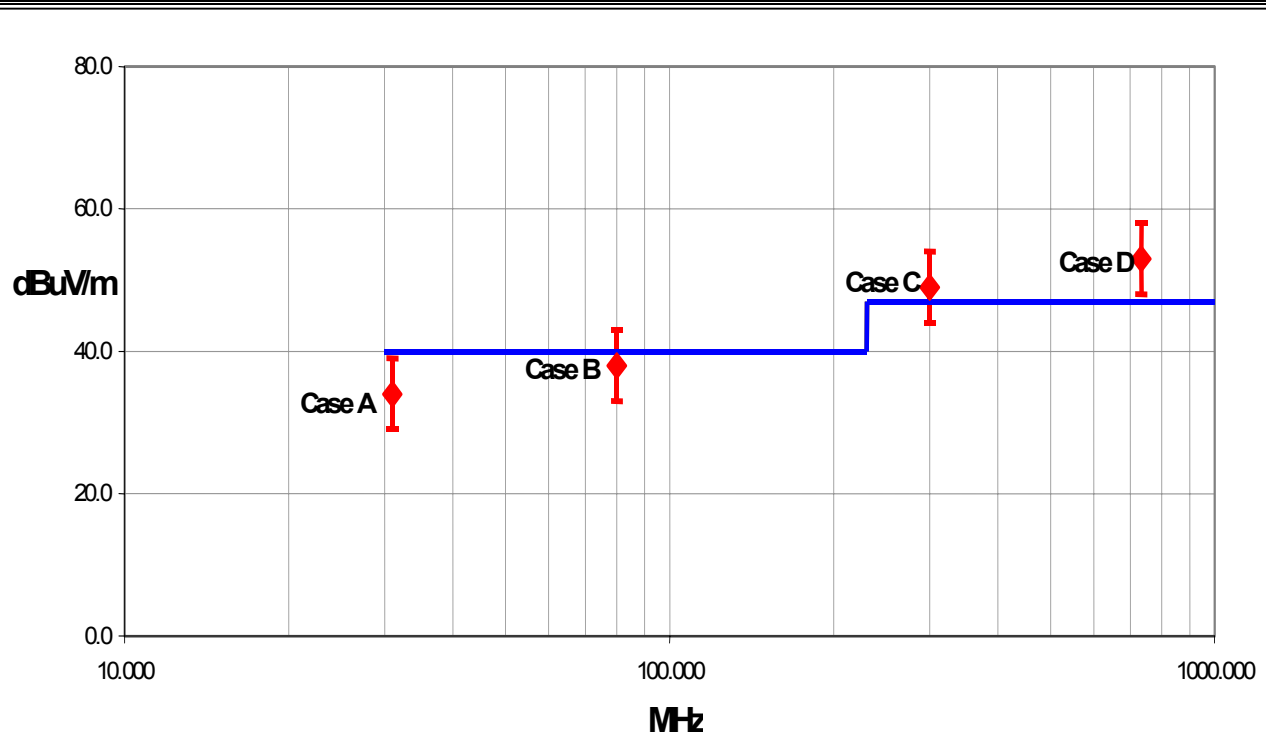

Test Result Scenarios:

Case A: Product complies.

Case B: Product conditionally complies. It is not possible to say with 95% confidence that the product complies.

Case C: Product conditionally does not comply. It is not possible to say with 95% confidence that the product does not comply.

Case D: Product does not comply.

Radiated Emissions ≤ 1 GHz		Value (dB)					
Test Distance	Probability Distribution	Biconical Antenna		Log Periodic Antenna		Dipole Antenna	
		3m	10m	3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.86 - 1.88	+ 1.82 - 1.87	+ 2.23 - 1.41	+ 1.29 - 1.26	+ 1.31 - 1.27	+ 1.25 - 1.25
Expanded uncertainty U (level of confidence ≈ 95%)	normal (k=2)	+ 3.72 - 3.77	+ 3.64 - 3.73	+ 4.46 - 2.81	+ 2.59 - 2.52	+ 2.61 - 2.55	+ 2.49 - 2.49

Radiated Emissions > 1 GHz		Value (dB)			
Test Distance	Probability Distribution	Without High Pass Filter		With High Pass Filter	
		3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.29 - 1.25		+ 1.38 - 1.35	
Expanded uncertainty U (level of confidence ≈ 95%)	normal (k=2)	+ 2.57 - 2.51		+ 2.76 - 2.70	

Conducted Emissions		
	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.48
Expanded uncertainty U (level of confidence ≈ 95 %)	normal (k = 2)	2.97

Radiated Immunity		
	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.05
Expanded uncertainty U (level of confidence ≈ 95 %)	normal (k = 2)	2.11

Conducted Immunity		
	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.05
Expanded uncertainty U (level of confidence ≈ 95 %)	normal (k = 2)	2.10

Legend

$u_c(y)$ = square root of the sum of squares of the individual standard uncertainties

U = combined standard uncertainty multiplied by the coverage factor: k . This defines an interval about the measured result that will encompass the true value with a confidence level of approximately 95%. If a higher level of confidence is required, then $k=3$ (CL of 99.7%) can be used. Please note that with a coverage factor of one, $u_c(y)$ yields a confidence level of only 68%.



California
Orange County Facility
Labs OC01 – OC13

41 Tesla Ave.
Irvine, CA 92618
(888) 364-2378
FAX (503) 844-3826



Oregon
Evergreen Facility
Labs EV01 – EV10

22975 NW Evergreen Pkwy.,
Suite 400
Hillsboro, OR 97124
(503) 844-4066
FAX (503) 844-3826



Oregon
Trails End Facility
Labs TE01 – TE03

30475 NE Trails End Lane
Newberg, OR 97132
(503) 844-4066
FAX (503) 537-0735



Washington
Sultan Facility
Labs SU01 – SU07

14128 339th Ave. SE
Sultan, WA 98294
(888) 364-2378
FAX (360) 793-2536

Party Requesting the Test

Company Name:	Product Creation Studio
Address:	5425 Ballard Ave NW
City, State, Zip:	Seattle, WA 98107
Test Requested By:	Scott Thielman
Model:	Q5 RF
First Date of Test:	December 22, 2004
Last Date of Test:	January 9, 2005
Receipt Date of Samples:	December 21, 2004
Equipment Design Stage:	Pre-Production
Equipment Condition:	No visual damage.

Information Provided by the Party Requesting the Test

Clocks/Oscillators:	1 MHz, 6 MHz, 16 MHz, 48 MHz, 65 MHz, 256 MHz, 2.45 GHz
I/O Ports:	none

Functional Description of the EUT (Equipment Under Test):

EUT is a 19 button with shuttle remote for an Audience Response System (ARS).

Client Justification for EUT Selection:

The product is an engineering sample, representative of the final product.


Client Justification for Test Selection:

These test satisfy the requirements for FCC 15.247 Certification.

EUT Information

The Audience Response System (ARS) consists of the elements shown in Figure 1. A computer (laptop or desktop) connects to the network host via a USB connection. The host obtains its power from the USB connection and alternately from a regulated 9VDC wall transformer. The network host communicates to multiple audience remotes via an IEEE 802.15.4 compliant RF link. The teacher remote, Q5 RF, has more buttons and a larger graphical display, while the student remote, Q4 RF, has fewer buttons and smaller LCD. The remotes accept user feedback via the keypad and displays information on an LCD. The Q5 remotes are powered by rechargeable batteries and can be powered and recharged via a 9VDC regulated wall transformer. Two AA alkaline batteries power the Q4 remotes.

Figure 1 – RF Network System Overview

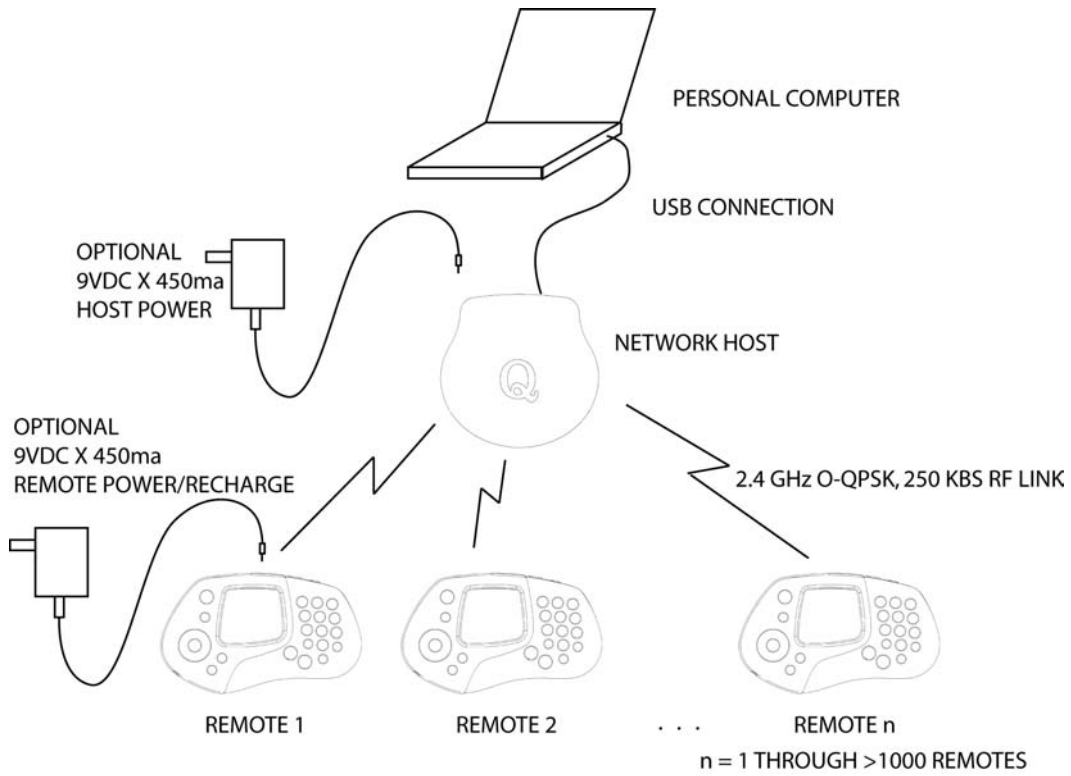

Equipment modifications

Item	Test	Date	Modification	Note	Disposition of EUT
1	Spurious Radiated Emissions	12/22/2004	No EMI suppression devices were added or modified during this test.	Same configuration as delivered.	EUT remained at Northwest EMC.
2	Out of Band Emissions	12/22/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
3	AC Powerline Conducted Emissions	01/04/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
4	Band Edge Compliance	01/08/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
5	Output Power	01/08/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
6	Occupied Bandwidth	01/08/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
7	Power Spectral Density	01/09/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

Channels in Specified Band Investigated:

Low
Mid
High

Operating Modes Investigated:

Typical

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

120 VAC, 60 Hz

Frequency Range Investigated

Start Frequency	30 MHz	Stop Frequency	26 GHz
------------------------	--------	-----------------------	--------

Software\Firmware Applied During Test

Exercise software	Standard Production Software	Version	Unknown
Description			
The system was tested using standard operating production software to exercise the functions of the device during the testing including channel, mode, and power.			

EUT and Peripherals in Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
EUT- Q5 RF	Quizdom, Inc.	Q5 RF	EMC 0x44040F
AC Power Adapter - 120V	CUI, Inc.	41-9-500R	N/A

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads (120V Adapter)	No	1.8	PA	AC Power Adapter - 120V	EUT- Q5 RF
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	15 mo
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	15 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
Pre-Amplifier	AR	LN1000A	APS	02/05/2004	13 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/02/2004	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/02/2004	13 mo

Test Description

Requirement: Per 47 CFR 15.247(d), in any 100kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

Configuration: The EUT was configured for low, mid, and high transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.4:2003). A preamp and suitable attenuation were used for this test in order to provide sufficient measurement sensitivity.

Completed by:



EUT:	Q5 RF	Work Order:	PROU0011
Serial Number:	EMC 0x44040F	Date:	12/22/04
Customer:	Product Creation Studio	Temperature:	23
Attendees:	Scott Thielman	Humidity:	23%
Cust. Ref. No.:		Barometric Pressure:	30.26
Tested by:	Dan Haas	Power:	120VAC/60Hz
		Job Site:	EV01

Specification:	FCC 15.247(d) Spurious Radiated Emissions:2004	Method:	ANSI C63.4:2003
----------------	--	---------	-----------------

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS
 In any 100kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band.


EUT OPERATING MODES
 Low channel

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	5

Other

Tested By: 

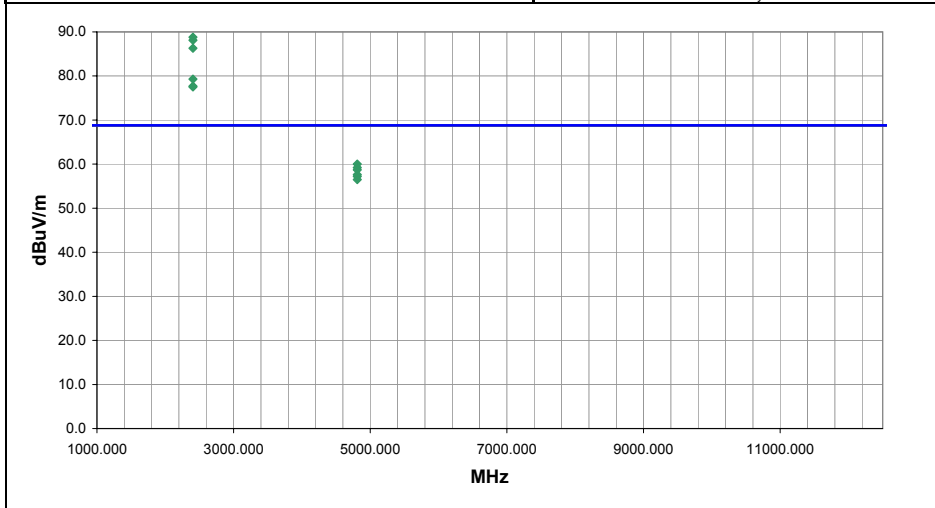

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
2405.000	71.2	-2.4	327.0	1.1	3.0	20.0	H-Horn	PK	0.0	88.8	n/a	n/a	Field Strength of Fundamental. EUT horizontal.
2405.000	70.5	-2.4	48.0	1.2	3.0	20.0	V-Horn	PK	0.0	88.1	n/a	n/a	Field Strength of Fundamental. EUT on its side.
2405.000	68.7	-2.4	360.0	1.3	3.0	20.0	H-Horn	PK	0.0	86.3	n/a	n/a	Field Strength of Fundamental. EUT vertical.
2405.000	61.7	-2.4	56.0	1.2	3.0	20.0	V-Horn	PK	0.0	79.3	n/a	n/a	Field Strength of Fundamental. EUT vertical.
2405.000	60.1	-2.4	232.0	1.2	3.0	20.0	V-Horn	PK	0.0	77.7	n/a	n/a	Field Strength of Fundamental. EUT horizontal.
2405.000	59.9	-2.4	334.0	3.0	3.0	20.0	H-Horn	PK	0.0	77.5	n/a	n/a	Field Strength of Fundamental. EUT on its side.
4809.954	56.7	3.3	34.0	1.4	3.0	0.0	H-Horn	PK	0.0	60.0	68.8	-8.8	EUT Vertical
4809.954	55.9	3.3	159.0	1.3	3.0	0.0	H-Horn	PK	0.0	59.2	68.8	-9.6	EUT on its side.
4809.954	55.4	3.3	16.0	1.4	3.0	0.0	V-Horn	PK	0.0	58.7	68.8	-10.1	EUT Vertical
4809.954	54.3	3.3	344.0	1.4	3.0	0.0	H-Horn	PK	0.0	57.6	68.8	-11.2	EUT Horizontal
4809.954	53.9	3.3	11.0	1.2	3.0	0.0	V-Horn	PK	0.0	57.2	68.8	-11.6	EUT on its side.
4809.954	53.2	3.3	201.0	1.2	3.0	0.0	V-Horn	PK	0.0	56.5	68.8	-12.3	EUT Horizontal

NORTHWEST

EMC

Out of Band Radiated Emissions

EUT: Q5 RF	Work Order: PROU0011
Serial Number: EMC 0x44040F	Date: 12/22/04
Customer: Product Creation Studio	Temperature: 23
Attendees: Scott Thielman	Humidity: 23%
Cust. Ref. No.:	Barometric Pressure: 30.26
Tested by: Holly Ashkannejhad	Power: 120VAC/60Hz
	Job Site: EV01

TEST SPECIFICATIONS	
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004	Method: ANSI C63.4:2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS
 In any 100kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band.

EUT OPERATING MODES
 Mid channel


DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	6

Other



Tested By: _____

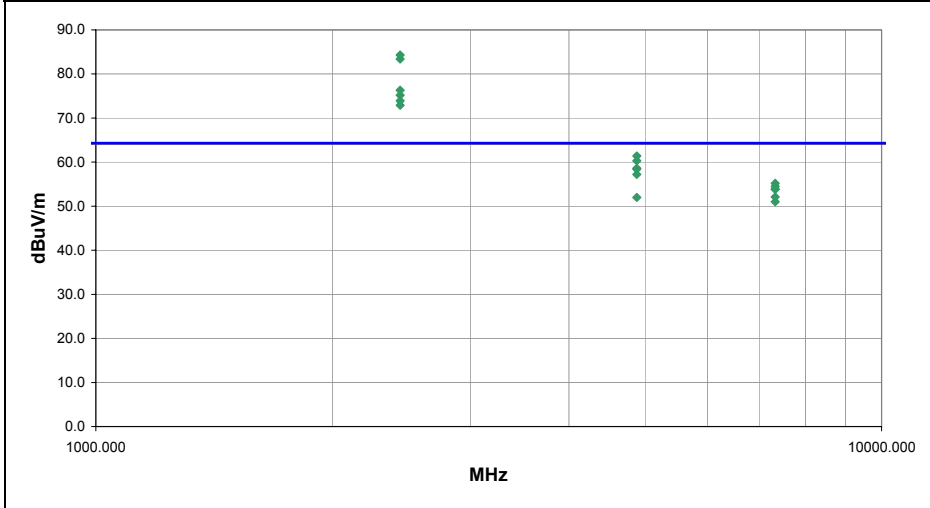

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
2440.000	66.5	-2.2	343.0	1.1	3.0	20.0	H-Horn	PK	0.0	84.3	n/a	n/a	Field Strength of Fundamental. EUT vertical.
2440.000	65.6	-2.2	110.0	1.2	3.0	20.0	V-Horn	PK	0.0	83.4	n/a	n/a	Field Strength of Fundamental. EUT on its side.
2440.000	58.5	-2.2	261.0	1.2	3.0	20.0	V-Horn	PK	0.0	76.3	n/a	n/a	Field Strength of Fundamental. EUT vertical.
2440.000	57.4	-2.2	253.0	1.2	3.0	20.0	V-Horn	PK	0.0	75.2	n/a	n/a	Field Strength of Fundamental. EUT horizontal.
2440.000	56.1	-2.2	201.0	1.3	3.0	20.0	H-Horn	PK	0.0	73.9	n/a	n/a	Field Strength of Fundamental. EUT horizontal.
2440.000	55.1	-2.2	319.0	1.2	3.0	20.0	H-Horn	PK	0.0	72.9	n/a	n/a	Field Strength of Fundamental.. EUT on its side.
4880.079	57.8	3.6	2.0	1.3	3.0	0.0	H-Horn	PK	0.0	61.4	64.3	-2.9	EUT on its side
4880.079	56.7	3.6	22.0	1.1	3.0	0.0	V-Horn	PK	0.0	60.3	64.3	-4.0	EUT Vertical
4880.079	55.0	3.6	343.0	1.3	3.0	0.0	H-Horn	PK	0.0	58.6	64.3	-5.7	EUT Vertical
4880.079	54.8	3.6	186.0	1.7	3.0	0.0	V-Horn	PK	0.0	58.4	64.3	-5.9	EUT Horizontal
4880.079	53.6	3.6	345.0	1.1	3.0	0.0	H-Horn	PK	0.0	57.2	64.3	-7.1	EUT Horizontal
7320.057	44.7	10.5	346.0	1.4	3.0	0.0	V-Horn	PK	0.0	55.2	64.3	-9.1	EUT Vertical
7320.057	44.0	10.5	322.0	1.1	3.0	0.0	H-Horn	PK	0.0	54.5	64.3	-9.8	EUT Vertical
7320.057	43.4	10.5	276.0	1.1	3.0	0.0	H-Horn	PK	0.0	53.9	64.3	-10.4	EUT on its side
7320.057	43.3	10.5	35.0	1.2	3.0	0.0	V-Horn	PK	0.0	53.8	64.3	-10.5	EUT Horizontal
7320.057	41.6	10.5	172.0	1.2	3.0	0.0	V-Horn	PK	0.0	52.1	64.3	-12.2	EUT on its side
4880.079	48.4	3.6	227.0	1.2	3.0	0.0	V-Horn	PK	0.0	52.0	64.3	-12.3	EUT on its side
7320.057	40.5	10.5	-1.0	1.3	3.0	0.0	H-Horn	PK	0.0	51.0	64.3	-13.3	EUT Horizontal

NORTHWEST

EMC

Out of Band Radiated Emissions

EUT: Q5 RF	Work Order: PROU0011
Serial Number: EMC 0x44040F	Date: 12/22/04
Customer: Product Creation Studio	Temperature: 22
Attendees: Scott Thielman	Humidity: 32%
Cust. Ref. No.:	Barometric Pressure: 30.44
Tested by: Holly Ashkannehad	Power: 120VAC/60Hz
	Job Site: EV01

TEST SPECIFICATIONS	
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004	Method: ANSI C63.4:2003

SAMPLE CALCULATIONS	
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation	
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator	

COMMENTS
 In any 100kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band.


EUT OPERATING MODES
 High channel

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	7



Other


 Tested By:

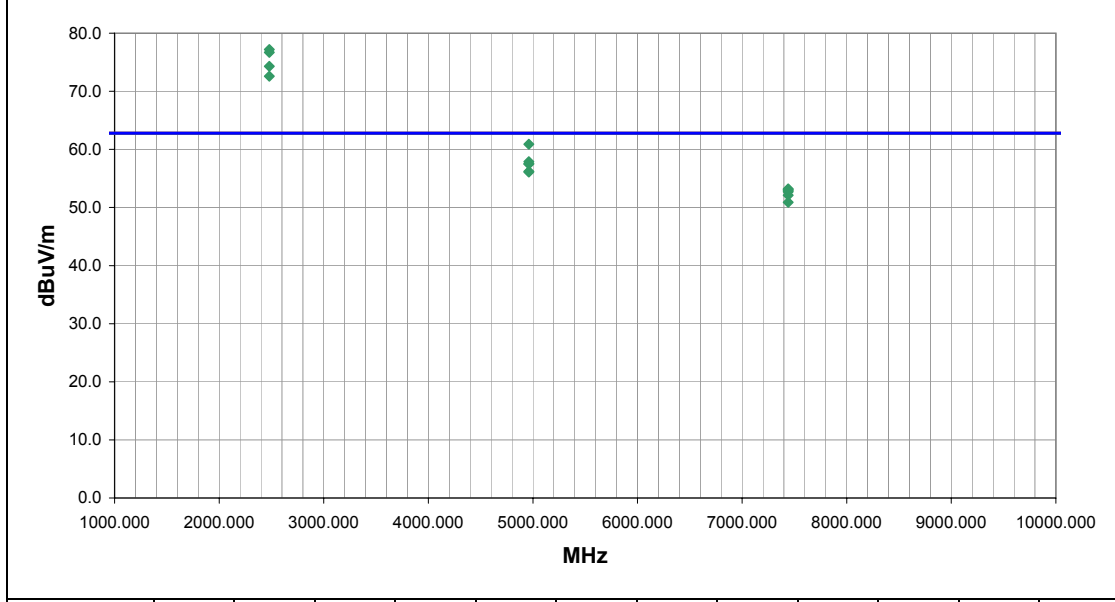

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
2480.000	65.0	-2.2	49.0	1.2	3.0	20.0	V-Horn	PK	0.0	82.8	n/a	n/a	Field Strength of I
2480.000	62.9	-2.2	168.0	1.3	3.0	20.0	H-Horn	PK	0.0	80.7	n/a	n/a	Field Strength of I
2480.000	59.4	-2.2	208.0	1.2	3.0	20.0	V-Horn	PK	0.0	77.2	n/a	n/a	Field Strength of I
2480.000	58.9	-2.2	163.0	1.1	3.0	20.0	H-Horn	PK	0.0	76.7	n/a	n/a	Field Strength of I
2480.000	56.5	-2.2	202.0	1.8	3.0	20.0	V-Horn	PK	0.0	74.3	n/a	n/a	Field Strength of I
2480.000	54.8	-2.2	147.0	1.3	3.0	20.0	H-Horn	PK	0.0	72.6	n/a	n/a	Field Strength of I
4959.985	57.3	3.6	27.0	1.3	3.0	0.0	H-Horn	PK	0.0	60.9	62.8	-1.9	EUT on its side
4959.985	54.3	3.6	186.0	1.6	3.0	0.0	V-Horn	PK	0.0	57.9	62.8	-4.9	EUT Vertical
4959.985	53.9	3.6	200.0	1.3	3.0	0.0	V-Horn	PK	0.0	57.5	62.8	-5.3	EUT Horizontal
4959.985	53.9	3.6	216.0	1.4	3.0	0.0	H-Horn	PK	0.0	57.5	62.8	-5.3	EUT Vertical
4959.985	52.6	3.6	37.0	1.1	3.0	0.0	H-Horn	PK	0.0	56.2	62.8	-6.6	EUT Horizontal
4959.985	52.5	3.6	82.0	1.7	3.0	0.0	V-Horn	PK	0.0	56.1	62.8	-6.7	EUT on its side
7440.009	42.1	11.1	264.0	1.5	3.0	0.0	H-Horn	PK	0.0	53.2	62.8	-9.6	EUT on its side
7440.009	42.0	11.1	220.0	2.4	3.0	0.0	V-Horn	PK	0.0	53.1	62.8	-9.7	EUT Horizontal
7440.009	41.8	11.1	52.0	1.2	3.0	0.0	V-Horn	PK	0.0	52.9	62.8	-9.9	EUT Vertical
7440.009	41.6	11.1	31.0	1.2	3.0	0.0	V-Horn	PK	0.0	52.7	62.8	-10.1	EUT on its side
7440.009	41.0	11.1	145.0	1.8	3.0	0.0	H-Horn	PK	0.0	52.1	62.8	-10.7	EUT Vertical
7440.009	39.8	11.1	158.0	1.3	3.0	0.0	H-Horn	PK	0.0	50.9	62.8	-11.9	EUT Horizontal



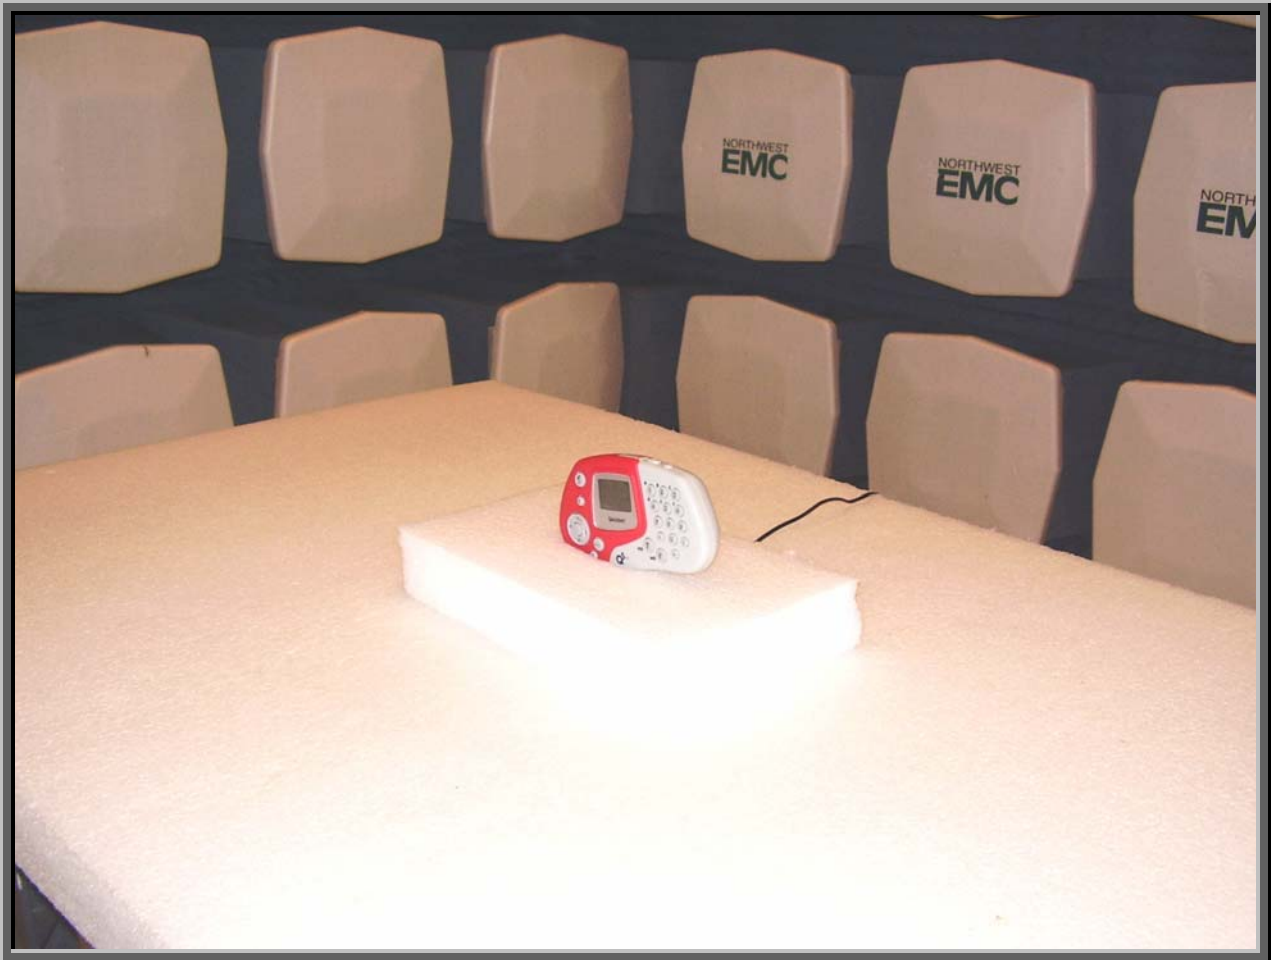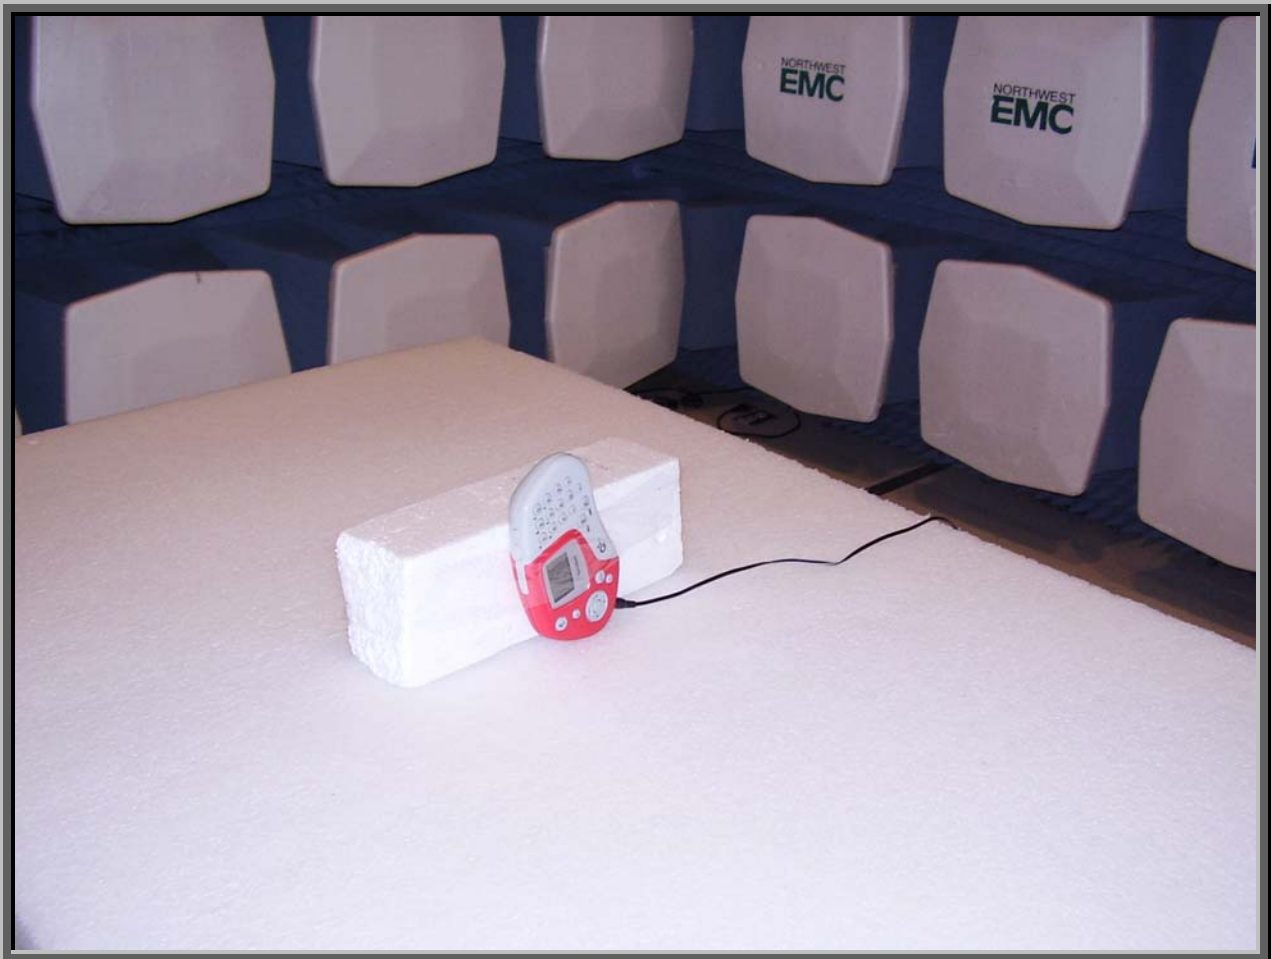

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

High
Mid
Low

Operating Modes Investigated:

Transmit

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

120 VAC, 60Hz

Software\Firmware Applied During Test

Exercise software	TestRFGen1	Version	Unknown
Description			
The system was tested using standard operating production software to exercise the functions of the device during the testing including mode, channel, and power.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
AC Adapter	CUI Inc.	41-9-500R	NA
EUT- Q5 RF	Quizdom, Inc.	Q5 RF	EMC 0x44040F

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	No	1.5	No	Q5RF	AC Adapter


Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
High Pass Filter	TTE	H97-100k-50-720B	HFC	12/29/2004	13 mo
Attenuator	Tektronix	011-0059-02	ATH	12/29/2004	13 mo
LISN	Solar	9252-50-R-24-BNC	LIO	04/30/2004	12 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/02/2004	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/02/2004	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/02/2004	13 mo

Test Description

Requirement: Per 47 15.207(d), if the EUT is connected to the AC power line indirectly, obtaining its power from another device that is connected to the AC power line, then it should be tested to demonstrate compliance with the conducted limits of 15.207.

Configuration: The EUT will be powered from a device that could be connected to the AC power line. Therefore, the measurements were made on the device used to power the EUT. The AC power line conducted emissions were measured with the EUT operating at the lowest, the highest, and a middle channel in the operational band. The EUT was transmitting at its maximum data rate. For each mode, the spectrum was scanned from 150 kHz to 30 MHz. The test setup and procedures were in accordance with ANSI C63.4-2003.

Completed by:



EUT:	Q5 RF	Work Order:	PROU0011
Serial Number:	EMC 0x44040F	Date:	01/03/05
Customer:	Product Creation Studio	Temperature:	18
Attendees:	None	Humidity:	32%
Cust. Ref. No.:		Barometric Pressure:	30.09
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 15.207:2004
Method:	ANSI C63.4: 2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator


COMMENTS


EUT OPERATING MODES
 Transmitting low channel

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Line	Run #
Pass	N	13

Other


 Tested By:

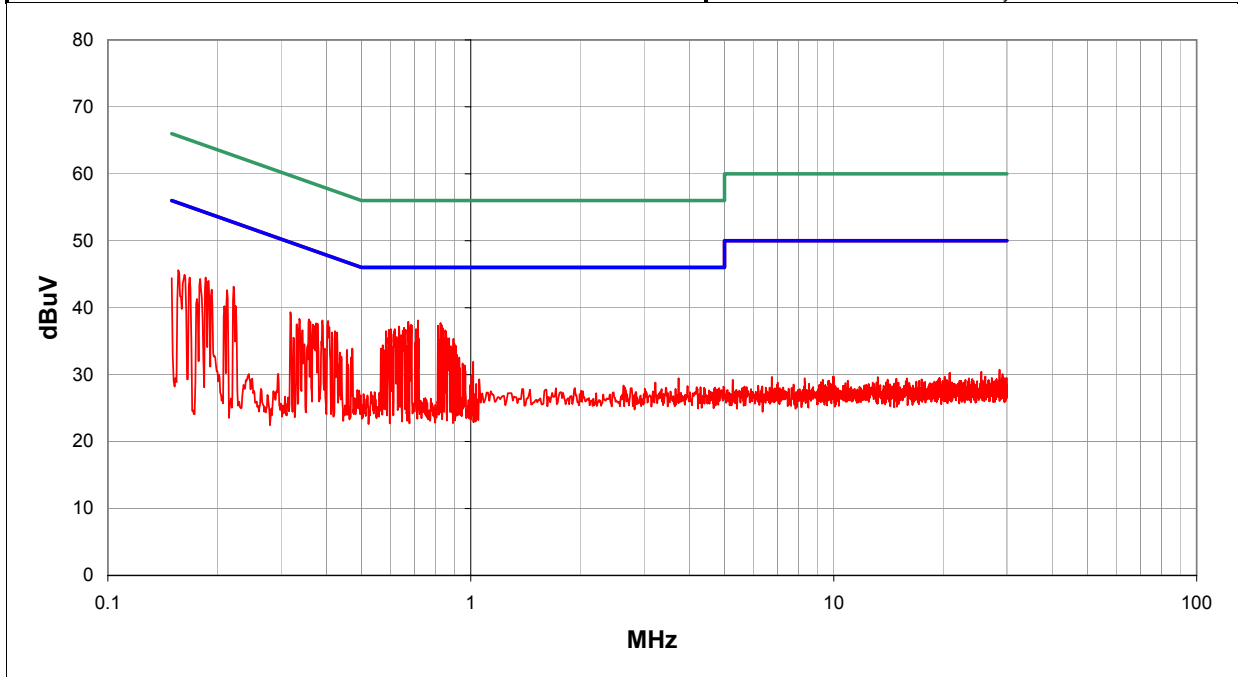

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.715	17.9	0.0	0.2	20.0		38.1	46.0	-7.9
0.673	17.7	0.0	0.2	20.0		37.9	46.0	-8.1
0.825	17.5	0.0	0.2	20.0		37.7	46.0	-8.3
0.831	17.2	0.0	0.2	20.0		37.4	46.0	-8.6
0.683	17.2	0.0	0.2	20.0		37.4	46.0	-8.6
0.686	17.2	0.0	0.2	20.0		37.4	46.0	-8.6
0.811	17.1	0.0	0.2	20.0		37.3	46.0	-8.7
0.634	17.0	0.0	0.2	20.0		37.2	46.0	-8.8
0.655	16.8	0.0	0.2	20.0		37.0	46.0	-9.0
0.679	16.8	0.0	0.2	20.0		37.0	46.0	-9.0
0.837	16.7	0.0	0.2	20.0		36.9	46.0	-9.1
0.602	16.6	0.0	0.2	20.0		36.8	46.0	-9.2
0.617	16.6	0.0	0.2	20.0		36.8	46.0	-9.2
0.706	16.6	0.0	0.2	20.0		36.8	46.0	-9.2
0.595	16.5	0.0	0.2	20.0		36.7	46.0	-9.3
0.661	16.5	0.0	0.2	20.0		36.7	46.0	-9.3
0.851	16.4	0.0	0.2	20.0		36.6	46.0	-9.4
0.650	16.4	0.0	0.2	20.0		36.6	46.0	-9.4
0.584	16.3	0.0	0.2	20.0		36.5	46.0	-9.5

EUT:	Q5 RF	Work Order:	PROU0011
Serial Number:	EMC 0x44040F	Date:	01/03/05
Customer:	Product Creation Studio	Temperature:	18
Attendees:	None	Humidity:	32%
Cust. Ref. No.:		Barometric Pressure:	30.09
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 15.207:2004
Method:	ANSI C63.4: 2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 Transmitting low channel

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Line	Run #
Pass	L1	14

Other


 Tested By:

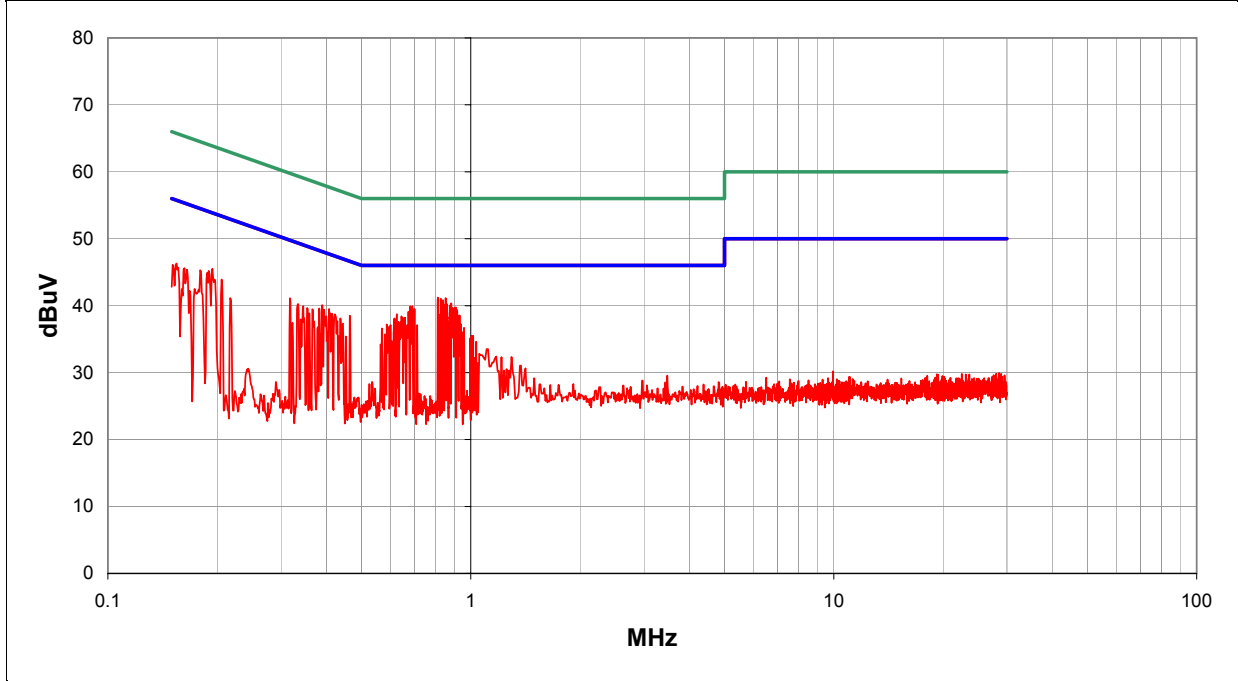

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.811	21.0	0.0	0.2	20.0		41.2	46.0	-4.8
0.852	20.9	0.0	0.2	20.0		41.1	46.0	-4.9
0.828	20.8	0.0	0.2	20.0		41.0	46.0	-5.0
0.838	20.6	0.0	0.2	20.0		40.8	46.0	-5.2
0.883	20.1	0.0	0.2	20.0		40.3	46.0	-5.7
0.860	20.0	0.0	0.2	20.0		40.2	46.0	-5.8
0.848	19.9	0.0	0.2	20.0		40.1	46.0	-5.9
0.876	19.8	0.0	0.2	20.0		40.0	46.0	-6.0
0.681	19.7	0.0	0.2	20.0		39.9	46.0	-6.1
0.690	19.7	0.0	0.2	20.0		39.9	46.0	-6.1
0.909	19.5	0.0	0.3	20.0		39.8	46.0	-6.2
0.900	19.4	0.0	0.2	20.0		39.6	46.0	-6.4
0.889	19.4	0.0	0.2	20.0		39.6	46.0	-6.4
0.902	19.3	0.0	0.3	20.0		39.6	46.0	-6.4
0.699	19.3	0.0	0.2	20.0		39.5	46.0	-6.5
0.915	19.1	0.0	0.3	20.0		39.4	46.0	-6.6
0.674	18.9	0.0	0.2	20.0		39.1	46.0	-6.9
0.816	18.5	0.0	0.2	20.0		38.7	46.0	-7.3
0.625	18.5	0.0	0.2	20.0		38.7	46.0	-7.3

EUT:	Q5 RF	Work Order:	PROU0011
Serial Number:	EMC 0x44040F	Date:	01/04/05
Customer:	Product Creation Studio	Temperature:	18
Attendees:	None	Humidity:	32%
Cust. Ref. No.:		Barometric Pressure:	30.09
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 15.207:2004
Method:	ANSI C63.4: 2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 Transmitting mid channel

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Line	Run #
Pass	L1	15

Other


 Tested By:

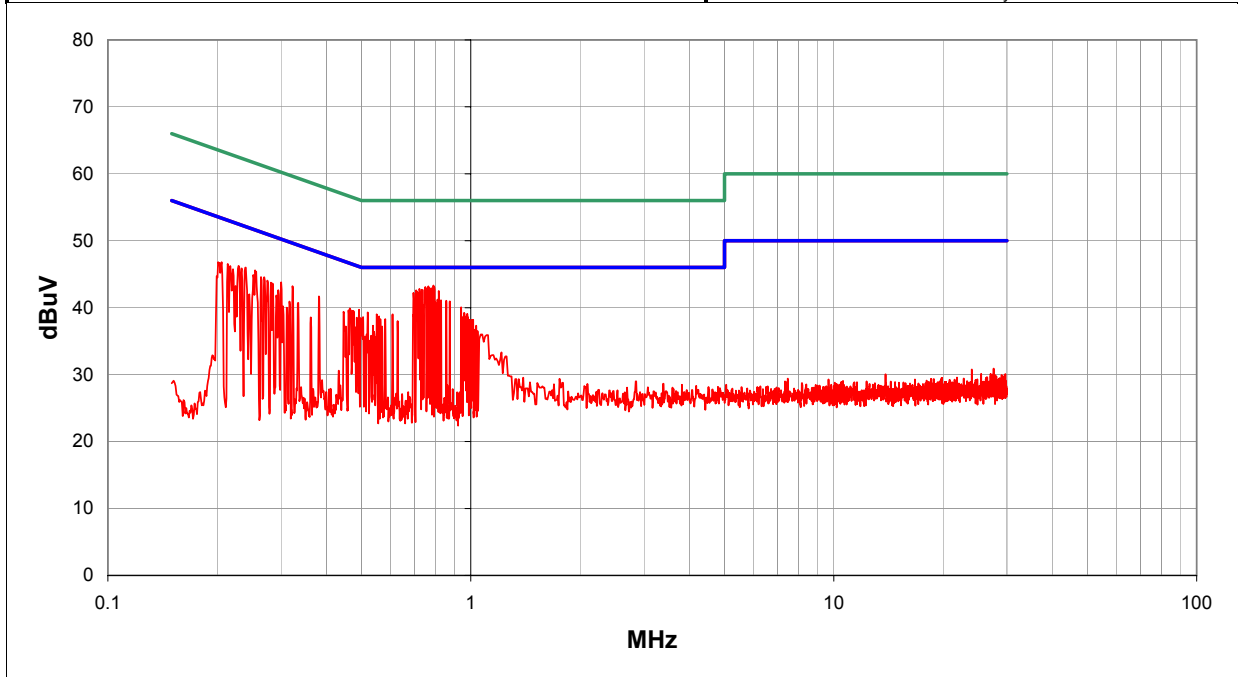

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.789	23.1	0.0	0.2	20.0		43.3	46.0	-2.7
0.764	23.0	0.0	0.2	20.0		43.2	46.0	-2.8
0.749	22.9	0.0	0.2	20.0		43.1	46.0	-2.9
0.793	22.9	0.0	0.2	20.0		43.1	46.0	-2.9
0.758	22.7	0.0	0.2	20.0		42.9	46.0	-3.1
0.769	22.7	0.0	0.2	20.0		42.9	46.0	-3.1
0.778	22.7	0.0	0.2	20.0		42.9	46.0	-3.1
0.721	22.6	0.0	0.2	20.0		42.8	46.0	-3.2
0.733	22.5	0.0	0.2	20.0		42.7	46.0	-3.3
0.707	22.4	0.0	0.2	20.0		42.6	46.0	-3.4
0.816	22.3	0.0	0.2	20.0		42.5	46.0	-3.5
0.711	22.2	0.0	0.2	20.0		42.4	46.0	-3.6
0.775	22.2	0.0	0.2	20.0		42.4	46.0	-3.6
0.695	22.0	0.0	0.2	20.0		42.2	46.0	-3.8
0.715	22.0	0.0	0.2	20.0		42.2	46.0	-3.8
0.727	21.9	0.0	0.2	20.0		42.1	46.0	-3.9
0.699	21.1	0.0	0.2	20.0		41.3	46.0	-4.7
0.810	21.0	0.0	0.2	20.0		41.2	46.0	-4.8
0.828	20.9	0.0	0.2	20.0		41.1	46.0	-4.9

EUT:	Q5 RF	Work Order:	PROU0011
Serial Number:	EMC 0x44040F	Date:	01/04/05
Customer:	Product Creation Studio	Temperature:	18
Attendees:	None	Humidity:	32%
Cust. Ref. No.:		Barometric Pressure:	30.09
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 15.207:2004
Method:	ANSI C63.4: 2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 Transmitting mid channel

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Line	Run #
Pass	N	16

Other


 Tested By:

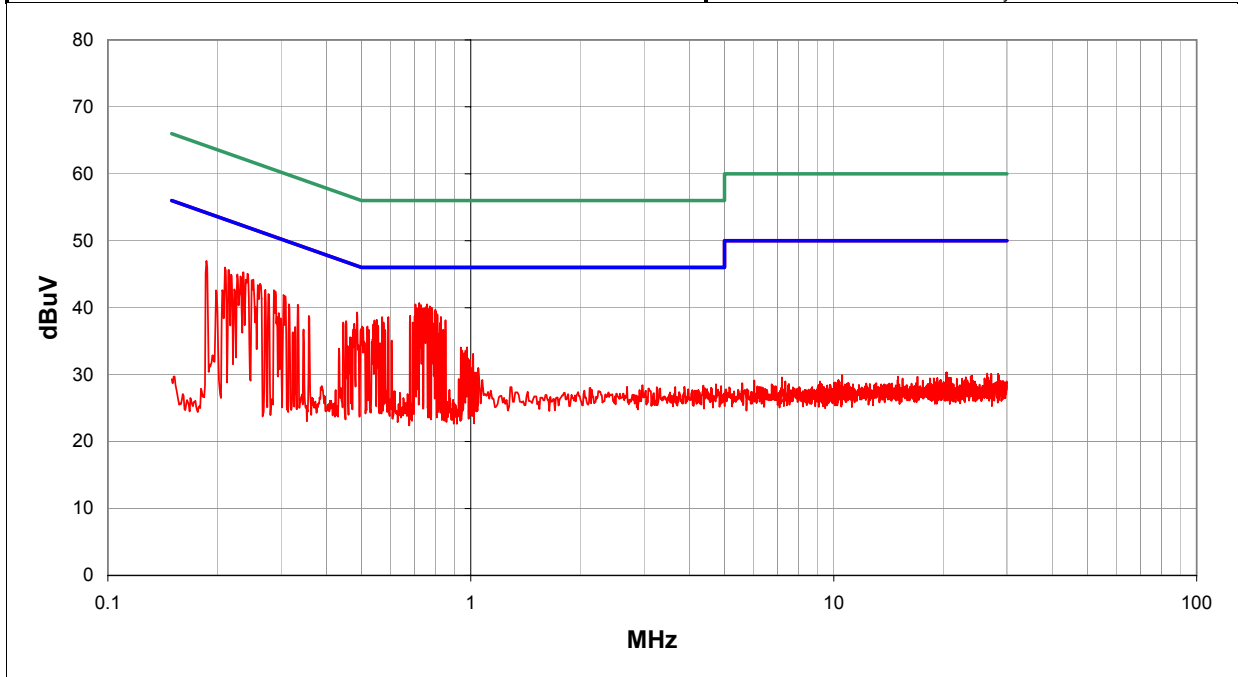

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.721	20.5	0.0	0.2	20.0		40.7	46.0	-5.3
0.703	20.3	0.0	0.2	20.0		40.5	46.0	-5.5
0.757	20.3	0.0	0.2	20.0		40.5	46.0	-5.5
0.729	20.2	0.0	0.2	20.0		40.4	46.0	-5.6
0.771	20.0	0.0	0.2	20.0		40.2	46.0	-5.8
0.725	19.9	0.0	0.2	20.0		40.1	46.0	-5.9
0.780	19.8	0.0	0.2	20.0		40.0	46.0	-6.0
0.709	19.7	0.0	0.2	20.0		39.9	46.0	-6.1
0.712	19.7	0.0	0.2	20.0		39.9	46.0	-6.1
0.733	19.7	0.0	0.2	20.0		39.9	46.0	-6.1
0.743	19.7	0.0	0.2	20.0		39.9	46.0	-6.1
0.745	19.7	0.0	0.2	20.0		39.9	46.0	-6.1
0.737	19.6	0.0	0.2	20.0		39.8	46.0	-6.2
0.765	19.6	0.0	0.2	20.0		39.8	46.0	-6.2
0.799	19.5	0.0	0.2	20.0		39.7	46.0	-6.3
0.783	19.3	0.0	0.2	20.0		39.5	46.0	-6.5
0.802	19.2	0.0	0.2	20.0		39.4	46.0	-6.6
0.748	19.1	0.0	0.2	20.0		39.3	46.0	-6.7
0.243	24.9	0.0	0.2	20.0		45.1	52.0	-6.9

EUT:	Q5 RF	Work Order:	PROU0011
Serial Number:	EMC 0x44040F	Date:	01/04/05
Customer:	Product Creation Studio	Temperature:	18
Attendees:	None	Humidity:	32%
Cust. Ref. No.:		Barometric Pressure:	30.09
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 15.207:2004
Method:	ANSI C63.4: 2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator


COMMENTS


EUT OPERATING MODES
 Transmitting high channel

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Line	Run #
Pass	N	17

Other


 Tested By:

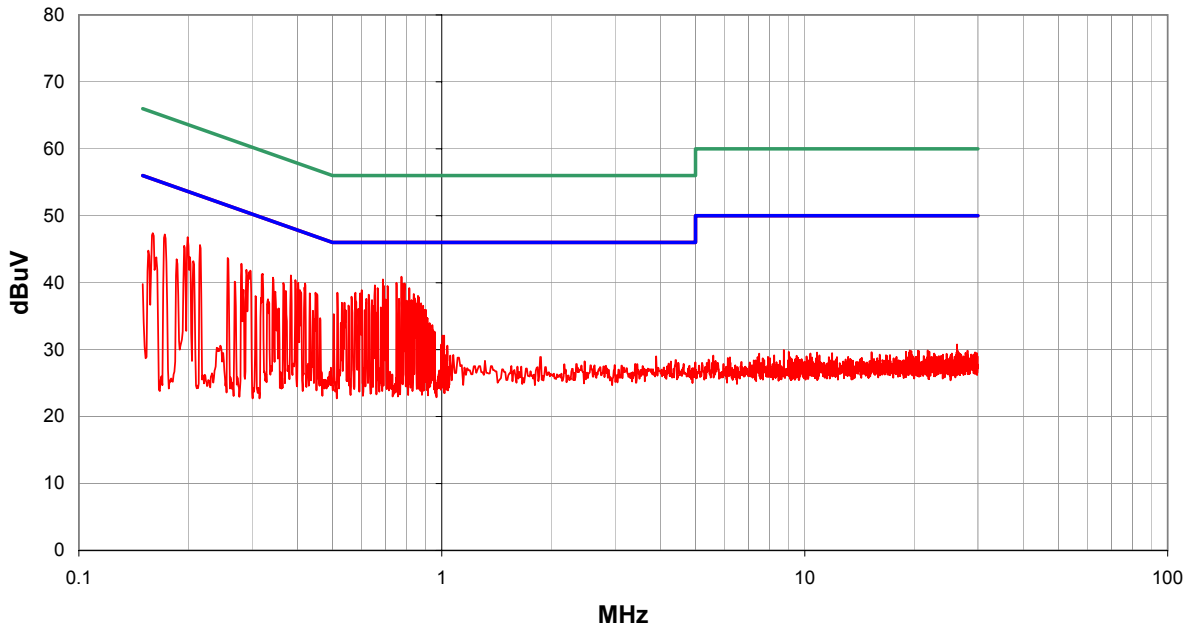

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.774	20.7	0.0	0.2	20.0		40.9	46.0	-5.1
0.688	20.3	0.0	0.2	20.0		40.5	46.0	-5.5
0.750	19.8	0.0	0.2	20.0		40.0	46.0	-6.0
0.790	19.7	0.0	0.2	20.0		39.9	46.0	-6.1
0.783	19.6	0.0	0.2	20.0		39.8	46.0	-6.2
0.654	19.4	0.0	0.2	20.0		39.6	46.0	-6.4
0.693	19.3	0.0	0.2	20.0		39.5	46.0	-6.5
0.709	19.3	0.0	0.2	20.0		39.5	46.0	-6.5
0.813	19.0	0.0	0.2	20.0		39.2	46.0	-6.8
0.666	19.0	0.0	0.2	20.0		39.2	46.0	-6.8
0.200	26.7	0.0	0.1	20.0		46.8	53.6	-6.8
0.602	18.7	0.0	0.2	20.0		38.9	46.0	-7.1
0.384	20.9	0.0	0.2	20.0		41.1	48.2	-7.1
0.216	25.5	0.0	0.1	20.0		45.6	53.0	-7.4
0.515	18.3	0.0	0.2	20.0		38.5	46.0	-7.5
0.578	18.3	0.0	0.2	20.0		38.5	46.0	-7.5
0.420	19.7	0.0	0.2	20.0		39.9	47.4	-7.5
0.395	20.2	0.0	0.2	20.0		40.4	48.0	-7.6
0.595	18.2	0.0	0.2	20.0		38.4	46.0	-7.6

EUT:	Q5 RF	Work Order:	PROU0011
Serial Number:	EMC 0x44040F	Date:	01/04/05
Customer:	Product Creation Studio	Temperature:	18
Attendees:	None	Humidity:	32%
Cust. Ref. No.:		Barometric Pressure:	30.09
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 15.207:2004
Method:	ANSI C63.4: 2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 Transmitting high channel

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Line	Run #
Pass	L1	18

Other


 Tested By: _____

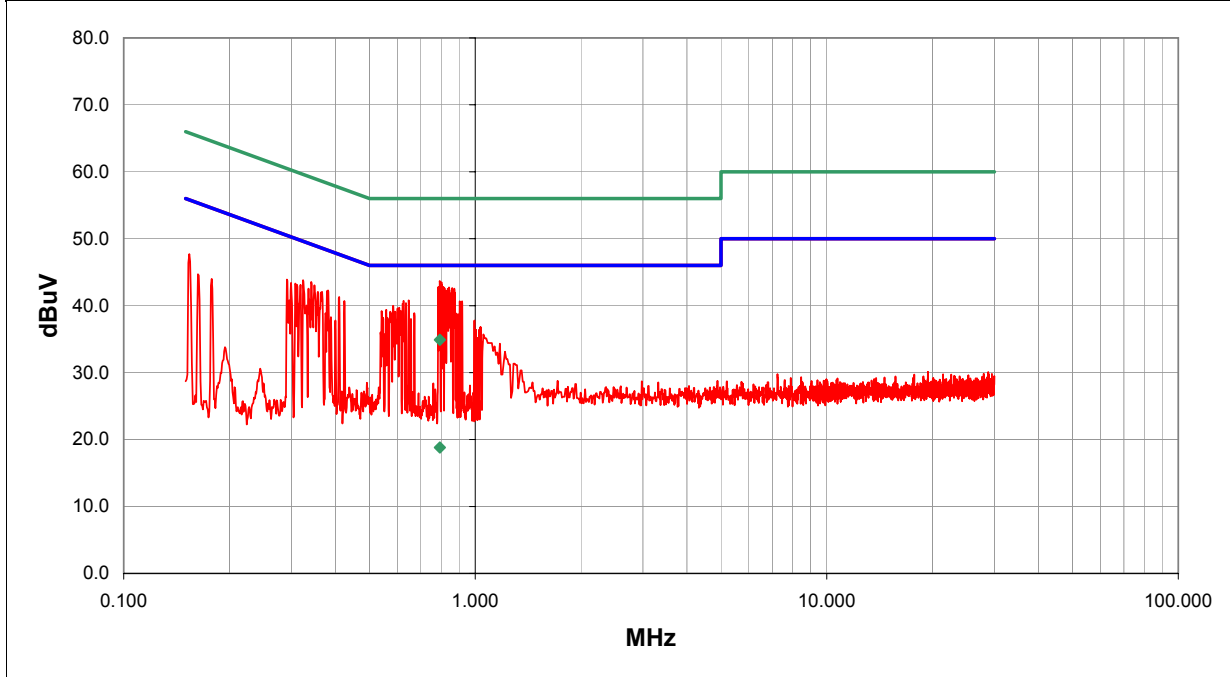

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.793	14.9	0.0	0.0	20.0	QP	34.9	56.0	-21.1
0.793	-1.2	0.0	0.0	20.0	AV	18.8	46.0	-27.2
0.793	23.5	0.0	0.2	20.0		43.7	46.0	-2.3
0.802	23.3	0.0	0.2	20.0		43.5	46.0	-2.5
0.805	22.9	0.0	0.2	20.0		43.1	46.0	-2.9
0.811	22.6	0.0	0.2	20.0		42.8	46.0	-3.2
0.785	22.6	0.0	0.2	20.0		42.8	46.0	-3.2
0.843	22.5	0.0	0.2	20.0		42.7	46.0	-3.3
0.860	22.4	0.0	0.2	20.0		42.6	46.0	-3.4
0.818	22.4	0.0	0.2	20.0		42.6	46.0	-3.4
0.872	22.3	0.0	0.2	20.0		42.5	46.0	-3.5
0.835	22.3	0.0	0.2	20.0		42.5	46.0	-3.5
0.829	22.0	0.0	0.2	20.0		42.2	46.0	-3.8
0.875	21.7	0.0	0.2	20.0		41.9	46.0	-4.1
0.850	21.6	0.0	0.2	20.0		41.8	46.0	-4.2
0.810	20.9	0.0	0.2	20.0		41.1	46.0	-4.9
0.647	20.6	0.0	0.2	20.0		40.8	46.0	-5.2
0.788	20.6	0.0	0.2	20.0		40.8	46.0	-5.2
0.625	20.5	0.0	0.2	20.0		40.7	46.0	-5.3





Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

Channels in Specified Band Investigated:

Low
Mid
High

Operating Modes Investigated:

Typical

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

120VAC, 60Hz

Software\Firmware Applied During Test

Exercise software	Standard Production Software	Version	Unknown
Description			
The system was tested using standard operating production software to exercise the functions of the device during the testing including channel, mode, and power.			

EUT and Peripherals in Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
EUT- Q5 RF	Quizdom, Inc.	Q5 RF	EMC 0x44040F
AC Power Adapter - 120V	CUI, Inc.	41-9-500R	N/A

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads (120V Adapter)	No	1.8	PA	AC Power Adapter - 120V	EUT- Q5 RF
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment


Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

Test Description

Requirement: Per 47 CFR 15.247(a)(2), the 6 dB bandwidth of a direct sequence channel must be at least 500kHz. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

Configuration: The occupied bandwidth was measured with the EUT set to low, mid, and high transmit frequencies. The EUT was transmitting at its maximum output power and data rate.

The measurement was made at a 3 meter test distance. The field strength was maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.4:2003).

Completed by:

EUT: Q5 RF	Work Order: PROU0011
Serial Number: EMC 0x44040F	Date: 01/08/05
Customer: Product Creation Studio	Temperature: 22°C
Attendees: None	Tested by: Holly Ashkannejhad
Customer Ref. No.: N/A	Power: 120VAC/60Hz
	Humidity: 31%
	Job Site: EV01

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(a)(2)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS

COMMENTS

EUT OPERATING MODES
Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD
None


REQUIREMENTS
The minimum 6dB bandwidth is 500KHz

RESULTS	BANDWIDTH
Pass	1.555MHz

SIGNATURE
Tested By: <i>Holly Ashkannejhad</i>

DESCRIPTION OF TEST

Occupied Bandwidth - Low Channel

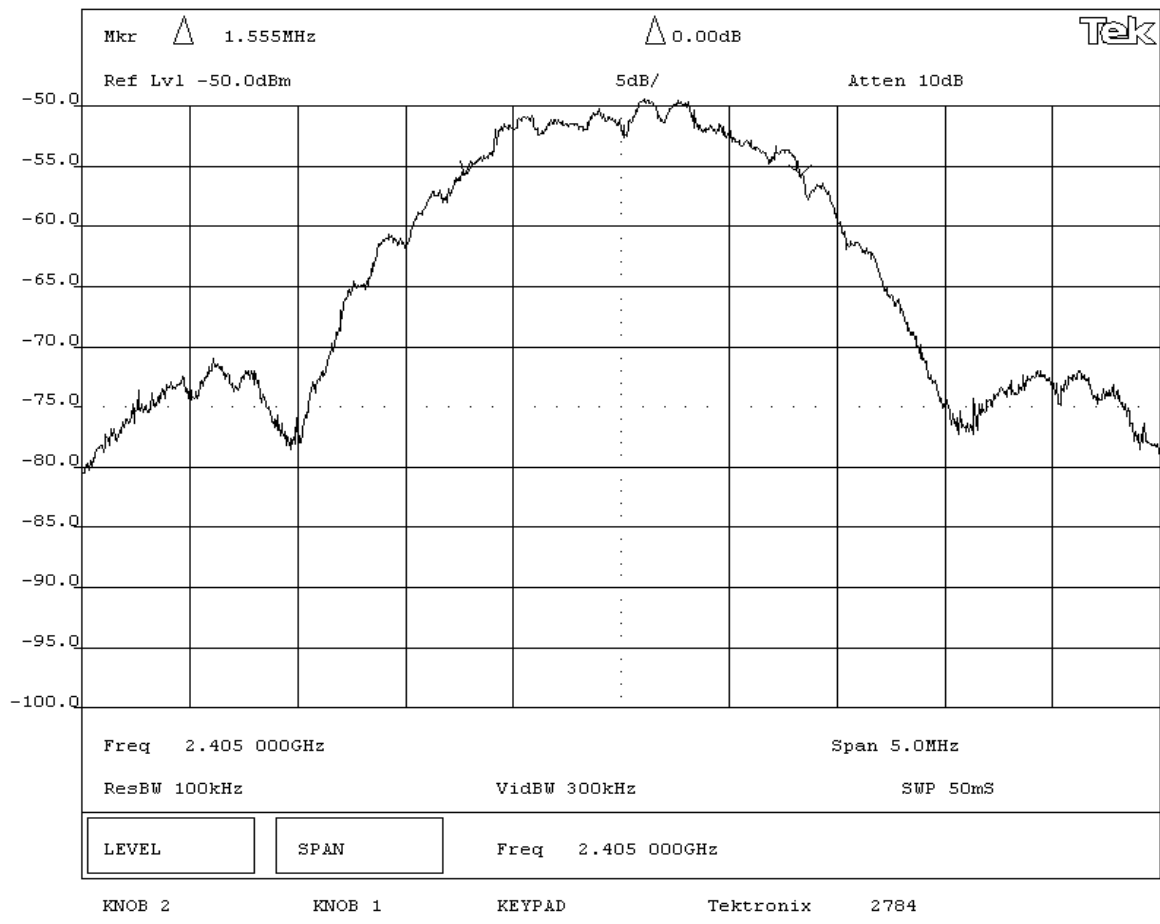

Occupied Bandwidth

EUT: Q5 RF	Work Order: PROU0011
Serial Number: EMC 0x44040F	Date: 01/08/05
Customer: Product Creation Studio	Temperature: 22°C
Attendees: None	Humidity: 31%
Customer Ref. No.: N/A	Tested by: Holly Ashkannejhad
	Power: 120VAC/60Hz
	Job Site: EV01

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(a)(2)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES			
Modulated by PRBS at maximum data rate			

DEVIATIONS FROM TEST STANDARD			
None			


REQUIREMENTS			
The minimum 6dB bandwidth is 500KHz			

RESULTS	BANDWIDTH
Pass	1.55MHz

SIGNATURE			
Tested By: <i>Holly Ashkannejhad</i>			

DESCRIPTION OF TEST

Occupied Bandwidth - Mid Channel

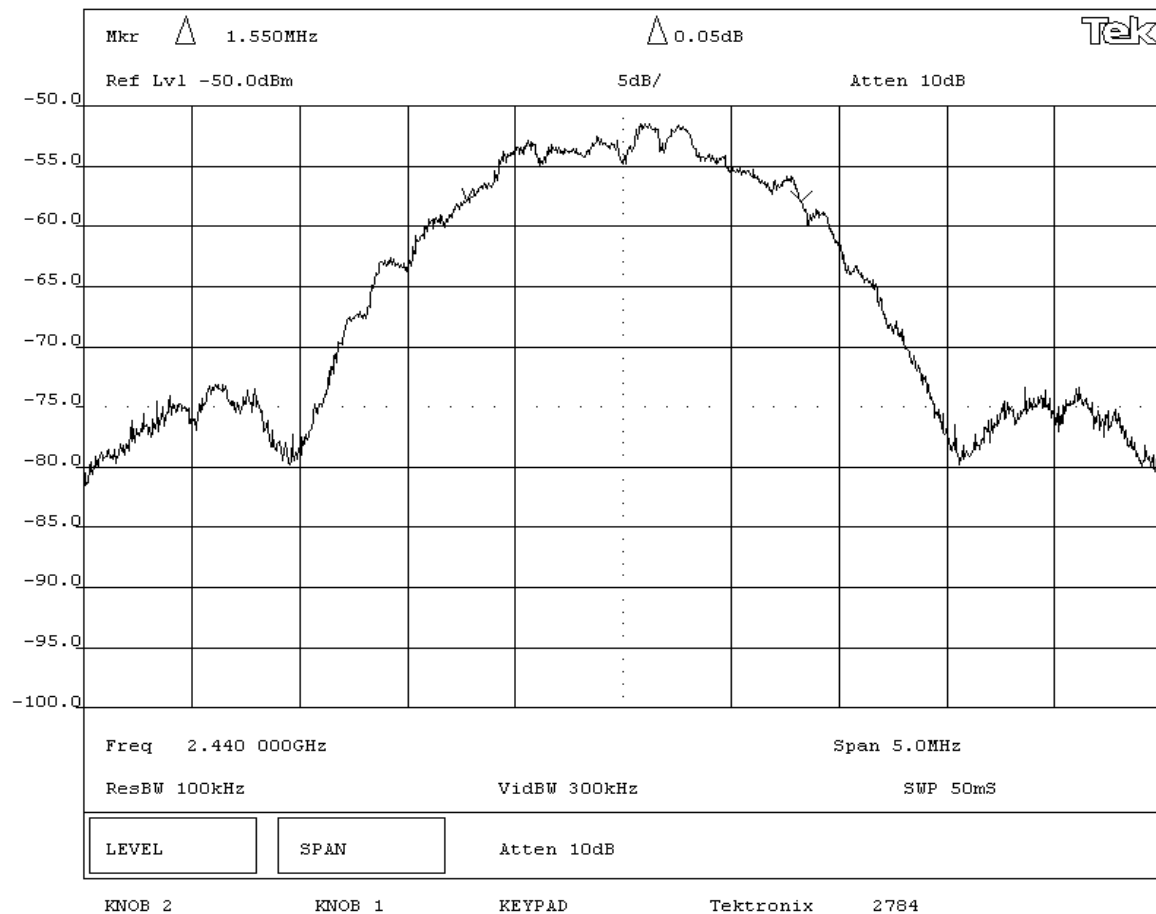

Occupied Bandwidth

EUT: Q5 RF	Work Order: PROU0011
Serial Number: EMC 0x44040F	Date: 01/08/05
Customer: Product Creation Studio	Temperature: 22°C
Attendees: None	Tested by: Holly Ashkannejhad
Customer Ref. No.: N/A	Power: 120VAC/60Hz
	Humidity: 31%
	Job Site: EV01

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(a)(2)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS

COMMENTS

EUT OPERATING MODES
Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD
None


REQUIREMENTS
The minimum 6dB bandwidth is 500KHz

RESULTS	BANDWIDTH
Pass	1.56MHz



SIGNATURE
Tested By: <i>Holly Ashkannejhad</i>

DESCRIPTION OF TEST

Occupied Bandwidth - High Channel

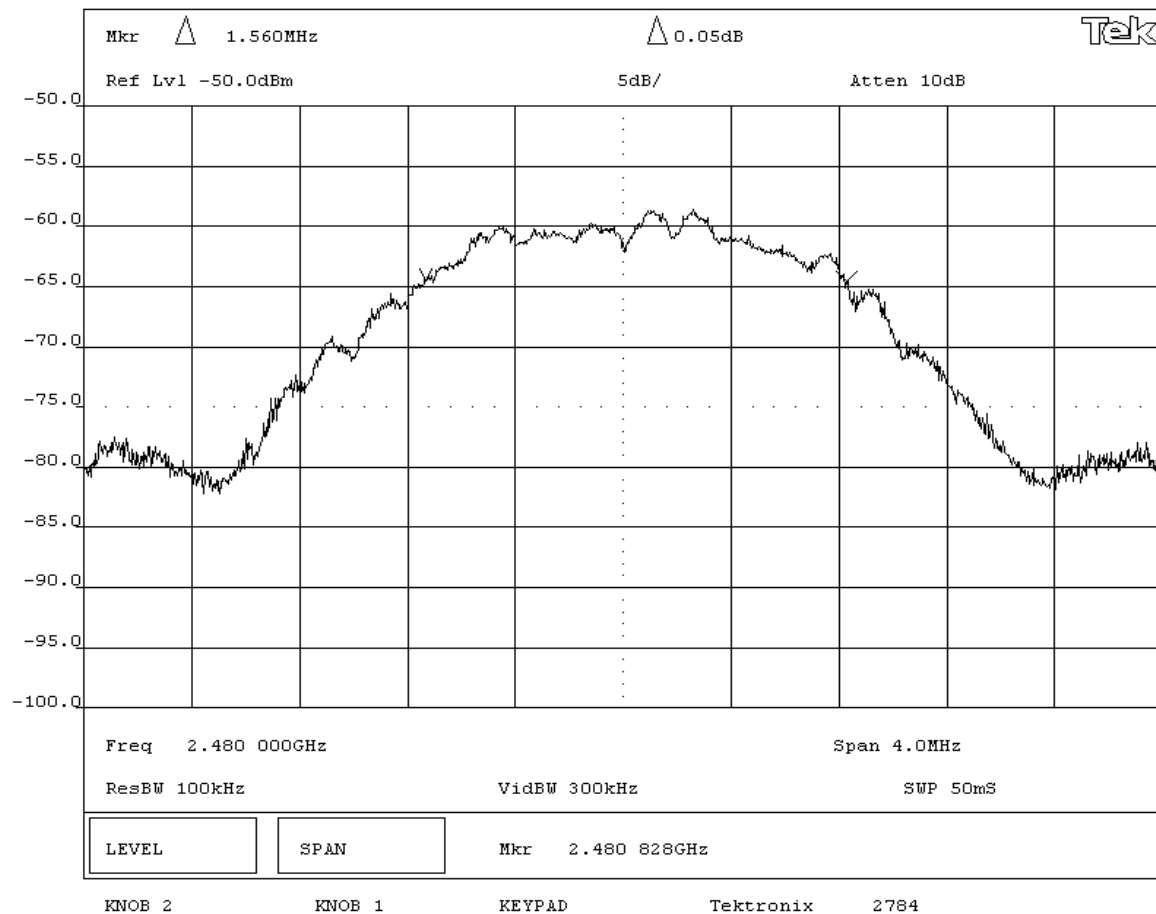



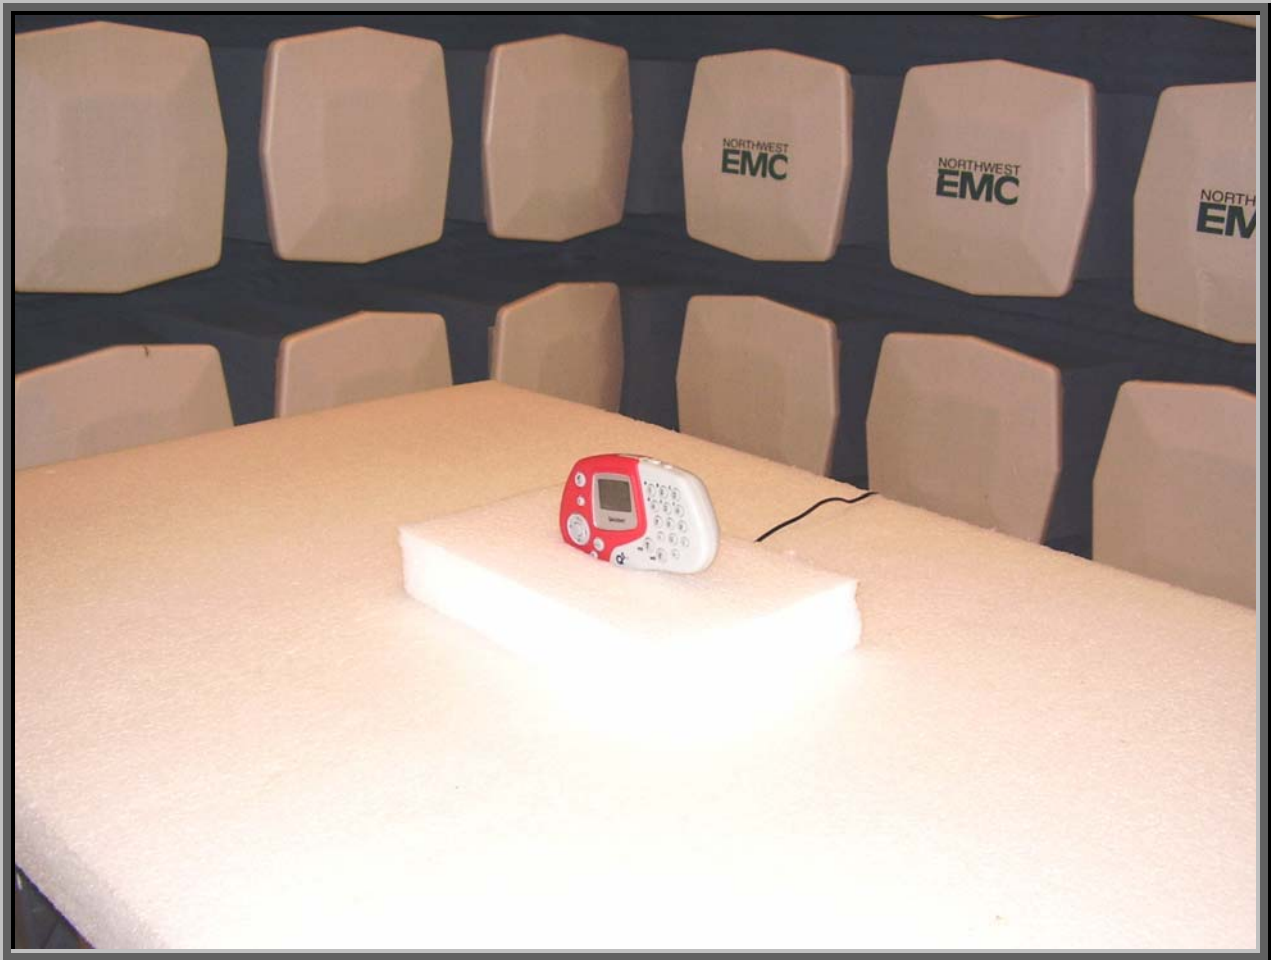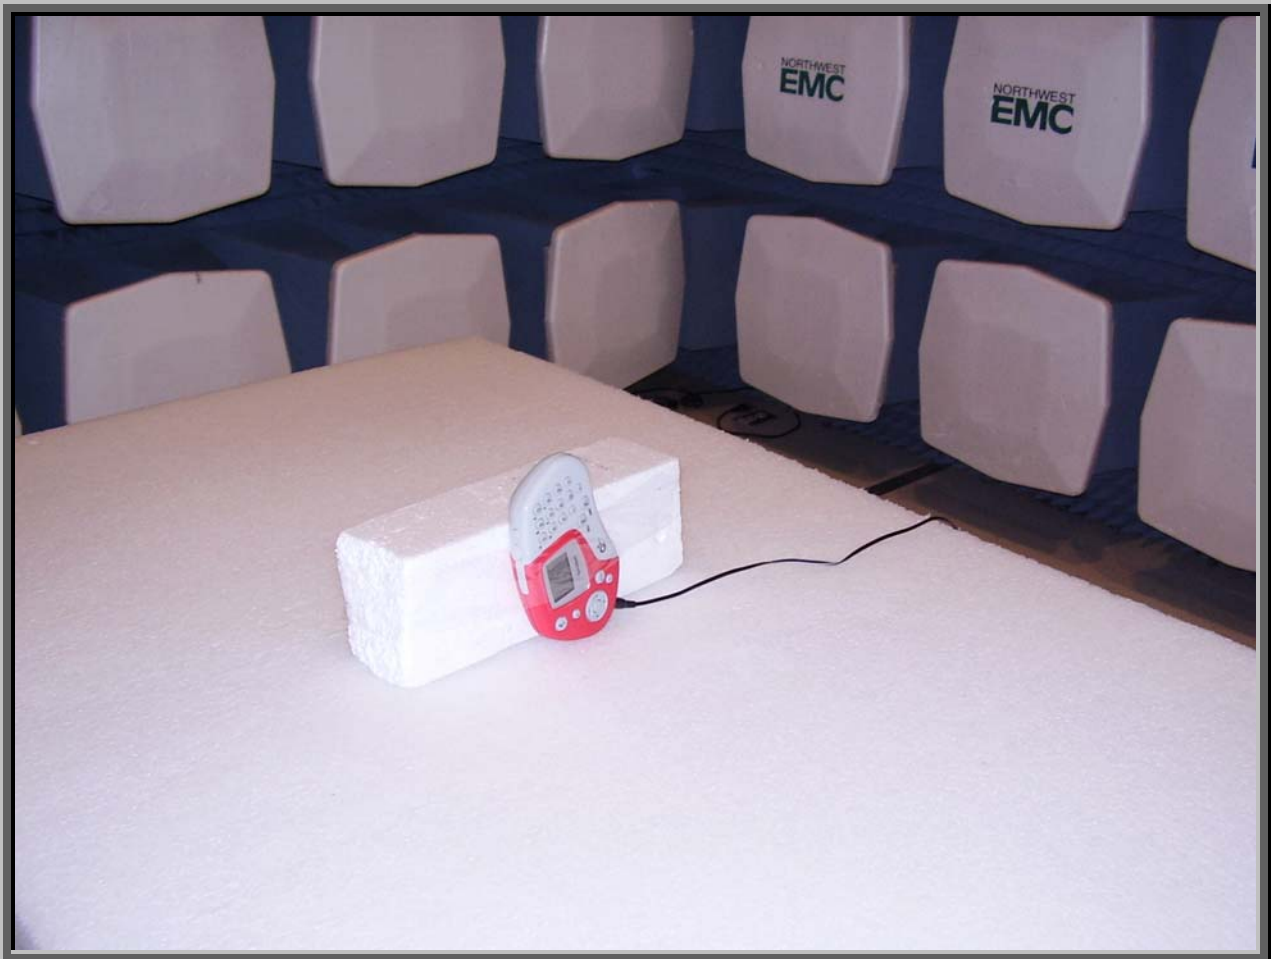

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

Channels in Specified Band Investigated:

Low

High

Operating Modes Investigated:

Typical

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

120VAC, 60Hz

Software\Firmware Applied During Test

Exercise software	Standard Production Software	Version	Unknown
Description			
The system was tested using standard operating production software to exercise the functions of the device during the testing including channel, mode, and power.			

EUT and Peripherals in Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
EUT- Q5 RF	Quizdom, Inc.	Q5 RF	EMC 0x44040F
AC Power Adapter - 120V	CUI, Inc.	41-9-500R	N/A

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads (120V Adapter)	No	1.8	PA	AC Power Adapter - 120V	EUT- Q5 RF
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment


Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

Test Description

Requirement: Per 47 CFR 15.247(d), in any 100 kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

Configuration: The peak output power was measured with the EUT set to low, mid, and high transmit frequencies. The EUT was transmitting at its maximum output power and data rate.

The measurement was made at a 3 meter test distance. The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to low and high transmit frequencies. The EUT was transmitting at its maximum data rate in a no hop mode. The channels closest to the band edges were selected. The spectrum was scanned across each band edge from at least 5 MHz below the band edge to at least 5 MHz above the band edge.

Completed by:

NORTHWEST
EMC

Band Edge Compliance

Rev BETA
01/30/01

EUT: Q5 RF	Work Order: PROU0011	
Serial Number: EMC 0x44040F	Date: 01/08/05	
Customer: Product Creation Studio	Temperature: 22°C	
Attendees: None	Tested by: Holly Ashkannejhad	Humidity: 31%
Customer Ref. No.: N/A	Power: 120VAC/60Hz	Job Site: EV01

TEST SPECIFICATIONS			
Specification: CFR 47 Part 15.247(d)	Year: 2004	Method: 97-114, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS

COMMENTS

EUT OPERATING MODES
Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD
None

REQUIREMENTS
The maximum level of the radio frequency power must be at least 20dB down from the highest emission level within the authorized band.


RESULTS	Amplitude
Pass	-30.05dB

SIGNATURE

Tested By: Holly Ashkannejhad

DESCRIPTION OF TEST

Low Channel

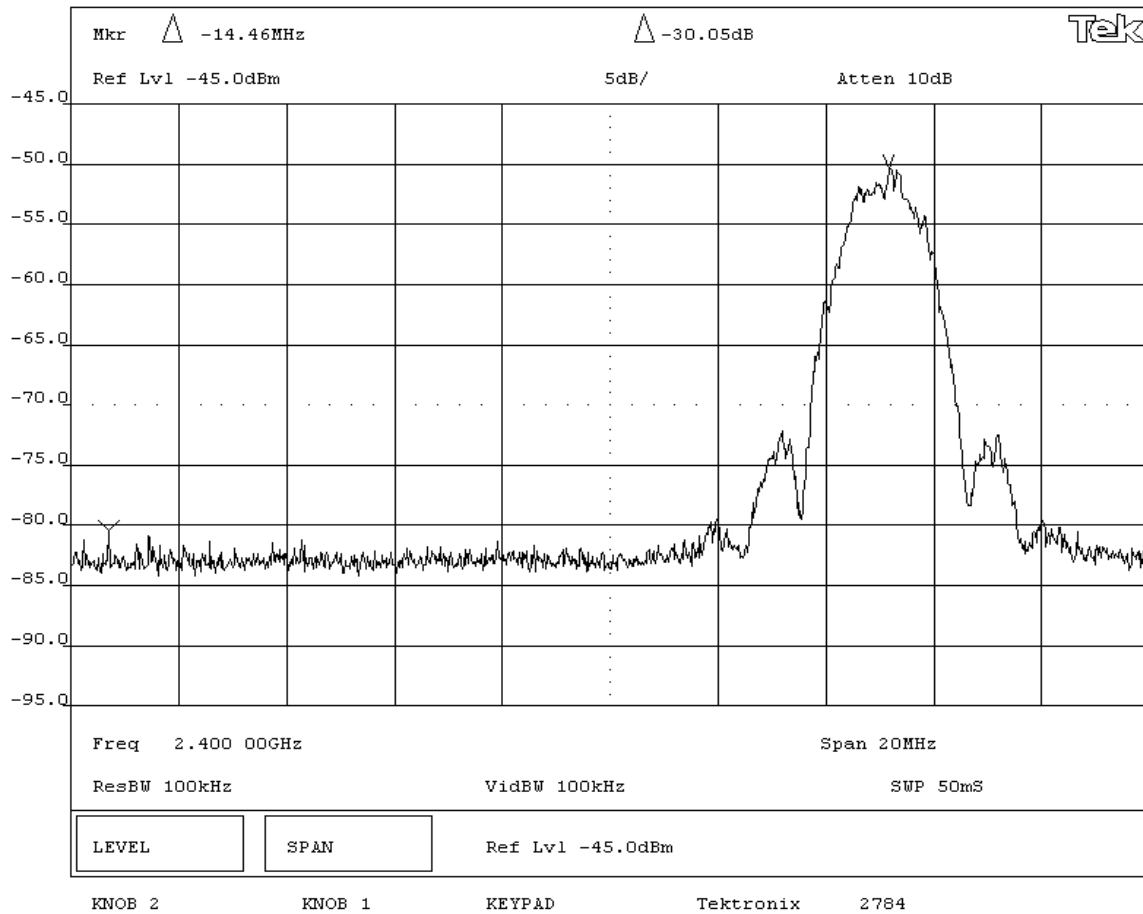

NORTHWEST
EMC

Band Edge Compliance

Rev BETA
01/30/01

EUT: Q5 RF	Work Order: PROU0011
Serial Number: EMC 0x44040F	Date: 01/08/05
Customer: Product Creation Studio	Temperature: 22°C
Attendees: None	Tested by: Holly Ashkannejhad
Customer Ref. No.: N/A	Power: 120VAC/60Hz
	Humidity: 31%
	Job Site: EV01

TEST SPECIFICATIONS			
Specification: CFR 47 Part 15.247(d)	Year: 2004	Method: 97-114, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS

COMMENTS

EUT OPERATING MODES
Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD
None

REQUIREMENTS
The maximum level of the radio frequency power must be at least 20dB down from the highest emission level within the authorized band.


RESULTS	Amplitude
Pass	-23.55dB

SIGNATURE



Tested By: Holly Ashkannejhad

DESCRIPTION OF TEST

High Channel

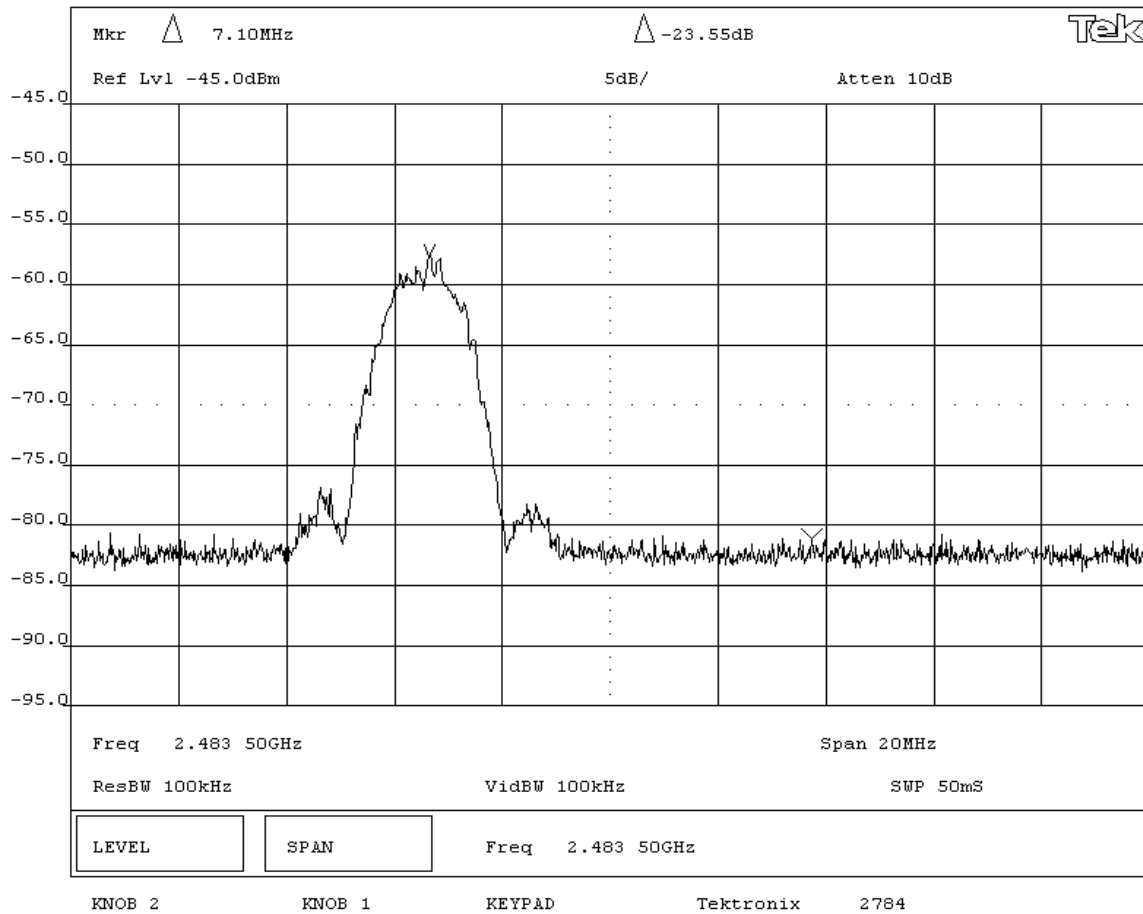



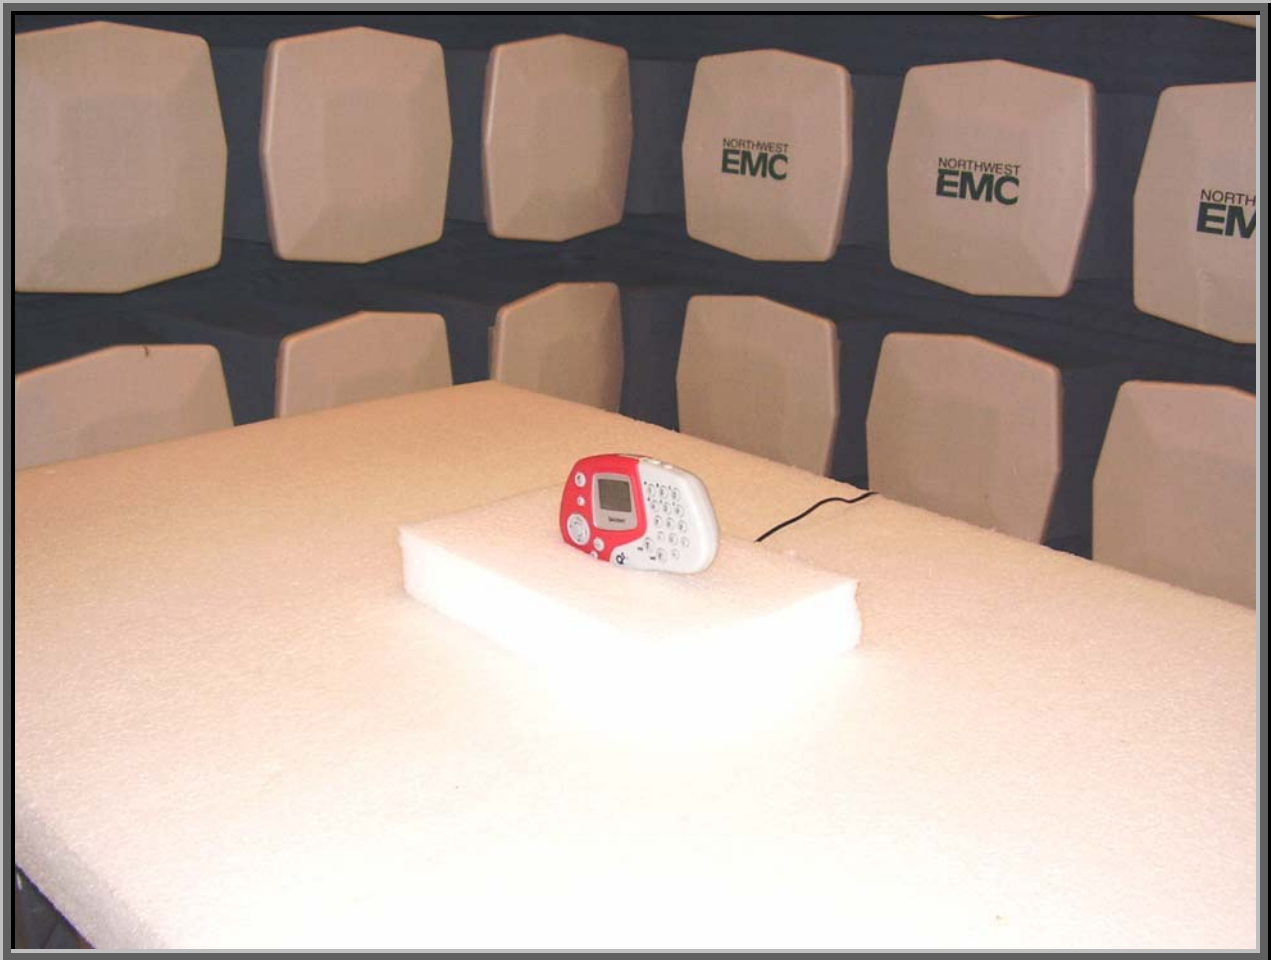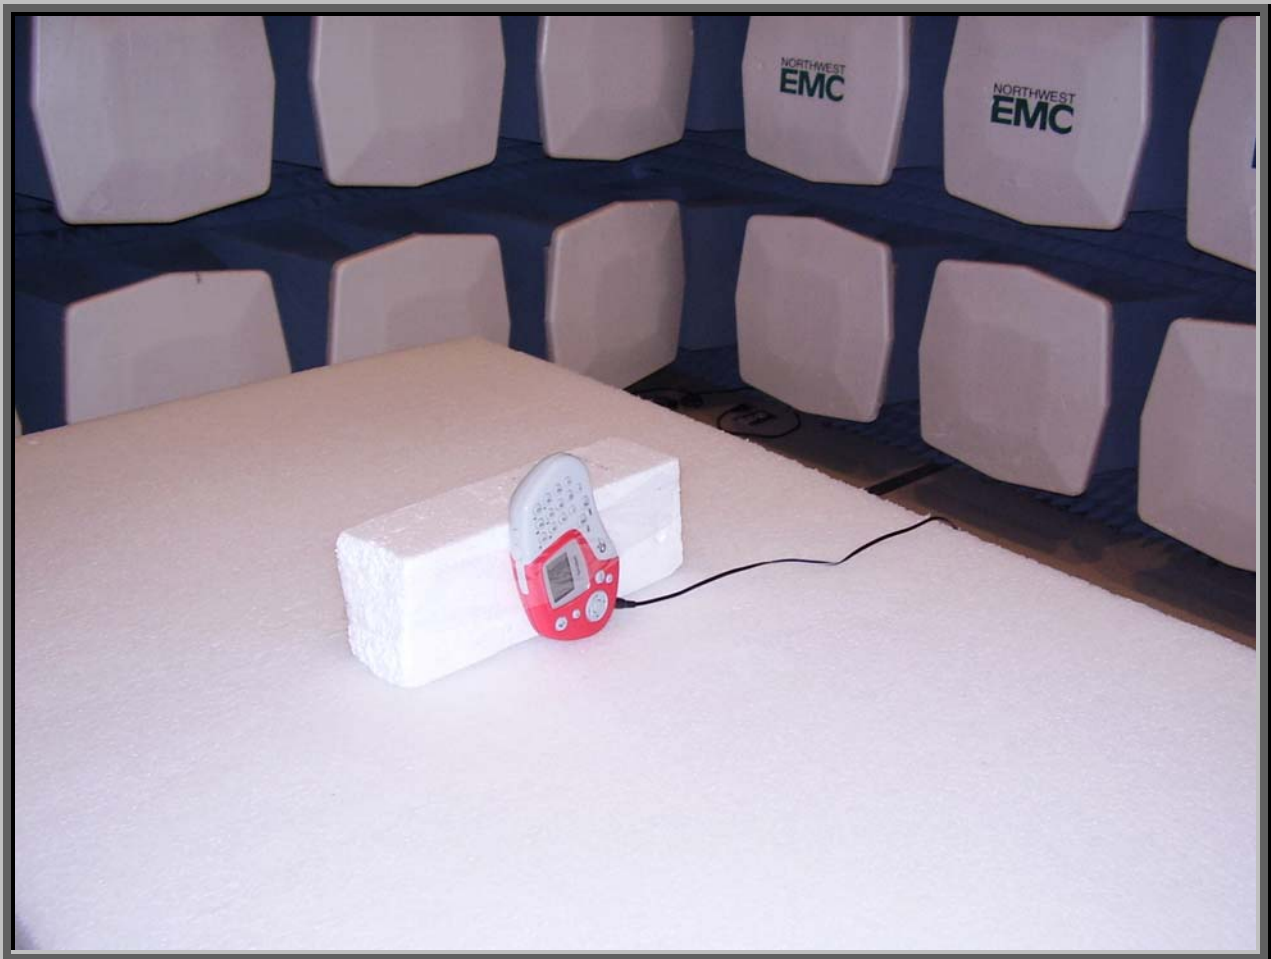

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

Channels in Specified Band Investigated:

Low
Mid
High

Operating Modes Investigated:

Typical

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

120VAC, 60Hz

Software\Firmware Applied During Test

Exercise software	Standard Production Software	Version	Unknown
--------------------------	------------------------------	----------------	---------

Description

The system was tested using standard operating production software to exercise the functions of the device during the testing including channel, mode, and power.

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
AC Adapter	CUI Inc.	41-9-500R	NA
EUT- Q5 RF	Quizdom, Inc.	Q5 RF	EMC 0x44040F

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	No	1.5	No	Q5RF	AC Adapter

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/02/2004	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/02/2004	13 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo

Test Description

Requirement: Per 47 CFR 15.247(b)(3), the maximum peak output power must not exceed 1 Watt.

Configuration: The peak output power was measured with the EUT set to low, mid, and high transmit frequencies. The EUT was transmitting at its maximum output power and data rate.

The measurement was made using the alternative test procedure described in FCC 97-114. The maximum field strength of the fundamental was measured at a 3 meter distance. The field strength was maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.4:2003). The resolution and video bandwidths of the spectrum analyzer were set greater than the 6 dB bandwidth of the measured signal: RBW = VBW = 3 MHz.

The peak EIRP was calculated using the equation:

$$\text{EIRP} = (\text{Ed})^2 / 30$$

Where: E is the measured maximum field strength in V/m
D is the distance in meters from which the field strength was measured

De Facto EIRP Limit: Per 47 CFR 15.247 (b)(1-3), the EUT meets the de facto EIRP limit of +36dBm.

Completed by:


EUT: Q5 RF	Work Order: PROU0011
Serial Number: 0x44040F	Date: 01/08/05
Customer: Product Creation Studio	Temperature: 21
Attendees: Holly Ashkannejhad	Humidity: 32%
Cust. Ref. No.:	Barometric Pressure: 30.44
Tested by: Holly Ashkannejhad	Power: 120VAC/60Hz
	Job Site: EV01

TEST SPECIFICATIONS	
Specification: FCC 15.247(b) Output Power:2004	Method: ANSI C63.4:2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 low channel

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	8

Other

Holly Ashkannejhad
Tested By:

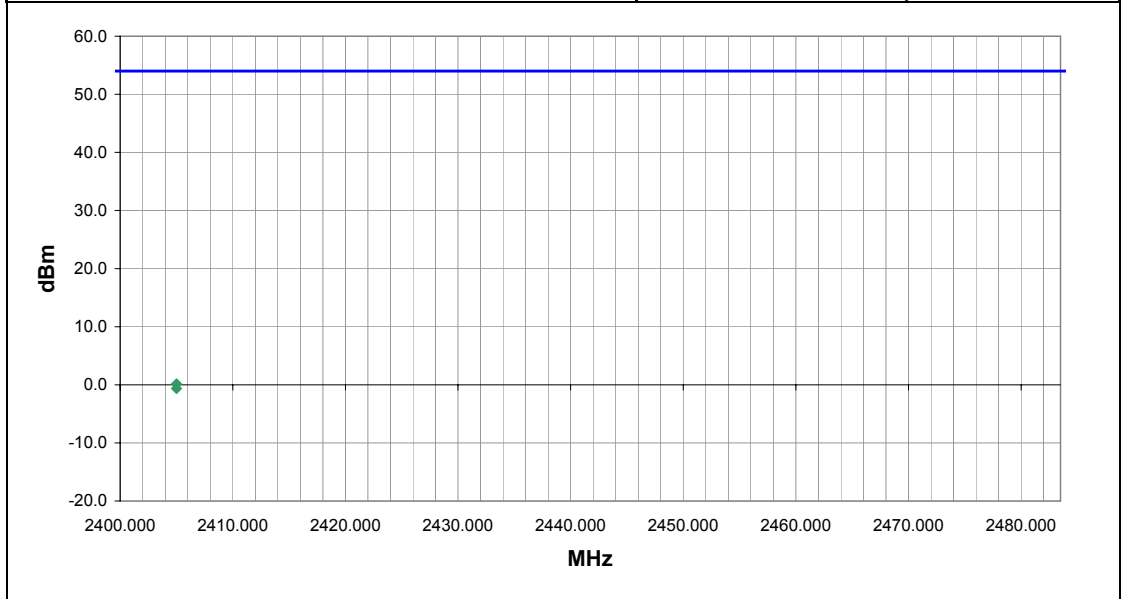

Freq (MHz)	Azimuth (degrees)	Height (meters)	Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
2405.000	87.0	1.2	V-Horn	PK	0.0010	0.2	30.0	-29.8	EUT on side.
2405.000	200.0	1.3	H-Horn	PK	0.0009	-0.6	30.0	-30.6	EUT horizontal.

EUT: Q5 RF	Work Order: PROU0011
Serial Number: 0x44040F	Date: 01/08/05
Customer: Product Creation Studio	Temperature: 21
Attendees: Holly Ashkannejhad	Humidity: 32%
Cust. Ref. No.:	Barometric Pressure: 30.44
Tested by: Holly Ashkannejhad	Power: 120VAC/60Hz
	Job Site: EV01

TEST SPECIFICATIONS	
Specification: FCC 15.247(b) Output Power:2004	Method: ANSI C63.4:2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 mid channel

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	9

Other

Holly Ashkannejhad
 Tested By:

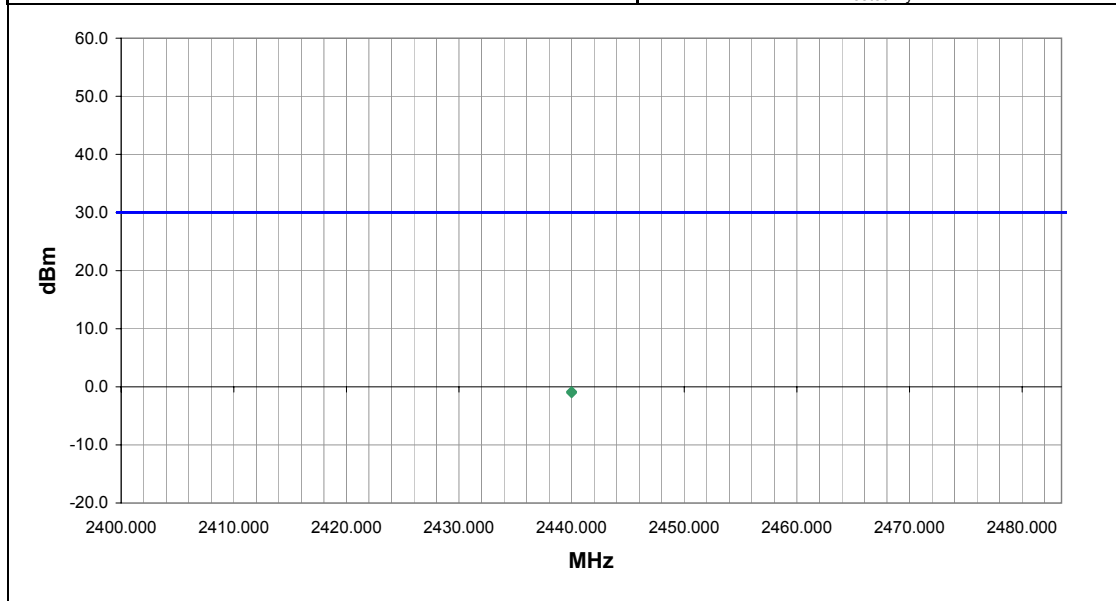

Freq (MHz)	Azimuth (degrees)	Height (meters)	Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
2440.000	65.0	1.2	V-Horn	PK	0.0008	-0.8	30.0	-30.8	EUT on side.
2440.000	200.0	1.2	H-Horn	PK	0.0008	-1.0	30.0	-31.0	EUT horizontal.

EUT: Q5 RF	Work Order: PROU0011
Serial Number: 0x44040F	Date: 01/08/05
Customer: Product Creation Studio	Temperature: 21
Attendees: Holly Ashkannejhad	Humidity: 32%
Cust. Ref. No.:	Barometric Pressure: 30.44
Tested by: Holly Ashkannejhad	Power: 120VAC/60Hz
	Job Site: EV01

TEST SPECIFICATIONS	
Specification: FCC 15.247(b) Output Power:2004	Method: ANSI C63.4:2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 high channel

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	10



Other


 Tested By: _____

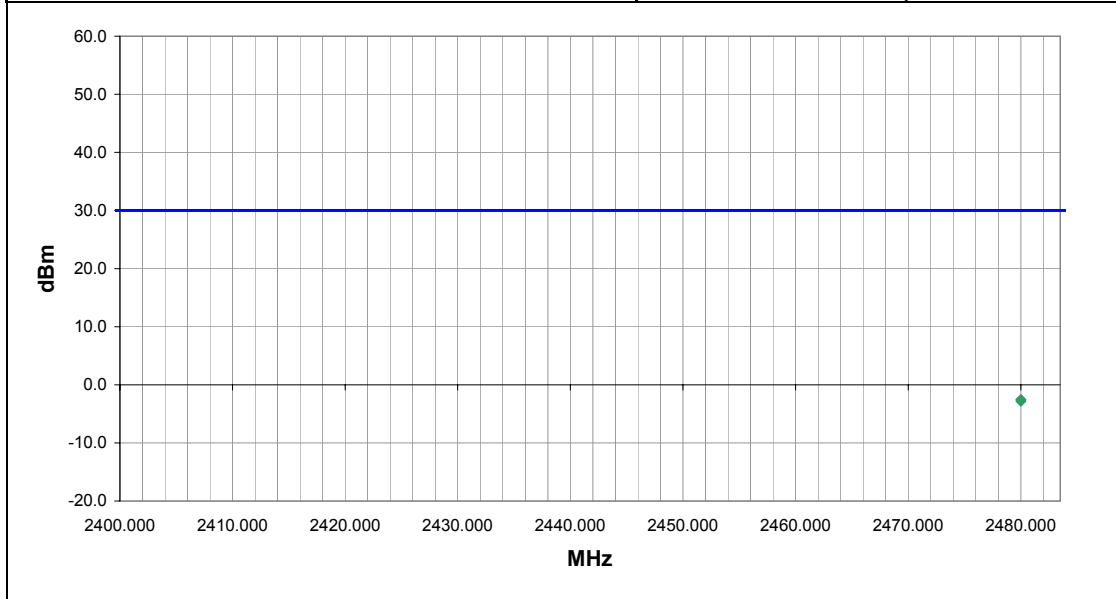

Freq (MHz)	Azimuth (degrees)	Height (meters)	Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
2480.000	165.0	1.1	H-Horn	PK	0.0006	-2.5	30.0	-32.5	EUT Horizontal.
2480.000	127.0	1.2	V-Horn	PK	0.0005	-2.8	30.0	-32.8	EUT on side.



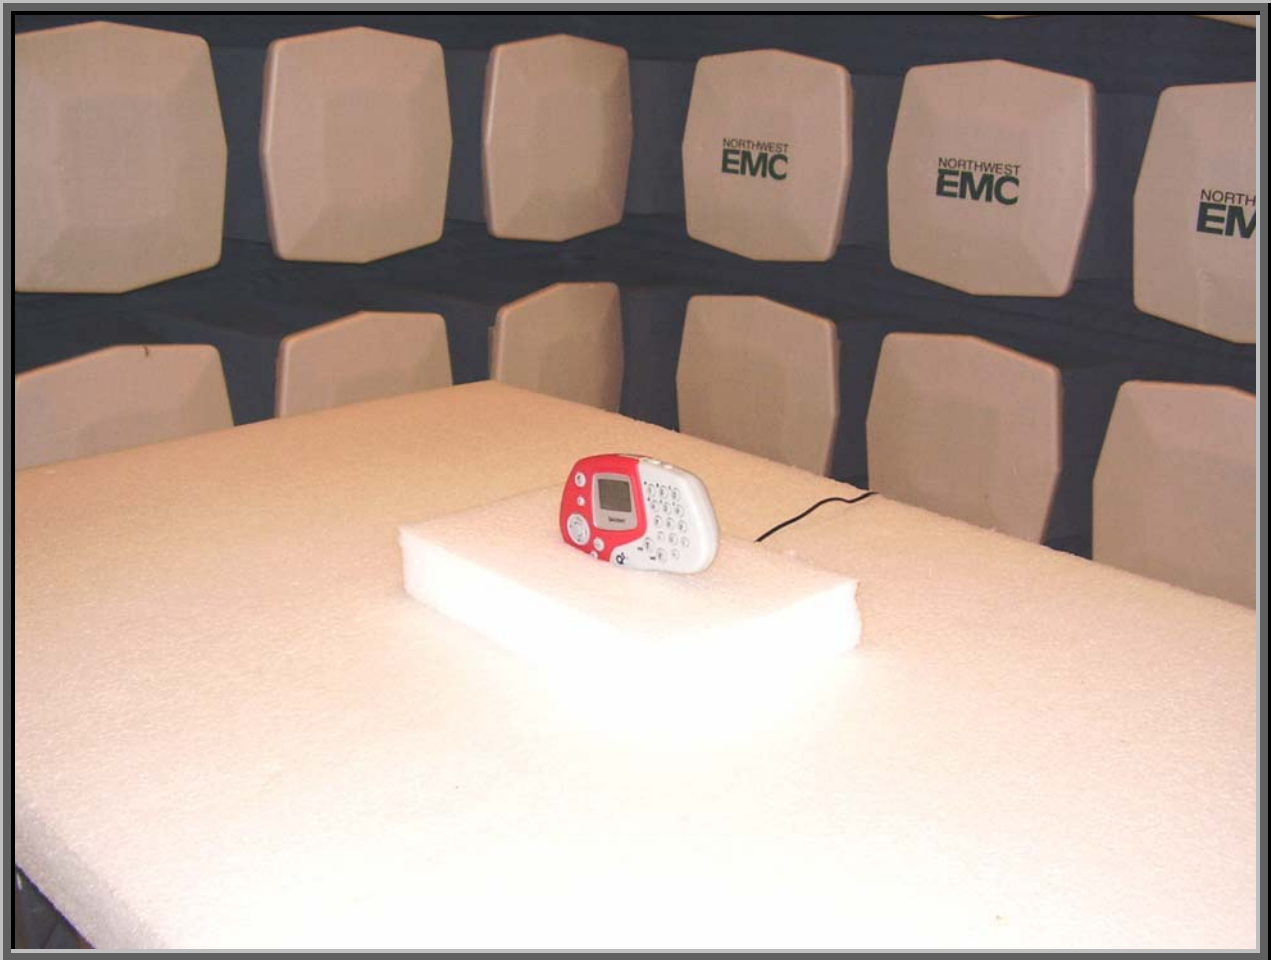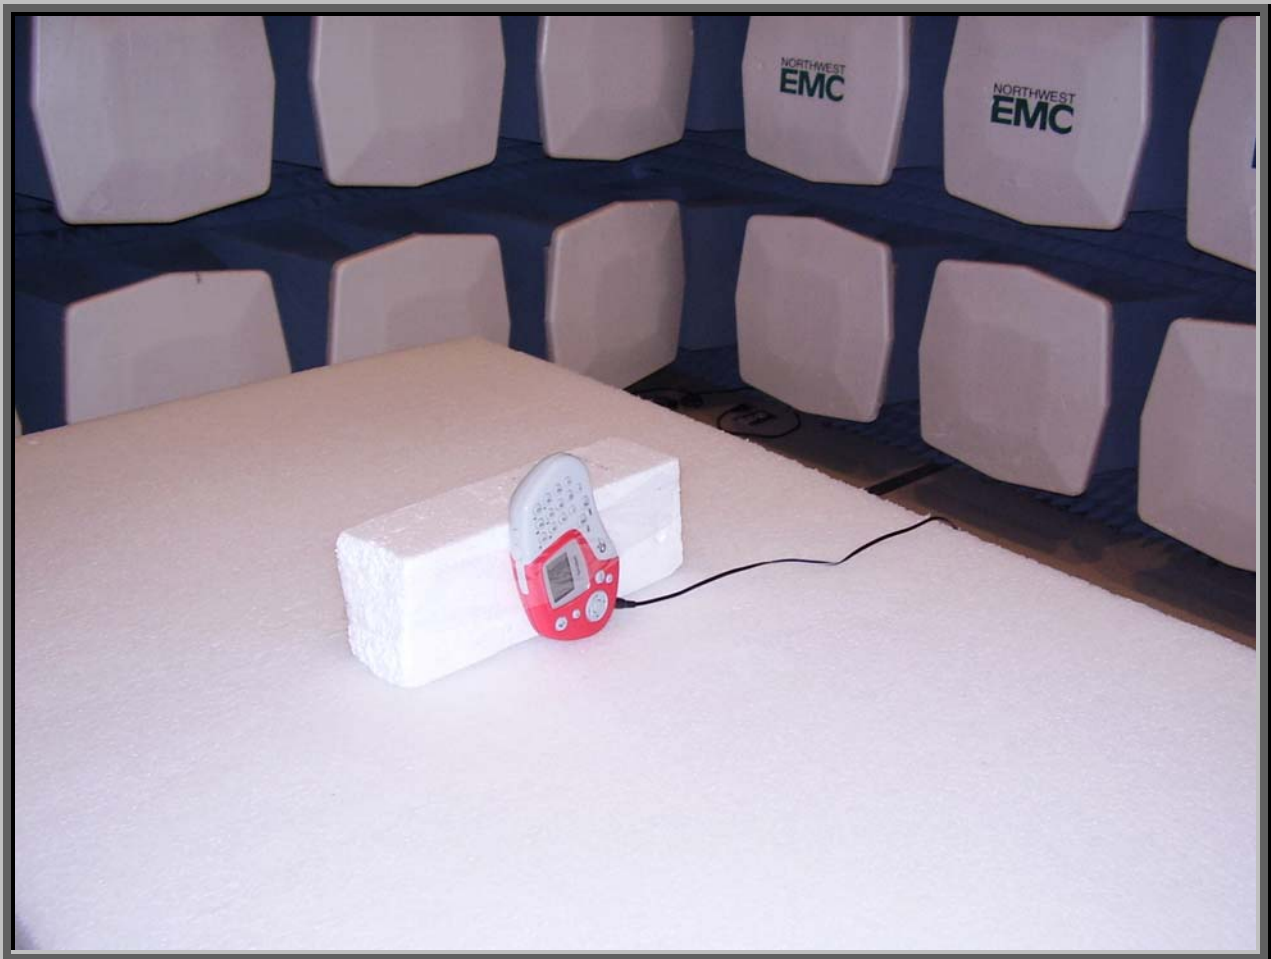

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

Channels in Specified Band Investigated:

Low
Mid
High

Operating Modes Investigated:

Typical

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

120VAC, 60Hz

Software\Firmware Applied During Test

Exercise software	Standard Production Software	Version	Unknown
--------------------------	------------------------------	----------------	---------

Description

The system was tested using standard operating production software to exercise the functions of the device during the testing including channel, mode, and power.

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
AC Adapter	CUI Inc.	41-9-500R	NA
EUT- Q5 RF	Quizdom, Inc.	Q5 RF	EMC 0x44040F

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	No	1.5	No	Q5RF	AC Adapter

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

Test Description

Requirement: Per 47 CFR 15.247(e), the peak power spectral density conducted from the antenna port of a direct sequence transmitter must not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission.

Configuration: The peak power spectral density measurements were measured with the EUT set to low, mid, and high transmit frequencies. The EUT was transmitting at its maximum data rate.

The measurement was made using the alternative test procedure described in FCC 97-114. The maximum field strength of the fundamental was measured at a 3 meter distance. The field strength was maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.4:2003). Then the analyzer was tuned to the highest point of the maximized fundamental emission and reset per the procedure outline in FCC 97-114.

The emission peak(s) were located and zoomed in on within the passband. The resolution Bandwidth was set to 3kHz, the video bandwidth was set to greater than or equal to the resolution bandwidth. The sweep speed was set equal to the span divided by 3kHz (sweep = (SPAN/3 kHz)). For example, given a span of 1.5 MHz, the sweep should be 1.5MHz/3kHz = 500 seconds. External attenuation was used and added to the reading. The following FCC procedure was used for modifying the power spectral density measurements.


"If the spectrum line spacing cannot be resolved on the available spectrum analyzer, the noise density function on most modern conventional spectrum analyzers will directly measure the noise power density normalized to a 1 Hz noise power bandwidth. Add 34.8 dB for correction to 3kHz."

The spectrum analyzer display was internally offset by a correction factor equal to the antenna factor (dB/m) plus the cable loss (dB) plus a field strength (dBm/m) to EIRP (dBm) conversion factor of 11.77dB. The conversion factor of 11.77 dB was derived from the equation:

$$\text{EIRP} = (\text{Ed})^2 / 30$$

Where: E is the measured maximum field strength in V/m
d is the distance in meters from which the field strength was measured (3 meters)
EIRP is in W

The bandwidth correction factor of 34.8 dB was added to the marker noise value (dBm/Hz) on the spectrum analyzer display to convert it to dBm/3kHz for comparison with the limit.

Completed by:

EUT: Q5 RF	Work Order: PROU0011
Serial Number: EMC 0x44040F	Date: 01/09/05
Customer: Product Creation Studio	Temperature: 22°C
Attendees: None	Tested by: Holly Ashkannejhad
Customer Ref. No.: N/A	Power: 120VAC/60Hz
	Humidity: 31%
	Job Site: EV01

TEST SPECIFICATIONS			
Specification: 47 CFR Part 15.247(e)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS
 Meter reading on spectrum analyzer is internally compensated for cable loss, antenna factor, and field strength (dBm/m) to EIRP (dBm) conversion factor.
 Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.
 Bandwidth Correction Factor = $10 \cdot \log(3\text{kHz}/1\text{Hz})$

COMMENTS

EUT OPERATING MODES

Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum peak power spectral density conducted from a hybrid transmitter does not exceed 8 dBm in any 3 kHz band.

RESULTS


Pass AMPLITUDE
Power Spectral Density = -13.8 dBm / 3kHz

SIGNATURE

Tested By: Holly Ashkannejhad

DESCRIPTION OF TEST

Power Spectral Density - Low Channel

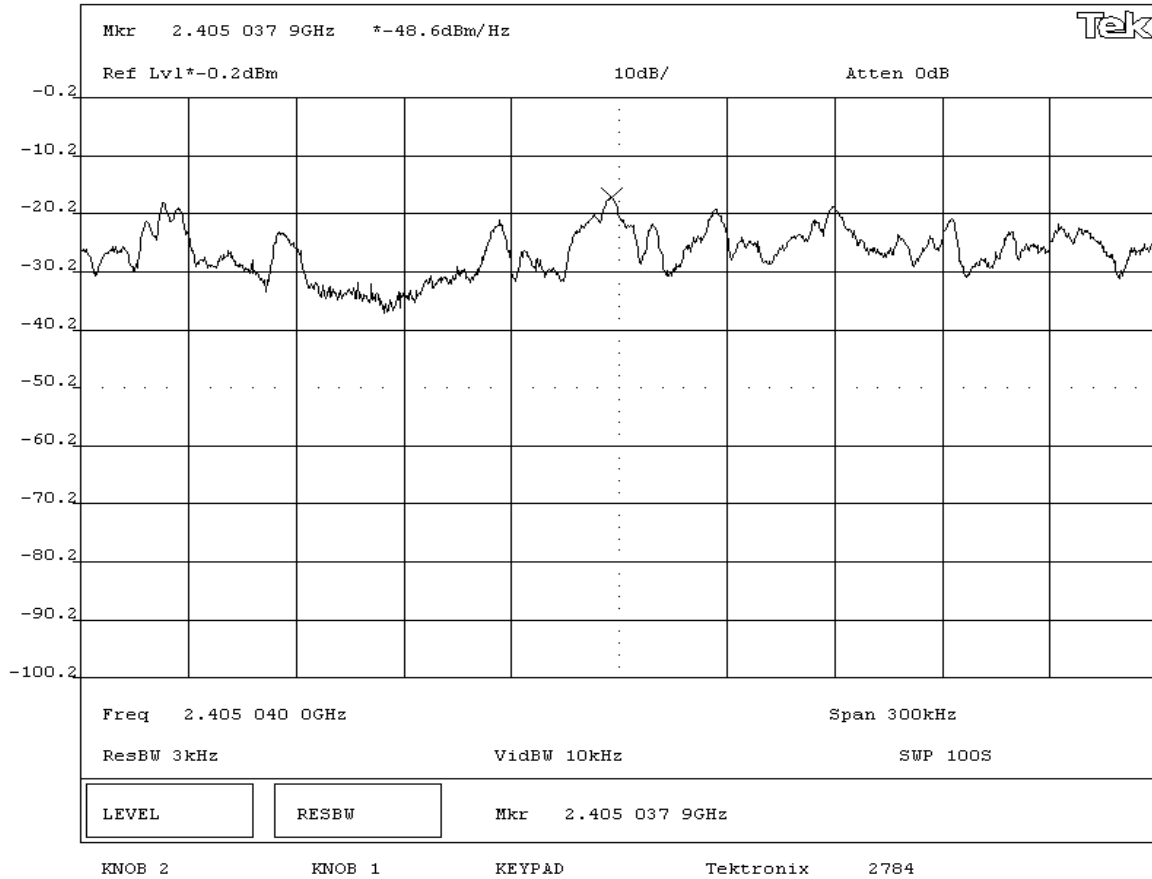

EMC Rev BETA 01/30/01

Power Spectral Density

EUT: Q5 RF		Work Order: PROU0011
Serial Number: EMC 0x44040F		Date: 01/09/05
Customer: Product Creation Studio		Temperature: 22°C
Attendees: None	Tested by: Holly Ashkannejhad	Humidity: 31%
Customer Ref. No.: N/A	Power: 120VAC/60Hz	Job Site: EV01

TEST SPECIFICATIONS			
Specification: 47 CFR Part 15.247(e)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS
 Meter reading on spectrum analyzer is internally compensated for cable loss, antenna factor, and field strength (dBm/m) to EIRP (dBm) conversion factor.
 Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.
 Bandwidth Correction Factor = $10 \cdot \log(3\text{kHz}/1\text{Hz})$

COMMENTS

EUT OPERATING MODES

Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum peak power spectral density conducted from a hybrid transmitter does not exceed 8 dBm in any 3 kHz band.

RESULTS **AMPLITUDE**


Pass Power Spectral Density = -14.3 dBm / 3kHz

SIGNATURE

Tested By: *Holly Ashkannejhad*

DESCRIPTION OF TEST

Power Spectral Density - Mid Channel

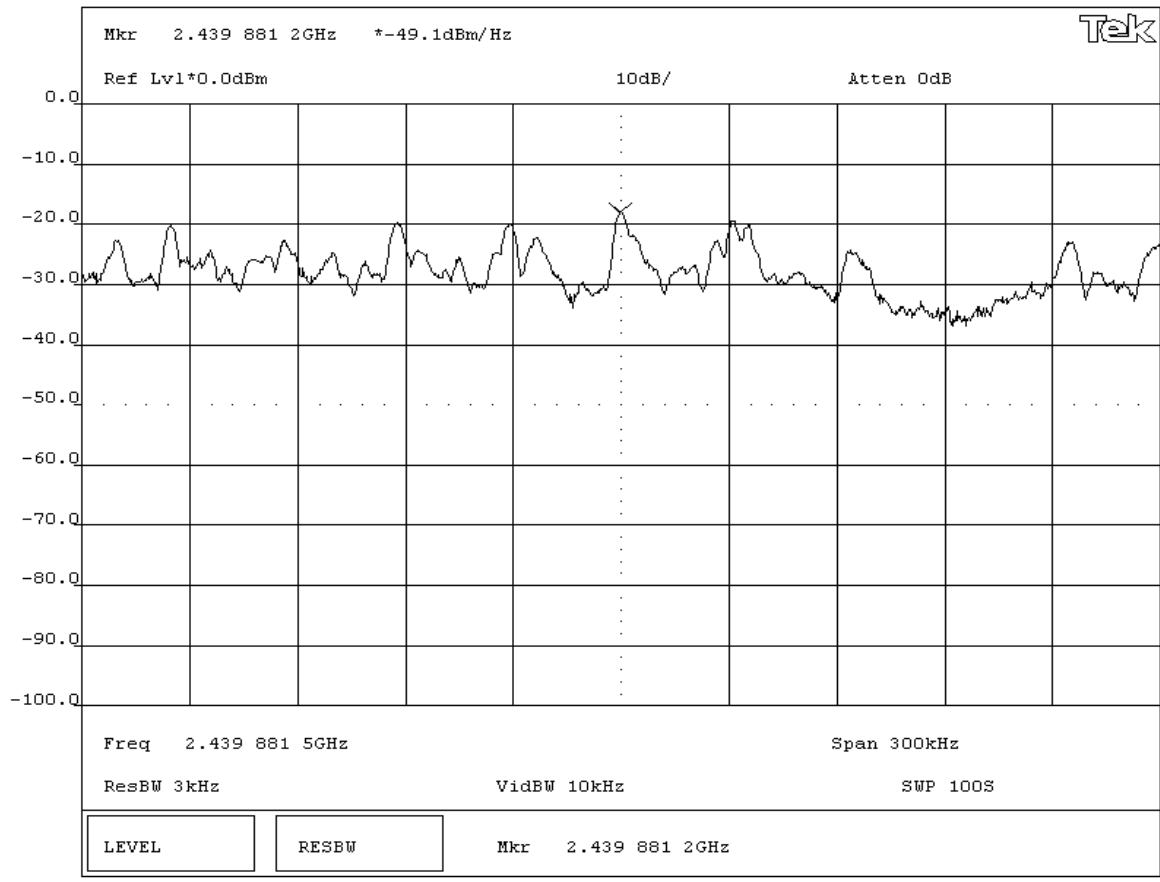

EUT: Q5 RF		Work Order: PROU0011	
Serial Number: EMC 0x44040F		Date: 01/09/05	
Customer: Product Creation Studio		Temperature: 22°C	
Attendees: None	Tested by: Holly Ashkannejhad	Humidity: 31%	
Customer Ref. No.: N/A	Power: 120VAC/60Hz	Job Site: EV01	

TEST SPECIFICATIONS			
Specification: 47 CFR Part 15.247(e)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS
 Meter reading on spectrum analyzer is internally compensated for cable loss, antenna factor, and field strength (dBm/m) to EIRP (dBm) conversion factor.
 Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.
 Bandwidth Correction Factor = $10 \cdot \log(3\text{kHz}/1\text{Hz})$

COMMENTS

EUT OPERATING MODES
 Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD
 None

REQUIREMENTS
 Maximum peak power spectral density conducted from a hybrid transmitter does not exceed 8 dBm in any 3 kHz band.


RESULTS **AMPLITUDE**
 Pass Power Spectral Density = -15.6 dBm / 3kHz

SIGNATURE



Tested By: *Holly Ashkannejhad*

DESCRIPTION OF TEST

Power Spectral Density - High Channel

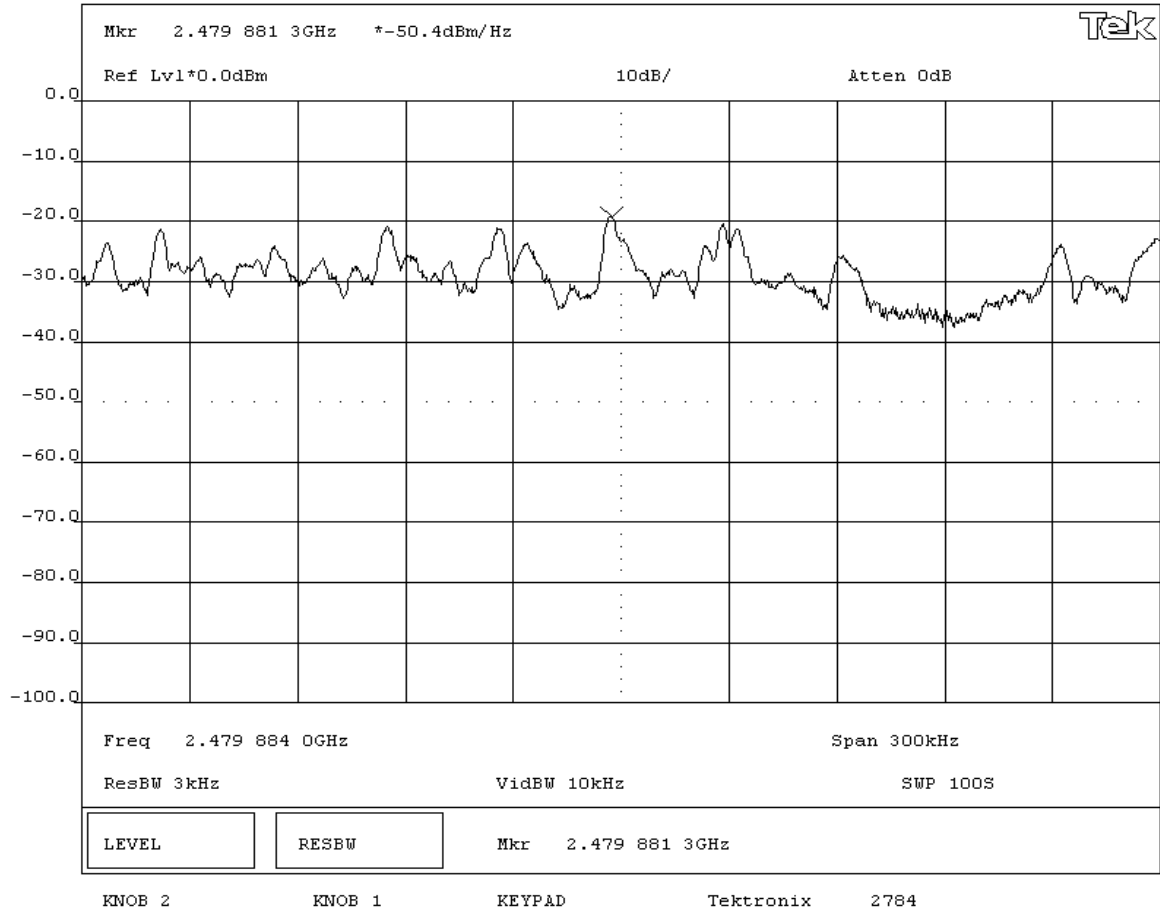



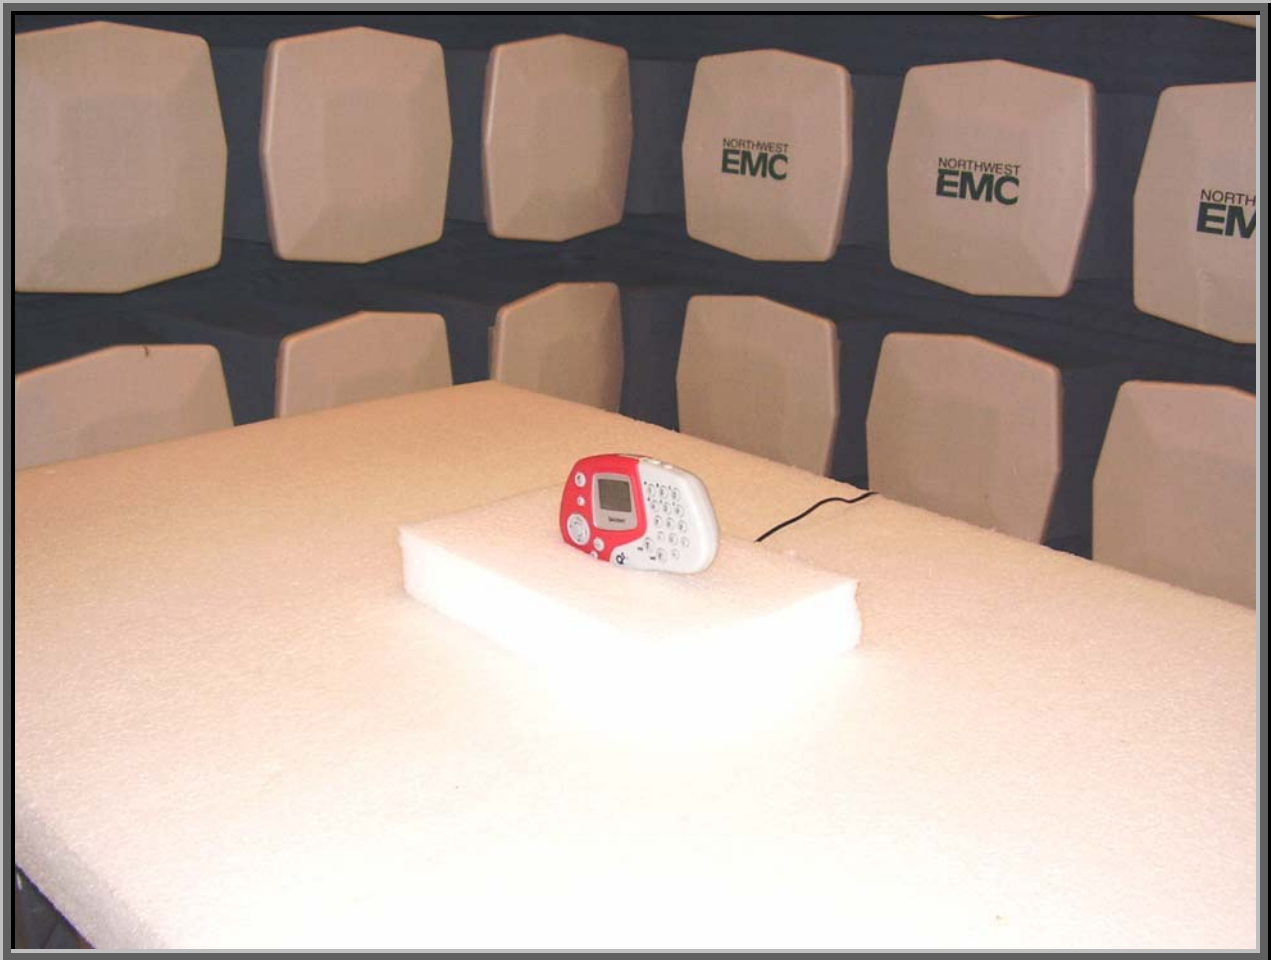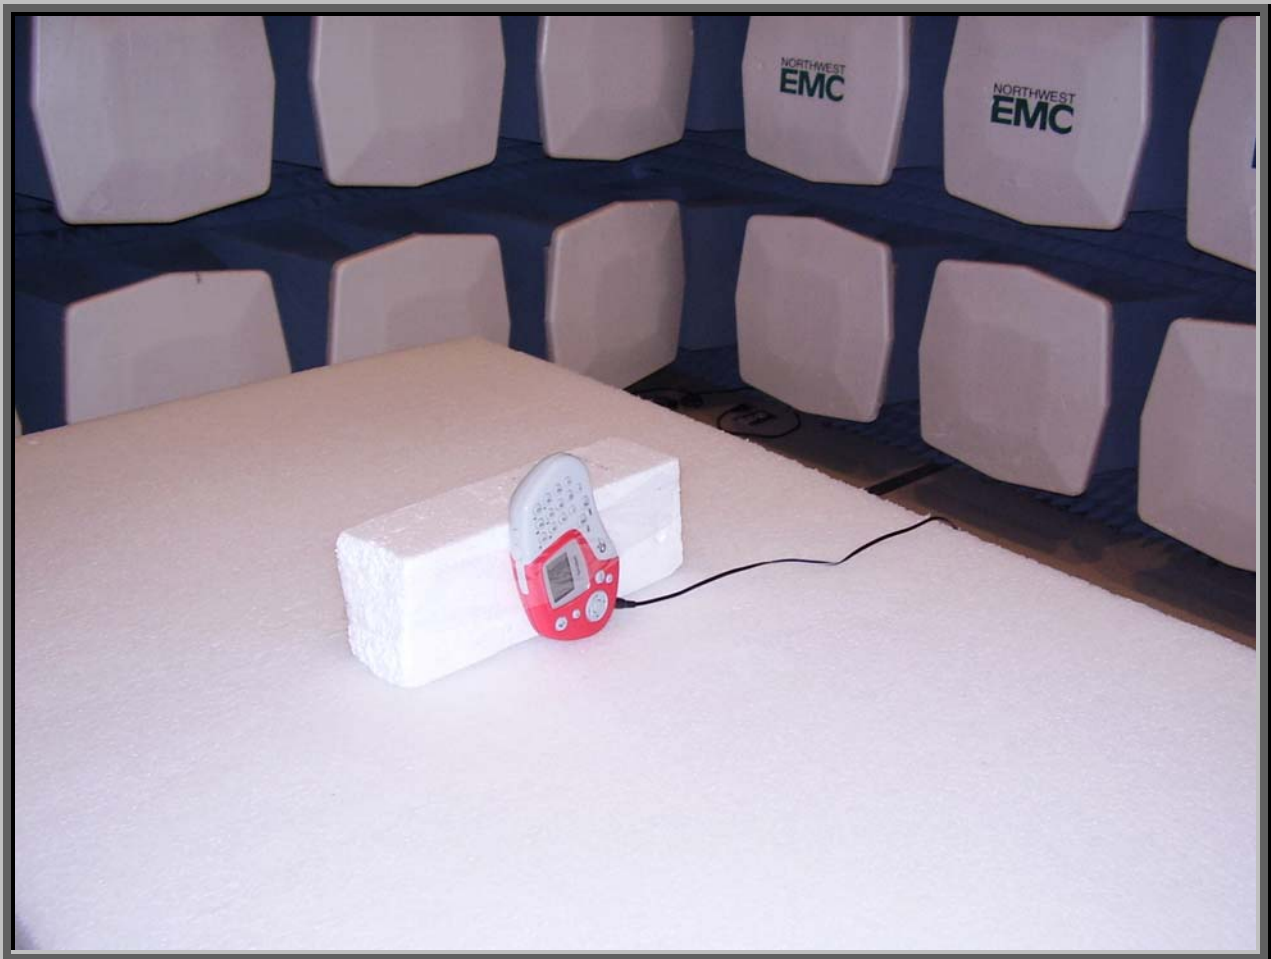

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low

Mid

High

Operating Modes Investigated:

Transmit

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

Battery

Frequency Range Investigated**Start Frequency**

30 MHz

Stop Frequency

26 GHz

Software\Firmware Applied During Test**Exercise software**

Standard Production Software

Version

Unknown

Description

The system was tested using standard operating production software to exercise the functions of the device during the testing including channel, mode, and power.

EUT and Peripherals in Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
EUT- Q5 RF	Quizdom, Inc.	Q5 RF	EMC 0x44040F
AC Power Adapter - 120V	CUI, Inc.	41-9-500R	N/A

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads (120V Adapter)	No	1.8	PA	AC Power Adapter - 120V	EUT- Q5 RF
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	15 mo
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	15 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
Pre-Amplifier	AR	LN1000A	APS	02/05/2004	13 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/02/2004	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/02/2004	13 mo

Test Description


Requirement: The field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 47 CFR 15.205, is measured. The peak level must comply with the limits specified in 47 CFR 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.

Configuration: The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

Bandwidths Used for Measurements

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 – 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
Measurements were made using the bandwidths and detectors specified. No video filter was used.			

Completed by:

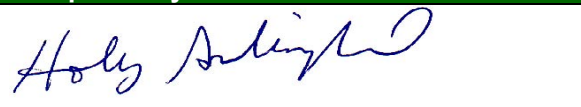

RADIATED EMISSIONS DATA SHEET

EUT: Q5 RF	Work Order: PROU0011
Serial Number: EMC 0x44040F	Date: 12/21/04
Customer: Product Creation Studio	Temperature: 22
Attendees: None	Humidity: 32%
Cust. Ref. No.:	Barometric Pressure: 30.44
Tested by: Rod Peloquin	Power: 120VAC/60Hz
	Job Site: EV01

TEST SPECIFICATIONS	
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004	Method: ANSI C63.4:2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS

EUT OPERATING MODES
 No hop, high channel


DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	1

Other

Rod Peloquin

 Tested By:

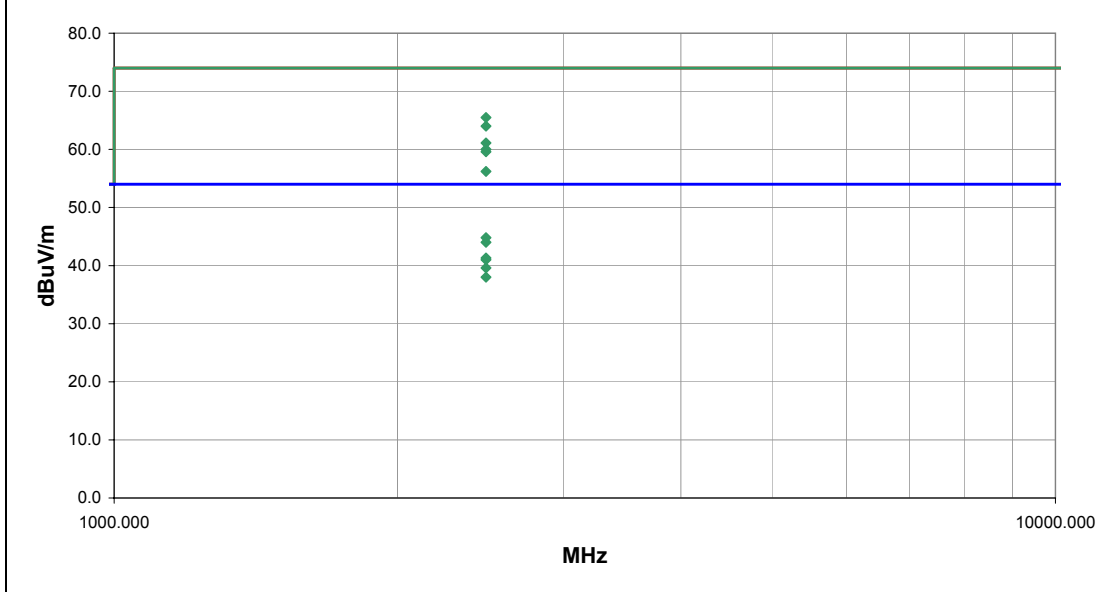

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
2483.500	57.7	-2.2	22.0	1.2	3.0	10.0	V-Horn	PK	0.0	65.5	74.0	-8.5	EUT on side
2483.500	37.0	-2.2	22.0	1.2	3.0	10.0	V-Horn	AV	0.0	44.8	54.0	-9.2	EUT on side
2483.500	36.2	-2.2	357.0	1.3	3.0	10.0	H-Horn	AV	0.0	44.0	54.0	-10.0	EUT vertical
2483.500	56.2	-2.2	357.0	1.3	3.0	10.0	H-Horn	PK	0.0	64.0	74.0	-10.0	EUT vertical
2483.500	33.5	-2.2	270.0	1.1	3.0	10.0	H-Horn	AV	0.0	41.3	54.0	-12.7	EUT horizontal
2483.500	53.3	-2.2	271.0	1.1	3.0	10.0	H-Horn	PK	0.0	61.1	74.0	-12.9	EUT horizontal
2483.500	33.2	-2.2	232.0	1.4	3.0	10.0	V-Horn	AV	0.0	41.0	54.0	-13.0	EUT vertical
2483.500	52.2	-2.2	223.0	1.4	3.0	10.0	V-Horn	PK	0.0	60.0	74.0	-14.0	EUT horizontal
2483.500	31.8	-2.2	223.0	1.4	3.0	10.0	V-Horn	AV	0.0	39.6	54.0	-14.4	EUT horizontal
2483.500	51.8	-2.2	232.0	1.4	3.0	10.0	V-Horn	PK	0.0	59.6	74.0	-14.4	EUT vertical
2483.500	30.2	-2.2	254.0	1.3	3.0	10.0	H-Horn	AV	0.0	38.0	54.0	-16.0	EUT on side
2483.500	48.4	-2.2	254.0	1.3	3.0	10.0	H-Horn	PK	0.0	56.2	74.0	-17.8	EUT on side

RADIATED EMISSIONS DATA SHEET

EUT: Q5 RF	Work Order: PROU0011
Serial Number: EMC 0x44040F	Date: 12/22/04
Customer: Product Creation Studio	Temperature: 21
Attendees: Scott Thielman	Humidity: 34%
Cust. Ref. No.:	Barometric Pressure: 30.5
Tested by: Dan Haas	Power: 120VAC/60Hz
	Job Site: EV01

TEST SPECIFICATIONS	
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004	Method: ANSI C63.4:2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 No hop, high channel

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	2

Other


 Tested By: _____

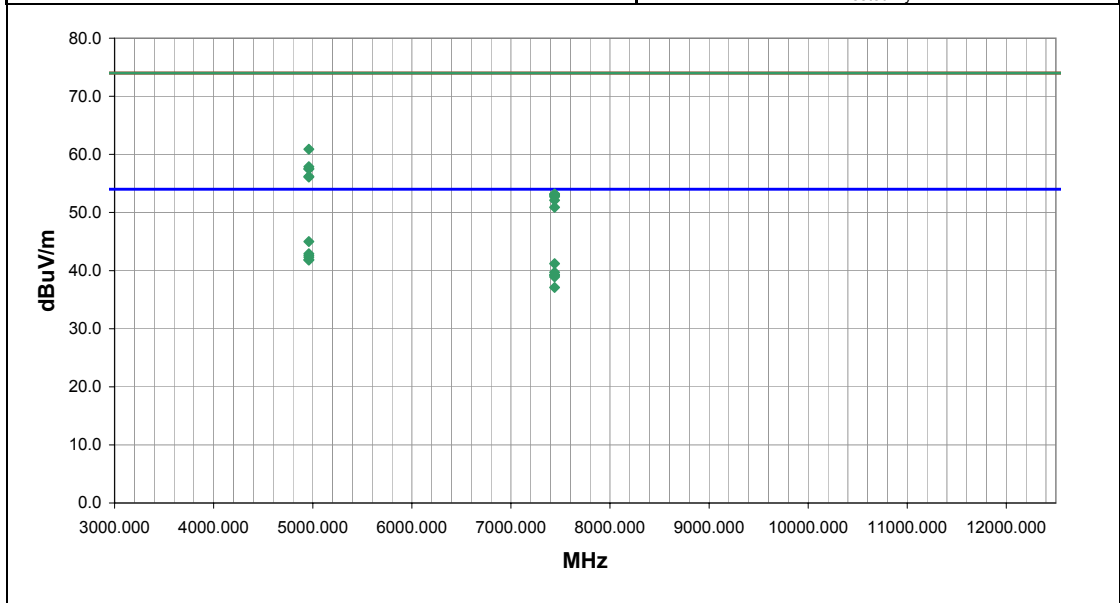

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
4959.985	41.4	3.6	27.0	1.3	3.0	0.0	H-Horn	AV	0.0	45.0	54.0	-9.0	EUT on its side
4959.985	39.3	3.6	186.0	1.6	3.0	0.0	V-Horn	AV	0.0	42.9	54.0	-11.1	EUT Vertical
4959.985	39.0	3.6	200.0	1.3	3.0	0.0	V-Horn	AV	0.0	42.6	54.0	-11.4	EUT Horizontal
4959.985	38.7	3.6	216.0	1.4	3.0	0.0	H-Horn	AV	0.0	42.3	54.0	-11.7	EUT Vertical
4959.985	38.3	3.6	82.0	1.7	3.0	0.0	V-Horn	AV	0.0	41.9	54.0	-12.1	EUT on its side
4959.985	38.2	3.6	37.0	1.1	3.0	0.0	H-Horn	AV	0.0	41.8	54.0	-12.2	EUT Horizontal
7440.009	30.1	11.1	264.0	1.5	3.0	0.0	H-Horn	AV	0.0	41.2	54.0	-12.8	EUT on its side
4959.985	57.3	3.6	27.0	1.3	3.0	0.0	H-Horn	PK	0.0	60.9	74.0	-13.1	EUT on its side
7440.009	28.6	11.1	52.0	1.2	3.0	0.0	V-Horn	AV	0.0	39.7	54.0	-14.3	EUT Vertical
7440.009	28.2	11.1	220.0	2.4	3.0	0.0	V-Horn	AV	0.0	39.3	54.0	-14.7	EUT Horizontal
7440.009	28.1	11.1	31.0	1.2	3.0	0.0	V-Horn	AV	0.0	39.2	54.0	-14.8	EUT on its side
7440.009	27.8	11.1	145.0	1.8	3.0	0.0	H-Horn	AV	0.0	38.9	54.0	-15.1	EUT Vertical
4959.985	54.3	3.6	186.0	1.6	3.0	0.0	V-Horn	PK	0.0	57.9	74.0	-16.1	EUT Vertical
4959.985	53.9	3.6	200.0	1.3	3.0	0.0	V-Horn	PK	0.0	57.5	74.0	-16.5	EUT Horizontal
4959.985	53.9	3.6	216.0	1.4	3.0	0.0	H-Horn	PK	0.0	57.5	74.0	-16.5	EUT Vertical
7440.009	26.0	11.1	158.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.1	54.0	-16.9	EUT Horizontal
4959.985	52.6	3.6	37.0	1.1	3.0	0.0	H-Horn	PK	0.0	56.2	74.0	-17.8	EUT Horizontal
4959.985	52.5	3.6	82.0	1.7	3.0	0.0	V-Horn	PK	0.0	56.1	74.0	-17.9	EUT on its side
7440.009	42.1	11.1	264.0	1.5	3.0	0.0	H-Horn	PK	0.0	53.2	74.0	-20.8	EUT on its side
7440.009	42.0	11.1	220.0	2.4	3.0	0.0	V-Horn	PK	0.0	53.1	74.0	-20.9	EUT Horizontal

EUT: Q5 RF	Work Order: PROU0011
Serial Number: EMC 0x44040F	Date: 12/22/04
Customer: Product Creation Studio	Temperature: 20
Attendees: Scott Thielman	Humidity: 35%
Cust. Ref. No.:	Barometric Pressure: 30.5
Tested by: Dan Haas	Power: 120VAC/60Hz
	Job Site: EV01

TEST SPECIFICATIONS	
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004	Method: ANSI C63.4:2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 No hop, Mid channel

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	3

Other


 Tested By: _____

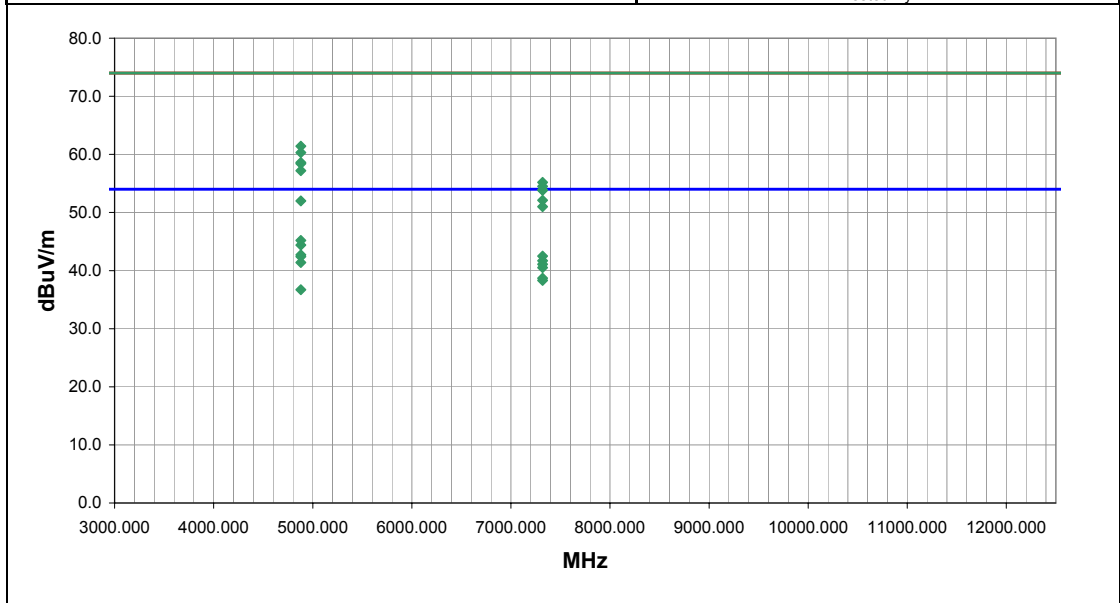

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
4880.079	41.6	3.6	2.0	1.3	3.0	0.0	H-Horn	AV	0.0	45.2	54.0	-8.8	EUT on its side
4880.079	40.8	3.6	22.0	1.1	3.0	0.0	V-Horn	AV	0.0	44.4	54.0	-9.6	EUT Vertical
4880.079	39.1	3.6	343.0	1.3	3.0	0.0	H-Horn	AV	0.0	42.7	54.0	-11.3	EUT Vertical
7320.057	32.0	10.5	346.0	1.4	3.0	0.0	V-Horn	AV	0.0	42.5	54.0	-11.5	EUT Vertical
4880.079	38.8	3.6	186.0	1.7	3.0	0.0	V-Horn	AV	0.0	42.4	54.0	-11.6	EUT Horizontal
7320.057	31.2	10.5	322.0	1.1	3.0	0.0	H-Horn	AV	0.0	41.7	54.0	-12.3	EUT Vertical
4880.079	37.8	3.6	345.0	1.1	3.0	0.0	H-Horn	AV	0.0	41.4	54.0	-12.6	EUT Horizontal
4880.079	57.8	3.6	2.0	1.3	3.0	0.0	H-Horn	PK	0.0	61.4	74.0	-12.6	EUT on its side
7320.057	30.6	10.5	276.0	1.1	3.0	0.0	H-Horn	AV	0.0	41.1	54.0	-12.9	EUT on its side
7320.057	30.0	10.5	35.0	1.2	3.0	0.0	V-Horn	AV	0.0	40.5	54.0	-13.5	EUT Horizontal
4880.079	56.7	3.6	22.0	1.1	3.0	0.0	V-Horn	PK	0.0	60.3	74.0	-13.7	EUT Vertical
7320.057	28.2	10.5	172.0	1.2	3.0	0.0	V-Horn	AV	0.0	38.7	54.0	-15.3	EUT on its side
4880.079	55.0	3.6	343.0	1.3	3.0	0.0	H-Horn	PK	0.0	58.6	74.0	-15.4	EUT Vertical
4880.079	54.8	3.6	186.0	1.7	3.0	0.0	V-Horn	PK	0.0	58.4	74.0	-15.6	EUT Horizontal
7320.057	27.8	10.5	-1.0	1.3	3.0	0.0	H-Horn	AV	0.0	38.3	54.0	-15.7	EUT Horizontal
4880.079	53.6	3.6	345.0	1.1	3.0	0.0	H-Horn	PK	0.0	57.2	74.0	-16.8	EUT Horizontal
4880.079	33.1	3.6	227.0	1.2	3.0	0.0	V-Horn	AV	0.0	36.7	54.0	-17.3	EUT on its side
7320.057	44.7	10.5	346.0	1.4	3.0	0.0	V-Horn	PK	0.0	55.2	74.0	-18.8	EUT Vertical
7320.057	44.0	10.5	322.0	1.1	3.0	0.0	H-Horn	PK	0.0	54.5	74.0	-19.5	EUT Vertical
7320.057	43.4	10.5	276.0	1.1	3.0	0.0	H-Horn	PK	0.0	53.9	74.0	-20.1	EUT on its side

NORTHWEST
EMC RADIATED EMISSIONS DATA SHEET
 REV d14.7 12/21/2004

EUT: Q5 RF	Work Order: PROU0011
Serial Number: EMC 0x44040F	Date: 12/22/04
Customer: Product Creation Studio	Temperature: 20
Attendees: Scott Thielman	Humidity: 35%
Cust. Ref. No.:	Barometric Pressure: 30.5
Tested by: Dan Haas	Power: 120VAC/60Hz
	Job Site: EV01

TEST SPECIFICATIONS	
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004	Method: ANSI C63.4:2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 No hop, Low channel

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	4

Other


 Tested By: _____

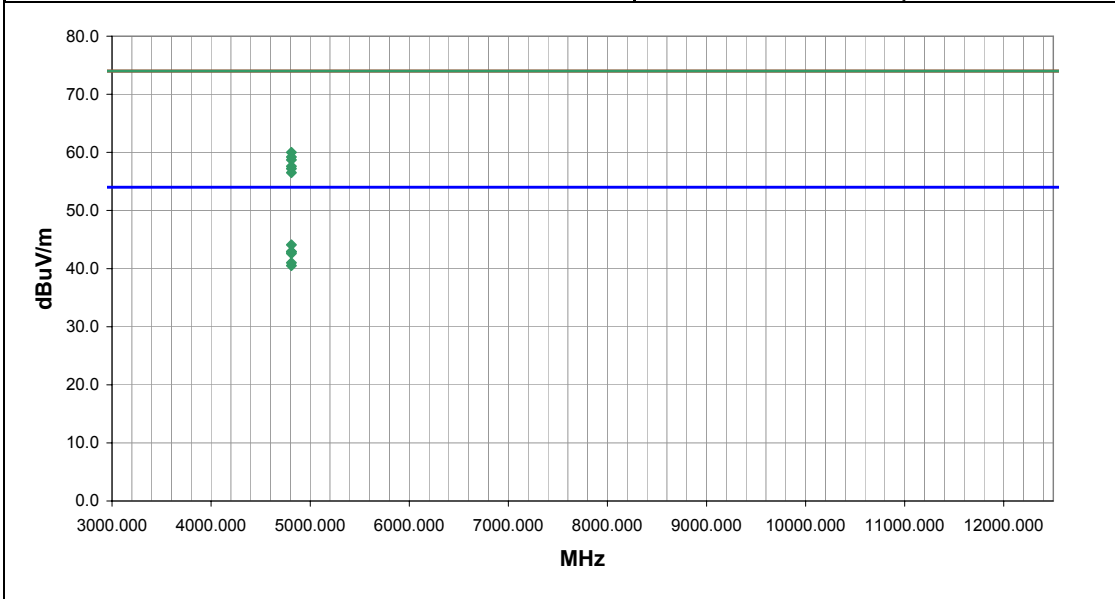

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
4809.954	40.8	3.3	34.0	1.4	3.0	0.0	H-Horn	AV	0.0	44.1	54.0	-9.9	EUT Vertical
4809.954	39.6	3.3	16.0	1.4	3.0	0.0	V-Horn	AV	0.0	42.9	54.0	-11.1	EUT Vertical
4809.954	39.6	3.3	159.0	1.3	3.0	0.0	H-Horn	AV	0.0	42.9	54.0	-11.1	EUT on its side.
4809.954	39.3	3.3	344.0	1.4	3.0	0.0	H-Horn	AV	0.0	42.6	54.0	-11.4	EUT Horizontal
4809.954	37.7	3.3	11.0	1.2	3.0	0.0	V-Horn	AV	0.0	41.0	54.0	-13.0	EUT on its side.
4809.954	37.2	3.3	201.0	1.2	3.0	0.0	V-Horn	AV	0.0	40.5	54.0	-13.5	EUT Horizontal
4809.954	56.7	3.3	34.0	1.4	3.0	0.0	H-Horn	PK	0.0	60.0	74.0	-14.0	EUT Vertical
4809.954	55.9	3.3	159.0	1.3	3.0	0.0	H-Horn	PK	0.0	59.2	74.0	-14.8	EUT on its side.
4809.954	55.4	3.3	16.0	1.4	3.0	0.0	V-Horn	PK	0.0	58.7	74.0	-15.3	EUT Vertical
4809.954	54.3	3.3	344.0	1.4	3.0	0.0	H-Horn	PK	0.0	57.6	74.0	-16.4	EUT Horizontal
4809.954	53.9	3.3	11.0	1.2	3.0	0.0	V-Horn	PK	0.0	57.2	74.0	-16.8	EUT on its side.
4809.954	53.2	3.3	201.0	1.2	3.0	0.0	V-Horn	PK	0.0	56.5	74.0	-17.5	EUT Horizontal



