

FCC PART 15.247
EMI MEASUREMENT AND TEST REPORT

For

Dust Networks, Inc.

30695 Huntwood Ave.
Hayward, CA 94544

FCC ID: SJC-D2120

This Report Concerns: ☒ Original Report	Equipment Type: 2.4GHz Hopping System
	
Test Engineer: <u>Snell Leong</u>	
Report No.: <u>R0504211</u>	
Report Date: <u>2005-05-04</u>	
	
Reviewed By: <u>Daniel Deng</u>	
Prepared By: Bay Area Compliance Laboratory Corporation (BACL) 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This test report is specially limited to the above client company and the particular sample only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
SPECIAL ACCESSORIES	5
SCHEMATICS / BLOCK DIAGRAM	5
EQUIPMENT MODIFICATIONS	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLING LIST AND DETAILS	5
POWER SUPPLY INFORMATION.....	5
CONFIGURATION OF TEST SYSTEM	6
TEST SETUP BLOCK DIAGRAM	6
SUMMARY OF TEST RESULTS FOR FCC PART 15.....	7
ANTENNA REQUIREMENT.....	8
§15.207(A) - CONDUCTED EMISSION.....	9
MEASUREMENT UNCERTAINTY	9
TEST SETUP.....	9
RECEIVER SETUP.....	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST PROCEDURE	9
ENVIRONMENTAL CONDITIONS	9
SUMMARY OF TEST RESULTS	10
CONDUCTED EMISSIONS TEST DATA	10
PLOT OF CONDUCTED EMISSIONS TEST DATA	10
§15.205 & §15.209 - RADIATED EMISSION.....	13
MEASUREMENT UNCERTAINTY	13
TEST SETUP.....	13
SPECTRUM ANALYZER SETUP	13
TEST EQUIPMENT LIST AND DETAILS.....	13
ENVIRONMENTAL CONDITIONS	14
TEST PROCEDURE	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
SUMMARY OF TEST RESULTS	14
3 METERS RADIATED EMISSION TEST DATA.....	15
§15.247 (A) (1) - HOPPING CHANNEL SEPARATION	17
STANDARD APPLICABLE	17
MEASUREMENT PROCEDURE.....	17
TEST EQUIPMENT	17
ENVIRONMENTAL CONDITIONS	17
MEASUREMENT RESULTS.....	17
PLOTS OF HOPPING CHANNEL SEPARATION	18
§15.247 (A) (1) - CHANNEL BANDWIDTH	20
STANDARD APPLICABLE	20
MEASUREMENT PROCEDURE.....	20
TEST EQUIPMENT	20
ENVIRONMENTAL CONDITIONS	20
MEASUREMENT RESULT	20

PLOT OF CHANNEL BANDWIDTH	21
§15.247 (A) (1) (III) - NUMBER OF HOPPING FREQUENCY USED	23
STANDARD APPLICABLE	23
MEASUREMENT PROCEDURE.....	23
TEST EQUIPMENT	23
ENVIRONMENTAL CONDITIONS	23
MEASUREMENT RESULTS.....	23
PLOTS OF NUMBER OF HOPPING FREQUENCY	24
§15.247 9 (A) (1) (III) - DWELL TIME	25
STANDARD APPLICABLE	25
MEASUREMENT PROCEDURE.....	25
TEST EQUIPMENT	25
ENVIRONMENTAL CONDITIONS	25
MEASUREMENT RESULTS.....	25
PLOTS OF DWELL TIME	25
§15.247(A)(2)– 6 DB BANDWIDTH	29
STANDARD APPLICABLE	29
MEASUREMENT PROCEDURE.....	29
EQUIPMENT LISTS	29
ENVIRONMENTAL CONDITIONS	29
MEASUREMENT RESULT	29
§15.247 (B) (1) - MAXIMUM PEAK OUTPUT POWER	32
STANDARD APPLICABLE	32
MEASUREMENT PROCEDURE.....	32
TEST EQUIPMENT	32
ENVIRONMENTAL CONDITIONS	32
MEASUREMENT RESULT	32
PLOTS OF MAXIMUM PEAK OUTPUT POWER	32
§15.247 (D) - 100 KHZ BANDWIDTH OF BAND EDGES	35
STANDARD APPLICABLE	35
MEASUREMENT PROCEDURE.....	35
TEST EQUIPMENT	35
ENVIRONMENTAL CONDITIONS	35
PLOTS OF 100KHz BANDWIDTH OF BAND EDGE	35
§15.247(E) - POWER SPECTRAL DENSITY	37
STANDARD APPLICABLE	37
MEASUREMENT PROCEDURE.....	37
EQUIPMENT LISTS	37
ENVIRONMENTAL CONDITIONS	37
MEASUREMENT RESULTS.....	37
§ 2.1051 - SPURIOUS EMISSION AT ANTENNA PORT	40
STANDARD APPLICABLE	40
MEASUREMENT PROCEDURE.....	40
TEST EQUIPMENT	40
ENVIRONMENTAL CONDITIONS	40
MEASUREMENT RESULTS.....	40

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Dust Networks, Inc.* product, FCC ID: *SJC-D2120*, or the “EUT” as referred to in this report is a 2.4 GHz Hybrid System, which measures approximately 120mmL x 105mm W x 31mm H. The EUT operates at the frequency range of 2405 – 2480MHz, with the maximum conducted output power of 0.69mW.

** The test data gathered are from a production sample, S/N: 192, provided by the manufacturer.*

Objective

This type approval report is prepared on behalf of *Dust Networks, Inc.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B, C,.

Related Submittal(s)/Grant(s)

No Related Submittals

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003& TIA/EIA-603.

Test Facility

The Open Area Test site used by BACL to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to ANSI C63.4-2003.

The EUT was tested in the normal (native) operating mode to represent *worst-case* results during the final qualification test.

Special Accessories

As shown in following test block diagram, all interface cables used for compliance testing are shielded.

Schematics / Block Diagram

Please refer to Appendix A.

Equipment Modifications

No modifications were made to the EUT.

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
Compaq	Laptop	Presario 2100	CNF43403FB	None


External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
Serial Cable	1.5	Laptop Serial Port	EUT Serial Port


Power Supply Information

Manufacturer	Description	Model	Serial Number	FCC ID
DVE	AC Adaptor	DSA-0151A-05 A	N/A	None

Configuration of Test System

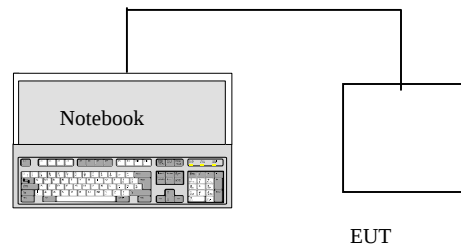

Test Setup Block Diagram

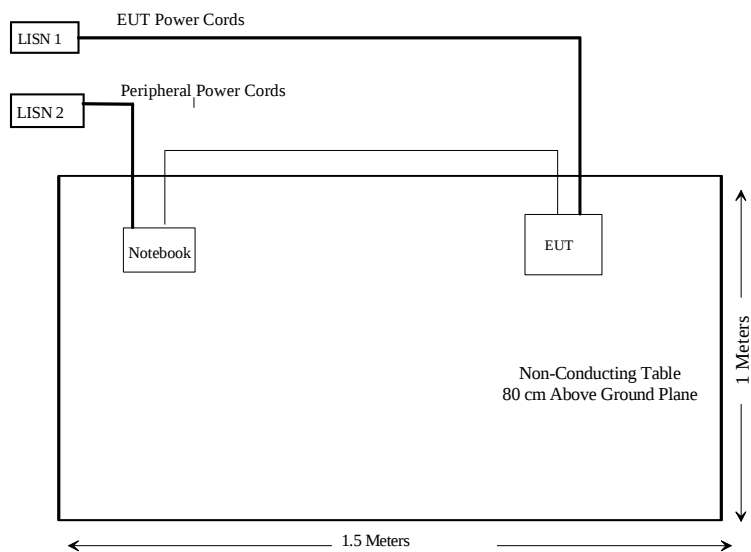

SUMMARY OF TEST RESULTS FOR FCC PART 15

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	Compliant
§ 15.205	Restricted Bands	Compliant
§15.207 (a)	Conducted Emission	Compliant
§15.209	Radiated Emission	Compliant*
§15.247 (a) (1)	Hopping Channel Separation	Compliant
§15.247 (a) (1)	Channel Bandwidth	Compliant
§15.247 (a) (1) (iii)	Number of Hopping Frequencies Used	Compliant
§15.247 (a) (1) (iii)	Dwell Time of Each Frequency within a period of 0.4 seconds multiplied by the number of hopping channels employed	Compliant
§15.247(a)(2)	6 dB Bandwidth	Compliant
§15.247 (b) (1)	Maximum Peak Output Power	Compliant
§ 15.247 (b)(4) § 2.1093	RF Safety Requirements	Compliant
§ 15.247 (d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Peak Power Spectral Density	Compliant
§ 2.1051	Spurious Emission at Antenna Port	Compliant

*: Test data are within measurement uncertainty.

ANTENNA REQUIREMENT

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (4)(i), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The gain of antenna used for transmitting is 2 dBi by default, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

§15.207(a) - CONDUCTED EMISSION

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are receiver, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is ± 2.4 dB.

Test Setup

The measurement was performed at shield room, using the same setup per ANSI C63.4 – 2003 measurement procedure. The specification used was FCC Class B limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The EUT was connected with LISN-1.

Receiver Setup

The receiver was set to investigate the frequency from 150 kHz to 30MHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
Rohde & Schwarz	Receiver, EMI Test	ESCS30	100176	9/15/2004
Rohde & Schwarz	LISN, Artificial Mains	ESH2-Z5	871884/039	8/16/2004

* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the power cord of the host system was connected to the mains outlet of the LISN-1.

Maximizing procedure were performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Qusi-Peak readings are distinguished with an “QP”. Average readings are distinguished with an “Ave”.

Environmental Conditions

Temperature:	20° C
Relative Humidity:	61%
ATM Pressure:	1022 mbar

*The testing was performed by Snell Leong on 2005-04-21.

Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC Conducted limit for a Class B device, with the *worst* margin reading of:

-4.4 dB at 0.250 MHz in the Line conductor

Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC CLASS B	
Frequency MHz	Amplitude dB μ V	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB μ V	Margin dB
0.250	47.4	Ave	Line	51.76	-4.4
0.250	44.7	Ave	Neutral	51.76	-7.1
0.380	39.6	Ave	Line	48.28	-8.7
0.250	51.2	QP	Line	61.76	-10.6
0.250	49.1	QP	Neutral	61.76	-12.7
0.380	34.6	Ave	Neutral	48.28	-13.7
0.380	41.0	QP	Line	58.28	-17.3
0.770	26.5	Ave	Line	46.00	-19.5
0.770	35.6	QP	Line	56.00	-20.4
0.770	25.5	Ave	Neutral	46.00	-20.5
0.380	37.7	QP	Neutral	58.28	-20.6
0.770	31.5	QP	Neutral	56.00	-24.5

Plot of Conducted Emissions Test Data

Plot(s) of Conducted Emissions Test Data is presented in the following page as reference.

Bay Area Compliance Laboratory Corp
Class B


21. Apr 05 16:28

21/Apr/05
Snel

EUT: DUST SMARTERH MANAGER
Manuf: DUST NETWORK
Op Cond: Normal
Operator: SNEEL
Comment: N

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	10k	9k	QP+AV	20ms	15dB LN	OFF
1M	5M	10k	9k	QP+AV	1ms	15dB LN	OFF
5M	30M	100k	9k	QP+AV	1ms	15dB LN	OFF

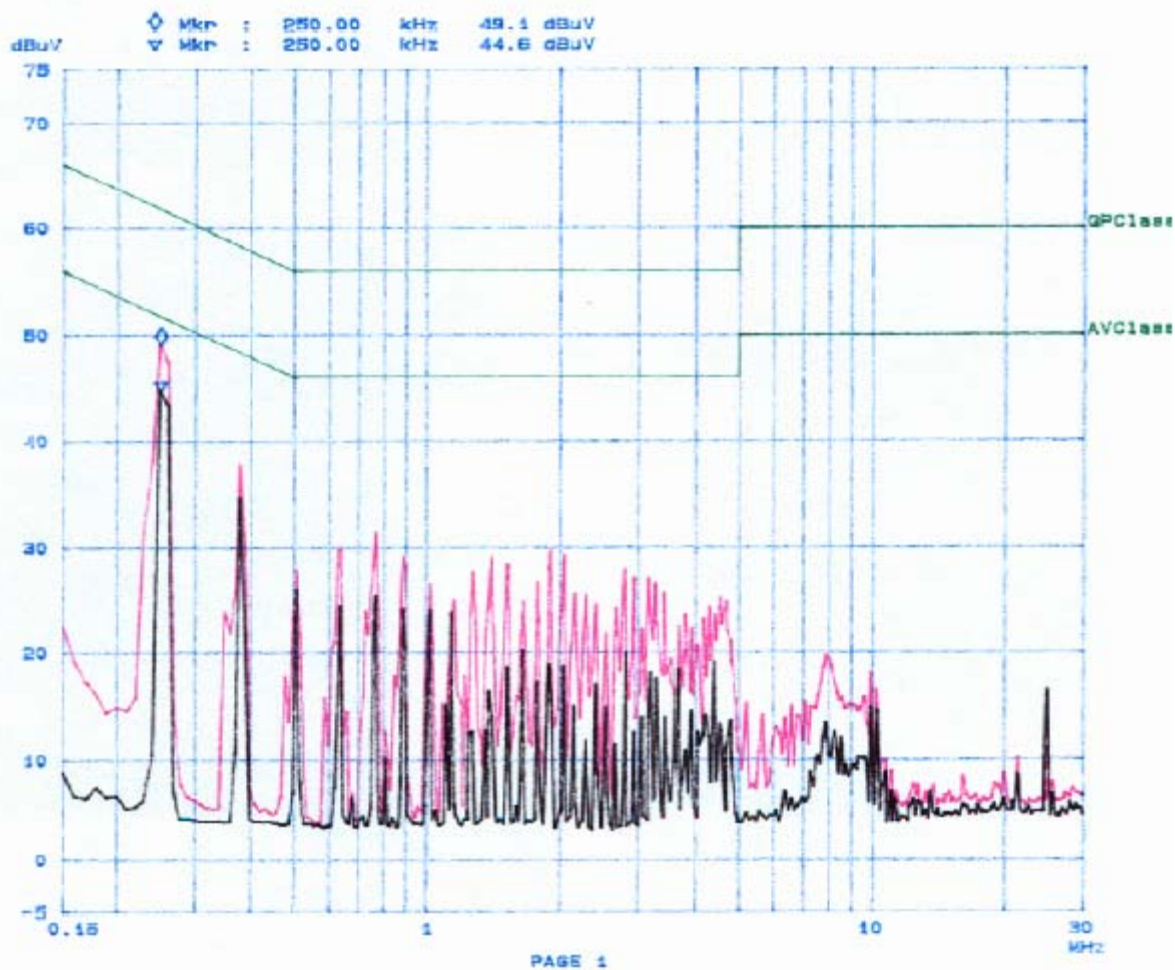

Bay Area Compliance Laboratory Corp
Class B


21. Apr 05 16:53

21 / April / 05
Snu

EUT: DUST SMARTMESH MANAGER
Manuf: DUST NETWORK
Op Cond: Normal
Operator: SNELL
Comment: L

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	10k	9k	QP+AV	20ms	15dB LN	OFF
1M	5M	10k	9k	QP+AV	1ms	15dB LN	OFF
5M	30M	100k	9k	QP+AV	1ms	15dB LN	OFF

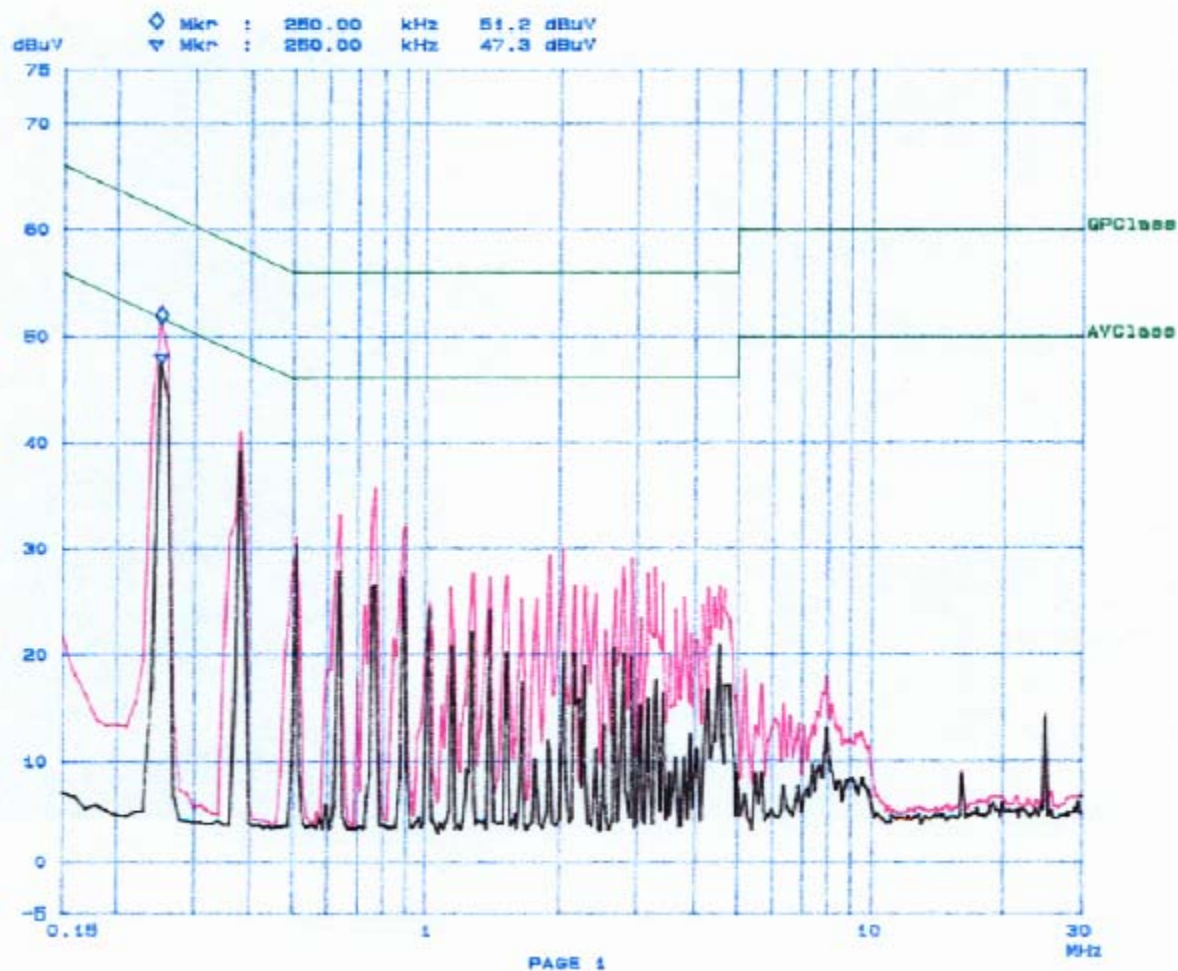

§15.205 & §15.209 - RADIATED EMISSION

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

Test Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with ANSI C63.4-2003. The specification used was the FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The EUT was connected with 120Vac/60Hz power source.

The device was tested with both hopping mode enabled and disabled.

Spectrum Analyzer Setup

According to FCC Rules, 47 CFR §15.33 (a) (1), the system was tested to 25GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
Below 30MHz	10kHz	10kHz
30 – 1000MHz	100kHz	100kHz
Above 1000MHz	1MHz	1MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
EMCO	Antenna, Biconical	3110B	9603-2315	12/14/2004
HP	Amplifier, Pre	8447D	2944A10198	8/20/2004
Agilent	Analyzer, Spectrum	E4446A	US44300386	11/10/2004
EMCO	Antenna, Log-Periodic	3148	4-1155	12/14/2004
HP	Amplifier, Pre	8449B	3147A00400	03/14/2004
Wisewave	Antenna, Horn, Std	ARH-2823-02	10555-02	12/13/2004
Sunol Science	Antenna	JB1	A03105-3	02/11/2005

*** Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	23° C
Relative Humidity:	63%
ATM Pressure:	1025 mbar

**The testing was performed by Snell Leong on 2005-04-25.*

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limits), and are distinguished with a "Qp" in the data table.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

Summary of Test Results

According to the recorded data in following table, the EUT test data are within the measurement uncertainty of $\pm 4.0\text{dB}$, and had the worst margin of:

- 16.1 dB at 1045.10 MHz in the **Vertical** polarization, Low Channel, 3 meters
- 15.9 dB at 4880.00 MHz in the **Vertical** polarization, Middle Channel, 3 meters
- 17.0 dB at 1045.10 MHz in the **Vertical** polarization, High Channel, 3 meters
- 1.3 dB at 298.57 MHz in the **Horizontal** polarization, Unintentional Emission, 3 meters

3 Meters Radiated Emission Test Data

Indicated			Antenna	Antenna		Correction Factor			FCC 15.247		
Frequency	Ampl.	Direction	Height	Polar	Antenna	Cable	Amp.	Corr.	Limit	Margin	Comments
MHz	dBμV/m	Degree	Meter	H/V	dB	Loss	dB	Ampl.	dBμV/m	dB	
Low Channel											
2405.0000				v	28.1	2.0	35.8	-5.7			Fund/Peak
2405.0000				h	28.1	2.0	35.8	-5.7			Fund/Peak
2405.0000				v	28.1	2.0	35.8	-5.7			Ave
2405.0000				h	28.1	2.0	35.8	-5.7			Ave
1045.1000	48.9	270	2.4	v	24.5	1.3	36.8	37.9	54	-16.1	Ave
4810.0000	36.6	270	2.4	v	32.5	3.1	34.8	37.4	54	-16.6	Ave
7215.0000	30.1	180	2.3	h	36.3	4.3	34.7	36.0	54	-18.0	Ave
7215.0000	30.0	270	2.4	v	36.3	4.3	34.7	35.9	54	-18.1	Ave
4810.0000	34.3	180	2.2	h	32.5	3.1	34.8	35.1	54	-18.9	Ave
1045.1000	41.4	180	2.2	h	24.5	1.3	36.8	30.4	54	-23.6	Ave
7215.0000	42.0	270	2.4	v	36.3	4.3	34.7	47.9	74	-26.1	Peak
7215.0000	41.4	180	2.3	h	36.3	4.3	34.7	47.4	74	-26.7	Peak
4810.0000	46.0	270	2.4	v	32.5	3.1	34.8	46.8	74	-27.2	Peak
1045.1000	55.0	270	2.4	v	24.5	1.3	36.8	44.0	74	-30.0	Peak
4810.0000	43.0	180	2.2	h	32.5	3.1	34.8	43.8	74	-30.2	Peak
1045.1000	50.9	180	2.2	h	24.5	1.3	36.8	39.9	74	-34.1	Peak
Middle Channel											
2440.0000				v	28.1	2.0	35.8	-5.7			Fund/Peak
2440.0000				h	28.1	2.0	35.8	-5.7			Fund/Peak
2440.0000				v	28.1	2.0	35.8	-5.7			Ave
2440.0000				h	28.1	2.0	35.8	-5.7			Ave
4880.0000	37.3	270	2.4	v	32.5	3.1	34.8	38.1	54	-15.9	Ave
7320.0000	30.4	270	2.4	v	36.3	4.3	34.7	36.3	54	-17.7	Ave
7320.0000	30.2	180	2.3	h	36.3	4.3	34.7	36.1	54	-17.9	Ave
4880.0000	30.9	180	2.2	h	32.5	3.1	34.8	31.7	54	-22.3	Ave
1045.0000	41.2	180	2.2	h	24.5	1.3	36.8	30.2	54	-23.8	Ave
1045.0000	37.9	270	2.4	v	24.5	1.3	36.8	26.9	54	-27.1	Ave
7320.0000	40.9	270	2.4	v	36.3	4.3	34.7	46.8	74	-27.2	Peak
4880.0000	45.6	270	2.4	v	32.5	3.1	34.8	46.4	74	-27.6	Peak
4880.0000	45.0	180	2.2	h	32.5	3.1	34.8	45.8	74	-28.2	Peak
7320.0000	39.7	180	2.3	h	36.3	4.3	34.7	45.7	74	-28.3	Peak
1045.0000	53.2	180	2.2	h	24.5	1.3	36.8	42.2	74	-31.8	Peak
1045.0000	49.8	270	2.4	v	24.5	1.3	36.8	38.8	74	-35.2	Peak

Indicated			Antenna	Antenna		Correction Factor			FCC 15.247		
Frequency	Ampl.	Direction	Height	Polar	Antenna	Cable Loss	Amp.	Corr. Ampl.	Limit	Margin	Comments
MHz	dBμV/m	Degree	Meter	H/V	dB	dB	dB	dBμV/m	dBμV/m	dB	
High Channel											
2480.0000				v	28.1	2.0	35.8	-5.7			Fund/Peak
2480.0000				h	28.1	2.0	35.8	-5.7			Fund/Peak
2480.0000				v	28.1	2.0	35.8	-5.7			Ave
2480.0000				h	28.1	2.0	35.8	-5.7			Ave
1045.1000	48.0	270	2.4	v	24.5	1.3	36.8	37.0	54	-17.0	Ave
7440.0000	30.7	270	2.4	v	36.3	4.3	34.7	36.7	54	-17.3	Ave
7440.0000	30.7	180	2.3	h	36.3	4.3	34.7	36.6	54	-17.4	Ave
4960.0000	30.9	270	2.4	v	32.5	3.1	34.8	31.7	54	-22.3	Ave
4960.0000	29.6	180	2.2	h	32.5	3.1	34.8	30.4	54	-23.6	Ave
7440.0000	43.6	270	2.4	v	36.3	4.3	34.7	49.5	74	-24.5	Peak
1045.1000	40.1	180	2.2	h	24.5	1.3	36.8	29.1	54	-24.9	Ave
7440.0000	43.0	180	2.3	h	36.3	4.3	34.7	48.9	74	-25.1	Peak
4960.0000	46.7	270	2.4	v	32.5	3.1	34.8	47.5	74	-26.5	Peak
1045.1000	55.7	270	2.4	v	24.5	1.3	36.8	44.7	74	-29.3	Peak
4960.0000	42.3	180	2.2	h	32.5	3.1	34.8	43.1	74	-30.9	Peak
1045.1000	49.9	180	2.2	h	24.5	1.3	36.8	38.9	74	-35.1	Peak

Note:

FUND: Fundamental

AVE: Average

Unintentional Emission

Indicated			Antenna	Antenna		Correction Factor			FCC 15.209	
Frequency	Ampl.	Direction	Height	Polar	Antenna	Cable Loss	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/m	Degree	Meter	H/V	dB	dB	dB	dBμV/m	dBμV/m	dB
298.57	56.52	0	2.0	H	13.7	2.3	27.8	44.7	46	-1.3
180.00	51.79	180	1.5	V	13.2	2.0	28.3	38.7	43.5	-4.8
160.00	51.99	180	1.5	V	12.9	1.8	28.4	38.3	43.5	-5.2
298.57	52.22	180	2.6	V	13.7	2.3	27.8	40.4	46	-5.6
160.00	50.86	180	1.5	V	12.9	1.8	28.4	37.1	43.5	-6.4
180.00	49.96	180	1.5	V	13.2	2.0	28.3	36.8	43.5	-6.7
895.78	39.61	180	1.5	H	23.7	3.8	28.4	38.7	46	-7.3
895.78	39.50	180	1.5	V	23.7	3.8	28.4	38.6	46	-7.4
911.62	34.96	180	1.5	V	23.2	3.9	28.4	33.7	46	-12.3
911.62	33.20	180	1.5	H	23.2	3.9	28.4	32.0	46	-14.0

§15.247 (a) (1) - HOPPING CHANNEL SEPARATION

Standard Applicable

According to §15.247(a)(1), frequency hopping system shall have, hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies.

Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the Max-Hold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function, and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4446A	US44300386	2004-11-10

* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	23° C
Relative Humidity:	63%
ATM Pressure:	1025 mbar

*The testing was performed by Snell Leong on 2005-04-25.

Measurement Results

Channel	Frequency MHz	Channel Separation (KHz)
Low	2405	5005
Mid	2440	5005
High	2480	5005

Note: The test was conducted at both hopping enable and disable mode, only the worst test data were presented.

Agilent 16:27:51 Apr 21, 2005

DUST 2.4GHZ MANAGER D2120

Ref 10 dBm Atten 20 dB

Peak Log 10 dB/Offst 3 dB

Marker 1

Marker 1R

Marker 1

-5.048333 MHz

-0.49 dB

LgAv

M1 S2

S3 FC

AA

£(f):

FTun

Swp

Start 2.402 00 GHz

Stop 2.415 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1 ms (601 pts)

Marker

Select Marker

1 2 3 4

Normal

Delta

Delta Pair

(Tracking Ref)

Ref

Span Pair


Span Center


Off

More

1 of 2

Unable to save file

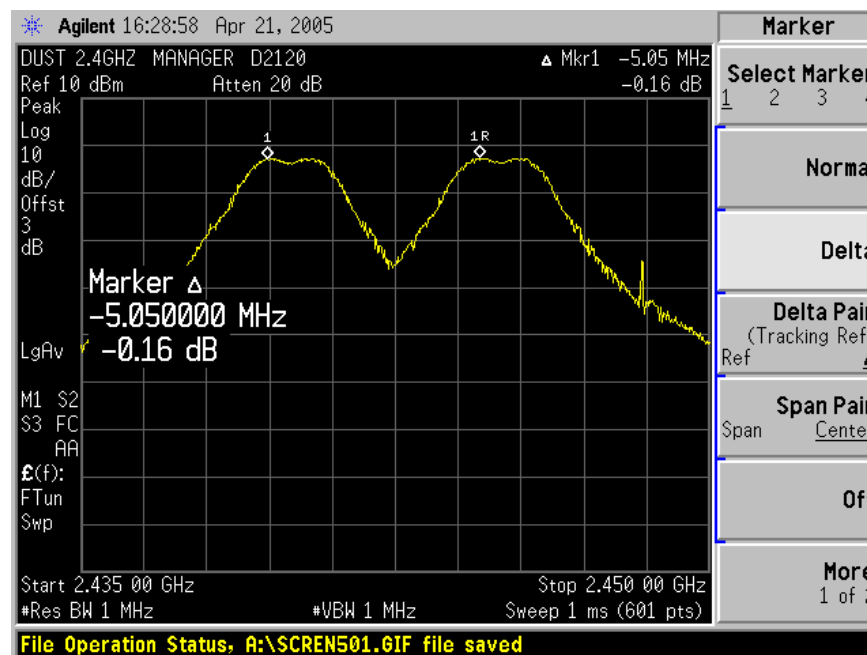

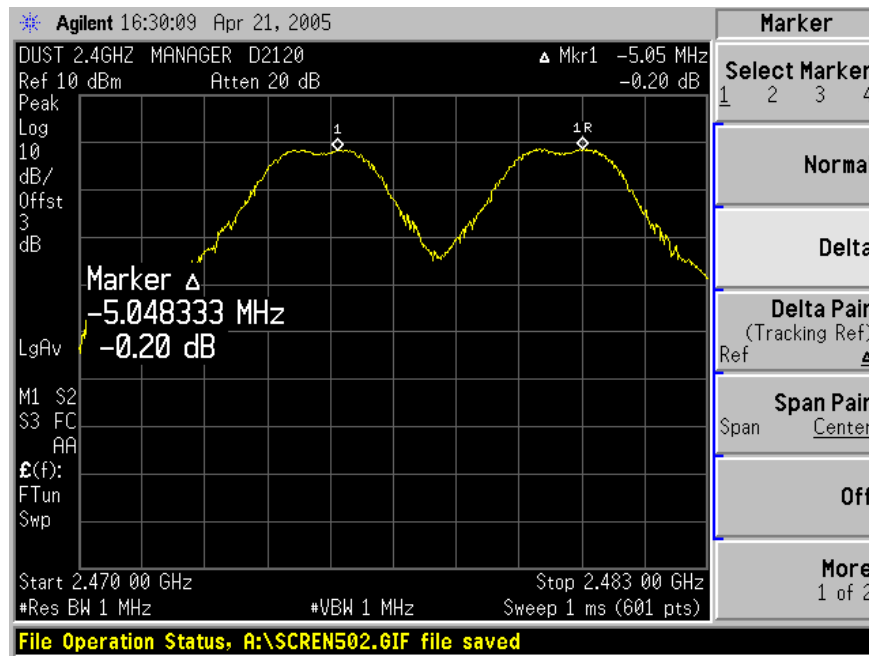

§15.247 (a) (1) - CHANNEL BANDWIDTH

Standard Applicable

According to §15.247(a)(1), the maximum 20 dB bandwidth of the hopping channel shall be presented.

Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4446A	US44300386	2004-11-10

* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.


Environmental Conditions

Temperature:	23° C
Relative Humidity:	63%
ATM Pressure:	1025 mbar

**The testing was performed by Snell Leong on 2005-04-25.*

Measurement Result

Channel	Frequency MHz	Channel Bandwidth (KHz)
Low	2405	2670
Mid	2440	2680
High	2480	2670

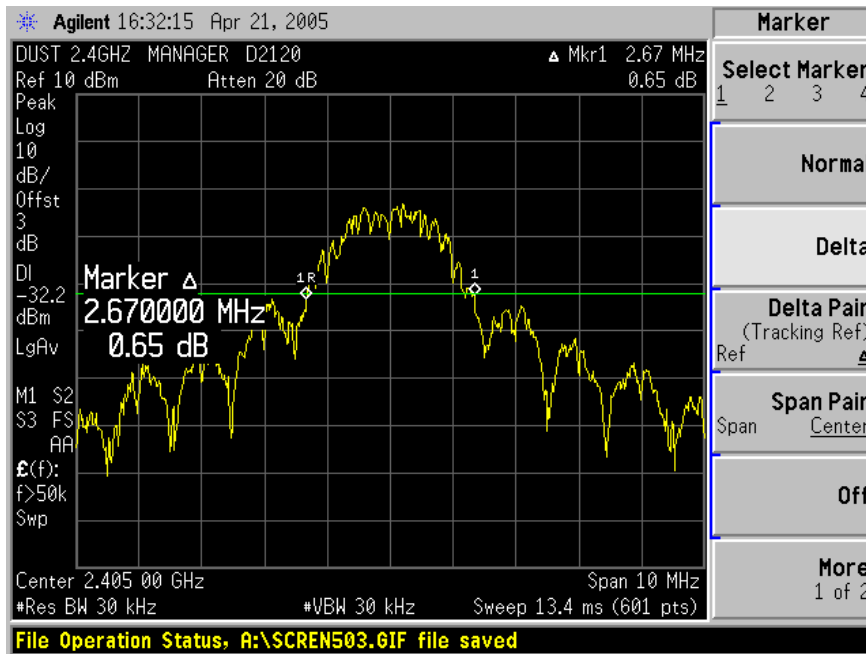Plot of Channel Bandwidth



§15.247 (a) (1) (iii) - NUMBER OF HOPPING FREQUENCY USED

Standard Applicable

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Enable hopping mode. Position the EUT on the bench without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4446A	US44300386	2004-11-10

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.



Environmental Conditions

Temperature:	23° C
Relative Humidity:	63%
ATM Pressure:	1025 mbar

**The testing was performed by Snell Leong on 2005-04-25.*

Measurement Results

Measurement	Standard	Result
16	15	Compliant

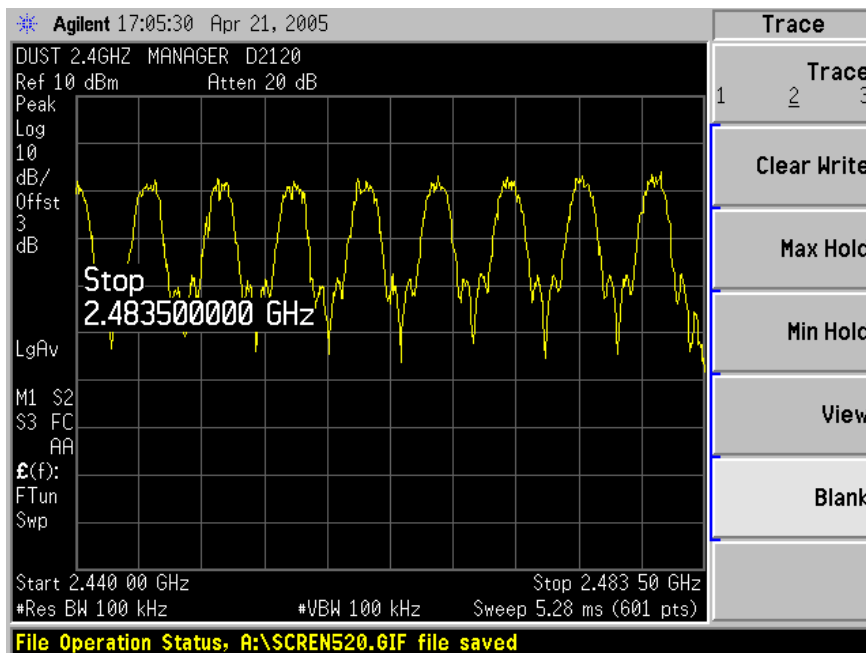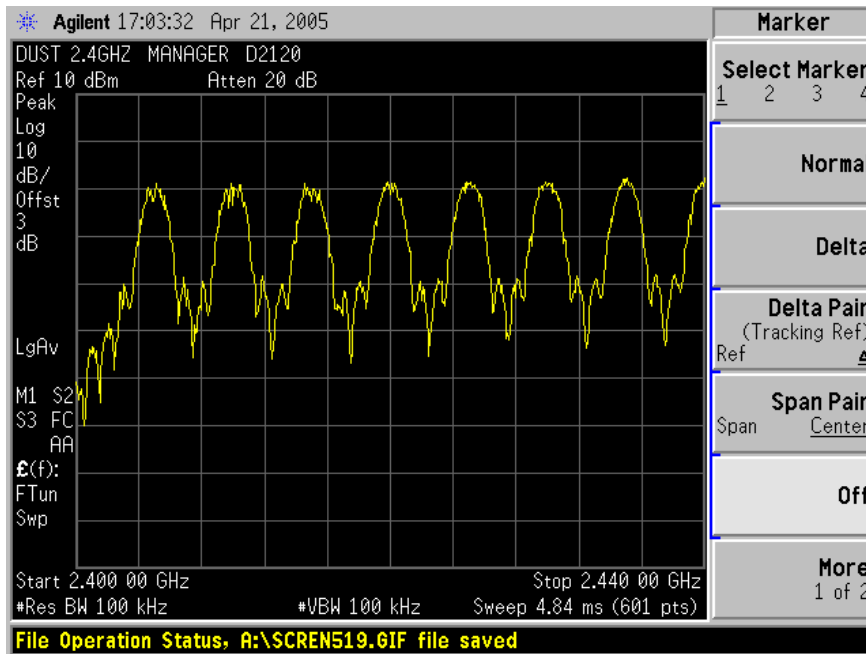Plots of Number of Hopping Frequency

§15.247 9 (a) (1) (iii) - DWELL TIME

Standard Applicable

According to §15.247 (a)(1)(iii), the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Enable hopping mode. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4446A	US44300386	2004-11-10

* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	23° C
Relative Humidity:	63%
ATM Pressure:	1025 mbar



*The testing was performed by Snell Leong on 2005-04-25.



Measurement Results



Channel	Frequency MHz	Pulse Wide uSec	Occupied time per 6.4 Sec	Dwell Time Sec	Limit Sec
Low	2405	1258	3	0.004	0.4
Mid	2440	1267	3	0.004	0.4
High	2480	1242	3	0.004	0.4

Plots of Dwell Time

Please refer the following plots.

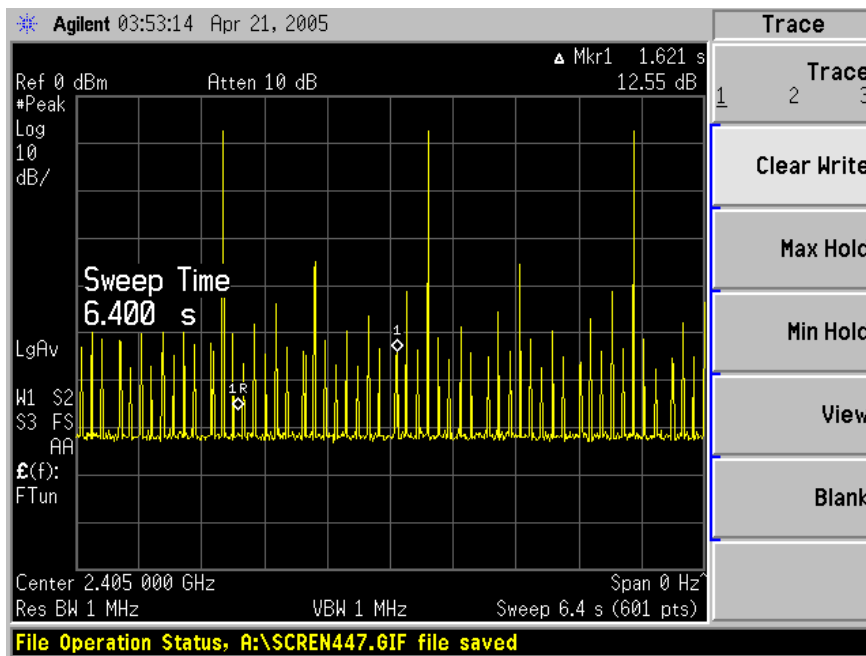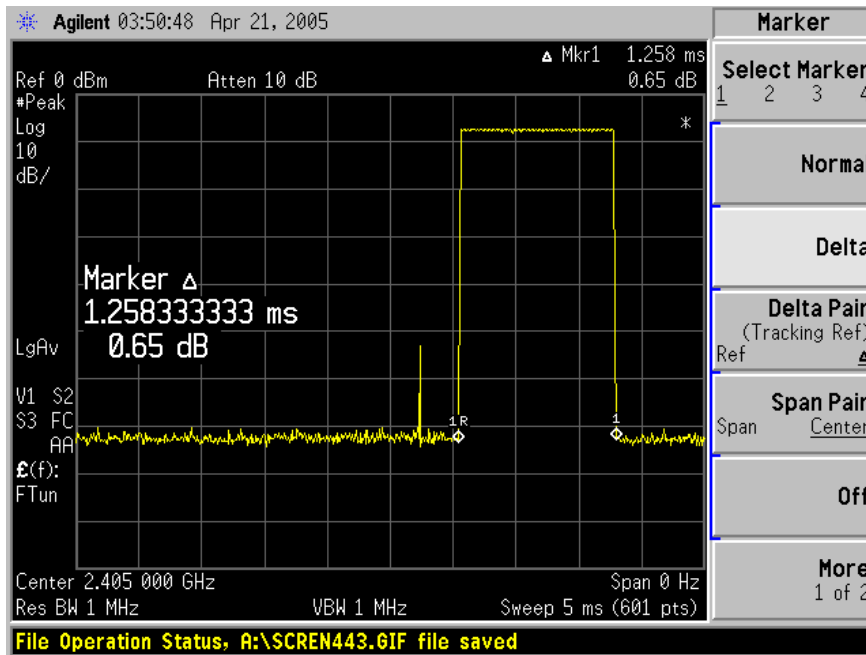

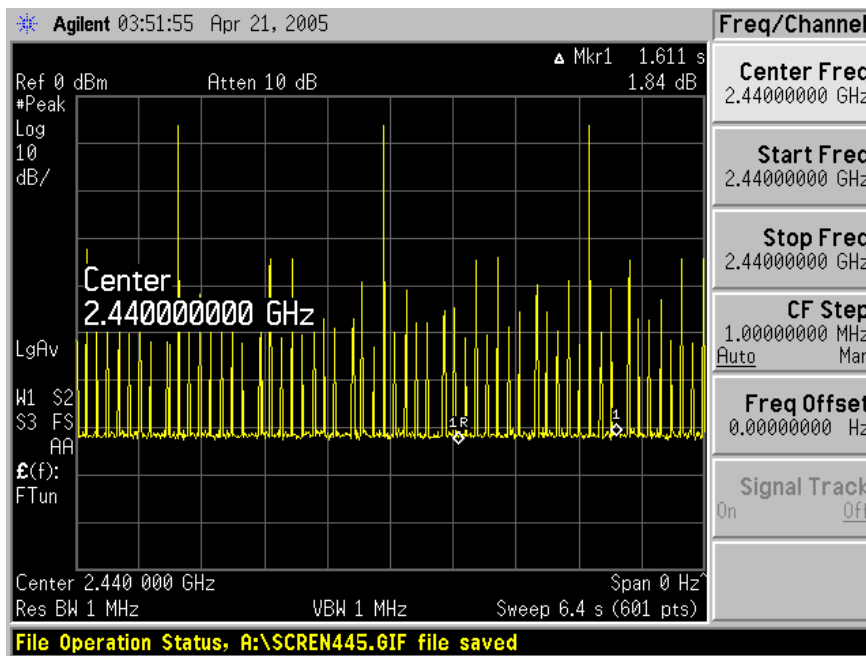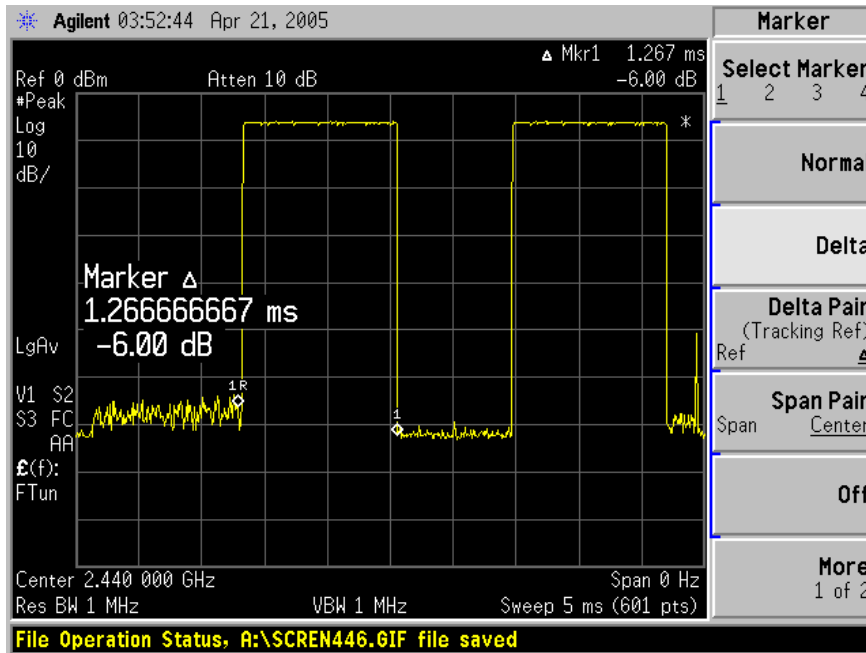

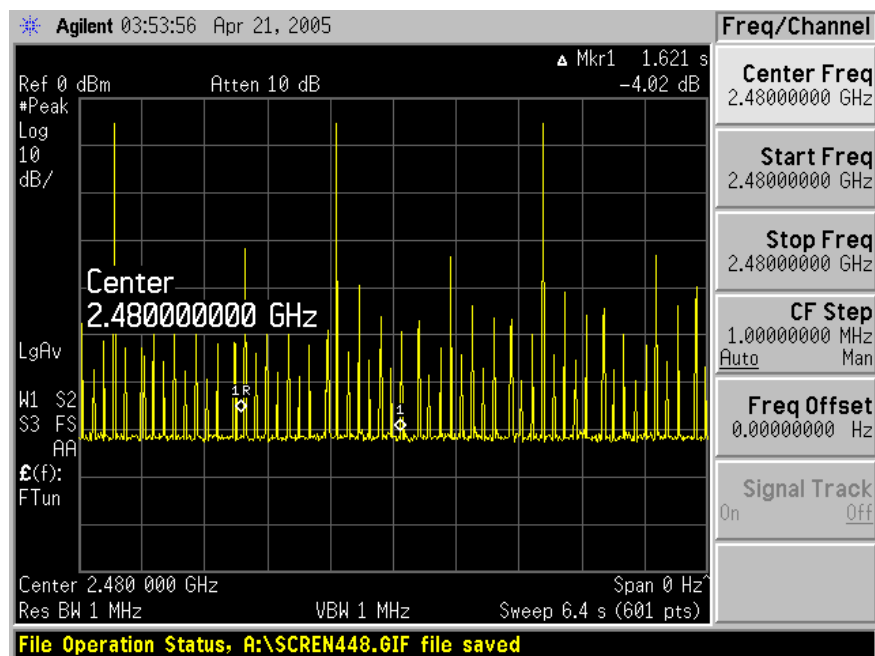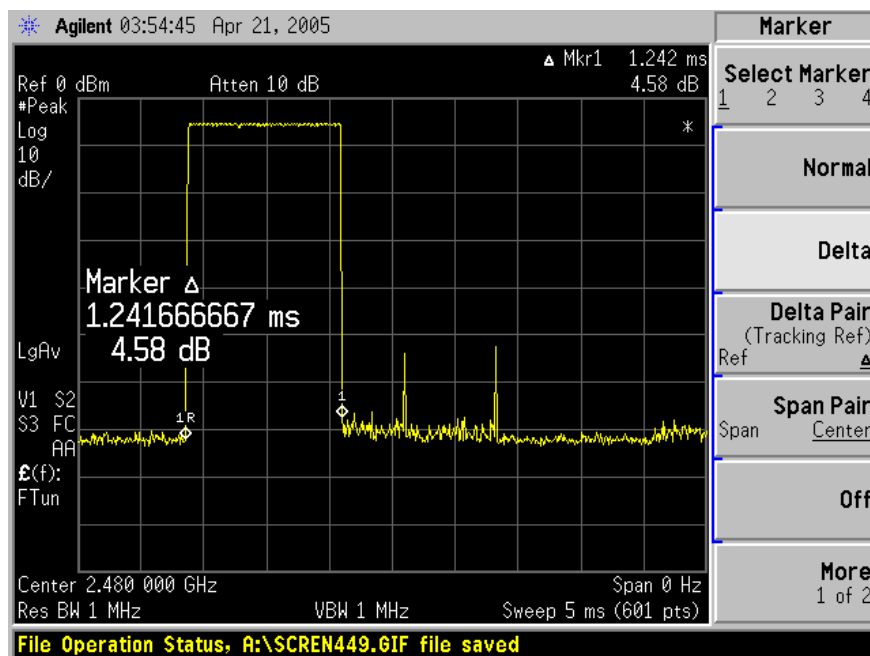

§15.247(a)(2)– 6 DB BANDWIDTH

Standard Applicable

According to §15.247(a)(2), for direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.

Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth. (6 dB bandwidth for DTS)
4. Same as (3) except 26 dB. (26dB bandwidth for UNII)
5. Repeat above procedures until all frequencies measured were complete.

Equipment Lists

Manufacturer	Model No.	Description	Calibration Date
HP	8565EC	Spectrum Analyzer	2005-01-22

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.



Environmental Conditions


Temperature:	23° C
Relative Humidity:	65%
ATM Pressure:	1025 mbar

The testing was performed by Snell Leong on 2005-05-29.

Measurement Result

Channel	Frequency MHz	6dB BW MHz	Limit KHz
Low	2405	1.475	>500
Mid	2440	1.483	>500
High	2480	1.467	>500

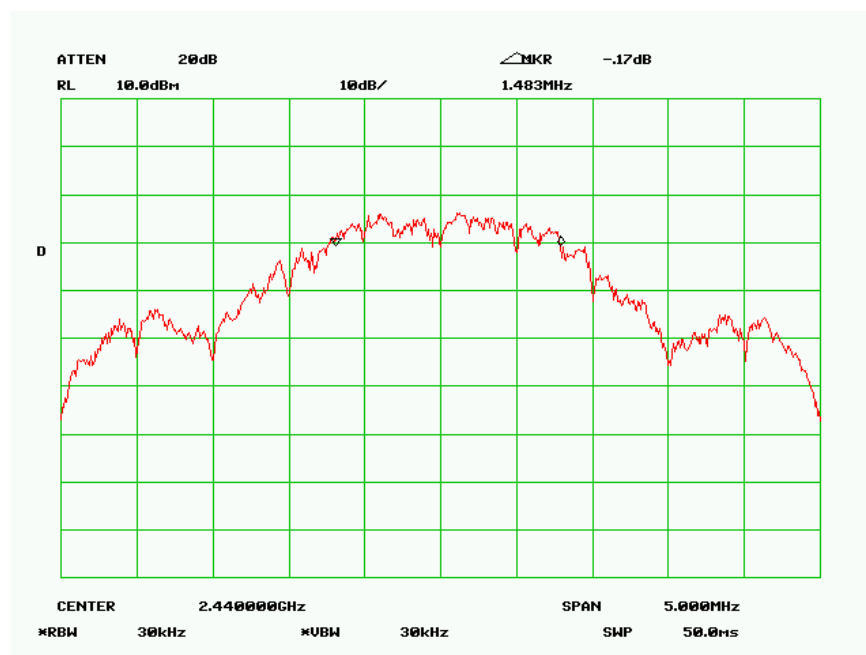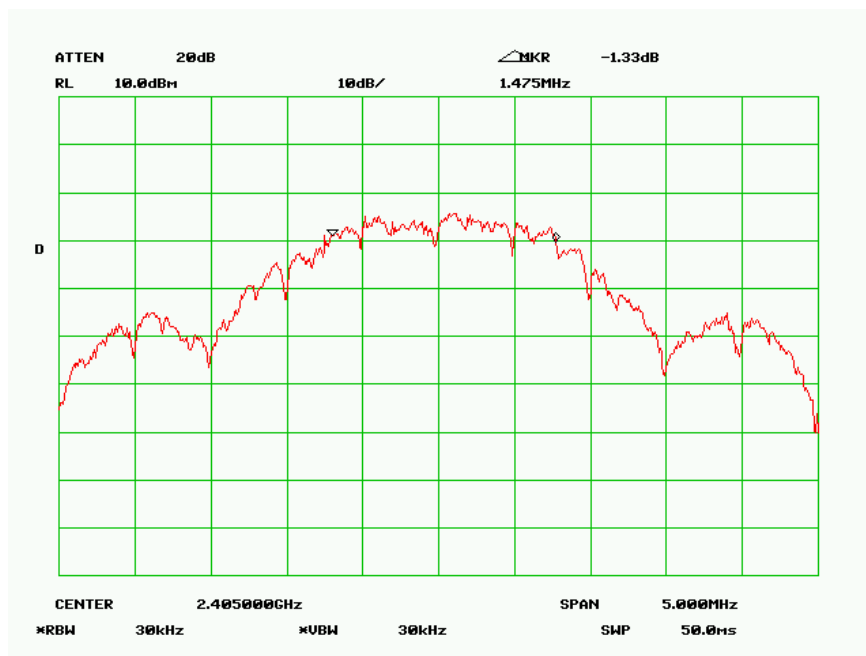

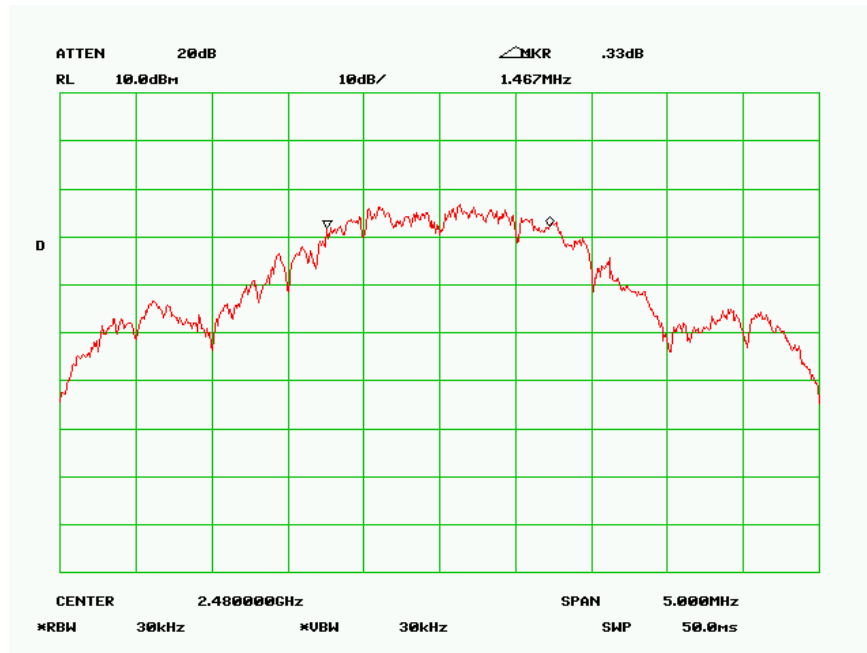

§15.247 (b) (1) - MAXIMUM PEAK OUTPUT POWER

Standard Applicable

According to §15.247(b) (1), for frequency hopping systems in the 2400-2483.5MHz band employing at least 75 hopping channels, and all direct sequence systems, the maximum peak output power of the transmitter shall not exceed 1 Watt. For all other frequency hopping system in the 2400 – 2483.5 MHz band, the maximum peak output power of the transmitter shall not exceed 0.125 Watt.

Measurement Procedure

1. Place the EUT on the turntable and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4446A	US44300386	2004-11-10

* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions



Temperature:	23° C
Relative Humidity:	63%
ATM Pressure:	1025 mbar


**The testing was performed by Snell Leong on 2005-04-25.*

Measurement Result

Channel	Frequency MHz	Max Peak Output Power		Limit (m Watt)	Result
		(dBm)	(m Watt)		
Low	2405	-2.42	0.57	125	pass
Mid	2440	-1.25	0.75	125	pass
High	2480	-0.64	0.86	125	pass

Plots of Maximum Peak Output Power

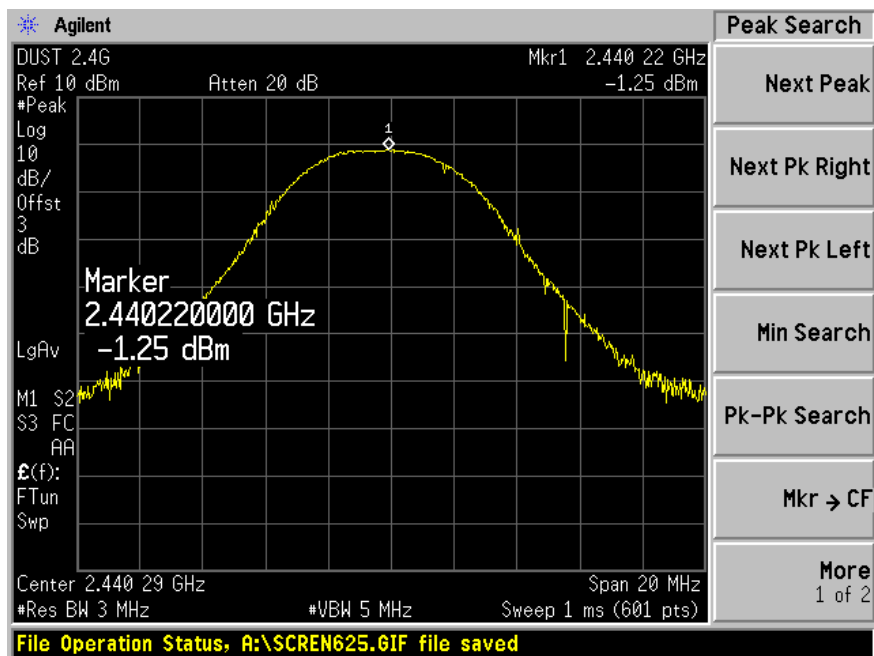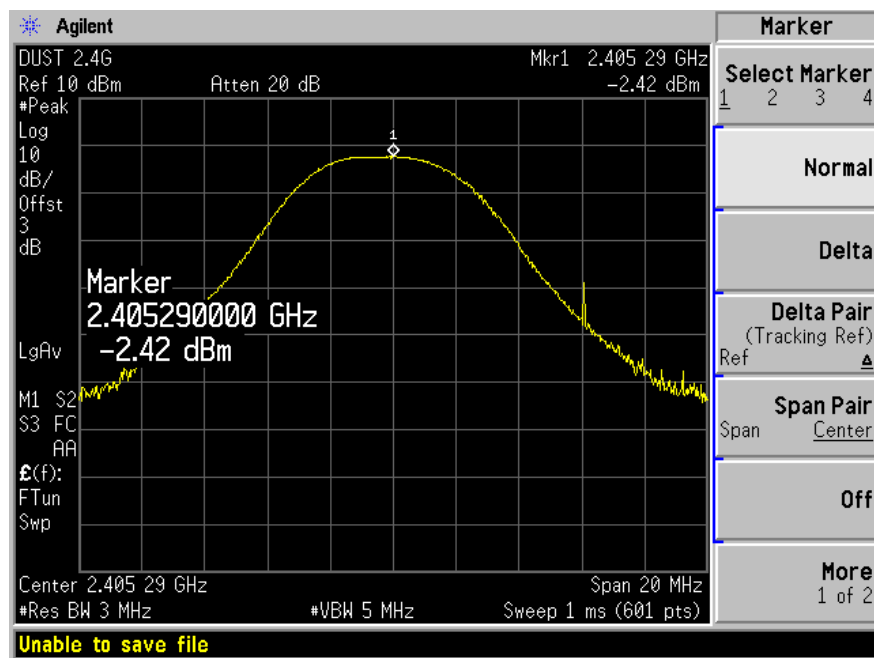

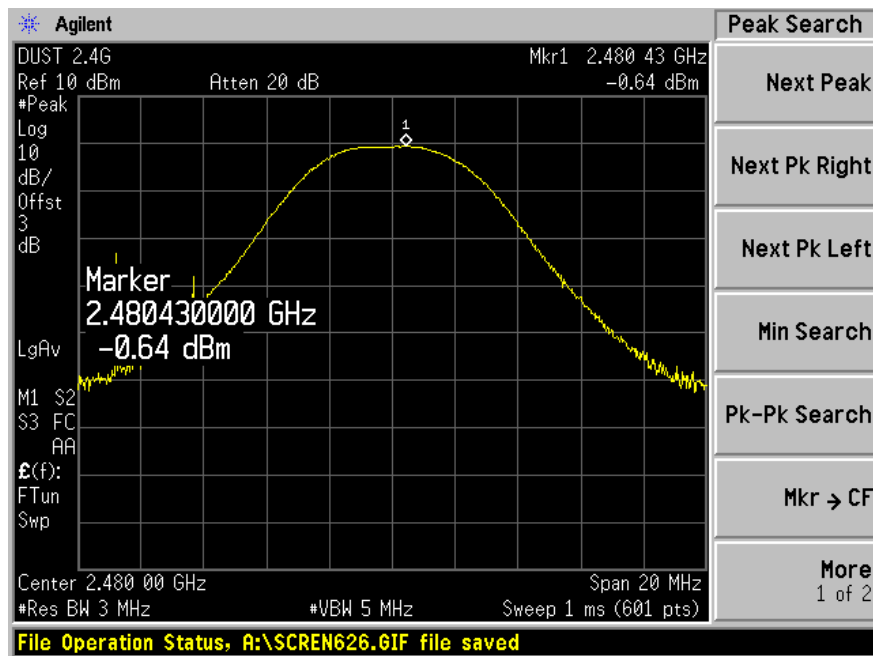

§15.247 (d) - 100 KHZ BANDWIDTH OF BAND EDGES

Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required.

Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Enable hopping mode. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4446A	US44300386	2004-11-10

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions



Temperature:	23° C
Relative Humidity:	63%
ATM Pressure:	1025 mbar

*The testing was performed by Snell Leong on 2005-04-25.

Plots of 100kHz Bandwidth of Band Edge

Please refer the following plots.

Note: The test was conducted at both hopping enable and disable mode, only the worst test data were presented.

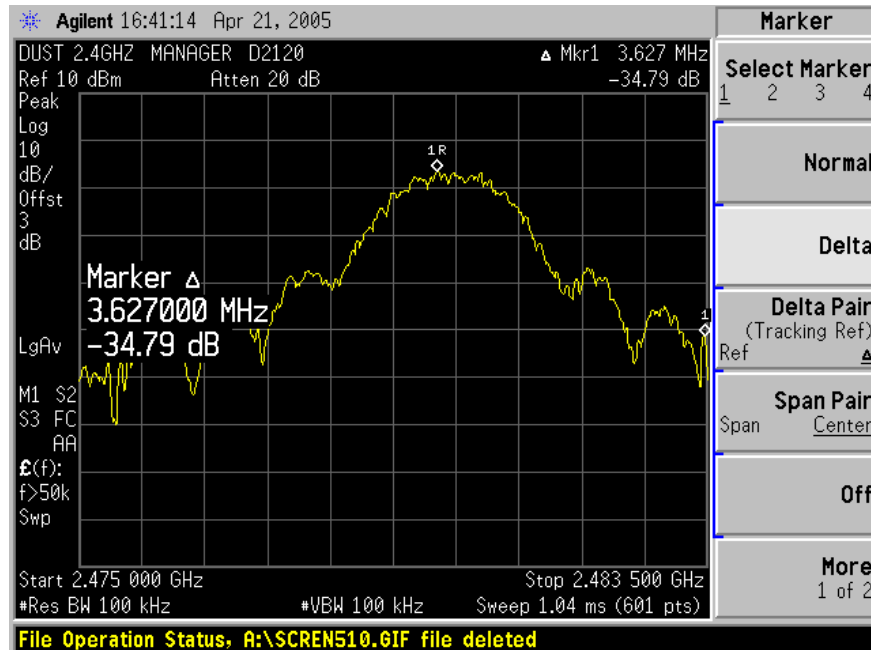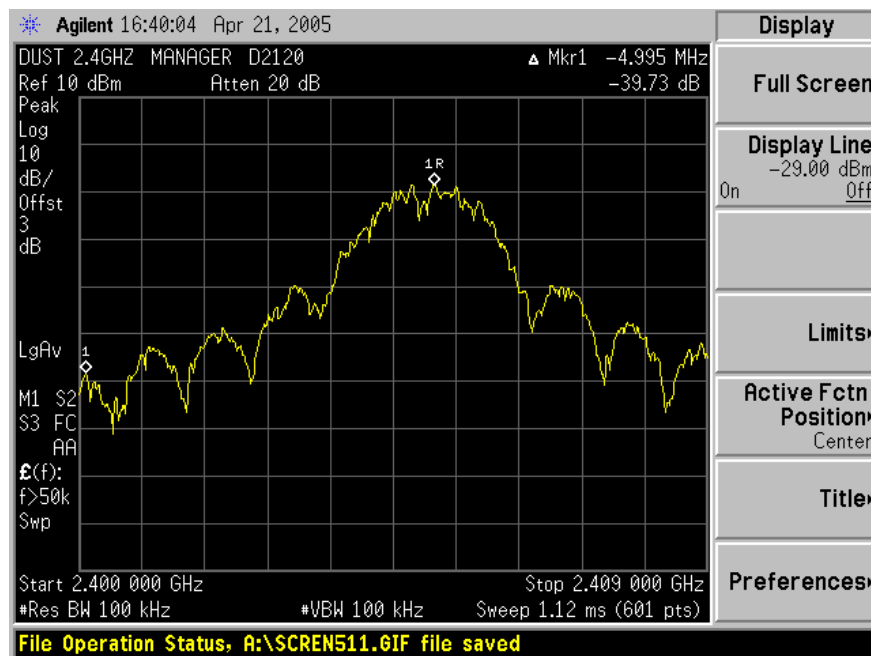

§15.247(e) - POWER SPECTRAL DENSITY

Standard Applicable

According to §15.247 (e), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 1.5MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value. (DTS)
4. Adjust the center frequency of SA on any frequency be measured and set SA to 50MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value. (UNII)
5. Repeat above procedures until all frequencies measured were complete.

Equipment Lists

Manufacturer	Model No.	Description	Calibration Date
HP	8565EC	Spectrum Analyzer	2005-01-22

*** Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.


Environmental Conditions


Temperature:	23° C
Relative Humidity:	65%
ATM Pressure:	1025 mbar

The testing was performed by Snell Leong on 2005-05-29.

Measurement Results

Channel	Frequency MHz	PSD dBm	Limit dBm
Low	2405	-19.83	8
Mid	2440	-19.17	8
High	2480	-20.17	8

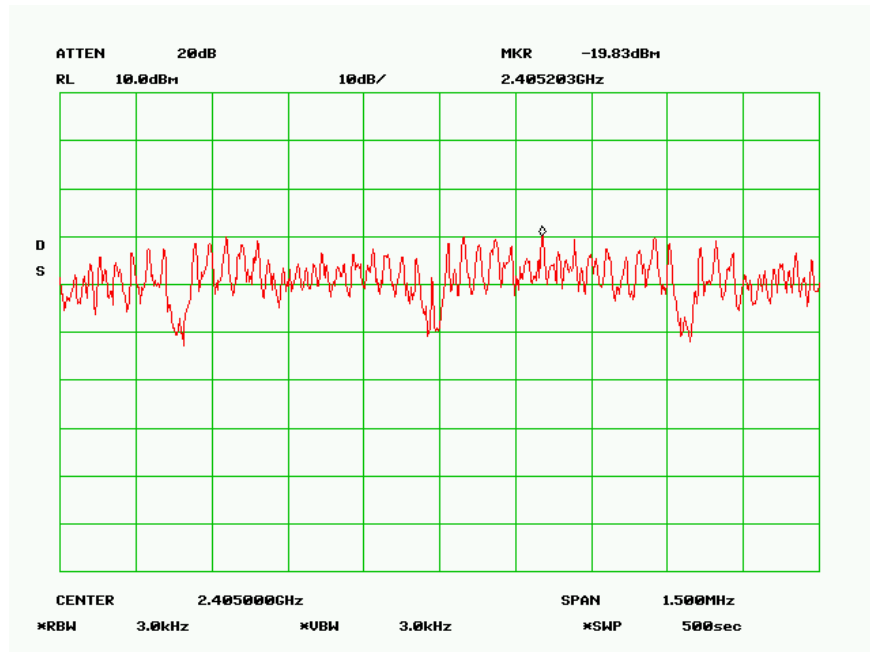

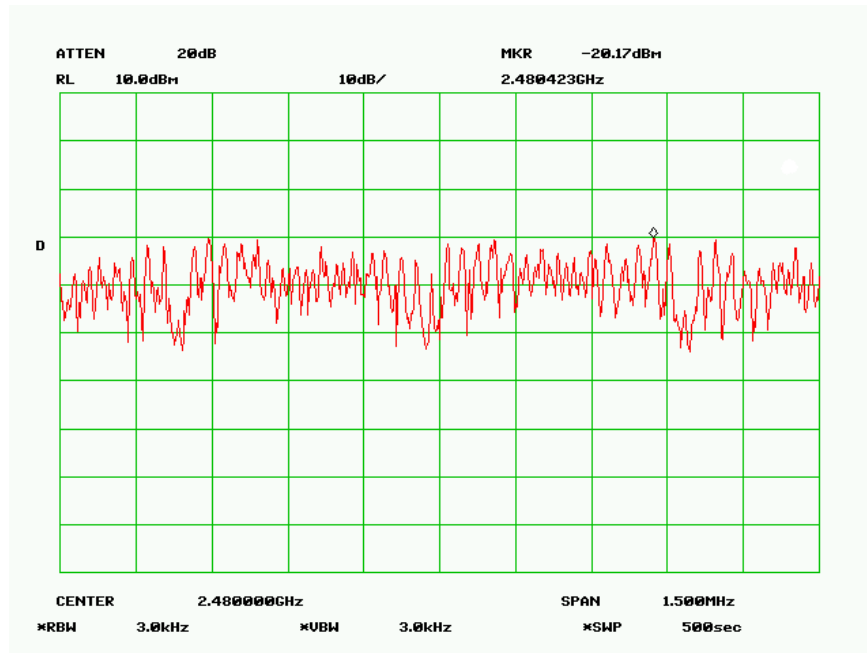

§ 2.1051 - SPURIOUS EMISSION AT ANTENNA PORT

Standard Applicable

According to §15.209 (f) and §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit.

Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Enable hopping mode. Position the EUT on a bench without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4446A	US44300386	2004-11-10

* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	23° C
Relative Humidity:	63%
ATM Pressure:	1025 mbar

**The testing was performed by Snell Leong on 2005-04-25.*

Measurement Results

Please refer to the following plots.

Note: The test was conducted at both hopping enable and disable mode, only the worst test data were presented.

