

FCC TEST REPORT
for
Jiuzhou Group Holdings Limited-Digital Dept.

MID
Model No.: QB101

Prepared for : Shenzhen Peilin Sports Technology Company Ltd.
Address : 2F, B5d Building, Yingzhan Industrial Zone, Longtian
Community, Kengzi Street, Longgang, Shenzhen, 518122, China

Prepared By : Coffee-T Electronics Technology Co Ltd
Address : Unit 12, 8F Honghai Building, Qianhai
Road, Nanshan, Shenzhen, China
+86-755-86622903
+86-755-86622819

Report Number : CTE14KR-801F
Date of Test : Aug. 11~ 18, 2014
Date of Report : Aug. 18, 2014

TABLE OF CONTENT

Description

Page

Test Report

1. GENERAL INFORMATION	4
1.1 Description of Device (EUT).....	4
1.2 Support Equipment	5
1.3 Description of Test Facility	6
1.4 Measurement Uncertainty.....	6
2. CONDUCTED LIMITS	7
2.1 Block Diagram of Test Setup	7
2.2 Power Line Conducted Emission Measurement Limits (15.207).....	7
2.3 Configuration of EUT on Measurement	7
2.4 Operating Condition of EUT	7
2.5 Test Procedure	8
2.6 Power Line Conducted Emission Measurement Results	8
3. RADIATION INTERFERENCE	11
3.1 Requirements (15.249, 15.209):	11
3.2 Test Procedure	11
3.3 Test Results.....	13
4. OCCUPIED BANDWIDTH.....	18
4.1 Requirements (15.249):	18
4.2 Test Procedure	18
4.3 Test Configuration:	18
4.4 Test Results.....	19
5. PHOTOGRAPH.....	21
5.1 Photo of Conducted Emission Test.....	21
5.2 Photo of Radiation Emission Test	22
APPENDIX I (EXTERNAL PHOTOS).....	23
APPENDIX II (INTERNAL PHOTOS)	25

TEST REPORT

Applicant : Jiuzhou Group Holdings Limited-Digital Dept.
Manufacturer : Jiuzhou Group Holdings Limited-Digital Dept.
EUT : MID
Model No. : QB101
Serial No. : N/A
Trade Mark : MID
Rating : DC 3.7V, 1.5A, 5.5W

Measurement Procedure Used:

FCC Part15 Subpart C, Paragraph 15.207, 15.249 & 15.209

The device described above is tested by Coffee-T Electronics Technology Co Ltd to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Coffee-T Electronics Technology Co Ltd is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.


This report applies to above tested sample only and shall not be reproduced in part without written approval of Coffee-T Electronics Technology Co Ltd.

Date of Test : Aug. 11~ 18, 2014



Prepared by :

(Tested Engineer / Angel Wu)



Reviewer :

(Project Manager /Jason Chen)



Approved & Authorized Signer :

(Manager /Sumy Li)

1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT : MID

Model Number : QB101

Test Power Supply : DC 3.7V

Frequency : 2402-2480MHz

Channels : 79

Modulation GFSK, $\pi/4$ DQPSK, 8DPSK

Antenna Type : Internal

Antenna Gain : 0 dBi

Applicant : Jiuzhou Group Holdings Limited-Digital Dept.

Address : 2F, B5d Building, Yingzhan Industrial Zone, Longtian Community,
Kengzi Street, Longgang, Shenzhen, 518122, China

Manufacturer : Jiuzhou Group Holdings Limited-Digital Dept.

Address : 2F, B5d Building, Yingzhan Industrial Zone, Longtian Community,
Kengzi Street, Longgang, Shenzhen, 518122, China

Date of receiver : Aug. 11, 2014

Date of Test : Aug. 11~ 18, 2014

1.2 Support Equipment

PC	: Manufacturer: DELL M/N: OPTIPLEX 380 S/N: 1J63X2X CE , FCC: DOC
MONITOR	: Manufacturer: DELL M/N: E170Sc S/N: CN-00V539-64180-055-0UPS CE , FCC: DOC
KEYBOARD	: Manufacturer: DELL M/N: SK-8115 S/N: CN-0DJ313-71616-06C-02XN CE , FCC: DOC Cable: 1m, unshielded
MOUSE	: Manufacturer: DELL M/N: M-UARDEL7 S/N: N/A CE , FCC: DOC Cable: 1m, unshielded
Power Cord of Printer	: Non-shielded, Detachable, 0.8m, w/o core
USB Cable for Printer	: Non-Shielded , 1.5m
Power Line	Non-Shielded, 1.5m
VGA Cable	: Non-Shielded, 1.5m
Network Cable	: Non-Shielded, 1.5m

1.3 Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Shenzhen Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 10, 2013.

1.4 Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.3dB
Conduction Uncertainty	:	Uc = 3.4dB


2. Conducted Limits

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	100055	Apr. 23, 2014	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Apr. 23, 2014	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Apr. 23, 2014	1 Year

2.1 Block Diagram of Test Setup

2.1.1. Block diagram of connection between the EUT and simulators

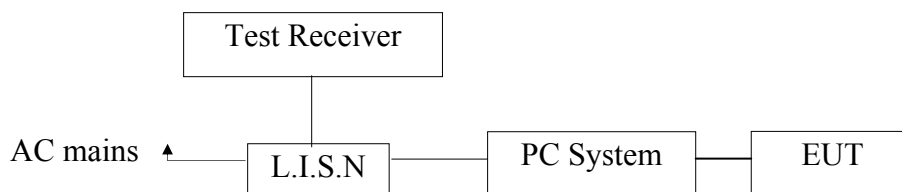

2.2 Power Line Conducted Emission Measurement Limits (15.207)

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

2.3 Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

2.4 Operating Condition of EUT

2.4.1. Setup the EUT and simulator as shown as Section 2.1.

2.4.2. Turn on the power of all equipment.

2.4.3. Let the EUT work in test mode (ON) and measure it.

2.5 Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2003 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 2.6.

2.6 Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.


Please refer the following pages.

CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room
Operating Condition: ON
Test Specification: DC 5V Via USB Port
Comment: Live Line
Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

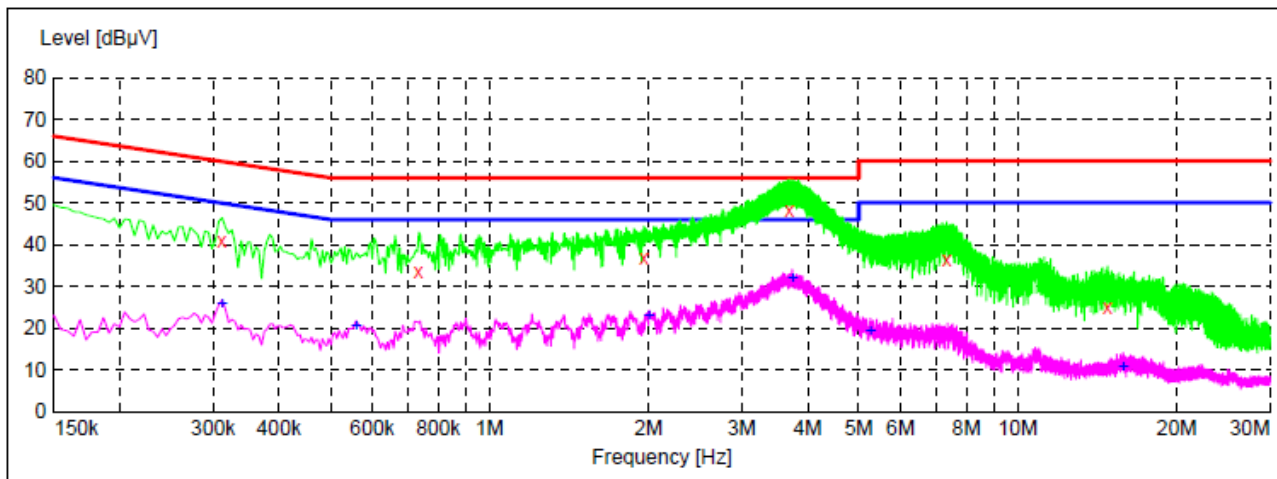

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.312000	40.80	20.1	60	19.1	QP	L1	GND
0.735000	33.50	20.1	56	22.5	QP	L1	GND
1.959000	36.70	20.3	56	19.3	QP	L1	GND
3.691500	48.30	20.4	56	7.7	QP	L1	GND
7.327500	36.60	20.5	60	23.4	QP	L1	GND
14.779500	24.80	20.7	60	35.2	QP	L1	GND


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.312000	25.80	20.1	50	24.1	AV	L1	GND
0.559500	20.50	20.1	46	25.5	AV	L1	GND
2.004000	23.00	20.3	46	23.0	AV	L1	GND
3.741000	32.10	20.4	46	13.9	AV	L1	GND
5.257500	19.30	20.5	50	30.7	AV	L1	GND
15.814500	10.50	20.7	50	39.5	AV	L1	GND

CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room
Operating Condition: ON
Test Specification: DC 5V Via USB Port
Comment: Neutral Line
Tem:25℃ Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

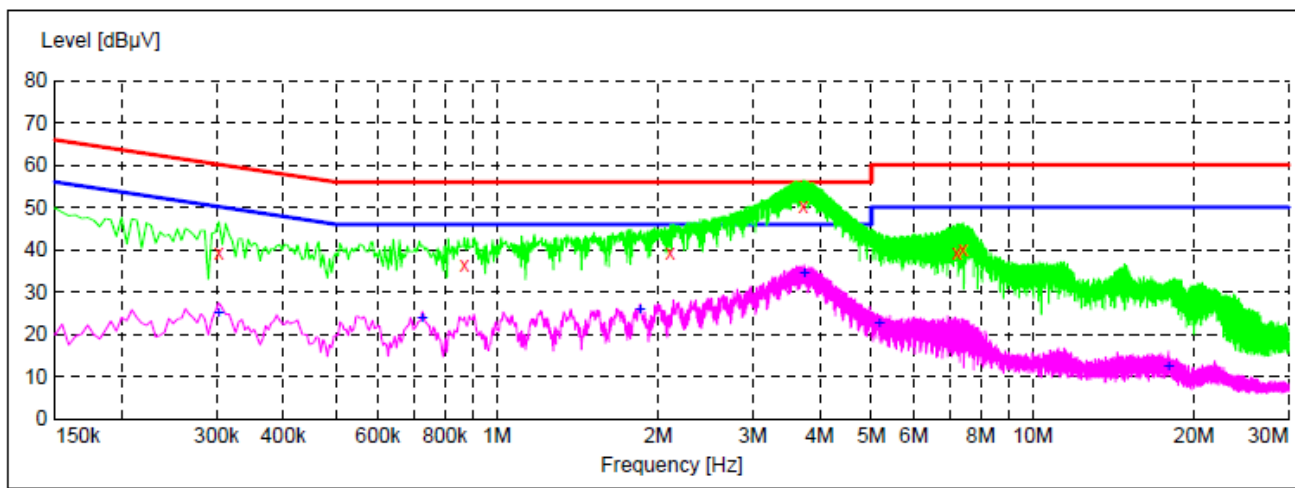

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.303000	39.10	20.1	60	21.1	QP	N	GND
0.870000	36.40	20.1	56	19.6	QP	N	GND
2.107500	39.30	20.3	56	16.7	QP	N	GND
3.732000	50.30	20.4	56	5.7	QP	N	GND
7.210500	39.40	20.5	60	20.6	QP	N	GND
7.417500	40.10	20.5	60	19.9	QP	N	GND

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.303000	24.80	20.1	50	25.4	AV	N	GND
0.726000	23.60	20.1	46	22.4	AV	N	GND
1.851000	25.60	20.3	46	20.4	AV	N	GND
3.745500	34.40	20.4	46	11.6	AV	N	GND
5.163000	22.60	20.5	50	27.4	AV	N	GND
17.907000	12.50	20.8	50	37.5	AV	N	GND

3. Radiation Interference

3.1 Requirements (15.249, 15.209):

FIELD STRENGTH of Fundamental: 902-928 MHZ 2.4-2.4835 GHz 94 dBμV/m @3m	FIELD STRENGTH of Harmonics 54 dBμV/m @3m	S15.209 30 - 88 MHz 88 - 216 MHz 216 - 960 MHz ABOVE 960 MHz	40 dBuV/m @3M 43.5 46 54dBuV/m
---	---	--	---

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.

3.2 Test Procedure

GENERAL: This report shall NOT be reproduced except in full without the written approval of Shenzhen Anbotek Compliance Laboratory Limited. The EUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2009 using a spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the EUT was 74.3oF with a humidity of 69%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m


ANSI STANDARD C63.4-2009 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.


All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz. The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 3.3.

1) 30M to 1G emissions:

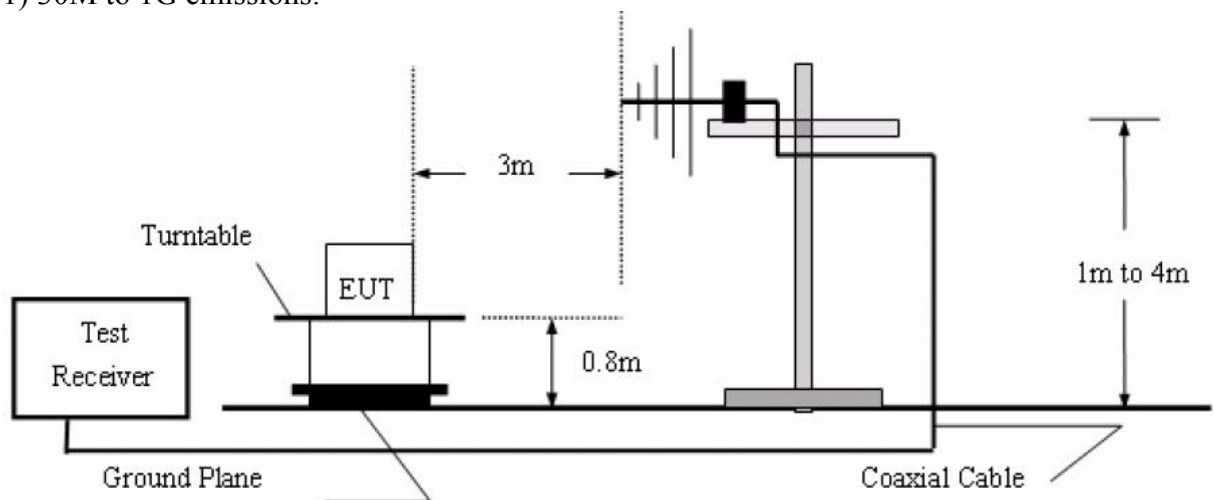

2) 1G to 40G emissions:

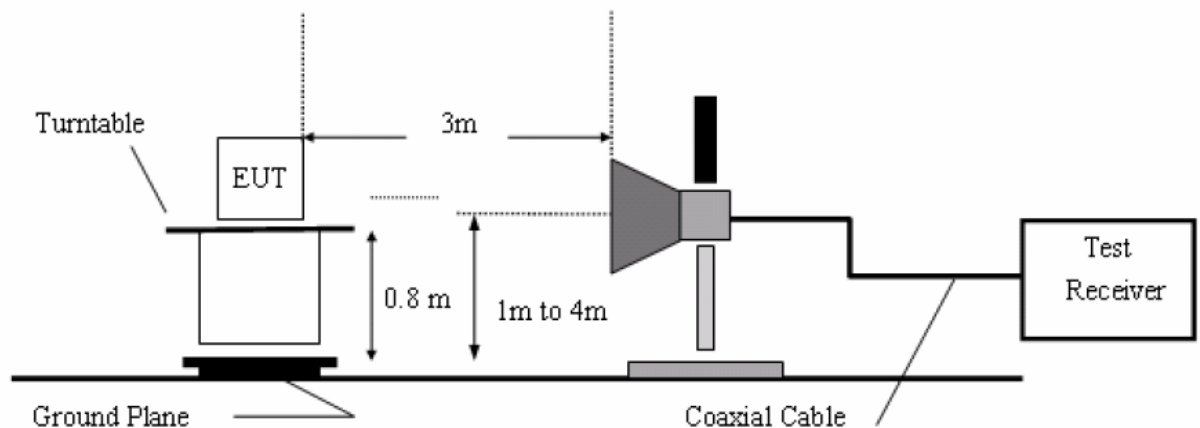

Test Equipment:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Aug. 09, 2014	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	Aug. 09, 2014	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 23, 2014	1 Year
4.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Aug. 09, 2013	3 Year
5.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	3 Year
6.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2014	1 Year

3.3 Test Results

PASS.

Please refer the following pages.

Data:**Below 1GHz:**

Freq. (MHz)	Ant. Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Note
69.780	V	27.88	40.00	-12.12	PK
197.250	V	32.65	43.50	-10.85	PK
388.710	V	35.73	46.00	-10.27	PK
672.510	V	39.15	46.00	-6.85	PK
784.630	V	32.46	46.00	-13.54	PK
792.440	V	37.49	46.00	-8.51	PK
104.330	H	27.31	43.50	-16.19	PK
189.370	H	24.63	43.50	-18.87	PK
442.510	H	32.46	46.00	-13.54	PK
706.930	H	37.65	46.00	-8.35	PK
792.510	H	36.04	46.00	-9.96	PK
844.320	H	31.45	46.00	-14.55	PK

Horizontal
CH Low (2402MHz)

Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
375.120	1.58	13.50	38.90	56.15	32.33	46.00	-13.67	QP
2402.00	2.17	31.21	35.30	85.33	83.41	114.0	-30.59	Peak
2402.00	2.17	31.21	35.30	82.51	80.59	94.0	-13.41	AV
4804.04	2.56	34.01	34.71	52.19	54.05	74.0	-19.95	Peak
4804.04	2.56	34.01	34.71	41.75	43.61	54.0	-10.39	AV
7207.98	2.98	36.16	35.15	46.22	50.21	74.0	-23.79	Peak
7207.98	2.98	36.16	35.15	28.94	32.93	54.0	-21.07	AV
9608.00	---	---	---	---	---	---	---	---
12010.00	---	---	---	---	---	---	---	---
14412.00	---	---	---	---	---	---	---	---
16814.00	---	---	---	---	---	---	---	---
---		.						

Vertical
CH Low (2402MHz)

Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
75.520	1.43	12.13	38.45	54.19	29.30	40.00	-10.70	QP
2402.00	2.17	31.21	35.30	86.33	84.41	114.0	-29.59	Peak
2402.00	2.17	31.21	35.30	81.25	79.33	94.0	-14.67	AV
4804.10	2.56	34.01	34.71	49.41	51.27	74.0	-22.73	Peak
4804.10	2.56	34.01	34.71	38.45	40.31	54.0	-13.69	AV
7207.93	2.98	36.16	35.15	47.76	51.75	74.0	-22.25	Peak
7207.93	2.98	36.16	35.15	39.84	43.83	54.0	-10.17	AV
9608.00	---	---	---	---	---	---	---	---
12010.00	---	---	---	---	---	---	---	---
14412.00	---	---	---	---	---	---	---	---
16814.00	---	---	---	---	---	---	---	---

Horizontal
CH Middle (2441MHz)

Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
316.33	1.60	13.52	38.82	56.25	32.65	46.00	-13.35	QP
2441.00	2.19	31.22	34.60	85.44	90.42	114.0	-23.58	Peak
2441.00	2.19	31.22	34.60	83.36	84.51	94.0	-9.49	AV
4882.08	2.57	35.00	34.58	39.27	42.79	74.0	-31.21	Peak
4882.08	2.57	35.00	34.58	37.68	40.02	54.0	-13.98	AV
7323.05	3.00	36.17	35.14	35.51	42.22	74.0	-31.78	Peak
7323.05	3.00	36.17	35.14	34.77	40.16	54.0	-13.84	AV
9764.00	---	---	---	---	---	---	---	---
12205.00	---	---	---	---	---	---	---	---
14646.00	---	---	---	---	---	---	---	---
17087.00	---	---	---	---	---	---	---	---

Vertical
CH Middle (2441MHz)

Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
159.31	1.50	13.40	38.89	53.11	29.12	43.50	-14.38	QP
2441.01	2.19	31.22	34.60	81.46	91.07	114.0	-22.93	Peak
2441.01	2.19	31.22	34.60	82.25	86.35	94.0	-7.65	AV
4882.11	2.57	35.00	34.58	43.36	43.48	74.0	-30.52	Peak
4882.11	2.57	35.00	34.58	35.19	40.76	54.0	-13.24	AV
7323.02	3.00	36.17	35.14	37.05	42.21	74.0	-31.79	Peak
7323.02	3.00	36.17	35.14	38.44	40.44	54.0	-13.56	AV
9764.00	---	---	---	---	---	---	---	---
12205.00	---	---	---	---	---	---	---	---
14646.00	---	---	---	---	---	---	---	---
17087.00	---	---	---	---	---	---	---	---

Horizontal
CH High (2480MHz)

Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
314.77	1.60	13.52	38.82	54.12	29.52	46.00	-16.48	QP
2480.00	2.20	31.65	36.00	97.78	90.41	114.0	-23.59	Peak
2480.00	2.20	31.65	36.00	88.51	85.76	94.0	-8.24	AV
4960.05	2.58	35.06	34.79	43.19	44.04	74.0	-29.96	Peak
4960.05	2.58	35.06	34.79	37.82	42.82	54.0	-11.18	AV
7439.99	3.02	36.19	34.90	41.37	43.84	74.0	-30.16	Peak
7439.99	3.02	36.20	35.20	37.40	41.92	54.0	-12.08	AV
9920.00	---	---	---	---	---	---	---	---
12400.00	---	---	---	---	---	---	---	---
14880.00	---	---	---	---	---	---	---	---
17360.00	---	---	---	---	---	---	---	---

Vertical
CH High (2480MHz)

Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
417.05	1.62	13.54	38.45	53.16	27.22	46.00	-18.78	QP
2480.00	2.20	31.65	36.00	83.79	91.45	114.0	-22.55	Peak
2480.00	2.20	31.65	36.00	82.12	86.17	94.0	-7.83	AV
4960.10	2.58	35.06	34.79	40.58	42.44	74.0	-31.56	Peak
4960.10	2.58	35.06	34.79	38.31	40.05	54.0	-13.95	AV
7439.96	3.02	36.19	34.90	38.68	42.76	74.0	-31.24	Peak
7439.96	3.02	36.20	35.20	36.91	40.21	54.0	-13.79	AV
9920.00	---	---	---	---	---	---	---	---
12400.00	---	---	---	---	---	---	---	---
14880.00	---	---	---	---	---	---	---	---
17360.00	---	---	---	---	---	---	---	---

NOTE: “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

4. Occupied Bandwidth


4.1 Requirements (15.249):

The field strength of any emissions appearing outside the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

4.2 Test Procedure

The EUT is placed on a turntable which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

4.3 Test Configuration:

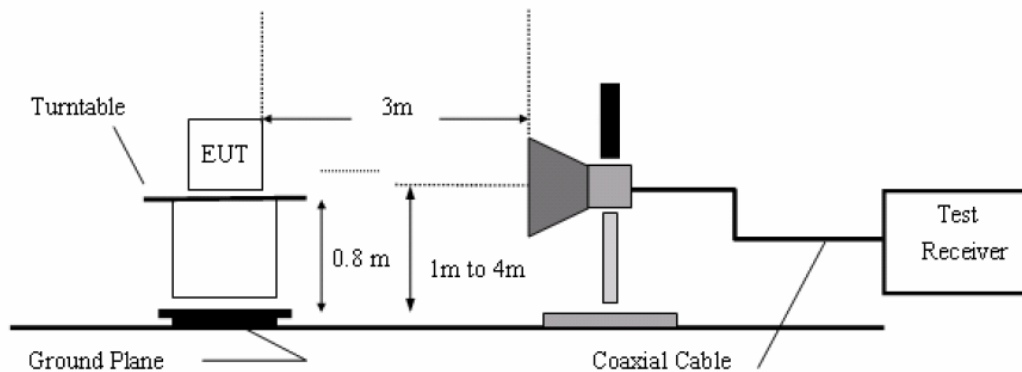

Test Equipment:


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Aug. 09, 2014	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	Aug. 09, 2014	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 23, 2014	1 Year
4.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Aug. 09, 2013	3 Year
5.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	3 Year
6.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2014	1 Year


4.4 Test Results

Pass.

Please refer the following plot.

(Note: Marker 3 means the highest value in 2.31GHz~2.39GHz or 2.4835~2.5GHz)

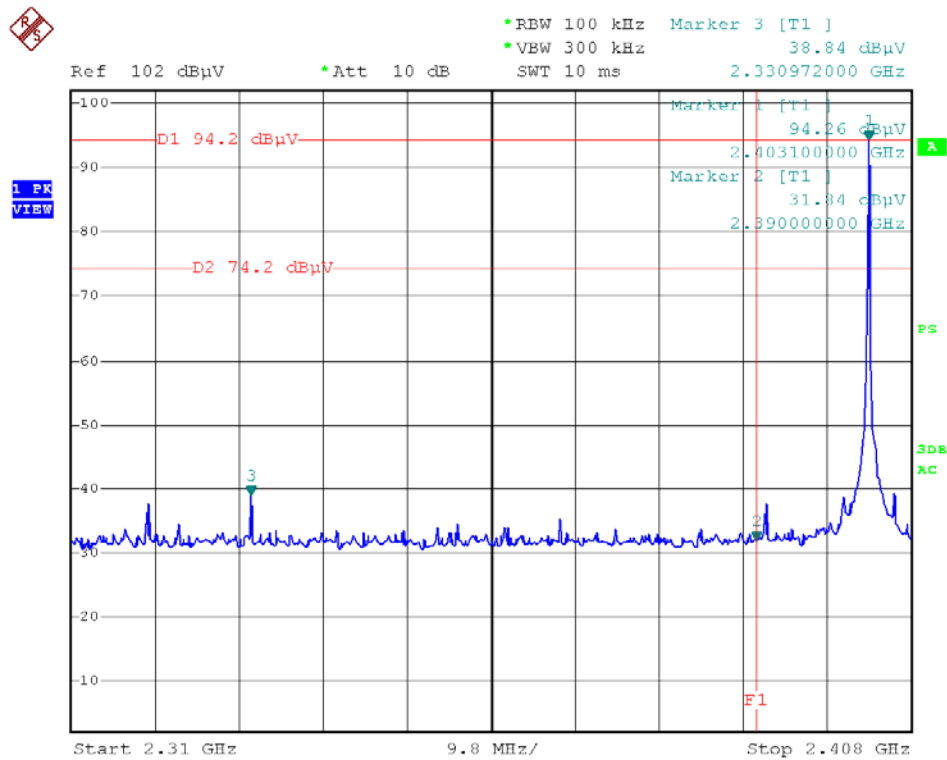

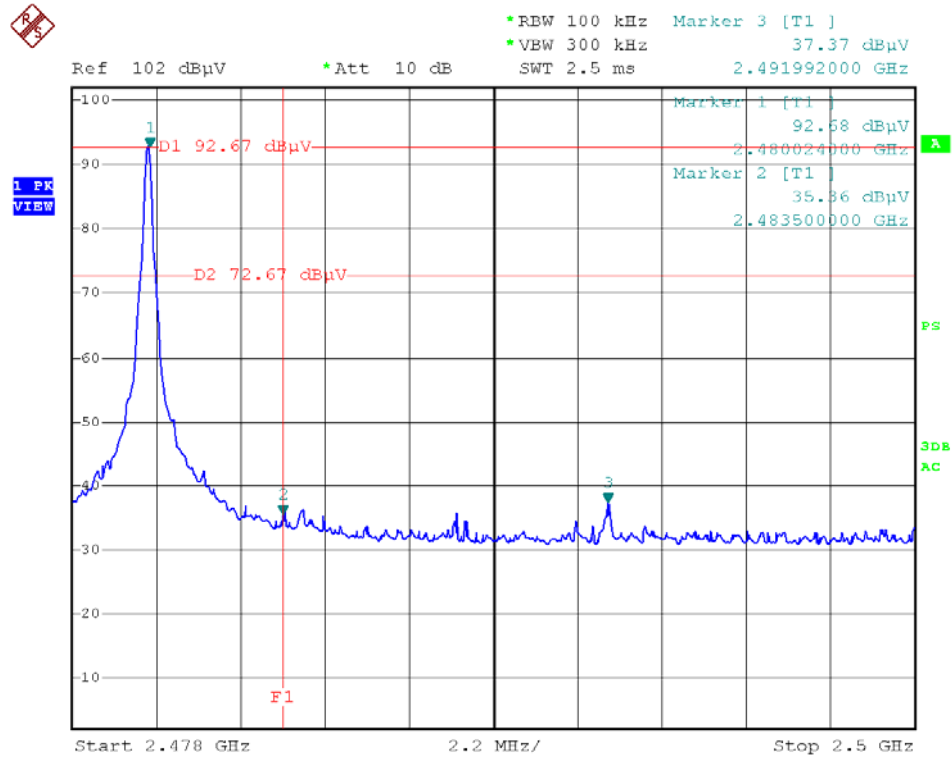


5. PHOTOGRAPH

5.1 Photo of Conducted Emission Test



5.2 Photo of Radiation Emission Test

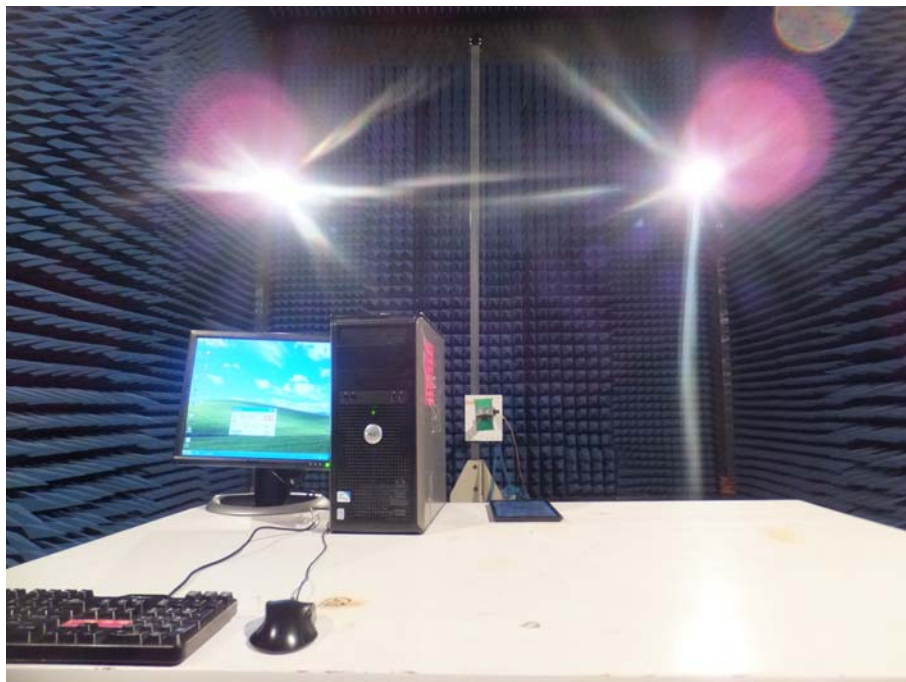

APPENDIX I (EXTERNAL PHOTOS)

Figure 1
The EUT-Front View



Figure 2
The EUT-Back View



Figure 3
The EUT-Port View



APPENDIX II (INTERNAL PHOTOS)

Figure 4
The EUT-Inside View



Figure 5
PCB of the EUT

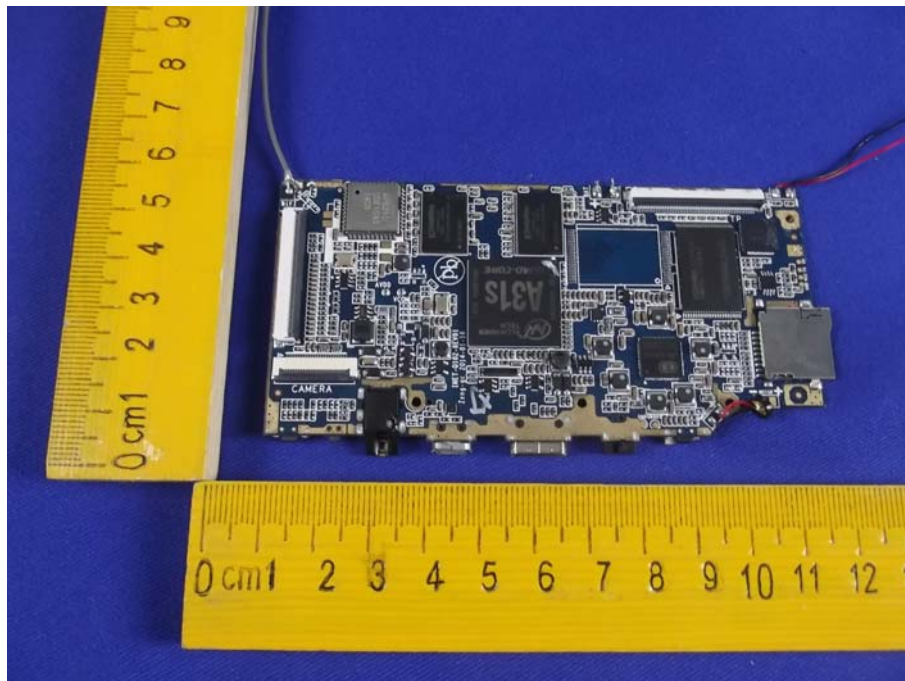


Figure 6
PCB of the EUT

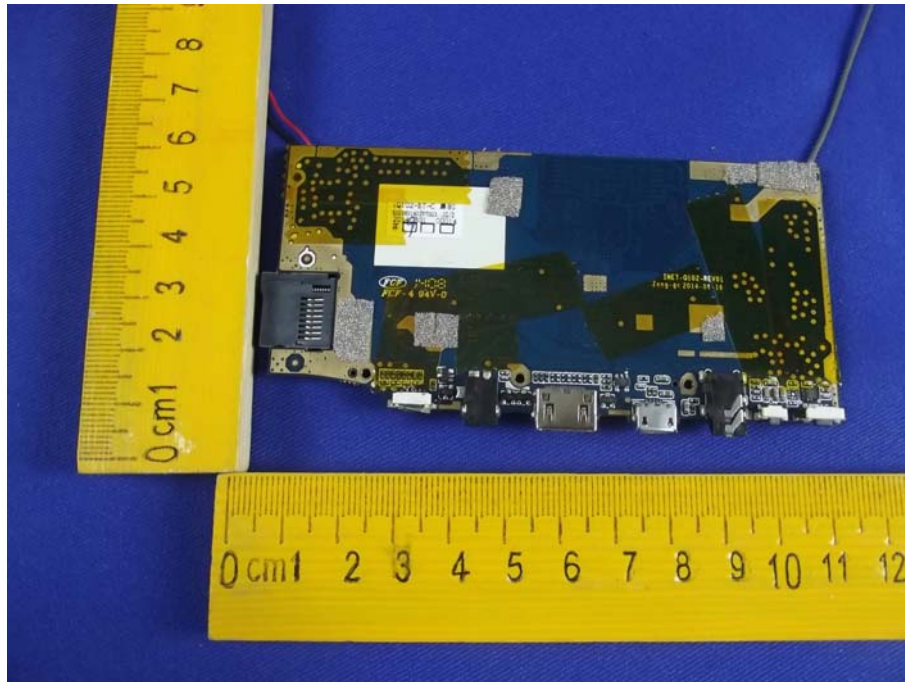


Figure 7
PCB of the Moduke

