



ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

TEST REPORT

For

APPLICATION of CERTIFICATION

For

BridgeCom Systems, Inc.
617 Liberty Road
SMITHVILLE, MO 64089

Mr. Ron Kochanowicz
Engineer

MODEL: CS540U
Land Mobile and General Mobile Radio Services (LMRS/GMRS)
UHF TRANSCEIVER
FREQUENCY: 450 - 480 MHz

FCC ID: SK4 MPTM40U

Test Date: October 17, 2004

Certifying Engineer: *Scot D. Rogers*
Scot D. Rogers
ROGERS LABS, INC.
4405 West 259th Terrace
Louisburg, KS 66053
Phone: (913) 837-3214
FAX: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

FORWARD:	3
2.1055 FREQUENCY STABILITY	3
<u>Measurements Required:</u>	3
<u>Test Arrangement:</u>	4
<u>Results:</u>	5
APPENDIX	6

FORWARD:

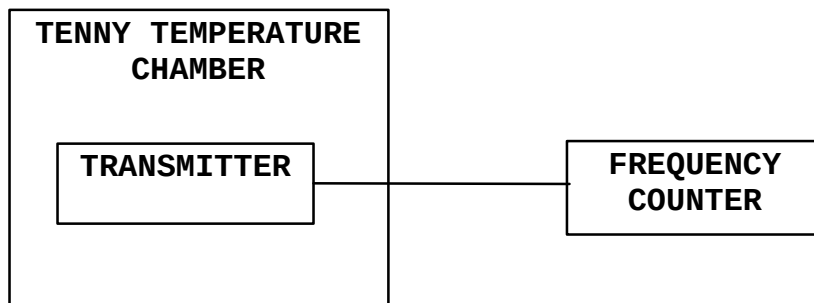
In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2003, Part 47, Paragraph 90.213, applicable paragraphs of Parts 15, 90, and 95, the following is submitted in support of the 1.5 parts per million frequency stability requirements.

2.1055 Frequency Stability**Measurements Required:**

The frequency stability shall be measured with variations of ambient temperature from -30° to +50° centigrade.

Measurements shall be made at the extremes of the temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. In addition to temperature stability the frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, batteries powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
- (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

Test Arrangement:

The measurement procedure outlined below shall be followed:

Steps 1: The transmitter shall be installed in an environmental test chamber whose temperature is controllable. Provision shall be made to measure the frequency of the transmitter.

Step 2: With the transmitter inoperative (power switched "OFF"), the temperature of the test chamber shall be adjusted to +25°C. After a temperature stabilization period of one hour at +25°C, the transmitter shall be switched "ON" with standard test voltage applied.

Step 3: The carrier shall be keyed "ON", and the transmitter shall be operated unmodulated at full radio frequency power output at the duty cycle, for which it is rated, for duration of at least 5 minutes. The radio frequency carrier frequency shall be monitored and measurements shall be recorded.

Step 4: The test procedures outlined in Steps 2 and 3, shall be repeated after stabilizing the transmitter at the environmental temperatures specified, -30°C to 50°C in 10 degree increments.

The frequency stability was measured with variations in the power supply voltage from 85 to 115 percent of the nominal value. A Topward 6303A DC Power Supply was used to vary the dc voltage for the power input from 11.7 Vdc to 15.8 Vdc. The frequency was measured and the variation in parts per million was calculated. Data was taken per Paragraphs 2.1055 and applicable paragraphs of parts 2, 90, and 95.

Results:

FREQ. (MHz) 462.5625	FREQUENCY STABILITY VS TEMPERATURE IN PARTS PER MILLION (PPM)								
	Temperature in °C								
	-30	-20	-10	0	+10	+20	+30	+40	+50
D (Hz)	160.0	-140.0	160.0	90.0	390.0	-170.0	-60.0	-70.0	-150.0
Ppm	0.34	-0.30	0.34	0.19	0.84	-0.37	-0.13	-0.15	-0.32
%	0.00003	-0.00003	0.00003	0.00002	0.00008	-0.00004	-0.00001	-0.00002	-0.00003

FREQUENCY IN MHz	FREQUENCY STABILITY VS VOLTAGE VARIATION 13.75 volts nominal; RESULTS IN PPM INPUT VOLTAGE		
	11.7 V _{dc}	13.75 V _{dc}	15.8 V _{dc}
464.85000	0.0	0.0	0.0

FREQUENCY IN MHz	FREQUENCY STABILITY VS VOLTAGE VARIATION 13.75 volts nominal; RESULTS IN PPM BATTERY ENDPOINT VOLTAGE 10.3 V _{dc}	
464.85000	0.0	

Specifications of Paragraphs 2.1055, 90.213, and applicable paragraphs of parts 2, 90, and 95 are met. There are no deviations to the specifications.

APPENDIX

Model: CS540U

1. Test Equipment List.
2. Rogers Qualifications.
3. FCC Site Approval Letter.

TEST EQUIPMENT LIST FOR ROGERS LABS, INC.

The test equipment used is maintained in calibration and good operating condition. Use of this calibrated equipment ensures measurements are traceable to national standards.

<u>List of Test Equipment:</u>	<u>Calibration Date:</u>
Scope: Tektronix 2230	2/04
Wattmeter: Bird 43 with Load Bird 8085	2/04
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/04
H/V Power Supply: Fluke Model: 408B (SN: 573)	2/04
R.F. Generator: HP 606A	2/04
R.F. Generator: HP 8614A	2/04
R.F. Generator: HP 8640B	2/04
Spectrum Analyzer: HP 8562A,	2/04
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	
HP Adapters: 11518, 11519, 11520	
Spectrum Analyzer: HP 8591 EM	5/04
Frequency Counter: Leader LDC 825	2/04
Antenna: EMCO Biconilog Model: 3143	5/04
Antenna: EMCO Log Periodic Model: 3147	10/04
Antenna: Antenna Research Biconical Model: BCD 235	10/04
Antenna: EMCO Dipole Set 3121C	2/04
Antenna: C.D. B-101	2/04
Antenna: Solar 9229-1 & 9230-1	2/04
Antenna: EMCO 6509	2/04
Audio Oscillator: H.P. 201CD	2/04
R.F. Power Amp 65W Model: 470-A-1010	2/04
R.F. Power Amp 50W M185- 10-501	2/04
R.F. PreAmp CPPA-102	2/04
LISN 50 μ Hy/50 ohm/0.1 μ f	10/04
LISN Compliance Eng. 240/20	2/04
Peavey Power Amp Model: IPS 801	2/04
Power Amp A.R. Model: 10W 1010M7	2/04
Power Amp EIN Model: A301	2/04
ELGAR Model: 1751	2/04
ELGAR Model: TG 704A-3D	2/04
ESD Test Set 2010i	2/04
Fast Transient Burst Generator Model: EFT/B-101	2/04
Current Probe: Singer CP-105	2/04
Current Probe: Solar 9108-1N	2/04
Field Intensity Meter: EFM-018	2/04
KEYTEK Ecat Surge Generator	2/04
Shielded Room 5 M x 3 M x 3.0 M (101 dB Integrity)	

10/1/2004

QUALIFICATIONS

of

SCOT D. ROGERS, ENGINEER**ROGERS LABS, INC.**

Mr. Rogers has approximately 17 years experience in the field of electronics. Six years working in the automated controls industry and 6 years working with the design, development and testing of radio communications and electronic equipment.

POSITIONS HELD:

Systems Engineer:	A/C Controls Mfg. Co., Inc. 6 Years
Electrical Engineer:	Rogers Consulting Labs, Inc. 5 Years
Electrical Engineer:	Rogers Labs, Inc. Current

EDUCATIONAL BACKGROUND:

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.


Scot D. Rogers

October 17, 2004
Date

1/11/2004

FEDERAL COMMUNICATIONS COMMISSION

**Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046**

August 15, 2003

Registration Number: 90910

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053

Attention: Scot Rogers

Re: Measurement facility located at Louisburg
3 & 10 meter site
Date of Renewal: August 15, 2003

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,



Ms. Phyllis Parrish
Information Technician