


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	62%
Test Engineer	Kenneth Huang	Configurations	2.4GHz WLAN (Radio 1)+ 2.4GHz WLAN (Radio 2) Mode

Horizontal

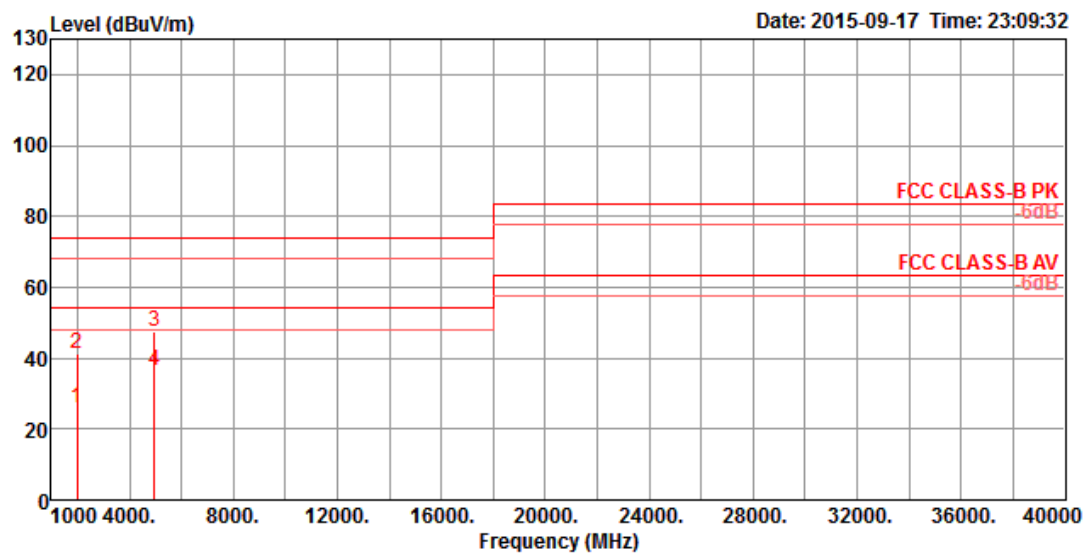

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1999.92	26.07	54.00	-27.93	31.70	3.50	26.00	35.13	117	359	Average	HORIZONTAL
2	1999.94	41.07	74.00	-32.93	46.69	3.50	26.00	35.12	117	359	Peak	HORIZONTAL
3	4955.10	47.65	74.00	-26.35	44.31	5.68	31.33	33.67	101	5	Peak	HORIZONTAL
4	4956.57	36.61	54.00	-17.39	33.27	5.68	31.33	33.67	101	5	Average	HORIZONTAL

Vertical

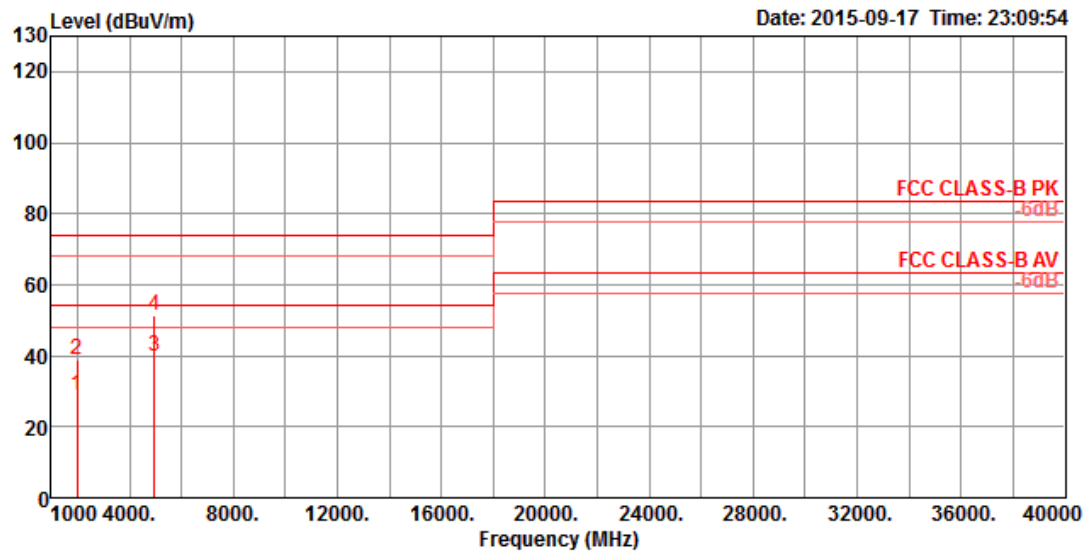

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2000.00	28.74	54.00	-25.26	34.36	3.50	26.00	35.12	100	18	Average
2	2000.10	38.99	74.00	-35.01	44.61	3.50	26.00	35.12	100	18	Peak
3	4955.11	40.00	54.00	-14.00	36.66	5.68	31.33	33.67	100	277	Average
4	4955.31	51.29	74.00	-22.71	47.95	5.68	31.33	33.67	100	277	Peak