


Project No.: 2407V20721E-RF
Test Mode: 11n20-5580
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

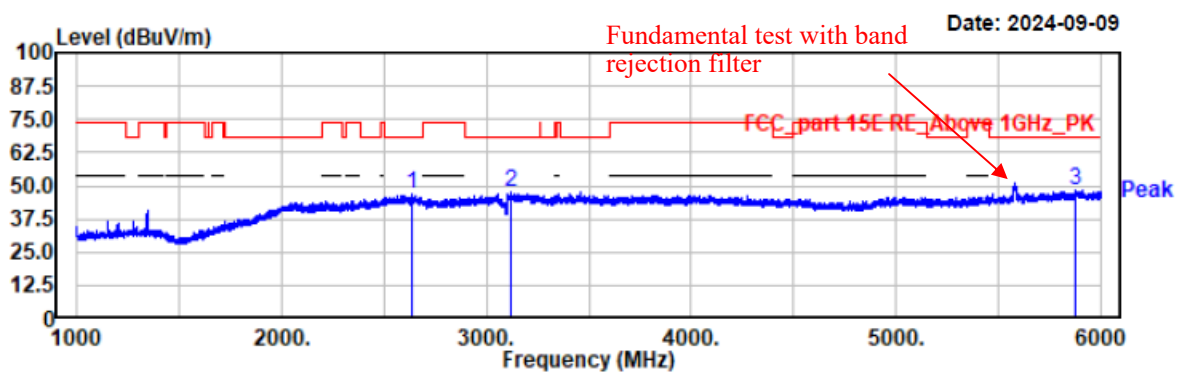

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2633.00	48.60	-1.99	46.61	68.20	21.59	horizontal	Peak
3121.50	49.37	-1.51	47.86	68.20	20.34	horizontal	Peak
5880.50	49.07	-0.52	48.55	68.20	19.65	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5580
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

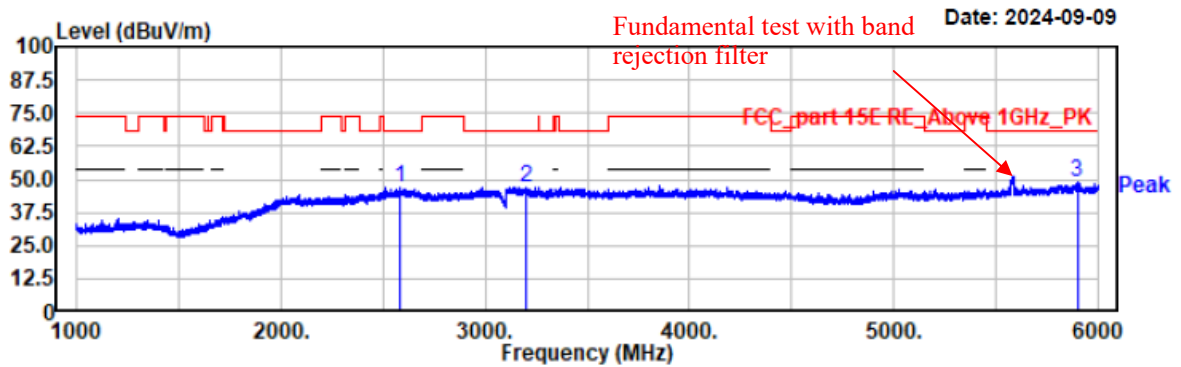

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2580.50	49.07	-2.03	47.04	68.20	21.16	vertical	Peak
3204.00	48.63	-1.49	47.14	68.20	21.06	vertical	Peak
5899.00	49.14	-0.37	48.77	68.20	19.43	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5700
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1℃/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

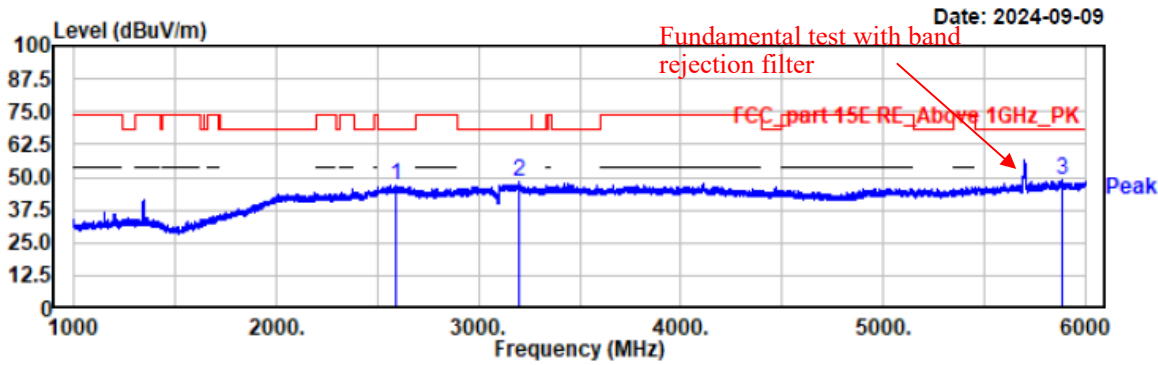

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2588.00	48.74	-2.00	46.74	68.20	21.46	horizontal	Peak
3202.00	49.58	-1.46	48.12	68.20	20.08	horizontal	Peak
5886.50	49.20	-0.46	48.74	68.20	19.46	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5700
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1℃/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

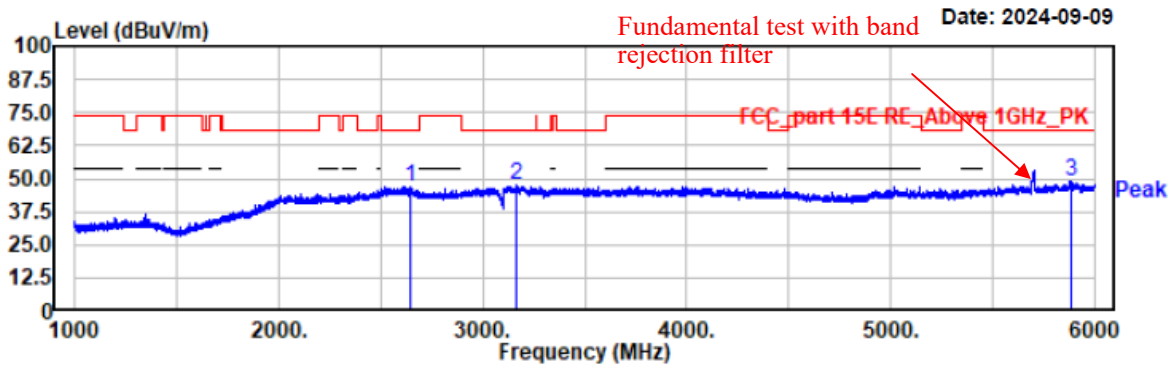

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2641.50	48.77	-2.00	46.77	68.20	21.43	vertical	Peak
3167.00	48.84	-1.44	47.40	68.20	20.80	vertical	Peak
5889.50	49.18	-0.44	48.74	68.20	19.46	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5510
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

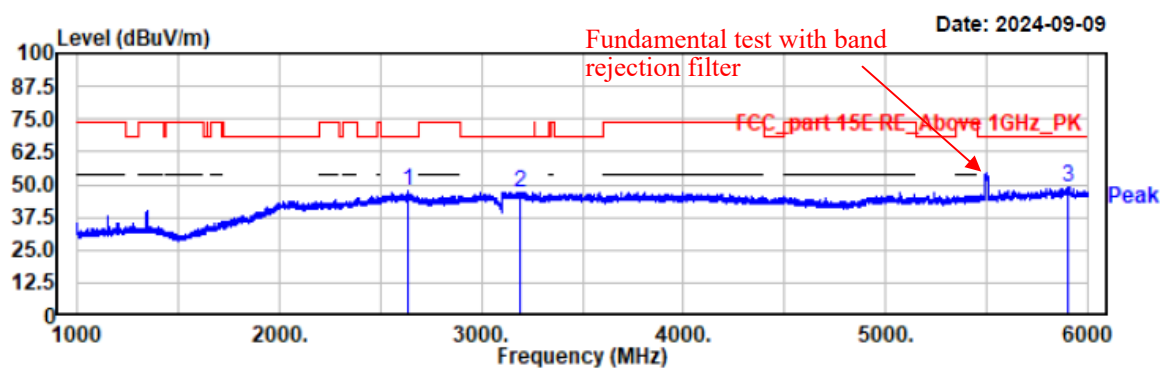

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2636.00	49.71	-1.99	47.72	68.20	20.48	horizontal	Peak
3189.50	48.61	-1.43	47.18	68.20	21.02	horizontal	Peak
5900.50	49.24	-0.36	48.88	68.20	19.32	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5510
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1℃/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

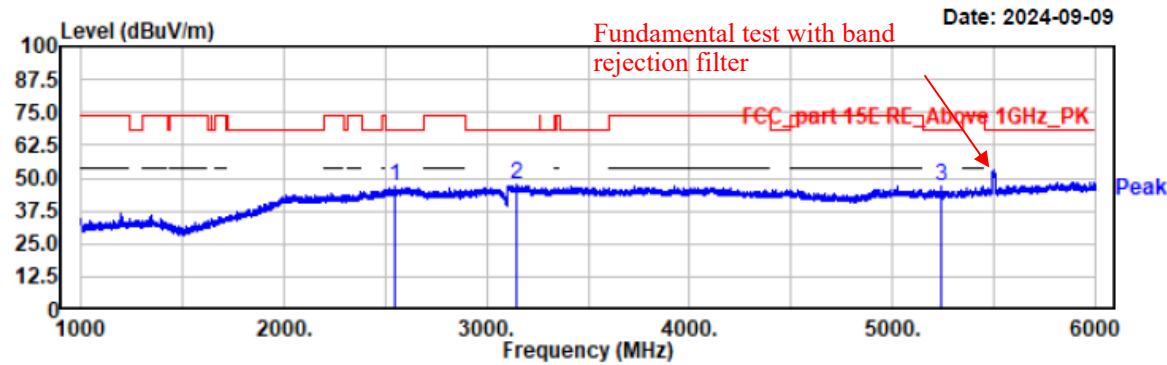

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2543.00	49.06	-2.24	46.82	68.20	21.38	vertical	Peak
3149.00	48.75	-1.44	47.31	68.20	20.89	vertical	Peak
5241.50	49.94	-3.16	46.78	68.20	21.42	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5550
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1℃/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

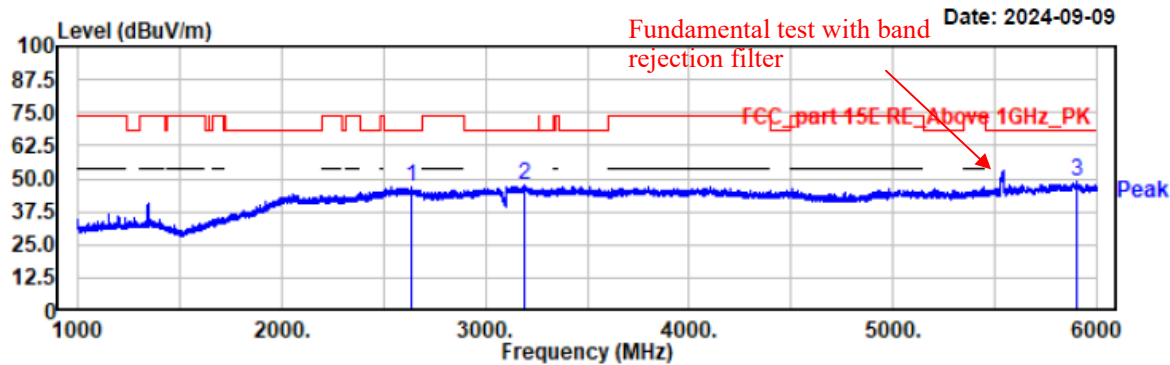

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2640.00	48.88	-2.00	46.88	68.20	21.32	horizontal	Peak
3189.50	49.03	-1.43	47.60	68.20	20.60	horizontal	Peak
5907.00	49.33	-0.46	48.87	68.20	19.33	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5550
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1℃/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

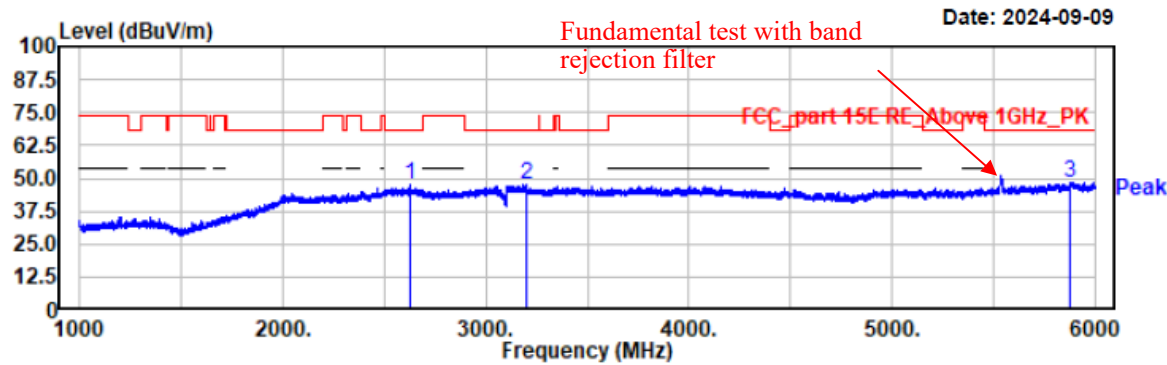

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2628.50	49.30	-1.98	47.32	68.20	20.88	vertical	Peak
3202.00	48.85	-1.46	47.39	68.20	20.81	vertical	Peak
5878.50	49.10	-0.52	48.58	68.20	19.62	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5670
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

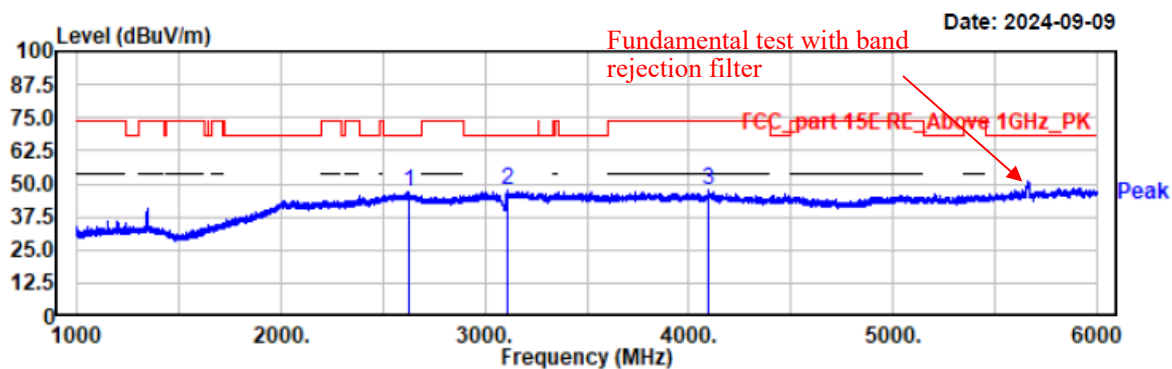

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2628.00	48.93	-1.98	46.95	68.20	21.25	horizontal	Peak
3109.50	49.03	-1.53	47.50	68.20	20.70	horizontal	Peak
4095.50	49.91	-2.41	47.50	74.00	26.50	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5670
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

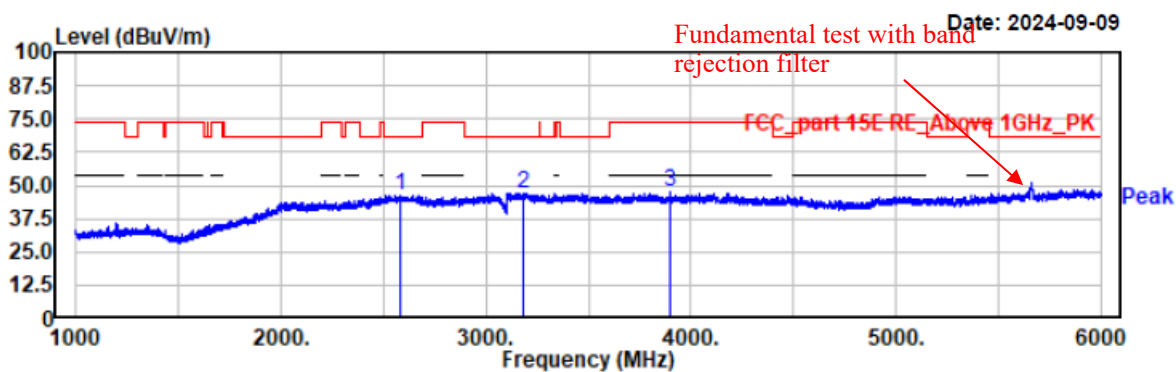

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2581.50	48.47	-2.02	46.45	68.20	21.75	vertical	Peak
3182.50	48.51	-1.43	47.08	68.20	21.12	vertical	Peak
3894.50	50.08	-2.75	47.33	74.00	26.67	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5530
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

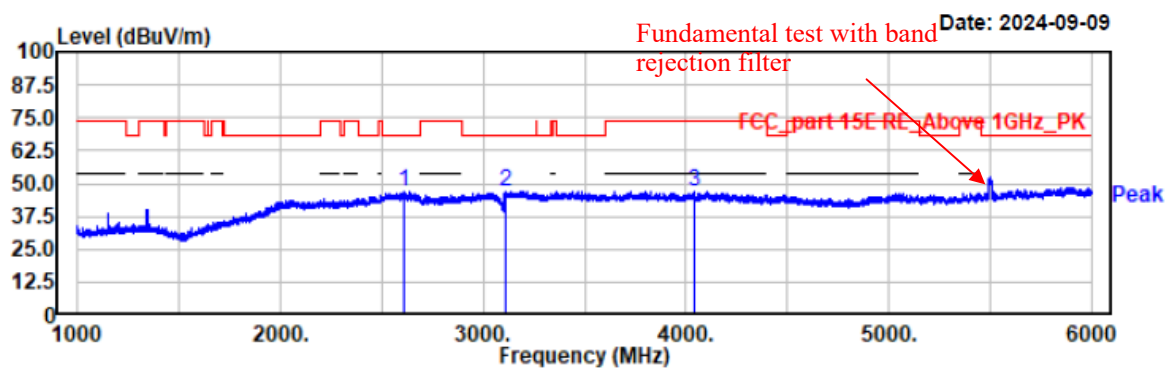

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2609.50	48.77	-1.96	46.81	68.20	21.39	horizontal	Peak
3109.00	48.77	-1.53	47.24	68.20	20.96	horizontal	Peak
4040.00	49.57	-2.45	47.12	74.00	26.88	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5530
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

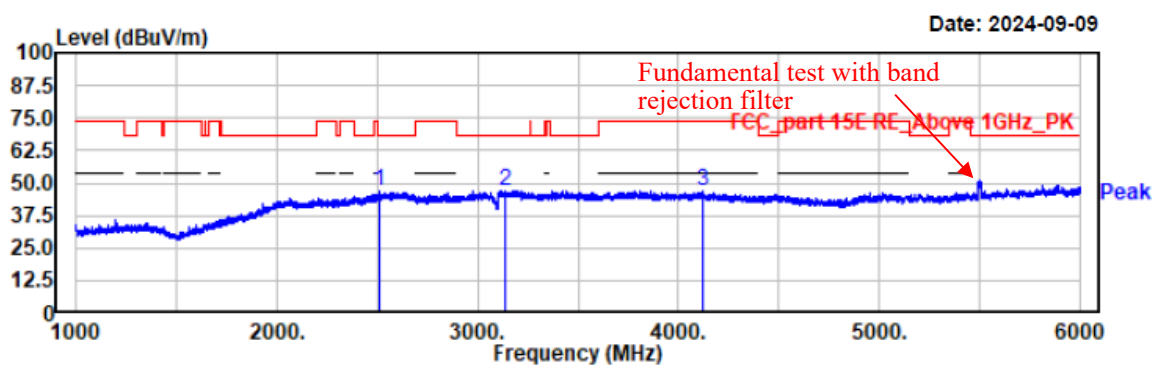

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2510.00	49.34	-2.68	46.66	68.20	21.54	vertical	Peak
3141.50	48.46	-1.46	47.00	68.20	21.20	vertical	Peak
4121.00	49.38	-2.65	46.73	74.00	27.27	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5610
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1℃/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

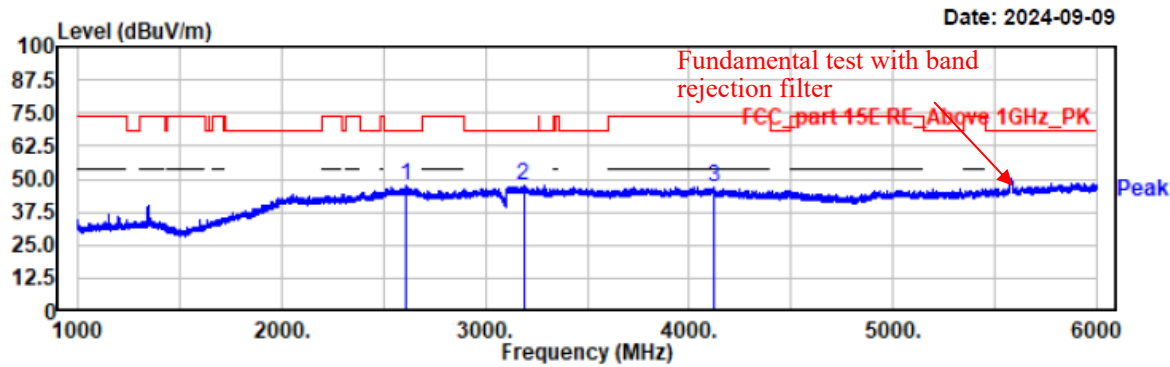

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2609.00	49.43	-1.96	47.47	68.20	20.73	horizontal	Peak
3187.00	48.99	-1.43	47.56	68.20	20.64	horizontal	Peak
4126.50	49.62	-2.70	46.92	74.00	27.08	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5610
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

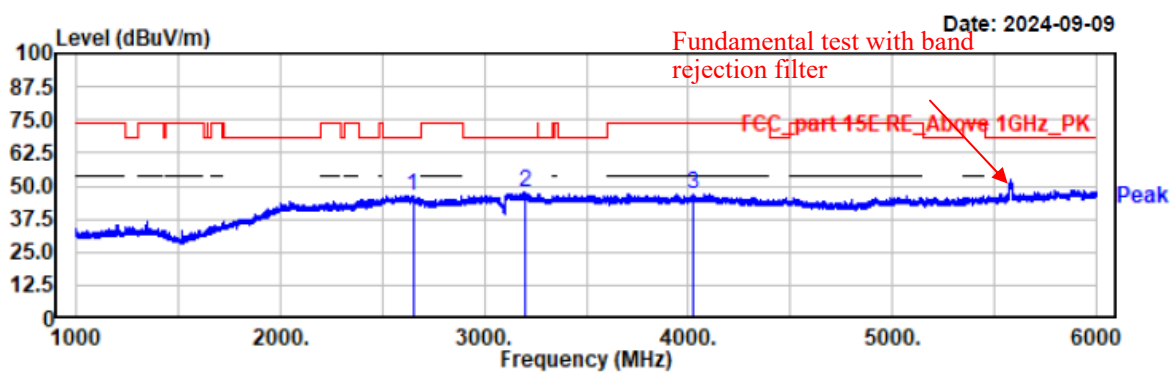


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2650.00	48.51	-2.01	46.50	68.20	21.70	vertical	Peak
3198.00	49.09	-1.43	47.66	68.20	20.54	vertical	Peak
4025.00	49.55	-2.53	47.02	74.00	26.98	vertical	Peak

B4


Project No.: 2407V20721E-RF
Test Mode: 11a-5745
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

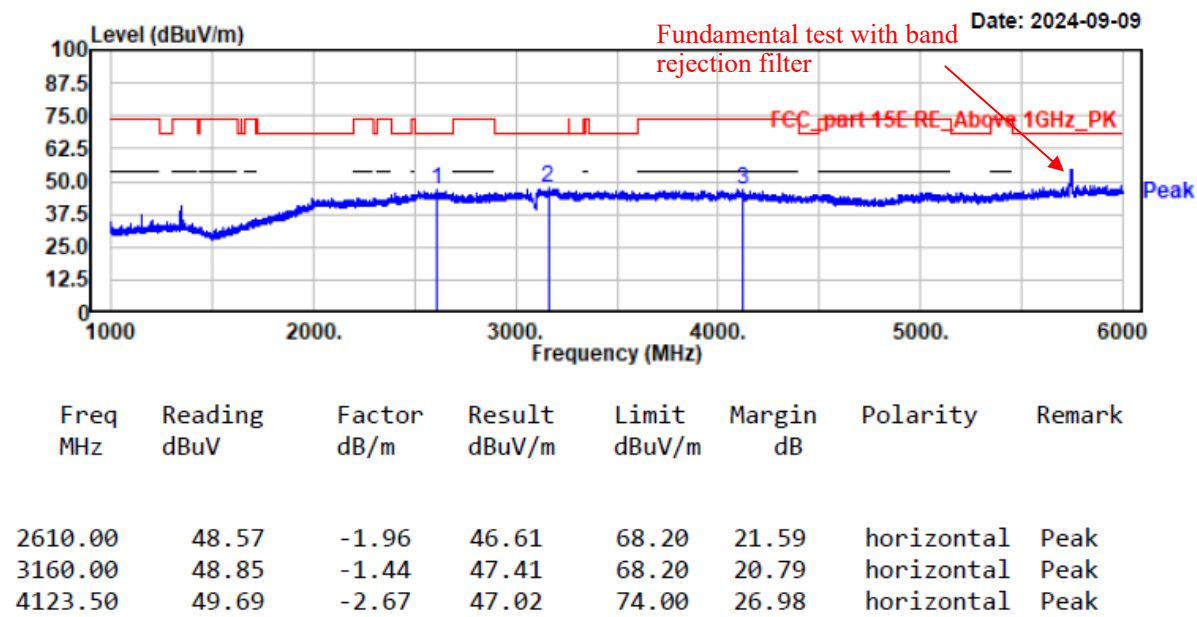


Project No.: 2407V20721E-RF
Test Mode: 11a-5745
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

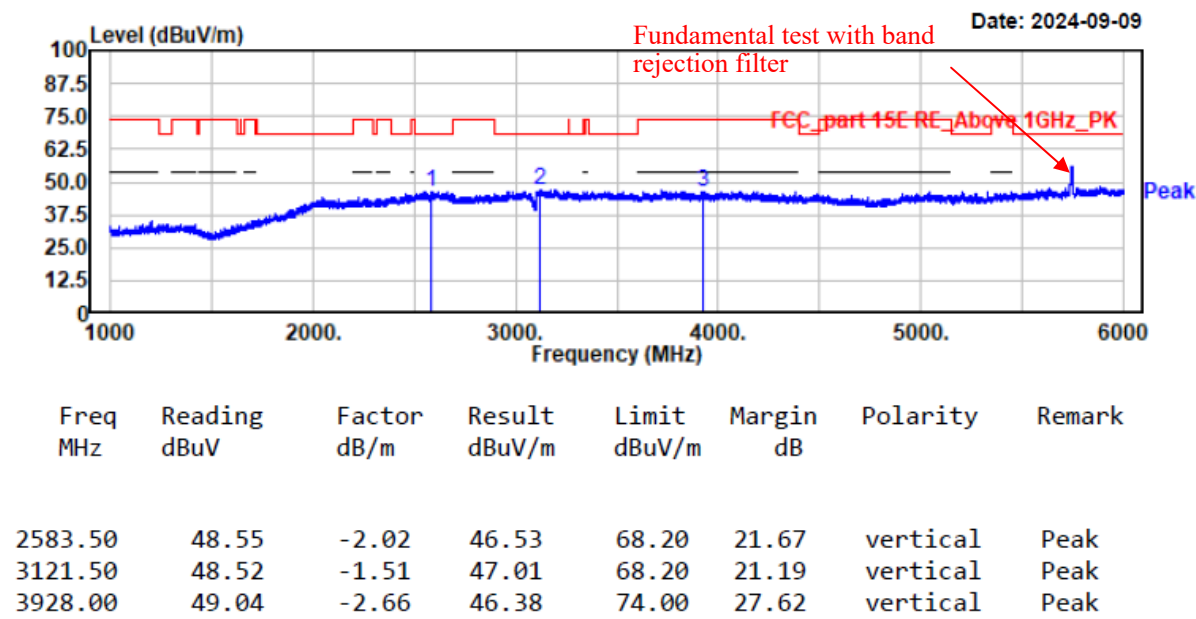

Project No.: 2407V20721E-RF
Test Mode: 11a-5785
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

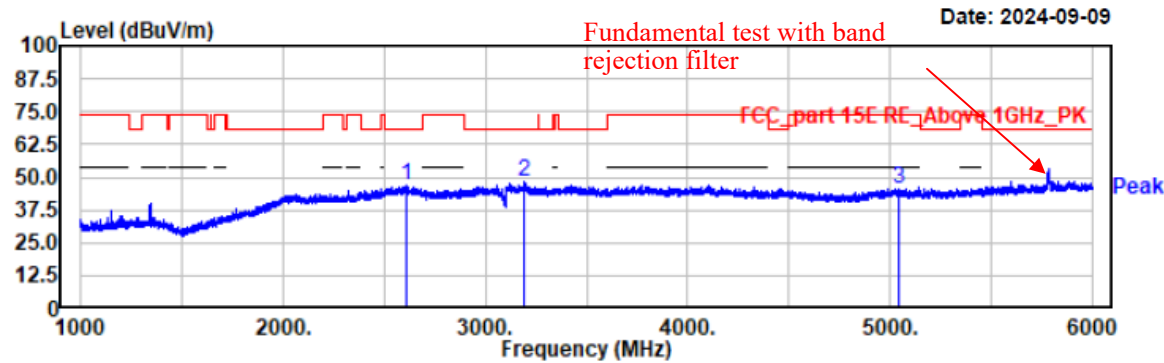

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2613.00	48.97	-1.97	47.00	68.20	21.20	horizontal	Peak
3192.00	49.86	-1.43	48.43	68.20	19.77	horizontal	Peak
5045.50	48.64	-3.17	45.47	74.00	28.53	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5785
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

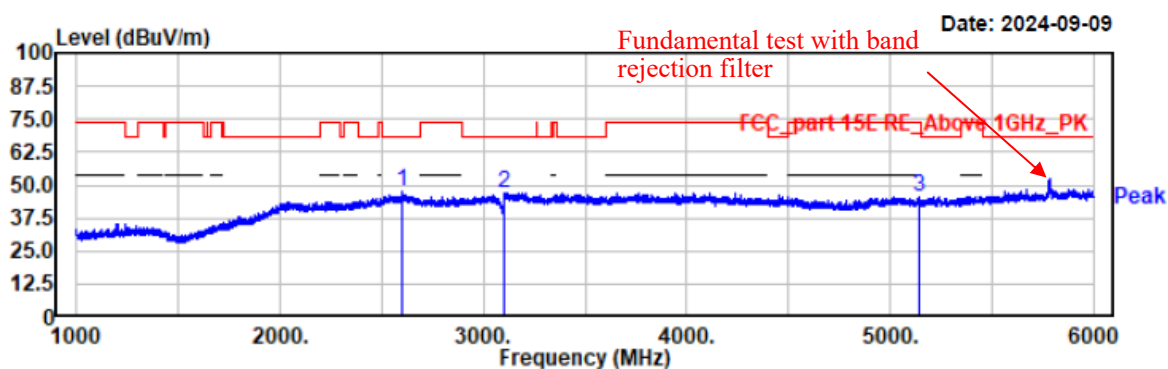

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2599.50	49.44	-1.95	47.49	68.20	20.71	vertical	Peak
3105.50	48.69	-1.54	47.15	68.20	21.05	vertical	Peak
5142.00	48.56	-3.15	45.41	74.00	28.59	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5825
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

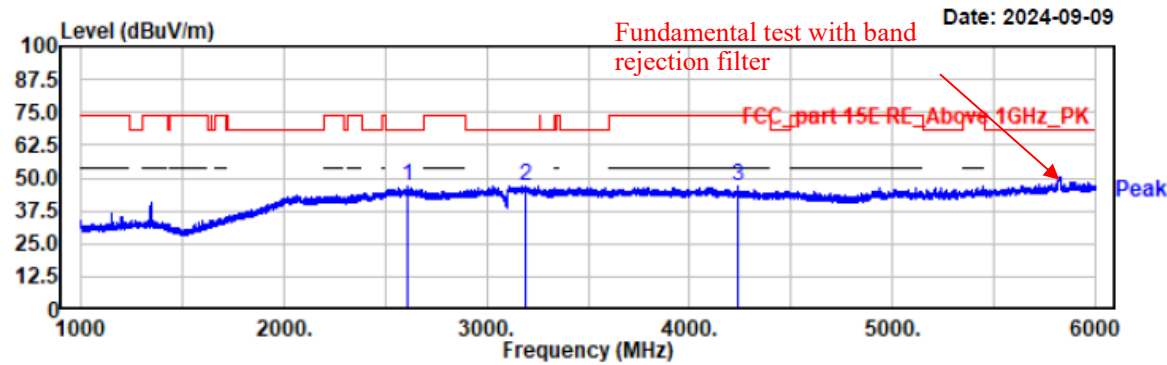

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2610.00	48.60	-1.96	46.64	68.20	21.56	horizontal	Peak
3194.00	48.53	-1.43	47.10	68.20	21.10	horizontal	Peak
4236.50	50.04	-3.41	46.63	74.00	27.37	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5825
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

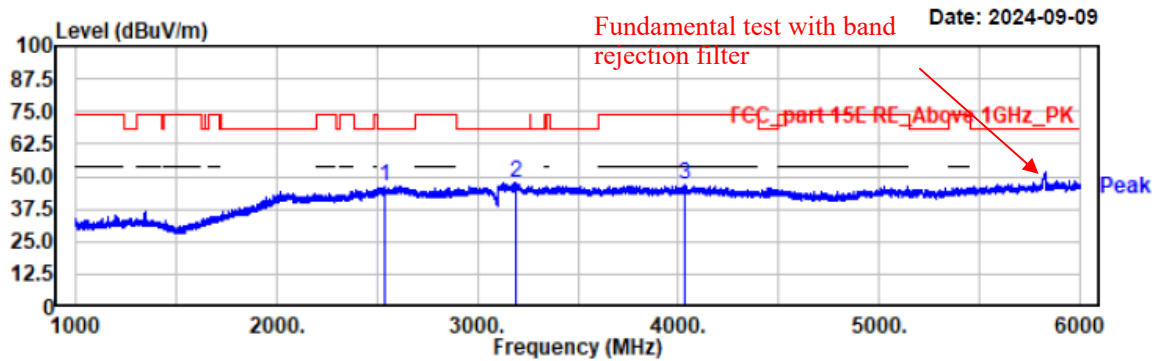

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2539.00	48.55	-2.28	46.27	68.20	21.93	vertical	Peak
3195.50	48.85	-1.43	47.42	68.20	20.78	vertical	Peak
4033.50	49.60	-2.49	47.11	74.00	26.89	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5745
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

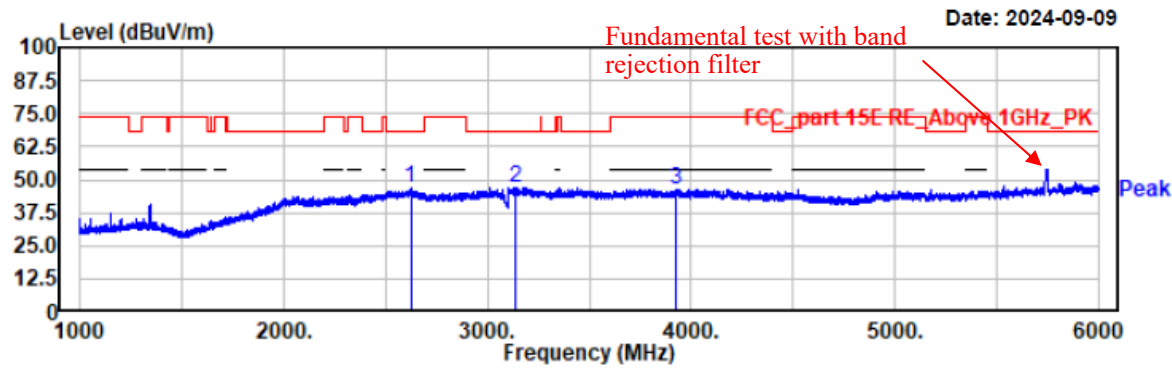

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2623.00	49.06	-1.99	47.07	68.20	21.13	horizontal	Peak
3137.50	48.50	-1.46	47.04	68.20	21.16	horizontal	Peak
3927.50	49.06	-2.65	46.41	74.00	27.59	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5745
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

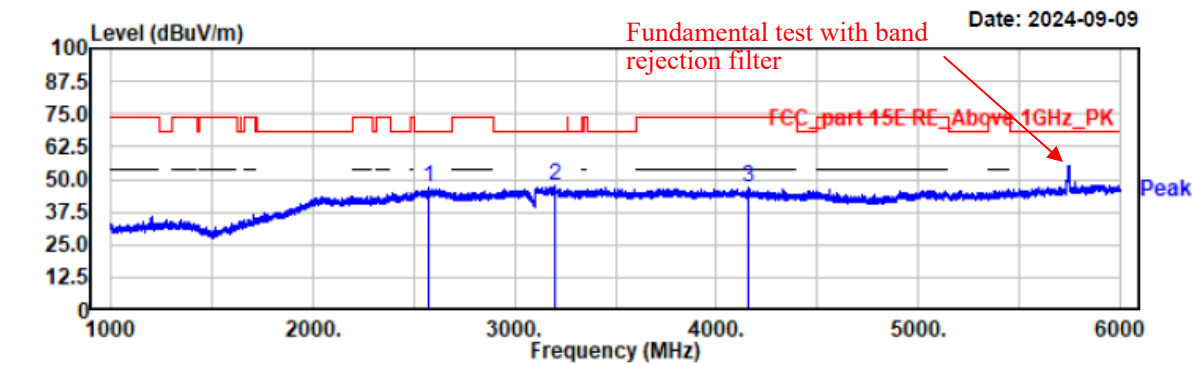

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2578.00	48.64	-2.04	46.60	68.20	21.60	vertical	Peak
3204.00	48.73	-1.49	47.24	68.20	20.96	vertical	Peak
4157.00	49.78	-2.97	46.81	74.00	27.19	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5785
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

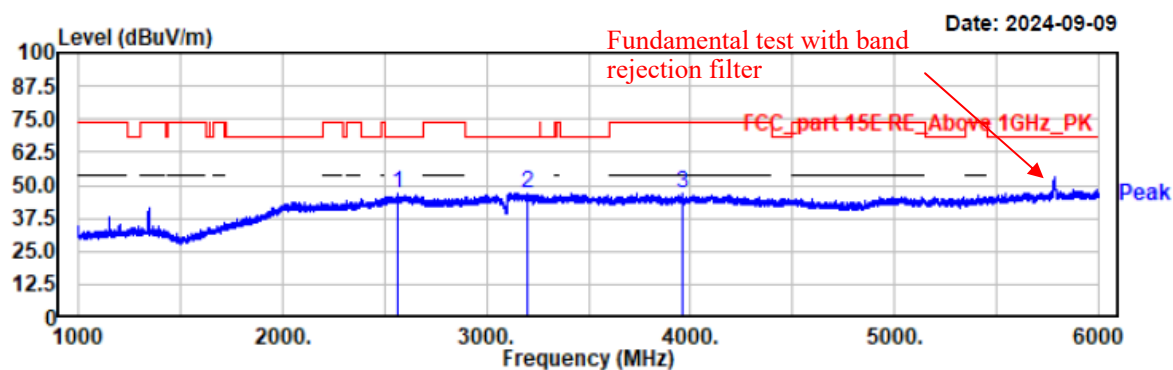

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2567.00	48.77	-2.07	46.70	68.20	21.50	horizontal	Peak
3197.00	48.27	-1.43	46.84	68.20	21.36	horizontal	Peak
3964.50	49.31	-2.60	46.71	74.00	27.29	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5785
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

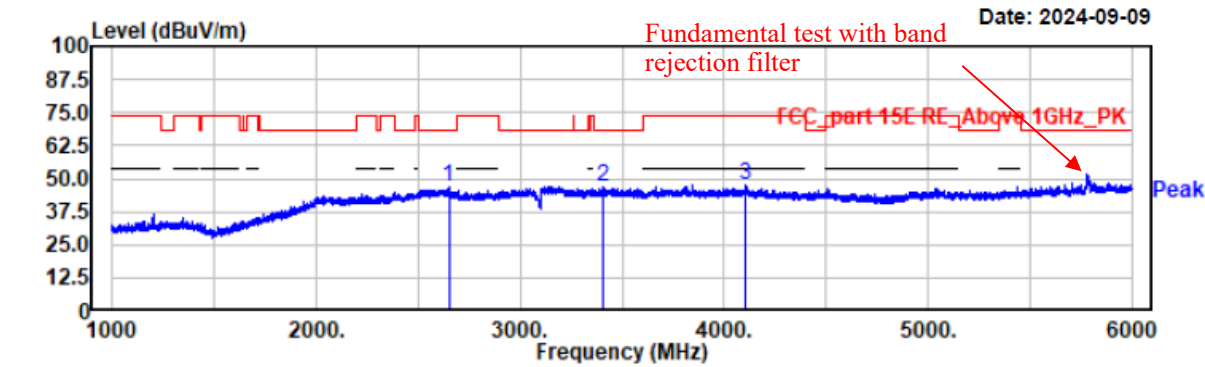

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2650.00	49.21	-2.01	47.20	68.20	21.00	vertical	Peak
3403.00	49.03	-2.05	46.98	68.20	21.22	vertical	Peak
4100.50	49.77	-2.43	47.34	74.00	26.66	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5825
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

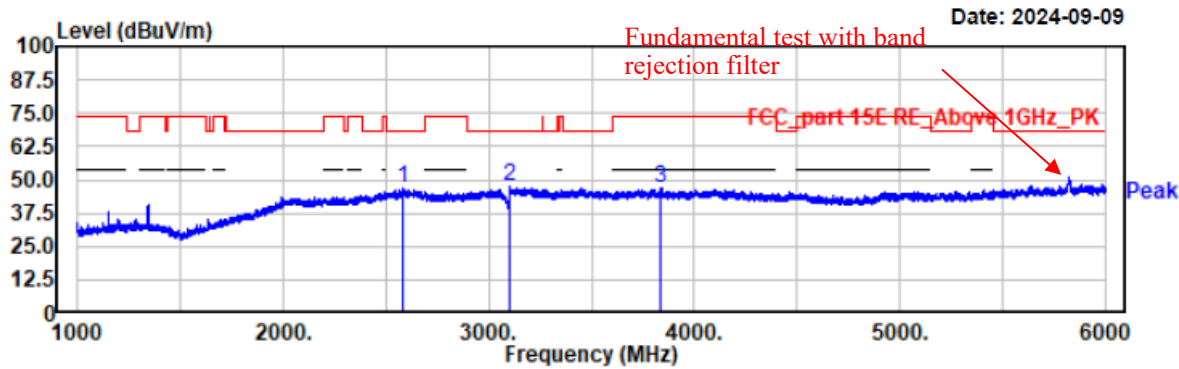

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2586.50	48.67	-2.01	46.66	68.20	21.54	horizontal	Peak
3101.50	49.22	-1.55	47.67	68.20	20.53	horizontal	Peak
3836.00	49.64	-2.64	47.00	74.00	27.00	horizontal	Peak


Project No.: 2407V20721E-RF
Test Mode: 11n20-5825
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

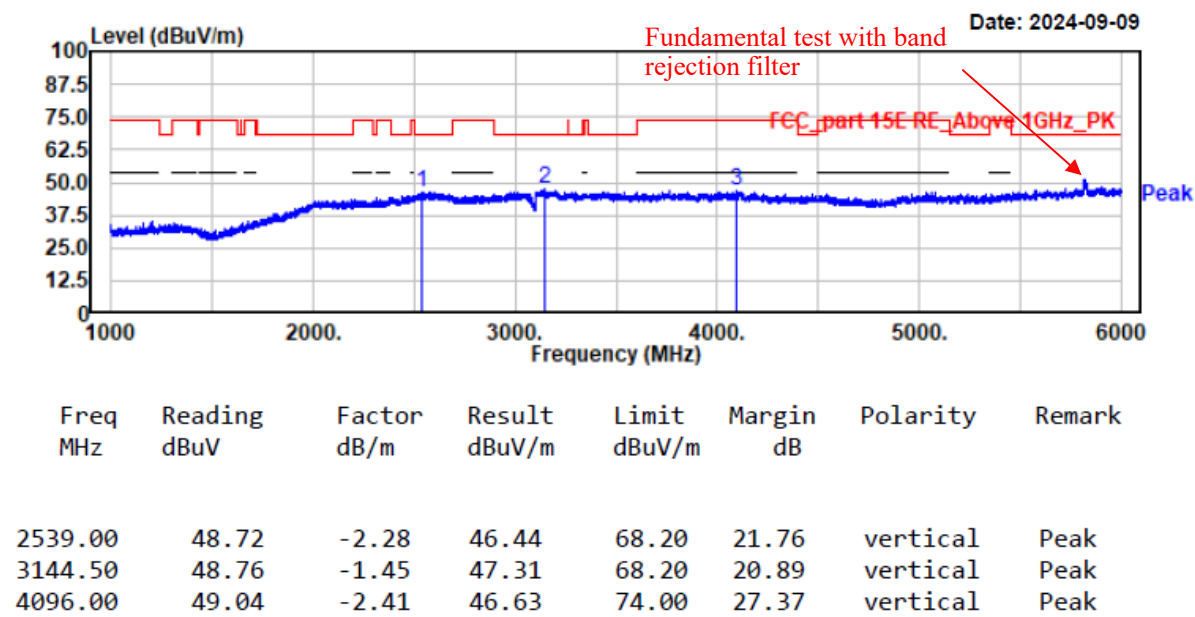

Project No.: 2407V20721E-RF
Test Mode: 11n40-5755
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

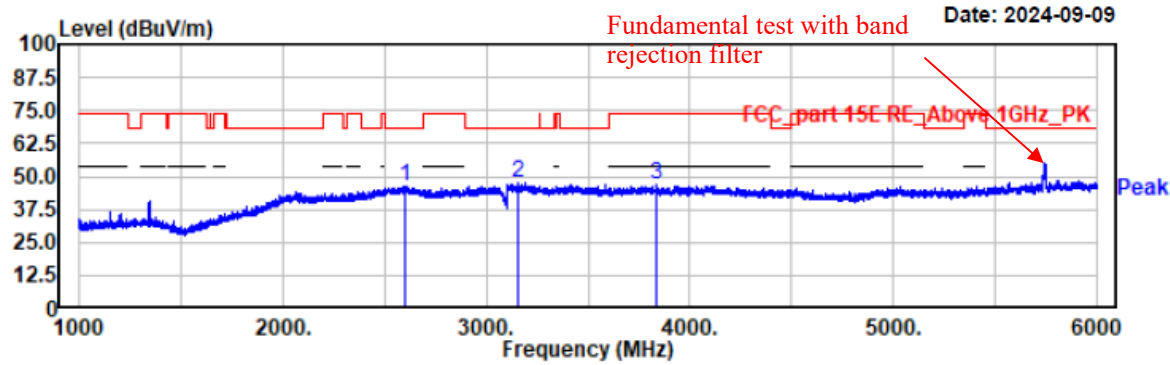

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2600.50	48.12	-1.95	46.17	68.20	22.03	horizontal	Peak
3158.00	48.85	-1.44	47.41	68.20	20.79	horizontal	Peak
3839.50	49.60	-2.65	46.95	74.00	27.05	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5755
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

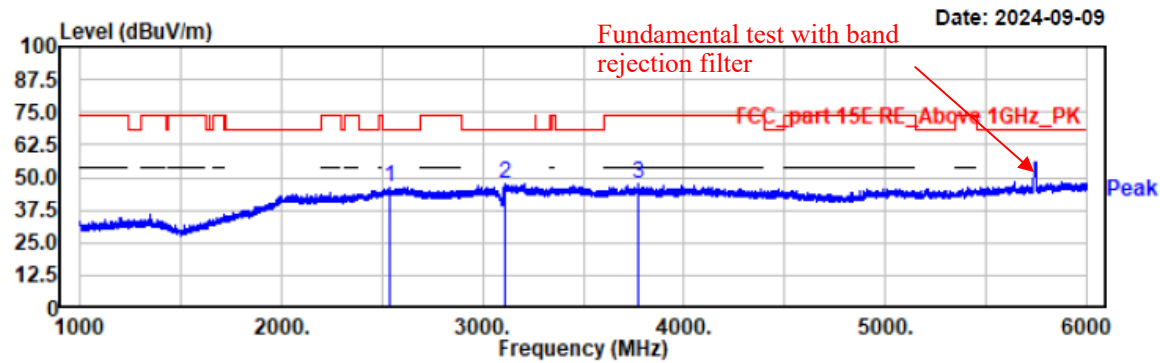

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2542.00	48.79	-2.25	46.54	68.20	21.66	vertical	Peak
3108.00	49.29	-1.53	47.76	68.20	20.44	vertical	Peak
3774.50	50.09	-2.42	47.67	74.00	26.33	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5795
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

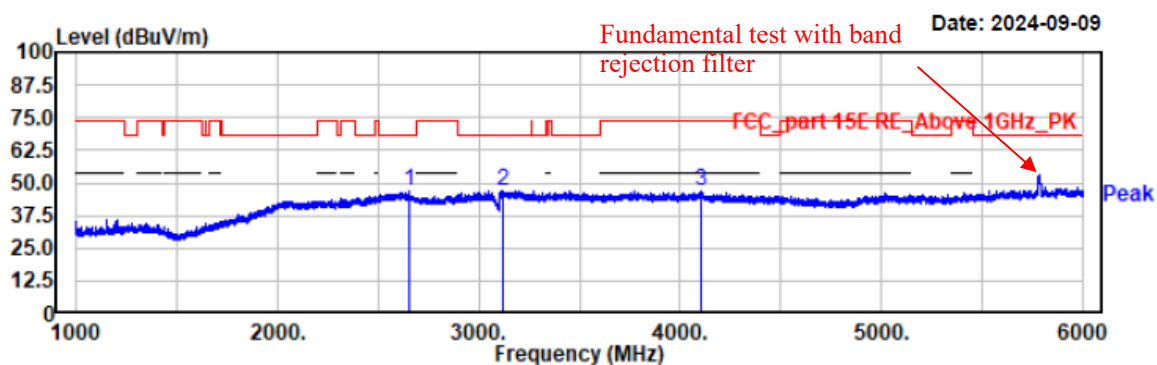

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2655.00	49.08	-2.14	46.94	68.20	21.26	horizontal	Peak
3116.50	48.46	-1.52	46.94	68.20	21.26	horizontal	Peak
4105.50	49.22	-2.49	46.73	74.00	27.27	horizontal	Peak

Project No.: 2407V20721E-RF
 Test Mode: 11n40-5795
 EUT Model: NLS-NQuire500
 Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC120V/60Hz

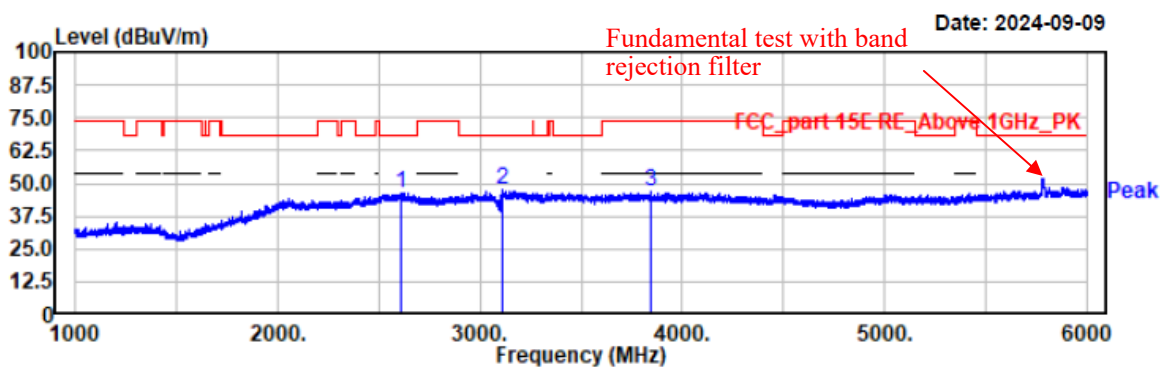

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2609.00	47.94	-1.96	45.98	68.20	22.22	vertical	Peak
3108.00	48.78	-1.53	47.25	68.20	20.95	vertical	Peak
3849.00	49.84	-2.70	47.14	74.00	26.86	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5775
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

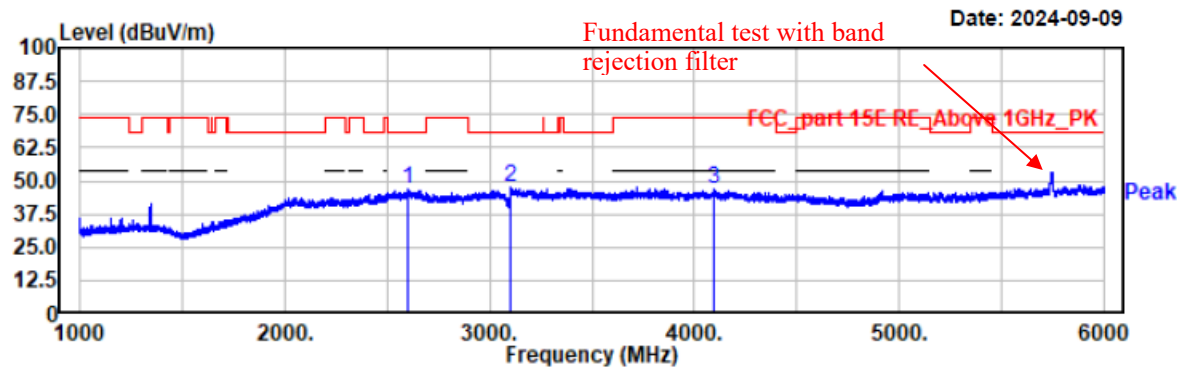

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2597.00	49.15	-1.96	47.19	68.20	21.01	horizontal	Peak
3104.50	48.89	-1.54	47.35	68.20	20.85	horizontal	Peak
4099.50	49.09	-2.42	46.67	74.00	27.33	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5775
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

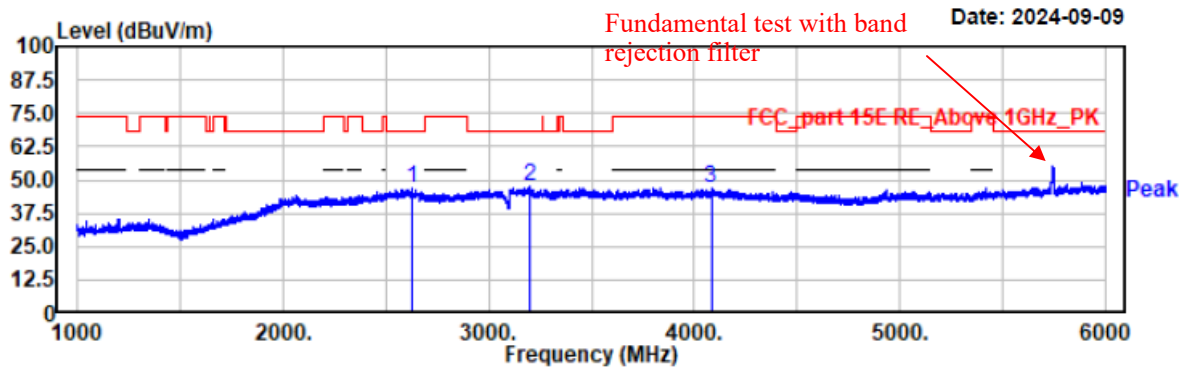

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2623.50	48.60	-1.99	46.61	68.20	21.59	vertical	Peak
3198.00	48.71	-1.43	47.28	68.20	20.92	vertical	Peak
4082.00	49.12	-2.41	46.71	74.00	27.29	vertical	Peak

EUT Model: NLS-NQuire700

B1

Project No.: 2407V20721E-RF

Test Mode: 11a-5180


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 23.8°C/51%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

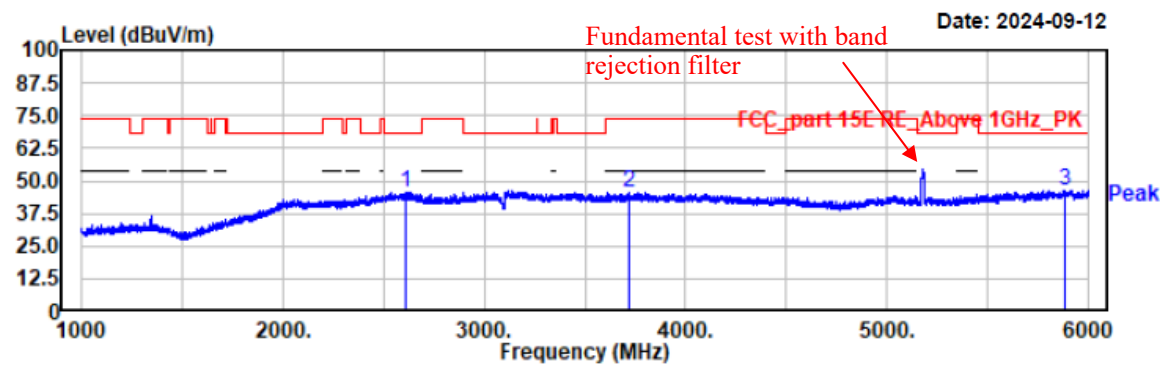

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2610.50	49.06	-3.31	45.75	68.20	22.45	horizontal	Peak
3718.00	49.96	-4.17	45.79	74.00	28.21	horizontal	Peak
5883.50	49.26	-2.73	46.53	68.20	21.67	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5180
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

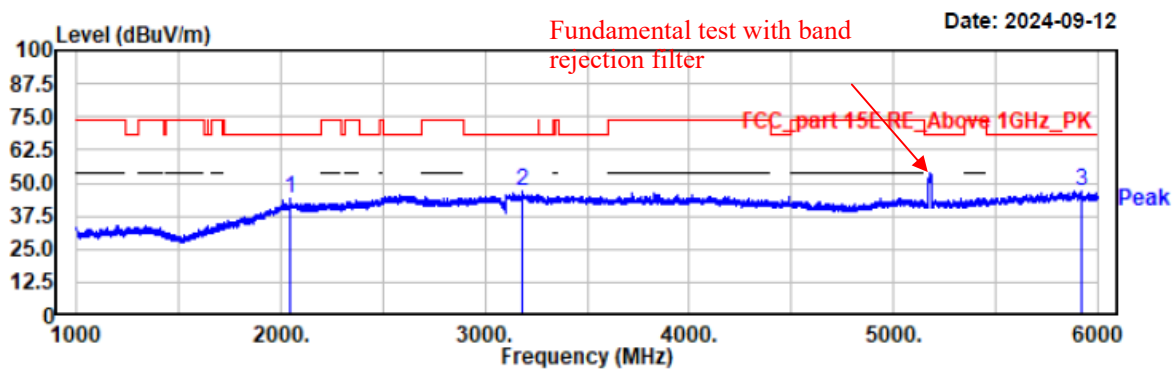

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2049.50	50.04	-6.00	44.04	68.20	24.16	vertical	Peak
3183.00	49.69	-2.94	46.75	68.20	21.45	vertical	Peak
5921.00	49.71	-2.90	46.81	68.20	21.39	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5200
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

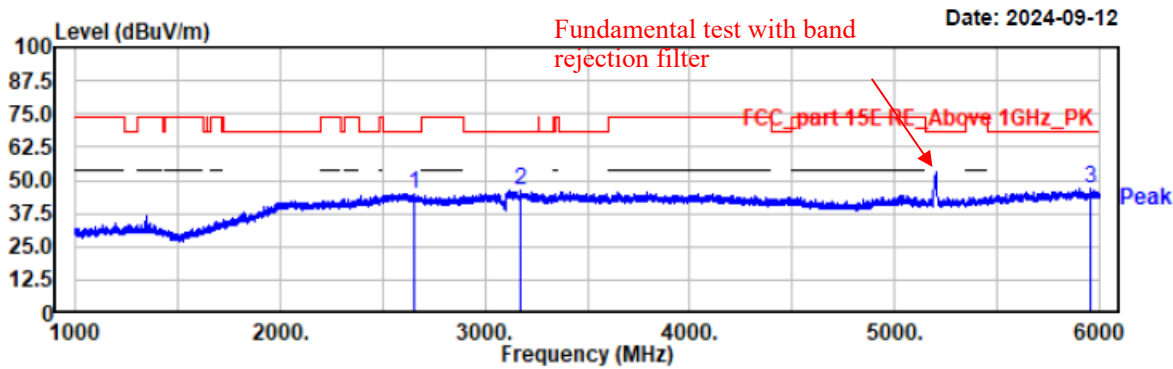

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2656.00	48.39	-3.53	44.86	68.20	23.34	horizontal	Peak
3171.50	48.96	-2.94	46.02	68.20	22.18	horizontal	Peak
5954.50	50.00	-3.27	46.73	68.20	21.47	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5200
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

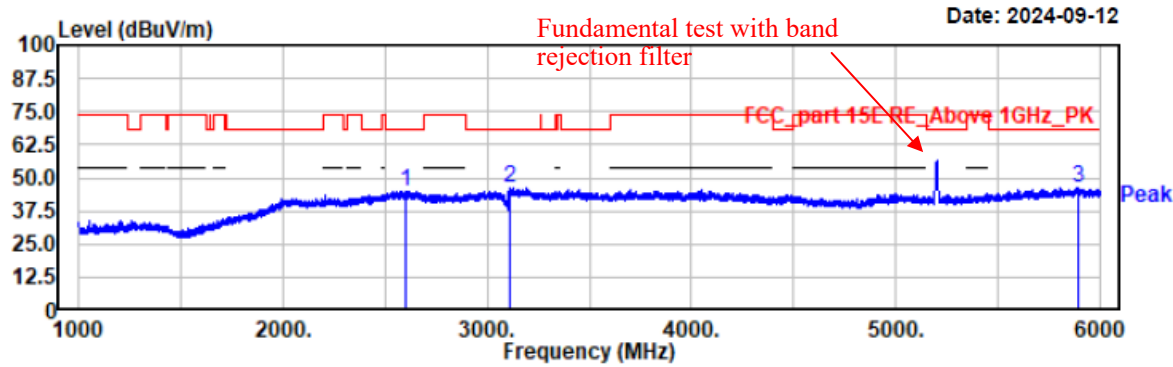

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2601.00	48.36	-3.30	45.06	68.20	23.14	vertical	Peak
3115.00	49.09	-3.01	46.08	68.20	22.12	vertical	Peak
5896.50	48.85	-2.62	46.23	68.20	21.97	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5240
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

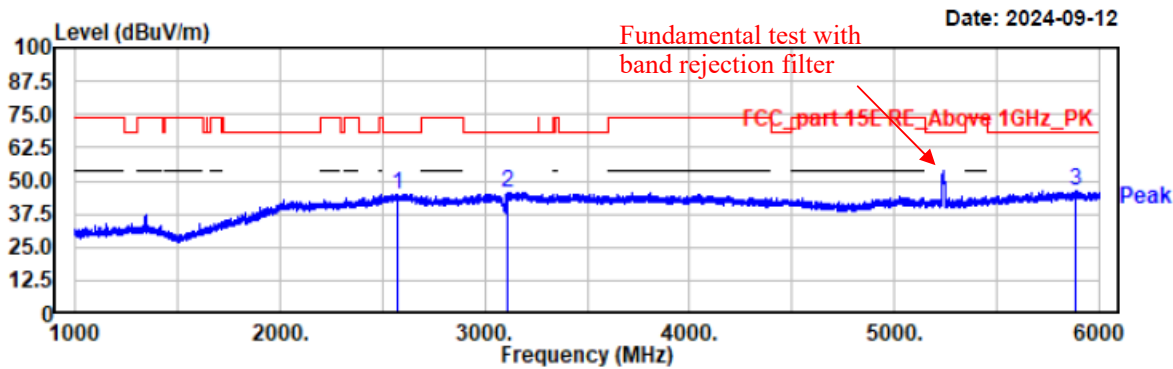

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2574.50	48.47	-3.38	45.09	68.20	23.11	horizontal	Peak
3108.00	48.45	-3.02	45.43	68.20	22.77	horizontal	Peak
5886.50	49.21	-2.70	46.51	68.20	21.69	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5240
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

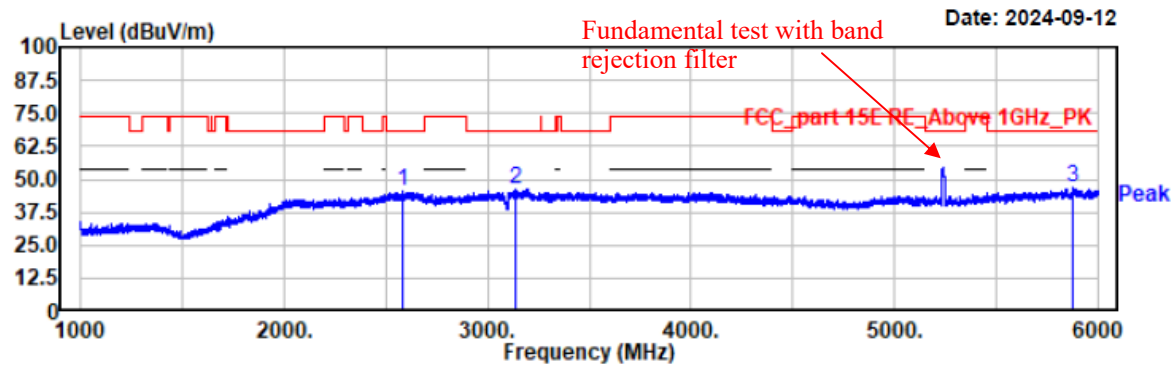

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2587.00	48.54	-3.34	45.20	68.20	23.00	vertical	Peak
3134.00	49.12	-2.97	46.15	68.20	22.05	vertical	Peak
5880.50	49.80	-2.76	47.04	68.20	21.16	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5180
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

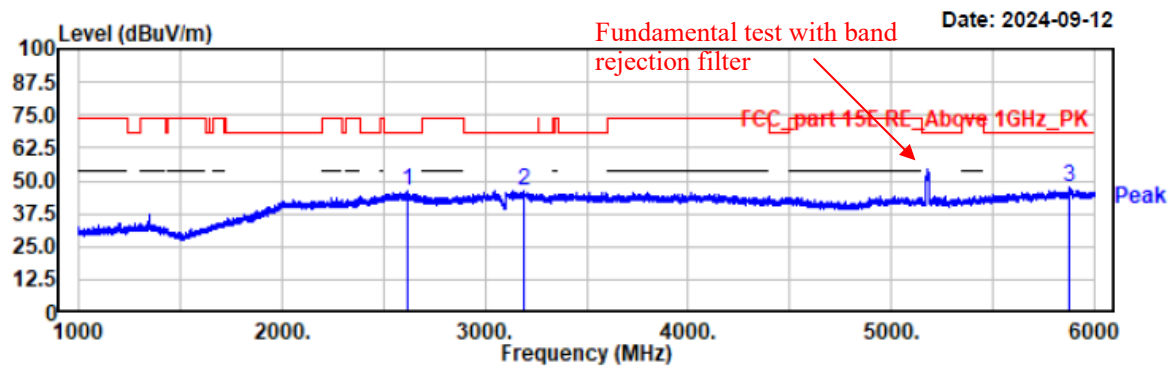

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2615.50	49.21	-3.32	45.89	68.20	22.31	horizontal	Peak
3192.50	48.91	-2.94	45.97	68.20	22.23	horizontal	Peak
5880.00	50.35	-2.75	47.60	68.20	20.60	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5180
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

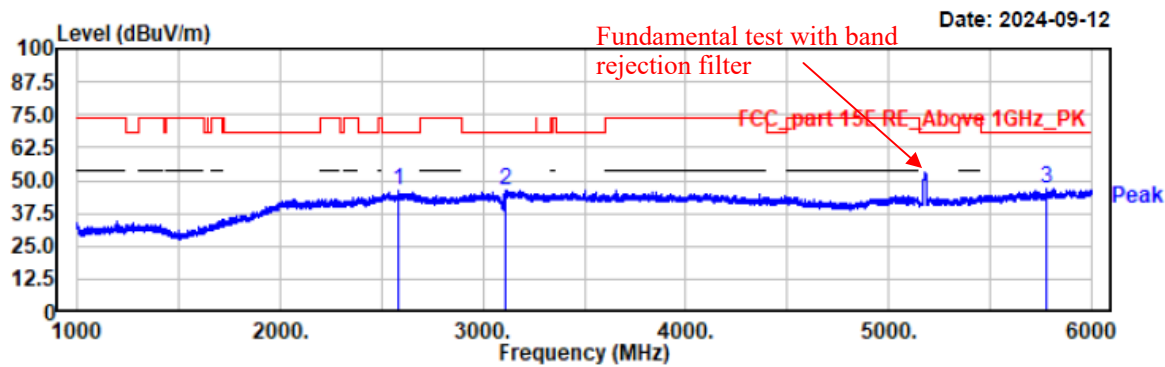

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2584.00	49.32	-3.35	45.97	68.20	22.23	vertical	Peak
3113.50	49.19	-3.01	46.18	68.20	22.02	vertical	Peak
5778.00	49.75	-2.88	46.87	68.20	21.33	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5200
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

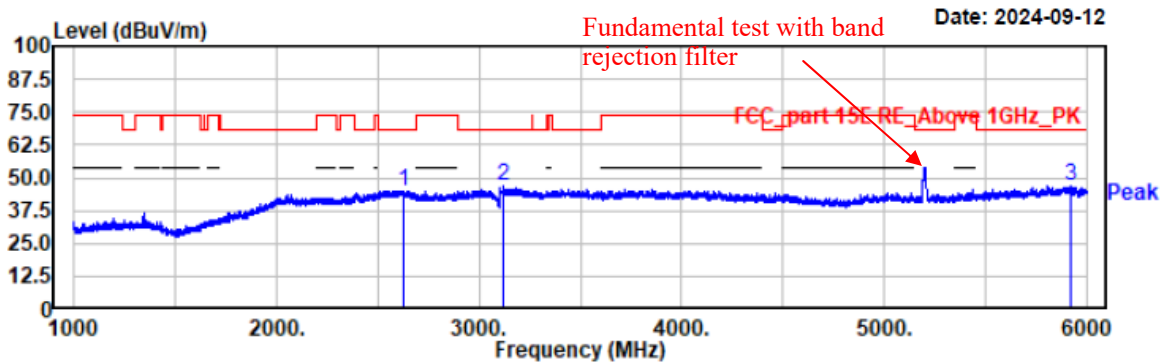

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2626.00	48.39	-3.33	45.06	68.20	23.14	horizontal	Peak
3119.00	49.90	-3.00	46.90	68.20	21.30	horizontal	Peak
5917.00	49.59	-2.84	46.75	68.20	21.45	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5200
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

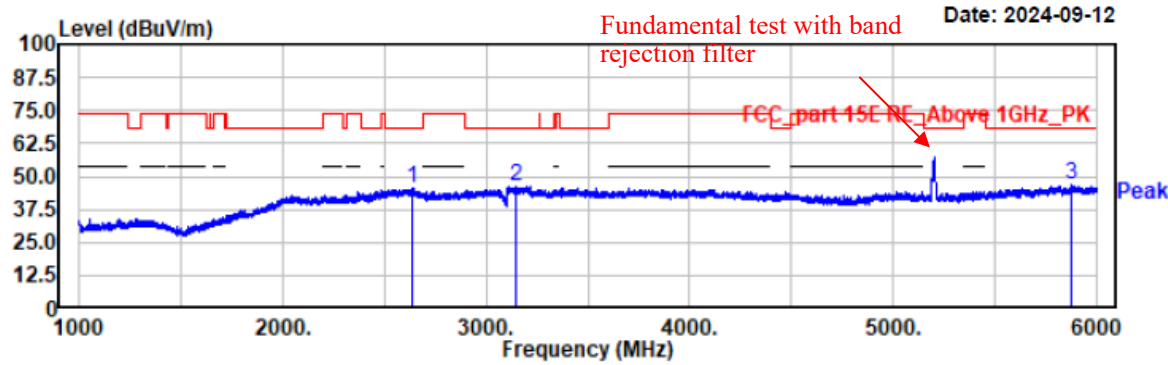

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2634.50	48.56	-3.35	45.21	68.20	22.99	vertical	Peak
3143.00	48.91	-2.95	45.96	68.20	22.24	vertical	Peak
5880.00	49.61	-2.75	46.86	68.20	21.34	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5240
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

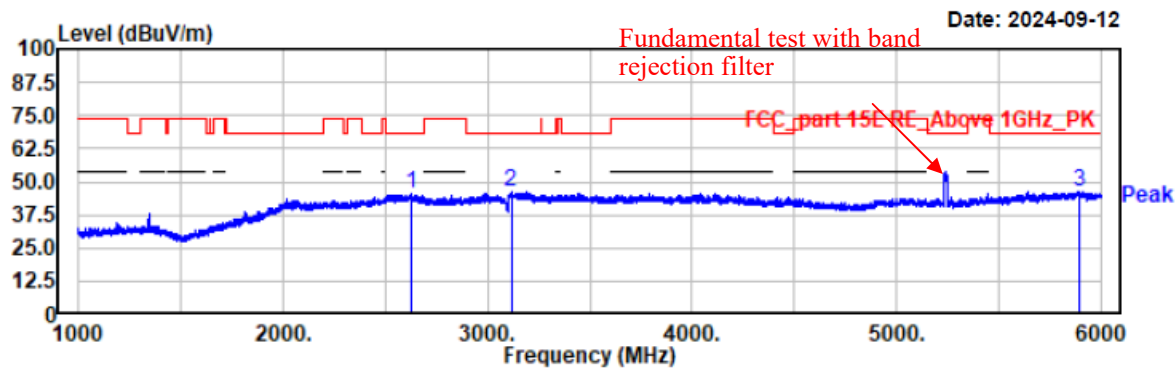

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2630.50	48.59	-3.34	45.25	68.20	22.95	horizontal	Peak
3115.50	48.93	-3.01	45.92	68.20	22.28	horizontal	Peak
5894.00	49.16	-2.65	46.51	68.20	21.69	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5240
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

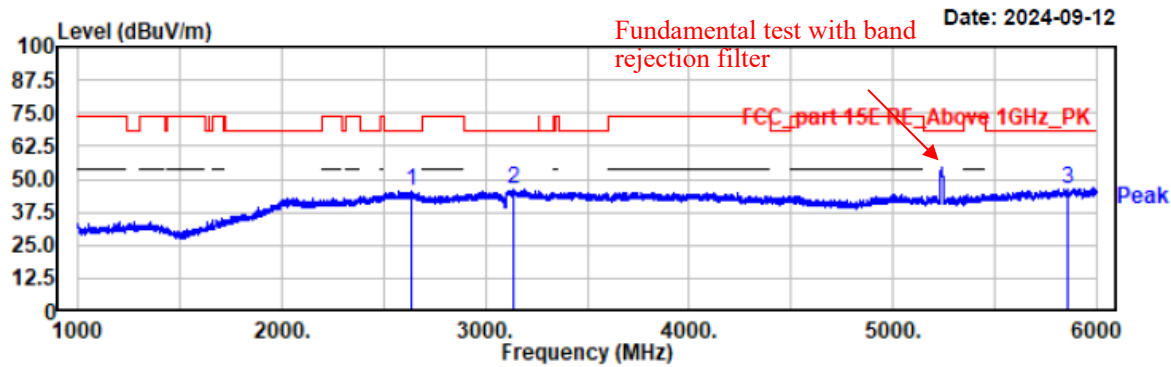

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2640.50	48.79	-3.36	45.43	68.20	22.77	vertical	Peak
3137.00	49.12	-2.97	46.15	68.20	22.05	vertical	Peak
5855.50	49.45	-2.94	46.51	68.20	21.69	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5190
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

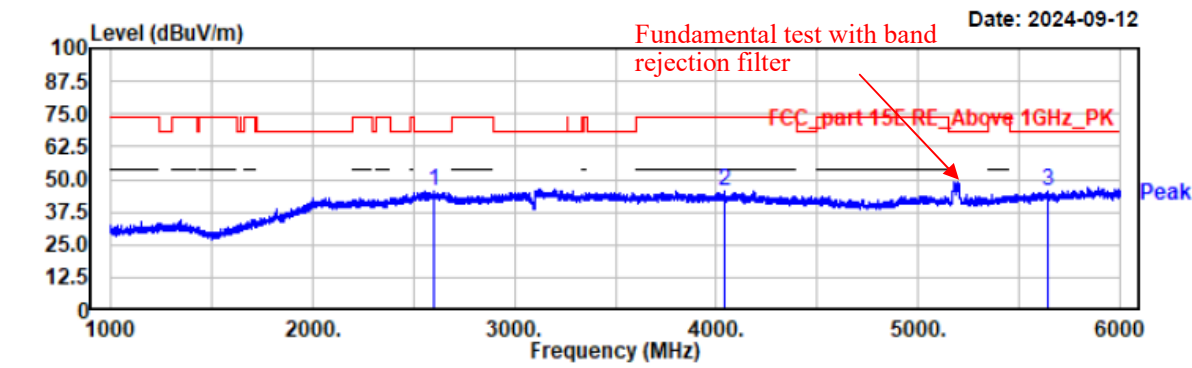

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2600.50	48.64	-3.30	45.34	68.20	22.86	horizontal	Peak
4043.00	49.91	-4.24	45.67	74.00	28.33	horizontal	Peak
5643.50	49.30	-3.72	45.58	68.20	22.62	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5190
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

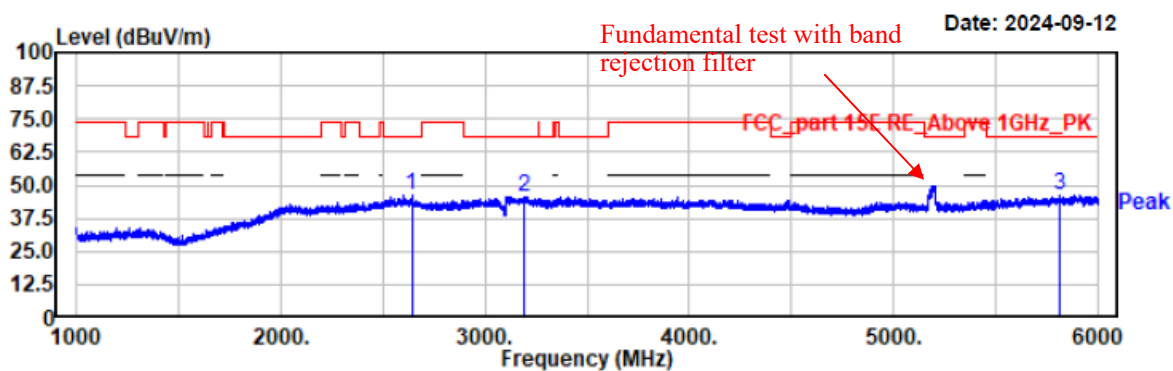

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2641.00	49.42	-3.36	46.06	68.20	22.14	vertical	Peak
3194.50	48.71	-2.94	45.77	68.20	22.43	vertical	Peak
5810.50	49.15	-2.72	46.43	68.20	21.77	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5230
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

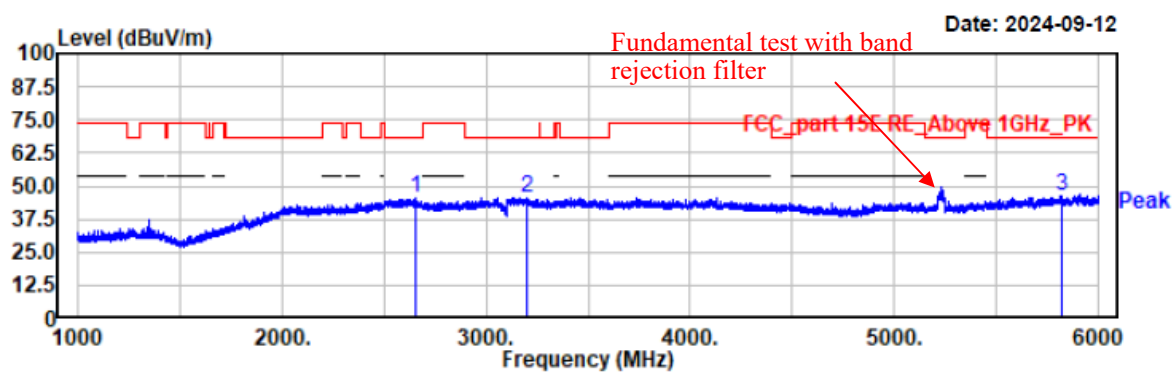

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2653.00	48.83	-3.45	45.38	68.20	22.82	horizontal	Peak
3202.50	48.67	-2.98	45.69	68.20	22.51	horizontal	Peak
5819.00	49.22	-2.78	46.44	68.20	21.76	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5230
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

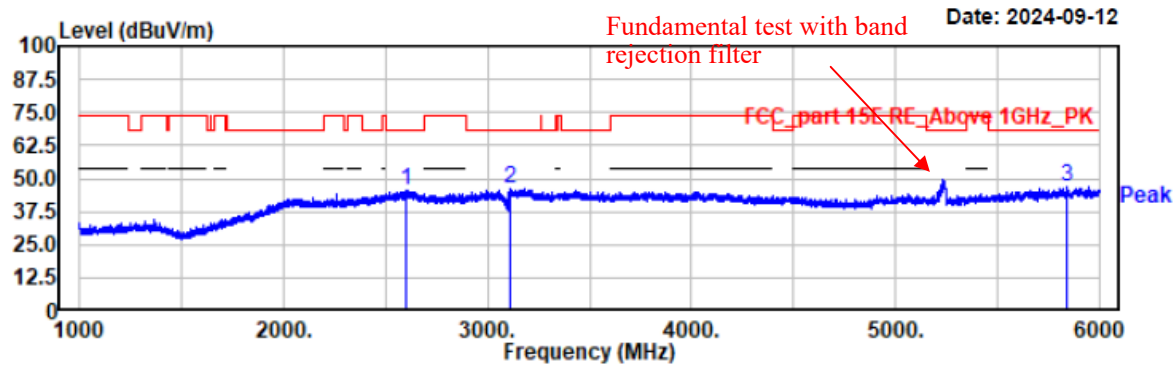

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2600.50	48.79	-3.30	45.49	68.20	22.71	vertical	Peak
3110.00	49.23	-3.02	46.21	68.20	21.99	vertical	Peak
5838.50	50.08	-2.91	47.17	68.20	21.03	vertical	Peak


Project No.: 2407V20721E-RF
Test Mode: 11ac80-5210
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

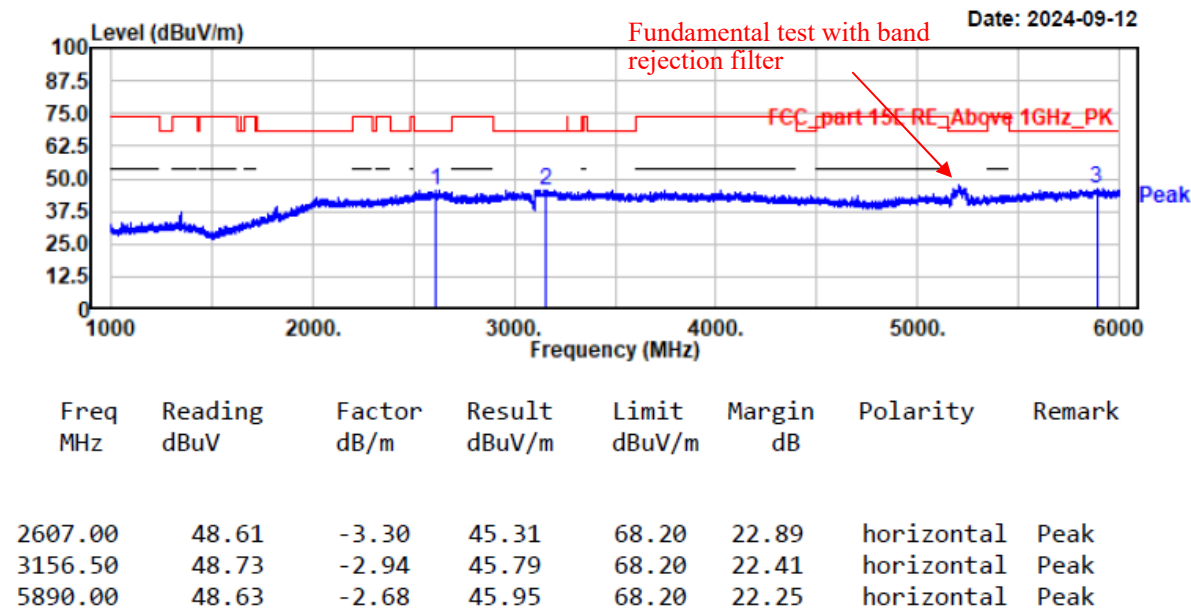

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5210
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

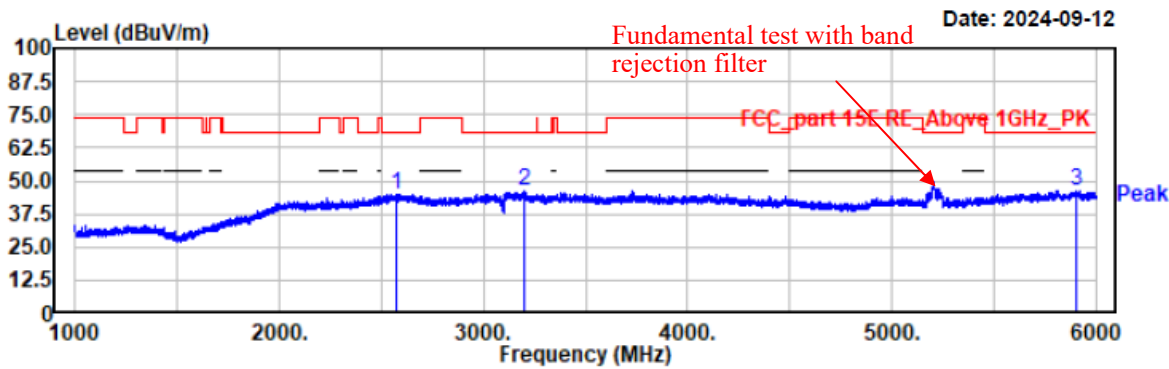

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2574.50	48.26	-3.38	44.88	68.20	23.32	vertical	Peak
3202.50	49.02	-2.98	46.04	68.20	22.16	vertical	Peak
5905.00	48.97	-2.68	46.29	68.20	21.91	vertical	Peak

B2

Project No.: 2407V20721E-RF

Test Mode: 11a-5260


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 23.8℃/51%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

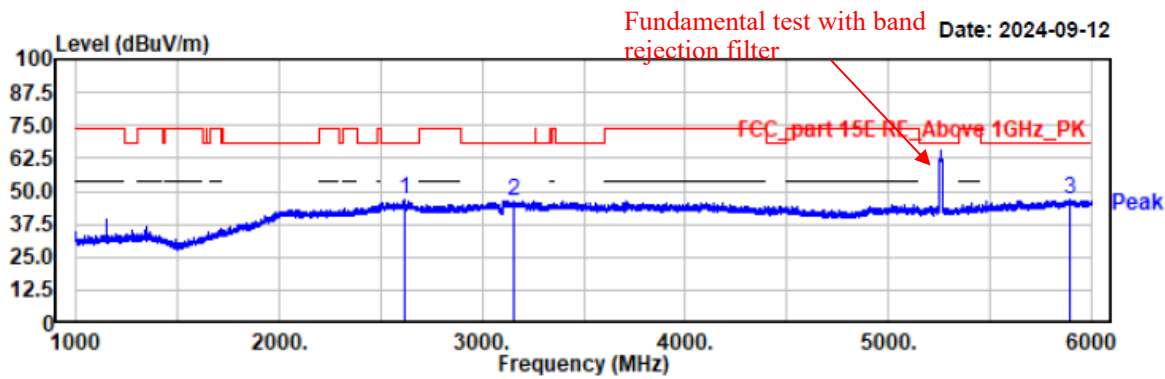

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2614.50	50.26	-3.32	46.94	68.20	21.26	horizontal	Peak
3153.50	49.44	-2.94	46.50	68.20	21.70	horizontal	Peak
5891.00	49.63	-2.66	46.97	68.20	21.23	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5260
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

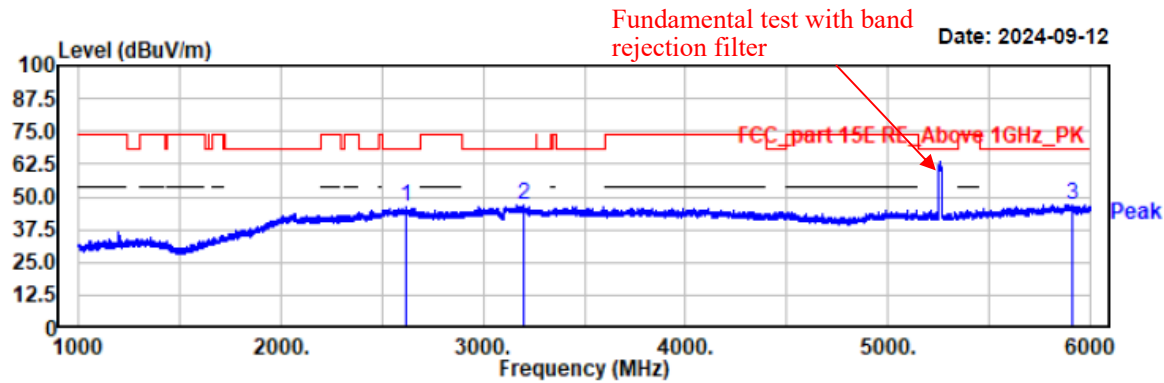

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2616.50	49.40	-3.32	46.08	68.20	22.12	vertical	Peak
3202.00	49.76	-2.97	46.79	68.20	21.41	vertical	Peak
5914.50	49.95	-2.81	47.14	68.20	21.06	vertical	Peak

Project No.: 2407V20721E-RF
 Test Mode: 11a-5280
 EUT Model: NLS-NQuire700
 Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC120V/60Hz

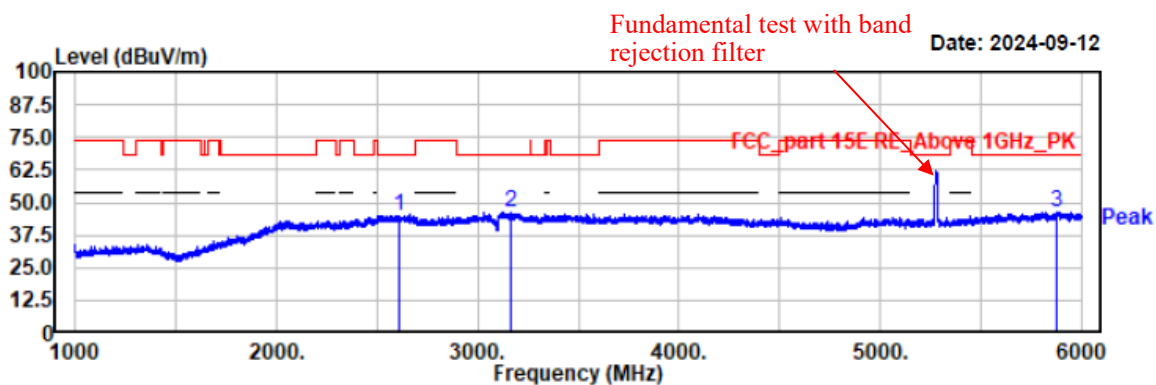

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2612.00	48.35	-3.31	45.04	68.20	23.16	horizontal	Peak
3168.00	49.34	-2.94	46.40	68.20	21.80	horizontal	Peak
5880.50	49.12	-2.76	46.36	68.20	21.84	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5280
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

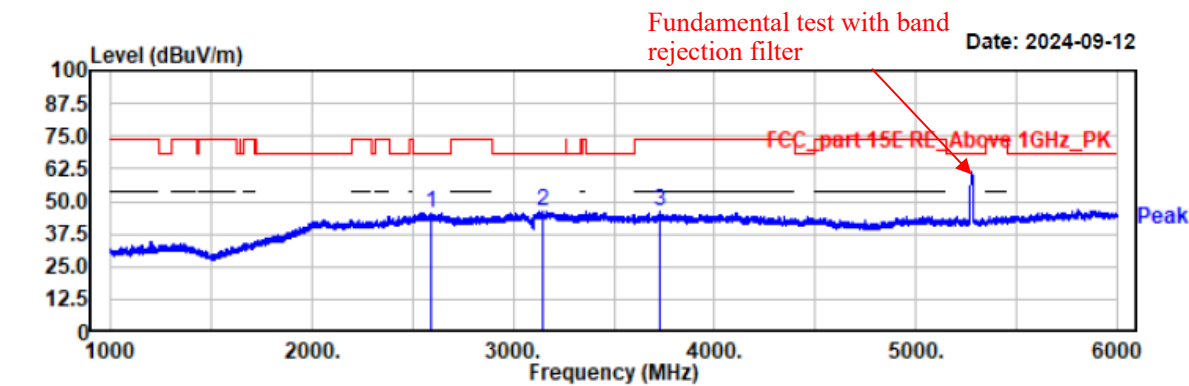

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2587.50	49.11	-3.34	45.77	68.20	22.43	vertical	Peak
3145.00	48.92	-2.95	45.97	68.20	22.23	vertical	Peak
3724.50	50.54	-4.15	46.39	74.00	27.61	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5320
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

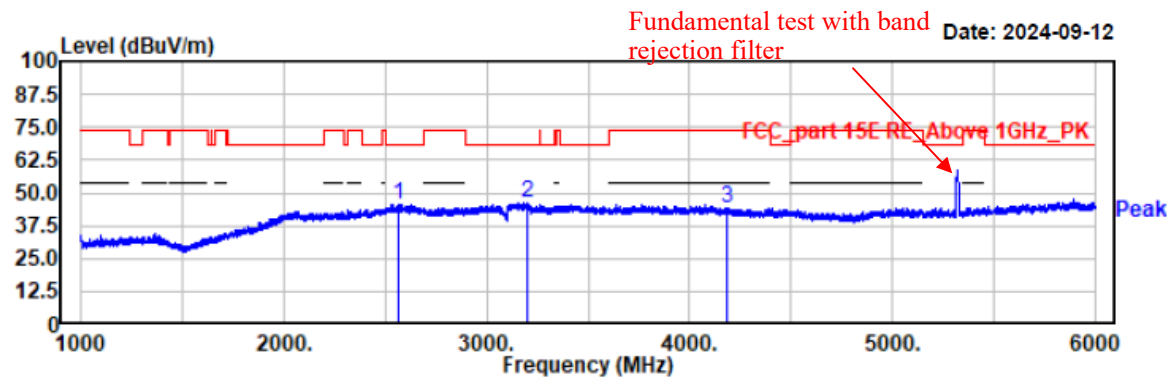

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2566.50	49.03	-3.41	45.62	68.20	22.58	horizontal	Peak
3200.00	49.19	-2.94	46.25	68.20	21.95	horizontal	Peak
4187.00	49.34	-4.92	44.42	74.00	29.58	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5320
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

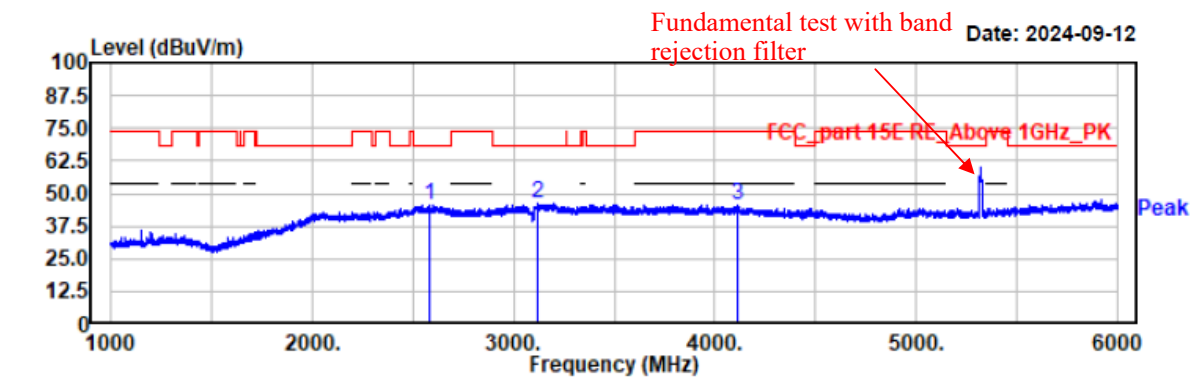

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2586.50	48.98	-3.35	45.63	68.20	22.57	vertical	Peak
3122.50	49.48	-2.99	46.49	68.20	21.71	vertical	Peak
4113.50	49.60	-4.40	45.20	74.00	28.80	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5260
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

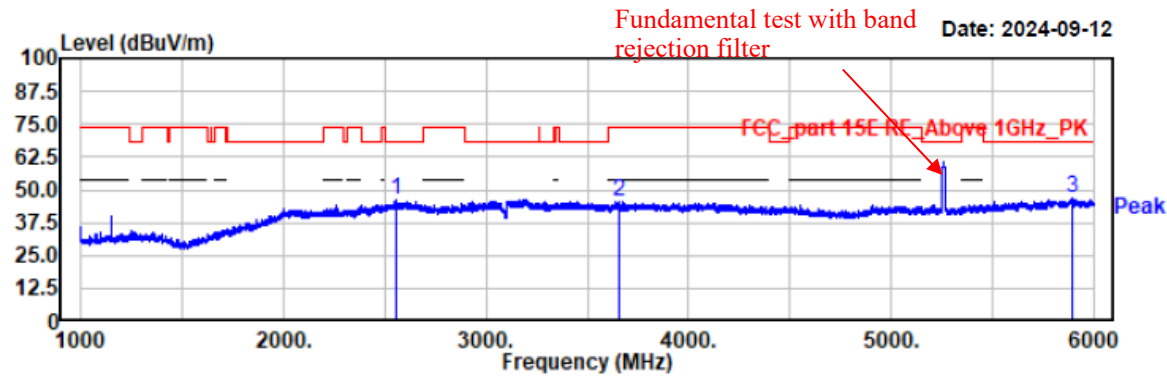

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2556.00	49.40	-3.45	45.95	68.20	22.25	horizontal	Peak
3659.50	49.89	-4.36	45.53	74.00	28.47	horizontal	Peak
5898.00	49.36	-2.61	46.75	68.20	21.45	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5260
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

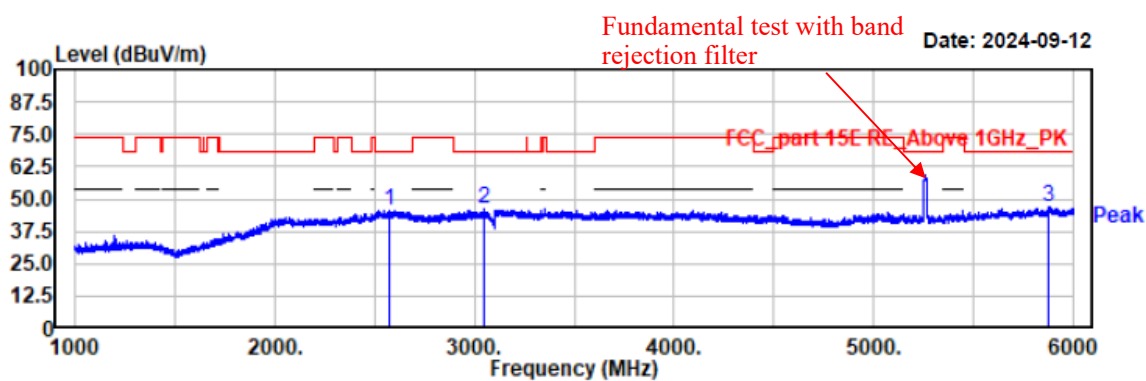

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2575.00	49.03	-3.38	45.65	68.20	22.55	vertical	Peak
3047.50	49.94	-3.60	46.34	68.20	21.86	vertical	Peak
5878.00	49.48	-2.76	46.72	68.20	21.48	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5280
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

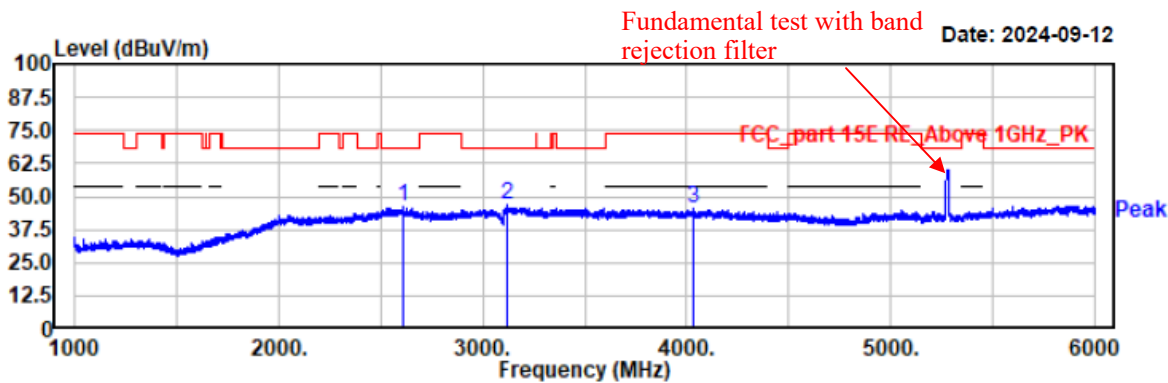

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2606.00	49.25	-3.30	45.95	68.20	22.25	horizontal	Peak
3121.50	49.72	-3.00	46.72	68.20	21.48	horizontal	Peak
4030.00	49.52	-4.31	45.21	74.00	28.79	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5280
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

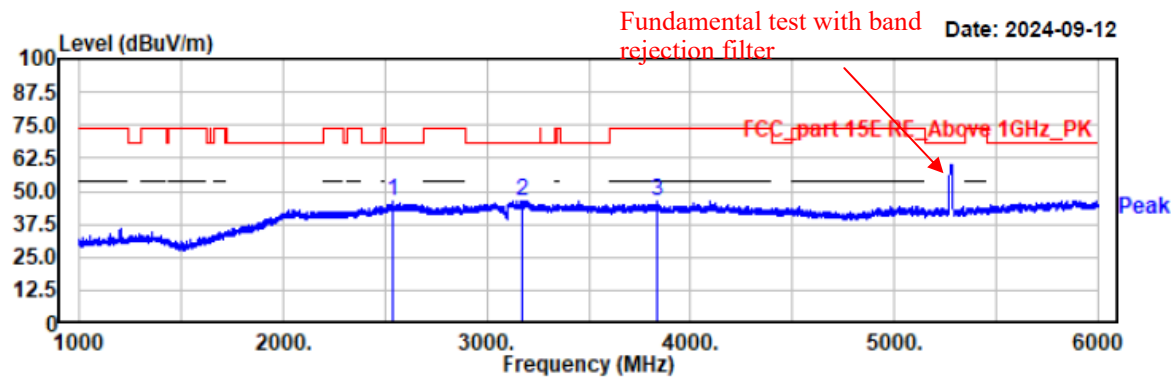

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2537.50	49.84	-3.64	46.20	68.20	22.00	vertical	Peak
3170.00	49.41	-2.94	46.47	68.20	21.73	vertical	Peak
3837.00	50.40	-4.36	46.04	74.00	27.96	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5320
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

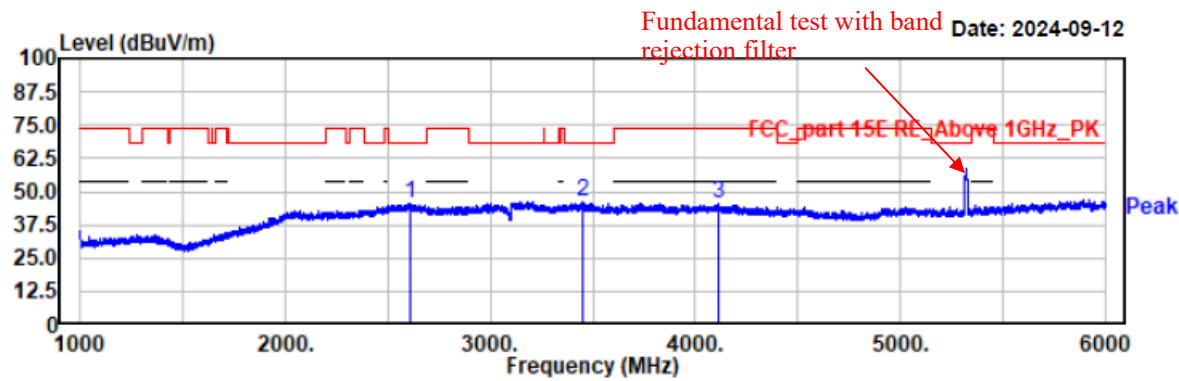

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2607.00	48.63	-3.30	45.33	68.20	22.87	horizontal	Peak
3450.00	49.96	-3.65	46.31	68.20	21.89	horizontal	Peak
4113.50	49.59	-4.40	45.19	74.00	28.81	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5320
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

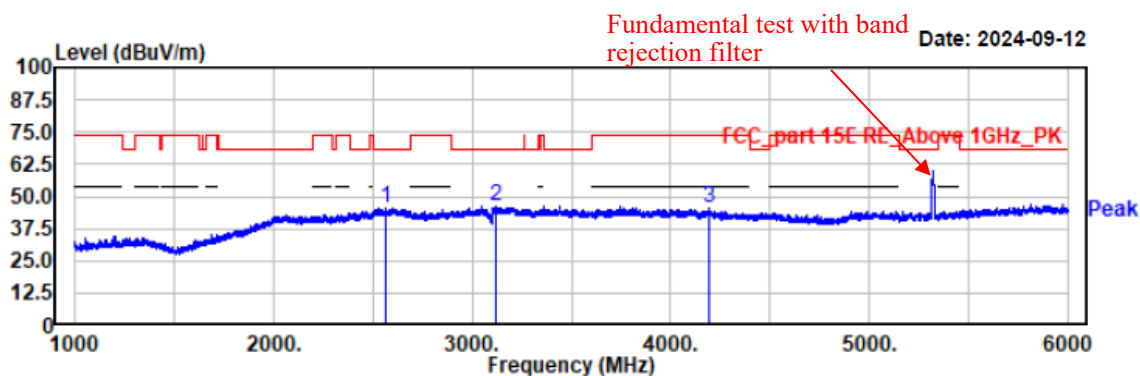

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2564.50	49.03	-3.42	45.61	68.20	22.59	vertical	Peak
3119.00	49.35	-3.00	46.35	68.20	21.85	vertical	Peak
4190.00	50.18	-4.93	45.25	74.00	28.75	vertical	Peak


Project No.: 2407V20721E-RF
Test Mode: 11n40-5270
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

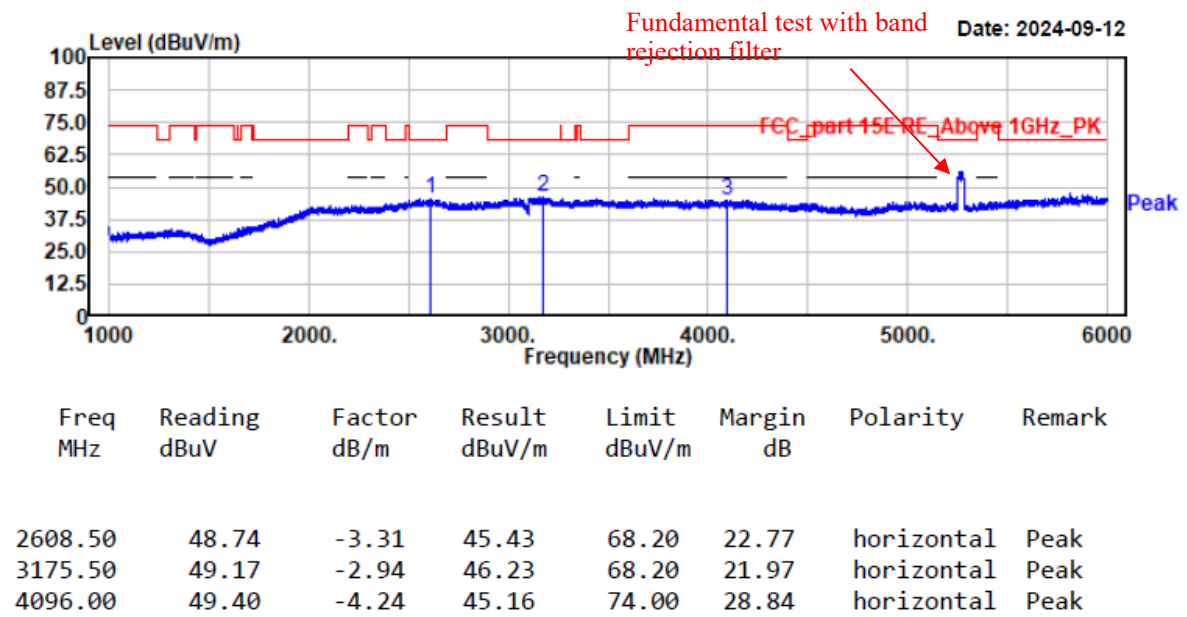

Project No.: 2407V20721E-RF
Test Mode: 11n40-5270
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

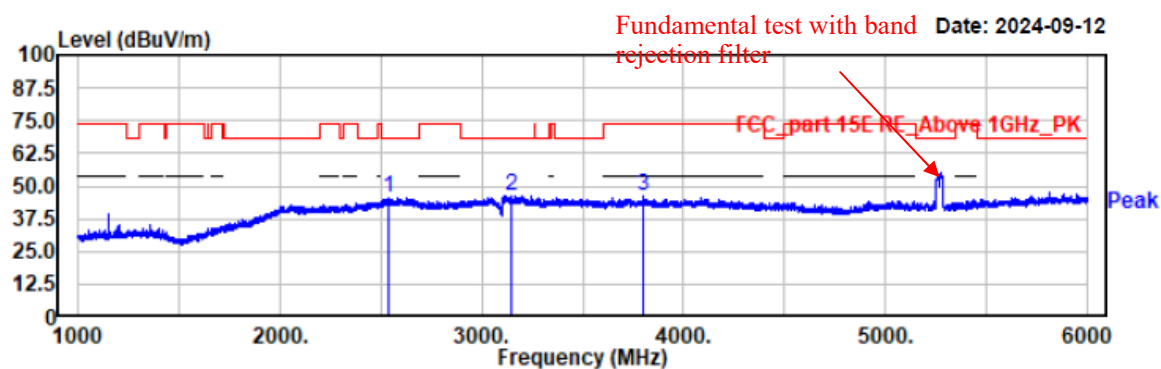

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2541.00	49.20	-3.60	45.60	68.20	22.60	vertical	Peak
3149.00	49.22	-2.94	46.28	68.20	21.92	vertical	Peak
3801.50	50.27	-4.16	46.11	74.00	27.89	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5310
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

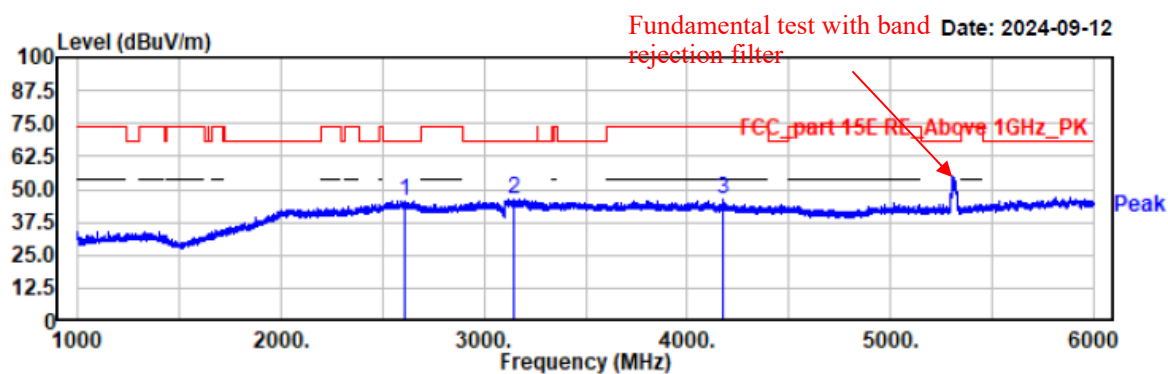

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2610.50	48.97	-3.31	45.66	68.20	22.54	horizontal	Peak
3147.00	49.10	-2.95	46.15	68.20	22.05	horizontal	Peak
4178.00	50.81	-4.89	45.92	74.00	28.08	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5310
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

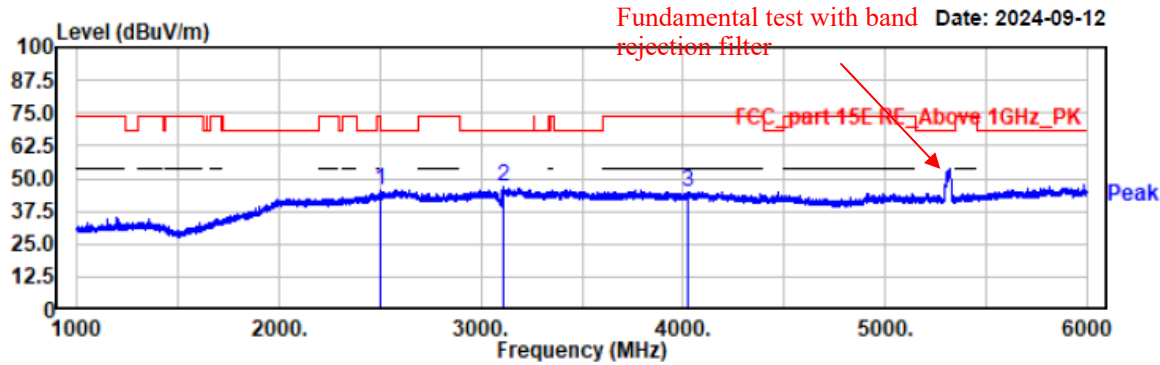

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2506.50	49.36	-4.06	45.30	68.20	22.90	vertical	Peak
3111.00	49.69	-3.02	46.67	68.20	21.53	vertical	Peak
4020.00	49.36	-4.37	44.99	74.00	29.01	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

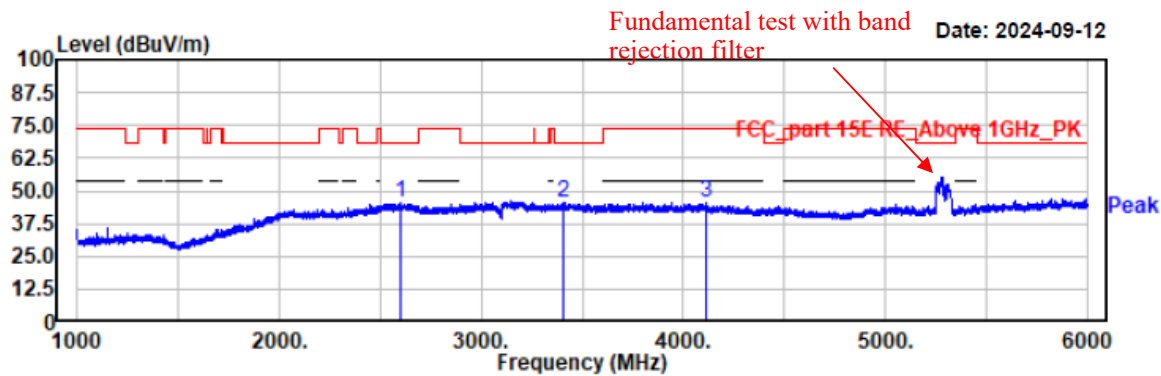

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2597.50	48.91	-3.31	45.60	68.20	22.60	horizontal	Peak
3408.50	49.36	-3.61	45.75	68.20	22.45	horizontal	Peak
4115.50	49.66	-4.43	45.23	74.00	28.77	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 23.8°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

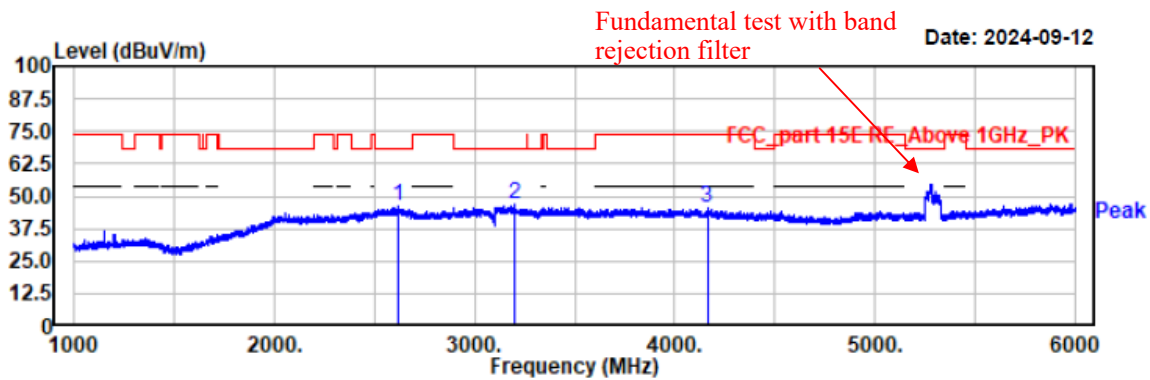

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2615.50	49.36	-3.32	46.04	68.20	22.16	vertical	Peak
3202.00	49.59	-2.97	46.62	68.20	21.58	vertical	Peak
4162.50	50.09	-4.85	45.24	74.00	28.76	vertical	Peak

B3

Project No.: 2407V20721E-RF

Test Mode: 11a-5500


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 23.3°C/50%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

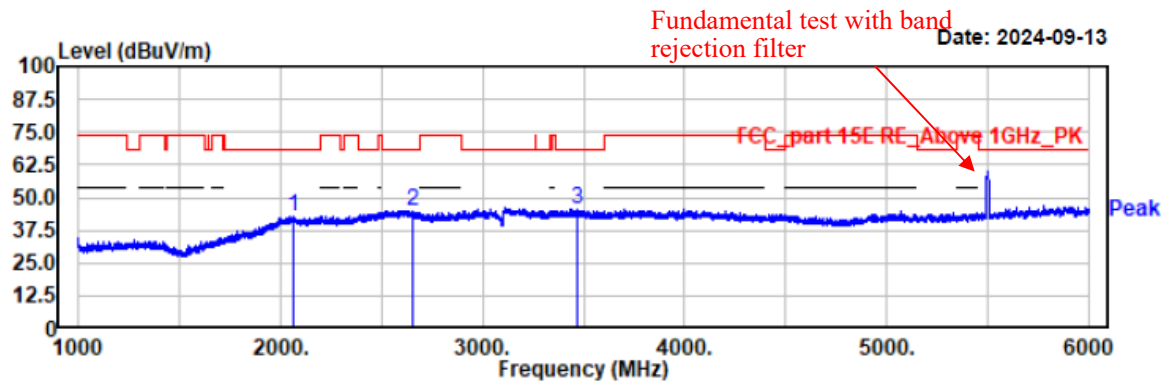

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2059.50	48.89	-6.12	42.77	68.20	25.43	horizontal	Peak
2653.00	48.58	-3.45	45.13	68.20	23.07	horizontal	Peak
3473.00	49.25	-3.86	45.39	68.20	22.81	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5500
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

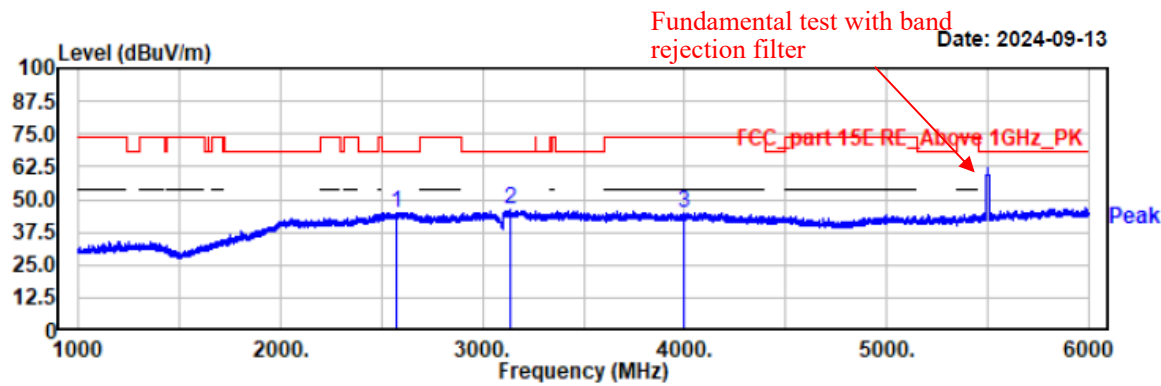

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2574.50	48.52	-3.38	45.14	68.20	23.06	vertical	Peak
3137.50	49.27	-2.96	46.31	68.20	21.89	vertical	Peak
4001.00	49.52	-4.47	45.05	74.00	28.95	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5580
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

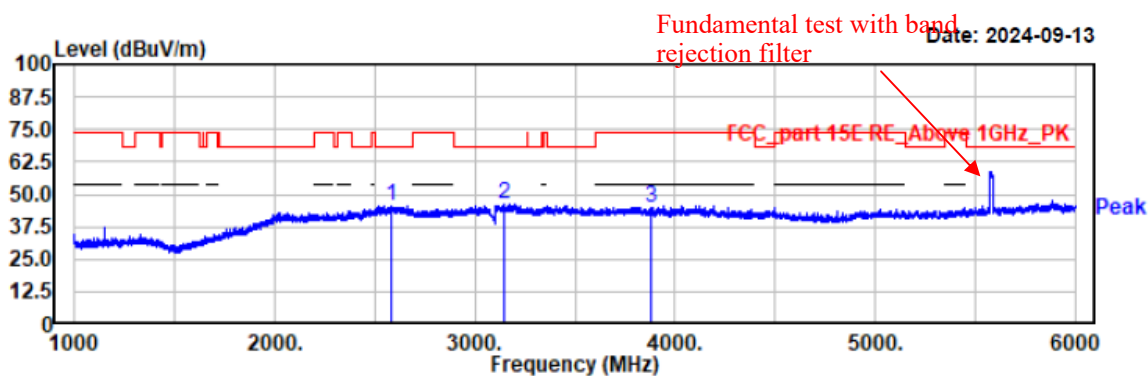

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2579.50	48.68	-3.37	45.31	68.20	22.89	horizontal	Peak
3148.00	49.02	-2.94	46.08	68.20	22.12	horizontal	Peak
3877.50	49.60	-4.48	45.12	74.00	28.88	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5580
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

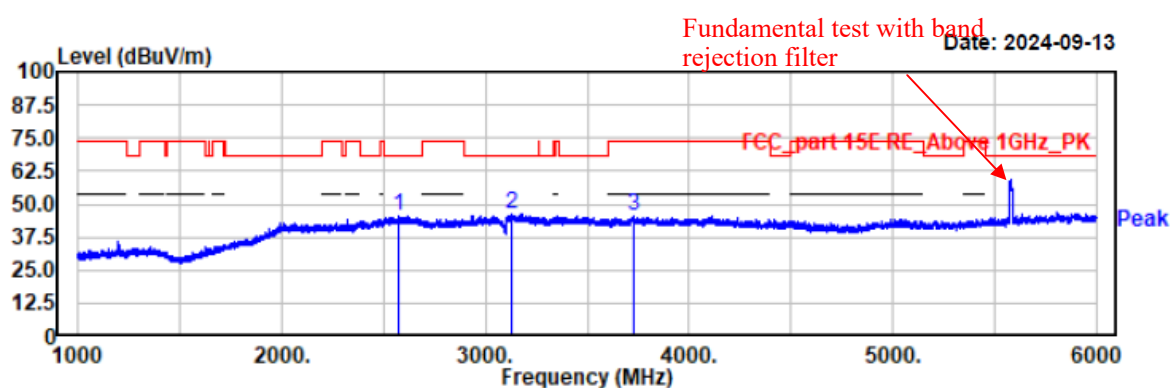

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2573.50	48.94	-3.39	45.55	68.20	22.65	vertical	Peak
3126.00	49.20	-2.99	46.21	68.20	21.99	vertical	Peak
3728.50	49.44	-4.15	45.29	74.00	28.71	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5700


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 23.3°C/50%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

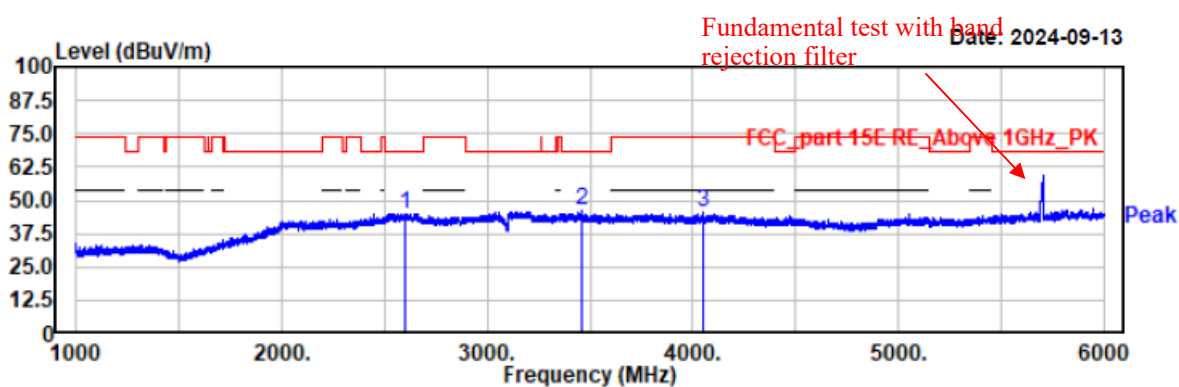

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2601.50	48.26	-3.30	44.96	68.20	23.24	horizontal	Peak
3459.00	49.63	-3.73	45.90	68.20	22.30	horizontal	Peak
4053.00	49.86	-4.21	45.65	74.00	28.35	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5700
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

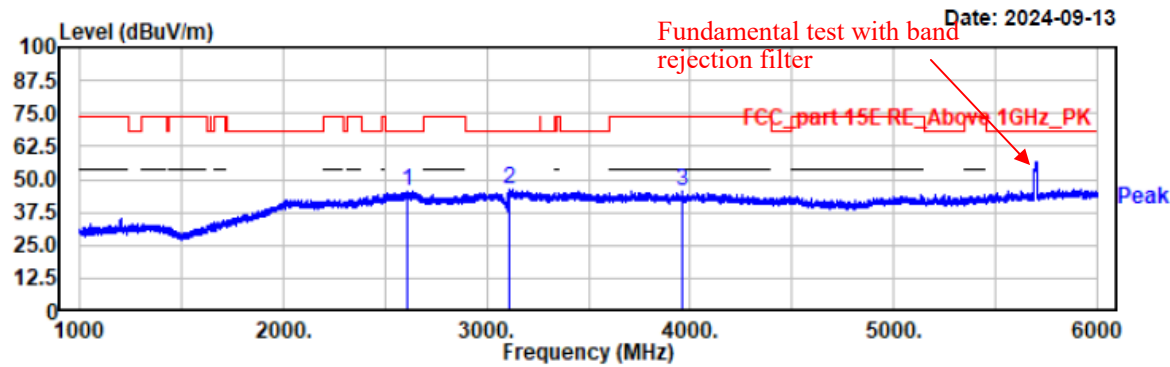

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2611.50	49.04	-3.31	45.73	68.20	22.47	vertical	Peak
3111.00	49.14	-3.02	46.12	68.20	22.08	vertical	Peak
3958.00	50.02	-4.36	45.66	74.00	28.34	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5500
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

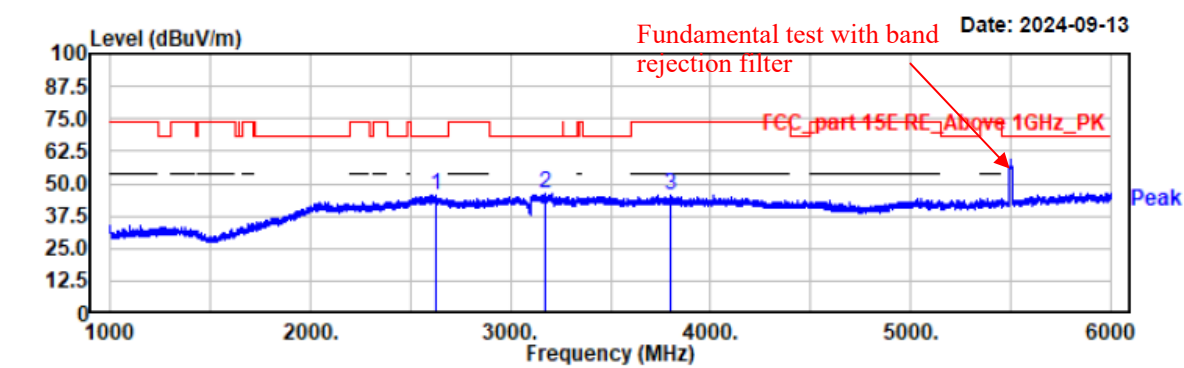

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2631.50	48.66	-3.34	45.32	68.20	22.88	horizontal	Peak
3177.50	49.38	-2.94	46.44	68.20	21.76	horizontal	Peak
3796.50	49.64	-4.15	45.49	74.00	28.51	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5500
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

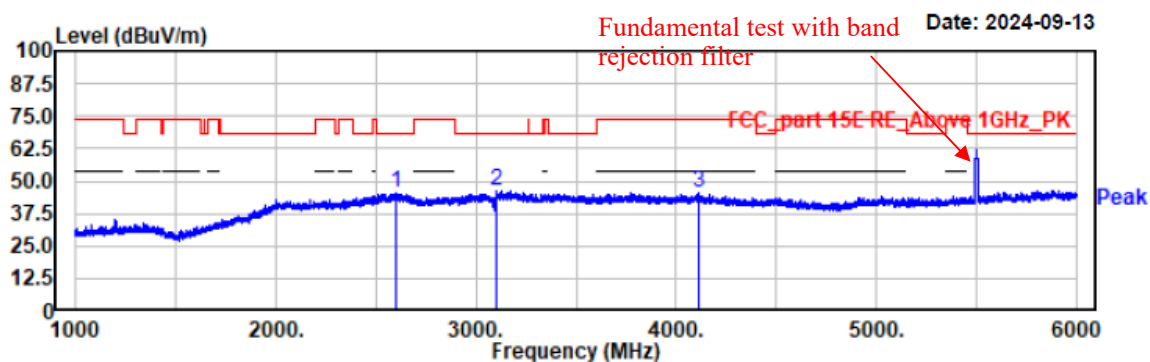

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2598.00	48.52	-3.31	45.21	68.20	22.99	vertical	Peak
3106.00	49.15	-3.03	46.12	68.20	22.08	vertical	Peak
4112.50	49.78	-4.39	45.39	74.00	28.61	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5580
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

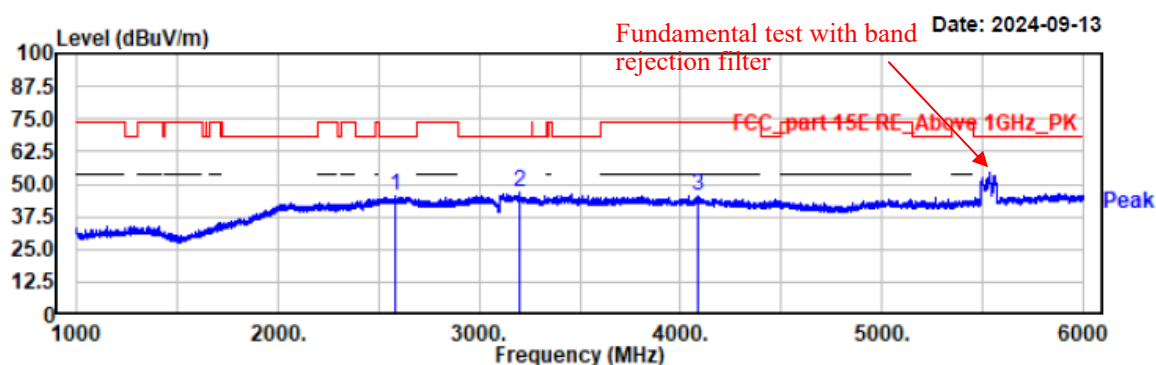

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2584.00	48.62	-3.35	45.27	68.20	22.93	horizontal	Peak
3202.50	49.64	-2.98	46.66	68.20	21.54	horizontal	Peak
4089.00	49.83	-4.24	45.59	74.00	28.41	horizontal	Peak


Project No.: 2407V20721E-RF
Test Mode: 11n20-5580
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

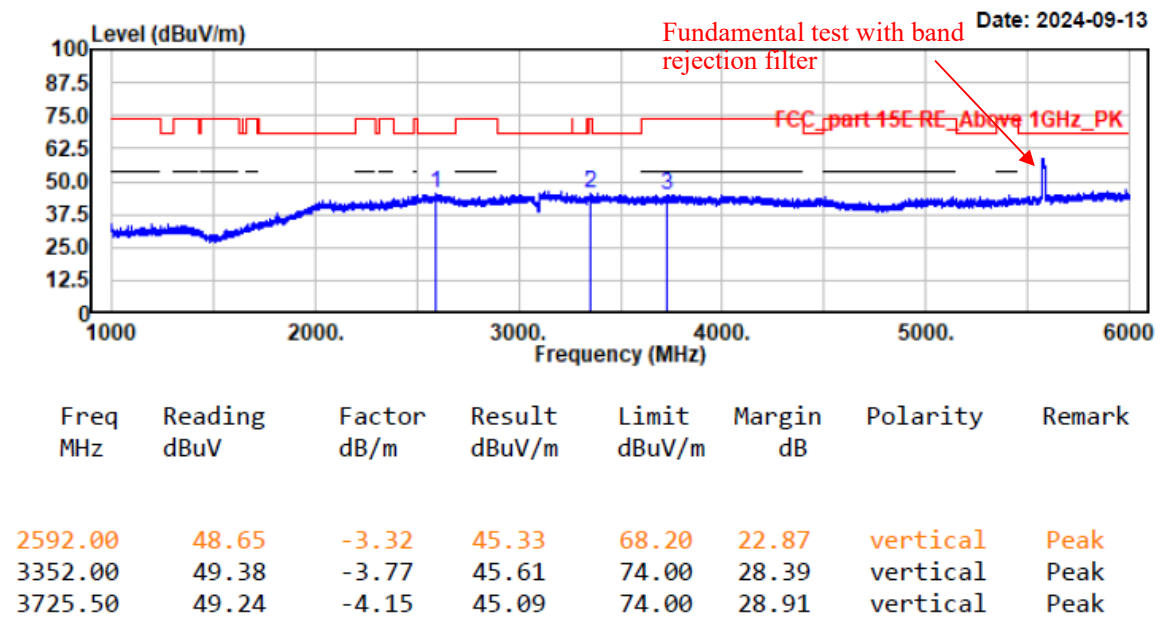

Project No.: 2407V20721E-RF
Test Mode: 11n20-5700
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

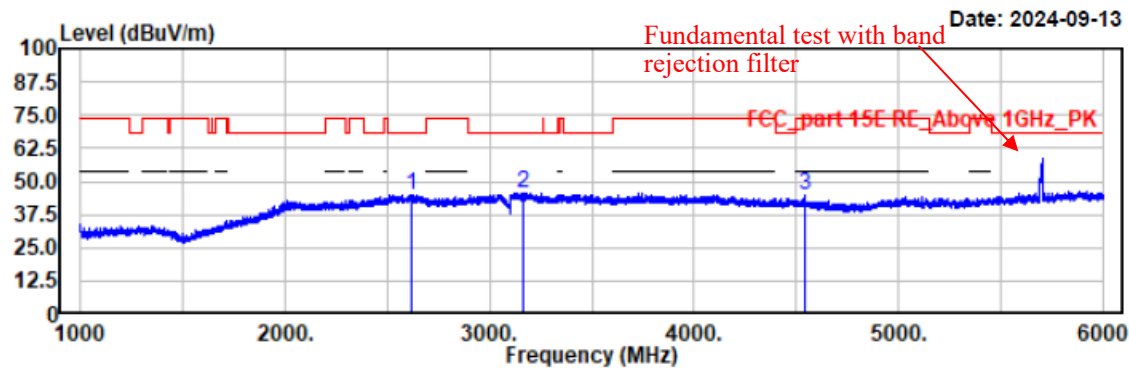

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2618.00	48.26	-3.33	44.93	68.20	23.27	horizontal	Peak
3166.00	48.74	-2.94	45.80	68.20	22.40	horizontal	Peak
4540.50	50.90	-5.94	44.96	74.00	29.04	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5700
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

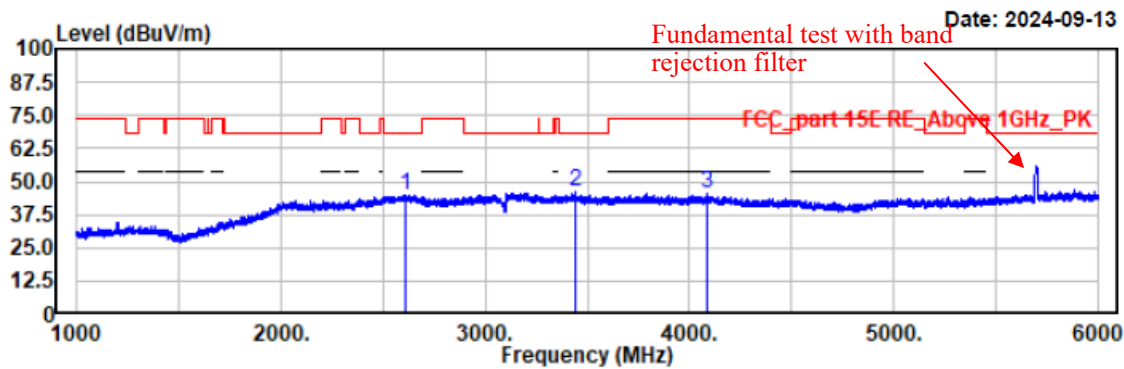

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2611.50	48.28	-3.31	44.97	68.20	23.23	vertical	Peak
3440.50	49.81	-3.64	46.17	68.20	22.03	vertical	Peak
4089.50	49.48	-4.24	45.24	74.00	28.76	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5510
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

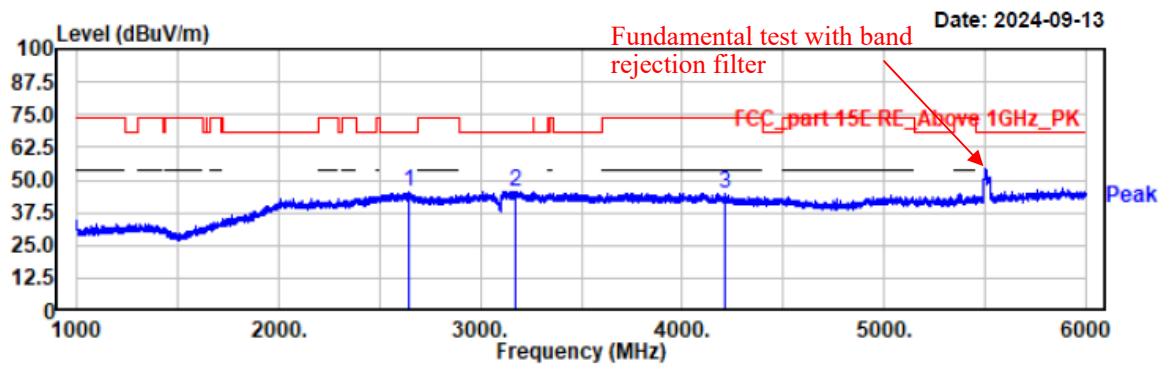

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2643.50	48.56	-3.37	45.19	68.20	23.01	horizontal	Peak
3169.50	48.68	-2.94	45.74	68.20	22.46	horizontal	Peak
4214.00	49.90	-5.09	44.81	74.00	29.19	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5510
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

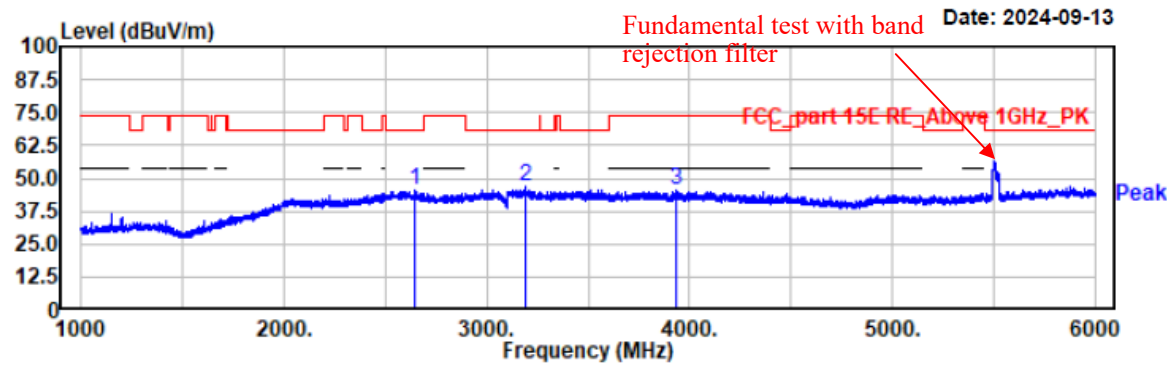

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2644.50	48.99	-3.36	45.63	68.20	22.57	vertical	Peak
3195.50	49.56	-2.94	46.62	68.20	21.58	vertical	Peak
3934.00	49.67	-4.39	45.28	74.00	28.72	vertical	Peak


Project No.: 2407V20721E-RF
Test Mode: 11n40-5550
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

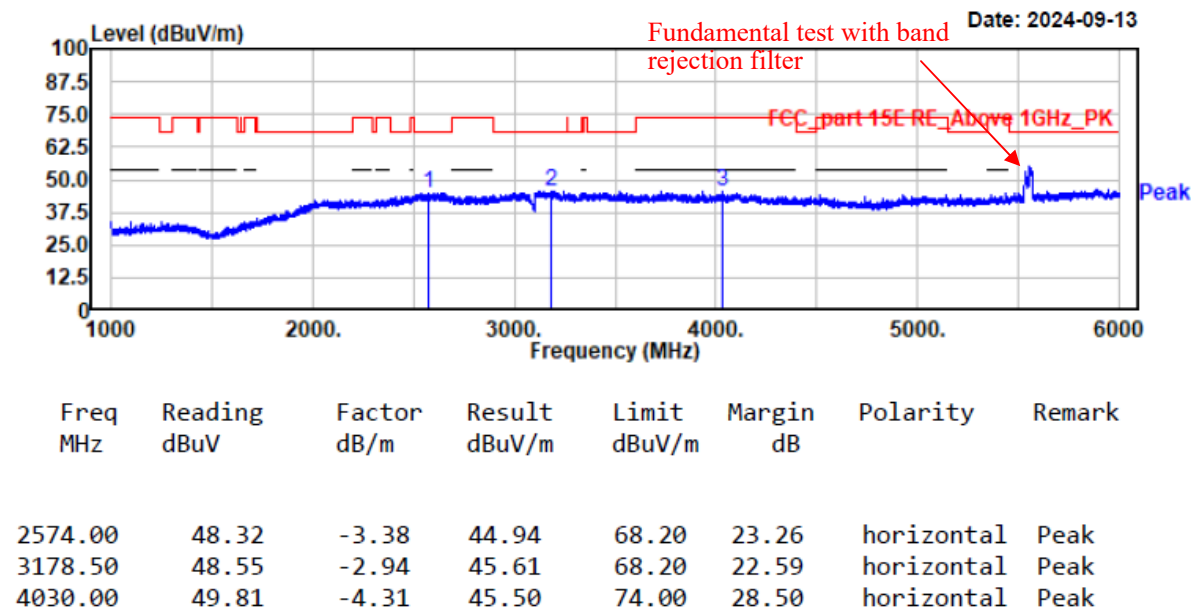

Project No.: 2407V20721E-RF
Test Mode: 11n40-5550
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

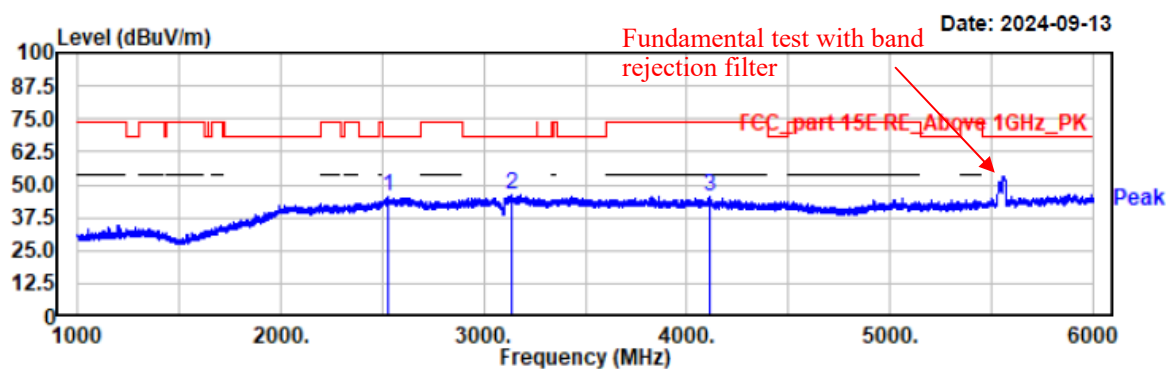

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2528.50	49.09	-3.76	45.33	68.20	22.87	vertical	Peak
3136.00	49.49	-2.97	46.52	68.20	21.68	vertical	Peak
4112.50	49.80	-4.39	45.41	74.00	28.59	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5670
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

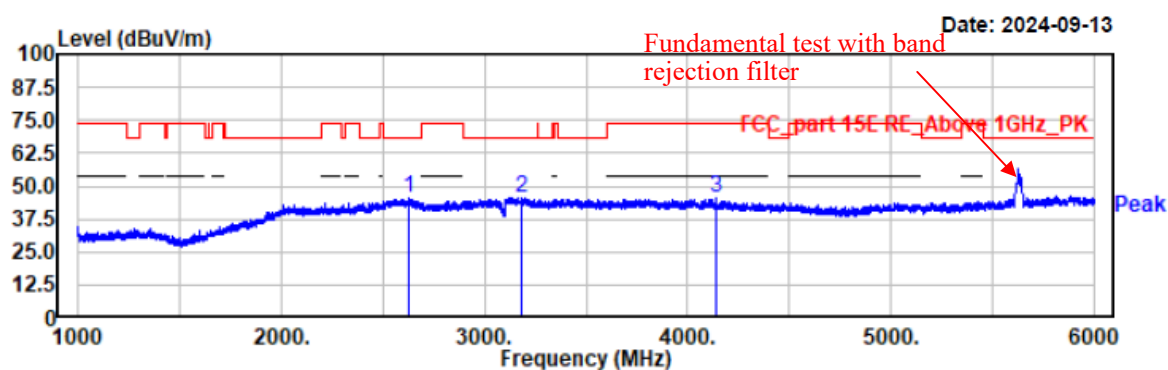

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2631.00	49.18	-3.34	45.84	68.20	22.36	horizontal	Peak
3181.00	48.38	-2.94	45.44	68.20	22.76	horizontal	Peak
4140.50	49.96	-4.70	45.26	74.00	28.74	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5670
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

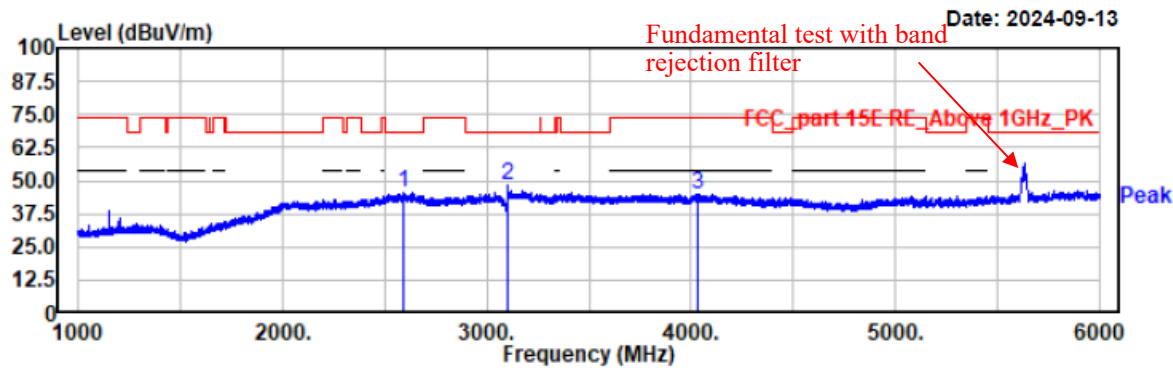

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2588.00	48.67	-3.34	45.33	68.20	22.87	vertical	Peak
3106.00	51.09	-3.03	48.06	68.20	20.14	vertical	Peak
4037.00	49.39	-4.28	45.11	74.00	28.89	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5530
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

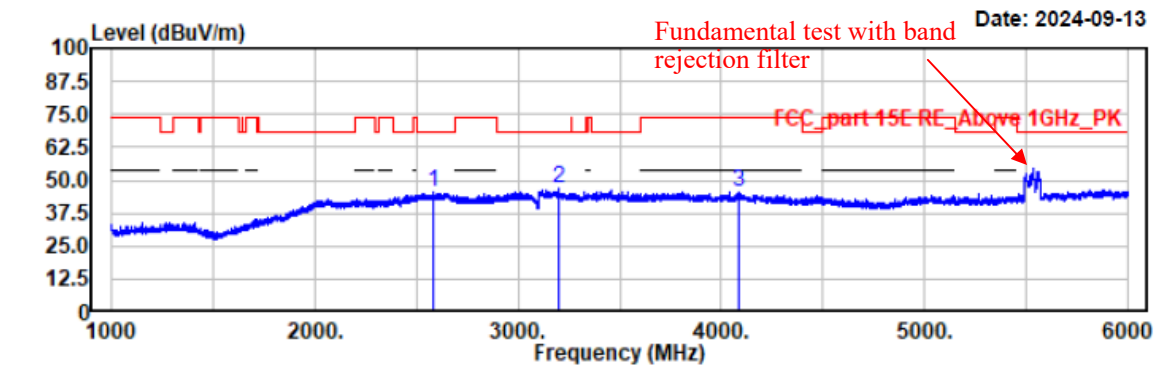

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2584.00	48.62	-3.35	45.27	68.20	22.93	horizontal	Peak
3202.50	49.64	-2.98	46.66	68.20	21.54	horizontal	Peak
4089.00	49.83	-4.24	45.59	74.00	28.41	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5530
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3℃/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

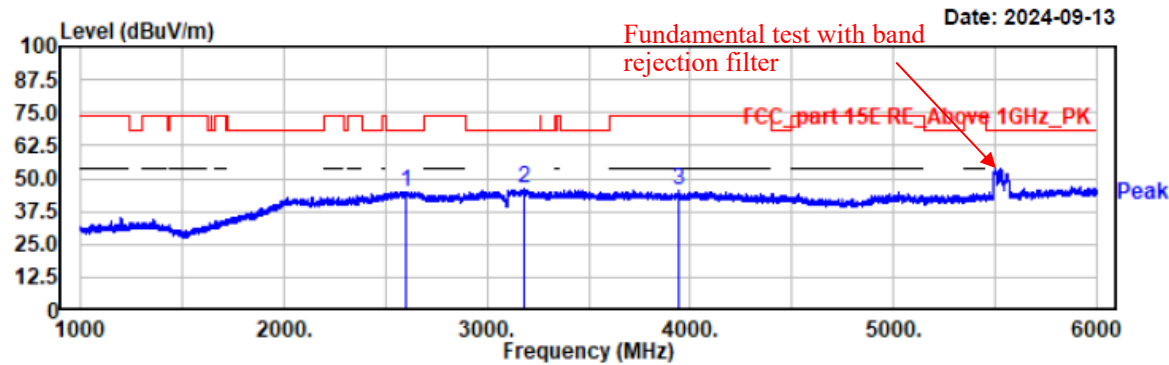

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2600.50	48.45	-3.30	45.15	68.20	23.05	vertical	Peak
3181.50	48.82	-2.94	45.88	68.20	22.32	vertical	Peak
3947.50	49.52	-4.35	45.17	74.00	28.83	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5610
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

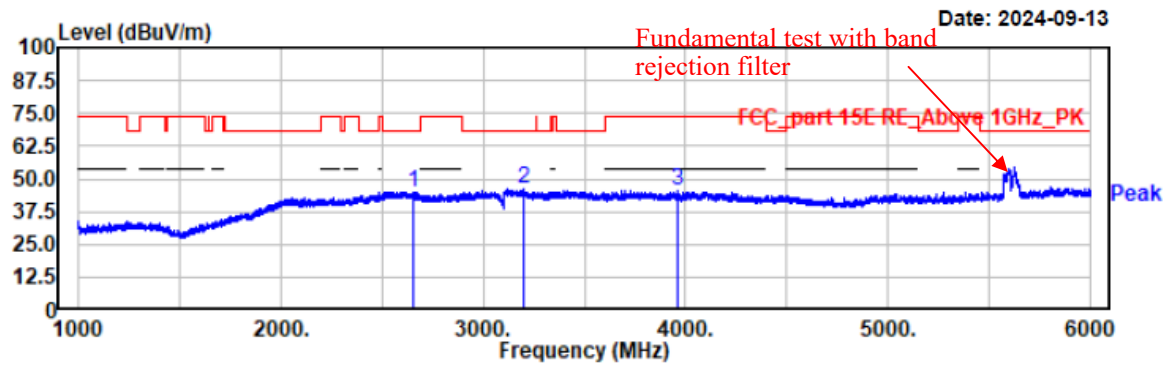

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2651.50	48.52	-3.41	45.11	68.20	23.09	horizontal	Peak
3200.50	49.14	-2.95	46.19	68.20	22.01	horizontal	Peak
3959.00	49.85	-4.36	45.49	74.00	28.51	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5610
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

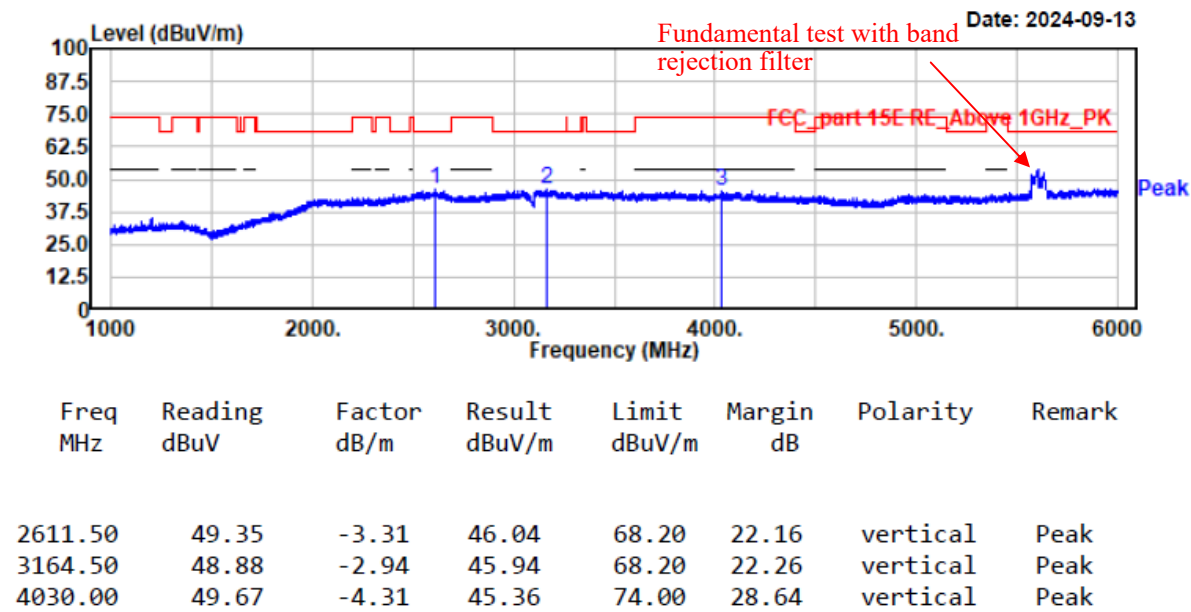

B4

Project No.: 2407V20721E-RF
Test Mode: 11a-5745
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

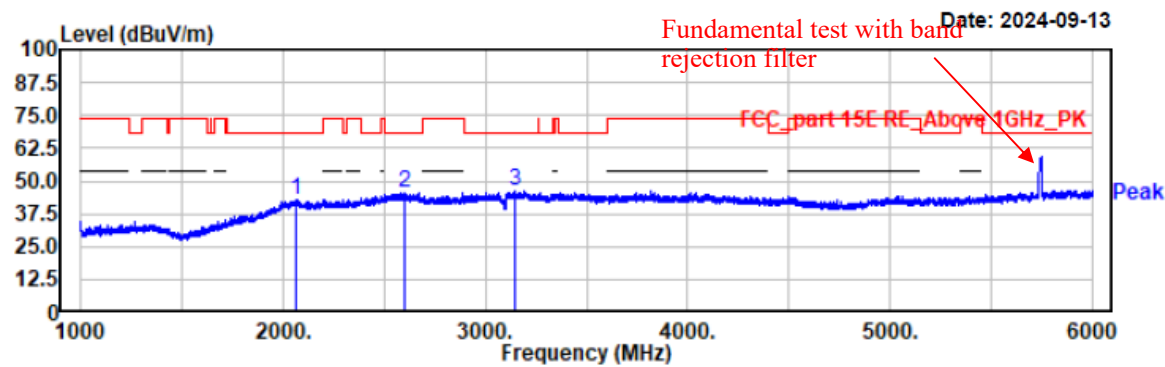

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2066.00	48.98	-6.23	42.75	68.20	25.45	horizontal	Peak
2599.50	49.06	-3.30	45.76	68.20	22.44	horizontal	Peak
3148.50	49.05	-2.94	46.11	68.20	22.09	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5745
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

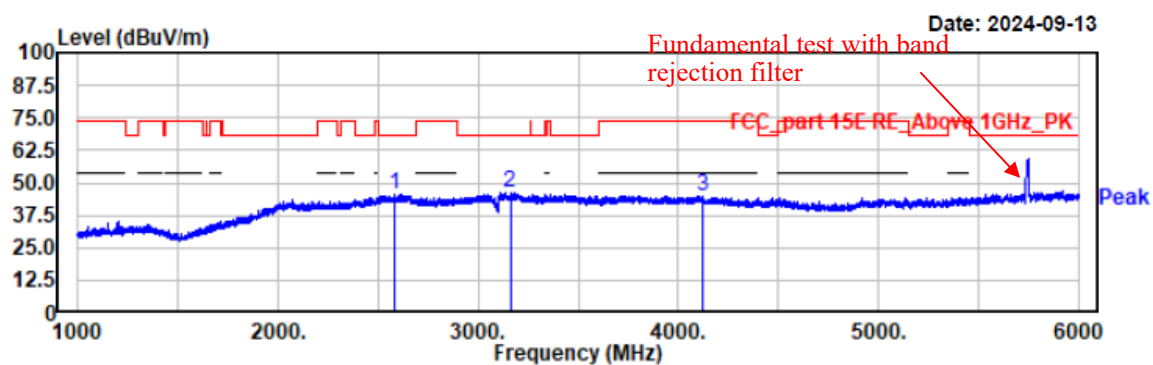

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2586.50	48.89	-3.35	45.54	68.20	22.66	vertical	Peak
3160.00	49.26	-2.94	46.32	68.20	21.88	vertical	Peak
4120.50	49.34	-4.49	44.85	74.00	29.15	vertical	Peak

Project No.: 2407V20721E-RF
 Test Mode: 11a-5785
 EUT Model: NLS-NQuire700
 Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC120V/60Hz

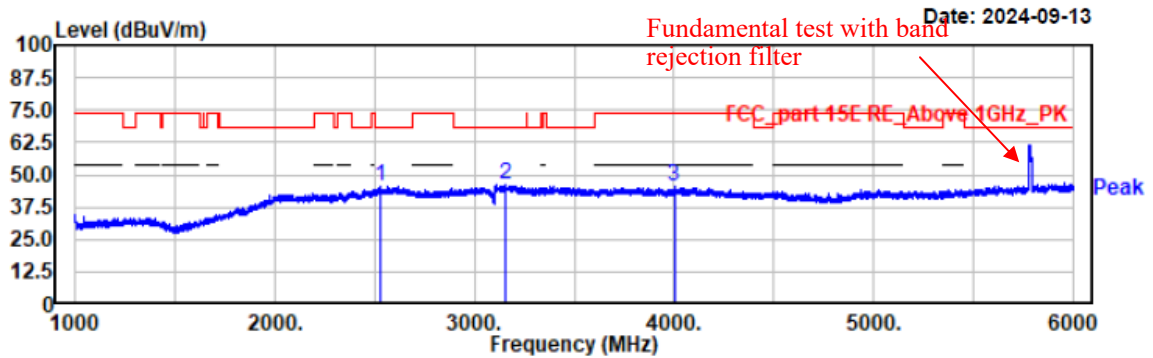

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2532.50	49.17	-3.71	45.46	68.20	22.74	horizontal	Peak
3158.50	49.08	-2.94	46.14	68.20	22.06	horizontal	Peak
4001.50	50.03	-4.47	45.56	74.00	28.44	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5785
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

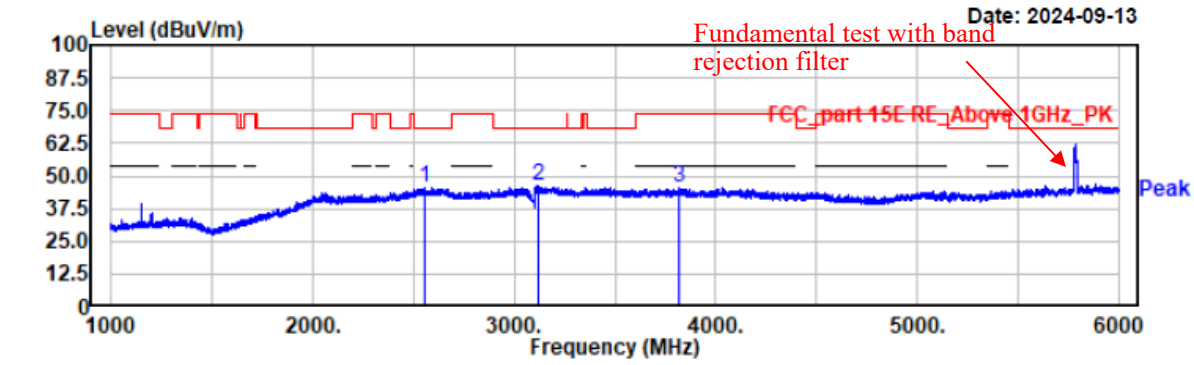

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2557.00	49.08	-3.44	45.64	68.20	22.56	vertical	Peak
3116.00	49.56	-3.01	46.55	68.20	21.65	vertical	Peak
3814.00	49.61	-4.23	45.38	74.00	28.62	vertical	Peak