


Project No.: 2407V20721E-RF
Test Mode: 3DH1-2480
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.7°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

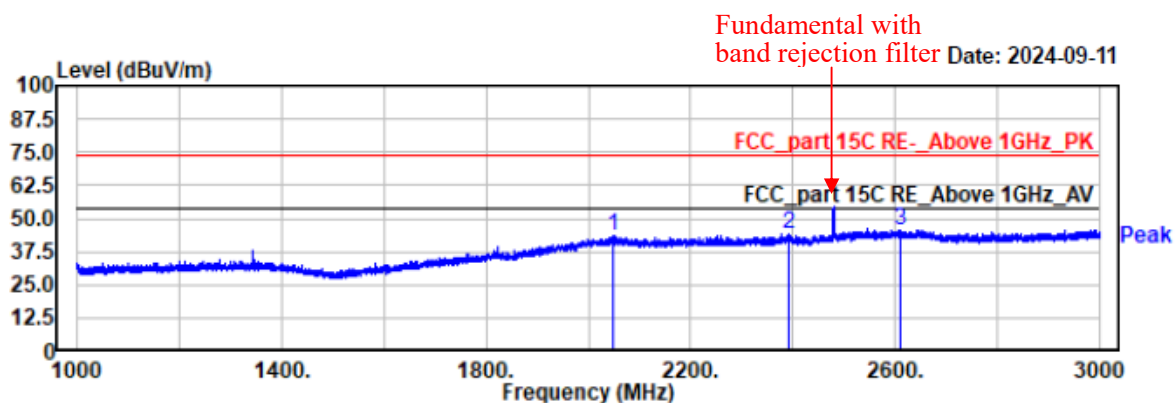

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2048.00	49.49	-6.02	43.47	74.00	30.53	horizontal	Peak
2391.60	49.46	-5.30	44.16	74.00	29.84	horizontal	Peak
2612.00	49.11	-3.31	45.80	74.00	28.20	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1-2480
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 23.7°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

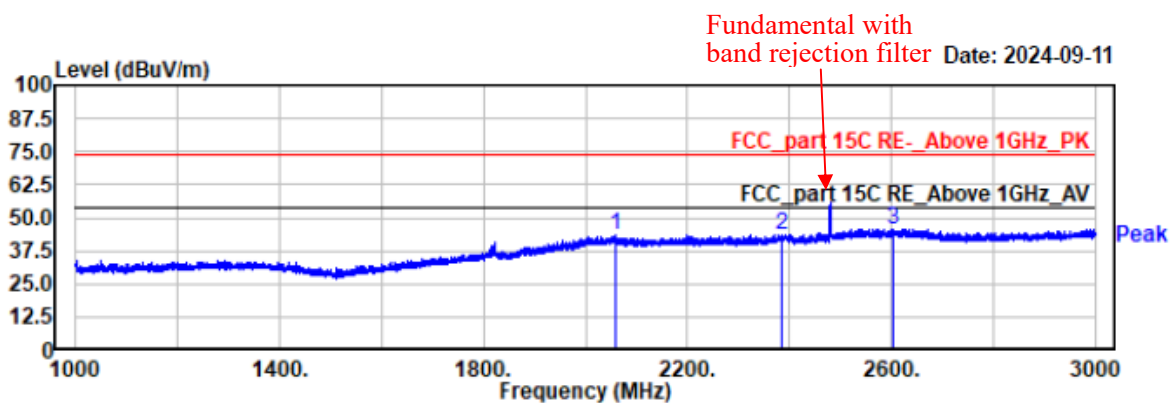

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2060.40	49.39	-6.14	43.25	74.00	30.75	vertical	Peak
2385.00	49.03	-5.39	43.64	74.00	30.36	vertical	Peak
2603.00	48.87	-3.31	45.56	74.00	28.44	vertical	Peak

1 GHz-3 GHz

EUT Model: NLS-NQuire1000

Project No.: 2407V20721E-RF

Test Mode: 1DH1-2402


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 24.5℃/53%/100.1kPa


Tested by: Wlif Wu

Power Source: AC120V/60Hz

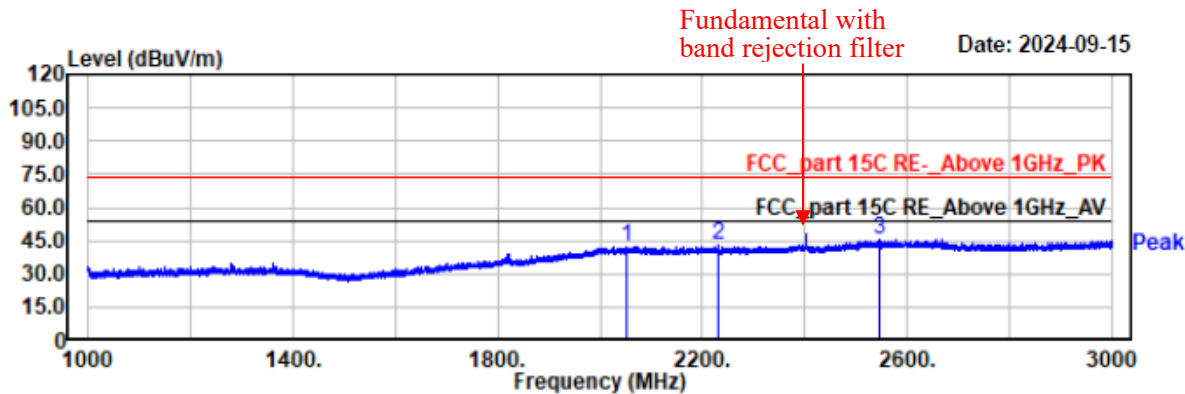

Project No.: 2407V20721E-RF
Test Mode: 1DH1-2402
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

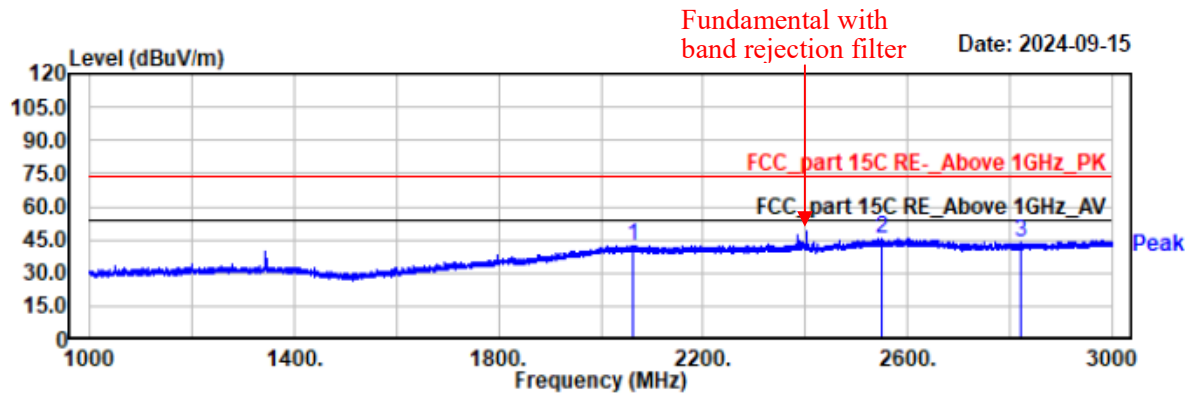

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2063.00	48.33	-6.18	42.15	74.00	31.85	vertical	Peak
2548.00	49.19	-3.50	45.69	74.00	28.31	vertical	Peak
2822.00	48.63	-4.63	44.00	74.00	30.00	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 1DH1-2441
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

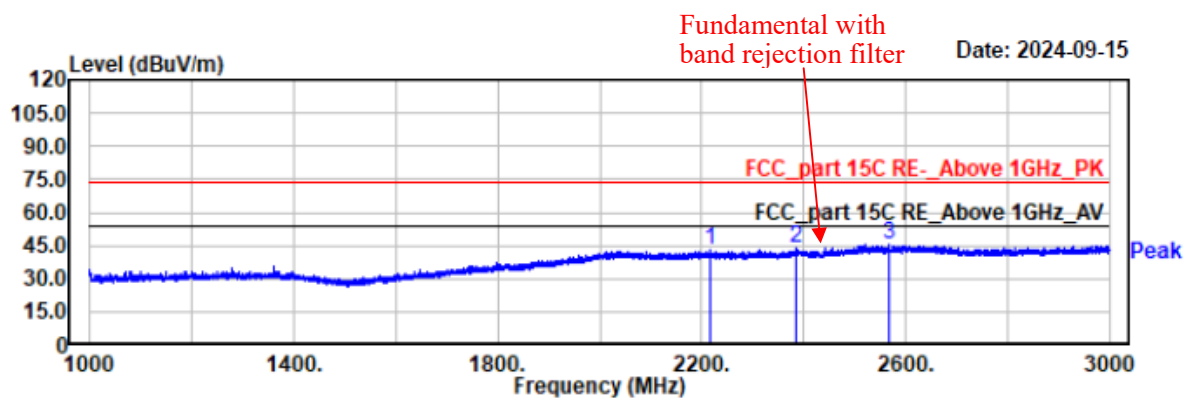

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2215.20	49.05	-6.25	42.80	74.00	31.20	horizontal	Peak
2386.00	48.98	-5.38	43.60	74.00	30.40	horizontal	Peak
2568.40	48.55	-3.41	45.14	74.00	28.86	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 1DH1-2441
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

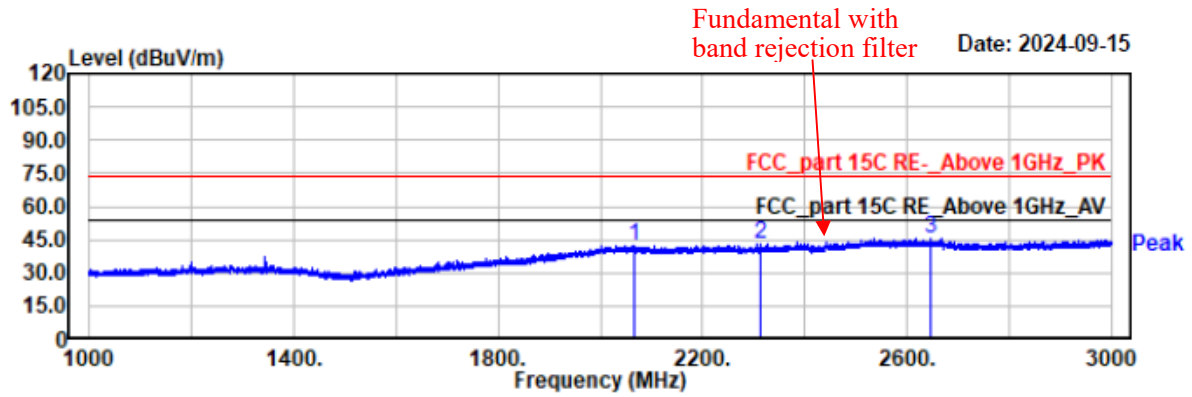

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2065.00	48.22	-6.21	42.01	74.00	31.99	vertical	Peak
2311.80	49.28	-6.22	43.06	74.00	30.94	vertical	Peak
2646.00	49.14	-3.36	45.78	74.00	28.22	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 1DH1-2480
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

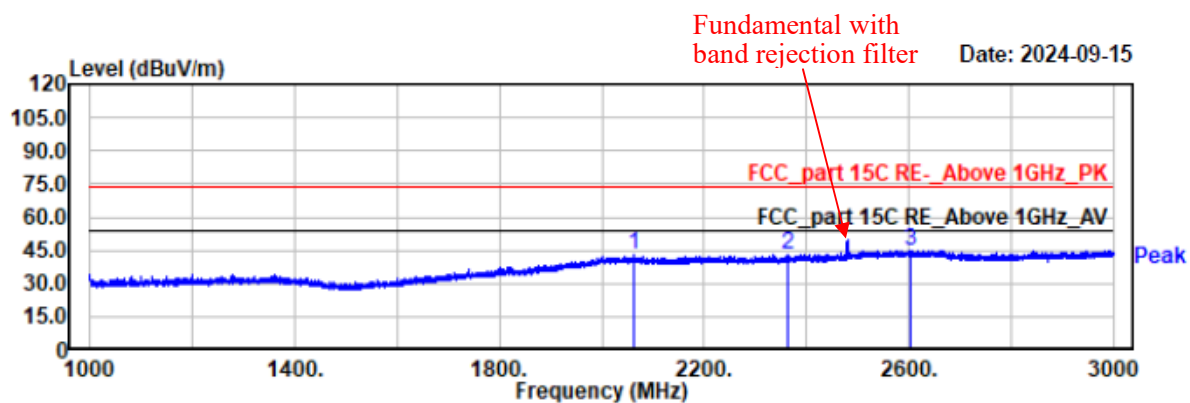

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2063.40	48.82	-6.17	42.65	74.00	31.35	horizontal	Peak
2364.20	48.43	-5.66	42.77	74.00	31.23	horizontal	Peak
2602.20	48.17	-3.30	44.87	74.00	29.13	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 1DH1-2480
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

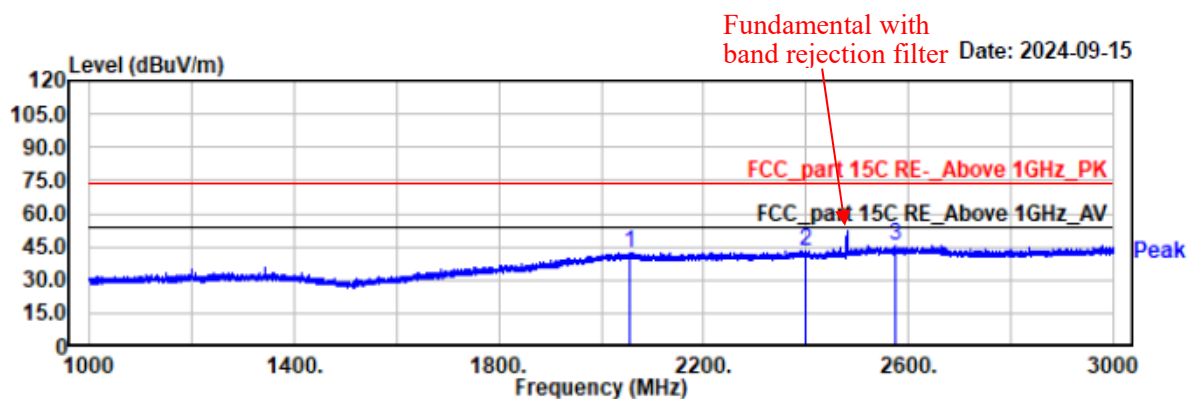

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2056.60	48.56	-6.09	42.47	74.00	31.53	vertical	Peak
2397.80	48.25	-5.22	43.03	74.00	30.97	vertical	Peak
2576.20	48.64	-3.38	45.26	74.00	28.74	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1-2402
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

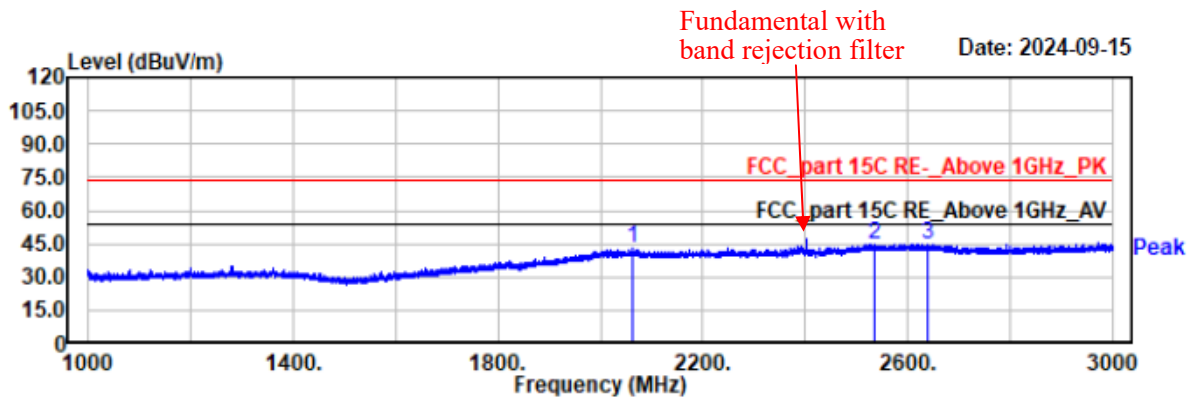

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2063.40	48.86	-6.17	42.69	74.00	31.31	horizontal	Peak
2535.40	48.66	-3.66	45.00	74.00	29.00	horizontal	Peak
2639.20	48.42	-3.36	45.06	74.00	28.94	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1-2402
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

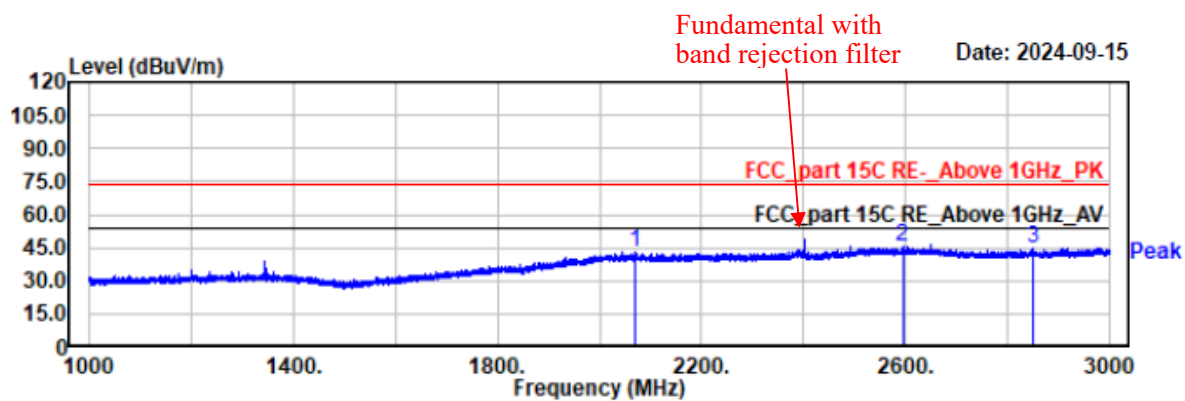

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2069.20	49.07	-6.27	42.80	74.00	31.20	vertical	Peak
2594.40	48.73	-3.31	45.42	74.00	28.58	vertical	Peak
2851.00	49.32	-4.54	44.78	74.00	29.22	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1-2441
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

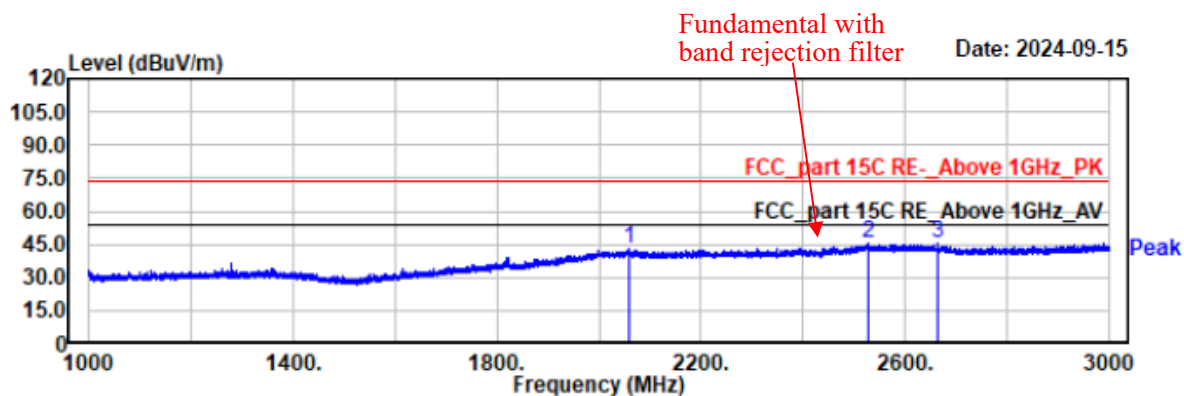

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2060.60	48.92	-6.14	42.78	74.00	31.22	horizontal	Peak
2528.00	49.21	-3.77	45.44	74.00	28.56	horizontal	Peak
2663.00	48.84	-3.71	45.13	74.00	28.87	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1-2441
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

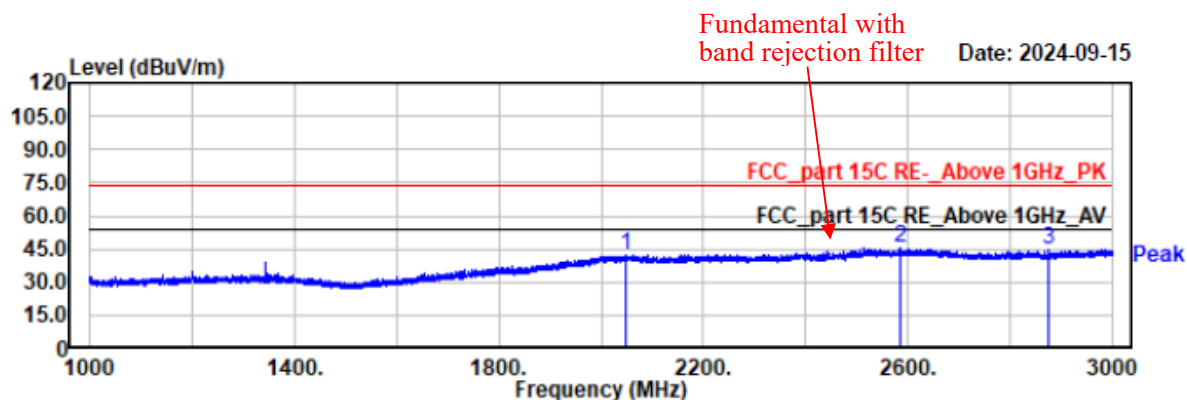

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2046.80	48.37	-6.03	42.34	74.00	31.66	vertical	Peak
2584.20	48.93	-3.35	45.58	74.00	28.42	vertical	Peak
2876.40	48.87	-4.46	44.41	74.00	29.59	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1-2480
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

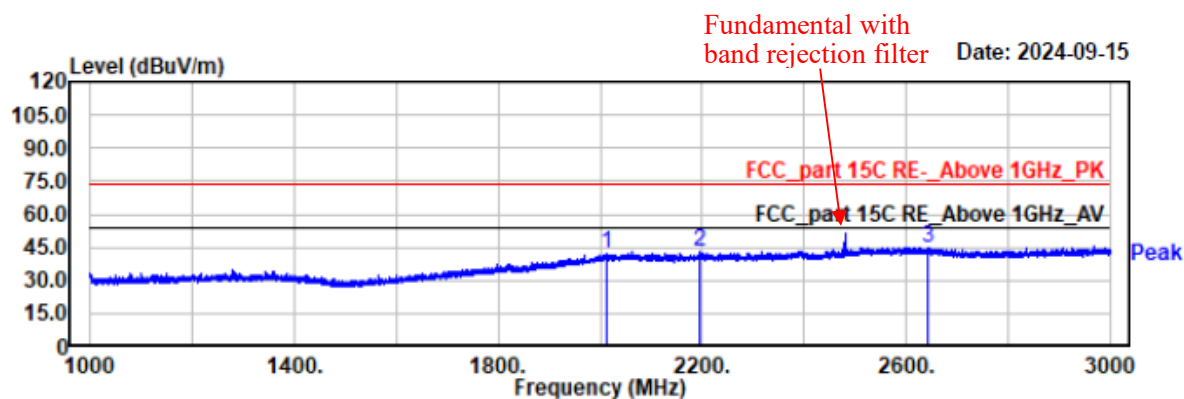

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2011.00	48.59	-6.58	42.01	74.00	31.99	horizontal	Peak
2194.40	49.14	-6.31	42.83	74.00	31.17	horizontal	Peak
2641.60	48.31	-3.36	44.95	74.00	29.05	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1-2480
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

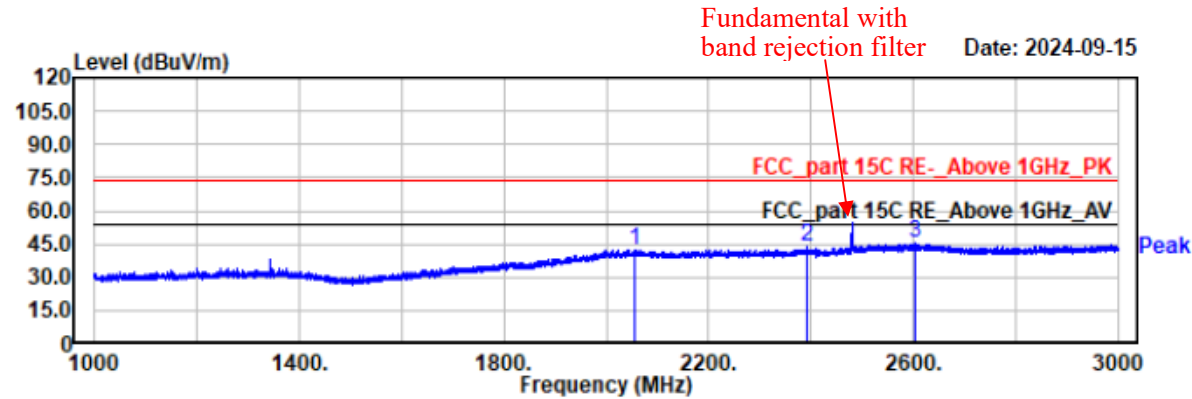

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2055.80	48.63	-6.07	42.56	74.00	31.44	vertical	Peak
2393.00	48.91	-5.28	43.63	74.00	30.37	vertical	Peak
2604.40	49.05	-3.31	45.74	74.00	28.26	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1-2402
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

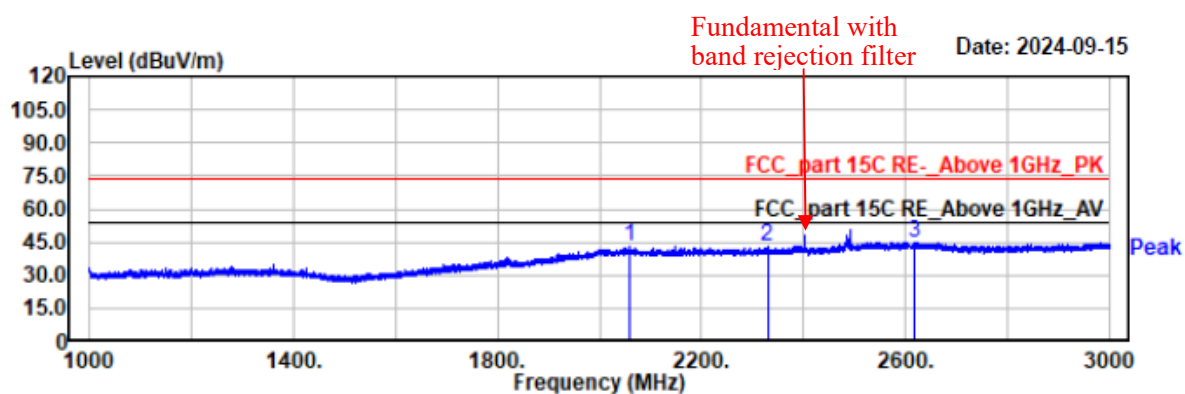

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2058.00	48.85	-6.11	42.74	74.00	31.26	horizontal	Peak
2329.40	48.71	-6.06	42.65	74.00	31.35	horizontal	Peak
2618.20	48.16	-3.33	44.83	74.00	29.17	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1-2402
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

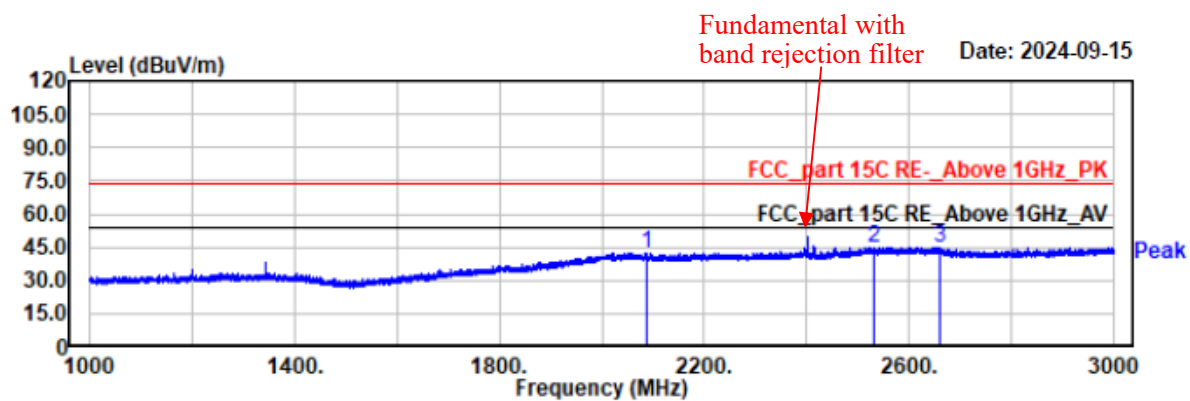

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2088.40	49.05	-6.55	42.50	74.00	31.50	vertical	Peak
2533.00	48.63	-3.70	44.93	74.00	29.07	vertical	Peak
2659.60	48.48	-3.62	44.86	74.00	29.14	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 3DH1-2441


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 24.5°C/53%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

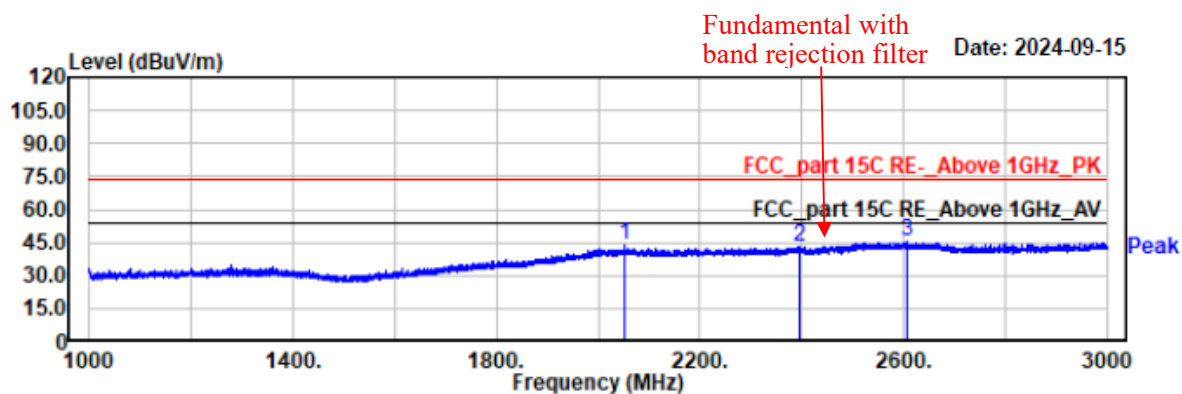

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2053.00	49.56	-6.03	43.53	74.00	30.47	horizontal	Peak
2394.20	48.28	-5.26	43.02	74.00	30.98	horizontal	Peak
2605.60	48.51	-3.31	45.20	74.00	28.80	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1-2441
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

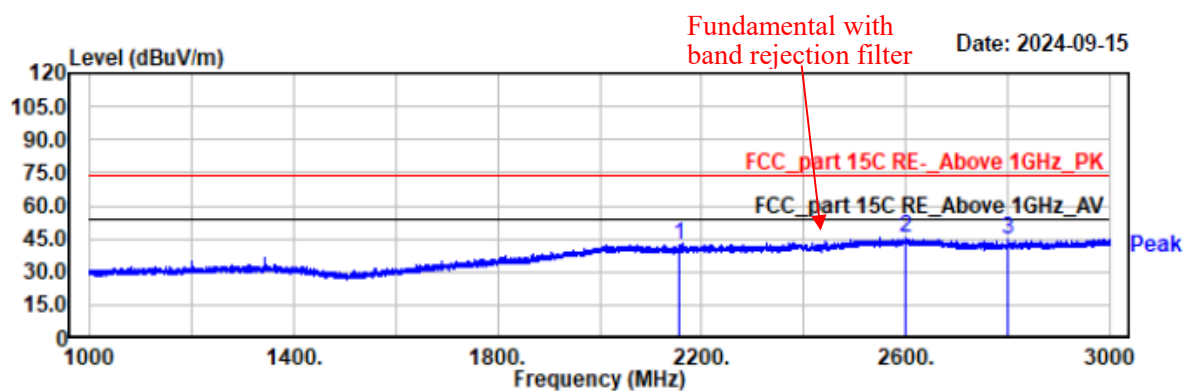

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2157.40	49.23	-6.67	42.56	74.00	31.44	vertical	Peak
2598.40	49.10	-3.31	45.79	74.00	28.21	vertical	Peak
2799.60	49.27	-4.69	44.58	74.00	29.42	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1-2480
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

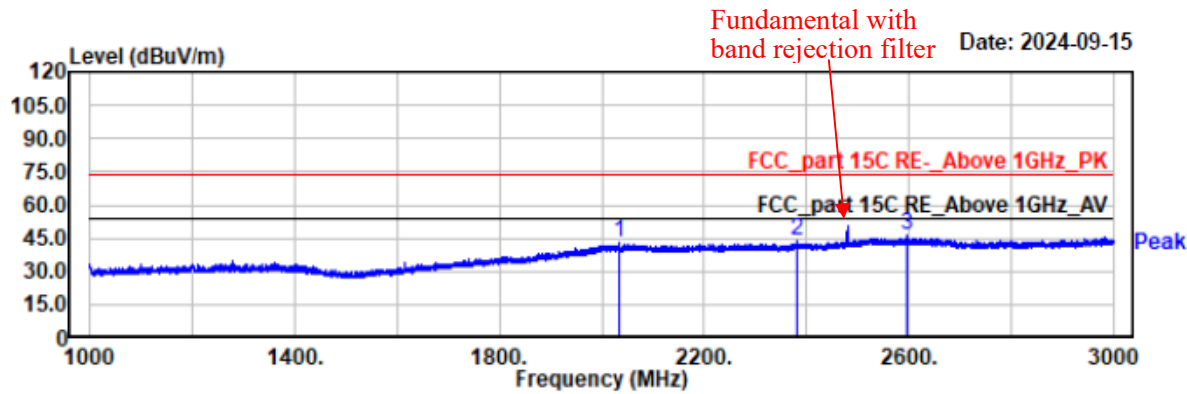

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2033.00	49.42	-6.24	43.18	74.00	30.82	horizontal	Peak
2381.00	48.94	-5.45	43.49	74.00	30.51	horizontal	Peak
2597.80	49.73	-3.31	46.42	74.00	27.58	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1-2480
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

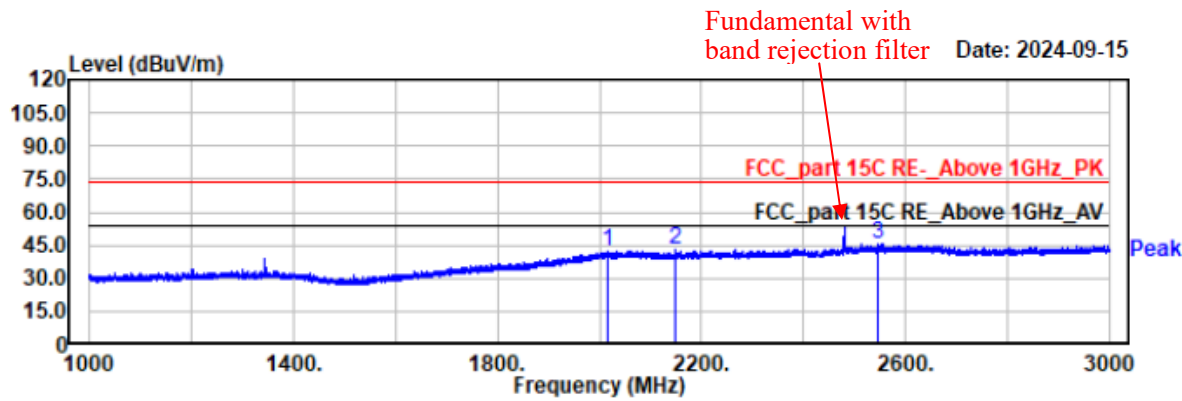


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2015.20	48.45	-6.53	41.92	74.00	32.08	vertical	Peak
2148.80	49.66	-6.74	42.92	74.00	31.08	vertical	Peak
2544.60	49.13	-3.55	45.58	74.00	28.42	vertical	Peak

5) 3 GHz-18 GHz

EUT Model: NLS-NQuire1500

Project No.: 2407V20721E-RF
Test Mode: 1DH1 2402
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

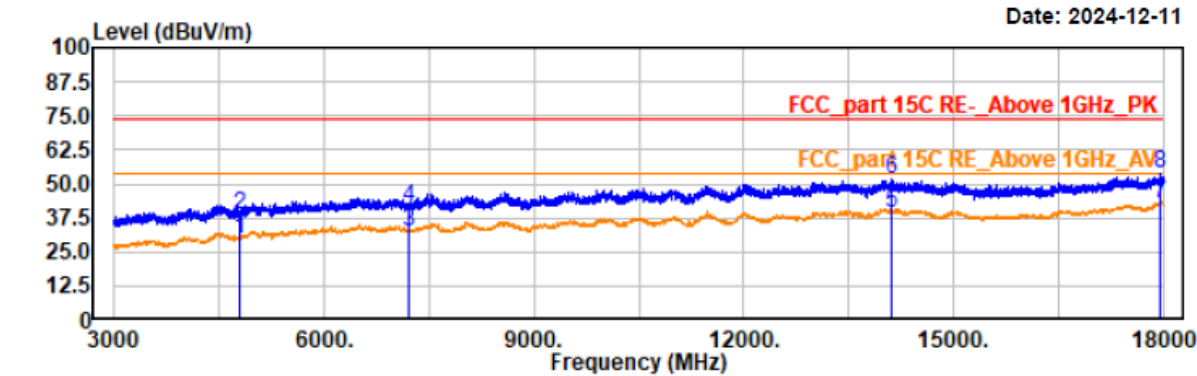


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	34.13	-4.45	29.68	54.00	24.32	horizontal	Average
4804.50	43.16	-4.45	38.71	74.00	35.29	horizontal	Peak
7206.00	34.38	-1.73	32.65	54.00	21.35	horizontal	Average
7206.00	43.04	-1.73	41.31	74.00	32.69	horizontal	Peak
14124.00	34.13	5.24	39.37	54.00	14.63	horizontal	Average
14124.00	46.15	5.24	51.39	74.00	22.61	horizontal	Peak
17953.50	35.29	7.67	42.96	54.00	11.04	horizontal	Average
17953.50	45.87	7.67	53.54	74.00	20.46	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 1DH1 2402
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

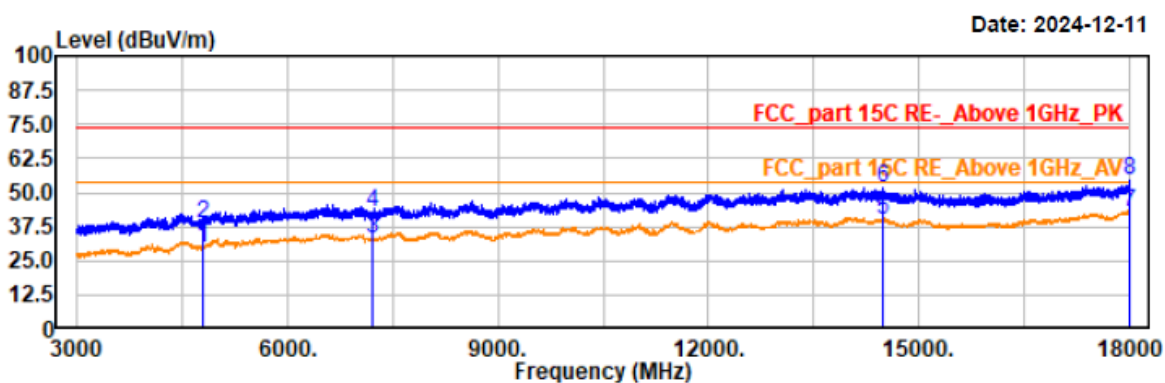


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	34.30	-4.45	29.85	54.00	24.15	vertical	Average
4804.50	42.77	-4.45	38.32	74.00	35.68	vertical	Peak
7206.00	34.64	-1.73	32.91	54.00	21.09	vertical	Average
7206.00	44.20	-1.73	42.47	74.00	31.53	vertical	Peak
14484.00	34.88	5.01	39.89	54.00	14.11	vertical	Average
14484.00	46.62	5.01	51.63	74.00	22.37	vertical	Peak
17998.50	34.80	7.74	42.54	54.00	11.46	vertical	Average
17998.50	46.97	7.74	54.71	74.00	19.29	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 1DH1 2441
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

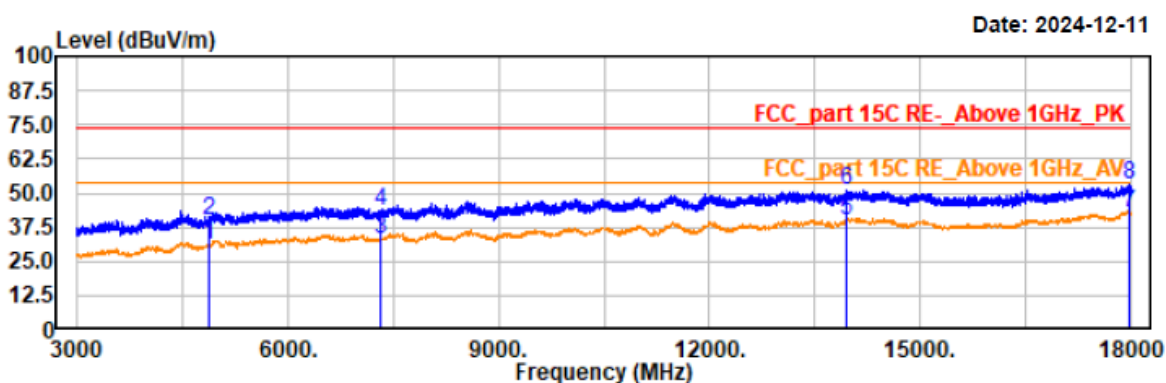


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	34.95	-4.24	30.71	54.00	23.29	horizontal	Average
4882.50	43.94	-4.24	39.70	74.00	34.30	horizontal	Peak
7323.00	34.80	-1.61	33.19	54.00	20.81	horizontal	Average
7323.00	44.79	-1.61	43.18	74.00	30.82	horizontal	Peak
13963.50	34.83	5.10	39.93	54.00	14.07	horizontal	Average
13963.50	45.82	5.10	50.92	74.00	23.08	horizontal	Peak
17967.00	35.41	7.69	43.10	54.00	10.90	horizontal	Average
17967.00	45.21	7.69	52.90	74.00	21.10	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 1DH1 2441
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

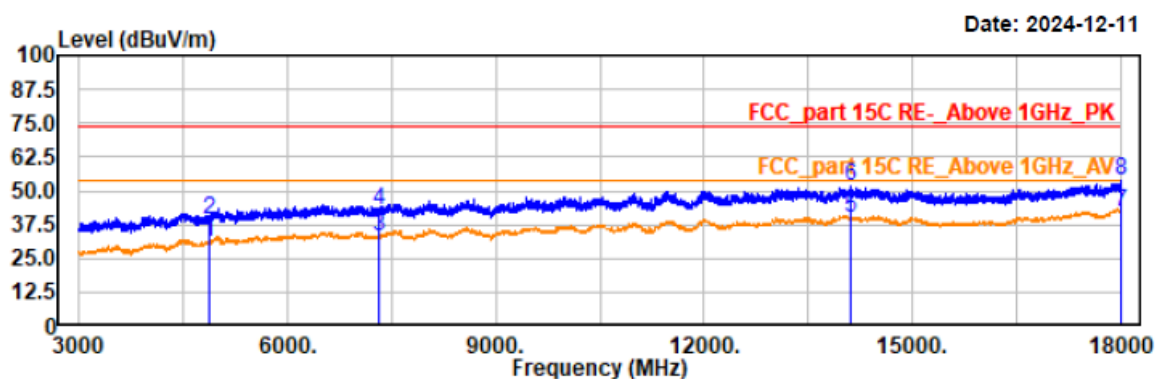

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	34.99	-4.24	30.75	54.00	23.25	vertical	Average
4882.50	43.83	-4.24	39.59	74.00	34.41	vertical	Peak
7323.00	34.76	-1.61	33.15	54.00	20.85	vertical	Average
7323.00	44.66	-1.61	43.05	74.00	30.95	vertical	Peak
14110.50	34.70	5.23	39.93	54.00	14.07	vertical	Average
14110.50	46.61	5.23	51.84	74.00	22.16	vertical	Peak
17997.00	34.61	7.74	42.35	54.00	11.65	vertical	Average
17997.00	46.09	7.74	53.83	74.00	20.17	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 1DH1 2480
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

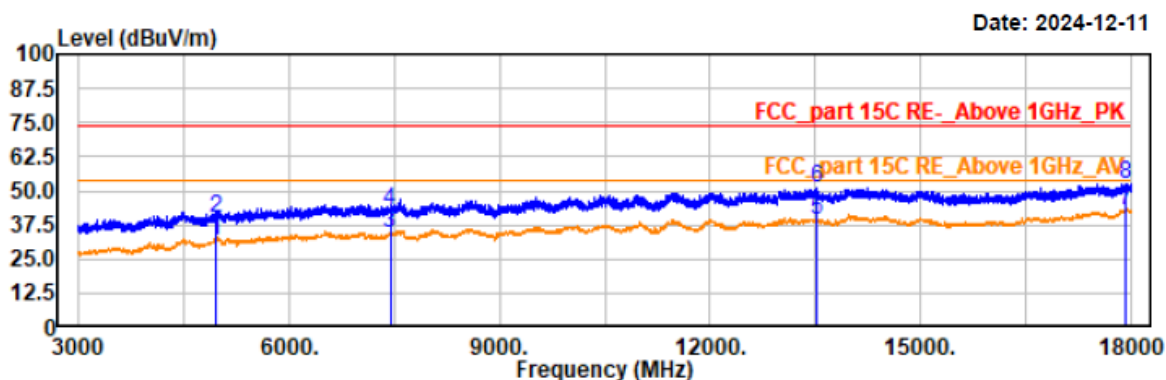**Trace: 1**


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	35.84	-4.01	31.83	54.00	22.17	horizontal	Average
4960.50	43.89	-4.01	39.88	74.00	34.12	horizontal	Peak
7440.00	35.90	-1.59	34.31	54.00	19.69	horizontal	Average
7440.00	44.42	-1.59	42.83	74.00	31.17	horizontal	Peak
13521.00	34.47	4.81	39.28	54.00	14.72	horizontal	Average
13521.00	46.50	4.81	51.31	74.00	22.69	horizontal	Peak
17917.50	34.80	7.62	42.42	54.00	11.58	horizontal	Average
17917.50	45.07	7.62	52.69	74.00	21.31	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 1DH1 2480
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

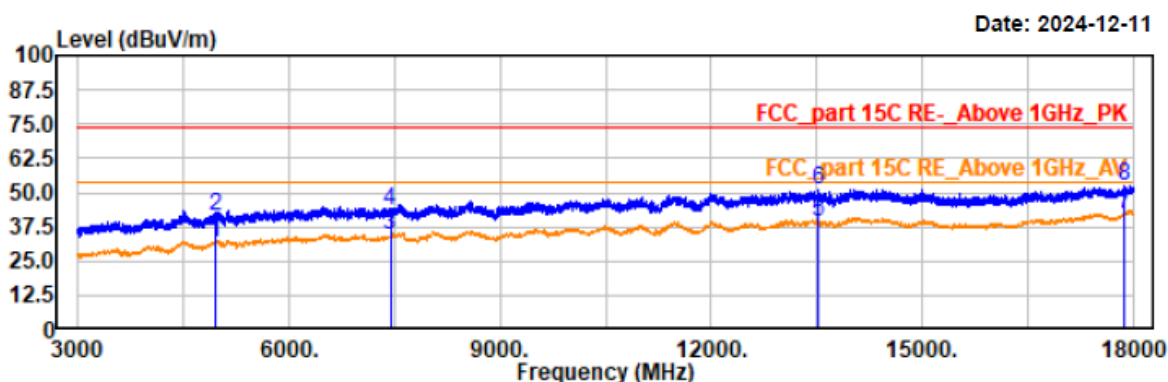


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	35.64	-4.01	31.63	54.00	22.37	vertical	Average
4960.50	45.48	-4.01	41.47	74.00	32.53	vertical	Peak
7440.00	35.73	-1.59	34.14	54.00	19.86	vertical	Average
7440.00	45.11	-1.59	43.52	74.00	30.48	vertical	Peak
13515.00	34.69	4.81	39.50	54.00	14.50	vertical	Average
13515.00	46.40	4.81	51.21	74.00	22.79	vertical	Peak
17877.00	34.60	7.50	42.10	54.00	11.90	vertical	Average
17877.00	44.92	7.50	52.42	74.00	21.58	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1 2402
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

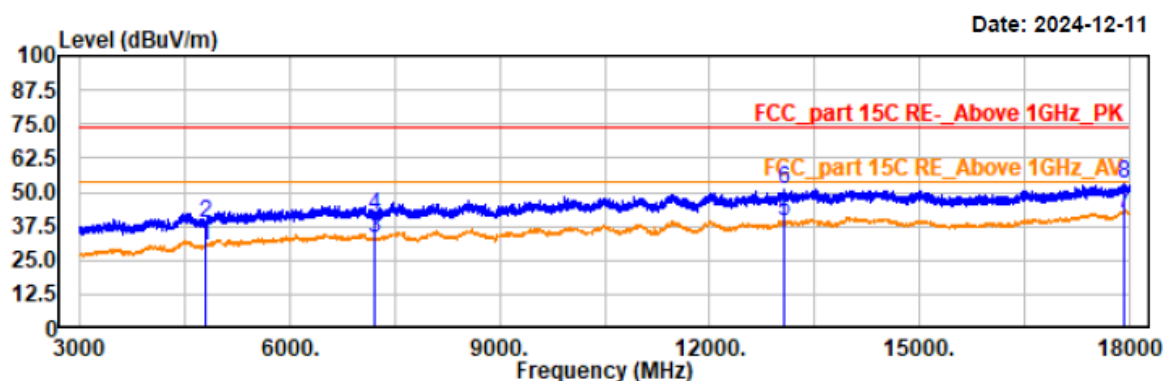

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	34.46	-4.45	30.01	54.00	23.99	horizontal	Average
4804.50	43.06	-4.45	38.61	74.00	35.39	horizontal	Peak
7206.00	34.58	-1.73	32.85	54.00	21.15	horizontal	Average
7206.00	43.26	-1.73	41.53	74.00	32.47	horizontal	Peak
13053.00	34.06	5.12	39.18	54.00	14.82	horizontal	Average
13053.00	46.14	5.12	51.26	74.00	22.74	horizontal	Peak
17916.00	34.38	7.62	42.00	54.00	12.00	horizontal	Average
17916.00	45.39	7.62	53.01	74.00	20.99	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1 2402
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

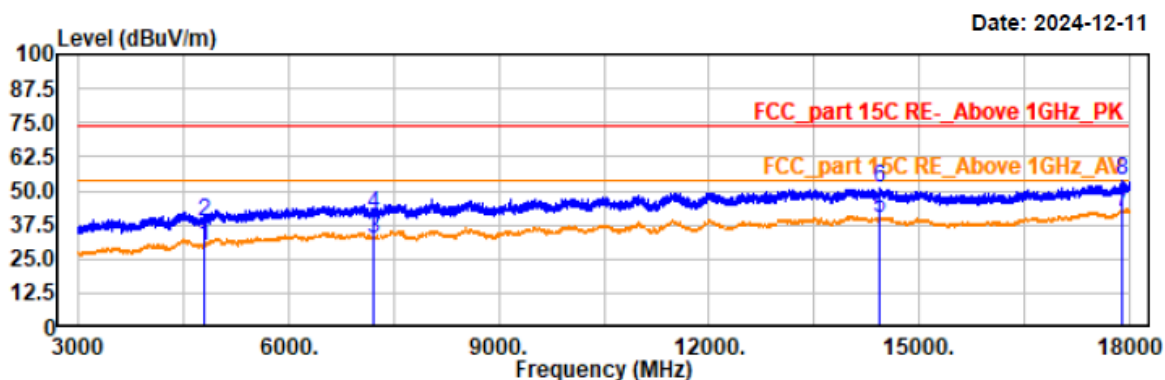
**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	34.11	-4.45	29.66	54.00	24.34	vertical	Average
4804.50	42.78	-4.45	38.33	74.00	35.67	vertical	Peak
7206.00	34.39	-1.73	32.66	54.00	21.34	vertical	Average
7206.00	43.39	-1.73	41.66	74.00	32.34	vertical	Peak
14445.00	35.11	5.07	40.18	54.00	13.82	vertical	Average
14445.00	45.64	5.07	50.71	74.00	23.29	vertical	Peak
17904.00	34.78	7.59	42.37	54.00	11.63	vertical	Average
17904.00	45.95	7.59	53.54	74.00	20.46	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1 2441
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

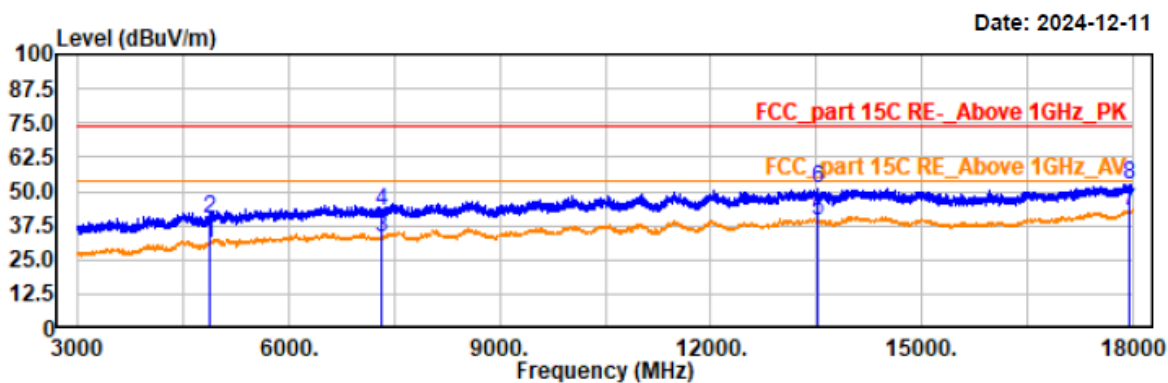


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	35.17	-4.24	30.93	54.00	23.07	horizontal	Average
4882.50	44.17	-4.24	39.93	74.00	34.07	horizontal	Peak
7323.00	34.55	-1.61	32.94	54.00	21.06	horizontal	Average
7323.00	44.35	-1.61	42.74	74.00	31.26	horizontal	Peak
13524.00	34.43	4.81	39.24	54.00	14.76	horizontal	Average
13524.00	46.27	4.81	51.08	74.00	22.92	horizontal	Peak
17956.50	35.05	7.68	42.73	54.00	11.27	horizontal	Average
17956.50	44.84	7.68	52.52	74.00	21.48	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1 2441
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

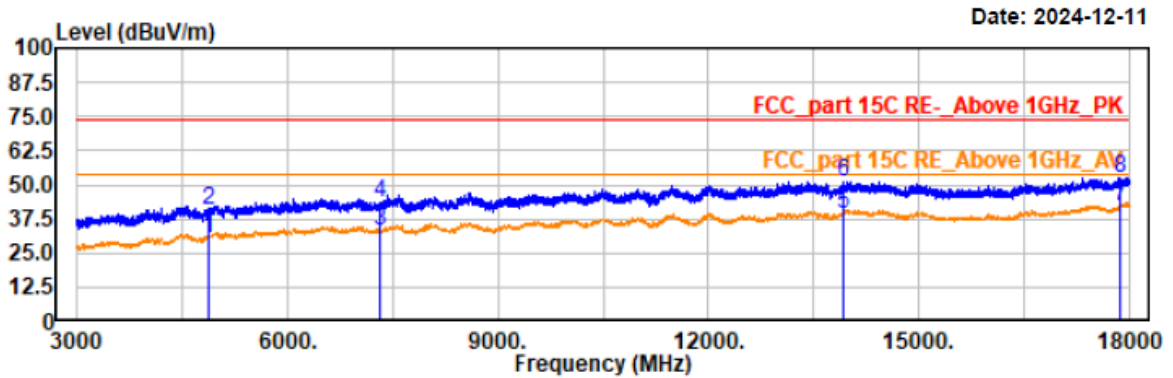
**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	34.92	-4.24	30.68	54.00	23.32	vertical	Average
4882.50	44.68	-4.24	40.44	74.00	33.56	vertical	Peak
7323.00	34.72	-1.61	33.11	54.00	20.89	vertical	Average
7323.00	44.78	-1.61	43.17	74.00	30.83	vertical	Peak
13927.50	34.36	5.10	39.46	54.00	14.54	vertical	Average
13927.50	45.98	5.10	51.08	74.00	22.92	vertical	Peak
17875.50	34.87	7.50	42.37	54.00	11.63	vertical	Average
17875.50	44.84	7.50	52.34	74.00	21.66	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1 2480
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

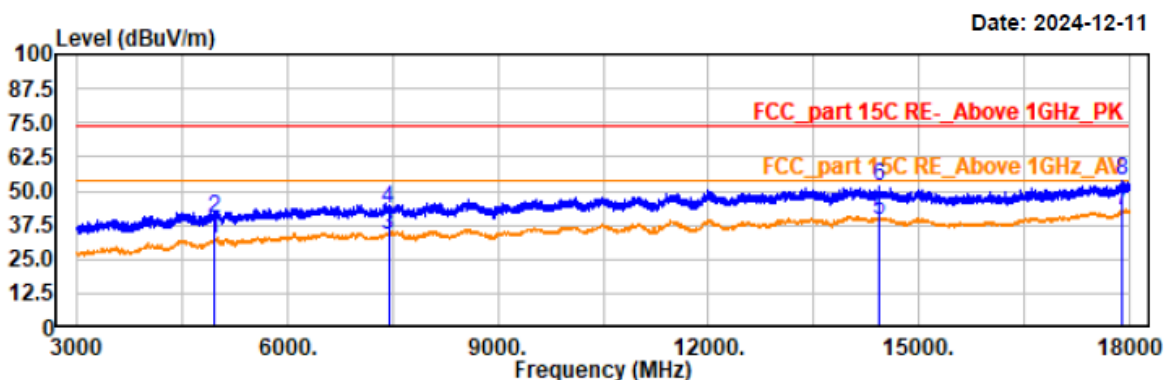
**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	36.33	-4.01	32.32	54.00	21.68	horizontal	Average
4960.50	44.24	-4.01	40.23	74.00	33.77	horizontal	Peak
7440.00	35.64	-1.59	34.05	54.00	19.95	horizontal	Average
7440.00	45.06	-1.59	43.47	74.00	30.53	horizontal	Peak
14431.50	34.32	5.09	39.41	54.00	14.59	horizontal	Average
14431.50	46.78	5.09	51.87	74.00	22.13	horizontal	Peak
17899.50	34.86	7.59	42.45	54.00	11.55	horizontal	Average
17899.50	46.10	7.59	53.69	74.00	20.31	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1 2480
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

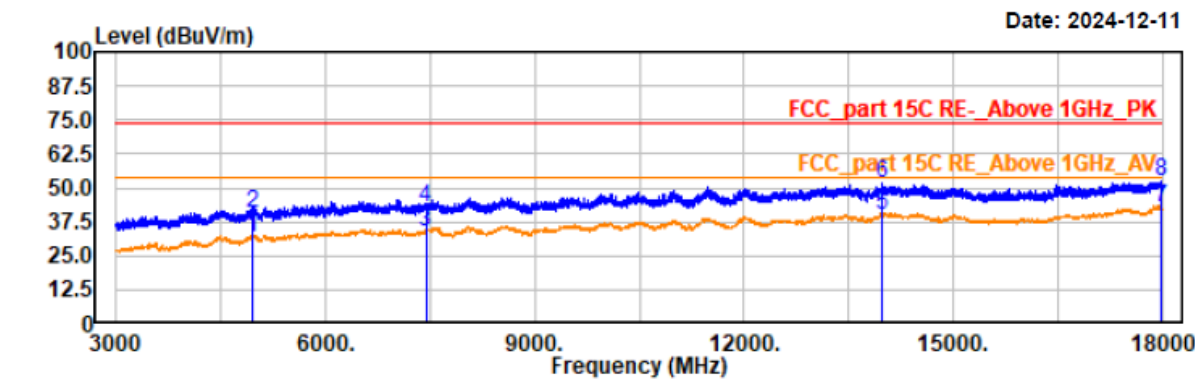


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	35.97	-4.01	31.96	54.00	22.04	vertical	Average
4960.50	44.65	-4.01	40.64	74.00	33.36	vertical	Peak
7440.00	35.43	-1.59	33.84	54.00	20.16	vertical	Average
7440.00	44.69	-1.59	43.10	74.00	30.90	vertical	Peak
13975.50	34.93	5.10	40.03	54.00	13.97	vertical	Average
13975.50	46.37	5.10	51.47	74.00	22.53	vertical	Peak
17974.50	34.90	7.70	42.60	54.00	11.40	vertical	Average
17974.50	44.87	7.70	52.57	74.00	21.43	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1 2402
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

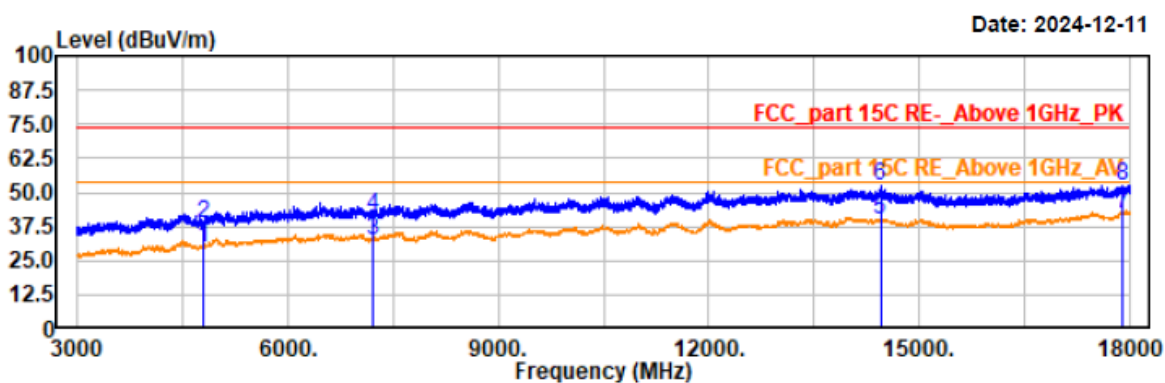


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	34.27	-4.45	29.82	54.00	24.18	horizontal	Average
4804.50	43.02	-4.45	38.57	74.00	35.43	horizontal	Peak
7206.00	34.39	-1.73	32.66	54.00	21.34	horizontal	Average
7206.00	42.89	-1.73	41.16	74.00	32.84	horizontal	Peak
14448.00	34.80	5.06	39.86	54.00	14.14	horizontal	Average
14448.00	47.06	5.06	52.12	74.00	21.88	horizontal	Peak
17889.00	34.44	7.55	41.99	54.00	12.01	horizontal	Average
17889.00	45.08	7.55	52.63	74.00	21.37	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1 2402
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

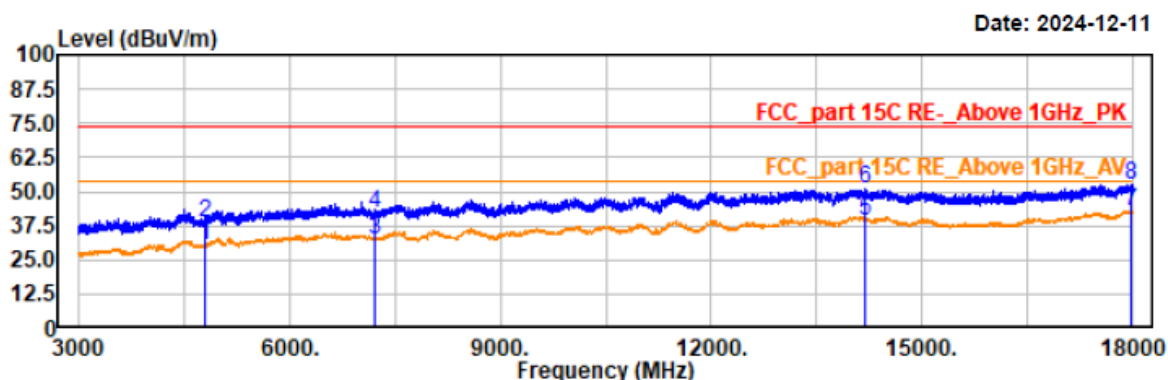


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	34.51	-4.45	30.06	54.00	23.94	vertical	Average
4804.50	43.07	-4.45	38.62	74.00	35.38	vertical	Peak
7206.00	34.48	-1.73	32.75	54.00	21.25	vertical	Average
7206.00	43.51	-1.73	41.78	74.00	32.22	vertical	Peak
14182.50	34.33	5.25	39.58	54.00	14.42	vertical	Average
14182.50	45.70	5.25	50.95	74.00	23.05	vertical	Peak
17982.00	34.76	7.71	42.47	54.00	11.53	vertical	Average
17982.00	44.85	7.71	52.56	74.00	21.44	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1 2441
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

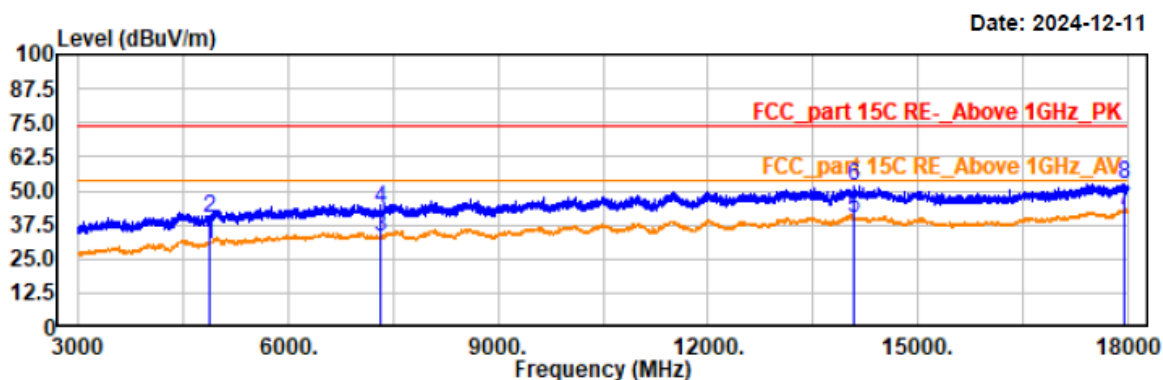**Trace: 1**


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	34.80	-4.24	30.56	54.00	23.44	horizontal	Average
4882.50	44.05	-4.24	39.81	74.00	34.19	horizontal	Peak
7323.00	35.01	-1.61	33.40	54.00	20.60	horizontal	Average
7323.00	44.92	-1.61	43.31	74.00	30.69	horizontal	Peak
14086.50	34.85	5.21	40.06	54.00	13.94	horizontal	Average
14086.50	46.54	5.21	51.75	74.00	22.25	horizontal	Peak
17956.50	34.97	7.68	42.65	54.00	11.35	horizontal	Average
17956.50	44.71	7.68	52.39	74.00	21.61	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1 2441
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

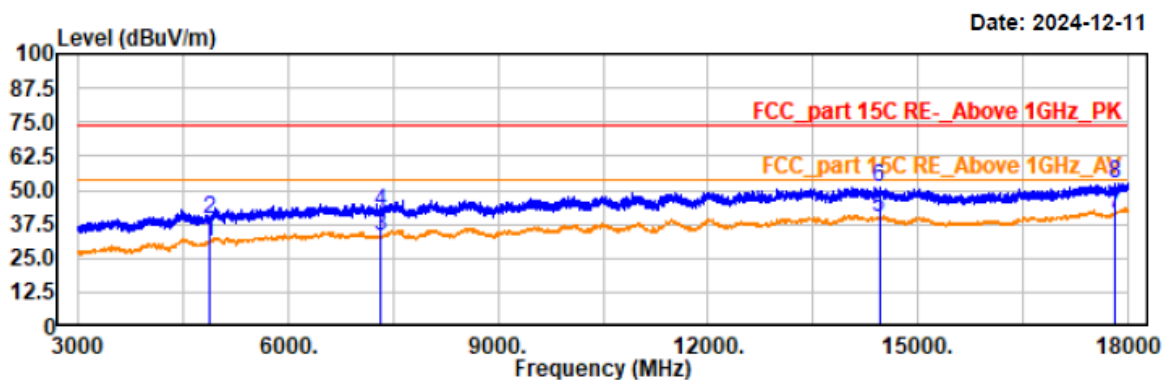


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	34.98	-4.24	30.74	54.00	23.26	vertical	Average
4882.50	43.61	-4.24	39.37	74.00	34.63	vertical	Peak
7323.00	34.60	-1.61	32.99	54.00	21.01	vertical	Average
7323.00	43.37	-1.61	41.76	74.00	32.24	vertical	Peak
14448.00	34.79	5.06	39.85	54.00	14.15	vertical	Average
14448.00	46.05	5.06	51.11	74.00	22.89	vertical	Peak
17815.50	33.81	7.30	41.11	54.00	12.89	vertical	Average
17815.50	45.41	7.30	52.71	74.00	21.29	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1 2480
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

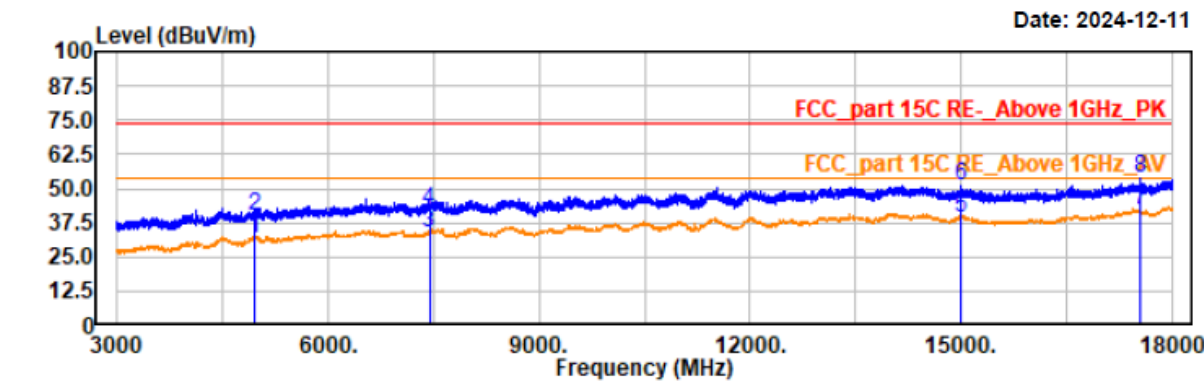


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	35.72	-4.01	31.71	54.00	22.29	horizontal	Average
4960.50	44.32	-4.01	40.31	74.00	33.69	horizontal	Peak
7440.00	35.36	-1.59	33.77	54.00	20.23	horizontal	Average
7440.00	43.95	-1.59	42.36	74.00	31.64	horizontal	Peak
15001.50	34.98	4.17	39.15	54.00	14.85	horizontal	Average
15001.50	46.84	4.17	51.01	74.00	22.99	horizontal	Peak
17536.50	35.50	6.41	41.91	54.00	12.09	horizontal	Average
17536.50	47.06	6.41	53.47	74.00	20.53	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1 2480
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

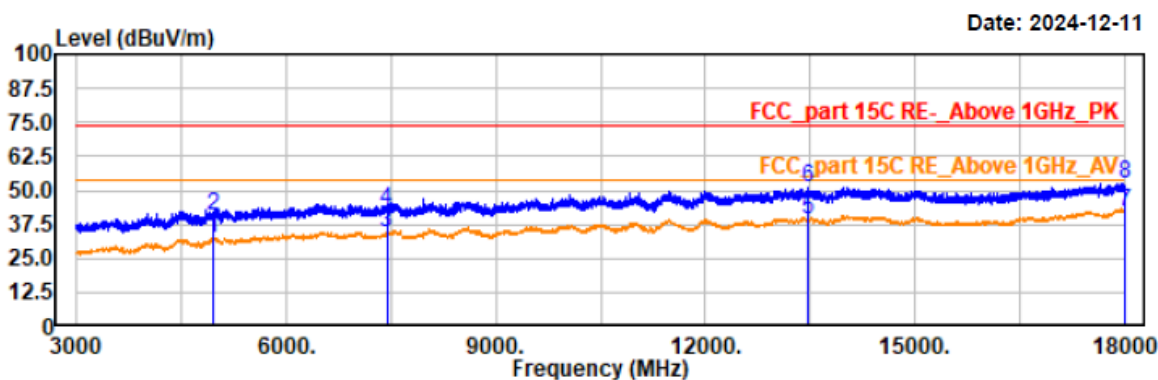

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	36.34	-4.01	32.33	54.00	21.67	vertical	Average
4960.50	45.03	-4.01	41.02	74.00	32.98	vertical	Peak
7440.00	36.03	-1.59	34.44	54.00	19.56	vertical	Average
7440.00	44.06	-1.59	42.47	74.00	31.53	vertical	Peak
13455.00	34.55	4.82	39.37	54.00	14.63	vertical	Average
13455.00	46.39	4.82	51.21	74.00	22.79	vertical	Peak
17998.50	34.64	7.74	42.38	54.00	11.62	vertical	Average
17998.50	44.97	7.74	52.71	74.00	21.29	vertical	Peak

3 GHz-18 GHz

EUT Model: NLS-NQuire500

Project No.: 2407V20721E-RF

Test Mode: 1DH1-2402


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.7°C/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

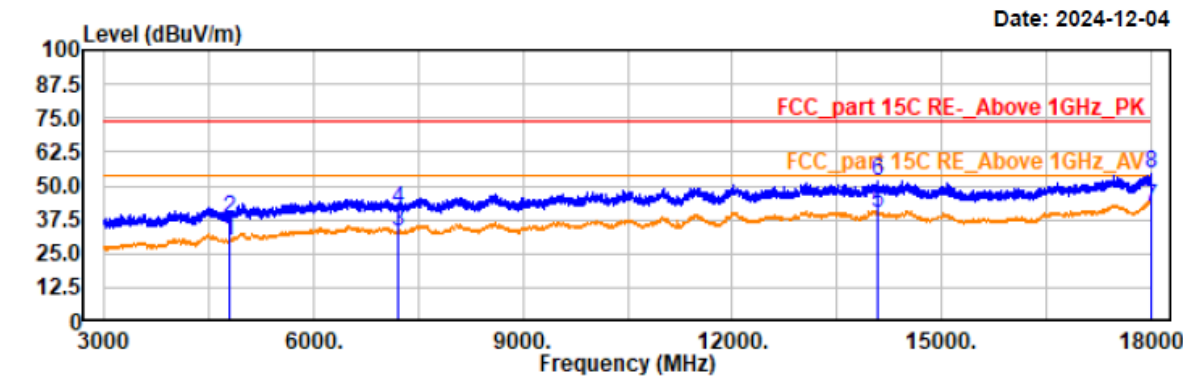

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	33.94	-4.45	29.49	54.00	24.51	horizontal	Average
4804.50	42.24	-4.45	37.79	74.00	36.21	horizontal	Peak
7206.00	34.60	-1.73	32.87	54.00	21.13	horizontal	Average
7206.00	43.22	-1.73	41.49	74.00	32.51	horizontal	Peak
14077.50	35.12	5.19	40.31	54.00	13.69	horizontal	Average
14077.50	46.46	5.19	51.65	74.00	22.35	horizontal	Peak
17997.00	34.35	7.74	42.09	54.00	11.91	horizontal	Average
17997.00	46.53	7.74	54.27	74.00	19.73	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 1DH1-2402


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.7°C/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

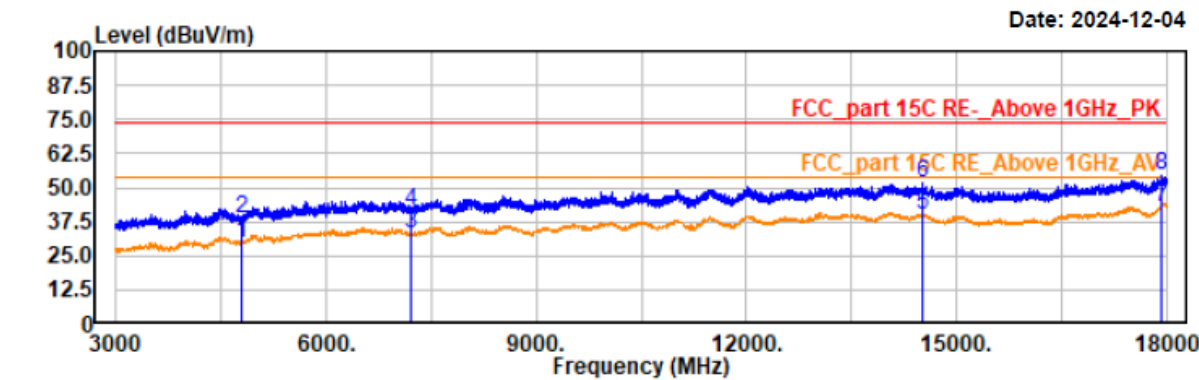


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	34.13	-4.45	29.68	54.00	24.32	vertical	Average
4804.50	43.30	-4.45	38.85	74.00	35.15	vertical	Peak
7206.00	34.96	-1.73	33.23	54.00	20.77	vertical	Average
7206.00	43.32	-1.73	41.59	74.00	32.41	vertical	Peak
14508.00	35.18	4.97	40.15	54.00	13.85	vertical	Average
14508.00	46.77	4.97	51.74	74.00	22.26	vertical	Peak
17919.00	35.19	7.62	42.81	54.00	11.19	vertical	Average
17919.00	46.65	7.62	54.27	74.00	19.73	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 1DH1-2441
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.7°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

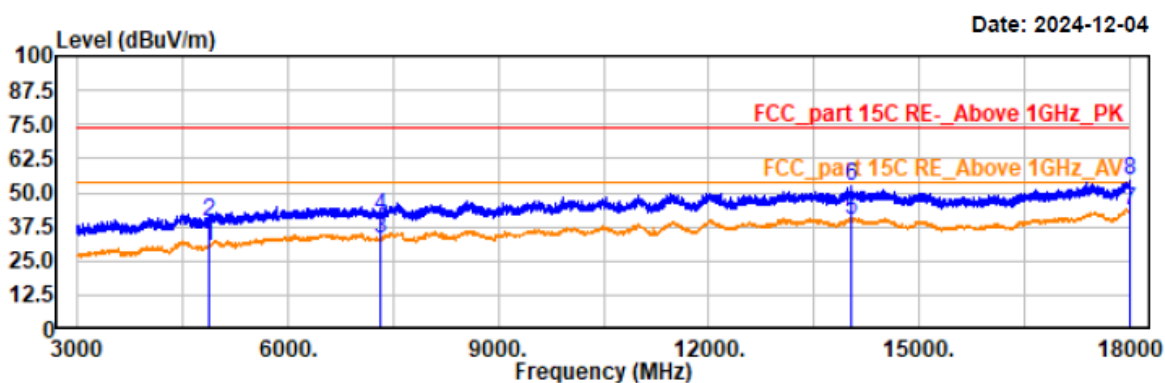

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	34.92	-4.24	30.68	54.00	23.32	horizontal	Average
4882.50	43.67	-4.24	39.43	74.00	34.57	horizontal	Peak
7323.00	34.76	-1.61	33.15	54.00	20.85	horizontal	Average
7323.00	43.15	-1.61	41.54	74.00	32.46	horizontal	Peak
14038.50	34.94	5.15	40.09	54.00	13.91	horizontal	Average
14038.50	47.23	5.15	52.38	74.00	21.62	horizontal	Peak
17994.00	35.70	7.72	43.42	54.00	10.58	horizontal	Average
17994.00	46.67	7.72	54.39	74.00	19.61	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 1DH1-2441


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.7℃/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

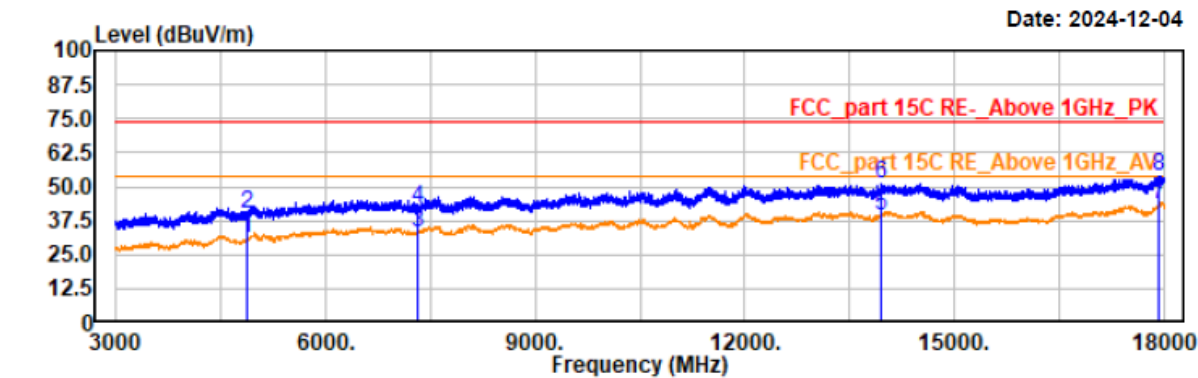

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	35.15	-4.24	30.91	54.00	23.09	vertical	Average
4882.50	44.39	-4.24	40.15	74.00	33.85	vertical	Peak
7323.00	34.73	-1.61	33.12	54.00	20.88	vertical	Average
7323.00	43.75	-1.61	42.14	74.00	31.86	vertical	Peak
13947.00	34.16	5.11	39.27	54.00	14.73	vertical	Average
13947.00	45.81	5.11	50.92	74.00	23.08	vertical	Peak
17932.50	35.49	7.63	43.12	54.00	10.88	vertical	Average
17932.50	46.48	7.63	54.11	74.00	19.89	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 1DH1-2480


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.7°C/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

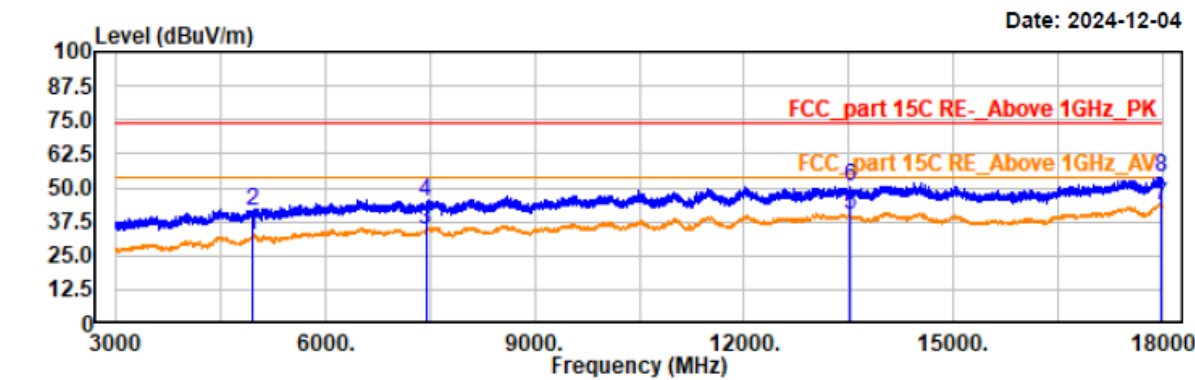


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.00	36.10	-4.01	32.09	54.00	21.91	horizontal	Average
4960.00	45.44	-4.01	41.43	74.00	32.57	horizontal	Peak
7440.00	36.13	-1.59	34.54	54.00	19.46	horizontal	Average
7440.00	46.21	-1.59	44.62	74.00	29.38	horizontal	Peak
13513.50	34.85	4.82	39.67	54.00	14.33	horizontal	Average
13513.50	45.59	4.82	50.41	74.00	23.59	horizontal	Peak
17967.00	36.03	7.69	43.72	54.00	10.28	horizontal	Average
17967.00	46.06	7.69	53.75	74.00	20.25	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 1DH1-2480
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.7°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

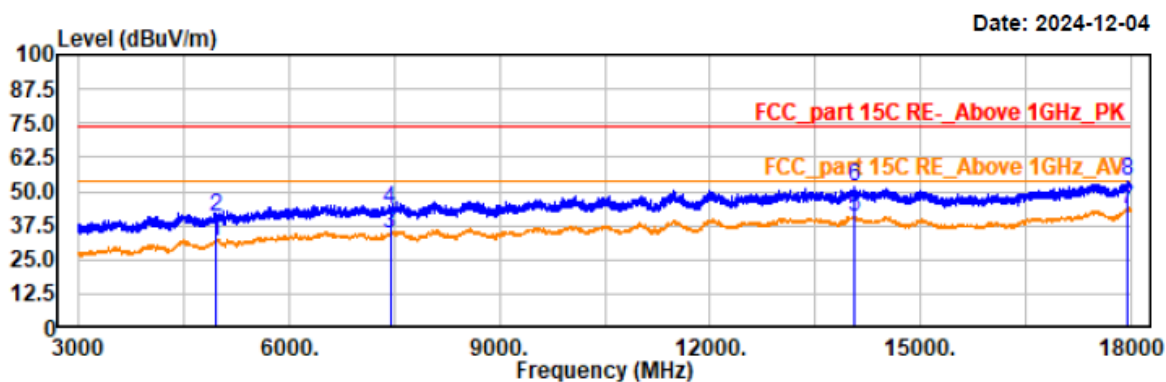

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	35.56	-4.01	31.55	54.00	22.45	vertical	Average
4960.50	44.57	-4.01	40.56	74.00	33.44	vertical	Peak
7440.00	36.25	-1.59	34.66	54.00	19.34	vertical	Average
7440.00	45.16	-1.59	43.57	74.00	30.43	vertical	Peak
14050.50	35.20	5.16	40.36	54.00	13.64	vertical	Average
14050.50	46.26	5.16	51.42	74.00	22.58	vertical	Peak
17940.00	35.54	7.65	43.19	54.00	10.81	vertical	Average
17940.00	46.05	7.65	53.70	74.00	20.30	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1-2402
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.7°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

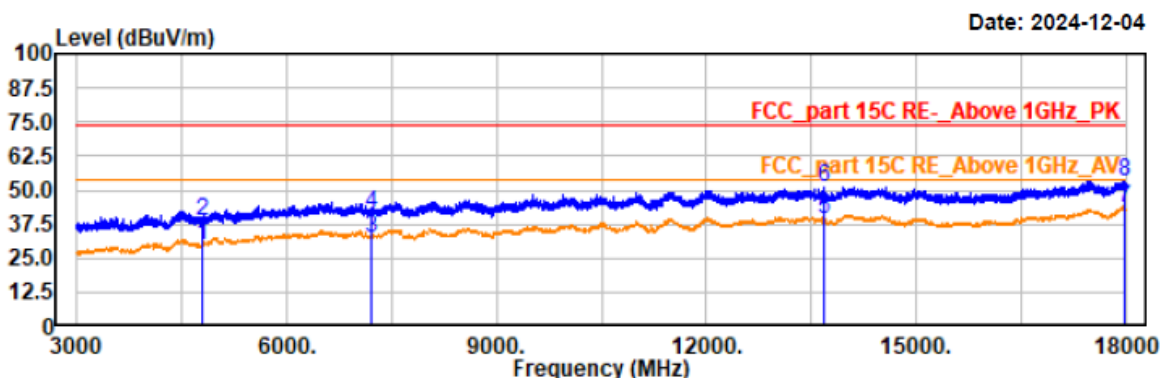


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.00	34.36	-4.45	29.91	54.00	24.09	horizontal	Average
4804.00	42.98	-4.45	38.53	74.00	35.47	horizontal	Peak
7206.00	34.40	-1.73	32.67	54.00	21.33	horizontal	Average
7206.00	43.39	-1.73	41.66	74.00	32.34	horizontal	Peak
13678.50	34.21	4.93	39.14	54.00	14.86	horizontal	Average
13678.50	46.09	4.93	51.02	74.00	22.98	horizontal	Peak
17970.00	35.71	7.69	43.40	54.00	10.60	horizontal	Average
17970.00	45.61	7.69	53.30	74.00	20.70	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1-2402
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.7°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

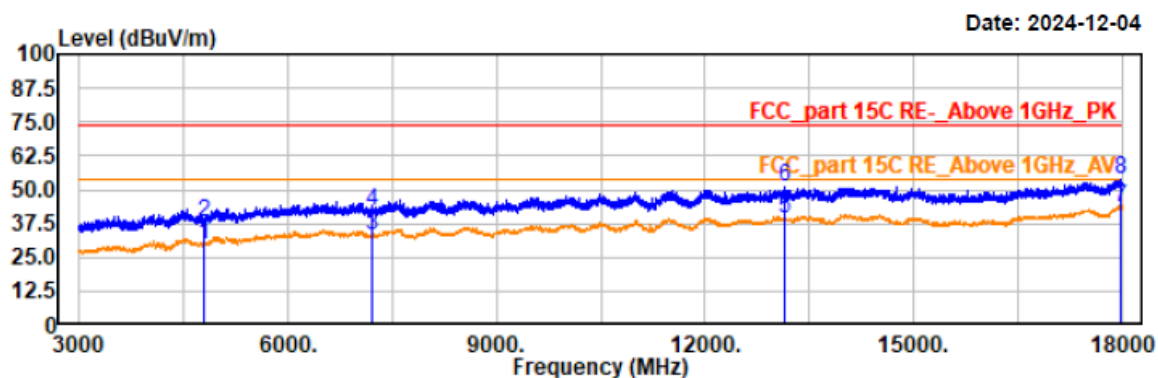


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	34.08	-4.45	29.63	54.00	24.37	vertical	Average
4804.50	42.58	-4.45	38.13	74.00	35.87	vertical	Peak
7206.00	34.85	-1.73	33.12	54.00	20.88	vertical	Average
7206.00	43.48	-1.73	41.75	74.00	32.25	vertical	Peak
13147.50	34.34	5.07	39.41	54.00	14.59	vertical	Average
13147.50	46.13	5.07	51.20	74.00	22.80	vertical	Peak
17970.00	35.63	7.69	43.32	54.00	10.68	vertical	Average
17970.00	45.97	7.69	53.66	74.00	20.34	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1-2441
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.7℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

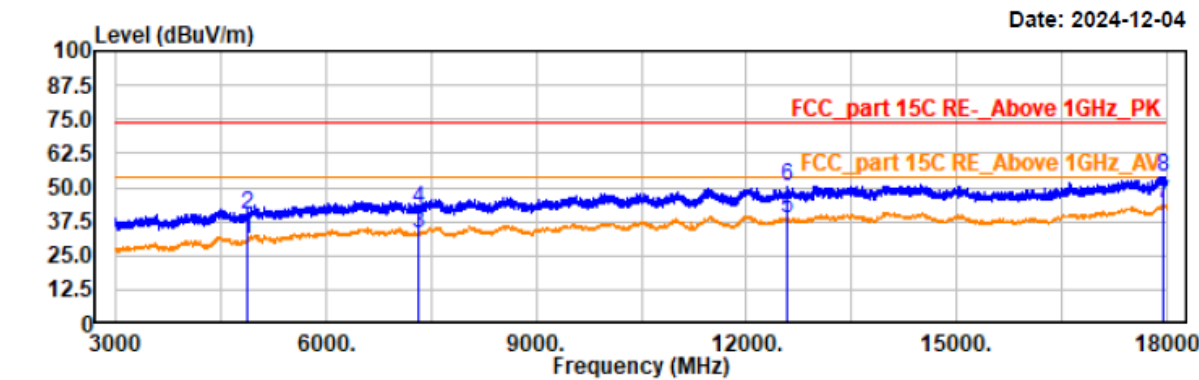


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	34.96	-4.24	30.72	54.00	23.28	horizontal	Average
4882.50	44.50	-4.24	40.26	74.00	33.74	horizontal	Peak
7323.00	34.91	-1.61	33.30	54.00	20.70	horizontal	Average
7323.00	43.49	-1.61	41.88	74.00	32.12	horizontal	Peak
12591.00	34.41	3.90	38.31	54.00	15.69	horizontal	Average
12591.00	46.74	3.90	50.64	74.00	23.36	horizontal	Peak
17958.00	36.40	7.68	44.08	54.00	9.92	horizontal	Average
17958.00	46.42	7.68	54.10	74.00	19.90	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1-2441
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.7°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

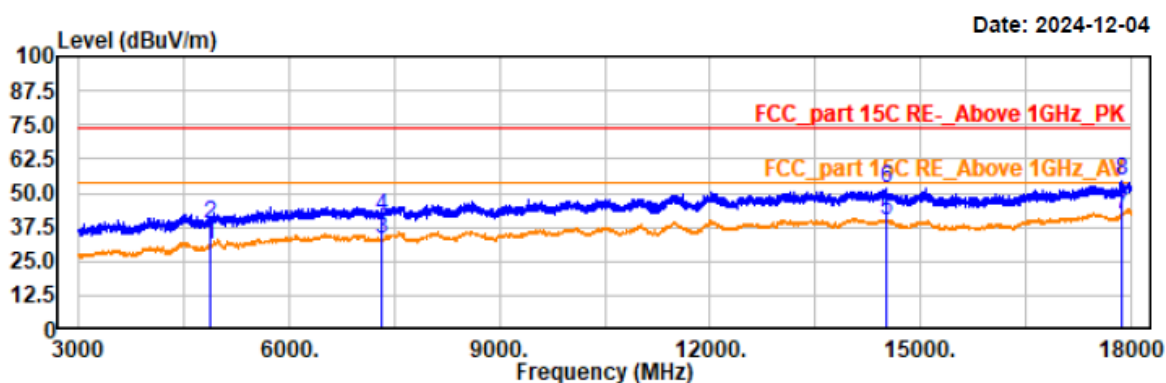


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	35.15	-4.24	30.91	54.00	23.09	vertical	Average
4882.50	43.07	-4.24	38.83	74.00	35.17	vertical	Peak
7323.00	34.75	-1.61	33.14	54.00	20.86	vertical	Average
7323.00	42.93	-1.61	41.32	74.00	32.68	vertical	Peak
14517.00	35.17	4.96	40.13	54.00	13.87	vertical	Average
14517.00	46.62	4.96	51.58	74.00	22.42	vertical	Peak
17872.50	34.60	7.50	42.10	54.00	11.90	vertical	Average
17872.50	46.99	7.50	54.49	74.00	19.51	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1-2480
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.7°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

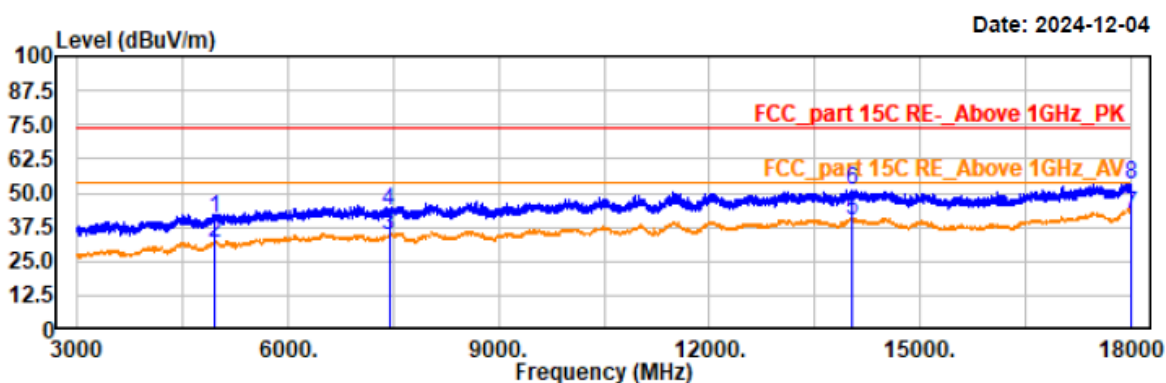

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.00	44.99	-4.01	40.98	74.00	33.02	horizontal	Peak
4960.50	35.41	-4.01	31.40	54.00	22.60	horizontal	Average
7440.00	35.87	-1.59	34.28	54.00	19.72	horizontal	Average
7440.00	44.90	-1.59	43.31	74.00	30.69	horizontal	Peak
14023.50	34.97	5.12	40.09	54.00	13.91	horizontal	Average
14023.50	46.08	5.12	51.20	74.00	22.80	horizontal	Peak
17998.50	34.63	7.74	42.37	54.00	11.63	horizontal	Average
17998.50	45.67	7.74	53.41	74.00	20.59	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 2DH1-2480


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.7℃/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

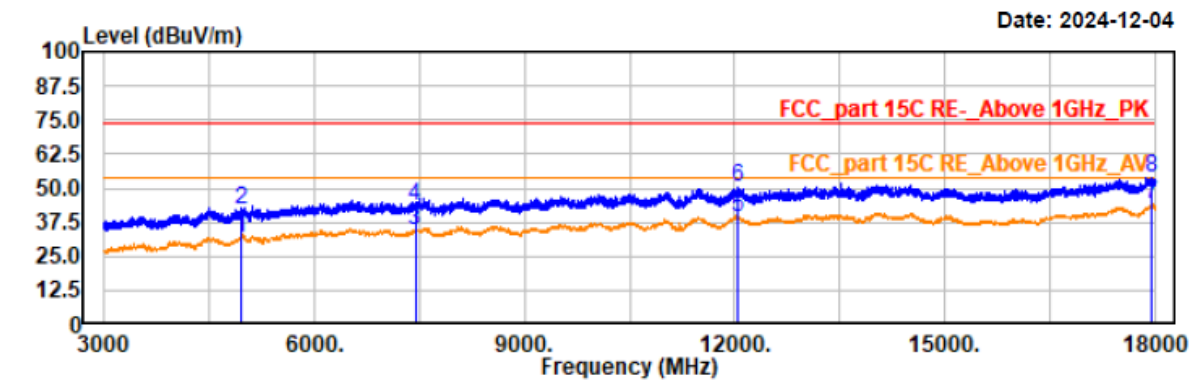

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.00	35.54	-4.01	31.53	54.00	22.47	vertical	Average
4960.50	45.78	-4.01	41.77	74.00	32.23	vertical	Peak
7440.00	35.83	-1.59	34.24	54.00	19.76	vertical	Average
7440.00	44.82	-1.59	43.23	74.00	30.77	vertical	Peak
12049.50	35.29	4.16	39.45	54.00	14.55	vertical	Average
12049.50	45.99	4.16	50.15	74.00	23.85	vertical	Peak
17961.00	36.42	7.68	44.10	54.00	9.90	vertical	Average
17961.00	46.04	7.68	53.72	74.00	20.28	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1-2402
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.7°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

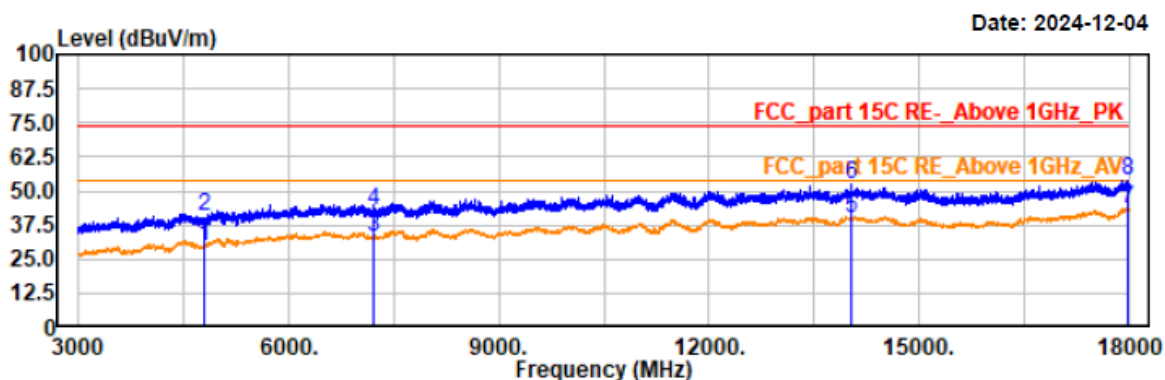
**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.00	33.83	-4.45	29.38	54.00	24.62	horizontal	Average
4804.00	45.03	-4.45	40.58	74.00	33.42	horizontal	Peak
7206.00	34.56	-1.73	32.83	54.00	21.17	horizontal	Average
7206.00	44.20	-1.73	42.47	74.00	31.53	horizontal	Peak
14041.50	34.88	5.15	40.03	54.00	13.97	horizontal	Average
14041.50	47.11	5.15	52.26	74.00	21.74	horizontal	Peak
17979.00	35.77	7.71	43.48	54.00	10.52	horizontal	Average
17979.00	46.10	7.71	53.81	74.00	20.19	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1-2402
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.7°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

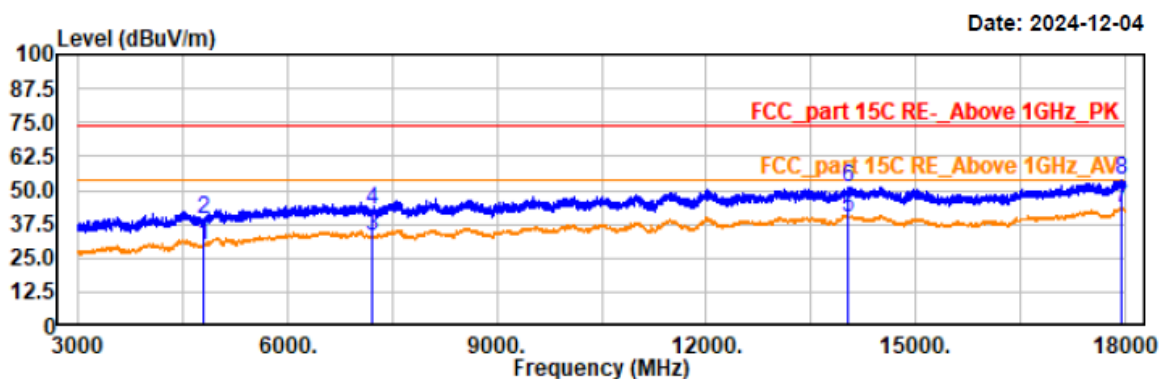

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.00	34.28	-4.45	29.83	54.00	24.17	vertical	Average
4804.50	43.45	-4.45	39.00	74.00	35.00	vertical	Peak
7206.00	34.81	-1.73	33.08	54.00	20.92	vertical	Average
7206.00	44.66	-1.73	42.93	74.00	31.07	vertical	Peak
14037.00	34.87	5.14	40.01	54.00	13.99	vertical	Average
14037.00	45.97	5.14	51.11	74.00	22.89	vertical	Peak
17943.00	35.53	7.65	43.18	54.00	10.82	vertical	Average
17943.00	46.12	7.65	53.77	74.00	20.23	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1-2441
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.7°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

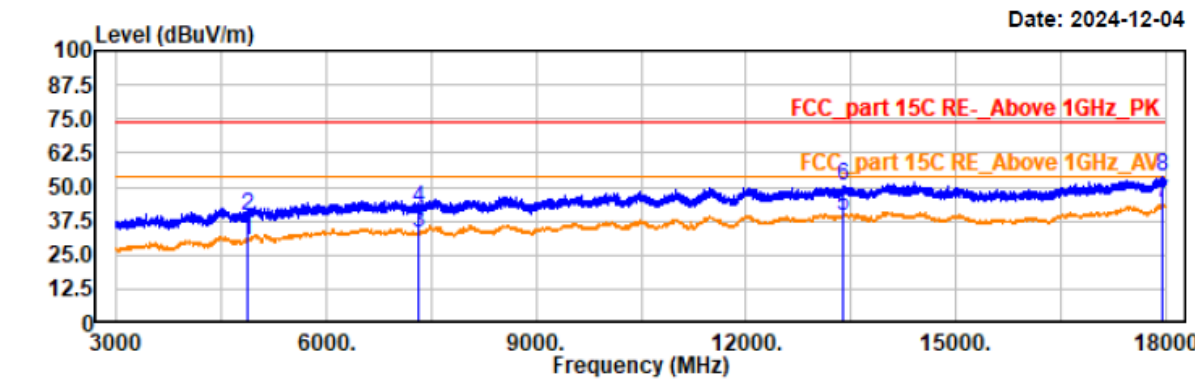


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.00	34.83	-4.25	30.58	54.00	23.42	horizontal	Average
4882.00	43.79	-4.25	39.54	74.00	34.46	horizontal	Peak
7323.00	35.04	-1.61	33.43	54.00	20.57	horizontal	Average
7323.00	43.38	-1.61	41.77	74.00	32.23	horizontal	Peak
13392.00	34.81	4.85	39.66	54.00	14.34	horizontal	Average
13392.00	45.26	4.85	50.11	74.00	23.89	horizontal	Peak
17959.50	36.32	7.67	43.99	54.00	10.01	horizontal	Average
17959.50	45.82	7.67	53.49	74.00	20.51	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1-2441
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.7°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

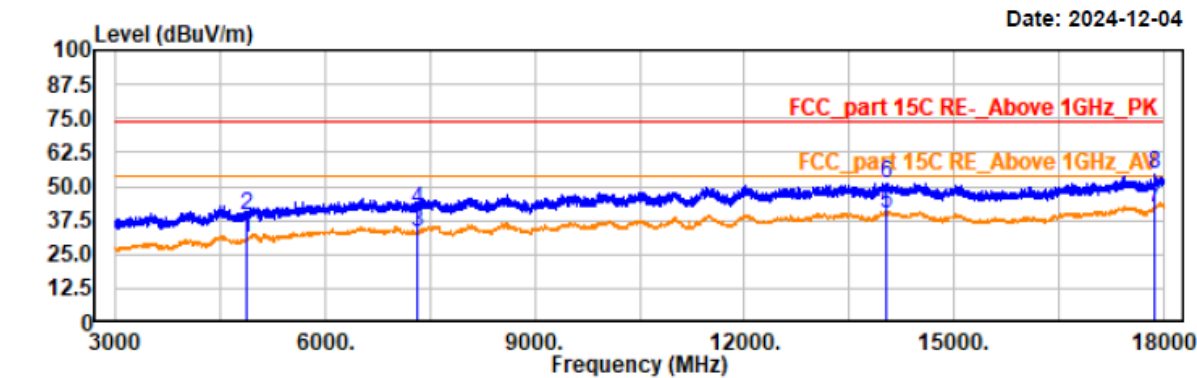

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.00	35.05	-4.25	30.80	54.00	23.20	vertical	Average
4882.50	43.40	-4.24	39.16	74.00	34.84	vertical	Peak
7323.00	34.98	-1.61	33.37	54.00	20.63	vertical	Average
7323.00	42.87	-1.61	41.26	74.00	32.74	vertical	Peak
14043.00	34.86	5.15	40.01	54.00	13.99	vertical	Average
14043.00	46.07	5.15	51.22	74.00	22.78	vertical	Peak
17878.50	34.74	7.51	42.25	54.00	11.75	vertical	Average
17878.50	46.74	7.51	54.25	74.00	19.75	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1-2480
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.7°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

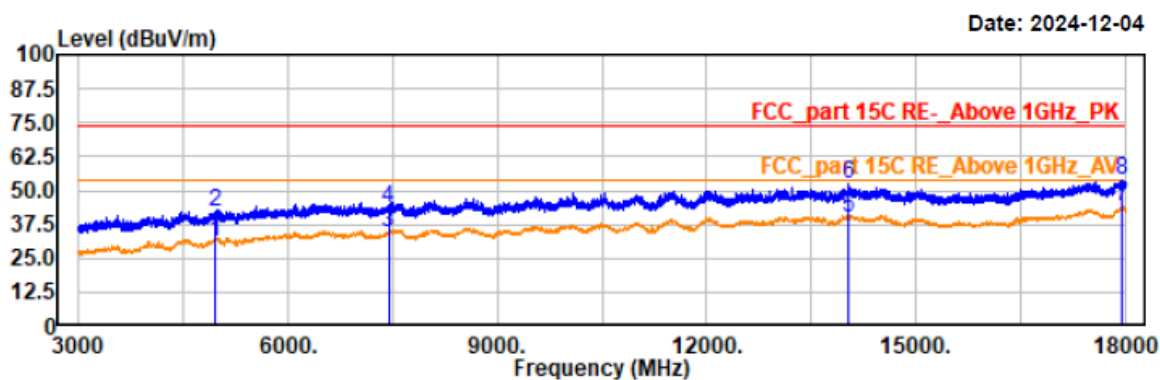


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.00	35.38	-4.01	31.37	54.00	22.63	horizontal	Average
4960.00	45.74	-4.01	41.73	74.00	32.27	horizontal	Peak
7440.00	35.89	-1.59	34.30	54.00	19.70	horizontal	Average
7440.00	45.01	-1.59	43.42	74.00	30.58	horizontal	Peak
14037.00	35.14	5.14	40.28	54.00	13.72	horizontal	Average
14037.00	46.95	5.14	52.09	74.00	21.91	horizontal	Peak
17962.50	36.14	7.68	43.82	54.00	10.18	horizontal	Average
17962.50	45.97	7.68	53.65	74.00	20.35	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1-2480
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.7°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

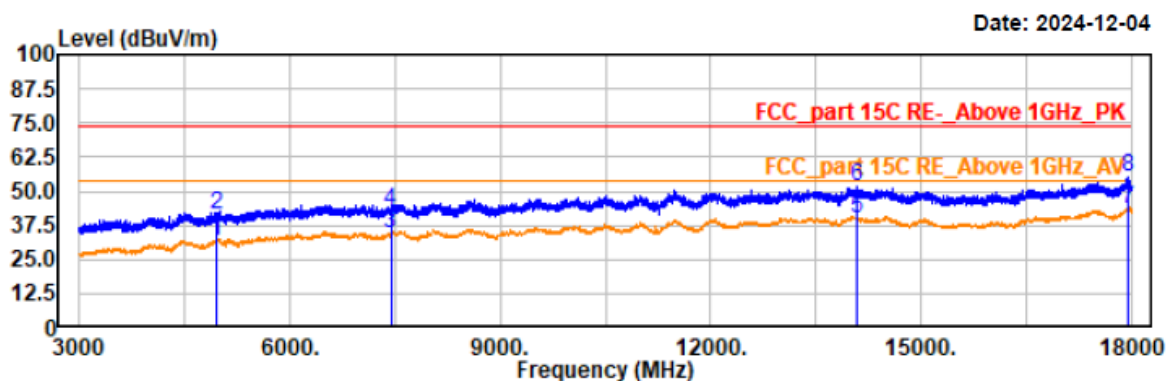

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	35.62	-4.01	31.61	54.00	22.39	vertical	Average
4960.50	45.66	-4.01	41.65	74.00	32.35	vertical	Peak
7440.00	35.88	-1.59	34.29	54.00	19.71	vertical	Average
7440.00	44.55	-1.59	42.96	74.00	31.04	vertical	Peak
14080.50	35.11	5.20	40.31	54.00	13.69	vertical	Average
14080.50	46.25	5.20	51.45	74.00	22.55	vertical	Peak
17946.00	35.59	7.66	43.25	54.00	10.75	vertical	Average
17946.00	47.47	7.66	55.13	74.00	18.87	vertical	Peak

3 GHz-18 GHz**EUT Model: NLS-NQuire700**

Project No.: 2407V20721E-RF

Test Mode: 1DH1 2402


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.1°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

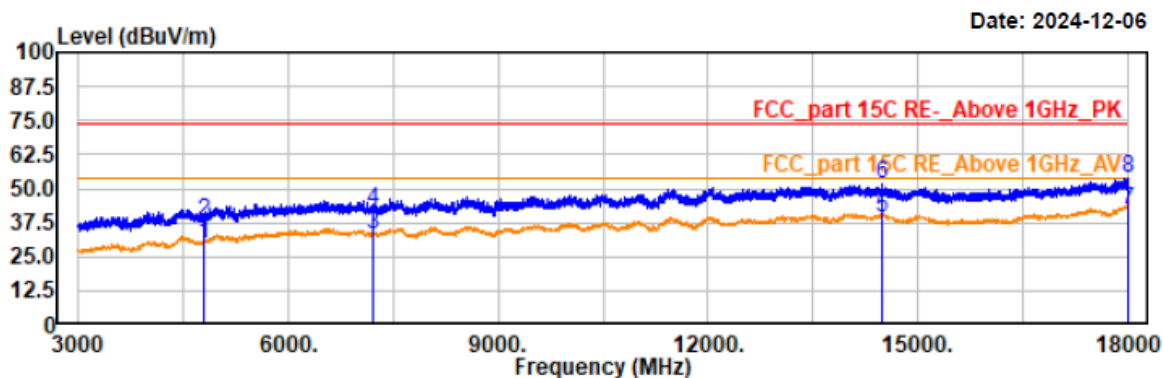**Trace: 1**


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	34.33	-4.45	29.88	54.00	24.12	horizontal	Average
4804.50	42.65	-4.45	38.20	74.00	35.80	horizontal	Peak
7206.00	34.92	-1.73	33.19	54.00	20.81	horizontal	Average
7206.00	43.52	-1.73	41.79	74.00	32.21	horizontal	Peak
14490.00	34.40	4.99	39.39	54.00	14.61	horizontal	Average
14490.00	46.47	4.99	51.46	74.00	22.54	horizontal	Peak
17998.50	34.53	7.74	42.27	54.00	11.73	horizontal	Average
17998.50	46.14	7.74	53.88	74.00	20.12	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 1DH1 2402
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.1°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

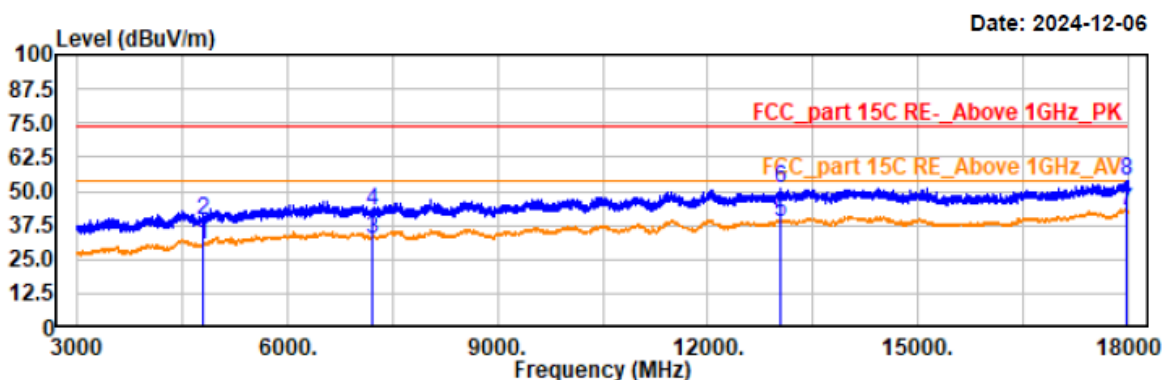

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	34.64	-4.45	30.19	54.00	23.81	vertical	Average
4804.50	43.63	-4.45	39.18	74.00	34.82	vertical	Peak
7206.00	34.38	-1.73	32.65	54.00	21.35	vertical	Average
7206.00	44.66	-1.73	42.93	74.00	31.07	vertical	Peak
13041.00	33.68	5.14	38.82	54.00	15.18	vertical	Average
13041.00	46.02	5.14	51.16	74.00	22.84	vertical	Peak
17973.00	35.36	7.70	43.06	54.00	10.94	vertical	Average
17973.00	46.08	7.70	53.78	74.00	20.22	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 1DH1 2441


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.1℃/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

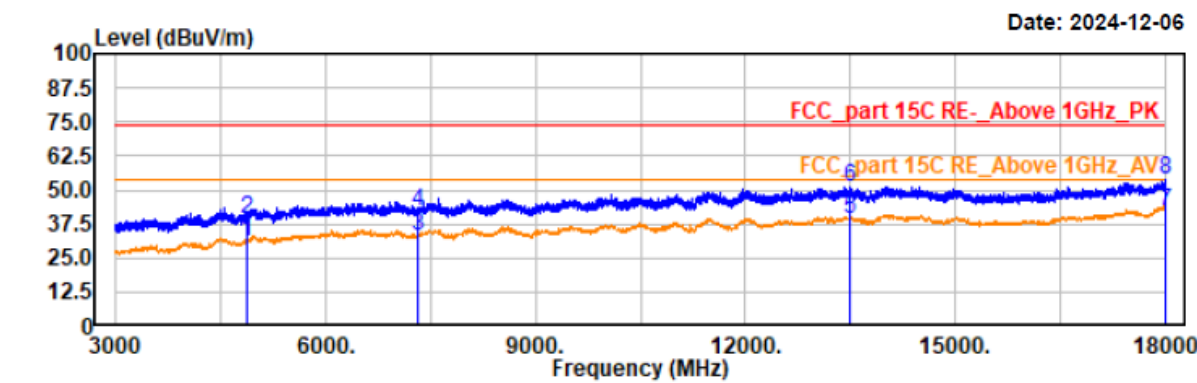


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	35.42	-4.24	31.18	54.00	22.82	horizontal	Average
4882.50	43.37	-4.24	39.13	74.00	34.87	horizontal	Peak
7323.00	34.89	-1.61	33.28	54.00	20.72	horizontal	Average
7323.00	43.38	-1.61	41.77	74.00	32.23	horizontal	Peak
13495.50	34.44	4.82	39.26	54.00	14.74	horizontal	Average
13495.50	46.55	4.82	51.37	74.00	22.63	horizontal	Peak
17997.00	34.48	7.74	42.22	54.00	11.78	horizontal	Average
17997.00	45.82	7.74	53.56	74.00	20.44	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 1DH1 2441
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.1°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

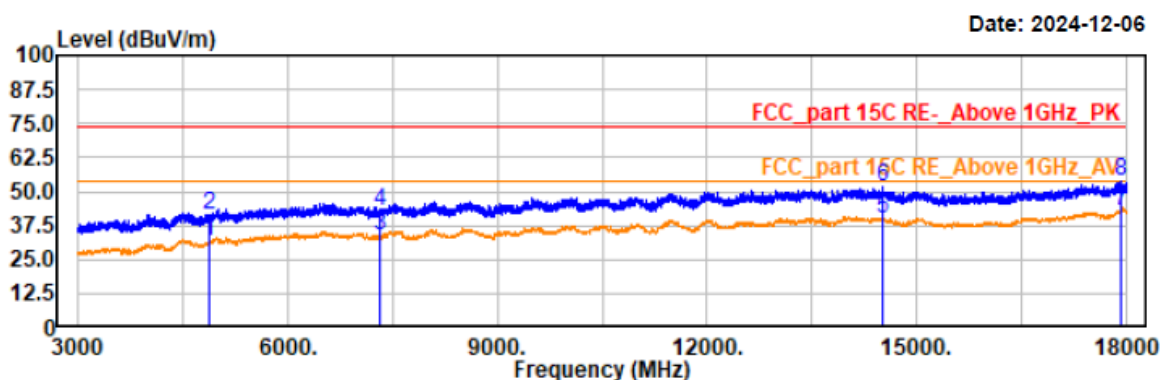
**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	35.70	-4.24	31.46	54.00	22.54	vertical	Average
4882.50	45.55	-4.24	41.31	74.00	32.69	vertical	Peak
7323.00	35.16	-1.61	33.55	54.00	20.45	vertical	Average
7323.00	44.05	-1.61	42.44	74.00	31.56	vertical	Peak
14503.50	35.07	4.98	40.05	54.00	13.95	vertical	Average
14503.50	46.64	4.98	51.62	74.00	22.38	vertical	Peak
17929.50	34.90	7.64	42.54	54.00	11.46	vertical	Average
17929.50	46.02	7.64	53.66	74.00	20.34	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 1DH1 2480
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.1°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

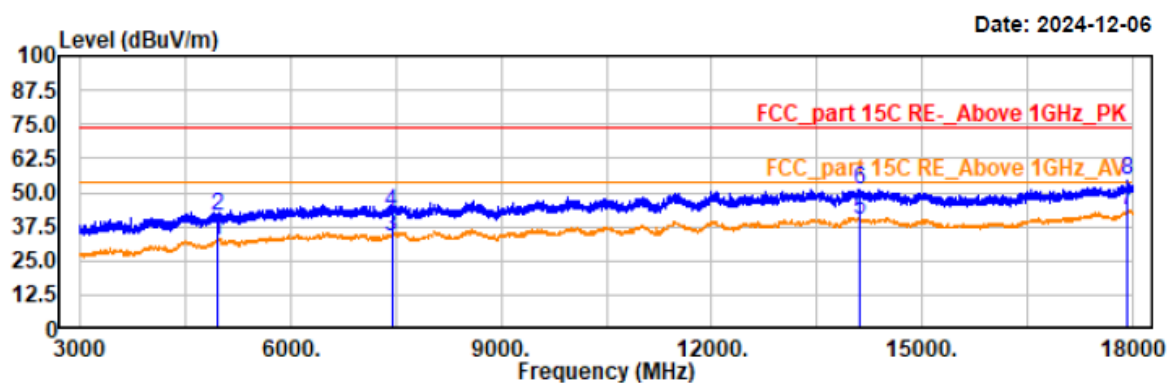

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	36.60	-4.01	32.59	54.00	21.41	horizontal	Average
4960.50	45.16	-4.01	41.15	74.00	32.85	horizontal	Peak
7440.00	35.70	-1.59	34.11	54.00	19.89	horizontal	Average
7440.00	44.53	-1.59	42.94	74.00	31.06	horizontal	Peak
14112.00	34.51	5.23	39.74	54.00	14.26	horizontal	Average
14112.00	45.85	5.23	51.08	74.00	22.92	horizontal	Peak
17925.00	35.67	7.63	43.30	54.00	10.70	horizontal	Average
17925.00	46.85	7.63	54.48	74.00	19.52	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 1DH1 2480
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.1°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

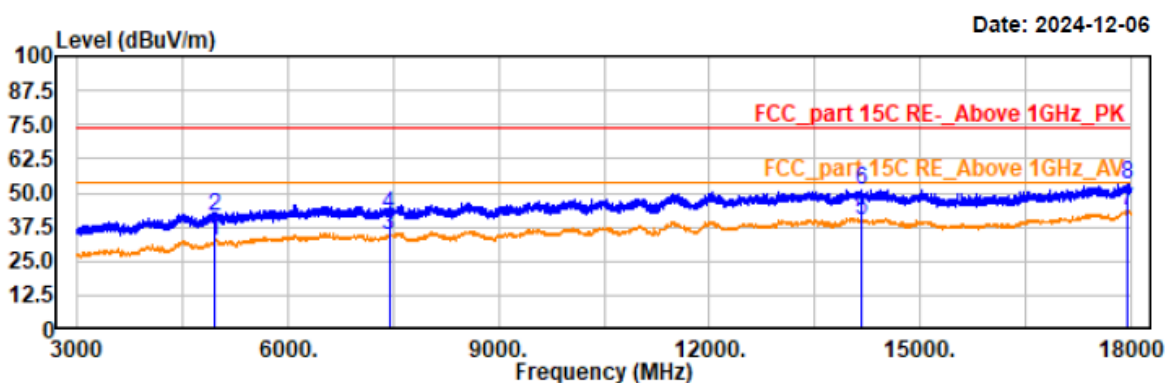

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	36.42	-4.01	32.41	54.00	21.59	vertical	Average
4960.50	45.49	-4.01	41.48	74.00	32.52	vertical	Peak
7440.00	35.79	-1.59	34.20	54.00	19.80	vertical	Average
7440.00	43.53	-1.59	41.94	74.00	32.06	vertical	Peak
14163.00	34.81	5.25	40.06	54.00	13.94	vertical	Average
14163.00	45.85	5.25	51.10	74.00	22.90	vertical	Peak
17950.50	35.95	7.67	43.62	54.00	10.38	vertical	Average
17950.50	45.68	7.67	53.35	74.00	20.65	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 2DH1 2402


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.1℃/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

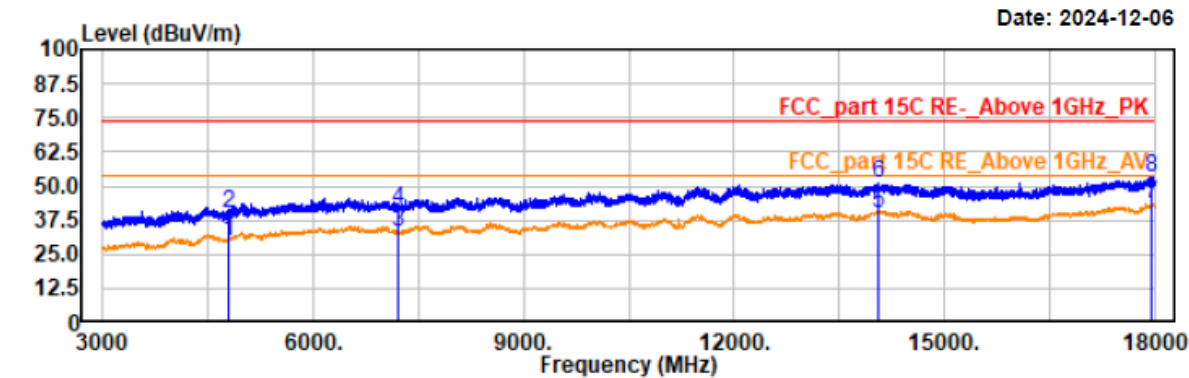

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	34.39	-4.45	29.94	54.00	24.06	horizontal	Average
4804.50	44.52	-4.45	40.07	74.00	33.93	horizontal	Peak
7206.00	34.94	-1.73	33.21	54.00	20.79	horizontal	Average
7206.00	43.45	-1.73	41.72	74.00	32.28	horizontal	Peak
14047.50	34.63	5.16	39.79	54.00	14.21	horizontal	Average
14047.50	45.68	5.16	50.84	74.00	23.16	horizontal	Peak
17941.50	35.53	7.65	43.18	54.00	10.82	horizontal	Average
17941.50	45.73	7.65	53.38	74.00	20.62	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 2DH1 2402


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.1℃/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

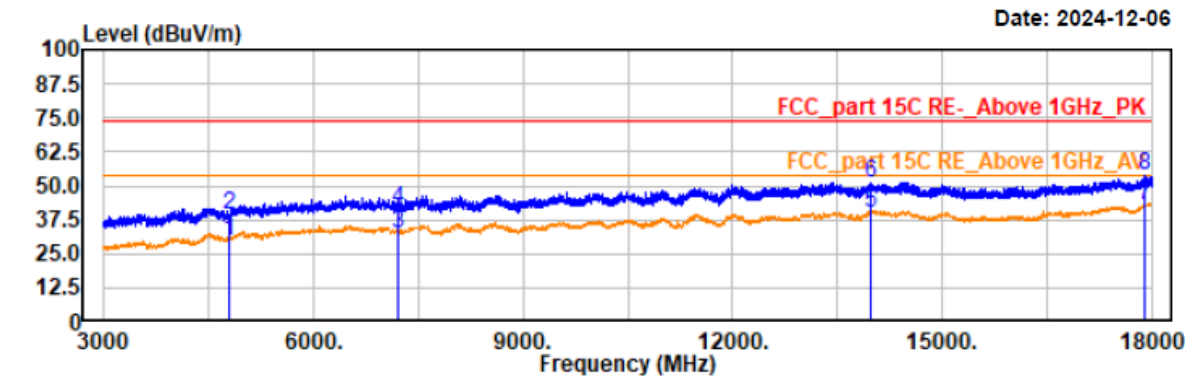


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	34.25	-4.45	29.80	54.00	24.20	vertical	Average
4804.50	44.04	-4.45	39.59	74.00	34.41	vertical	Peak
7206.00	34.31	-1.73	32.58	54.00	21.42	vertical	Average
7206.00	43.02	-1.73	41.29	74.00	32.71	vertical	Peak
13966.50	34.77	5.10	39.87	54.00	14.13	vertical	Average
13966.50	46.28	5.10	51.38	74.00	22.62	vertical	Peak
17905.50	35.19	7.60	42.79	54.00	11.21	vertical	Average
17905.50	45.92	7.60	53.52	74.00	20.48	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1 2441
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.1℃/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

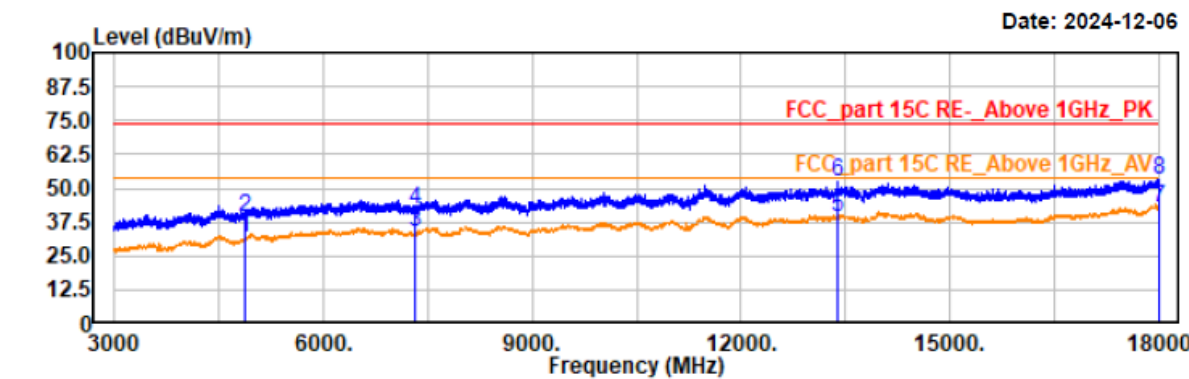


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	35.88	-4.24	31.64	54.00	22.36	horizontal	Average
4882.50	43.39	-4.24	39.15	74.00	34.85	horizontal	Peak
7323.00	35.07	-1.61	33.46	54.00	20.54	horizontal	Average
7323.00	43.88	-1.61	42.27	74.00	31.73	horizontal	Peak
13387.50	34.17	4.86	39.03	54.00	14.97	horizontal	Average
13387.50	47.37	4.86	52.23	74.00	21.77	horizontal	Peak
17998.50	34.97	7.74	42.71	54.00	11.29	horizontal	Average
17998.50	45.55	7.74	53.29	74.00	20.71	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1 2441
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.1°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

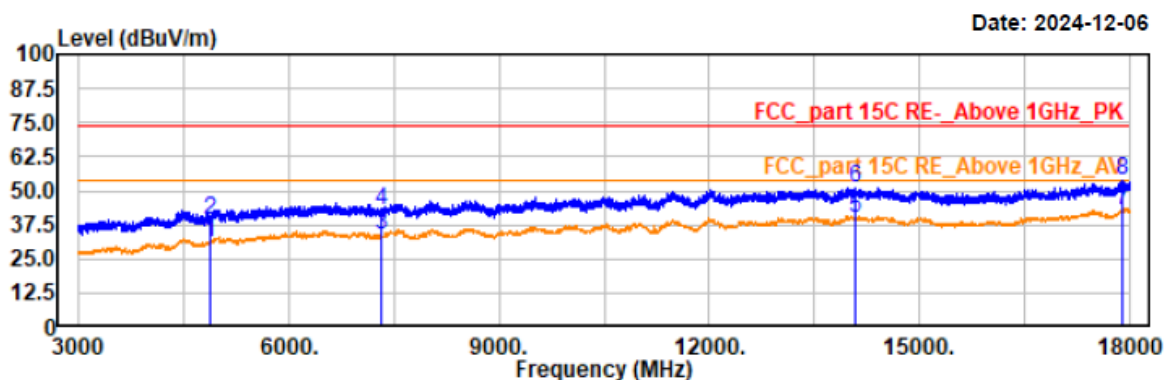**Trace: 1**


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	35.55	-4.24	31.31	54.00	22.69	vertical	Average
4882.50	43.68	-4.24	39.44	74.00	34.56	vertical	Peak
7323.00	35.15	-1.61	33.54	54.00	20.46	vertical	Average
7323.00	44.13	-1.61	42.52	74.00	31.48	vertical	Peak
14092.50	34.62	5.23	39.85	54.00	14.15	vertical	Average
14092.50	45.71	5.23	50.94	74.00	23.06	vertical	Peak
17899.50	34.96	7.59	42.55	54.00	11.45	vertical	Average
17899.50	45.95	7.59	53.54	74.00	20.46	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1 2480
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.1°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

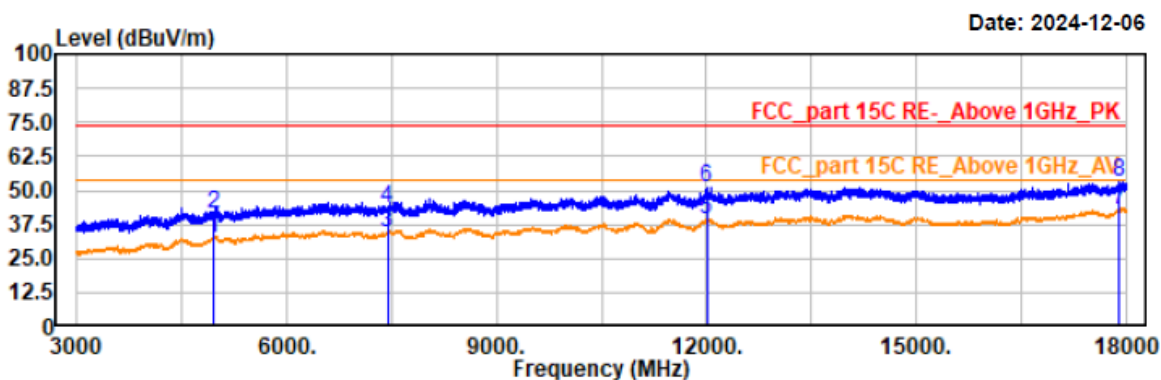


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	36.28	-4.01	32.27	54.00	21.73	horizontal	Average
4960.50	45.08	-4.01	41.07	74.00	32.93	horizontal	Peak
7440.00	35.86	-1.59	34.27	54.00	19.73	horizontal	Average
7440.00	45.26	-1.59	43.67	74.00	30.33	horizontal	Peak
12004.50	35.15	4.24	39.39	54.00	14.61	horizontal	Average
12004.50	46.91	4.24	51.15	74.00	22.85	horizontal	Peak
17899.50	34.99	7.59	42.58	54.00	11.42	horizontal	Average
17899.50	45.26	7.59	52.85	74.00	21.15	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 2DH1 2480
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.1°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

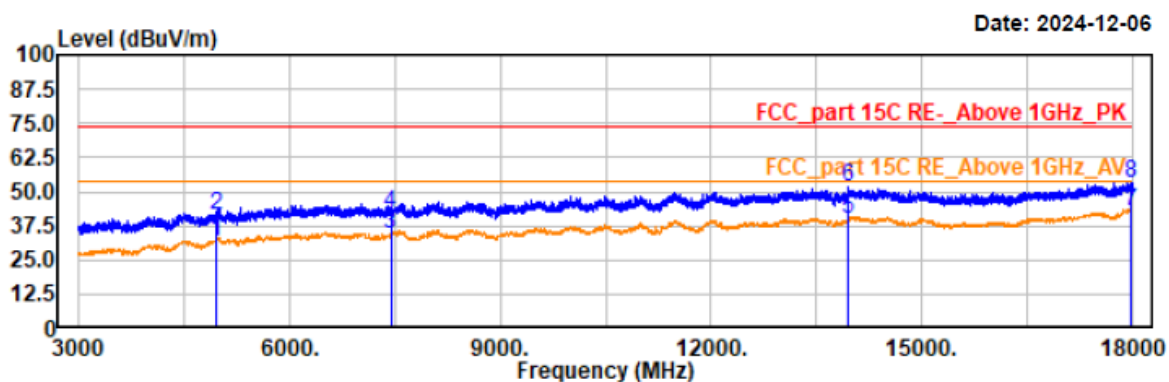**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	35.97	-4.01	31.96	54.00	22.04	vertical	Average
4960.50	45.68	-4.01	41.67	74.00	32.33	vertical	Peak
7440.00	35.76	-1.59	34.17	54.00	19.83	vertical	Average
7440.00	43.81	-1.59	42.22	74.00	31.78	vertical	Peak
13950.00	34.74	5.11	39.85	54.00	14.15	vertical	Average
13950.00	46.75	5.11	51.86	74.00	22.14	vertical	Peak
17973.00	35.33	7.70	43.03	54.00	10.97	vertical	Average
17973.00	45.35	7.70	53.05	74.00	20.95	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 3DH1 2402


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.1°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

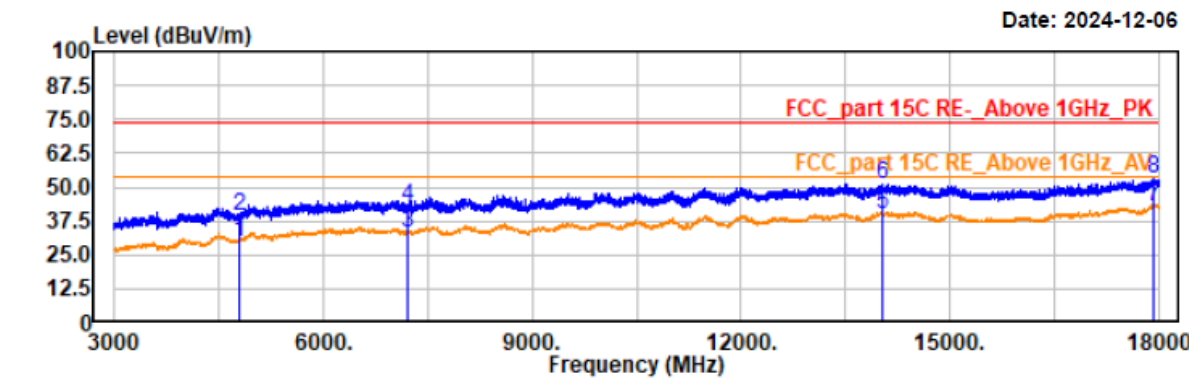


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	34.30	-4.45	29.85	54.00	24.15	horizontal	Average
4804.50	43.48	-4.45	39.03	74.00	34.97	horizontal	Peak
7206.00	34.61	-1.73	32.88	54.00	21.12	horizontal	Average
7206.00	44.70	-1.73	42.97	74.00	31.03	horizontal	Peak
14028.00	34.89	5.13	40.02	54.00	13.98	horizontal	Average
14028.00	45.85	5.13	50.98	74.00	23.02	horizontal	Peak
17932.50	34.79	7.63	42.42	54.00	11.58	horizontal	Average
17932.50	45.72	7.63	53.35	74.00	20.65	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1 2402
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.1°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

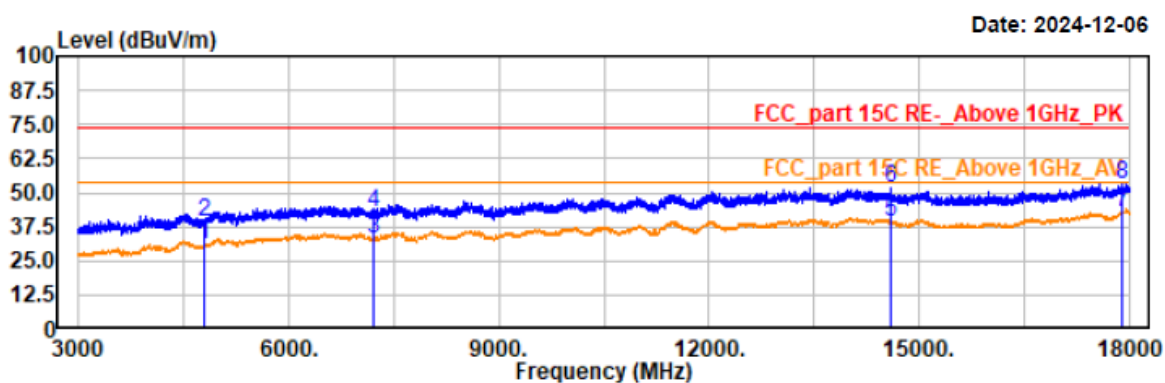


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	35.16	-4.45	30.71	54.00	23.29	vertical	Average
4804.50	43.79	-4.45	39.34	74.00	34.66	vertical	Peak
7206.00	34.66	-1.73	32.93	54.00	21.07	vertical	Average
7206.00	44.15	-1.73	42.42	74.00	31.58	vertical	Peak
14598.00	34.28	4.88	39.16	54.00	14.84	vertical	Average
14598.00	46.63	4.88	51.51	74.00	22.49	vertical	Peak
17898.00	35.06	7.58	42.64	54.00	11.36	vertical	Average
17898.00	45.42	7.58	53.00	74.00	21.00	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1 2441
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.1°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

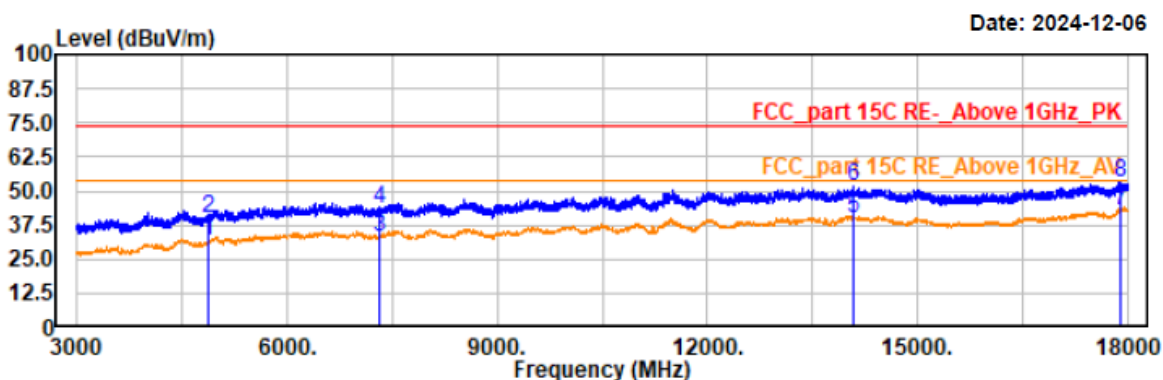
**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	35.64	-4.24	31.40	54.00	22.60	horizontal	Average
4882.50	44.22	-4.24	39.98	74.00	34.02	horizontal	Peak
7323.00	35.05	-1.61	33.44	54.00	20.56	horizontal	Average
7323.00	44.82	-1.61	43.21	74.00	30.79	horizontal	Peak
14083.50	34.64	5.21	39.85	54.00	14.15	horizontal	Average
14083.50	46.65	5.21	51.86	74.00	22.14	horizontal	Peak
17896.50	35.18	7.58	42.76	54.00	11.24	horizontal	Average
17896.50	45.69	7.58	53.27	74.00	20.73	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 3DH1 2441
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.1°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

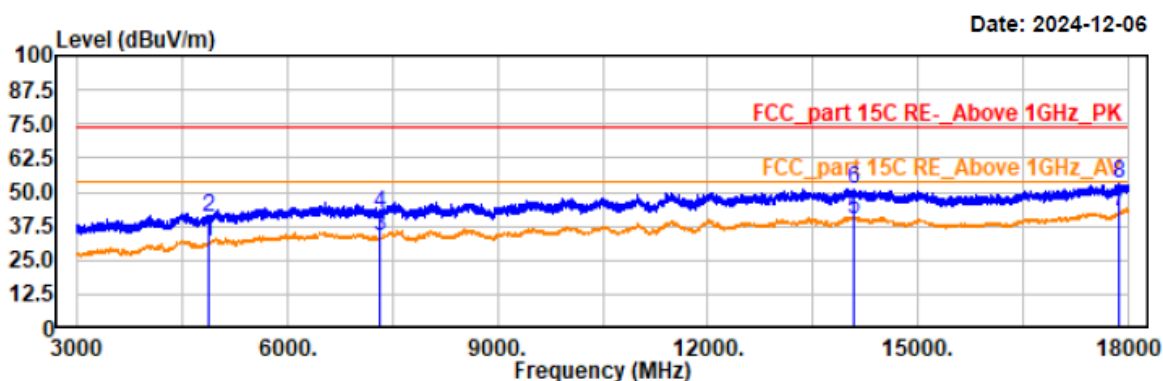

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.50	35.63	-4.24	31.39	54.00	22.61	vertical	Average
4882.50	44.89	-4.24	40.65	74.00	33.35	vertical	Peak
7323.00	35.55	-1.61	33.94	54.00	20.06	vertical	Average
7323.00	43.55	-1.61	41.94	74.00	32.06	vertical	Peak
14080.50	34.48	5.20	39.68	54.00	14.32	vertical	Average
14080.50	46.03	5.20	51.23	74.00	22.77	vertical	Peak
17871.00	35.02	7.49	42.51	54.00	11.49	vertical	Average
17871.00	45.38	7.49	52.87	74.00	21.13	vertical	Peak