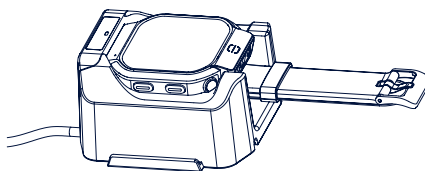
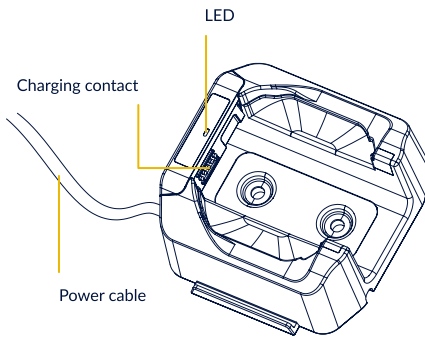
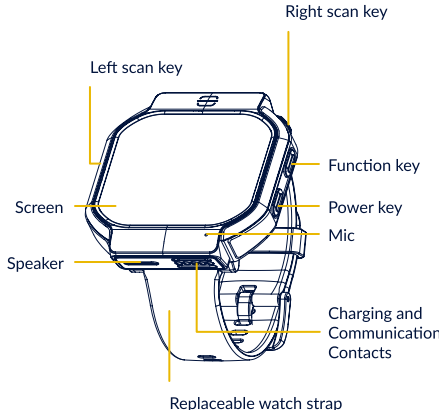




70.00 mm 100.00 mm	Charging the battery  Before your first use, please make sure the power is fully charged via the included charging cradle. About the charging cradle 	About the Industrial Smartwatch 	Safety guidelines 1 Do not charge the device in a hot or humid environment. The low environmental temperature will affect charging efficiency. 2 The terminal contains a built-in battery. Please do not try to replace it yourself to avoid damage. 3 Do not use the terminal's wireless functionalities where wireless device use is prohibited or where it may cause interference or danger, such as in mines or gas stations. 4 Use only a dry, soft cloth to clean the terminal. Cleaning with a wet cloth or benzene/thinner/other volatile chemicals may deform and shorten the service life of the keypad and shell of the terminal. 5 The environment temperature should not be too low or high during use. This could cause malfunction. Please use the terminal under the permitted temperature. 6 If the terminal is damaged due to a drop from a high place or water, please contact the service center. Do not try to repair it yourself. 7 Please charge the device in an environment above 0 degrees Celsius (32 degrees Fahrenheit).
	Connect to the cradle  Step 1: Place the smartwatch on the charging cradle as shown in the figure.  Step 2: Ensure the cradle is securely connected to a power source. When the connection is successfully established, the red LED will turn on. Quick settings Power key 1 When the terminal is powered off, hold down the power key for 3 seconds to switch the terminal on. 2 When the terminal is powered on, briefly press the power key to lock the screen. Function key 1 The user-defined key will be set as "Home Key" by default. 2 To reset the user-defined key: go to "Quick Setting" > "Key Map", then set the parameters per your needs. Touch the screen 1 Back to previous page: swipe inward from the left or right edge of the screen. 2 Back to the desktop: swipe the screen from bottom to top. 3 Switch to new task: swipe the screen from bottom to top, then hold on until the recently used apps display.	Support information NLS-WD5 Name: WD5 Industrial Smartwatch Manufacturer: Newland EMEA All technical information are subject to the actual performance, Newland reserve the right of final explanations. Newland Europe BV Rolweg 25 4104 AV Culemborg The Netherlands For more information and technical support, please visit newland-id.com/contact  QSG PN: 1060091376 	 WD5 Industrial Smartwatch  Quick Guide V1.0

FCC Statement	FCC Radiation Exposure Statement
Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.	Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna - Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. - Consult the dealer or an experienced radio/TV technician for help. SAR tests are conducted using standard operating positions accepted by the FCC with the device transmitting at its highest certified power level in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value. Before a new device is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the exposure limit established by the FCC. Tests for each device are performed in positions and locations as required by the FCC. For face-up, 10mm was used for test, this equipment should be installed and operated with minimum distance 10mm.	For limb worn operation, this device has been tested and meets the FCC RF exposure guidelines. Non-compliance with the above restrictions may result in violation of RF exposure guidelines.