




802.11ax/40MHz/MCS0/2422MHz/Ch3 (Ref.)

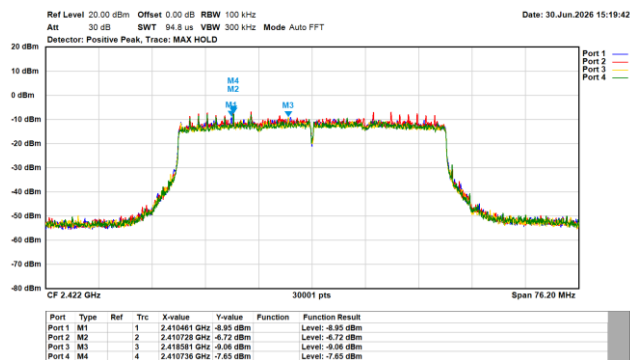


802.11ax/40MHz/MCS0/2422MHz/Ch3

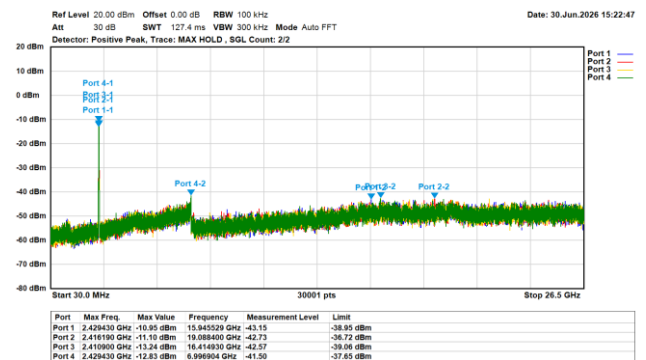


802.11ax/40MHz/MCS0/2437MHz/Ch6 (Ref.)

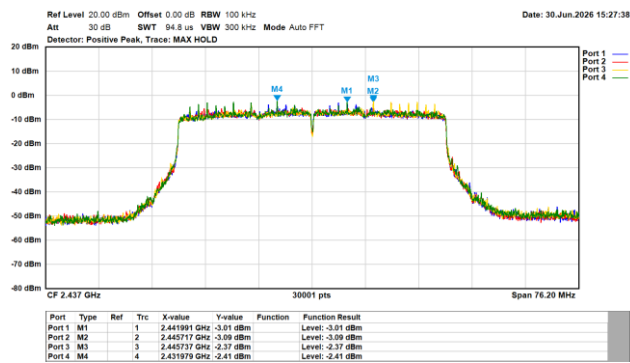


802.11ax/40MHz/MCS0/2437MHz/Ch6

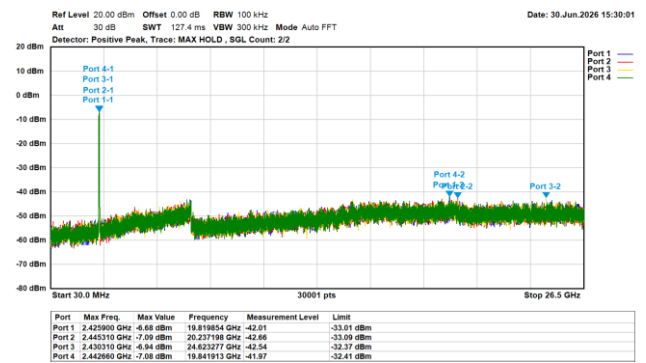


802.11ax/40MHz/MCS0/2452MHz/Ch9 (Ref.)

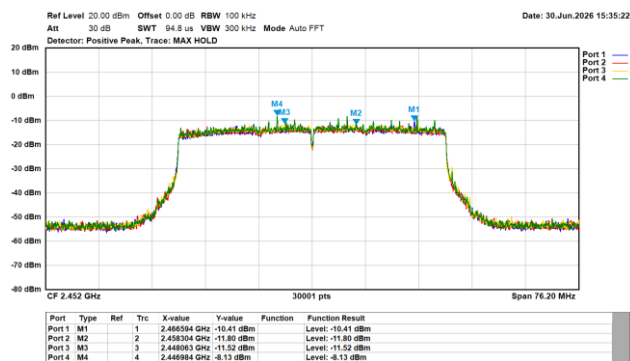


802.11ax/40MHz/MCS0/2452MHz/Ch9

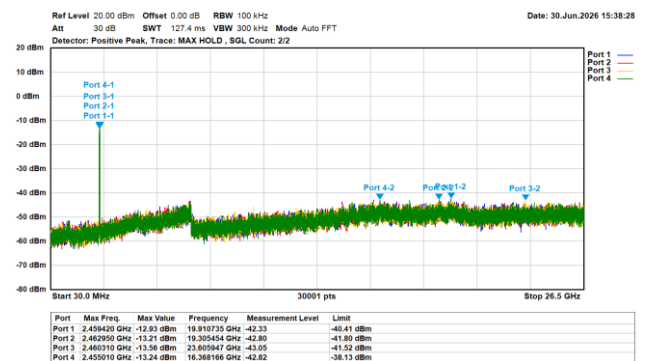


802.11b/20MHz/1M/2412MHz/Ch1(Band Edge)

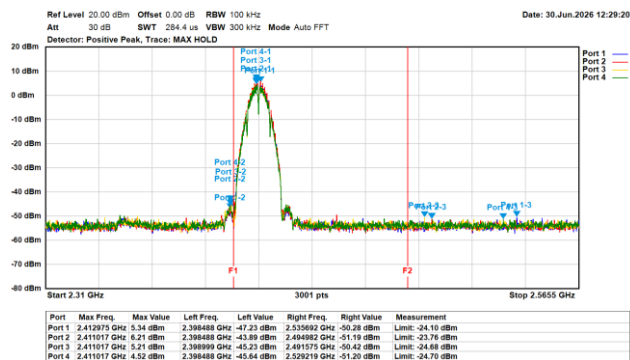


802.11b/20MHz/1M/2462MHz/Ch11(Band Edge)

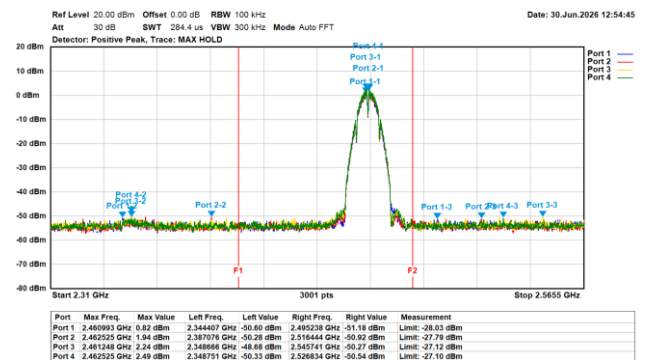


802.11g/20MHz/6M/2412MHz/Ch1(Band Edge)

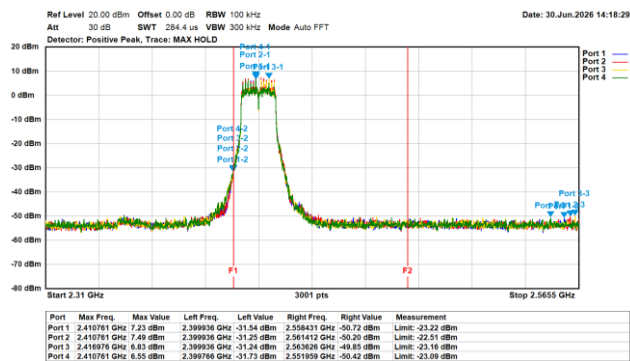


802.11g/20MHz/6M/2462MHz/Ch11(Band Edge)

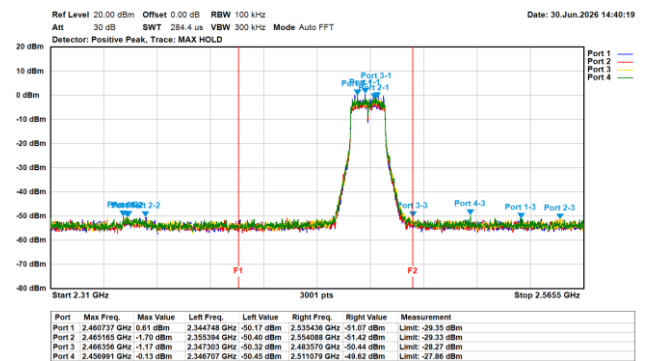


802.11ax/20MHz/MCS0/2412MHz/Ch1(Band Edge)

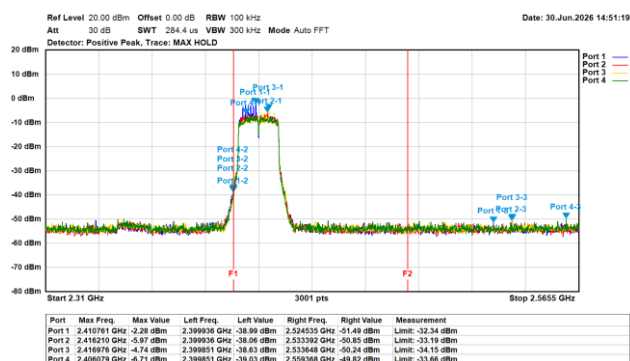


802.11ax/20MHz/MCS0/2462MHz/Ch11(Band Edge)

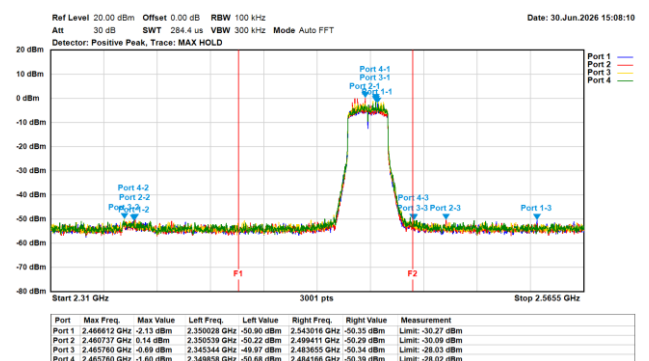

802.11ax/40MHz/MCS0/2422MHz/Ch3(Band Edge)

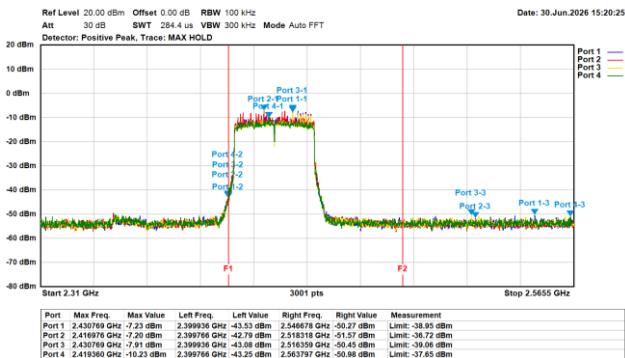


802.11ax/40MHz/MCS0/2452MHz/Ch9(Band Edge)

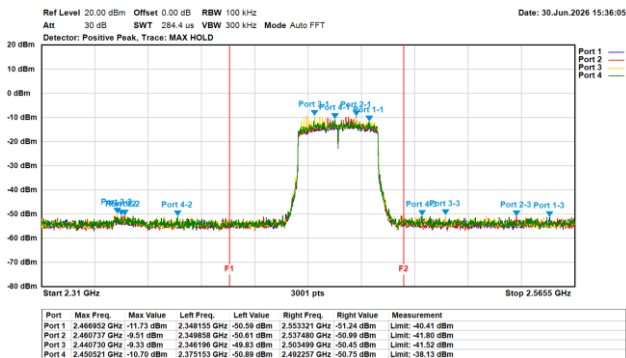


Appendix F. Test Result of Radiated Emission

TX_b_2412MHz_H

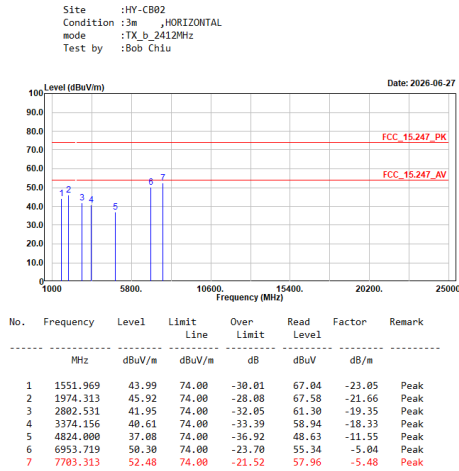


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_V

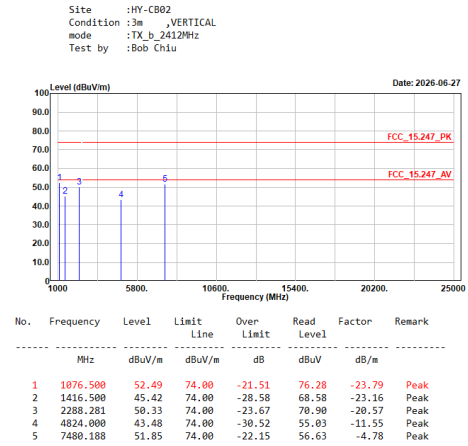


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_H

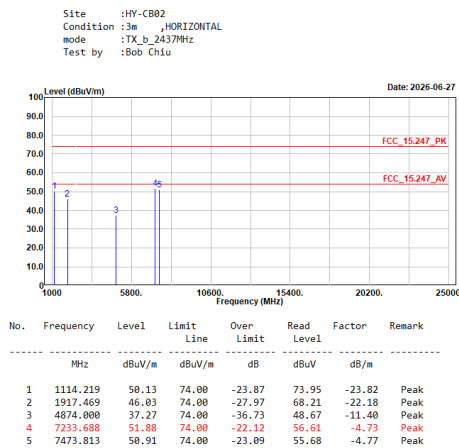

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_b_2437MHz_V

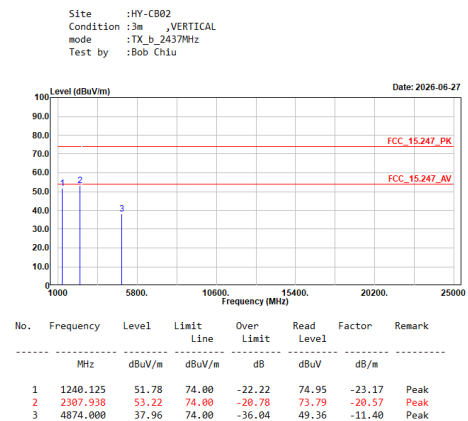

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2462MHz
Test by :Bob Chiu

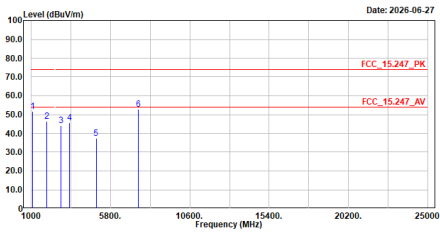


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1876.500	51.58	74.00	-22.42	75.37	-23.79	Peak
2	1941.375	46.60	74.00	-27.40	68.57	-21.97	Peak
3	2782.875	44.14	74.00	-29.86	63.62	-19.48	Peak
4	3299.781	45.55	74.00	-28.45	64.17	-18.62	Peak
5	4924.000	37.22	74.00	-36.78	48.27	-11.05	Peak
6	7466.375	52.68	74.00	-21.32	57.43	-4.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2462MHz
Test by :Bob Chiu

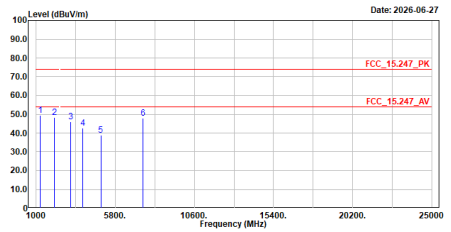


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1243.313	49.44	74.00	-24.56	72.60	-23.16	Peak
2	2101.813	48.15	74.00	-25.85	69.19	-21.04	Peak
3	3805.688	45.95	74.00	-28.05	64.82	-18.87	Peak
4	3814.563	42.65	74.00	-31.35	58.50	-15.85	Peak
5	4924.000	38.83	74.00	-35.17	49.88	-11.05	Peak
6	7489.750	48.09	74.00	-25.91	52.90	-4.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2412MHz
Test by :Bob Chiu

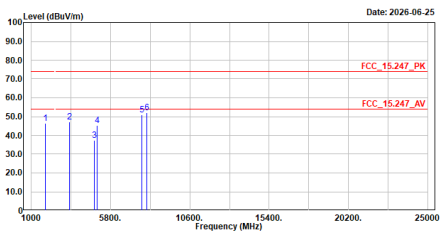


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1858.500	46.60	74.00	-27.40	68.98	-22.38	Peak
2	3303.500	47.05	74.00	-26.95	65.66	-18.61	Peak
3	4824.000	37.39	74.00	-36.61	48.94	-11.55	Peak
4	4987.031	45.13	74.00	-28.87	55.95	-10.82	Peak
5	7683.656	50.83	74.00	-23.17	56.26	-5.43	Peak
6	7998.688	52.20	74.00	-21.80	57.69	-5.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2412MHz
Test by :Bob Chiu

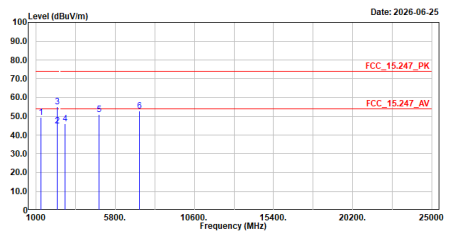


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1278.906	49.55	74.00	-24.45	72.71	-23.16	Peak
2	2284.031	44.81	54.00	-9.19	65.37	-20.56	Average
3	2284.031	55.26	74.00	-18.74	75.82	-20.56	Peak
4	2754.719	45.87	74.00	-28.13	65.56	-19.69	Peak
5	4824.000	51.09	74.00	-22.91	62.64	-11.55	Peak
6	7245.375	52.83	74.00	-21.17	57.56	-4.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2437MHz
Test by :Bob Chiu

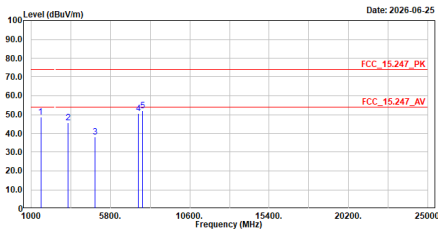


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1572.688	48.78	74.00	-25.22	71.64	-22.86	Peak
2	3229.656	45.64	74.00	-28.36	64.53	-18.89	Peak
3	4874.000	38.03	74.00	-35.97	49.43	-11.40	Peak
4	7489.156	50.46	74.00	-23.54	55.27	-4.81	Peak
5	7757.500	52.05	74.00	-21.95	57.49	-5.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2437MHz
Test by :Bob Chiu

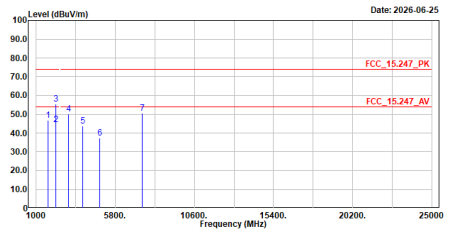


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1712.406	46.97	74.00	-27.03	69.83	-22.86	Peak
2	2214.438	44.66	54.00	-9.34	65.45	-20.79	Average
3	2214.438	55.66	74.00	-18.34	76.45	-20.79	Peak
4	2961.906	50.17	74.00	-23.83	69.29	-19.12	Peak
5	3815.094	43.73	74.00	-30.27	59.58	-15.85	Peak
6	4874.000	37.31	74.00	-36.69	48.71	-11.40	Peak
7	7445.125	50.63	74.00	-23.37	55.34	-4.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz
Test by :Bob Chiu

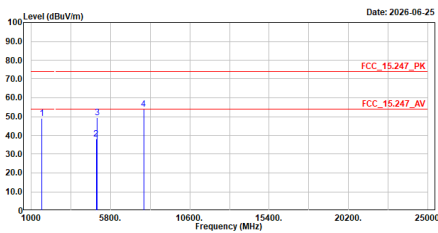


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1657.688	48.93	74.00	-25.07	71.78	-22.85	Peak
2	4924.000	38.28	74.00	-35.72	49.33	-11.05	Peak
3	4991.281	49.52	74.00	-24.48	60.34	-10.82	Peak
4	7802.656	53.85	74.00	-20.15	59.33	-5.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2462MHz
Test by :Bob Chiu

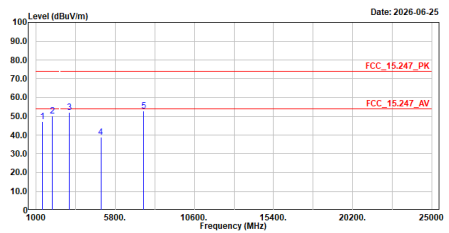


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1376.656	47.17	74.00	-26.83	70.16	-22.99	Peak
2	1990.781	50.17	74.00	-23.83	71.67	-21.50	Peak
3	2998.031	52.14	74.00	-21.86	71.20	-19.06	Peak
4	4924.000	38.76	74.00	-35.24	49.81	-11.05	Peak
5	7521.094	53.00	74.00	-21.00	57.89	-4.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2412MHz
Test by :Bob Chiu

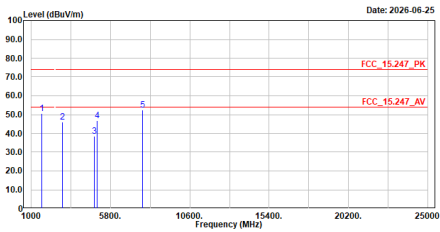


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1644.938	50.40	74.00	-23.60	73.21	-22.81	Peak
2	2895.500	46.18	74.00	-27.82	65.52	-19.34	Peak
3	4824.000	38.50	74.00	-35.50	50.05	-11.55	Peak
4	4985.969	46.81	74.00	-27.19	57.64	-10.83	Peak
5	7745.281	52.56	74.00	-21.44	58.00	-5.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2412MHz
Test by :Bob Chiu

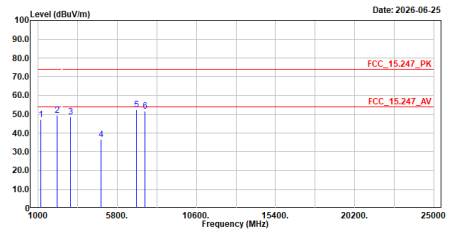


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1180.625	47.22	74.00	-26.78	70.69	-23.47	Peak
2	2153.344	49.38	74.00	-24.62	70.39	-21.01	Peak
3	2956.594	48.67	74.00	-25.33	67.80	-19.13	Peak
4	4824.000	36.63	74.00	-37.37	48.18	-11.55	Peak
5	6979.750	52.55	74.00	-21.45	57.56	-5.01	Peak
6	7494.000	51.58	74.00	-22.42	56.39	-4.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2437MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2437MHz
Test by :Bob Chiu

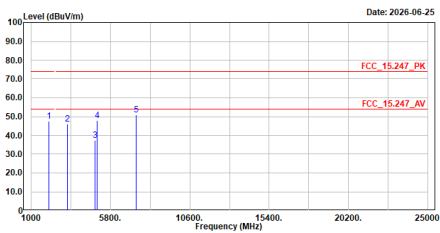


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2080.031	47.63	74.00	-26.37	68.65	-21.02	Peak
2	3190.875	45.87	74.00	-28.13	64.77	-18.90	Peak
3	4874.000	37.33	74.00	-36.67	48.73	-11.40	Peak
4	4984.375	47.87	74.00	-26.13	58.70	-10.83	Peak
5	7350.563	51.10	74.00	-22.90	55.76	-4.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2437MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2437MHz
Test by :Bob Chiu

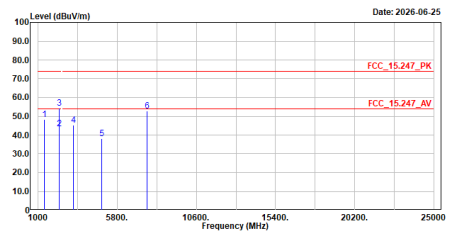


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1391.531	48.25	74.00	-25.75	71.23	-22.98	Peak
2	2267.563	43.50	54.00	-10.50	64.16	-20.66	Average
3	2267.563	54.35	74.00	-19.65	75.01	-20.66	Peak
4	3155.813	45.43	74.00	-28.57	64.24	-18.81	Peak
5	4874.000	38.10	74.00	-35.90	49.50	-11.40	Peak
6	7623.625	52.94	74.00	-21.06	58.14	-5.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2462MHz
Test by :Bob Chiu

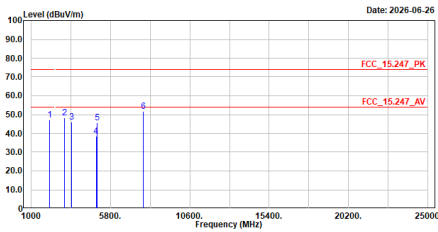


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2101.281	47.35	74.00	-26.65	68.38	-21.03	Peak
2	3001.219	48.31	74.00	-25.69	67.39	-19.08	Peak
3	3457.031	45.99	74.00	-28.01	64.00	-18.01	Peak
4	4924.000	38.34	74.00	-35.66	49.39	-11.05	Peak
5	4980.656	45.47	74.00	-28.53	56.30	-10.83	Peak
6	7785.656	51.86	74.00	-22.14	57.33	-5.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2462MHz
Test by :Bob Chiu

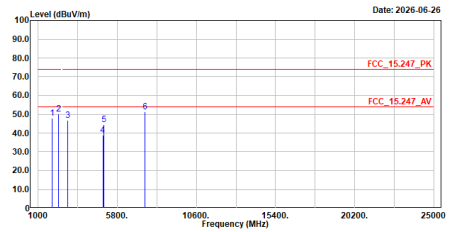


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1859.031	48.05	74.00	-25.95	70.43	-22.38	Peak
2	2243.125	50.22	74.00	-23.78	70.90	-20.68	Peak
3	2801.469	46.84	74.00	-27.16	66.21	-19.37	Peak
4	4924.000	38.69	74.00	-35.31	49.74	-11.05	Peak
5	4991.813	44.71	74.00	-29.29	55.53	-10.82	Peak
6	7490.281	51.34	74.00	-22.66	56.15	-4.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2422MHz
Test by :Bob Chiu

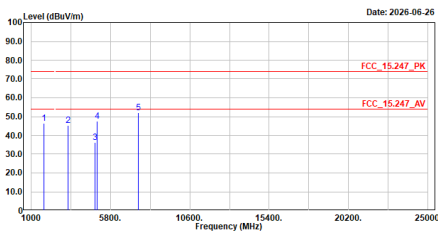


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1746.938	46.26	74.00	-27.74	69.02	-22.76	Peak
2	3217.969	45.21	74.00	-28.79	64.12	-18.91	Peak
3	4844.000	36.24	74.00	-37.76	47.79	-11.55	Peak
4	4987.031	47.71	74.00	-26.29	58.53	-10.82	Peak
5	7498.781	52.19	74.00	-21.81	57.02	-4.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2422MHz
Test by :Bob Chiu

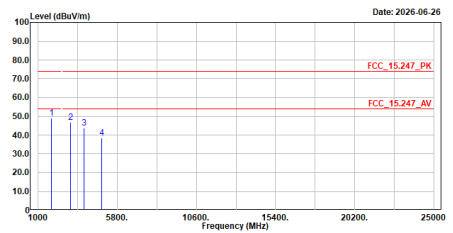


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1829.281	48.89	74.00	-25.11	71.27	-22.38	Peak
2	2957.125	46.91	74.00	-27.09	66.04	-19.13	Peak
3	3802.344	43.89	74.00	-30.11	59.85	-15.96	Peak
4	4844.000	38.32	74.00	-35.68	49.87	-11.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2437MHz
Test by :Bob Chiu

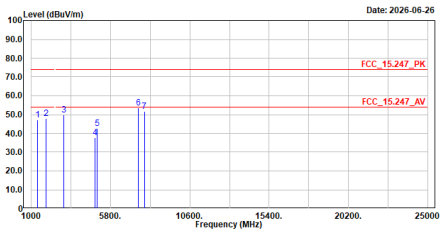


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1368.156	47.21	74.00	-26.79	70.19	-22.98	Peak
2	1883.469	47.91	74.00	-26.09	70.26	-22.35	Peak
3	2965.094	49.70	74.00	-24.30	68.82	-19.12	Peak
4	4874.000	37.83	74.00	-36.17	49.23	-11.40	Peak
5	4987.563	42.52	74.00	-31.48	53.35	-10.83	Peak
6	7480.719	53.49	74.00	-20.51	58.27	-4.78	Peak
7	7845.688	51.61	74.00	-22.39	57.20	-5.59	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2437MHz
Test by :Bob Chiu

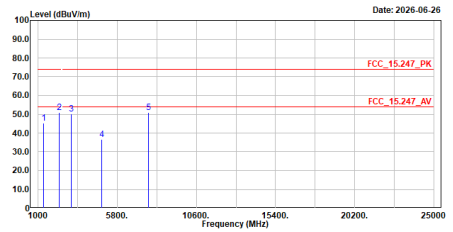


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1344.250	45.35	74.00	-28.65	68.50	-23.15	Peak
2	2294.125	50.78	74.00	-23.22	71.34	-20.56	Peak
3	3826.188	50.16	74.00	-23.84	69.15	-18.99	Peak
4	4874.000	36.54	74.00	-37.46	47.94	-11.40	Peak
5	7686.844	50.82	74.00	-23.18	56.25	-5.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2452MHz
Test by :Bob Chiu

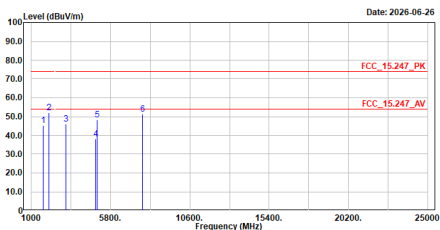


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1722.500	45.36	74.00	-28.64	68.11	-22.75	Peak
2	2067.813	52.02	74.00	-21.98	73.26	-21.24	Peak
3	3107.469	46.08	74.00	-27.92	64.93	-18.85	Peak
4	4904.000	37.95	74.00	-36.05	49.16	-11.21	Peak
5	4996.063	48.12	74.00	-25.88	58.95	-10.83	Peak
6	7742.094	51.50	74.00	-22.50	56.96	-5.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2452MHz
Test by :Bob Chiu

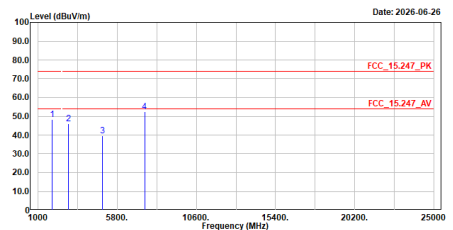


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1842.563	48.24	74.00	-25.76	70.62	-22.38	Peak
2	2854.594	45.98	74.00	-28.02	65.29	-19.31	Peak
3	4904.000	39.54	74.00	-34.46	50.75	-11.21	Peak
4	7458.938	52.39	74.00	-21.61	57.13	-4.74	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_H_QP

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2437MHz
Test by :Bob Chiu

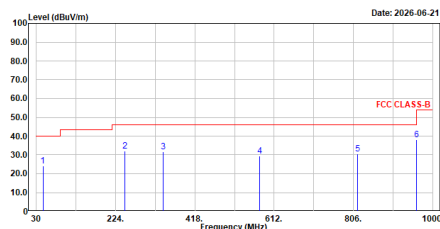


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	46.201	24.28	40.00	-15.72	34.22	-9.94	QP
2	246.061	32.10	46.00	-13.90	44.23	-12.13	QP
3	340.666	31.76	46.00	-14.24	41.00	-9.32	QP
4	576.028	29.38	46.00	-16.62	33.48	-4.10	QP
5	816.691	30.38	46.00	-15.62	31.08	-0.70	QP
6	960.048	37.95	54.00	-16.05	36.87	1.08	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ax40_2437MHz_V_QP

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2437MHz
Test by :Bob Chiu

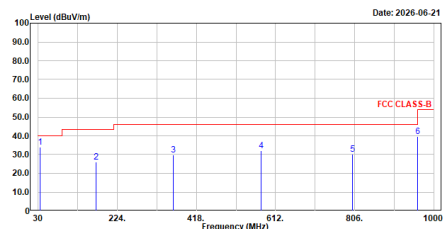


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	34.850	33.93	40.00	-6.07	44.81	-10.88	QP
2	171.807	25.91	43.50	-17.59	37.34	-11.43	QP
3	361.617	29.70	46.00	-16.30	38.77	-9.07	QP
4	575.978	32.09	46.00	-13.91	36.19	-4.10	QP
5	800.290	30.22	46.00	-15.78	30.98	-0.76	QP
6	960.048	39.50	54.00	-14.50	38.42	1.08	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_b_2412MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2412MHz
Test by :Bob Chiu

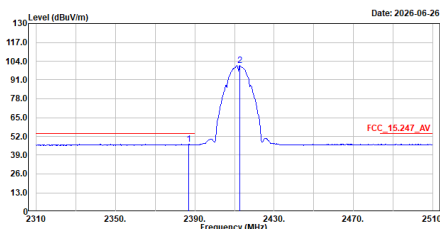


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2387.000	46.53	54.00	-7.47	16.19	30.34	Average
2	2412.000	100.90	-----	-----	70.64	30.26	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2412MHz
Test by :Bob Chiu

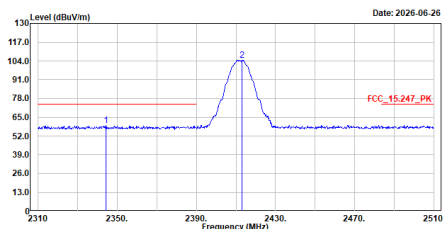


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2344.200	59.32	74.00	-14.68	28.88	30.44	Peak
2	2413.200	104.59	-----	-----	74.33	30.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_V_Average

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2412MHz
Test by :Bob Chiu

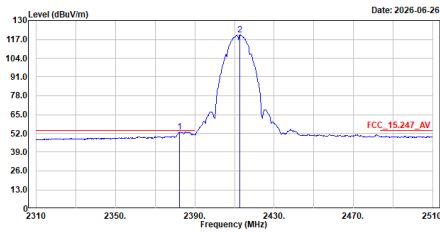


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2382.400	53.11	54.00	-0.89	22.72	30.39	Average
2	2412.000	120.18	-----	-----	89.92	30.26	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_V_Peak

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2412MHz
Test by :Bob Chiu

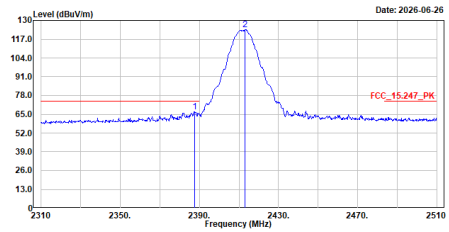


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2387.800	66.84	74.00	-7.16	36.51	30.33	Peak
2	2413.200	123.65	-----	-----	93.39	30.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2437MHz
Test by :Bob Chiu

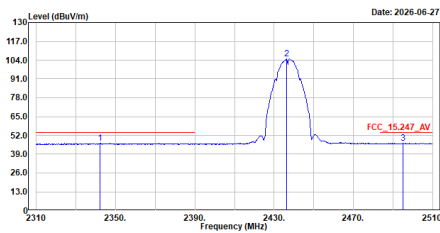


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2342.200	46.45	54.00	-7.55	15.99	30.46	Average
2	2436.200	104.83	-----	-----	74.54	30.29	Average
3	2495.200	46.47	54.00	-7.53	16.18	30.29	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2437MHz
Test by :Bob Chiu

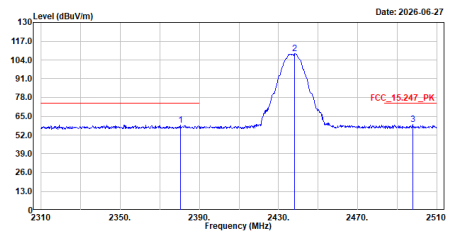


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2380.400	59.03	74.00	-14.97	28.62	30.41	Peak
2	2438.200	108.35	-----	-----	78.08	30.27	Peak
3	2497.800	59.13	74.00	-14.87	28.84	30.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2437MHz
Test by :Bob Chiu

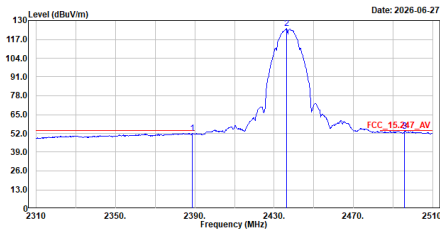


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.800	51.93	54.00	-2.07	21.61	30.32	Average
2	2436.200	124.39	-----	-----	94.10	30.29	Average
3	2495.800	53.46	54.00	-0.54	23.17	30.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2437MHz
Test by :Bob Chiu

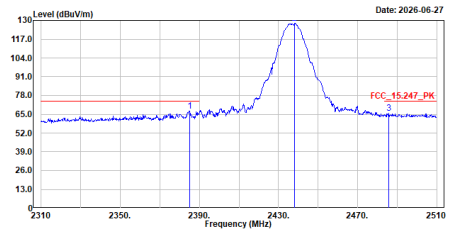


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2385.000	67.39	74.00	-6.61	37.03	30.36	Peak
2	2438.200	127.88	-----	-----	97.61	30.27	Peak
3	2485.600	65.63	74.00	-8.37	35.35	30.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2462MHz
Test by :Bob Chiu

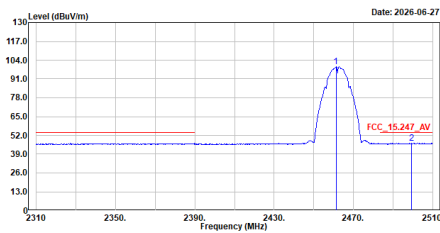


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2461.200	99.46	-----	-----	69.09	30.37	Average
2	2499.200	46.58	54.00	-7.42	16.29	30.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2462MHz
Test by :Bob Chiu

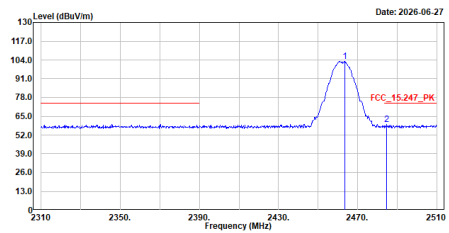


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2463.400	102.89	-----	-----	72.52	30.37	Peak
2	2484.800	59.17	74.00	-14.83	28.89	30.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2462MHz
Test by :Bob Chiu

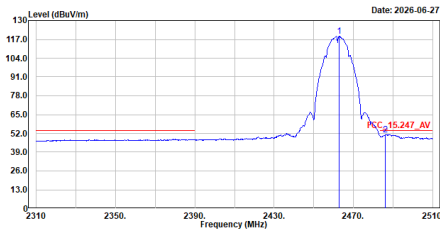


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2462.000	119.13	54.00	-2.92	88.76	30.37	Average
2	2486.200	51.08	54.00	-2.92	20.80	30.28	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2462MHz
Test by :Bob Chiu

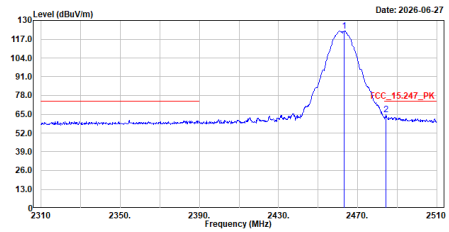


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2462.000	122.64	54.00	-9.42	92.27	30.37	Peak
2	2484.400	64.58	54.00	-9.42	34.30	30.28	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_g_2412MHz
Test by :Bob Chiu

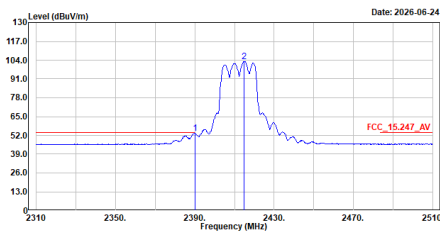


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	53.44	54.00	-0.56	23.13	30.31	Average
2	2415.000	103.05	54.00	-0.56	72.76	30.29	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Peak


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_g_2412MHz
Test by :Bob Chiu

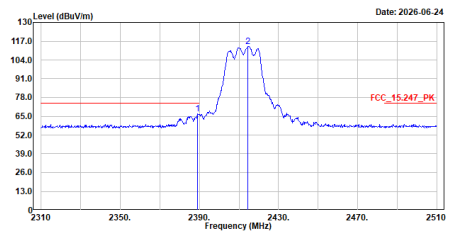


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.200	66.50	54.00	-7.50	36.18	30.32	Peak
2	2414.600	113.52	54.00	-7.50	83.24	30.28	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_g_2412MHz_V_Average

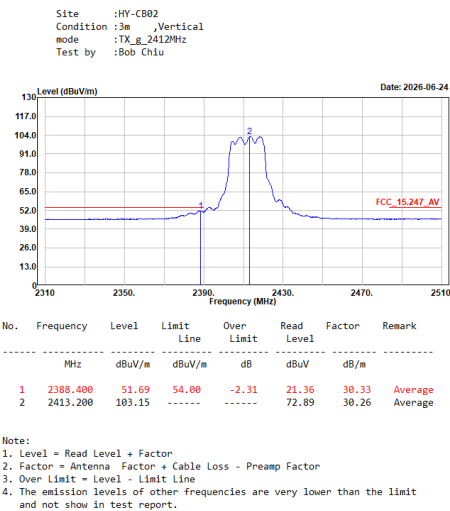


TX_g_2412MHz_V_Peak

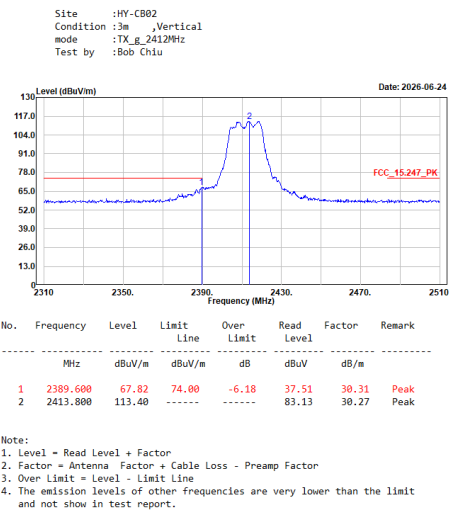

TX_g_2437MHz_H_Average

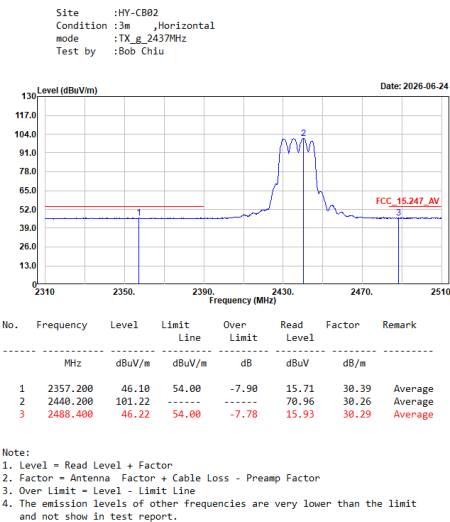


TX_g_2437MHz_H_Peak

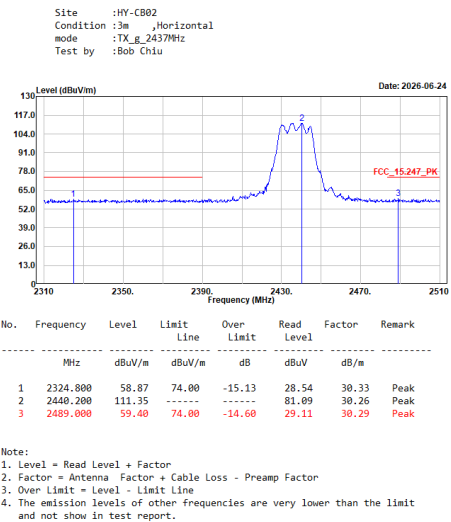

TX_g_2437MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_g_2437MHz
Test by :Bob Chiu

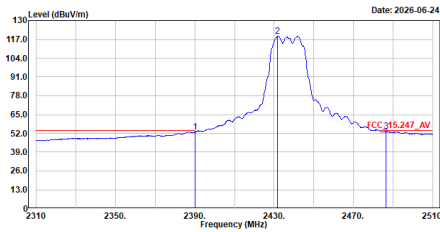


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	52.99	54.00	-1.01	22.68	30.31	Average
2	2431.800	119.27	-----	-----	88.94	30.33	Average
3	2486.400	53.47	54.00	-0.53	23.19	30.28	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_g_2437MHz
Test by :Bob Chiu

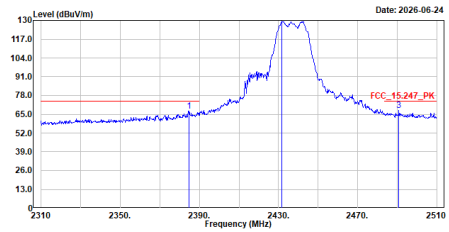


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2384.600	67.12	74.00	-6.88	36.76	30.36	Peak
2	2431.800	129.28	-----	-----	98.95	30.33	Peak
3	2498.800	67.73	74.00	-6.27	37.44	30.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_g_2462MHz
Test by :Bob Chiu

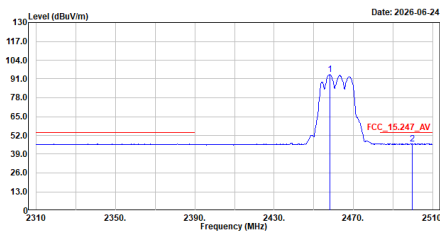


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2458.200	94.04	-----	-----	63.69	30.35	Average
2	2499.600	46.28	54.00	-7.72	15.99	30.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_g_2462MHz
Test by :Bob Chiu

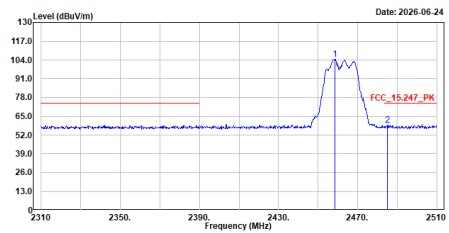


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2458.600	104.69	-----	-----	74.33	30.36	Peak
2	2485.000	58.89	74.00	-15.11	28.61	30.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_g_2462MHz
Test by :Bob Chiu

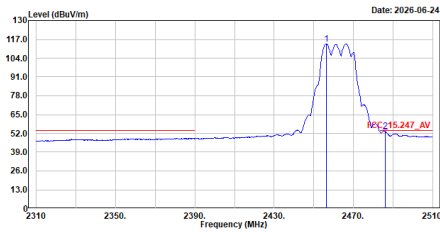


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2456.200	113.76	-----	-----	83.43	30.33	Average
2	2486.000	53.50	54.00	-0.50	23.22	30.28	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_g_2462MHz
Test by :Bob Chiu

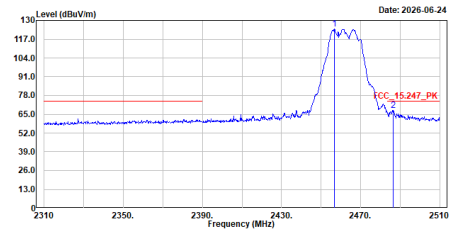


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2456.600	123.88	-----	-----	93.54	30.34	Peak
2	2486.400	67.67	74.00	-6.33	37.39	30.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_2412MHz
Test by :Bob Chiu

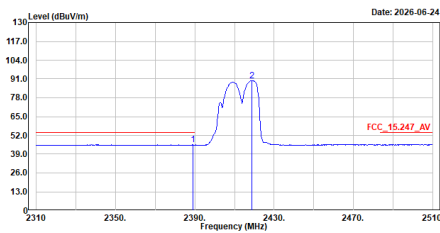


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.000	45.50	54.00	-8.50	15.18	30.32	Average
2	2418.000	89.92	-----	-----	59.59	30.33	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_2412MHz
Test by :Bob Chiu

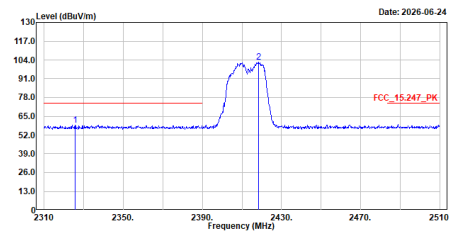


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2325.600	58.79	74.00	-15.21	28.45	30.34	Peak
2	2418.400	102.63	-----	-----	72.31	30.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2412MHz
Test by :Bob Chiu

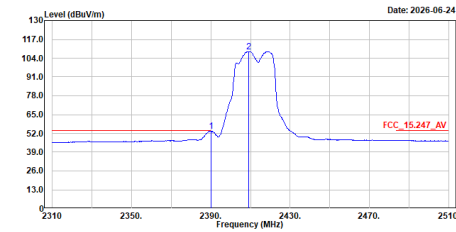


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	53.44	54.00	-0.56	23.13	30.31	Average
2	2409.200	108.62	-----	-----	78.39	30.23	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2412MHz
Test by :Bob Chiu

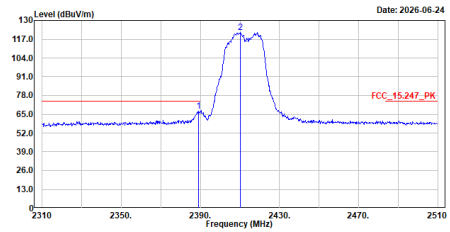


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.000	67.10	74.00	-6.90	36.78	30.32	Peak
2	2410.200	121.65	-----	-----	91.42	30.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2437MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_2437MHz
Test by :Bob Chiu

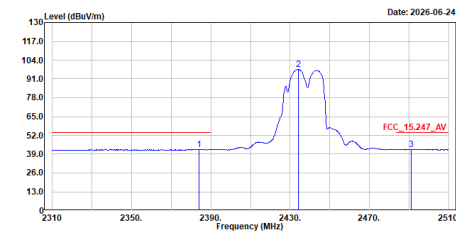


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2384.200	42.25	54.00	-11.75	15.29	26.96	Average
2	2434.200	97.80	-----	-----	70.94	26.86	Average
3	2491.000	42.31	54.00	-11.69	15.51	26.80	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2437MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_2437MHz
Test by :Bob Chiu

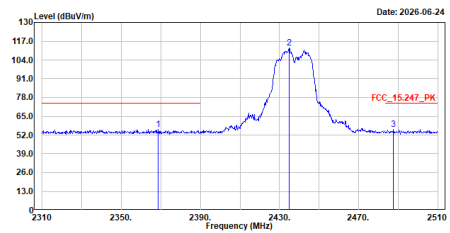


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2368.800	55.98	74.00	-18.02	28.98	27.00	Peak
2	2435.000	112.44	-----	-----	85.59	26.85	Peak
3	2487.600	55.96	74.00	-18.04	29.16	26.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2437MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2437MHz
Test by :Bob Chiu

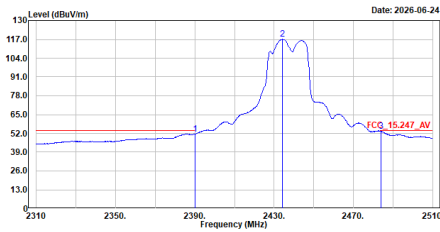


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	51.50	54.00	-2.50	24.60	26.90	Average
2	2434.200	117.11	-----	90.25	26.86	-----	Average
3	2483.800	53.43	54.00	-0.57	26.63	26.80	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2437MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2437MHz
Test by :Bob Chiu

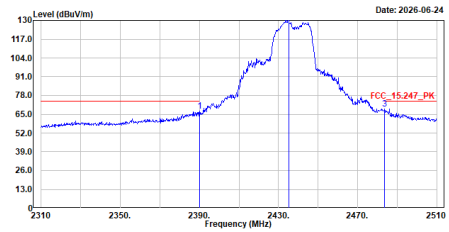


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	66.99	74.00	-7.01	40.09	26.90	Peak
2	2435.200	129.58	-----	102.73	26.85	-----	Peak
3	2483.600	68.65	74.00	-5.35	41.85	26.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_2462MHz
Test by :Bob Chiu

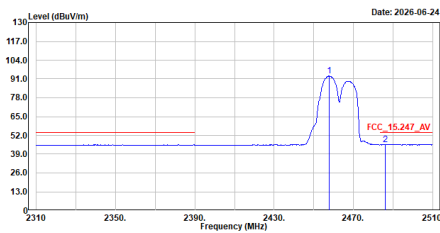


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2457.800	93.12	-----	62.77	30.35	-----	Average
2	2486.000	45.68	54.00	-8.32	15.40	30.28	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_2462MHz
Test by :Bob Chiu

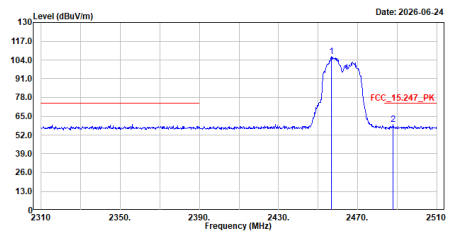


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2456.600	106.31	-----	75.97	30.34	-----	Peak
2	2488.000	59.11	74.00	-14.89	28.82	30.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2462MHz
Test by :Bob Chiu

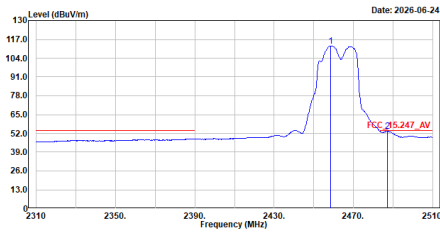


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2458.600	112.53	-----	-----	82.17	30.36	Average
2	2487.000	53.44	54.00	-0.56	23.16	30.28	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2462MHz
Test by :Bob Chiu

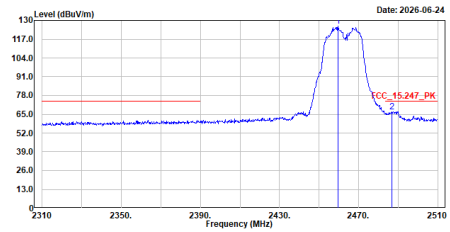


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2459.600	125.99	-----	-----	95.62	30.37	Peak
2	2486.800	66.88	74.00	-7.12	36.60	30.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_2422MHz
Test by :Bob Chiu

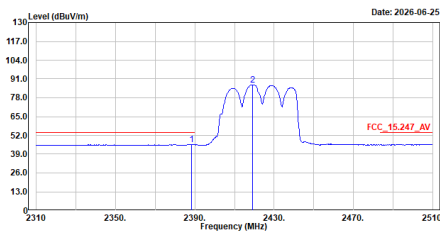


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.400	45.60	54.00	-8.40	15.27	30.33	Average
2	2419.200	87.05	-----	-----	56.72	30.33	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_2422MHz
Test by :Bob Chiu

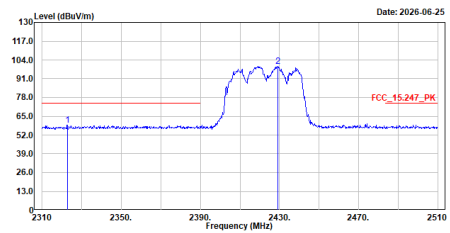


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2322.800	58.93	74.00	-15.07	28.62	30.31	Peak
2	2429.200	99.74	-----	-----	69.39	30.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_2422MHz
Test by :Bob Chiu

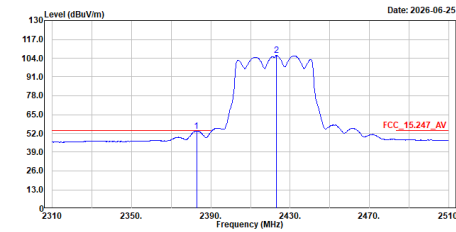


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2382.800	53.47	54.00	-0.53	23.09	30.38	Average
2	2423.200	105.85	-----	-----	75.51	30.34	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_2422MHz
Test by :Bob Chiu

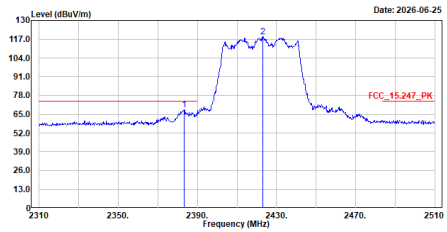


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2383.200	68.14	74.00	-5.86	37.76	30.38	Peak
2	2423.000	118.83	-----	-----	88.49	30.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_2437MHz
Test by :Bob Chiu

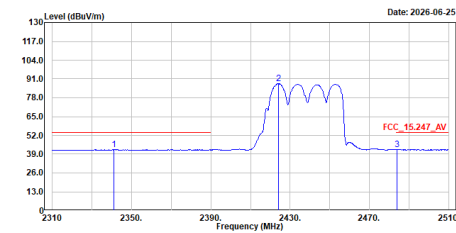


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2341.000	42.11	54.00	-11.89	15.02	27.09	Average
2	2424.000	87.81	-----	-----	60.91	26.90	Average
3	2484.000	42.27	54.00	-11.73	15.47	26.80	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_2437MHz
Test by :Bob Chiu

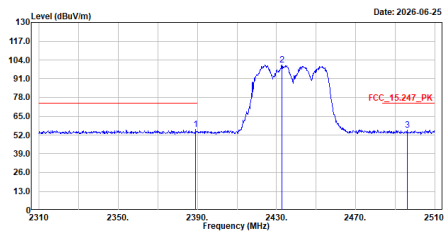


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.200	55.73	74.00	-18.27	28.82	26.91	Peak
2	2432.600	100.65	-----	-----	73.78	26.87	Peak
3	2496.000	55.51	74.00	-18.49	28.71	26.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_2437MHz
Test by :Bob Chiu

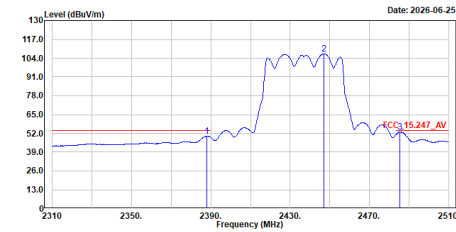


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.000	49.94	54.00	-4.06	23.02	26.92	Average
2	2447.200	106.93	-----	-----	80.13	26.80	Average
3	2485.200	52.95	54.00	-1.05	26.15	26.80	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_2437MHz
Test by :Bob Chiu

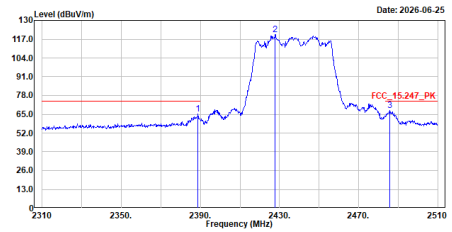


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.800	65.07	74.00	-8.93	38.16	26.91	Peak
2	2427.800	120.42	-----	-----	93.52	26.90	Peak
3	2485.600	67.47	74.00	-6.53	40.67	26.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_2452MHz
Test by :Bob Chiu

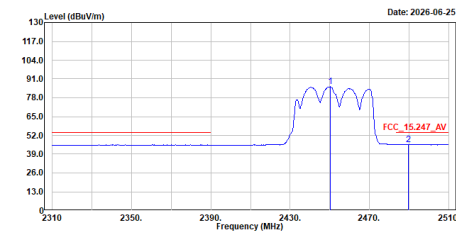


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2450.200	85.65	-----	-----	55.39	30.26	Average
2	2489.800	45.76	54.00	-8.24	15.47	30.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_2452MHz
Test by :Bob Chiu

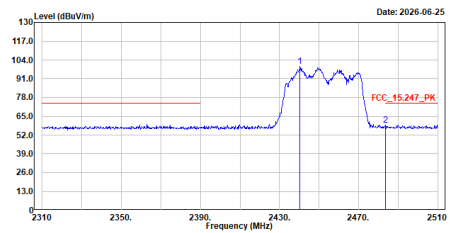


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2440.400	99.43	-----	-----	69.17	30.26	Peak
2	2483.600	58.71	74.00	-15.29	28.43	30.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_2452MHz
Test by :Bob Chiu

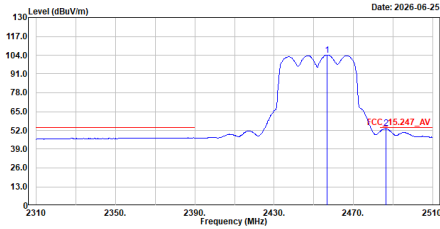


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2456.600	104.21	-----	-----	73.87	30.34	Average
2	2486.400	53.24	54.00	-0.76	22.96	30.28	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_2452MHz
Test by :Bob Chiu

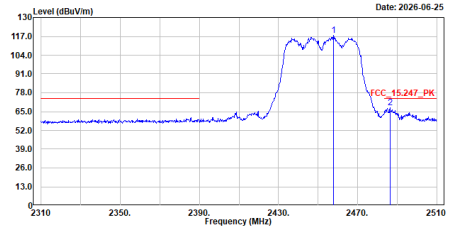


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2457.800	117.52	-----	-----	87.17	30.35	Peak
2	2486.400	67.48	74.00	-6.52	37.20	30.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Co-location**TX_g_2462MHz+ax80_5210MHz_H**

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz+ax80_5210MHz
Test by :Bob Chiu

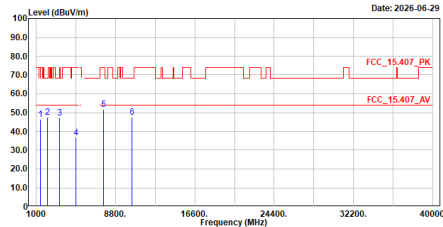


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1401.094	46.36	74.00	-27.64	69.35	-22.99	Peak
2	2074.719	47.51	68.22	-20.71	68.64	-21.13	Peak
3	3262.063	47.20	74.00	-26.80	66.01	-18.81	Peak
4	4924.000	36.42	74.00	-37.58	47.47	-11.05	Peak
5	7628.406	51.53	74.00	-22.47	56.75	-5.22	Peak
6	10420.000	47.51	68.22	-20.71	52.42	-4.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz+ax80_5210MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2462MHz+ax80_5210MHz
Test by :Bob Chiu

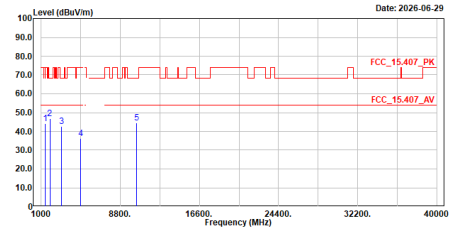


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1389.406	44.17	74.00	-29.83	67.15	-22.98	Peak
2	1863.281	46.77	68.22	-21.45	69.15	-22.38	Peak
3	2993.250	42.49	68.22	-25.73	61.51	-19.02	Peak
4	4924.000	36.36	74.00	-37.64	47.41	-11.05	Peak
5	10420.000	44.52	68.22	-23.70	49.43	-4.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz+ax80_5210MHz_H_QP

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz+ax80_5210MHz
Test by :Bob Chiu

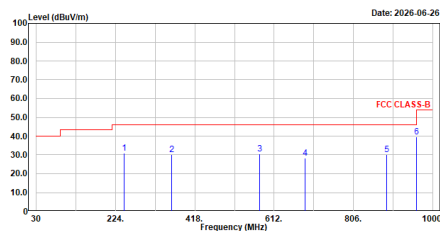


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	244.811	31.10	46.00	-14.90	43.26	-12.16	QP
2	361.417	30.23	46.00	-15.77	39.31	-9.08	QP
3	576.028	30.66	46.00	-15.34	34.76	-4.10	QP
4	688.234	28.12	46.00	-17.88	30.49	-2.37	QP
5	887.844	30.36	46.00	-15.64	30.39	-0.03	QP
6	960.048	39.54	54.00	-14.46	38.46	1.08	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_g_2462MHz+ax80_5210MHz_V_QP

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2462MHz+ax80_5210MHz
Test by :Bob Chiu

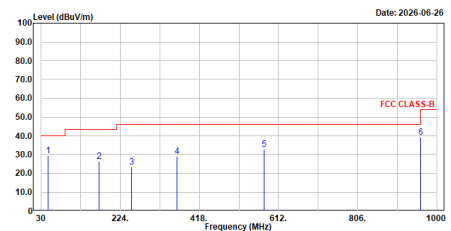

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	46.701	29.26	48.00	-18.74	39.26	-10.00	QP
2	172.057	26.51	43.50	-16.99	37.95	-11.44	QP
3	252.162	23.52	46.00	-22.48	35.55	-12.03	QP
4	363.517	29.22	46.00	-16.78	38.17	-8.95	QP
5	576.028	32.65	46.00	-13.35	36.75	-4.10	QP
6	960.048	39.22	54.00	-14.78	38.14	1.08	QP


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Appendix G. Test Result of Test Setup Photograph


Front View of AC Power Line Conducted Emission Test




Back View of AC Power Line Conducted Emission Test

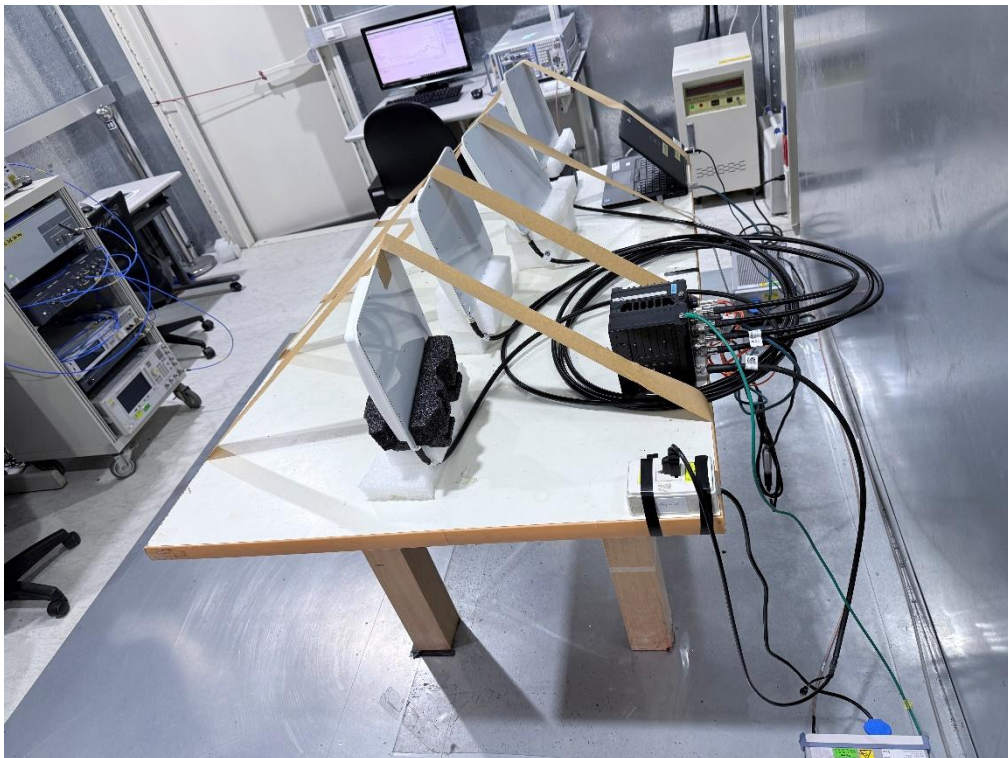

Radiated Test (Below 1 GHz)

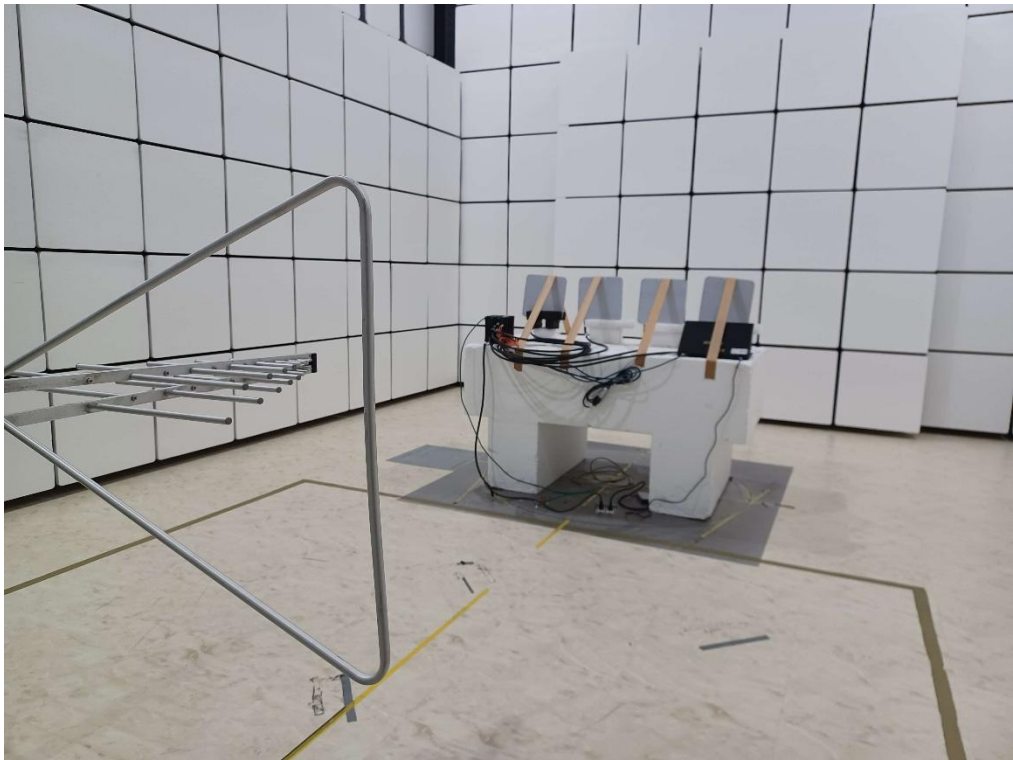

Radiated Test (Above 1 GHz)

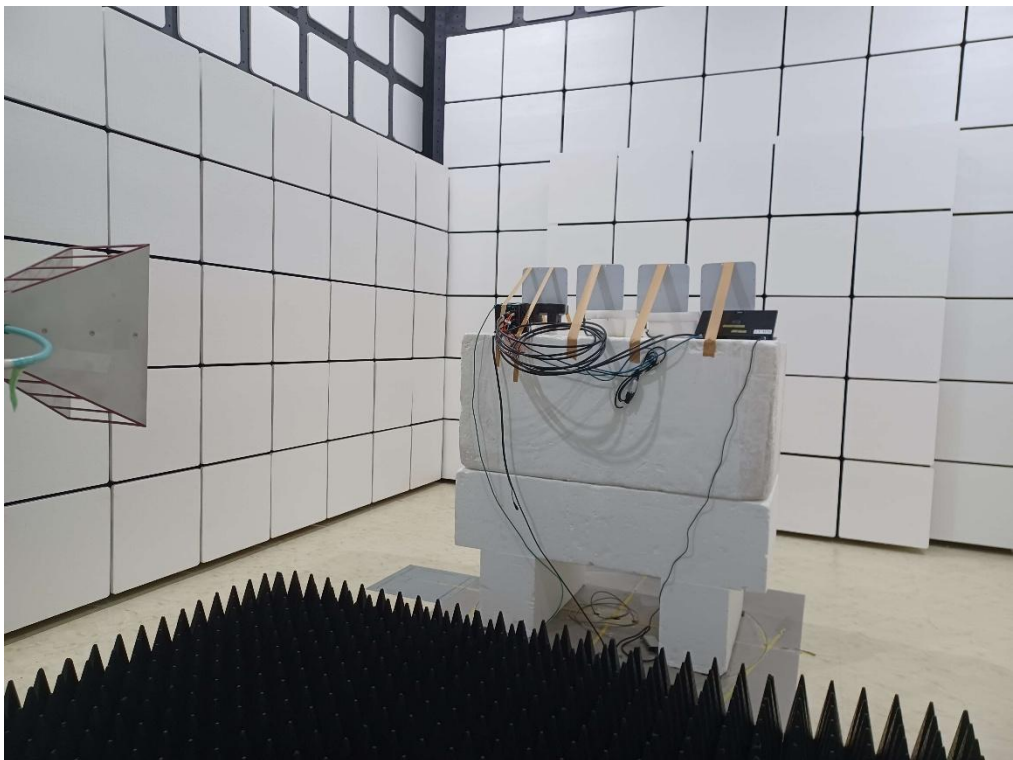

Radiated Test (Above 1 GHz)

