

FCC Test Report

Product Name	Wireless gateway
Model No	MGate W5xyz, MGate W5xyz-T x represent the number of serial port. yz represent series number. -T represent wide temperature model
FCC ID.	SLE-W5X08

Applicant	MOXA Inc.
Address	FL.4, NO.135 LANE 235, BAOQIAO RD. XINDIAN DIST., NEW TAIPEI CITY, TAIWAN

Date of Receipt	Jul. 01, 2015
Issue Date	Sep. 23, 2015
Report No.	1570097R-RFUSP26V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of Quietek Corporation.

Test Report

Issue Date: Sep. 23, 2015

Report No.: 1570097R-RFUSP26V00



Product Name	Wireless gateway
Applicant	MOXA Inc.
Address	FL.4, NO.135 LANE 235, BAOQIAO RD. XINDIAN DIST., NEW TAIPEI CITY, TAIWAN
Manufacturer	MOXA Inc.
Model No.	MGate W5xyz, MGate W5xyz-T x represent the number of serial port. yz represent series number. -T represent wide temperature model
FCC ID.	SLE-W5X08
EUT Rated Voltage	DC 12V
EUT Test Voltage	DC 12V
Trade Name	MOXA
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2014 ANSI C63.4: 2014, ANSI C63.10: 2013 KDB 558074 D01 DTS Meas Guidance v03r03
Test Result	Complied

Documented By :

Joanne Lin

(Senior Adm. Specialist / Joanne Lin)

Tested By :

Eason chen

(Engineer / Eason Chen)

Approved By :

Vincent Lin

(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	9
1.6. Test Facility	10
2. Conducted Emission.....	11
2.1. Test Equipment.....	11
2.2. Test Setup	11
2.3. Limits	12
2.4. Test Procedure	12
2.5. Uncertainty	12
2.6. Test Result of Conducted Emission.....	13
3. Peak Power Output	13
3.1. Test Equipment.....	14
3.2. Test Setup	14
3.3. Limits	14
3.4. Test Procedure	14
3.5. Uncertainty	14
3.6. Test Result of Peak Power Output.....	15
4. Radiated Emission.....	19
4.1. Test Equipment.....	19
4.2. Test Setup	19
4.3. Limits	20
4.4. Test Procedure	21
4.5. Uncertainty	21
4.6. Test Result of Radiated Emission.....	22
5. RF antenna conducted test.....	38
5.1. Test Equipment.....	38
5.2. Test Setup	38
5.3. Limits	38
5.4. Test Procedure	38
5.5. Uncertainty	38
5.6. Test Result of RF antenna conducted test.....	39
6. Band Edge	43
6.1. Test Equipment.....	43
6.2. Test Setup	43
6.3. Limits	44
6.4. Test Procedure	44
6.5. Uncertainty	44
6.6. Test Result of Band Edge	45

7.	Occupied Bandwidth	61
7.1.	Test Equipment	61
7.2.	Test Setup	61
7.3.	Limits	61
7.4.	Test Procedure	61
7.5.	Uncertainty	61
7.6.	Test Result of Occupied Bandwidth	62
8.	Power Density	70
8.1.	Test Equipment	70
8.2.	Test Setup	70
8.3.	Limits	70
8.4.	Test Procedure	70
8.5.	Uncertainty	70
8.6.	Test Result of Power Density	71
9.	EMI Reduction Method During Compliance Testing	79
Attachment 1: EUT Test Photographs		
Attachment 2: EUT Detailed Photographs		

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Wireless gateway
Trade Name	MOXA
Model No.	MGate W5xyz, MGate W5xyz-T x represent the number of serial port. yz represent series number. -T represent wide temperature model
FCC ID.	SLE-W5X08
Frequency Range	2412-2462MHz for 802.11b/g/n-20BW, 2422-2452MHz for 802.11n-40BW
Number of Channels	802.11b/g/n-20MHz: 11, n-40MHz: 7
Data Speed	802.11b: 1-11Mbps, 802.11g: 6-54Mbps, 802.11n: up to 150Mbps
Type of Modulation	802.11b:DSSS (DBPSK, DQPSK, CCK) 802.11g/n:OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna Type	Dipole Antenna
Antenna Gain	Refer to the table "Antenna List"
Channel Control	Auto

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	KINSUN	6602D03081	Dipole	1.21dBi For 2.4GHz

Note: The antenna of EUT conforms to FCC 15.203.

802.11b/g/n-20MHz Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2412 MHz	Channel 02:	2417 MHz	Channel 03:	2422 MHz	Channel 04:	2427 MHz
Channel 05:	2432 MHz	Channel 06:	2437 MHz	Channel 07:	2442 MHz	Channel 08:	2447 MHz
Channel 09:	2452 MHz	Channel 10:	2457 MHz	Channel 11:	2462 MHz		

802.11n-40MHz Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 03:	2422 MHz	Channel 04:	2427 MHz	Channel 05:	2432 MHz	Channel 06:	2437 MHz
Channel 07:	2442 MHz	Channel 08:	2447 MHz	Channel 09:	2452 MHz		

Note:

1. The EUT is a Wireless gateway with a built-in 2.4GHz and 5GHz WLAN transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report. (802.11b is 1Mbps 、802.11g is 6Mbps 、802.11n(20M-BW) is 7.2Mbps and 802.11n(40M-BW) is 15Mbps)
4. These tests are conducted on a sample for the purpose of demonstrating compliance of 802.11b/g/n transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.
5. The different of each model is shown as below:

Model No.	Description
MGate W5108	1 port wireless Modbus gateway
MGate W5208	2 port wireless Modbus gateway
MGate W5108-T	1 port wireless Modbus gateway, -40~75 operating temperature
MGate W5208-T	2 port wireless Modbus gateway, -40~75 operating temperature

Test Mode:	Mode 1: Transmit (802.11b 1Mbps)
	Mode 2: Transmit (802.11g 6Mbps)
	Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)
	Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook PC	DELL	PPT	N/A	Non-Shielded, 0.8m
2 Modem	ACEEX	DM-1414	0102027536	Non-Shielded, 1.8m
3 Modem	ACEEX	DM-1414	0102027550	Non-Shielded, 1.8m
4 DC 12V Battery	Chen Guang	66N50	N/A	N/A
5 Test Fixture	MOXA	N/A	N/A	N/A

Signal Cable Type	Signal cable Description
A LAN Cable	Non-Shielded, 1.8m
B Power Cable	Non-Shielded, 1.8m
C RS-232 Cable	Non-Shielded, 1.4m
D USB Cable	Non-Shielded, 1m
E RS-232 Cable	Non-Shielded, 1.8m
F RS-232 Cable	Non-Shielded, 1.8m

1.4. Configuration of Tested System

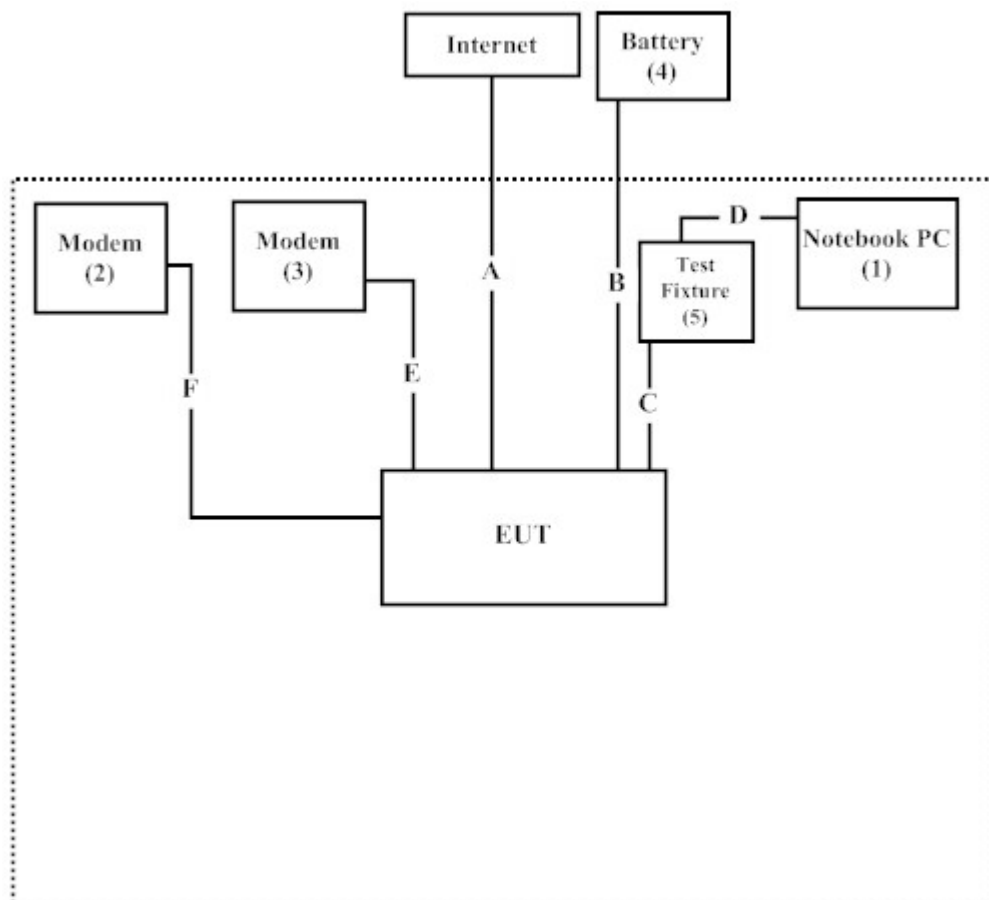

1.5. EUT Exercise Software

1. Setup the EUT as shown in Section 1.4.
2. Execute “Tera Term 4.72” program on the EUT.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from

Quietek Corporation's Web Site: <http://www.quietek.com/chinese/about/certificates.aspx?bval=5>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site:

<http://www.quietek.com/>

Site Description: File on

Federal Communications Commission

FCC Engineering Laboratory

7435 Oakland Mills Road

Columbia, MD 21046

Registration Number: 92195

Site Name: Quietek Corporation

Site Address: No.5-22, Ruishukeng,

Linkou Dist. New Taipei City 24451,

Taiwan, R.O.C.

TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789

E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2015	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2015	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2015	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar., 2015	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2015	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

2.2. Test Setup

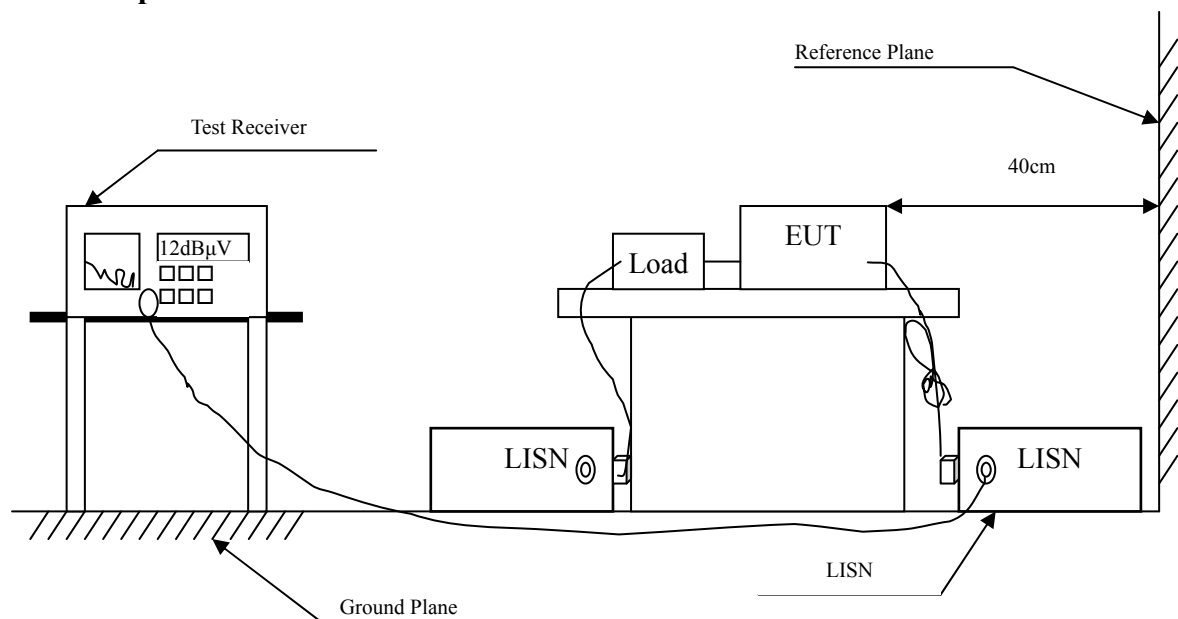

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Owing to the DC operation of EUT, this test item is not performed.

3. Peak Power Output


3.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2015
X	Power Sensor	Anritsu	MA2411B/0738448	Jun., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

3.2. Test Setup

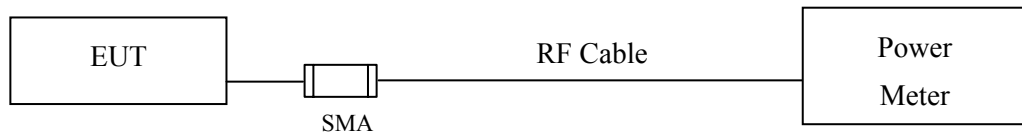

3.3. Limits

The maximum peak power shall be less 1 Watt.

3.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 D01 DTS Meas Guidance v03r02 section 9.1.2 PKPM1 Peak power meter method.

3.5. Uncertainty

± 1.27 dB

3.6. Test Result of Peak Power Output

Product : Wireless gateway
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit	Result
		1	2	5.5	11	1		
		Measurement Level (dBm)						
01	2412	15.31	--	--	--	17.73	<30dBm	Pass
06	2437	15.71	15.62	15.54	15.42	18.32	<30dBm	Pass
11	2462	15.54	--	--	--	17.82	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Product : Wireless gateway
Test Item : Peak Power Output Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54	6		
		Measurement Level (dBm)										
01	2412	14.73	--	--	--	--	--	--	--	21.82	<30dBm	Pass
06	2437	14.76	14.65	14.58	14.42	14.36	14.29	14.15	14.05	21.32	<30dBm	Pass
11	2462	14.18	--	--	--	--	--	--	--	20.72	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Product : Wireless gateway
Test Item : Peak Power Output Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		7.2	14.4	21.7	28.9	43.3	57.8	65	72.2	7.2		
		Measurement Level (dBm)										
01	2412	14.4	--	--	--	--	--	--	--	21.67	<30dBm	Pass
06	2437	14.78	14.65	14.58	14.49	14.38	14.24	14.15	14.02	21.26	<30dBm	Pass
11	2462	14.17	--	--	--	--	--	--	--	20.62	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Product : Wireless gateway
Test Item : Peak Power Output Data
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		15	30	45	60	90	120	135	150	15		
		Measurement Level (dBm)										
03	2422	13.18	--	--	--	--	--	--	--	21.22	<30dBm	Pass
06	2437	13.17	13.05	12.97	12.89	12.73	12.65	12.54	12.49	20.95	<30dBm	Pass
09	2452	13.01	--	--	--	--	--	--	--	20.57	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

4. Radiated Emission

4.1. Test Equipment

The following test equipments are used during the radiated emission test:


Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Magnetic Loop Antenna	Teseq	HLA6121/ 37133	Sep., 2015
	X	Bilog Antenna	Schaffner Chase	CBL6112B/ 2707	Jun., 2015
	X	EMI Test Receiver	R&S	ESCS 30/838251/ 001	Jun., 2015
	X	Coaxial Cable	QTK(Arnist)	RG 214/ LC003-RG	Jun., 2015
	X	Coaxial signal switch	Arnist	MP59B/ 6200798682	Jun., 2015

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct., 2014
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar., 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan., 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug., 2015
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan., 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul., 2015
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul., 2015


- Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

4.2. Test Setup

Radiated Emission Below 1GHz

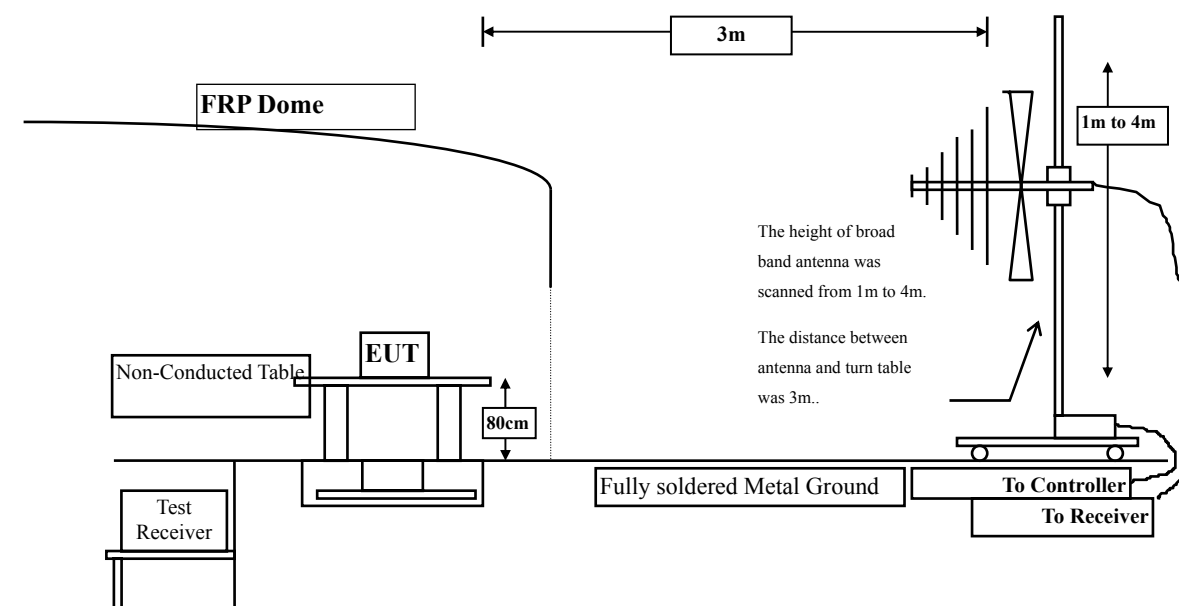

Radiated Emission Above 1GHz

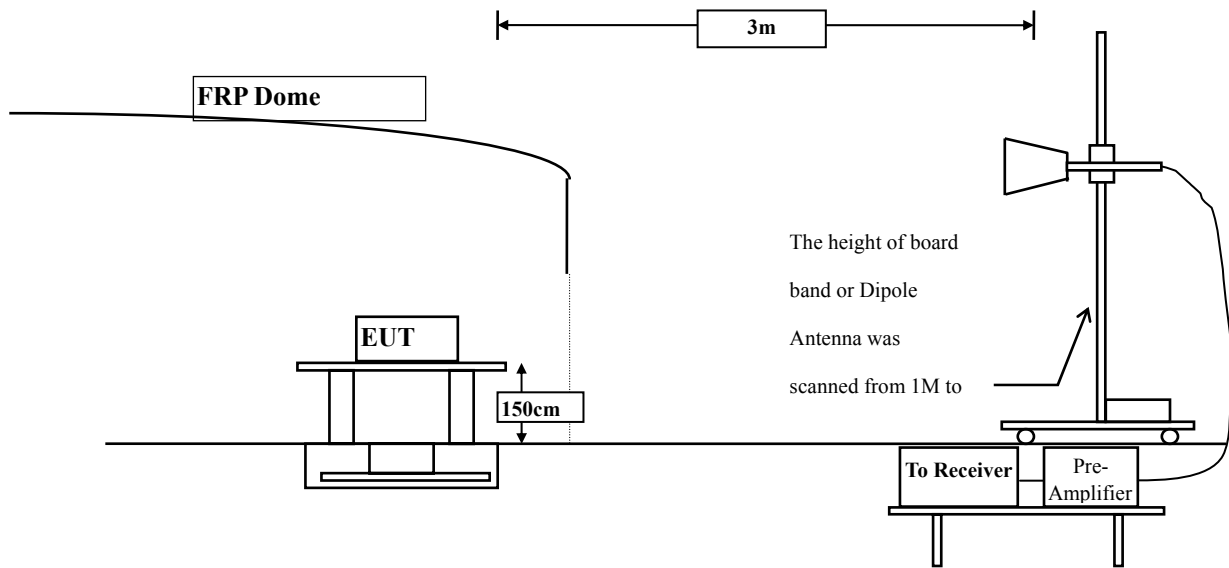

4.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dB μ V/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Radiated Emission

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
4824.000	2.428	50.910	53.339	-20.661	74.000
7236.000	9.177	39.820	48.997	-25.003	74.000
9648.000	10.019	36.570	46.590	-27.410	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4824.000	2.836	42.800	45.637	-28.363	74.000
7236.000	9.676	37.410	47.086	-26.914	74.000
9648.000	10.556	36.460	47.017	-26.983	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4874.000	2.076	50.760	52.837	-21.163	74.000
7311.000	9.512	37.420	46.932	-27.068	74.000
9748.000	9.630	39.020	48.650	-25.350	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4874.000	2.532	43.820	46.352	-27.648	74.000
7311.000	10.089	36.490	46.579	-27.421	74.000
9748.000	10.266	38.510	48.777	-25.223	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462 MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
4924.000	2.191	50.280	52.471	-21.529	74.000
7386.000	10.373	37.280	47.654	-26.346	74.000
9848.000	9.964	44.730	54.694	-19.306	74.000
Average Detector:					
9848.000	9.964	40.610	50.574	-3.426	54.000
Vertical					
Peak Detector:					
4924.000	2.805	43.440	46.245	-27.755	74.000
7386.000	11.180	37.510	48.690	-25.310	74.000
9848.000	10.801	38.470	49.271	-24.729	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4824.000	2.428	47.020	49.449	-24.551	74.000
7236.000	9.177	42.100	51.277	-22.723	74.000
9648.000	10.019	37.340	47.360	-26.640	74.000

Average Detector:

--

Vertical

Peak Detector:

4824.000	2.836	40.990	43.827	-30.173	74.000
7236.000	9.676	36.550	46.226	-27.774	74.000
9648.000	10.556	38.030	48.587	-25.413	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4874.000	2.076	52.980	55.057	-18.943	74.000
7311.000	9.512	40.620	50.132	-23.868	74.000
9748.000	9.630	38.440	48.070	-25.930	74.000
Average Detector:					
4874.000	2.076	40.660	42.737	-11.263	54.000
Vertical					
Peak Detector:					
4874.000	2.532	43.780	46.312	-27.688	74.000
7311.000	10.089	36.040	46.129	-27.871	74.000
9748.000	10.266	36.510	46.777	-27.223	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4924.000	2.191	46.420	48.611	-25.389	74.000
7386.000	10.373	38.520	48.894	-25.106	74.000
9848.000	9.964	38.550	48.514	-25.486	74.000

Average Detector:

--

Vertical

Peak Detector:

4924.000	2.805	38.680	41.485	-32.515	74.000
7386.000	11.180	36.840	48.020	-25.980	74.000
9848.000	10.801	37.250	48.051	-25.949	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)(2412MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4824.000	2.428	46.470	48.899	-25.101	74.000
7236.000	9.177	39.520	48.697	-25.303	74.000
9648.000	10.019	37.840	47.860	-26.140	74.000

Average Detector:

--

Vertical

Peak Detector:

4824.000	2.836	40.510	43.347	-30.653	74.000
7236.000	9.676	38.510	48.186	-25.814	74.000
9648.000	10.556	37.860	48.417	-25.583	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW) (2437 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector:					
4874.000	2.076	52.630	54.707	-19.293	74.000
7311.000	9.512	40.660	50.172	-23.828	74.000
9748.000	9.630	38.850	48.480	-25.520	74.000
Average Detector:					
4874.000	2.076	38.100	40.177	-13.823	54.000
Vertical					
Peak Detector:					
4874.000	2.532	44.210	46.742	-27.258	74.000
7311.000	10.089	38.250	48.339	-25.661	74.000
9748.000	10.266	37.630	47.897	-26.103	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW) (2462 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4924.000	2.191	46.200	48.391	-25.609	74.000
7386.000	10.373	38.950	49.324	-24.676	74.000
9848.000	9.964	38.220	48.184	-25.816	74.000

Average Detector:

--

Vertical

Peak Detector:

4924.000	2.805	39.520	42.325	-31.675	74.000
7386.000	11.180	38.140	49.320	-24.680	74.000
9848.000	10.801	38.690	49.491	-24.509	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)(2422MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4844.000	2.280	43.740	46.021	-27.979	74.000
7266.000	9.106	38.640	47.746	-26.254	74.000
9688.000	9.663	36.440	46.103	-27.897	74.000

Average Detector:

--

Vertical

Peak Detector:

4844.000	2.707	39.630	42.338	-31.662	74.000
7266.000	9.626	38.350	47.976	-26.024	74.000
9688.000	10.284	38.650	48.934	-25.066	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4874.000	2.076	45.340	47.417	-26.583	74.000
7311.000	9.512	40.510	50.022	-23.978	74.000
9748.000	9.630	38.200	47.830	-26.170	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4874.000	2.532	40.630	43.162	-30.838	74.000
7311.000	10.089	38.950	49.039	-24.961	74.000
9748.000	10.266	38.140	48.407	-25.593	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)(2452 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4904.000	2.000	42.840	44.841	-29.159	74.000
7356.000	10.308	37.840	48.148	-25.852	74.000
9808.000	9.850	38.520	48.370	-25.630	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4904.000	2.513	40.360	42.874	-31.126	74.000
7356.000	11.022	37.480	48.502	-25.498	74.000
9808.000	10.512	37.490	48.002	-25.998	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : General Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps)(2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
330.700	-4.492	44.339	39.847	-6.153	46.000
480.080	-0.329	37.630	37.301	-8.699	46.000
528.580	1.848	37.348	39.196	-6.804	46.000
604.240	4.770	24.582	29.352	-16.648	46.000
720.640	3.511	29.794	33.305	-12.695	46.000
918.520	6.396	29.900	36.296	-9.704	46.000
Vertical					
119.240	-3.541	37.522	33.981	-9.519	43.500
293.840	-7.738	41.263	33.526	-12.474	46.000
480.080	-4.359	36.869	32.510	-13.490	46.000
528.580	-0.462	34.707	34.245	-11.755	46.000
790.480	2.913	27.258	30.170	-15.830	46.000
924.340	5.550	32.731	38.281	-7.719	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless gateway
Test Item : General Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps)(2437 MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
142.520	-10.427	41.964	31.537	-11.963	43.500
324.880	-4.491	40.068	35.577	-10.423	46.000
454.860	-0.779	41.365	40.585	-5.415	46.000
528.580	1.848	36.999	38.847	-7.153	46.000
722.580	3.496	34.423	37.919	-8.081	46.000
883.600	6.146	25.644	31.789	-14.211	46.000
Vertical					
94.020	-3.539	35.406	31.866	-11.634	43.500
231.760	-8.848	42.793	33.945	-12.055	46.000
394.720	-4.024	43.887	39.863	-6.137	46.000
528.580	-0.462	33.492	33.030	-12.970	46.000
666.320	-1.809	36.541	34.733	-11.267	46.000
792.420	2.889	37.181	40.070	-5.930	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless gateway
Test Item : General Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)(2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
127.000	-10.017	41.439	31.422	-12.078	43.500
191.020	-10.040	40.249	30.209	-13.291	43.500
324.880	-4.491	38.660	34.169	-11.831	46.000
435.460	-1.920	35.055	33.135	-12.865	46.000
584.840	3.391	26.276	29.667	-16.333	46.000
724.520	3.485	32.611	36.096	-9.904	46.000
Vertical					
167.740	-8.239	40.974	32.735	-10.765	43.500
264.740	-7.681	46.257	38.576	-7.424	46.000
462.620	-3.838	36.014	32.176	-13.824	46.000
528.580	-0.462	33.818	33.356	-12.644	46.000
666.320	-1.809	36.662	34.854	-11.146	46.000
903.000	2.966	29.905	32.871	-13.129	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless gateway
Test Item : General Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)(2437 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
167.740	-10.799	41.157	30.358	-13.142	43.500
342.340	-3.272	41.238	37.966	-8.034	46.000
439.340	-2.009	36.532	34.523	-11.477	46.000
577.080	3.169	30.693	33.862	-12.138	46.000
666.320	2.031	33.267	35.299	-10.701	46.000
924.340	6.240	32.678	38.918	-7.082	46.000
Vertical					
167.740	-8.239	40.543	32.304	-11.196	43.500
295.780	-7.455	39.626	32.171	-13.829	46.000
410.240	-6.616	40.004	33.388	-12.612	46.000
528.580	-0.462	35.535	35.073	-10.927	46.000
697.360	1.311	35.453	36.764	-9.236	46.000
924.340	5.550	30.832	36.382	-9.618	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF antenna conducted test


5.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with "X" are used to measure the final test results.

5.2. Test Setup

RF antenna Conducted Measurement:

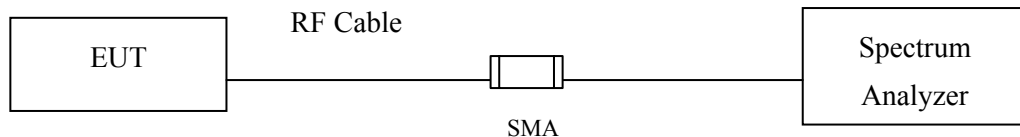

5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.5. Uncertainty


The measurement uncertainty

Conducted is defined as $\pm 1.27\text{dB}$


5.6. Test Result of RF antenna conducted test

Product : Wireless gateway
Test Item : RF antenna conducted test
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps)


Channel 01 (2412MHz)

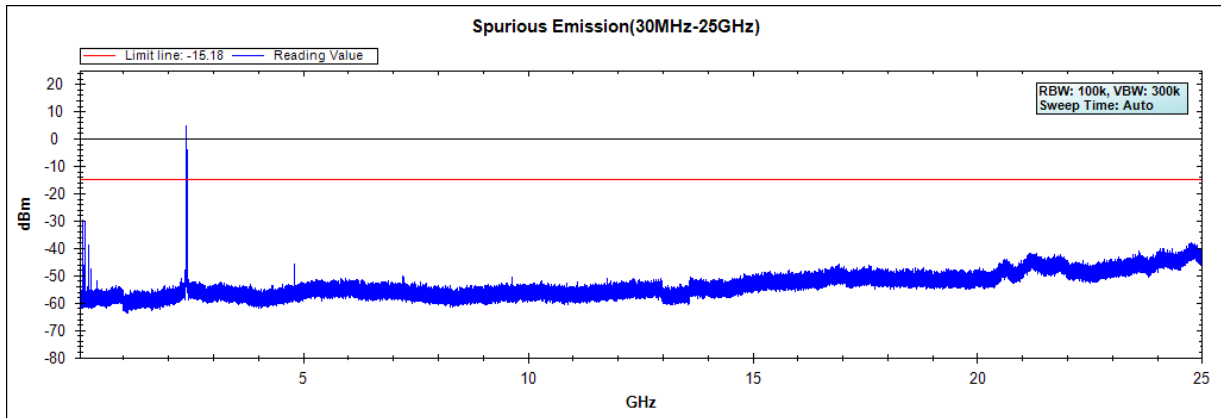

Channel 06 (2437MHz)

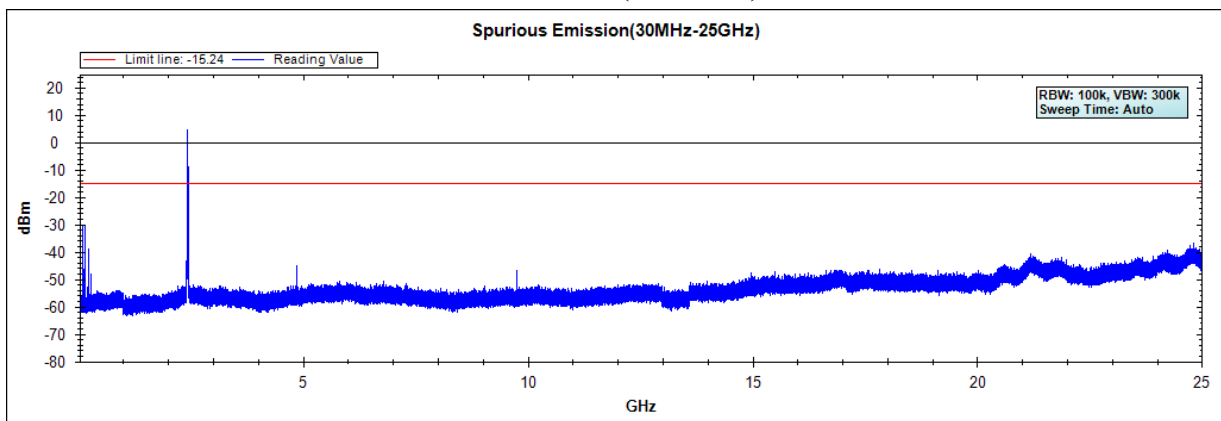


Channel 11 (2462MHz)

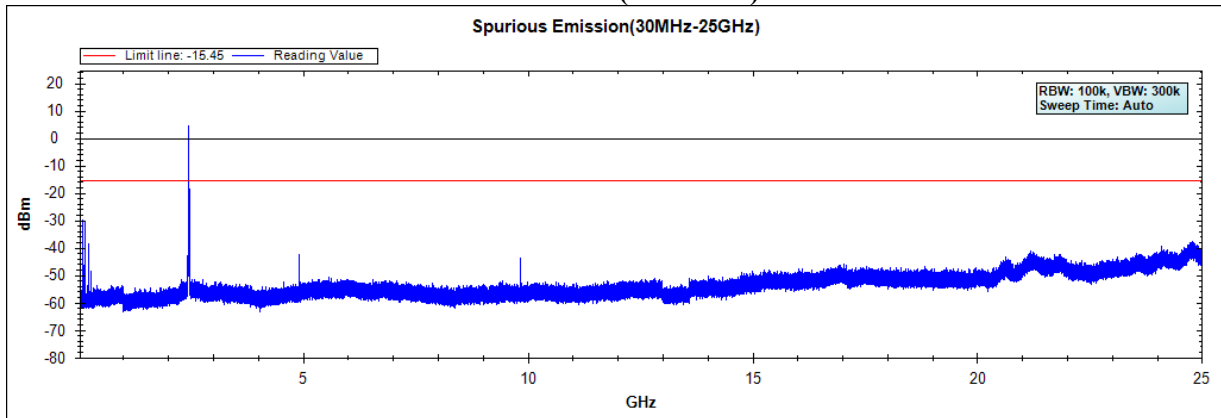


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Wireless gateway
Test Item : RF Antenna Conducted Spurious
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps)


Channel 01 (2412MHz)

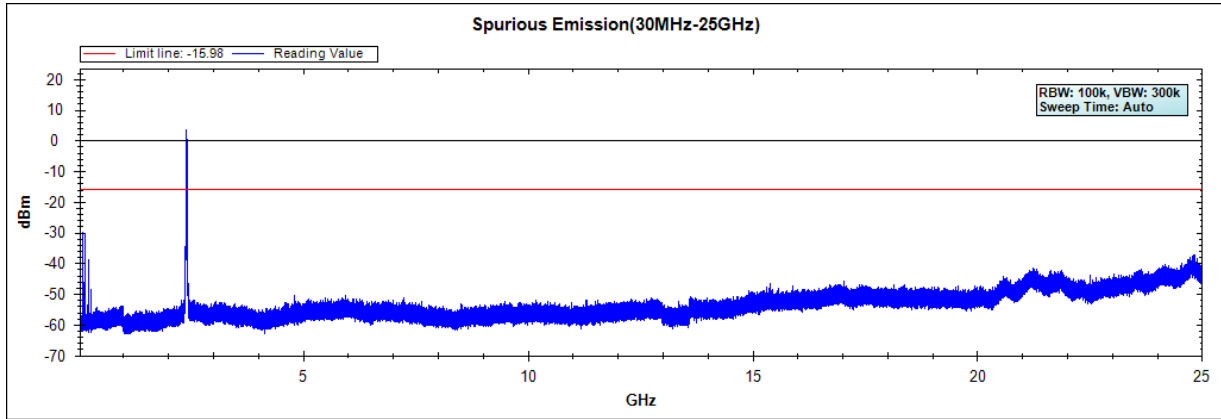

Channel 06 (2437MHz)

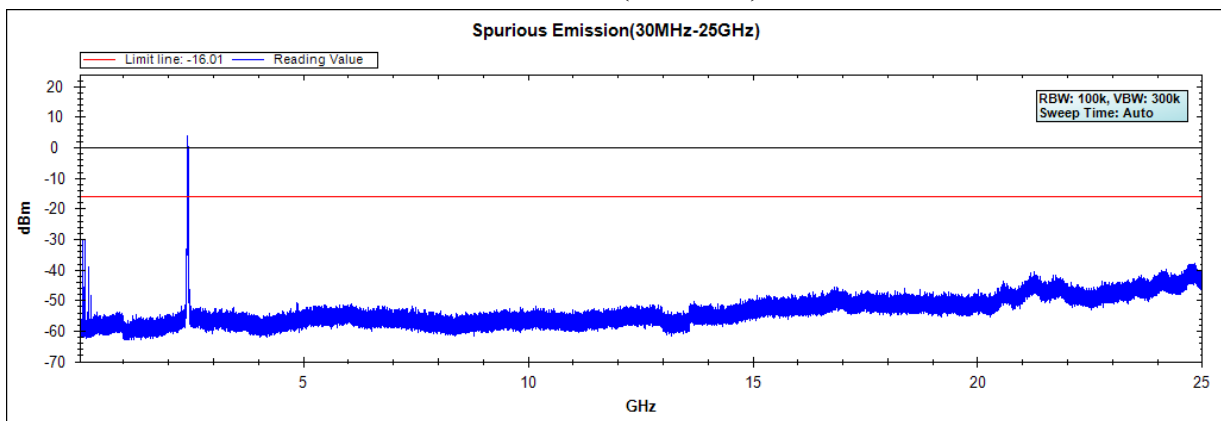


Channel 11 (2462MHz)

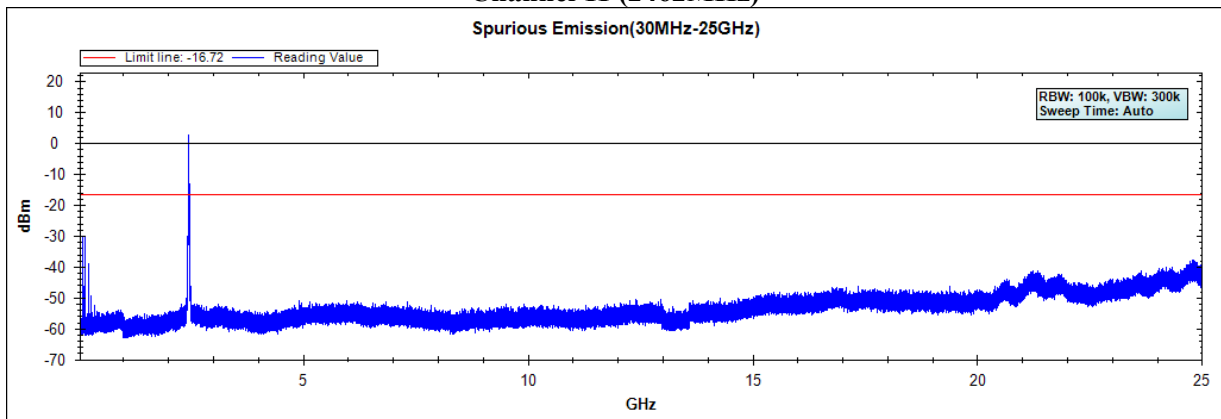


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Wireless gateway
Test Item : RF Antenna Conducted Spurious
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)


Channel 01 (2412MHz)

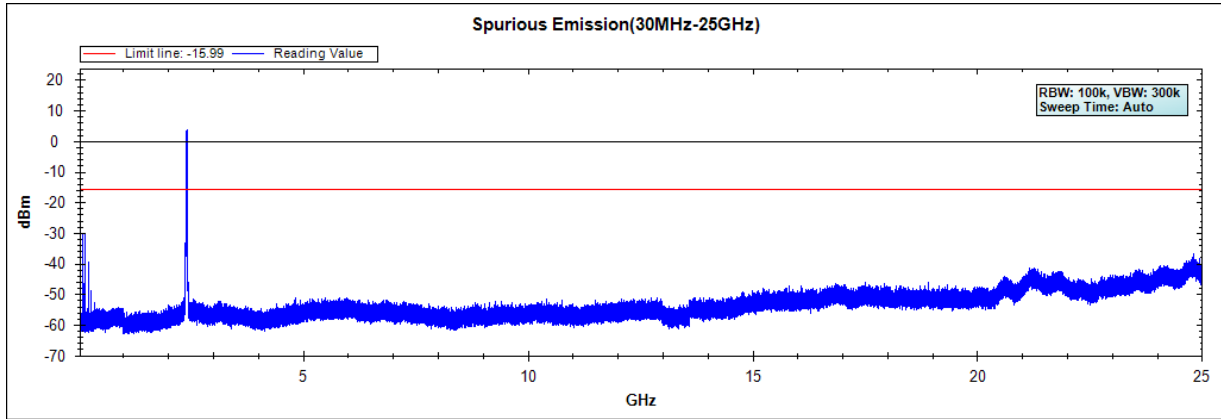

Channel 06 (2437MHz)

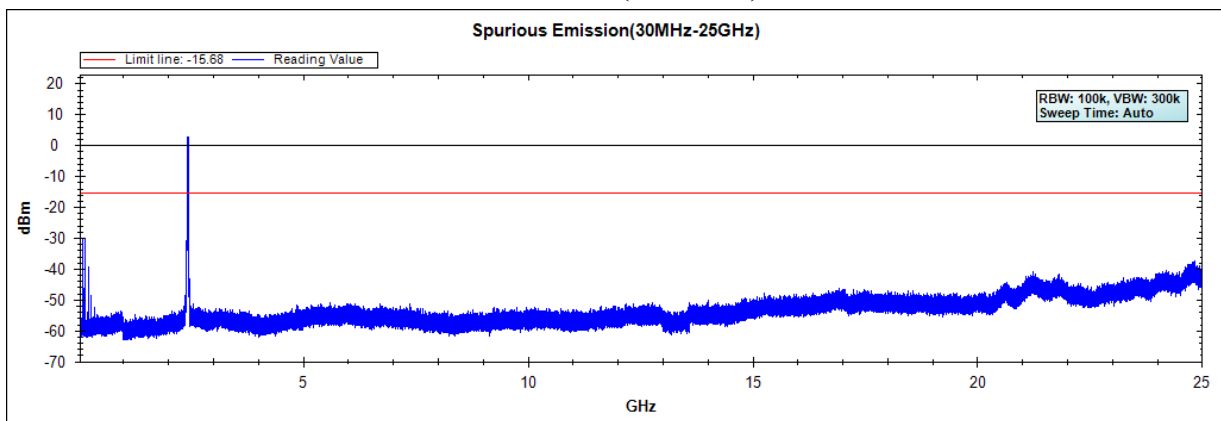


Channel 11 (2462MHz)

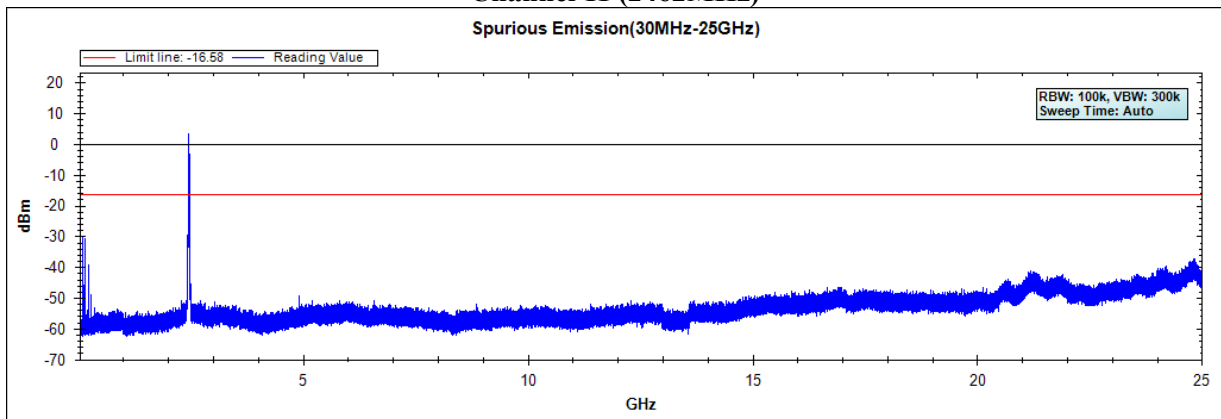


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Wireless gateway
Test Item : RF Antenna Conducted Spurious
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)


Channel 01 (2422MHz)

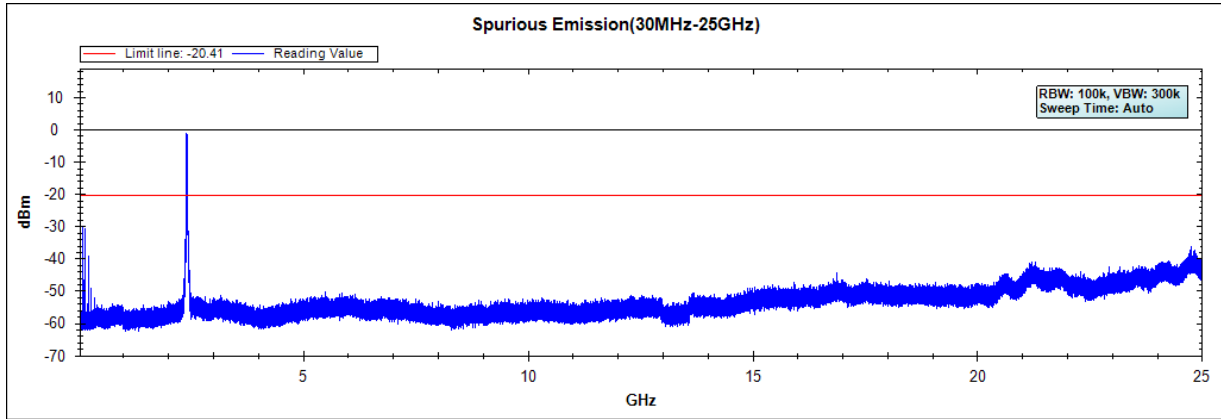

Channel 04 (2437MHz)

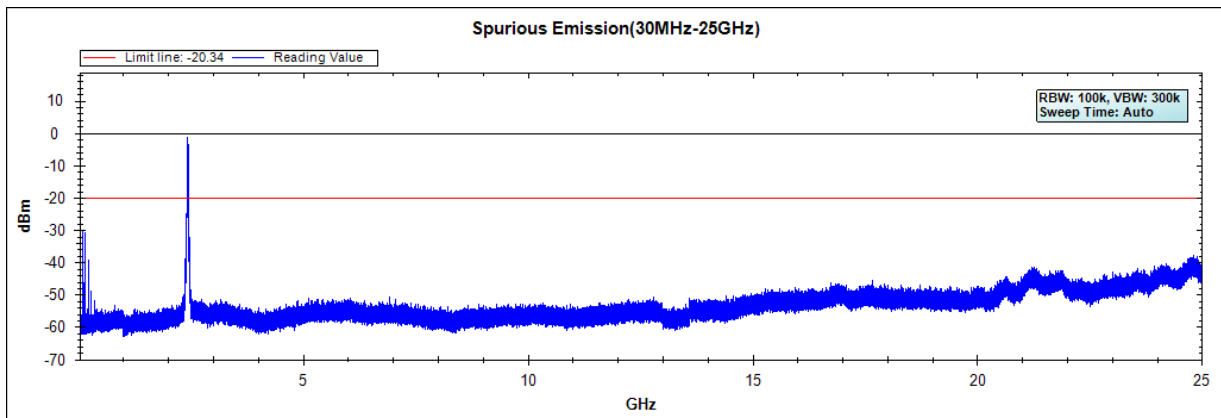

Channel 07 (2452MHz)

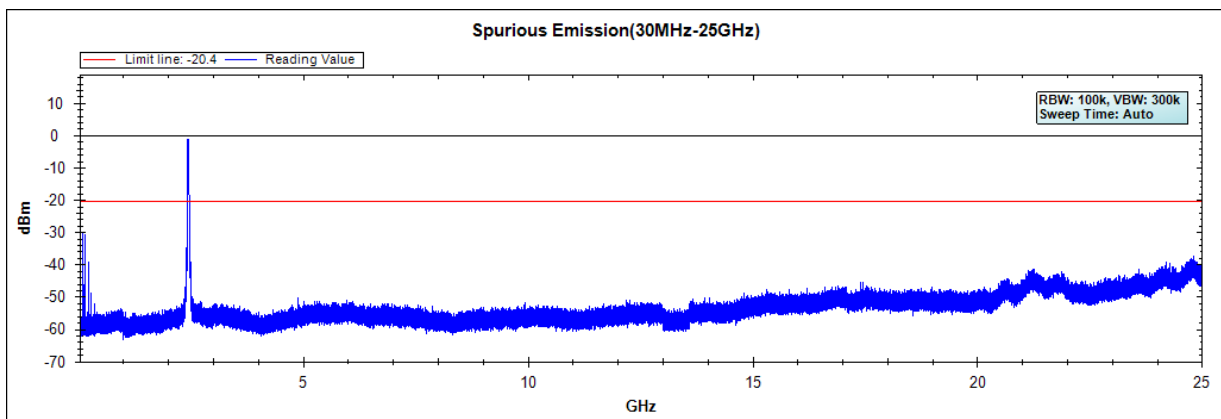

Note: The above test pattern is synthesized by multiple of the frequency range.

6. Band Edge

6.1. Test Equipment

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct., 2014
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar., 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan., 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug., 2015
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan., 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul., 2015
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul., 2015

- Note:
1. All instruments are calibrated every one year.
 2. The test instruments marked by "X" are used to measure the final test results.

6.2. Test Setup

RF Radiated Measurement:

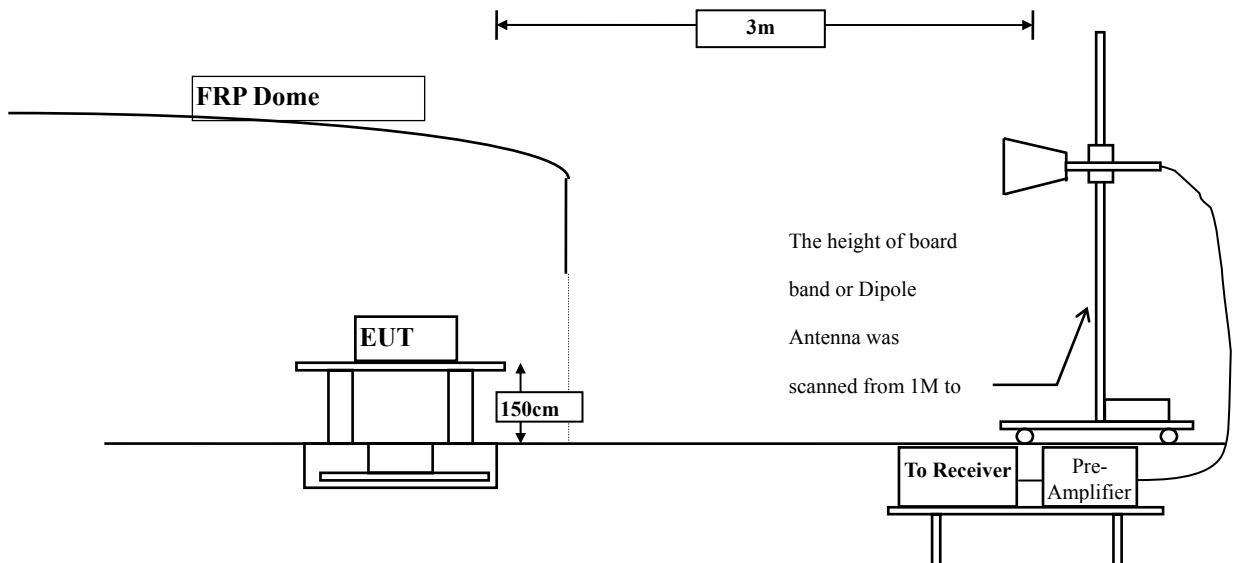

6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

6.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

6.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

6.6. Test Result of Band Edge

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
01 (Peak)	2386.600	-2.702	61.814	59.112	74.00	54.00	Pass
01 (Peak)	2390.000	-2.687	58.414	55.727	74.00	54.00	Pass
01 (Peak)	2400.000	-2.660	72.330	69.670	--	--	--
01 (Peak)	2413.000	-2.642	109.804	107.161	--	--	--
01 (Average)	2386.200	-2.704	52.879	50.175	74.00	54.00	Pass
01 (Average)	2390.000	-2.687	50.427	47.740	74.00	54.00	Pass
01 (Average)	2400.000	-2.660	57.824	55.164	--	--	--
01 (Average)	2410.200	-2.645	106.216	103.571	--	--	--

Figure Channel 01: Horizontal (Peak)


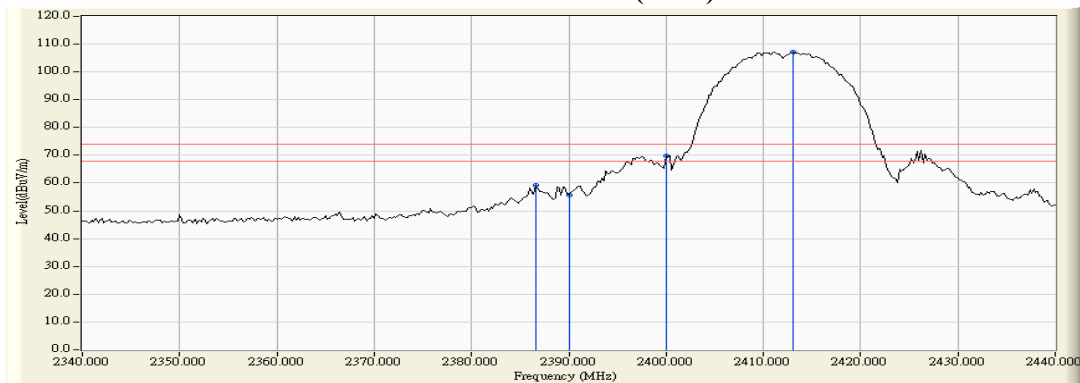


Figure Channel 01: Horizontal (Average)

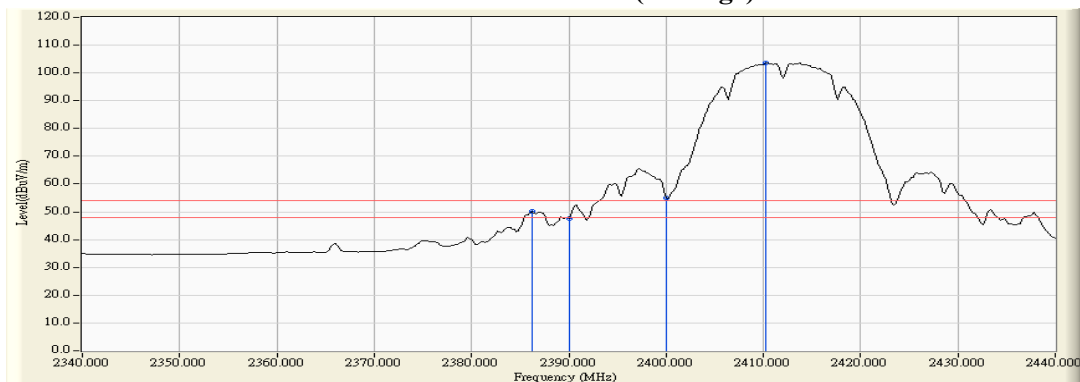

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
01 (Peak)	2389.200	-4.156	54.112	49.956	74.00	54.00	Pass
01 (Peak)	2390.000	-4.159	49.675	45.516	74.00	54.00	Pass
01 (Peak)	2400.000	-4.171	53.937	49.766	--	--	--
01 (Peak)	2411.000	-4.169	98.972	94.803	--	--	--
01 (Average)	2386.600	-4.147	43.295	39.148	74.00	54.00	Pass
01 (Average)	2390.000	-4.159	40.661	36.502	74.00	54.00	Pass
01 (Average)	2400.000	-4.171	45.228	41.057	--	--	--
01 (Average)	2411.200	-4.168	95.496	91.328	--	--	--

Figure Channel 01: VERTICAL (Peak)


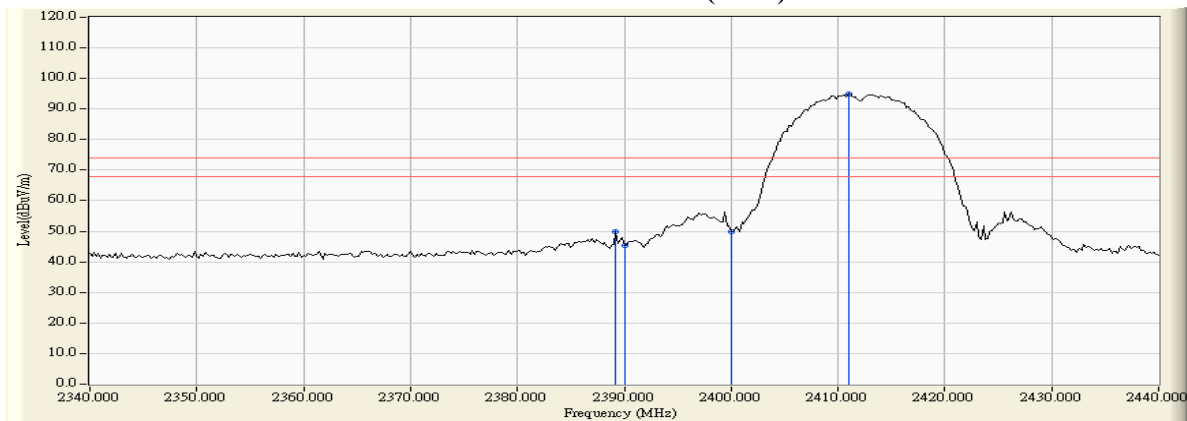


Figure Channel 01: VERTICAL (Average)

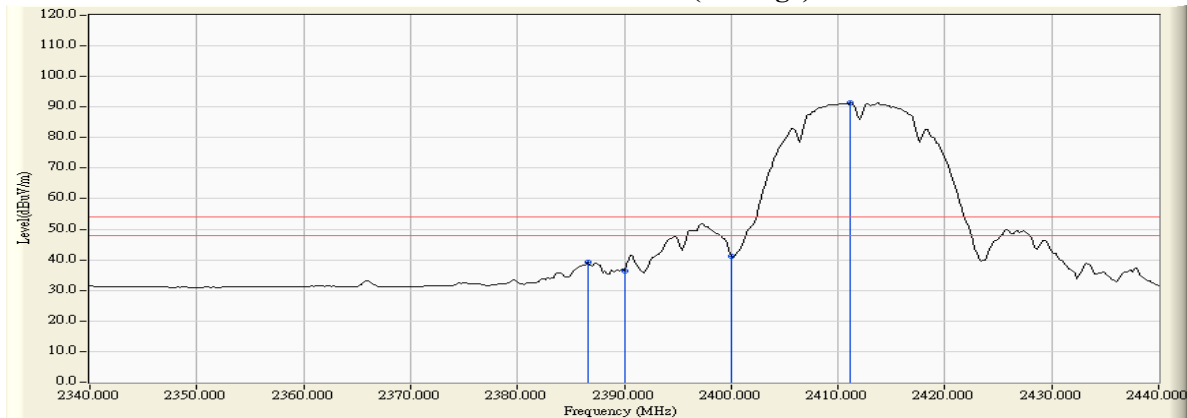

- Note:1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
11 (Peak)	2462.900	-2.622	109.064	106.442	--	--	--
11 (Peak)	2483.500	-2.601	59.368	56.766	74.00	54.00	Pass
11 (Peak)	2487.500	-2.598	60.723	58.125	74.00	54.00	Pass
11 (Average)	2460.100	-2.625	105.321	102.697	--	--	--
11 (Average)	2483.500	-2.601	52.440	49.838	74.00	54.00	Pass

Figure Channel 11: Horizontal (Peak)

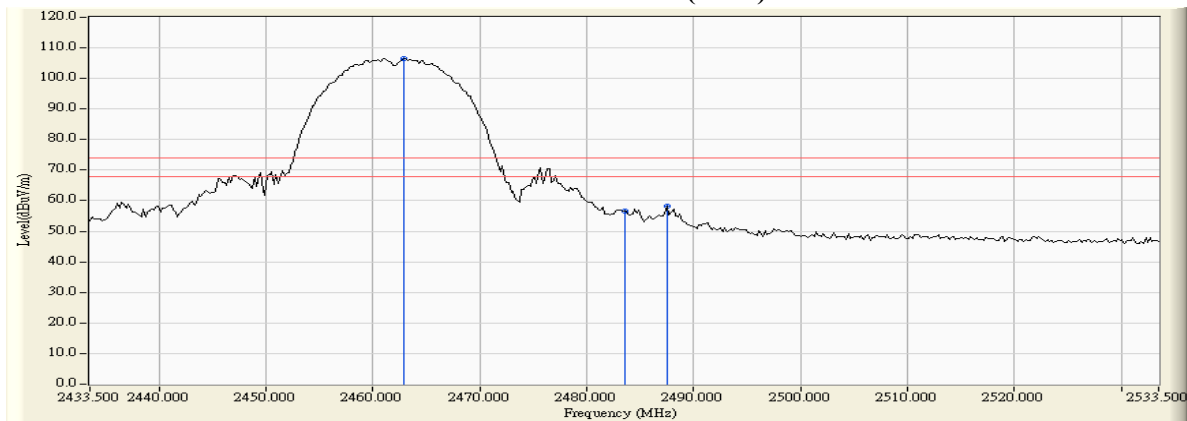


Figure Channel 11: Horizontal (Average)



- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
11 (Peak)	2462.900	-4.032	98.160	94.128	--	--	--
11 (Peak)	2483.500	-3.966	49.520	45.553	74.00	54.00	Pass
11 (Peak)	2484.500	-3.964	50.260	46.296	74.00	54.00	Pass
11 (Average)	2460.100	-4.041	94.513	90.473	--	--	--
11 (Average)	2483.500	-3.966	41.088	37.121	74.00	54.00	Pass

Figure Channel 11: VERTICAL (Peak)

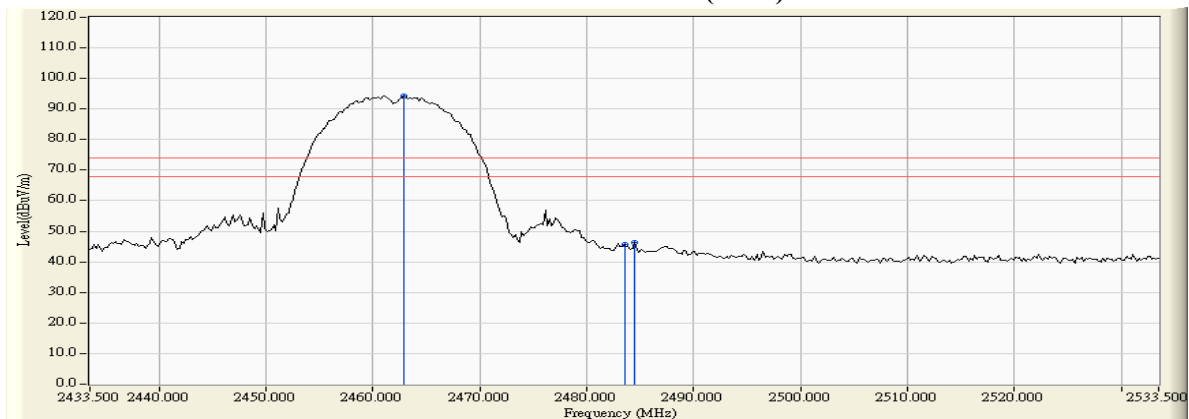


Figure Channel 11: VERTICAL (Average)



- Note:1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
01 (Peak)	2389.200	-2.690	70.549	67.859	74.00	54.00	Pass
01 (Peak)	2390.000	-2.687	69.051	66.364	74.00	54.00	Pass
01 (Peak)	2400.000	-2.660	84.764	82.104	--	--	--
01 (Peak)	2416.800	-2.642	108.201	105.559	--	--	--
01 (Average)	2390.000	-2.687	54.479	51.792	74.00	54.00	Pass
01 (Average)	2400.000	-2.660	65.897	63.237	--	--	--
01 (Average)	2407.000	-2.650	97.529	94.879	--	--	--

Figure Channel 01: Horizontal (Peak)


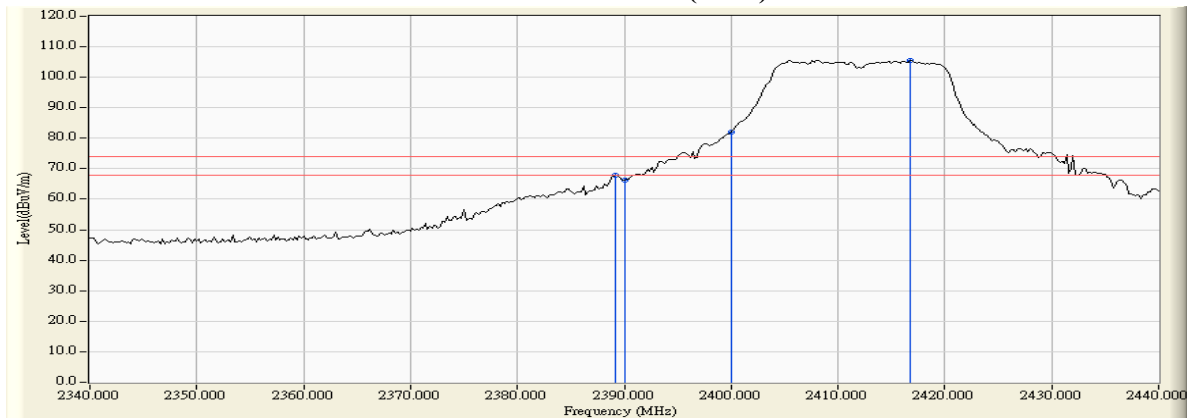


Figure Channel 01: Horizontal (Average)

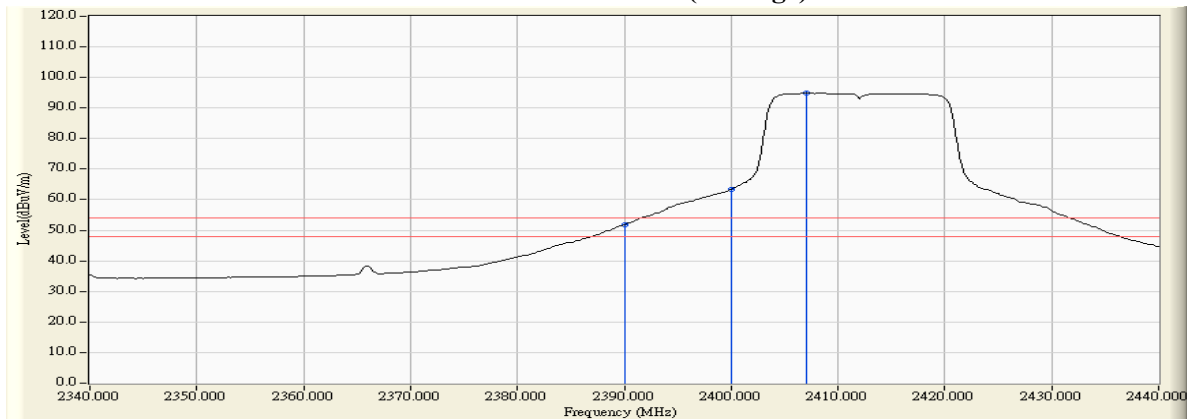

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
01 (Peak)	2388.800	-4.155	63.405	59.250	74.00	54.00	Pass
01 (Peak)	2390.000	-4.159	61.668	57.509	74.00	54.00	Pass
01 (Peak)	2400.000	-4.171	78.152	73.981	--	--	--
01 (Peak)	2405.400	-4.170	101.570	97.400	--	--	--
01 (Average)	2390.000	-4.159	48.030	43.871	74.00	54.00	Pass
01 (Average)	2400.000	-4.171	58.225	54.054	--	--	--
01 (Average)	2407.000	-4.170	91.126	86.956	--	--	--

Figure Channel 01:

VERTICAL (Peak)


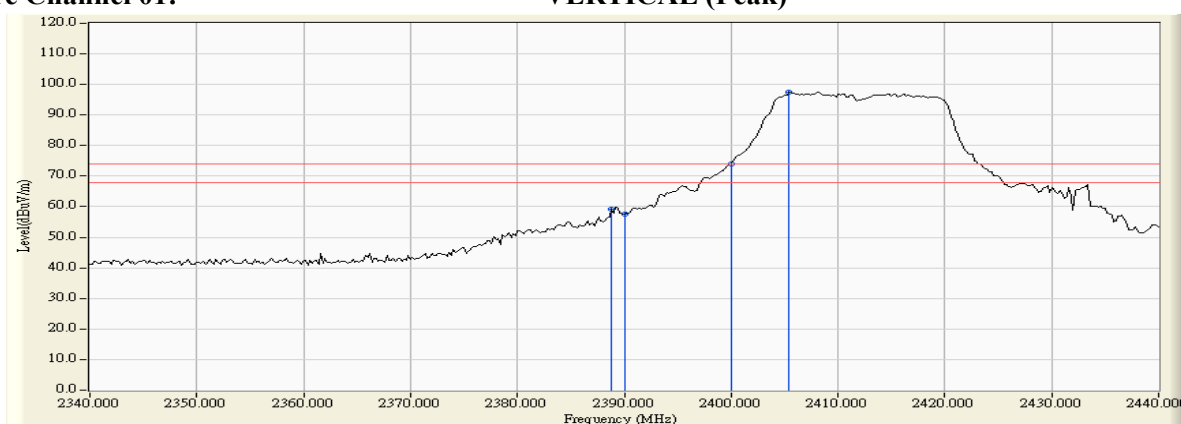


Figure Channel 01:

VERTICAL (Average)

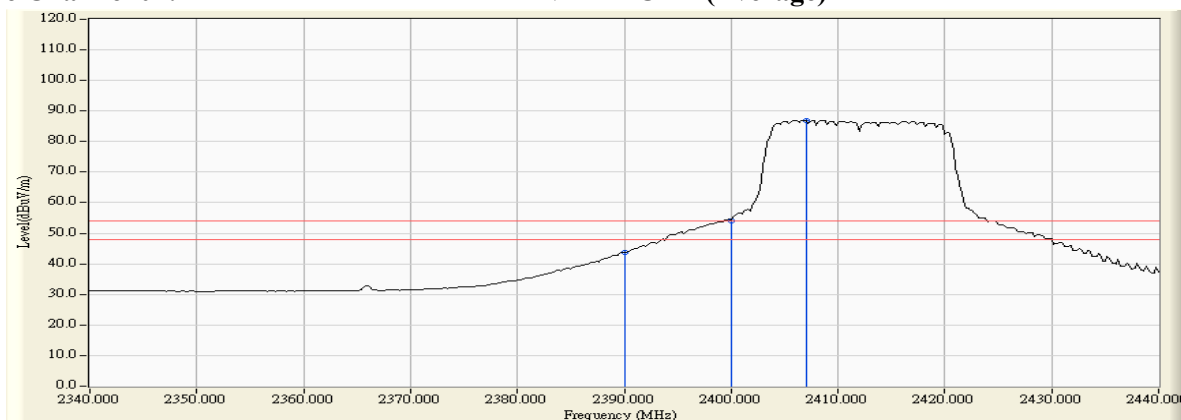

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)


RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
11 (Peak)	2464.700	-2.620	107.820	105.200	--	--	--
11 (Peak)	2483.500	-2.601	71.953	69.351	74.00	54.00	Pass
11 (Average)	2456.900	-2.626	97.106	94.480	--	--	--
11 (Average)	2483.500	-2.601	54.116	51.514	74.00	54.00	Pass

Figure Channel 11: Horizontal (Peak)



Figure Channel 11: Horizontal (Average)

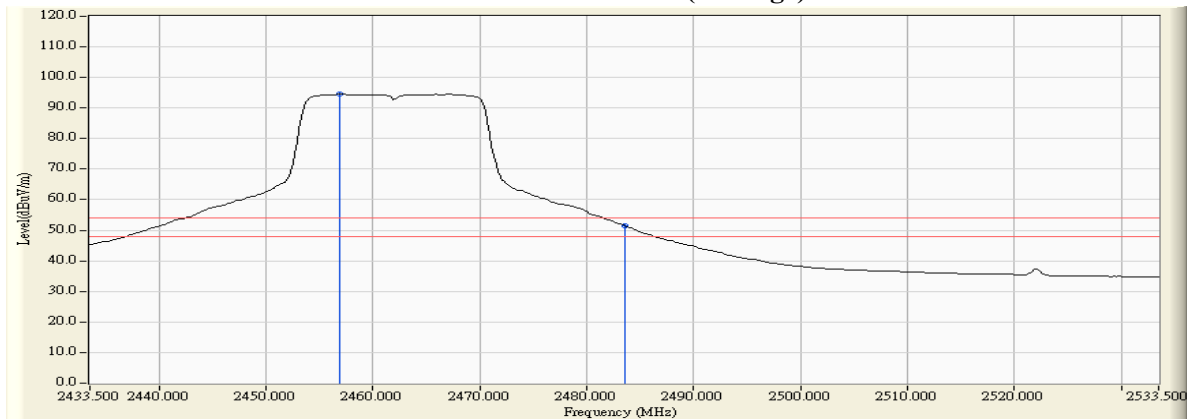

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)


RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
11 (Peak)	2455.300	-4.055	97.059	93.004	--	--	--
11 (Peak)	2483.500	-3.966	58.663	54.696	74.00	54.00	Pass
11 (Peak)	2484.700	-3.963	59.809	55.846	74.00	54.00	Pass
11 (Average)	2456.900	-4.050	86.771	82.721	--	--	--
11 (Average)	2483.500	-3.966	42.636	38.669	74.00	54.00	Pass

Figure Channel 11: VERTICAL (Peak)



Figure Channel 11: VERTICAL (Average)

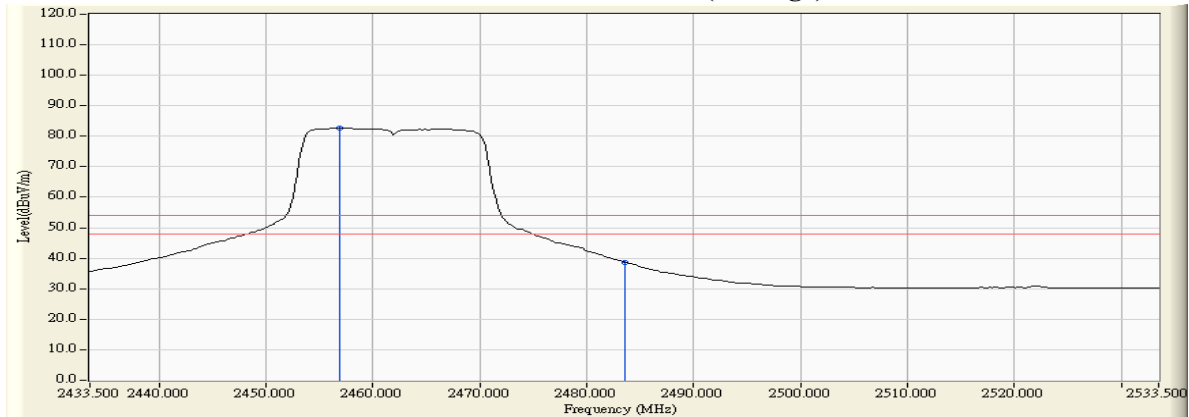

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW) (2412MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
01 (Peak)	2390.000	-2.687	70.782	68.095	74.00	54.00	Pass
01 (Peak)	2400.000	-2.660	83.572	80.912	--	--	--
01 (Peak)	2409.000	-2.647	107.155	104.508	--	--	--
01 (Average)	2390.000	-2.687	53.066	50.379	74.00	54.00	Pass
01 (Average)	2400.000	-2.660	64.095	61.435	--	--	--
01 (Average)	2417.400	-2.643	96.747	94.105	--	--	--

Figure Channel 01: Horizontal (Peak)


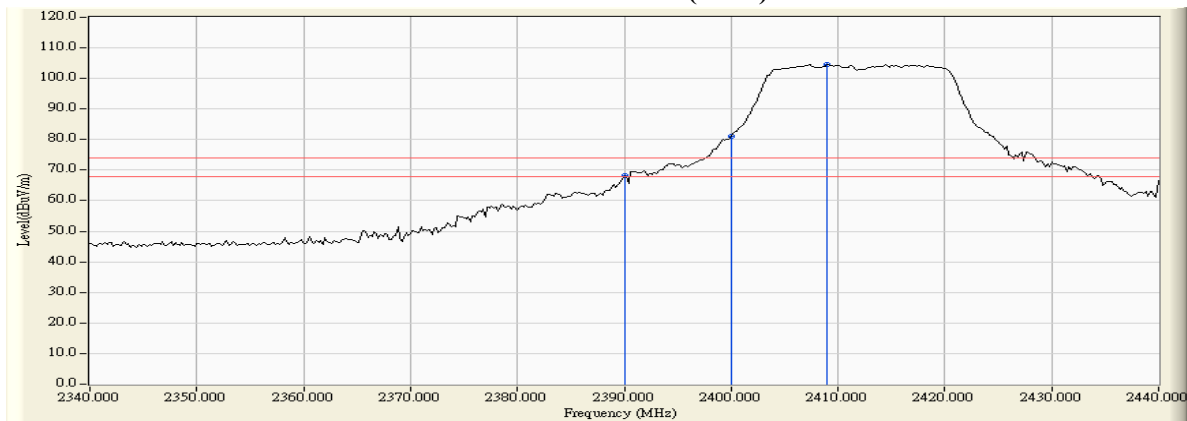


Figure Channel 01: Horizontal (Average)

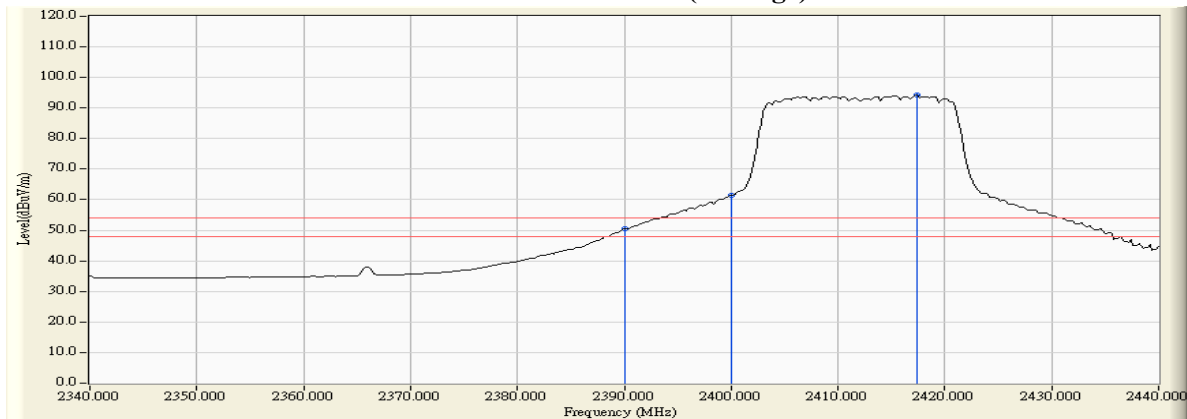

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW) (2412MHz)

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
01 (Peak)	2390.000	-4.159	61.789	57.630	74.00	54.00	Pass
01 (Peak)	2400.000	-4.171	77.096	72.925	--	--	--
01 (Peak)	2409.000	-4.169	99.868	95.699	--	--	--
01 (Average)	2390.000	-4.159	45.223	41.064	74.00	54.00	Pass
01 (Average)	2400.000	-4.171	56.079	51.908	--	--	--
01 (Average)	2406.800	-4.170	89.134	84.964	--	--	--

Figure Channel 01: VERTICAL (Peak)


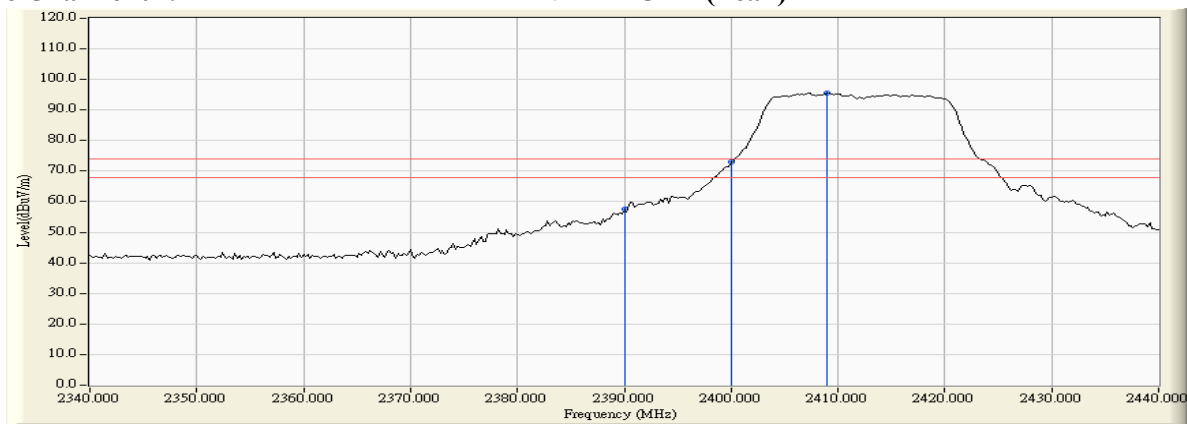


Figure Channel 01: VERTICAL (Average)

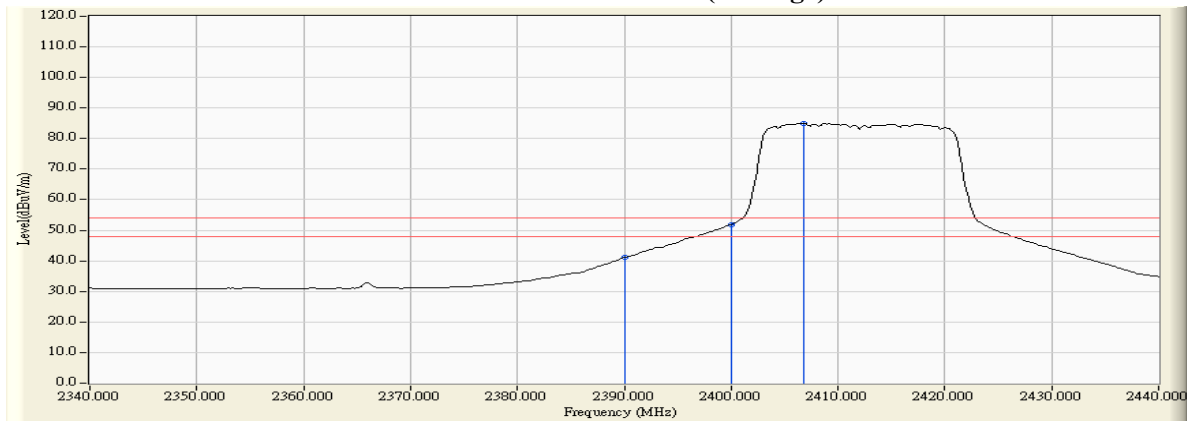

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW) (2462MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
11 (Peak)	2457.100	-2.626	107.621	104.995	--	--	--
11 (Peak)	2483.500	-2.601	72.327	69.725	74.00	54.00	Pass
11 (Average)	2467.300	-2.618	96.787	94.169	--	--	--
11 (Average)	2483.500	-2.601	54.979	52.377	74.00	54.00	Pass

Figure Channel 11:

Horizontal (Peak)


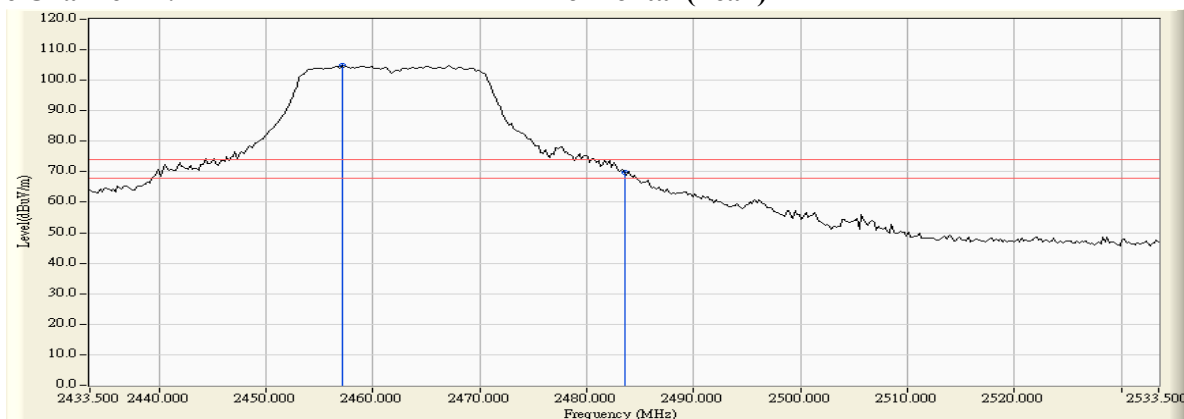


Figure Channel 11:

Horizontal (Average)

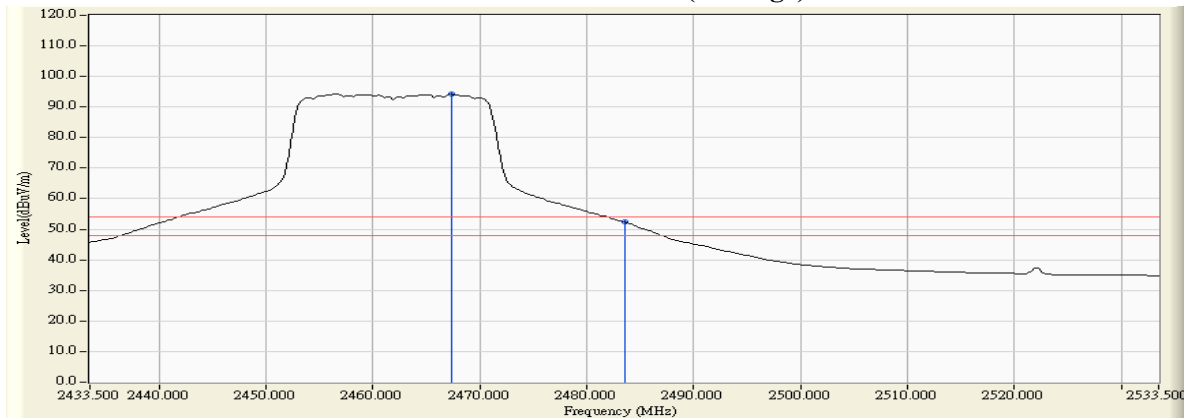

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW) (2462MHz)

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
11 (Peak)	2459.100	-4.043	96.817	92.774	--	--	--
11 (Peak)	2483.500	-3.966	60.907	56.940	74.00	54.00	Pass
11 (Average)	2456.500	-4.051	86.299	82.248	--	--	--
11 (Average)	2483.500	-3.966	43.354	39.387	74.00	54.00	Pass

Figure Channel 11: VERTICAL (Peak)


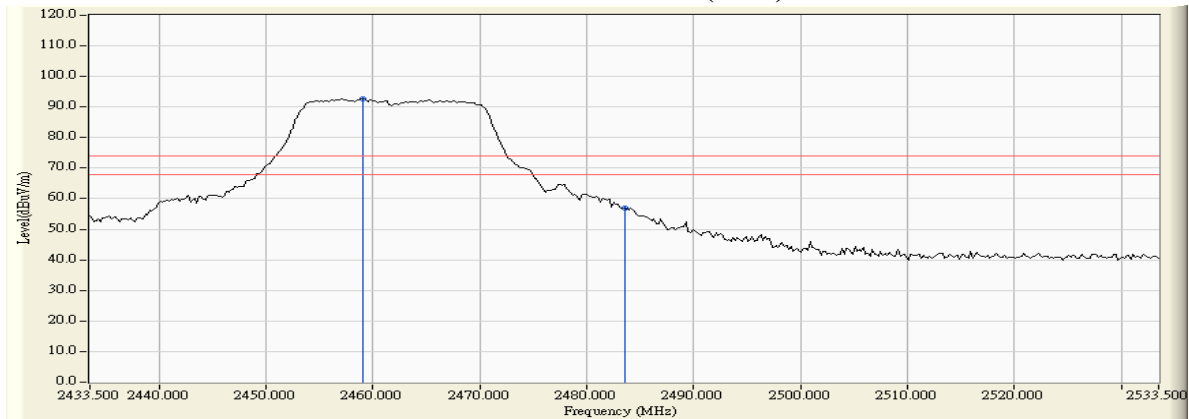


Figure Channel 11: VERTICAL (Average)

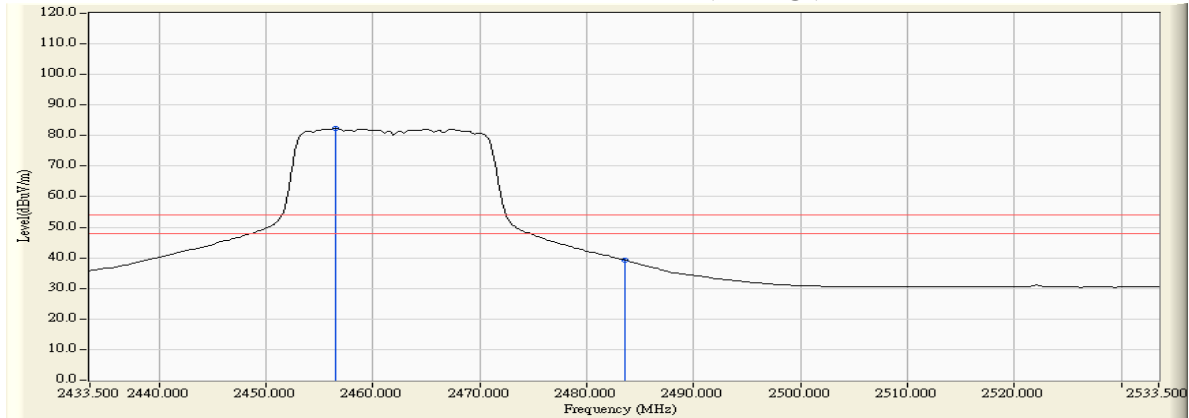

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW) (2422MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
03 (Peak)	2390.000	-2.687	70.626	67.939	74.00	54.00	Pass
03 (Peak)	2400.000	-2.660	81.122	78.462	--	--	--
03 (Peak)	2432.200	-2.639	103.848	101.210	--	--	--
03 (Average)	2390.000	-2.687	54.735	52.048	74.00	54.00	Pass
03 (Average)	2400.000	-2.660	60.275	57.615	--	--	--
03 (Average)	2431.200	-2.638	92.060	89.422	--	--	--

Figure Channel 03: Horizontal (Peak)


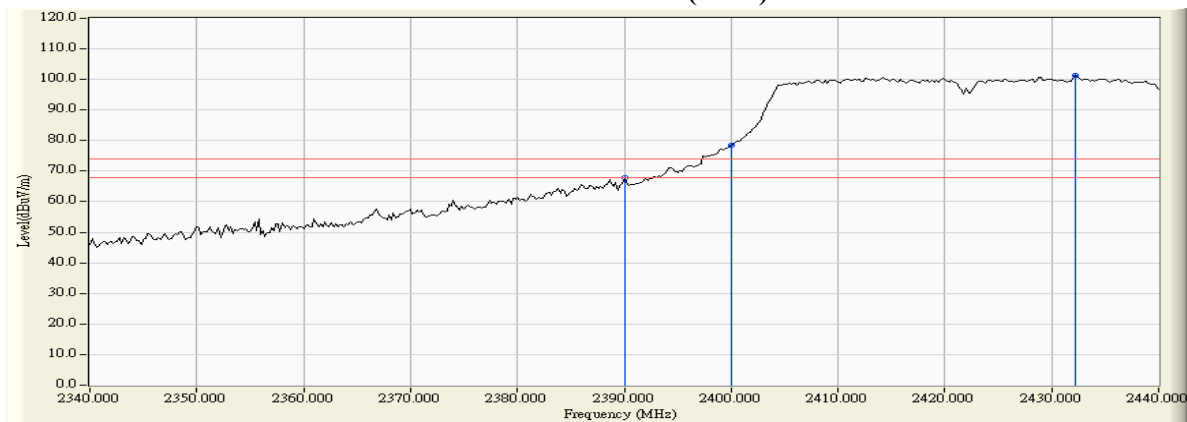


Figure Channel 03: Horizontal (Average)

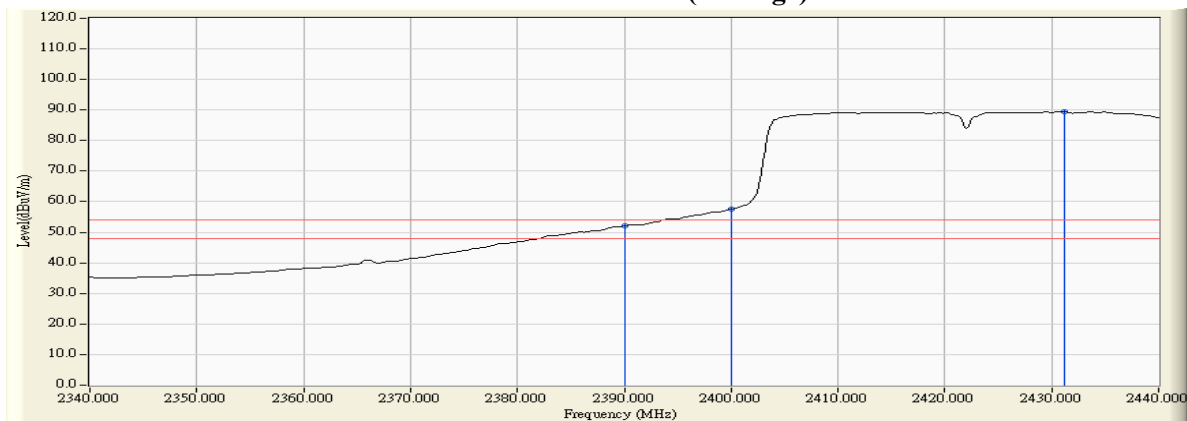

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW) (2422MHz)

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
03 (Peak)	2390.000	-4.159	62.210	58.051	74.00	54.00	Pass
03 (Peak)	2400.000	-4.171	75.317	71.146	--	--	--
03 (Peak)	2432.400	-4.117	96.048	91.931	--	--	--
03 (Average)	2390.000	-4.159	47.820	43.661	74.00	54.00	Pass
03 (Average)	2400.000	-4.171	53.214	49.043	--	--	--
03 (Average)	2409.800	-4.169	84.982	80.813	--	--	--

Figure Channel 03: VERTICAL (Peak)


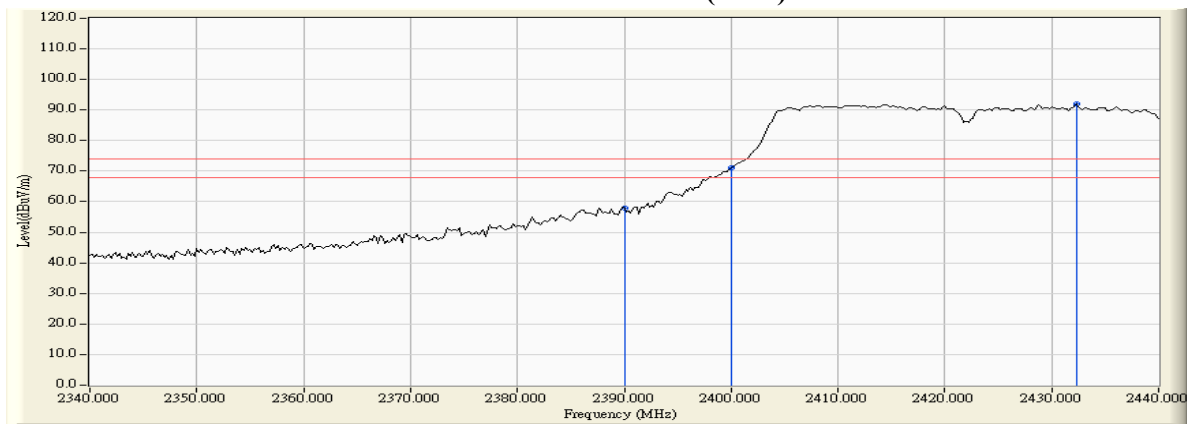


Figure Channel 03: VERTICAL (Average)

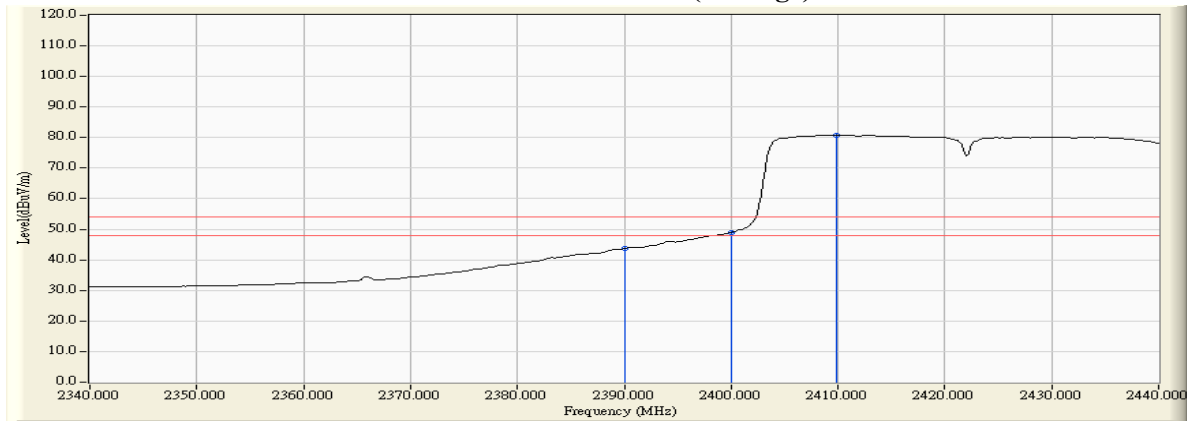

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW) (2452MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
09 (Peak)	2462.100	-2.623	103.956	101.333	--	--	--
09 (Peak)	2483.500	-2.601	69.979	67.377	74.00	54.00	Pass
09 (Peak)	2485.700	-2.600	71.679	69.079	74.00	54.00	Pass
09 (Average)	2461.100	-2.623	91.927	89.304	--	--	--
09 (Average)	2483.500	-2.601	53.355	50.753	74.00	54.00	Pass

Figure Channel 09: Horizontal (Peak)


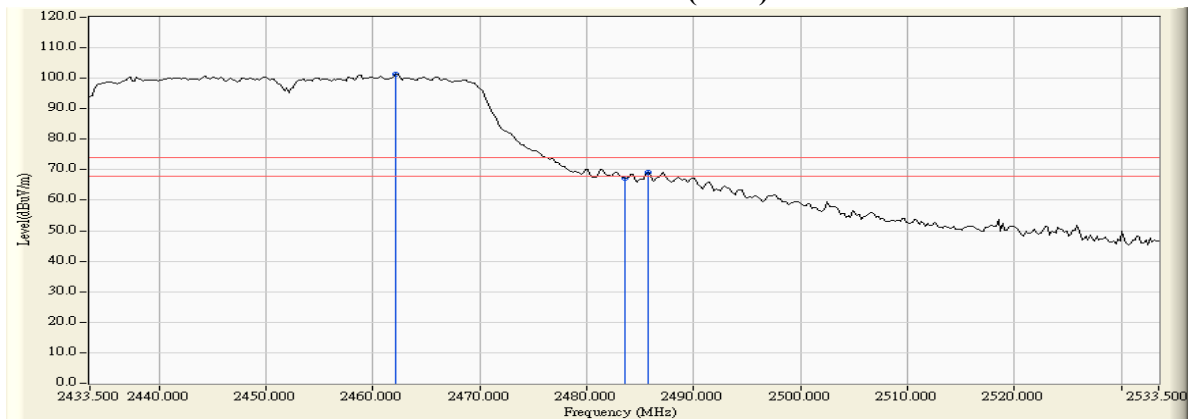


Figure Channel 09: Horizontal (Average)

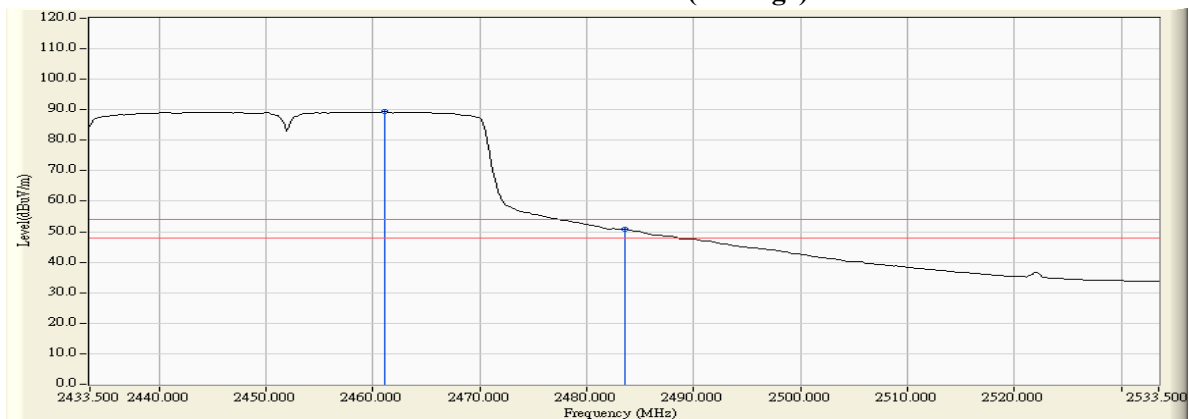

- Note:1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW) (2452MHz)

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
09 (Peak)	2442.700	-4.092	93.203	89.111	--	--	--
09 (Peak)	2483.500	-3.966	58.400	54.433	74.00	54.00	Pass
09 (Peak)	2485.700	-3.960	59.832	55.872	74.00	54.00	Pass
09 (Average)	2438.300	-4.103	82.198	78.095	--	--	--
09 (Average)	2483.500	-3.966	41.458	37.491	74.00	54.00	Pass

Figure Channel 09: VERTICAL (Peak)


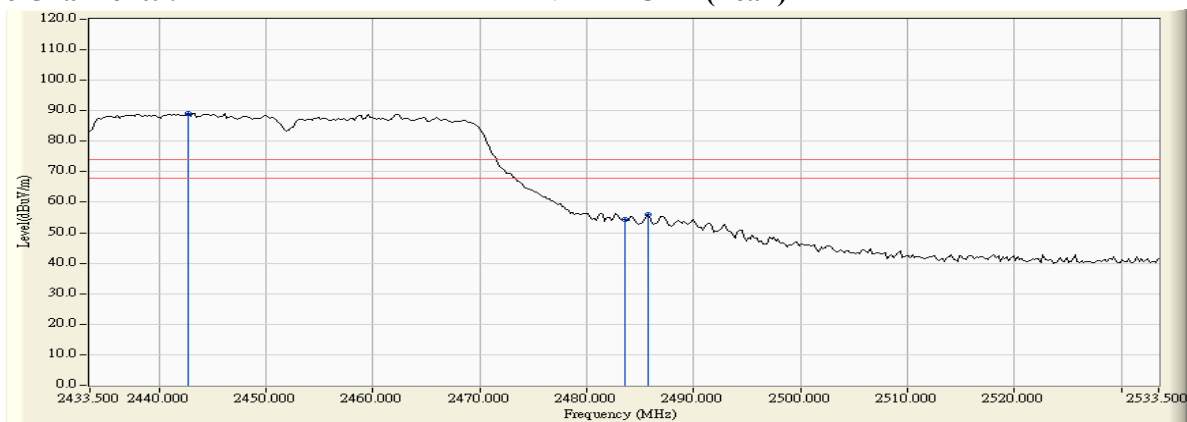


Figure Channel 09: VERTICAL (Average)

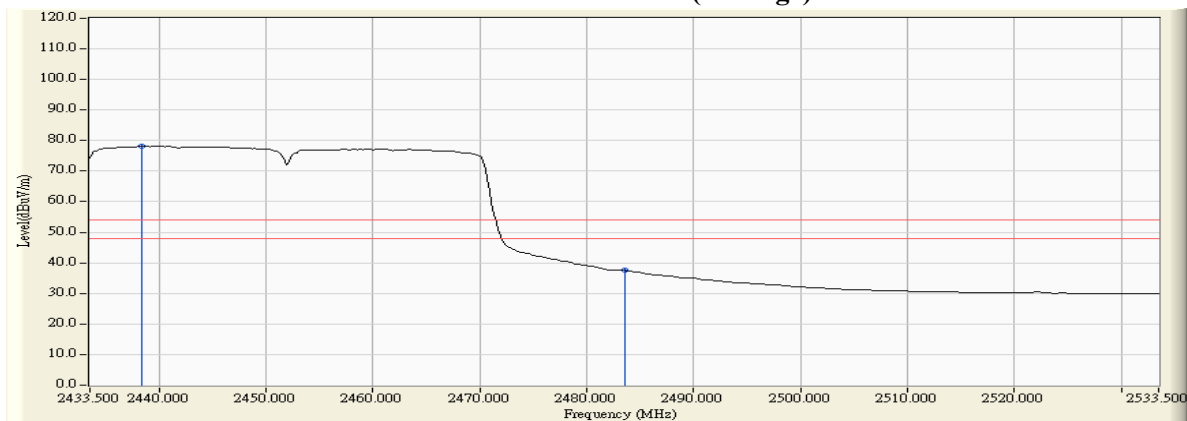

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

7. Occupied Bandwidth


7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

7.2. Test Setup

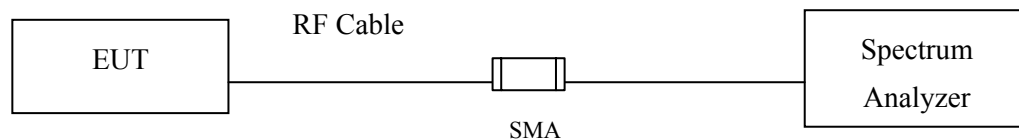

7.3. Limits

The minimum bandwidth shall be at least 500 kHz.

7.4. Test Procedure

The EUT was setup according to ANSI C63.4: 2014; tested according to DTS test procedure of Jan KDB558074 for compliance to FCC 47CFR 15.247 requirements.

7.5. Uncertainty

$\pm 150\text{Hz}$

7.6. Test Result of Occupied Bandwidth

Product : Wireless gateway
Test Item : Occupied Bandwidth Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	10150	>500	Pass
06	2437	10150	>500	Pass
11	2462	10150	>500	Pass

Figure Channel 01:

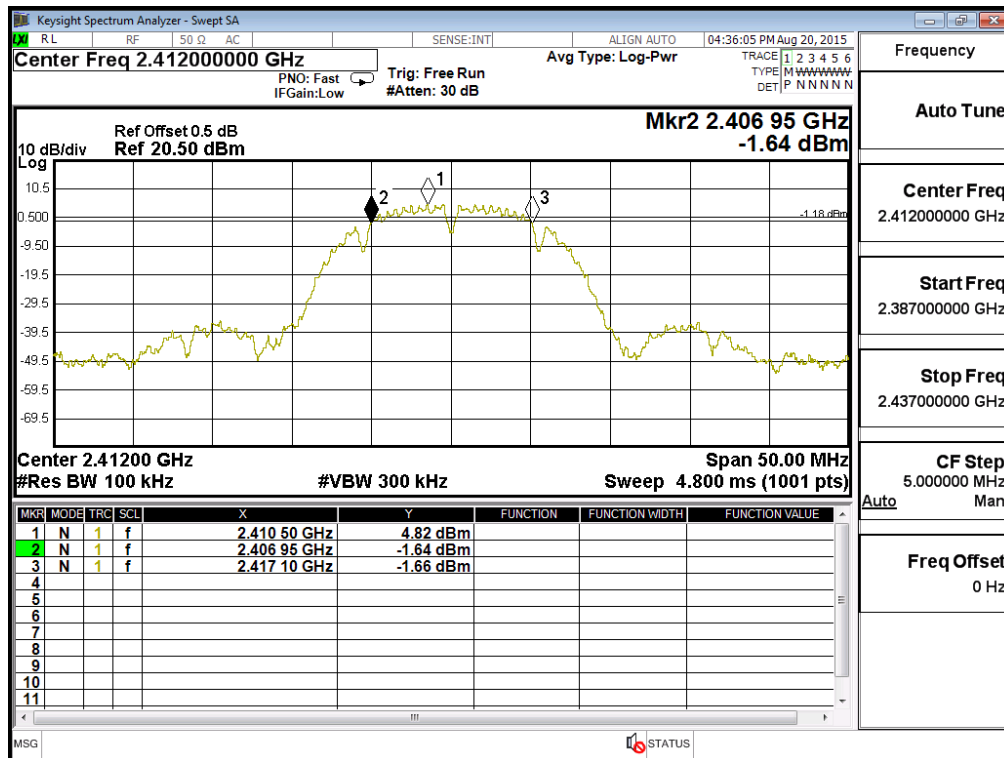


Figure Channel 06:


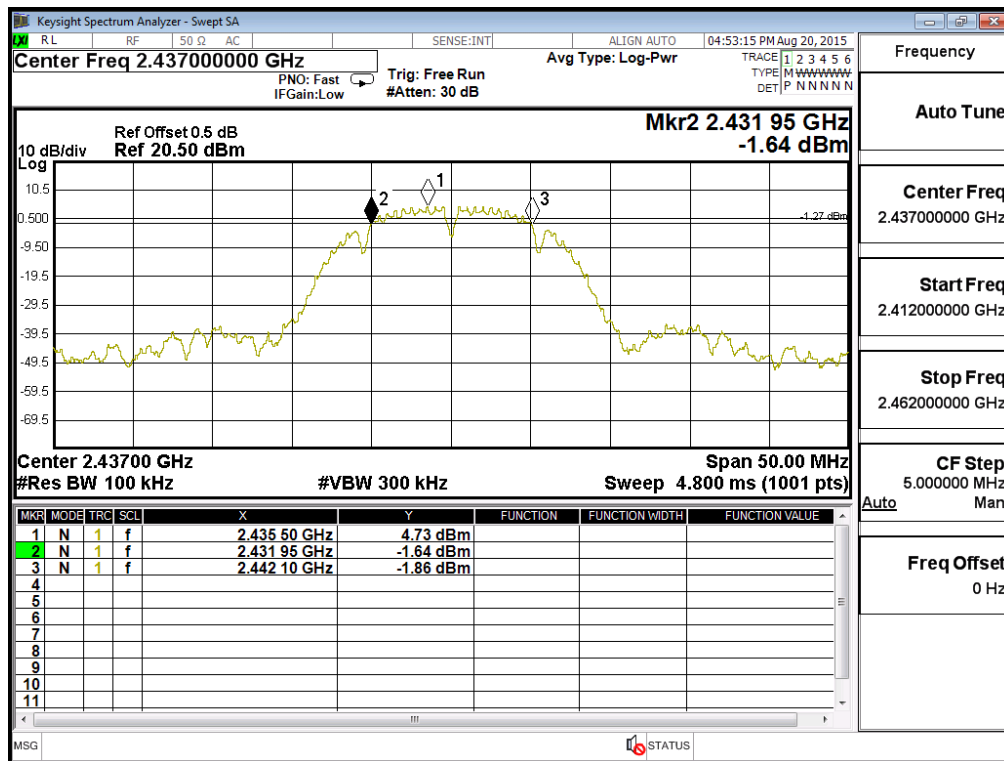


Figure Channel 11:

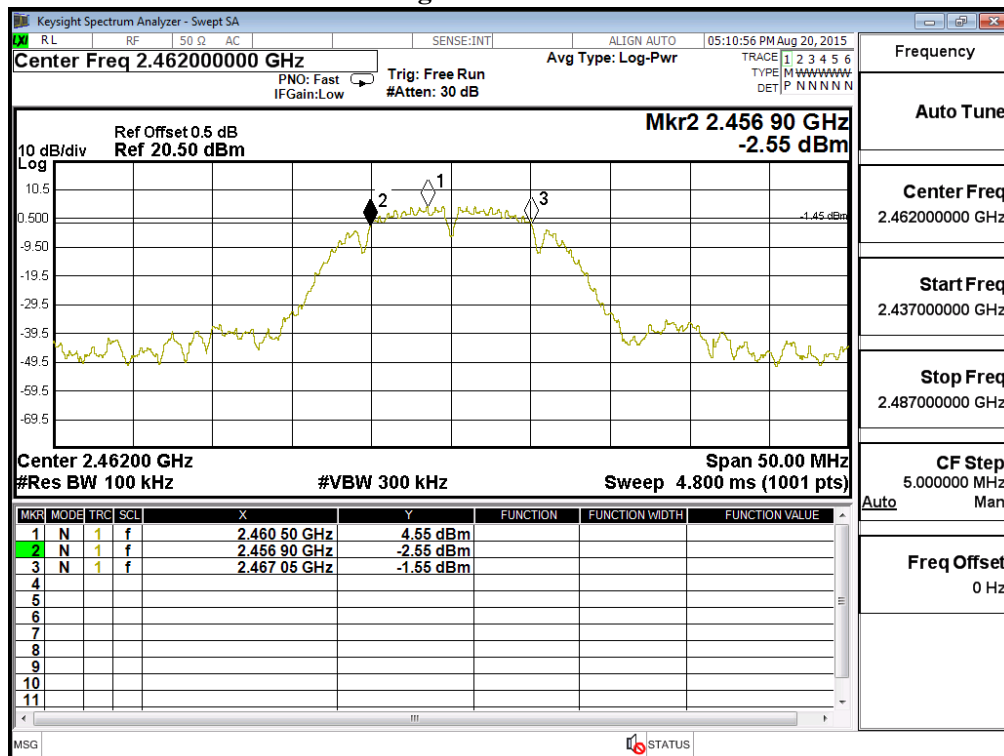

Product : Wireless gateway
Test Item : Occupied Bandwidth Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	16400	>500	Pass
06	2437	16400	>500	Pass
11	2462	16400	>500	Pass

Figure Channel 01:

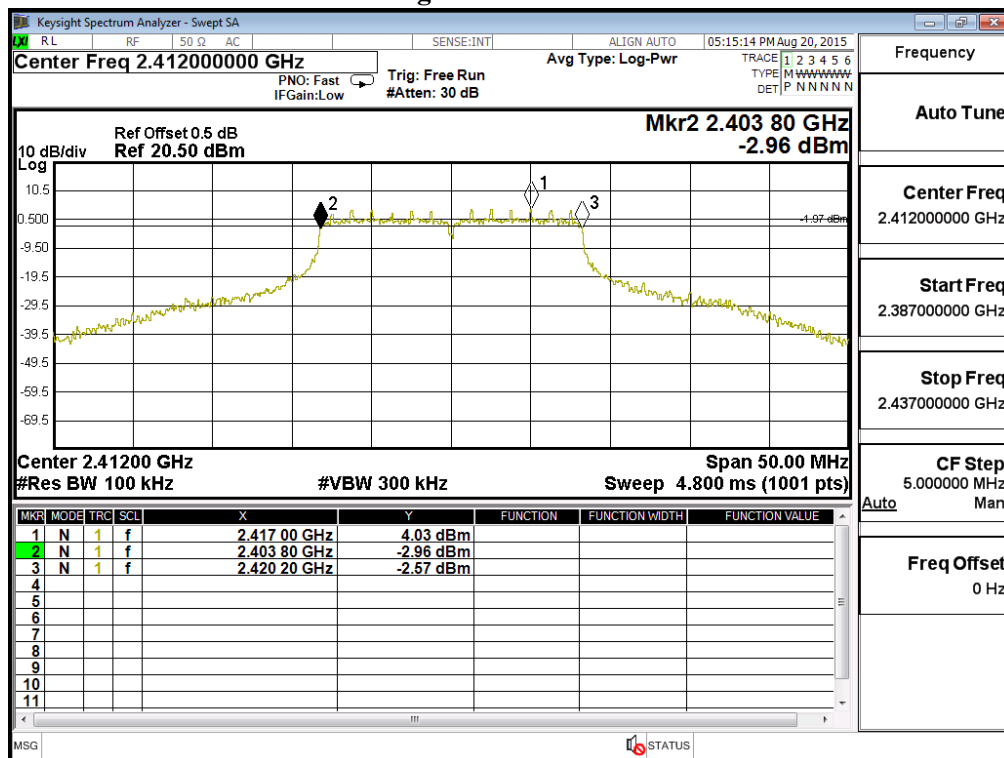


Figure Channel 06:


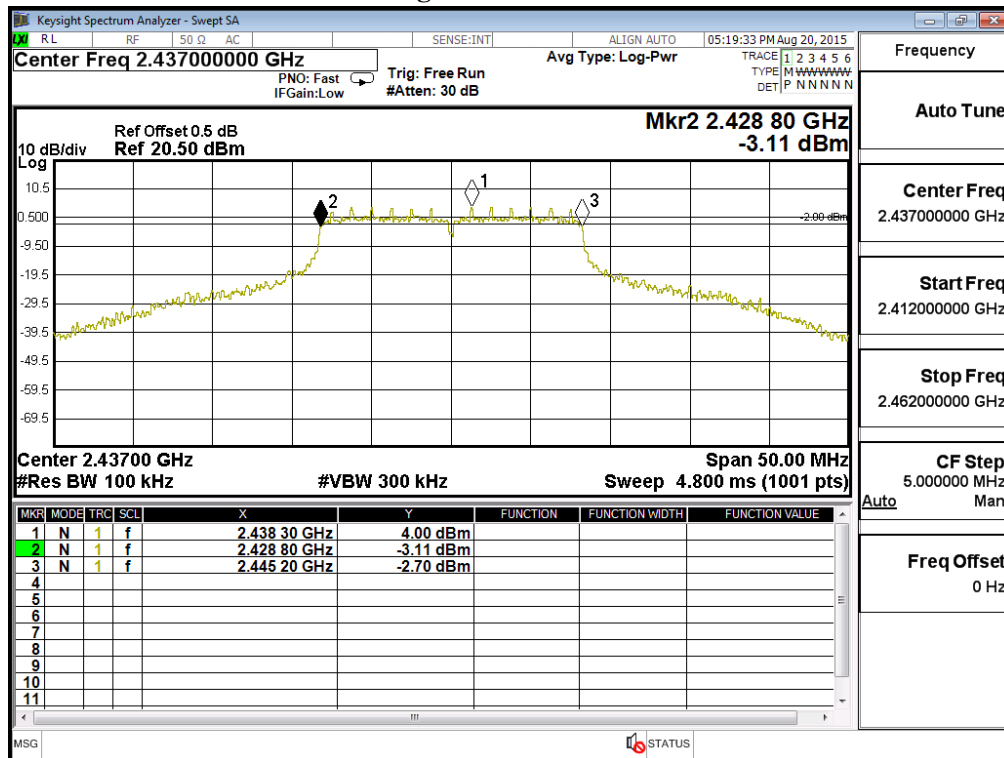


Figure Channel 11:

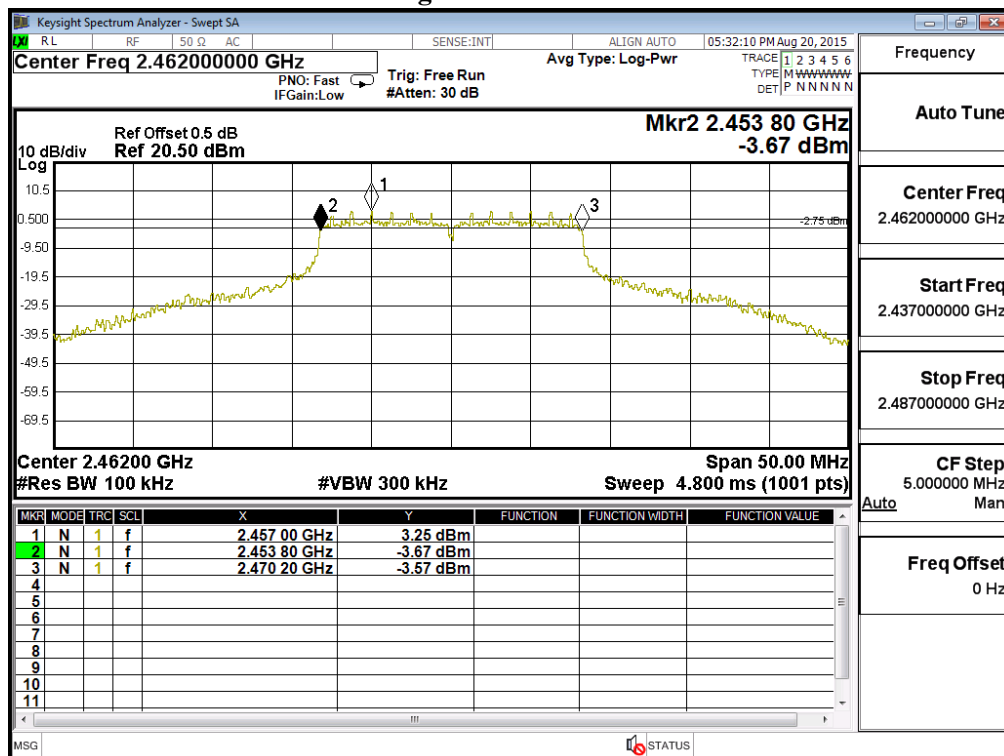

Product : Wireless gateway
Test Item : Occupied Bandwidth Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	17150	>500	Pass
06	2437	17400	>500	Pass
11	2462	17150	>500	Pass

Figure Channel 01:

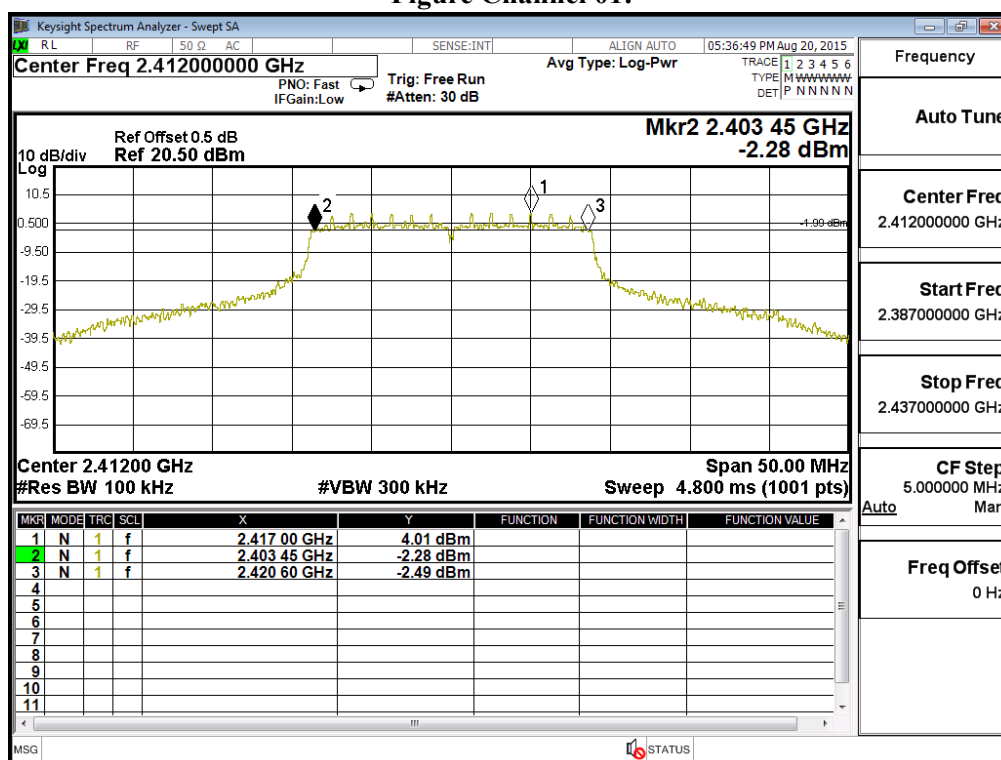


Figure Channel 06:


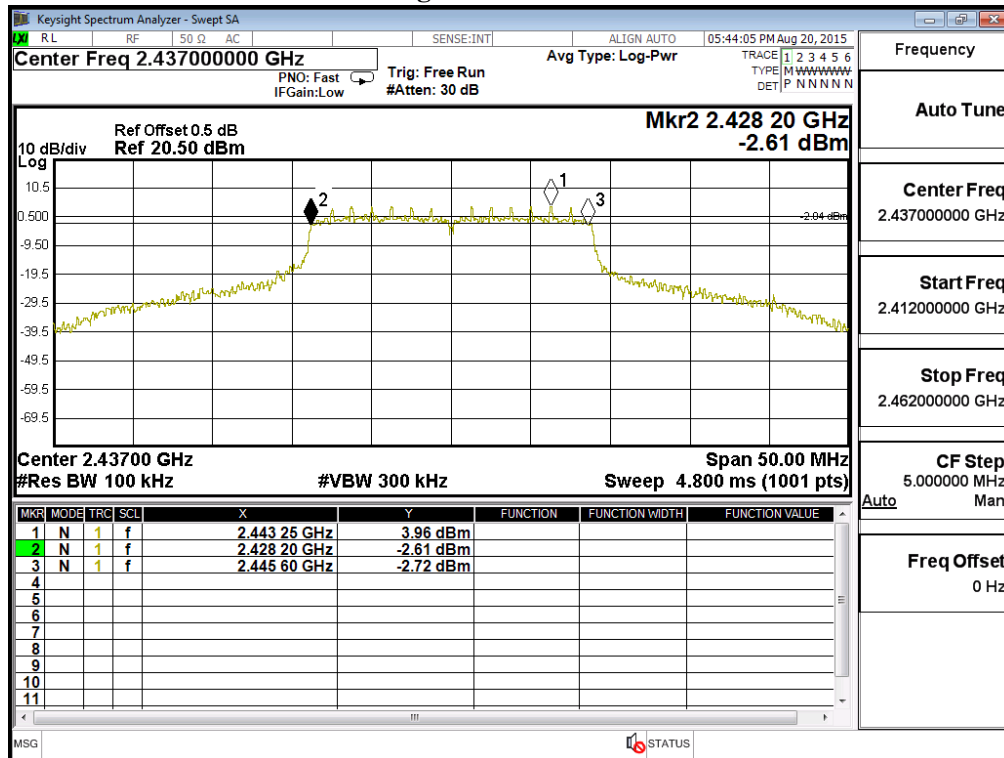


Figure Channel 11:

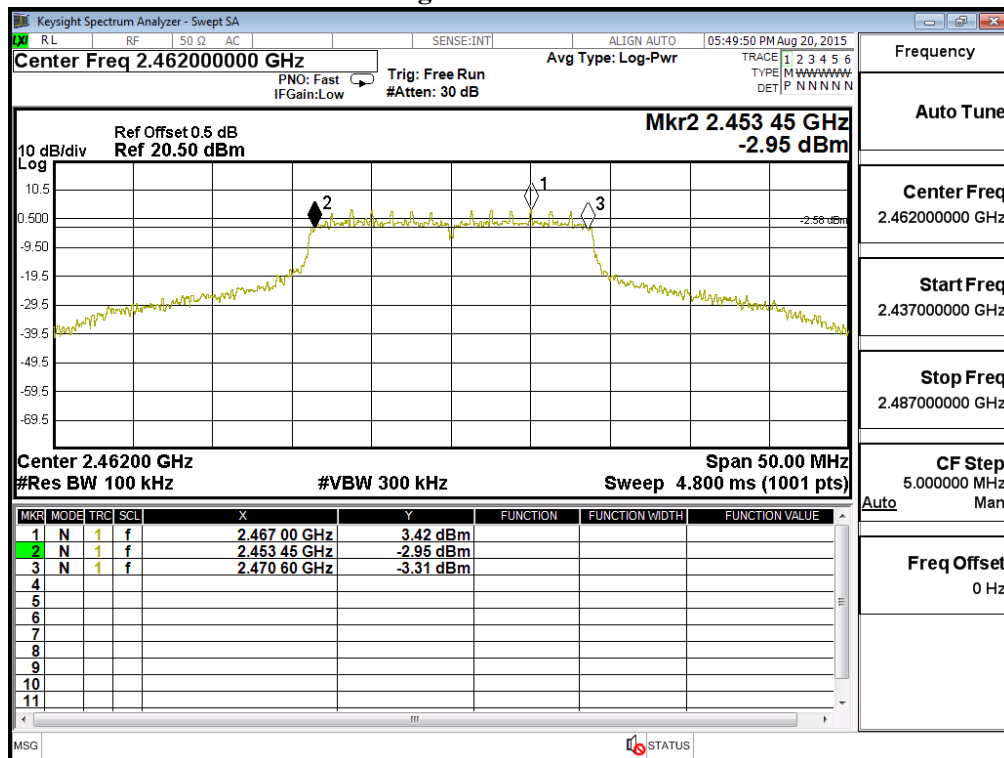

Product : Wireless gateway
Test Item : Occupied Bandwidth Data
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
03	2422	35800	>500	Pass
06	2437	35800	>500	Pass
09	2452	35600	>500	Pass

Figure Channel 03:

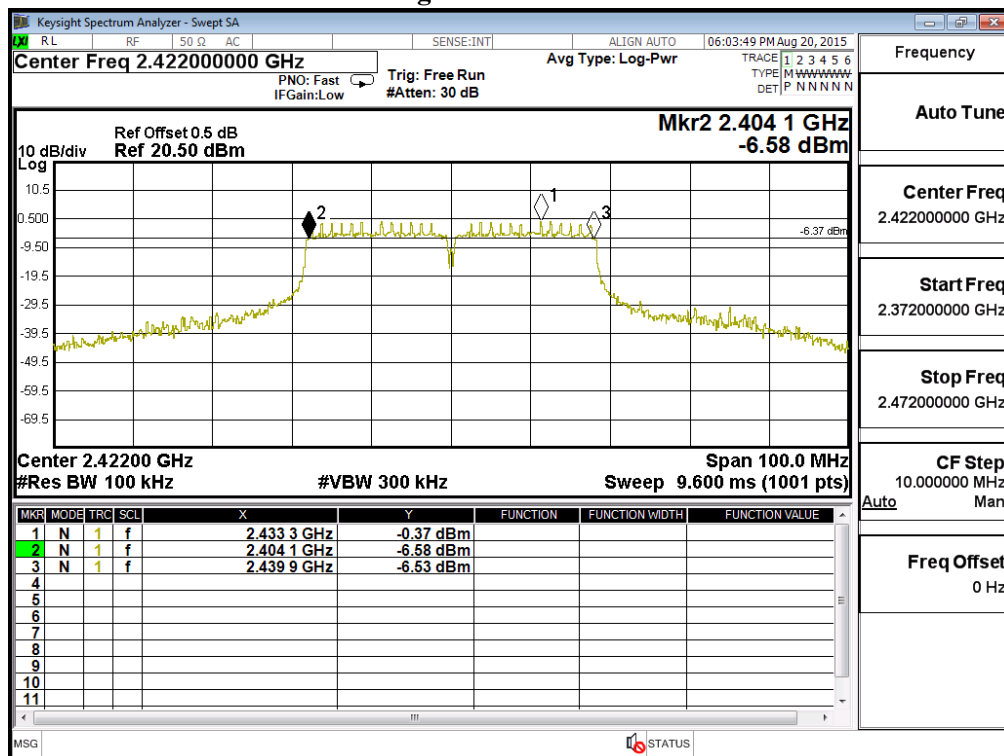


Figure Channel 06:


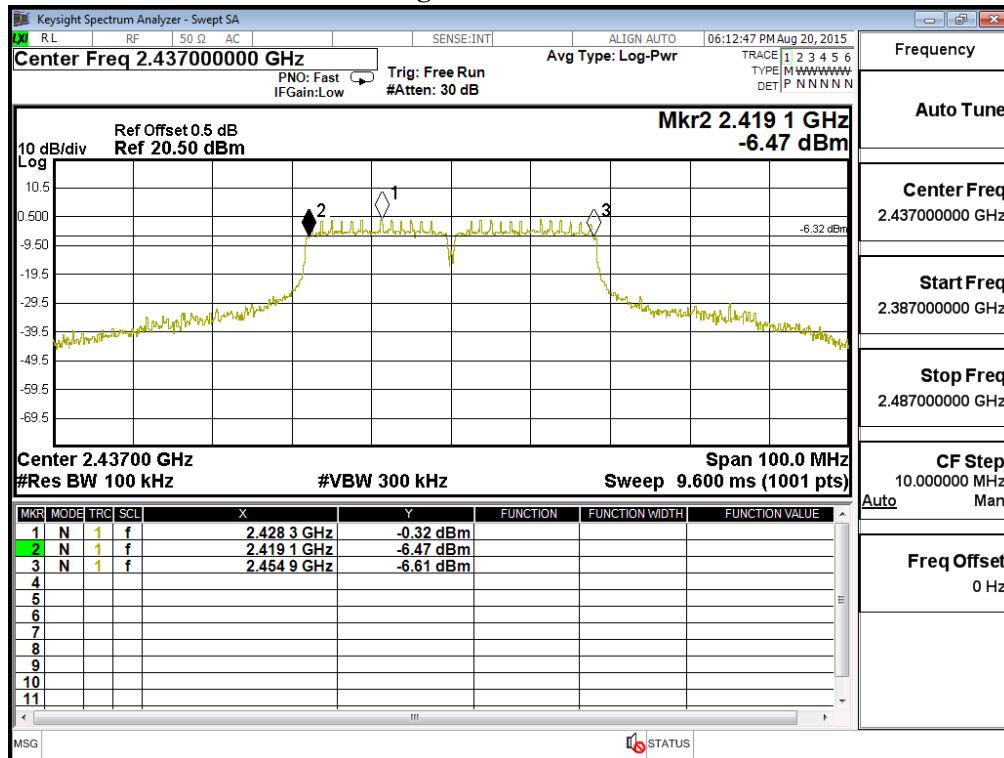


Figure Channel 09:

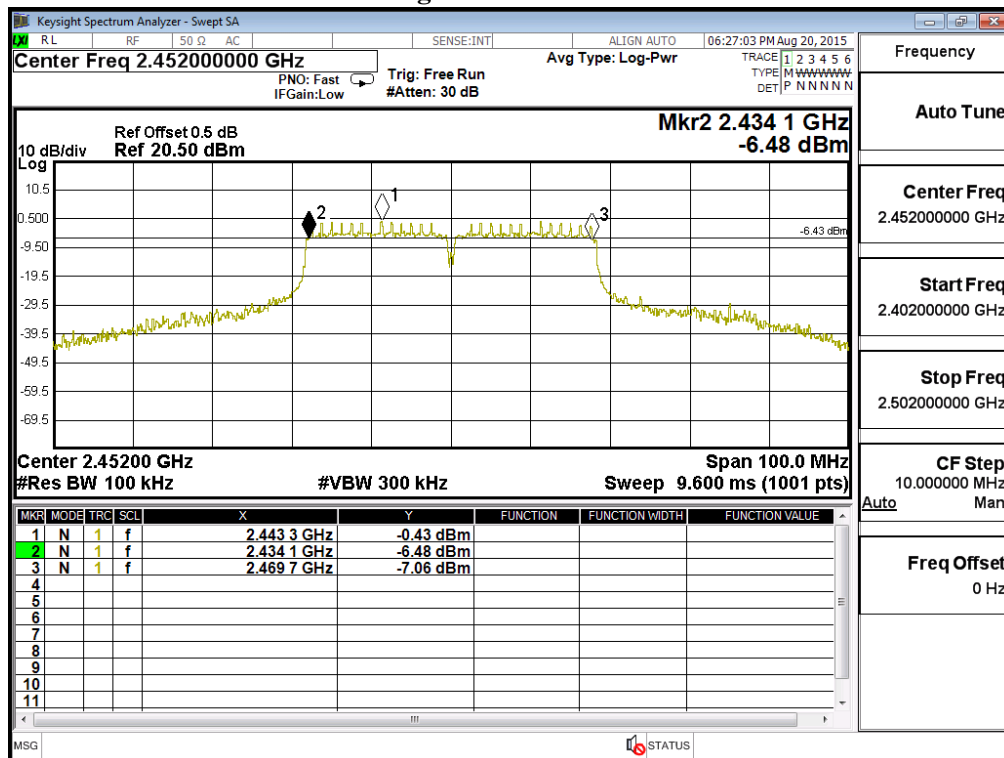

8. Power Density


8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with "X" are used to measure the final test results.

8.2. Test Setup

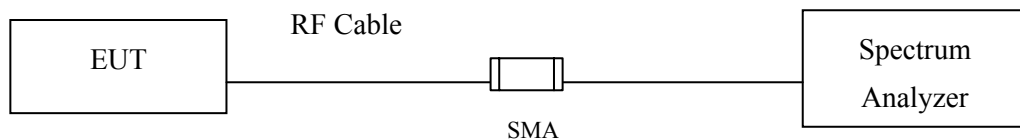

8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The maximum power spectral density using KDB 558074 section 10.2 PKPSD (peak PSD) method.

8.5. Uncertainty

± 1.27 dB

8.6. Test Result of Power Density

Product : Wireless gateway
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
01	2412	4.810	< 8dBm	Pass
06	2437	4.760	< 8dBm	Pass
11	2462	4.550	< 8dBm	Pass

Figure Channel 01:

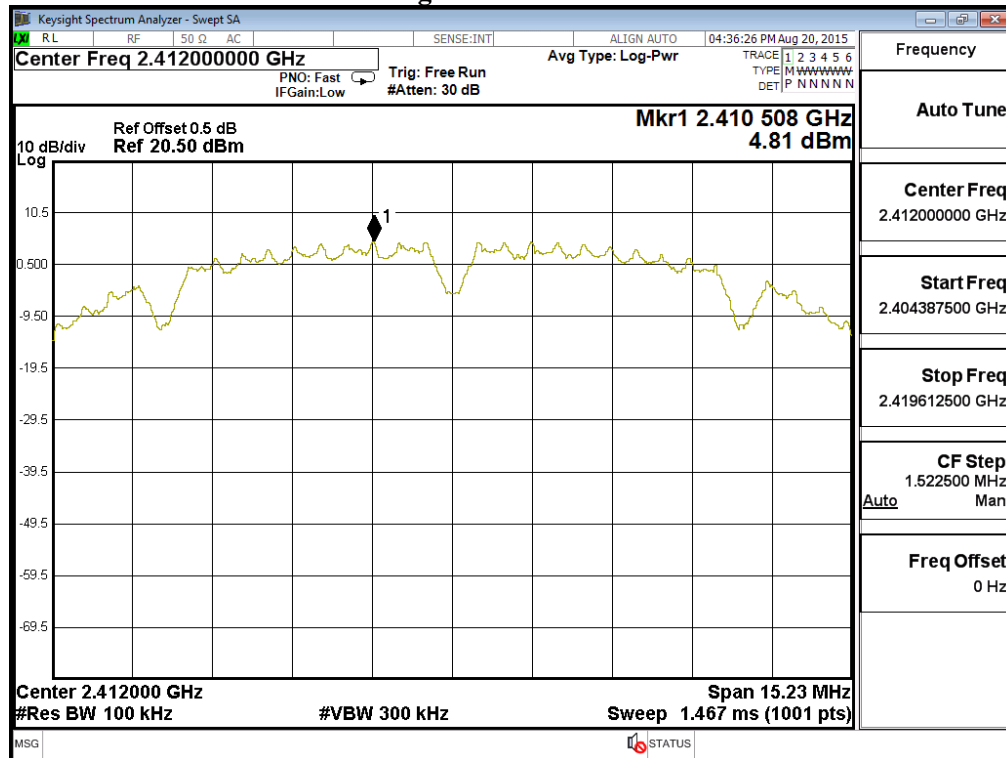


Figure Channel 06:


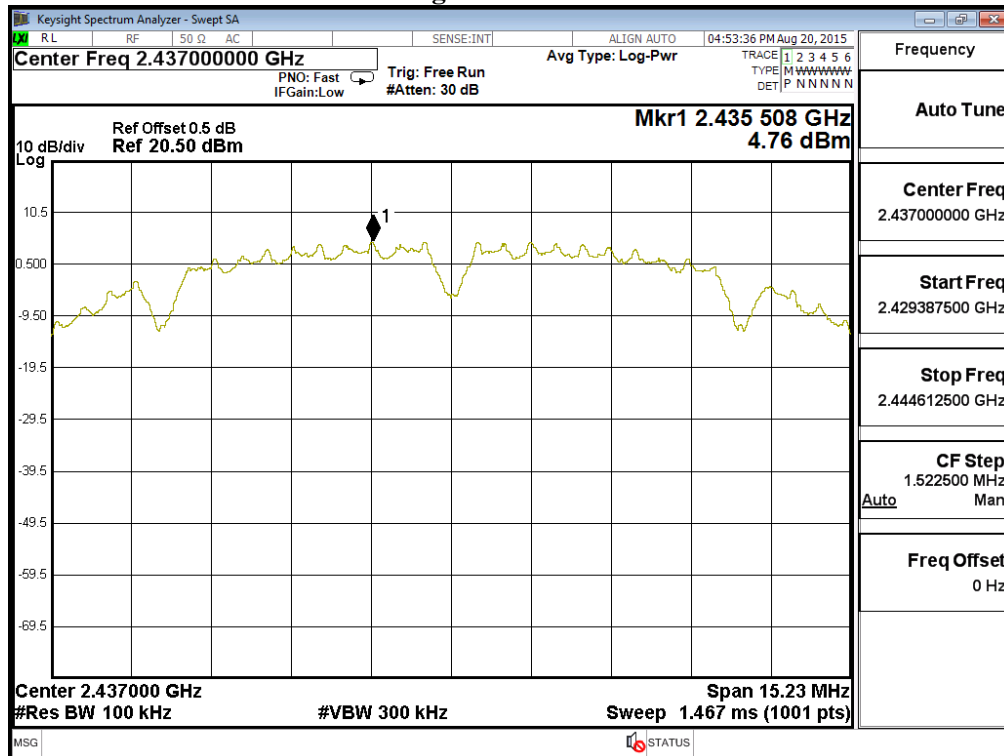


Figure Channel 11:

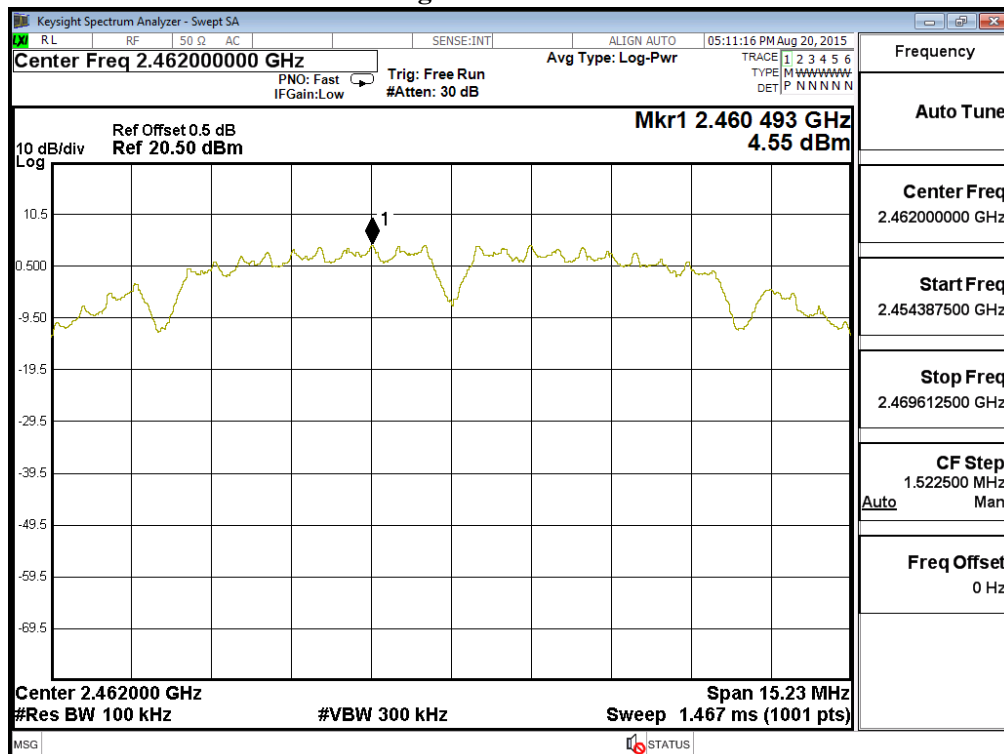

Product : Wireless gateway
Test Item : Power Density Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
01	2412	4.020	< 8dBm	Pass
06	2437	3.990	< 8dBm	Pass
11	2462	3.280	< 8dBm	Pass

Figure Channel 01:

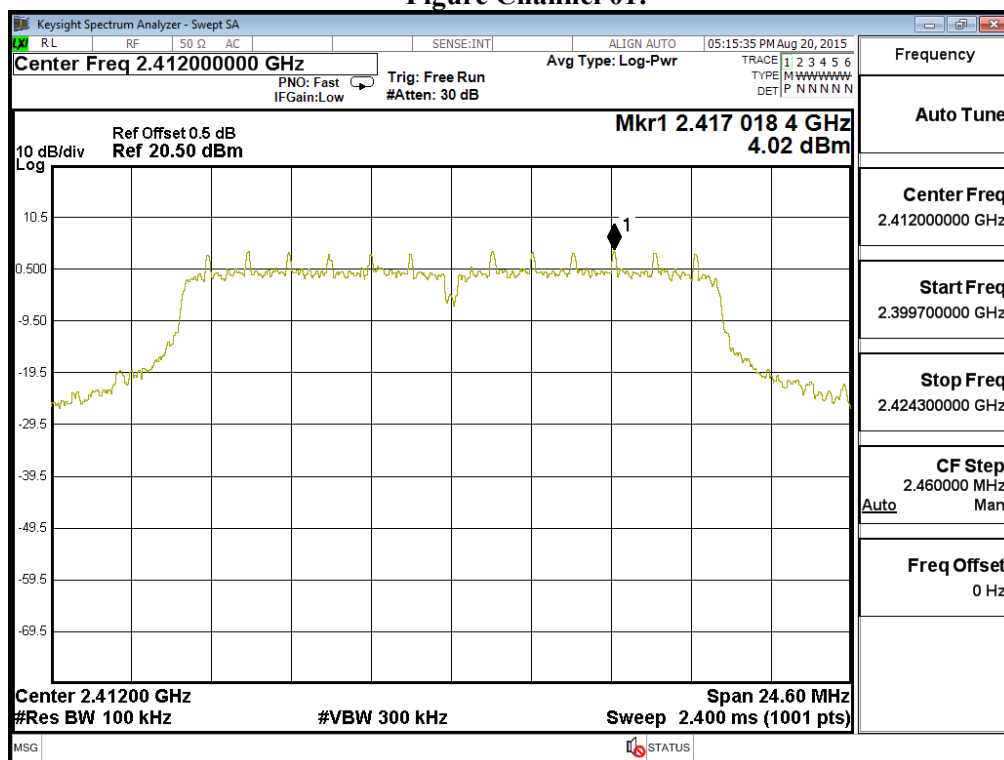


Figure Channel 06:


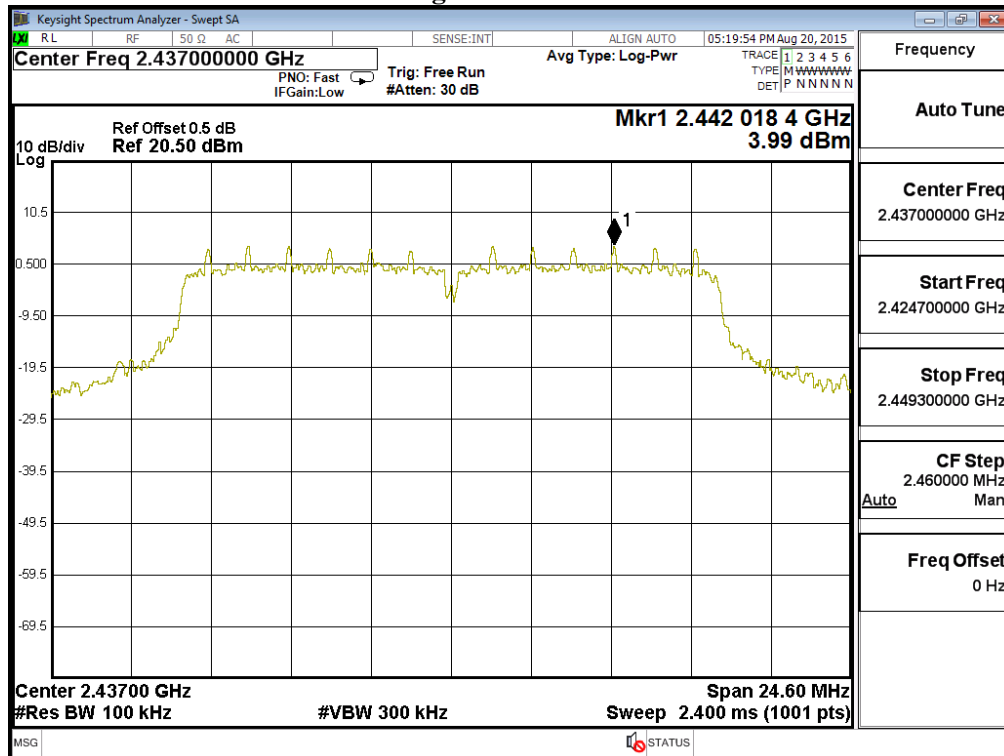


Figure Channel 11:

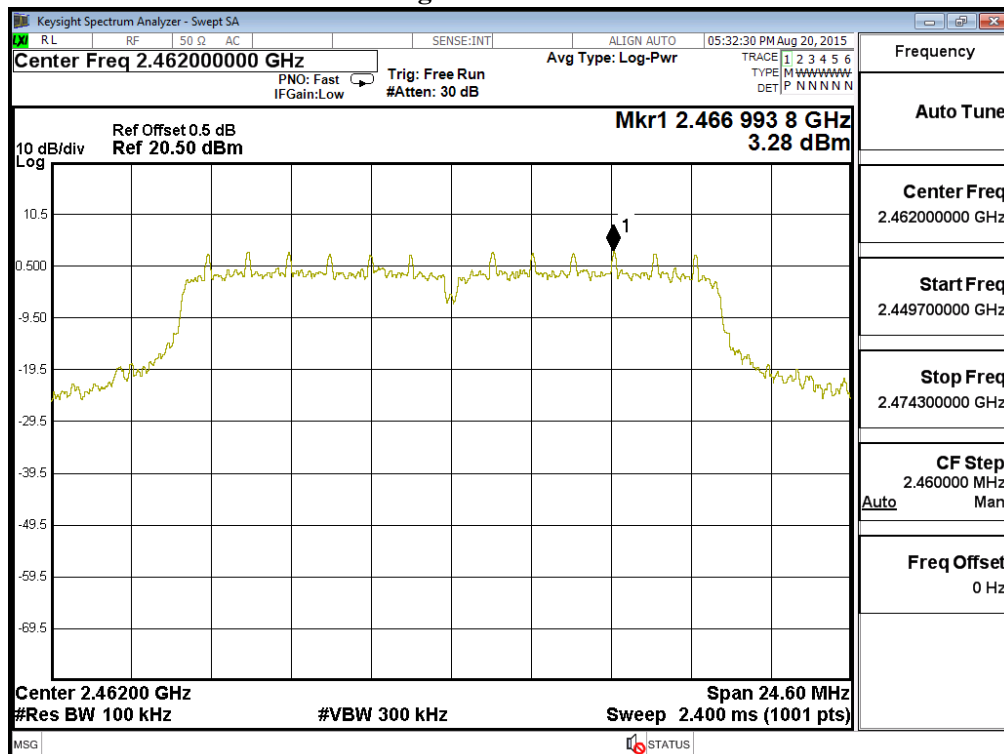

Product : Wireless gateway
Test Item : Power Density Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
01	2412	4.010	< 8dBm	Pass
06	2437	4.320	< 8dBm	Pass
11	2462	3.420	< 8dBm	Pass

Figure Channel 01:

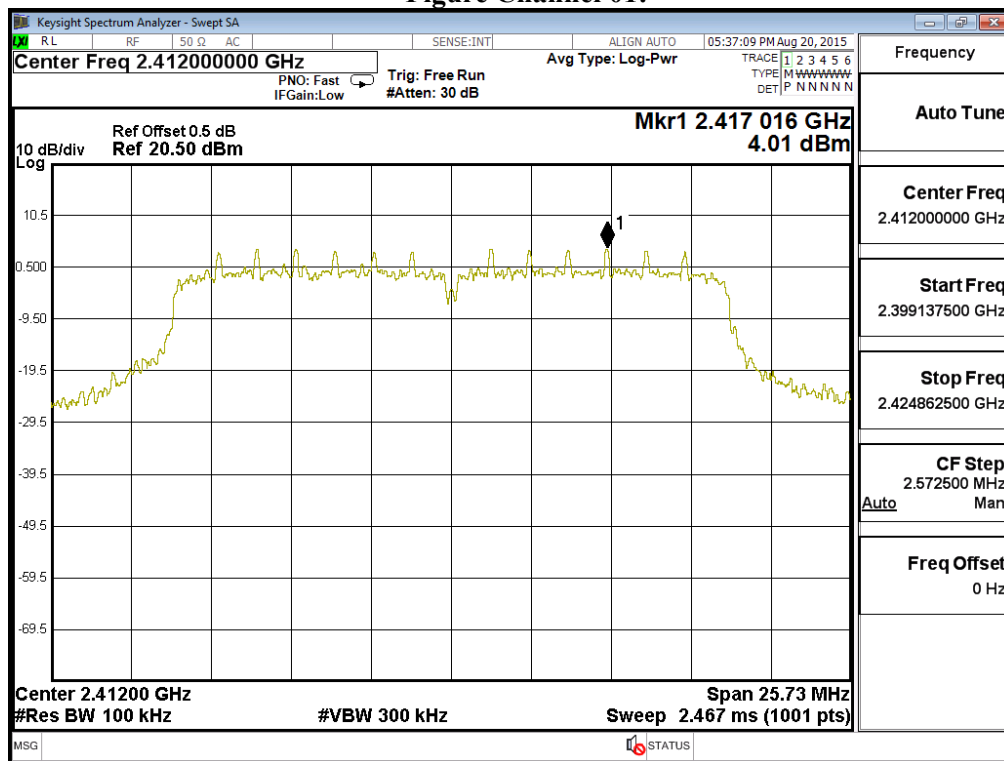


Figure Channel 06:


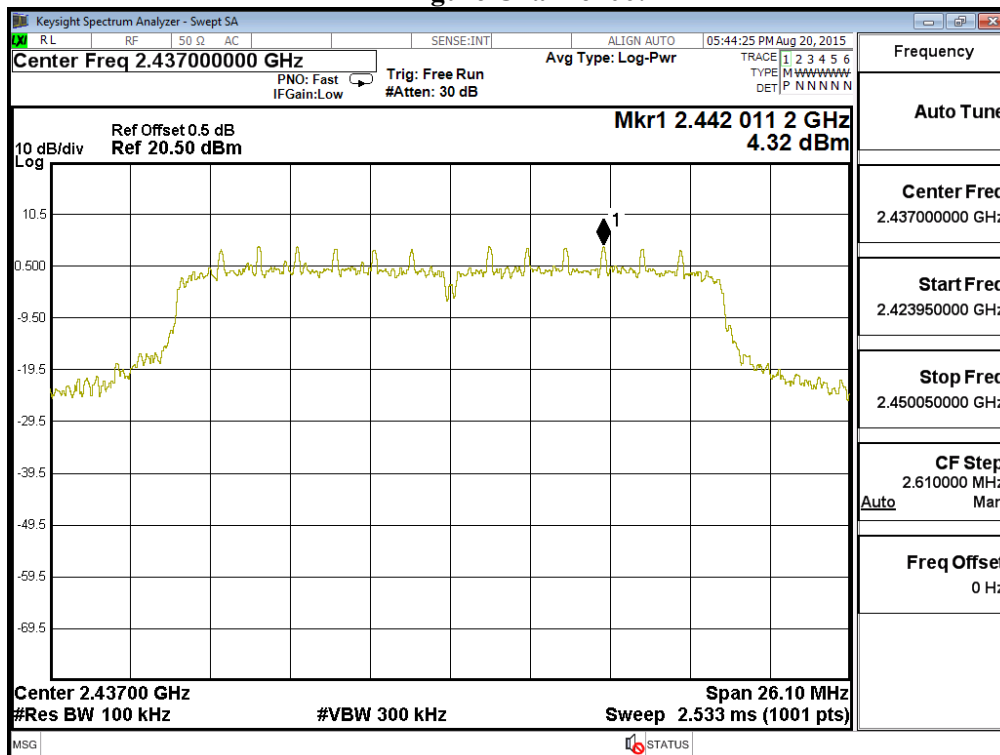


Figure Channel 11:

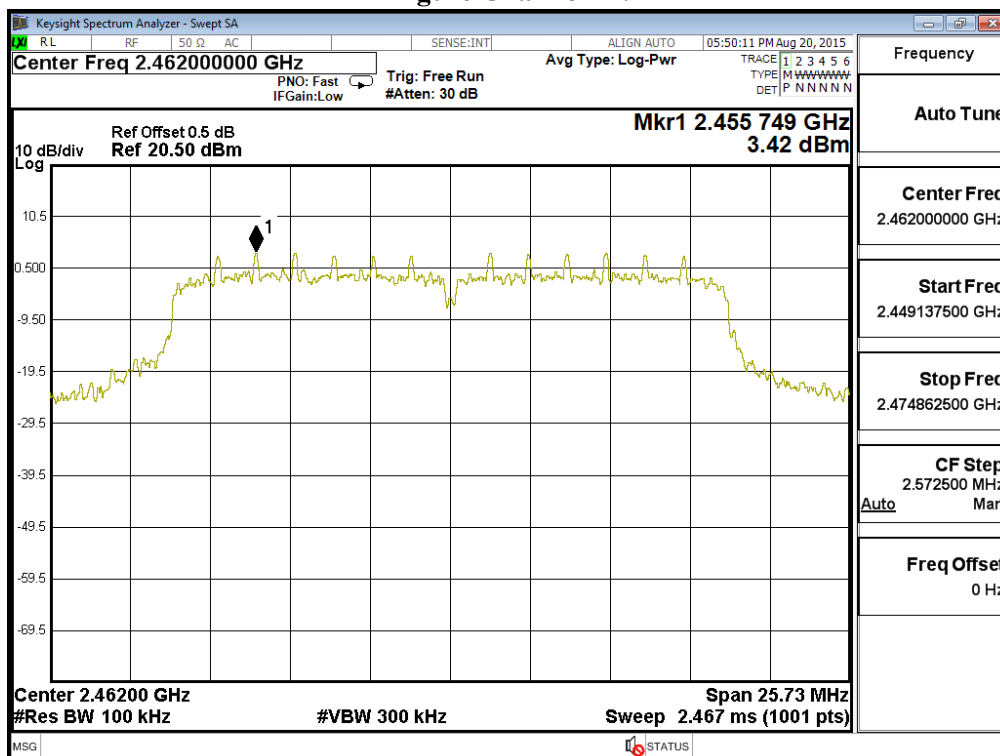

Product : Wireless gateway
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
03	2422	-0.410	< 8dBm	Pass
06	2437	-0.340	< 8dBm	Pass
09	2452	-0.400	< 8dBm	Pass

Figure Channel 03:

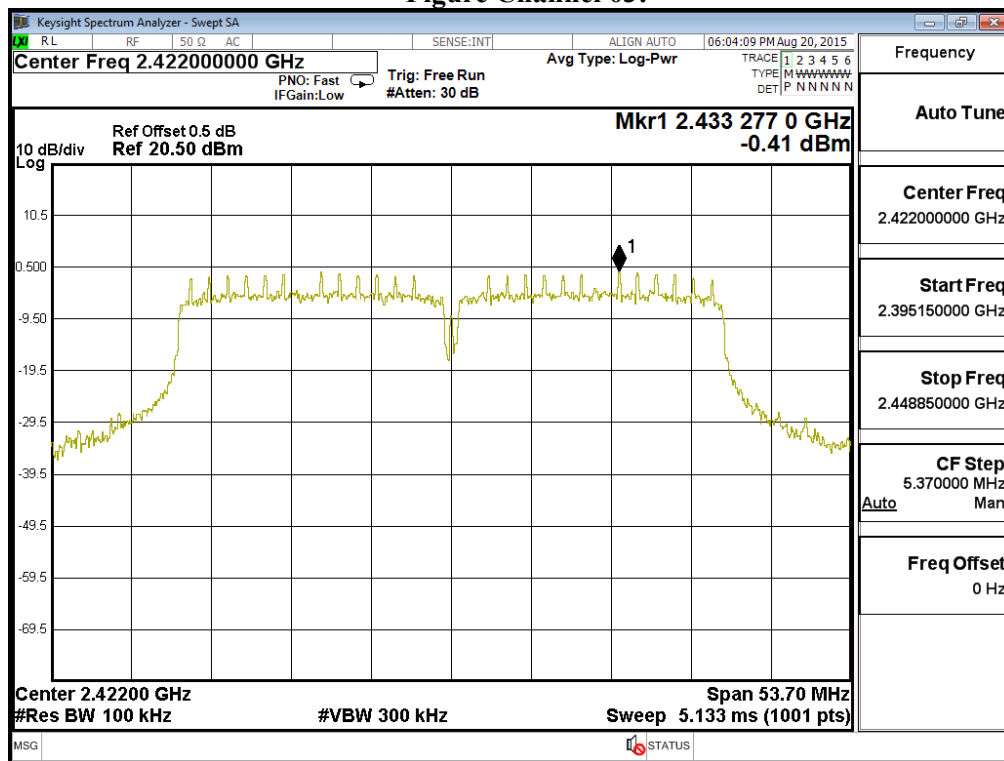


Figure Channel 06:


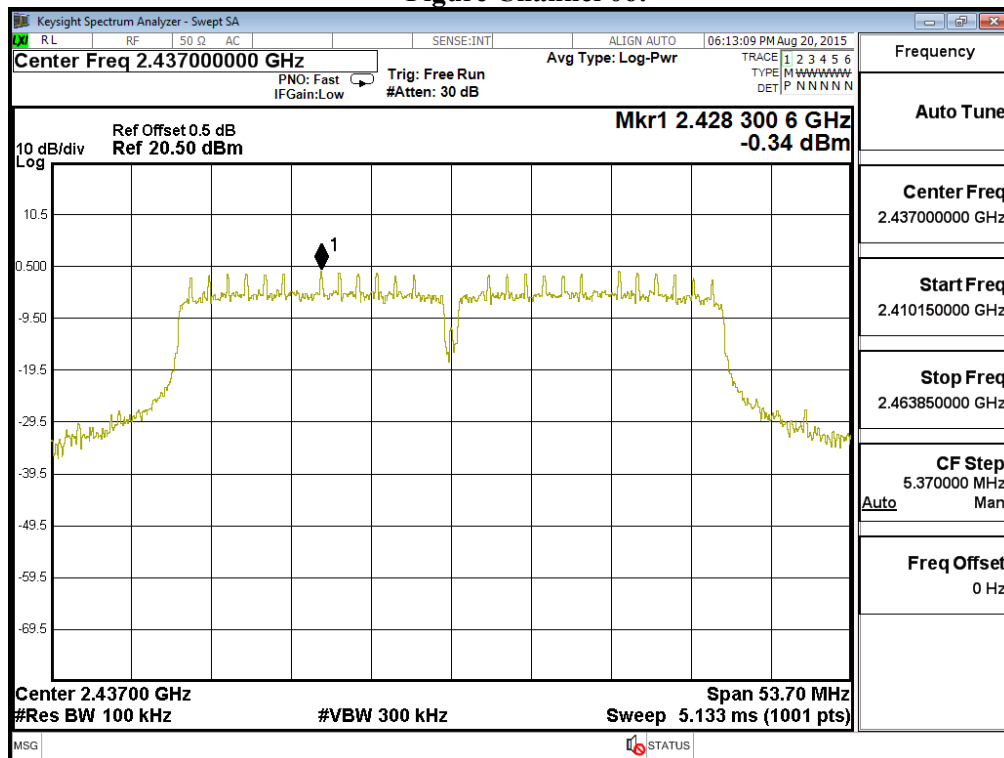


Figure Channel 09:

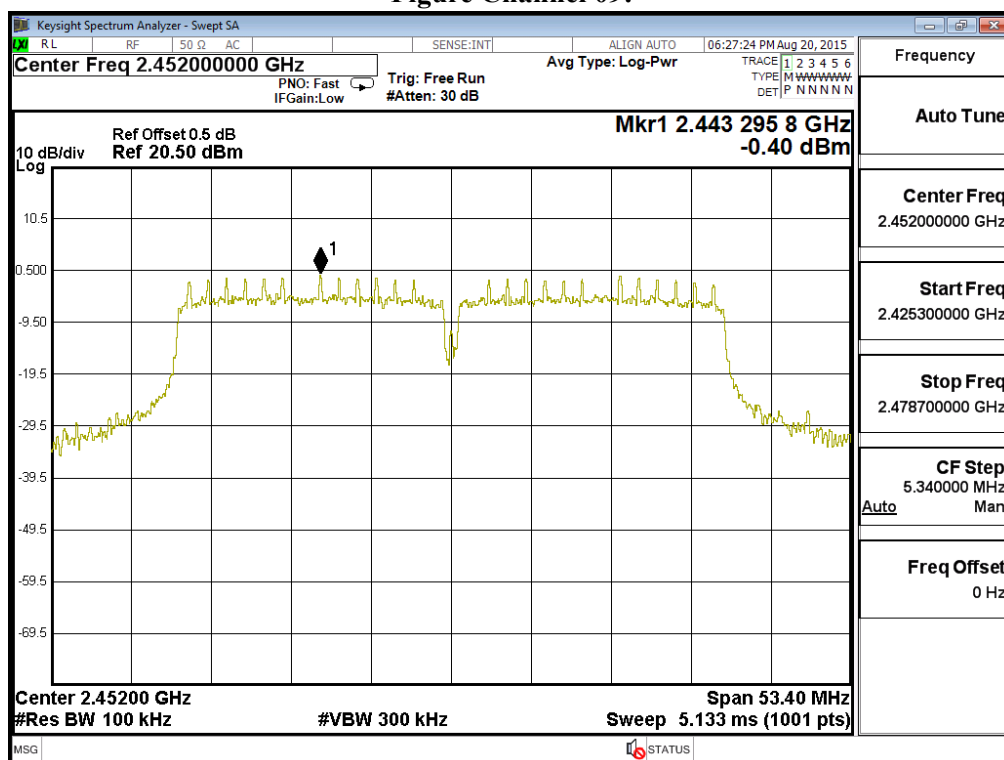

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs