

FCC Test Report

Product Name	Wireless gateway
Model No	MGate W5xyz, MGate W5xyz-T x represent the number of serial port. yz represent series number. -T represent wide temperature model
FCC ID	SLE-W5X08

Applicant	MOXA Inc.
Address	FL.4, NO.135 LANE 235, BAOQIAO RD. XINDIAN DIST., NEW TAIPEI CITY, TAIWAN

Date of Receipt	Jul. 01, 2015
Issued Date	Sep. 23, 2015
Report No.	1570097R-RFUSP47V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report

Issued Date: Sep. 23, 2015

Report No.: 1570097R-RFUSP47V00



Product Name	Wireless gateway
Applicant	MOXA Inc.
Address	FL.4, NO.135 LANE 235, BAOQIAO RD. XINDIAN DIST., NEW TAIPEI CITY, TAIWAN
Manufacturer	MOXA Inc.
Model No.	MGate W5xyz, MGate W5xyz-T x represent the number of serial port. yz represent series number. -T represent wide temperature model
FCC ID.	SLE-W5X08
EUT Rated Voltage	DC 12V
EUT Test Voltage	DC 12V
Trade Name	MOXA
Applicable Standard	FCC CFR Title 47 Part 15 Subpart E: 2014 ANSI C63.4: 2014, ANSI C63.10: 2013 789033 D02 General UNII Test Procedures New Rules v01
Test Result	Complied

Documented By :

Joanne Lin

(Senior Adm. Specialist / Joanne Lin)

Tested By :

Eason chen

(Engineer / Eason Chen)

Approved By :

Vincent Lin

(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	5
1.1. EUT Description.....	5
1.2. Operational Description	7
1.3. Tested System Details.....	8
1.4. Configuration of tested System	8
1.5. EUT Exercise Software	9
1.6. Test Facility	10
2. Conducted Emission	11
2.1. Test Equipment.....	11
2.2. Test Setup	11
2.3. Limits	12
2.4. Test Procedure	12
2.5. Uncertainty	12
2.6. Test Result of Conducted Emission.....	13
3. Maximun conducted output power.....	14
3.1. Test Equipment.....	14
3.2. Test Setup	14
3.3. Limits	15
3.4. Test Procedure	16
3.5. Uncertainty	16
3.6. Test Result of Maximum conducted output power.....	17
4. Peak Power Spectral Density	29
4.1. Test Equipment.....	29
4.2. Test Setup	29
4.3. Limits	29
4.4. Test Procedure	30
4.5. Uncertainty	30
4.6. Test Result of Peak Power Spectral Density	31
5. Radiated Emission.....	51
5.1. Test Equipment.....	51
5.2. Test Setup	52
5.3. Limits	53
5.4. Test Procedure	54
5.5. Uncertainty	54
5.6. Test Result of Radiated Emission.....	55
6. Band Edge.....	100

6.1.	Test Equipment.....	100
6.2.	Test Setup	101
6.3.	Limits	102
6.4.	Test Procedure	102
6.5.	Uncertainty	102
6.6.	Test Result of Band Edge	103
7.	Occupied Bandwidth.....	133
7.1.	Test Equipment.....	133
7.2.	Test Setup	133
7.3.	Limits	133
7.4.	Test Procedure	133
7.5.	Uncertainty	133
7.6.	Test Result of Occupied Bandwidth	134
8.	Frequency Stability	139
8.1.	Test Equipment.....	139
8.2.	Test Setup	139
8.3.	Limits	139
8.4.	Test Procedure	139
8.5.	Uncertainty	139
8.6.	Test Result of Frequency Stability.....	140
9.	EMI Reduction Method During Compliance Testing	145

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Wireless gateway
Trade Name	MOXA
FCC ID.	SLE-W5X08
Model No.	MGate W5xyz, MGate W5xyz-T x represent the number of serial port. yz represent series number. -T represent wide temperature model
Frequency Range	802.11a/n-20MHz: 5180-5320MHz, 5500-5700MHz, 5745-5825MHz 802.11n-40MHz: 5190-5310, 5510-5670MHz, 5755-5795MHz
Number of Channels	802.11a/n-20MHz: 24; 802.11n-40MHz: 11
Data Rate	802.11a: 6 - 54Mbps 802.11n: up to 150Mbps
Channel Control	Auto
Type of Modulation	802.11a/n:OFDM, BPSK, QPSK, 16QAM, 64QAM
Antenna type	Dipole Antenna
Antenna Gain	Refer to the table “Antenna List”

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	KINSUN	6602D03081	Dipole	1.73dBi For 5.15~5.25GHz 1.73dBi For 5.25~5.35GHz 1.73dBi For 5.47~5.725GHz 1.73dBi For 5.725~5.825GHz

Note: The antenna of EUT is conform to FCC 15.203

802.11a/n-20MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 36:	5180 MHz	Channel 40:	5200 MHz	Channel 44:	5220 MHz	Channel 48:	5240 MHz
Channel 52:	5260 MHz	Channel 56:	5280 MHz	Channel 60:	5300 MHz	Channel 64:	5320 MHz
Channel 100:	5500 MHz	Channel 104:	5520 MHz	Channel 108:	5540 MHz	Channel 112:	5560 MHz
Channel 116:	5580 MHz	Channel 120:	5600 MHz	Channel 124:	5620 MHz	Channel 128:	5640 MHz
Channel 132:	5660 MHz	Channel 136:	5680 MHz	Channel 140:	5700 MHz	Channel 149:	5745 MHz
Channel 153:	5765 MHz	Channel 157:	5785 MHz	Channel 161:	5805 MHz	Channel 165:	5825 MHz

802.11n-40MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 38:	5190 MHz	Channel 46:	5230 MHz	Channel 54:	5270 MHz	Channel 62:	5310 MHz
Channel 102:	5510 MHz	Channel 110:	5550 MHz	Channel 118:	5590 MHz	Channel 126:	5630 MHz
Channel 134:	5670 MHz	Channel 151:	5755 MHz	Channel 159:	5795 MHz		

Note:

1. This device is a Wireless gateway with a built-in 802.11a/b/g/n WLAN transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report. (802.11a is 6Mbps 、802.11n-20BW is 7.2Mbps and 802.11n-40BW is 15Mbps)
4. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart E for Unlicensed National Information Infrastructure devices.
5. The different of each model is shown as below:

Model No.	Description
MGate W5108	1 port wireless Modbus gateway
MGate W5208	2 port wireless Modbus gateway
MGate W5108-T	1 port wireless Modbus gateway, -40~75 operating temperature
MGate W5208-T	2 port wireless Modbus gateway, -40~75 operating temperature

Test Mode	Mode 1: Transmit (802.11a-6Mbps) Mode 2: Transmit (802.11n-20BW 7.2Mbps) Mode 3: Transmit (802.11n-40BW 15Mbps)
-----------	---


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook PC	DELL	PPT	N/A	Non-Shielded, 0.8m
2 Modem	ACEEX	DM-1414	0102027536	Non-Shielded, 1.8m
3 Modem	ACEEX	DM-1414	0102027550	Non-Shielded, 1.8m
4 DC 12V Battery	Chen Guang	66N50	N/A	N/A
5 Test Fixture	MOXA	N/A	N/A	N/A

Signal Cable Type	Signal cable Description
A LAN Cable	Non-Shielded, 1.8m
B Power Cable	Non-Shielded, 1.8m
C RS-232 Cable	Non-Shielded, 1.4m
D USB Cable	Non-Shielded, 1m
E RS-232 Cable	Non-Shielded, 1.8m
F RS-232 Cable	Non-Shielded, 1.8m

1.4. Configuration of tested System

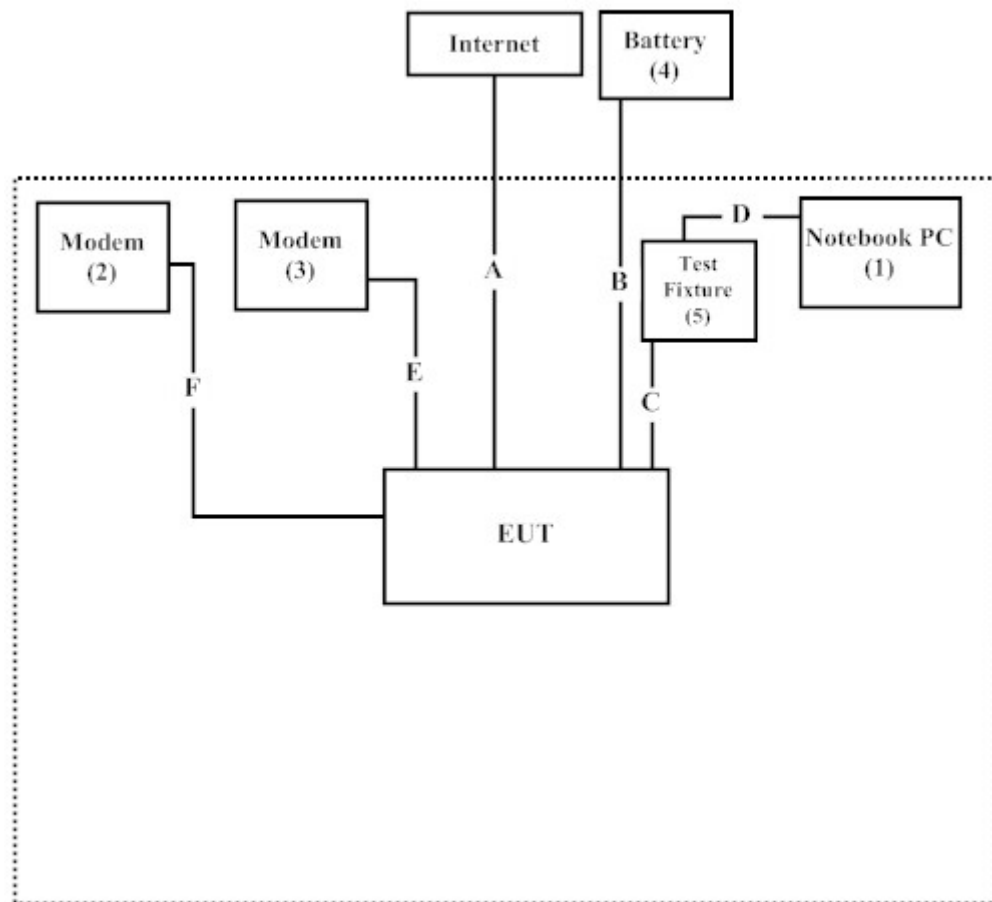

1.5. EUT Exercise Software

1. Setup the EUT as shown on 1.4
2. Execute “Tera Term 4.72” program on the EUT.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from QuieTek Corporation's Web Site : <http://www.quietek.com/chinese/about/certificates.aspx?bval=5>

The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng,
Linkou Dist. New Taipei City 24451,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2015	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2015	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2015	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar., 2015	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2015	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

2.2. Test Setup

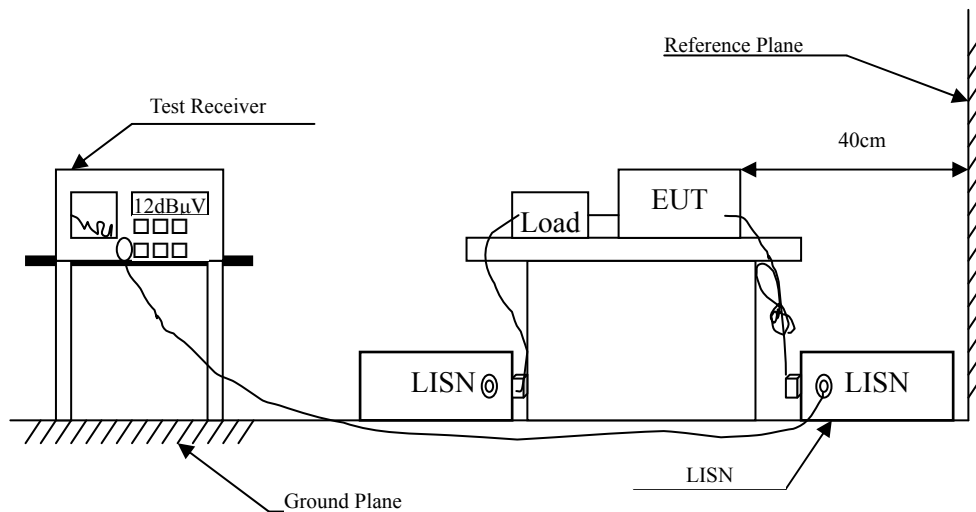

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks : In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Owing to the DC operation of EUT, this test item is not performed.

3. Maximun conducted output power

3.1. Test Equipment


	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2015
X	Power Sensor	Anritsu	MA2411B/0738448	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:


1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

3.2. Test Setup


26dBc Occupied Bandwidth

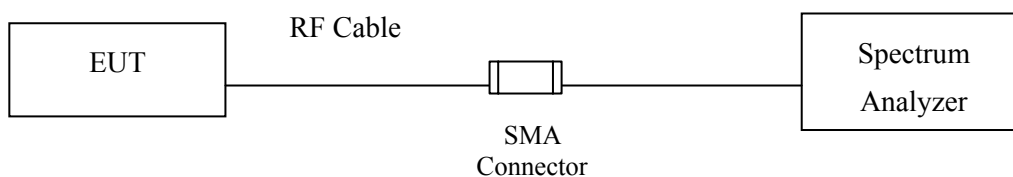

Conduction Power Measurement (for 802.11an)

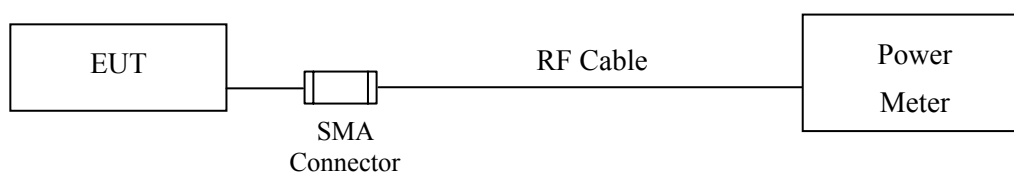

Conduction Power Measurement (for 802.11ac)

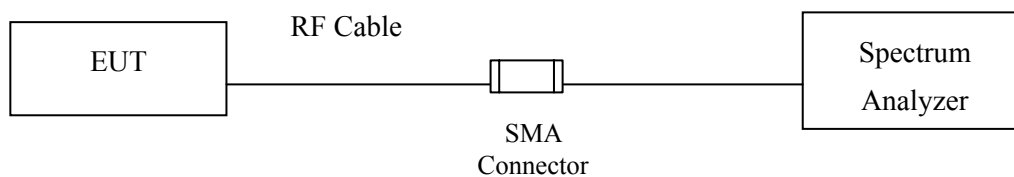

3.3. Limits

3.3.1. For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.3. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point UNII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any

corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.4. Test Procedure

As an alternative to FCC KDB-789033, the EUT maximum conducted output power was measured with an average power meter employing a video bandwidth greater than the 6dB BW of the emission under test. Maximum conducted output power was read directly from the meter across all data rates, and across three channels within each sub-band. Special care was used to make sure that the EUT was transmitting in continuous mode. This method exceeds the limitations of FCC KDB-789033, and provides more accurate measurements.

802.11an (BW $\leq$ 40MHz) Maximum conducted output power using KDB 789033 section E)3)b)
Method PM-G (Measurement using a gated RF average power meter)

Note: the power meter have a video bandwidth that is greater than or equal to the measurement bandwidth, (Anritsu/ MA2411B video bandwidth: 65MHz)

802.11ac (BW=80MHz) Maximum conducted output power using KDB 789033 section E)2)b)
Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep).

When transmitted signals consist of two or more non-contiguous spectrum segments (e.g., 80+80 MHz mode) or when a single spectrum segment of a transmission crosses the boundary between two adjacent U-NII bands, KDB 644545 D01 section F) procedure is used for measurements.

3.5. Uncertainty

± 1.27 dB

3.6. Test Result of Maximum conducted output power

Product : Wireless gateway
Test Item : Maximum conducted output power
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps)

Cable loss=1dB		Maximum conducted output power								
Channel No.	Frequency (MHz)	Data Rate (Mbps)								Required Limit
		6	9	12	18	24	36	48	54	
		Measurement Level (dBm)								
36	5180	15.12	--	--	--	--	--	--	--	<24dBm
44	5220	15.38	15.29	15.22	15.16	15.04	14.98	14.89	14.78	<24dBm
48	5240	14.63	--	--	--	--	--	--	--	<24dBm
52	5260	14.64	--	--	--	--	--	--	--	<24dBm
60	5300	14.56	14.49	14.38	14.29	14.15	14.06	13.95	13.84	<24dBm
64	5320	14.98	--	--	--	--	--	--	--	<24dBm
100	5500	14.97	--	--	--	--	--	--	--	<24dBm
116	5580	15.13	15.02	14.97	14.86	14.81	14.75	14.63	14.59	<24dBm
140	5700	15.2	--	--	--	--	--	--	--	<24dBm
149	5745	14.72	--	--	--	--	--	--	--	<30dBm
157	5785	15.26	15.22	15.19	15.07	14.95	14.88	14.77	14.62	<30dBm
165	5825	14.82	--	--	--	--	--	--	--	<30dBm

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Output Power Limit	
				(dBm)	dBm+10log(BW)
36	5180	--	15.12	24	--
44	5220	--	15.38	24	--
48	5240	--	14.63	24	--
52	5260	17.625	14.64	24	23.46
60	5300	17.662	14.56	24	23.47
64	5320	17.683	14.98	24	23.48
100	5500	17.626	14.97	24	23.46
116	5580	17.713	15.13	24	23.48
140	5700	17.708	15.2	24	23.48
149	5745	--	14.72	30	--
157	5785	--	15.26	30	--
165	5825	--	14.82	30	--

Note:


1. Power Output Value =Reading value on average power meter + cable loss

26dBc Occupied Bandwidth:


Channel 52:

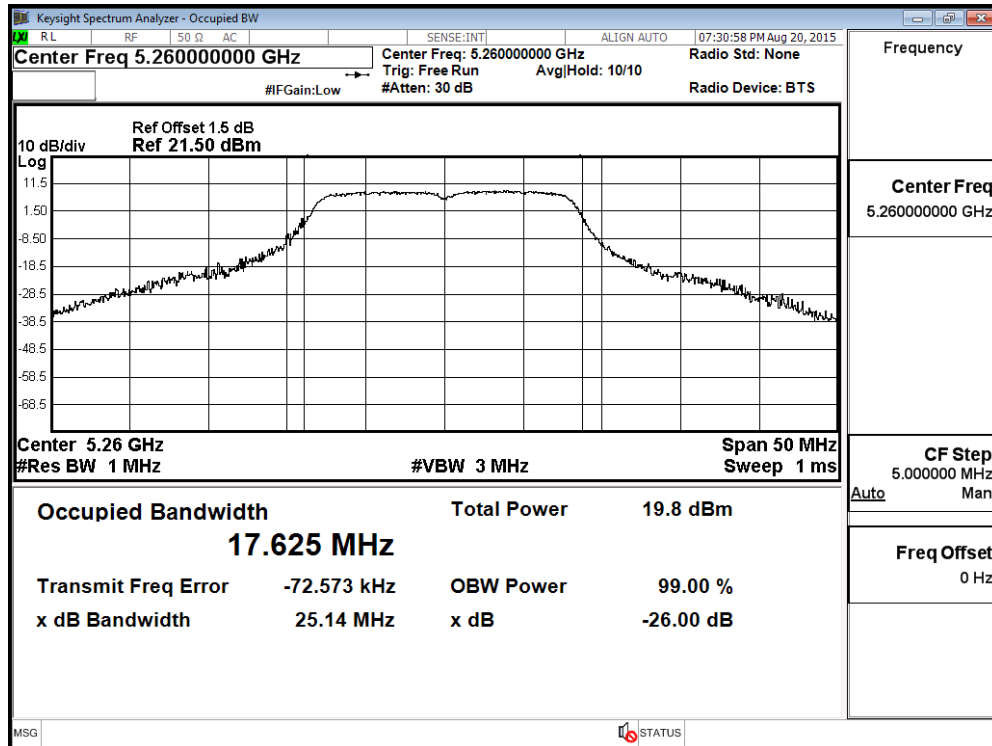


Channel 60:

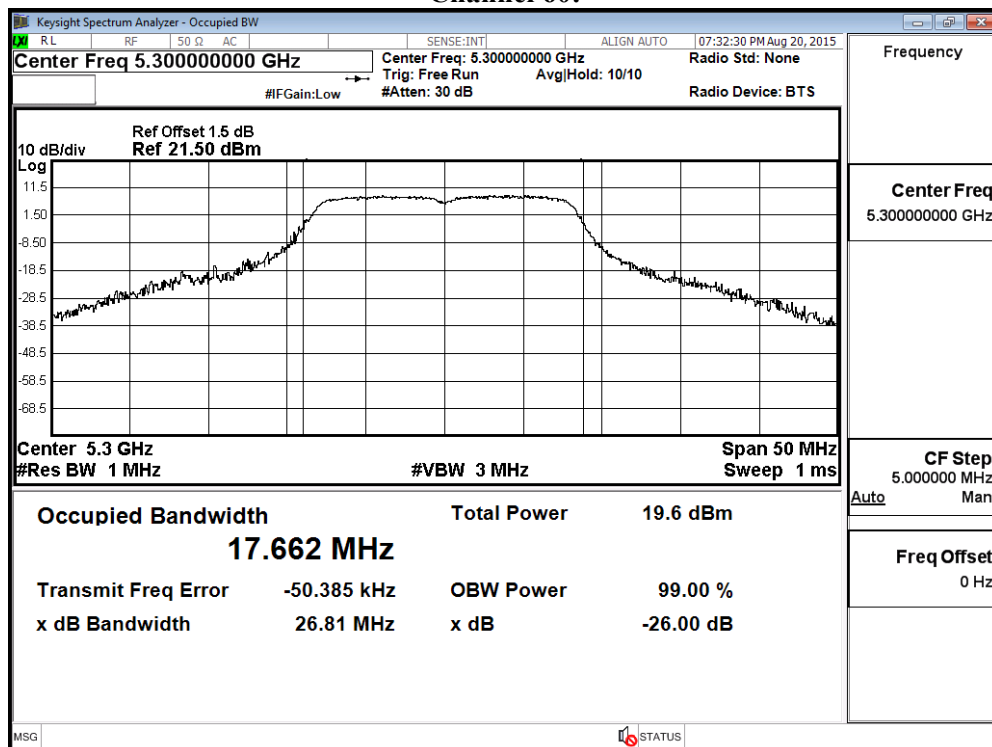


Channel 64:

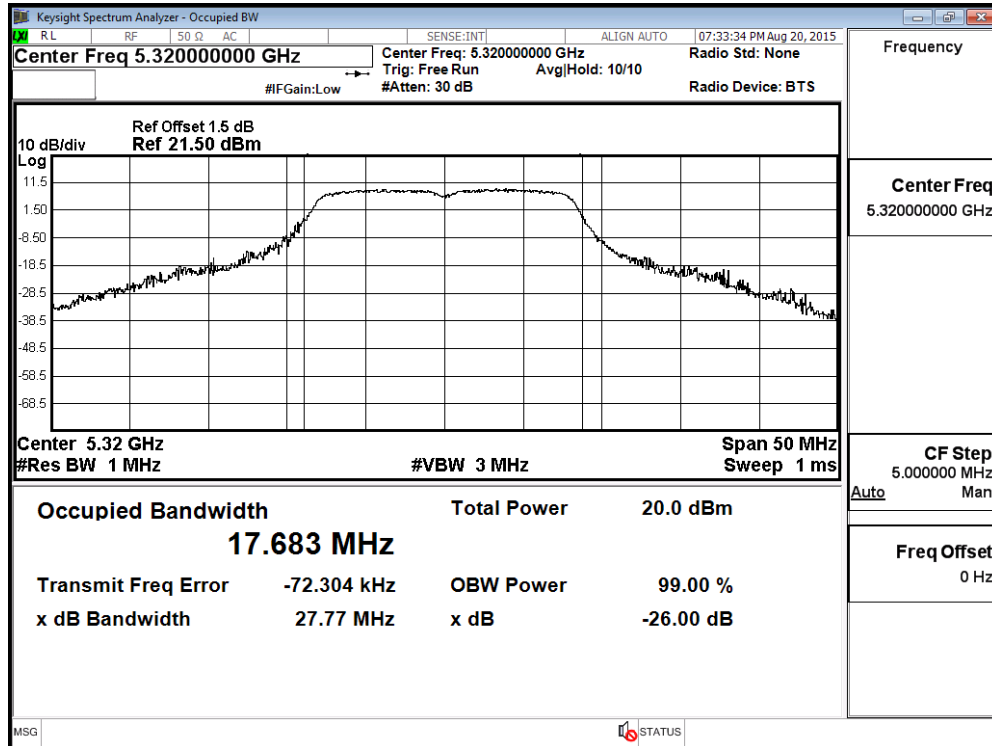


Channel 100:

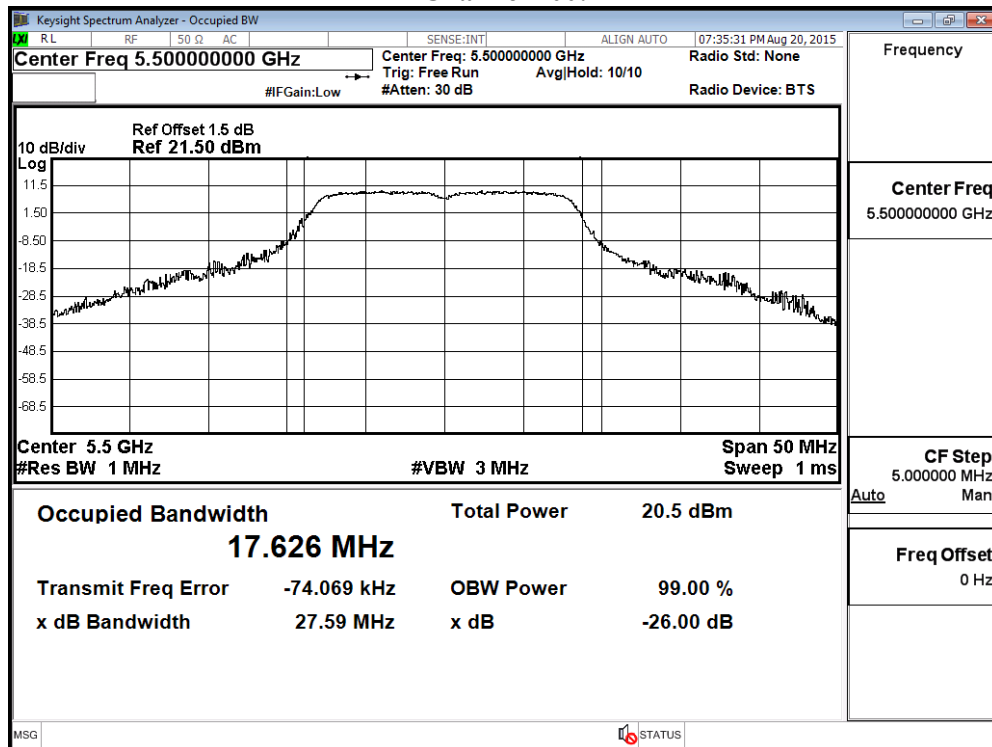

Channel 116:

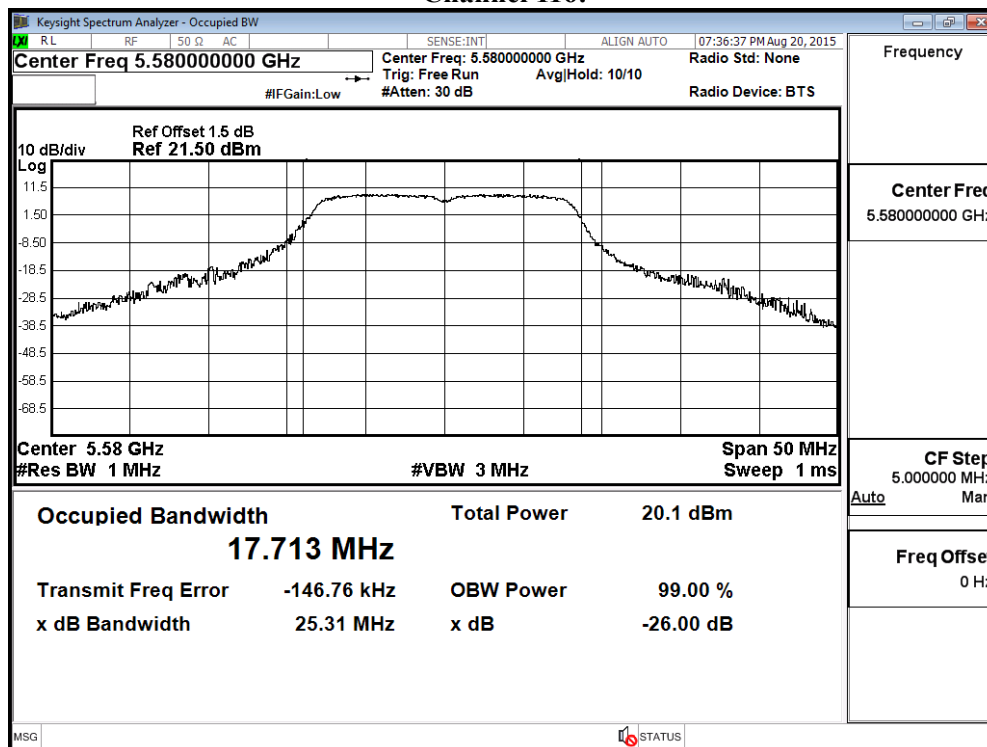

Channel 140:

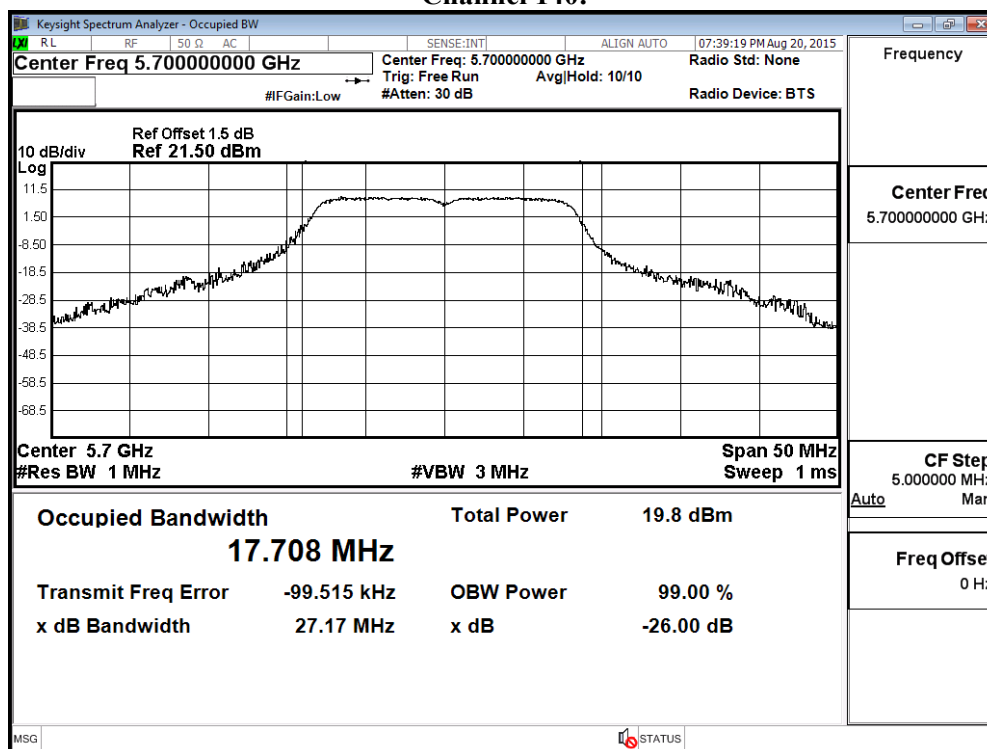

Product : Wireless gateway
Test Item : Maximum conducted output power
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps)

Cable loss=1dB		Maximum conducted output power								
Channel No.	Frequency (MHz)	Data Rate (Mbps)								Required Limit
		7.2	14.4	21.7	28.9	43.3	57.8	65	72.2	
		Measurement Level (dBm)								
36	5180	14.87	--	--	--	--	--	--	--	<24dBm
44	5220	15.32	15.26	15.14	15.02	14.92	14.86	14.78	14.68	<24dBm
48	5240	14.36	--	--	--	--	--	--	--	<24dBm
52	5260	14.63	--	--	--	--	--	--	--	<24dBm
60	5300	14.62	14.58	14.49	14.37	14.25	14.16	14.05	13.94	<24dBm
64	5320	14.58	--	--	--	--	--	--	--	<24dBm
100	5500	15.08	--	--	--	--	--	--	--	<24dBm
116	5580	14.87	14.79	14.65	14.51	14.49	14.35	14.21	14.018	<24dBm
140	5700	14.98	--	--	--	--	--	--	--	<24dBm
149	5745	14.86	--	--	--	--	--	--	--	<30dBm
157	5785	15.21	15.17	15.03	14.96	14.84	14.72	14.61	14.53	<30dBm
165	5825	14.84	--	--	--	--	--	--	--	<30dBm

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Output Power Limit	
				(dBm)	dBm+10log(BW)
36	5180	--	14.87	24	--
44	5220	--	15.32	24	--
48	5240	--	14.36	24	--
52	5260	18.558	14.63	24	23.69
60	5300	18.581	14.62	24	23.69
64	5320	18.606	14.58	24	23.70
100	5500	18.627	15.08	24	23.70
116	5580	18.648	14.87	24	23.71
140	5700	18.605	14.98	24	23.70
149	5745	--	14.86	30	--
157	5785	--	15.21	30	--
165	5825	--	14.84	30	--

Note:


1. Power Output Value =Reading value on average power meter + cable loss

26dBc Occupied Bandwidth:


Channel 52

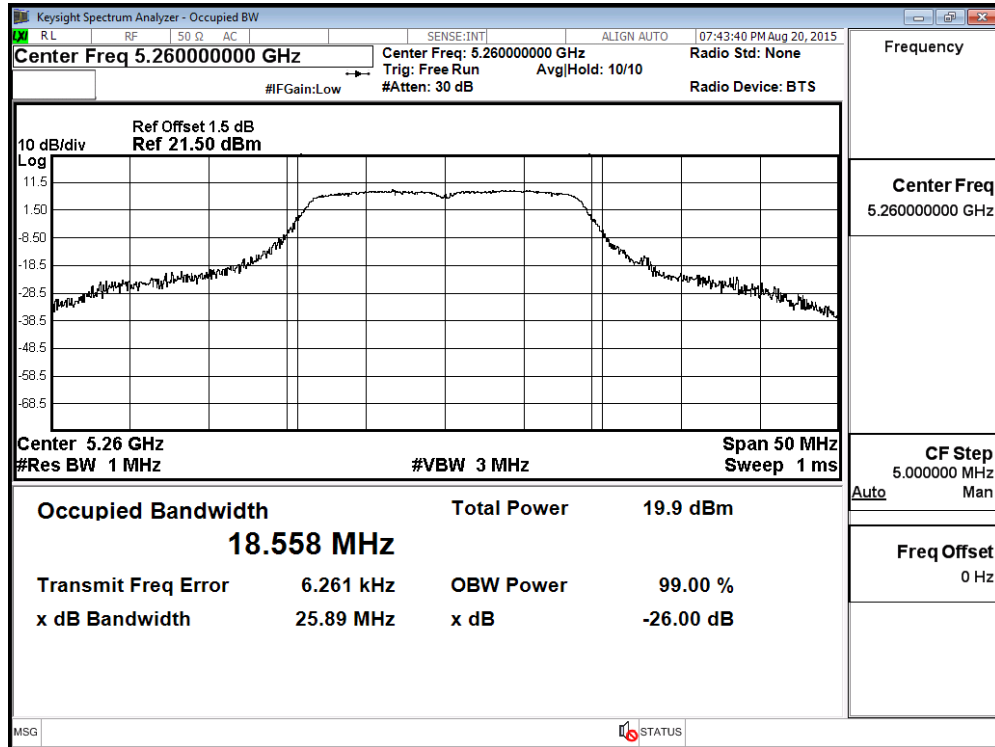


Channel 60

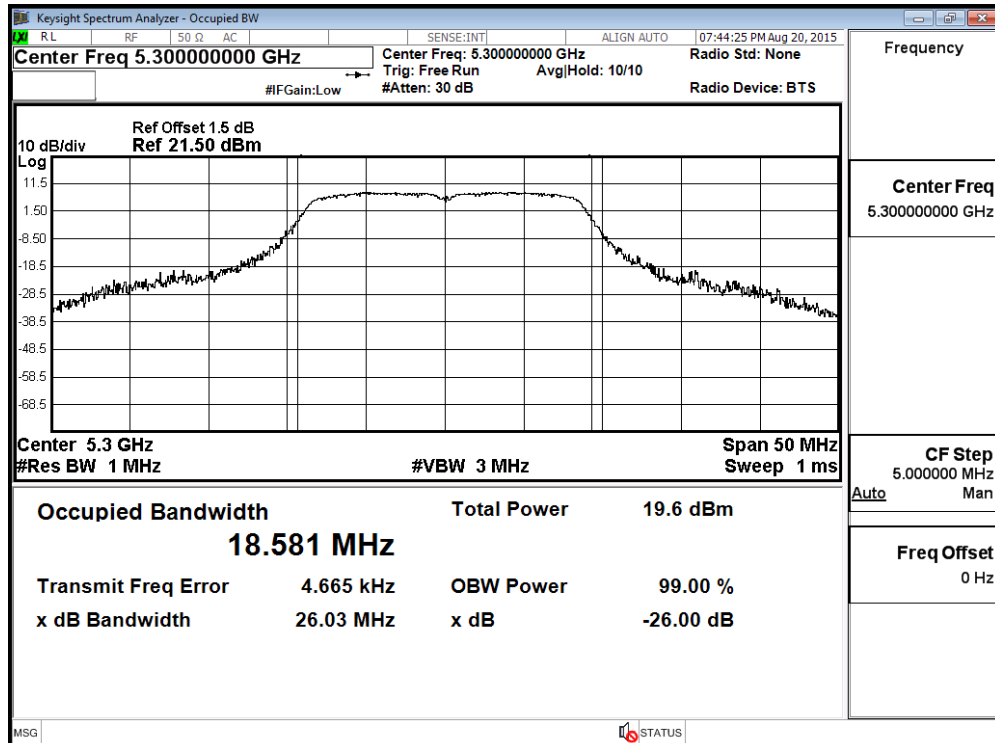


Channel 64

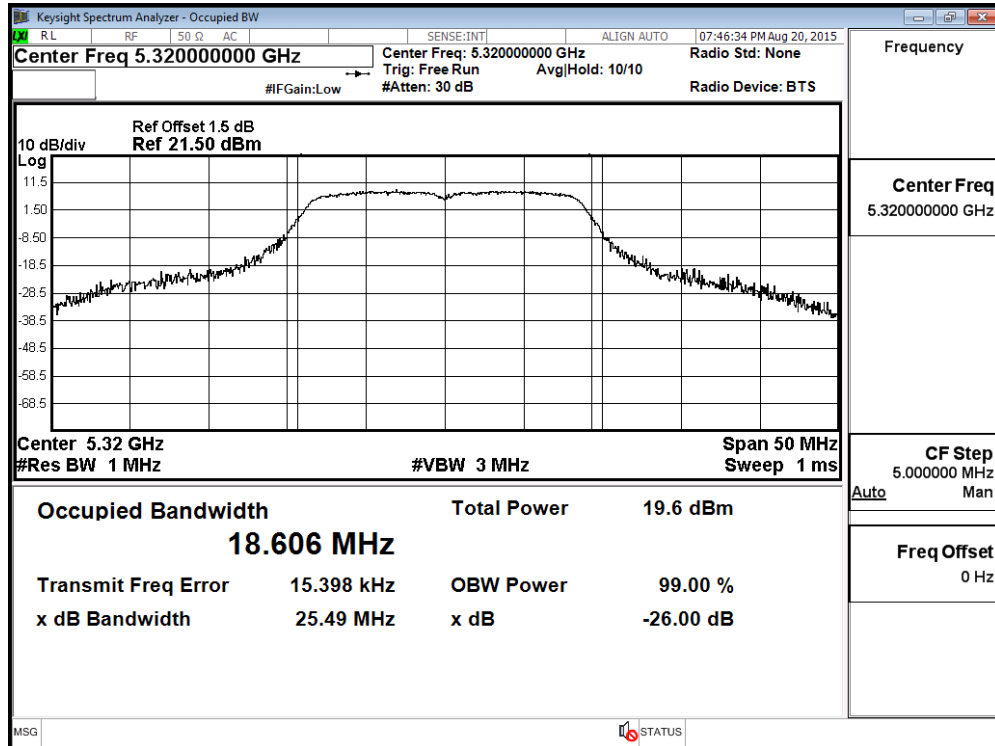


Channel 100

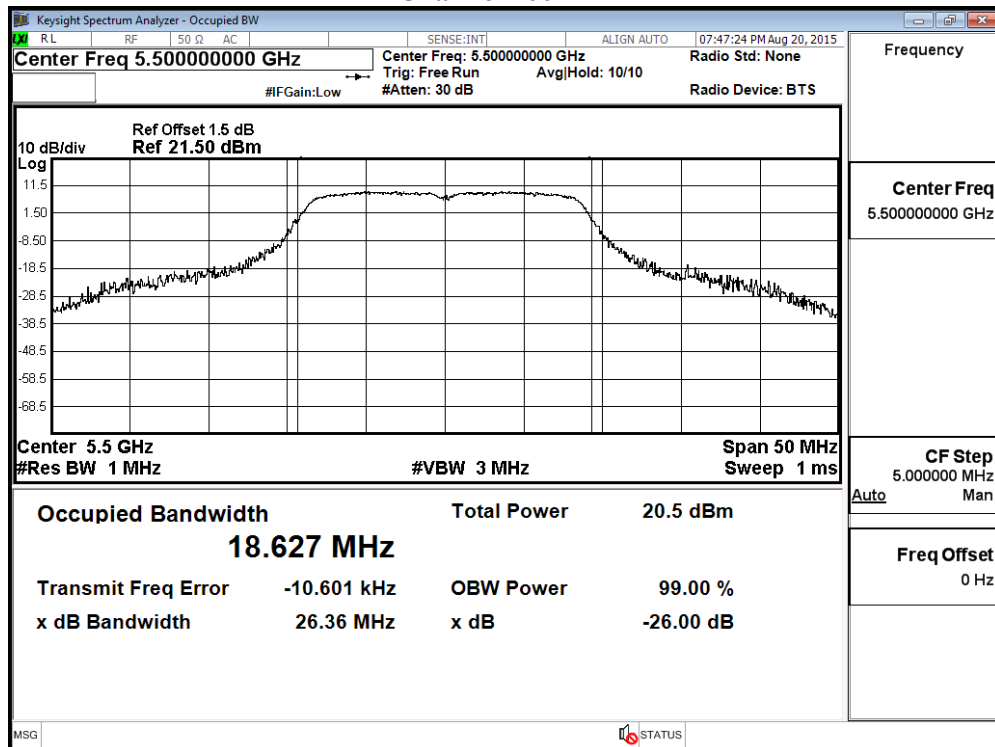

Channel 116

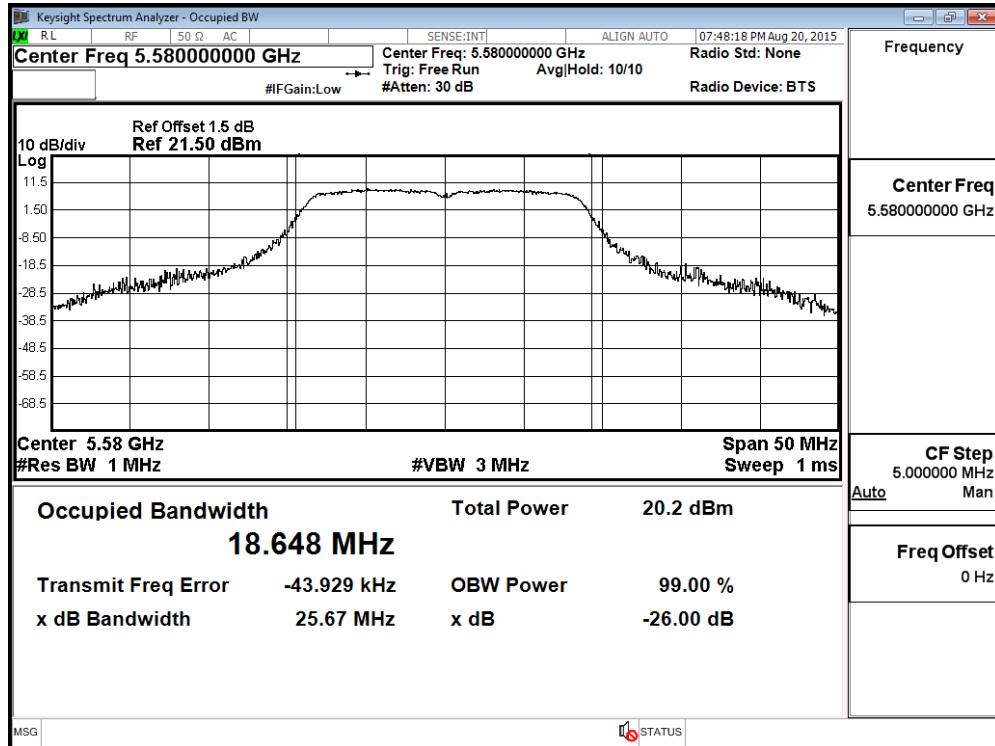

Channel 140

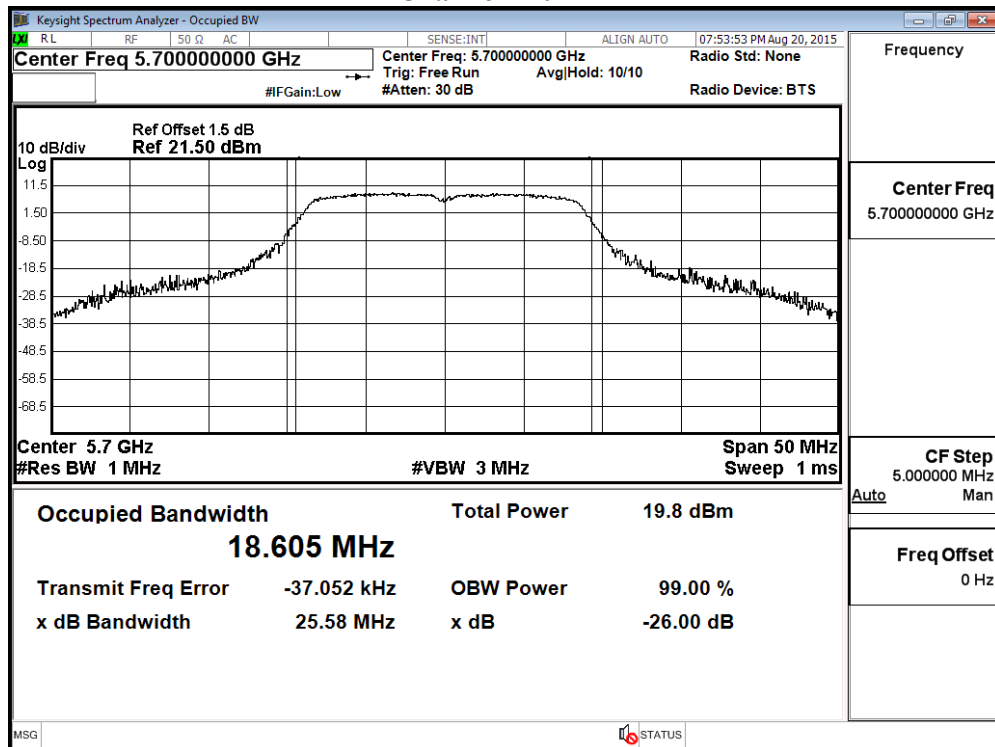

Product : Wireless gateway
Test Item : Maximum conducted output power
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps)

Cable loss=1dB		Maximum conducted output power								
Channel No.	Frequency (MHz)	Data Rate (Mbps)								Required Limit
		15	30	45	60	90	120	135	150	
		Measurement Level (dBm)								
38	5190	13.56	13.48	13.35	13.25	13.16	13.04	12.98	12.88	<24dBm
46	5230	12.83	--	--	--	--	--	--	--	<24dBm
54	5270	13.41	13.35	13.26	13.18	13.09	12.94	12.82	12.76	<24dBm
62	5310	13.26	--	--	--	--	--	--	--	<24dBm
102	5510	12.78	--	--	--	--	--	--	--	<24dBm
110	5550	13.23	13.18	13.01	12.92	12.86	12.77	12.62	12.55	<24dBm
134	5670	13.26	--	--	--	--	--	--	--	<24dBm
151	5755	13.03	12.97	12.86	12.74	12.66	12.51	12.44	12.39	<30dBm
159	5795	13.09	--	--	--	--	--	--	--	<30dBm

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Output Power Limit	
				(dBm)	dBm+10log(BW)
38	5190	--	13.56	24	--
46	5230	--	12.83	24	--
54	5270	36.344	13.41	24	26.60
62	5310	36.349	13.26	24	26.60
102	5510	36.366	12.78	24	26.61
110	5550	36.381	13.23	24	26.61
134	5670	36.449	13.26	24	26.62
151	5755	--	13.03	30	--
159	5795	--	13.09	30	--

Note:


- Power Output Value =Reading value on average power meter + cable loss

26dBc Occupied Bandwidth:


Channel 54

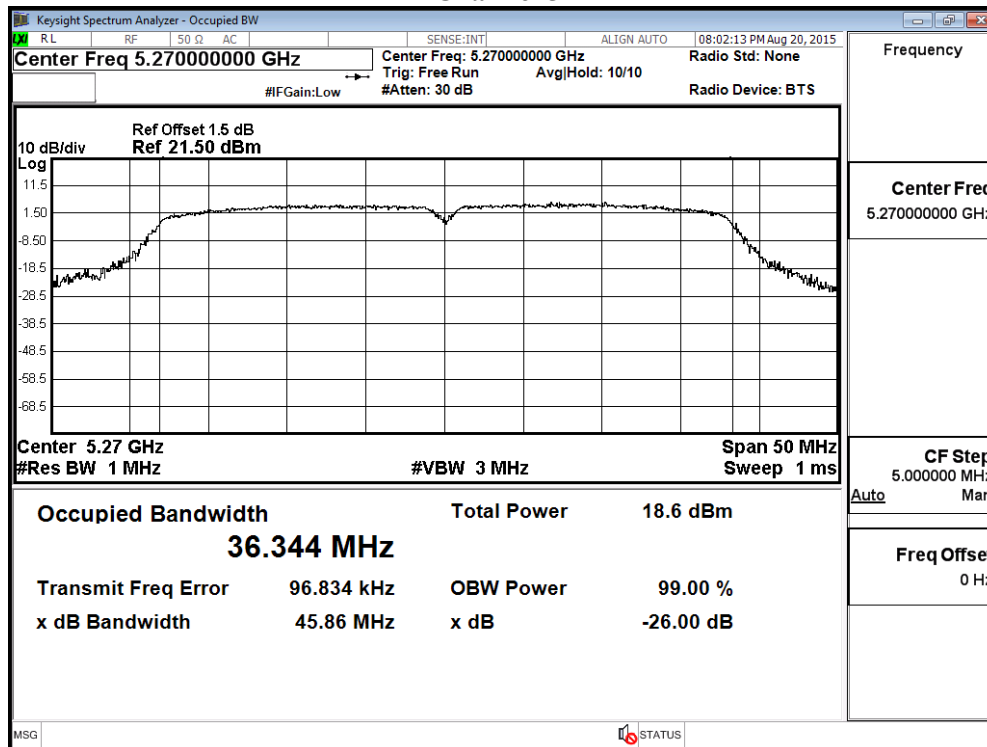


Channel 62

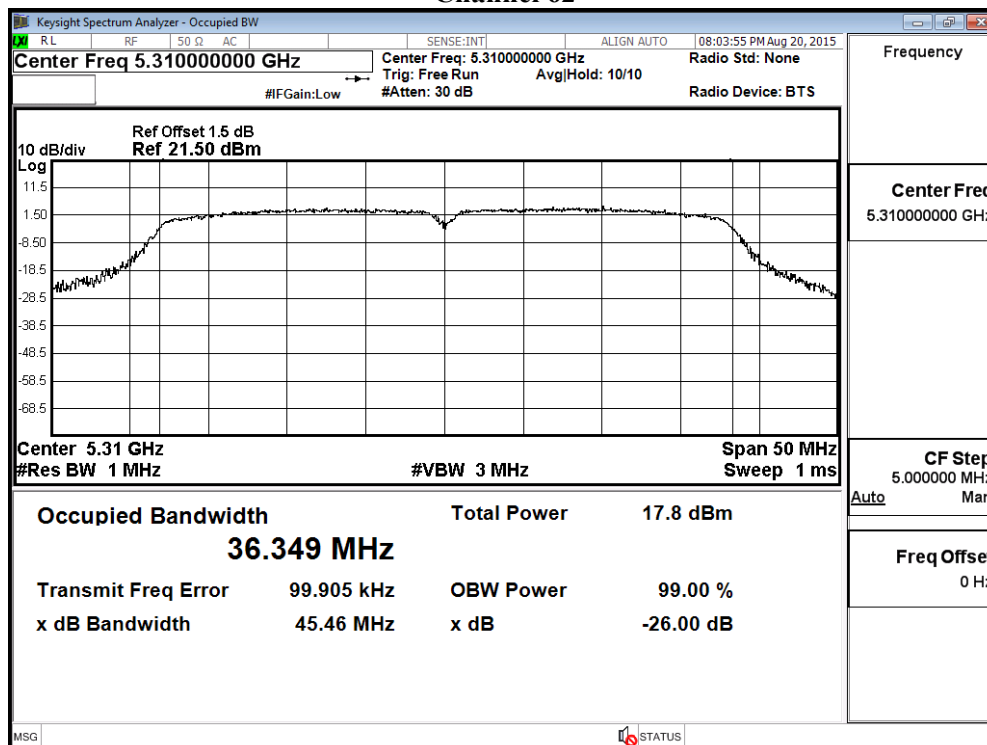


Channel 102

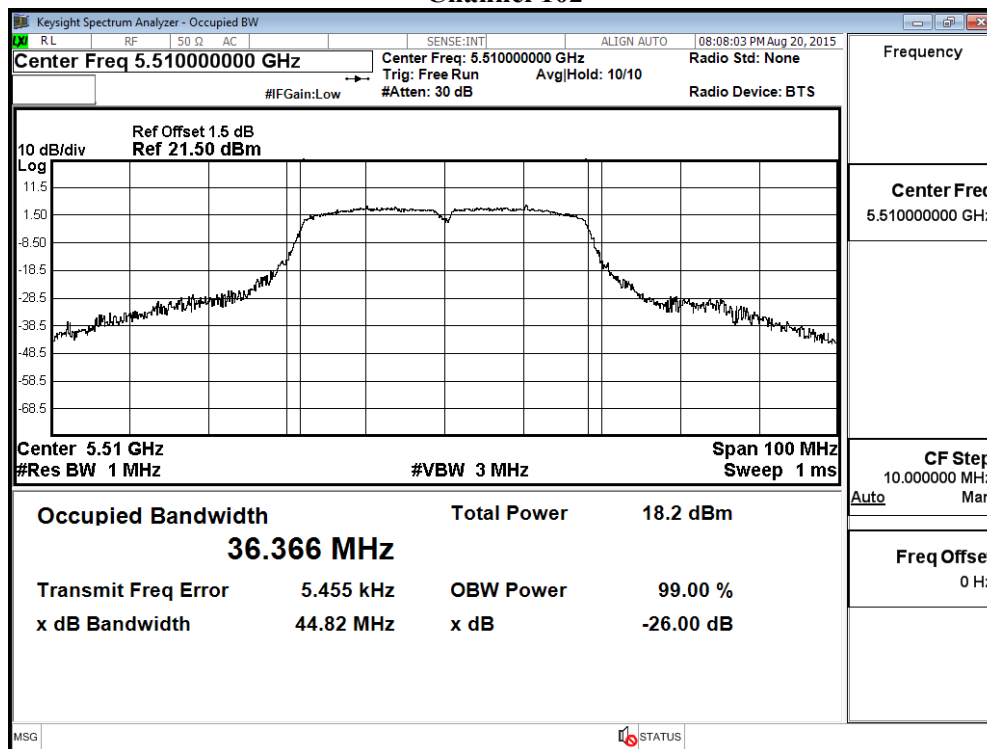

Channel 110

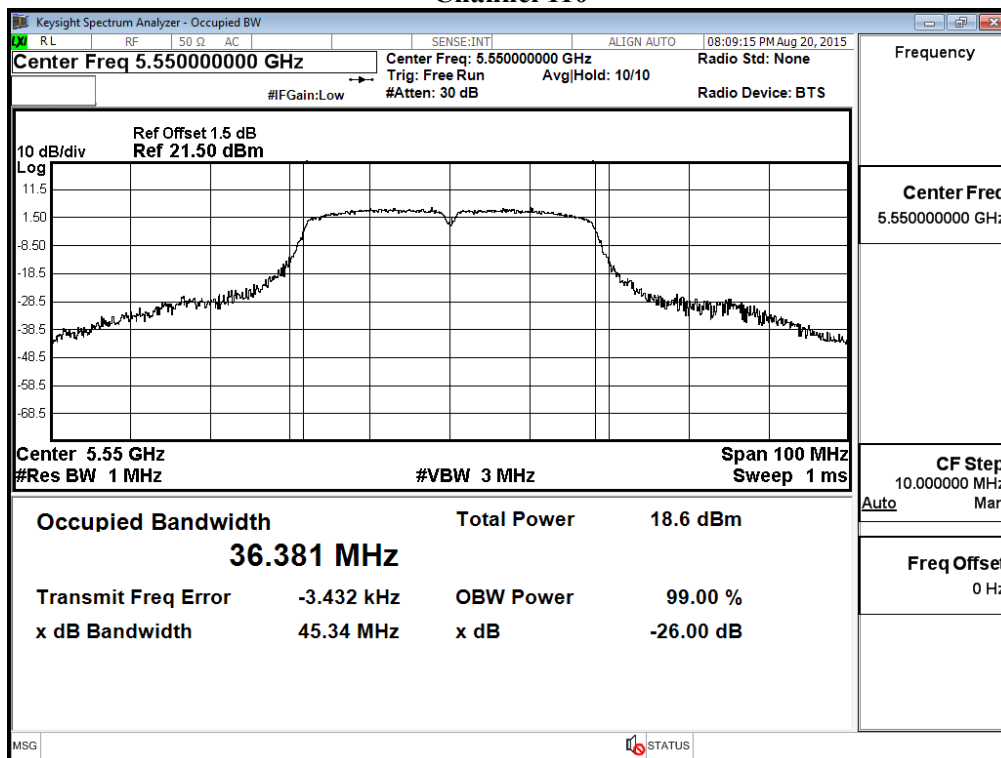

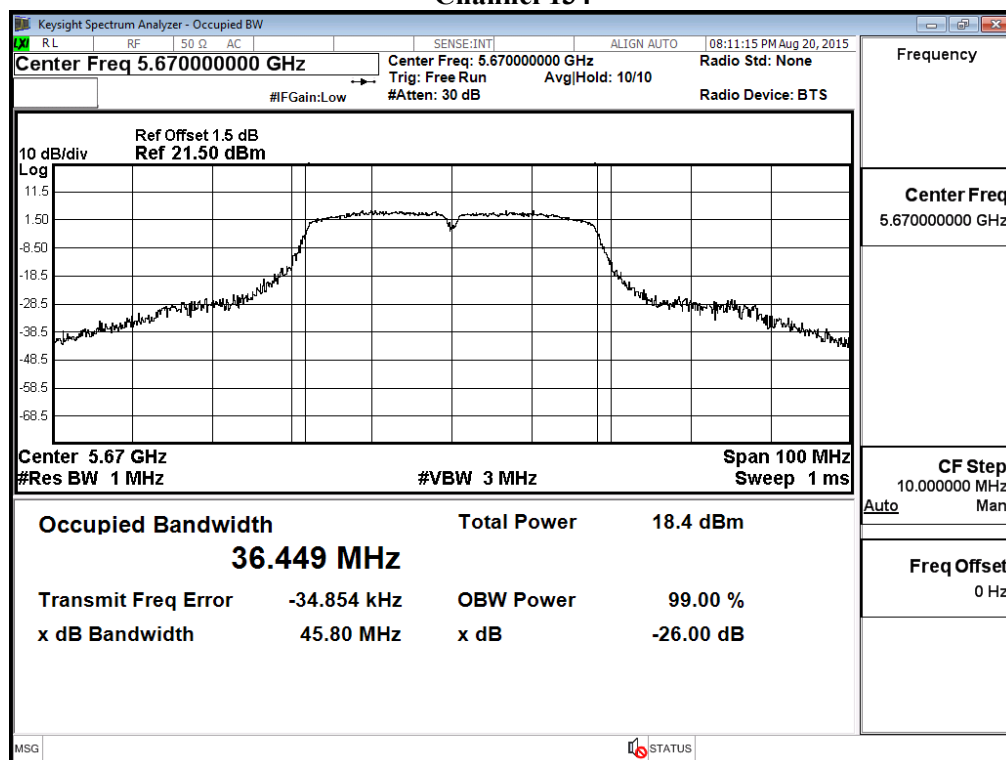

4. Peak Power Spectral Density


4.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr, 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

4.2. Test Setup

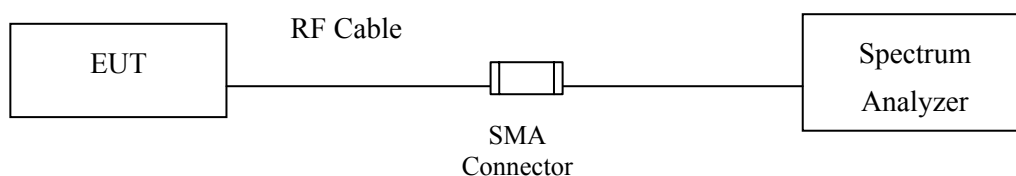

4.3. Limits

- (1) For the band 5.15-5.25 GHz,
 - (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
 - (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
 - (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems

employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.+

- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point UNII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.4. Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

The Peak Power Spectral Density using KDB 789033 section F) procedure, Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer.

SA-1 method is selected to run the test.

For the band 5.725-5.85 GHz, Scale the observed power level to an equivalent value in 500 kHz by adjusting (increase) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{ kHz}/100\text{ kHz}) = 6.98\text{ dB}$.

4.5. Uncertainty

$\pm 1.27\text{ dB}$


4.6. Test Result of Peak Power Spectral Density

Product : Wireless gateway
Test Item : Peak Power Spectral Density
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps)


Channel Number	Frequency (MHz)	Data Rate (Mbps)	Measurement Level (dBm)	Required Limit (dBm)	Result
36	5180	6	4.330	11	Pass
44	5220	6	4.310	11	Pass
48	5240	6	3.480	11	Pass
52	5260	6	3.700	11	Pass
60	5300	6	3.410	11	Pass
64	5320	6	3.970	11	Pass
100	5500	6	4.320	11	Pass
116	5580	6	4.000	11	Pass
140	5700	6	3.590	11	Pass

Channel Number	Frequency (MHz)	Data Rate (Mbps)	PPSD (dBm)	BWCF (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
149	5745	6	-5.36	6.98	1.62	<30	Pass
157	5785	6	-5.89	6.98	1.09	<30	Pass
165	5825	6	-5.75	6.98	1.23	<30	Pass


Channel 36:

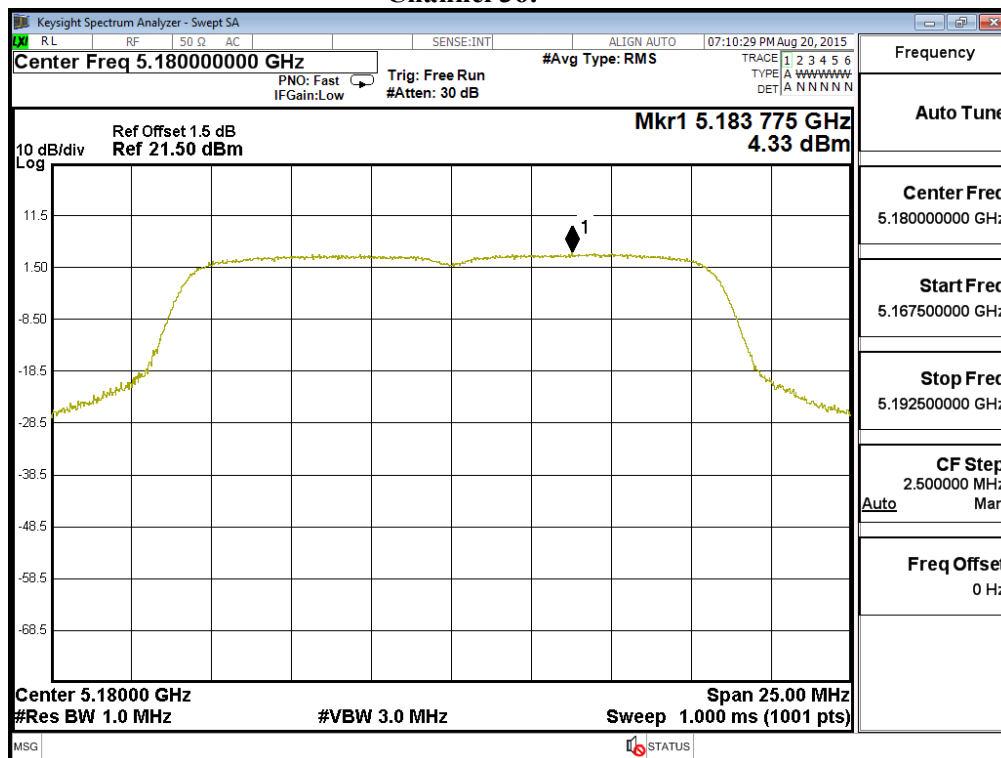


Channel 44:

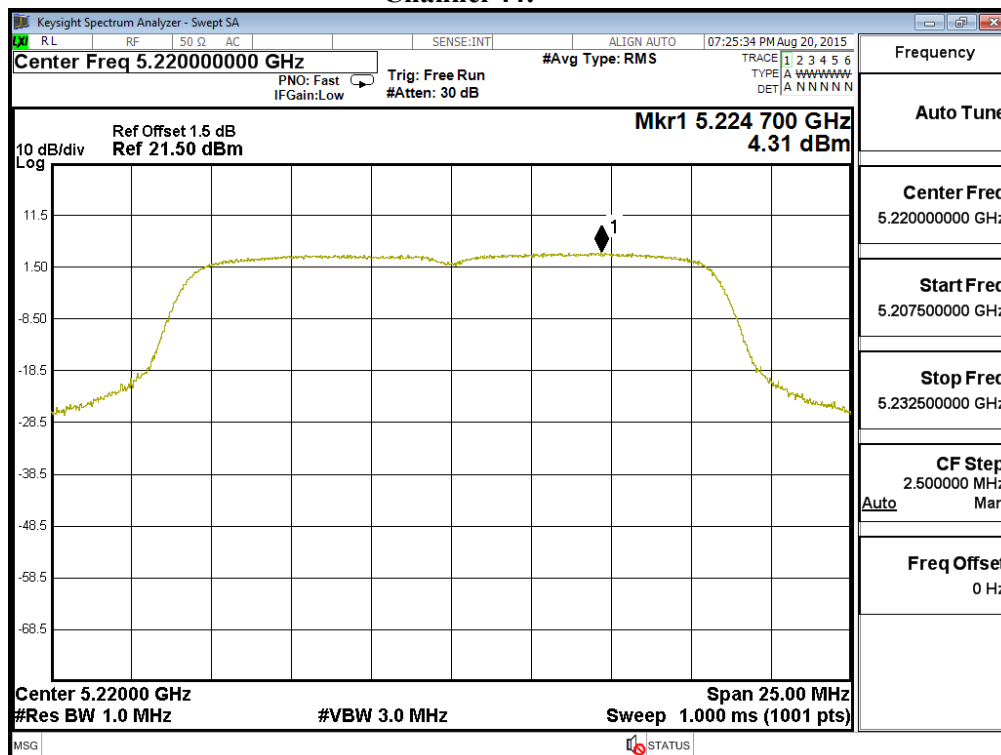


Channel 48:

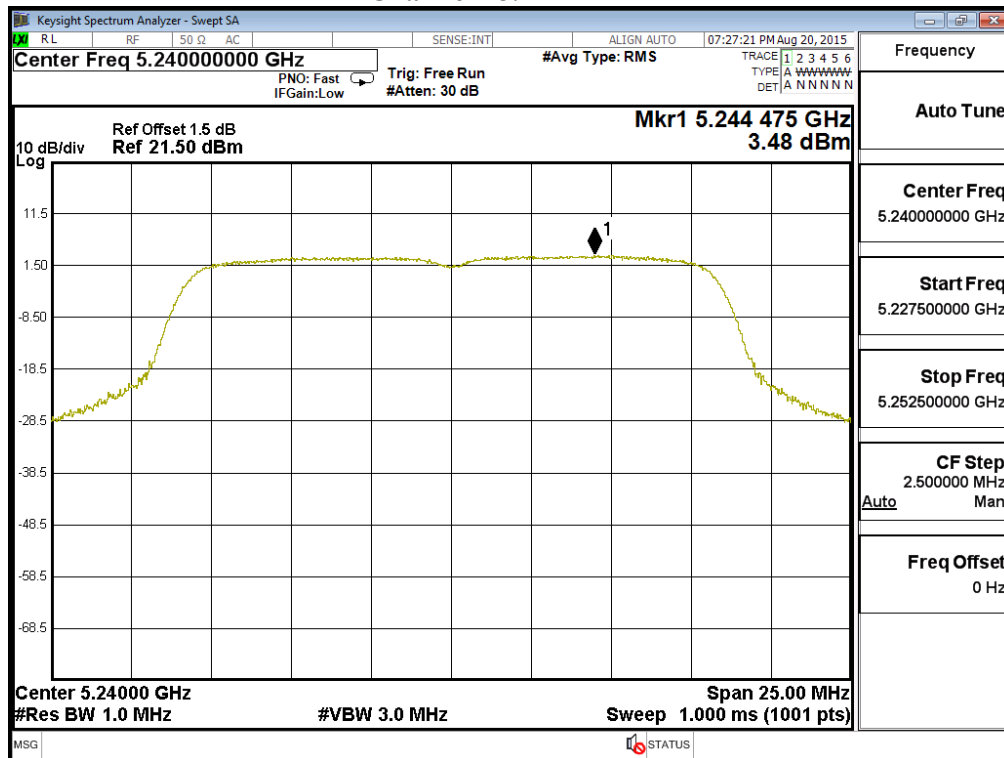


Channel 52:

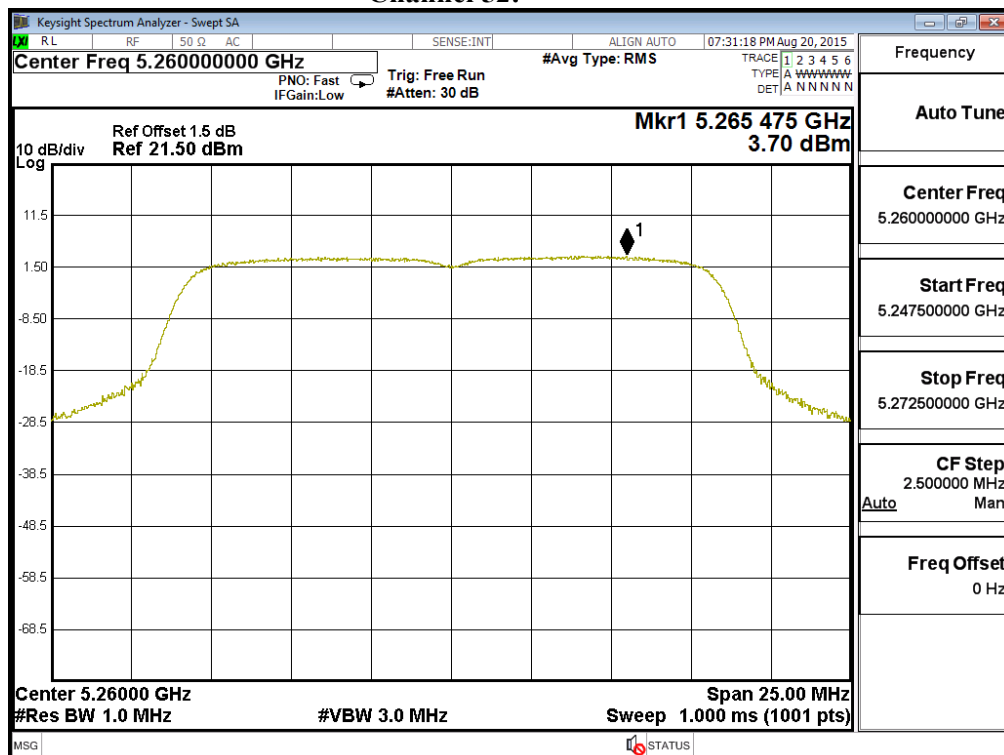


Channel 60:

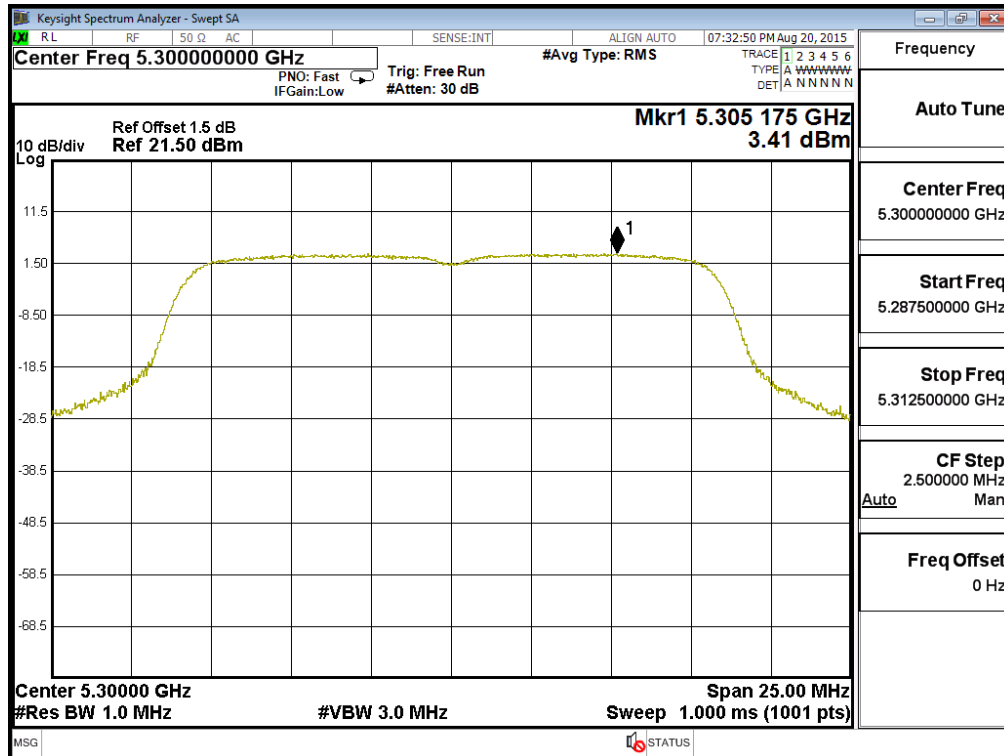


Channel 64:

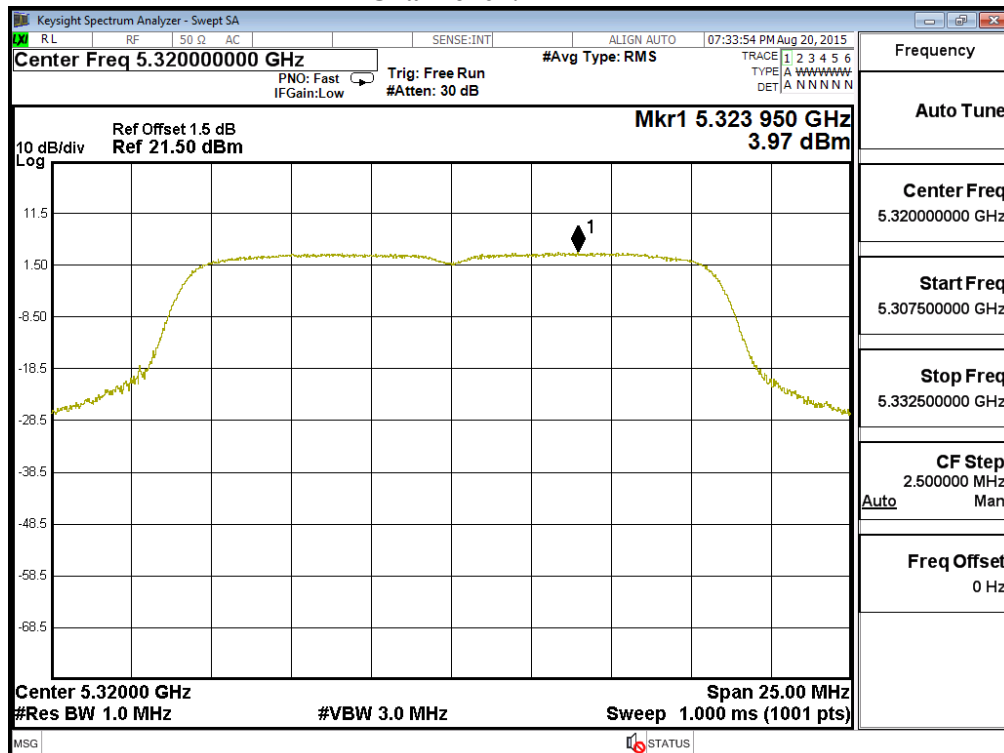


Channel 100:

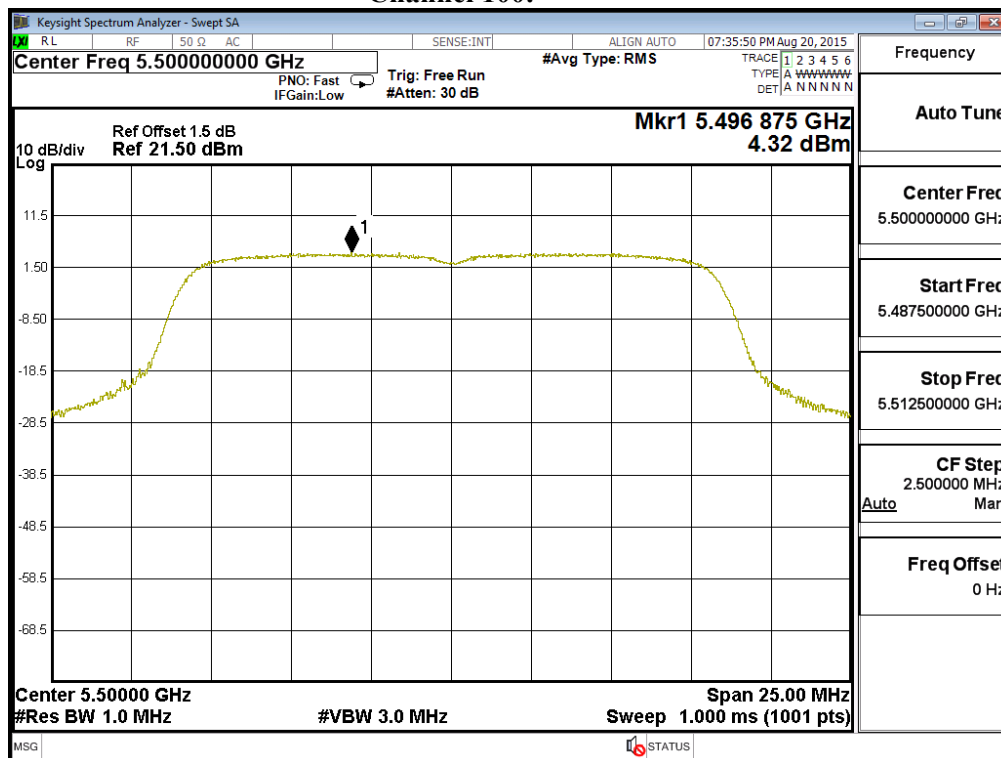


Channel 116:

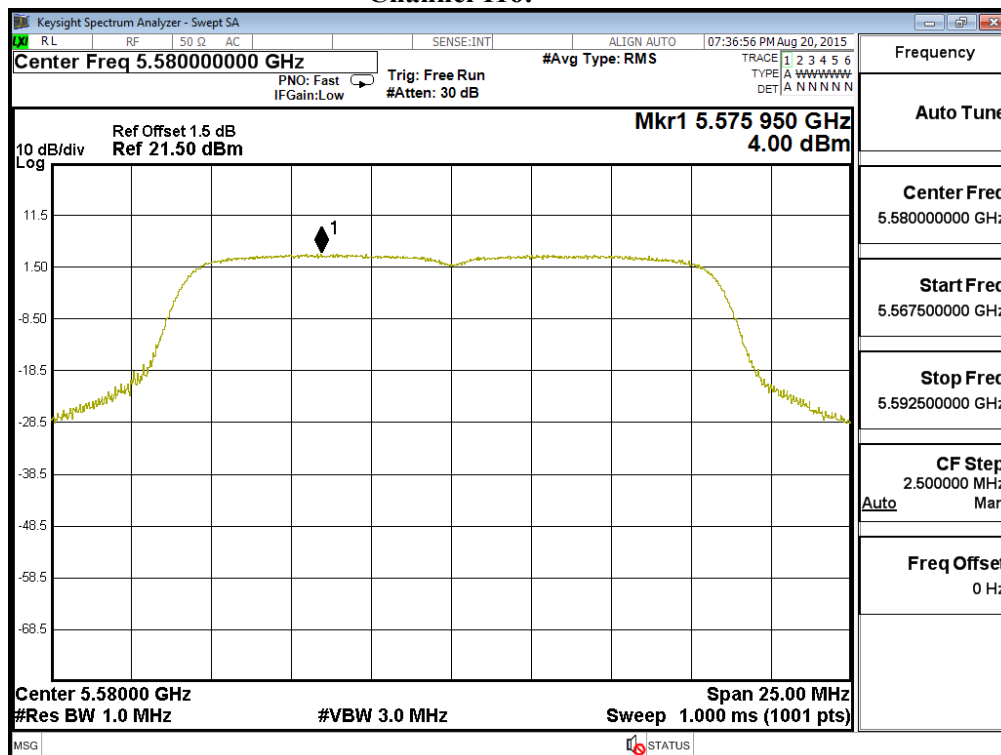


Channel 140:

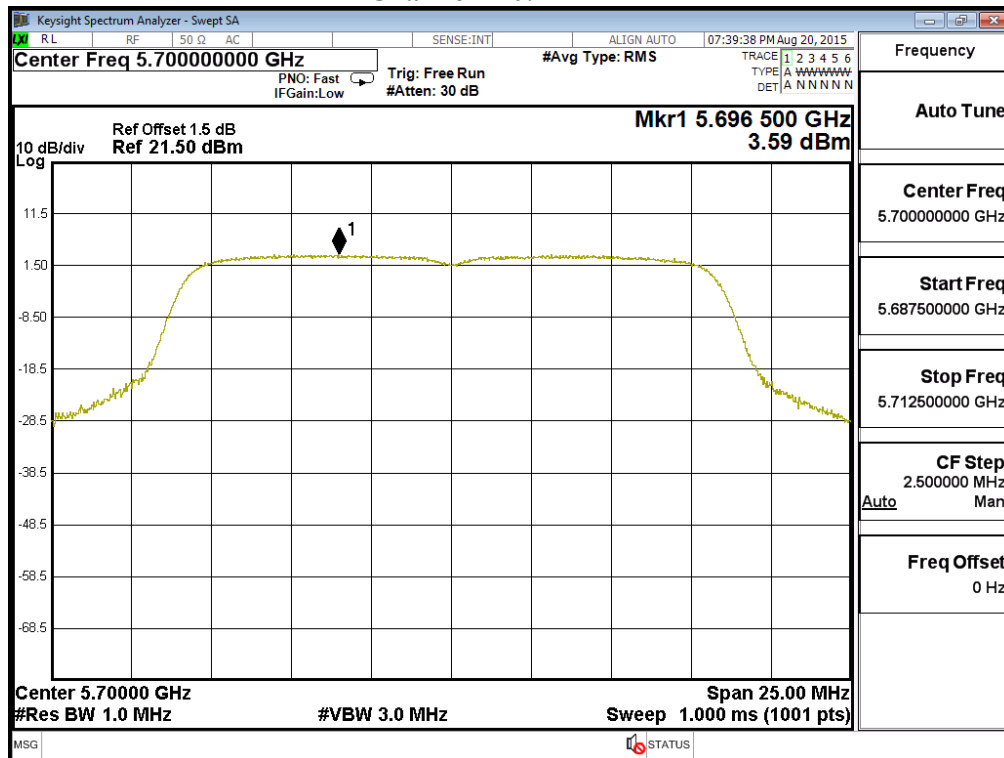


Channel 149

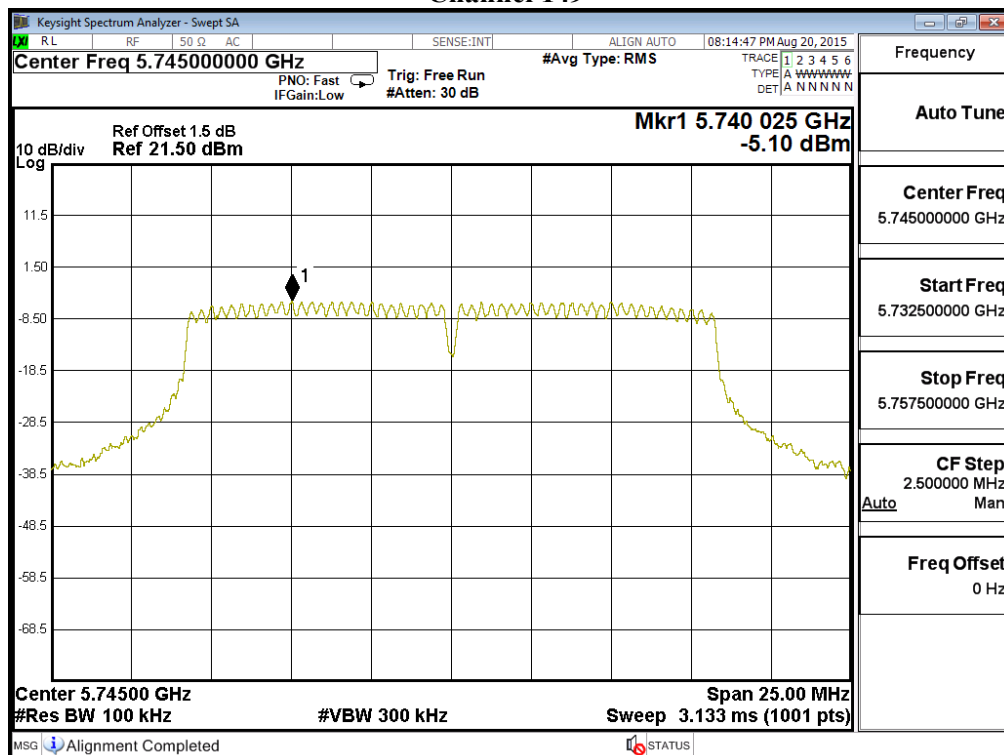

Channel 157

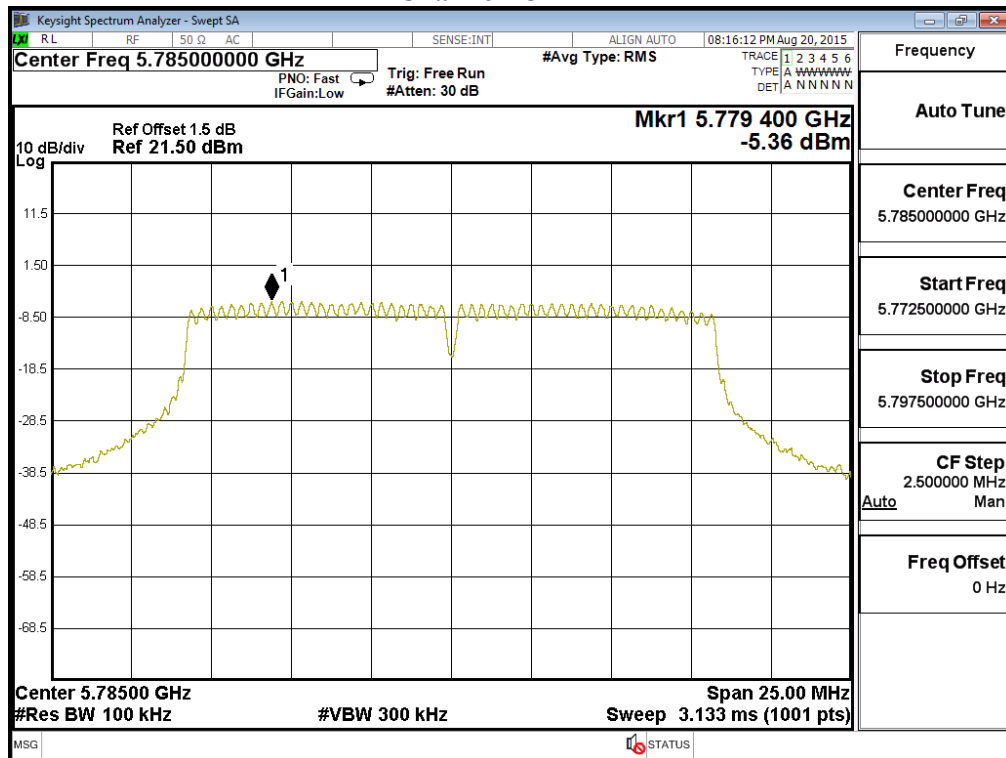

Channel 165

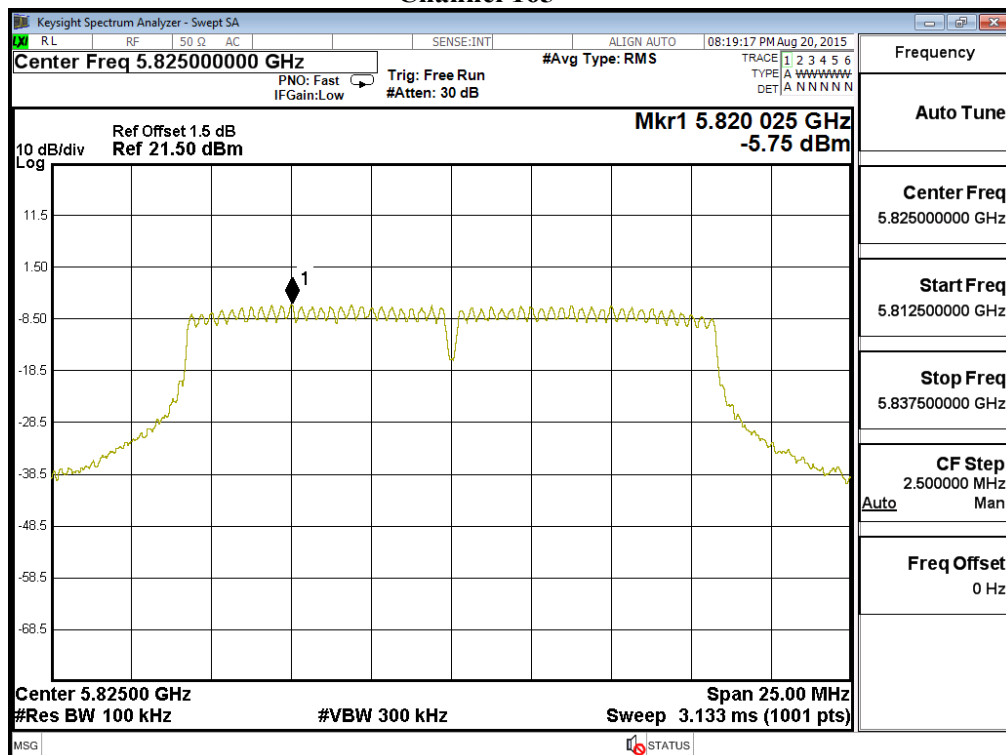


Product : Wireless gateway
Test Item : Peak Power Spectral Density
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps)


Channel Number	Frequency (MHz)	Data Rate (Mbps)	Measurement Level (dBm)	Required Limit (dBm)	Result
36	5180	7.2	3.810	11	Pass
44	5220	7.2	4.040	11	Pass
48	5240	7.2	3.430	11	Pass
52	5260	7.2	3.480	11	Pass
60	5300	7.2	3.250	11	Pass
64	5320	7.2	3.230	11	Pass
100	5500	7.2	3.980	11	Pass
116	5580	7.2	3.800	11	Pass
140	5700	7.2	3.280	11	Pass

Channel Number	Frequency (MHz)	Data Rate (Mbps)	PPSD (dBm)	BWCF (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
149	5745	7.2	-6.23	6.98	0.75	<30	Pass
157	5785	7.2	-6.43	6.98	0.55	<30	Pass
165	5825	7.2	-7.18	6.98	-0.20	<30	Pass


Channel 36:

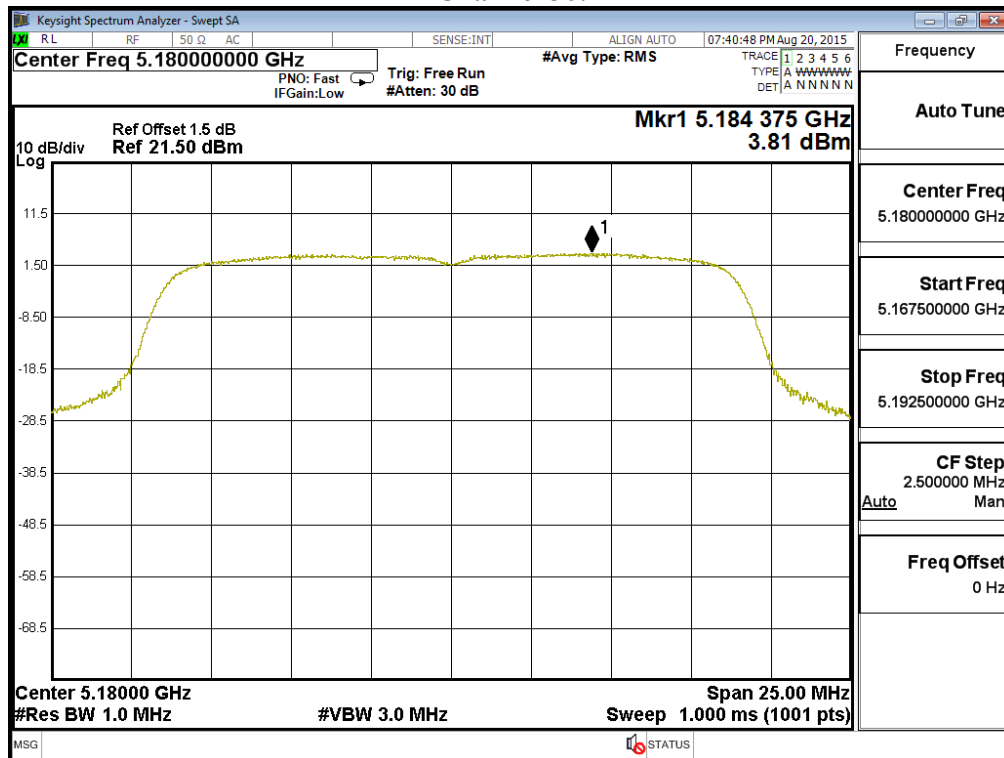


Channel 44:

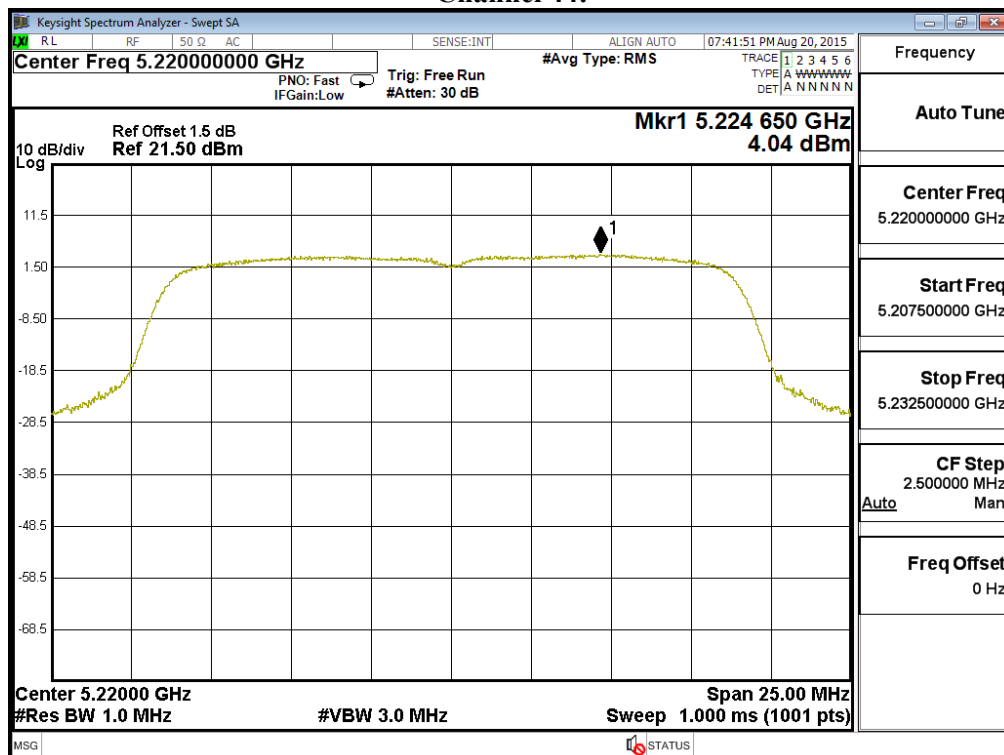


Channel 48:

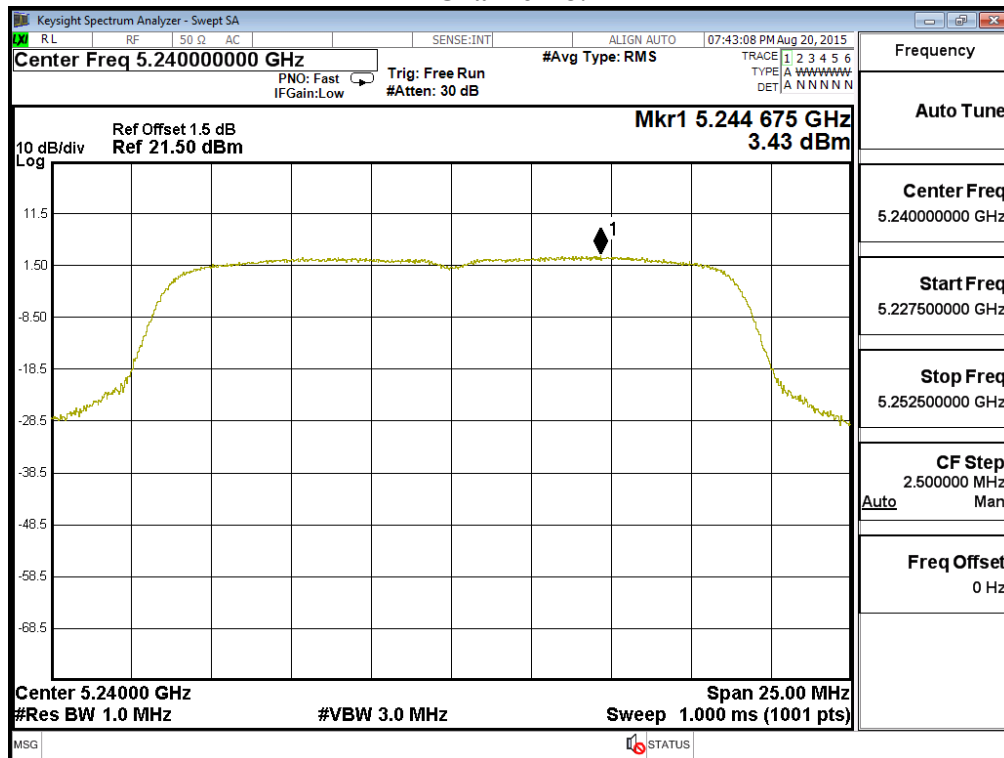


Channel 52:

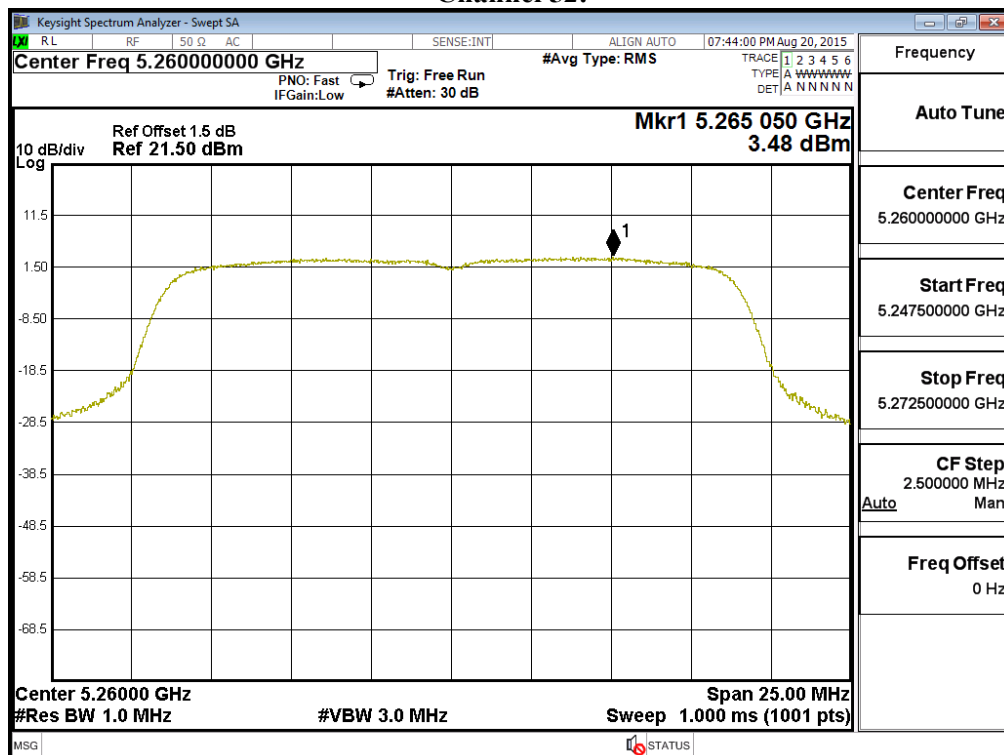


Channel 60:

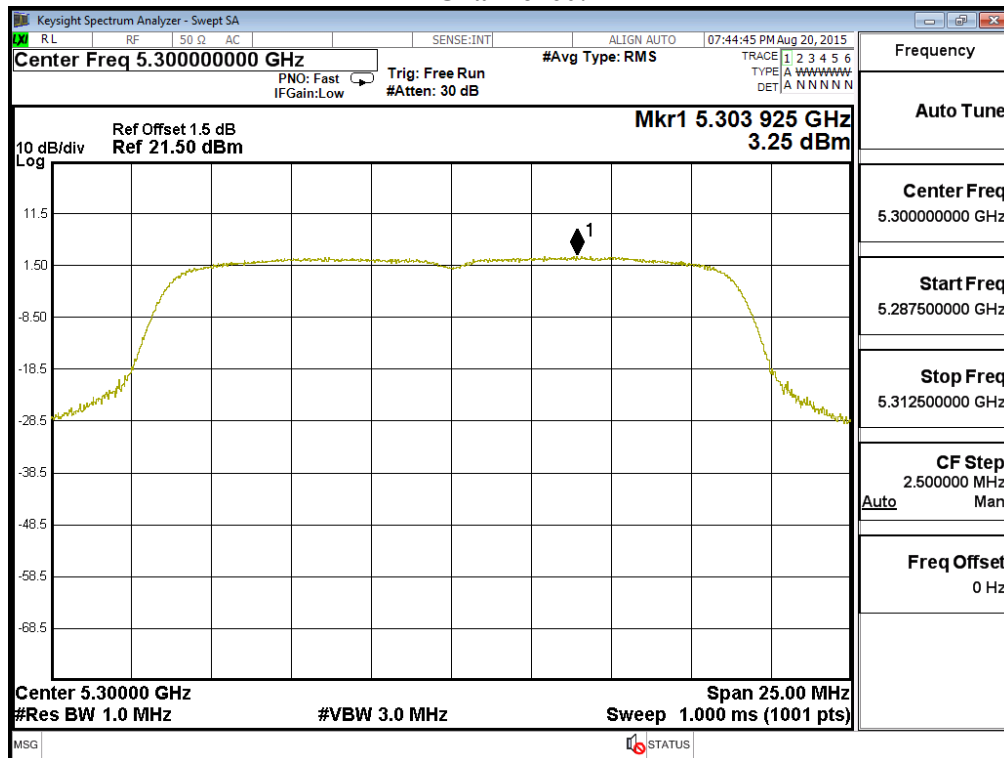


Channel 64:

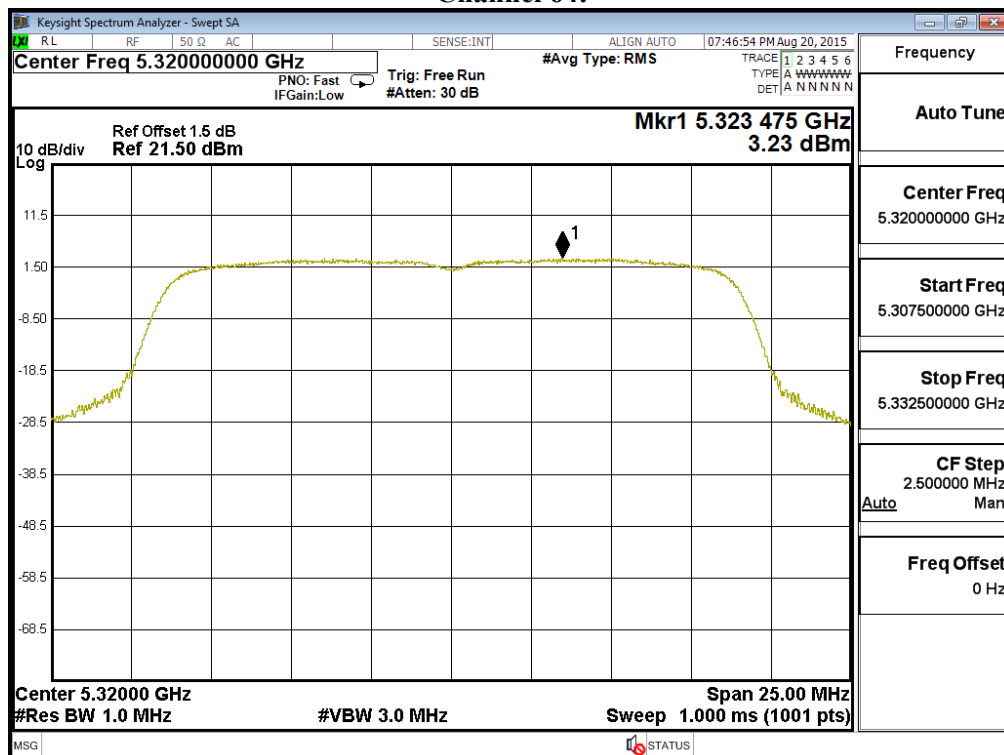


Channel 100:

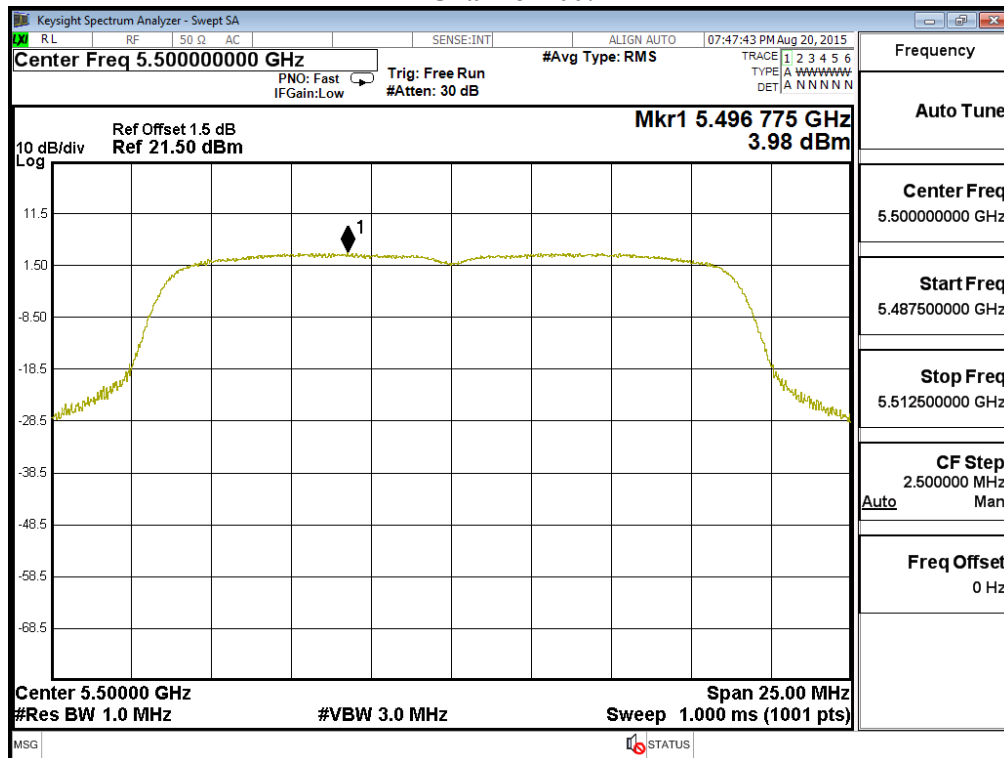


Channel 116:

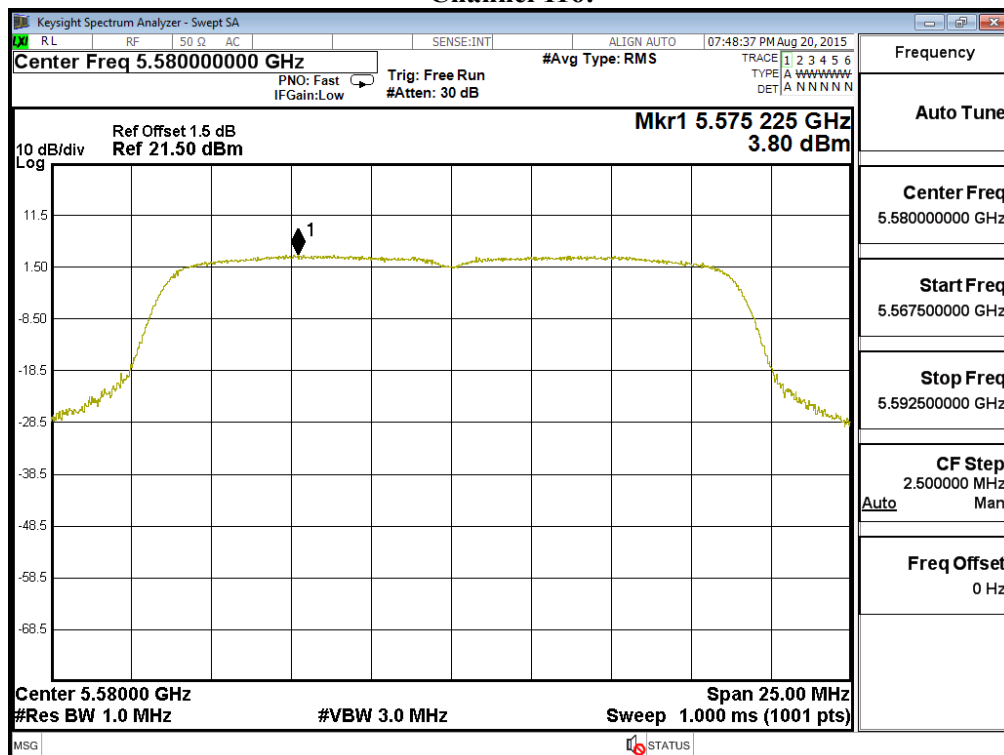


Channel 140:

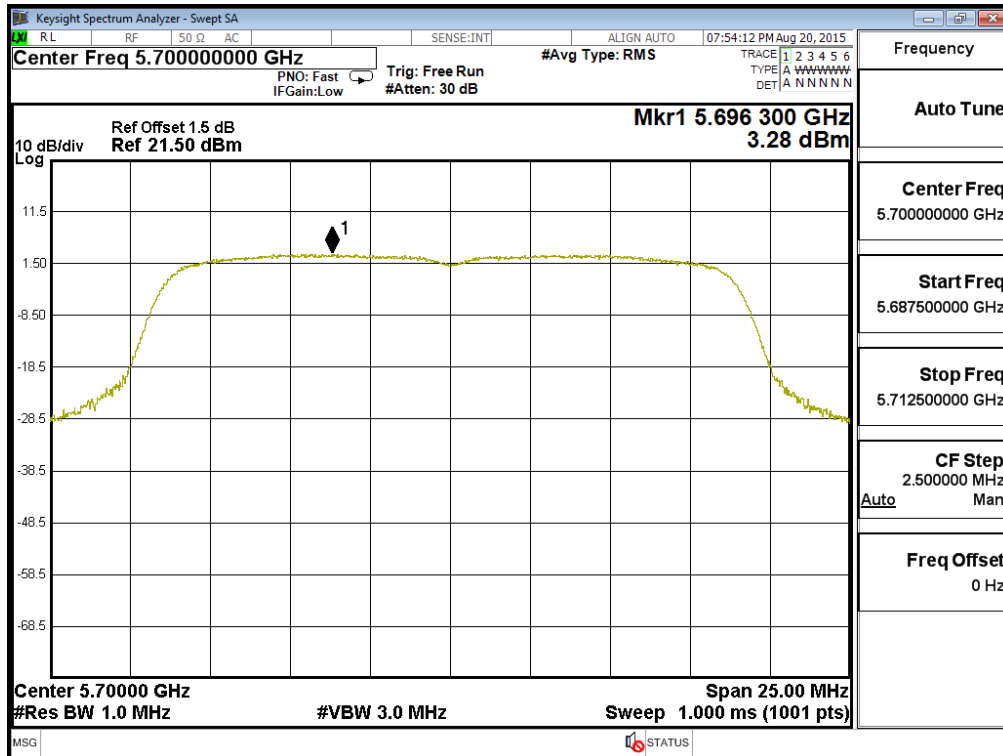


Channel 149

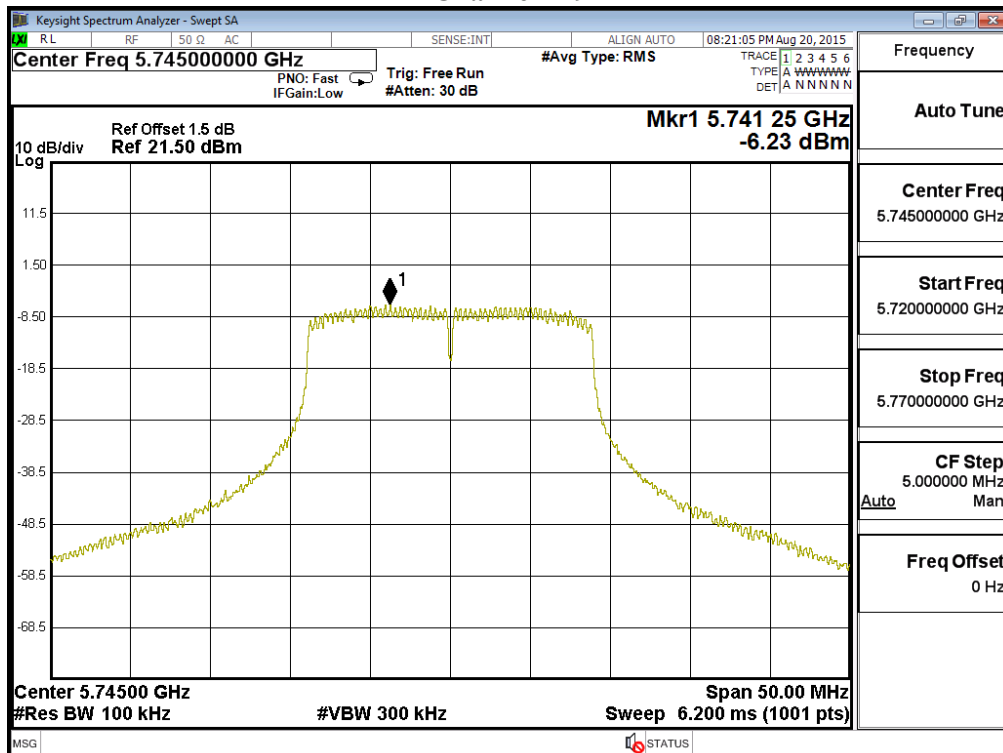

Channel 157

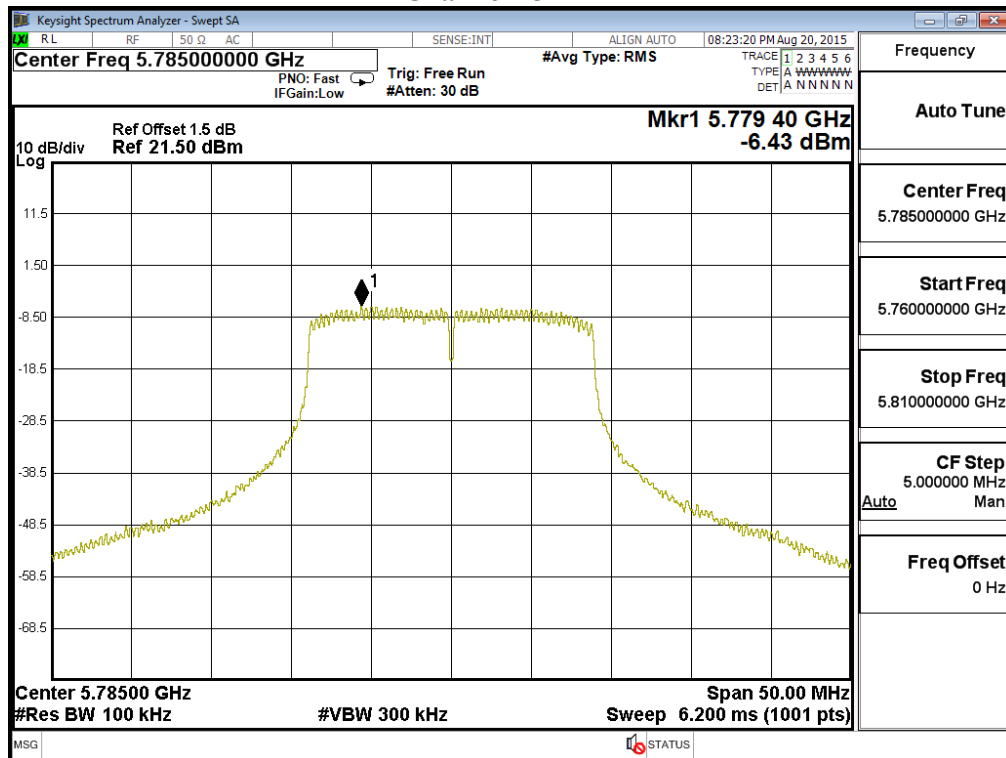

Channel 165

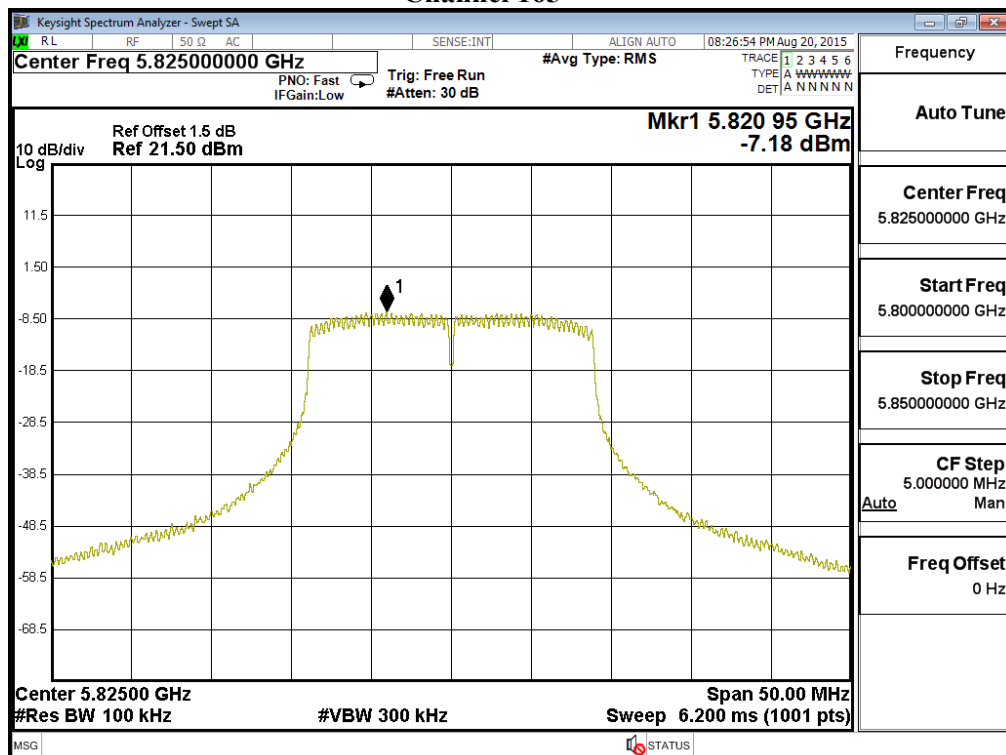


Product : Wireless gateway
Test Item : Peak Power Spectral Density
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps)


Channel Number	Frequency (MHz)	Data Rata (Mbps)	Measurement Level (dBm)	Required Limit (dBm)	Result
38	5190	15	-0.510	11	Pass
46	5230	15	-1.010	11	Pass
54	5270	15	-0.510	11	Pass
62	5310	15	-1.400	11	Pass
102	5510	15	-1.100	11	Pass
110	5550	15	-0.580	11	Pass
134	5670	15	-0.860	11	Pass

Channel Number	Frequency (MHz)	Data Rata (Mbps)	PPSD (dBm)	BWCF (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
151	5755	15	-10.75	6.98	-3.77	<30	Pass
159	5795	15	-11.36	6.98	-4.38	<30	Pass


Channel 38

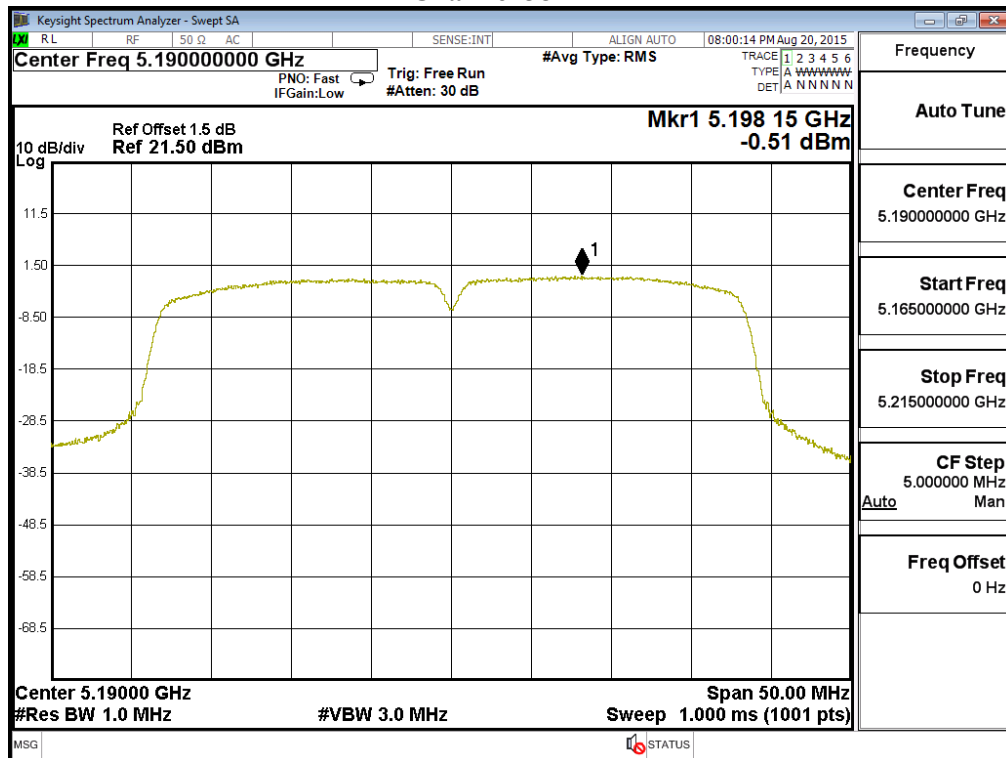


Channel 46

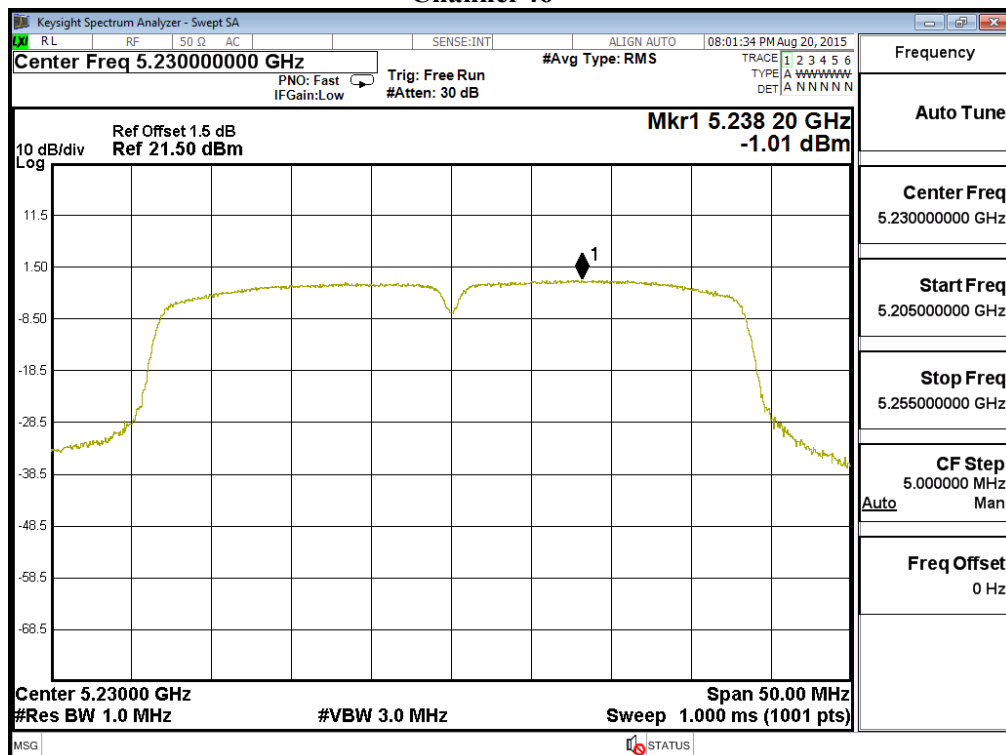


Channel 54

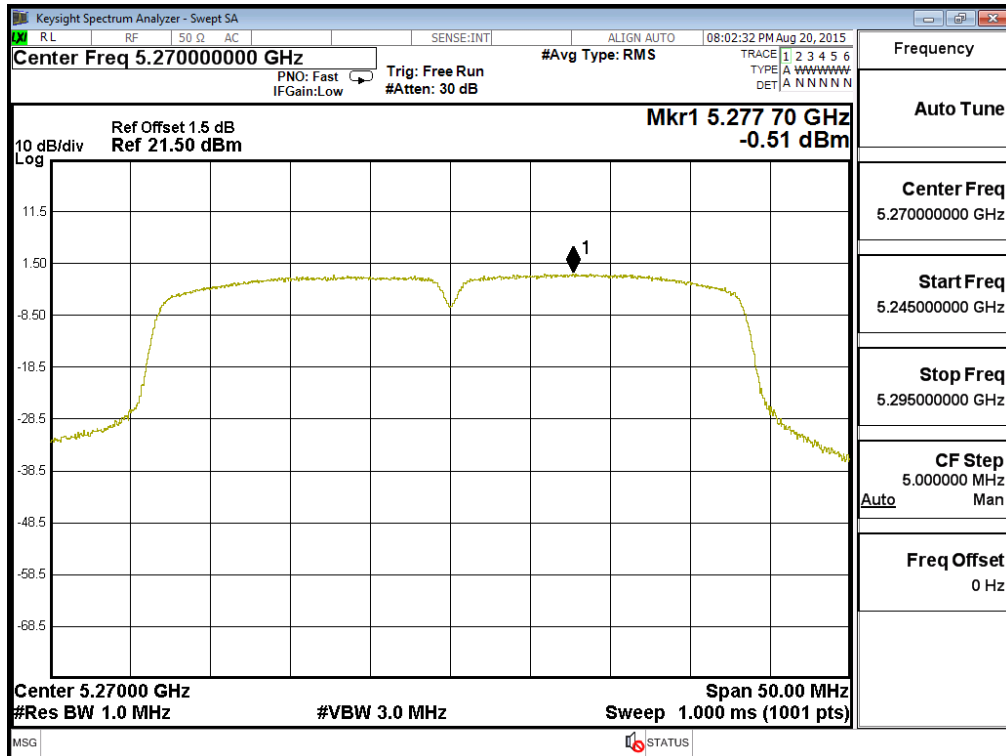


Channel 62

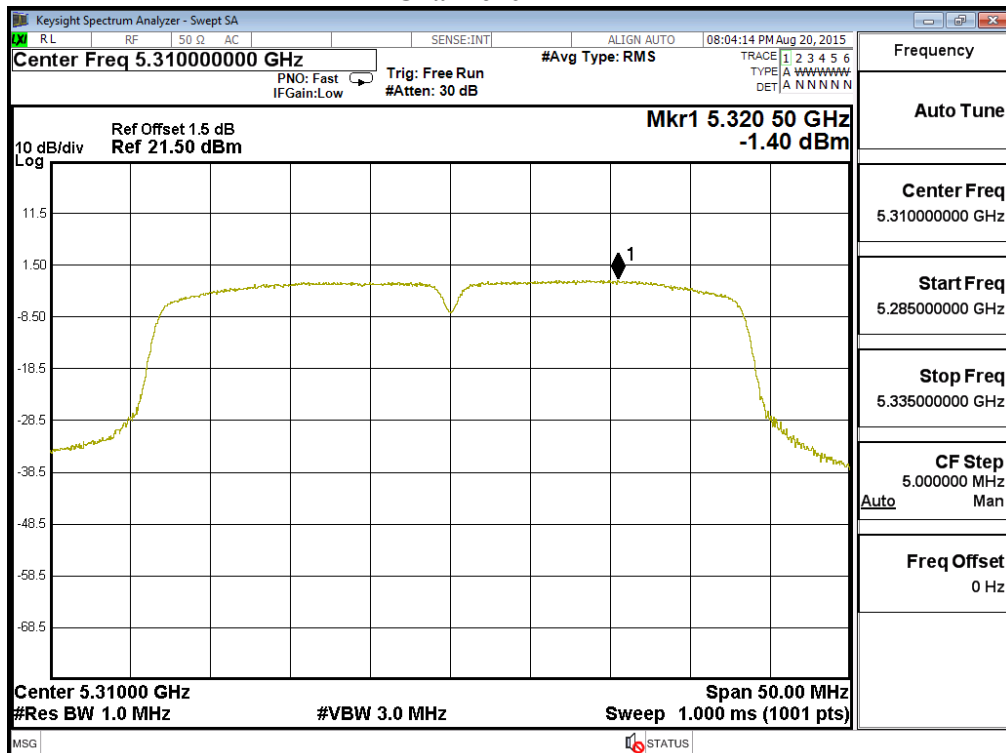


Channel 102

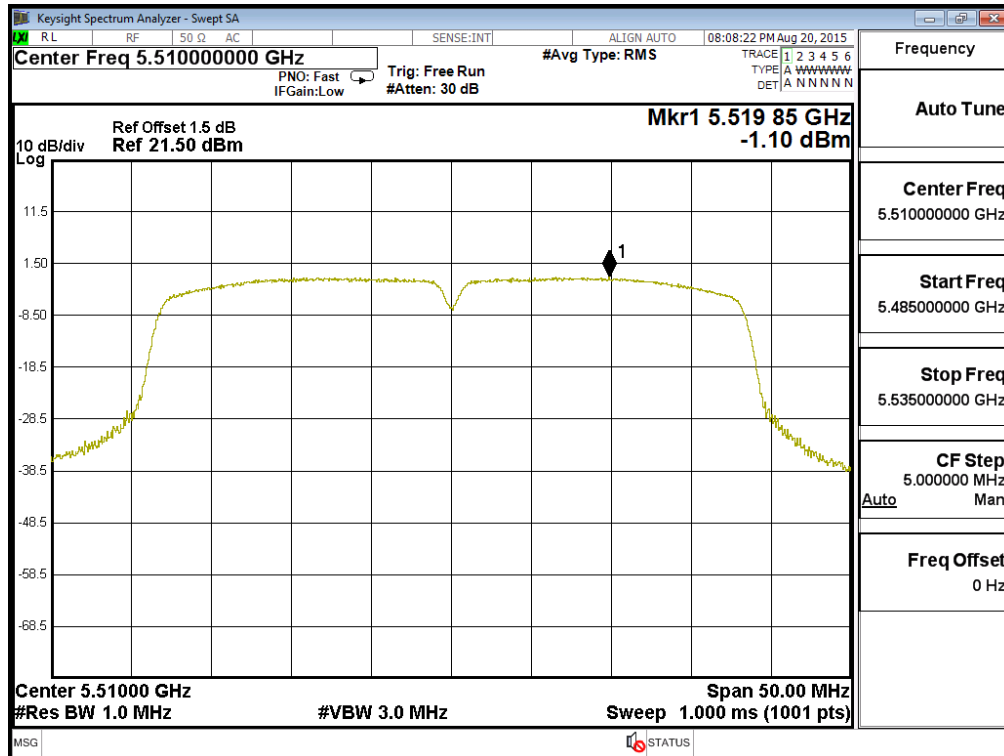


Channel 110

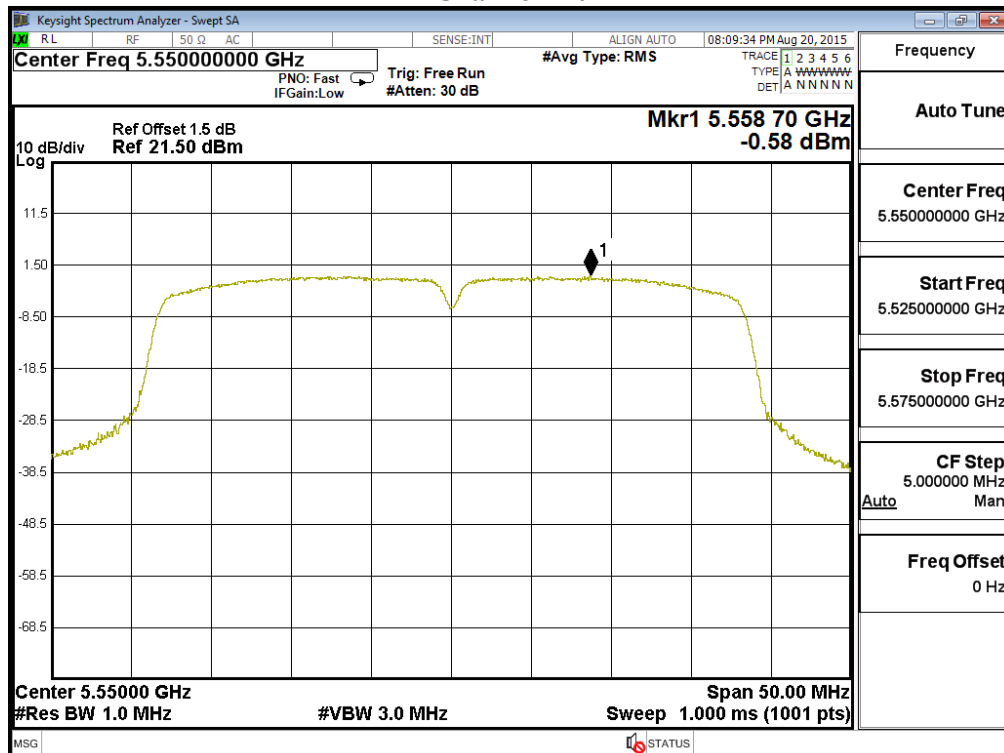


Channel 134

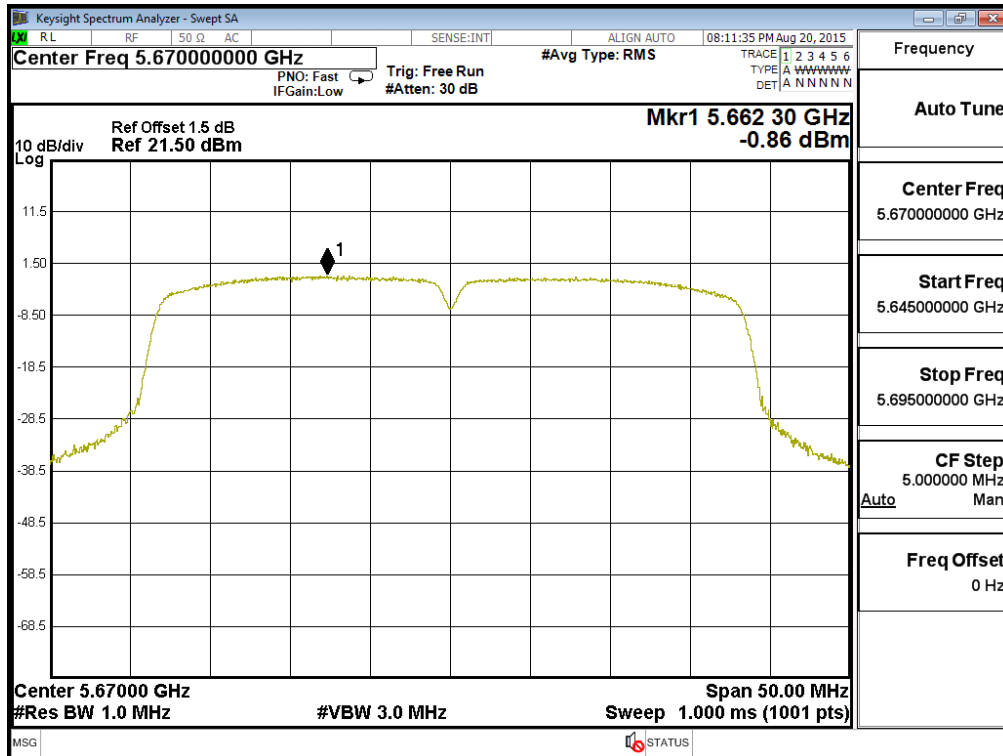

Channel 151

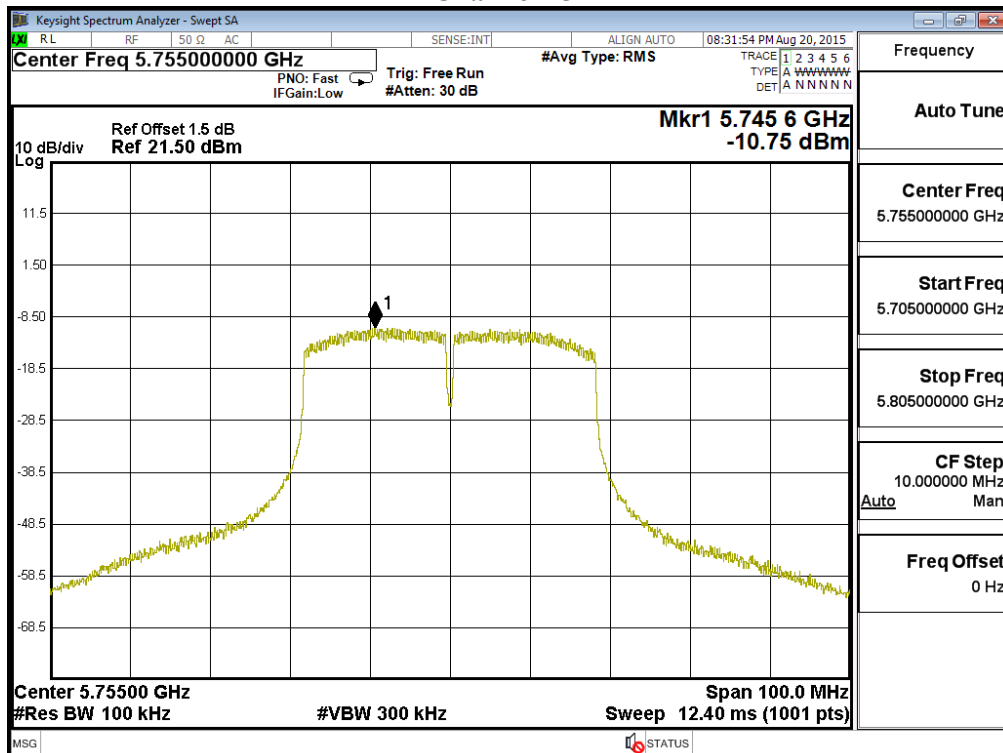

Channel 159

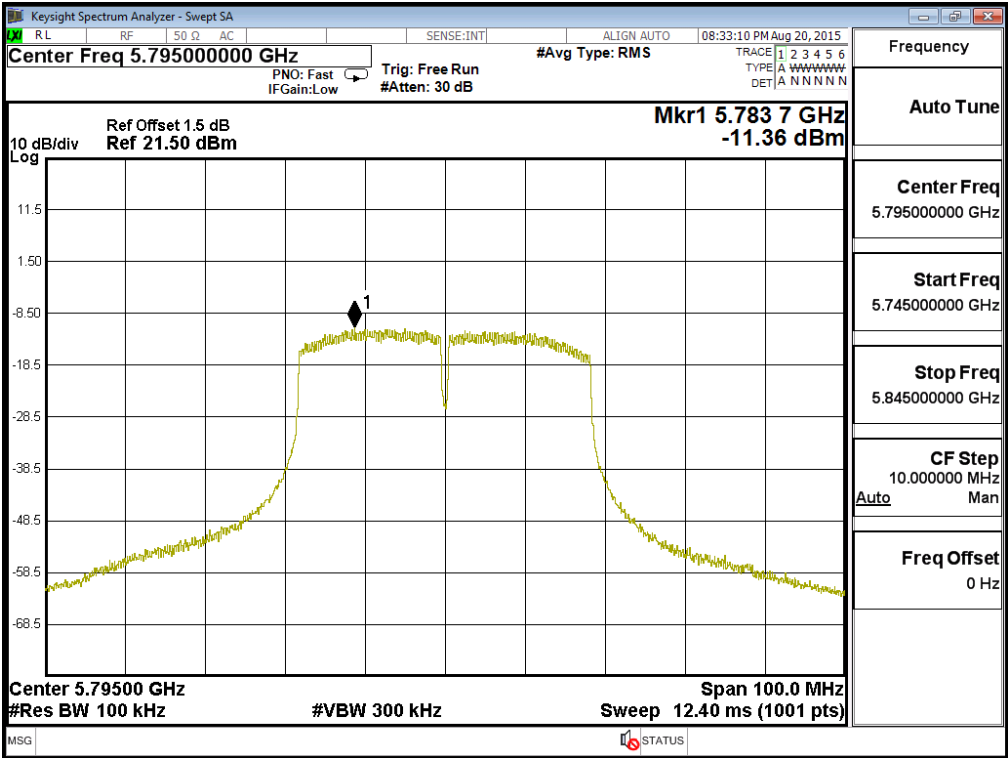

5. Radiated Emission

5.1. Test Equipment

The following test equipments are used during the radiated emission test:


Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Magnetic Loop Antenna	Teseq	HLA6121/ 37133	Sep., 2015
	X	Bilog Antenna	Schaffner Chase	CBL6112B/ 2707	Jun., 2015
	X	EMI Test Receiver	R&S	ESCS 30/838251/ 001	Jun., 2015
	X	Coaxial Cable	QTK(Arnist)	RG 214/ LC003-RG	Jun., 2015
	X	Coaxial signal switch	Arnist	MP59B/ 6200798682	Jun., 2015

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct., 2014
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar., 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan, 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug., 2015
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan., 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul., 2015
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul., 2015


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

5.2. Test Setup

Radiated Emission Below 1GHz

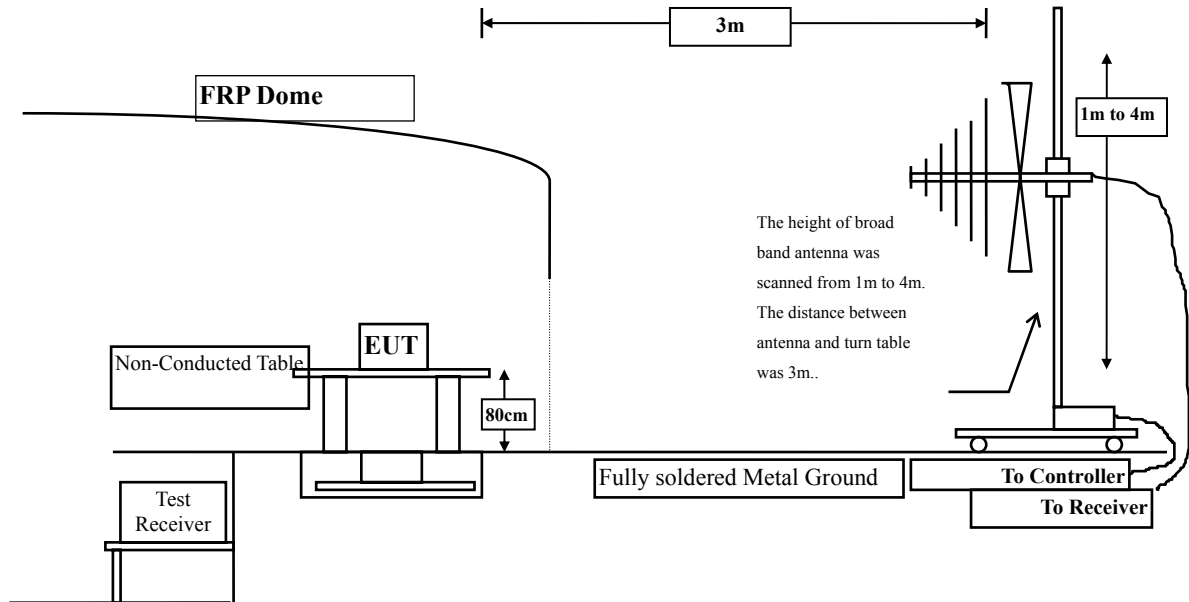

Radiated Emission Above 1GHz

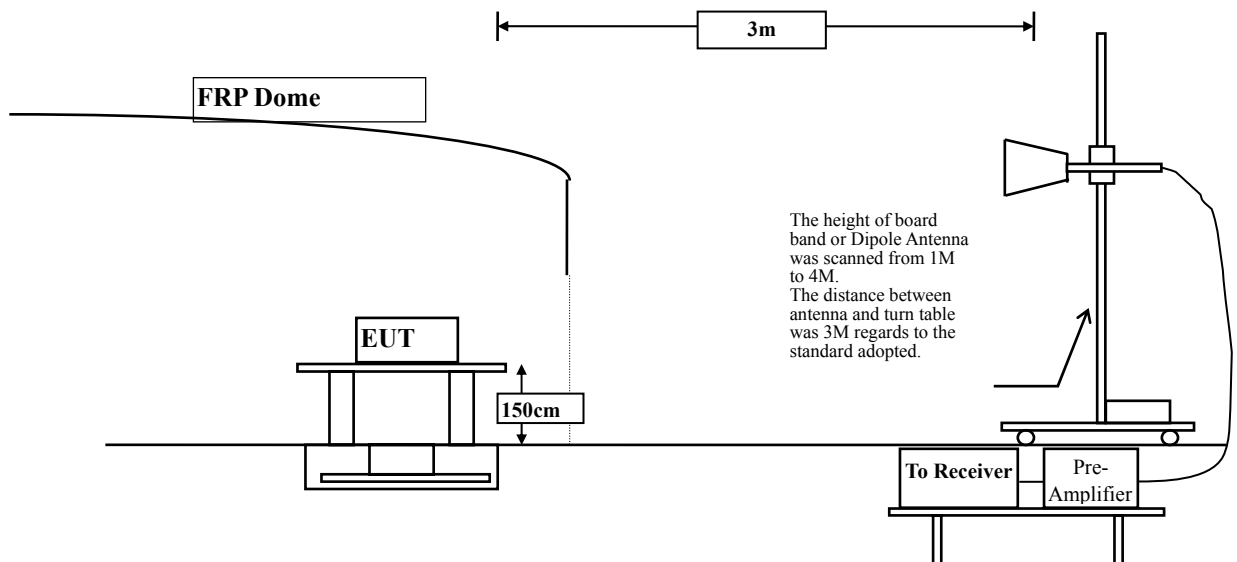

5.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBμV/m) = 20 log E field strength (uV/m)

5.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to FCC KDB-789033 test procedure for compliance to FCC 47CFR 15. 407 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

5.5. Uncertainty

± 3.8 dB below 1GHz

± 3.9 dB above 1GHz

5.6. Test Result of Radiated Emission

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10360.000	10.932	38.560	49.492	-24.508	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10360.000	12.436	37.850	50.285	-23.715	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10440.000	9.725	37.790	47.515	-26.485	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10440.000	11.505	37.850	49.355	-24.645	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5240MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10480.000	10.464	37.580	48.043	-25.957	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10480.000	12.399	37.250	49.649	-24.351	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5260MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10520.000	11.531	37.630	49.161	-24.839	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10520.000	13.441	37.250	50.691	-23.309	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5300MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10600.000	13.182	37.580	50.762	-23.238	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10600.000	14.717	36.980	51.697	-22.303	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5320MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10640.000	12.912	36.520	49.432	-24.568	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10640.000	14.585	36.220	50.805	-23.195	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5500MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11000.000	12.513	38.140	50.653	-23.347	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11000.000	14.635	37.250	51.885	-22.115	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5580MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11160.000	12.953	36.850	49.804	-24.196	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11160.000	15.197	36.210	51.407	-22.593	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5700MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11400.000	14.753	36.890	51.643	-22.357	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11400.000	16.303	36.650	52.953	-21.047	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5745MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11490.000	14.326	38.750	53.075	-20.925	74.000
17235.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11490.000	15.842	38.430	53.971	-20.029	74.000
17235.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5785MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11570.000	14.849	38.280	53.129	-20.871	74.000
17355.000	*	*	*	*	74.000
20800.000	*	*	*	*	74.000
26000.000	*	*	*	*	74.000
31200.000	*	*	*	*	74.000
36400.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11570.000	16.215	36.850	53.064	-20.936	74.000
17355.000	*	*	*	*	74.000
20800.000	*	*	*	*	74.000
26000.000	*	*	*	*	74.000
31200.000	*	*	*	*	74.000
36400.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5825MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11650.000	13.179	38.450	51.629	-22.371	74.000
17475.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
31440000	*	*	*	*	74.000
36680.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11650.000	14.634	37.960	52.594	-21.406	74.000
17475.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
31440000	*	*	*	*	74.000
36680.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5180MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10360.000	10.932	38.650	49.582	-24.418	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10360.000	12.436	37.980	50.415	-23.585	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5220MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10440.000	9.725	37.750	47.475	-26.525	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10440.000	11.505	38.630	50.135	-23.865	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5240MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10480.000	10.464	38.950	49.413	-24.587	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10480.000	12.399	38.110	50.509	-23.491	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5260MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10520.000	11.531	38.520	50.051	-23.949	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10520.000	13.441	37.630	51.071	-22.929	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5300MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10600.000	13.182	36.520	49.702	-24.298	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10600.000	14.717	36.120	50.837	-23.163	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5320MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10640.000	12.912	36.320	49.232	-24.768	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10640.000	14.585	35.850	50.435	-23.565	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5500MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
11000.000	12.513	38.220	50.733	-23.267	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11000.000	14.635	37.280	51.915	-22.085	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5580MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11160.000	12.953	37.140	50.094	-23.906	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11160.000	15.197	37.330	52.527	-21.473	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5700MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
11400.000	14.753	36.690	51.443	-22.557	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11400.000	16.303	36.070	52.373	-21.627	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5745MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11490.000	14.326	37.950	52.275	-21.725	74.000
17235.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11490.000	15.842	37.870	53.711	-20.289	74.000
17235.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5785MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11570.000	14.849	37.760	52.609	-21.391	74.000
17355.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
31320.000	*	*	*	*	74.000
36540.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11570.000	16.215	37.750	53.964	-20.036	74.000
17355.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
31320.000	*	*	*	*	74.000
36540.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5825MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11650.000	13.179	38.570	51.749	-22.251	74.000
17475.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
31440.000	*	*	*	*	74.000
36680.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11650.000	14.634	37.540	52.174	-21.826	74.000
17475.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
31440.000	*	*	*	*	74.000
36680.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5190MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10380.000	10.400	38.200	48.600	-25.400	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10380.000	11.965	37.760	49.726	-24.274	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5230MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10460.000	9.932	38.370	48.302	-25.698	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10460.000	11.790	38.210	50.000	-24.000	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5270MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10540.000	12.058	38.520	50.579	-23.421	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10540.000	13.868	37.360	51.228	-22.772	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5310MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10620.000	13.096	37.710	50.805	-23.195	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10620.000	14.683	36.880	51.563	-22.437	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5510MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11020.000	12.820	38.670	51.490	-22.510	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11020.000	14.966	38.250	53.217	-20.783	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5550MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11100.000	12.752	37.220	49.972	-24.028	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11100.000	15.006	36.370	51.376	-22.624	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5670MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11340.000	14.149	36.870	51.019	-22.981	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11340.000	15.891	35.980	51.871	-22.129	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5755MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11510.000	14.402	38.380	52.782	-21.218	74.000
17265.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
31140.000	*	*	*	*	74.000
36330.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11510.000	15.894	37.510	53.404	-20.596	74.000
17265.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
31140.000	*	*	*	*	74.000
36330.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5795MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11590.000	15.138	37.670	52.808	-21.192	74.000
17385.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
31380.000	*	*	*	*	74.000
36610.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11590.000	16.461	35.040	51.501	-22.499	74.000
17385.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
31380.000	*	*	*	*	74.000
36610.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless gateway
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
161.920	-11.626	47.213	35.588	-7.912	43.500
392.780	-2.096	36.327	34.231	-11.769	46.000
483.960	-0.688	36.919	36.232	-9.768	46.000
600.360	3.977	33.950	37.927	-8.073	46.000
712.880	3.569	27.806	31.375	-14.625	46.000
961.200	6.450	43.499	49.949	-4.051	54.000

Vertical					
Peak Detector					
111.480	-0.954	35.740	34.786	-8.714	43.500
181.320	-9.512	44.271	34.759	-8.741	43.500
222.060	-8.789	43.212	34.423	-11.577	46.000
286.080	-8.097	45.106	37.009	-8.991	46.000
365.620	-2.179	34.574	32.395	-13.605	46.000
747.800	2.166	30.672	32.838	-13.162	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless gateway
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5300MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector					
222.060	-10.439	45.017	34.578	-11.422	46.000
505.300	0.308	31.268	31.576	-14.424	46.000
664.380	2.062	29.952	32.014	-13.986	46.000
747.800	3.296	29.620	32.916	-13.084	46.000
858.380	5.972	31.844	37.816	-8.184	46.000
961.200	6.450	43.202	49.652	-4.348	54.000

Vertical					
Peak Detector					
101.780	-0.021	34.656	34.634	-8.866	43.500
171.620	-8.752	41.884	33.132	-10.368	43.500
229.820	-8.512	44.640	36.128	-9.872	46.000
363.680	-2.393	37.978	35.585	-10.415	46.000
480.080	-4.359	32.641	28.282	-17.718	46.000
961.200	7.260	33.483	40.743	-13.257	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless gateway
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5580MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
152.220	-10.135	41.859	31.724	-11.776	43.500
402.480	-2.263	33.788	31.525	-14.475	46.000
513.060	1.550	30.172	31.722	-14.278	46.000
625.580	1.770	28.788	30.558	-15.442	46.000
697.360	3.171	27.379	30.550	-15.450	46.000
961.200	6.450	43.013	49.463	-4.537	54.000
Vertical					
Peak Detector					
134.760	-4.648	37.232	32.584	-10.916	43.500
355.920	-3.488	38.783	35.295	-10.705	46.000
480.080	-4.359	36.246	31.887	-14.113	46.000
600.360	-2.833	29.121	26.288	-19.712	46.000
747.800	2.166	29.746	31.912	-14.088	46.000
961.200	7.260	36.865	44.125	-9.875	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless gateway
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5785MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector					
261.140	-5.462	43.520	38.058	-7.942	46.000
359.700	-0.248	40.510	40.262	-5.738	46.000
372.500	0.871	39.580	40.451	-5.549	46.000
386.500	1.135	38.250	39.385	-6.615	46.000
452.930	1.292	36.810	38.103	-7.897	46.000
749.750	3.965	30.850	34.815	-11.185	46.000
854.600	7.373	29.470	36.843	-9.157	46.000
Vertical					
Peak Detector					
251.250	-4.962	40.870	35.908	-10.092	46.000
326.850	-2.754	40.880	38.127	-7.873	46.000
348.250	-0.909	38.650	37.742	-8.258	46.000
371.740	-0.254	37.840	37.586	-8.414	46.000
447.150	-6.192	40.250	34.058	-11.942	46.000
749.850	2.043	31.280	33.323	-12.677	46.000
798.250	2.629	30.840	33.468	-12.532	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless gateway
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5220MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
Peak Detector					
171.620	-10.242	44.542	34.300	-9.200	43.500
406.360	-2.500	35.772	33.272	-12.728	46.000
559.620	1.664	33.160	34.824	-11.176	46.000
608.120	4.384	29.852	34.236	-11.764	46.000
720.640	3.511	31.804	35.315	-10.685	46.000
961.200	6.450	43.648	50.098	-3.902	54.000
Vertical					
Peak Detector					
159.980	-6.185	38.478	32.293	-11.207	43.500
288.020	-8.189	44.244	36.055	-9.945	46.000
390.840	-3.099	37.207	34.108	-11.892	46.000
509.180	-0.158	31.207	31.049	-14.951	46.000
687.660	2.444	27.477	29.921	-16.079	46.000
961.200	7.260	36.351	43.611	-10.389	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless gateway
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5300MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
148.340	-10.254	41.038	30.784	-12.716	43.500
408.300	-2.866	38.357	35.491	-10.509	46.000
474.260	0.024	36.979	37.002	-8.998	46.000
600.360	3.977	34.330	38.307	-7.693	46.000
720.640	3.511	32.508	36.019	-9.981	46.000
961.200	6.450	43.038	49.488	-4.512	54.000
Vertical					
Peak Detector					
111.480	-0.954	37.405	36.451	-7.049	43.500
235.640	-9.330	48.536	39.206	-6.794	46.000
390.840	-3.099	35.414	32.315	-13.685	46.000
480.080	-4.359	40.738	36.379	-9.621	46.000
666.320	-1.809	32.539	30.731	-15.269	46.000
961.200	7.260	36.131	43.391	-10.609	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless gateway
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5580MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector					
159.980	-11.775	43.334	31.559	-11.941	43.500
355.920	-2.528	40.571	38.043	-7.957	46.000
460.680	1.589	34.277	35.866	-10.134	46.000
600.360	3.977	35.394	39.371	-6.629	46.000
720.640	3.511	31.599	35.110	-10.890	46.000
825.400	6.250	24.043	30.293	-15.707	46.000
Vertical					
Peak Detector					
159.980	-6.185	41.531	35.346	-8.154	43.500
288.020	-8.189	43.397	35.208	-10.792	46.000
365.620	-2.179	40.213	38.034	-7.966	46.000
480.080	-4.359	36.693	32.334	-13.666	46.000
681.840	1.484	28.552	30.036	-15.964	46.000
961.200	7.260	36.174	43.434	-10.566	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless gateway
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5785MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
Peak Detector					
251.250	-5.974	44.740	38.766	-7.234	46.000
359.800	-0.226	40.350	40.124	-5.876	46.000
371.250	0.856	39.840	40.696	-5.304	46.000
383.540	1.288	38.140	39.428	-6.572	46.000
452.870	1.279	36.140	37.419	-8.581	46.000
854.700	7.366	30.250	37.616	-8.384	46.000
Vertical					
Peak Detector					
251.180	-4.959	40.840	35.881	-10.119	46.000
326.580	-2.804	40.850	38.047	-7.953	46.000
348.160	-0.890	38.650	37.760	-8.240	46.000
371.250	-0.334	38.250	37.916	-8.084	46.000
447.200	-6.187	40.160	33.973	-12.027	46.000
749.700	2.016	31.840	33.856	-12.144	46.000
798.250	2.629	30.840	33.468	-12.532	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless gateway
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5190MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
101.780	-7.141	42.502	35.361	-8.139	43.500
152.220	-10.135	40.694	30.559	-12.941	43.500
369.500	-1.098	35.487	34.389	-11.611	46.000
468.440	1.195	33.790	34.985	-11.015	46.000
600.360	3.977	36.226	40.203	-5.797	46.000
961.200	6.450	42.479	48.929	-5.071	54.000
Vertical					
Peak Detector					
119.240	-3.541	34.451	30.910	-12.590	43.500
237.580	-8.970	49.206	40.236	-5.764	46.000
357.860	-3.734	40.629	36.895	-9.105	46.000
480.080	-4.359	35.967	31.608	-14.392	46.000
687.660	2.444	28.304	30.748	-15.252	46.000
831.220	2.561	33.565	36.126	-9.874	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless gateway
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5270MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
49.400	-11.018	44.021	33.003	-6.997	40.000
225.940	-9.878	45.873	35.994	-10.006	46.000
398.600	-2.268	36.141	33.873	-12.127	46.000
600.360	3.977	35.177	39.154	-6.846	46.000
747.800	3.296	29.772	33.068	-12.932	46.000
961.200	6.450	42.999	49.449	-4.551	54.000
Vertical					
Peak Detector					
165.800	-7.719	43.118	35.399	-8.101	43.500
276.380	-8.653	45.953	37.300	-8.700	46.000
369.500	-2.868	38.155	35.287	-10.713	46.000
480.080	-4.359	39.388	35.029	-10.971	46.000
664.380	-1.918	34.414	32.496	-13.504	46.000
961.200	7.260	36.736	43.996	-10.004	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless gateway
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5550MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
175.500	-10.017	46.537	36.519	-6.981	43.500
396.660	-2.296	35.982	33.686	-12.314	46.000
476.200	-0.252	39.170	38.918	-7.082	46.000
600.360	3.977	33.844	37.821	-8.179	46.000
666.320	2.031	31.468	33.500	-12.500	46.000
961.200	6.450	43.395	49.845	-4.155	54.000

Vertical					
Peak Detector					
169.680	-8.728	42.051	33.323	-10.177	43.500
299.660	-6.855	42.258	35.403	-10.597	46.000
373.380	-2.373	35.882	33.509	-12.491	46.000
503.360	-0.852	29.721	28.869	-17.131	46.000
637.220	-3.649	31.262	27.613	-18.387	46.000
961.200	7.260	34.913	42.173	-11.827	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless gateway
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5755MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
251.250	-5.974	44.770	38.796	-7.204	46.000
359.840	-0.220	40.810	40.589	-5.411	46.000
371.440	0.860	39.850	40.710	-5.290	46.000
383.510	1.289	37.510	38.799	-7.201	46.000
452.920	1.290	35.284	36.574	-9.426	46.000
749.700	3.961	30.840	34.801	-11.199	46.000
854.200	7.348	30.250	37.598	-8.402	46.000
Vertical					
Peak Detector					
252.260	-5.000	41.680	36.680	-9.320	46.000
326.820	-2.759	40.840	38.081	-7.919	46.000
348.160	-0.890	38.260	37.370	-8.630	46.000
371.520	-0.295	37.220	36.925	-9.075	46.000
447.200	-6.187	40.250	34.063	-11.937	46.000
749.850	2.043	31.250	33.293	-12.707	46.000
798.250	2.629	30.820	33.448	-12.552	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

6. Band Edge

6.1. Test Equipment

RF Conducted Measurement

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with "X" are used to measure the final test results.

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct., 2014
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar., 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan., 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug., 2015
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan., 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul., 2015
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul., 2015


- Note:
1. All instruments are calibrated every one year.
 2. The test instruments marked by "X" are used to measure the final test results.

6.2. Test Setup

RF Conducted Measurement:

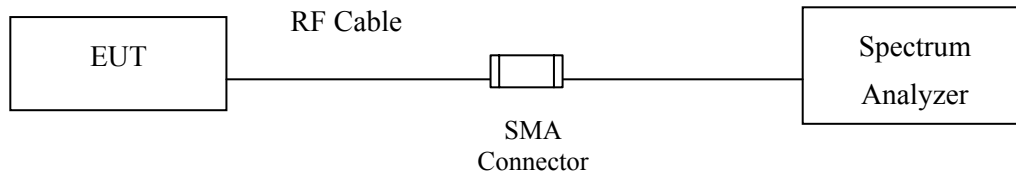

RF Radiated Measurement:

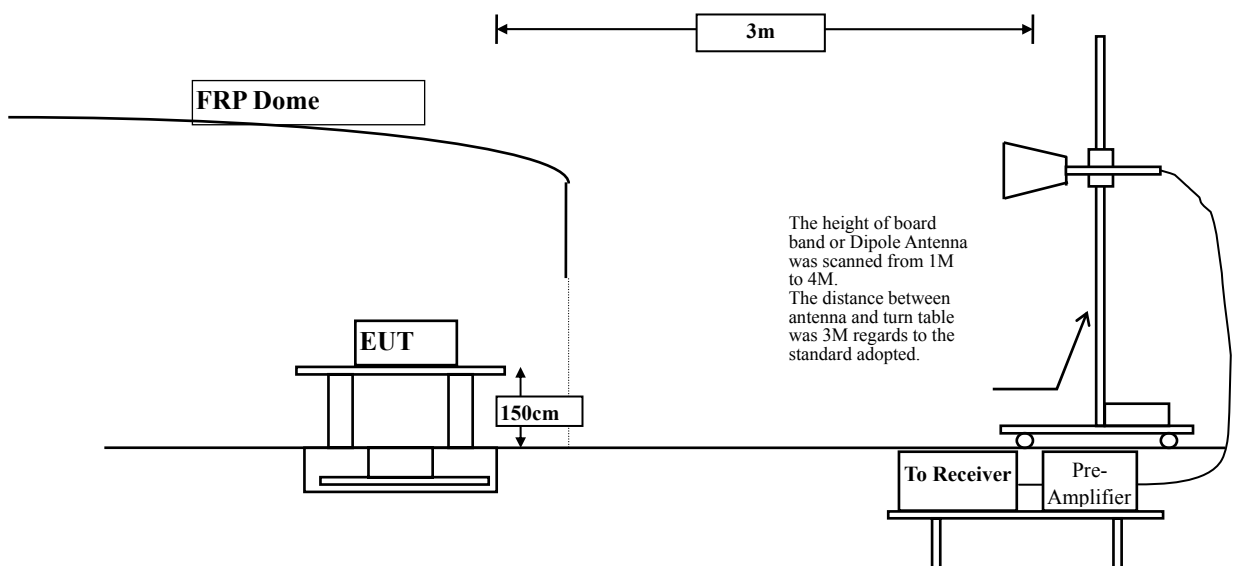

6.3. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBμV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks :

1. RF Voltage (dBμV) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

6.4. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz.

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

6.5. Uncertainty

± 3.8 dB below 1GHz

± 3.9 dB above 1GHz

6.6. Test Result of Band Edge

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5150.000	2.796	58.532	61.328	74.00	54.00	Pass
36 (Peak)	5183.400	2.685	103.889	106.573	--	--	--
36 (Average)	5150.000	2.796	42.135	44.931	74.00	54.00	Pass
36 (Average)	5185.000	2.680	93.421	96.100	--	--	--

Figure Channel 36: Horizontal (Peak)


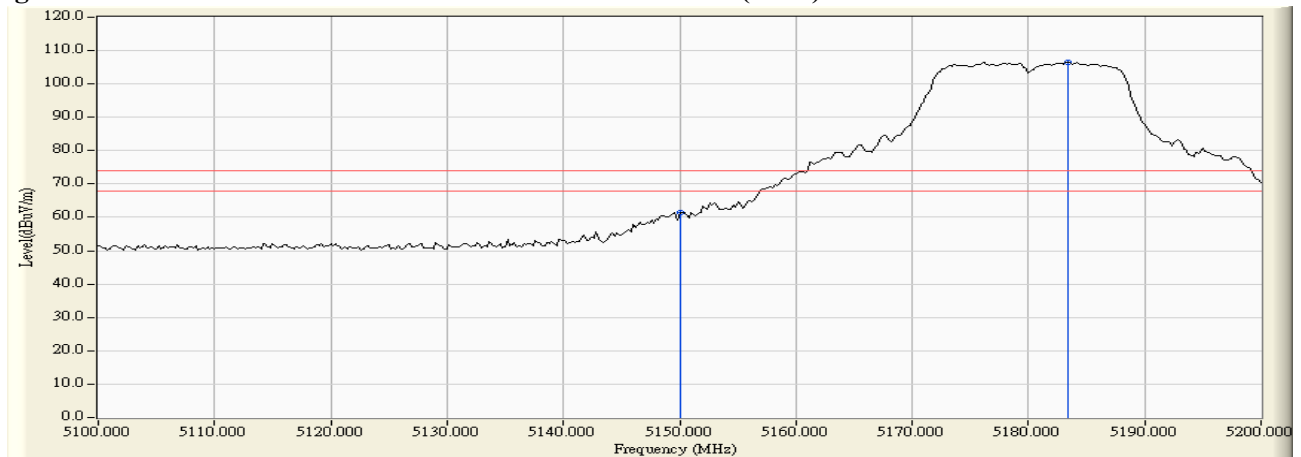


Figure Channel 36: Horizontal (Average)

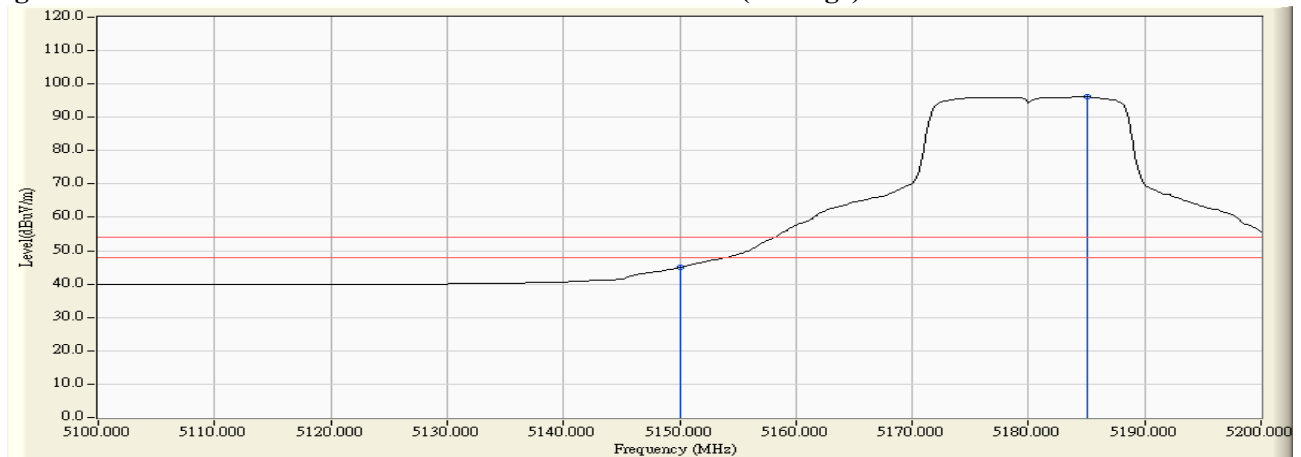

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz)


RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5149.000	3.327	50.782	54.109	74.00	54.00	Pass
36 (Peak)	5150.000	3.331	49.022	52.354	74.00	54.00	Pass
36 (Peak)	5183.400	3.489	94.553	98.042	--	--	--
36 (Average)	5150.000	3.331	37.626	40.958	74.00	54.00	Pass
36 (Average)	5185.000	3.497	84.378	87.874	--	--	--

Figure Channel 36: Vertical (Peak)



Figure Channel 36: Vertical (Average)

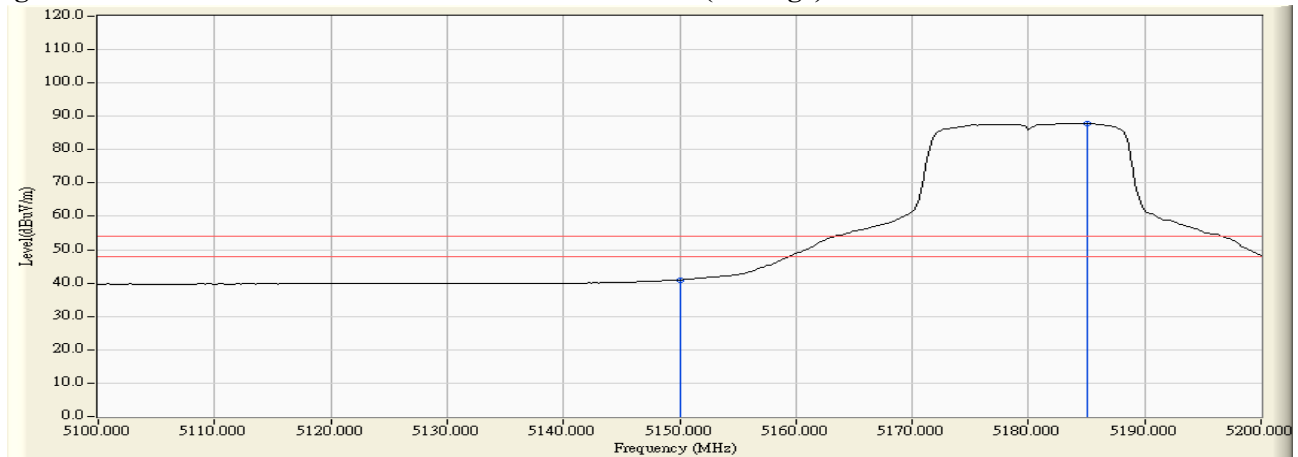

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5320MHz)


RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5323.200	3.637	102.753	106.390	--	--	--
64 (Peak)	5350.000	3.575	54.566	58.141	74.00	54.00	Pass
64 (Peak)	5350.800	3.572	54.737	58.310	74.00	54.00	Pass
64 (Average)	5324.400	3.634	92.368	96.002	--	--	--
64 (Average)	5350.000	3.575	41.240	44.815	74.00	54.00	Pass

Figure Channel 64: Horizontal (Peak)



Figure Channel 64: Horizontal (Average)

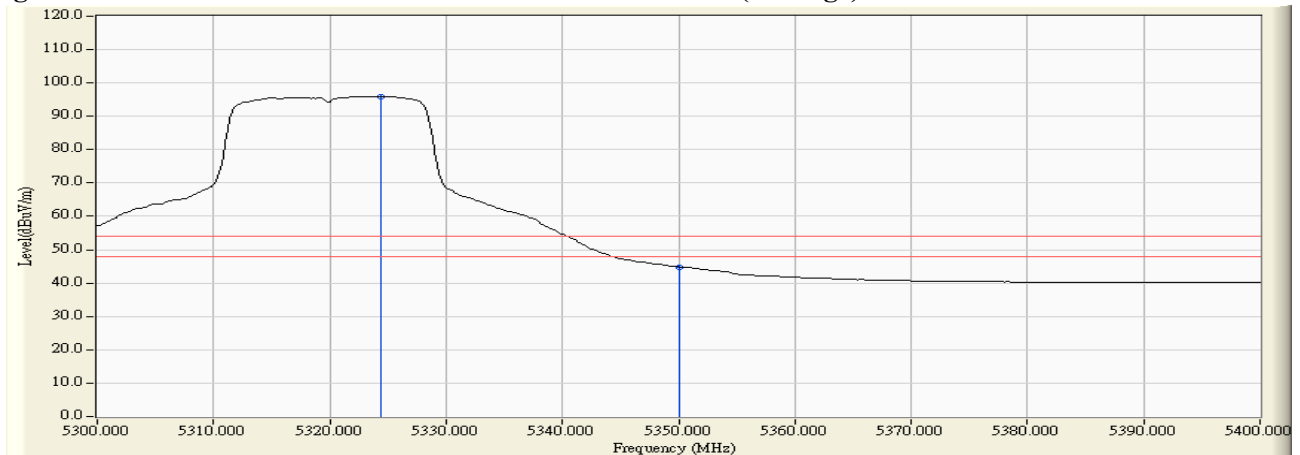

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5320MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5315.800	3.883	93.573	97.456	--	--	--
64 (Peak)	5350.000	3.900	48.506	52.406	74.00	54.00	Pass
64 (Peak)	5350.400	3.900	49.814	53.714	74.00	54.00	Pass
64 (Average)	5324.800	3.890	82.718	86.609	--	--	--
64 (Average)	5350.000	3.900	37.356	41.256	74.00	54.00	Pass

Figure Channel 64: Vertical (Peak)


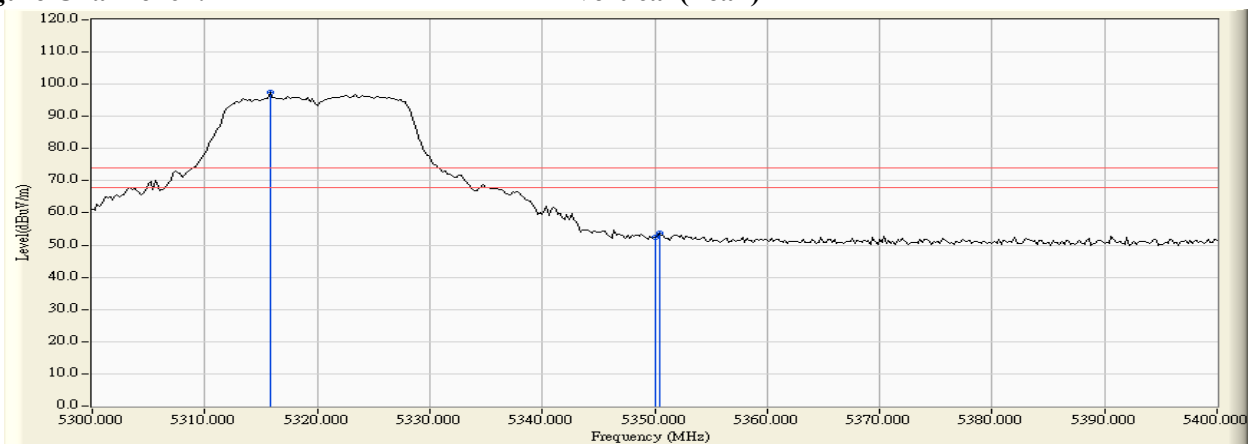


Figure Channel 64: Vertical (Average)

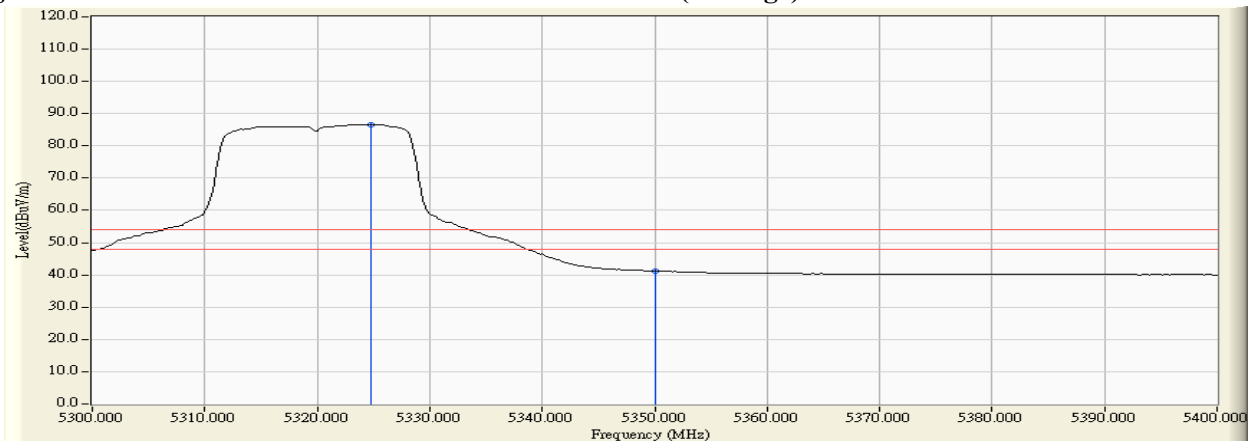

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5500MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5459.000	3.755	50.372	54.128	74.00	54.00	Pass
100 (Peak)	5460.000	3.775	49.693	53.468	74.00	54.00	Pass
100 (Peak)	5496.200	4.427	100.412	104.839	--	--	--
100 (Average)	5460.000	3.775	37.341	41.116	74.00	54.00	Pass
100 (Average)	5495.400	4.417	90.196	94.612	--	--	--

Figure Channel 100: Horizontal (Peak)


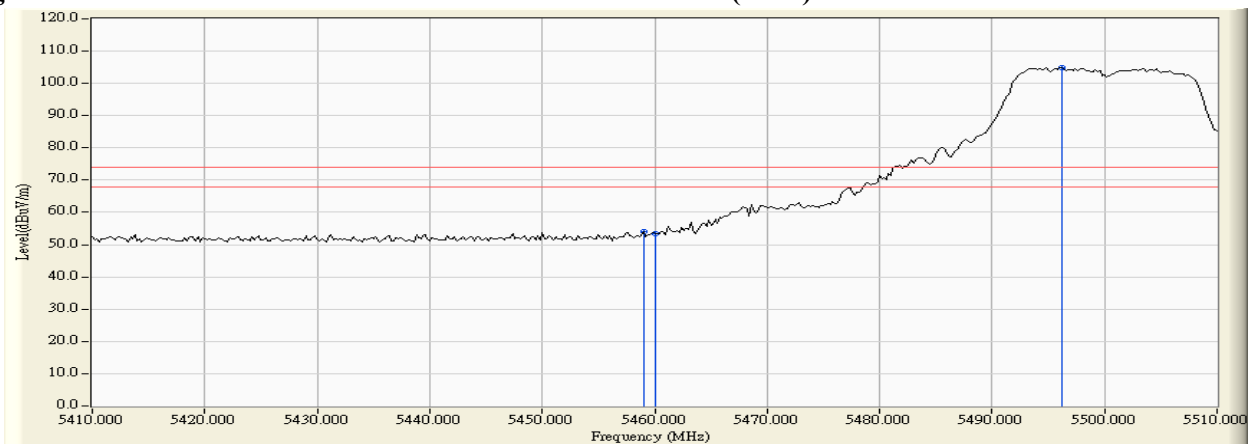


Figure Channel 100: Horizontal (Average)

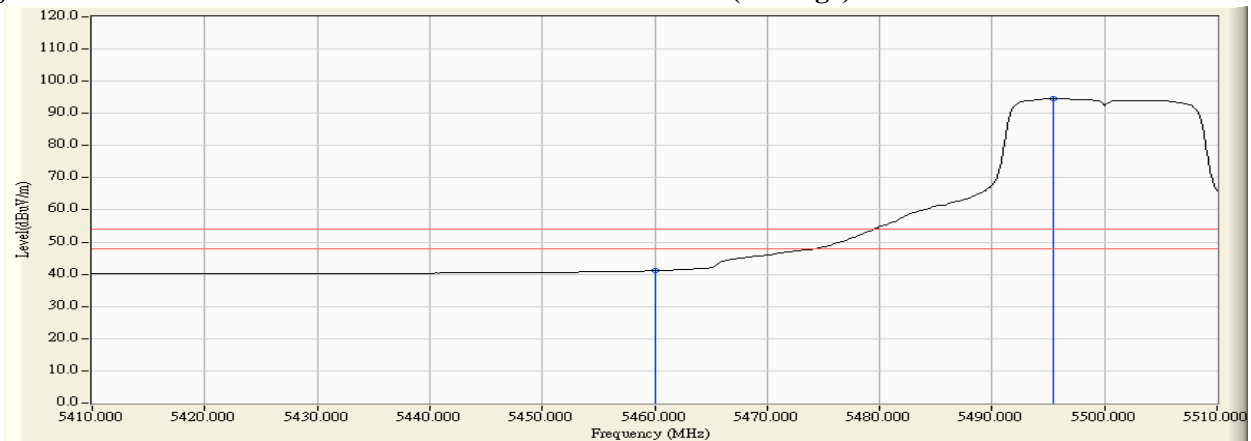

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5500MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5426.200	3.724	49.547	53.272	74.00	54.00	Pass
100 (Peak)	5460.000	3.934	47.807	51.742	74.00	54.00	Pass
100 (Peak)	5496.200	4.421	92.322	96.743	--	--	--
100 (Average)	5460.000	3.934	36.294	40.229	74.00	54.00	Pass
100 (Average)	5495.400	4.413	82.252	86.664	--	--	--

Figure Channel 100: Vertical (Peak)


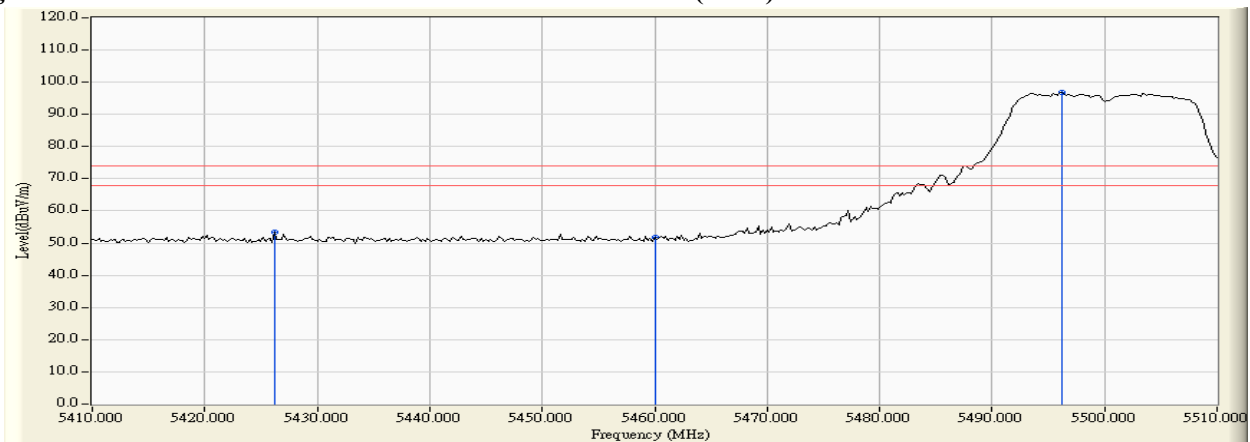


Figure Channel 100: Vertical (Average)

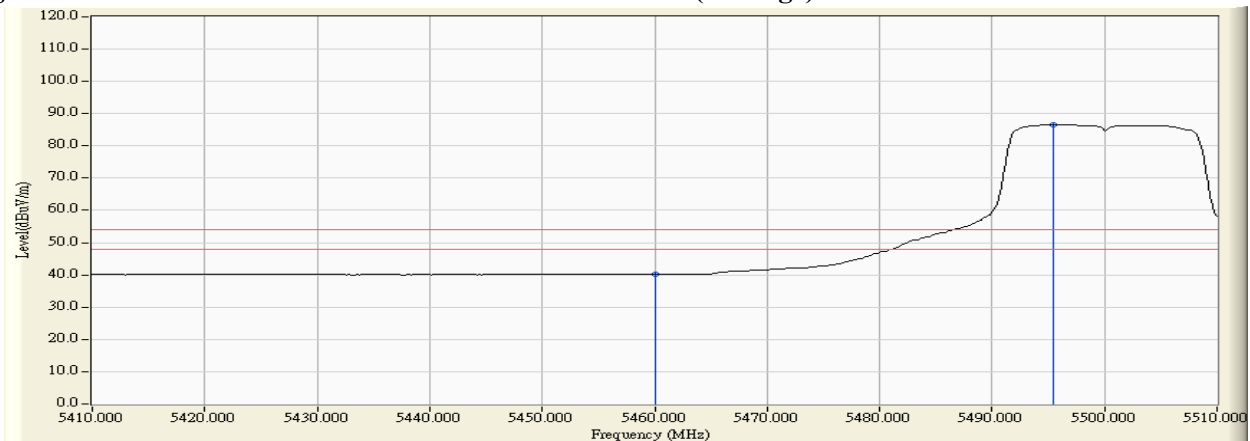


Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 100

RF Radiated Measurement:

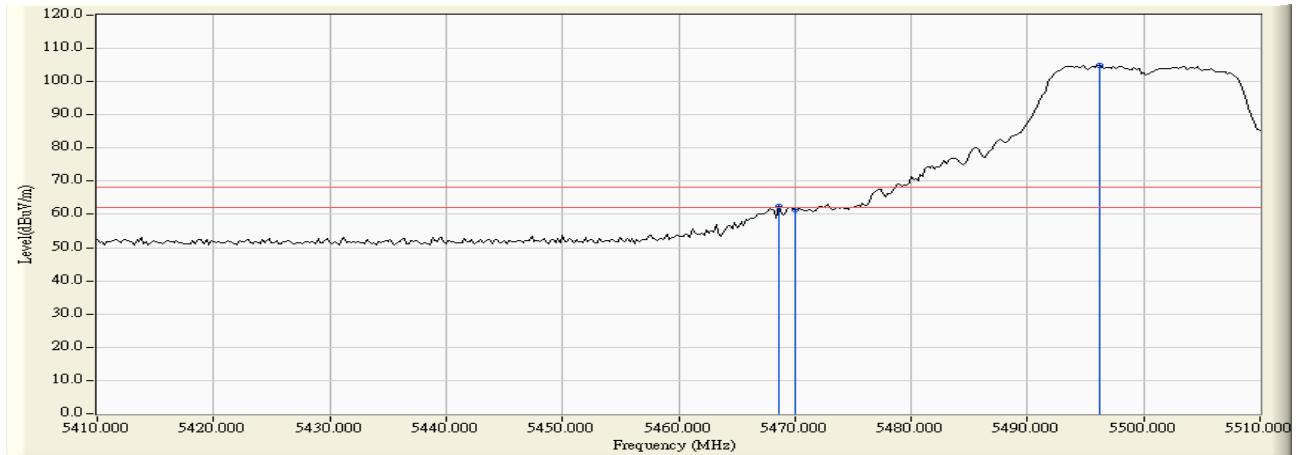


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Horizontal	5468.600	3.943	58.348	62.291	-5.929	68.220	Pass
Horizontal	5470.000	3.970	57.428	61.398	-6.822	68.220	Pass
Horizontal	5496.200	4.427	100.412	104.839	36.619	68.220	Pass

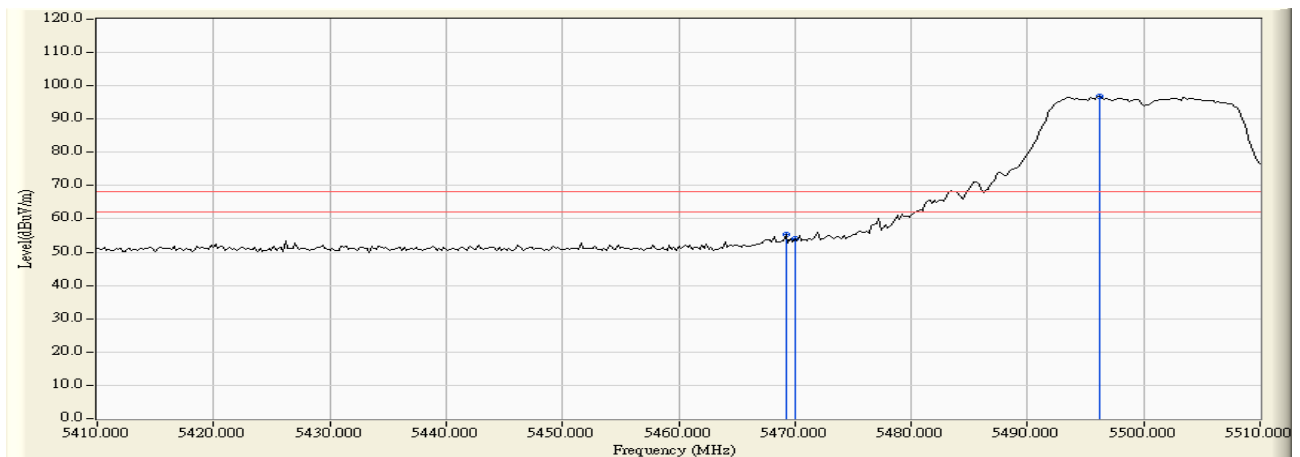


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Vertical	5469.200	4.067	51.167	55.235	-12.985	68.220	Pass
Vertical	5470.000	4.079	49.970	54.049	-14.171	68.220	Pass
Vertical	5496.200	4.421	92.322	96.743	28.523	68.220	Pass

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 140

RF Radiated Measurement:

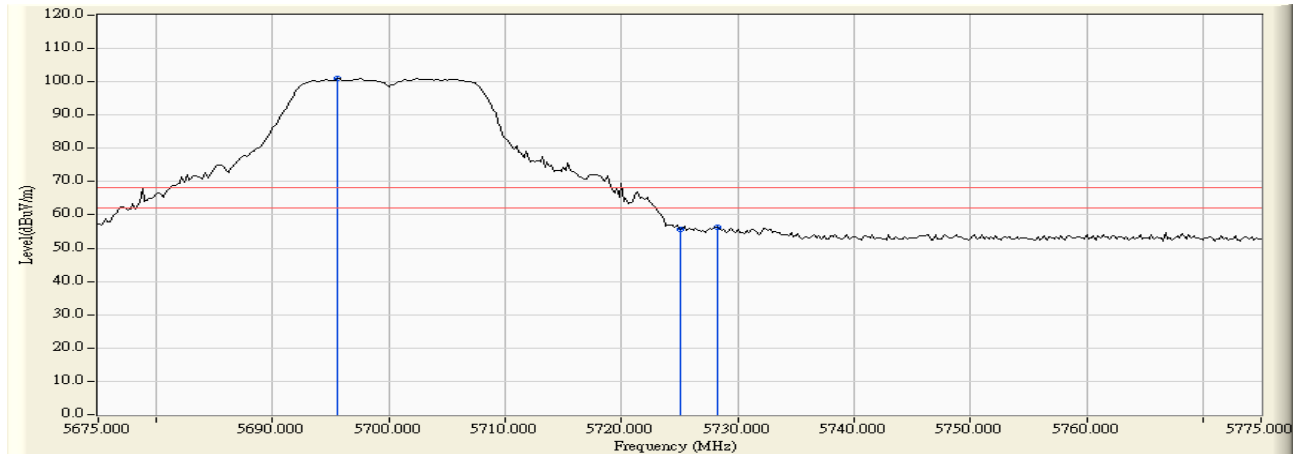


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Horizontal	5695.600	4.984	95.998	100.982	32.762	68.220	Pass
Horizontal	5725.000	5.104	50.679	55.782	-12.438	68.220	Pass
Horizontal	5728.200	5.117	51.312	56.429	-11.791	68.220	Pass

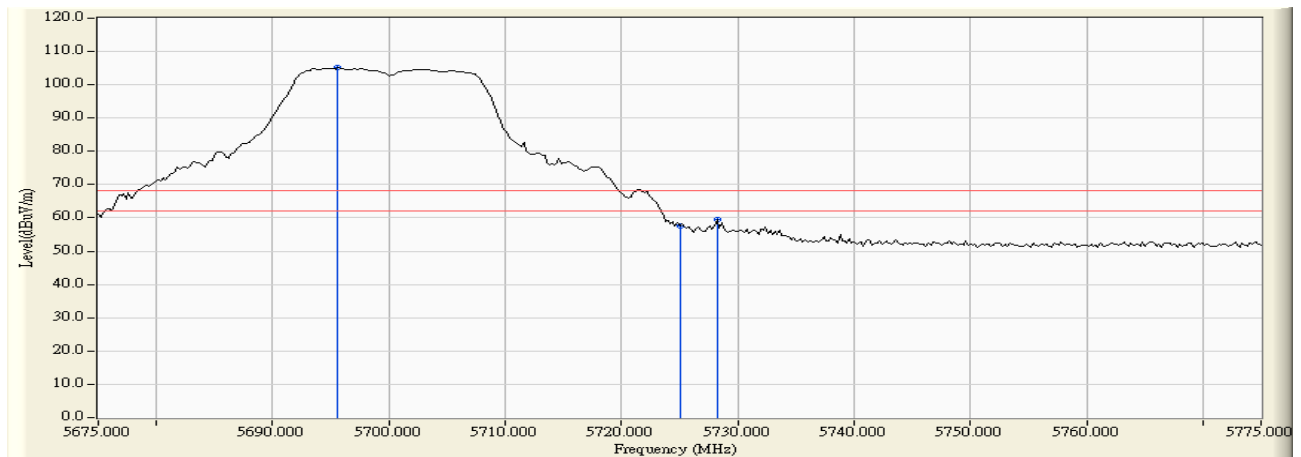


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Vertical	5695.600	4.180	101.081	105.260	37.040	68.220	Pass
Vertical	5725.000	4.215	53.486	57.701	-10.519	68.220	Pass
Vertical	5728.200	4.224	55.147	59.371	-8.849	68.220	Pass

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 149

RF Radiated Measurement:

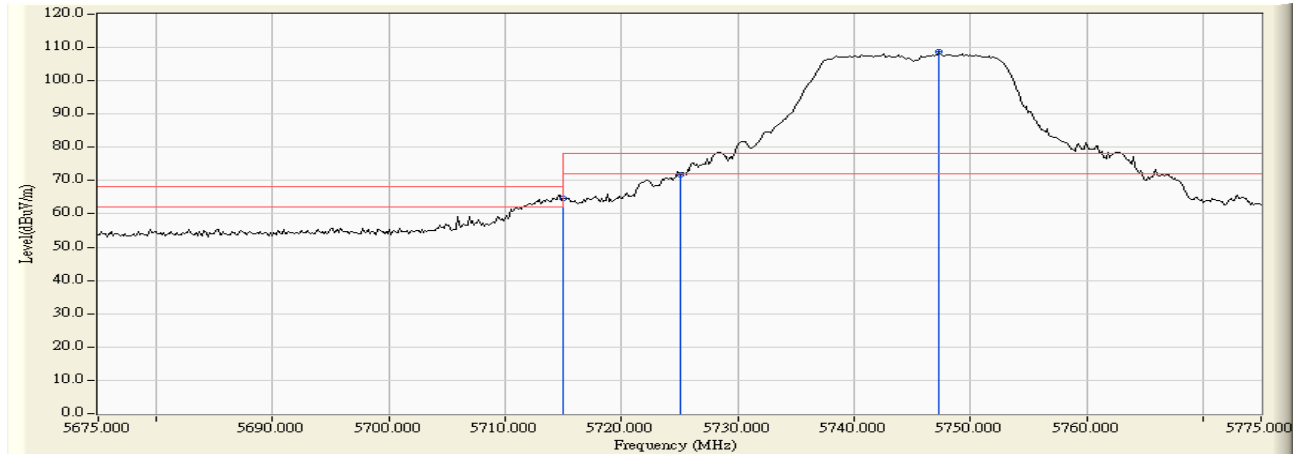


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Horizontal	5715.000	5.063	59.596	64.659	-3.561	68.220	Pass
Horizontal	5725.000	5.104	66.775	71.878	-6.342	78.220	Pass
Horizontal	5747.319	5.194	103.586	108.780	30.560	78.220	Pass

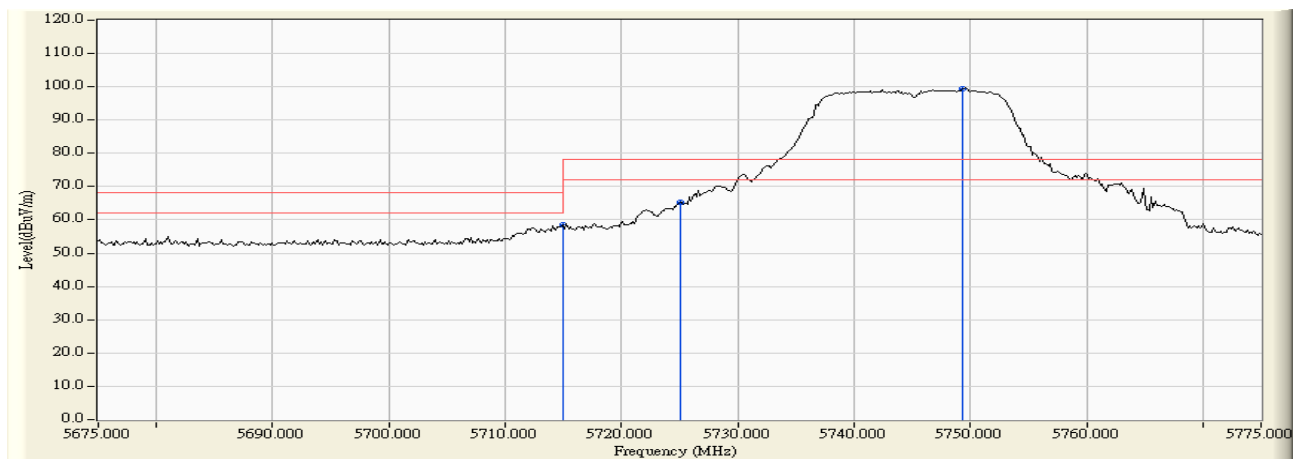


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Vertical	5715.000	4.186	54.452	58.638	-9.582	68.220	Pass
Vertical	5725.000	4.215	61.125	65.340	-12.880	78.220	Pass
Vertical	5749.348	4.285	94.978	99.263	21.043	78.220	Pass

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 165

RF Radiated Measurement:

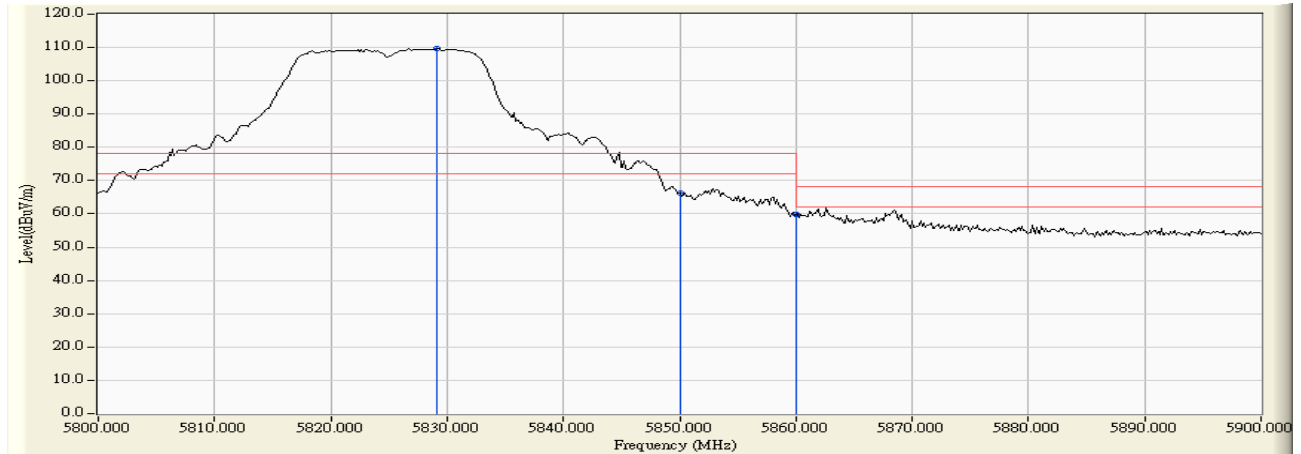

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Horizontal	5829.130	5.568	104.158	109.726	31.506	78.220	Pass
Horizontal	5850.000	5.715	60.584	66.299	-11.921	78.220	Pass
Horizontal	5860.000	5.798	54.145	59.943	-8.277	68.220	Pass

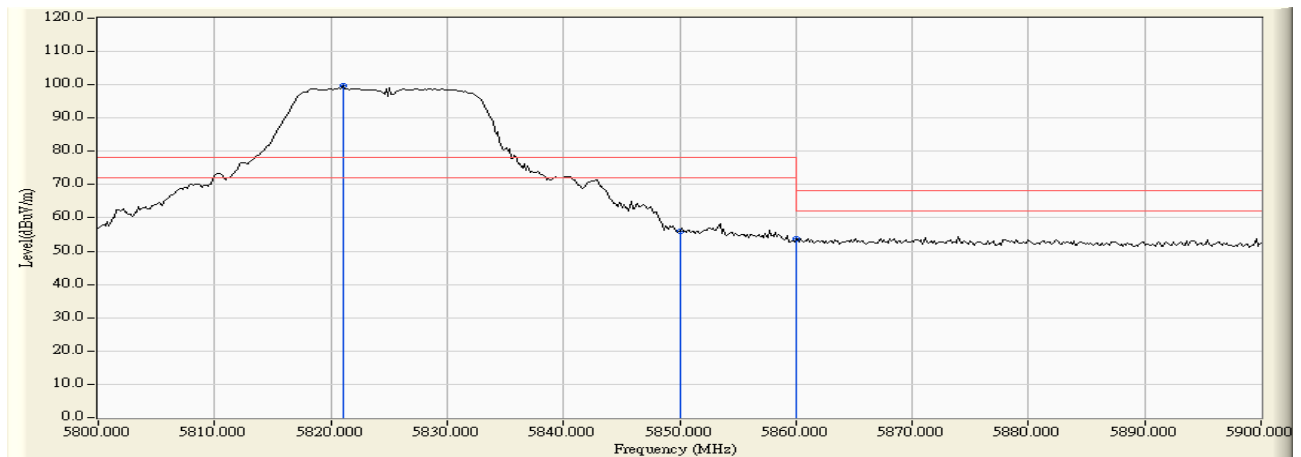

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Vertical	5821.014	4.309	95.466	99.775	21.555	78.220	Pass
Vertical	5850.000	4.194	51.667	55.861	-22.359	78.220	Pass
Vertical	5860.000	4.168	49.589	53.757	-14.463	68.220	Pass

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5180MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5148.600	2.801	59.120	61.921	74.00	54.00	Pass
36 (Peak)	5150.000	2.796	59.091	61.887	74.00	54.00	Pass
36 (Peak)	5177.000	2.706	103.984	106.690	--	--	--
36 (Average)	5150.000	2.796	43.076	45.872	74.00	54.00	Pass
36 (Average)	5185.200	2.679	93.470	96.148	--	--	--

Figure Channel 36: Horizontal (Peak)


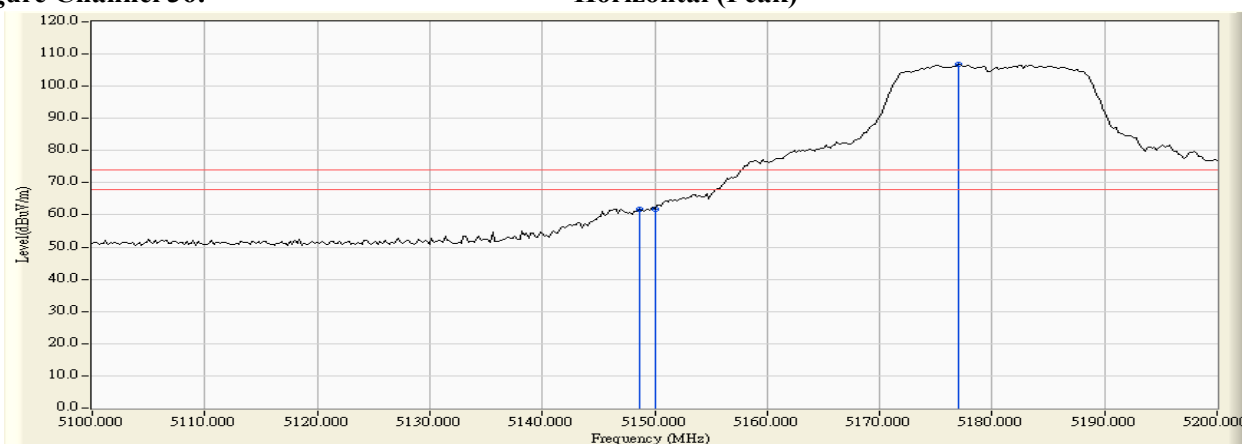


Figure Channel 36: Horizontal (Average)

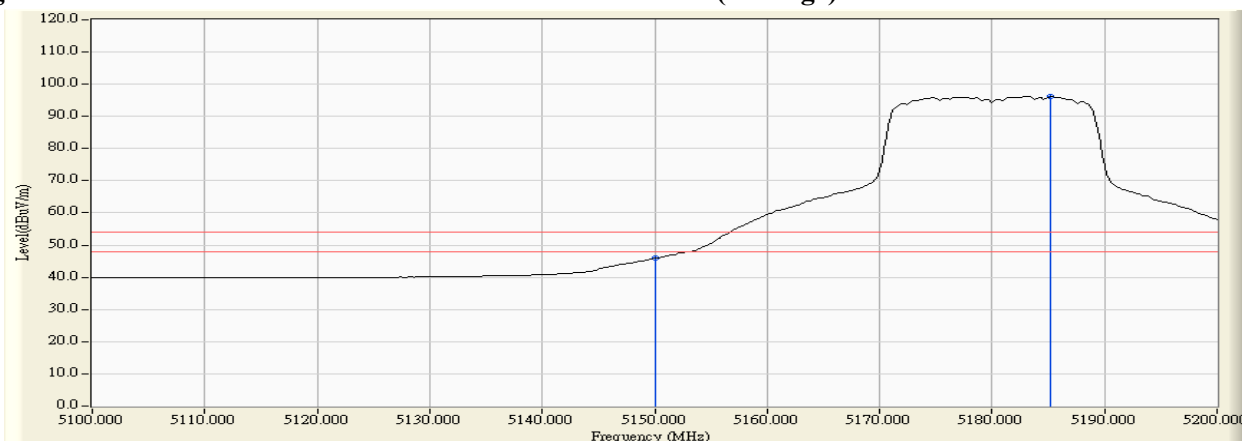

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5180MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5146.200	3.313	51.127	54.440	74.00	54.00	Pass
36 (Peak)	5150.000	3.331	50.038	53.370	74.00	54.00	Pass
36 (Peak)	5183.200	3.488	94.234	97.722	--	--	--
36 (Average)	5150.000	3.331	37.801	41.133	74.00	54.00	Pass
36 (Average)	5185.400	3.499	84.090	87.588	--	--	--

Figure Channel 36: Vertical (Peak)


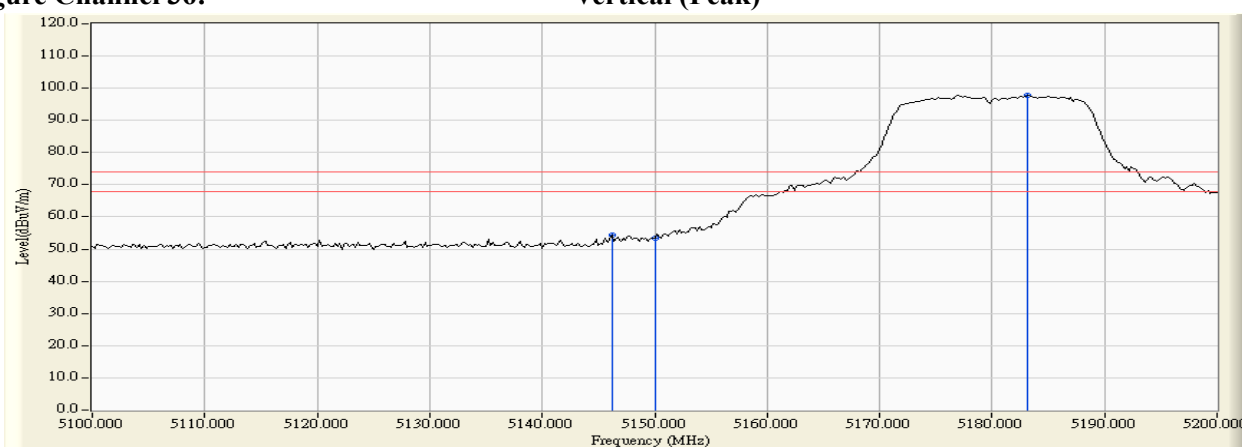


Figure Channel 36: Vertical (Average)

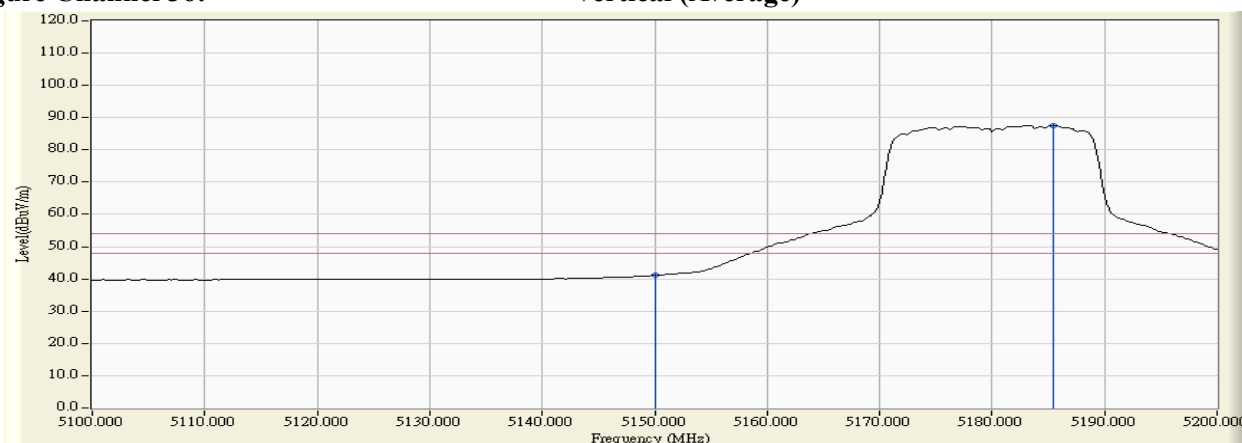

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5320MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5317.000	3.648	101.857	105.505	--	--	--
64 (Peak)	5350.000	3.575	53.987	57.562	74.00	54.00	Pass
64 (Average)	5325.200	3.633	91.493	95.126	--	--	--
64 (Average)	5350.000	3.575	40.264	43.839	74.00	54.00	Pass

Figure Channel 64:

Horizontal (Peak)


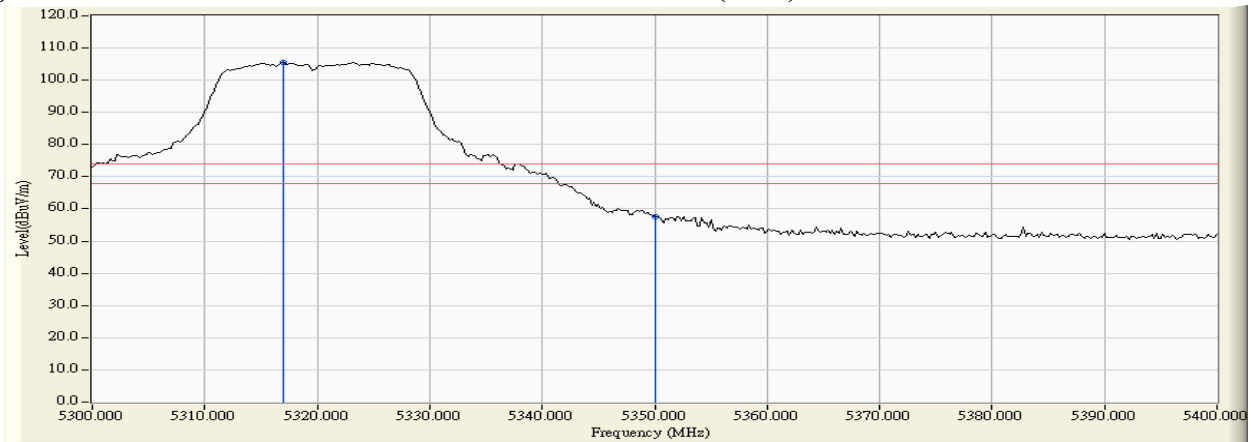


Figure Channel 64:

Horizontal (Average)

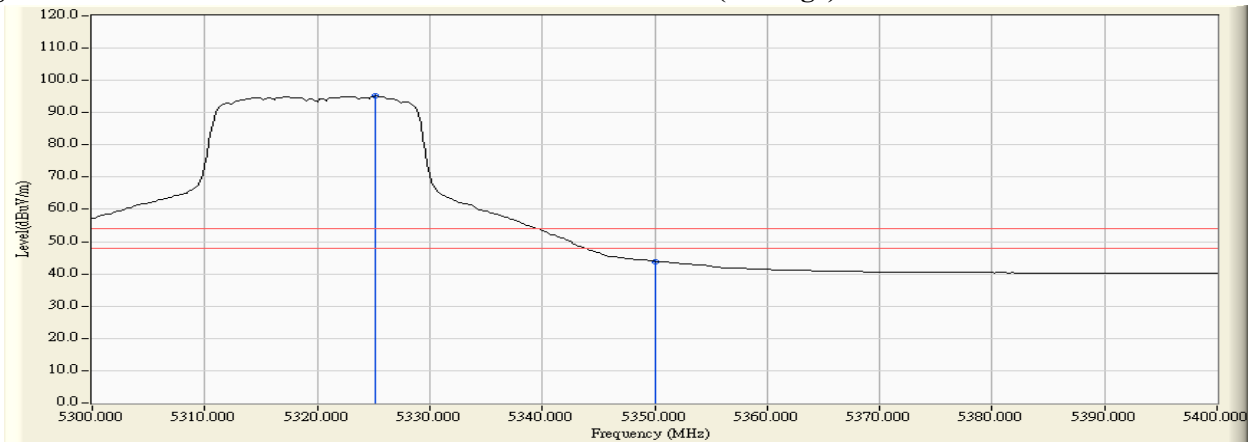

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5320MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5317.000	3.884	92.849	96.733	--	--	--
64 (Peak)	5350.000	3.900	48.303	52.203	74.00	54.00	Pass
64 (Peak)	5350.400	3.900	50.650	54.550	74.00	54.00	Pass
64 (Average)	5325.200	3.891	82.404	86.295	--	--	--
64 (Average)	5350.000	3.900	37.158	41.058	74.00	54.00	Pass

Figure Channel 64: Vertical (Peak)


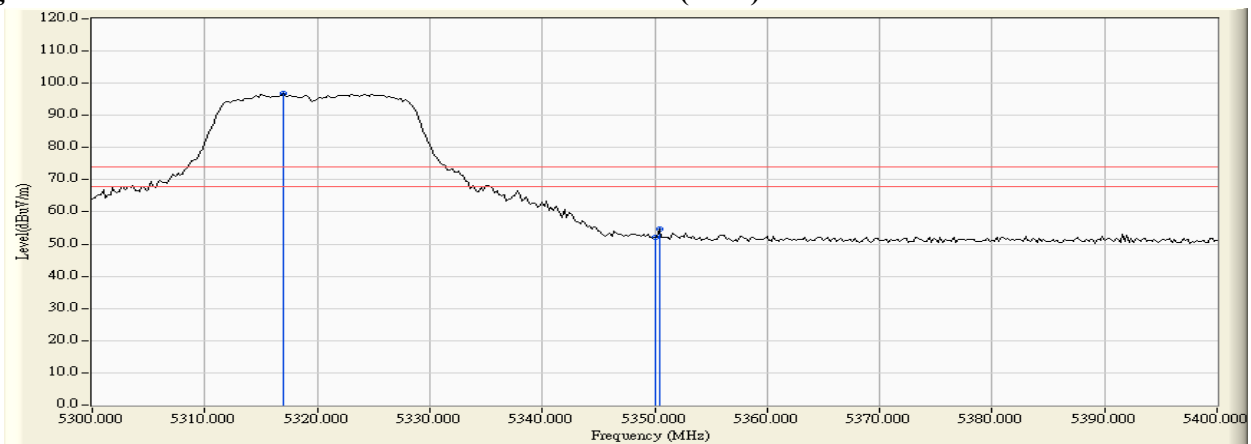


Figure Channel 64: Vertical (Average)

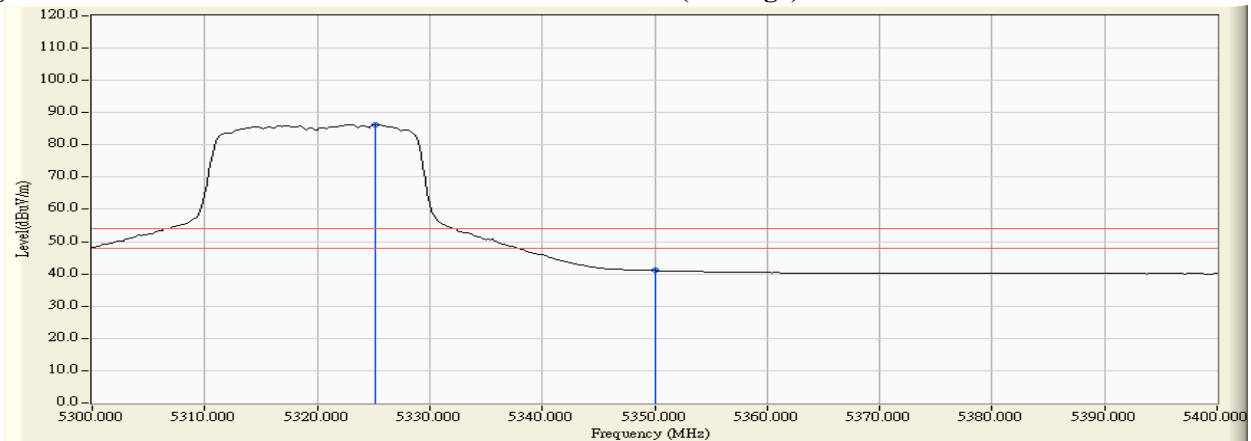

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5500MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5459.800	3.771	51.076	54.848	74.00	54.00	Pass
100 (Peak)	5460.000	3.775	49.978	53.753	74.00	54.00	Pass
100 (Peak)	5497.000	4.438	101.038	105.476	--	--	--
100 (Average)	5460.000	3.775	37.084	40.859	74.00	54.00	Pass
100 (Average)	5494.800	4.408	89.825	94.233	--	--	--

Figure Channel 100: Horizontal (Peak)


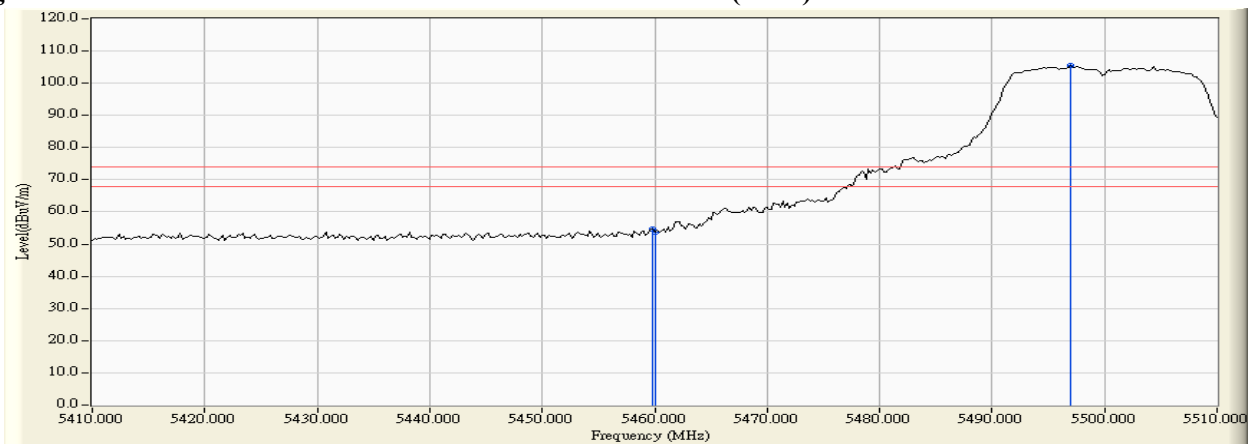


Figure Channel 100: Horizontal (Average)

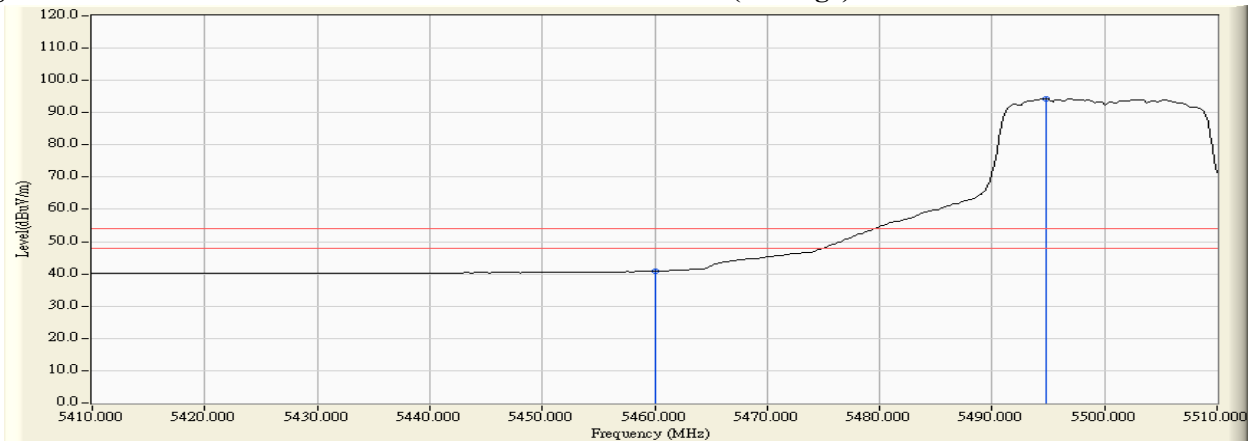

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5500MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5457.800	3.903	49.375	53.278	74.00	54.00	Pass
100 (Peak)	5460.000	3.934	47.223	51.158	74.00	54.00	Pass
100 (Peak)	5497.000	4.428	92.249	96.678	--	--	--
100 (Average)	5460.000	3.934	36.293	40.228	74.00	54.00	Pass
100 (Average)	5494.800	4.406	81.791	86.197	--	--	--

Figure Channel 100: Vertical (Peak)


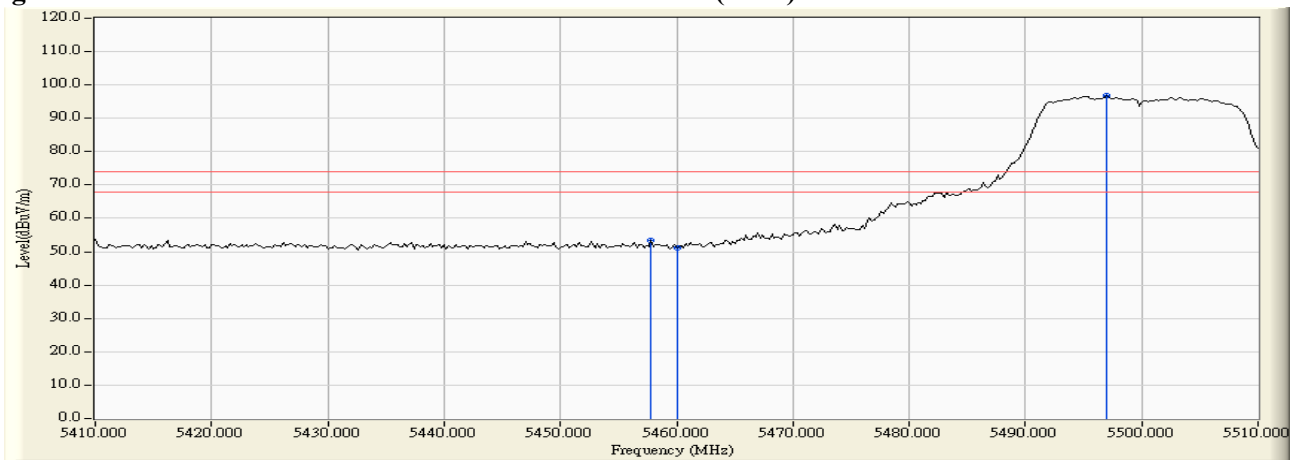


Figure Channel 100: Vertical (Average)

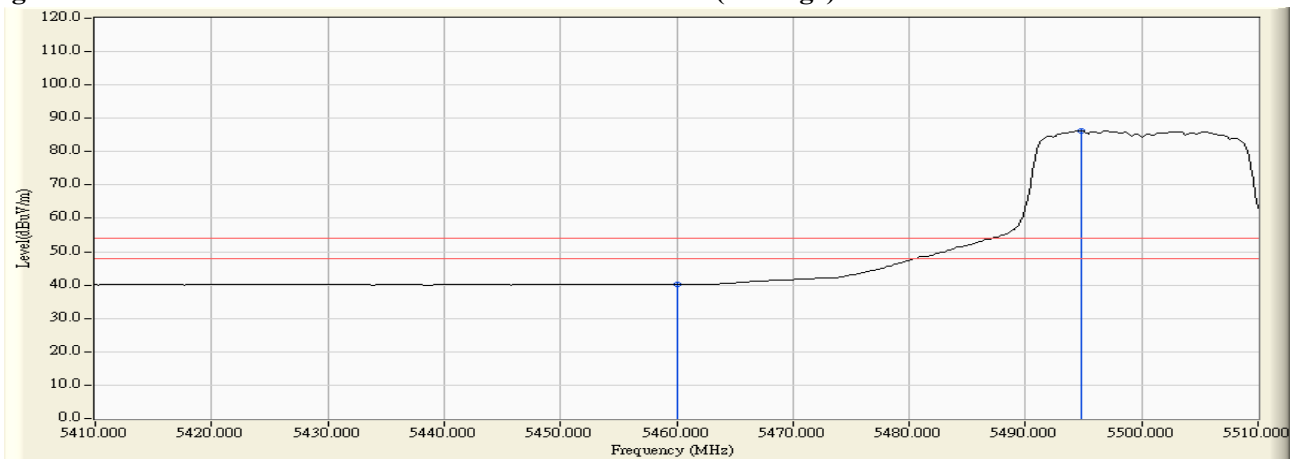


Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) -Channel 100

RF Radiated Measurement:

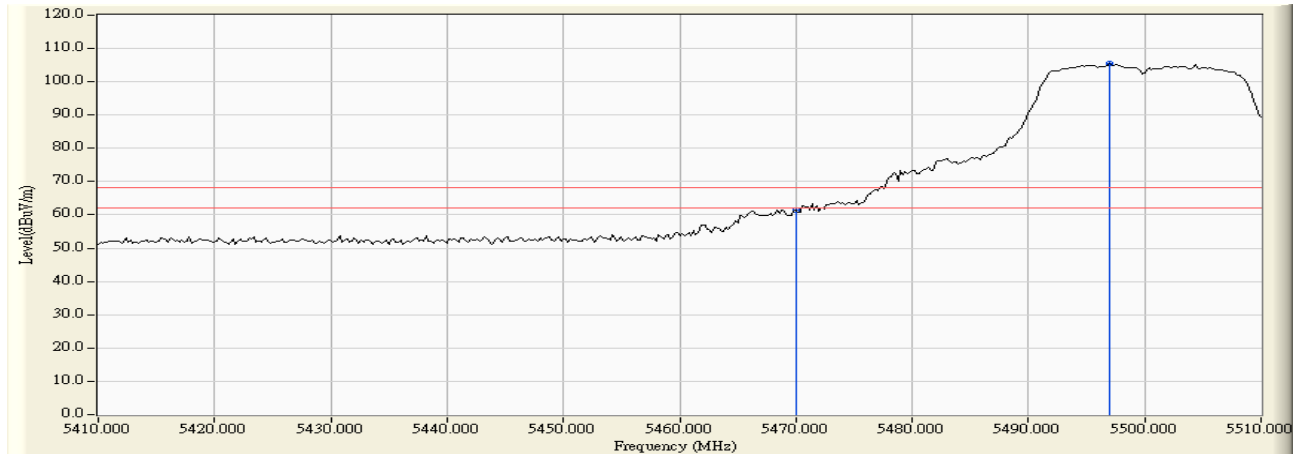


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Horizontal	5470.000	3.970	57.516	61.486	-6.734	68.220	Pass
Horizontal	5497.000	4.438	101.038	105.476	37.256	68.220	Pass

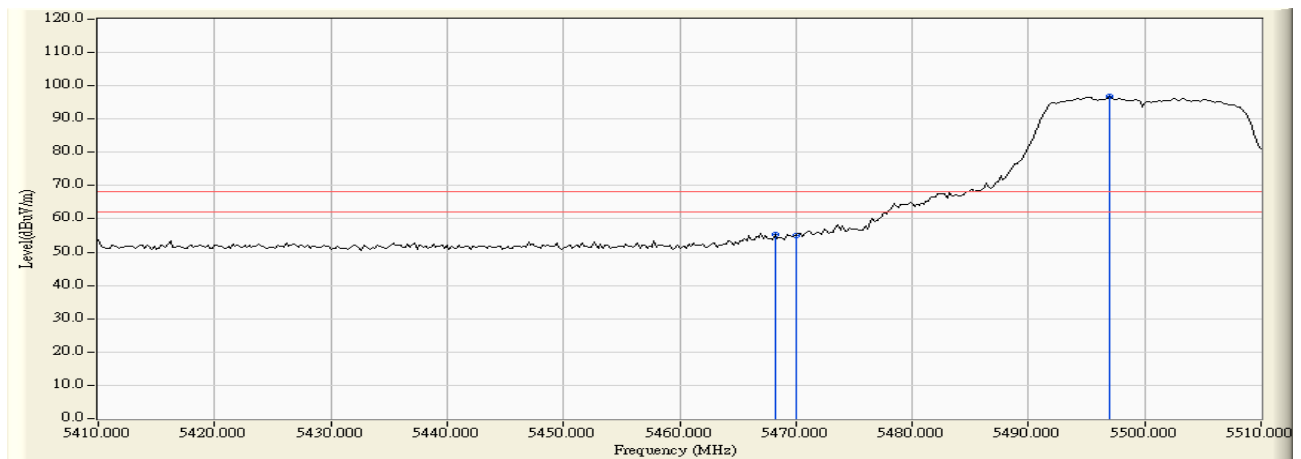


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Vertical	5468.200	4.054	51.225	55.278	-12.942	68.220	Pass
Vertical	5470.000	4.079	50.806	54.885	-13.335	68.220	Pass
Vertical	5497.000	4.428	92.249	96.678	28.458	68.220	Pass

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) -Channel 140

RF Radiated Measurement:

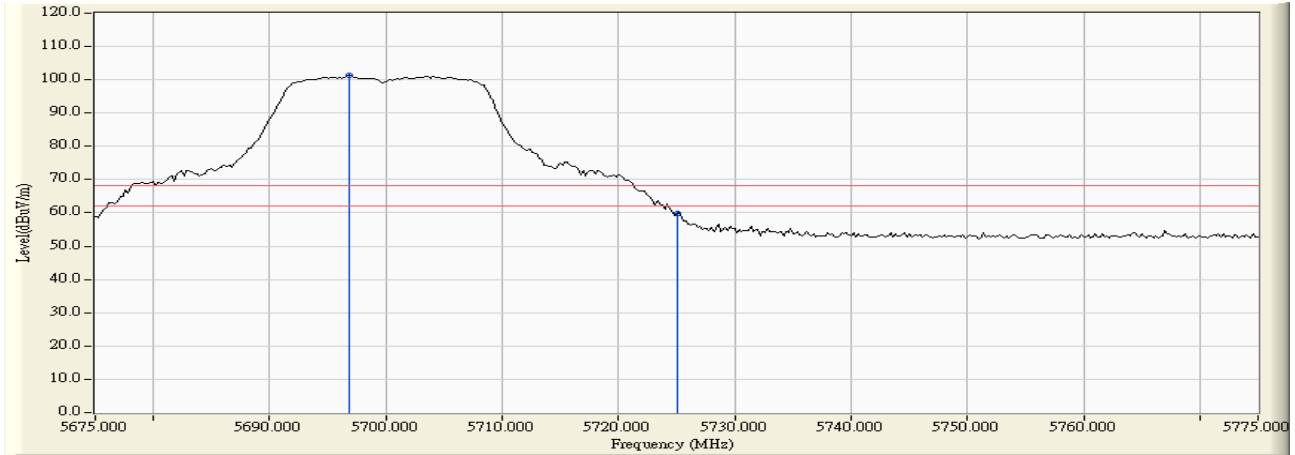


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Horizontal	5696.800	4.989	96.470	101.459	33.239	68.220	Pass
Horizontal	5725.000	5.104	54.632	59.735	-8.485	68.220	Pass

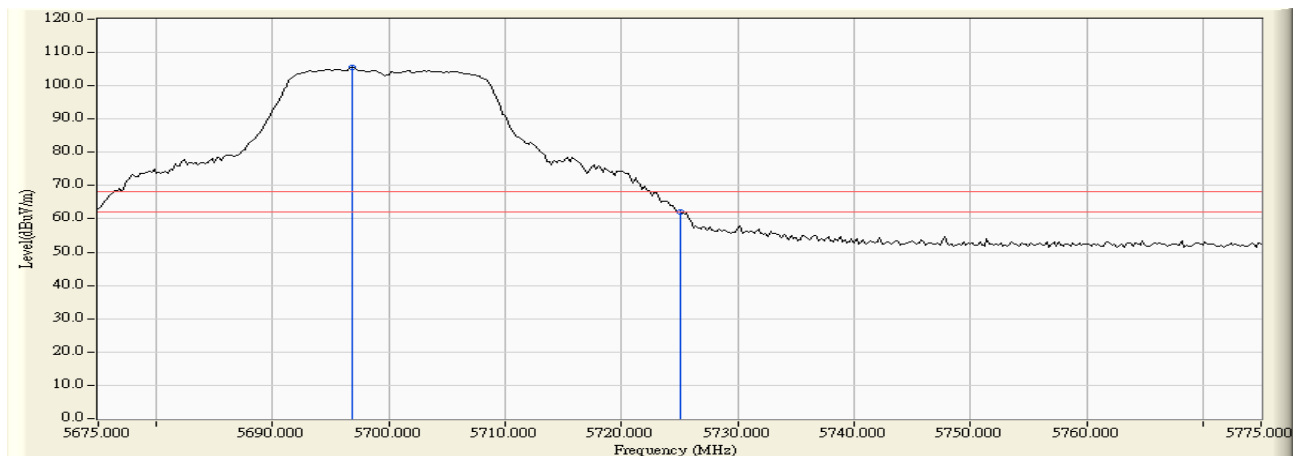


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Vertical	5696.800	4.178	101.432	105.611	37.391	68.220	Pass
Vertical	5725.000	4.215	57.716	61.931	-6.289	68.220	Pass

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) -Channel 149

RF Radiated Measurement:

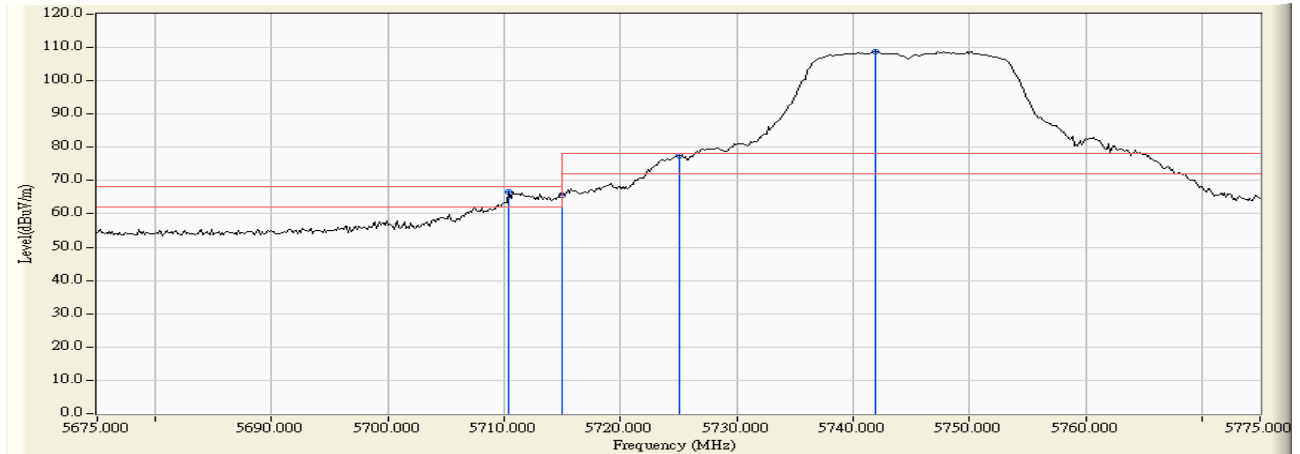


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Horizontal	5710.362	5.044	61.436	66.480	-1.740	68.220	Pass
Horizontal	5715.000	5.063	60.703	65.766	-2.454	68.220	Pass
Horizontal	5725.000	5.104	72.440	77.543	-0.677	78.220	Pass
Horizontal	5741.957	5.174	103.718	108.892	30.672	78.220	Pass

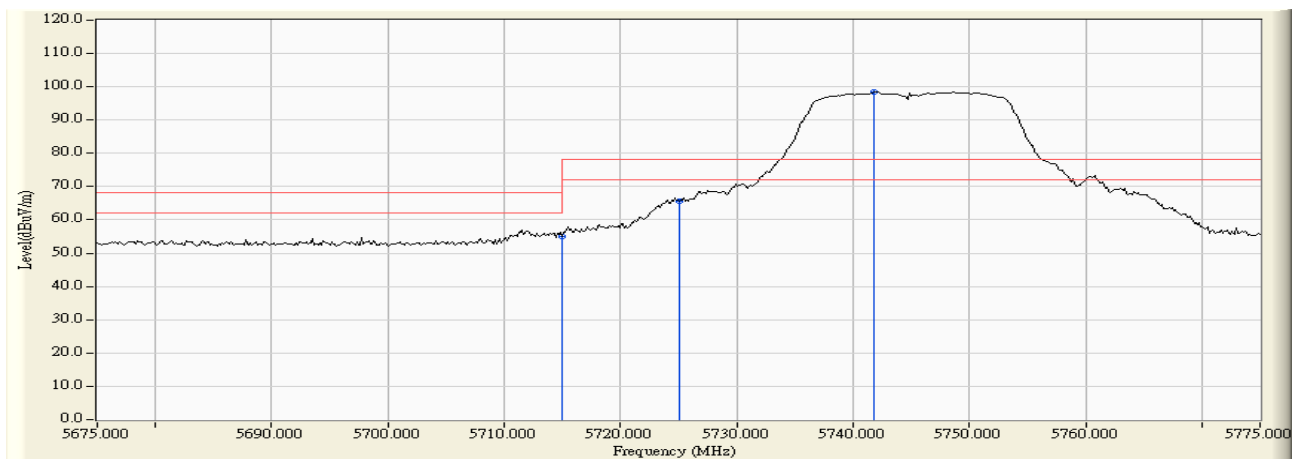


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Vertical	5715.000	4.186	50.934	55.120	-13.100	68.220	Pass
Vertical	5725.000	4.215	61.543	65.758	-12.462	78.220	Pass
Vertical	5741.812	4.264	94.263	98.528	20.308	78.220	Pass

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) -Channel 165

RF Radiated Measurement:

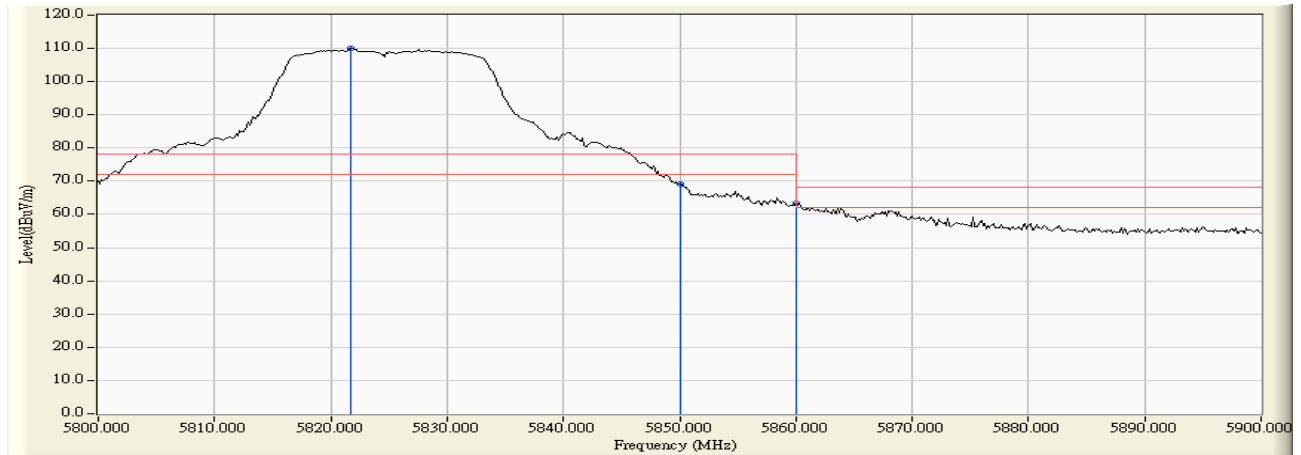

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Horizontal	5821.739	5.519	104.405	109.924	31.704	78.220	Pass
Horizontal	5850.000	5.715	63.474	69.189	-9.031	78.220	Pass
Horizontal	5860.000	5.798	57.482	63.280	-4.940	68.220	Pass

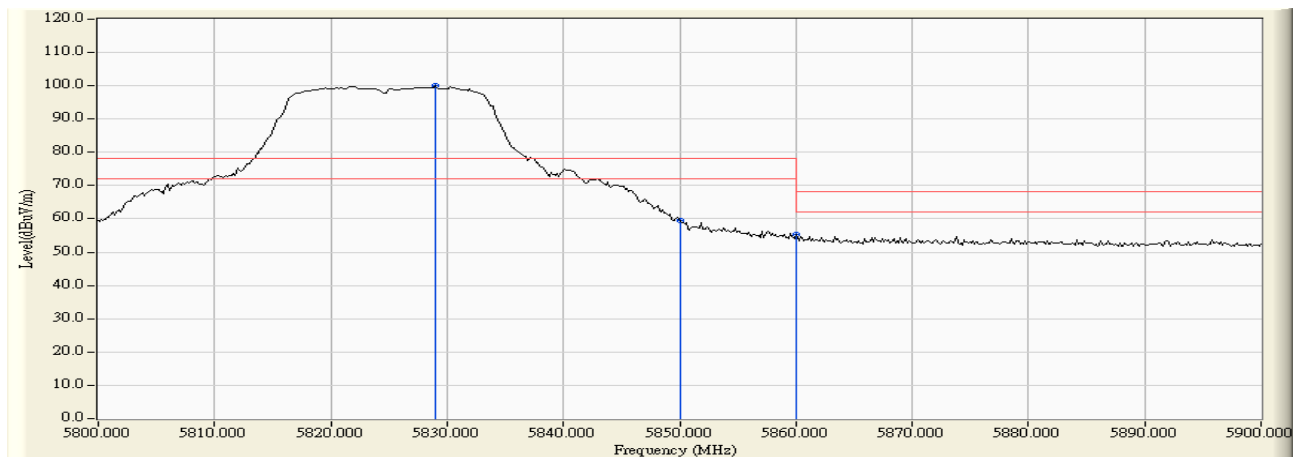

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Vertical	5828.986	4.276	95.817	100.092	21.872	78.220	Pass
Vertical	5850.000	4.194	55.476	59.670	-18.550	78.220	Pass
Vertical	5860.000	4.168	51.238	55.406	-12.814	68.220	Pass

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5190MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
38 (Peak)	5150.000	2.796	64.731	67.527	74.00	54.00	Pass
38 (Peak)	5196.800	2.640	99.640	102.281	--	--	--
38 (Average)	5150.000	2.796	48.883	51.679	74.00	54.00	Pass
38 (Average)	5199.000	2.634	87.900	90.534	--	--	--


Figure Channel 38:

Horizontal (Peak)



Figure Channel 38:

Horizontal (Average)

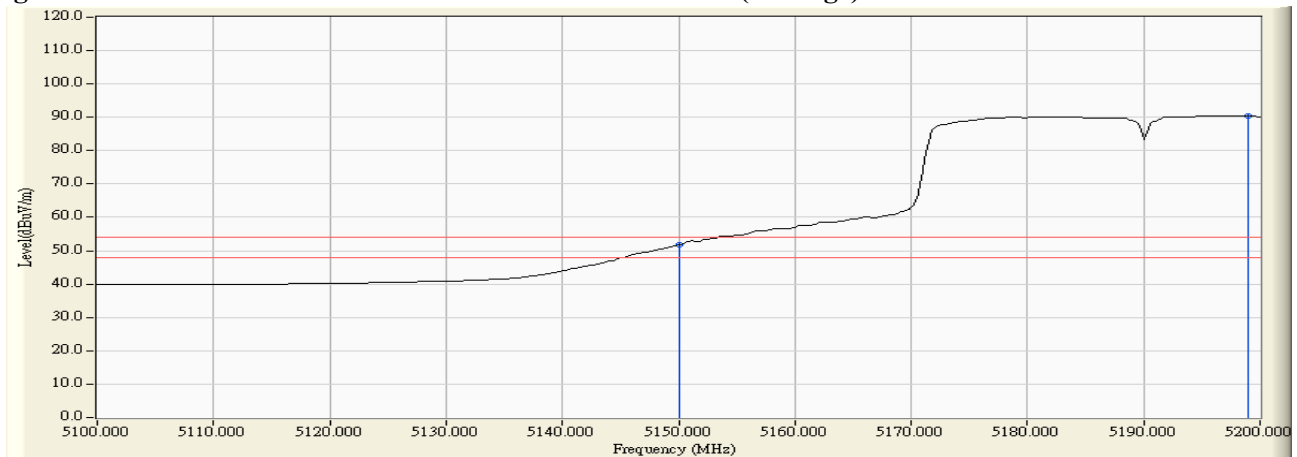

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5190MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
38 (Peak)	5146.600	3.314	52.194	55.509	74.00	54.00	Pass
38 (Peak)	5150.000	3.331	51.775	55.107	74.00	54.00	Pass
38 (Peak)	5197.000	3.554	88.891	92.446	--	--	--
38 (Average)	5150.000	3.331	39.163	42.495	74.00	54.00	Pass
38 (Average)	5195.600	3.547	77.602	81.150	--	--	--

Figure Channel 38: Vertical (Peak)


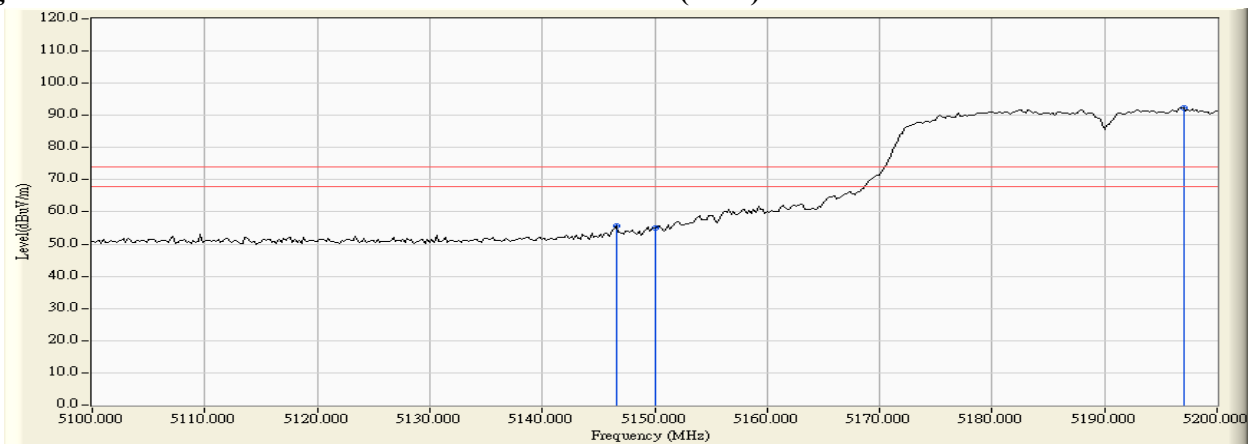


Figure Channel 38: Vertical (Average)

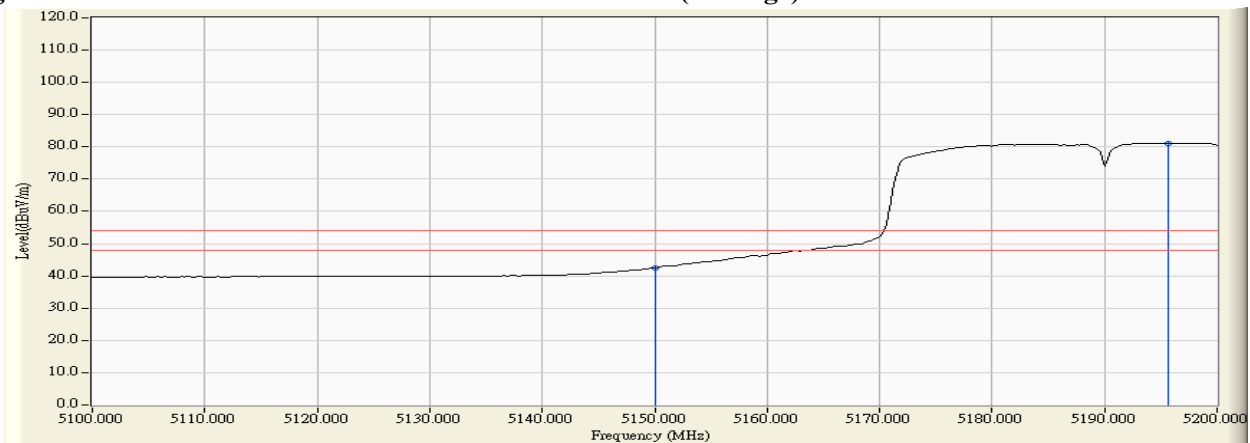

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5310MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
62 (Peak)	5320.200	3.642	98.339	101.981	--	--	--
62 (Peak)	5350.000	3.575	57.645	61.220	74.00	54.00	Pass
62 (Average)	5319.000	3.644	86.534	90.178	--	--	--
62 (Average)	5350.000	3.575	43.444	47.019	74.00	54.00	Pass

Figure Channel 62: Horizontal (Peak)


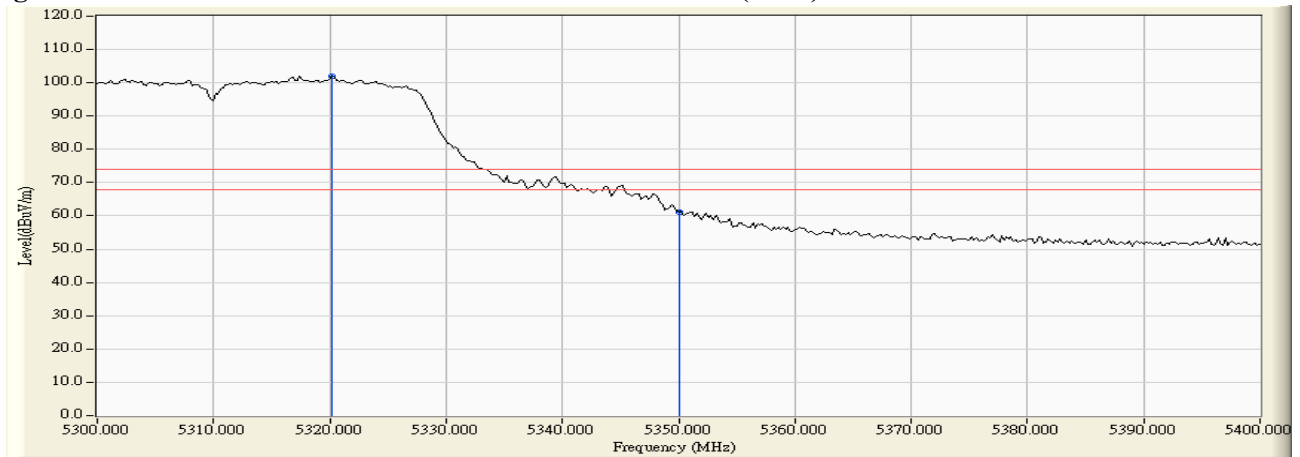


Figure Channel 62: Horizontal (Average)

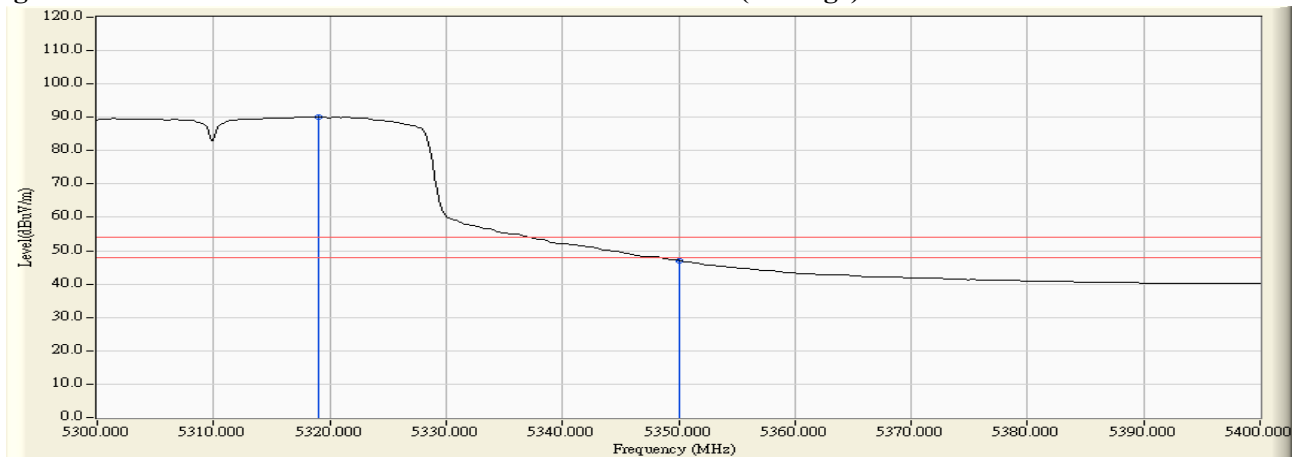

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5310MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
62 (Peak)	5320.200	3.886	89.157	93.044	--	--	--
62 (Peak)	5350.000	3.900	49.762	53.662	74.00	54.00	Pass
62 (Peak)	5353.000	3.894	51.400	55.295	74.00	54.00	Pass
62 (Average)	5319.000	3.885	77.793	81.679	--	--	--
62 (Average)	5350.000	3.900	37.972	41.872	74.00	54.00	Pass

Figure Channel 62: Vertical (Peak)


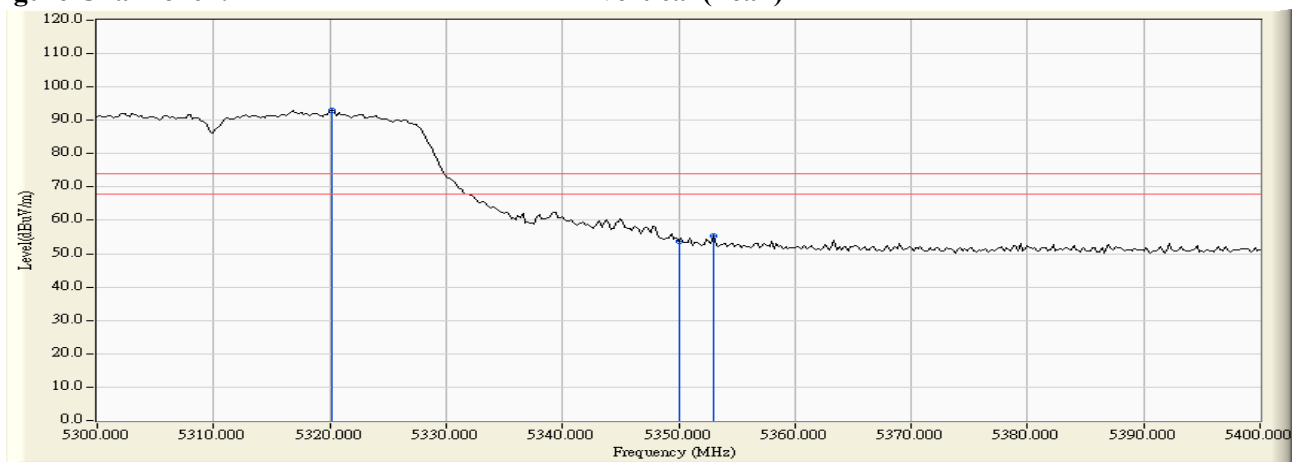


Figure Channel 62: Vertical (Average)

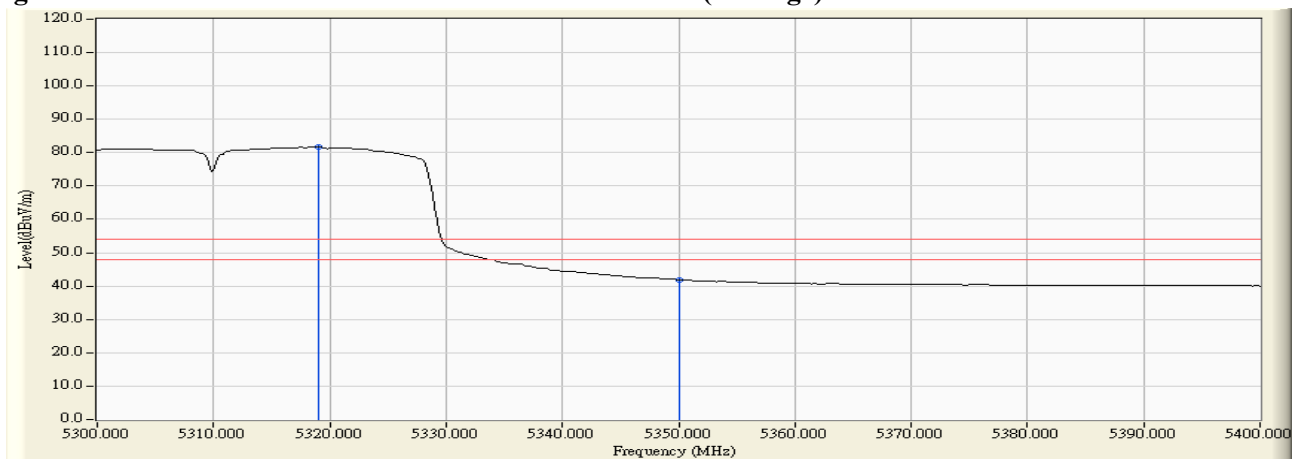

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5510MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
102 (Peak)	5457.400	3.725	55.512	59.237	74.00	54.00	Pass
102 (Peak)	5460.000	3.775	54.575	58.350	74.00	54.00	Pass
102 (Peak)	5502.200	4.509	96.245	100.753	--	--	--
102 (Average)	5460.000	3.775	40.757	44.532	74.00	54.00	Pass
102 (Average)	5501.400	4.498	85.188	89.686	--	--	--

Figure Channel 102: Horizontal (Peak)


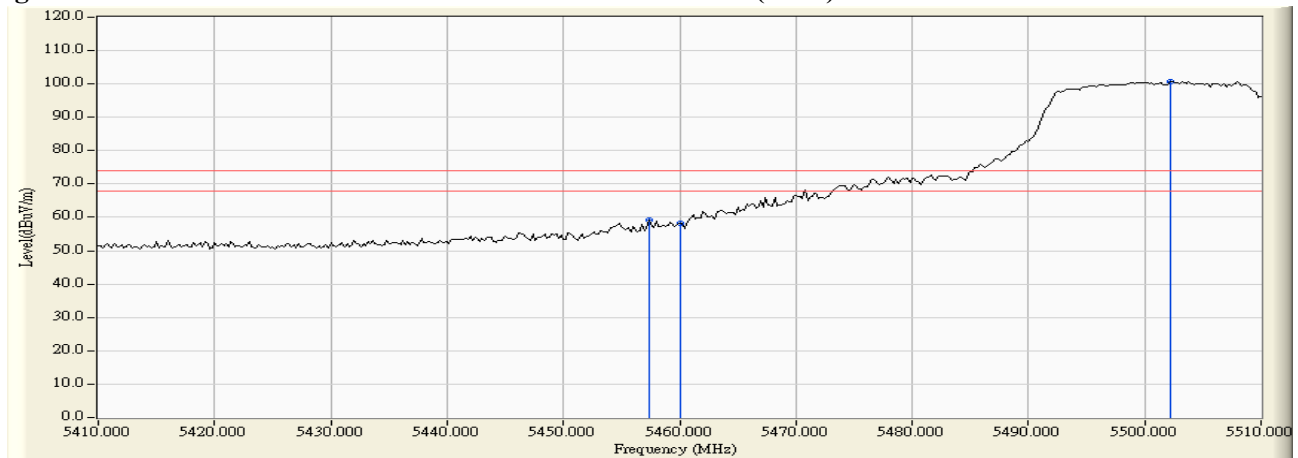


Figure Channel 102: Horizontal (Average)

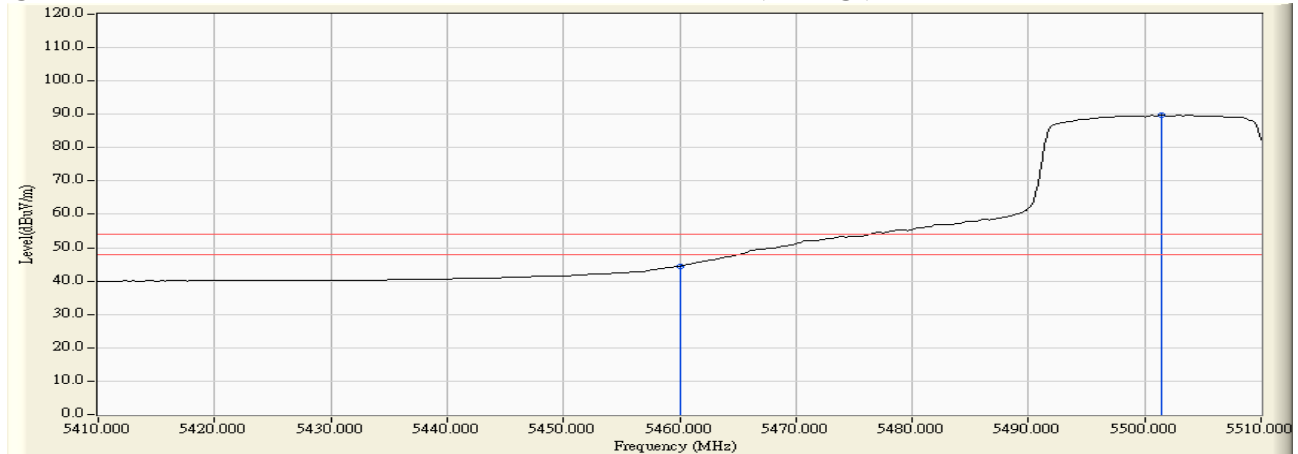

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5510MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
102 (Peak)	5459.600	3.930	50.700	54.629	74.00	54.00	Pass
102 (Peak)	5460.000	3.934	49.485	53.420	74.00	54.00	Pass
102 (Peak)	5502.400	4.485	88.275	92.759	--	--	--
102 (Average)	5460.000	3.934	37.438	41.373	74.00	54.00	Pass
102 (Average)	5501.600	4.476	77.190	81.666	--	--	--

Figure Channel 102:

Vertical (Peak)


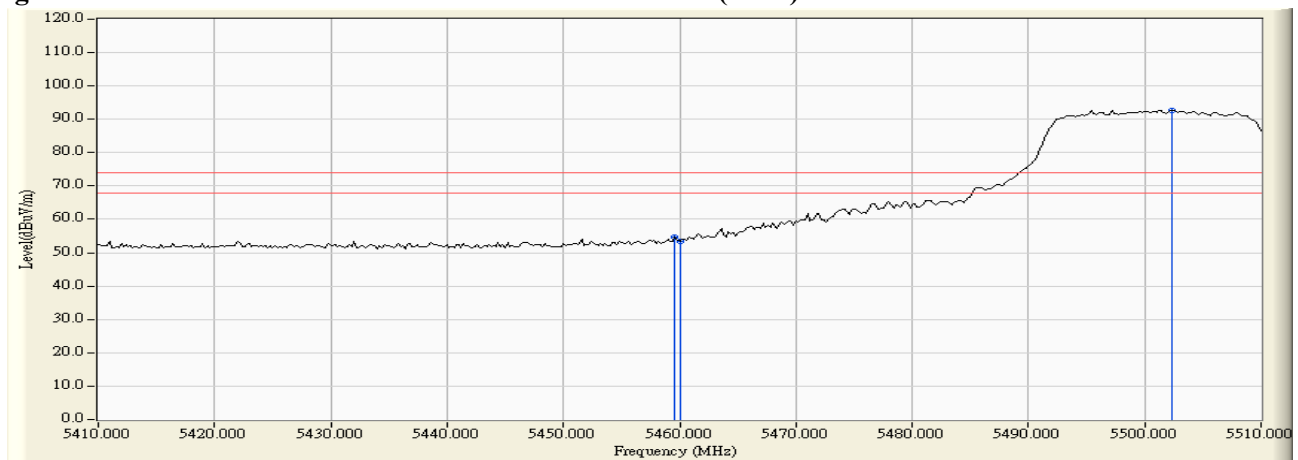


Figure Channel 102:

Vertical (Average)

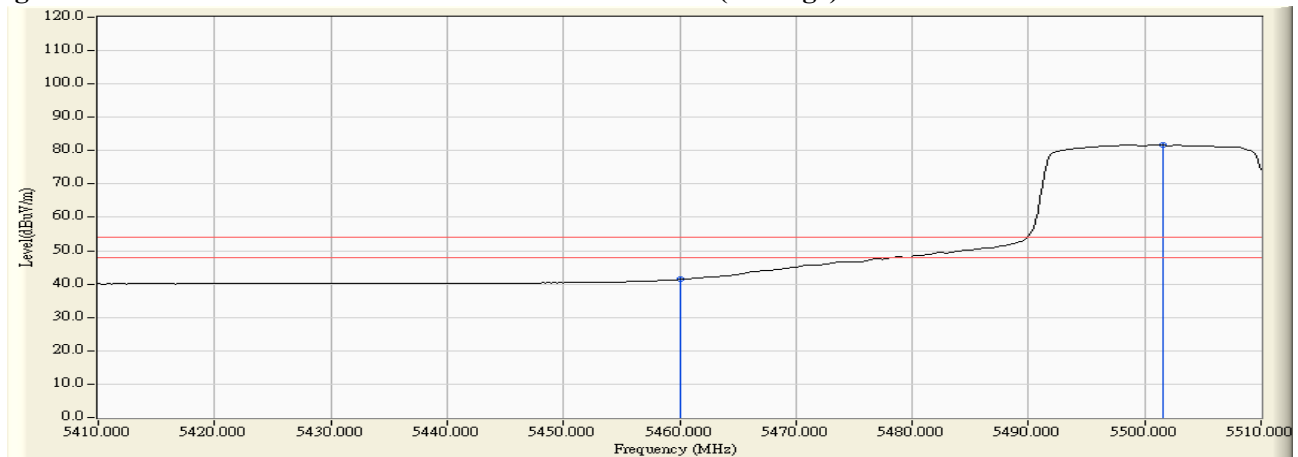


Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) -Channel 102

RF Radiated Measurement:

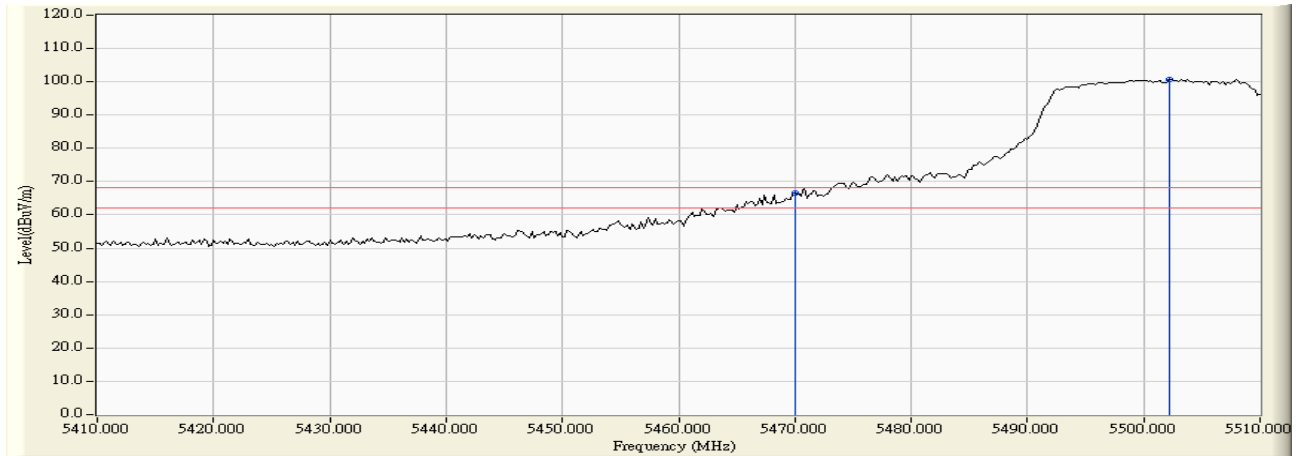


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Horizontal	5470.000	3.970	62.691	66.661	-1.559	68.220	Pass
Horizontal	5502.200	4.509	96.245	100.753	32.533	68.220	Pass

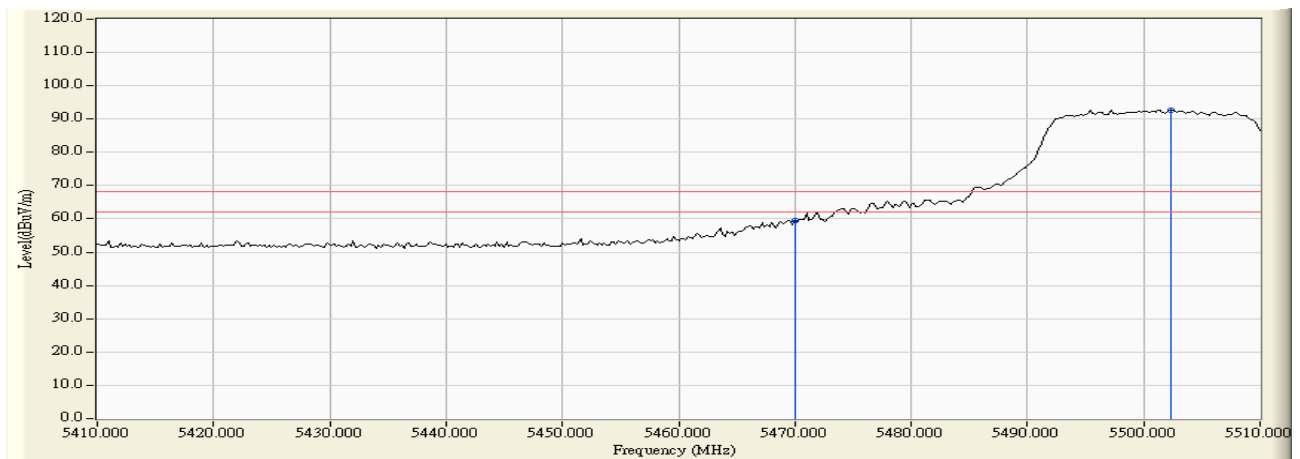


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Vertical	5470.000	4.079	55.414	59.493	-8.727	68.220	Pass
Vertical	5502.400	4.485	88.275	92.759	24.539	68.220	Pass

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) -Channel 134

RF Radiated Measurement:

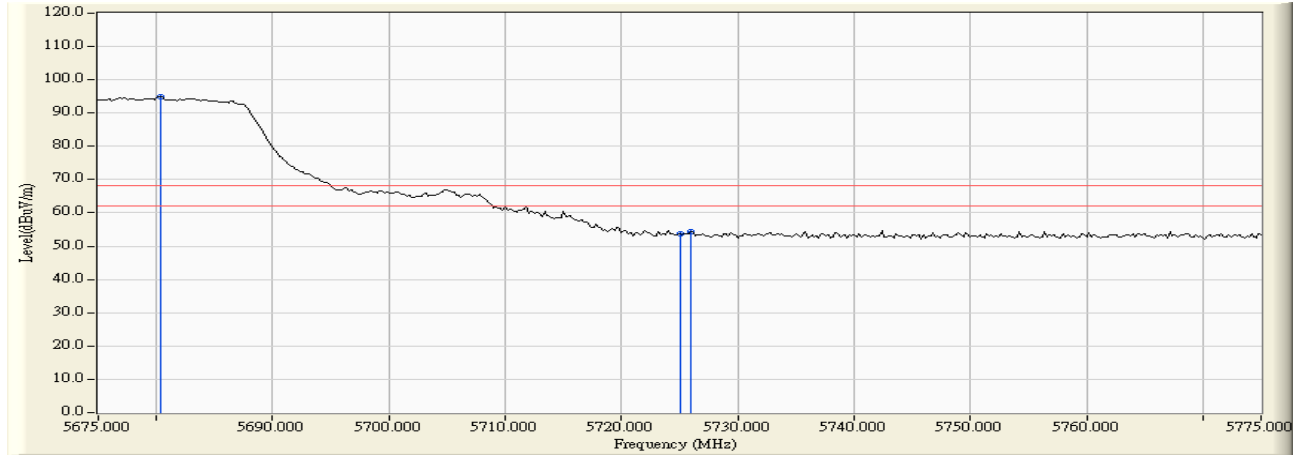


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Horizontal	5680.400	4.928	90.128	95.055	26.835	68.220	Pass
Horizontal	5725.000	5.104	48.506	53.609	-14.611	68.220	Pass
Horizontal	5726.000	5.108	49.175	54.283	-13.937	68.220	Pass

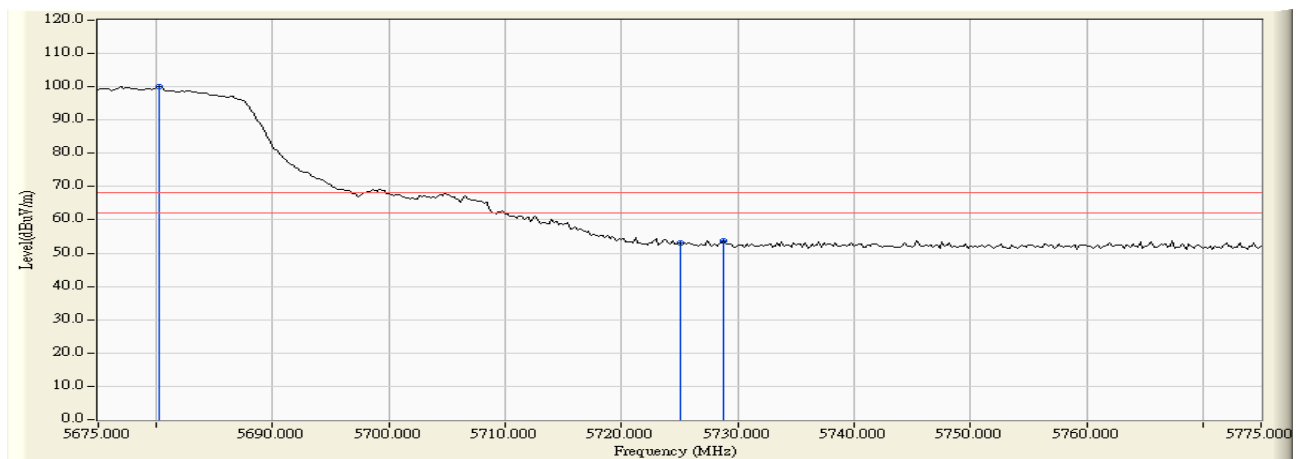


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Vertical	5680.200	4.247	95.832	100.079	31.859	68.220	Pass
Vertical	5725.000	4.215	49.020	53.235	-14.985	68.220	Pass
Vertical	5728.800	4.225	49.592	53.818	-14.402	68.220	Pass

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) -Channel 151

RF Radiated Measurement:

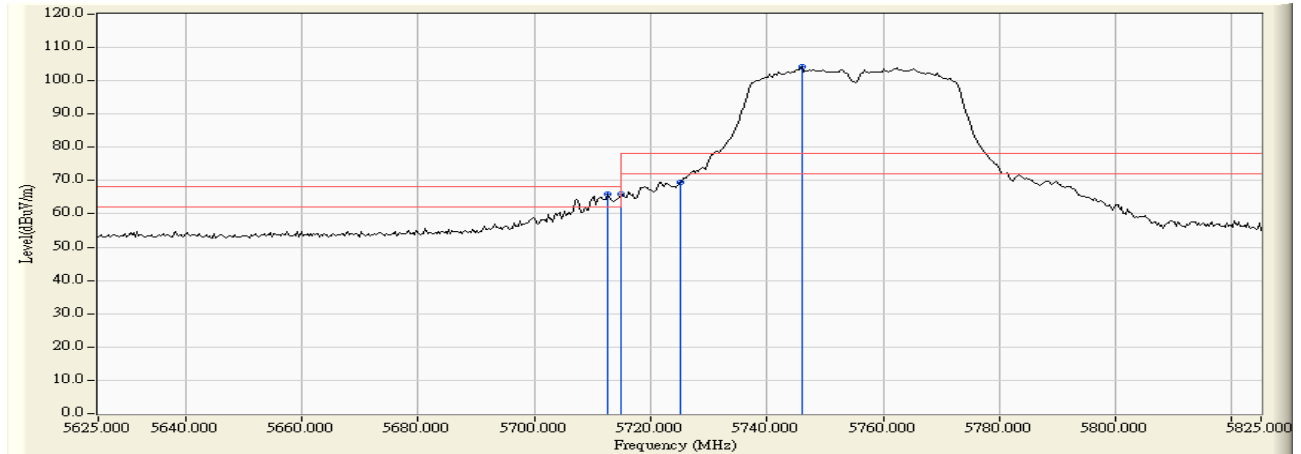


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Horizontal	5712.536	5.053	60.851	65.904	-2.316	68.220	Pass
Horizontal	5715.000	5.063	60.732	65.795	-2.425	68.220	Pass
Horizontal	5725.000	5.104	64.373	69.476	-8.744	78.220	Pass
Horizontal	5746.159	5.190	98.906	104.096	25.876	78.220	Pass

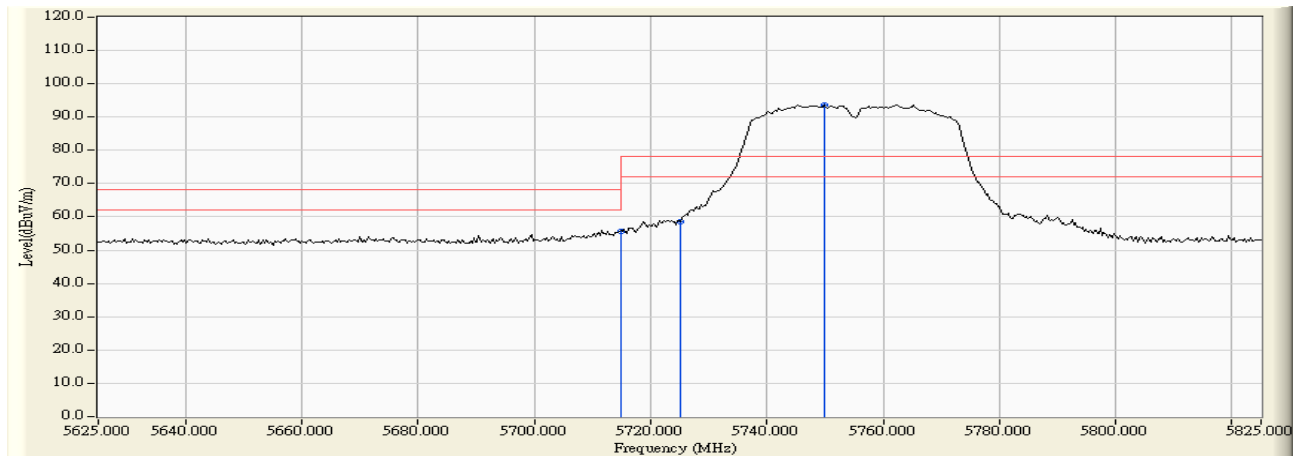


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Vertical	5715.000	4.186	51.590	55.776	-12.444	68.220	Pass
Vertical	5725.000	4.215	54.495	58.710	-19.510	78.220	Pass
Vertical	5749.928	4.285	89.420	93.706	15.486	78.220	Pass

Product : Wireless gateway
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) -Channel 159

RF Radiated Measurement:

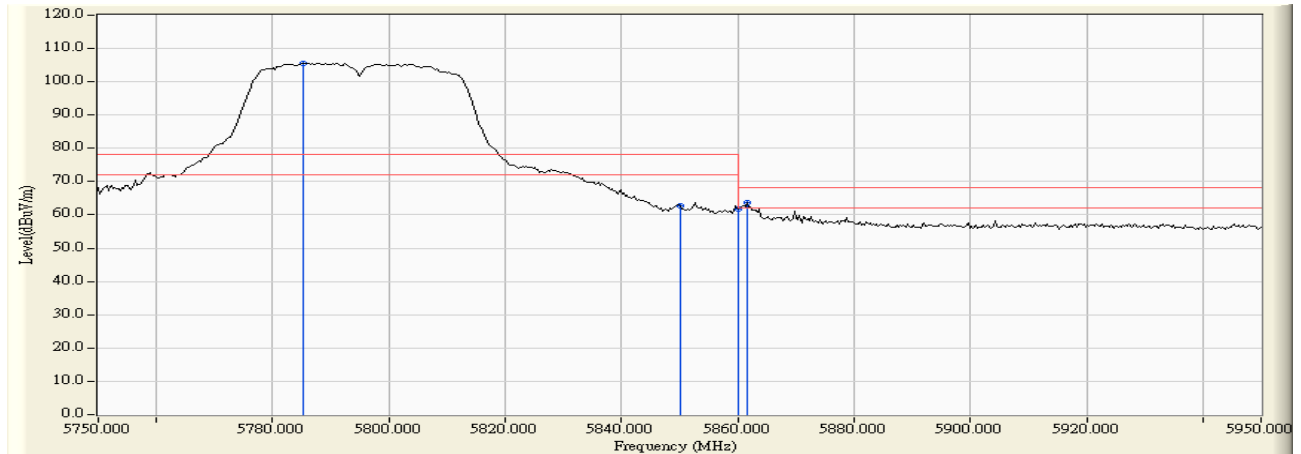

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Horizontal	5785.362	5.326	100.324	105.650	27.430	78.220	Pass
Horizontal	5850.000	5.715	57.109	62.824	-15.396	78.220	Pass
Horizontal	5860.000	5.798	56.061	61.859	-6.361	68.220	Pass
Horizontal	5861.594	5.812	57.792	63.603	-4.617	68.220	Pass

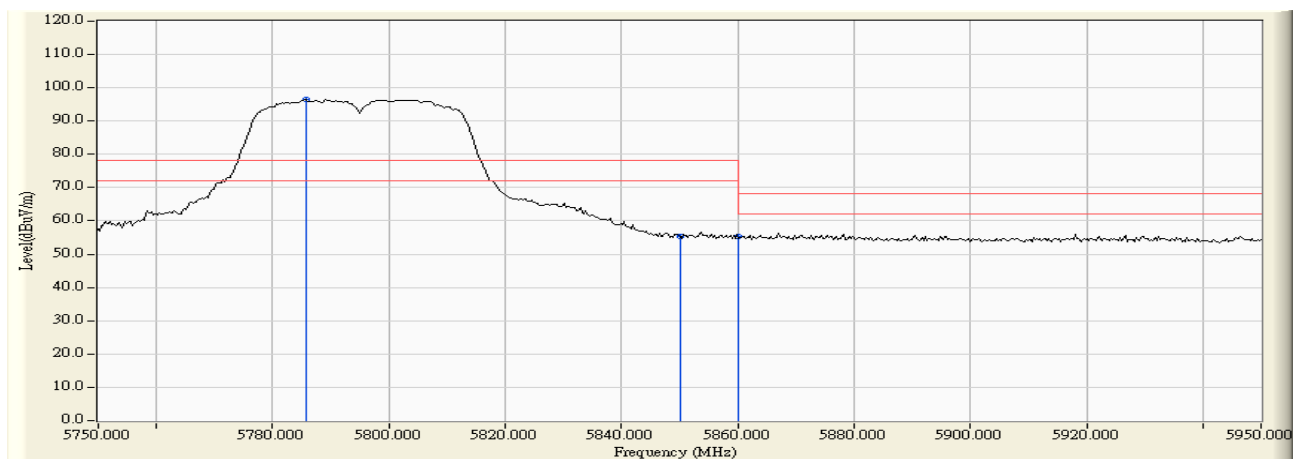

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV /m)	Margin (dB)	Limit (dBμV /m)	Result
Vertical	5785.652	4.368	92.204	96.571	18.351	78.220	Pass
Vertical	5850.000	4.194	51.069	55.263	-22.957	78.220	Pass
Vertical	5860.000	4.168	51.213	55.381	-12.839	68.220	Pass

7. Occupied Bandwidth


7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

7.2. Test Setup

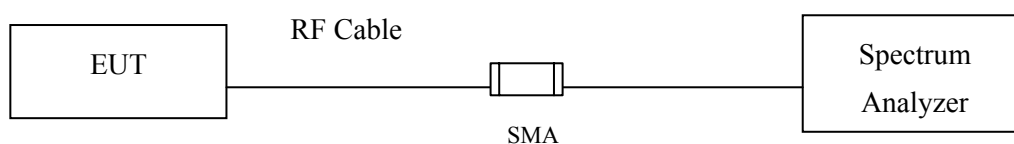

7.3. Limits

For the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz

7.4. Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

7.5. Uncertainty

$\pm 150\text{Hz}$

7.6. Test Result of Occupied Bandwidth

Product : Wireless gateway
Test Item : Occupied Bandwidth Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745	16150	>500	Pass
157	5785	16200	>500	Pass
165	5825	16200	>500	Pass

Figure Channel 149:

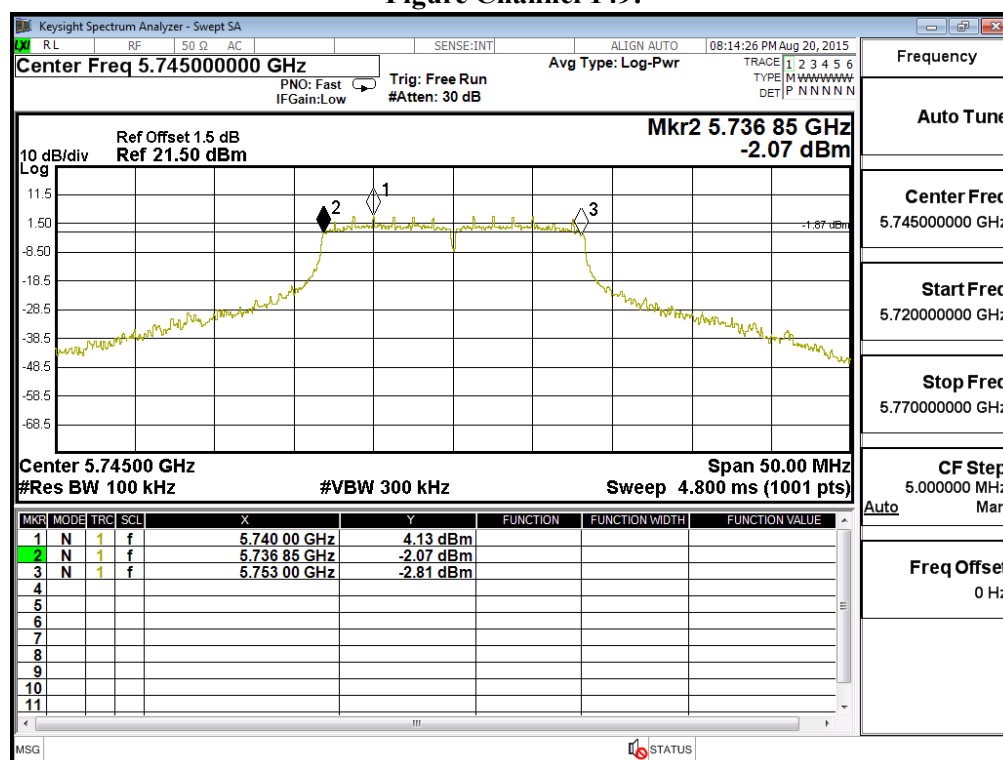


Figure Channel 157:


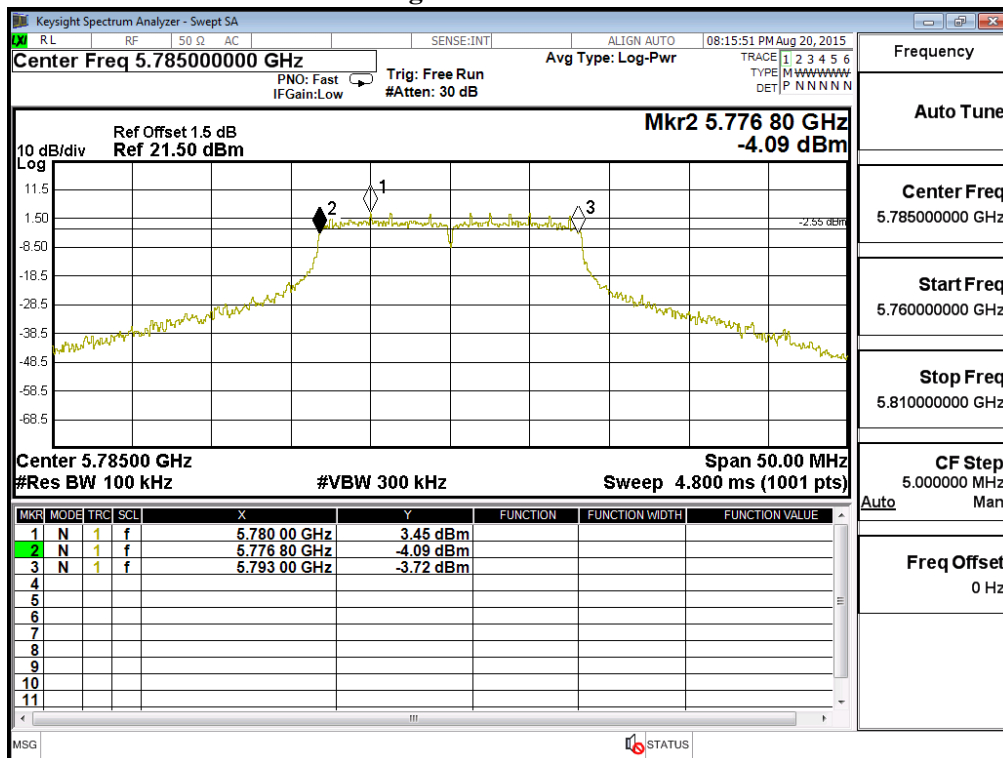


Figure Channel 165:

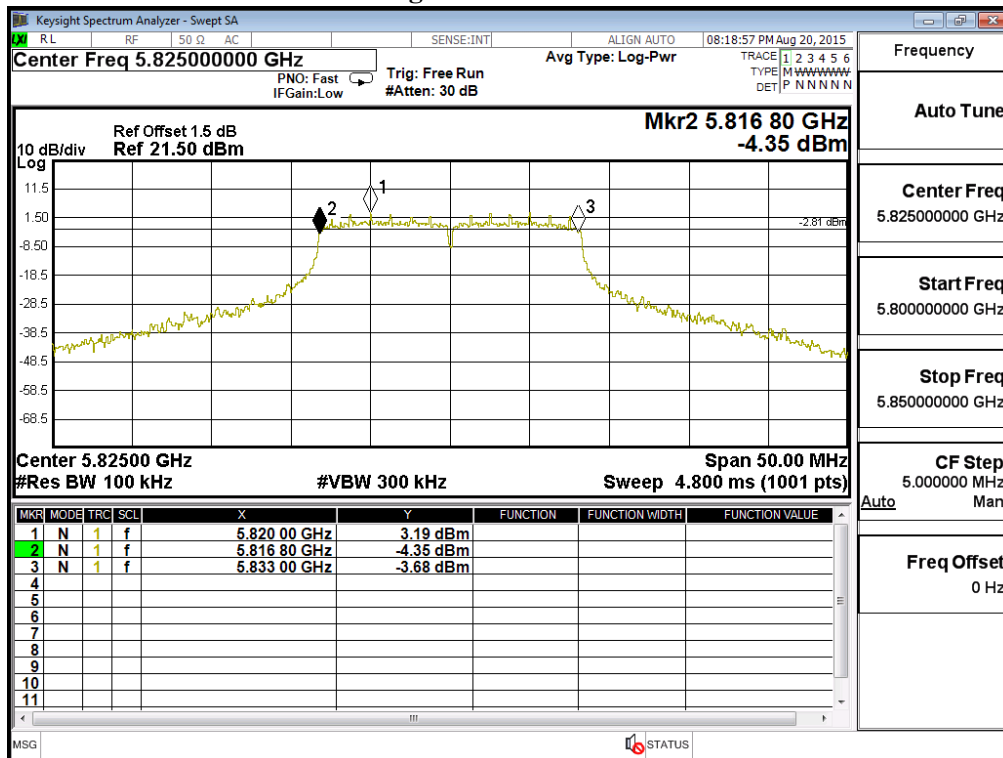

Product	:	Wireless gateway
Test Item	:	Occupied Bandwidth Data
Test Site	:	No.3 OATS
Test Mode	:	Mode 2: Transmit (802.11n-20BW 7.2Mbps)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745	16850	>500	Pass
157	5785	17000	>500	Pass
165	5825	16900	>500	Pass

Figure Channel 149:

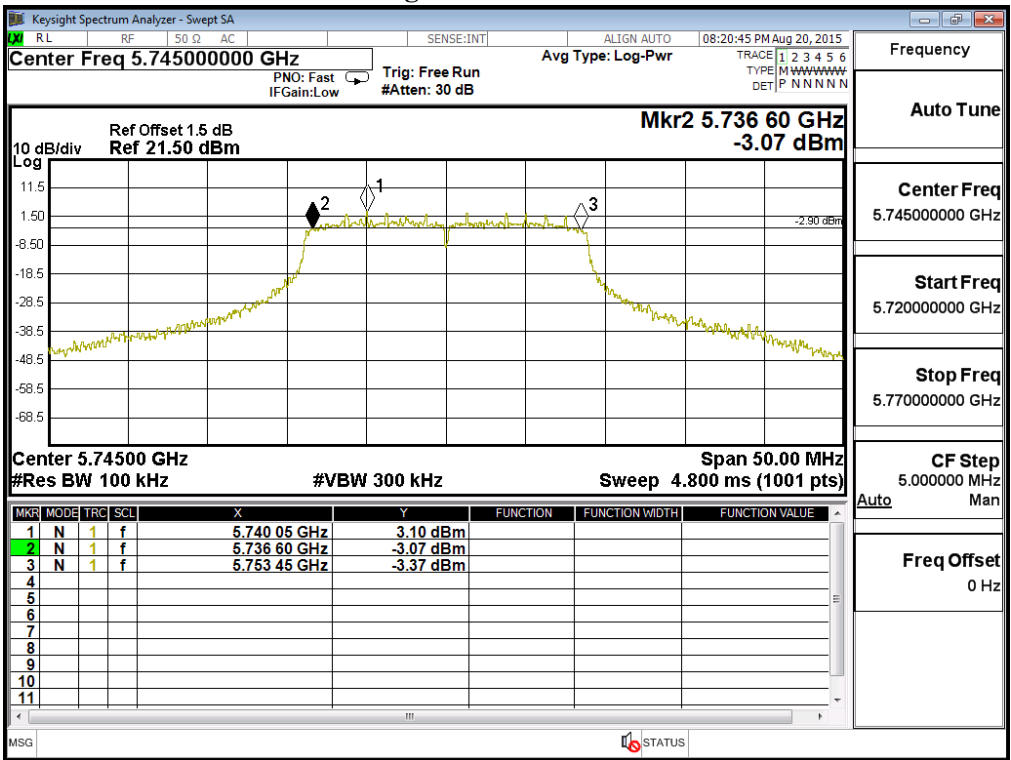


Figure Channel 157:


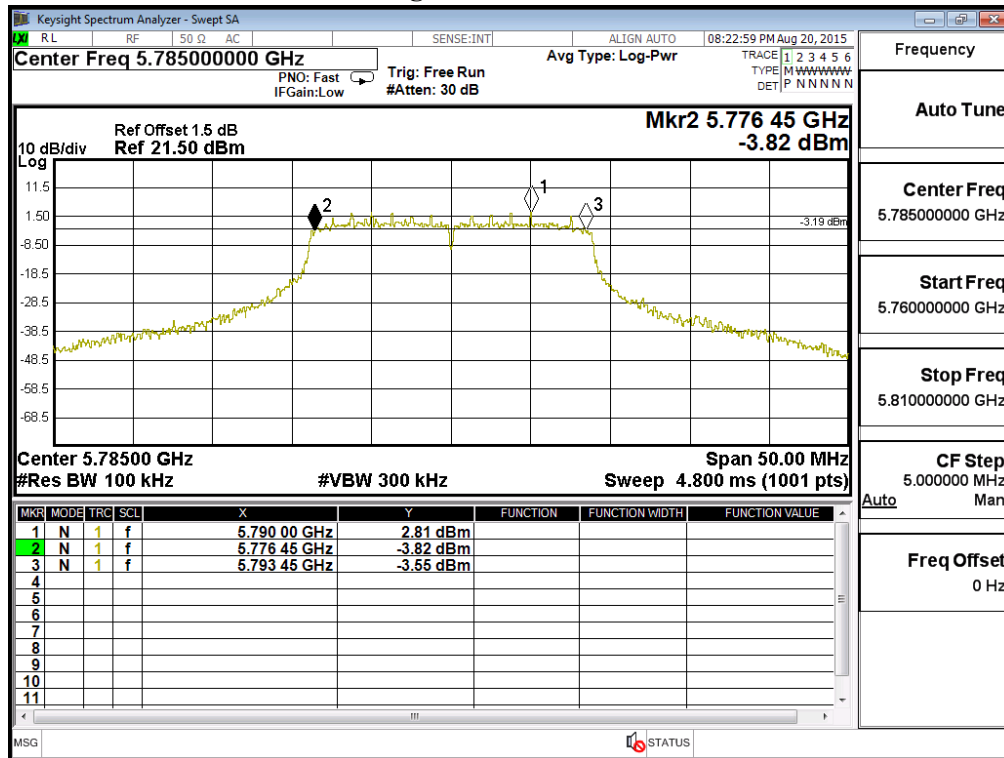


Figure Channel 165:

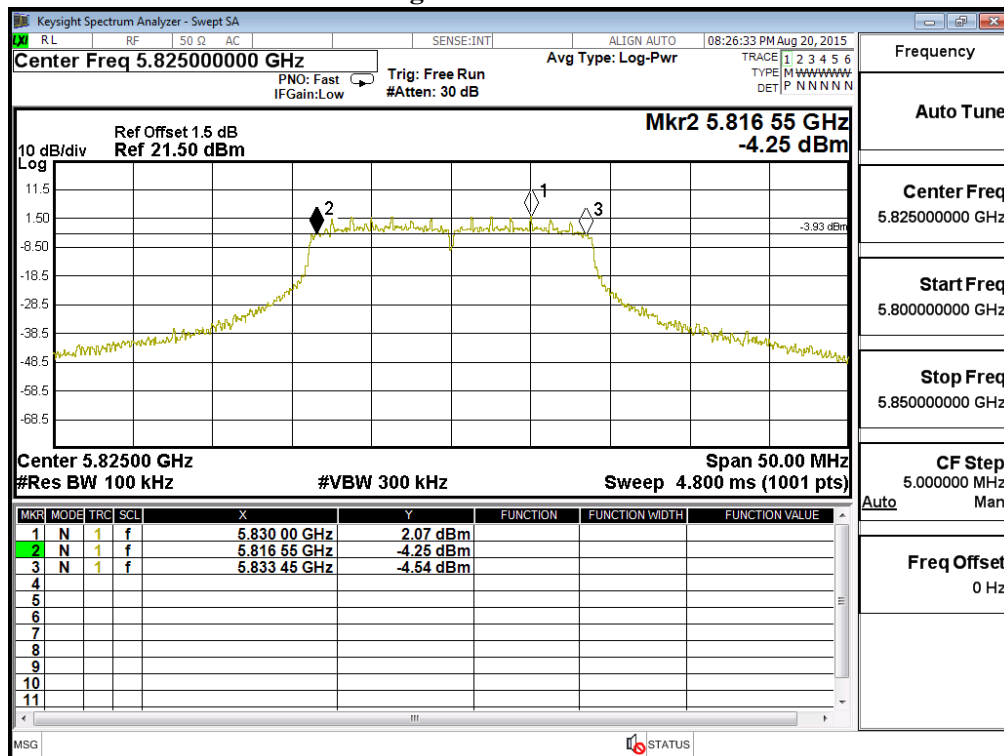

Product : Wireless gateway
Test Item : Occupied Bandwidth Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
151	5755	35300	>500	Pass
159	5795	35300	>500	Pass

Figure Channel 151:


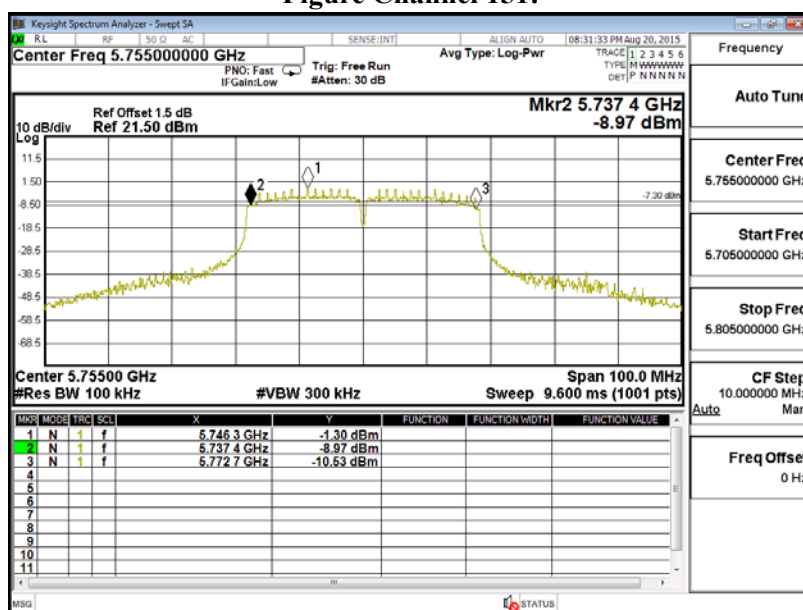


Figure Channel 159:

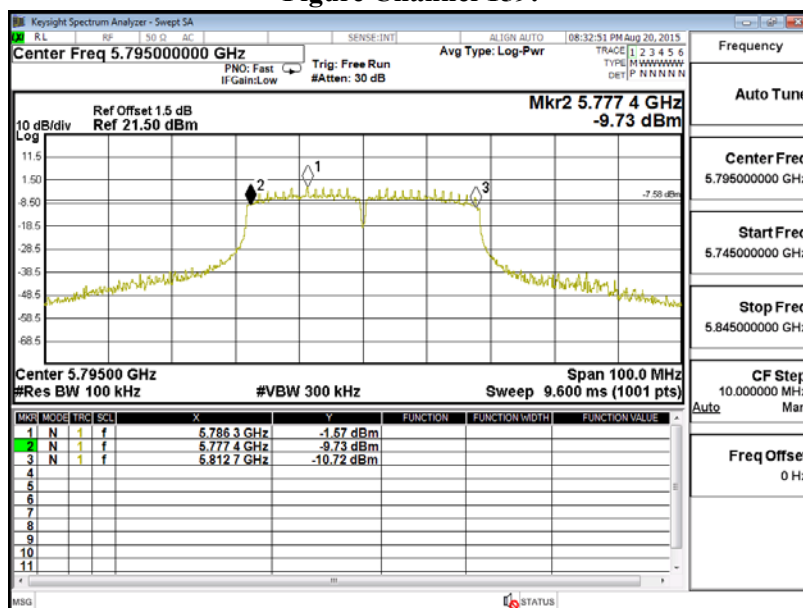

8. Frequency Stability


8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

8.2. Test Setup

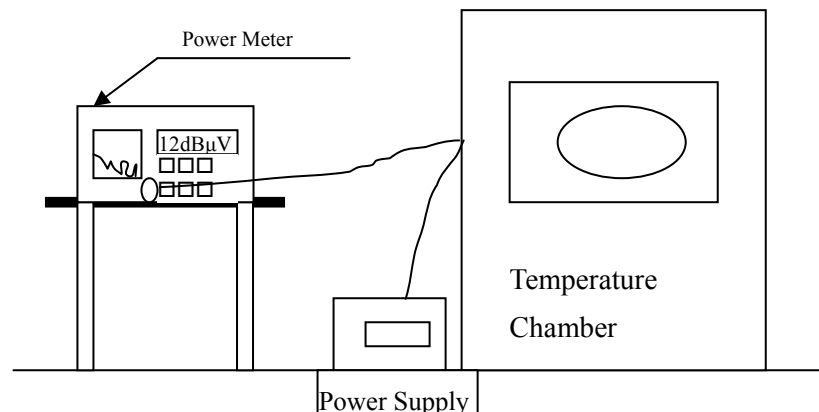

8.3. Limits

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified

8.4. Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

8.5. Uncertainty

± 150 Hz

8.6. Test Result of Frequency Stability

Product : Wireless gateway
Test Item : Frequency Stability
Test Site : Temperature Chamber
Test Mode : Carrier Wave

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tnom (20) °C	Vnom (12)V	36	5180.0000	5179.9970	0.0030
		38	5190.0000	5189.9980	0.0020
		44	5220.0000	5219.9960	0.0040
		46	5230.0000	5229.9940	0.0060
		48	5240.0000	5239.9980	0.0020
		52	5260.0000	5259.9920	0.0080
		54	5270.0000	5269.9940	0.0060
		60	5300.0000	5299.9950	0.0050
		62	5310.0000	5309.9940	0.0060
		64	5320.0000	5319.9920	0.0080
		100	5500.0000	5499.9980	0.0020
		102	5510.0000	5509.9970	0.0030
		110	5550.0000	5549.9980	0.0020
		116	5580.0000	5579.9990	0.0010
		134	5670.0000	5669.9970	0.0030
		140	5700.0000	5699.9980	0.0020
		149	5745.0000	5744.9960	0.0040
		151	5755.0000	5754.9980	0.0020
		157	5785.0000	5784.9980	0.0020
		159	5795.0000	5794.9990	0.0010
		165	5825.0000	5824.9970	0.0030

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmax (50) °C	Vmax (13.8)V	36	5180.0000	5179.9980	0.0020
		38	5190.0000	5189.9990	0.0010
		44	5220.0000	5219.9970	0.0030
		46	5230.0000	5229.9980	0.0020
		48	5240.0000	5239.9980	0.0020
		52	5260.0000	5259.9990	0.0010
		54	5270.0000	5269.9970	0.0030
		60	5300.0000	5299.9950	0.0050
		62	5310.0000	5309.9980	0.0020
		64	5320.0000	5319.9960	0.0040
		100	5500.0000	5499.9970	0.0030
		102	5510.0000	5509.9980	0.0020
		110	5550.0000	5549.9970	0.0030
		116	5580.0000	5579.9980	0.0020
		134	5670.0000	5669.9960	0.0040
		140	5700.0000	5699.9980	0.0020
		149	5745.0000	5744.9980	0.0020
		151	5755.0000	5754.9980	0.0020
		157	5785.0000	5784.9970	0.0030
		159	5795.0000	5794.9980	0.0020
		165	5825.0000	5824.9970	0.0030

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmax (50)°C	Vmin (10.2)V	36	5180.0000	5179.9980	0.0020
		38	5190.0000	5189.9990	0.0010
		44	5220.0000	5219.9970	0.0030
		46	5230.0000	5229.9980	0.0020
		48	5240.0000	5239.9980	0.0020
		52	5260.0000	5259.9990	0.0010
		54	5270.0000	5269.9970	0.0030
		60	5300.0000	5299.9950	0.0050
		62	5310.0000	5309.9980	0.0020
		64	5320.0000	5319.9960	0.0040
		100	5500.0000	5499.9970	0.0030
		102	5510.0000	5509.9980	0.0020
		110	5550.0000	5549.9970	0.0030
		116	5580.0000	5579.9980	0.0020
		134	5670.0000	5669.9960	0.0040
		140	5700.0000	5699.9980	0.0020
		149	5745.0000	5744.9980	0.0020
		151	5755.0000	5754.9980	0.0020
		157	5785.0000	5784.9970	0.0030
		159	5795.0000	5794.9980	0.0020
		165	5825.0000	5824.9970	0.0030

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tnom (0)°C	Vnom (13.8)V	36	5180.0000	5179.9980	0.0020
		38	5190.0000	5189.9970	0.0030
		44	5220.0000	5219.9980	0.0020
		46	5230.0000	5229.9960	0.0040
		48	5240.0000	5239.9990	0.0010
		52	5260.0000	5259.9980	0.0020
		54	5270.0000	5269.9970	0.0030
		60	5300.0000	5299.9980	0.0020
		62	5310.0000	5309.9980	0.0020
		64	5320.0000	5319.9990	0.0010
		100	5500.0000	5499.9970	0.0030
		102	5510.0000	5509.9960	0.0040
		110	5550.0000	5549.9980	0.0020
		116	5580.0000	5579.9970	0.0030
		134	5670.0000	5669.9980	0.0020
		140	5700.0000	5699.9980	0.0020
		149	5745.0000	5744.9970	0.0030
		151	5755.0000	5754.9960	0.0040
		157	5785.0000	5784.9980	0.0020
		159	5795.0000	5794.9970	0.0030
		165	5825.0000	5824.9980	0.0020

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmax (0)°C	Vmax (10.2)V	36	5180.0000	5179.9980	0.0020
		38	5190.0000	5189.9970	0.0030
		44	5220.0000	5219.9980	0.0020
		46	5230.0000	5229.9960	0.0040
		48	5240.0000	5239.9990	0.0010
		52	5260.0000	5259.9980	0.0020
		54	5270.0000	5269.9970	0.0030
		60	5300.0000	5299.9980	0.0020
		62	5310.0000	5309.9980	0.0020
		64	5320.0000	5319.9990	0.0010
		100	5500.0000	5499.9970	0.0030
		102	5510.0000	5509.9960	0.0040
		110	5550.0000	5549.9980	0.0020
		116	5580.0000	5579.9970	0.0030
		134	5670.0000	5669.9980	0.0020
		140	5700.0000	5699.9980	0.0020
		149	5745.0000	5744.9970	0.0030
		151	5755.0000	5754.9960	0.0040
		157	5785.0000	5784.9980	0.0020
		159	5795.0000	5794.9970	0.0030
		165	5825.0000	5824.9980	0.0020

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs