




Test report No.: 23C0626R-RFUSV19S-A

TEST REPORT (Class II Permissive Change)

Product Name	Wireless module
Trademark	MOXA
Model and /or type reference	WAPC003
FCC ID	SLE-WAPC003
Applicant's name / address	Moxa Inc. No. 1111, Heping Rd., Bade Dist., Taoyuan City 334004, Taiwan
Manufacturer's name	Moxa Inc.
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart E 15.407 (h) KDB 905462
Verdict Summary	IN COMPLIANCE
Documented By (Supervisor / Jinn Chen)	
Tested By (Senior Engineer / Benjamin Pan)	
Approved By (Senior Engineer / Steven Tsai)	
Date of Receipt	2023/12/18
Date of Issue	2024/01/18
Report Version	V1.0

INDEX

Page

1. General Information.....	6
1.1. Standard Requirement	6
1.2. EUT Description.....	7
1.3. UNII Device Description.....	10
1.4. Test Facility	11
1.5. Test Equipment.....	12
1.6. Uncertainty	13
1.7. Summary of Test Results.....	14
2. Test Setup.....	15
2.1. DFS Detection Thresholds.....	15
2.2. Radar Test Waveforms.....	17
2.3. Radar Waveform Calibration	20
2.4. Radar Waveform Calibration Result.....	21
2.5. Master Data Traffic Plot Result	37
3. UNII Detection Bandwidth	40
3.1. Test Procedure	40
3.2. Test Requirement.....	40
3.3. Test Result of UNII Detection Bandwidth.....	43
4. Initial Channel Availability Check Time.....	49
4.1. Test Procedure	49
4.2. Test Requirement.....	49
4.3. Test Result of Initial Channel Availability Check Time	50
5. Radar Burst at the Beginning of the Channel Availability Check Time.....	51
5.1. Test Procedure	51
5.2. Test Requirement.....	51
5.3. Test Result of Radar Burst at the Beginning of the Channel Availability Check Time	52
6. Radar Burst at the End of the Channel Availability Check Time	53
6.1. Test Procedure	53
6.2. Test Requirement.....	53
6.3. Test Result of Radar Burst at the End of the Channel Availability Check Time	54
7. In-Service Monitoring for Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period	55

7.1.	Test Procedure	55
7.2.	Test Requirement.....	55
7.3.	Test Result of Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period 56	
8.	Statistical Performance Check	58
8.1.	Test Procedure	58
8.2.	Test Requirement.....	58
8.3.	Test Result of Statistical Performance Check.....	60
Appendix 1: EUT Test Photographs		
Appendix 2: Product Photos-Please refer to the file: 23C0626R-Product Photos		

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Report No.	Version	Description	Issued Date
23C0626R-RFUSV19S-A	V1.0	Initial issue of report.	2024/01/18

1. General Information

1.1. Standard Requirement

FCC Part 15.407:

U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30dBm. A TPC mechanism is not required for systems with an E.I.R.P. of less than 500mW.

U-NII devices operating in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

1.2. EUT Description

Product Name	Wireless module
Trademark	MOXA
Model and /or type reference	WAPC003
FCC ID	SLE-WAPC003
EUT Rated Voltage	DC 24V
EUT Test Voltage	DC 24V (by Power Adapter)
Frequency Range	802.11a/n/ac-20 MHz: 5180-5320 MHz, 5500-5720 MHz, 5745-5825 MHz 802.11n/ac-40 MHz: 5190-5310 MHz, 5510-5710 MHz, 5755-5795 MHz 802.11ac-80 MHz: 5210-5290 MHz, 5530-5690 MHz, 5775 MHz
Number of Channels	802.11a/n/ac-20 MHz: 25 CH 802.11n/ac-40 MHz: 12 CH 802.11ac-80 MHz: 6 CH
Data Rate	802.11a: 6-54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 866.7 Mbps
Type of Modulation	802.11a/n/ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Control	Auto
Channel Bandwidth	20/40/80 MHz
DFS Function	☒ Master ☐ Slave
TPC Function	☐ <500mW not required ☒ $\geq$ 500mW employ a TPC*
Communication Mode	☒ IP Based Systems ☐ Frame Based System ☐ Other System

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	MOXA	ANT-WDB-ANM-0306	Dipole	5.7 dBi for 5.15~5.25GHz 5.7 dBi for 5.25~5.35GHz 6.3 dBi for 5.47~5.725GHz
2	MOXA	ANT-WDB-ANM-0502	Dipole	1.41 dBi for 5GHz
3	MOXA	ANT-WDB-ARM-02	Dipole	0.38 dBi for 5.15~5.25GHz 0.38 dBi for 5.25~5.35GHz -0.39 dBi for 5.47~5.725GHz
4	MOXA	ANT-WDB-ARM-0202	Dipole	1.8 dBi for 5GHz
5	MOXA	MAT-WDB-CA-RM-2-0205	Dipole	5.7 dBi for 5.15~5.25GHz 5.7 dBi for 5.25~5.35GHz 4.9 dBi for 5.47~5.725GHz
6	MOXA	MAT-WDB-DA-RM-2-0203-1m	Dipole	2.72 dBi for 5.15~5.25GHz 2.72 dBi for 5.25~5.35GHz 2.26 dBi for 5.47~5.725GHz
7	MOXA	MAT-WDB-PA-NF-2-0708	Panel	8.77 dBi for 5.15~5.25GHz 8.77 dBi for 5.25~5.35GHz 8.61 dBi for 5.47~5.725GHz
8	MOXA	ANT-WDB-PNF-1011	Panel	12.04 dBi for 5.15~5.25GHz 12.04 dBi for 5.25~5.35GHz 11.06 dBi for 5.47~5.725GHz
9	MOXA	ANT-WDB-ONM-0707	Dipole	7.3 dBi for 5.15~5.25GHz 7.3 dBi for 5.25~5.35GHz 7.5 dBi for 5.47~5.725GHz
10	MOXA	ANT-WDB-ONF-0709	Dipole	8.61 dBi for 5.15~5.25GHz 8.15 dBi for 5.25~5.35GHz 8.87 dBi for 5.47~5.725GHz
11	MOXA	ANT-WSB5-PNF-16	Panel	16.38 dBi for 5.15~5.25GHz 16.38 dBi for 5.25~5.35GHz 16.94 dBi for 5.47~5.725GHz

Note: 1. Each antenna has been evaluated and only the lower gain antenna is presented in the report.
2. The antenna gain as by the manufacturer provided.

802.11a/n/ac-20 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	44	5220	48	5240
52	5260	56	5280	60	5300	64	5320
100	5500	104	5520	108	5540	112	5560
116	5580	120	5600	124	5620	128	5640
132	5660	136	5680	140	5700	144	5720
149	5745	153	5765	157	5785	161	5805
165	5825	--	--	--	--	--	--

802.11n/ac-40 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230	54	5270	62	5310
102	5510	110	5550	118	5590	126	5630
134	5670	142	5710	151	5755	159	5795

802.11ac-80MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530	122	5610
138	5690	155	5775	--	--	--	--

Note:

1. This is to request a Class II permissive change.

The major change filed under this application is:

Change #1: Additional Chassis added, Product name: Industrial Wireless 802.11a/b/g/n/ac Access Point, Brand: MOXA, Model number: AWK-1151C (AP), AWK-1151C-US (AP), AWK-1151C-US-T (AP).

Change #2: Add DFS master function through firmware.

Test Mode	Mode 1	Normal (802.11ac-20 MHz) Normal (802.11ac-40 MHz) Normal (802.11ac-80 MHz)
-----------	--------	--

1.3. UNII Device Description

(1) The EUT operates in the following DFS band:

1. 5250-5350 MHz
2. 5470-5725 MHz

(2) The U-NII device maximum power is 30.00 dBm(E.I.R.P).

Master mode:

Below are the available 50 ohm antenna assemblies and their corresponding gains. 0 dBi gain was used to set the -61 dBm threshold level (-62dBm +1 dB) during calibration of the test setup.

Slave mode:

Below are the available 50 ohm antenna assemblies and their corresponding gains. 0dBi gain was used to set the -63 dBm threshold level (-64dBm +1 dB) during calibration of the test setup.

(3) WLAN traffic is generated by the test software “Iperf.exe” from the Master device to the Slave device in the transfer data rate >17%.

(4) For the 5250-5350 MHz and 5470-5725MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

(5) Master mode:

The client device is a Notebook pc contains Intel WLAN radio Module card
(Model: AX200NGW). The Intel WLAN Module card FCC ID: PD9AX200NG.

(6) This device does not support partial RU function.

1.4. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Radiated Emission	Temperature (°C)	10~40 °C	22.6 °C
	Humidity (%RH)	10~90 %	55.9 %

USA	FCC Registration Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF
	Accredited Number: 3023

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
	Linkou Laboratory
Address	No. 5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan, R.O.C.
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

1.5. Test Equipment

Dynamic Frequency Selection (DFS) / HY-SR06

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Spectrum Analyzer	R&S	FSV40	101894	2023.05.30
Vector Signal Generator	R&S	SMBV100A	261871	2023.05.30
Horn Antenna	ETS-Lindgren	3117	00227709	2023.11.27
Horn Antenna	ETS-Lindgren	3117	00201259	2023.11.14

Instrument	Manufacturer	Type No.	Serial No
Notebook Pc	Dell	Inspiron 14 5459	1599Q72
RF Cable	WOKEN	L1406-031C	S02-130729-305
RF Cable	SUHNER	SUCOFLEX 106	3474516
Access Point	ASUS	RT-AX88U	JCITHP000040

Software	Manufacturer	Function
R&S Pulse Sequencer DFS V 2.6, 07.06.2023 Build: 8558 Rev: 5141	R&S	Radar Signal Generation Software
Iperf v2.0.8	iperf.fr	Streaming data

1.6. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.


Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty
Timing	$\pm 0.53\%$

1.7. Summary of Test Results

Test item	Result
UNII Detection Bandwidth	Pass
Initial Channel Availability Check Time	Pass
Radar Burst at the Beginning of the Channel Availability Check Time	Pass
Radar Burst at the End of the Channel Availability Check Time	Pass
In-Service Monitoring for Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period	Pass
Statistical Performance Check	Pass
UNII Detection Bandwidth	Pass

2. Test Setup

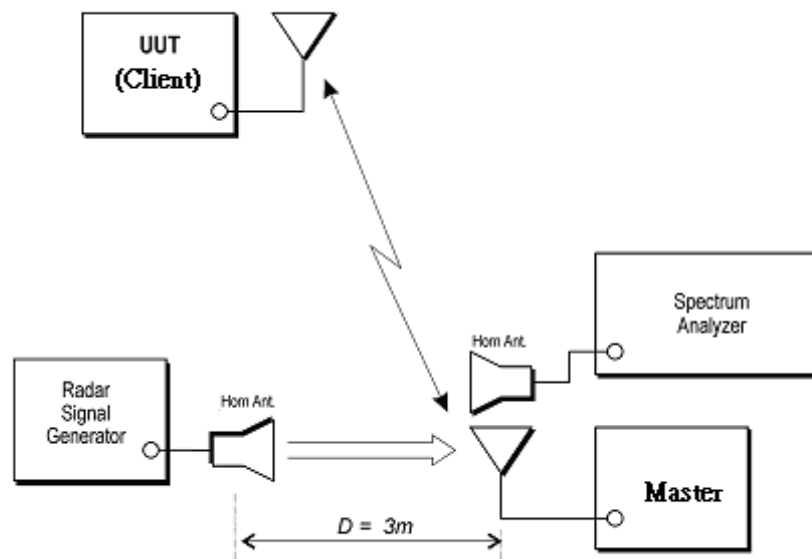

2.1. DFS Detection Thresholds

(1) Interference Threshold value, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

(2) DFS Response requirement values

Parameter	Value
Non-Occupancy Period	Minimum 30 Minutes
Channel Availability Check Time	60 Seconds
Channel Move Time	10 Seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period (See Notes 1 and 2)
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: *Channel Move Time* and the *Channel Closing Transmission Time* should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate a *Channel* move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

2.2. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

(1) Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

(2) Long Pulse Radar Test Signal

Radar Waveform	Bursts	Number of Pulses Per Burst	Pulse Width (usec)	Chirp Width (MHz)	PRI (usec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the long pulse radar test signal. If more than 30 waveforms are used for the long pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.


Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- 3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a transmission period will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

A representative example of a Long Pulse radar test waveform:

- 1) The total test signal length is 12 seconds.
- 2) 8 Bursts are randomly generated for the Burst_Count.
- 3) Burst 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) Bursts 2 through 8 are generated using steps 3 – 5.
- 7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

Graphical Representation of a Long Pulse radar Test Waveform

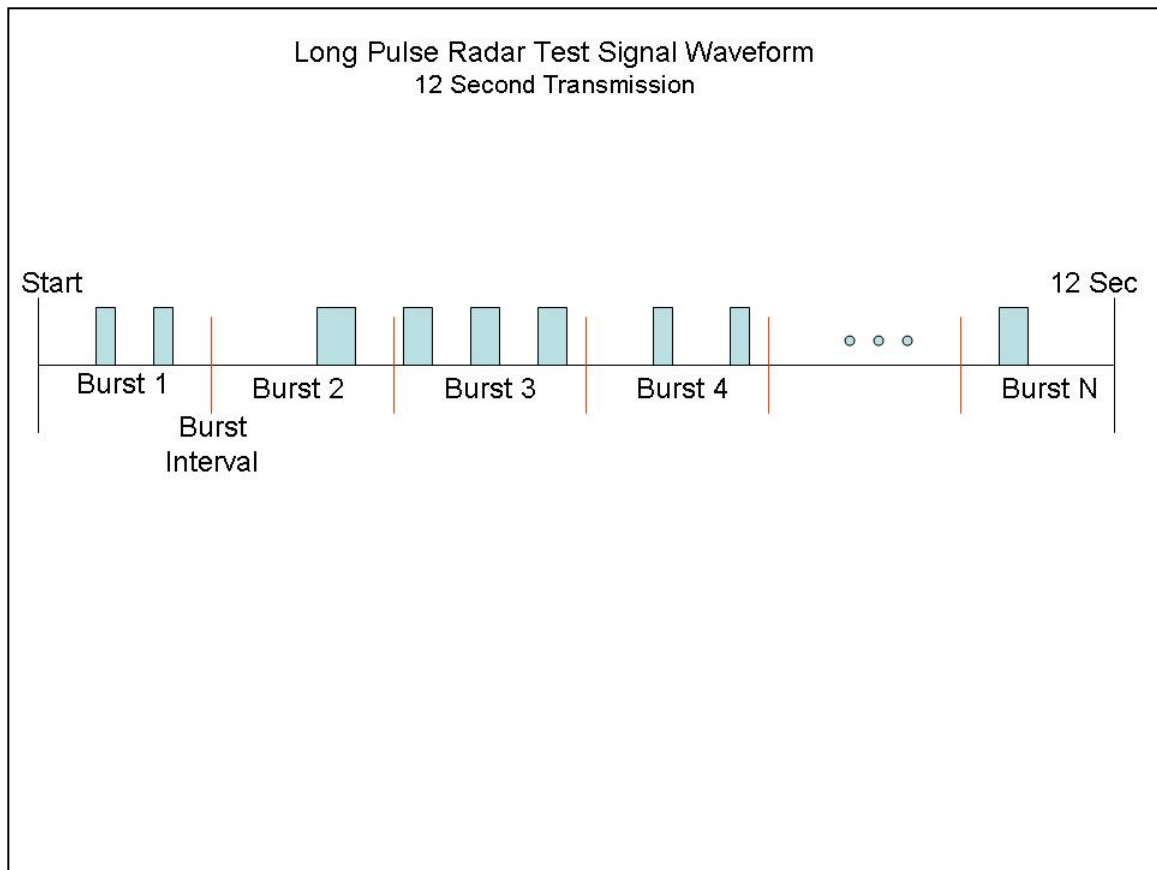

(3) Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Hopping Sequence Length (msec)	Pulses Per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

2.3. Radar Waveform Calibration


The following equipment setup was used to calibrate the conducted radar waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were replace 50ohm terminal from master and client device and no transmissions by either the master or client device. The spectrum analyzer was switched to the zero span (time domain) at the frequency of the radar waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3MHz and 3 MHz.

The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm due to the interference threshold level is not required.


Radiated Calibration Setup

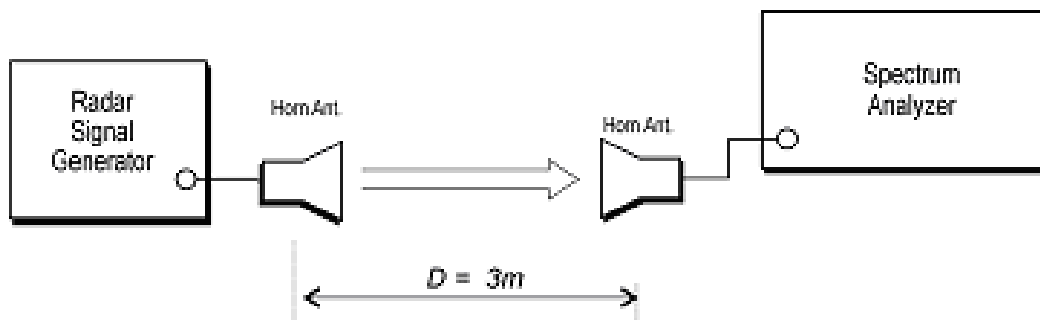

2.4. Radar Waveform Calibration Result

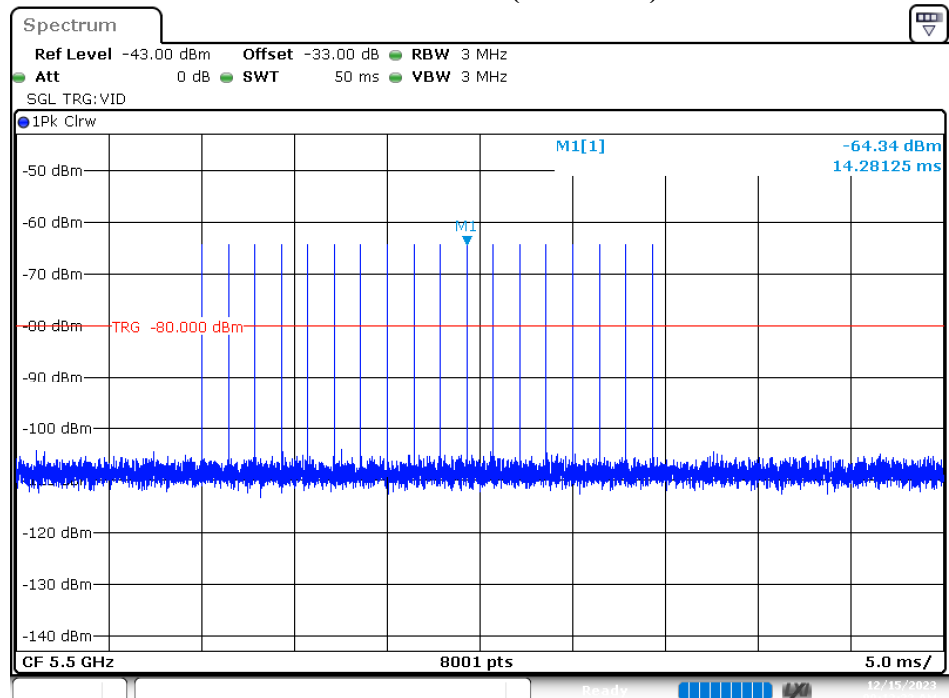
**Radar Type 0
Calibration Plot (5500 MHz)**

Date: 15.DEC.2023 09:13:23

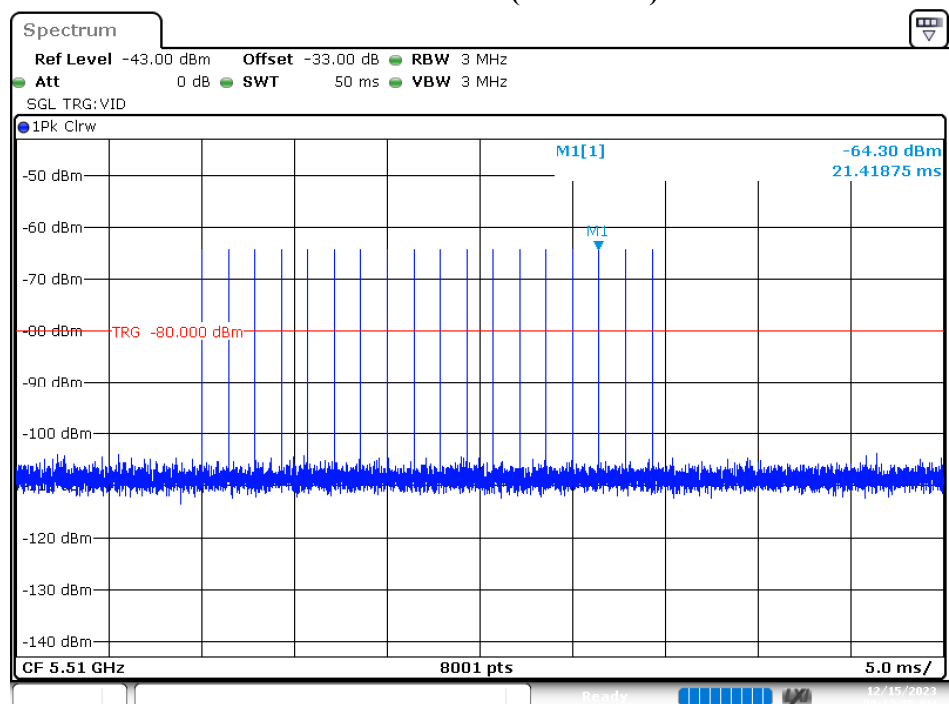Calibration Plot (5510 MHz)


Date: 15.DEC.2023 09:12:36

Calibration Plot (5530 MHz)

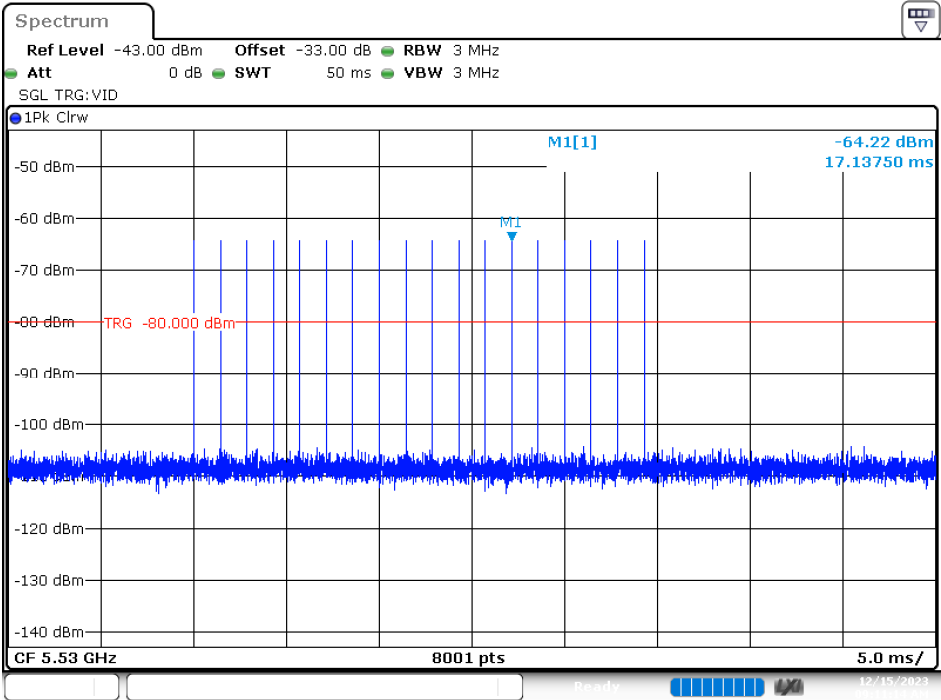


Date: 15.DEC.2023 09:11:15

Radar Type 1-A
Calibration Plot (5500 MHz)

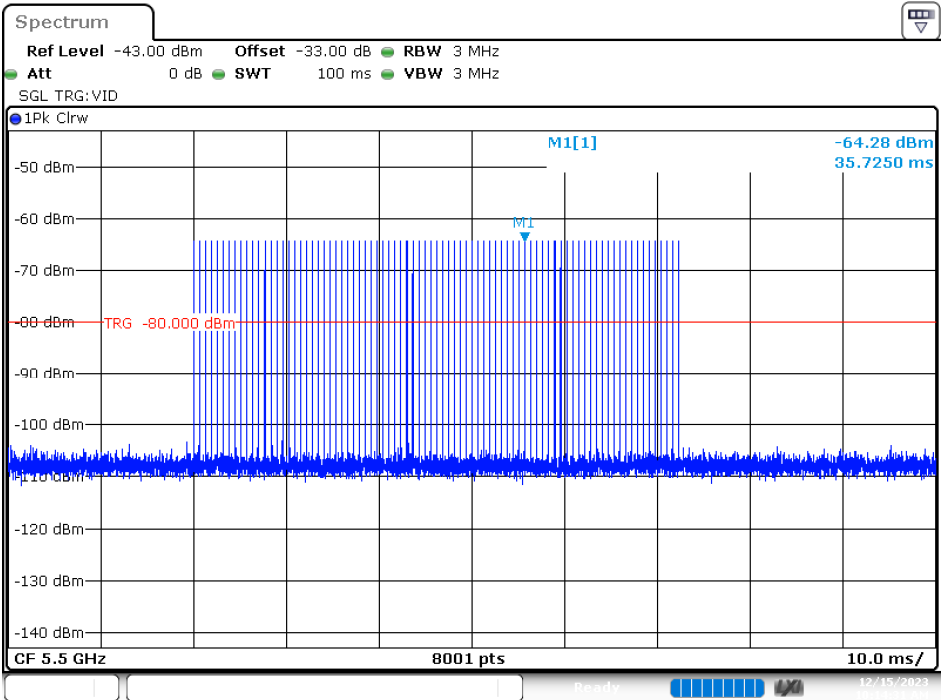


Date: 15.DEC.2023 10:14:31

Calibration Plot (5510 MHz)

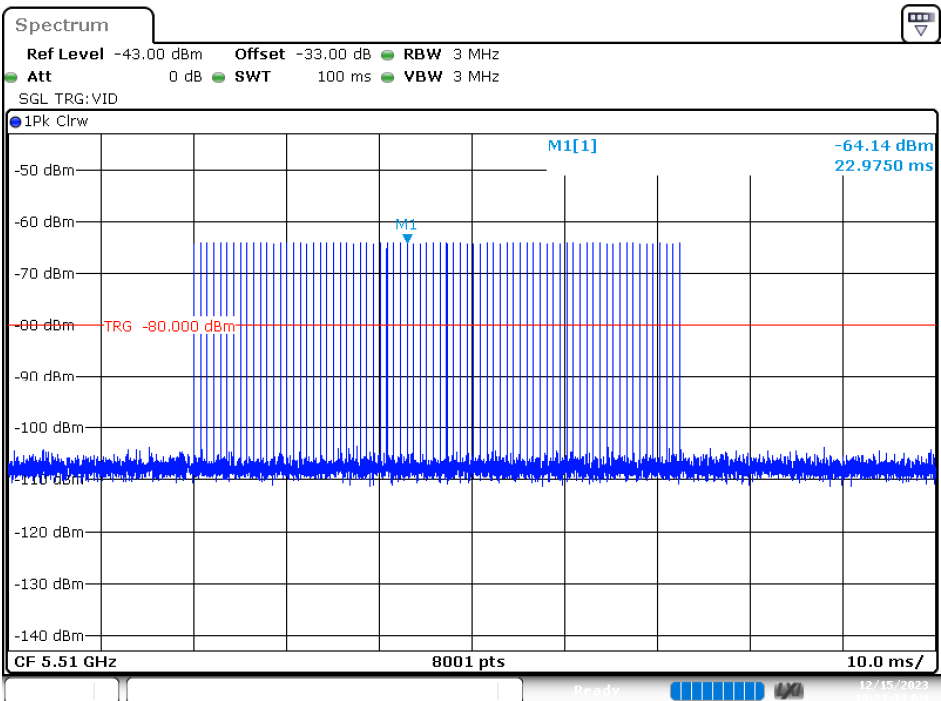

Date: 15.DEC.2023 10:21:35


Calibration Plot (5530 MHz)

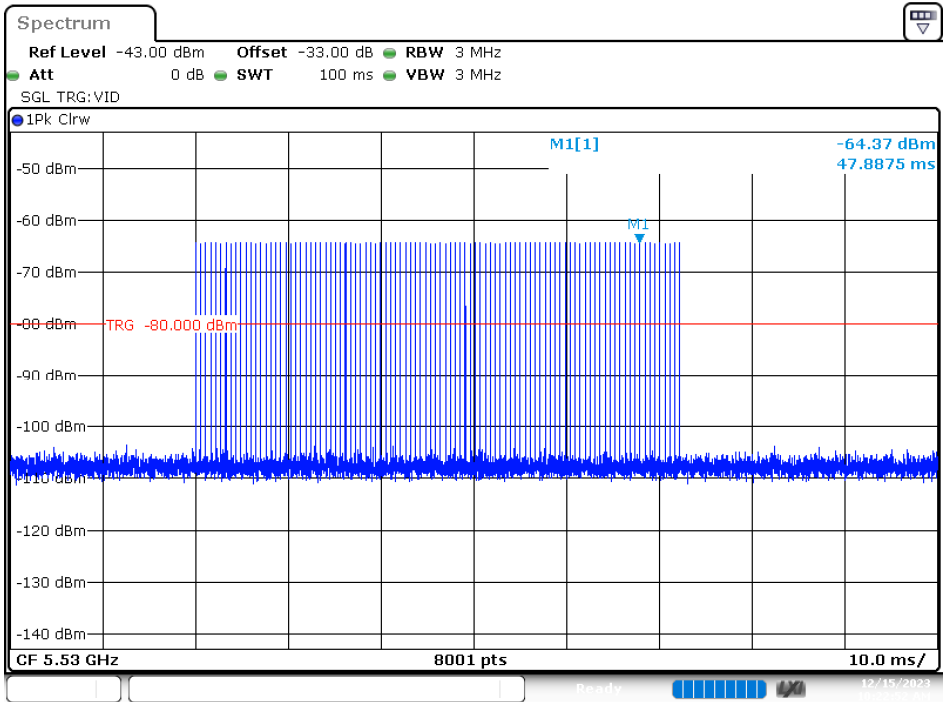

Date: 15.DEC.2023 10:22:52


Radar Type 1-B

Calibration Plot (5500 MHz)

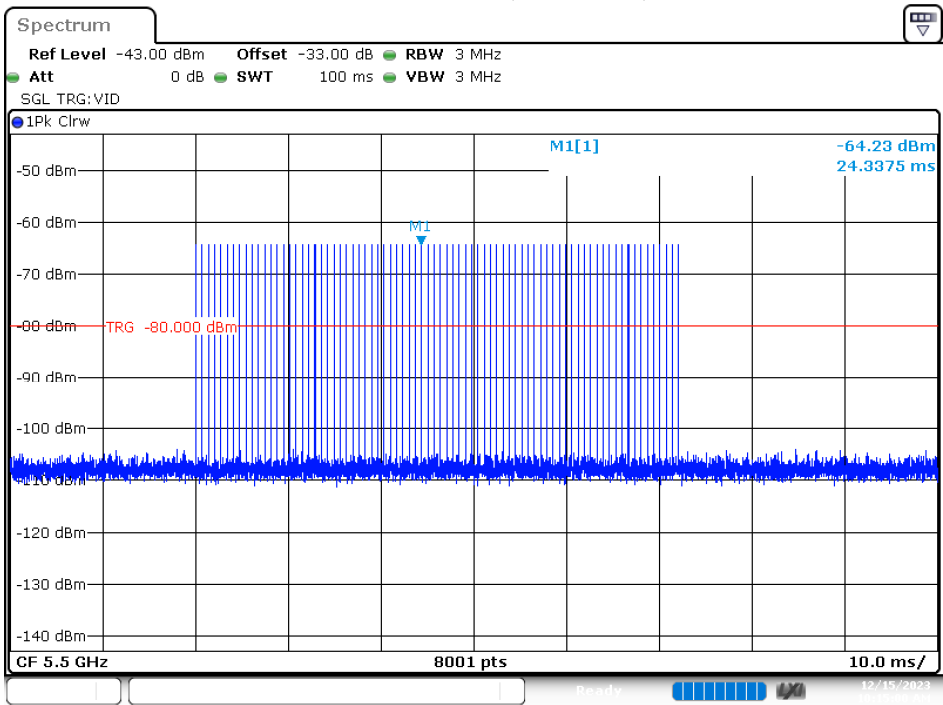


Date: 15.DEC.2023 10:15:01

Calibration Plot (5510 MHz)

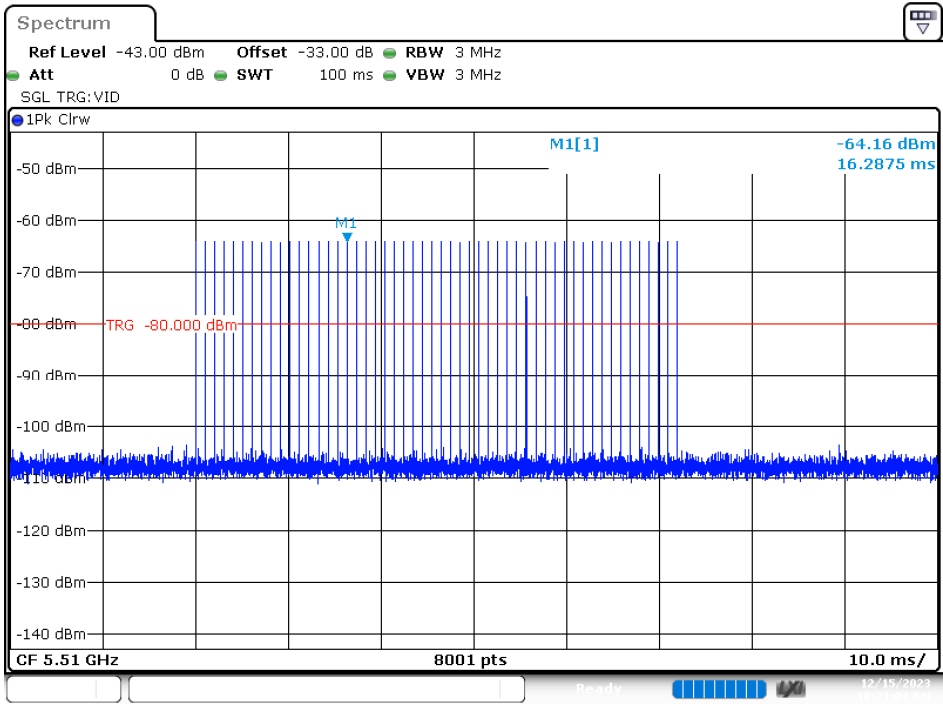


Date: 15.DEC.2023 10:21:05

Calibration Plot (5530 MHz)

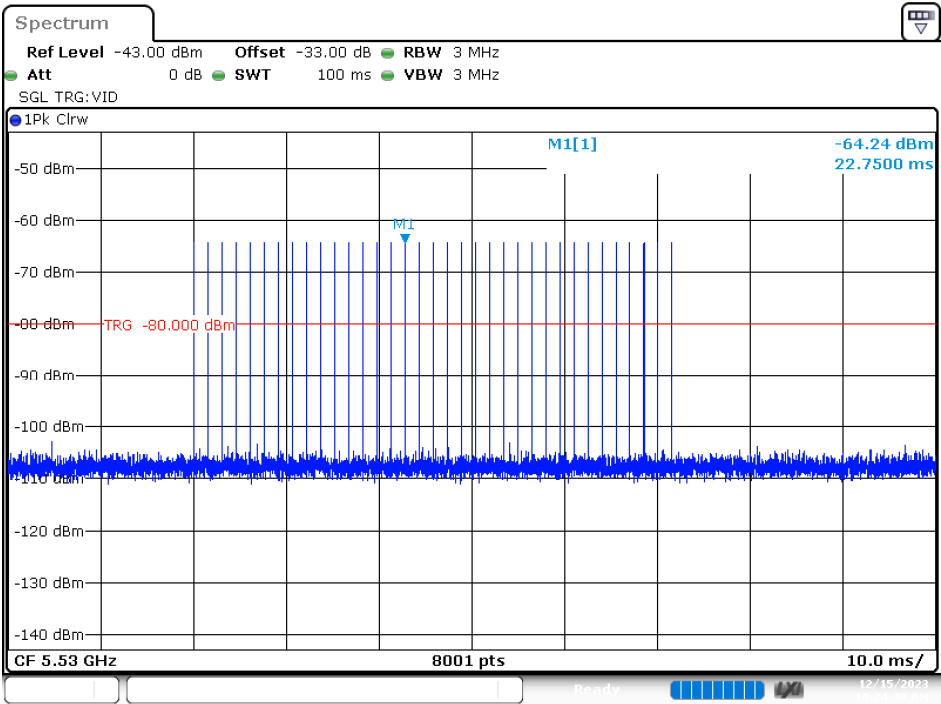


Date: 15.DEC.2023 10:24:41

Radar Type 2
Calibration Plot (5500 MHz)

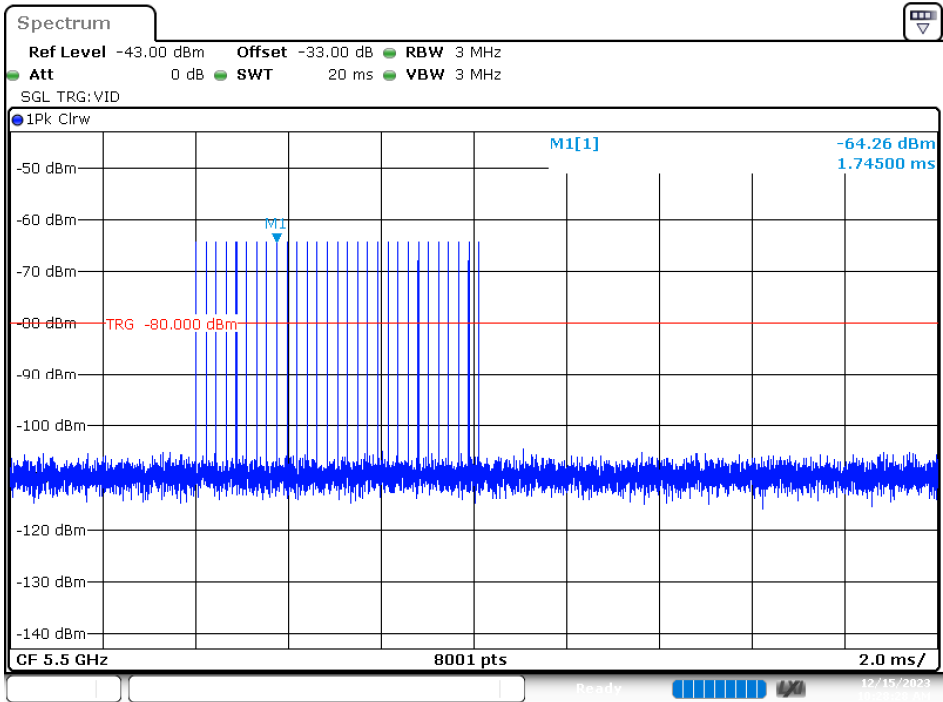


Date: 15.DEC.2023 10:28:29

Calibration Plot (5510 MHz)

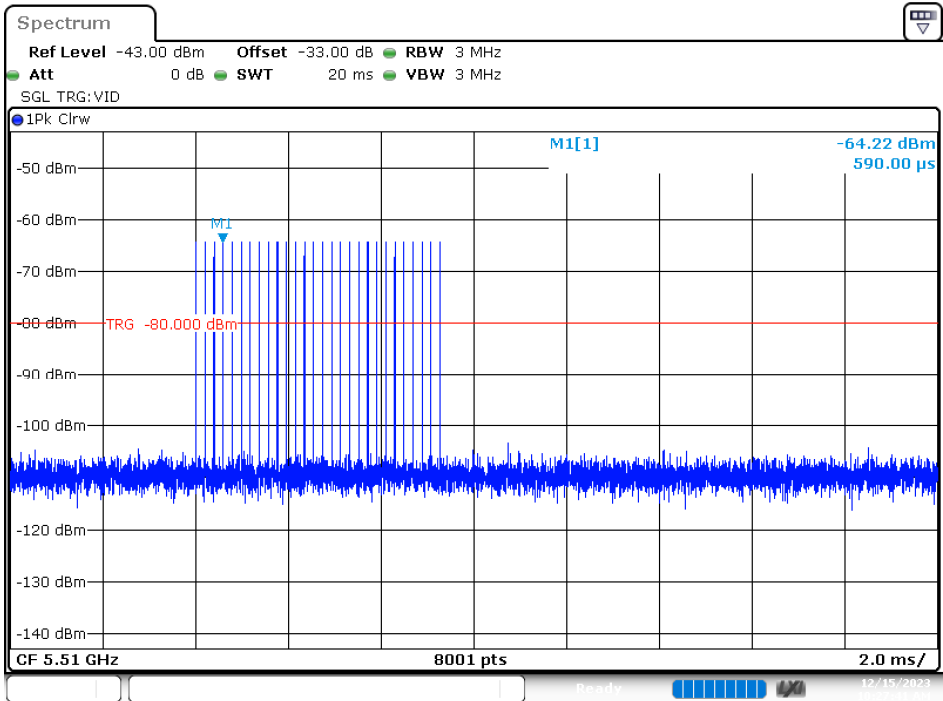


Date: 15.DEC.2023 10:27:42

Calibration Plot (5530 MHz)

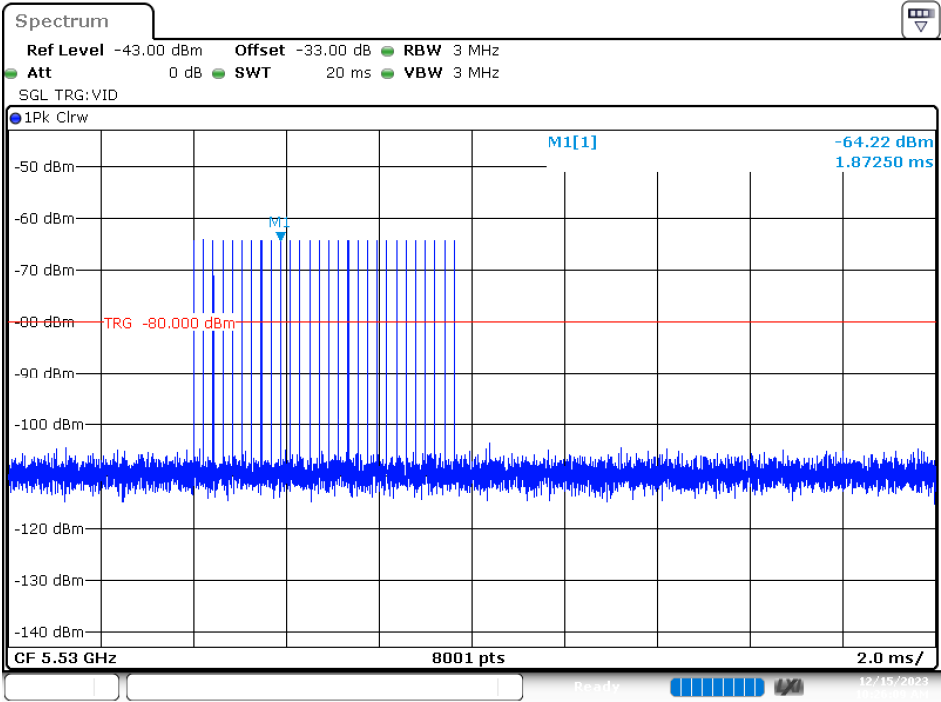


Date: 15.DEC.2023 10:26:09

Radar Type 3
Calibration Plot (5500 MHz)

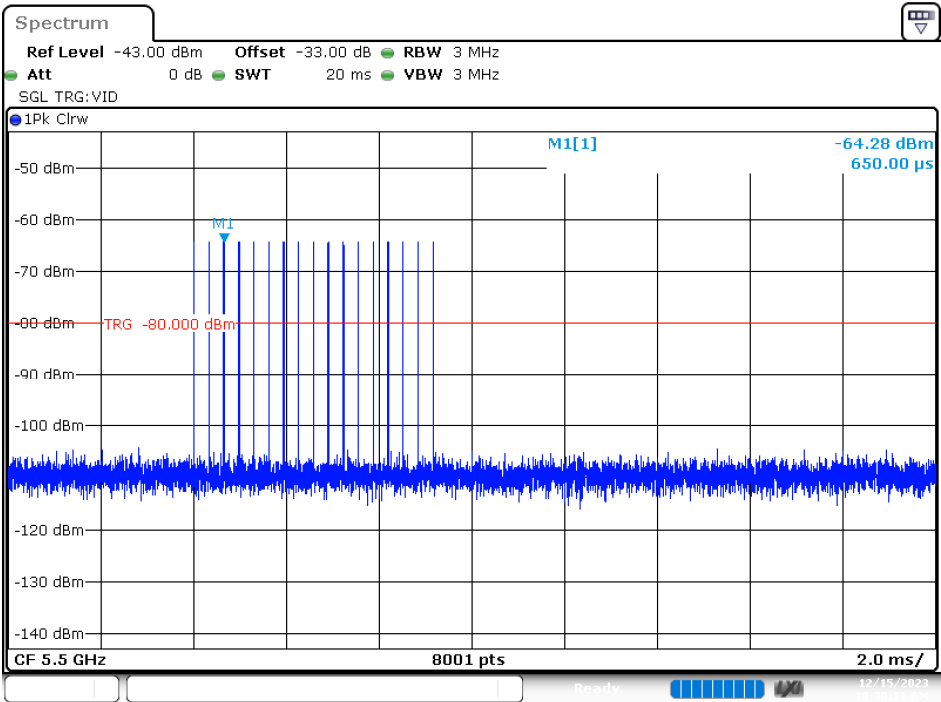


Date: 15.DEC.2023 10:30:11

Calibration Plot (5510 MHz)

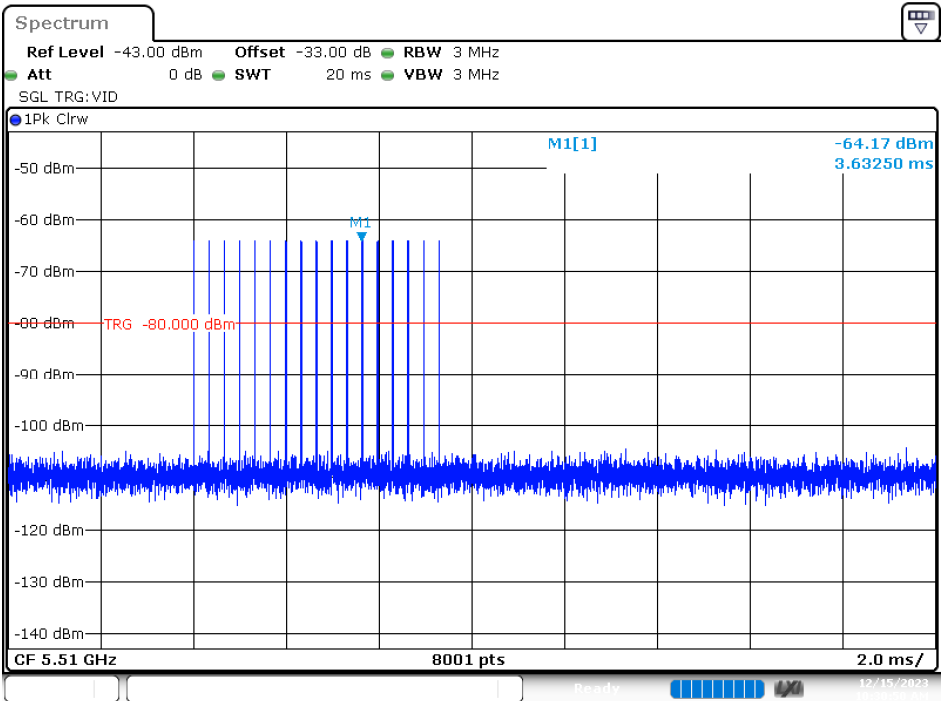


Date: 15.DEC.2023 10:30:51

Calibration Plot (5530 MHz)

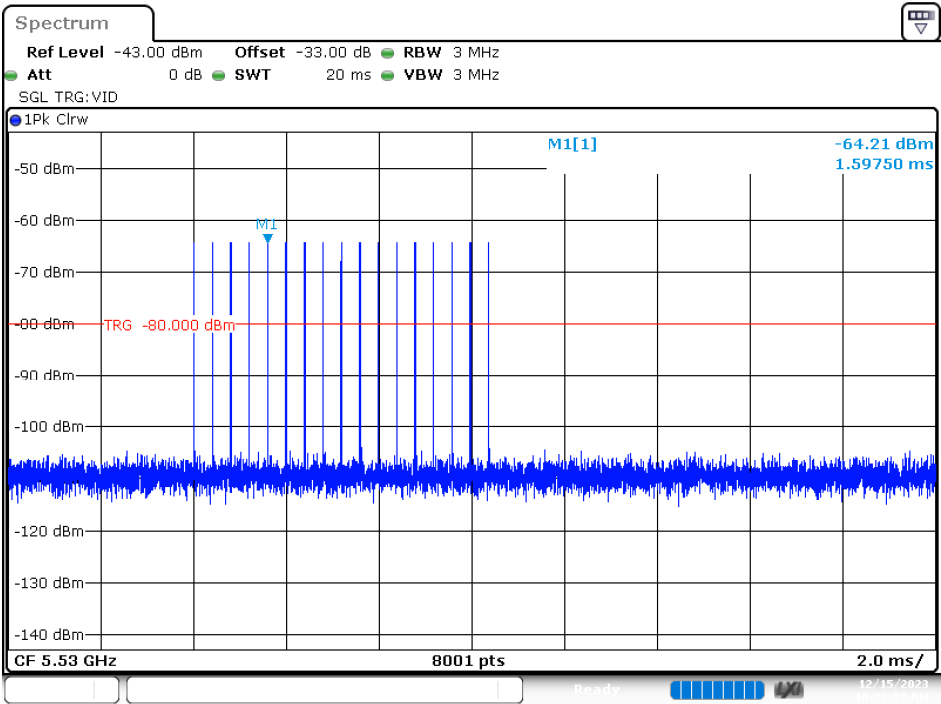


Date: 15.DEC.2023 10:31:28

Radar Type 4
Calibration Plot (5500 MHz)

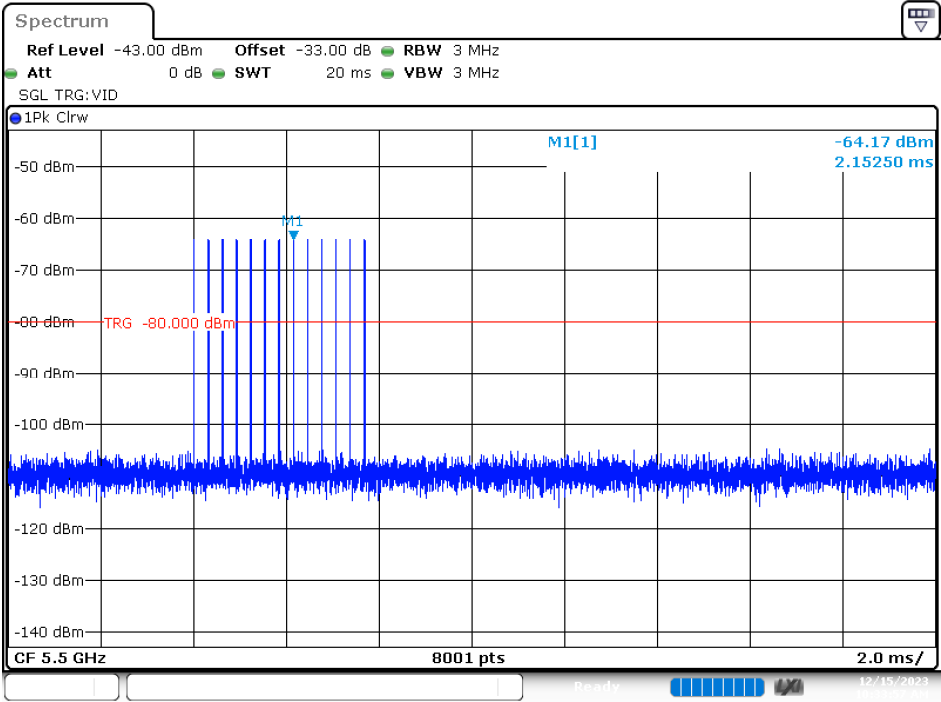


Date: 15.DEC.2023 10:33:58

Calibration Plot (5510 MHz)

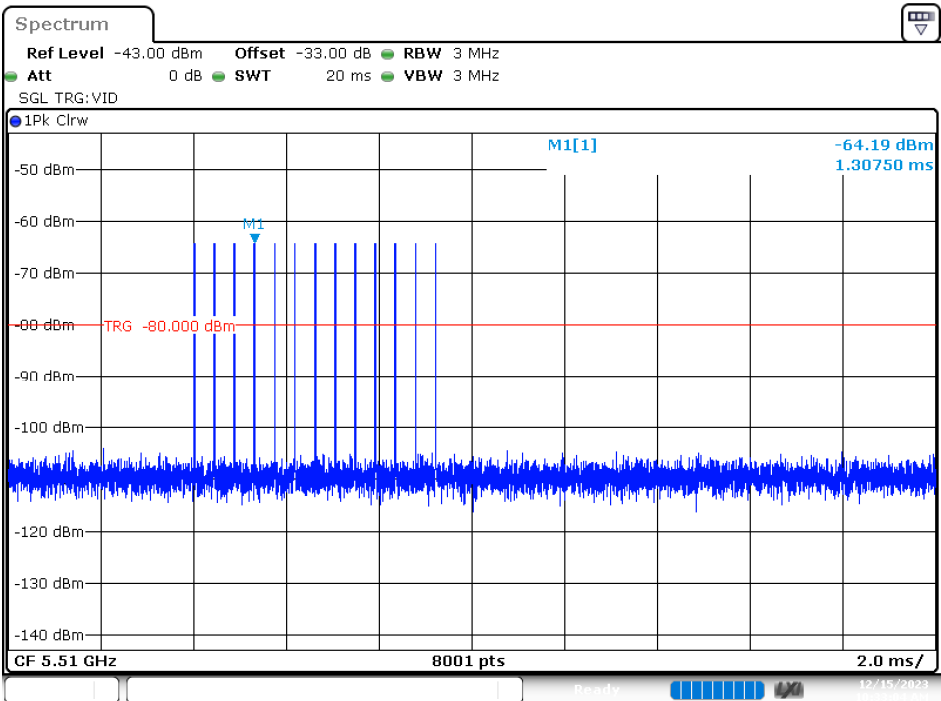


Date: 15.DEC.2023 10:33:05

Calibration Plot (5530 MHz)

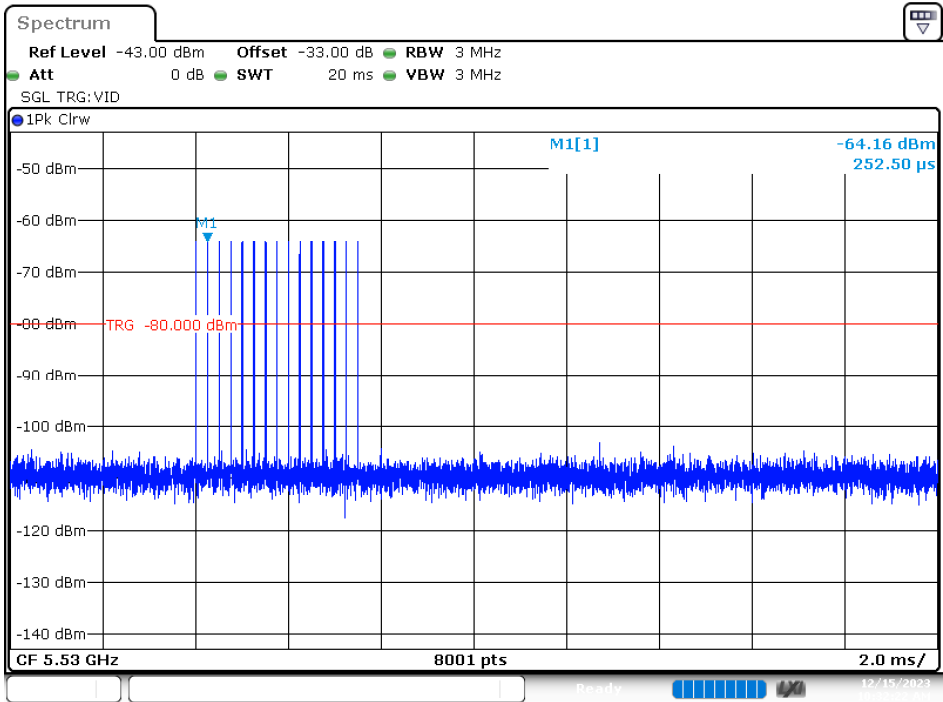


Date: 15.DEC.2023 10:32:23

Radar Type 5
Calibration Plot (5500 MHz)

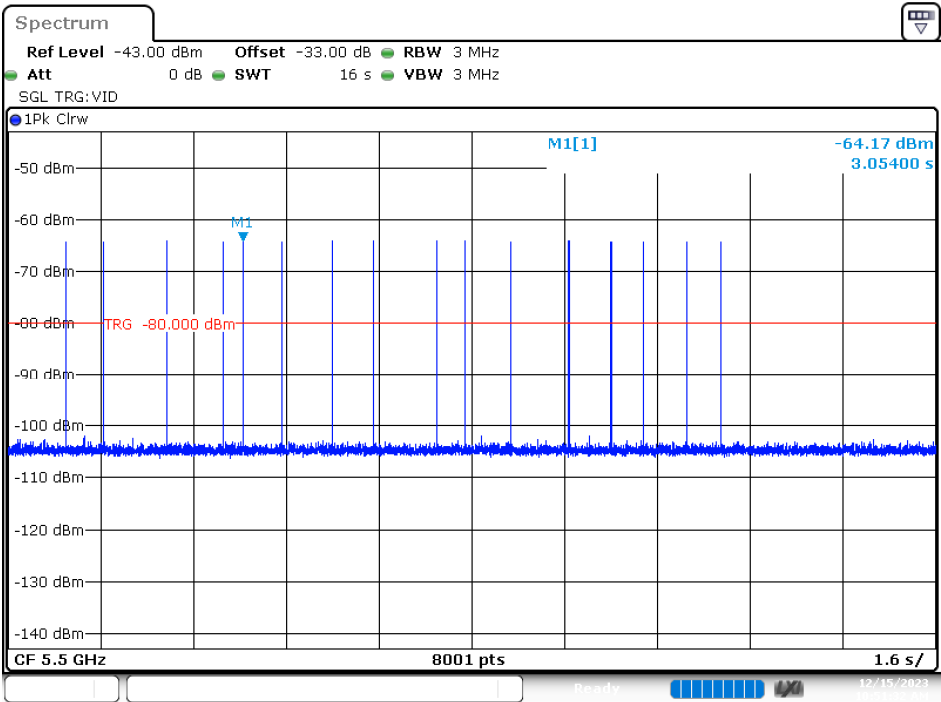


Date: 15.DEC.2023 10:51:32

Calibration Plot (5510 MHz)

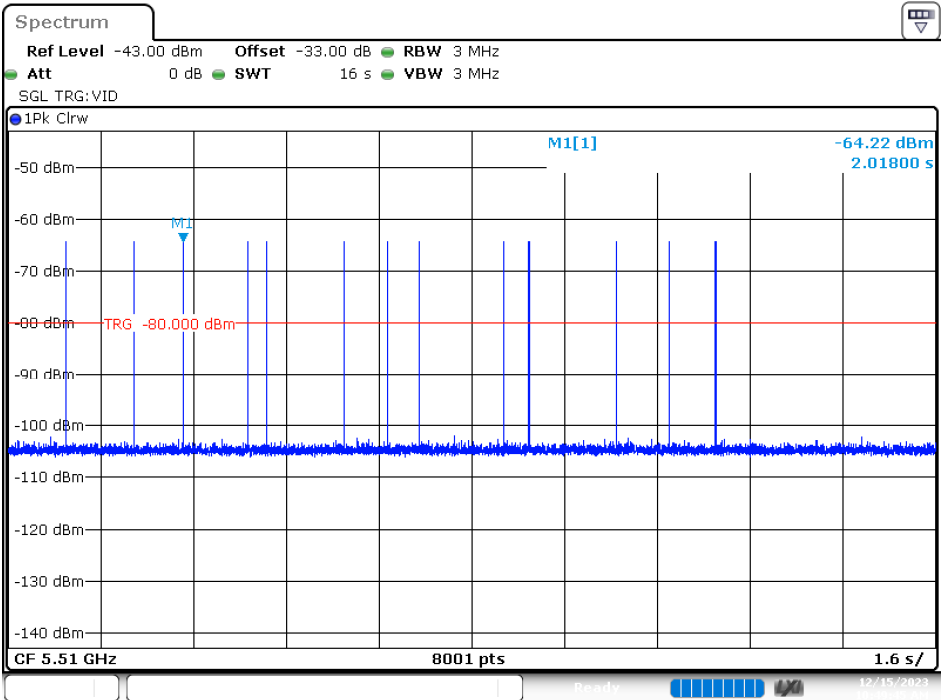


Date: 15.DEC.2023 10:49:45

Calibration Plot (5530 MHz)

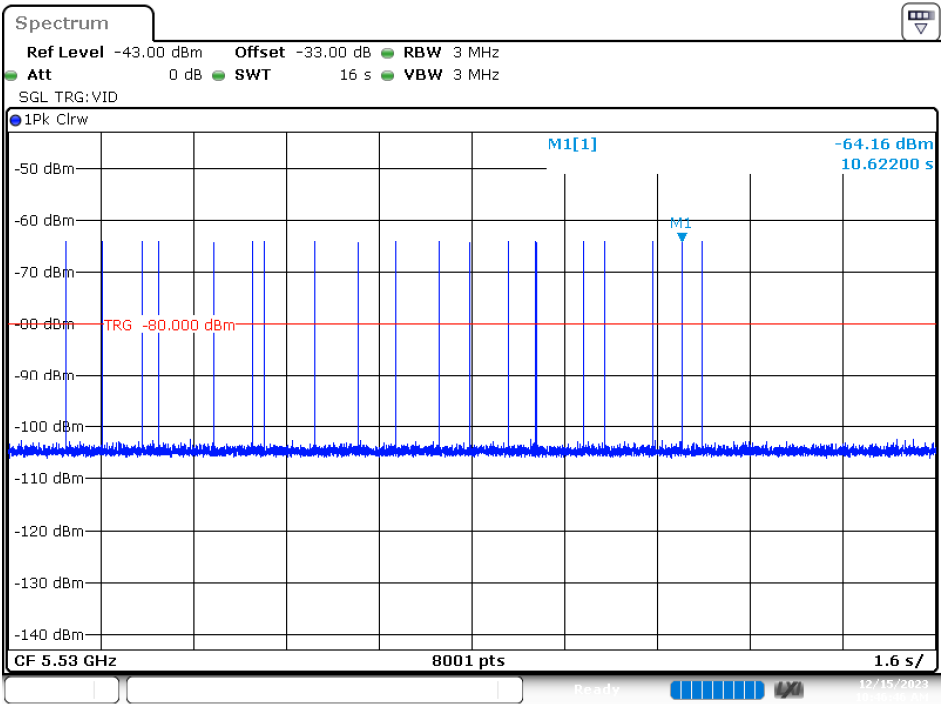


Date: 15.DEC.2023 10:46:46

Radar Type 6
Calibration Plot (5500 MHz)

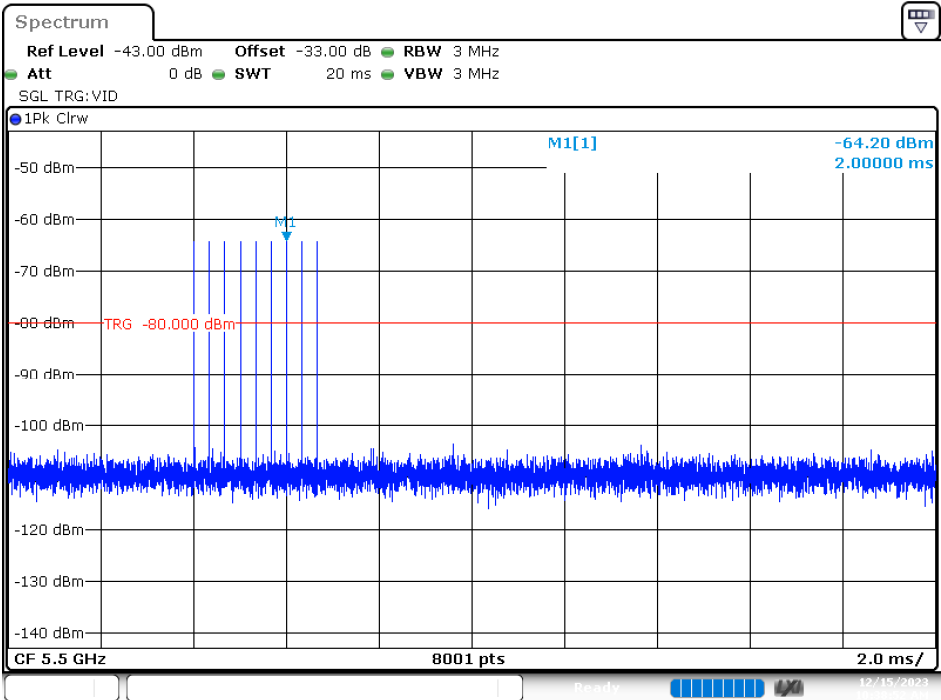


Date: 15.DEC.2023 10:38:53

Calibration Plot (5510 MHz)

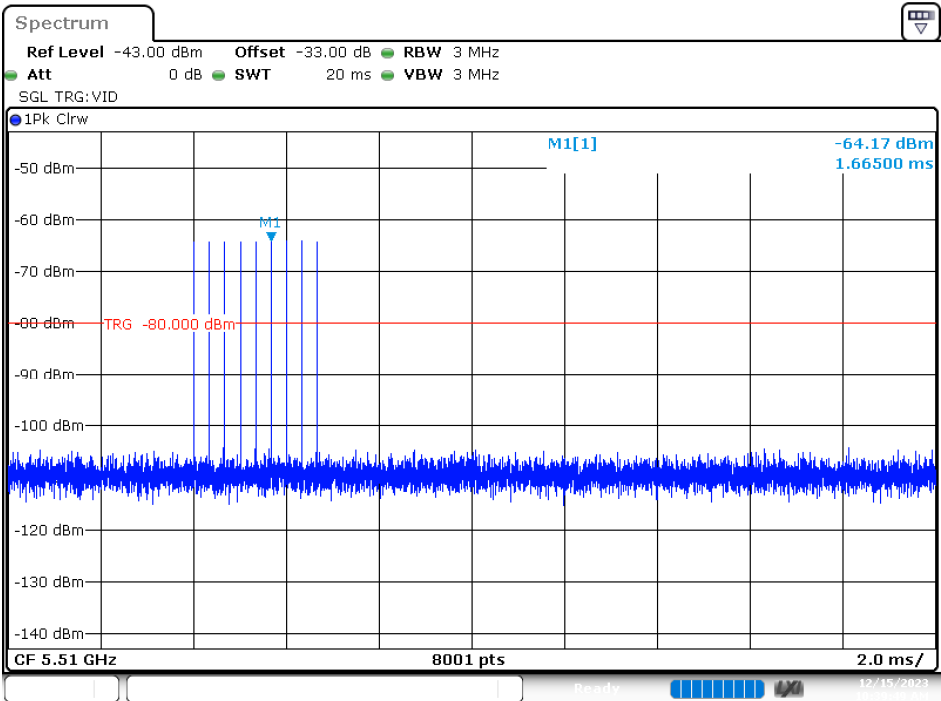

Date: 15.DEC.2023 10:39:50


Calibration Plot (5530 MHz)

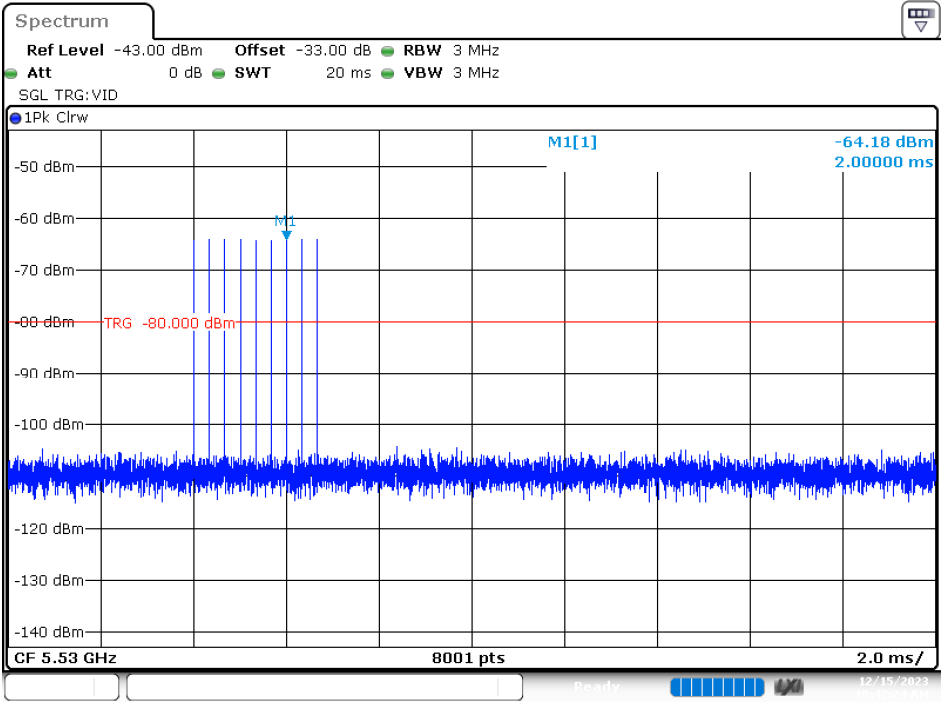

Date: 15.DEC.2023 10:42:25

2.5. Master Data Traffic Plot Result


Plot of WLAN Traffic at 5500 MHz

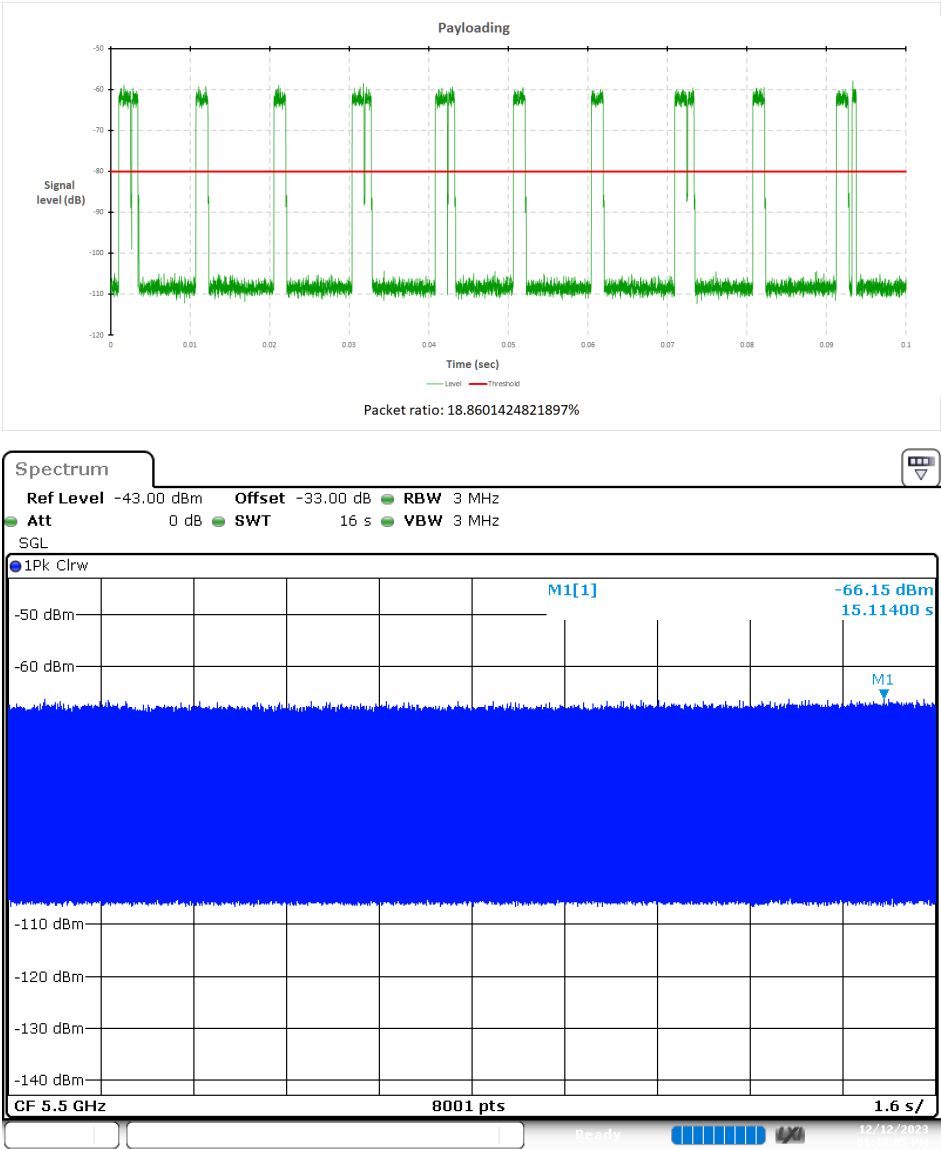

Date: 12.DEC.2023 13:49:05

Channel loading	Requirement loading
18.86 %	>17%



Plot of WLAN Traffic at 5510 MHz

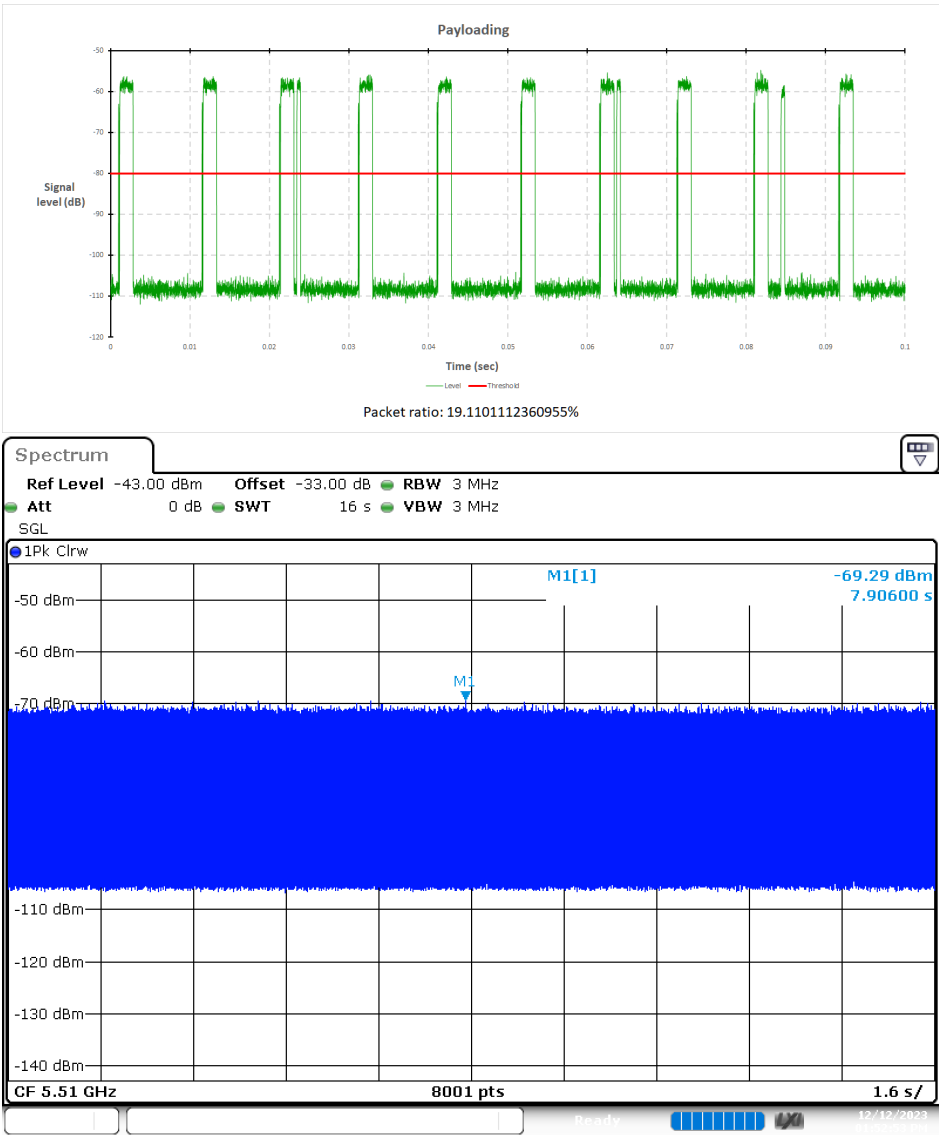

Date: 12.DEC.2023 13:52:53

Channel loading	Requirement loading
19.11 %	>17%

Plot of WLAN Traffic at 5530 MHz

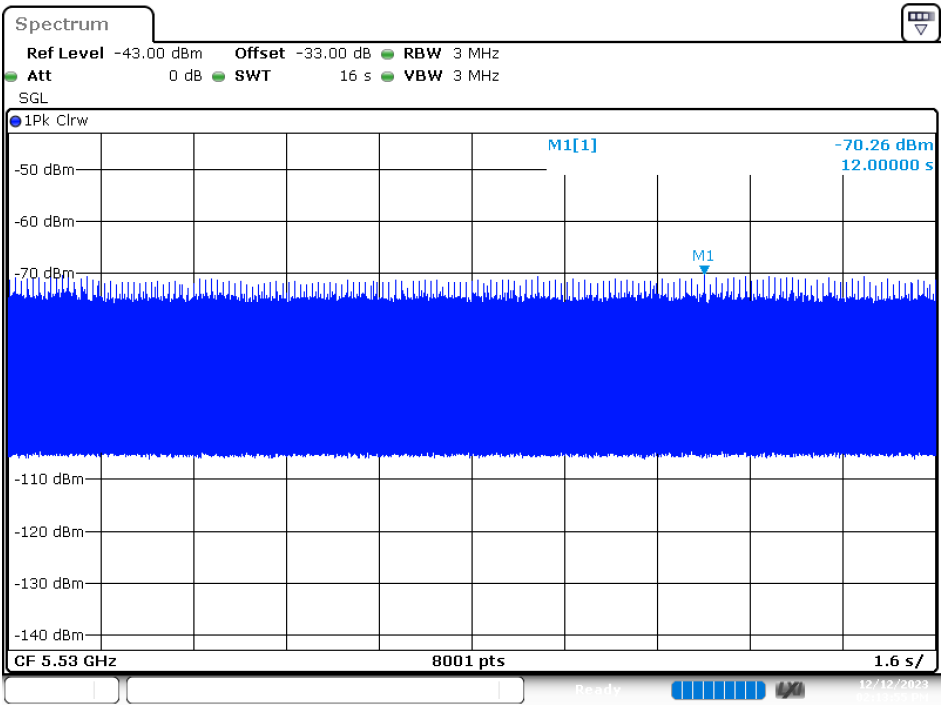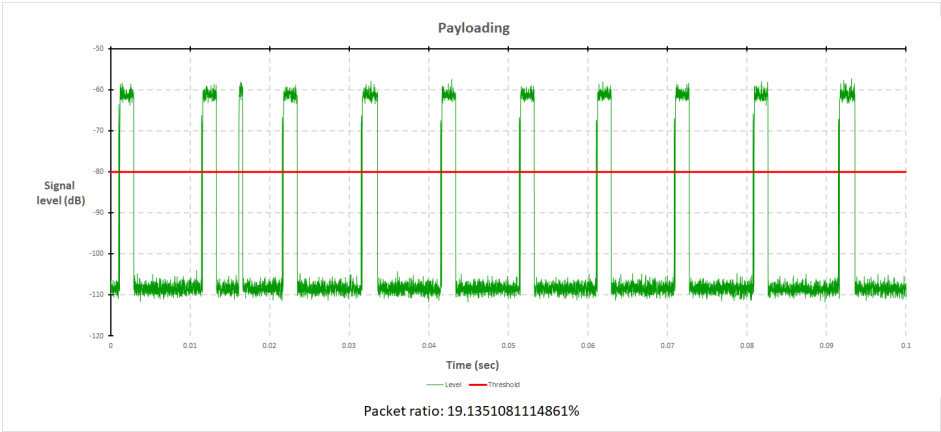

Date: 12.DEC.2023 14:13:55

Channel loading	Requirement loading
19.13 %	>17%

3. UNII Detection Bandwidth

3.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR15.407 requirements.

The generating equipment is configured as shown in the radiated Test Setup above. A single *Burst* of the short pulse radar type 0 is produced at 5300MHz and 5510 at a -63dBm level. The EUT is set up as a standalone device (no associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the EUT is noted.

The EUT must detect the Radar Waveform 90% or more of the time. The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as F_H .

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as F_L .

The U-NII Detection Bandwidth is calculated as follows:


$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

The U-NII Detection Bandwidth must be at least 100% of the EUT transmitter 99% power, otherwise, the EUT does not comply with DFS requirements.

3.2. Test Requirement


All UNII 20/40MHz and 80MHz channels for this device have identical Channel bandwidths. All UNII 20/40/80MHz channels for this device also have identical Channel bandwidths. Therefore, all DFS testing was done at 5300MHz, 5500MHz, 5510MHz and 5530MHz. The 99% channel bandwidth for 20MHz signals is 17.43 MHz, and the 99% channel bandwidth for 40MHz signals is 35.96 MHz and 80MHz signals is 75.12MHz. Uncertainty

802.11ac-20 MHz

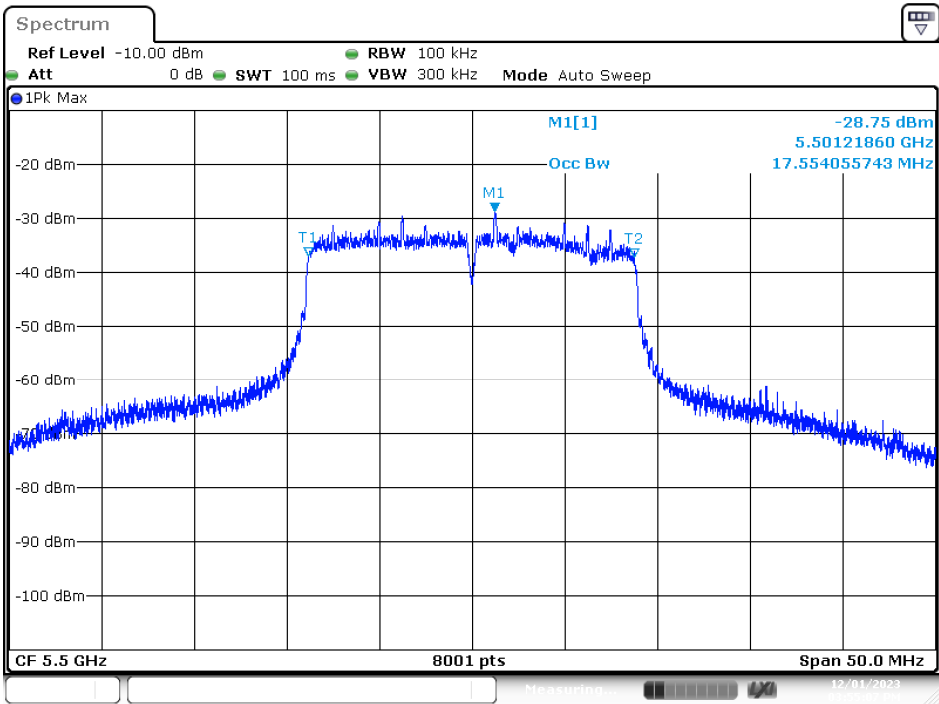


Date: 1.DEC.2023 15:55:07

802.11ac-40 MHz

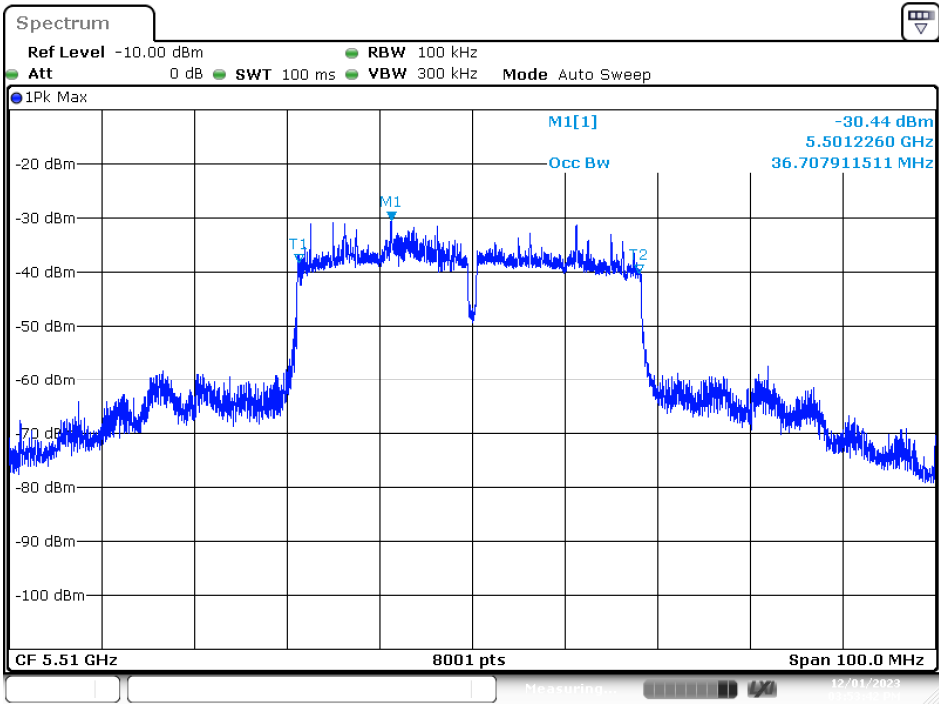

Date: 1.DEC.2023 15:53:42

802.11ac80 MHz

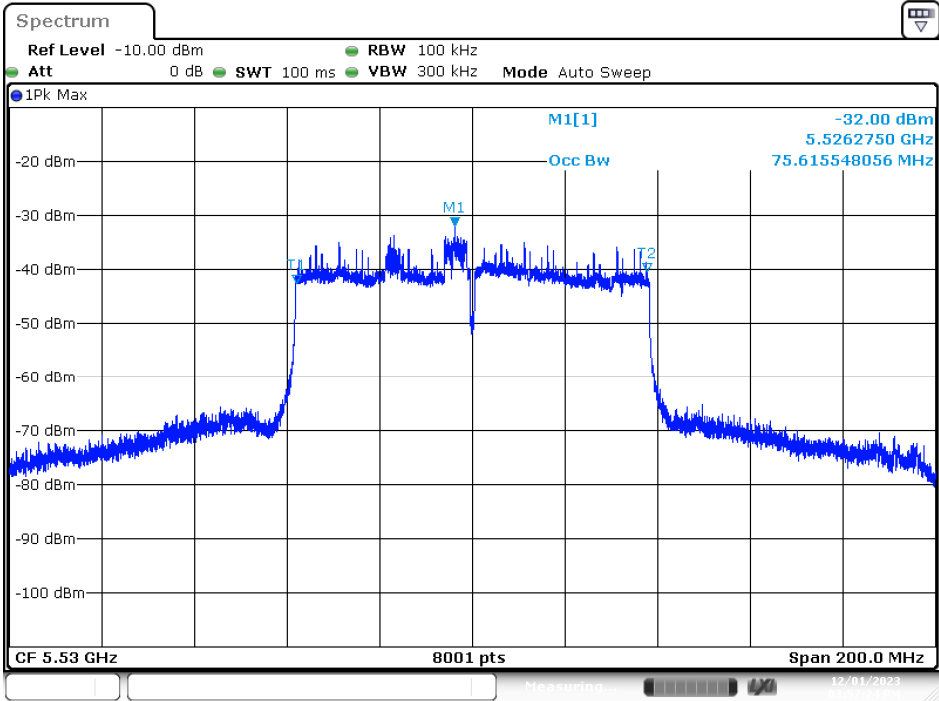

Date: 1.DEC.2023 15:52:24

3.3. Test Result of UNII Detection Bandwidth

Product : Wireless module
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Mode : Normal (802.11ac-20 MHz)
 Test Date : 2024/01/05

Test Channel: 5500 MHz											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	0	0	1	0	1	1	n	1	n	1	50.00
5491 (FL)	1	1	1	1	1	1	1	1	1	1	100.00
5492	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510 (FH)	1	1	1	1	0	1	1	1	1	1	90.00
Detection Bandwidth = FH - FL = 5510 MHz – 5491 MHz = 19 MHz											
EUT 99% Bandwidth = 17.5541 MHz											
UNII Detection Bandwidth Min. Limit = 17.5541 MHz X 100% = 17.5541 MHz											

Product : Wireless module
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Mode : Normal (802.11ac-40 MHz)
 Test Date : 2024/01/05

Test Channel: 5510 MHz											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	0	0	1	1	0	0	0	0	0	1	30.00
5491 (FL)	1	1	1	1	1	1	1	1	1	1	100.00
5492	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510	1	1	1	1	1	1	1	1	1	1	100.00
5511	1	1	1	1	1	1	1	1	1	1	100.00
5512	1	1	1	1	1	1	1	1	1	1	100.00
5513	1	1	1	1	1	1	1	1	1	1	100.00
5514	1	1	1	1	1	1	1	1	1	1	100.00
5515	1	1	1	1	1	1	1	1	1	1	100.00
5516	1	1	1	1	1	1	1	1	1	1	100.00

5517	1	1	1	1	1	1	1	1	1	1	100.00
5518	1	1	1	1	1	1	1	1	1	1	100.00
5519	1	1	1	1	1	1	1	1	1	1	100.00
5520	1	1	1	1	1	1	1	1	1	1	100.00
5521	1	1	1	1	1	1	1	1	1	1	100.00
5522	1	1	1	1	1	1	1	1	1	1	100.00
5523	1	1	1	1	1	1	1	1	1	1	100.00
5524	1	1	1	1	1	1	1	1	1	1	100.00
5525	1	1	1	1	1	1	1	1	1	1	100.00
5526	1	1	1	1	1	1	1	1	1	1	100.00
5527	1	1	1	1	1	1	1	1	1	1	100.00
5528	1	1	1	1	1	1	1	1	1	1	100.00
5529 (FH)	1	0	1	1	1	1	1	1	1	1	90.00
5530	0	0	0	0	0	0	0	0	0	0	0.00
Detection Bandwidth = FH - FL = 5529 MHz – 5491 MHz = 38 MHz											
EUT 99% Bandwidth = 36.7079 MHz											
UNII Detection Bandwidth Min. Limit = 36.7079 MHz X 100% = 36.7079 MHz											

Product : Wireless module
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Mode : Normal (802.11ac-80 MHz)
 Test Date : 2024/01/05

Test Channel: 5530 MHz											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	0	1	0	0	0	0	0	0	0	1	20.00
5491 (FL)	1	1	1	1	1	1	1	1	1	1	100.00
5492	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510	1	1	1	1	1	1	1	1	1	1	100.00
5511	1	1	1	1	1	1	1	1	1	1	100.00
5512	1	1	1	1	1	1	1	1	1	1	100.00
5513	1	1	1	1	1	1	1	1	1	1	100.00
5514	1	1	1	1	1	1	1	1	1	1	100.00
5515	1	1	1	1	1	1	1	1	1	1	100.00
5516	1	1	1	1	1	1	1	1	1	1	100.00

5517	1	1	1	1	1	1	1	1	1	1	100.00
5518	1	1	1	1	1	1	1	1	1	1	100.00
5519	1	1	1	1	1	1	1	1	1	1	100.00
5520	1	1	1	1	1	1	1	1	1	1	100.00
5521	1	1	1	1	1	1	1	1	1	1	100.00
5522	1	1	1	1	1	1	1	1	1	1	100.00
5523	1	1	1	1	1	1	1	1	1	1	100.00
5524	1	1	1	1	1	1	1	1	1	1	100.00
5525	1	1	1	1	1	1	1	1	1	1	100.00
5526	1	1	1	1	1	1	1	1	1	1	100.00
5527	1	1	1	1	1	1	1	1	1	1	100.00
5528	1	1	1	1	1	1	1	1	1	1	100.00
5529	1	1	1	1	1	1	1	1	1	1	100.00
5530	1	1	1	1	1	1	1	1	1	1	100.00
5531	1	1	1	1	1	1	1	1	1	1	100.00
5532	1	1	1	1	1	1	1	1	1	1	100.00
5533	1	1	1	1	1	1	1	1	1	1	100.00
5534	1	1	1	1	1	1	1	1	1	1	100.00
5535	1	1	1	1	1	1	1	1	1	1	100.00
5536	1	1	1	1	1	1	1	1	1	1	100.00
5537	1	1	1	1	1	1	1	1	1	1	100.00
5538	1	1	1	1	1	1	1	1	1	1	100.00
5539	1	1	1	1	1	1	1	1	1	1	100.00
5540	1	1	1	1	1	1	1	1	1	1	100.00
5541	1	1	1	1	1	1	1	1	1	1	100.00
5542	1	1	1	1	1	1	1	1	1	1	100.00
5543	1	1	1	1	1	1	1	1	1	1	100.00
5544	1	1	1	1	1	1	1	1	1	1	100.00
5545	1	1	1	1	1	1	1	1	1	1	100.00
5546	1	1	1	1	1	1	1	1	1	1	100.00
5547	1	1	1	1	1	1	1	1	1	1	100.00
5548	1	1	1	1	1	1	1	1	1	1	100.00
5549	1	1	1	1	1	1	1	1	1	1	100.00
5550	1	1	1	1	1	1	1	1	1	1	100.00
5551	1	1	1	1	1	1	1	1	1	1	100.00
5552	1	1	1	1	1	1	1	1	1	1	100.00
5553	1	1	1	1	1	1	1	1	1	1	100.00

5554	1	1	1	1	1	1	1	1	1	1	100.00
5555	1	1	1	1	1	1	1	1	1	1	100.00
5556	1	1	1	1	1	1	1	1	1	1	100.00
5557	1	1	1	1	1	1	1	1	1	1	100.00
5558	1	1	1	1	1	1	1	1	1	1	100.00
5559	1	1	1	1	1	1	1	1	1	1	100.00
5560	1	1	1	1	1	1	1	1	1	1	100.00
5561	1	1	1	1	1	1	1	1	1	1	100.00
5562	1	1	1	1	1	1	1	1	1	1	100.00
5563	1	1	1	1	1	1	1	1	1	1	100.00
5564	1	1	1	1	1	1	1	1	1	1	100.00
5565	1	1	1	1	1	1	1	1	1	1	100.00
5566	1	1	1	1	1	1	1	1	1	1	100.00
5567	1	1	1	1	1	1	1	1	1	1	100.00
5568 (FH)	1	1	1	1	1	1	1	1	1	1	100.00
5569	1	1	0	1	1	1	1	1	0	1	80.00
5570	1	0	0	1	0	1	0	0	1	0	40.00
Detection Bandwidth = FH - FL = 5568 MHz – 5491 MHz = 77 MHz											
EUT 99% Bandwidth = 75.6155 MHz											
UNII Detection Bandwidth Min. Limit = 75.6155 MHz X 100% = 75.6155 MHz											

4. Initial Channel Availability Check Time

4.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The U-NII device is powered on and instructed to operate at 5530MHz. At the same time the UUT is powered on, the spectrum analyzer is set to zero span mode with a 3 MHz resolution bandwidth at 5530MHz with a 2.5minute sweep time. The analyzer's sweep will be started the same time power is applied to the U-NII device.

The EUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.

The initial power up time of the EUT is indicated by marker1 in the plot, Initial beacons/data transmissions are indicated by marker 1R.


4.2. Test Requirement

The EUT shall perform a channel availability check to ensure that there is no radar operation on the channel, after power-up sequence, receiver at least 1 minute on the intended operation frequency.

4.3. Test Result of Initial Channel Availability Check Time

Product : Wireless module
Test Item : Initial Channel Availability Check Time
Radar Type : Type 0
Test Mode : Normal (802.11ac-80 MHz)

The EUT does not transmit any beacon or data transmission until at least 1 minute after the completion of the power-on cycle (55.09sec). The initial power up time of the EUT is indicated by Marker 1 (115.09 sec) – CAC (60 sec). Initial beacons/data transmission is indicated by Marker 1 (115.09 sec)

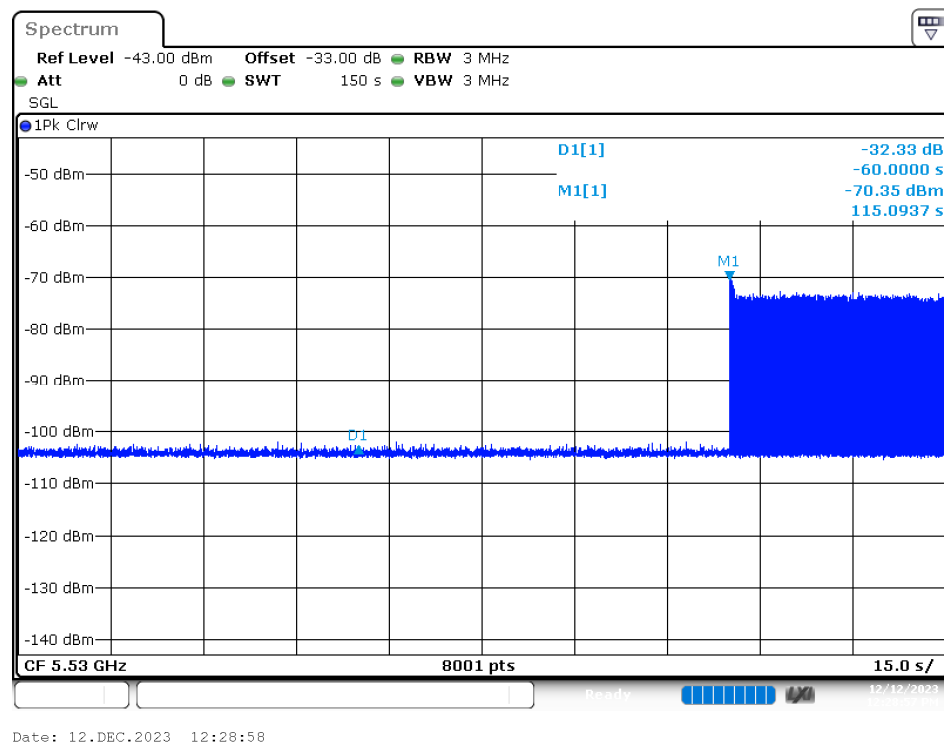

5. Radar Burst at the Beginning of the Channel Availability Check Time

5.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-62dBm) occurs at the beginning of the Channel Availability Check Time.

The EUT is powered on at T0. T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds.

A single Burst of short pulse of radar type 1 at -63dBm will commence within a 6 second window starting at T1.


Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5530MHz will continue for 2.5 minutes after the radar Burst, Verify that during the 2.5 minute measurement window no EUT transmissions occurred at 5530MHz.

5.2. Test Requirement

In beginning of the Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC that channel.

5.3. Test Result of Radar Burst at the Beginning of the Channel Availability Check Time

Product : Wireless module
Test Item : Radar Burst at the Beginning of the Channel Availability Check Time
Radar Type : Type 0
Test Mode : Normal (802.11ac-80 MHz)

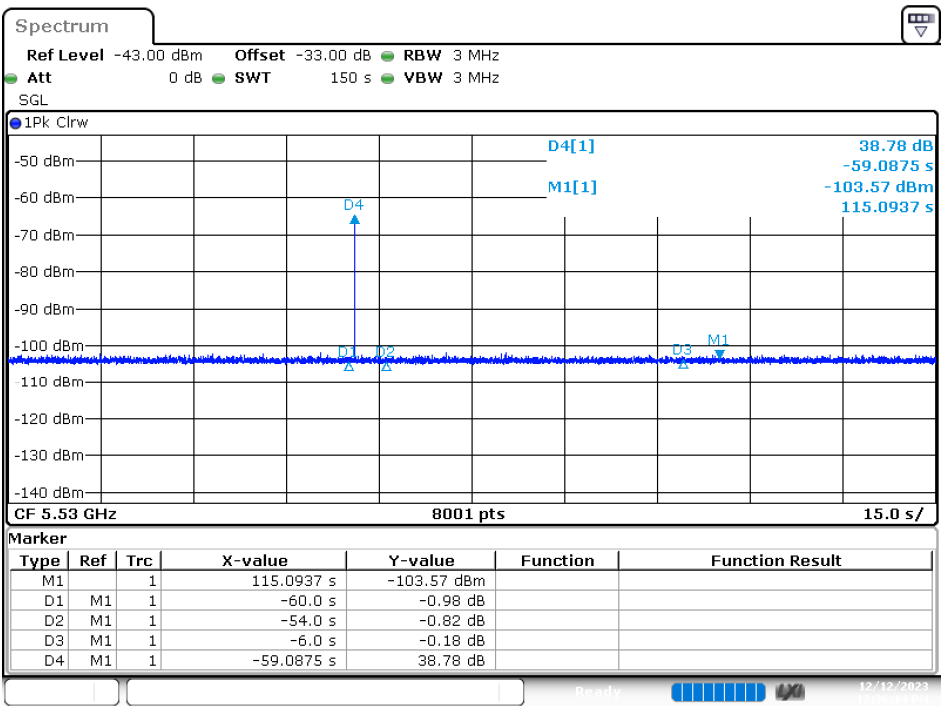

Date: 12.DEC.2023 12:36:15

6. Radar Burst at the End of the Channel Availability Check Time

6.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-62dBm) occurs at the end of the Channel Availability Check Time.

The UUT is powered on at T0. T1 denotes the instant when the UUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds. A single Burst of short pulse of radar type 1 at -61 dBm will commence within a 6 second window starting at T1+ 54 seconds.

Visual indication on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5530MHz will continue for 2.5 minutes after the radar Burst has been generated.


Verify that during the 2.5 minute measurement window no UUT transmissions occurred at 5530Hz.

6.2. Test Requirement

In the end of Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC that channel.

6.3. Test Result of Radar Burst at the End of the Channel Availability Check Time

Product : Wireless module
Test Item : Radar Burst at the End of the Channel Availability Check Time
Radar Type : Type 0
Test Mode : Normal (802.11ac-80 MHz)

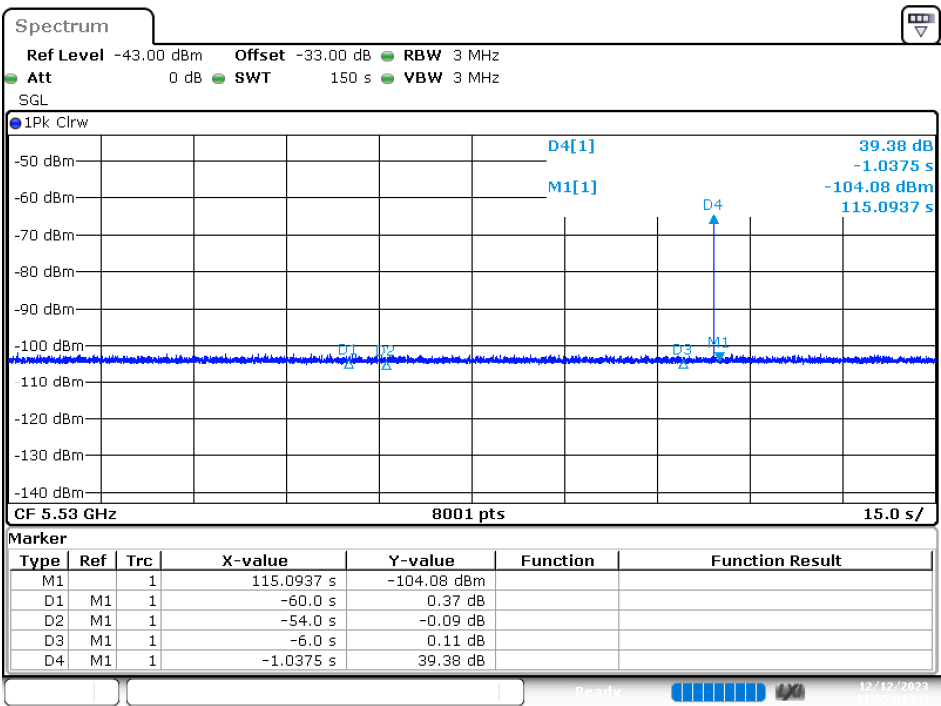

Date: 12.DEC.2023 13:05:00

7. In-Service Monitoring for Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period

7.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

These tests define how the following DFS parameters are verified during In-Service Monitoring;

Channel Closing Transmission Time, Channel Move Time, and Non-Occupancy Period.. The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5530MHz..

Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at -61dBm.

Observe the transmissions of the UUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing

Transmission Time results to the limits defined in the DFS Response requirement values table.

Measure the UUT for more than 30 minutes following the channel close/move time to verify that the UUT does not resume any transmissions on this Channel.


7.2. Test Requirement

Parameter	Value
Channel Move Time	10 Seconds
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period
Non-Occupancy Period	Minimum 30 minutes

7.3. Test Result of Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period

Product : Wireless module
 Test Item : Channel Move Time and Channel Closing Transmission Time
 Radar Type : Type 0
 Test Mode : Normal (802.11ac-80 MHz)

Channel Closing Transmission Time and Channel Move Time for Radar Test Type 0 at 5570 MHz

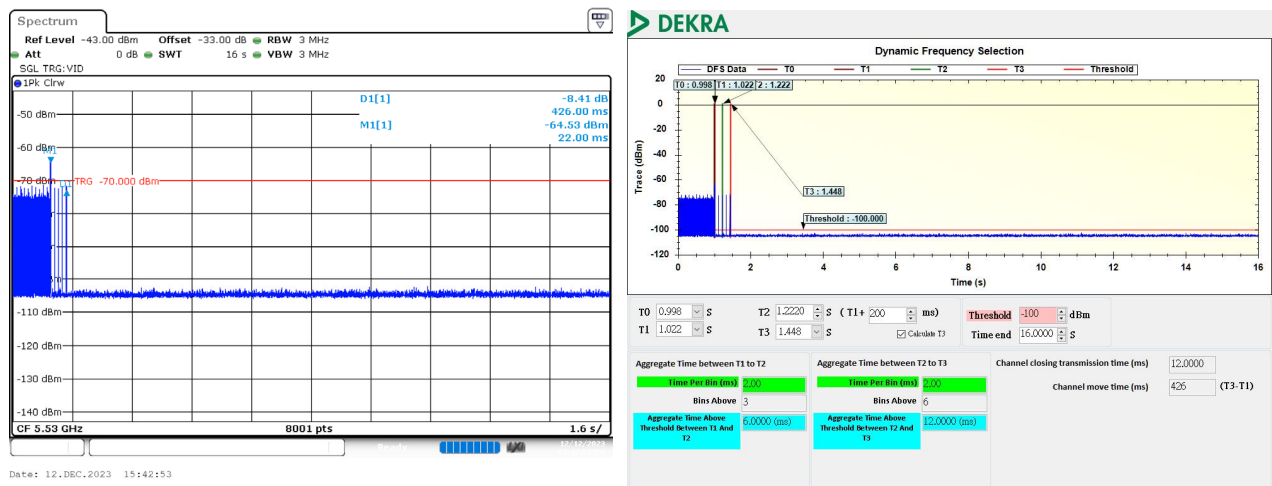


Test Item	Test Result (ms)	Limit
Channel Closing Transmission Time	12	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period
Channel Move Time	426	10 seconds

Note:

- 1.The results showed that after radar signal injected the channel transmission closing time less than 200 milliseconds and an aggregate of no more than 60 milliseconds.
- 2.The results showed that after radar signal injected the channel move time was less than 10 seconds.

Product : Wireless module
 Test Item : Non-Occupancy Period
 Radar Type : Type 0
 Test Mode : Normal (802.11ac-80 MHz)

Non-Occupancy Period at 5570 MHz

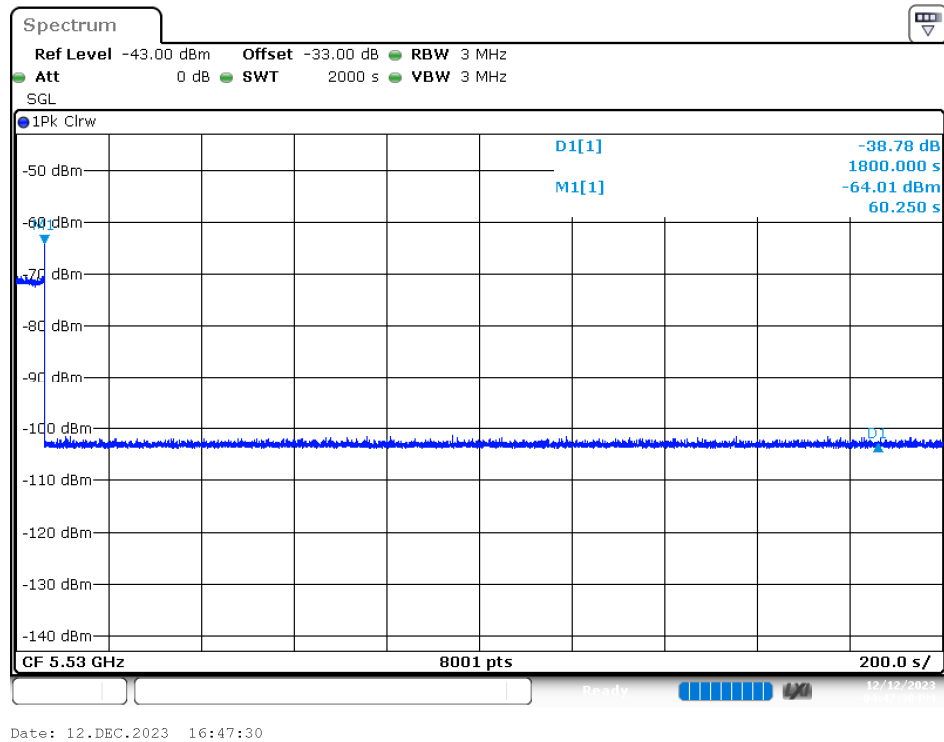

Test Item	Test Result (Minutes)	Limit (Minutes)
Non-Occupancy Period	>30	>30

*No EUT transmissions were observed on the test channel during 30 minutes observation time.

8. Statistical Performance Check

8.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the

Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5500MHz, 5510MHz and 5530MHz.

Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6 at

-62dbm. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs.

8.2. Test Requirement

The minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Minimum percentage of successful detections

Radar Type	Minimum Percentage of Successful Detection	Minimum Number of Trials
1	60%	30
2	60%	30
3	60%	30
4	60%	30
Aggregate (Radar Types 1-4)	80%	120
5	80%	30
6	70%	30

The percentage of successful detection is calculated by:

$$\frac{\text{TotalWaveformDetections}}{\text{TotalWaveformTrials}} \times 100 = \text{Probability of Detection Radar Waveform}$$

In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows:

$$\frac{P_d 1 + P_d 2 + P_d 3 + P_d 4}{4}$$

8.3. Test Result of Statistical Performance Check

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Mode : Normal (802.11ac-20 MHz)
 Test Date : 2024/01/05

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	67	1	798	1
2	5500	74	1	718	0
3	5500	89	1	598	1
4	5500	62	1	858	1
5	5500	63	1	838	1
6	5500	102	1	518	1
7	5500	95	1	558	1
8	5500	92	1	578	1
9	5500	68	1	778	1
10	5500	78	1	678	1
11	5500	81	1	658	1
12	5500	72	1	738	1
13	5500	58	1	918	1
14	5500	76	1	698	1
15	5500	61	1	878	0
16	5500	20	1	2647	1
17	5500	31	1	1730	1
18	5500	54	1	976	1
19	5500	29	1	1823	1
20	5500	42	1	1274	0
21	5500	25	1	2125	1
22	5500	56	1	948	1
23	5500	31	1	1742	1
24	5500	85	1	622	1
25	5500	35	1	1506	1
26	5500	19	1	2784	0
27	5500	63	1	840	1
28	5500	26	1	2044	1
29	5500	36	1	1474	1
30	5500	44	1	1210	1
Detection Percentage (%)					86.67%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Mode : Normal (802.11ac-20 MHz)
 Test Date : 2024/01/05

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	27	3.20	199	0
2	5500	25	4.90	220	1
3	5500	25	3.30	196	1
4	5500	27	1.20	178	1
5	5500	23	1.10	168	1
6	5500	26	4.80	205	1
7	5500	26	3.10	167	1
8	5500	26	2.90	205	1
9	5500	28	1.10	168	1
10	5500	25	1.60	192	1
11	5500	25	1.30	223	1
12	5500	29	1.00	214	1
13	5500	24	2.10	228	1
14	5500	25	4.30	185	1
15	5500	28	1.00	210	1
16	5500	25	2.80	180	0
17	5500	25	3.90	211	1
18	5500	26	3.90	194	1
19	5500	28	4.90	209	1
20	5500	28	4.70	159	1
21	5500	24	3.00	218	1
22	5500	27	2.90	152	1
23	5500	28	4.00	185	1
24	5500	27	2.80	208	0
25	5500	25	4.90	201	1
26	5500	27	1.30	183	1
27	5500	23	3.90	158	1
28	5500	26	4.30	158	1
29	5500	26	4.50	153	1
30	5500	29	1.90	176	1
Detection Percentage (%)					90.00 %

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Mode : Normal (802.11ac-20 MHz)
 Test Date : 2024/01/05

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	16	7.00	397	1
2	5500	16	7.60	339	1
3	5500	17	6.50	261	1
4	5500	17	7.60	448	0
5	5500	16	8.80	499	1
6	5500	17	7.30	294	1
7	5500	17	8.90	408	1
8	5500	17	9.20	283	1
9	5500	18	6.70	214	1
10	5500	17	7.10	339	1
11	5500	18	8.90	295	1
12	5500	17	6.00	312	1
13	5500	17	7.90	417	0
14	5500	17	8.10	373	1
15	5500	17	8.50	362	1
16	5500	17	7.90	473	1
17	5500	18	6.80	294	1
18	5500	18	7.20	281	1
19	5500	18	9.60	279	1
20	5500	17	9.80	292	1
21	5500	18	7.80	363	1
22	5500	18	8.10	462	1
23	5500	17	9.20	295	1
24	5500	17	8.70	379	1
25	5500	16	8.20	425	0
26	5500	18	7.20	413	1
27	5500	16	9.10	280	1
28	5500	17	9.70	282	1
29	5500	16	7.60	342	1
30	5500	17	9.60	341	0
Detection Percentage (%)					86.67%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Mode : Normal (802.11ac-20 MHz)
 Test Date : 2024/01/05

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	14	11.90	229	0
2	5500	15	11.80	460	1
3	5500	15	14.60	205	1
4	5500	13	13.90	238	0
5	5500	13	11.50	305	1
6	5500	16	14.70	219	1
7	5500	15	19.80	387	1
8	5500	15	13.80	441	1
9	5500	13	14.30	479	1
10	5500	14	18.90	323	1
11	5500	14	13.50	260	1
12	5500	14	16.20	386	1
13	5500	12	15.70	463	1
14	5500	13	14.10	220	1
15	5500	12	13.20	229	1
16	5500	15	18.10	339	0
17	5500	13	17.40	277	1
18	5500	14	17.30	337	1
19	5500	13	19.90	322	1
20	5500	14	13.50	202	0
21	5500	14	13.10	411	1
22	5500	15	13.10	346	1
23	5500	14	12.20	403	1
24	5500	12	17.90	245	1
25	5500	14	12.40	227	1
26	5500	13	11.50	372	1
27	5500	14	13.80	496	1
28	5500	14	12.30	330	1
29	5500	16	19.90	273	1
30	5500	14	18.50	320	0
Detection Percentage (%)					83.33%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Mode : Normal (802.11ac-40 MHz)
 Test Date : 2024/01/05

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5510	86	1	618	1
2	5510	95	1	558	1
3	5510	92	1	578	1
4	5510	76	1	698	1
5	5510	74	1	718	0
6	5510	57	1	938	1
7	5510	78	1	678	1
8	5510	62	1	858	1
9	5510	18	1	3066	1
10	5510	83	1	638	1
11	5510	58	1	918	1
12	5510	63	1	838	1
13	5510	61	1	878	1
14	5510	98	1	538	1
15	5510	67	1	798	1
16	5510	26	1	2086	1
17	5510	19	1	2867	1
18	5510	89	1	596	0
19	5510	95	1	557	1
20	5510	28	1	1891	1
21	5510	89	1	593	1
22	5510	38	1	1405	1
23	5510	27	1	1986	1
24	5510	23	1	2356	0
25	5510	21	1	2589	1
26	5510	46	1	1158	1
27	5510	21	1	2532	1
28	5510	18	1	3055	1
29	5510	31	1	1738	1
30	5510	18	1	2959	1
Detection Percentage (%)					90.00%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Mode : Normal (802.11ac-40 MHz)
 Test Date : 2024/01/05

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5510	24	3	205	1
2	5510	26	4.2	207	1
3	5510	28	2.1	224	1
4	5510	26	3.6	192	1
5	5510	25	3	220	1
6	5510	24	1.3	163	1
7	5510	25	1.6	185	1
8	5510	27	3.4	203	1
9	5510	29	3.2	162	0
10	5510	26	4.1	182	1
11	5510	28	4.7	163	1
12	5510	25	4.2	173	1
13	5510	26	2.4	156	1
14	5510	28	2.3	157	1
15	5510	25	3.9	215	1
16	5510	27	3.4	186	1
17	5510	28	1.6	190	1
18	5510	25	2.9	227	1
19	5510	25	2.9	158	1
20	5510	29	3.1	188	0
21	5510	28	2.2	153	1
22	5510	25	3.9	228	0
23	5510	24	1.1	196	1
24	5510	26	2.4	197	1
25	5510	26	1.3	195	1
26	5510	26	3.6	198	1
27	5510	27	2	159	1
28	5510	27	1	174	1
29	5510	25	3.5	199	1
30	5510	26	1.8	177	1
Detection Percentage (%)					90.00%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Mode : Normal (802.11ac-40 MHz)
 Test Date : 2024/01/05

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5510	16	9.4	484	1
2	5510	17	9.9	338	1
3	5510	17	6.6	381	1
4	5510	17	8.2	313	0
5	5510	17	7.4	296	0
6	5510	18	9	463	1
7	5510	17	6	412	1
8	5510	17	6	460	1
9	5510	17	6.8	406	1
10	5510	18	8.8	268	1
11	5510	18	9.9	413	1
12	5510	16	7	467	1
13	5510	16	6.5	371	1
14	5510	18	7.9	475	1
15	5510	17	7.6	322	1
16	5510	17	6.9	297	1
17	5510	16	6.2	448	1
18	5510	17	7.1	459	1
19	5510	18	9.7	374	0
20	5510	18	8.8	496	1
21	5510	18	9.3	361	1
22	5510	18	7.9	221	1
23	5510	17	7.4	499	0
24	5510	17	9.1	417	1
25	5510	17	8.4	200	1
26	5510	16	7.7	328	1
27	5510	17	7.7	315	1
28	5510	17	6.7	369	1
29	5510	16	7.7	217	1
30	5510	16	6.4	275	1
Detection Percentage (%)					86.67%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Mode : Normal (802.11ac-40 MHz)
 Test Date : 2024/01/05

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5510	12	16.9	215	0
2	5510	15	13.5	386	1
3	5510	14	14.7	463	1
4	5510	15	16.8	406	1
5	5510	15	14.6	308	1
6	5510	16	16.2	331	1
7	5510	16	19.5	447	1
8	5510	14	18.8	456	0
9	5510	15	19.4	388	1
10	5510	13	19.8	499	1
11	5510	16	11.5	418	1
12	5510	15	12.3	391	1
13	5510	13	14.5	229	1
14	5510	16	14.2	241	1
15	5510	12	13.6	270	0
16	5510	15	11.8	461	1
17	5510	14	16.1	443	1
18	5510	13	17.6	481	1
19	5510	13	11.9	231	1
20	5510	15	15.7	334	1
21	5510	15	12.1	384	1
22	5510	14	11.4	426	1
23	5510	16	11.6	495	1
24	5510	16	12.2	464	1
25	5510	14	12.2	419	1
26	5510	14	14	272	1
27	5510	16	11.9	215	1
28	5510	15	14.7	298	1
29	5510	13	11.7	231	0
30	5510	13	11.4	204	1
Detection Percentage (%)					86.67%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Mode : Normal (802.11ac-80 MHz)
 Test Date : 2024/01/05

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	26	1	2059	1
2	5530	66	1	804	1
3	5530	63	1	848	1
4	5530	71	1	746	1
5	5530	29	1	1874	0
6	5530	22	1	2461	1
7	5530	27	1	2016	1
8	5530	79	1	675	1
9	5530	52	1	1016	1
10	5530	44	1	1199	0
11	5530	31	1	1747	1
12	5530	52	1	1023	0
13	5530	49	1	1097	1
14	5530	23	1	2340	1
15	5530	36	1	1498	1
16	5530	22	1	2412	1
17	5530	20	1	2665	1
18	5530	53	1	1008	1
19	5530	38	1	1417	1
20	5530	25	1	2111	1
21	5530	32	1	1652	0
22	5530	66	1	806	1
23	5530	35	1	1509	1
24	5530	32	1	1683	0
25	5530	42	1	1276	1
26	5530	27	1	1975	1
27	5530	39	1	1355	1
28	5530	70	1	759	1
29	5530	20	1	2727	1
30	5530	21	1	2588	1
Detection Percentage (%)					83.33%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Mode : Normal (802.11ac-80 MHz)
 Test Date : 2024/01/05

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	26	1.8	169	1
2	5530	23	1.9	174	1
3	5530	27	2.7	203	0
4	5530	26	1.2	153	1
5	5530	25	2.2	164	1
6	5530	24	1.5	156	1
7	5530	26	2.7	152	1
8	5530	26	4.5	188	1
9	5530	25	3.8	157	1
10	5530	28	3	159	1
11	5530	26	4.6	221	1
12	5530	24	2.9	227	1
13	5530	27	4.8	164	1
14	5530	27	4.1	228	1
15	5530	26	1.9	196	0
16	5530	27	3.4	224	1
17	5530	29	4.1	153	1
18	5530	27	1.4	159	1
19	5530	27	4.4	202	0
20	5530	25	4	169	1
21	5530	24	4.4	203	1
22	5530	23	1.9	197	0
23	5530	27	3.5	202	1
24	5530	27	3.5	193	1
25	5530	24	2.6	179	1
26	5530	28	3.5	157	1
27	5530	28	3.1	217	1
28	5530	29	3	226	1
29	5530	26	4.6	212	1
30	5530	28	1.4	206	0
Detection Percentage (%)					83.33%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Mode : Normal (802.11ac-80 MHz)
 Test Date : 2024/01/05

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	16	7.8	362	1
2	5530	18	7.6	364	0
3	5530	18	9	244	1
4	5530	18	6.3	479	0
5	5530	17	6.6	313	1
6	5530	16	8.3	269	1
7	5530	16	6.6	499	1
8	5530	17	7.7	227	1
9	5530	18	6.4	352	1
10	5530	16	6.4	228	1
11	5530	16	7.6	415	0
12	5530	17	8.4	430	1
13	5530	18	8.7	201	1
14	5530	16	9.9	215	1
15	5530	17	8.5	226	1
16	5530	18	7.4	479	1
17	5530	16	9.6	325	1
18	5530	17	6.5	325	1
19	5530	16	7.8	267	1
20	5530	16	8.9	281	1
21	5530	17	9.4	340	1
22	5530	18	6.3	466	1
23	5530	17	8	444	1
24	5530	17	9.2	300	1
25	5530	18	7.8	265	1
26	5530	17	8.9	383	1
27	5530	17	8.1	464	1
28	5530	17	7	387	1
29	5530	18	7.1	444	0
30	5530	18	9.1	338	0
Detection Percentage (%)					83.33%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Mode : Normal (802.11ac-80 MHz)
 Test Date : 2024/01/05

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	12	14	250	1
2	5530	12	13.6	487	1
3	5530	15	11.9	466	1
4	5530	14	11.5	285	1
5	5530	15	17.9	222	1
6	5530	14	13.6	379	0
7	5530	15	18	223	0
8	5530	14	11.1	476	1
9	5530	15	13.2	354	1
10	5530	15	12.3	458	1
11	5530	16	16.7	217	1
12	5530	13	16.8	313	1
13	5530	14	16.3	481	1
14	5530	13	12.4	400	1
15	5530	15	18.4	347	0
16	5530	16	19.7	322	1
17	5530	14	11.9	384	1
18	5530	13	16.2	469	0
19	5530	14	12.8	216	1
20	5530	14	14.5	231	1
21	5530	13	19.4	485	1
22	5530	14	12.6	327	1
23	5530	16	13.7	363	0
24	5530	14	12.6	295	1
25	5530	13	18.9	439	1
26	5530	15	17.7	485	1
27	5530	15	15.4	369	1
28	5530	15	15	437	1
29	5530	16	12.1	327	0
30	5530	14	14.6	420	1
Detection Percentage (%)					80.00%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Mode : Normal (802.11ac-20 MHz)
 Test Date : 2024/01/05

Center Freq: 5500MHz				Low Edge: 5491MHz	High Edge: 5510MHz
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	16		5500	Statistical_Check_RandParm_For_Radar_Type_5_1_trail	1
2	15		5500	Statistical_Check_RandParm_For_Radar_Type_5_2_trail	1
3	15		5500	Statistical_Check_RandParm_For_Radar_Type_5_3_trail	1
4	9		5500	Statistical_Check_RandParm_For_Radar_Type_5_4_trail	1
5	8		5500	Statistical_Check_RandParm_For_Radar_Type_5_5_trail	1
6	17		5500	Statistical_Check_RandParm_For_Radar_Type_5_6_trail	1
7	10		5500	Statistical_Check_RandParm_For_Radar_Type_5_7_trail	1
8	8		5500	Statistical_Check_RandParm_For_Radar_Type_5_8_trail	1
9	11		5500	Statistical_Check_RandParm_For_Radar_Type_5_9_trail	1
10	11		5500	Statistical_Check_RandParm_For_Radar_Type_5_10_trail	1
11	7	2.8	5493.8	Statistical_Check_RandParm_For_Radar_Type_5_11_trail	1
12	16	6.4	5497.4	Statistical_Check_RandParm_For_Radar_Type_5_12_trail	0
13	6	2.4	5493.4	Statistical_Check_RandParm_For_Radar_Type_5_13_trail	1
14	17	6.8	5497.8	Statistical_Check_RandParm_For_Radar_Type_5_14_trail	1
15	7	2.8	5493.8	Statistical_Check_RandParm_For_Radar_Type_5_15_trail	1
16	10	4	5495	Statistical_Check_RandParm_For_Radar_Type_5_16_trail	0
17	13	5.2	5496.2	Statistical_Check_RandParm_For_Radar_Type_5_17_trail	0
18	5	2	5493	Statistical_Check_RandParm_For_Radar_Type_5_18_trail	1
19	16	6.4	5497.4	Statistical_Check_RandParm_For_Radar_Type_5_19_trail	0
20	9	3.6	5494.6	Statistical_Check_RandParm_For_Radar_Type_5_20_trail	0
21	8	3.2	5506.8	Statistical_Check_RandParm_For_Radar_Type_5_21_trail	1
22	8	3.2	5506.8	Statistical_Check_RandParm_For_Radar_Type_5_22_trail	1
23	10	4	5506	Statistical_Check_RandParm_For_Radar_Type_5_23_trail	1
24	19	7.6	5502.4	Statistical_Check_RandParm_For_Radar_Type_5_24_trail	1
25	6	2.4	5507.6	Statistical_Check_RandParm_For_Radar_Type_5_25_trail	1
26	5	2	5508	Statistical_Check_RandParm_For_Radar_Type_5_26_trail	1
27	8	3.2	5506.8	Statistical_Check_RandParm_For_Radar_Type_5_27_trail	1
28	19	7.6	5502.4	Statistical_Check_RandParm_For_Radar_Type_5_28_trail	1
29	11	4.4	5505.6	Statistical_Check_RandParm_For_Radar_Type_5_29_trail	1
30	10	4	5506	Statistical_Check_RandParm_For_Radar_Type_5_30_trail	1
Detection Percentage (%)					83.33
Limit					≥ 80

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	75	15	1741		299.998
2	3	97.3	15	1163	1007	354.36
3	2	71.7	15	1833		172.81
4	2	50.7	15	1940		465.63
5	2	79.4	15	1151		608.07
6	2	61.2	15	1670		307.29
7	3	51.1	15	1094	1725	84.57
8	2	80	15	1894		675.91
9	3	72.9	15	1036	1828	245.35
10	2	72.2	15	1228		670.63
11	2	79.1	15	1189		449.21
12	2	83.9	15	1242		460.07
13	1	84	15			304.53
14	2	71.8	15	1459		371.6
15	2	61.8	15	1639		382.8
16	3	96.2	15	1017	1028	394.8

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	77.4	15			273.081
2	2	81.1	15	1719		297.747
3	1	51.9	15			783.534
4	2	81.4	15	1273		571.121
5	2	58.9	15	1204		190.559
6	2	85.9	15	1490		353.306
7	3	88	15	1901	1923	119.353
8	2	87	15	1674		652.96
9	3	82	15	1365	1531	609.357
10	3	82.1	15	1744	1172	170.854
11	2	83.8	15	1707		291.221
12	1	79.8	15			404.069
13	2	64.7	15	1408		148.686
14	3	69.5	15	1759	1713	674.943

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	94.2	8	1079	1445	825.427
2	1	82	8			505.66
3	3	90.3	8	1927	1853	313.51
4	2	98	8	1689		891.76
5	1	77.8	8			810.63
6	1	76.2	8			929.42
7	1	60.6	8			420.62
8	2	62.5	8	1825		733.37
9	2	77.5	8	1137		198.38
10	1	89.4	8			6.01
11	2	78.2	8	1264		865.1
12	2	58.9	8	1064		943.9

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	76	17	1113		320.642
2	2	90.4	17	1760		723.603
3	3	93.1	17	1915	1579	498.976
4	3	55.6	17	1482	1307	414.049
5	2	82.1	17	1270		505.862
6	1	60.3	17			156.445
7	2	96.7	17	1530		323.598
8	2	77.6	17	1591		148.362
9	2	54.6	17	1400		369.005
10	2	71.4	17	1867		143.628
11	2	99.7	17	1607		236.051
12	2	84.9	17	1694		1.254
13	2	89.2	17	1512		860.877

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	70.9	10			204.945
2	1	54.6	10			201.644
3	3	69.3	10	1561	1025	487.16
4	2	75	10	1240		127.47
5	2	65.8	10	1631		275.07
6	2	91.5	10	1240		363.74
7	2	52.2	10	1089		166.61
8	2	56.2	10	1005		88.61
9	2	96.1	10	1414		406.36
10	2	79.8	10	1567		222.08
11	1	91	10			241.62
12	2	79.1	10	1233		523.83
13	3	55.9	10	1724	1392	193.1
14	2	73.2	10	1266		13.35
15	1	81.3	10			388.95
16	1	95.3	10			591.52
17	1	84	10			49.86
18	2	99.4	10	1385		295.2
19	2	94	10	1969		263.4
20	2	86	10	1030		93.1

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	70.8	8			93.994
2	2	59.1	8	1241		665.91
3	3	59.4	8	1549	1207	402.4
4	2	62.8	8	1636		662.66
5	2	73.2	8	1983		544.41
6	2	58	8	1955		198.53
7	2	53.3	8	1626		350.31
8	2	68.8	8	1189		789.23
9	1	86.4	8			253.45
10	3	79.9	8	1531	1133	527.71
11	2	99.1	8	1677		348.92
12	3	77.9	8	1470	1356	249.79
13	3	59.3	8	1605	1743	485
14	2	66.5	8	1914		566.8
15	2	89.9	8	1622		239.2

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	72.7	11	1692	1583	35.443
2	2	73.7	11	1246		78.014
3	2	72.3	11	1340		140.32
4	3	75.4	11	1728	1689	240.95
5	1	56.1	11			761.41
6	2	82.9	11	1532		366.54
7	3	58.7	11	1546	1469	440.53
8	2	84.4	11	1305		609.73
9	2	50.2	11	1863		335.65
10	2	58.6	11	1908		751.09
11	2	54.1	11	1599		745.67
12	2	56	11	1906		608.79
13	1	88	11			456.7
14	1	93	11			438.7
15	2	82.9	11	1146		550.3

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	84.6	11	1386	1359	527.818
2	2	58.4	11	1466		140.853
3	2	69.2	11	1739		257.562
4	3	77.8	11	1408	1422	139.003
5	1	56.7	11			157.684
6	2	51.1	11	1827		554.595
7	1	57.7	11			563.736
8	2	89.5	11	1509		40.497
9	2	95.1	11	1317		378.528
10	3	61.9	11	1639	1152	200.689
11	3	92.6	11	1131	1811	499.461
12	2	60	11	1670		471.732
13	2	82.8	11	1319		540.203
14	2	99.1	11	1805		211.674
15	2	68.9	11	1879		503.015
16	2	51.2	11	1338		293.506
17	2	54.9	11	1246		136.537
18	2	59.1	11	1679		355.058
19	3	83	11	1560	1607	263.579

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	56.6	7	1115	1264	317.112
2	3	64.3	7	1714	1955	70.372
3	2	55.4	7	1131		911.136
4	2	90.1	7	1363		916.989
5	2	62.1	7	1986		184.262
6	1	61	7			103.095
7	2	67	7	1815		627.448
8	3	50.4	7	1427	1814	171.372
9	3	74.2	7	1619	1192	300.385
10	3	55.4	7	1910	1908	138.248
11	3	92	7	1221	1229	902.831
12	1	58.9	7			273.654
13	3	52.5	7	1079	1639	898.377

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	65.8	16	1370	1781	506.742
2	2	89.1	16	1702		463.591
3	2	92.8	16	1818		2.552
4	3	92.5	16	1636	1464	264.283
5	2	74.1	16	1510		381.874
6	2	69.2	16	1251		158.395
7	2	53.2	16	1981		114.986
8	2	94.7	16	1275		538.847
9	2	67	16	1058		387.398
10	2	97.7	16	1443		142.159
11	2	91.7	16	1775		534.841
12	1	99.8	16			286.302
13	2	70.8	16	1737		46.183
14	1	85.1	16			451.024
15	3	55	16	1963	1051	620.495
16	2	57.3	16	1180		27.476
17	2	97.7	16	1393		180.237
18	3	85.2	16	1558	1497	126.358
19	2	61.3	16	1944		264.779

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	72.9	6	1582		857.999
2	2	53.5	6	1800		307.153
3	2	86.2	6	1515		299.446
4	1	69.9	6			825.929
5	2	54.7	6	1444		375.512
6	2	57	6	1892		684.505
7	2	61.4	6	1285		501.838
8	1	73.9	6			572.762
9	2	53.1	6	1587		141.855
10	1	78.7	6			106.848
11	2	84.4	6	1717		441.771
12	2	87.9	6	1225		312.054
13	2	70.1	6	1656		611.177

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 8

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	53.1	17	1044		323.119
2	3	63.5	17	1735	1580	67.44
3	3	65.1	17	1512	1565	887.85
4	3	84.3	17	1071	1664	303.07
5	2	60.7	17	1139		942.49
6	3	82.6	17	1013	1396	112.17
7	2	87.1	17	1516		1434.6
8	3	56.5	17	1695	1797	1125.4

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	92.3	7	1341	1090	575.501
2	2	92.7	7	1074		304.628
3	1	70.1	7			48.425
4	3	56.1	7	1757	1801	452.433
5	2	81.5	7	1361		480.591
6	1	64.9	7			565.558
7	1	80.7	7			7.286
8	1	92.5	7			143.824
9	2	59.9	7	1033		652.101
10	1	90.4	7			413.319
11	2	78.1	7	1423		552.196
12	2	50	7	1022		688.994
13	3	97.6	7	1344	1582	544.282
14	2	73.1	7	1162		497.979
15	2	86	7	1586		633.347
16	2	84.6	7	1519		595.065
17	2	58	7	1865		307.582

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	58.4	10	1906		419.953
2	1	66.5	10			399.613
3	2	58.2	10	1045		580.947
4	2	71.5	10	1732		527.18
5	2	68.5	10	1924		318.793
6	2	70.9	10	1104		607.277
7	2	77.7	10	1691		425.37
8	2	68	10	1487		643.153
9	2	77.4	10	1829		651.417
10	2	58.9	10	1192		469.41
11	1	78	10			627.773
12	2	97	10	1445		24.347
13	3	70.6	10	1375	1198	345.11
14	3	60.1	10	1585	1259	623.973
15	1	97.9	10			303.137
16	2	87.4	10	1392		180.1
17	2	77.1	10	1949		648.833
18	2	95.1	10	1750		59.367

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Trial Number : 17

Bursts in Trial: 10

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	60.8	5			337.085
2	2	50.3	5	1038		588.593
3	2	88.5	5	1902		12.627
4	1	88.3	5			211.08
5	2	65.4	5	1433		1.063
6	3	86.9	5	1479	1408	128.407
7	2	66.8	5	1016		56.52
8	2	68.4	5	1646		640.693
9	3	78.7	5	1805	1951	372.767
10	2	59.1	5	1766		632.93
11	2	85.6	5	1765		157.573
12	2	72.4	5	1700		443.127
13	2	62.2	5	1062		218.32
14	1	63.5	5			114.013
15	3	67.5	5	1725	1629	366.647
16	1	80.8	5			641.5
17	3	99	5	1971	1610	274.933
18	1	96.9	5			598.367

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	95.5	16			613.907
2	2	63.9	16	1850		101.075
3	2	64	16	1162		226.054
4	3	93.9	16	1624	1383	293.061
5	1	96.3	16			781.879
6	1	87.4	16			250.506
7	2	60.6	16	1630		18.133
8	3	67.2	16	1159	1139	509.77
9	2	76.9	16	1461		284.427
10	2	84.6	16	1986		76.674
11	3	75.1	16	1528	1361	658.931
12	2	66	16	1675		778.629
13	2	52.1	16	1462		398.086
14	3	75.9	16	1294	1577	832.943

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	92.8	9	1374		618.373
2	3	88.1	9	1298	1354	815.207
3	2	62	9	1632		15.134
4	2	61.9	9	1474		111.051
5	3	51.8	9	1332	1966	540.979
6	1	69.1	9			736.356
7	3	86.2	9	1059	1259	302.713
8	3	74.7	9	1179	1203	585.93
9	2	97	9	1107		391.597
10	3	96.9	9	1404	1939	130.744
11	2	96.2	9	1076		550.371
12	2	99.6	9	1587		333.199
13	1	53.1	9			483.886
14	3	82.1	9	1279	1030	581.943

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	76.3	8	1166		359.301
2	1	51.8	8			432.191
3	2	90.4	8	1574		153.282
4	1	76	8			509.163
5	3	90.9	8	1751	1818	518.204
6	2	78	8	1488		602.315
7	2	90	8	1307		544.596
8	1	85.5	8			354.347
9	3	61	8	1831	1787	553.088
10	2	61.3	8	1945		490.349
11	3	77.6	8	1458	1278	246.591
12	3	98.7	8	1687	1781	412.382
13	1	96.7	8			437.113
14	1	79.6	8			314.424
15	2	59.1	8	1539		527.025
16	2	98.2	8	1077		198.546
17	2	85.5	8	1004		18.237
18	1	91.2	8			131.758
19	2	96.4	8	1630		2.779

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Trial Number : 22

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	71.3	10			120.172
2	1	65.9	10			69.892
3	1	87.4	10			203.547
4	2	81.3	10	1850		572.23
5	2	66.2	10	1296		246.943
6	3	92	10	1864	1805	527.537
7	3	55.3	10	1334	1630	517.33
8	2	55.2	10	1776		177.513
9	3	87.8	10	1662	1695	510.027
10	2	67.8	10	1564		232.92
11	2	71.3	10	1022		150.563
12	2	92.2	10	1343		78.637
13	3	83.5	10	1320	1729	211.58
14	2	89.5	10	1552		501.493
15	2	58.5	10	1680		367.177
16	1	79	10			98.2
17	2	97	10	1454		433.333
18	3	93.7	10	1717	1141	607.067

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	85.3	19	1656		1040.42
2	1	72.6	19			661.231
3	2	76.2	19	1489		806.532
4	3	55.9	19	1389	1417	393.663
5	2	81.6	19	1973		282.044
6	1	83.8	19			1081.195
7	3	53.9	19	1071	1084	322.645
8	2	93.3	19	1918		505.776
9	1	91.5	19			402.217
10	2	62.3	19	1236		266.618
11	3	98	19	1222	1537	397.909

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	50.5	6	1399		329.126
2	2	79.4	6	1553		232.639
3	2	69.3	6	1959		203.412
4	3	83.8	6	1216	1501	350.783
5	2	56.2	6	1131		217.664
6	1	95.4	6			586.705
7	1	76.9	6			220.676
8	2	65.9	6	1823		200.837
9	1	82.1	6			623.348
10	2	64.8	6	1717		448.649
11	2	64.9	6	1053		464.841
12	2	74.5	6	1702		507.062
13	2	93.6	6	1968		60.883
14	2	60.2	6	1311		417.744
15	2	75.4	6	1558		571.825
16	1	69	6			618.716
17	1	79.6	6			259.037
18	2	56.9	6	1015		259.358
19	2	68.3	6	1319		609.579

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	76	5	1314		340.956
2	2	84.1	5	1863		421.851
3	2	97.9	5	1573		560.232
4	1	54	5			271.623
5	2	96.8	5	1495		473.634
6	2	84.5	5	1142		421.915
7	1	69.5	5			58.156
8	2	50.7	5	1380		391.037
9	1	66.7	5			276.928
10	2	51.1	5	1092		235.319
11	2	69.4	5	1173		483.121
12	2	76.2	5	1405		209.762
13	1	67.3	5			285.433
14	1	95.4	5			479.904
15	2	60.3	5	1046		552.045
16	3	54.1	5	1058	1626	453.016
17	3	64.6	5	1370	1764	497.237
18	2	81	5	1330		535.258
19	1	68.9	5			219.579

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	50.1	8			102.645
2	2	87.8	8	1137		470.64
3	2	71.1	8	1315		281.9
4	2	87.2	8	1905		965.29
5	2	78.9	8	1242		547.64
6	2	95	8	1982		113.19
7	2	75.5	8	1877		932.61
8	2	90.4	8	1452		539.06
9	2	71.6	8	1859		193.73
10	3	85.3	8	1298	1098	244.31
11	3	64.4	8	1482	1415	314.4
12	1	66.4	8			334.6

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	70.1	19	1821		321.103
2	2	50.2	19	1131		366.253
3	2	95.1	19	1836		591.682
4	1	82.1	19			218.113
5	3	77.4	19	1953	1672	80.864
6	1	84.4	19			574.145
7	3	82.6	19	1041	1095	146.226
8	2	57.8	19	1489		54.207
9	2	55.3	19	1640		167.538
10	2	56.6	19	1904		415.859
11	2	86.7	19	1605		325.021
12	2	94.5	19	1510		52.592
13	3	73.5	19	1289	1738	354.833
14	1	91.2	19			355.834
15	3	54.7	19	1108	1042	156.665
16	2	75.9	19	1842		617.916
17	2	72.5	19	1796		416.437
18	3	86.4	19	1867	1300	447.358
19	2	67.6	19	1181		389.379

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	62.5	11			167.425
2	3	87.1	11	1334	1398	185.521
3	2	70.4	11	1294		299.29
4	3	79.1	11	1031	1413	249.57
5	3	64.1	11	1601	1392	416.11
6	3	63.6	11	1642	1191	52.23
7	3	59.6	11	1393	1305	476.84
8	3	66.1	11	1651	1066	137.69
9	1	59.1	11			487.68
10	1	90.9	11			86.61
11	3	96.8	11	1786	1237	46.32
12	2	97.9	11	1772		355.07
13	2	71.5	11	1028		583.67
14	2	64.5	11	1617		218.93
15	2	82	11	1349		360.73
16	2	65.2	11	1419		148.28
17	2	54.2	11	1831		274.15
18	2	92.7	11	1883		232.5
19	1	72.6	11			539.6
20	2	62.2	11	1227		469.2

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	98.4	10	1468		452.373
2	2	73.1	10	1576		206.22
3	1	74	10			394.59
4	3	76.5	10	1898	1196	685.63
5	2	89.4	10	1292		134.94
6	3	83.8	10	1703	1871	593.24
7	1	93.1	10			657.94
8	2	87	10	1276		793.25
9	3	50.6	10	1360	1927	129.24
10	3	78.1	10	1876	1576	342.65
11	1	65	10			328.08
12	3	73	10	1429	1180	83.5
13	2	91.4	10	1993		403.8
14	3	89	10	1003	1924	75.6
15	3	83.9	10	1510	1249	304.9

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Mode : Normal (802.11ac-40 MHz)
 Test Date : 2024/01/05

Center Freq: 5510MHz				Low Edge: 5491MHz		High Edge: 5529MHz	
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename		1= Detection 0= No Detection	
1	8		5510	Statistical_Check_RandParm_For_Radar_Type_5_1_trail		1	
2	6		5510	Statistical_Check_RandParm_For_Radar_Type_5_2_trail		1	
3	19		5510	Statistical_Check_RandParm_For_Radar_Type_5_3_trail		1	
4	16		5510	Statistical_Check_RandParm_For_Radar_Type_5_4_trail		1	
5	7		5510	Statistical_Check_RandParm_For_Radar_Type_5_5_trail		1	
6	13		5510	Statistical_Check_RandParm_For_Radar_Type_5_6_trail		1	
7	15		5510	Statistical_Check_RandParm_For_Radar_Type_5_7_trail		1	
8	8		5510	Statistical_Check_RandParm_For_Radar_Type_5_8_trail		1	
9	17		5510	Statistical_Check_RandParm_For_Radar_Type_5_9_trail		1	
10	8		5510	Statistical_Check_RandParm_For_Radar_Type_5_10_trail		1	
11	8	3.2	5494.2	Statistical_Check_RandParm_For_Radar_Type_5_11_trail		1	
12	13	5.2	5496.2	Statistical_Check_RandParm_For_Radar_Type_5_12_trail		0	
13	17	6.8	5497.8	Statistical_Check_RandParm_For_Radar_Type_5_13_trail		0	
14	7	2.8	5493.8	Statistical_Check_RandParm_For_Radar_Type_5_14_trail		1	
15	17	6.8	5497.8	Statistical_Check_RandParm_For_Radar_Type_5_15_trail		0	
16	8	3.2	5494.2	Statistical_Check_RandParm_For_Radar_Type_5_16_trail		0	
17	6	2.4	5493.4	Statistical_Check_RandParm_For_Radar_Type_5_17_trail		1	
18	13	5.2	5496.2	Statistical_Check_RandParm_For_Radar_Type_5_18_trail		0	
19	8	3.2	5494.2	Statistical_Check_RandParm_For_Radar_Type_5_19_trail		1	
20	14	5.6	5496.6	Statistical_Check_RandParm_For_Radar_Type_5_20_trail		0	
21	12	4.8	5524.2	Statistical_Check_RandParm_For_Radar_Type_5_21_trail		1	
22	8	3.2	5525.8	Statistical_Check_RandParm_For_Radar_Type_5_22_trail		1	
23	13	5.2	5523.8	Statistical_Check_RandParm_For_Radar_Type_5_23_trail		1	
24	17	6.8	5522.2	Statistical_Check_RandParm_For_Radar_Type_5_24_trail		1	
25	13	5.2	5523.8	Statistical_Check_RandParm_For_Radar_Type_5_25_trail		1	
26	18	7.2	5521.8	Statistical_Check_RandParm_For_Radar_Type_5_26_trail		1	
27	7	2.8	5526.2	Statistical_Check_RandParm_For_Radar_Type_5_27_trail		1	
28	6	2.4	5526.6	Statistical_Check_RandParm_For_Radar_Type_5_28_trail		1	
29	18	7.2	5521.8	Statistical_Check_RandParm_For_Radar_Type_5_29_trail		1	
30	11	4.4	5524.6	Statistical_Check_RandParm_For_Radar_Type_5_30_trail		1	
Detection Percentage (%)						80.00	
Limit						≥ 80	

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	53.1	8	1756		829.57
2	3	60.9	8	1309	1485	135.433
3	2	51.8	8	1100		462.424
4	3	50.4	8	1436	1390	642.101
5	2	76.1	8	1135		474.129
6	2	54	8	1372		482.526
7	2	82	8	1525		587.073
8	1	90.7	8			121.7
9	3	82.8	8	1407	1923	4.007
10	3	52	8	1087	1966	12.844
11	3	90.6	8	1653	1413	77.451
12	2	86	8	1390		316.089
13	2	67.9	8	1469		139.886
14	2	90.3	8	1484		81.943

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	52	6	1648		314.481
2	1	54.4	6			278.917
3	2	54.4	6	1070		387.414
4	2	98.6	6	1735		397.231
5	1	89.3	6			499.809
6	2	68.3	6	1282		122.316
7	2	59.5	6	1400		405.073
8	2	52	6	1874		168.04
9	2	66	6	1142		803.417
10	2	56.7	6	1369		496.104
11	2	81.7	6	1270		615.631
12	1	51.7	6			134.499
13	2	86	6	1784		557.486
14	3	69.7	6	1628	1705	677.043

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	83.8	19	1929		3.656
2	2	53.6	19	1861		450.46
3	2	77.2	19	1174		427.63
4	2	90.3	19	1862		232.37
5	3	78.5	19	1992	1184	728.86
6	2	96.2	19	1216		696.74
7	1	83.1	19			640.13
8	1	72.8	19			486.9
9	3	53.1	19	1627	1496	431.55
10	3	85.2	19	1800	1035	164.38
11	3	97.2	19	1807	1470	310.68
12	1	57.2	19			290.43
13	1	58.6	19			27.38
14	2	68.5	19	1513		399.7
15	1	59.9	19			387.3

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	89.8	16	1301	1735	263.011
2	2	59.3	16	1667		932.79
3	2	74.8	16	1061		715.64
4	2	53.7	16	1488		660
5	1	59.2	16			158.01
6	3	93	16	1707	1547	765.59
7	1	95.5	16			159.88
8	2	79.4	16	1705		267.43
9	2	64.3	16	1805		920.39
10	1	89.5	16			632.28
11	2	64.5	16	1160		559.9
12	2	69.1	16	1048		907.6

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	88.7	7	1949	1524	203.889
2	2	94.4	7	1186		167.43
3	2	66.4	7	1596		250.735
4	1	53.3	7			343.273
5	1	97.2	7			558.011
6	2	61.5	7	1065		696.368
7	2	98.3	7	1147		169.956
8	2	74	7	1668		576.184
9	3	89.1	7	1862	1196	283.881
10	2	59.8	7	1965		410.369
11	2	50.1	7	1634		24.546
12	2	62.1	7	1660		683.364
13	3	80.7	7	1257	1438	671.512
14	1	81.4	7			46.319
15	3	63.9	7	1868	1961	258.247
16	1	87.5	7			434.165
17	3	98.6	7	1145	1031	534.482

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	86.1	13	1729	1738	64.633
2	3	93	13	1183	1190	310.803
3	2	54.4	13	1903		292.366
4	3	99	13	1961	1436	202.469
5	2	57.8	13	1709		776.782
6	3	59.7	13	1534	1032	579.365
7	2	80.1	13	1863		564.608
8	1	79.6	13			630.472
9	2	90.7	13	1009		81.685
10	1	86.3	13			46.928
11	2	99.8	13	1142		247.961
12	1	69.2	13			887.154
13	2	75.5	13	1114		622.977

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	86.1	15			42.163
2	1	51.3	15			242.127
3	3	52.9	15	1207	1847	26.414
4	3	80.4	15	1924	1539	242.591
5	2	65.3	15	1453		242.099
6	2	80.3	15	1614		553.076
7	3	84.6	15	1157	1285	15.403
8	1	89.8	15			467.84
9	2	74.1	15	1546		18.557
10	2	81.1	15	1502		262.084
11	3	77.1	15	1303	1433	210.341
12	2	63.7	15	1683		817.429
13	2	52.4	15	1520		551.186
14	1	71.7	15			607.143

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 PRI (μsec)	Start Location Within Interval (msec)
1	1	69	8			442.97
2	2	56.7	8	1257		891.961
3	2	97.4	8	1176		131.052
4	2	99.2	8	1965		870.583
5	1	56.7	8			1045.004
6	2	88.6	8	1459		253.515
7	2	58.8	8	1899		502.605
8	1	82.3	8			406.886
9	2	96	8	1140		746.657
10	1	97.7	8			750.318
11	2	97.4	8	1076		668.609

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 8

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	98.9	8	1432	1152	83.069
2	1	60.2	8			337.84
3	2	80.6	8	1471		99.49
4	3	88.6	8	1139	1641	13.62
5	2	61.4	8	1572		738.57
6	2	74.5	8	1518		353.95
7	3	78.1	8	1983	1365	445.24
8	1	71.7	8			726.01
9	2	75.1	8	1477		701.29
10	3	51.5	8	1242	1983	177.09
11	3	74.2	8	1174	1405	732.56
12	2	92.8	8	1950		511.73
13	3	76.7	8	1348	1792	389.38
14	2	77.7	8	1044		329
15	2	81.5	8	1536		689.9
16	1	75.2	8			3.9

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 8

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	77	13	1246		62.101
2	2	74	13	1174		788.83
3	1	80.9	13			782.34
4	2	73.3	13	1422		78.81
5	2	92.2	13	1727		362.63
6	2	64.5	13	1650		558
7	2	83.9	13	1633		675.33
8	3	54.7	13	1833	1271	787.74
9	1	82.7	13			654.36
10	2	79.2	13	1421		587.63
11	2	69.2	13	1462		316.11
12	1	57.8	13			788.11
13	2	89.6	13	1089		624.2
14	3	87.4	13	1887	1446	757.2
15	1	78.6	13			334.9

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 8

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	96.3	7	1920		323.687
2	3	74.7	7	1617	1545	702.607
3	3	96.1	7	1905	1899	145.884
4	3	87.9	7	1240	1473	193.081
5	2	93.3	7	1868		247.279
6	1	54.8	7			136.816
7	3	61.1	7	1373	1172	408.853
8	3	93.9	7	1960	1358	93.24
9	1	97.3	7			370.077
10	2	51.9	7	1221		249.644
11	3	80.6	7	1349	1017	523.051
12	2	70.5	7	1254		171.539
13	2	88.1	7	1917		496.086
14	1	97.3	7			287.943

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	76.9	17			279.595
2	3	92.7	17	1645	1772	673.8
3	2	74.1	17	1805		56.26
4	2	75.2	17	1953		308.59
5	3	51.4	17	1455	1215	919.43
6	2	55.4	17	1478		492.71
7	2	88.8	17	1709		679.28
8	1	96.1	17			295.53
9	1	81.2	17			348.86
10	3	88.4	17	1419	1021	855.94
11	2	87	17	1926		592.1
12	2	89	17	1802		989.1

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	86.8	8	1836	1833	611.131
2	2	60.7	8	1782		10.901
3	2	87.6	8	1740		484.892
4	2	80.9	8	1219		161.123
5	1	81.9	8			283.914
6	2	87.8	8	1846		181.765
7	2	59.5	8	1578		334.606
8	1	54.5	8			430.227
9	2	76.3	8	1996		228.418
10	2	51.9	8	1899		314.739
11	2	61	8	1961		442.531
12	2	90.6	8	1526		362.022
13	1	56.1	8			597.323
14	3	91.9	8	1184	1614	375.944
15	2	52.8	8	1153		136.625
16	2	65.7	8	1335		495.426
17	3	82	8	1587	1663	127.437
18	1	59.4	8			276.658
19	1	99.8	8			492.079

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 17

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	65.5	6	1900	1383	218.64
2	2	59.2	6	1393		679.013
3	2	66.9	6	1623		594.676
4	3	71.6	6	1481	1938	128.779
5	1	68.9	6			284.472
6	1	59.9	6			488.305
7	2	81.8	6	1611		557.158
8	2	66.7	6	1994		48.352
9	3	56.2	6	1503	1886	147.835
10	2	92.4	6	1164		505.598
11	2	87.4	6	1713		761.941
12	3	86.4	6	1032	1611	91.554
13	3	77.3	6	1177	1510	886.577

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	80.4	13	1874		545.448
2	2	76.1	13	1220		127.944
3	1	60	13			580.297
4	3	50.3	13	1559	1797	599.71
5	2	62	13	1305		638.873
6	2	51.5	13	1202		51.317
7	2	67.7	13	1922		347.65
8	2	90.4	13	1350		128.613
9	3	90	13	1706	1093	605.837
10	1	86.3	13			11.03
11	2	67.2	13	1971		559.983
12	3	96.9	13	1178	1335	125.737
13	1	97.2	13			597.69
14	3	91.7	13	1426	1490	169.253
15	2	76.3	13	1703		66.287
16	2	60.5	13	1342		305.8
17	3	74	13	1495	1395	331.533
18	1	94.3	13			12.667

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	77.8	8	1816		105.519
2	3	80.9	8	1761	1233	98.331
3	3	64.5	8	1091	1760	501.45
4	2	54.5	8	1643		562.41
5	1	95.6	8			178.44
6	1	97	8			486.19
7	3	81.9	8	1632	1474	756.62
8	1	75	8			371.69
9	2	78	8	1282		240.33
10	2	99.4	8	1389		170.43
11	3	79.5	8	1062	1609	110.57
12	2	69.8	8	1577		14.32
13	2	75.6	8	1950		283.19
14	2	67.5	8	1663		569.3
15	1	66.5	8			280.1

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	93.2	14	1796		122.66
2	1	67.2	14			465.47
3	2	80.2	14	1583		95.32
4	3	75.4	14	1824	1719	539.56
5	3	80	14	1518	1231	183.28
6	3	56.9	14	1093	1481	376.95
7	2	98.7	14	1031		569.97
8	1	82.4	14			177.17
9	3	72	14	1169	1766	750
10	1	59.3	14			197.4
11	1	70	14			494.49
12	1	87.8	14			383.38
13	2	74.8	14	1836		753
14	2	57	14	1871		666.5
15	3	70.9	14	1399	1856	181.2

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	71.2	12			591.793
2	1	70.3	12			111.563
3	3	51.7	12	1789	1454	110.526
4	3	94.7	12	1707	1166	753.989
5	2	74.9	12	1841		851.152
6	2	51.5	12	1448		243.405
7	3	82.3	12	1304	1180	554.528
8	2	78.8	12	1027		432.442
9	2	96.4	12	1597		157.275
10	1	57.9	12			109.008
11	3	72	12	1707	1513	152.051
12	2	87.6	12	1613		875.054
13	1	86.2	12			647.977

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	89.2	8			508.262
2	2	96.9	8	1074		308.683
3	1	90.7	8			41.016
4	2	85	8	1588		441.429
5	2	75.5	8	1120		621.262
6	3	68.3	8	1884	1855	395.525
7	2	62.9	8	1771		758.808
8	2	72.7	8	1078		542.262
9	2	67	8	1729		60.605
10	3	99.7	8	1488	1019	214.388
11	1	75.2	8			493.231
12	3	99.8	8	1090	1640	559.354
13	3	94.6	8	1246	1559	128.977

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	74.3	13	1810		85.682
2	3	60.3	13	1012	1724	641.17
3	2	89.3	13	1023		375.14
4	2	75.7	13	1113		180.92
5	2	93.3	13	1861		351.22
6	1	89.1	13			349.52
7	1	56.1	13			396.39
8	2	93.2	13	1901		286.39
9	2	99.1	13	1528		520.46
10	2	96.1	13	1059		200.4
11	1	92	13			380.41
12	3	66.9	13	1105	1749	606.51
13	2	70.1	13	1639		669.67
14	1	87.4	13			201.75
15	1	53.9	13			367.8
16	1	67.9	13			433.7

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	82.4	17	1821	1092	303.471
2	2	52.4	17	1302		225.372
3	1	98	17			388.995
4	1	93.6	17			85.013
5	1	71.6	17			556.491
6	3	81.2	17	1107	1305	336.298
7	3	64.5	17	1508	1351	121.516
8	2	64.4	17	1861		501.604
9	1	68.4	17			432.551
10	2	90.5	17	1256		95.599
11	2	94.9	17	1701		395.796
12	3	72.5	17	1134	1331	287.544
13	1	72.5	17			464.202
14	1	57.8	17			62.329
15	1	52.7	17			320.047
16	3	54.1	17	1634	1587	664.265
17	1	88.7	17			608.482

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	53.3	13	1381		810.851
2	1	92.5	13			916.74
3	1	51.6	13			690.84
4	1	92.6	13			181.28
5	2	83.9	13	1234		786.73
6	3	97.6	13	1622	1637	17.34
7	1	86.1	13			497.64
8	1	87.7	13			633.47
9	3	79.4	13	1744	1388	703.41
10	2	55.2	13	1689		49.71
11	2	90.7	13	1199		237.8
12	2	81.3	13	1591		489.2

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	63	18	1964	1933	503.697
2	3	78.7	18	1673	1676	650.38
3	3	73.3	18	1650	1144	299.21
4	3	55.4	18	1378	1784	324.72
5	2	59.3	18	1778		422.13
6	2	53.7	18	1022		563.24
7	3	81	18	1007	1265	650.86
8	2	88.1	18	1164		970.1
9	2	93.1	18	1904		424.03
10	2	59.9	18	1772		894.63
11	3	50.3	18	1485	1873	332.3
12	1	64	18			379.1

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	80.1	7	1183		316.095
2	2	61.4	7	1005		531.24
3	2	57.2	7	1488		10.08
4	2	96.1	7	1281		17.75
5	1	89.2	7			762.22
6	2	59.6	7	1412		501.29
7	2	78.8	7	1523		194.32
8	2	73.9	7	1117		81.67
9	2	66.6	7	1793		729.24
10	2	92.5	7	1059		262.42
11	2	57.8	7	1964		552.58
12	3	93.8	7	1601	1697	359.36
13	3	82.6	7	1737	1365	633.7
14	2	90.6	7	1335		460.3
15	1	90.3	7			496.7

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	65	6	1540	1197	302.353
2	3	98.4	6	1961	1222	829.787
3	2	63.2	6	1605		621.474
4	3	61.8	6	1221	1143	282.861
5	2	74.9	6	1039		480.039
6	1	62.2	6			537.266
7	2	69.5	6	1608		533.333
8	2	86.8	6	1991		154.34
9	2	70.2	6	1194		359.667
10	1	69.3	6			551.664
11	2	57.1	6	1251		412.381
12	2	67.3	6	1174		680.329
13	2	70.7	6	1018		322.886
14	2	72.3	6	1457		840.143

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	53.9	18			121.504
2	1	82.3	18			808.473
3	2	58.9	18	1123		591.116
4	2	91.7	18	1041		315.599
5	2	61.9	18	1203		264.742
6	3	56.6	18	1308	1424	500.095
7	2	57.3	18	1512		569.818
8	2	50.6	18	1286		777.852
9	3	57	18	1854	1884	376.805
10	1	59.3	18			446.998
11	2	54.8	18	1280		584.561
12	2	64.2	18	1129		143.154
13	2	82	18	1167		855.677

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Trial Number : 30

Bursts in Trial: 10

[illegible]

--

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Mode : Normal (802.11ac-80 MHz)
 Test Date : 2024/01/05

Center Freq: 5530MHz				Low Edge: 5491MHz	High Edge: 5568MHz
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	8		5530	Statistical_Check_RandParm_For_Radar_Type_5_1_trail	1
2	16		5530	Statistical_Check_RandParm_For_Radar_Type_5_2_trail	1
3	9		5530	Statistical_Check_RandParm_For_Radar_Type_5_3_trail	1
4	19		5530	Statistical_Check_RandParm_For_Radar_Type_5_4_trail	1
5	16		5530	Statistical_Check_RandParm_For_Radar_Type_5_5_trail	1
6	15		5530	Statistical_Check_RandParm_For_Radar_Type_5_6_trail	1
7	8		5530	Statistical_Check_RandParm_For_Radar_Type_5_7_trail	1
8	14		5530	Statistical_Check_RandParm_For_Radar_Type_5_8_trail	1
9	19		5530	Statistical_Check_RandParm_For_Radar_Type_5_9_trail	1
10	17		5530	Statistical_Check_RandParm_For_Radar_Type_5_10_trail	1
11	5	2	5493	Statistical_Check_RandParm_For_Radar_Type_5_11_trail	1
12	15	6	5497	Statistical_Check_RandParm_For_Radar_Type_5_12_trail	0
13	6	2.4	5493.4	Statistical_Check_RandParm_For_Radar_Type_5_13_trail	0
14	17	6.8	5497.8	Statistical_Check_RandParm_For_Radar_Type_5_14_trail	0
15	7	2.8	5493.8	Statistical_Check_RandParm_For_Radar_Type_5_15_trail	1
16	10	4	5495	Statistical_Check_RandParm_For_Radar_Type_5_16_trail	0
17	7	2.8	5493.8	Statistical_Check_RandParm_For_Radar_Type_5_17_trail	1
18	5	2	5493	Statistical_Check_RandParm_For_Radar_Type_5_18_trail	1
19	5	2	5493	Statistical_Check_RandParm_For_Radar_Type_5_19_trail	1
20	8	3.2	5494.2	Statistical_Check_RandParm_For_Radar_Type_5_20_trail	0
21	13	5.2	5562.8	Statistical_Check_RandParm_For_Radar_Type_5_21_trail	1
22	16	6.4	5561.6	Statistical_Check_RandParm_For_Radar_Type_5_22_trail	1
23	17	6.8	5561.2	Statistical_Check_RandParm_For_Radar_Type_5_23_trail	1
24	13	5.2	5562.8	Statistical_Check_RandParm_For_Radar_Type_5_24_trail	1
25	11	4.4	5563.6	Statistical_Check_RandParm_For_Radar_Type_5_25_trail	1
26	12	4.8	5563.2	Statistical_Check_RandParm_For_Radar_Type_5_26_trail	1
27	5	2	5566	Statistical_Check_RandParm_For_Radar_Type_5_27_trail	1
28	15	6	5562	Statistical_Check_RandParm_For_Radar_Type_5_28_trail	1
29	13	5.2	5562.8	Statistical_Check_RandParm_For_Radar_Type_5_29_trail	1
30	10	4	5564	Statistical_Check_RandParm_For_Radar_Type_5_30_trail	1
Detection Percentage (%)					83.33
Limit					≥ 80

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	68.6	8	1492	1769	663.932
2	1	59.1	8			160.278
3	3	81.5	8	1474	1958	641.19
4	3	94.3	8	1503	1617	772.91
5	2	56.2	8	1353		129.96
6	2	66.4	8	1966		459.55
7	2	85.8	8	1552		0.1
8	2	96.4	8	1297		757.18
9	2	78.1	8	1962		10.55
10	2	83	8	1492		48.78
11	1	63.4	8			335.95
12	3	52.6	8	1641	1475	708.28
13	2	61.4	8	1325		621.8
14	2	89.3	8	1615		653.2
15	3	77.6	8	1905	1920	296.6

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	59.2	16	1112		505.146
2	3	88.8	16	1148	1859	4.725
3	3	97.4	16	1382	1524	393.912
4	1	80.8	16			614.633
5	3	64.9	16	1663	1707	13.034
6	1	69.2	16			510.775
7	2	97.9	16	1382		281.486
8	1	74	16			173.067
9	2	80.4	16	1360		620.138
10	3	99.4	16	1435	1441	69.069
11	2	89.3	16	1725		509.921
12	2	63	16	1781		230.722
13	3	73.4	16	1893	1551	232.533
14	2	73.1	16	1142		620.484
15	2	85.2	16	1193		392.245
16	2	97.5	16	1429		566.716
17	3	80.3	16	1687	1340	412.737
18	2	95.2	16	1432		163.458
19	1	87.1	16			312.379

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	87	9			1155.42
2	2	63.5	9	1727		1135.24
3	3	91.8	9	1644	1790	888.81
4	3	51.2	9	1821	1003	121.69
5	1	73.8	9			1072.46
6	1	76.8	9			42.13
7	3	55.5	9	1751	1462	1018.4
8	2	91.7	9	1279		410.77
9	2	93.7	9	1735		761.3
10	2	80.4	9	1241		964.4

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	77.9	19	1121		420.134
2	3	53.4	19	1823	1483	433.203
3	3	76	19	1065	1341	853.756
4	2	60.7	19	1119		296.089
5	1	64.5	19			217.272
6	1	68.4	19			358.905
7	2	99.7	19	1997		295.398
8	2	71.4	19	1926		85.082
9	1	98.9	19			343.885
10	3	89.5	19	1291	1577	386.788
11	1	87.6	19			587.191
12	3	98.9	19	1351	1900	888.554
13	2	66.4	19	1322		539.877

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	56.8	16	1695		424.234
2	3	60.9	16	1017	1453	8.29
3	2	55.1	16	1559		4.35
4	2	96	16	1692		957.44
5	2	67.4	16	1749		724.63
6	1	81.6	16			339.46
7	1	69.3	16			695.99
8	2	60.2	16	1833		554.69
9	2	76.3	16	1037		55.37
10	3	55.9	16	1632	1516	21.2

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	87.5	15	1102	1947	654.412
2	3	83.9	15	1318	1640	495.2
3	1	81	15			203.28
4	1	95.7	15			318.24
5	2	52.9	15	1387		248.38
6	3	75.3	15	1607	1576	730.49
7	1	78.3	15			24.69
8	2	82.6	15	1866		546.91
9	3	74.5	15	1906	1730	554.75
10	3	75.2	15	1164	1883	194.97
11	1	55.3	15			50.32
12	1	70.1	15			492.88
13	3	57.9	15	1496	1682	194.08
14	3	56.7	15	1559	1262	693
15	3	67.9	15	1537	1964	286.5

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	78.3	8	1528		389.215
2	2	94.9	8	1111		365.378
3	3	87	8	1004	1089	696.925
4	1	51.1	8			412.213
5	2	80	8	1258		213.011
6	2	81.5	8	1338		348.328
7	1	56.4	8			595.556
8	1	96.1	8			457.774
9	3	79.9	8	1899	1712	411.251
10	3	84.8	8	1130	1814	394.069
11	1	77.3	8			390.346
12	2	76	8	1765		311.484
13	1	87.5	8			89.102
14	2	75.2	8	1055		178.409
15	1	63.6	8			508.547
16	2	62.8	8	1546		556.265
17	1	83.3	8			455.882


TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 PRI (μsec)	Start Location Within Interval (msec)
1	3	81.7	14	1854	1510	534.423
2	2	87.4	14	1553		569.691
3	3	63.6	14	1681	1769	411.152
4	1	76.9	14			124.653
5	2	58.9	14	1605		284.054
6	1	55.6	14			284.475
7	2	82.5	14	1712		434.286
8	1	68.4	14			432.317
9	1	70.5	14			83.428
10	2	92.4	14	1528		615.449
11	3	92.9	14	1336	1841	4.381
12	1	75.3	14			364.492
13	2	76.7	14	1898		20.603
14	3	50.2	14	1574	1484	581.544
15	2	73.6	14	1949		55.175
16	3	91.9	14	1878	1070	220.426
17	2	99.2	14	1998		352.137
18	3	71.4	14	1770	1705	504.658
19	3	86.6	14	1244	1338	476.079



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	81.1	19	1219	1240	1189.1
2	2	98	19	1146		340.127
3	2	77.5	19	1181		913.893
4	2	61.6	19	1194		604.44
5	2	79.9	19	1155		1128.407
6	2	88	19	1739		64.193
7	3	52.1	19	1228	1888	546.21
8	3	55.8	19	1856	1705	637.597
9	3	55.7	19	1360	1531	844.733

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	60.4	17	1567		148.95
2	1	84.6	17			378.606
3	1	76.5	17			564.32
4	1	77.2	17			187.32
5	1	94.1	17			97.93
6	1	58.5	17			58.63
7	2	80.9	17	1435		540.09
8	3	97.1	17	1469	1626	521.98
9	3	81.2	17	1231	1945	378.48
10	1	62.4	17			457.58
11	2	80.4	17	1158		110.72
12	2	85.3	17	1282		219.23
13	2	92.6	17	1665		53.04
14	2	89.2	17	1527		156.95
15	3	68.5	17	1897	1683	61.44
16	2	83.1	17	1191		47.25
17	2	87.9	17	1548		272.21
18	3	63.9	17	1372	1222	316.5
19	2	81.5	17	1818		78.8
20	1	67	17			221.2

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	71	5	1617		980.643
2	2	64.6	5	1346		787.771
3	2	84.2	5	1641		277.342
4	1	96	5			205.733
5	2	71.5	5	1046		738.084
6	1	70.4	5			330.385
7	2	66.9	5	1700		255.755
8	3	97.3	5	1537	1563	101.216
9	3	79.1	5	1387	1595	494.477
10	2	60.3	5	1704		829.618
11	1	58.4	5			569.909

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 8

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	88.8	6	1693		426.773
2	1	50.5	6			125.833
3	2	69.7	6	1563		106.356
4	3	75.8	6	1464	1008	681.179
5	2	62.7	6	1555		883.952
6	1	60.8	6			629.475
7	2	69.5	6	1418		81.498
8	1	74	6			659.132
9	2	60.6	6	1845		356.935
10	2	72.4	6	1998		901.448
11	2	94.9	6	1067		728.601
12	2	55.7	6	1274		374.554
13	2	74.2	6	1127		528.777

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	73.8	17	1046		765.027
2	2	55.9	17	1004		257.267
3	2	94.4	17	1971		705.734
4	2	51.2	17	1686		144.441
5	2	50	17	1845		213.609
6	2	61.3	17	1163		86.296
7	3	53.1	17	1974	1109	337.873
8	3	56.8	17	1523	1887	263.84
9	3	87.9	17	1028	1617	208.427
10	2	99.7	17	1790		458.944
11	2	92.5	17	1282		577.001
12	1	50.4	17			754.829
13	3	83.9	17	1531	1279	339.286
14	2	81.8	17	1239		537.943

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	83	7	1719		172.977
2	1	78.6	7			687.18
3	1	76.2	7			74.37
4	2	72.8	7	1014		742.73
5	2	83.6	7	1314		424.95
6	1	73.8	7			206.01
7	2	87.1	7	1756		729.93
8	1	90.4	7			734.18
9	1	72.2	7			156.39
10	2	74.3	7	1270		712.68
11	2	78.9	7	1278		99.47
12	3	98.1	7	1548	1161	580.51
13	2	62.6	7	1340		414.83
14	3	98.6	7	1080	1699	16.23
15	2	80.2	7	1667		389.3
16	1	70.7	7			382.2

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	81.1	10	1258		413.392
2	3	72	10	1153	1301	695.14
3	3	73.3	10	1965	1214	258.83
4	2	59.7	10	1321		173.95
5	2	93.7	10	1607		488.67
6	3	72.3	10	1638	1467	295.9
7	2	86.2	10	1533		396.31
8	2	54.6	10	1997		821.95
9	2	72.4	10	1844		252.99
10	3	94.4	10	1196	1862	187.9
11	3	53.6	10	1090	1537	681
12	2	68.8	10	1514		686.1

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 17

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	74.5	7	1665		169.111
2	2	64.1	7	1549		524.371
3	2	87.5	7	1896		424.422
4	2	77.5	7	1649		105.803
5	1	88.6	7			475.024
6	1	77.6	7			446.475
7	2	50.8	7	1602		605.466
8	2	93	7	1418		59.187
9	3	68	7	1627	1072	417.218
10	1	58.5	7			587.299
11	1	93.5	7			294.961
12	2	96	7	1575		216.052
13	3	63.4	7	1652	1816	14.513
14	2	59.3	7	1098		358.724
15	1	88.5	7			320.745
16	3	75.8	7	1396	1539	542.616
17	1	55.6	7			179.837
18	1	68.2	7			125.758
19	3	63.4	7	1425	1115	450.879

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	57	5	1486		187.288
2	2	85.8	5	1008		485.07
3	2	57.7	5	1014		612.04
4	1	97.5	5			459.88
5	2	85.9	5	1381		112.99
6	2	71.6	5	1619		142.96
7	3	77.5	5	1715	1276	534.94
8	1	84.2	5			694.94
9	3	66.2	5	1355	1933	99.73
10	3	96.3	5	1430	1163	552.1
11	2	84	5	1193		355.77
12	1	88.3	5			150.87
13	2	83.9	5	1342		541.27
14	1	64.1	5			13.73
15	2	81.4	5	1342		630.5
16	2	58.9	5	1348		189.4

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	60.6	8			331.131
2	1	79	8			813.141
3	1	78.8	8			1068.802
4	1	87.6	8			663.703
5	2	85.1	8	1601		308.744
6	2	83	8	1897		257.255
7	1	78.4	8			81.195
8	3	99.5	8	1159	1194	519.576
9	2	69.8	8	1774		911.877
10	3	87.1	8	1695	1664	59.888
11	2	54.6	8	1978		137.909

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	99.4	13	1823		793.404
2	2	56.3	13	1716		612.78
3	1	55.2	13			345.74
4	2	99.4	13	1952		769.88
5	1	89.4	13			222.78
6	2	74.4	13	1312		108.78
7	3	99.8	13	1083	1058	358.77
8	1	97.9	13			527.1
9	2	51.3	13	1902		90.93
10	2	55.6	13	1944		654.05
11	2	85	13	1467		332.2
12	2	68.3	13	1841		424.6

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	80.7	16	1882	1891	405.183
2	2	64.6	16	1814		556.693
3	3	70.8	16	1332	1399	74.236
4	3	80.7	16	1247	1144	71.899
5	2	57.9	16	1681		174.522
6	1	63.2	16			174.015
7	1	62.3	16			383.118
8	2	66.5	16	1761		44.732
9	2	71.1	16	1883		302.035
10	2	89.4	16	1216		585.768
11	3	55.2	16	1847	1931	844.931
12	2	54.5	16	1486		308.854
13	2	98.5	16	1484		489.277

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	58.2	17	1028		132.646
2	2	87.1	17	1105		119.433
3	2	66.4	17	1016		399.767
4	2	77.5	17	1892		38.58
5	3	85.9	17	1857	1870	421.803
6	2	77	17	1912		587.167
7	2	71.2	17	1859		305.63
8	2	51.6	17	1323		194.643
9	2	78.7	17	1271		232.127
10	1	65.1	17			424.26
11	2	89.7	17	1215		59.723
12	2	55.8	17	1388		657.287
13	1	72.1	17			610.79
14	2	67.8	17	1528		212.713
15	2	65.6	17	1499		232.757
16	2	67.4	17	1105		623.9
17	2	88.1	17	1868		330.433
18	2	77.6	17	1074		377.667

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	52.3	13	1778	1959	882.084
2	1	69	13			1226.897
3	2	82.3	13	1168		1155.403
4	1	83.5	13			59.02
5	3	96.8	13	1489	1754	973.767
6	2	79.2	13	1626		713.073
7	2	93.8	13	1803		27.22
8	1	57.8	13			998.267
9	2	61.3	13	1409		960.233

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	52.2	11	1972	1486	343.743
2	2	74.4	11	1318		691.497
3	3	52	11	1784	1024	424.634
4	2	50.5	11	1157		33.361
5	2	54.3	11	1959		673.469
6	2	67.8	11	1761		168.716
7	2	68	11	1110		782.493
8	2	80.8	11	1877		299.6
9	1	79.5	11			741.207
10	2	64.8	11	1020		742.464
11	2	87.8	11	1898		64.461
12	2	52.6	11	1806		11.459
13	2	69.8	11	1802		129.286
14	3	86.8	11	1323	1491	582.543

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Trial Number : 26

Bursts in Trial: 8

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	90.7	5	1600		712.776
2	2	60.8	5	1766		840.44
3	1	61.7	5			199.3
4	2	70.1	5	1923		605.19
5	1	56.4	5			452.22
6	2	98	5	1718		787.39
7	1	74.2	5			813.8
8	2	64.4	5	1972		779.57
9	2	59.4	5	1604		267.57
10	1	93.3	5			592.3

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	57.2	15			361.53
2	2	89.5	15	1561		334.443
3	2	85.5	15	1432		302.756
4	2	73.5	15	1652		262.889
5	2	88.3	15	1973		115.332
6	2	65.5	15	1550		810.305
7	2	98.4	15	1259		673.348
8	2	93.3	15	1815		564.592
9	3	90.2	15	1960	1242	47.105
10	2	57.9	15	1321		325.798
11	2	81.7	15	1307		185.511
12	2	67.3	15	1992		468.954
13	2	80.9	15	1056		388.777

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	59.1	13	1212		25.957
2	3	62.9	13	1514	1438	238.104
3	2	50.4	13	1467		246.115
4	2	55.4	13	1909		614.643
5	2	65.6	13	1814		3.901
6	3	82.9	13	1609	1048	614.598
7	2	93.8	13	1495		427.856
8	3	72.1	13	1857	1511	2.964
9	2	58.4	13	1634		169.731
10	3	98	13	1342	1316	528.599
11	2	92.7	13	1623		60.366
12	2	65.5	13	1173		459.174
13	3	57.7	13	1632	1321	661.312
14	3	78.8	13	1803	1641	620.259
15	1	91.4	13			108.607
16	2	61.5	13	1574		306.265
17	2	71.8	13	1404		84.282

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	76.2	10	1283		729.662
2	2	80	10	1673		813.997
3	3	69.9	10	1629	1008	640.354
4	2	86.3	10	1257		525.791
5	2	69.8	10	1063		308.449
6	2	81.2	10	1997		370.556
7	3	59.8	10	1461	1903	850.573
8	2	56.5	10	1892		674.77
9	1	57.9	10			126.497
10	3	61.1	10	1579	1200	127.074
11	1	81.7	10			695.781
12	2	59.8	10	1650		797.129
13	2	88.2	10	1498		183.986
14	1	80	10			512.043

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Mode : Normal (802.11ac-20 MHz)
 Test Date : 2024/01/05

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	1
3	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	1
4	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	1
5	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	1
7	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	1
8	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	1
9	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	1
11	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	1
12	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	1
13	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	1
14	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	1
15	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	1
17	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	1
19	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	1
20	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	1
21	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	1
22	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	1
23	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	1
24	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	1
26	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	0
29	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			96.67
Limit			>70

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.275	20	
2	5.5	5.508	20	*
3	5.5	5.494	20	*
4	5.5	5.679	20	
5	5.5	5.341	20	
6	5.5	5.462	20	
7	5.5	5.52	20	
8	5.5	5.503	20	*
9	5.5	5.612	20	
10	5.5	5.683	20	
11	5.5	5.585	20	
12	5.5	5.339	20	
13	5.5	5.43	20	
14	5.5	5.452	20	
15	5.5	5.386	20	
16	5.5	5.716	20	
17	5.5	5.471	20	
18	5.5	5.497	20	*
19	5.5	5.692	20	
20	5.5	5.674	20	
21	5.5	5.336	20	
22	5.5	5.398	20	
23	5.5	5.581	20	
24	5.5	5.255	20	
25	5.5	5.548	20	
26	5.5	5.607	20	
27	5.5	5.299	20	
28	5.5	5.304	20	
29	5.5	5.723	20	
30	5.5	5.685	20	
31	5.5	5.291	20	
32	5.5	5.518	20	
33	5.5	5.473	20	
34	5.5	5.421	20	
35	5.5	5.663	20	
36	5.5	5.547	20	
37	5.5	5.711	20	
38	5.5	5.475	20	
39	5.5	5.322	20	
40	5.5	5.713	20	
41	5.5	5.604	20	
42	5.5	5.426	20	
43	5.5	5.342	20	
44	5.5	5.632	20	
45	5.5	5.63	20	
46	5.5	5.382	20	
47	5.5	5.26	20	
48	5.5	5.538	20	
49	5.5	5.434	20	

50	5.5	5.682	20	
51	5.5	5.541	20	
52	5.5	5.375	20	
53	5.5	5.335	20	
54	5.5	5.392	20	
55	5.5	5.525	20	
56	5.5	5.379	20	
57	5.5	5.323	20	
58	5.5	5.4	20	
59	5.5	5.697	20	
60	5.5	5.664	20	
61	5.5	5.296	20	
62	5.5	5.506	20	*
63	5.5	5.457	20	
64	5.5	5.407	20	
65	5.5	5.499	20	*
66	5.5	5.294	20	
67	5.5	5.574	20	
68	5.5	5.283	20	
69	5.5	5.587	20	
70	5.5	5.512	20	
71	5.5	5.517	20	
72	5.5	5.404	20	
73	5.5	5.276	20	
74	5.5	5.485	20	
75	5.5	5.359	20	
76	5.5	5.546	20	
77	5.5	5.644	20	
78	5.5	5.354	20	
79	5.5	5.388	20	
80	5.5	5.3	20	
81	5.5	5.419	20	
82	5.5	5.27	20	
83	5.5	5.482	20	
84	5.5	5.498	20	*
85	5.5	5.706	20	
86	5.5	5.545	20	
87	5.5	5.295	20	
88	5.5	5.391	20	
89	5.5	5.454	20	
90	5.5	5.562	20	
91	5.5	5.62	20	
92	5.5	5.395	20	
93	5.5	5.645	20	
94	5.5	5.455	20	
95	5.5	5.654	20	
96	5.5	5.661	20	
97	5.5	5.303	20	
98	5.5	5.705	20	
99	5.5	5.33	20	
100	5.5	5.519	20	

--

TYPE 6 PARAMETER SHEET				
Trial Number : 2				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.3	20	
2	5.5	5.651	20	
3	5.5	5.469	20	
4	5.5	5.391	20	
5	5.5	5.467	20	
6	5.5	5.331	20	
7	5.5	5.404	20	
8	5.5	5.615	20	
9	5.5	5.723	20	
10	5.5	5.271	20	
11	5.5	5.418	20	
12	5.5	5.686	20	
13	5.5	5.631	20	
14	5.5	5.413	20	
15	5.5	5.565	20	
16	5.5	5.591	20	
17	5.5	5.568	20	
18	5.5	5.514	20	
19	5.5	5.42	20	
20	5.5	5.511	20	
21	5.5	5.393	20	
22	5.5	5.526	20	
23	5.5	5.603	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 3				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.658	20	
2	5.5	5.3	20	
3	5.5	5.273	20	
4	5.5	5.259	20	
5	5.5	5.446	20	
6	5.5	5.643	20	
7	5.5	5.342	20	
8	5.5	5.503	20	*
9	5.5	5.31	20	
10	5.5	5.336	20	
11	5.5	5.663	20	
12	5.5	5.471	20	
13	5.5	5.693	20	
14	5.5	5.272	20	
15	5.5	5.363	20	
16	5.5	5.334	20	
17	5.5	5.474	20	
18	5.5	5.532	20	
19	5.5	5.679	20	
20	5.5	5.258	20	
21	5.5	5.566	20	
22	5.5	5.347	20	
23	5.5	5.607	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 4				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.395	20	
2	5.5	5.67	20	
3	5.5	5.654	20	
4	5.5	5.522	20	
5	5.5	5.588	20	
6	5.5	5.651	20	
7	5.5	5.579	20	
8	5.5	5.412	20	
9	5.5	5.451	20	
10	5.5	5.316	20	
11	5.5	5.284	20	
12	5.5	5.542	20	
13	5.5	5.278	20	
14	5.5	5.513	20	
15	5.5	5.29	20	
16	5.5	5.55	20	
17	5.5	5.311	20	
18	5.5	5.397	20	
19	5.5	5.424	20	
20	5.5	5.45	20	
21	5.5	5.577	20	
22	5.5	5.531	20	
23	5.5	5.648	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 5				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.714	20	
2	5.5	5.422	20	
3	5.5	5.63	20	
4	5.5	5.536	20	
5	5.5	5.684	20	
6	5.5	5.251	20	
7	5.5	5.477	20	
8	5.5	5.374	20	
9	5.5	5.396	20	
10	5.5	5.673	20	
11	5.5	5.606	20	
12	5.5	5.43	20	
13	5.5	5.404	20	
14	5.5	5.377	20	
15	5.5	5.692	20	
16	5.5	5.515	20	
17	5.5	5.445	20	
18	5.5	5.704	20	
19	5.5	5.351	20	
20	5.5	5.257	20	
21	5.5	5.419	20	
22	5.5	5.32	20	
23	5.5	5.616	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 6				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.312	20	
2	5.5	5.716	20	
3	5.5	5.478	20	
4	5.5	5.295	20	
5	5.5	5.409	20	
6	5.5	5.695	20	
7	5.5	5.574	20	
8	5.5	5.388	20	
9	5.5	5.519	20	
10	5.5	5.434	20	
11	5.5	5.315	20	
12	5.5	5.473	20	
13	5.5	5.621	20	
14	5.5	5.313	20	
15	5.5	5.414	20	
16	5.5	5.689	20	
17	5.5	5.4	20	
18	5.5	5.676	20	
19	5.5	5.659	20	
20	5.5	5.43	20	
21	5.5	5.405	20	
22	5.5	5.586	20	
23	5.5	5.298	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 7				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.483	20	
2	5.5	5.292	20	
3	5.5	5.425	20	
4	5.5	5.542	20	
5	5.5	5.405	20	
6	5.5	5.651	20	
7	5.5	5.537	20	
8	5.5	5.602	20	
9	5.5	5.454	20	
10	5.5	5.713	20	
11	5.5	5.488	20	
12	5.5	5.304	20	
13	5.5	5.279	20	
14	5.5	5.388	20	
15	5.5	5.605	20	
16	5.5	5.544	20	
17	5.5	5.474	20	
18	5.5	5.682	20	
19	5.5	5.362	20	
20	5.5	5.565	20	
21	5.5	5.532	20	
22	5.5	5.26	20	
23	5.5	5.556	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 8				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.658	20	
2	5.5	5.478	20	
3	5.5	5.266	20	
4	5.5	5.307	20	
5	5.5	5.547	20	
6	5.5	5.56	20	
7	5.5	5.691	20	
8	5.5	5.363	20	
9	5.5	5.346	20	
10	5.5	5.458	20	
11	5.5	5.461	20	
12	5.5	5.409	20	
13	5.5	5.576	20	
14	5.5	5.665	20	
15	5.5	5.502	20	*
16	5.5	5.415	20	
17	5.5	5.599	20	
18	5.5	5.602	20	
19	5.5	5.417	20	
20	5.5	5.539	20	
21	5.5	5.667	20	
22	5.5	5.329	20	
23	5.5	5.551	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 9				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.444	20	
2	5.5	5.365	20	
3	5.5	5.367	20	
4	5.5	5.68	20	
5	5.5	5.277	20	
6	5.5	5.42	20	
7	5.5	5.643	20	
8	5.5	5.472	20	
9	5.5	5.618	20	
10	5.5	5.499	20	*
11	5.5	5.296	20	
12	5.5	5.559	20	
13	5.5	5.544	20	
14	5.5	5.577	20	
15	5.5	5.606	20	
16	5.5	5.422	20	
17	5.5	5.314	20	
18	5.5	5.574	20	
19	5.5	5.672	20	
20	5.5	5.272	20	
21	5.5	5.386	20	
22	5.5	5.47	20	
23	5.5	5.527	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 10				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.669	20	
2	5.5	5.43	20	
3	5.5	5.551	20	
4	5.5	5.349	20	
5	5.5	5.436	20	
6	5.5	5.413	20	
7	5.5	5.256	20	
8	5.5	5.353	20	
9	5.5	5.677	20	
10	5.5	5.404	20	
11	5.5	5.665	20	
12	5.5	5.355	20	
13	5.5	5.498	20	*
14	5.5	5.595	20	
15	5.5	5.53	20	
16	5.5	5.648	20	
17	5.5	5.6	20	
18	5.5	5.602	20	
19	5.5	5.375	20	
20	5.5	5.386	20	
21	5.5	5.63	20	
22	5.5	5.456	20	
23	5.5	5.425	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 11				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.389	20	
2	5.5	5.703	20	
3	5.5	5.338	20	
4	5.5	5.524	20	
5	5.5	5.619	20	
6	5.5	5.588	20	
7	5.5	5.414	20	
8	5.5	5.408	20	
9	5.5	5.701	20	
10	5.5	5.616	20	
11	5.5	5.394	20	
12	5.5	5.351	20	
13	5.5	5.433	20	
14	5.5	5.561	20	
15	5.5	5.549	20	
16	5.5	5.47	20	
17	5.5	5.321	20	
18	5.5	5.302	20	
19	5.5	5.263	20	
20	5.5	5.372	20	
21	5.5	5.266	20	
22	5.5	5.641	20	
23	5.5	5.438	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 12				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.425	20	
2	5.5	5.671	20	
3	5.5	5.408	20	
4	5.5	5.26	20	
5	5.5	5.503	20	*
6	5.5	5.32	20	
7	5.5	5.402	20	
8	5.5	5.5	20	*
9	5.5	5.356	20	
10	5.5	5.679	20	
11	5.5	5.549	20	
12	5.5	5.522	20	
13	5.5	5.396	20	
14	5.5	5.452	20	
15	5.5	5.318	20	
16	5.5	5.664	20	
17	5.5	5.392	20	
18	5.5	5.354	20	
19	5.5	5.374	20	
20	5.5	5.35	20	
21	5.5	5.34	20	
22	5.5	5.608	20	
23	5.5	5.279	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 13				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.671	20	
2	5.5	5.353	20	
3	5.5	5.335	20	
4	5.5	5.684	20	
5	5.5	5.589	20	
6	5.5	5.602	20	
7	5.5	5.345	20	
8	5.5	5.305	20	
9	5.5	5.497	20	*
10	5.5	5.701	20	
11	5.5	5.624	20	
12	5.5	5.583	20	
13	5.5	5.618	20	
14	5.5	5.636	20	
15	5.5	5.417	20	
16	5.5	5.411	20	
17	5.5	5.617	20	
18	5.5	5.373	20	
19	5.5	5.351	20	
20	5.5	5.366	20	
21	5.5	5.433	20	
22	5.5	5.354	20	
23	5.5	5.458	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 14				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.415	20	
2	5.5	5.273	20	
3	5.5	5.697	20	
4	5.5	5.55	20	
5	5.5	5.453	20	
6	5.5	5.483	20	
7	5.5	5.253	20	
8	5.5	5.343	20	
9	5.5	5.266	20	
10	5.5	5.662	20	
11	5.5	5.46	20	
12	5.5	5.651	20	
13	5.5	5.502	20	*
14	5.5	5.532	20	
15	5.5	5.593	20	
16	5.5	5.666	20	
17	5.5	5.667	20	
18	5.5	5.698	20	
19	5.5	5.714	20	
20	5.5	5.563	20	
21	5.5	5.625	20	
22	5.5	5.595	20	
23	5.5	5.512	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 15				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.647	20	
2	5.5	5.331	20	
3	5.5	5.474	20	
4	5.5	5.656	20	
5	5.5	5.274	20	
6	5.5	5.56	20	
7	5.5	5.557	20	
8	5.5	5.485	20	
9	5.5	5.483	20	
10	5.5	5.62	20	
11	5.5	5.342	20	
12	5.5	5.595	20	
13	5.5	5.709	20	
14	5.5	5.279	20	
15	5.5	5.533	20	
16	5.5	5.678	20	
17	5.5	5.409	20	
18	5.5	5.519	20	
19	5.5	5.482	20	
20	5.5	5.491	20	*
21	5.5	5.564	20	
22	5.5	5.412	20	
23	5.5	5.288	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 16				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.306	20	
2	5.5	5.488	20	
3	5.5	5.311	20	
4	5.5	5.425	20	
5	5.5	5.365	20	
6	5.5	5.503	20	*
7	5.5	5.654	20	
8	5.5	5.523	20	
9	5.5	5.446	20	
10	5.5	5.258	20	
11	5.5	5.458	20	
12	5.5	5.724	20	
13	5.5	5.418	20	
14	5.5	5.457	20	
15	5.5	5.272	20	
16	5.5	5.661	20	
17	5.5	5.371	20	
18	5.5	5.645	20	
19	5.5	5.577	20	
20	5.5	5.426	20	
21	5.5	5.338	20	
22	5.5	5.411	20	
23	5.5	5.381	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 17				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.519	20	
2	5.5	5.388	20	
3	5.5	5.591	20	
4	5.5	5.425	20	
5	5.5	5.365	20	
6	5.5	5.443	20	
7	5.5	5.712	20	
8	5.5	5.603	20	
9	5.5	5.714	20	
10	5.5	5.565	20	
11	5.5	5.596	20	
12	5.5	5.566	20	
13	5.5	5.503	20	*
14	5.5	5.53	20	
15	5.5	5.694	20	
16	5.5	5.461	20	
17	5.5	5.467	20	
18	5.5	5.406	20	
19	5.5	5.312	20	
20	5.5	5.41	20	
21	5.5	5.293	20	
22	5.5	5.271	20	
23	5.5	5.645	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 18				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.673	20	
2	5.5	5.374	20	
3	5.5	5.72	20	
4	5.5	5.333	20	
5	5.5	5.293	20	
6	5.5	5.329	20	
7	5.5	5.714	20	
8	5.5	5.366	20	
9	5.5	5.672	20	
10	5.5	5.304	20	
11	5.5	5.679	20	
12	5.5	5.529	20	
13	5.5	5.516	20	
14	5.5	5.386	20	
15	5.5	5.336	20	
16	5.5	5.61	20	
17	5.5	5.685	20	
18	5.5	5.257	20	
19	5.5	5.512	20	
20	5.5	5.28	20	
21	5.5	5.448	20	
22	5.5	5.51	20	*
23	5.5	5.513	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 19				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.387	20	
2	5.5	5.333	20	
3	5.5	5.442	20	
4	5.5	5.586	20	
5	5.5	5.315	20	
6	5.5	5.53	20	
7	5.5	5.294	20	
8	5.5	5.671	20	
9	5.5	5.597	20	
10	5.5	5.602	20	
11	5.5	5.358	20	
12	5.5	5.356	20	
13	5.5	5.493	20	*
14	5.5	5.502	20	*
15	5.5	5.261	20	
16	5.5	5.437	20	
17	5.5	5.634	20	
18	5.5	5.393	20	
19	5.5	5.401	20	
20	5.5	5.398	20	
21	5.5	5.673	20	
22	5.5	5.709	20	
23	5.5	5.413	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 20				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.526	20	
2	5.5	5.293	20	
3	5.5	5.625	20	
4	5.5	5.556	20	
5	5.5	5.255	20	
6	5.5	5.347	20	
7	5.5	5.633	20	
8	5.5	5.413	20	
9	5.5	5.289	20	
10	5.5	5.598	20	
11	5.5	5.252	20	
12	5.5	5.492	20	*
13	5.5	5.35	20	
14	5.5	5.666	20	
15	5.5	5.509	20	*
16	5.5	5.561	20	
17	5.5	5.427	20	
18	5.5	5.288	20	
19	5.5	5.719	20	
20	5.5	5.622	20	
21	5.5	5.672	20	
22	5.5	5.407	20	
23	5.5	5.695	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 21				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.486	20	
2	5.5	5.43	20	
3	5.5	5.34	20	
4	5.5	5.555	20	
5	5.5	5.631	20	
6	5.5	5.337	20	
7	5.5	5.595	20	
8	5.5	5.27	20	
9	5.5	5.313	20	
10	5.5	5.457	20	
11	5.5	5.566	20	
12	5.5	5.602	20	
13	5.5	5.416	20	
14	5.5	5.434	20	
15	5.5	5.551	20	
16	5.5	5.395	20	
17	5.5	5.634	20	
18	5.5	5.539	20	
19	5.5	5.373	20	
20	5.5	5.527	20	
21	5.5	5.678	20	
22	5.5	5.562	20	
23	5.5	5.494	20	*

TYPE 6 PARAMETER SHEET				
Trial Number : 22				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.572	20	
2	5.5	5.262	20	
3	5.5	5.697	20	
4	5.5	5.626	20	
5	5.5	5.718	20	
6	5.5	5.66	20	
7	5.5	5.531	20	
8	5.5	5.632	20	
9	5.5	5.361	20	
10	5.5	5.524	20	
11	5.5	5.624	20	
12	5.5	5.32	20	
13	5.5	5.468	20	
14	5.5	5.71	20	
15	5.5	5.658	20	
16	5.5	5.314	20	
17	5.5	5.426	20	
18	5.5	5.397	20	
19	5.5	5.362	20	
20	5.5	5.592	20	
21	5.5	5.574	20	
22	5.5	5.618	20	
23	5.5	5.582	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 23				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.421	20	
2	5.5	5.637	20	
3	5.5	5.425	20	
4	5.5	5.272	20	
5	5.5	5.691	20	
6	5.5	5.308	20	
7	5.5	5.715	20	
8	5.5	5.721	20	
9	5.5	5.325	20	
10	5.5	5.297	20	
11	5.5	5.447	20	
12	5.5	5.289	20	
13	5.5	5.458	20	
14	5.5	5.496	20	*
15	5.5	5.39	20	
16	5.5	5.373	20	
17	5.5	5.469	20	
18	5.5	5.677	20	
19	5.5	5.304	20	
20	5.5	5.72	20	
21	5.5	5.433	20	
22	5.5	5.681	20	
23	5.5	5.342	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 24				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.505	20	*
2	5.5	5.438	20	
3	5.5	5.352	20	
4	5.5	5.284	20	
5	5.5	5.572	20	
6	5.5	5.312	20	
7	5.5	5.44	20	
8	5.5	5.594	20	
9	5.5	5.668	20	
10	5.5	5.684	20	
11	5.5	5.309	20	
12	5.5	5.532	20	
13	5.5	5.283	20	
14	5.5	5.68	20	
15	5.5	5.322	20	
16	5.5	5.579	20	
17	5.5	5.311	20	
18	5.5	5.353	20	
19	5.5	5.423	20	
20	5.5	5.508	20	*
21	5.5	5.315	20	
22	5.5	5.295	20	
23	5.5	5.482	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 25				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.705	20	
2	5.5	5.649	20	
3	5.5	5.672	20	
4	5.5	5.272	20	
5	5.5	5.271	20	
6	5.5	5.541	20	
7	5.5	5.582	20	
8	5.5	5.526	20	
9	5.5	5.446	20	
10	5.5	5.437	20	
11	5.5	5.553	20	
12	5.5	5.311	20	
13	5.5	5.571	20	
14	5.5	5.336	20	
15	5.5	5.387	20	
16	5.5	5.392	20	
17	5.5	5.587	20	
18	5.5	5.292	20	
19	5.5	5.58	20	
20	5.5	5.303	20	
21	5.5	5.619	20	
22	5.5	5.673	20	
23	5.5	5.413	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 26				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.629	20	
2	5.5	5.427	20	
3	5.5	5.436	20	
4	5.5	5.374	20	
5	5.5	5.405	20	
6	5.5	5.575	20	
7	5.5	5.498	20	*
8	5.5	5.72	20	
9	5.5	5.588	20	
10	5.5	5.569	20	
11	5.5	5.687	20	
12	5.5	5.455	20	
13	5.5	5.506	20	*
14	5.5	5.377	20	
15	5.5	5.354	20	
16	5.5	5.538	20	
17	5.5	5.323	20	
18	5.5	5.435	20	
19	5.5	5.382	20	
20	5.5	5.561	20	
21	5.5	5.45	20	
22	5.5	5.486	20	
23	5.5	5.267	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 27				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.708	20	
2	5.5	5.292	20	
3	5.5	5.356	20	
4	5.5	5.666	20	
5	5.5	5.306	20	
6	5.5	5.697	20	
7	5.5	5.473	20	
8	5.5	5.647	20	
9	5.5	5.58	20	
10	5.5	5.336	20	
11	5.5	5.585	20	
12	5.5	5.339	20	
13	5.5	5.278	20	
14	5.5	5.676	20	
15	5.5	5.601	20	
16	5.5	5.651	20	
17	5.5	5.46	20	
18	5.5	5.316	20	
19	5.5	5.369	20	
20	5.5	5.61	20	
21	5.5	5.452	20	
22	5.5	5.718	20	
23	5.5	5.657	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 28				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.412	20	
2	5.5	5.295	20	
3	5.5	5.716	20	
4	5.5	5.265	20	
5	5.5	5.623	20	
6	5.5	5.576	20	
7	5.5	5.523	20	
8	5.5	5.711	20	
9	5.5	5.397	20	
10	5.5	5.57	20	
11	5.5	5.25	20	
12	5.5	5.556	20	
13	5.5	5.315	20	
14	5.5	5.591	20	
15	5.5	5.608	20	
16	5.5	5.533	20	
17	5.5	5.547	20	
18	5.5	5.609	20	
19	5.5	5.286	20	
20	5.5	5.386	20	
21	5.5	5.568	20	
22	5.5	5.572	20	
23	5.5	5.706	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 29				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.527	20	
2	5.5	5.347	20	
3	5.5	5.302	20	
4	5.5	5.418	20	
5	5.5	5.502	20	*
6	5.5	5.619	20	
7	5.5	5.512	20	
8	5.5	5.31	20	
9	5.5	5.528	20	
10	5.5	5.647	20	
11	5.5	5.373	20	
12	5.5	5.69	20	
13	5.5	5.576	20	
14	5.5	5.408	20	
15	5.5	5.72	20	
16	5.5	5.303	20	
17	5.5	5.299	20	
18	5.5	5.426	20	
19	5.5	5.401	20	
20	5.5	5.289	20	
21	5.5	5.582	20	
22	5.5	5.392	20	
23	5.5	5.433	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 30				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.477	20	
2	5.5	5.488	20	
3	5.5	5.444	20	
4	5.5	5.629	20	
5	5.5	5.314	20	
6	5.5	5.44	20	
7	5.5	5.647	20	
8	5.5	5.601	20	
9	5.5	5.269	20	
10	5.5	5.427	20	
11	5.5	5.384	20	
12	5.5	5.464	20	
13	5.5	5.592	20	
14	5.5	5.251	20	
15	5.5	5.585	20	
16	5.5	5.497	20	*
17	5.5	5.431	20	
18	5.5	5.706	20	
19	5.5	5.335	20	
20	5.5	5.33	20	
21	5.5	5.347	20	
22	5.5	5.3	20	
23	5.5	5.381	20	

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Mode : Normal (802.11ac-40 MHz)
 Test Date : 2024/01/05

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	0
3	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	1
4	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	1
5	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	1
7	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	1
8	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	1
9	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	1
11	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	1
12	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	1
13	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	1
14	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	1
15	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	1
17	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	0
19	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	1
20	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	1
21	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	1
22	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	0
23	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	1
24	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	1
26	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	1
29	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			90.00
Limit			>70

TYPE 6 PARAMETER SHEET				
Trial Number : 1				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.304	40	
2	5.51	5.252	40	
3	5.51	5.596	40	
4	5.51	5.48	40	
5	5.51	5.702	40	
6	5.51	5.354	40	
7	5.51	5.677	40	
8	5.51	5.318	40	
9	5.51	5.605	40	
10	5.51	5.25	40	
11	5.51	5.595	40	
12	5.51	5.332	40	
13	5.51	5.337	40	
14	5.51	5.717	40	
15	5.51	5.69	40	
16	5.51	5.632	40	
17	5.51	5.536	40	
18	5.51	5.319	40	
19	5.51	5.699	40	
20	5.51	5.56	40	
21	5.51	5.38	40	
22	5.51	5.314	40	
23	5.51	5.441	40	
24	5.51	5.279	40	
25	5.51	5.507	40	*
26	5.51	5.266	40	
27	5.51	5.333	40	
28	5.51	5.4	40	
29	5.51	5.521	40	*
30	5.51	5.661	40	
31	5.51	5.303	40	
32	5.51	5.485	40	
33	5.51	5.585	40	
34	5.51	5.663	40	
35	5.51	5.543	40	
36	5.51	5.477	40	
37	5.51	5.339	40	
38	5.51	5.424	40	
39	5.51	5.461	40	
40	5.51	5.306	40	
41	5.51	5.504	40	*
42	5.51	5.412	40	
43	5.51	5.679	40	
44	5.51	5.46	40	
45	5.51	5.35	40	
46	5.51	5.499	40	*
47	5.51	5.298	40	
48	5.51	5.271	40	
49	5.51	5.296	40	

50	5.51	5.478	40	
51	5.51	5.607	40	
52	5.51	5.63	40	
53	5.51	5.531	40	
54	5.51	5.523	40	*
55	5.51	5.675	40	
56	5.51	5.668	40	
57	5.51	5.662	40	
58	5.51	5.514	40	*
59	5.51	5.369	40	
60	5.51	5.449	40	
61	5.51	5.525	40	*
62	5.51	5.505	40	*
63	5.51	5.587	40	
64	5.51	5.316	40	
65	5.51	5.274	40	
66	5.51	5.345	40	
67	5.51	5.312	40	
68	5.51	5.465	40	
69	5.51	5.593	40	
70	5.51	5.411	40	
71	5.51	5.529	40	*
72	5.51	5.722	40	
73	5.51	5.394	40	
74	5.51	5.256	40	
75	5.51	5.36	40	
76	5.51	5.542	40	
77	5.51	5.647	40	
78	5.51	5.511	40	*
79	5.51	5.386	40	
80	5.51	5.719	40	
81	5.51	5.701	40	
82	5.51	5.532	40	
83	5.51	5.47	40	
84	5.51	5.665	40	
85	5.51	5.428	40	
86	5.51	5.513	40	*
87	5.51	5.352	40	
88	5.51	5.28	40	
89	5.51	5.43	40	
90	5.51	5.682	40	
91	5.51	5.277	40	
92	5.51	5.615	40	
93	5.51	5.402	40	
94	5.51	5.617	40	
95	5.51	5.357	40	
96	5.51	5.5	40	*
97	5.51	5.398	40	
98	5.51	5.621	40	
99	5.51	5.713	40	
100	5.51	5.447	40	

--

TYPE 6 PARAMETER SHEET				
Trial Number : 2				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.446	40	
2	5.51	5.314	40	
3	5.51	5.473	40	
4	5.51	5.634	40	
5	5.51	5.271	40	
6	5.51	5.367	40	
7	5.51	5.548	40	
8	5.51	5.616	40	
9	5.51	5.393	40	
10	5.51	5.338	40	
11	5.51	5.629	40	
12	5.51	5.486	40	
13	5.51	5.708	40	
14	5.51	5.465	40	
15	5.51	5.571	40	
16	5.51	5.435	40	
17	5.51	5.684	40	
18	5.51	5.696	40	
19	5.51	5.31	40	
20	5.51	5.462	40	
21	5.51	5.319	40	
22	5.51	5.299	40	
23	5.51	5.601	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 3				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.647	40	
2	5.51	5.386	40	
3	5.51	5.628	40	
4	5.51	5.639	40	
5	5.51	5.545	40	
6	5.51	5.338	40	
7	5.51	5.349	40	
8	5.51	5.638	40	
9	5.51	5.693	40	
10	5.51	5.382	40	
11	5.51	5.36	40	
12	5.51	5.723	40	
13	5.51	5.7	40	
14	5.51	5.284	40	
15	5.51	5.533	40	
16	5.51	5.564	40	
17	5.51	5.402	40	
18	5.51	5.358	40	
19	5.51	5.346	40	
20	5.51	5.577	40	
21	5.51	5.507	40	*
22	5.51	5.421	40	
23	5.51	5.566	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 4				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.502	40	*
2	5.51	5.401	40	
3	5.51	5.677	40	
4	5.51	5.712	40	
5	5.51	5.687	40	
6	5.51	5.581	40	
7	5.51	5.675	40	
8	5.51	5.709	40	
9	5.51	5.257	40	
10	5.51	5.585	40	
11	5.51	5.52	40	*
12	5.51	5.338	40	
13	5.51	5.564	40	
14	5.51	5.59	40	
15	5.51	5.57	40	
16	5.51	5.279	40	
17	5.51	5.648	40	
18	5.51	5.55	40	
19	5.51	5.322	40	
20	5.51	5.673	40	
21	5.51	5.373	40	
22	5.51	5.295	40	
23	5.51	5.259	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 5				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.509	40	*
2	5.51	5.689	40	
3	5.51	5.687	40	
4	5.51	5.339	40	
5	5.51	5.382	40	
6	5.51	5.419	40	
7	5.51	5.629	40	
8	5.51	5.639	40	
9	5.51	5.295	40	
10	5.51	5.334	40	
11	5.51	5.588	40	
12	5.51	5.429	40	
13	5.51	5.402	40	
14	5.51	5.583	40	
15	5.51	5.471	40	
16	5.51	5.304	40	
17	5.51	5.465	40	
18	5.51	5.264	40	
19	5.51	5.258	40	
20	5.51	5.683	40	
21	5.51	5.381	40	
22	5.51	5.426	40	
23	5.51	5.487	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 6				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.571	40	
2	5.51	5.443	40	
3	5.51	5.425	40	
4	5.51	5.266	40	
5	5.51	5.405	40	
6	5.51	5.346	40	
7	5.51	5.388	40	
8	5.51	5.302	40	
9	5.51	5.256	40	
10	5.51	5.546	40	
11	5.51	5.645	40	
12	5.51	5.273	40	
13	5.51	5.706	40	
14	5.51	5.342	40	
15	5.51	5.34	40	
16	5.51	5.379	40	
17	5.51	5.717	40	
18	5.51	5.651	40	
19	5.51	5.423	40	
20	5.51	5.432	40	
21	5.51	5.412	40	
22	5.51	5.439	40	
23	5.51	5.653	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 7				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.405	40	
2	5.51	5.29	40	
3	5.51	5.45	40	
4	5.51	5.375	40	
5	5.51	5.38	40	
6	5.51	5.485	40	
7	5.51	5.472	40	
8	5.51	5.461	40	
9	5.51	5.548	40	
10	5.51	5.688	40	
11	5.51	5.608	40	
12	5.51	5.494	40	*
13	5.51	5.621	40	
14	5.51	5.716	40	
15	5.51	5.547	40	
16	5.51	5.294	40	
17	5.51	5.552	40	
18	5.51	5.542	40	
19	5.51	5.712	40	
20	5.51	5.591	40	
21	5.51	5.651	40	
22	5.51	5.569	40	
23	5.51	5.435	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 8				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.612	40	
2	5.51	5.317	40	
3	5.51	5.628	40	
4	5.51	5.705	40	
5	5.51	5.625	40	
6	5.51	5.637	40	
7	5.51	5.523	40	*
8	5.51	5.322	40	
9	5.51	5.346	40	
10	5.51	5.297	40	
11	5.51	5.427	40	
12	5.51	5.357	40	
13	5.51	5.709	40	
14	5.51	5.253	40	
15	5.51	5.57	40	
16	5.51	5.618	40	
17	5.51	5.449	40	
18	5.51	5.351	40	
19	5.51	5.704	40	
20	5.51	5.692	40	
21	5.51	5.555	40	
22	5.51	5.29	40	
23	5.51	5.483	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 9				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.362	40	
2	5.51	5.511	40	*
3	5.51	5.722	40	
4	5.51	5.63	40	
5	5.51	5.418	40	
6	5.51	5.255	40	
7	5.51	5.406	40	
8	5.51	5.27	40	
9	5.51	5.594	40	
10	5.51	5.724	40	
11	5.51	5.462	40	
12	5.51	5.454	40	
13	5.51	5.433	40	
14	5.51	5.585	40	
15	5.51	5.642	40	
16	5.51	5.596	40	
17	5.51	5.435	40	
18	5.51	5.714	40	
19	5.51	5.679	40	
20	5.51	5.455	40	
21	5.51	5.257	40	
22	5.51	5.603	40	
23	5.51	5.69	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 10				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.295	40	
2	5.51	5.695	40	
3	5.51	5.701	40	
4	5.51	5.391	40	
5	5.51	5.703	40	
6	5.51	5.716	40	
7	5.51	5.632	40	
8	5.51	5.445	40	
9	5.51	5.647	40	
10	5.51	5.465	40	
11	5.51	5.294	40	
12	5.51	5.685	40	
13	5.51	5.424	40	
14	5.51	5.586	40	
15	5.51	5.545	40	
16	5.51	5.456	40	
17	5.51	5.291	40	
18	5.51	5.405	40	
19	5.51	5.408	40	
20	5.51	5.641	40	
21	5.51	5.686	40	
22	5.51	5.617	40	
23	5.51	5.481	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 11				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.276	40	
2	5.51	5.422	40	
3	5.51	5.306	40	
4	5.51	5.646	40	
5	5.51	5.489	40	
6	5.51	5.6	40	
7	5.51	5.364	40	
8	5.51	5.524	40	*
9	5.51	5.397	40	
10	5.51	5.29	40	
11	5.51	5.431	40	
12	5.51	5.254	40	
13	5.51	5.444	40	
14	5.51	5.283	40	
15	5.51	5.69	40	
16	5.51	5.485	40	
17	5.51	5.707	40	
18	5.51	5.723	40	
19	5.51	5.402	40	
20	5.51	5.382	40	
21	5.51	5.471	40	
22	5.51	5.672	40	
23	5.51	5.698	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 12				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.297	40	
2	5.51	5.467	40	
3	5.51	5.65	40	
4	5.51	5.577	40	
5	5.51	5.624	40	
6	5.51	5.437	40	
7	5.51	5.335	40	
8	5.51	5.481	40	
9	5.51	5.268	40	
10	5.51	5.484	40	
11	5.51	5.611	40	
12	5.51	5.531	40	
13	5.51	5.431	40	
14	5.51	5.326	40	
15	5.51	5.513	40	*
16	5.51	5.406	40	
17	5.51	5.53	40	*
18	5.51	5.354	40	
19	5.51	5.709	40	
20	5.51	5.722	40	
21	5.51	5.336	40	
22	5.51	5.565	40	
23	5.51	5.476	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 13				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.607	40	
2	5.51	5.504	40	*
3	5.51	5.487	40	
4	5.51	5.567	40	
5	5.51	5.602	40	
6	5.51	5.551	40	
7	5.51	5.454	40	
8	5.51	5.518	40	*
9	5.51	5.72	40	
10	5.51	5.695	40	
11	5.51	5.303	40	
12	5.51	5.492	40	*
13	5.51	5.647	40	
14	5.51	5.59	40	
15	5.51	5.437	40	
16	5.51	5.297	40	
17	5.51	5.354	40	
18	5.51	5.32	40	
19	5.51	5.58	40	
20	5.51	5.549	40	
21	5.51	5.433	40	
22	5.51	5.593	40	
23	5.51	5.512	40	*

TYPE 6 PARAMETER SHEET				
Trial Number : 14				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.695	40	
2	5.51	5.51	40	*
3	5.51	5.396	40	
4	5.51	5.666	40	
5	5.51	5.475	40	
6	5.51	5.642	40	
7	5.51	5.273	40	
8	5.51	5.557	40	
9	5.51	5.282	40	
10	5.51	5.426	40	
11	5.51	5.662	40	
12	5.51	5.284	40	
13	5.51	5.668	40	
14	5.51	5.388	40	
15	5.51	5.39	40	
16	5.51	5.616	40	
17	5.51	5.627	40	
18	5.51	5.361	40	
19	5.51	5.447	40	
20	5.51	5.635	40	
21	5.51	5.526	40	*
22	5.51	5.425	40	
23	5.51	5.705	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 15				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.254	40	
2	5.51	5.376	40	
3	5.51	5.69	40	
4	5.51	5.463	40	
5	5.51	5.706	40	
6	5.51	5.558	40	
7	5.51	5.633	40	
8	5.51	5.489	40	
9	5.51	5.699	40	
10	5.51	5.722	40	
11	5.51	5.262	40	
12	5.51	5.661	40	
13	5.51	5.538	40	
14	5.51	5.556	40	
15	5.51	5.257	40	
16	5.51	5.42	40	
17	5.51	5.454	40	
18	5.51	5.615	40	
19	5.51	5.636	40	
20	5.51	5.264	40	
21	5.51	5.578	40	
22	5.51	5.539	40	
23	5.51	5.366	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 16				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.621	40	
2	5.51	5.601	40	
3	5.51	5.523	40	*
4	5.51	5.473	40	
5	5.51	5.469	40	
6	5.51	5.609	40	
7	5.51	5.293	40	
8	5.51	5.683	40	
9	5.51	5.707	40	
10	5.51	5.495	40	*
11	5.51	5.277	40	
12	5.51	5.62	40	
13	5.51	5.689	40	
14	5.51	5.396	40	
15	5.51	5.562	40	
16	5.51	5.533	40	
17	5.51	5.658	40	
18	5.51	5.535	40	
19	5.51	5.603	40	
20	5.51	5.328	40	
21	5.51	5.423	40	
22	5.51	5.401	40	
23	5.51	5.447	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 17				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.251	40	
2	5.51	5.347	40	
3	5.51	5.706	40	
4	5.51	5.622	40	
5	5.51	5.717	40	
6	5.51	5.37	40	
7	5.51	5.602	40	
8	5.51	5.263	40	
9	5.51	5.53	40	*
10	5.51	5.285	40	
11	5.51	5.486	40	
12	5.51	5.707	40	
13	5.51	5.721	40	
14	5.51	5.586	40	
15	5.51	5.67	40	
16	5.51	5.56	40	
17	5.51	5.352	40	
18	5.51	5.504	40	*
19	5.51	5.418	40	
20	5.51	5.517	40	*
21	5.51	5.547	40	
22	5.51	5.604	40	
23	5.51	5.385	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 18				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.708	40	
2	5.51	5.402	40	
3	5.51	5.421	40	
4	5.51	5.657	40	
5	5.51	5.701	40	
6	5.51	5.308	40	
7	5.51	5.383	40	
8	5.51	5.272	40	
9	5.51	5.29	40	
10	5.51	5.529	40	*
11	5.51	5.512	40	*
12	5.51	5.299	40	
13	5.51	5.568	40	
14	5.51	5.263	40	
15	5.51	5.533	40	
16	5.51	5.682	40	
17	5.51	5.422	40	
18	5.51	5.532	40	
19	5.51	5.387	40	
20	5.51	5.304	40	
21	5.51	5.415	40	
22	5.51	5.58	40	
23	5.51	5.497	40	*

TYPE 6 PARAMETER SHEET				
Trial Number : 19				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.471	40	
2	5.51	5.506	40	*
3	5.51	5.685	40	
4	5.51	5.702	40	
5	5.51	5.665	40	
6	5.51	5.549	40	
7	5.51	5.428	40	
8	5.51	5.42	40	
9	5.51	5.452	40	
10	5.51	5.315	40	
11	5.51	5.486	40	
12	5.51	5.658	40	
13	5.51	5.577	40	
14	5.51	5.262	40	
15	5.51	5.707	40	
16	5.51	5.676	40	
17	5.51	5.45	40	
18	5.51	5.395	40	
19	5.51	5.646	40	
20	5.51	5.298	40	
21	5.51	5.417	40	
22	5.51	5.581	40	
23	5.51	5.391	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 20				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.372	40	
2	5.51	5.596	40	
3	5.51	5.401	40	
4	5.51	5.703	40	
5	5.51	5.275	40	
6	5.51	5.281	40	
7	5.51	5.472	40	
8	5.51	5.45	40	
9	5.51	5.384	40	
10	5.51	5.366	40	
11	5.51	5.499	40	*
12	5.51	5.432	40	
13	5.51	5.452	40	
14	5.51	5.317	40	
15	5.51	5.524	40	*
16	5.51	5.27	40	
17	5.51	5.501	40	*
18	5.51	5.337	40	
19	5.51	5.569	40	
20	5.51	5.673	40	
21	5.51	5.688	40	
22	5.51	5.582	40	
23	5.51	5.448	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 21				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.683	40	
2	5.51	5.525	40	*
3	5.51	5.577	40	
4	5.51	5.52	40	*
5	5.51	5.341	40	
6	5.51	5.406	40	
7	5.51	5.483	40	
8	5.51	5.626	40	
9	5.51	5.507	40	*
10	5.51	5.646	40	
11	5.51	5.275	40	
12	5.51	5.37	40	
13	5.51	5.628	40	
14	5.51	5.71	40	
15	5.51	5.287	40	
16	5.51	5.335	40	
17	5.51	5.302	40	
18	5.51	5.393	40	
19	5.51	5.284	40	
20	5.51	5.303	40	
21	5.51	5.617	40	
22	5.51	5.285	40	
23	5.51	5.522	40	*

TYPE 6 PARAMETER SHEET				
Trial Number : 22				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.482	40	
2	5.51	5.342	40	
3	5.51	5.487	40	
4	5.51	5.676	40	
5	5.51	5.686	40	
6	5.51	5.375	40	
7	5.51	5.367	40	
8	5.51	5.343	40	
9	5.51	5.358	40	
10	5.51	5.407	40	
11	5.51	5.685	40	
12	5.51	5.497	40	*
13	5.51	5.509	40	*
14	5.51	5.364	40	
15	5.51	5.473	40	
16	5.51	5.386	40	
17	5.51	5.674	40	
18	5.51	5.583	40	
19	5.51	5.537	40	
20	5.51	5.441	40	
21	5.51	5.4	40	
22	5.51	5.299	40	
23	5.51	5.413	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 23				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.517	40	*
2	5.51	5.291	40	
3	5.51	5.602	40	
4	5.51	5.627	40	
5	5.51	5.34	40	
6	5.51	5.44	40	
7	5.51	5.42	40	
8	5.51	5.427	40	
9	5.51	5.29	40	
10	5.51	5.326	40	
11	5.51	5.433	40	
12	5.51	5.678	40	
13	5.51	5.416	40	
14	5.51	5.422	40	
15	5.51	5.358	40	
16	5.51	5.425	40	
17	5.51	5.593	40	
18	5.51	5.531	40	
19	5.51	5.253	40	
20	5.51	5.333	40	
21	5.51	5.613	40	
22	5.51	5.473	40	
23	5.51	5.632	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 24				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.64	40	
2	5.51	5.251	40	
3	5.51	5.541	40	
4	5.51	5.302	40	
5	5.51	5.516	40	*
6	5.51	5.484	40	
7	5.51	5.518	40	*
8	5.51	5.596	40	
9	5.51	5.286	40	
10	5.51	5.311	40	
11	5.51	5.269	40	
12	5.51	5.555	40	
13	5.51	5.437	40	
14	5.51	5.28	40	
15	5.51	5.572	40	
16	5.51	5.652	40	
17	5.51	5.344	40	
18	5.51	5.418	40	
19	5.51	5.442	40	
20	5.51	5.574	40	
21	5.51	5.329	40	
22	5.51	5.39	40	
23	5.51	5.542	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 25				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.537	40	
2	5.51	5.358	40	
3	5.51	5.687	40	
4	5.51	5.668	40	
5	5.51	5.624	40	
6	5.51	5.305	40	
7	5.51	5.646	40	
8	5.51	5.484	40	
9	5.51	5.411	40	
10	5.51	5.438	40	
11	5.51	5.616	40	
12	5.51	5.65	40	
13	5.51	5.673	40	
14	5.51	5.564	40	
15	5.51	5.439	40	
16	5.51	5.493	40	*
17	5.51	5.479	40	
18	5.51	5.413	40	
19	5.51	5.383	40	
20	5.51	5.498	40	*
21	5.51	5.634	40	
22	5.51	5.586	40	
23	5.51	5.678	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 26				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.67	40	
2	5.51	5.632	40	
3	5.51	5.419	40	
4	5.51	5.499	40	*
5	5.51	5.492	40	*
6	5.51	5.421	40	
7	5.51	5.344	40	
8	5.51	5.401	40	
9	5.51	5.605	40	
10	5.51	5.384	40	
11	5.51	5.501	40	*
12	5.51	5.263	40	
13	5.51	5.406	40	
14	5.51	5.314	40	
15	5.51	5.278	40	
16	5.51	5.342	40	
17	5.51	5.493	40	*
18	5.51	5.529	40	*
19	5.51	5.34	40	
20	5.51	5.533	40	
21	5.51	5.528	40	*
22	5.51	5.438	40	
23	5.51	5.659	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 27				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.629	40	
2	5.51	5.271	40	
3	5.51	5.558	40	
4	5.51	5.687	40	
5	5.51	5.615	40	
6	5.51	5.379	40	
7	5.51	5.296	40	
8	5.51	5.414	40	
9	5.51	5.285	40	
10	5.51	5.426	40	
11	5.51	5.654	40	
12	5.51	5.555	40	
13	5.51	5.712	40	
14	5.51	5.513	40	*
15	5.51	5.478	40	
16	5.51	5.417	40	
17	5.51	5.335	40	
18	5.51	5.353	40	
19	5.51	5.323	40	
20	5.51	5.442	40	
21	5.51	5.613	40	
22	5.51	5.722	40	
23	5.51	5.561	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 28				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.44	40	
2	5.51	5.477	40	
3	5.51	5.446	40	
4	5.51	5.577	40	
5	5.51	5.313	40	
6	5.51	5.612	40	
7	5.51	5.55	40	
8	5.51	5.455	40	
9	5.51	5.315	40	
10	5.51	5.458	40	
11	5.51	5.409	40	
12	5.51	5.62	40	
13	5.51	5.536	40	
14	5.51	5.632	40	
15	5.51	5.524	40	*
16	5.51	5.281	40	
17	5.51	5.322	40	
18	5.51	5.635	40	
19	5.51	5.489	40	
20	5.51	5.266	40	
21	5.51	5.38	40	
22	5.51	5.426	40	
23	5.51	5.653	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 29				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.615	40	
2	5.51	5.311	40	
3	5.51	5.706	40	
4	5.51	5.295	40	
5	5.51	5.713	40	
6	5.51	5.389	40	
7	5.51	5.71	40	
8	5.51	5.547	40	
9	5.51	5.585	40	
10	5.51	5.645	40	
11	5.51	5.559	40	
12	5.51	5.616	40	
13	5.51	5.532	40	
14	5.51	5.523	40	*
15	5.51	5.614	40	
16	5.51	5.464	40	
17	5.51	5.335	40	
18	5.51	5.657	40	
19	5.51	5.634	40	
20	5.51	5.362	40	
21	5.51	5.692	40	
22	5.51	5.672	40	
23	5.51	5.604	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 30				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.626	40	
2	5.51	5.427	40	
3	5.51	5.44	40	
4	5.51	5.37	40	
5	5.51	5.504	40	*
6	5.51	5.706	40	
7	5.51	5.369	40	
8	5.51	5.576	40	
9	5.51	5.548	40	
10	5.51	5.683	40	
11	5.51	5.676	40	
12	5.51	5.478	40	
13	5.51	5.486	40	
14	5.51	5.366	40	
15	5.51	5.373	40	
16	5.51	5.4	40	
17	5.51	5.41	40	
18	5.51	5.569	40	
19	5.51	5.323	40	
20	5.51	5.299	40	
21	5.51	5.294	40	
22	5.51	5.603	40	
23	5.51	5.562	40	

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Mode : Normal (802.11ac-80 MHz)
 Test Date : 2024/01/05

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	1
3	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	1
4	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	1
5	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	1
7	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	1
8	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	1
9	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	1
11	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	1
12	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	0
13	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	1
14	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	1
15	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	1
17	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	1
19	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	1
20	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	1
21	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	1
22	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	1
23	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	1
24	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	0
26	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	1
29	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			93.33
Limit			>70

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.624	80	
2	5.53	5.564	80	*
3	5.53	5.656	80	
4	5.53	5.561	80	*
5	5.53	5.362	80	
6	5.53	5.548	80	*
7	5.53	5.43	80	
8	5.53	5.706	80	
9	5.53	5.703	80	
10	5.53	5.641	80	
11	5.53	5.422	80	
12	5.53	5.531	80	*
13	5.53	5.588	80	
14	5.53	5.523	80	*
15	5.53	5.618	80	
16	5.53	5.387	80	
17	5.53	5.412	80	
18	5.53	5.625	80	
19	5.53	5.4	80	
20	5.53	5.424	80	
21	5.53	5.557	80	*
22	5.53	5.559	80	*
23	5.53	5.658	80	
24	5.53	5.392	80	
25	5.53	5.278	80	
26	5.53	5.563	80	*
27	5.53	5.721	80	
28	5.53	5.616	80	
29	5.53	5.501	80	*
30	5.53	5.313	80	
31	5.53	5.294	80	
32	5.53	5.323	80	
33	5.53	5.527	80	*
34	5.53	5.295	80	
35	5.53	5.433	80	
36	5.53	5.611	80	
37	5.53	5.499	80	*
38	5.53	5.686	80	
39	5.53	5.453	80	
40	5.53	5.556	80	*
41	5.53	5.361	80	
42	5.53	5.312	80	
43	5.53	5.504	80	*
44	5.53	5.45	80	
45	5.53	5.613	80	
46	5.53	5.46	80	
47	5.53	5.332	80	
48	5.53	5.353	80	
49	5.53	5.372	80	

50	5.53	5.62	80	
51	5.53	5.525	80	*
52	5.53	5.636	80	
53	5.53	5.363	80	
54	5.53	5.354	80	
55	5.53	5.374	80	
56	5.53	5.321	80	
57	5.53	5.543	80	*
58	5.53	5.536	80	*
59	5.53	5.631	80	
60	5.53	5.386	80	
61	5.53	5.629	80	
62	5.53	5.607	80	
63	5.53	5.614	80	
64	5.53	5.615	80	
65	5.53	5.26	80	
66	5.53	5.286	80	
67	5.53	5.663	80	
68	5.53	5.601	80	
69	5.53	5.443	80	
70	5.53	5.722	80	
71	5.53	5.437	80	
72	5.53	5.645	80	
73	5.53	5.447	80	
74	5.53	5.677	80	
75	5.53	5.595	80	
76	5.53	5.446	80	
77	5.53	5.651	80	
78	5.53	5.27	80	
79	5.53	5.672	80	
80	5.53	5.574	80	
81	5.53	5.262	80	
82	5.53	5.56	80	*
83	5.53	5.445	80	
84	5.53	5.409	80	
85	5.53	5.498	80	*
86	5.53	5.364	80	
87	5.53	5.293	80	
88	5.53	5.528	80	*
89	5.53	5.389	80	
90	5.53	5.69	80	
91	5.53	5.396	80	
92	5.53	5.406	80	
93	5.53	5.716	80	
94	5.53	5.705	80	
95	5.53	5.466	80	
96	5.53	5.407	80	
97	5.53	5.366	80	
98	5.53	5.67	80	
99	5.53	5.415	80	
100	5.53	5.259	80	

--

TYPE 6 PARAMETER SHEET				
Trial Number : 2				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.659	80	
2	5.53	5.603	80	
3	5.53	5.685	80	
4	5.53	5.436	80	
5	5.53	5.313	80	
6	5.53	5.633	80	
7	5.53	5.665	80	
8	5.53	5.427	80	
9	5.53	5.467	80	
10	5.53	5.446	80	
11	5.53	5.532	80	*
12	5.53	5.629	80	
13	5.53	5.631	80	
14	5.53	5.635	80	
15	5.53	5.602	80	
16	5.53	5.279	80	
17	5.53	5.261	80	
18	5.53	5.712	80	
19	5.53	5.46	80	
20	5.53	5.389	80	
21	5.53	5.543	80	*
22	5.53	5.599	80	
23	5.53	5.287	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 3				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.307	80	
2	5.53	5.354	80	
3	5.53	5.624	80	
4	5.53	5.629	80	
5	5.53	5.704	80	
6	5.53	5.581	80	
7	5.53	5.495	80	*
8	5.53	5.411	80	
9	5.53	5.409	80	
10	5.53	5.42	80	
11	5.53	5.58	80	
12	5.53	5.506	80	*
13	5.53	5.558	80	*
14	5.53	5.649	80	
15	5.53	5.473	80	
16	5.53	5.438	80	
17	5.53	5.711	80	
18	5.53	5.537	80	*
19	5.53	5.365	80	
20	5.53	5.528	80	*
21	5.53	5.608	80	
22	5.53	5.475	80	
23	5.53	5.716	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 4				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.67	80	
2	5.53	5.433	80	
3	5.53	5.595	80	
4	5.53	5.563	80	*
5	5.53	5.494	80	*
6	5.53	5.576	80	
7	5.53	5.708	80	
8	5.53	5.543	80	*
9	5.53	5.616	80	
10	5.53	5.591	80	
11	5.53	5.286	80	
12	5.53	5.309	80	
13	5.53	5.472	80	
14	5.53	5.553	80	*
15	5.53	5.268	80	
16	5.53	5.503	80	*
17	5.53	5.654	80	
18	5.53	5.56	80	*
19	5.53	5.618	80	
20	5.53	5.383	80	
21	5.53	5.513	80	*
22	5.53	5.288	80	
23	5.53	5.334	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 5				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.355	80	
2	5.53	5.257	80	
3	5.53	5.517	80	*
4	5.53	5.537	80	*
5	5.53	5.433	80	
6	5.53	5.514	80	*
7	5.53	5.617	80	
8	5.53	5.585	80	
9	5.53	5.494	80	*
10	5.53	5.442	80	
11	5.53	5.611	80	
12	5.53	5.669	80	
13	5.53	5.387	80	
14	5.53	5.268	80	
15	5.53	5.557	80	*
16	5.53	5.304	80	
17	5.53	5.666	80	
18	5.53	5.561	80	*
19	5.53	5.707	80	
20	5.53	5.309	80	
21	5.53	5.362	80	
22	5.53	5.28	80	
23	5.53	5.59	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 6				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.329	80	
2	5.53	5.416	80	
3	5.53	5.54	80	*
4	5.53	5.624	80	
5	5.53	5.489	80	
6	5.53	5.575	80	
7	5.53	5.476	80	
8	5.53	5.557	80	*
9	5.53	5.676	80	
10	5.53	5.648	80	
11	5.53	5.254	80	
12	5.53	5.301	80	
13	5.53	5.291	80	
14	5.53	5.658	80	
15	5.53	5.452	80	
16	5.53	5.651	80	
17	5.53	5.253	80	
18	5.53	5.576	80	
19	5.53	5.494	80	*
20	5.53	5.612	80	
21	5.53	5.584	80	
22	5.53	5.533	80	*
23	5.53	5.426	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 7				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.588	80	
2	5.53	5.294	80	
3	5.53	5.674	80	
4	5.53	5.563	80	*
5	5.53	5.417	80	
6	5.53	5.6	80	
7	5.53	5.354	80	
8	5.53	5.564	80	*
9	5.53	5.403	80	
10	5.53	5.363	80	
11	5.53	5.476	80	
12	5.53	5.632	80	
13	5.53	5.541	80	*
14	5.53	5.723	80	
15	5.53	5.492	80	*
16	5.53	5.321	80	
17	5.53	5.598	80	
18	5.53	5.692	80	
19	5.53	5.702	80	
20	5.53	5.577	80	
21	5.53	5.559	80	*
22	5.53	5.487	80	
23	5.53	5.361	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 8				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.617	80	
2	5.53	5.722	80	
3	5.53	5.342	80	
4	5.53	5.519	80	*
5	5.53	5.636	80	
6	5.53	5.48	80	
7	5.53	5.466	80	
8	5.53	5.451	80	
9	5.53	5.5	80	*
10	5.53	5.269	80	
11	5.53	5.486	80	
12	5.53	5.718	80	
13	5.53	5.344	80	
14	5.53	5.315	80	
15	5.53	5.667	80	
16	5.53	5.439	80	
17	5.53	5.546	80	*
18	5.53	5.297	80	
19	5.53	5.445	80	
20	5.53	5.657	80	
21	5.53	5.53	80	*
22	5.53	5.573	80	
23	5.53	5.545	80	*

TYPE 6 PARAMETER SHEET				
Trial Number : 9				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.498	80	*
2	5.53	5.652	80	
3	5.53	5.385	80	
4	5.53	5.487	80	
5	5.53	5.303	80	
6	5.53	5.687	80	
7	5.53	5.642	80	
8	5.53	5.633	80	
9	5.53	5.641	80	
10	5.53	5.402	80	
11	5.53	5.258	80	
12	5.53	5.265	80	
13	5.53	5.288	80	
14	5.53	5.442	80	
15	5.53	5.638	80	
16	5.53	5.573	80	
17	5.53	5.564	80	*
18	5.53	5.45	80	
19	5.53	5.627	80	
20	5.53	5.643	80	
21	5.53	5.366	80	
22	5.53	5.526	80	*
23	5.53	5.44	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 10				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.336	80	
2	5.53	5.586	80	
3	5.53	5.26	80	
4	5.53	5.631	80	
5	5.53	5.657	80	
6	5.53	5.486	80	
7	5.53	5.277	80	
8	5.53	5.409	80	
9	5.53	5.488	80	
10	5.53	5.566	80	*
11	5.53	5.308	80	
12	5.53	5.537	80	*
13	5.53	5.33	80	
14	5.53	5.266	80	
15	5.53	5.417	80	
16	5.53	5.709	80	
17	5.53	5.64	80	
18	5.53	5.52	80	*
19	5.53	5.605	80	
20	5.53	5.693	80	
21	5.53	5.316	80	
22	5.53	5.285	80	
23	5.53	5.458	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 11				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.447	80	
2	5.53	5.524	80	*
3	5.53	5.251	80	
4	5.53	5.622	80	
5	5.53	5.348	80	
6	5.53	5.517	80	*
7	5.53	5.287	80	
8	5.53	5.651	80	
9	5.53	5.625	80	
10	5.53	5.278	80	
11	5.53	5.63	80	
12	5.53	5.435	80	
13	5.53	5.709	80	
14	5.53	5.45	80	
15	5.53	5.513	80	*
16	5.53	5.264	80	
17	5.53	5.588	80	
18	5.53	5.701	80	
19	5.53	5.372	80	
20	5.53	5.354	80	
21	5.53	5.596	80	
22	5.53	5.493	80	*
23	5.53	5.538	80	*

TYPE 6 PARAMETER SHEET				
Trial Number : 12				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.44	80	
2	5.53	5.54	80	*
3	5.53	5.259	80	
4	5.53	5.71	80	
5	5.53	5.613	80	
6	5.53	5.443	80	
7	5.53	5.284	80	
8	5.53	5.646	80	
9	5.53	5.419	80	
10	5.53	5.454	80	
11	5.53	5.384	80	
12	5.53	5.518	80	*
13	5.53	5.709	80	
14	5.53	5.567	80	*
15	5.53	5.427	80	
16	5.53	5.602	80	
17	5.53	5.582	80	
18	5.53	5.354	80	
19	5.53	5.644	80	
20	5.53	5.424	80	
21	5.53	5.385	80	
22	5.53	5.625	80	
23	5.53	5.368	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 13				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.25	80	
2	5.53	5.583	80	
3	5.53	5.281	80	
4	5.53	5.263	80	
5	5.53	5.513	80	*
6	5.53	5.417	80	
7	5.53	5.548	80	*
8	5.53	5.46	80	
9	5.53	5.686	80	
10	5.53	5.4	80	
11	5.53	5.672	80	
12	5.53	5.256	80	
13	5.53	5.384	80	
14	5.53	5.394	80	
15	5.53	5.447	80	
16	5.53	5.652	80	
17	5.53	5.414	80	
18	5.53	5.33	80	
19	5.53	5.392	80	
20	5.53	5.636	80	
21	5.53	5.562	80	*
22	5.53	5.604	80	
23	5.53	5.393	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 14				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.393	80	
2	5.53	5.301	80	
3	5.53	5.422	80	
4	5.53	5.25	80	
5	5.53	5.37	80	
6	5.53	5.311	80	
7	5.53	5.375	80	
8	5.53	5.427	80	
9	5.53	5.704	80	
10	5.53	5.336	80	
11	5.53	5.481	80	
12	5.53	5.58	80	
13	5.53	5.423	80	
14	5.53	5.664	80	
15	5.53	5.517	80	*
16	5.53	5.511	80	*
17	5.53	5.529	80	*
18	5.53	5.621	80	
19	5.53	5.399	80	
20	5.53	5.691	80	
21	5.53	5.445	80	
22	5.53	5.47	80	
23	5.53	5.582	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 15				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.374	80	
2	5.53	5.339	80	
3	5.53	5.29	80	
4	5.53	5.53	80	*
5	5.53	5.534	80	*
6	5.53	5.342	80	
7	5.53	5.666	80	
8	5.53	5.427	80	
9	5.53	5.575	80	
10	5.53	5.514	80	*
11	5.53	5.518	80	*
12	5.53	5.367	80	
13	5.53	5.704	80	
14	5.53	5.724	80	
15	5.53	5.503	80	*
16	5.53	5.398	80	
17	5.53	5.624	80	
18	5.53	5.542	80	*
19	5.53	5.622	80	
20	5.53	5.526	80	*
21	5.53	5.257	80	
22	5.53	5.306	80	
23	5.53	5.348	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 16				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.285	80	
2	5.53	5.64	80	
3	5.53	5.498	80	*
4	5.53	5.567	80	*
5	5.53	5.331	80	
6	5.53	5.373	80	
7	5.53	5.602	80	
8	5.53	5.476	80	
9	5.53	5.427	80	
10	5.53	5.617	80	
11	5.53	5.583	80	
12	5.53	5.408	80	
13	5.53	5.5	80	*
14	5.53	5.404	80	
15	5.53	5.349	80	
16	5.53	5.478	80	
17	5.53	5.681	80	
18	5.53	5.671	80	
19	5.53	5.453	80	
20	5.53	5.519	80	*
21	5.53	5.264	80	
22	5.53	5.287	80	
23	5.53	5.318	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 17				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.329	80	
2	5.53	5.54	80	*
3	5.53	5.65	80	
4	5.53	5.303	80	
5	5.53	5.345	80	
6	5.53	5.313	80	
7	5.53	5.52	80	*
8	5.53	5.62	80	
9	5.53	5.595	80	
10	5.53	5.323	80	
11	5.53	5.294	80	
12	5.53	5.531	80	*
13	5.53	5.615	80	
14	5.53	5.354	80	
15	5.53	5.565	80	*
16	5.53	5.396	80	
17	5.53	5.445	80	
18	5.53	5.251	80	
19	5.53	5.499	80	*
20	5.53	5.383	80	
21	5.53	5.403	80	
22	5.53	5.47	80	
23	5.53	5.683	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 18				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.406	80	
2	5.53	5.704	80	
3	5.53	5.664	80	
4	5.53	5.382	80	
5	5.53	5.341	80	
6	5.53	5.689	80	
7	5.53	5.395	80	
8	5.53	5.292	80	
9	5.53	5.405	80	
10	5.53	5.597	80	
11	5.53	5.279	80	
12	5.53	5.475	80	
13	5.53	5.299	80	
14	5.53	5.534	80	*
15	5.53	5.52	80	*
16	5.53	5.55	80	*
17	5.53	5.501	80	*
18	5.53	5.542	80	*
19	5.53	5.596	80	
20	5.53	5.548	80	*
21	5.53	5.332	80	
22	5.53	5.373	80	
23	5.53	5.512	80	*

TYPE 6 PARAMETER SHEET				
Trial Number : 19				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.692	80	
2	5.53	5.321	80	
3	5.53	5.391	80	
4	5.53	5.708	80	
5	5.53	5.44	80	
6	5.53	5.25	80	
7	5.53	5.693	80	
8	5.53	5.383	80	
9	5.53	5.677	80	
10	5.53	5.261	80	
11	5.53	5.398	80	
12	5.53	5.457	80	
13	5.53	5.348	80	
14	5.53	5.467	80	
15	5.53	5.562	80	*
16	5.53	5.302	80	
17	5.53	5.671	80	
18	5.53	5.58	80	
19	5.53	5.52	80	*
20	5.53	5.616	80	
21	5.53	5.563	80	*
22	5.53	5.351	80	
23	5.53	5.327	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 20				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.313	80	
2	5.53	5.392	80	
3	5.53	5.411	80	
4	5.53	5.675	80	
5	5.53	5.525	80	*
6	5.53	5.336	80	
7	5.53	5.682	80	
8	5.53	5.379	80	
9	5.53	5.529	80	*
10	5.53	5.427	80	
11	5.53	5.63	80	
12	5.53	5.305	80	
13	5.53	5.344	80	
14	5.53	5.521	80	*
15	5.53	5.637	80	
16	5.53	5.671	80	
17	5.53	5.41	80	
18	5.53	5.673	80	
19	5.53	5.363	80	
20	5.53	5.502	80	*
21	5.53	5.31	80	
22	5.53	5.527	80	*
23	5.53	5.608	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 21				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.665	80	
2	5.53	5.603	80	
3	5.53	5.606	80	
4	5.53	5.338	80	
5	5.53	5.599	80	
6	5.53	5.653	80	
7	5.53	5.499	80	*
8	5.53	5.578	80	
9	5.53	5.669	80	
10	5.53	5.274	80	
11	5.53	5.605	80	
12	5.53	5.492	80	*
13	5.53	5.376	80	
14	5.53	5.526	80	*
15	5.53	5.588	80	
16	5.53	5.698	80	
17	5.53	5.425	80	
18	5.53	5.516	80	*
19	5.53	5.656	80	
20	5.53	5.333	80	
21	5.53	5.593	80	
22	5.53	5.294	80	
23	5.53	5.633	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 22				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.534	80	*
2	5.53	5.675	80	
3	5.53	5.378	80	
4	5.53	5.373	80	
5	5.53	5.269	80	
6	5.53	5.358	80	
7	5.53	5.536	80	*
8	5.53	5.405	80	
9	5.53	5.562	80	*
10	5.53	5.699	80	
11	5.53	5.522	80	*
12	5.53	5.64	80	
13	5.53	5.548	80	*
14	5.53	5.654	80	
15	5.53	5.705	80	
16	5.53	5.516	80	*
17	5.53	5.3	80	
18	5.53	5.67	80	
19	5.53	5.423	80	
20	5.53	5.714	80	
21	5.53	5.66	80	
22	5.53	5.713	80	
23	5.53	5.592	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 23				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.281	80	
2	5.53	5.636	80	
3	5.53	5.4	80	
4	5.53	5.375	80	
5	5.53	5.586	80	
6	5.53	5.423	80	
7	5.53	5.551	80	*
8	5.53	5.36	80	
9	5.53	5.462	80	
10	5.53	5.583	80	
11	5.53	5.717	80	
12	5.53	5.616	80	
13	5.53	5.398	80	
14	5.53	5.354	80	
15	5.53	5.576	80	
16	5.53	5.406	80	
17	5.53	5.558	80	*
18	5.53	5.262	80	
19	5.53	5.469	80	
20	5.53	5.313	80	
21	5.53	5.26	80	
22	5.53	5.545	80	*
23	5.53	5.588	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 24				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.315	80	
2	5.53	5.67	80	
3	5.53	5.272	80	
4	5.53	5.584	80	
5	5.53	5.609	80	
6	5.53	5.499	80	*
7	5.53	5.633	80	
8	5.53	5.443	80	
9	5.53	5.486	80	
10	5.53	5.7	80	
11	5.53	5.696	80	
12	5.53	5.665	80	
13	5.53	5.338	80	
14	5.53	5.547	80	*
15	5.53	5.286	80	
16	5.53	5.628	80	
17	5.53	5.441	80	
18	5.53	5.573	80	
19	5.53	5.583	80	
20	5.53	5.302	80	
21	5.53	5.663	80	
22	5.53	5.592	80	
23	5.53	5.351	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 25				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.656	80	
2	5.53	5.469	80	
3	5.53	5.419	80	
4	5.53	5.465	80	
5	5.53	5.41	80	
6	5.53	5.342	80	
7	5.53	5.293	80	
8	5.53	5.637	80	
9	5.53	5.723	80	
10	5.53	5.276	80	
11	5.53	5.525	80	*
12	5.53	5.612	80	
13	5.53	5.713	80	
14	5.53	5.459	80	
15	5.53	5.441	80	
16	5.53	5.703	80	
17	5.53	5.62	80	
18	5.53	5.31	80	
19	5.53	5.601	80	
20	5.53	5.526	80	*
21	5.53	5.607	80	
22	5.53	5.697	80	
23	5.53	5.371	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 26				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.272	80	
2	5.53	5.266	80	
3	5.53	5.284	80	
4	5.53	5.638	80	
5	5.53	5.692	80	
6	5.53	5.675	80	
7	5.53	5.484	80	
8	5.53	5.382	80	
9	5.53	5.388	80	
10	5.53	5.703	80	
11	5.53	5.442	80	
12	5.53	5.671	80	
13	5.53	5.416	80	
14	5.53	5.28	80	
15	5.53	5.446	80	
16	5.53	5.401	80	
17	5.53	5.418	80	
18	5.53	5.719	80	
19	5.53	5.601	80	
20	5.53	5.694	80	
21	5.53	5.659	80	
22	5.53	5.263	80	
23	5.53	5.605	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 27				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.552	80	*
2	5.53	5.346	80	
3	5.53	5.493	80	*
4	5.53	5.612	80	
5	5.53	5.306	80	
6	5.53	5.544	80	*
7	5.53	5.648	80	
8	5.53	5.272	80	
9	5.53	5.446	80	
10	5.53	5.681	80	
11	5.53	5.601	80	
12	5.53	5.458	80	
13	5.53	5.304	80	
14	5.53	5.468	80	
15	5.53	5.719	80	
16	5.53	5.574	80	
17	5.53	5.467	80	
18	5.53	5.664	80	
19	5.53	5.706	80	
20	5.53	5.676	80	
21	5.53	5.331	80	
22	5.53	5.436	80	
23	5.53	5.63	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 28				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.312	80	
2	5.53	5.543	80	*
3	5.53	5.279	80	
4	5.53	5.396	80	
5	5.53	5.483	80	
6	5.53	5.315	80	
7	5.53	5.367	80	
8	5.53	5.264	80	
9	5.53	5.265	80	
10	5.53	5.262	80	
11	5.53	5.431	80	
12	5.53	5.257	80	
13	5.53	5.695	80	
14	5.53	5.544	80	*
15	5.53	5.465	80	
16	5.53	5.533	80	*
17	5.53	5.445	80	
18	5.53	5.273	80	
19	5.53	5.456	80	
20	5.53	5.715	80	
21	5.53	5.573	80	
22	5.53	5.555	80	*
23	5.53	5.491	80	*

TYPE 6 PARAMETER SHEET				
Trial Number : 29				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.399	80	
2	5.53	5.498	80	*
3	5.53	5.716	80	
4	5.53	5.261	80	
5	5.53	5.276	80	
6	5.53	5.385	80	
7	5.53	5.301	80	
8	5.53	5.641	80	
9	5.53	5.35	80	
10	5.53	5.704	80	
11	5.53	5.354	80	
12	5.53	5.421	80	
13	5.53	5.265	80	
14	5.53	5.405	80	
15	5.53	5.536	80	*
16	5.53	5.667	80	
17	5.53	5.472	80	
18	5.53	5.451	80	
19	5.53	5.298	80	
20	5.53	5.268	80	
21	5.53	5.592	80	
22	5.53	5.283	80	
23	5.53	5.717	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 30				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.648	80	
2	5.53	5.448	80	
3	5.53	5.57	80	*
4	5.53	5.41	80	
5	5.53	5.588	80	
6	5.53	5.621	80	
7	5.53	5.481	80	
8	5.53	5.339	80	
9	5.53	5.273	80	
10	5.53	5.641	80	
11	5.53	5.642	80	
12	5.53	5.424	80	
13	5.53	5.547	80	*
14	5.53	5.501	80	*
15	5.53	5.419	80	
16	5.53	5.712	80	
17	5.53	5.566	80	*
18	5.53	5.674	80	
19	5.53	5.664	80	
20	5.53	5.461	80	
21	5.53	5.48	80	
22	5.53	5.698	80	
23	5.53	5.699	80	

Mode 1 – 802.11ax20

Total Type 1~4 Radar Statistical Performance (5500MHz)			
Radar Type	Detection Percentage (%)	Limit (%)	Result
1	86.67	>60%	Pass
2	90.00	>60%	Pass
3	86.67	>60%	Pass
4	83.33	>60%	Pass
Total Type 1~4	86.67	>80%	Pass
5	83.33	≥80%	Pass
6	96.67	≥70%	Pass

Mode 2 – 802.11ax40

Total Type 1~4 Radar Statistical Performance (5510MHz)			
Radar Type	Detection Percentage (%)	Limit (%)	Result
1	90.00	>60%	Pass
2	90.00	>60%	Pass
3	86.67	>60%	Pass
4	86.67	>60%	Pass
Total Type 1~4	88.33	>80%	Pass
5	80.00	≥80%	Pass
6	90.00	≥70%	Pass

Mode 3 – 802.11ax80

Total Type 1~4 Radar Statistical Performance (5530MHz)			
Radar Type	Detection Percentage (%)	Limit (%)	Result
1	83.33	>60%	Pass
2	83.33	>60%	Pass
3	83.33	>60%	Pass
4	80.00	>60%	Pass
Total Type 1~4	82.50	>80%	Pass
5	83.33	≥80%	Pass
6	93.33	≥70%	Pass