

FCC Test Report

Product Name	MOXA IEEE 802.11a/b/g/n Wireless
Model No	WAPN005
FCC ID.	SLE-WAPN005L

Applicant	Moxa Inc.
Address	4F, No. 135, Lane 235, BAOQIAO Rd. XINDIAN DIST., NEW TAIPEI CITY, Taiwan

Date of Receipt	Mar. 05, 2014
Issue Date	Mar. 14, 2014
Report No.	1430089R-RFUSP10V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report

Issue Date: Mar. 14, 2014

Report No.: 1430089R-RFUSP10V00



Product Name	MOXA IEEE 802.11a/b/g/n Wireless
Applicant	Moxa Inc.
Address	4F, No. 135, Lane 235, BAOQIAO Rd. XINDIAN DIST., NEW TAIPEI CITY, Taiwan
Manufacturer	Moxa Inc.
Model No.	WAPN005
EUT Rated Voltage	DC 3.3V
EUT Test Voltage	AC 120V/60Hz
Trade Name	MOXA
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2012 ANSI C63.10: 2009, KDB 558074
Test Result	Complied

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of Quietek Corporation.

Documented By :

(Senior Adm. Specialist / Joanne Lin)

Tested By :

(Engineer / Alan Chen)

Approved By :

(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
2. Conducted Emission.....	10
2.1. Test Equipment.....	10
2.2. Test Setup	10
2.3. Limits	11
2.4. Test Procedure	11
2.5. Uncertainty	11
2.6. Test Result of Conducted Emission.....	12
3. Maximum Conducted Power.....	16
3.1. Test Equipment.....	16
3.2. Test Setup	16
3.3. Limits	16
3.4. Test Procedure	16
3.5. Uncertainty	16
3.6. Test Result of Maximum Conducted Power.....	17
4. Radiated Emission.....	24
4.1. Test Equipment.....	24
4.2. Test Setup	25
4.3. Limits	26
4.4. Test Procedure	27
4.5. Uncertainty	27
4.6. Test Result of Radiated Emission.....	28
5. RF Antenna conducted test.....	55
5.1. Test Equipment.....	55
5.2. Test Setup	55
5.3. Limits	55
5.4. Test Procedure	56
5.5. Uncertainty	56
5.6. Test Result of RF antenna conducted test.....	57
6. Band Edge	76
6.1. Test Equipment.....	76
6.2. Test Setup	76
6.3. Limits	77
6.4. Test Procedure	77
6.5. Uncertainty	77
6.6. Test Result of Band Edge	78

7.	Occupied Bandwidth.....	104
7.1.	Test Equipment.....	104
7.2.	Test Setup	104
7.3.	Limits	104
7.4.	Test Procedure	104
7.5.	Uncertainty	104
7.6.	Test Result of Occupied Bandwidth	105
8.	Power Density	125
8.1.	Test Equipment.....	125
8.2.	Test Setup	125
8.3.	Limits	125
8.4.	Test Procedure	125
8.5.	Uncertainty	125
8.6.	Test Result of Power Density	126
9.	EMI Reduction Method During Compliance Testing	146
Attachment 1: EUT Test Photographs		
Attachment 2: EUT Detailed Photographs		

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	MOXA IEEE 802.11a/b/g/n Wireless
Trade Name	MOXA
Model No.	WAPN005
FCC ID.	SLE-WAPN005L
Frequency Range	802.11b/g/n-20MHz:2412-2462MHz,802.11n-40MHz:2422-2452MHz 802.11a/n-20MHz:5745-5825MHz ,802.11n-40MHz:5755-5795MHz
Number of Channels	802.11b/g/n-20MHz: 11, n-40MHz: 7 802.11a/n-20MHz: 5, n-40MHz: 2
Data Speed	802.11b: 1-11Mbps, 802.11a/g: 6-54Mbps, 802.11n: up to 300Mbps
Channel separation	802.11b/g/n-20MHz: 5 MHz, 802.11a/n-20MHz: 20MHz 802.11n-40MHz: 40MHz
Type of Modulation	802.11b:DSSS, DBPSK, DQPSK, CCK 802.11a/g/n: OFDM, BPSK, QPSK, 16QAM, 64QAM
Antenna Type	Dipole Antenna
Antenna Gain	Refer to the table “Antenna List”
Channel Control	Auto

Antenna List

No.	Manufacturer	Model No.	Antenna Type	Peak Gain
1	KINSUN	ANT-WDB-O-2 BK	Dipole	2.9dBi for 2.4 GHz 2.34dBi for 5GHz
2	KINSUN	ANT-WDB-ANM-0502	Dipole	4.62dBi for 2.4 GHz 1.41dBi for 5GHz

Note:

1. The antenna of EUT is conform to FCC 15.203
2. Only the higher gain antenna was tested and recorded in this report.

802.11b/g/n-20MHz Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2412 MHz	Channel 02:	2417 MHz	Channel 03:	2422 MHz	Channel 04:	2427 MHz
Channel 05:	2432 MHz	Channel 06:	2437 MHz	Channel 07:	2442 MHz	Channel 08:	2447 MHz
Channel 09:	2452 MHz	Channel 10:	2457 MHz	Channel 11:	2462 MHz		

802.11n-40MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 3:	2422 MHz	Channel 4:	2427 MHz	Channel 5:	2432 MHz	Channel 6:	2437 MHz
Channel 7:	2442 MHz	Channel 8:	2447 MHz	Channel 9:	2452 MHz		

802.11a/n-20MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 149:	5745 MHz	Channel 153:	5765 MHz	Channel 157:	5785 MHz	Channel 161:	5805 MHz
Channel 165:	5825 MHz						

802.11n-40MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency
Channel 151:	5755 MHz	Channel 159:	5795 MHz

Note:

1. This device is a MOXA IEEE 802.11a/b/g/n **Wireless** with a built-in WLAN transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report. (802.11b is 1Mbps 、802.11a/g is 6Mbps 、802.11n(20M-BW) is 14.4Mbps and 、802.11n(40M-BW) is 30Mbps).
4. At result of pretests, module supports dual-channel transmission, only the worst case is shown in the report. (802.11b is chain A 、802.11g is chain A 、802.11a is chain A)
5. These tests are conducted on a sample for the purpose of demonstrating compliance of 802.11a/b/g/n transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.
6. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode:	Mode 1: Transmit (802.11b 1Mbps)
	Mode 2: Transmit (802.11g 6Mbps)
	Mode 3: Transmit - 802.11a 6Mbps
	Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)
	Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)
	Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band)
	Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band)


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook PC	DELL	PPT	N/A	Non-Shielded, 0.8m
2 Test Fixture	MOXA	N/A	N/A	N/A

Signal Cable Type	Signal cable Description
A LAN Cable	Shielded, 1.8m

1.4. Configuration of Tested System

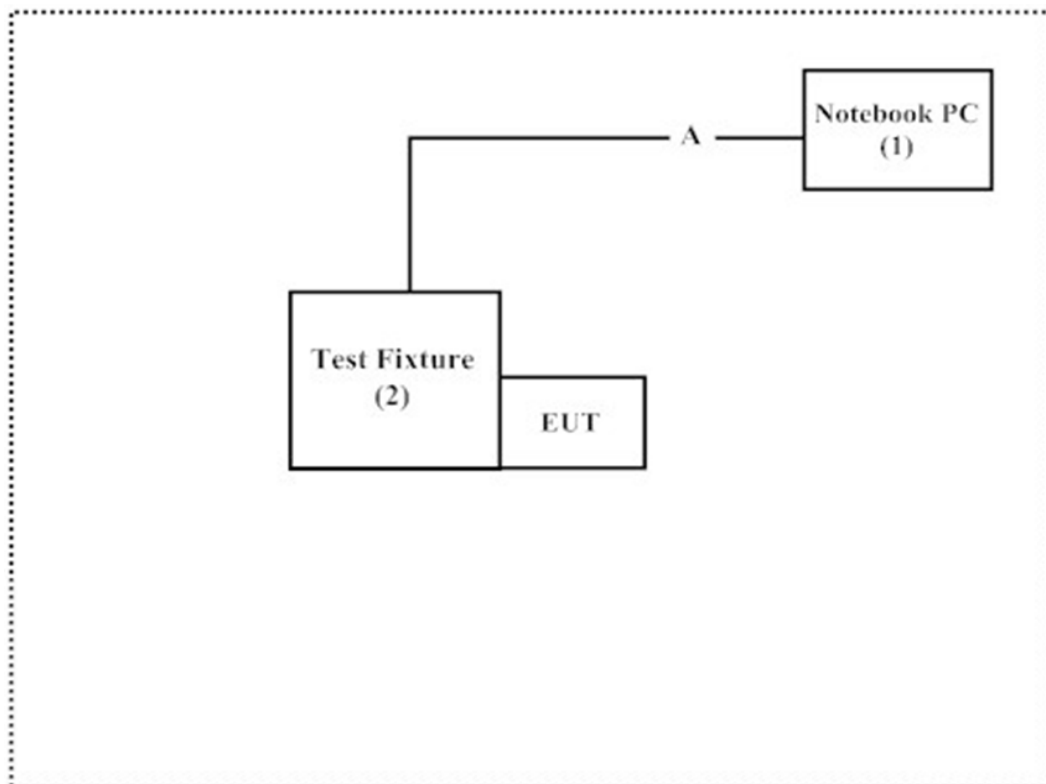

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4
- (2) Execute "ART-2 v2.3" program on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press "OK" to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from

Quietek Corporation's Web Site : <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web

site : <http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng Linkou Dist., New Taipei City
24451, Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2013	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2014	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2014	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar., 2014	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2014	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

2.2. Test Setup

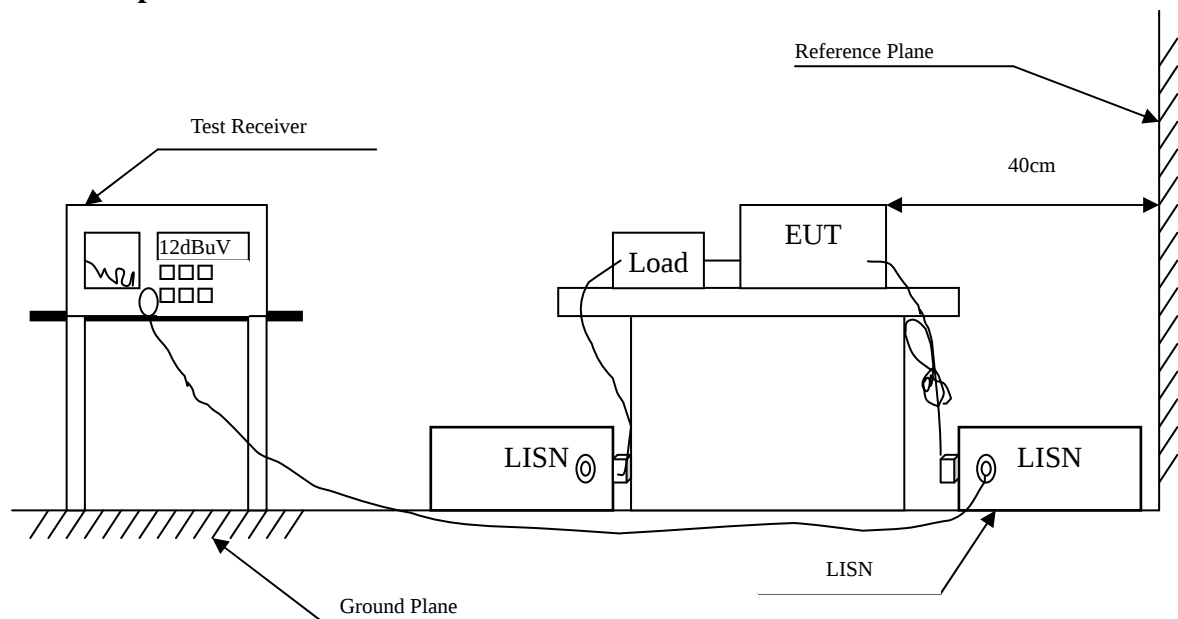

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2437MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 1					
Quasi-Peak					
0.170	9.743	34.220	43.964	-21.465	65.429
0.216	9.739	30.030	39.769	-24.345	64.114
0.334	9.745	27.380	37.125	-23.618	60.743
0.490	9.752	32.180	41.932	-14.354	56.286
0.779	9.765	28.600	38.365	-17.635	56.000
7.920	9.910	27.320	37.230	-22.770	60.000
Average					
0.170	9.743	18.800	28.544	-26.885	55.429
0.216	9.739	22.700	32.439	-21.675	54.114
0.334	9.745	24.340	34.085	-16.658	50.743
0.490	9.752	24.580	34.332	-11.954	46.286
0.779	9.765	20.320	30.085	-15.915	46.000
7.920	9.910	21.530	31.440	-18.560	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2437MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
Line 2					
Quasi-Peak					
0.173	9.747	31.650	41.397	-23.946	65.343
0.509	9.753	33.100	42.853	-13.147	56.000
0.771	9.775	28.660	38.435	-17.565	56.000
1.974	9.839	19.840	29.679	-26.321	56.000
6.685	9.900	23.990	33.890	-26.110	60.000
20.920	10.100	24.460	34.560	-25.440	60.000
Average					
0.173	9.747	12.100	21.847	-33.496	55.343
0.509	9.753	21.120	30.873	-15.127	46.000
0.771	9.775	18.660	28.435	-17.565	46.000
1.974	9.839	6.030	15.869	-30.131	46.000
6.685	9.900	16.290	26.190	-23.810	50.000
20.920	10.100	19.050	29.150	-20.850	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : MOXA IEEE 802.11a/b/g/n Wireless
Test Item : Conducted Emission Test
Power Line : Line 1
Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band) (5755MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level	dB	dBuV
	dB	dBuV	dBuV		
Line 1					
Quasi-Peak					
0.158	9.747	34.680	44.427	-21.344	65.771
0.170	9.743	32.900	42.644	-22.785	65.429
0.212	9.739	28.440	38.179	-26.050	64.229
0.341	9.745	26.150	35.895	-24.648	60.543
0.505	9.753	33.100	42.853	-13.147	56.000
0.654	9.759	26.900	36.659	-19.341	56.000
Average					
0.158	9.747	26.160	35.907	-19.864	55.771
0.170	9.743	13.810	23.554	-31.875	55.429
0.212	9.739	20.420	30.159	-24.070	54.229
0.341	9.745	10.480	20.225	-30.318	50.543
0.505	9.753	21.420	31.173	-14.827	46.000
0.654	9.759	19.760	29.519	-16.481	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band) (5755MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
Line 2					
Quasi-Peak					
0.166	9.747	33.830	43.577	-21.966	65.543
0.212	9.749	28.580	38.329	-25.900	64.229
0.373	9.747	28.450	38.197	-21.432	59.629
0.498	9.752	32.750	42.502	-13.555	56.057
7.912	9.920	27.580	37.500	-22.500	60.000
21.162	10.105	25.840	35.945	-24.055	60.000
Average					
0.166	9.747	28.500	38.247	-17.296	55.543
0.212	9.749	24.300	34.049	-20.180	54.229
0.373	9.747	15.410	25.157	-24.472	49.629
0.498	9.752	28.740	38.492	-7.565	46.057
7.912	9.920	22.630	32.550	-17.450	50.000
21.162	10.105	20.160	30.265	-19.735	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Maximum Conducted Power


3.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2013
X	Power Sensor	Anritsu	MA2411B/0738448	Jun., 2013
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2013
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2013
	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with "X" are used to measure the final test results.

3.2. Test Setup



3.3. Limits

The maximum average power shall be less 1 Watt. (Section 15.247 (b)(3))

3.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 section 9.1.3 PKPM1 Peak power meter method.

3.5. Uncertainty

± 1.27 dB

3.6. Test Result of Maximum Conducted Power

Product : MOXA IEEE 802.11a/b/g/n Wireless
Test Item : Maximum Conducted Power
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps)

CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit	Result
		1	2	5.5	11	1		
		Measurement Level (dBm)						
01	2412	17.20	--	--	--	19.54	<30dBm	Pass
06	2437	18.22	18.11	17.92	17.83	20.51	<30dBm	Pass
11	2462	14.49	--	--	--	16.82	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit	Result
		1	2	5.5	11	1		
		Measurement Level (dBm)						
01	2412	16.51	--	--	--	18.84	<30dBm	Pass
06	2437	17.82	17.74	17.63	17.51	20.14	<30dBm	Pass
11	2462	13.48	--	--	--	15.81	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Maximum Conducted Power
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54			
		Measurement Level (dBm)										
01	2412	16.53	--	--	--	--	--	--	--	24.47	<30dBm	Pass
06	2437	18.63	18.41	18.28	18.09	17.84	17.78	17.62	17.51	24.97	<30dBm	Pass
11	2462	14.18	--	--	--	--	--	--	--	23.09	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54	6		
		Measurement Level (dBm)										
01	2412	16.31	--	--	--	--	--	--	--	24.37	<30dBm	Pass
06	2437	18.51	18.32	18.27	18.07	17.82	17.63	17.55	17.34	24.91	<30dBm	Pass
11	2462	13.48	--	--	--	--	--	--	--	22.76	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Maximum Conducted Power
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)

CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4	
		Measurement Level (dBm)								
01	2412	10.06	--	--	--	--	--	--	--	20.78
06	2437	10.49	10.37	10.26	10.07	9.81	9.76	9.61	9.42	20.79
11	2462	10.52	--	--	--	--	--	--	--	20.65

Note: Peak Power Output Value =Reading value on power meter + cable loss

CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4	14.4
		Measurement Level (dBm)								
01	2412	9.91	--	--	--	--	--	--	--	20.31
06	2437	10.41	10.13	9.82	9.63	9.34	9.14	8.94	8.61	20.64
11	2462	10.14	--	--	--	--	--	--	--	20.57

Note: Peak Power Output Value =Reading value on power meter + cable loss

CHAIN A+B

Channel	Frequency (MHz)	Data Rate (Mbps)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
1	2412	14.4	20.78	20.31	23.56	<30dBm	Pass
6	2437	14.4	20.79	20.64	23.73	<30dBm	Pass
11	2462	14.4	20.65	20.57	23.62	<30dBm	Pass

Note: Peak Power Output Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Maximum Conducted Power
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)

CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		30	60	90	120	180	240	270	300	30
		Measurement Level (dBm)								
3	2422	10.54	--	--	--	--	--	--	--	22.73
6	2437	10.49	10.21	10.09	9.81	9.61	9.48	9.33	9.24	22.34
9	2452	10.27	--	--	--	--	--	--	--	22.25

Note: Peak Power Output Value = Reading value on power meter + cable loss

CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		30	60	90	120	180	240	270	300	30
		Measurement Level (dBm)								
3	2422	10.42	--	--	--	--	--	--	--	22.67
6	2437	10.39	10.01	9.87	9.42	9.24	8.92	8.71	8.51	22.81
9	2452	10.20	--	--	--	--	--	--	--	22.41

Note: Peak Power Output Value = Reading value on power meter + cable loss

CHAIN A+B

Channel	Frequency (MHz)	Data Rate (Mbps)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
3	2422	30	22.73	22.67	25.71	<30dBm	Pass
6	2437	30	22.34	22.81	25.59	<30dBm	Pass
9	2452	30	22.25	22.41	25.34	<30dBm	Pass

Note: Peak Power Output Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Maximum Conducted Power
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps

CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54	6		
		Measurement Level (dBm)										
149	5745	12.96	--	--	--	--	--	--	--	20.72	<30dBm	Pass
157	5785	12.51	12.35	12.29	12.21	12.17	12.11	12.07	11.92	20.42	<30dBm	Pass
165	5825	12.71	--	--	--	--	--	--	--	20.36	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54	6		
		Measurement Level (dBm)										
149	5745	12.46	--	--	--	--	--	--	--	21.41	<30dBm	Pass
157	5785	12.41	12.38	12.36	12.33	12.35	12.32	12.27	12.28	21.22	<30dBm	Pass
165	5825	12.61	--	--	--	--	--	--	--	21.07	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Maximum Conducted Power
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band)

CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4	14.4
		Measurement Level (dBm)								
149	5745	11.31	--	--	--	--	--	--	--	19.61
157	5785	11.26	11.19	11.08	10.92	10.81	10.71	10.68	10.53	19.67
165	5825	11.41	--	--	--	--	--	--	--	19.26

Note: Peak Power Output Value =Reading value on power meter + cable loss

CHAIN B

Channel No	Frequency (MHz)	Average Power								Peak Power
		For different Data Rate (Mbps)								
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4	14.4
		Measurement Level (dBm)								
149	5745	10.72	--	--	--	--	--	--	--	19.91
157	5785	11.21	11.14	11.08	10.86	10.71	10.53	10.38	10.21	20.04
165	5825	11.21	--	--	--	--	--	--	--	20.23

Note: Peak Power Output Value =Reading value on power meter + cable loss

CHAIN A+B

Channel	Frequency (MHz)	Data Rate (Mbps)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
149	5745	14.4	19.61	19.91	22.77	<30dBm	Pass
157	5785	14.4	19.67	20.04	22.87	<30dBm	Pass
165	5825	14.4	19.26	20.23	22.78	<30dBm	Pass

Note: Peak Power Output Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Maximum Conducted Power
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band)

CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		30	60	90	120	180	240	270	300	30
		Measurement Level (dBm)								
151	5755	11.54	--	--	--	--	--	--	--	20.18
159	5795	11.82	10.81	10.63	10.39	10.21	10.09	9.92	9.86	19.76

Note: Peak Power Output Value =Reading value on power meter + cable loss

CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		30	60	90	120	180	240	270	300	30
		Measurement Level (dBm)								
151	5755	10.97	--	--	--	--	--	--	--	20.63
159	5795	10.86	11.67	11.43	11.24	11.08	10.98	10.89	10.71	20.83

Note: Peak Power Output Value =Reading value on power meter + cable loss

CHAIN A+B

Channel	Frequency (MHz)	Data Rate (Mbps)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
151	5755	30	20.18	20.63	23.42	<30dBm	Pass
159	5795	30	19.76	20.83	23.34	<30dBm	Pass

Note: Peak Power Output Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

4. Radiated Emission

4.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Loop Antenna	Teseq	HLA6120 / 26739	Jul., 2013
	X	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	X	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2013
	X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2013
	X	Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2013
	X	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar., 2014
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2013
	X	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X	Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X	Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

4.2. Test Setup

Radiated Emission Below 1GHz

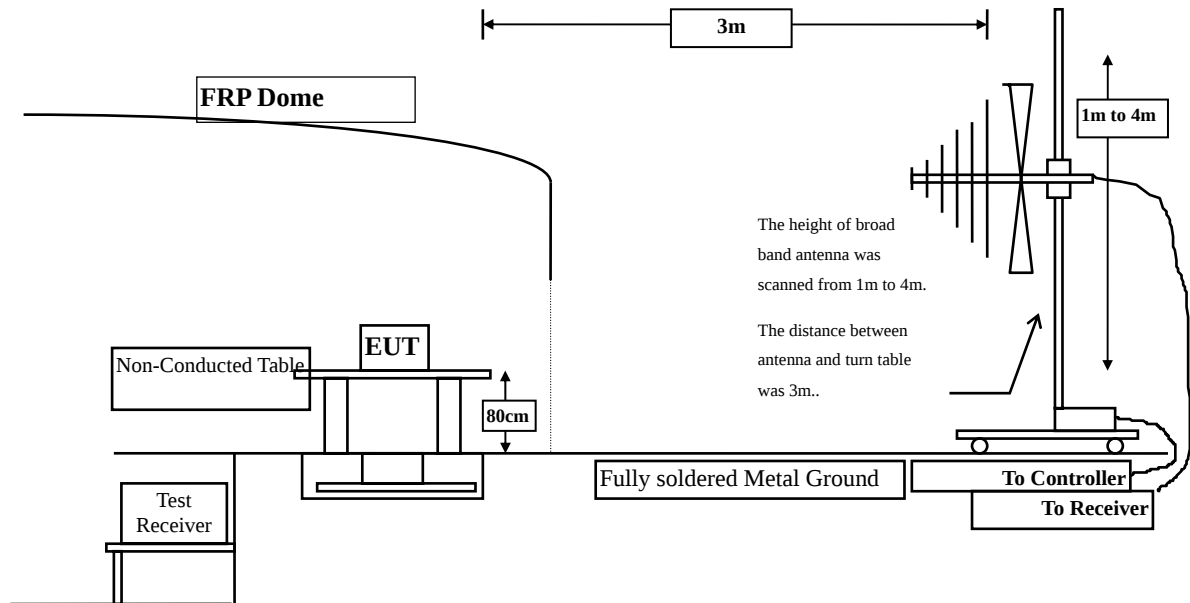

Radiated Emission Above 1GHz

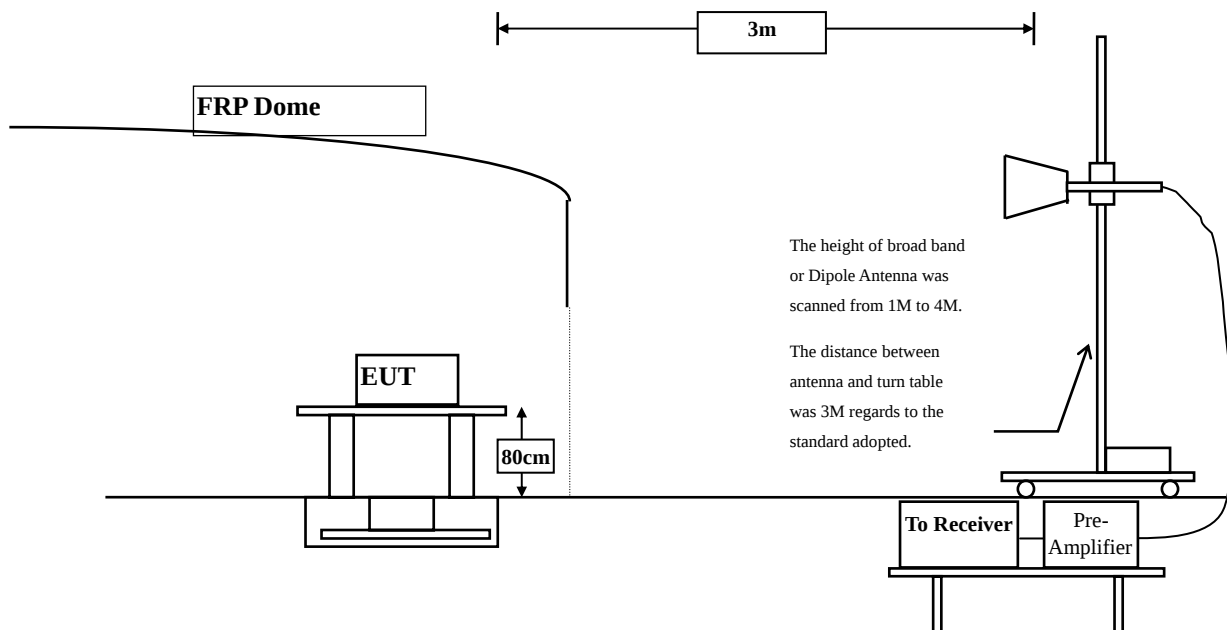

4.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 30dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9KHz - 10th Harmonic of fundamental was investigated.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Radiated Emission

Product : MOXA IEEE 802.11a/b/g/n Wireless
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4824.000	3.261	37.590	40.851	-33.149	74.000
7236.000	10.650	36.590	47.240	-26.760	74.000
9648.000	13.337	37.450	50.786	-23.214	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4824.000	6.421	42.090	48.511	-25.489	74.000
7236.000	11.495	37.010	48.505	-25.495	74.000
9648.000	13.807	36.590	50.396	-23.604	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4874.000	3.038	37.590	40.627	-33.373	74.000
7311.000	11.795	37.150	48.944	-25.056	74.000
9748.000	12.635	36.150	48.785	-25.215	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4874.000	5.812	43.260	49.071	-24.929	74.000
7311.000	12.630	37.150	49.779	-24.221	74.000
9748.000	13.126	36.590	49.716	-24.284	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4924.000	2.858	37.590	40.447	-33.553	74.000
7386.000	12.127	36.150	48.278	-25.722	74.000
9848.000	12.852	36.980	49.833	-24.167	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4924.000	5.521	44.150	49.670	-24.330	74.000
7386.000	13.254	37.180	50.434	-23.566	74.000
9848.000	13.367	36.590	49.957	-24.043	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4824.000	3.261	38.590	41.851	-32.149	74.000
7236.000	10.650	37.140	47.790	-26.210	74.000
9648.000	13.337	36.590	49.926	-24.074	74.000

Average

Detector:

--

Vertical

Peak Detector:

4824.000	6.421	44.150	50.571	-23.429	74.000
7236.000	11.495	36.590	48.085	-25.915	74.000
9648.000	13.807	37.150	50.956	-23.044	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4874.000	3.038	37.590	40.627	-33.373	74.000
7311.000	11.795	36.540	48.334	-25.666	74.000
9748.000	12.635	36.580	49.215	-24.785	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4874.000	5.812	43.570	49.381	-24.619	74.000
7311.000	12.630	36.980	49.609	-24.391	74.000
9748.000	13.126	37.540	50.666	-23.334	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4924.000	2.858	38.150	41.007	-32.993	74.000
7386.000	12.127	36.580	48.708	-25.292	74.000
9848.000	12.852	36.980	49.833	-24.167	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4924.000	5.521	44.590	50.110	-23.890	74.000
7386.000	13.254	36.570	49.824	-24.176	74.000
9848.000	13.367	37.140	50.507	-23.493	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5745 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
11490.000	17.106	35.190	52.297	-21.703	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
11490.000	18.034	35.330	53.365	-20.635	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5785 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
11570.000	16.809	36.260	53.069	-20.931	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
11570.000	17.698	36.060	53.758	-20.242	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5825 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
11650.000	16.158	35.260	51.418	-22.582	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
11650.000	17.274	35.540	52.815	-21.185	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2412MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4824.000	3.261	37.150	40.411	-33.589	74.000
7236.000	10.650	36.480	47.130	-26.870	74.000
9648.000	13.337	37.150	50.486	-23.514	74.000

Average

Detector:

--

Vertical

Peak Detector:

4824.000	6.421	38.150	44.571	-29.429	74.000
7236.000	11.495	36.590	48.085	-25.915	74.000
9648.000	13.807	37.010	50.816	-23.184	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4874.000	3.038	37.150	40.187	-33.813	74.000
7311.000	11.795	36.590	48.384	-25.616	74.000
9748.000	12.635	36.590	49.225	-24.775	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4874.000	5.812	38.150	43.961	-30.039	74.000
7311.000	12.630	36.590	49.219	-24.781	74.000
9748.000	13.126	36.980	50.106	-23.894	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2462 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4924.000	2.858	37.590	40.447	-33.553	74.000
7386.000	12.127	36.570	48.698	-25.302	74.000
9848.000	12.852	36.840	49.693	-24.307	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4924.000	5.521	38.150	43.670	-30.330	74.000
7386.000	13.254	36.580	49.834	-24.166	74.000
9848.000	13.367	36.590	49.957	-24.043	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2422MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4844.000	3.171	37.590	40.761	-33.239	74.000
7266.000	11.162	36.580	47.742	-26.258	74.000
9688.000	12.964	36.590	49.555	-24.445	74.000

Average

Detector:

--

Vertical

Peak Detector:

4844.000	6.178	38.580	44.758	-29.242	74.000
7266.000	11.982	36.470	48.452	-25.548	74.000
9688.000	13.507	36.570	50.078	-23.922	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4874.000	3.038	37.440	40.477	-33.523	74.000
7311.000	11.795	36.520	48.314	-25.686	74.000
9748.000	12.635	36.980	49.615	-24.385	74.000

Average

Detector:

--

Vertical

Peak Detector:

4874.000	5.812	38.690	44.501	-29.499	74.000
7311.000	12.630	36.850	49.479	-24.521	74.000
9748.000	13.126	36.980	50.106	-23.894	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2452 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4904.000	2.914	38.150	41.065	-32.935	74.000
7356.000	11.995	36.580	48.574	-25.426	74.000
9808.000	12.475	36.540	49.015	-24.985	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4904.000	5.530	37.850	43.381	-30.619	74.000
7356.000	13.005	36.580	49.584	-24.416	74.000
9808.000	12.901	37.050	49.951	-24.049	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band) (5745MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
11490.000	17.106	36.512	53.619	-20.381	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
11490.000	18.034	35.480	53.515	-20.485	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band) (5785 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
11570.000	16.809	36.590	53.399	-20.601	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
11570.000	17.698	35.590	53.288	-20.712	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band) (5825 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
11650.000	16.158	36.590	52.748	-21.252	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
11650.000	17.274	36.150	53.425	-20.575	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band) (5755MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
11510.000	17.124	35.150	52.274	-21.726	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
11510.000	18.081	35.590	53.671	-20.329	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band) (5795 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
11590.000	16.701	35.150	51.850	-22.150	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
11590.000	17.567	36.290	53.856	-20.144	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
94.020	-8.189	43.191	35.001	-8.499	43.500
330.700	-4.492	42.056	37.564	-8.436	46.000
468.440	1.195	34.784	35.979	-10.021	46.000
606.180	4.666	30.836	35.502	-10.498	46.000
728.400	3.452	32.159	35.611	-10.389	46.000
920.460	6.467	29.637	36.104	-9.896	46.000
Vertical					
82.380	-5.215	40.563	35.348	-4.652	40.000
202.660	-7.739	46.555	38.816	-4.684	43.500
338.460	-4.265	41.347	37.082	-8.918	46.000
507.240	-0.471	38.506	38.035	-7.965	46.000
703.180	0.139	33.146	33.284	-12.716	46.000
965.080	7.932	27.965	35.897	-18.103	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
142.520	-10.427	48.202	37.775	-5.725	43.500
330.700	-4.492	42.056	37.564	-8.436	46.000
468.440	1.195	34.784	35.979	-10.021	46.000
606.180	4.666	30.836	35.502	-10.498	46.000
728.400	3.452	32.159	35.611	-10.389	46.000
920.460	6.467	29.637	36.104	-9.896	46.000
Vertical					
132.820	-4.440	40.375	35.935	-7.565	43.500
330.700	-4.912	42.056	37.144	-8.856	46.000
507.240	-0.471	38.506	38.035	-7.965	46.000
703.180	0.139	33.146	33.284	-12.716	46.000
815.700	3.221	28.812	32.033	-13.967	46.000
943.740	6.592	28.263	34.856	-11.144	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5785MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
117.300	-9.196	47.333	38.137	-5.363	43.500
282.200	-5.211	43.485	38.274	-7.726	46.000
449.040	-2.238	39.290	37.052	-8.948	46.000
650.800	2.175	31.921	34.096	-11.904	46.000
811.820	5.081	32.485	37.565	-8.435	46.000
955.380	6.247	28.702	34.949	-11.051	46.000
Vertical					
107.600	-0.318	39.374	39.056	-4.444	43.500
227.880	-8.519	47.062	38.544	-7.456	46.000
406.360	-6.660	39.695	33.035	-12.965	46.000
540.220	0.121	29.639	29.760	-16.240	46.000
668.260	-1.694	40.358	38.664	-7.336	46.000
901.060	3.331	32.854	36.185	-9.815	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
175.500	-10.017	49.342	39.324	-4.176	43.500
338.460	-3.925	41.347	37.422	-8.578	46.000
507.240	0.759	38.506	39.265	-6.735	46.000
606.180	4.666	30.836	35.502	-10.498	46.000
728.400	3.452	32.159	35.611	-10.389	46.000
901.060	5.591	32.854	38.445	-7.555	46.000
Vertical					
105.660	-0.253	39.151	38.898	-4.602	43.500
202.660	-7.739	46.555	38.816	-4.684	43.500
406.360	-6.660	39.695	33.035	-12.965	46.000
507.240	-0.471	38.506	38.035	-7.965	46.000
749.740	2.510	39.396	41.906	-4.094	46.000
965.080	7.932	27.965	35.897	-18.103	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
117.300	-9.196	47.333	38.137	-5.363	43.500
272.500	-5.359	42.144	36.785	-9.215	46.000
330.700	-4.492	42.056	37.564	-8.436	46.000
507.240	0.759	38.506	39.265	-6.735	46.000
728.400	3.452	32.159	35.611	-10.389	46.000
901.060	5.591	32.854	38.445	-7.555	46.000
Vertical					
107.600	-0.318	39.374	39.056	-4.444	43.500
202.660	-7.739	46.555	38.816	-4.684	43.500
338.460	-4.265	41.347	37.082	-8.918	46.000
507.240	-0.471	38.506	38.035	-7.965	46.000
728.400	-0.188	32.159	31.971	-14.029	46.000
965.080	7.932	27.965	35.897	-18.103	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band) (5785 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
117.300	-9.196	47.333	38.137	-5.363	43.500
268.620	-4.942	44.057	39.115	-6.885	46.000
449.040	-2.238	39.290	37.052	-8.948	46.000
666.320	2.031	38.300	40.332	-5.668	46.000
811.820	5.081	32.485	37.565	-8.435	46.000
943.740	6.492	28.263	34.756	-11.244	46.000
Vertical					
107.600	-0.318	39.374	39.056	-4.444	43.500
227.880	-8.519	47.062	38.544	-7.456	46.000
338.460	-4.265	41.347	37.082	-8.918	46.000
507.240	-0.471	38.506	38.035	-7.965	46.000
681.840	1.484	37.538	39.022	-6.978	46.000
901.060	3.331	32.854	36.185	-9.815	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : MOXA IEEE 802.11a/b/g/n Wireless
Test Item : General Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band) (5755MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
117.300	-9.196	47.333	38.137	-5.363	43.500
233.700	-8.619	46.008	37.389	-8.611	46.000
330.700	-4.492	42.056	37.564	-8.436	46.000
507.240	0.759	38.506	39.265	-6.735	46.000
728.400	3.452	32.159	35.611	-10.389	46.000
920.460	6.467	29.637	36.104	-9.896	46.000
Vertical					
111.480	-0.954	37.955	37.001	-6.499	43.500
256.980	-7.573	46.941	39.368	-6.632	46.000
338.460	-4.265	41.347	37.082	-8.918	46.000
449.040	-7.498	39.290	31.792	-14.208	46.000
681.840	1.484	37.538	39.022	-6.978	46.000
901.060	3.331	32.854	36.185	-9.815	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF Antenna conducted test


5.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2013
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2013
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

5.2. Test Setup

RF antenna Conducted Measurement:



5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.5. Uncertainty


The measurement uncertainty

Conducted is defined as $\pm 1.27\text{dB}$


5.6. Test Result of RF antenna conducted test

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : RF antenna conducted test
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)


Channel 01 (2412MHz) 30MHz-25GHz

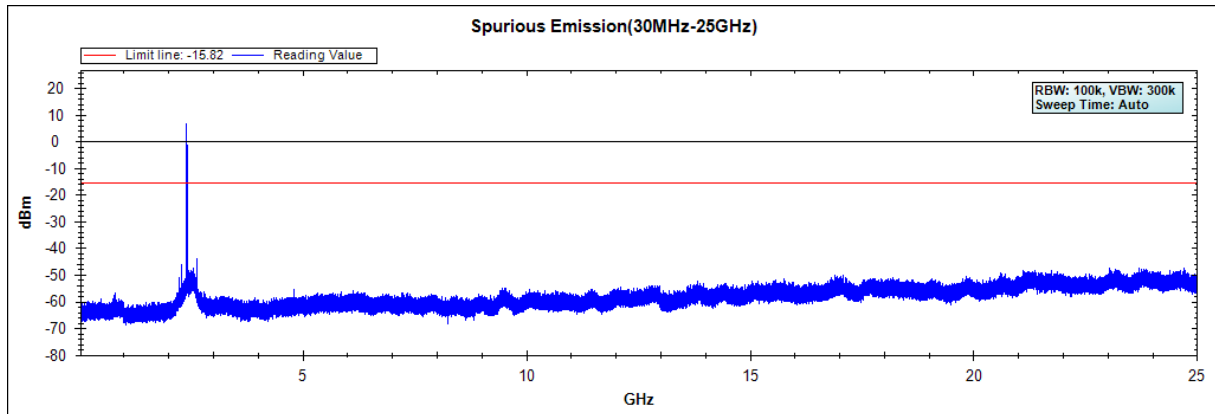

Channel 06 (2437MHz) 30MHz -25GHz

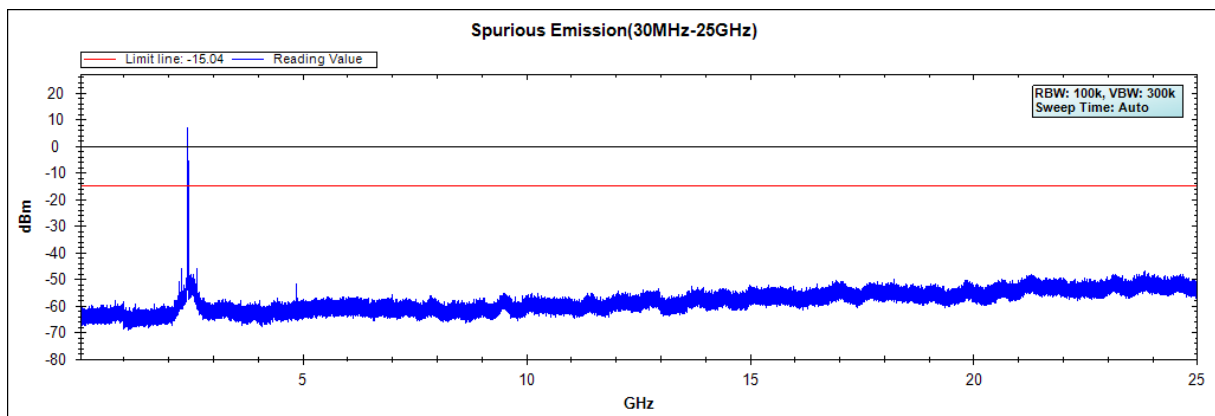


Channel 11 (2462MHz) 30MHz -25GHz

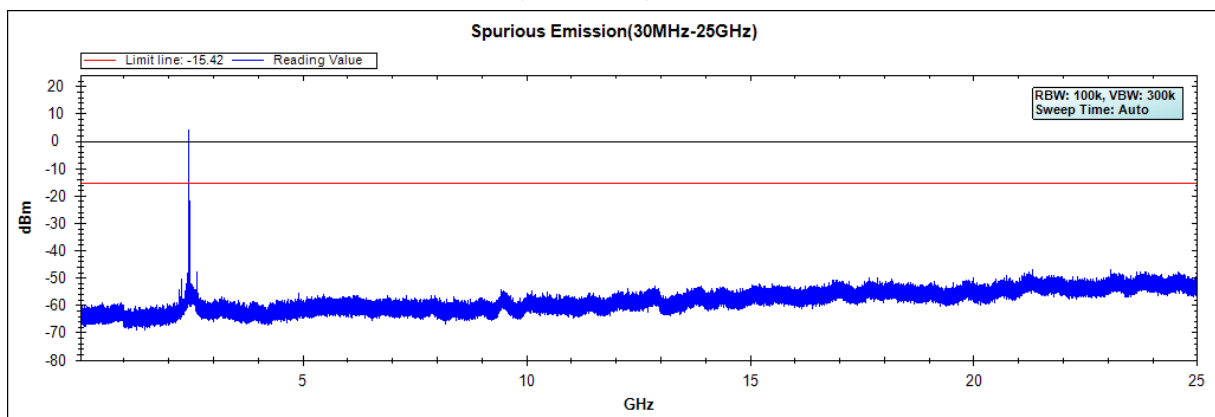


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)


Channel 01 (2412MHz) 30MHz -25GHz

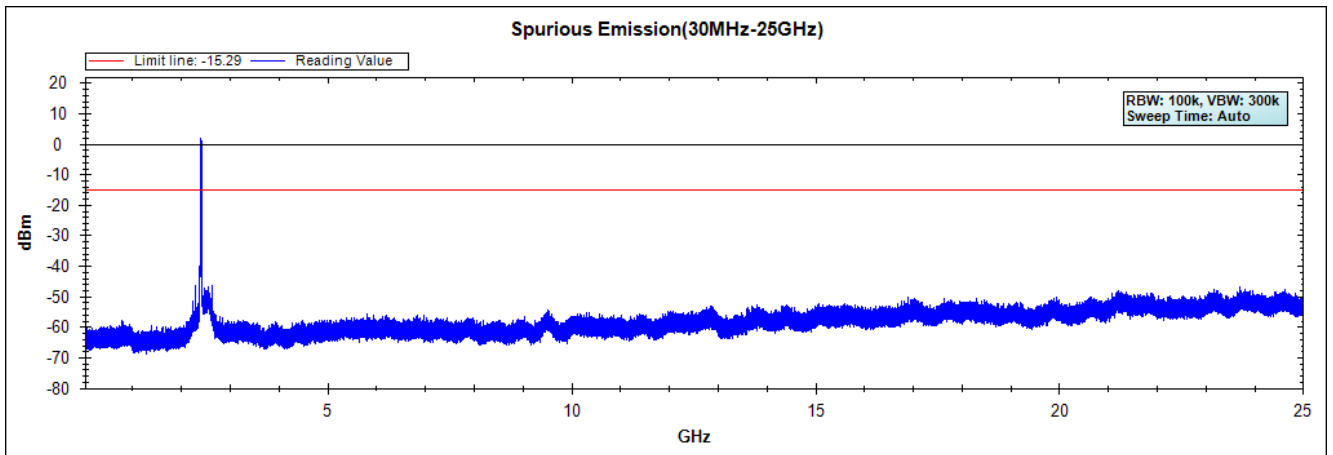

Channel 06 (2437MHz) 30MHz -25GHz

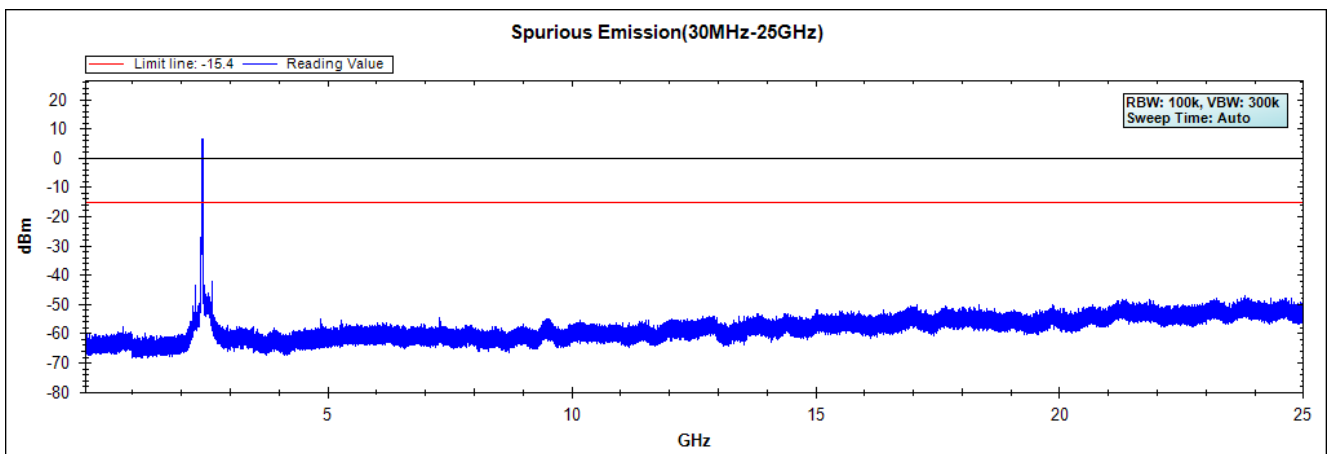



Channel 11 (2462MHz) 30MHz -25GHz

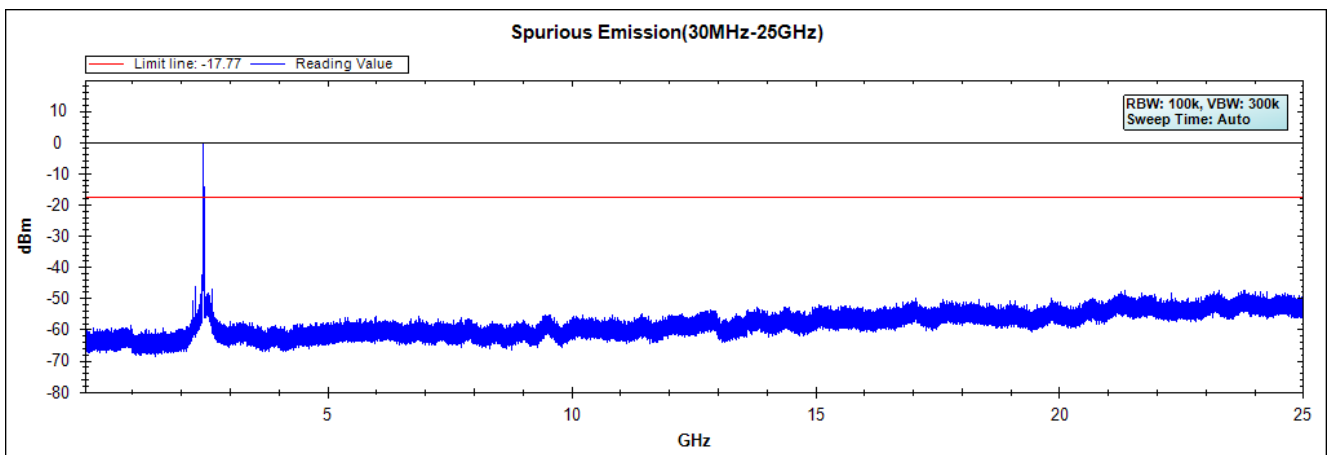

Note: The above test pattern is synthesized by multiple of the frequency range.



Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps

Channel 149 (5745MHz) 30MHz -40GHz

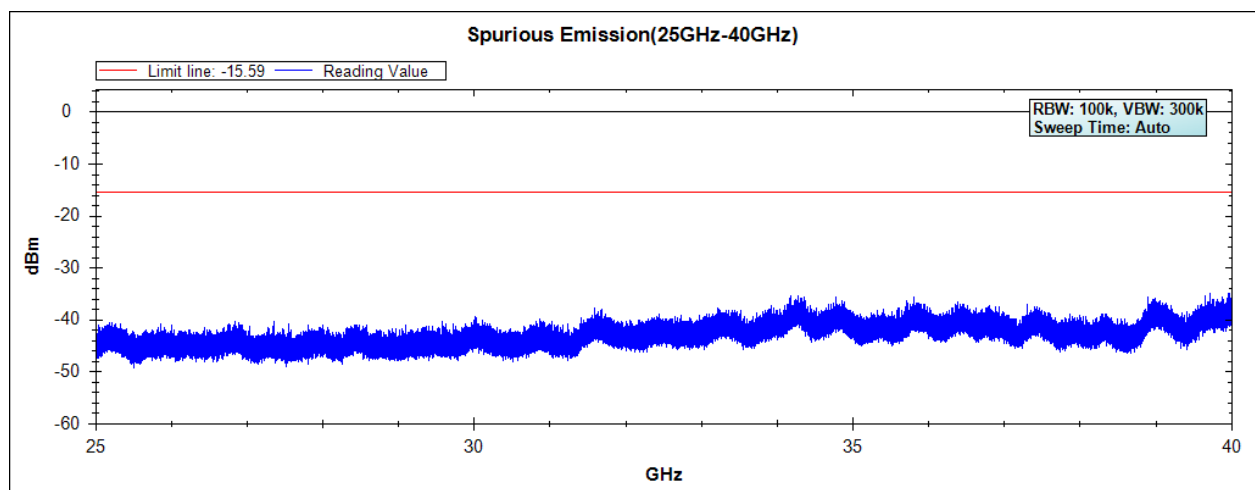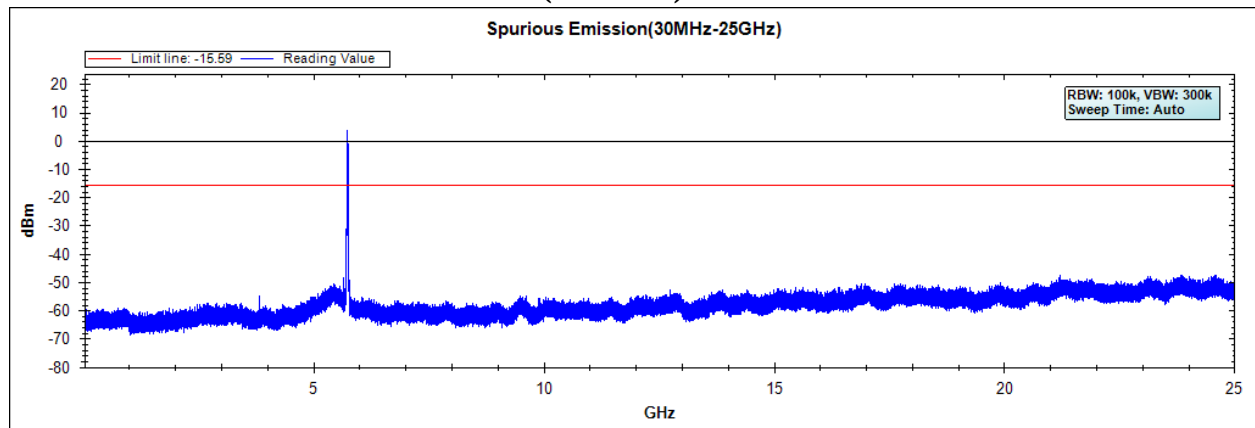



Note: The above test pattern is synthesized by multiple of the frequency range.

Channel 157 (5785MHz) 30MHz -40GHz

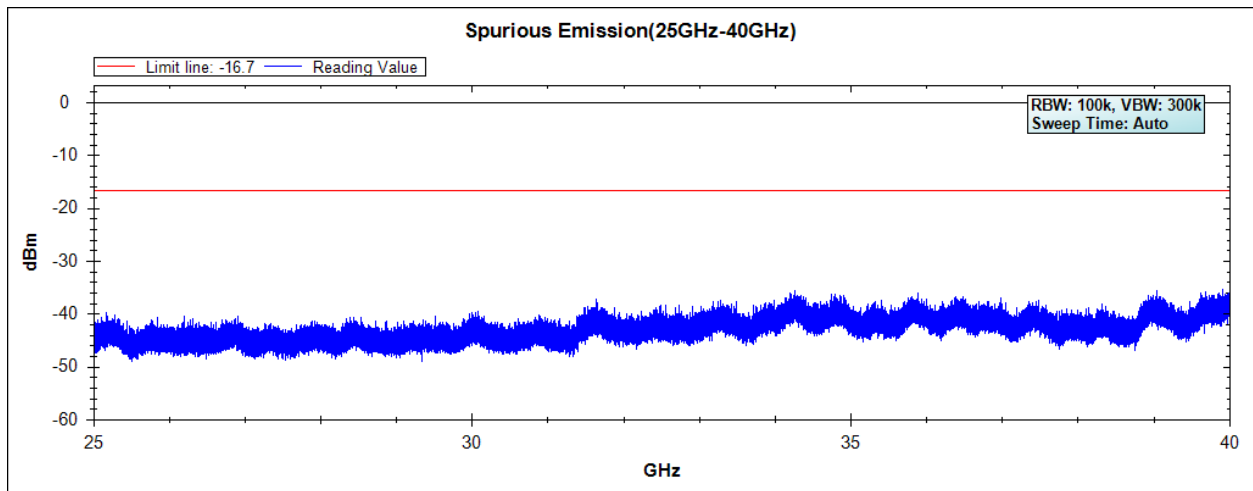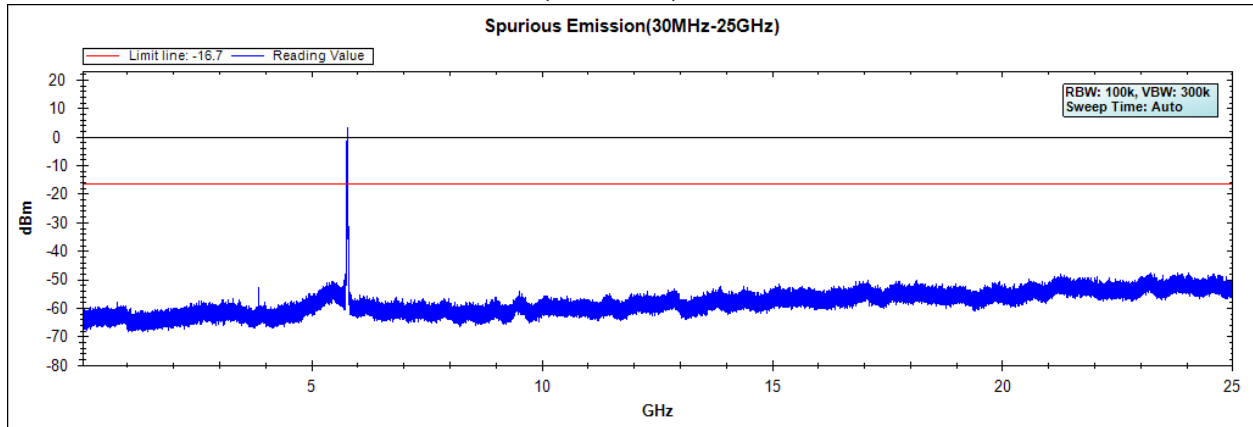

Note: The above test pattern is synthesized by multiple of the frequency range.


Channel 165 (5825MHz) 30MHz -40GHz

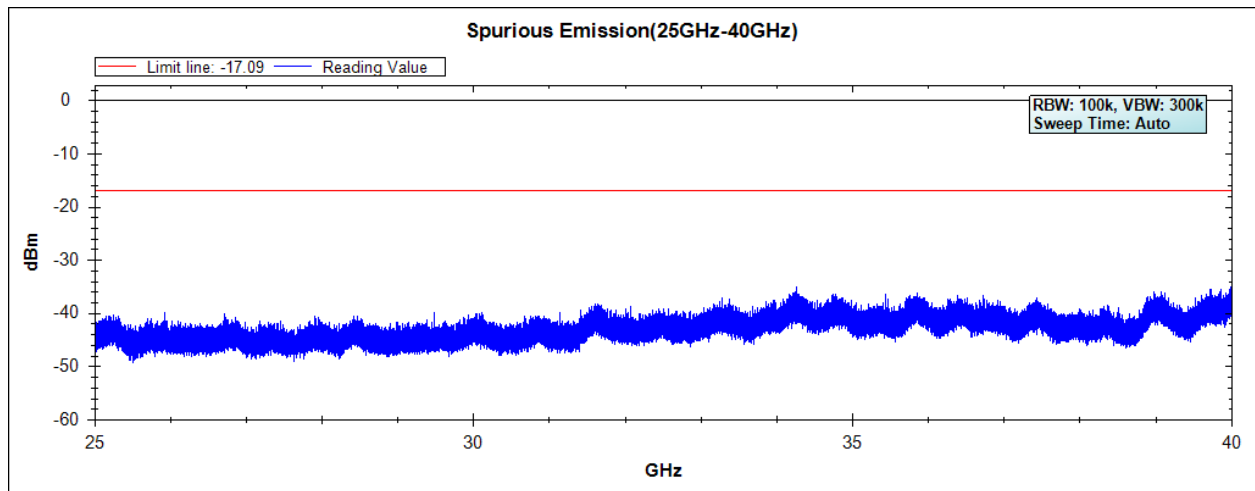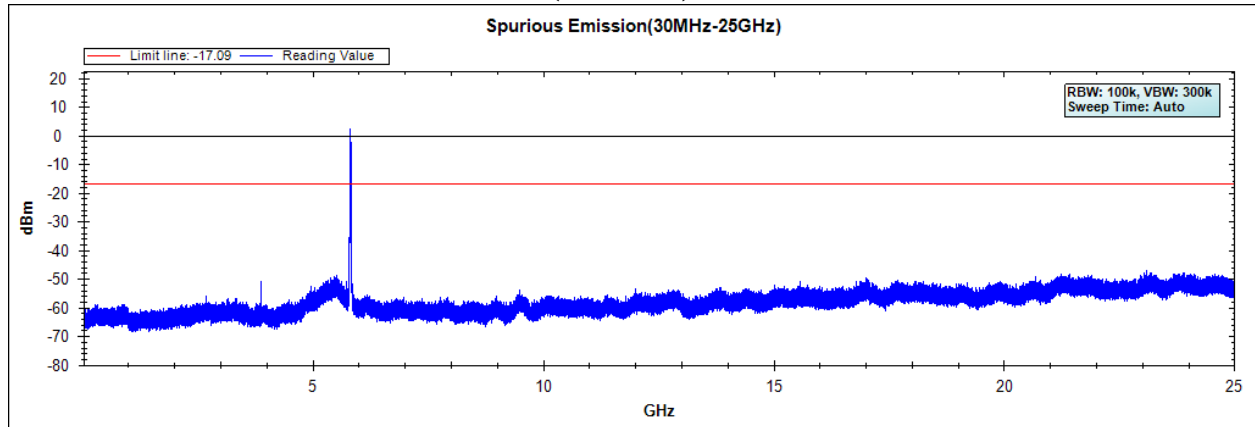


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)


Channel 01 (2412MHz) 30MHz -25GHz-Chain A

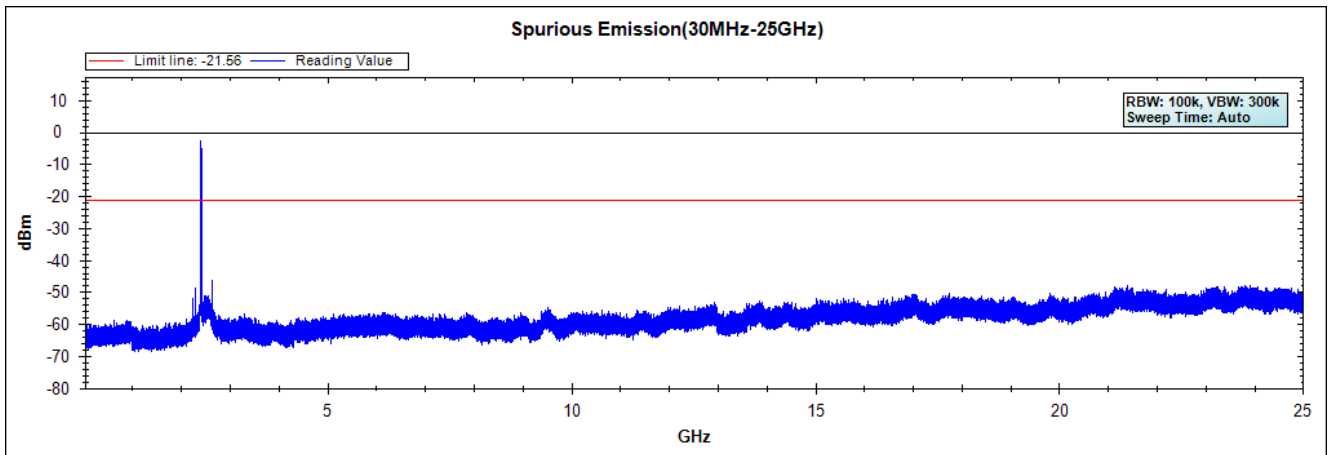

Channel 06 (2437MHz) 30MHz -25GHz-Chain A

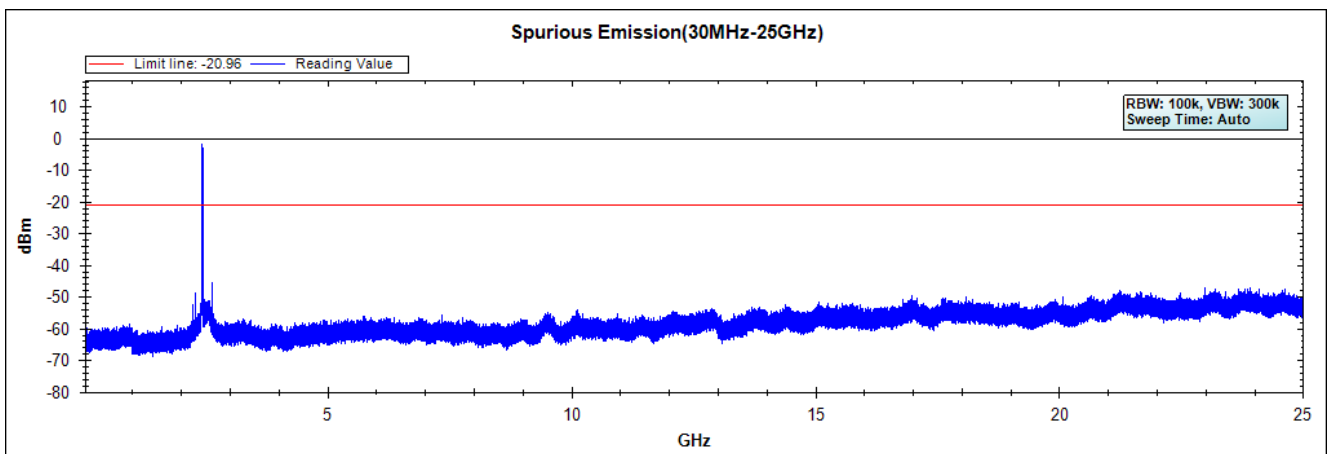


Channel 11 (2462MHz) 30MHz -25GHz-Chain A

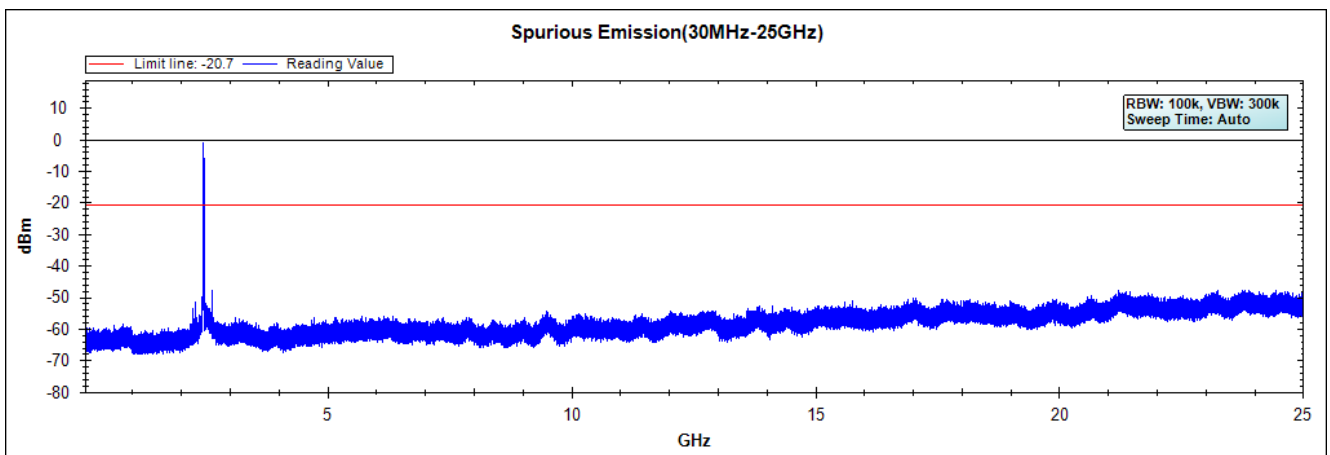


Note: The above test pattern is synthesized by multiple of the frequency range.


Channel 01 (2412MHz) 30MHz -25GHz-Chain B

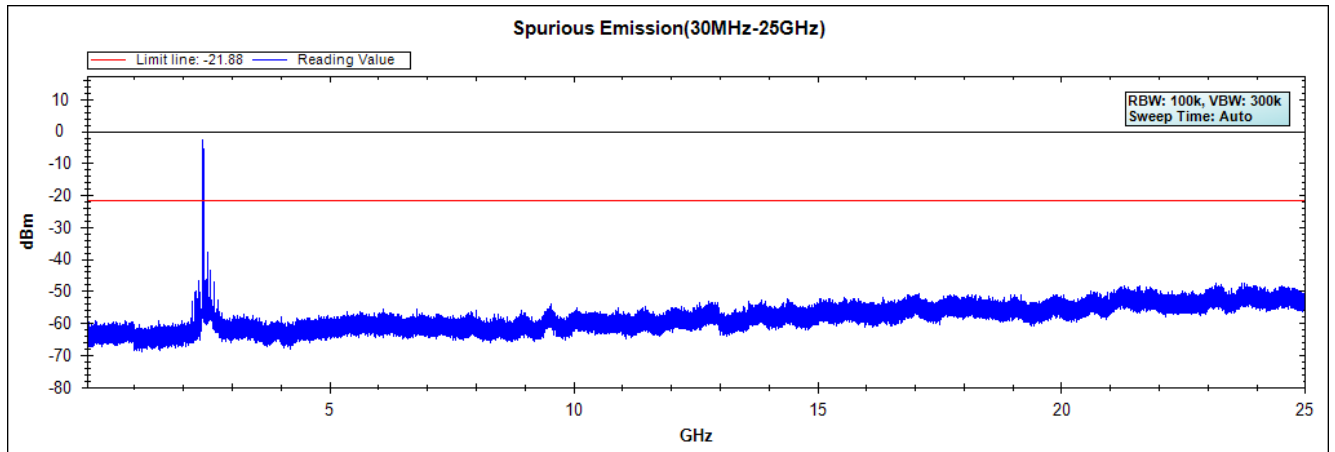

Channel 06 (2437MHz) 30MHz -25GHz-Chain B

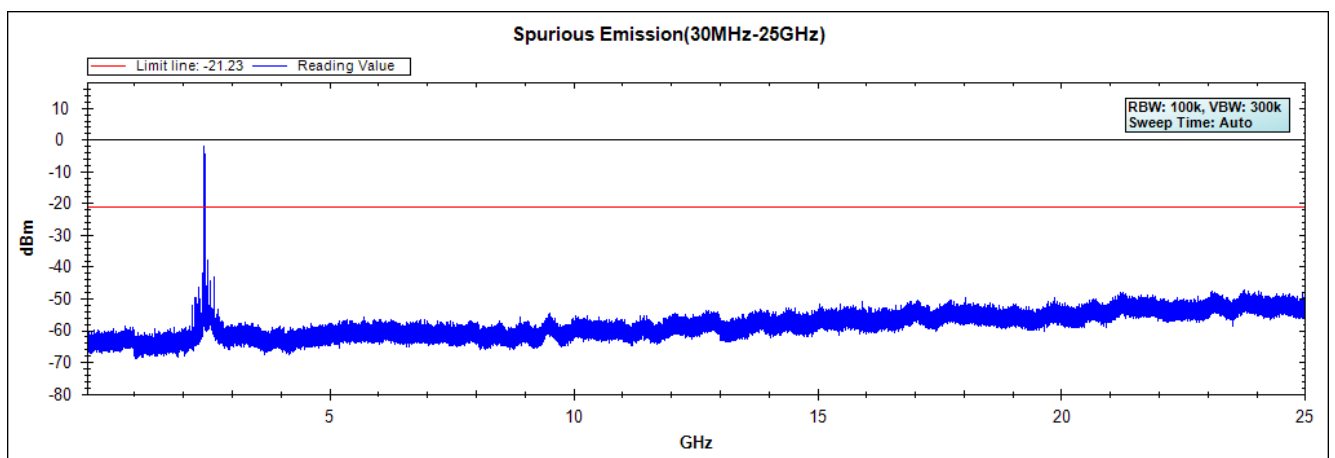


Channel 11 (2462MHz) 30MHz -25GHz-Chain B

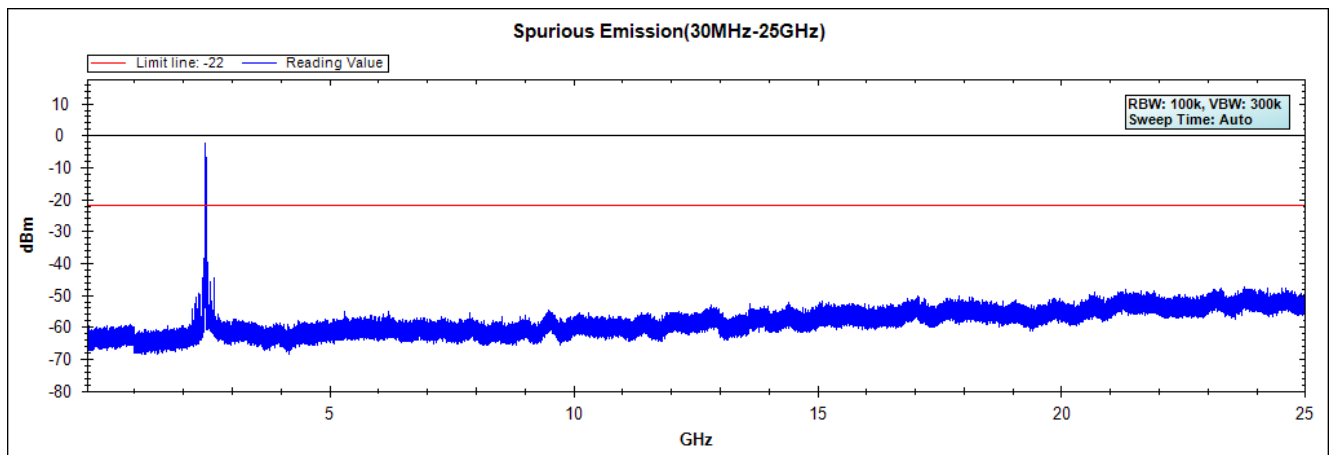


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)


Channel 01 (2422MHz) 30MHz -25GHz-Chain A

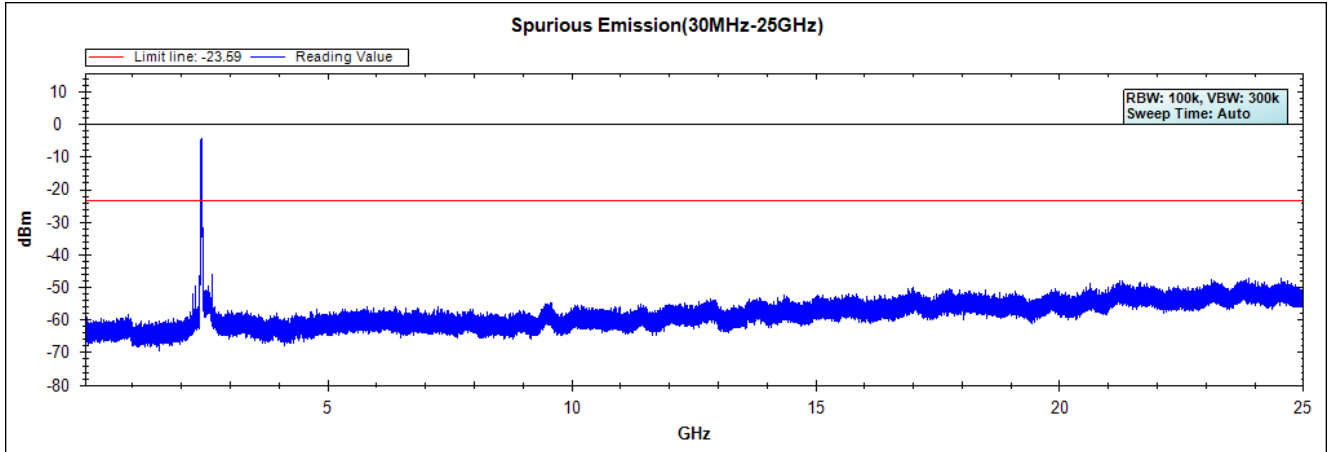

Channel 04 (2437MHz) 30MHz -25GHz-Chain A

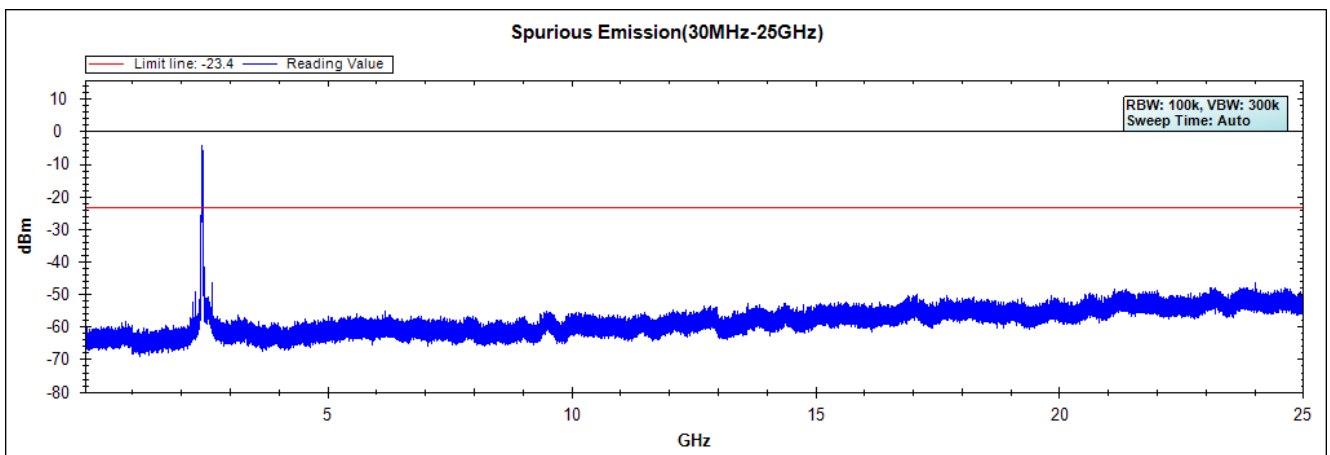


Channel 07 (2452MHz) 30MHz -25GHz-Chain A

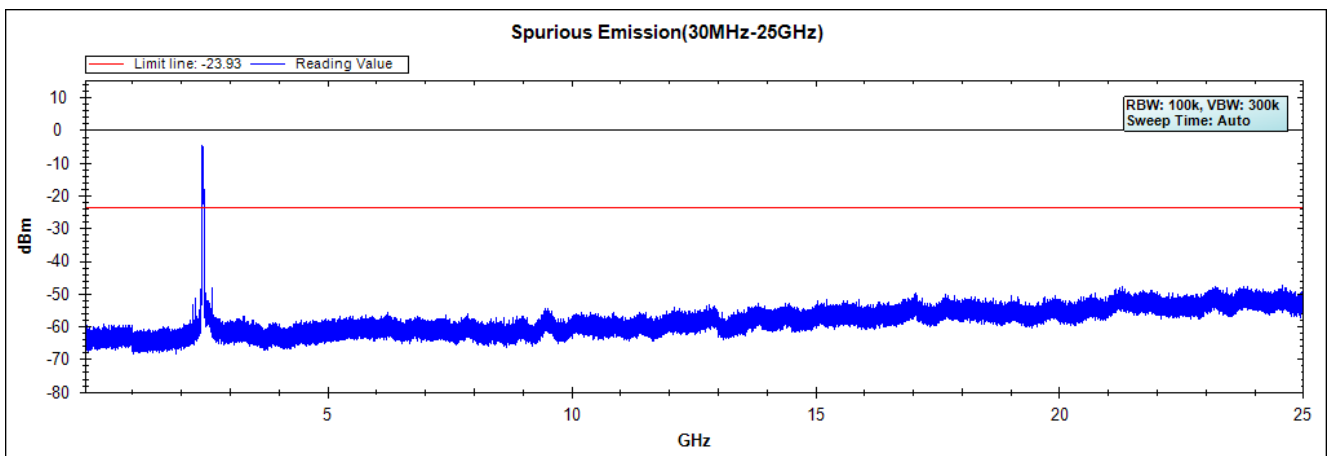


Note: The above test pattern is synthesized by multiple of the frequency range.


Channel 01 (2422MHz) 30MHz -25GHz-Chain B

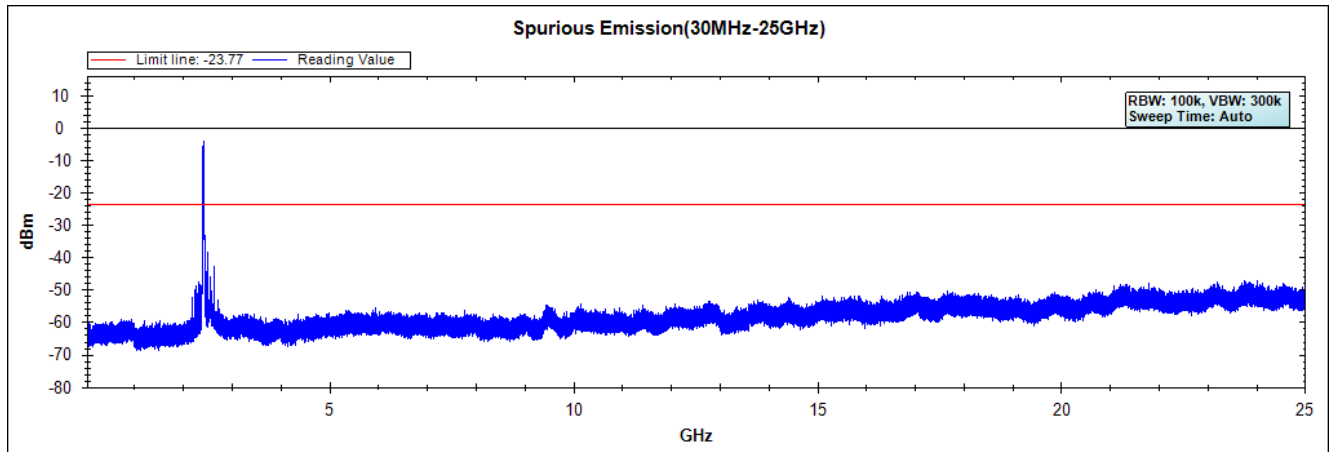

Channel 04 (2437MHz) 30MHz -25GHz-Chain B

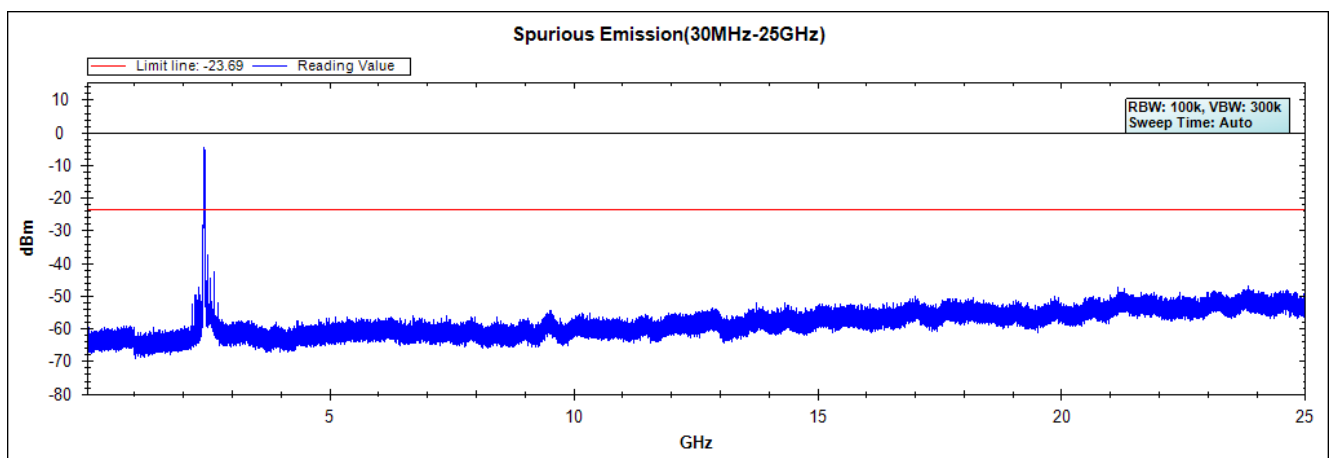



Channel 07 (2452MHz) 30MHz -25GHz-Chain B

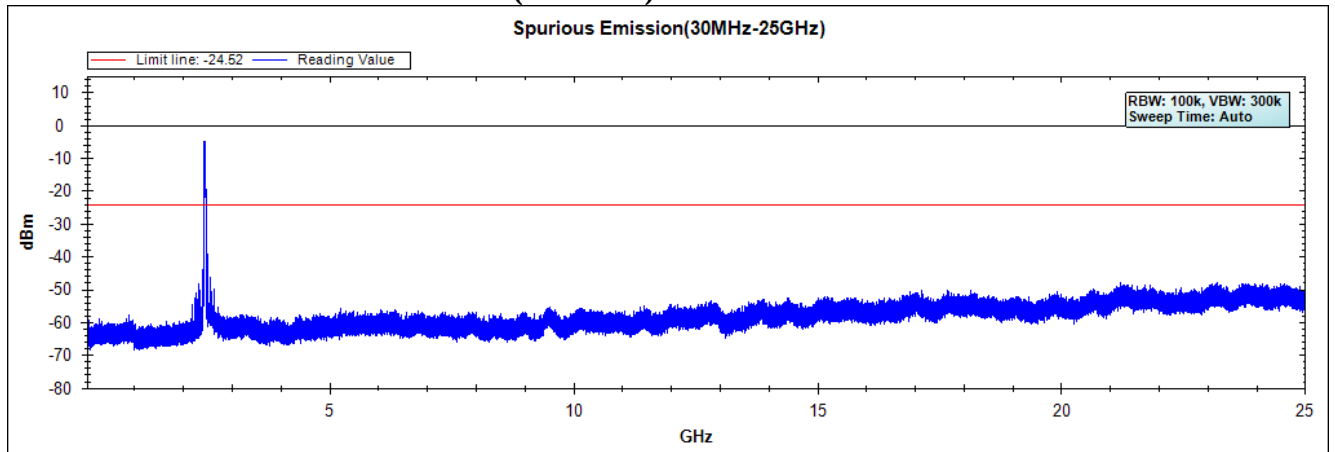

Note: The above test pattern is synthesized by multiple of the frequency range.


Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band)

Channel 49 (5745MHz) 30MHz -40GHz-Chain A

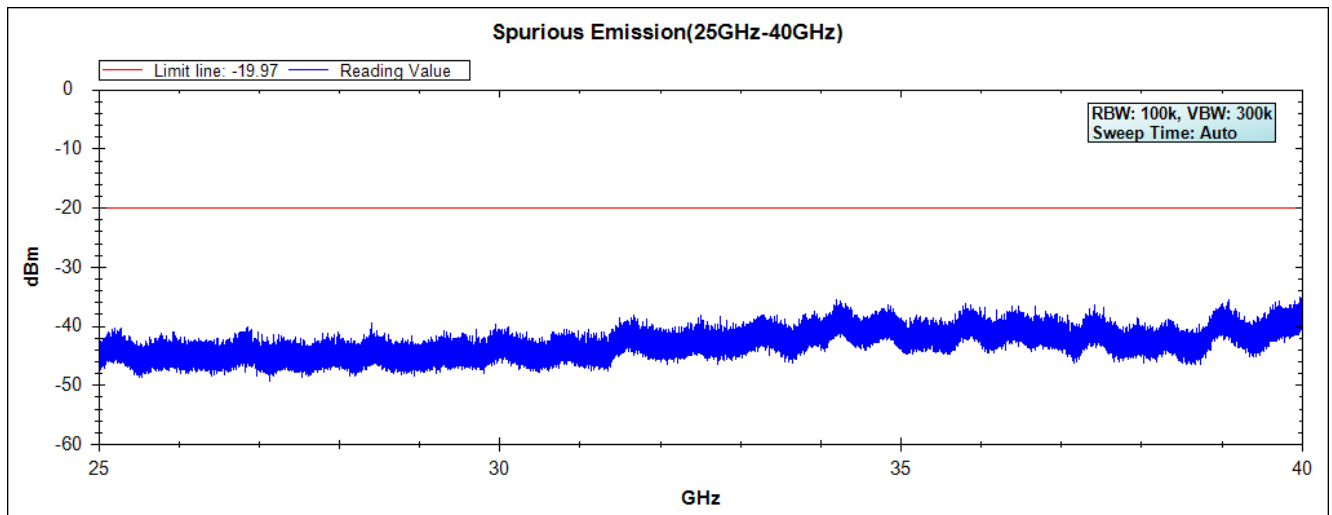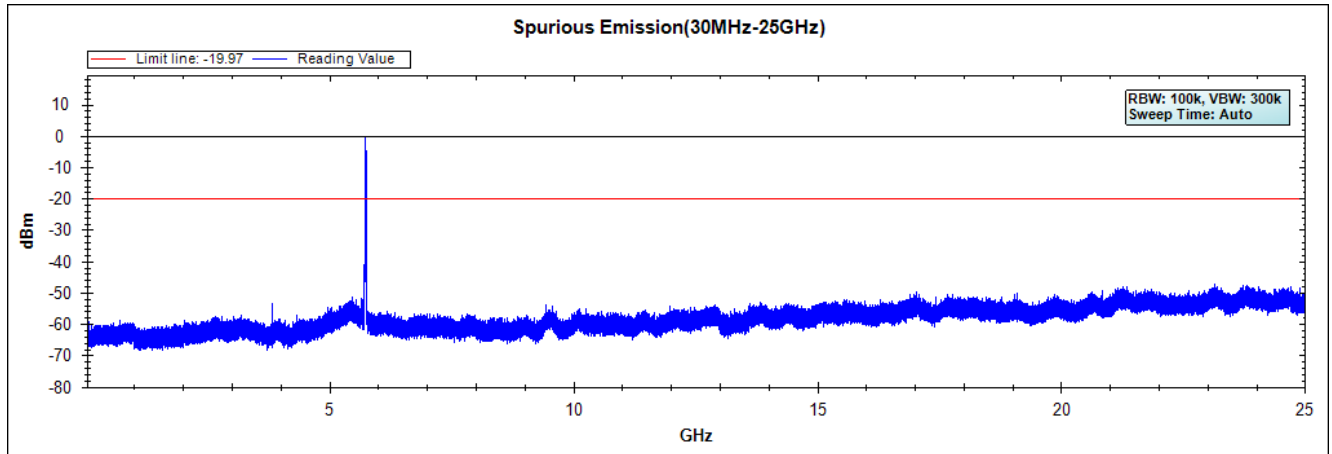



Note: The above test pattern is synthesized by multiple of the frequency range.

Channel 157 (5785MHz) 30MHz -40GHz-Chain A

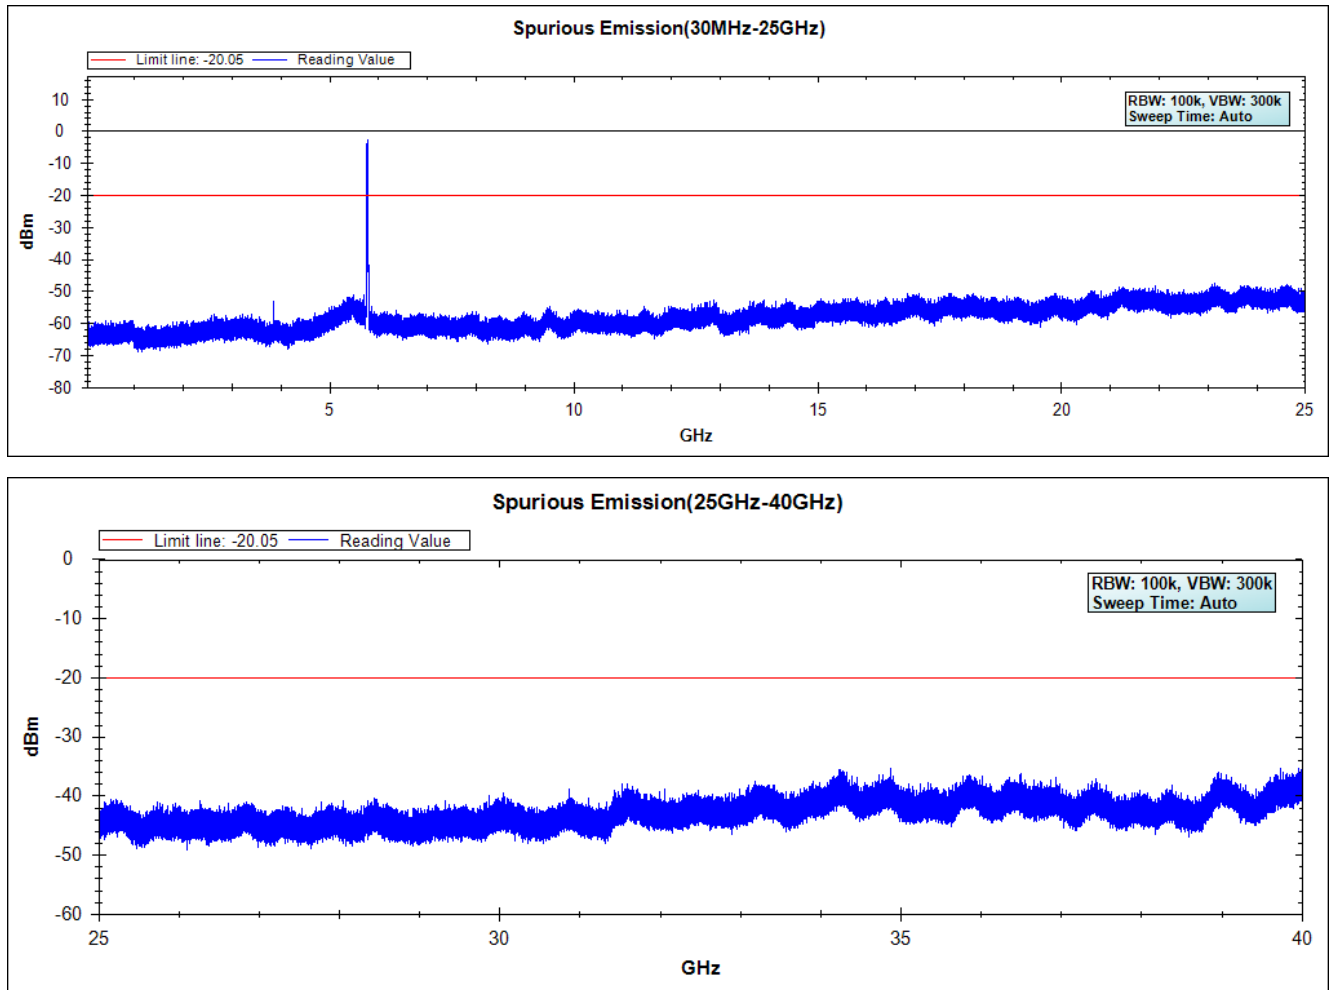



Note: The above test pattern is synthesized by multiple of the frequency range.

Channel 165 (5825MHz) 30MHz -40GHz-Chain A

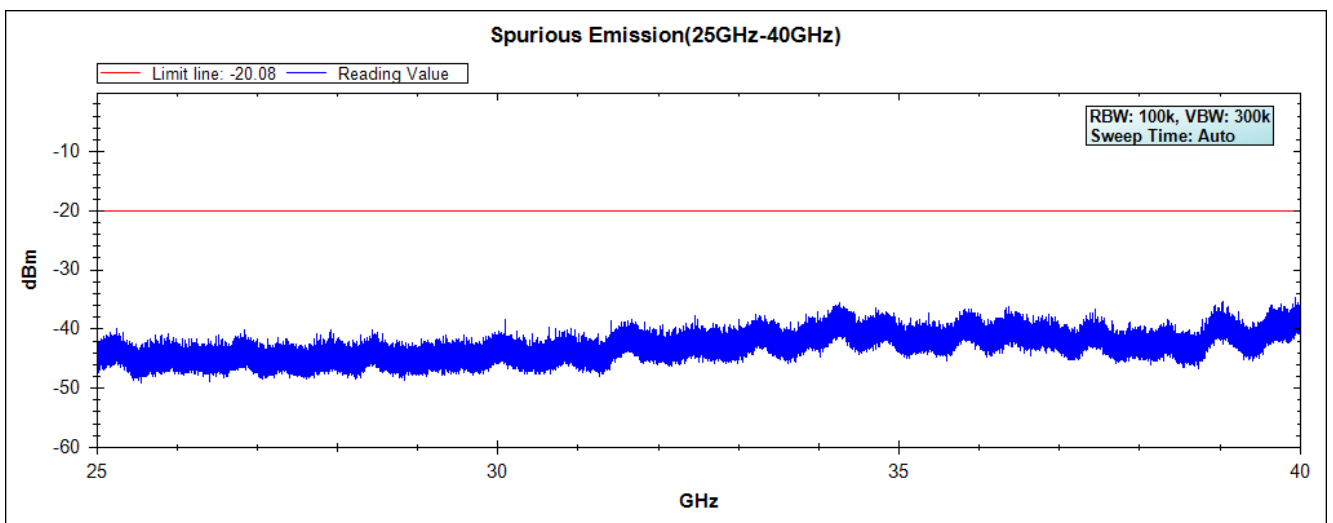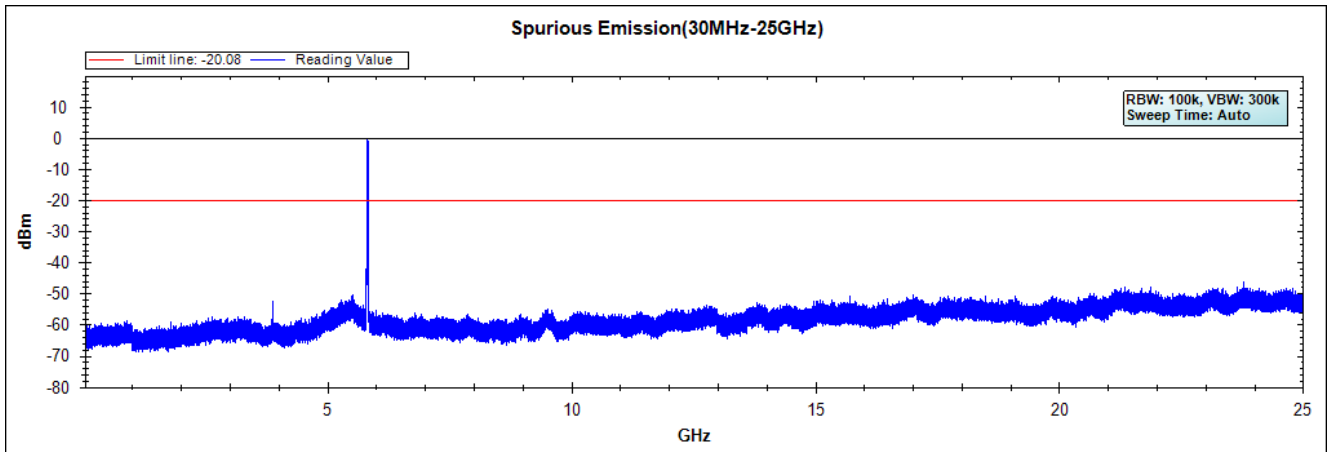


Note: The above test pattern is synthesized by multiple of the frequency range.

Channel 149 (5745MHz) 30MHz -40GHz-Chain B

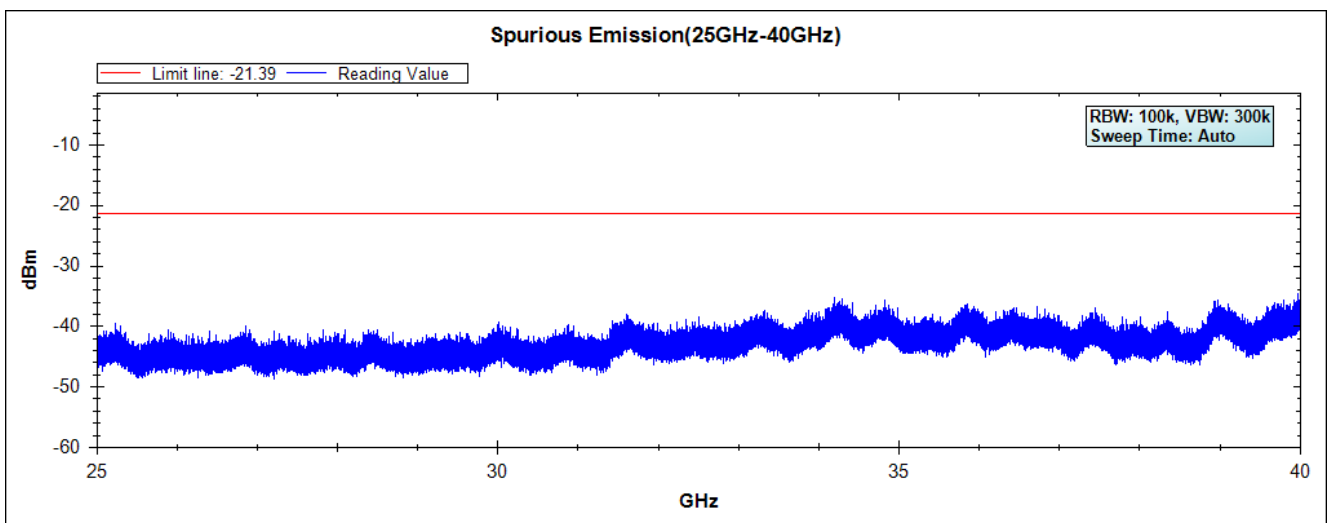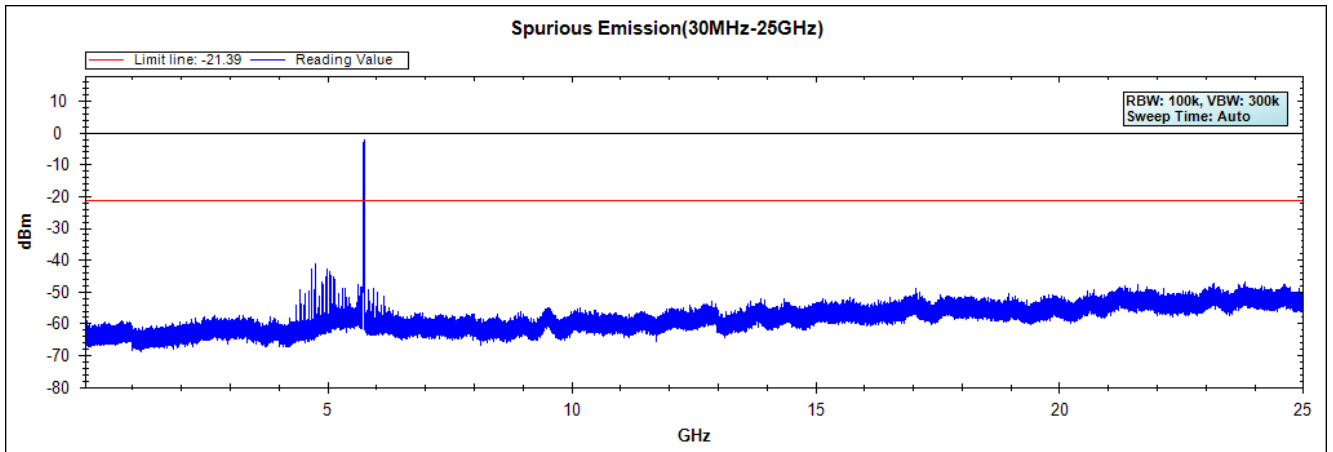


Note: The above test pattern is synthesized by multiple of the frequency range.

Channel 157 (5785MHz) 30MHz -40GHz-Chain B

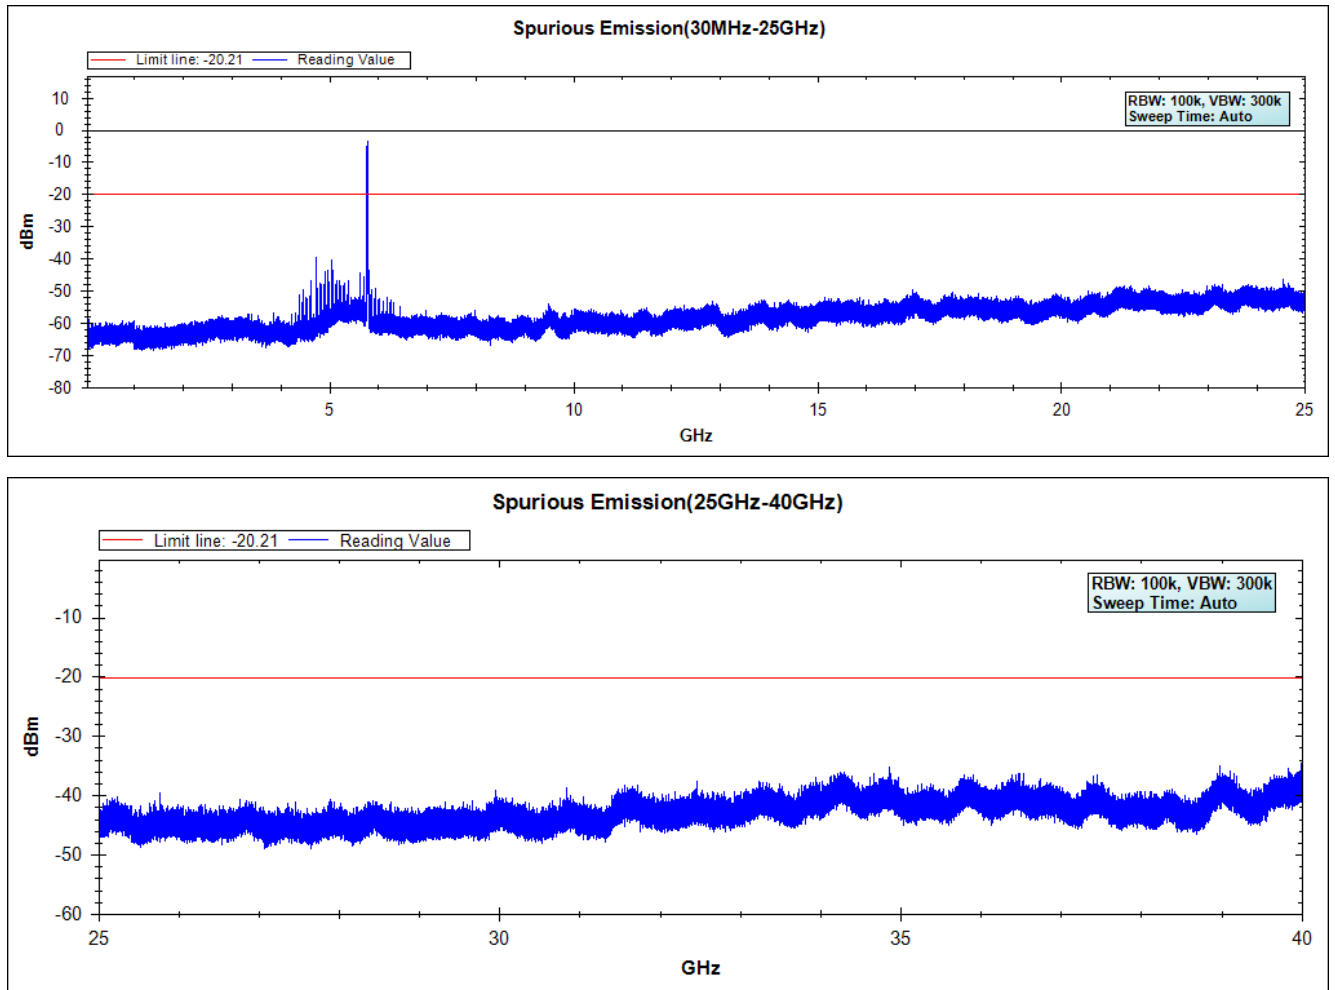

Note: The above test pattern is synthesized by multiple of the frequency range.



Channel 165 (5825MHz) 30MHz -40GHz-Chain B

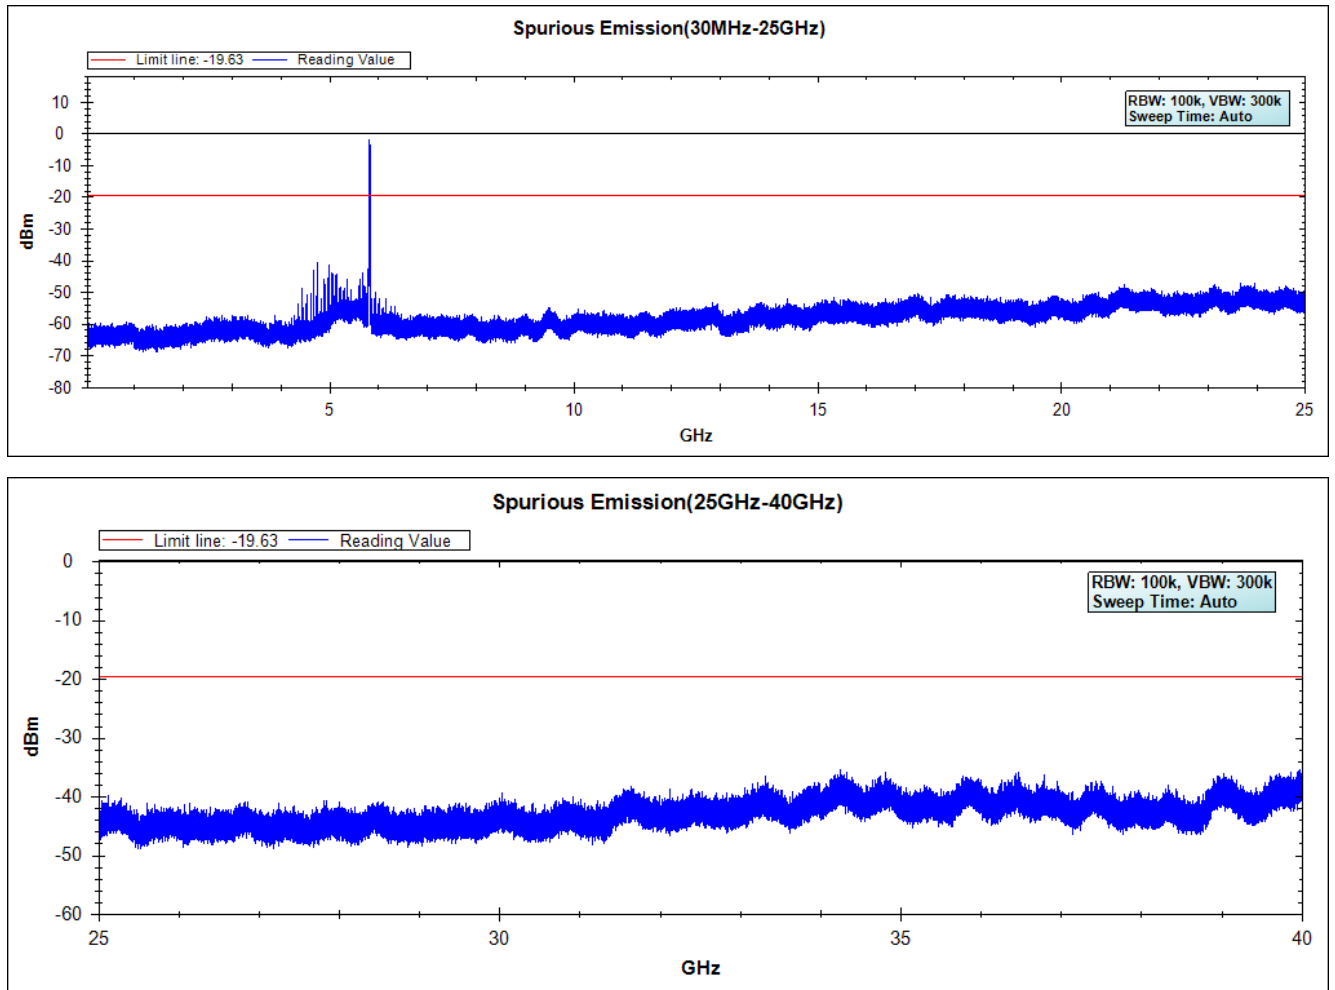

Note: The above test pattern is synthesized by multiple of the frequency range.



Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band)

Channel 151 (5755MHz) 30MHz -40GHz-Chain A

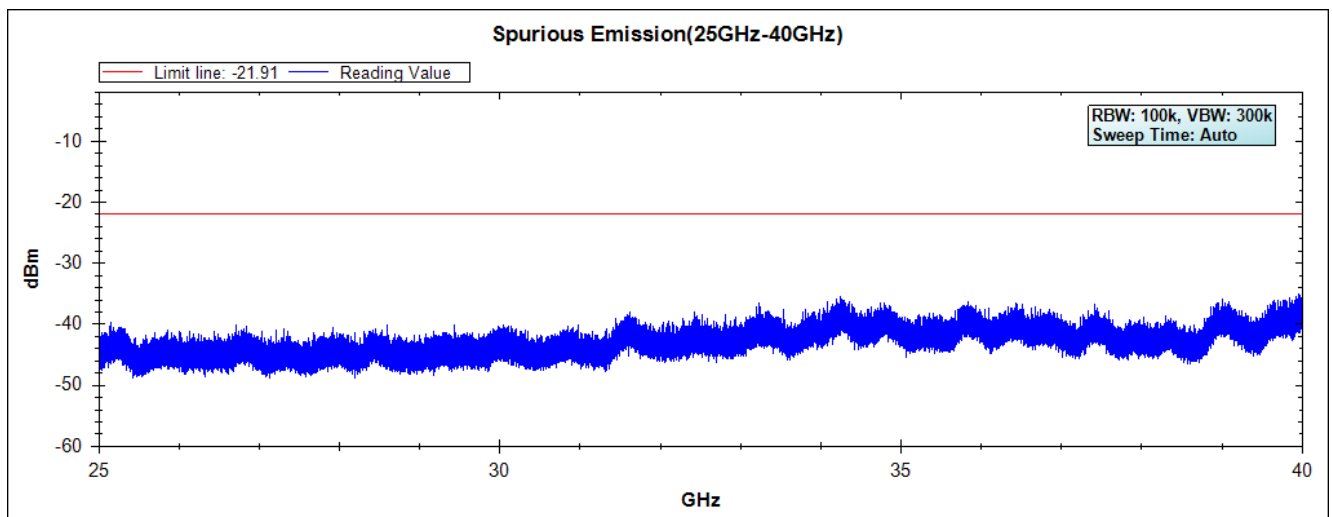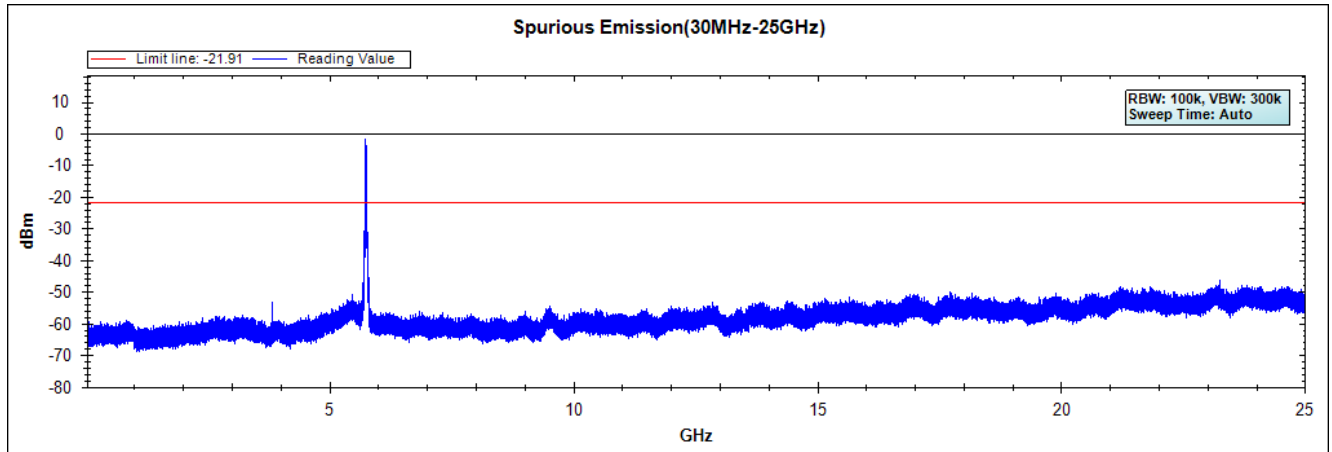



Note: The above test pattern is synthesized by multiple of the frequency range.

Channel 159 (5795MHz) 30MHz -40GHz-Chain A

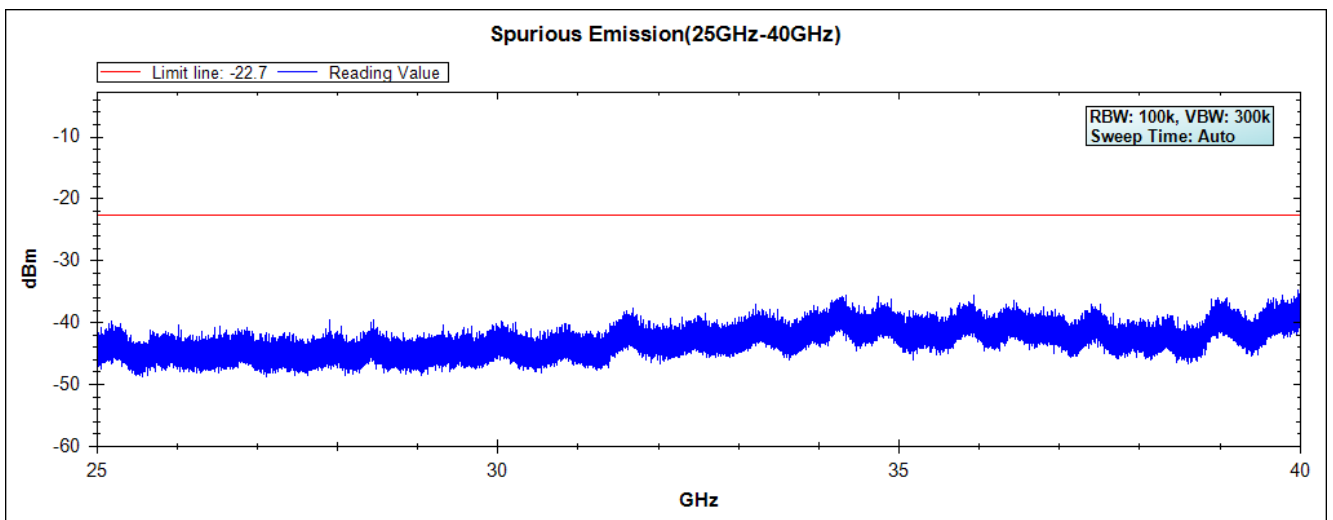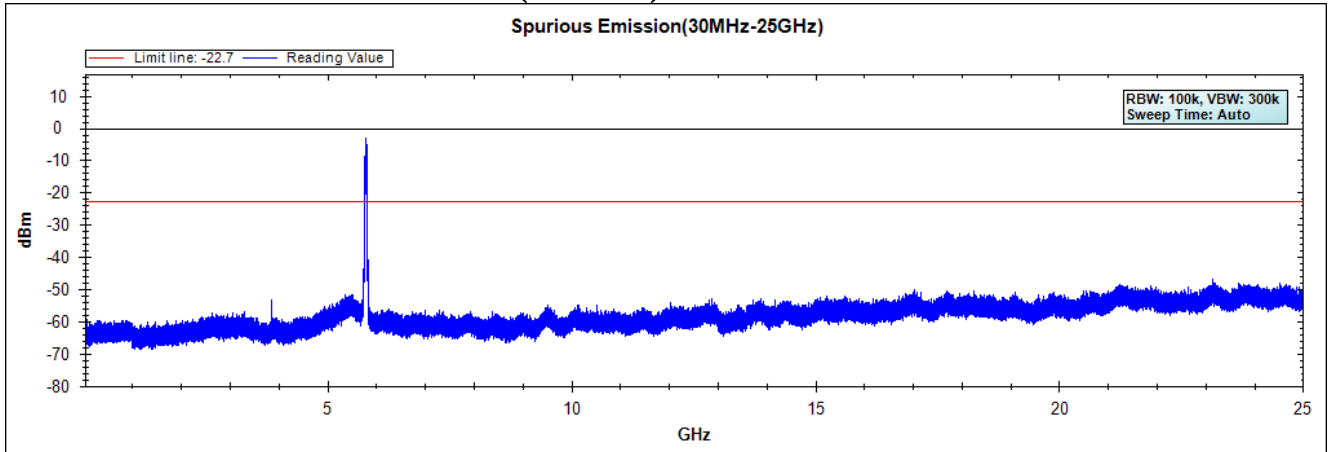


Note: The above test pattern is synthesized by multiple of the frequency range.

Channel 151 (5755MHz) 30MHz -40GHz-Chain B

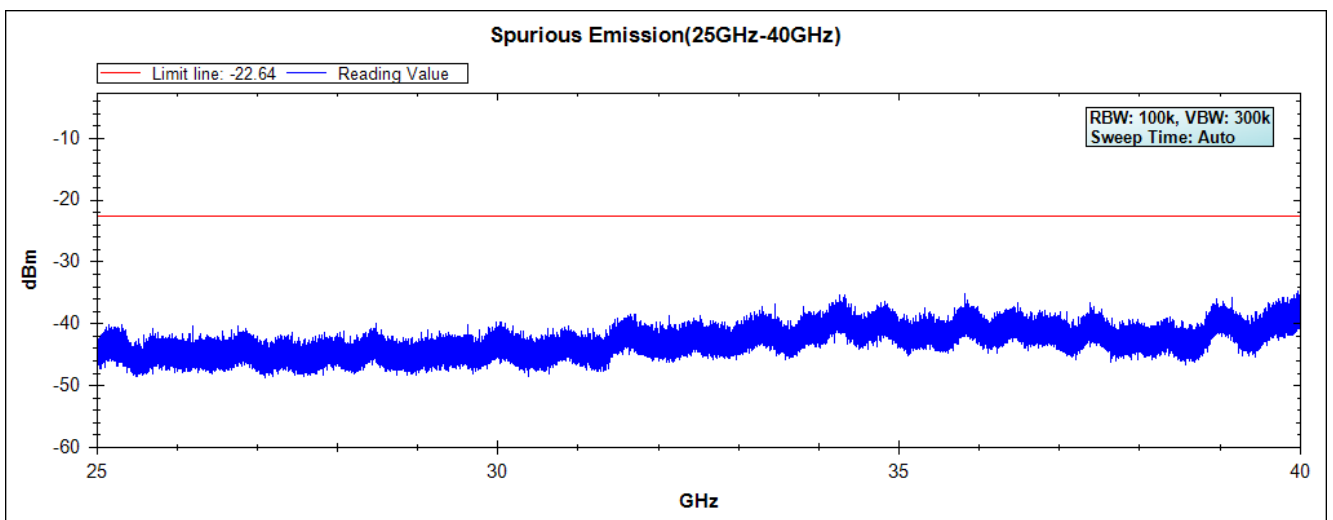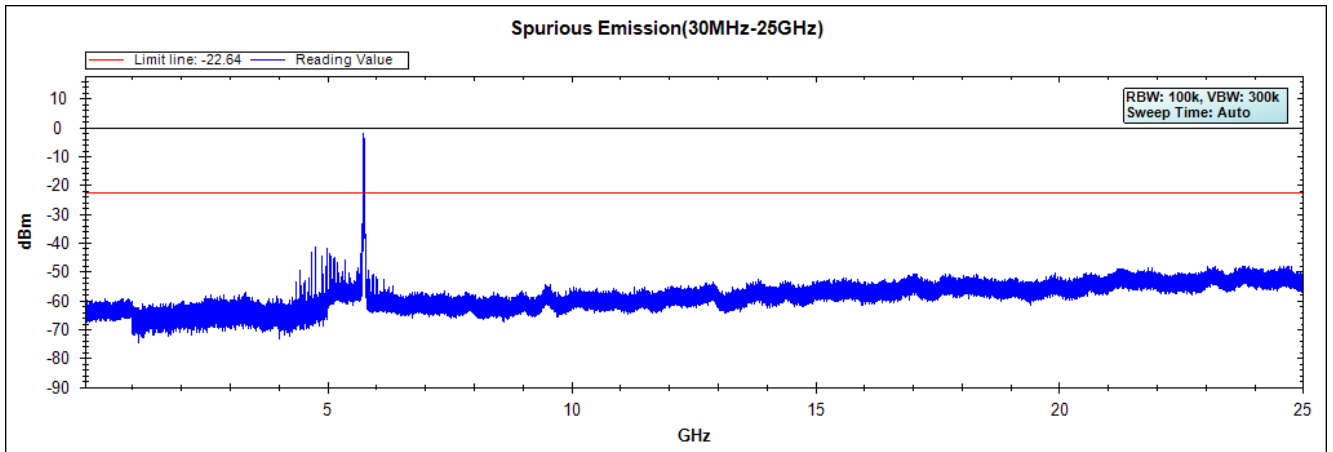

Note: The above test pattern is synthesized by multiple of the frequency range.

Channel 159 (5795MHz) 30MHz -40GHz-Chain B

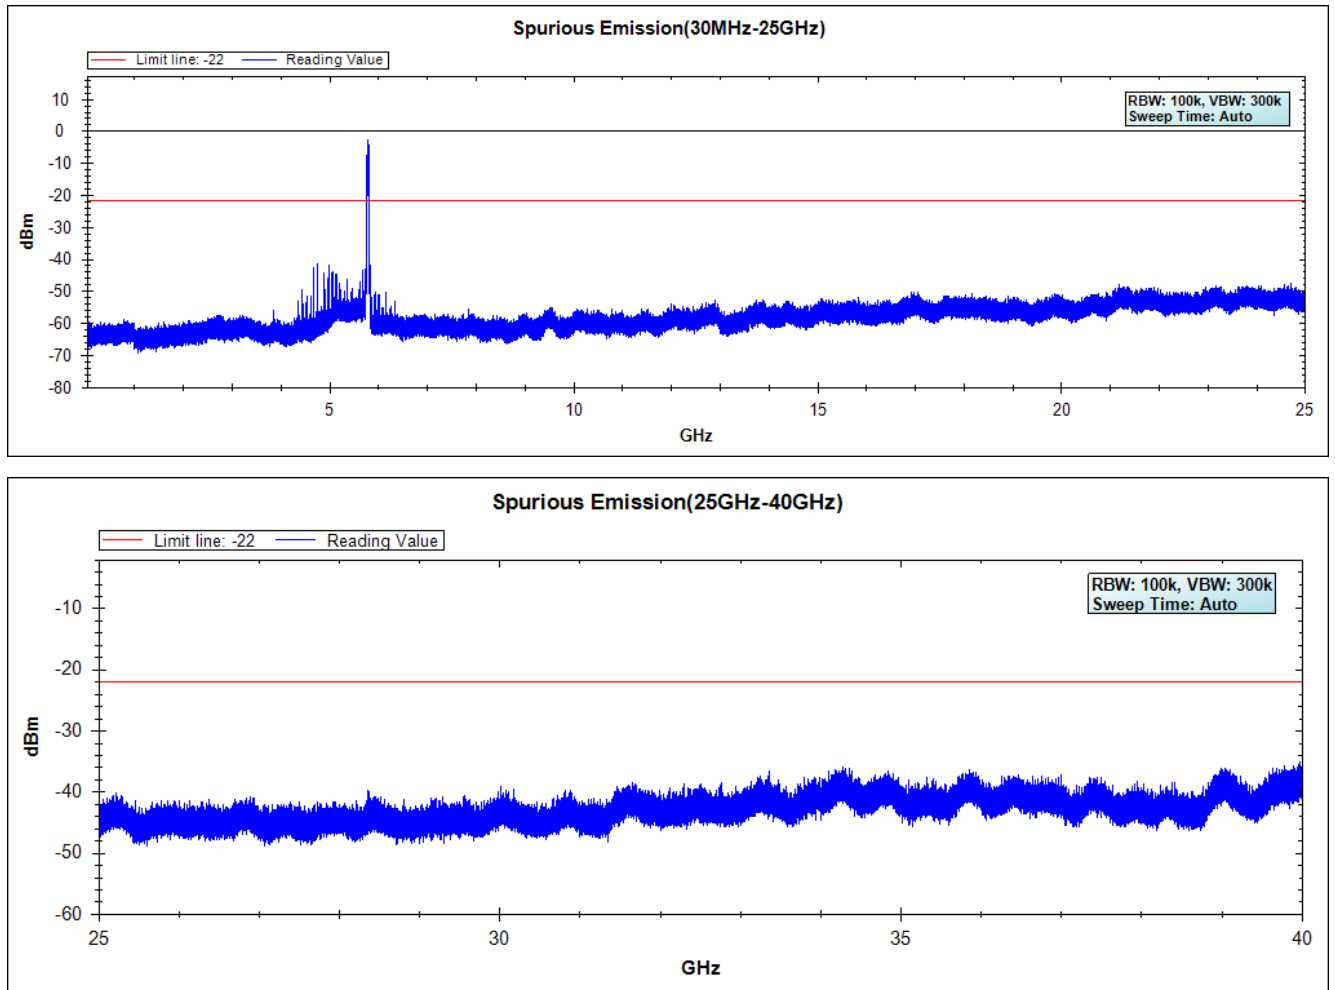

Note: The above test pattern is synthesized by multiple of the frequency range.

6. Band Edge

6.1. Test Equipment

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3		Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
		Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2013
		Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2013
	X	Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2013
		Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar., 2014
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2013
		Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X	Coaxial Cable	Quietek	QTK-CABLE/ CAB5	Feb., 2014
	X	Controller	Quietek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A

- Note:
1. All instruments are calibrated every one year.
 2. The test instruments marked by “X” are used to measure the final test results.

6.2. Test Setup

RF Radiated Measurement:

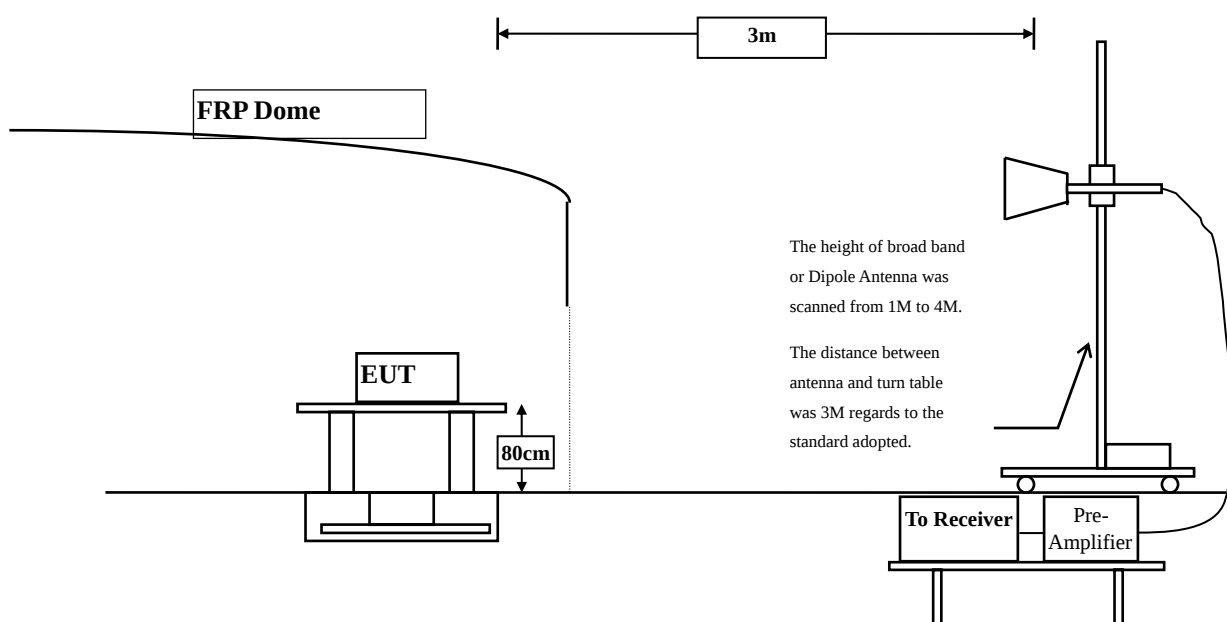

6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 30dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

6.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2009 on radiated measurement.

6.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

6.6. Test Result of Band Edge

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2385.200	31.490	25.659	57.149	74.00	54.00	Pass
01 (Peak)	2390.000	31.509	23.360	54.869	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	25.555	57.116	--	--	--
01 (Peak)	2413.000	31.646	60.668	92.314	--	--	--
01 (Average)	2390.000	31.509	13.852	45.361	74.00	54.00	Pass
01 (Average)	2400.000	31.561	14.003	45.564	--	--	--
01 (Average)	2414.800	31.660	56.800	88.460	--	--	--

Figure Channel 01: Horizontal (Peak)


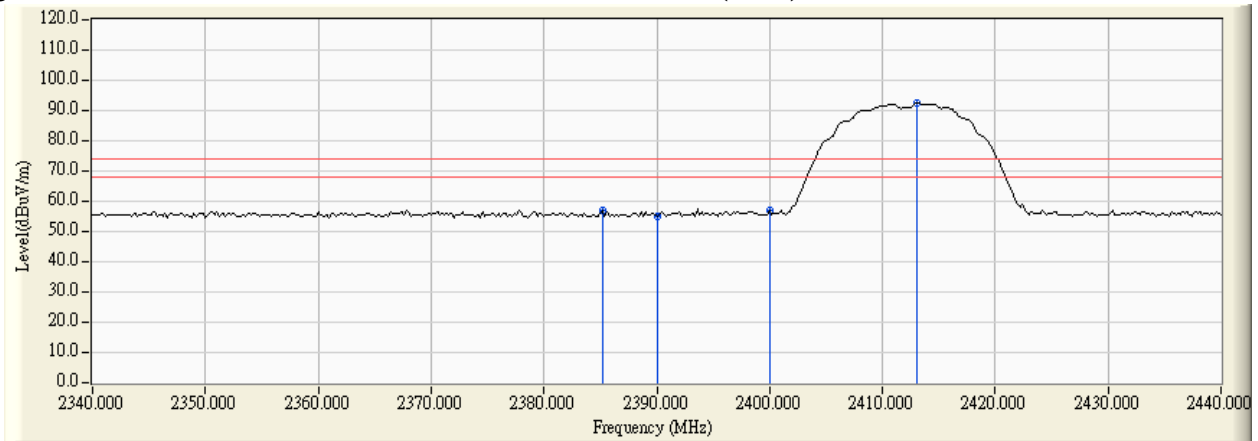


Figure Channel 01: Horizontal (Average)

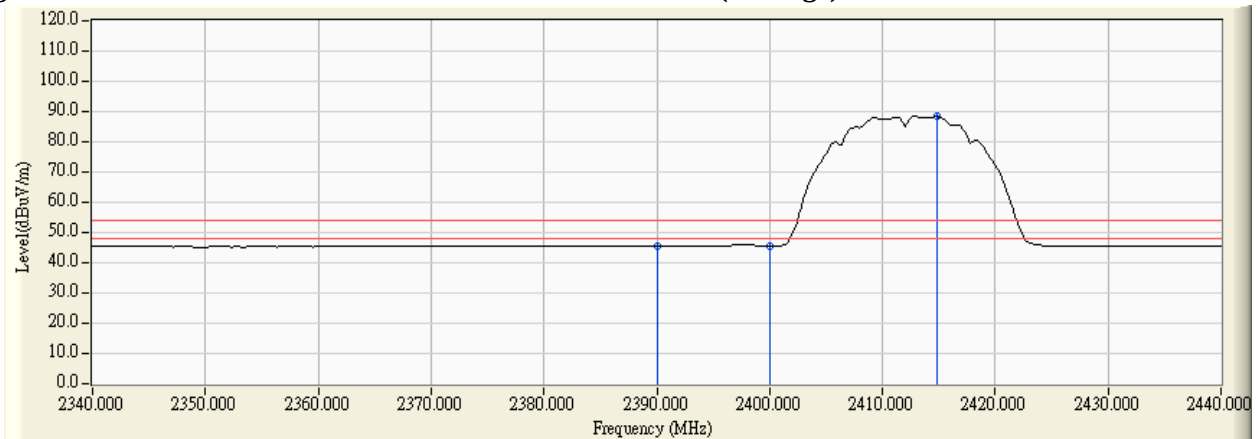

- Note:1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
 4. “ * ”, means this data is the worst emission level.
 5. Measurement Level = Reading Level + Correct Factor.
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	30.915	26.221	57.136	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	29.810	60.722	--	--	--
01 (Peak)	2413.200	30.957	75.234	106.191	--	--	--
01 (Average)	2390.000	30.915	15.324	46.239	74.00	54.00	Pass
01 (Average)	2400.000	30.912	17.986	48.898	--	--	--
01 (Average)	2412.800	30.955	71.329	102.284	--	--	--

Figure Channel 01: Vertical (Peak)


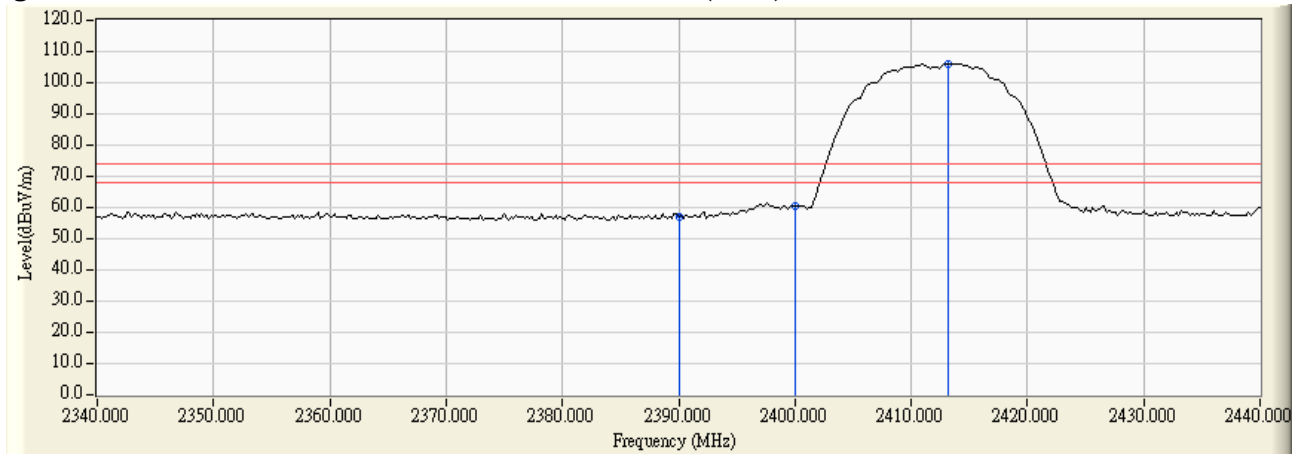


Figure Channel 01: Vertical (Average)

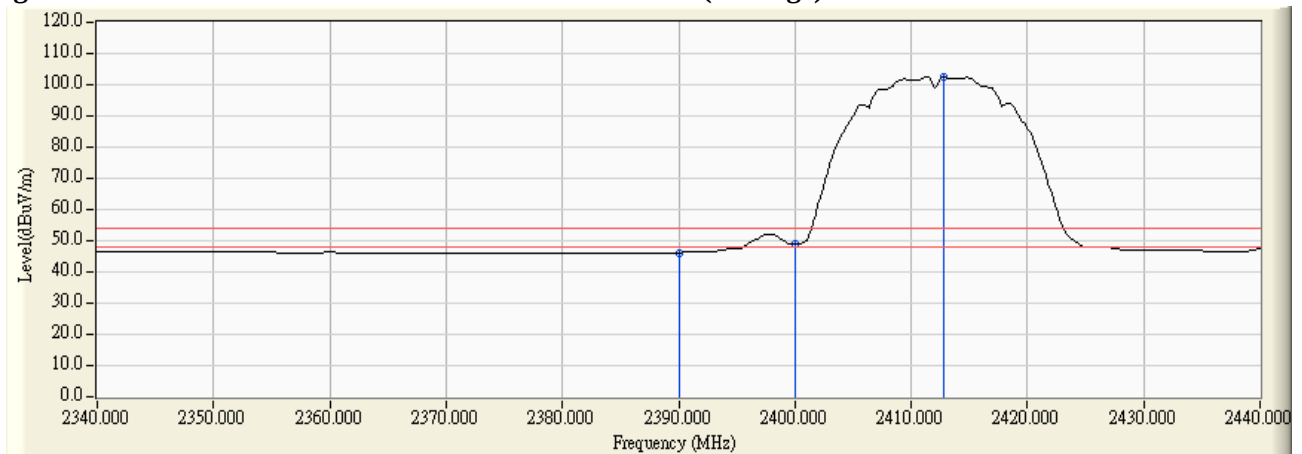

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2463.100	32.028	59.313	91.341	--	--	--
11 (Peak)	2483.500	32.182	23.629	55.811	74.00	54.00	Pass
11 (Peak)	2488.900	32.223	25.620	57.843	74.00	54.00	Pass
11 (Average)	2461.100	32.013	55.590	87.603	--	--	--
11 (Average)	2483.500	32.182	13.818	46.000	74.00	54.00	Pass

Figure Channel 11: Horizontal (Peak)


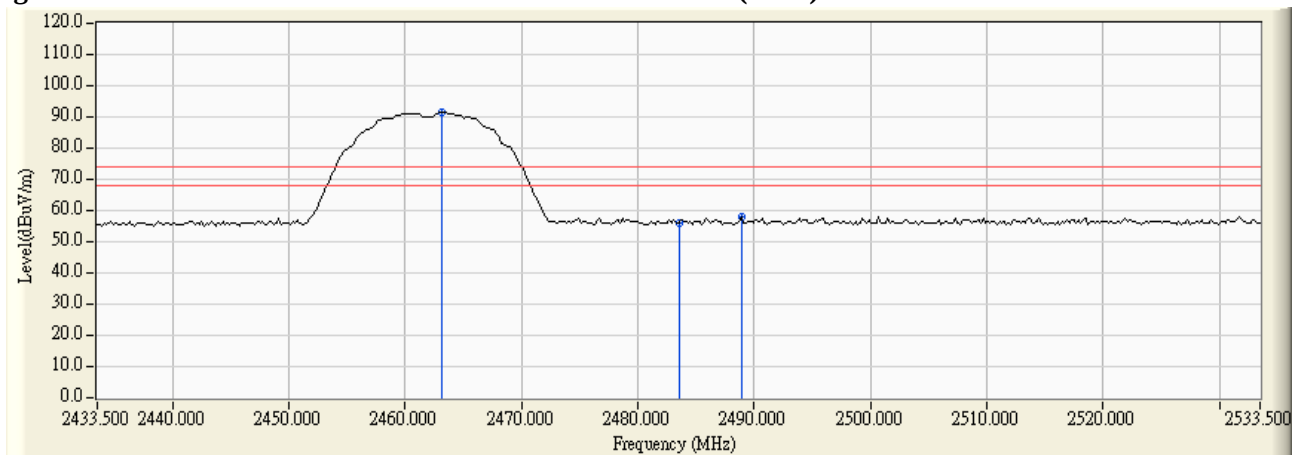


Figure Channel 11: Horizontal (Average)

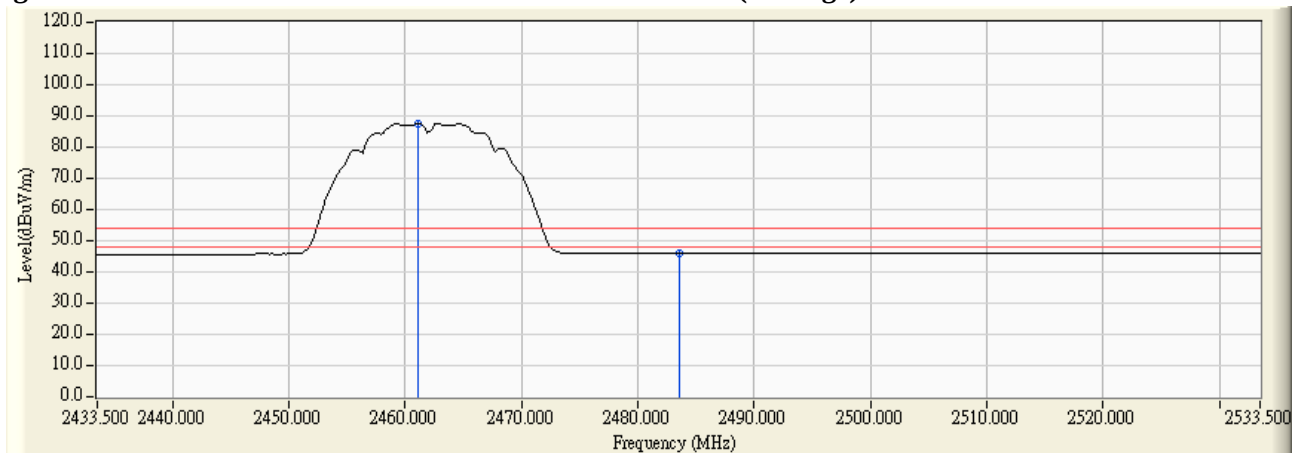

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2462.900	31.296	70.556	101.852	--	--	--
11 (Peak)	2483.500	31.435	25.202	56.637	74.00	54.00	Pass
11 (Peak)	2488.100	31.466	25.820	57.286	74.00	54.00	Pass
11 (Average)	2461.300	31.286	66.888	98.174	--	--	--
11 (Average)	2483.500	31.435	14.442	45.877	74.00	54.00	Pass

Figure Channel 11: Vertical (Peak)


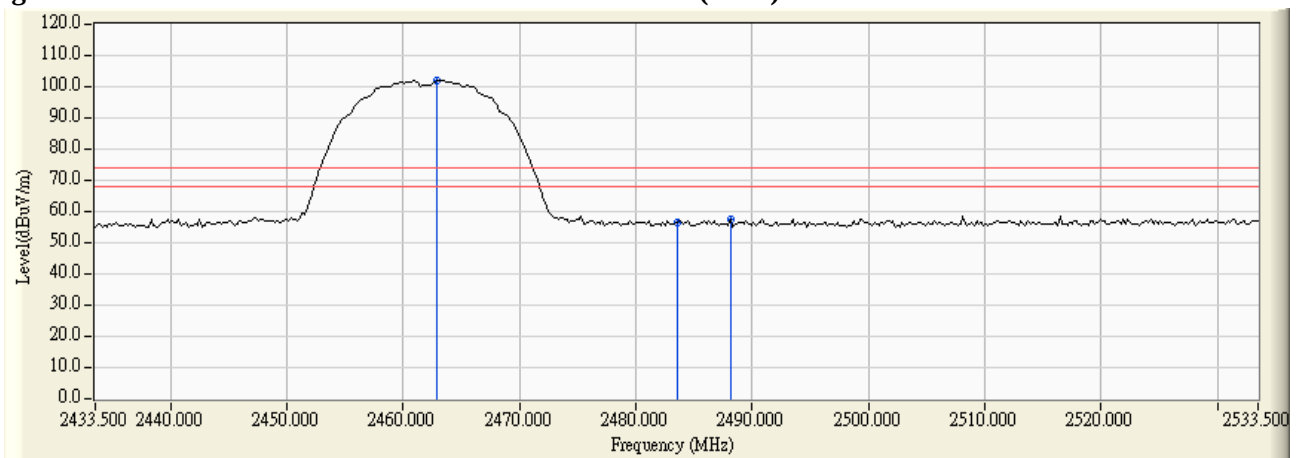


Figure Channel 11: Vertical (Average)

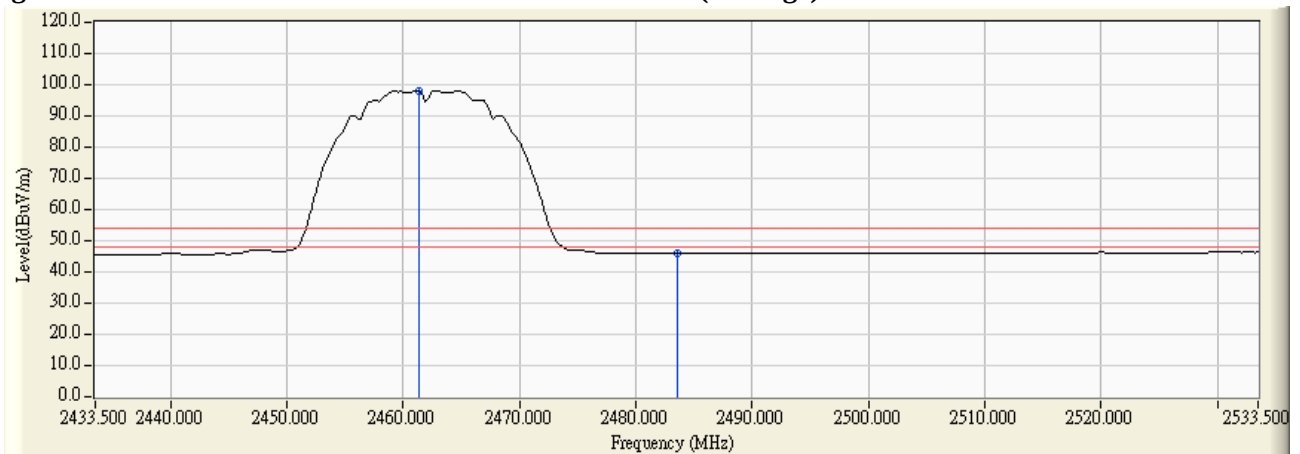

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	31.509	26.932	58.441	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	41.753	73.314	--	--	--
01 (Peak)	2417.400	31.679	63.446	95.126	--	--	--
01(Average)	2390.000	31.509	14.176	45.685	74.00	54.00	Pass
01(Average)	2400.000	31.561	17.766	49.327	--	--	--
01(Average)	2406.400	31.602	52.970	84.571	--	--	--

Figure Channel 01: Horizontal (Peak)


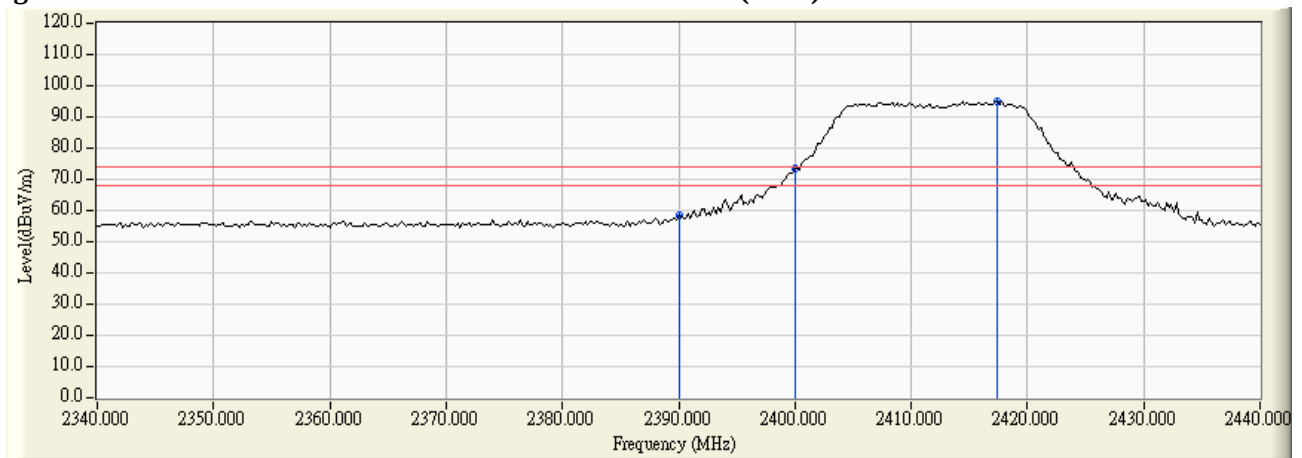


Figure Channel 01: Horizontal (Average)

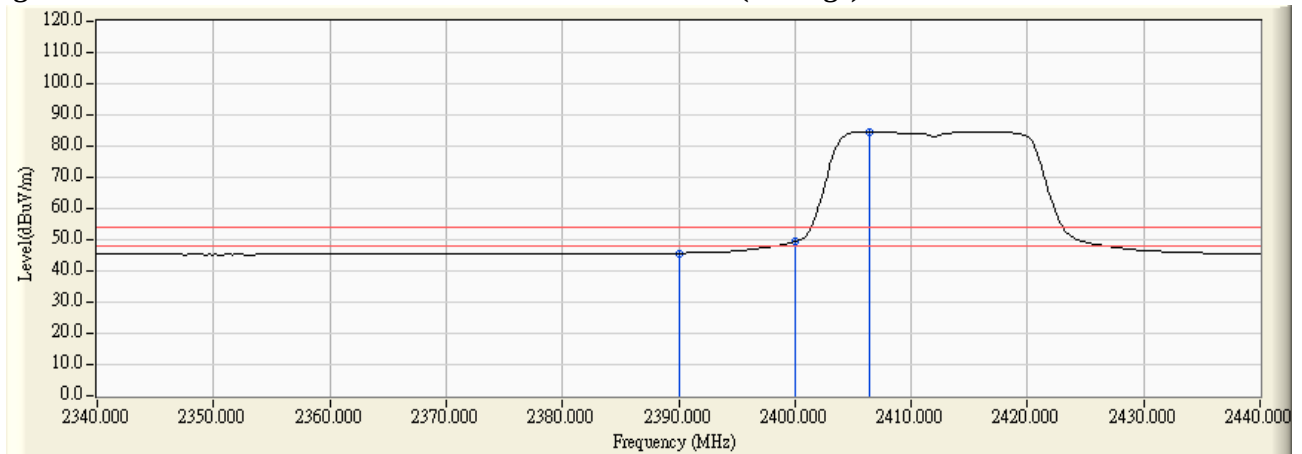

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2388.800	30.921	39.643	70.564	74.00	54.00	Pass
01 (Peak)	2390.000	30.915	38.853	69.768	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	54.835	85.747	--	--	--
01 (Peak)	2417.200	30.984	77.454	108.439	--	--	--
01 (Average)	2390.000	30.915	17.822	48.737	74.00	54.00	Pass
01 (Average)	2400.000	30.912	26.233	57.145	--	--	--
01 (Average)	2417.000	30.983	67.265	98.248	--	--	--

Figure Channel 01: Vertical (Peak)


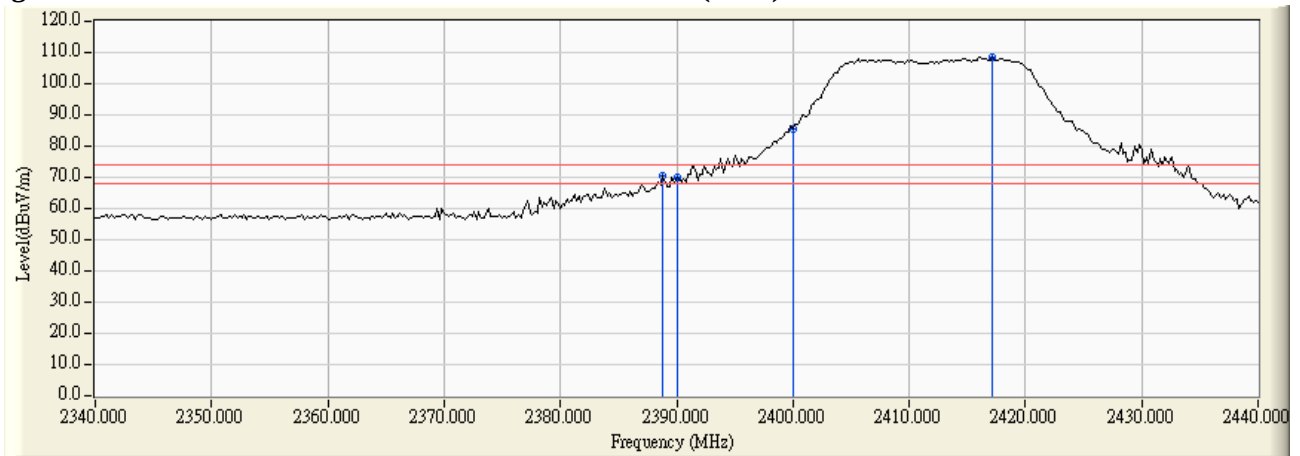


Figure Channel 01: Vertical (Average)

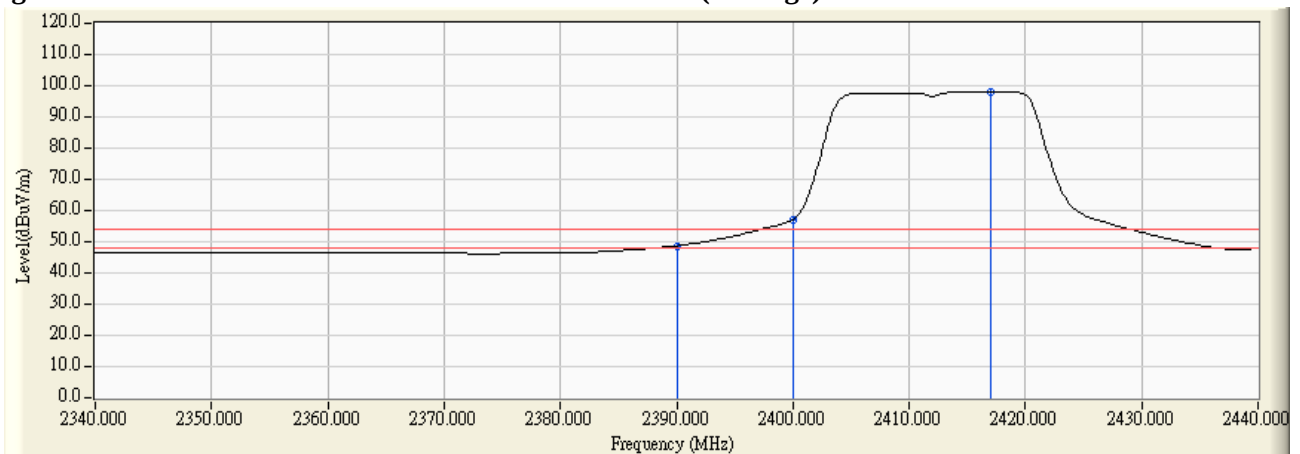

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2466.500	32.053	62.760	94.813	--	--	--
11 (Peak)	2483.500	32.182	24.387	56.569	74.00	54.00	Pass
11 (Peak)	2483.700	32.183	26.678	58.862	74.00	54.00	Pass
11 (Average)	2467.300	32.059	51.669	83.728	--	--	--
11 (Average)	2483.500	32.182	14.017	46.199	74.00	54.00	Pass

Figure Channel 11: Horizontal (Peak)


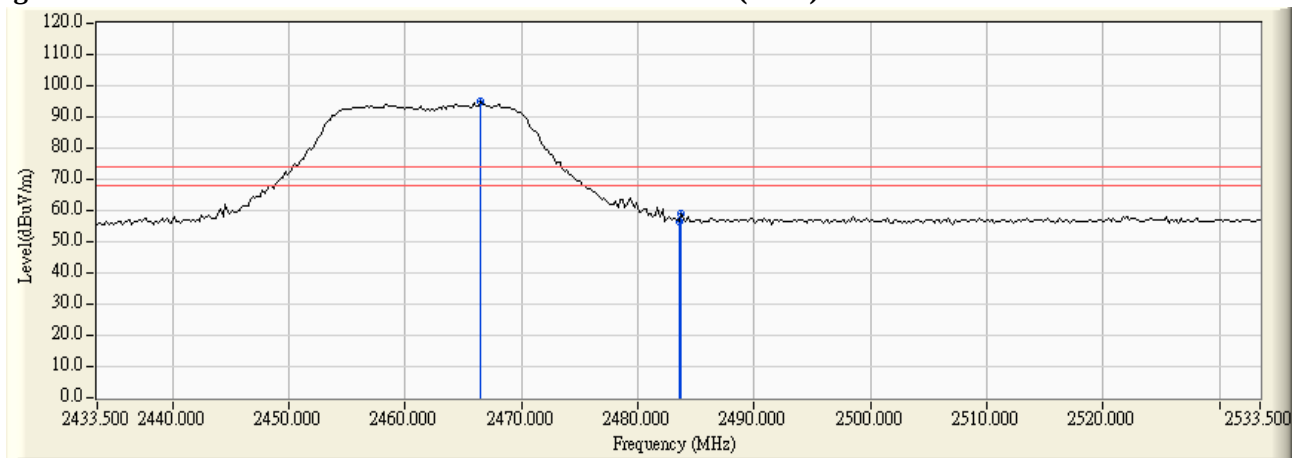


Figure Channel 11: Horizontal (Average)

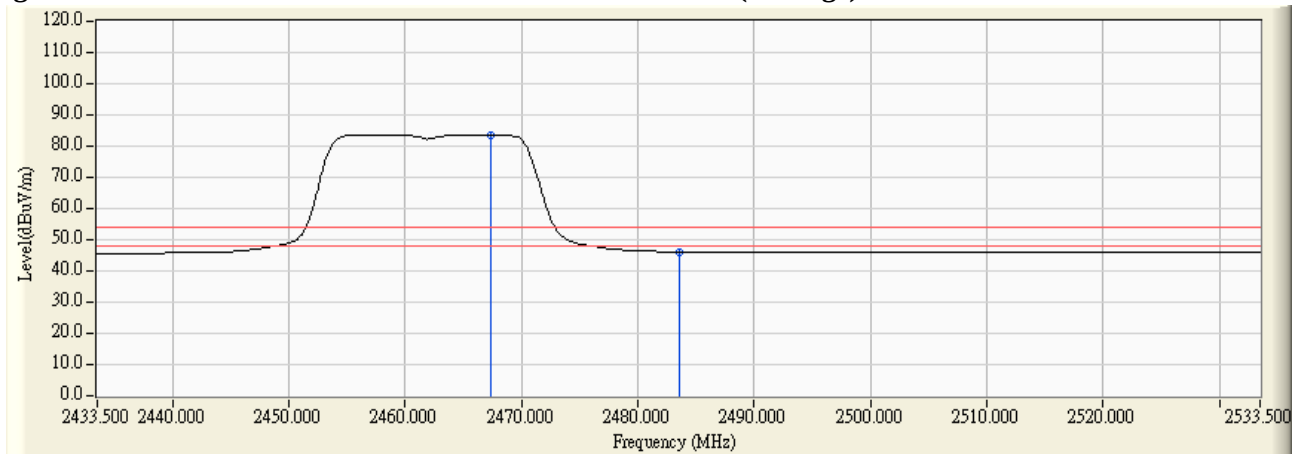

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2465.900	31.317	73.403	104.720	--	--	--
11 (Peak)	2483.500	31.435	33.136	64.571	74.00	54.00	Pass
11 (Average)	2467.500	31.327	63.120	94.447	--	--	--
11 (Average)	2483.500	31.435	16.146	47.581	74.00	54.00	Pass

Figure Channel 11: Vertical (Peak)


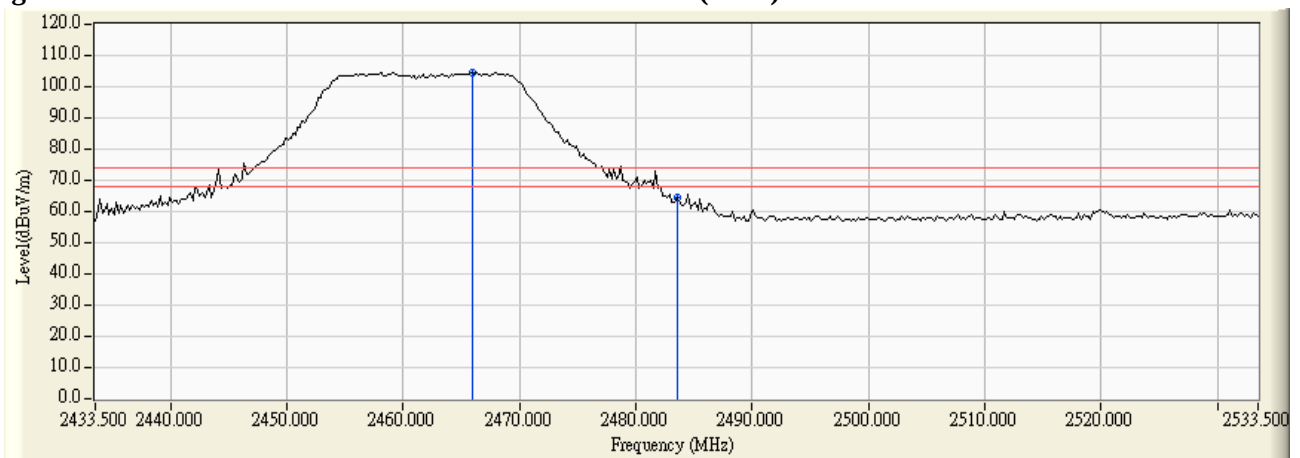


Figure Channel 11: Vertical (Average)

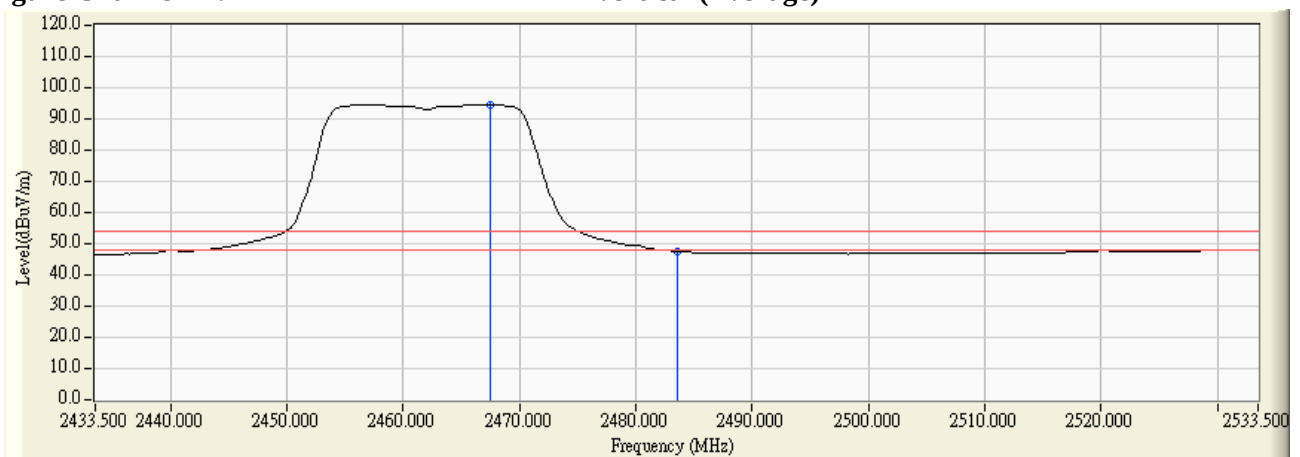

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2412MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	31.509	24.586	56.095	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	36.401	67.962	--	--	--
01 (Peak)	2416.400	31.672	59.384	91.056	--	--	--
01 (Average)	2390.000	31.509	13.826	45.335	74.00	54.00	Pass
01 (Average)	2400.000	31.561	16.758	48.319	--	--	--
01 (Average)	2415.800	31.667	47.506	79.173	--	--	--

Figure Channel 01: Horizontal (Peak)


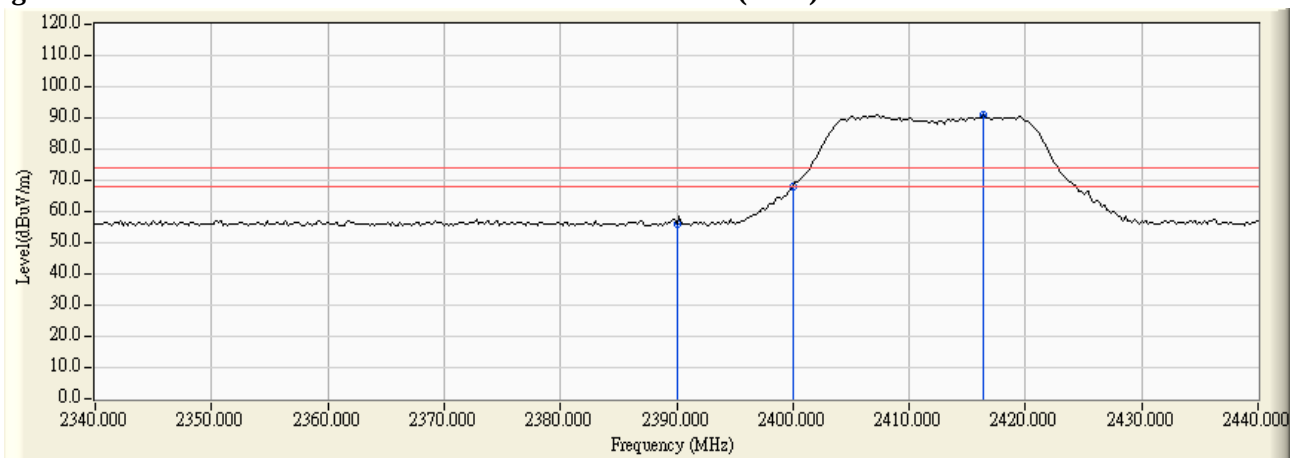


Figure Channel 01: Horizontal (Average)

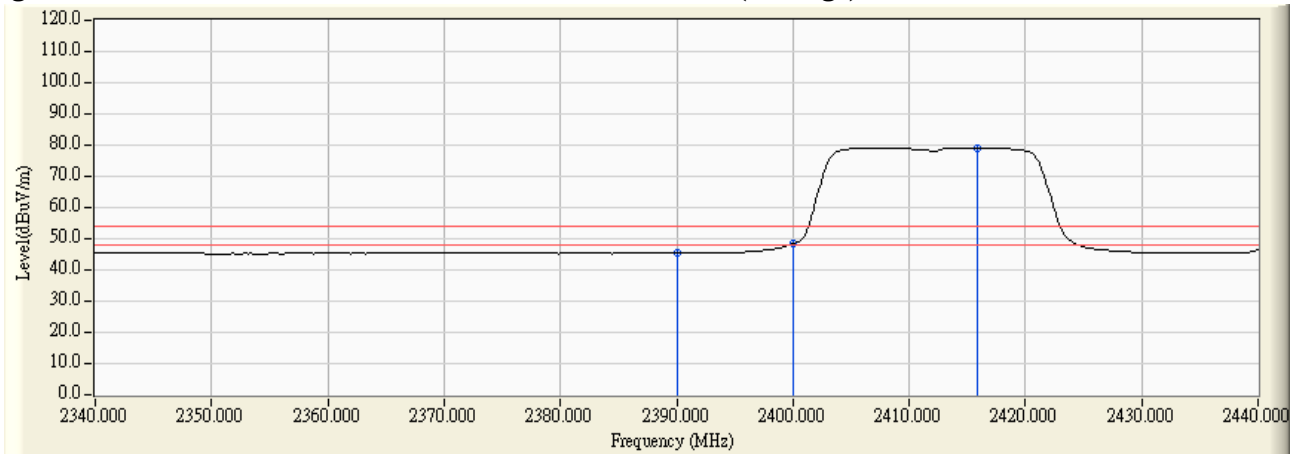

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2412MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2389.000	30.920	26.284	57.204	74.00	54.00	Pass
01 (Peak)	2390.000	30.915	25.564	56.479	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	50.493	81.405	--	--	--
01 (Peak)	2418.800	30.995	73.753	104.748	--	--	--
01 (Average)	2360.000	31.054	16.267	47.321	74.00	54.00	Pass
01 (Average)	2390.000	30.915	14.822	45.737	74.00	54.00	Pass
01 (Average)	2400.000	30.912	24.176	55.088	--	--	--
01 (Average)	2417.200	30.984	61.873	92.858	--	--	--

Figure Channel 01: Vertical (Peak)


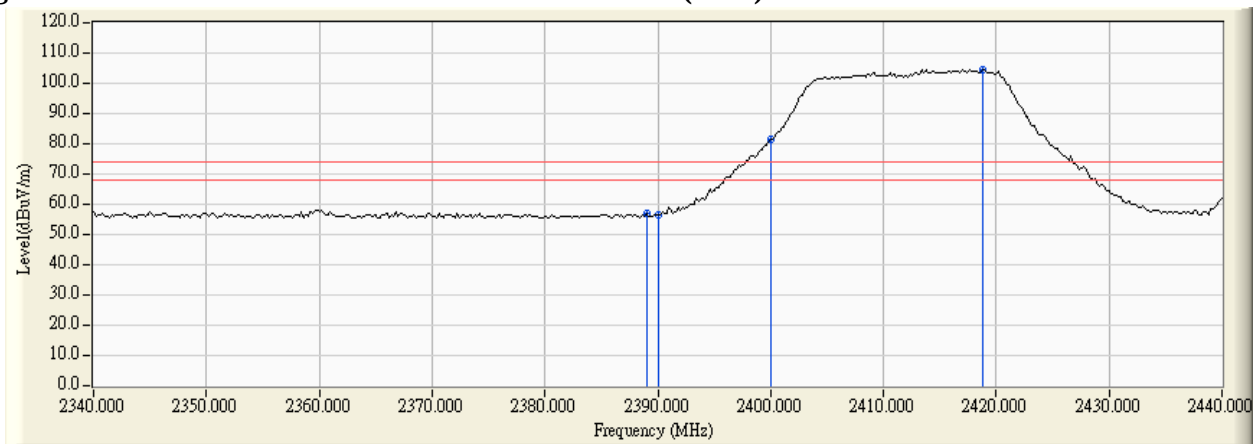


Figure Channel 01: Vertical (Average)

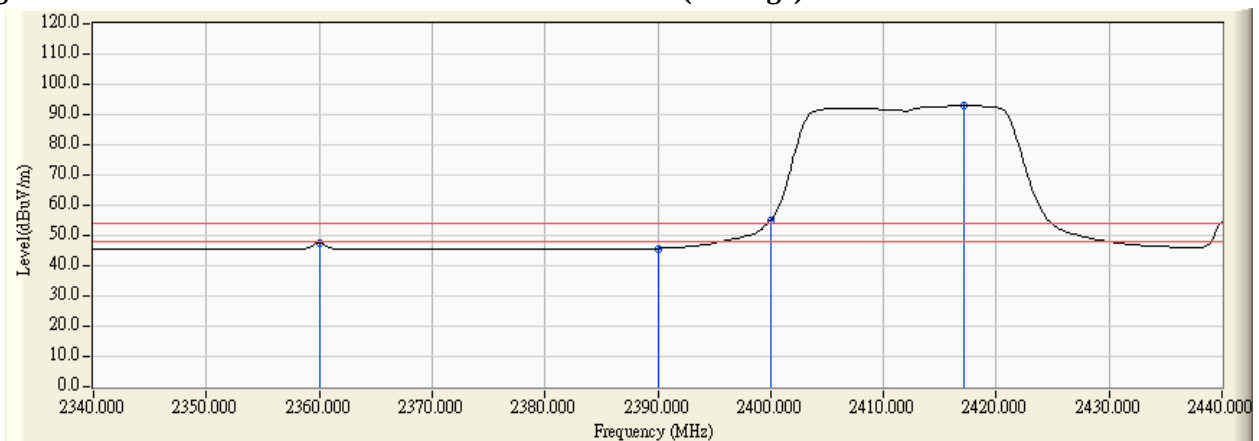

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2462MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2465.100	32.043	59.582	91.625	--	--	--
11 (Peak)	2483.500	32.182	25.165	57.347	74.00	54.00	Pass
11 (Average)	2456.700	31.979	47.534	79.513	--	--	--
11 (Average)	2483.500	32.182	13.814	45.996	74.00	54.00	Pass

Figure Channel 11: Horizontal (Peak)


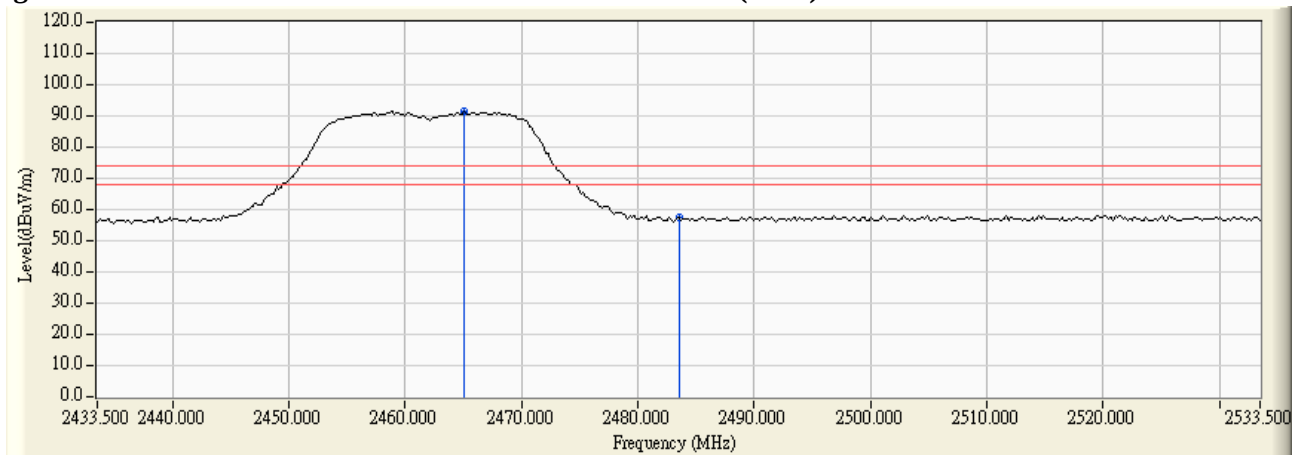


Figure Channel 11: Horizontal (Average)

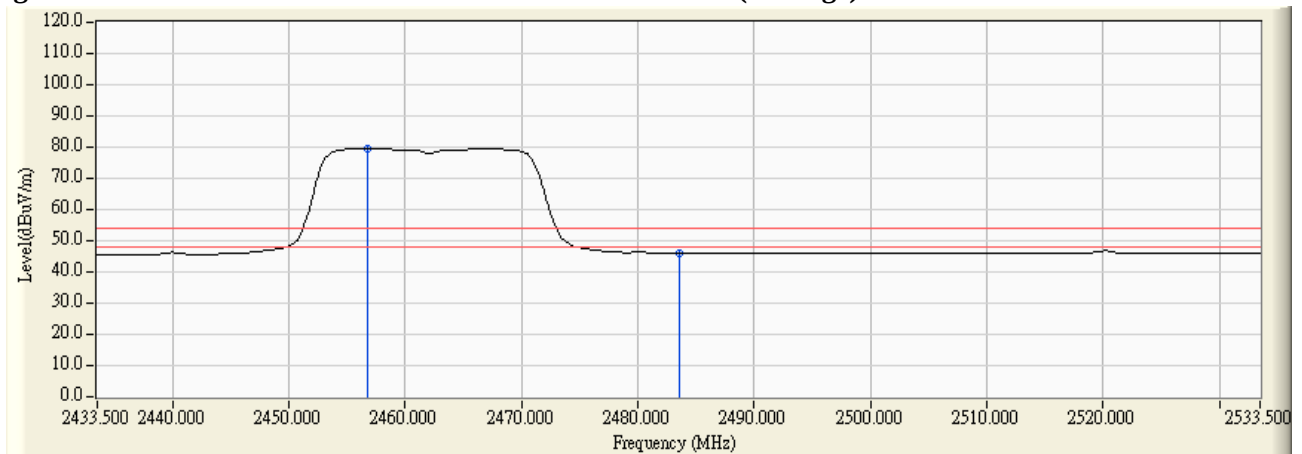

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2462MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2457.100	31.257	71.396	102.653	--	--	--
11 (Peak)	2483.500	31.435	24.762	56.197	74.00	54.00	Pass
11 (Peak)	2483.900	31.438	27.156	58.594	74.00	54.00	Pass
11 (Average)	2467.100	31.325	59.657	90.982	--	--	--
11 (Average)	2483.500	31.435	14.678	46.113	74.00	54.00	Pass
11 (Average)	2520.300	31.555	18.747	50.302	74.00	54.00	Pass

Figure Channel 11: Vertical (Peak)


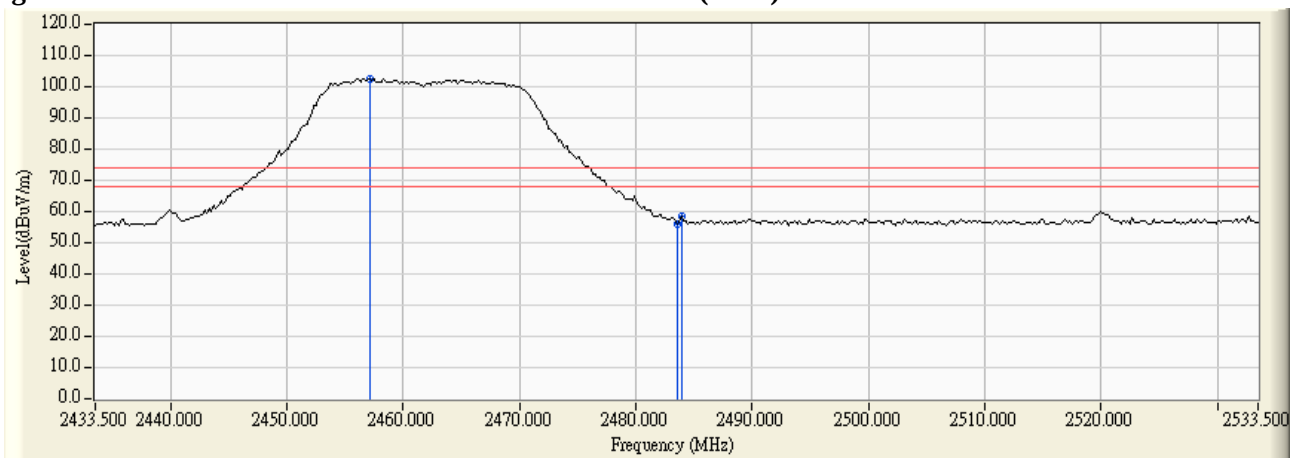


Figure Channel 11: Vertical (Average)

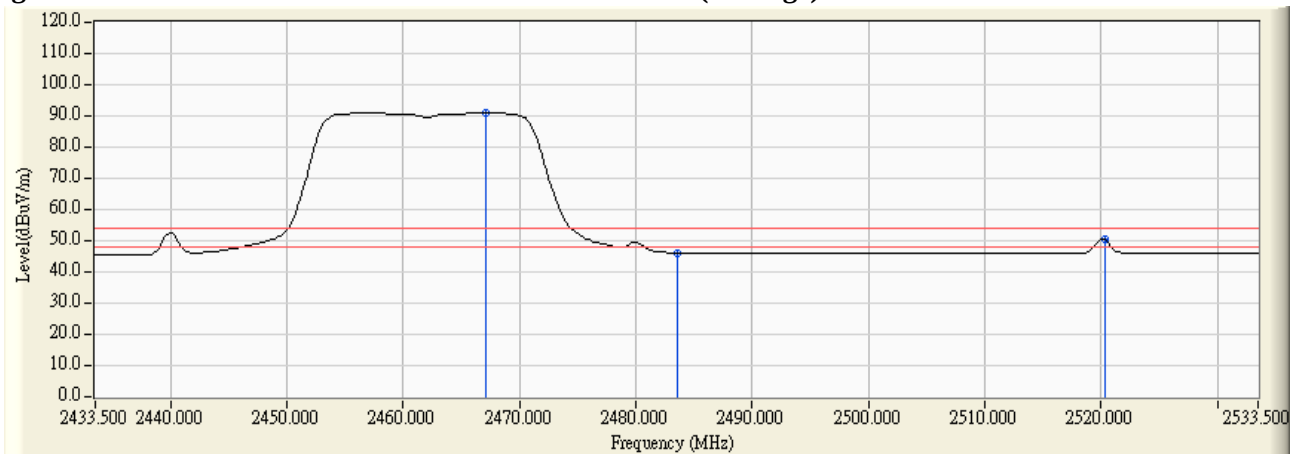

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2422MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
0 (Peak)	2390.000	31.509	24.948	56.457	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	34.263	65.824	--	--	--
01 (Peak)	2434.600	31.811	56.027	87.838	--	--	--
01 (Average)	2390.000	31.509	13.978	45.487	74.00	54.00	Pass
01 (Average)	2400.000	31.561	16.473	48.034	--	--	--
01 (Average)	2432.800	31.798	44.231	76.028	--	--	--

Figure Channel 01: Horizontal (Peak)


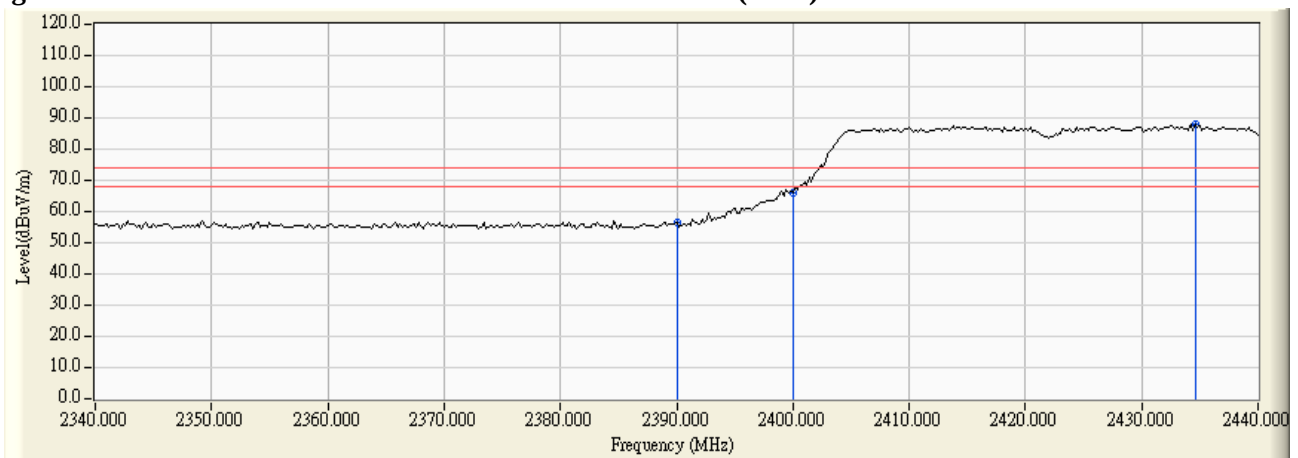


Figure Channel 01: Horizontal (Average)

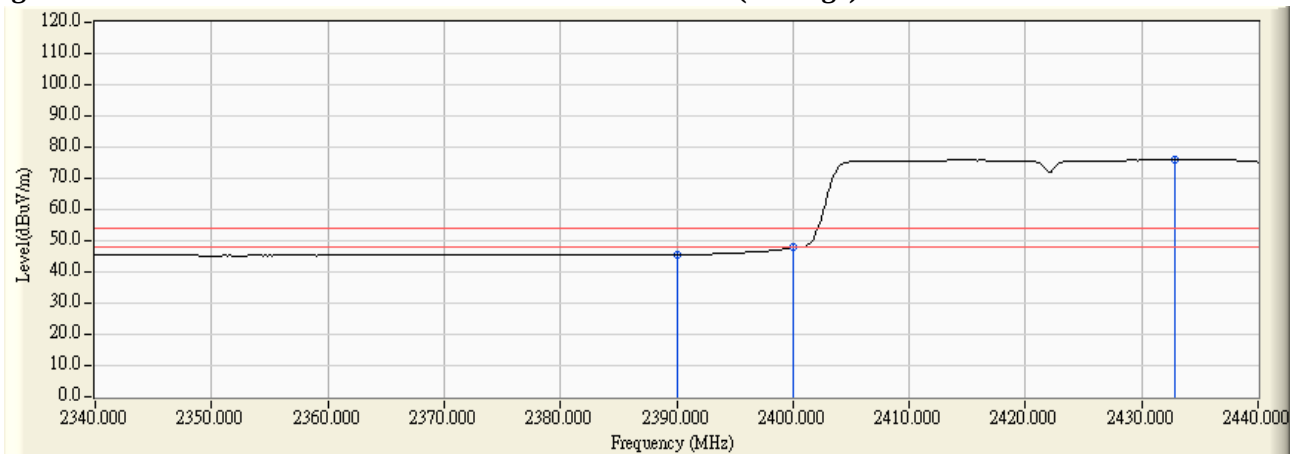

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2422MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	30.915	35.143	66.058	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	50.050	80.962	--	--	--
01 (Peak)	2433.200	31.093	70.062	101.155	--	--	--
01 (Average)	2390.000	30.915	16.502	47.417	74.00	54.00	Pass
01 (Average)	2400.000	30.912	23.211	54.123	--	--	--
01 (Average)	2433.200	31.093	58.158	89.251	--	--	--

Figure Channel 01: Vertical (Peak)


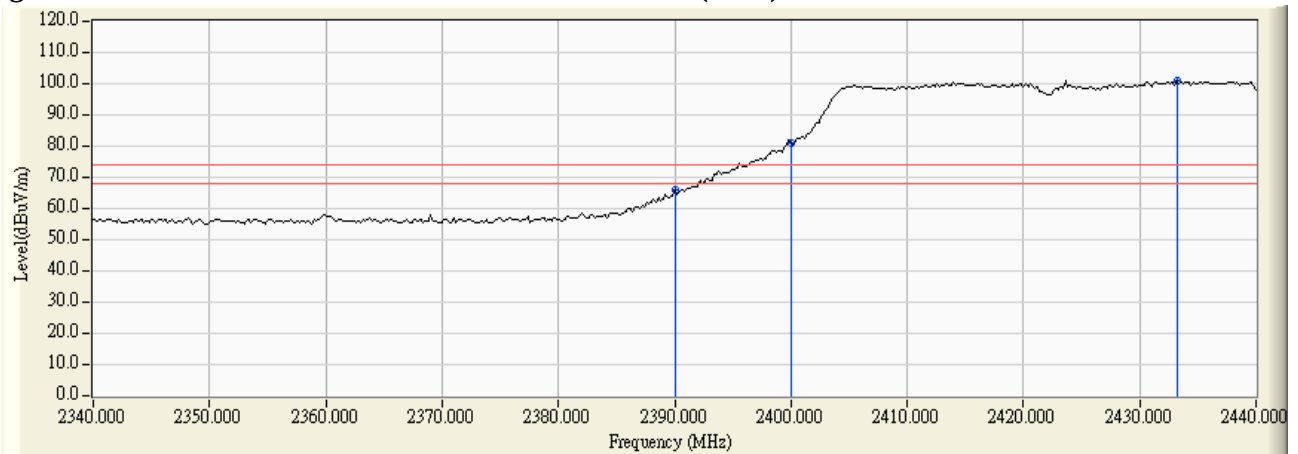


Figure Channel 01: Vertical (Average)

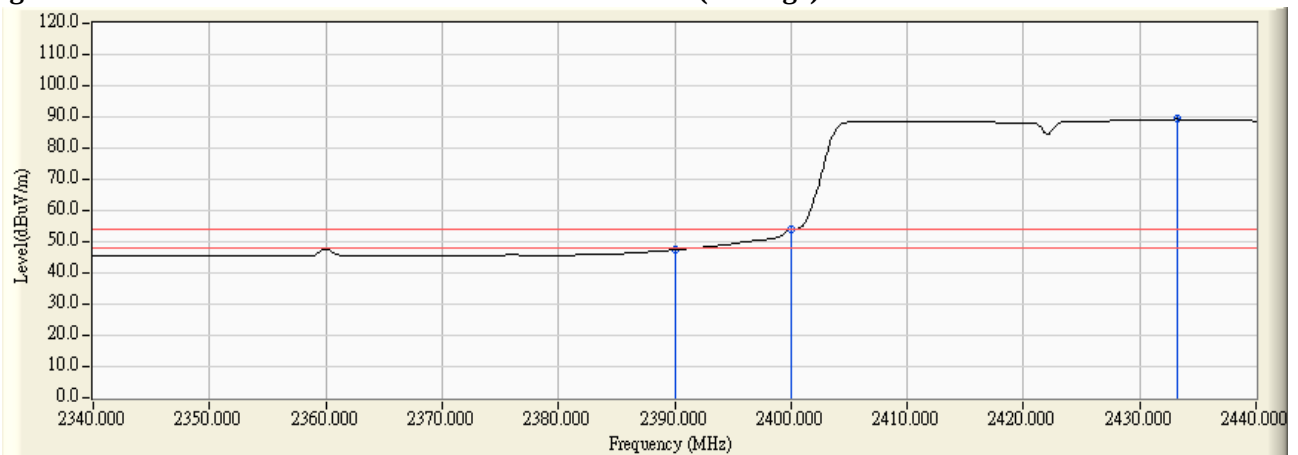

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2452MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
07 (Peak)	2456.300	31.976	56.061	88.037	--	--	--
07 (Peak)	2483.500	32.182	25.417	57.599	74.00	54.00	Pass
07 (Average)	2466.100	32.051	44.254	76.304	--	--	--
07 (Average)	2483.500	32.182	14.093	46.275	74.00	54.00	Pass

Figure Channel 07:

Horizontal (Peak)


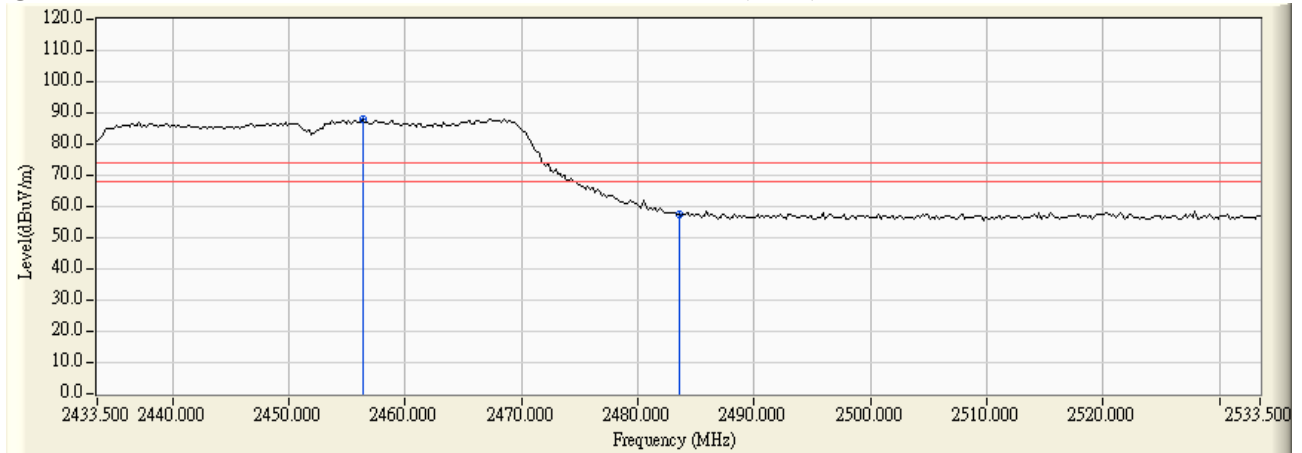


Figure Channel 07:

Horizontal (Average)

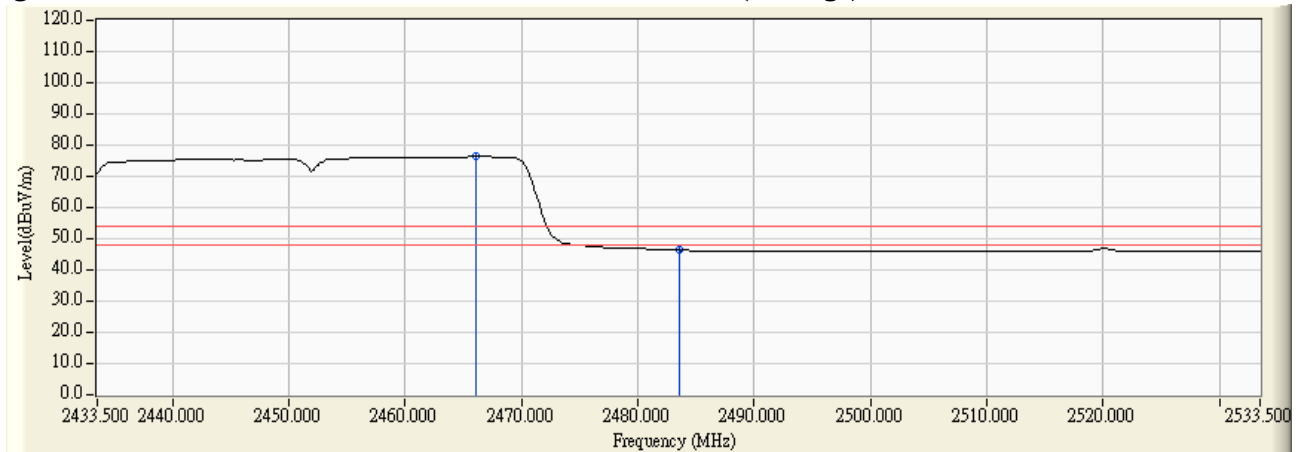

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2452MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
07 (Peak)	2438.900	31.133	68.985	100.117	--	--	--
07 (Peak)	2483.500	31.435	33.580	65.015	74.00	54.00	Pass
07 (Average)	2441.700	31.150	57.364	88.515	--	--	--
07 (Average)	2483.500	31.435	16.388	47.823	74.00	54.00	Pass
07 (Average)	2519.900	31.555	19.991	51.546	74.00	54.00	Pass

Figure Channel 07: Vertical (Peak)


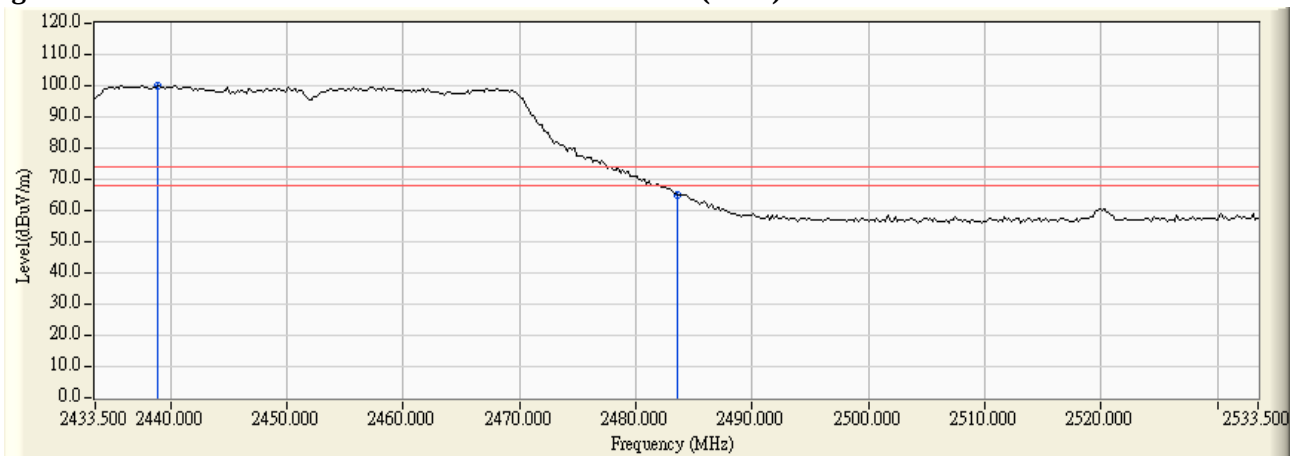


Figure Channel 07: Vertical (Average)

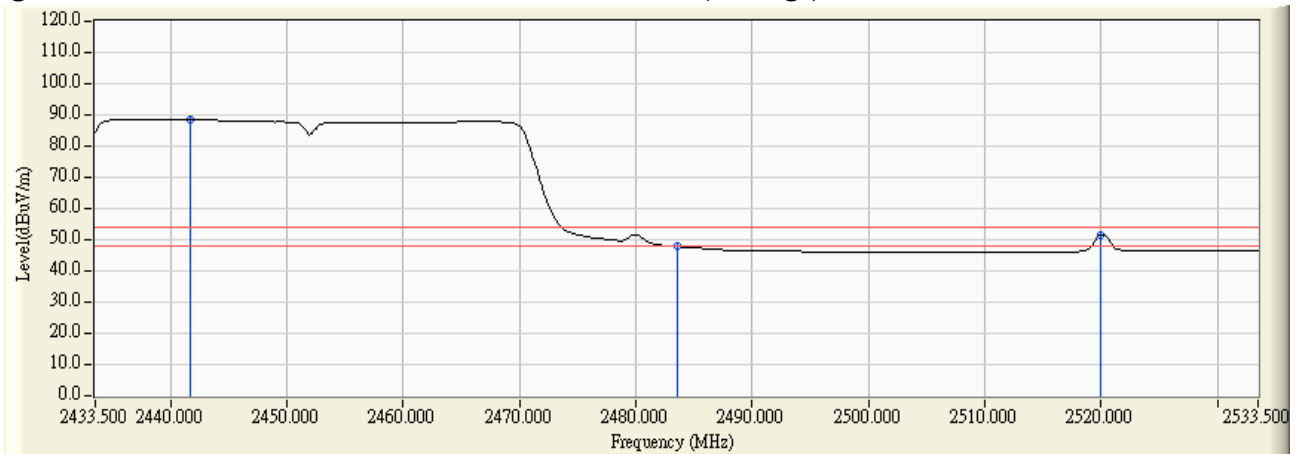


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5745	34.58	>20	PASS

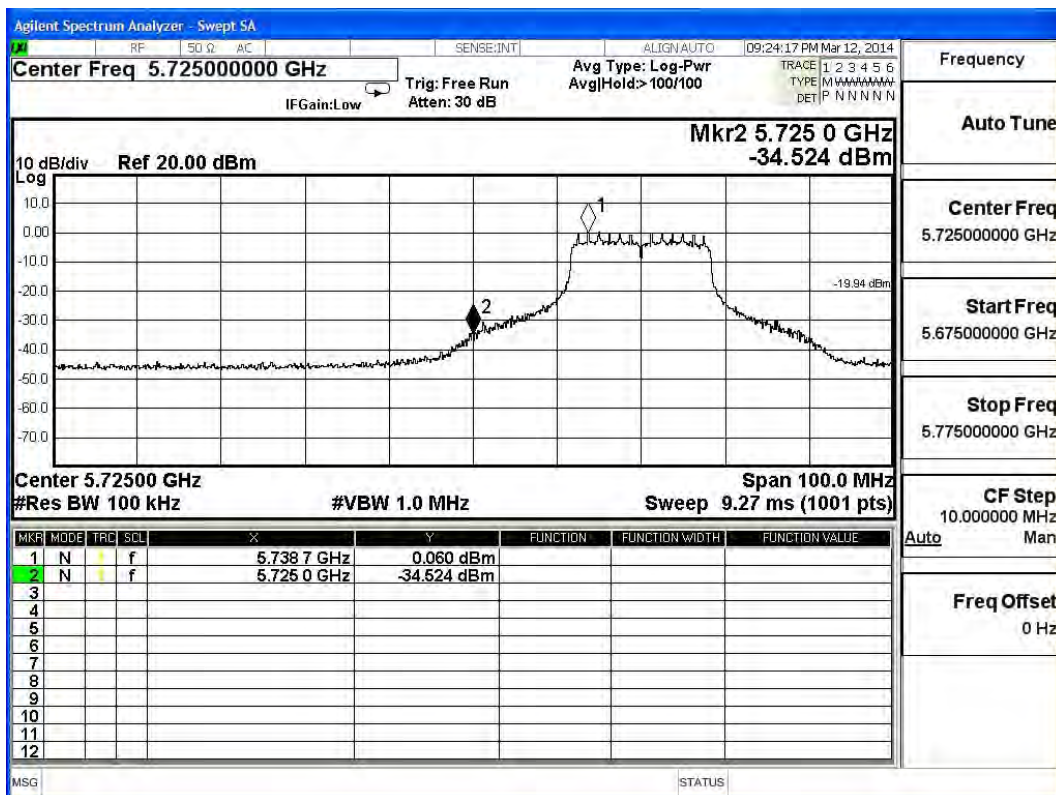

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps


Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5825	42.83	>20	PASS

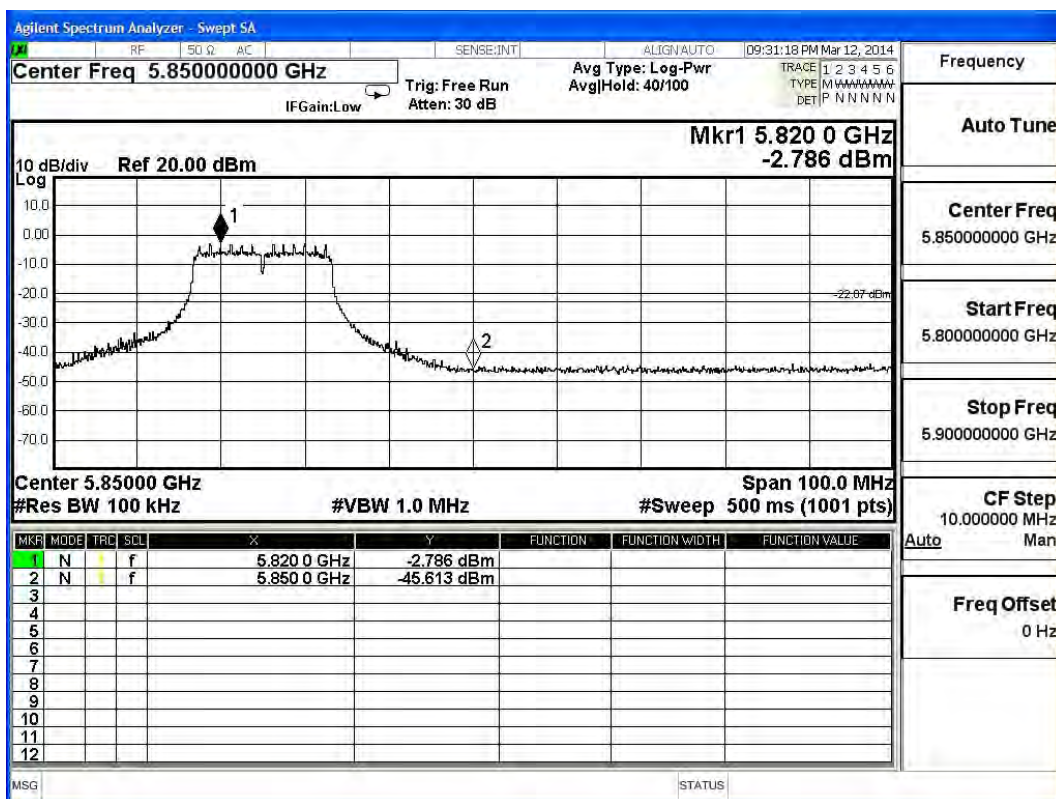

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band)

Chain A


Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5745	34.78	>20	PASS

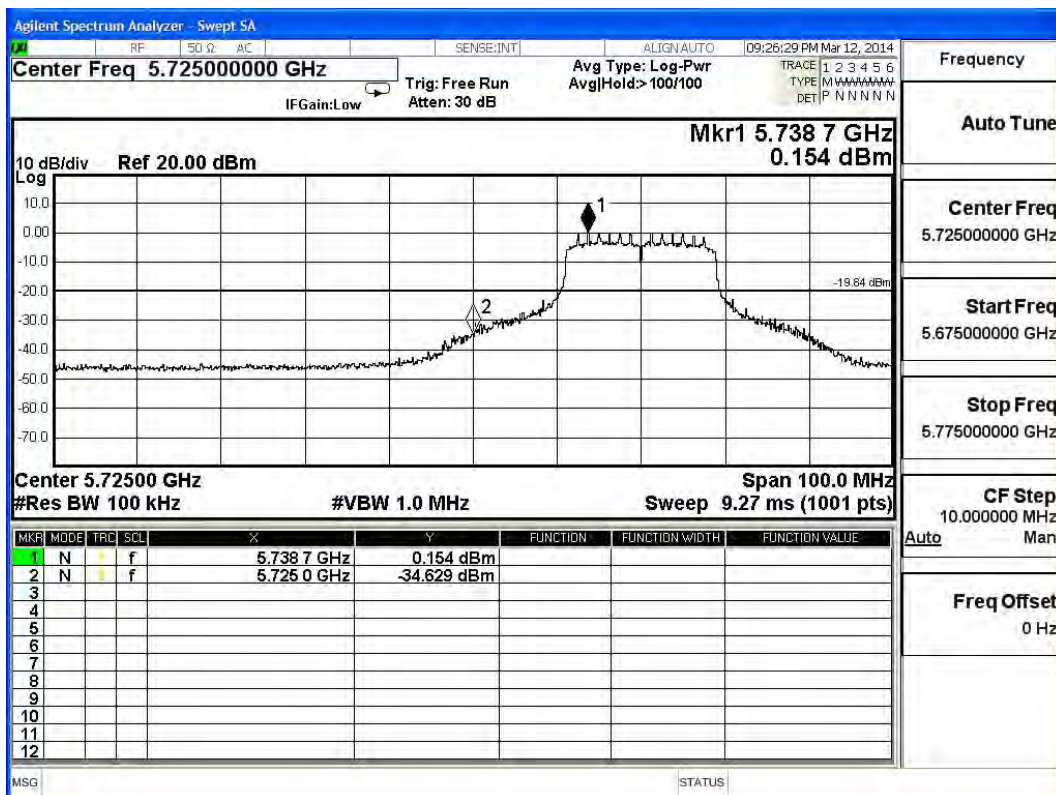

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band)

Chain B


Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5745	37.75	>20	PASS

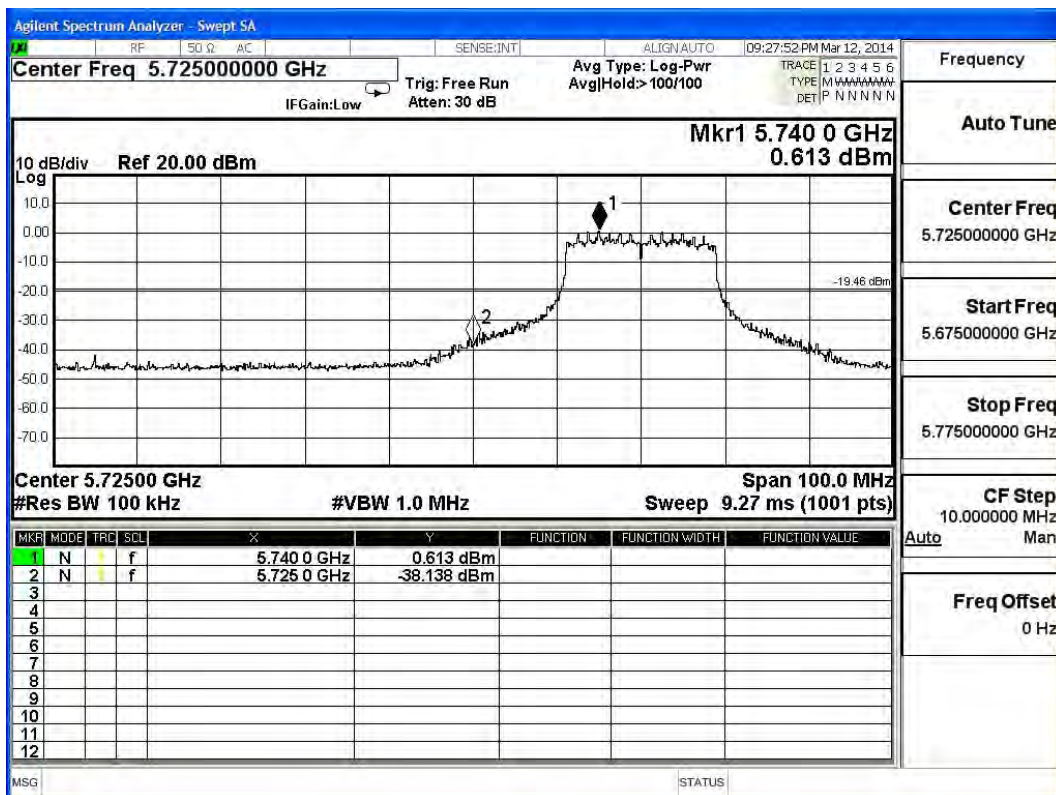

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band)

Chain A


Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5825	43.45	>20	PASS

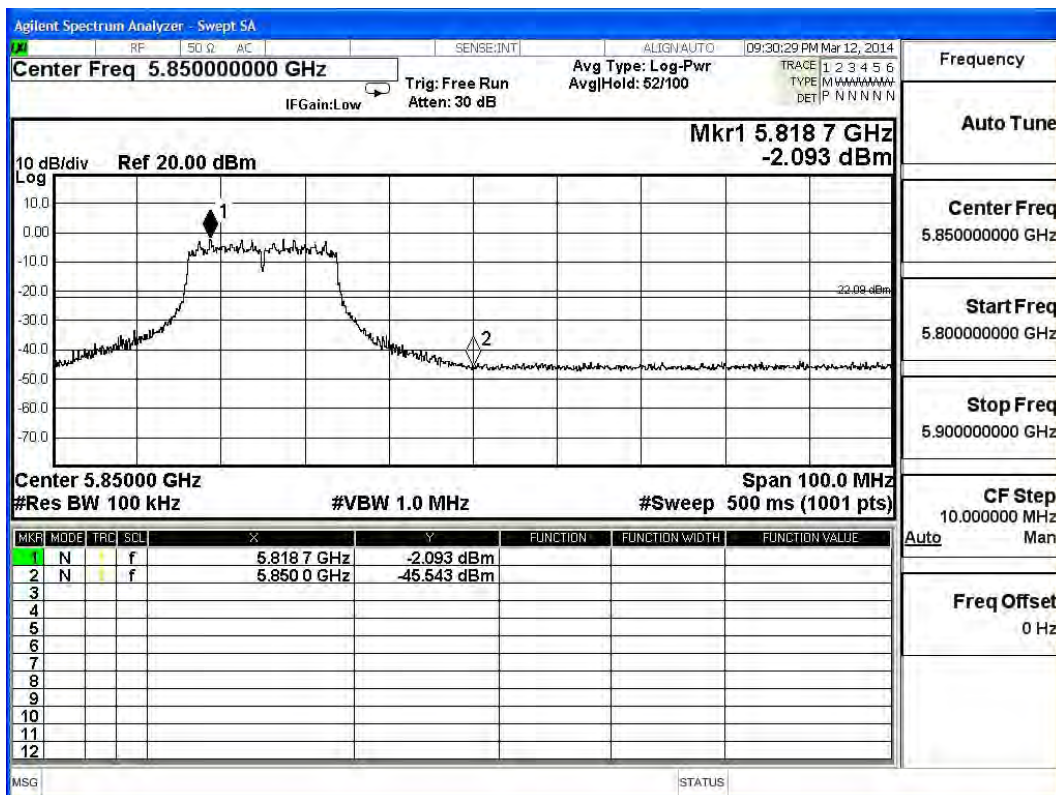

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band)

Chain B


Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5825	45.55	>20	PASS

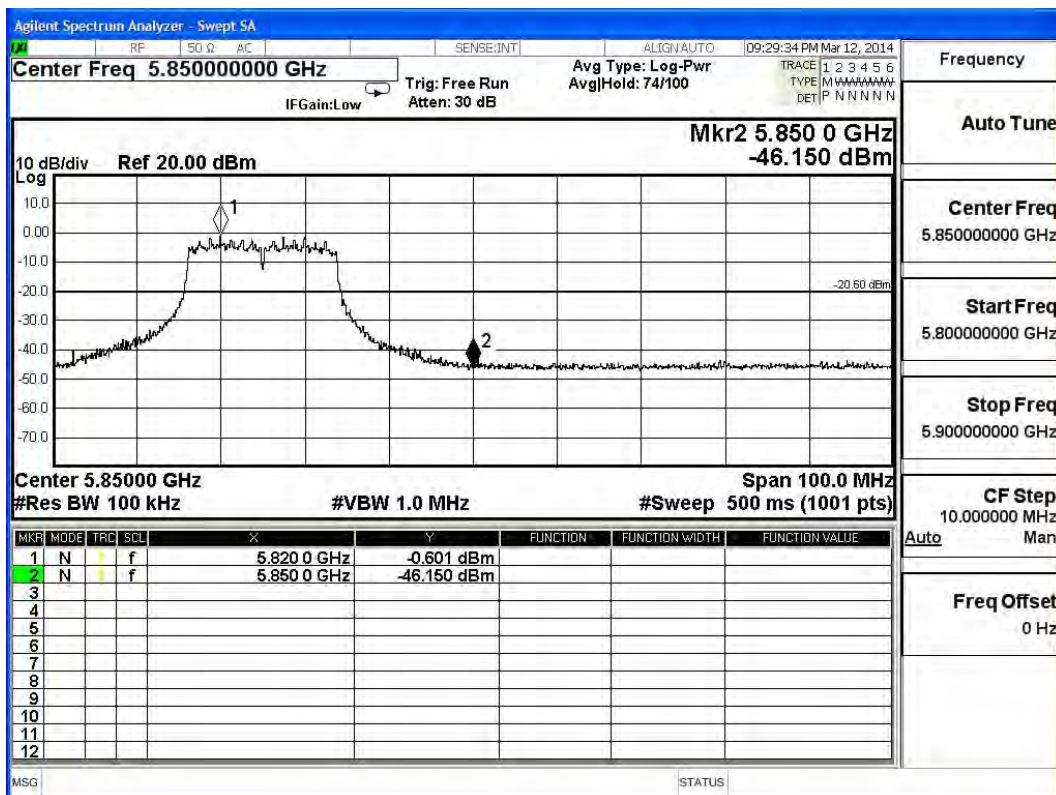

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band)

Chain A


Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5755	30.07	>20	PASS

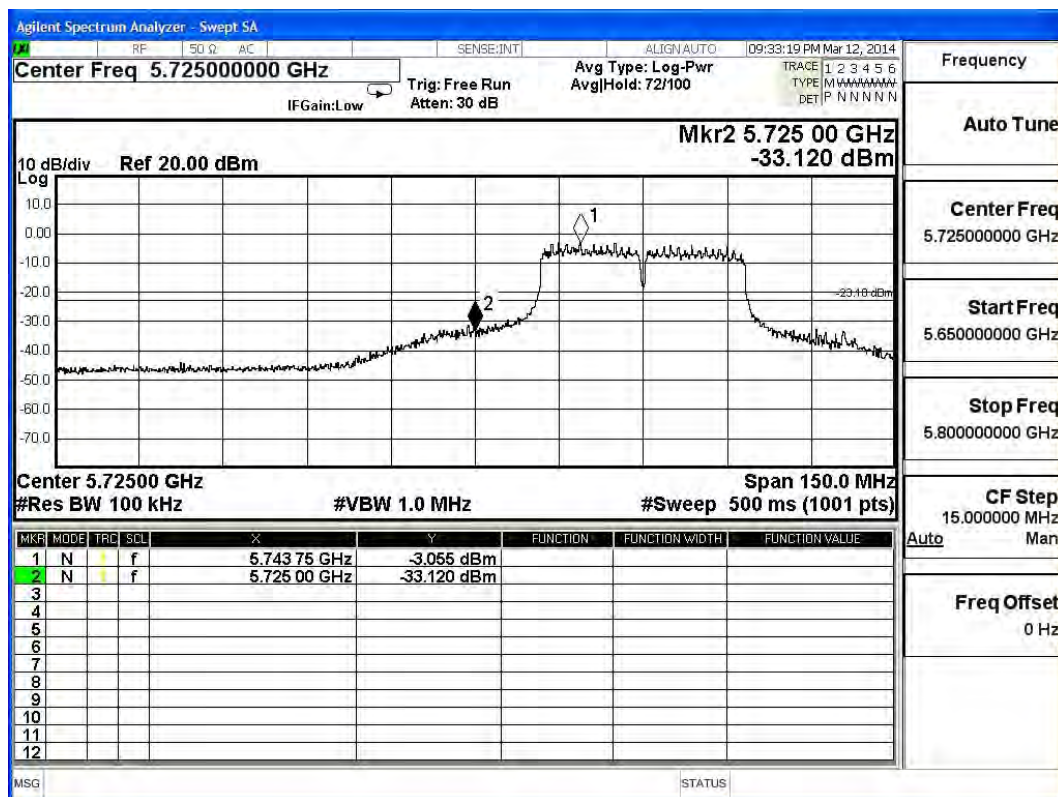

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band)

Chain B


Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5755	32.41	>20	PASS

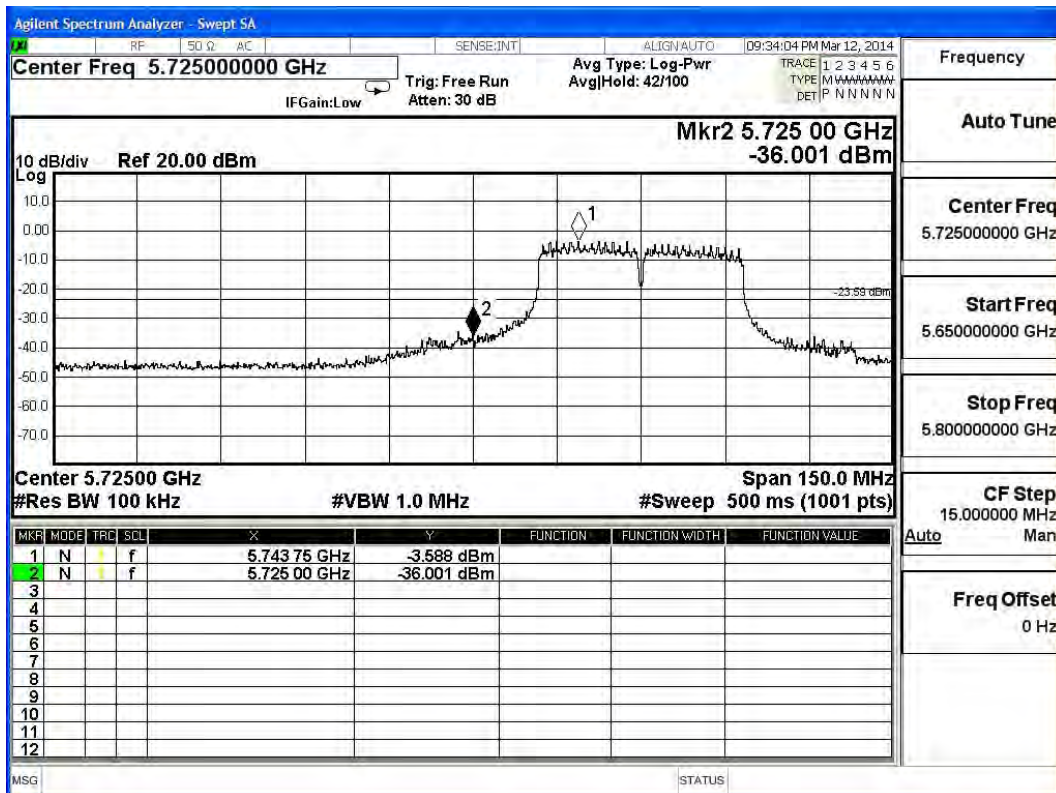

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band)


Chain A

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5795	43.69	>20	PASS

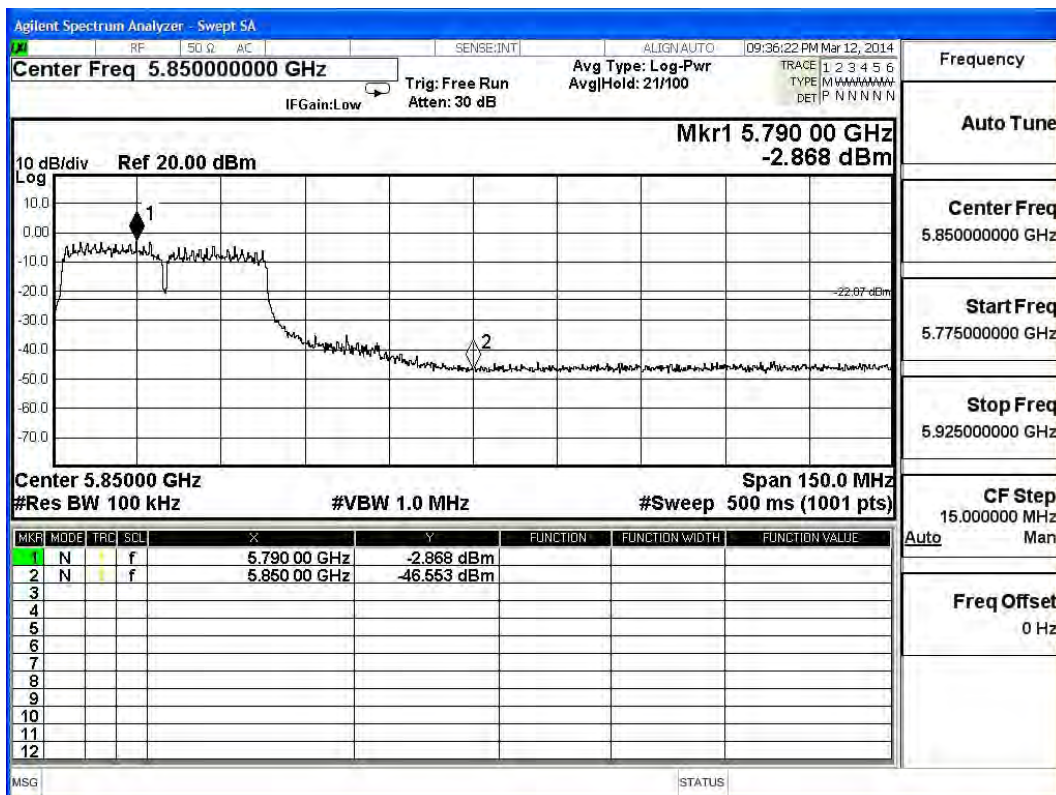

Chain B

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5795	43.54	>20	PASS

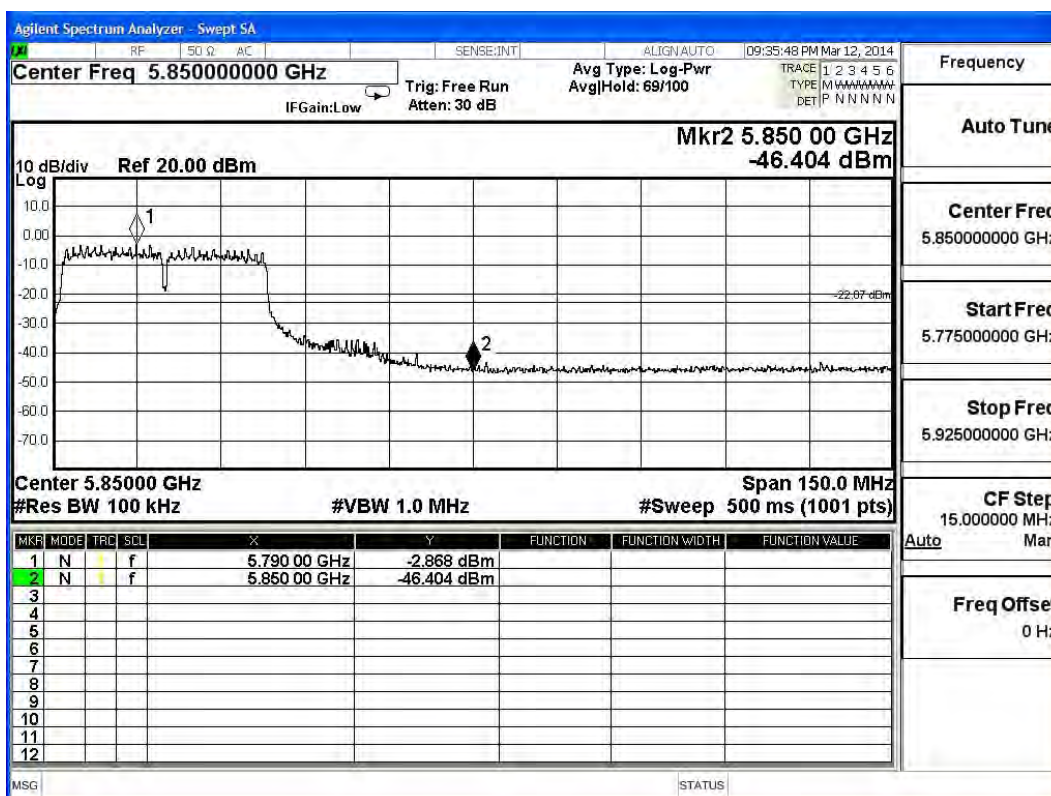

7. Occupied Bandwidth


7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2013
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2013
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

7.2. Test Setup



7.3. Limits

The minimum bandwidth shall be at least 500 kHz.

7.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth, $VBW \geq 3 \times RBW$

7.5. Uncertainty


$\pm 150\text{Hz}$

7.6. Test Result of Occupied Bandwidth

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	10200	>500	Pass


Figure Channel 1:

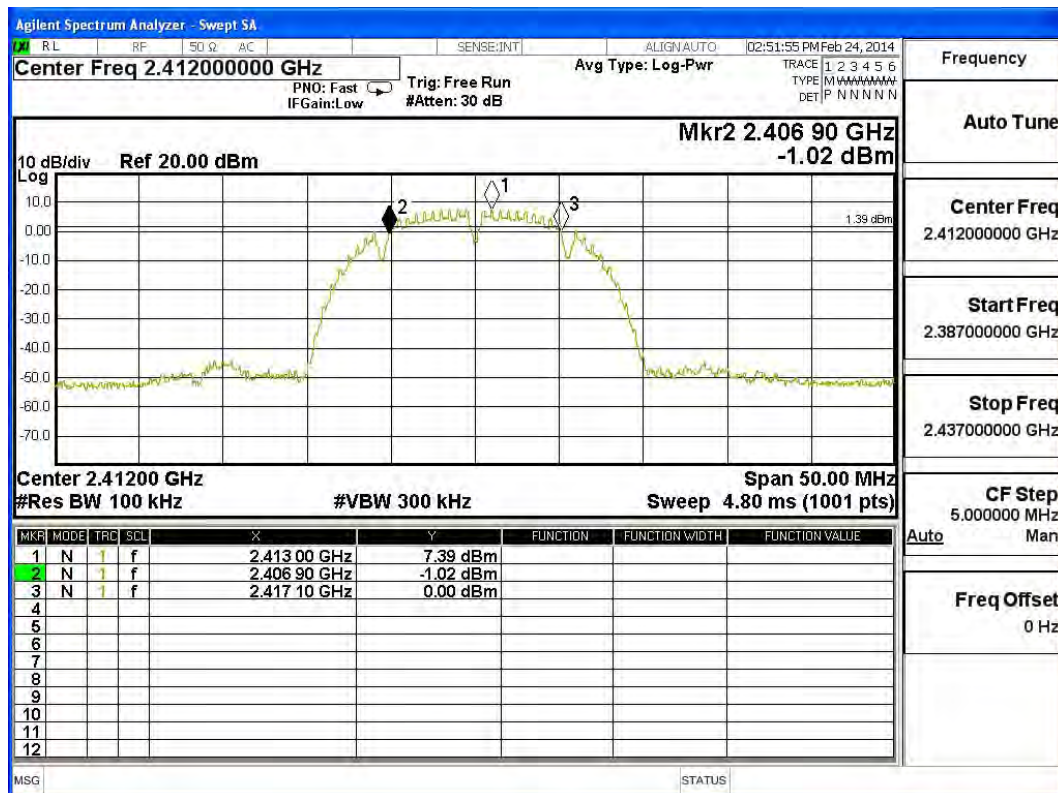

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	10200	>500	Pass


Figure Channel 6:

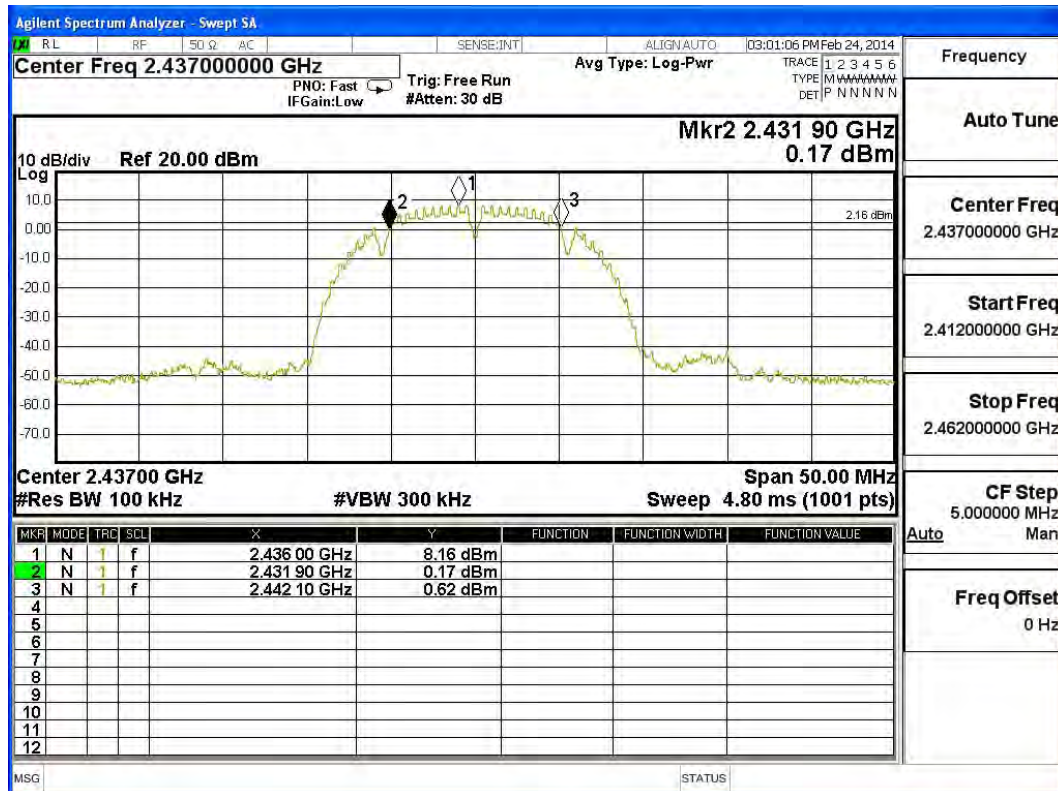

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	10200	>500	Pass


Figure Channel 11:

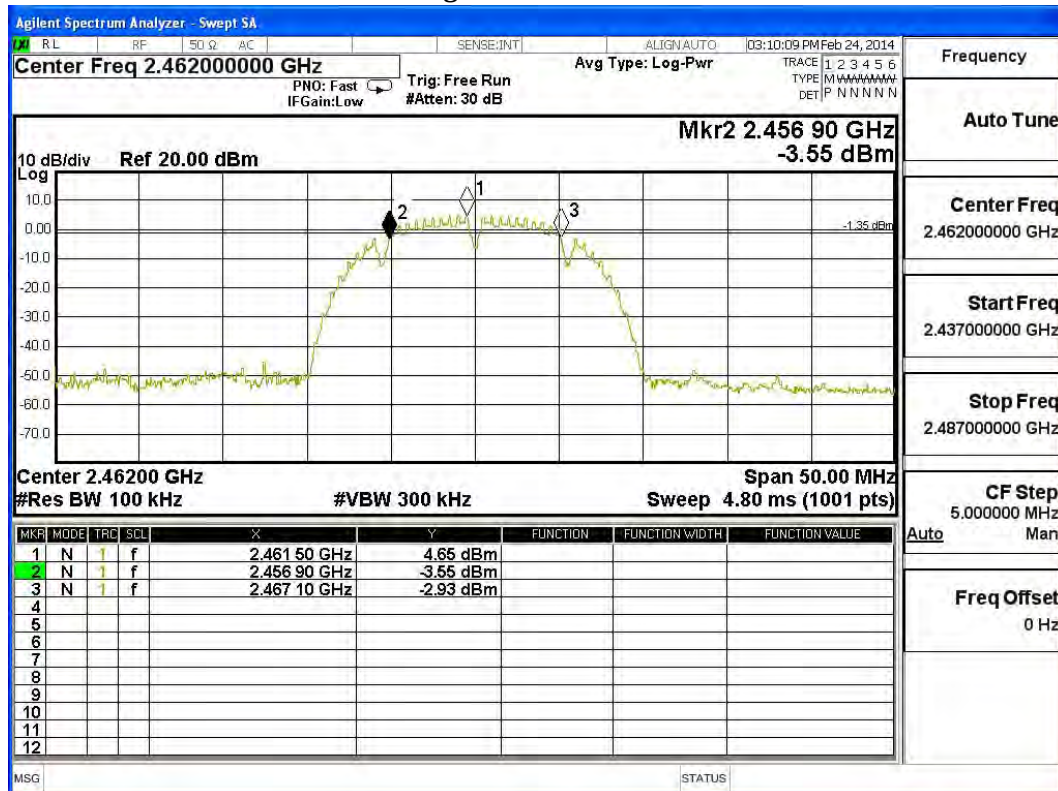

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	16450	>500	Pass


Figure Channel 1:

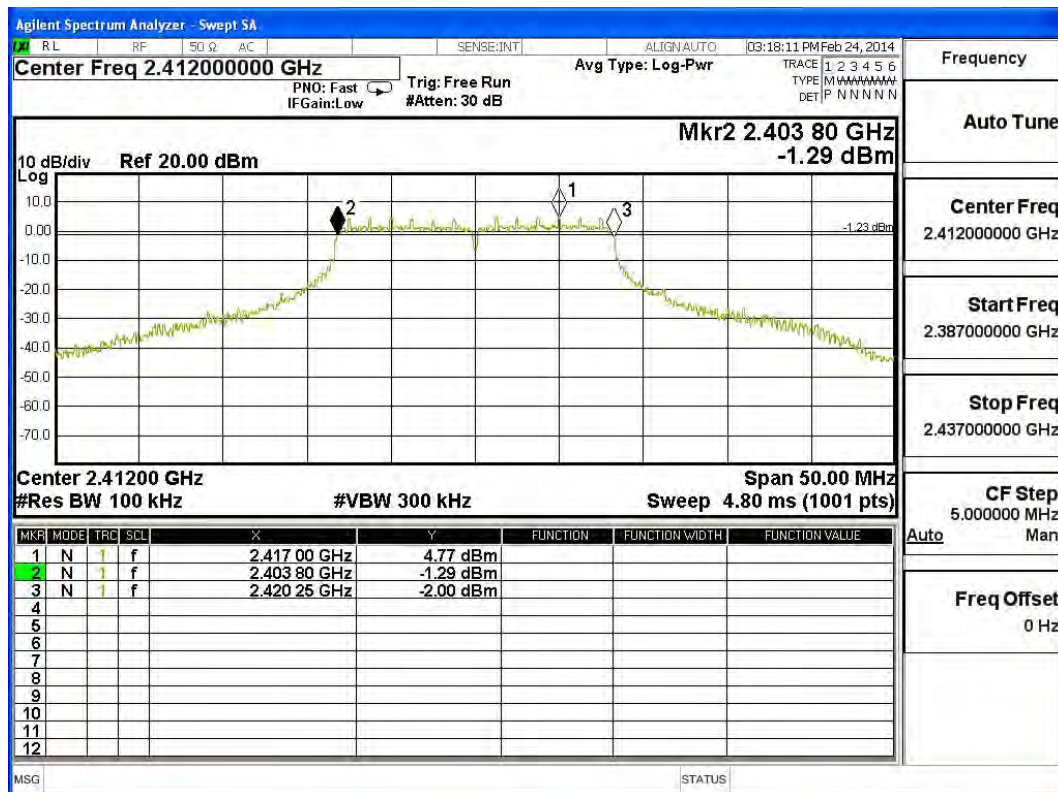

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	16450	>500	Pass


Figure Channel 6:

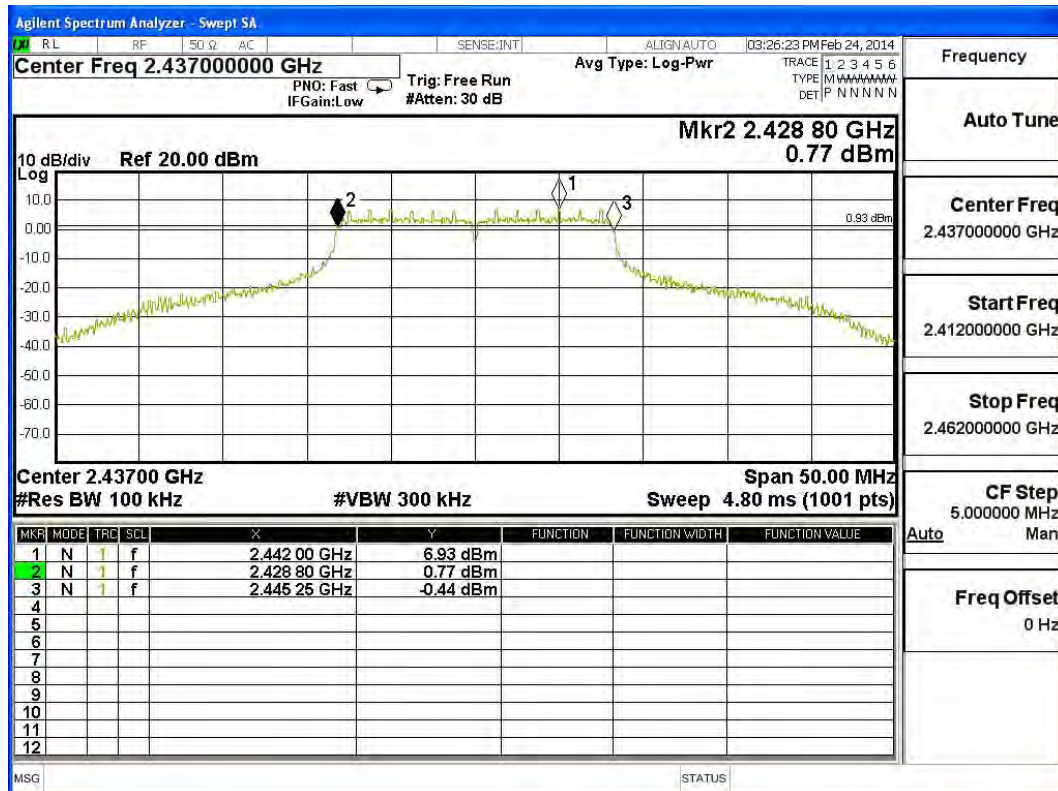

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	16450	>500	Pass


Figure Channel 11:

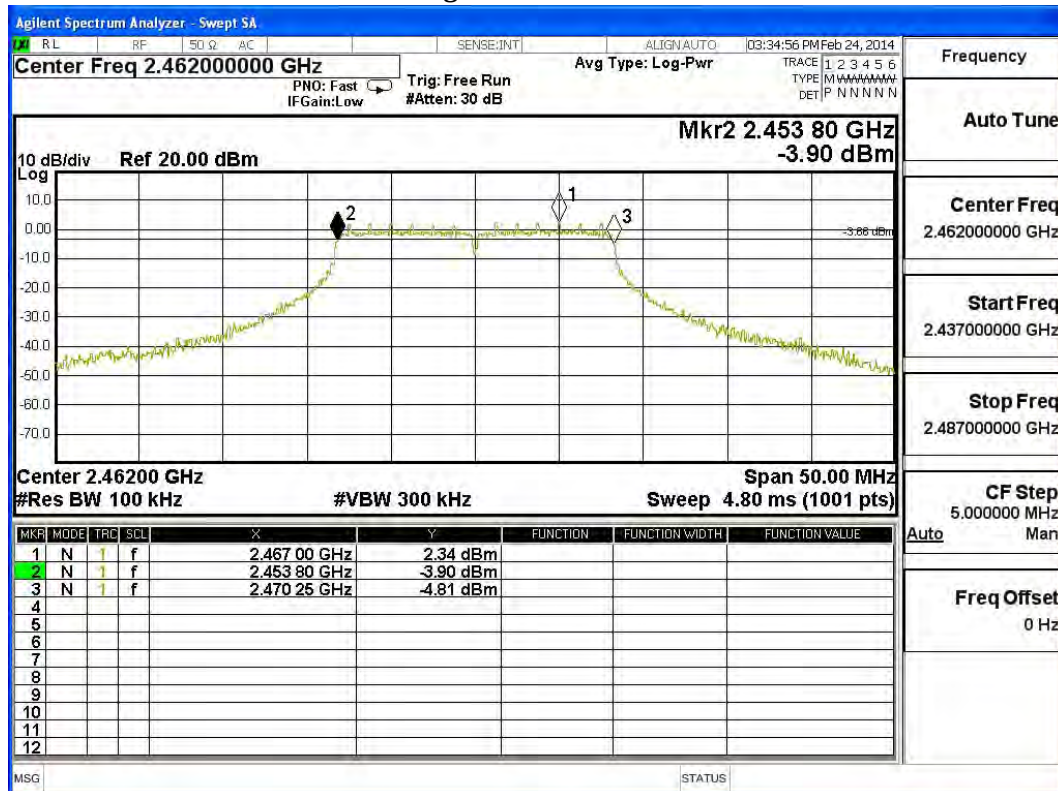

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5745MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745.00	16050	>500	Pass


Figure Channel 149:

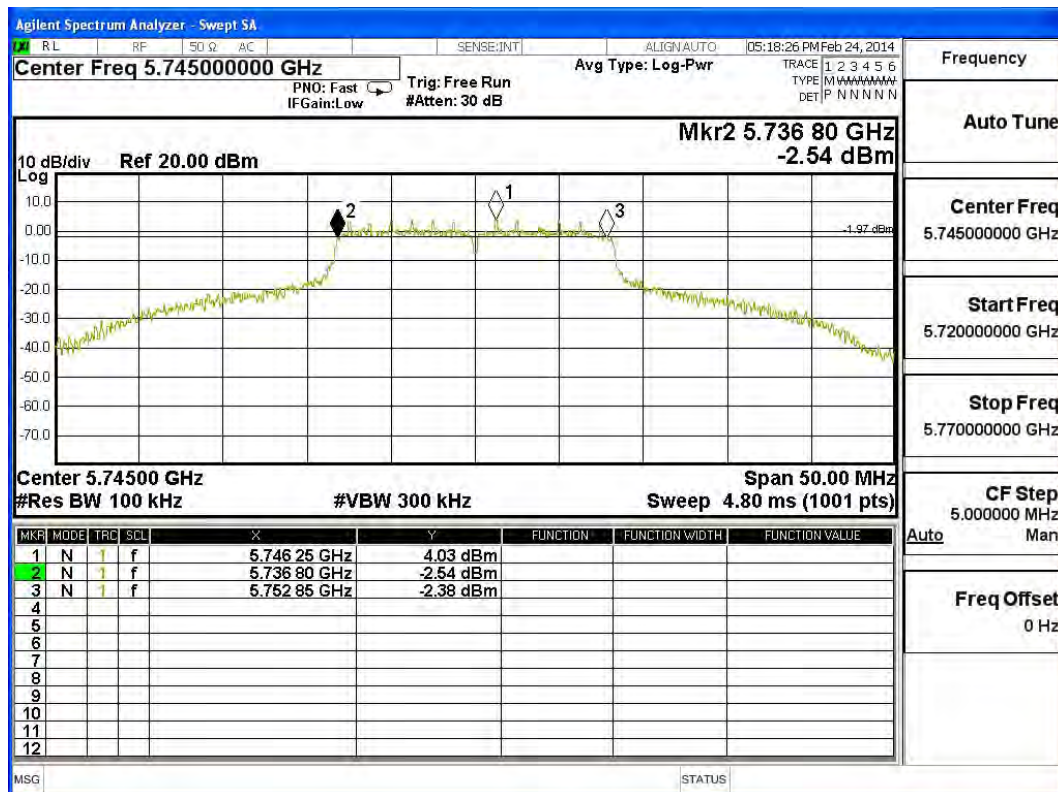

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5785MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
157	5785.00	16400	>500	Pass


Figure Channel 157:

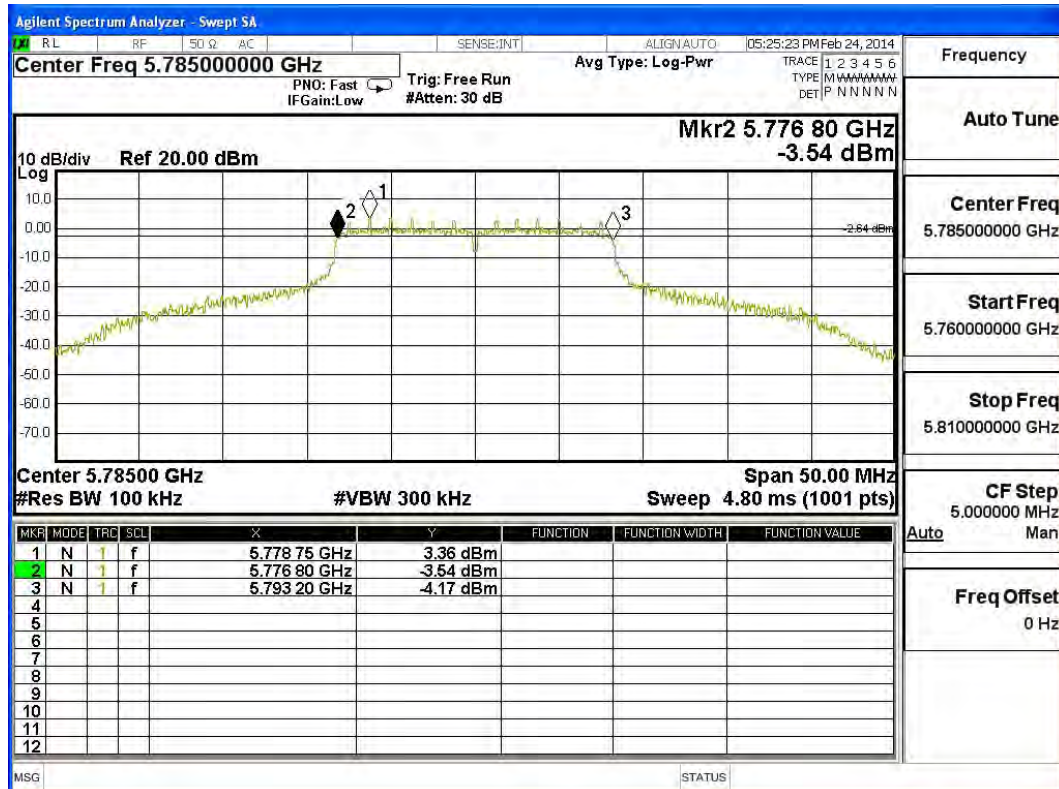

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5825MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
165	5825.00	16100	>500	Pass


Figure Channel 165:

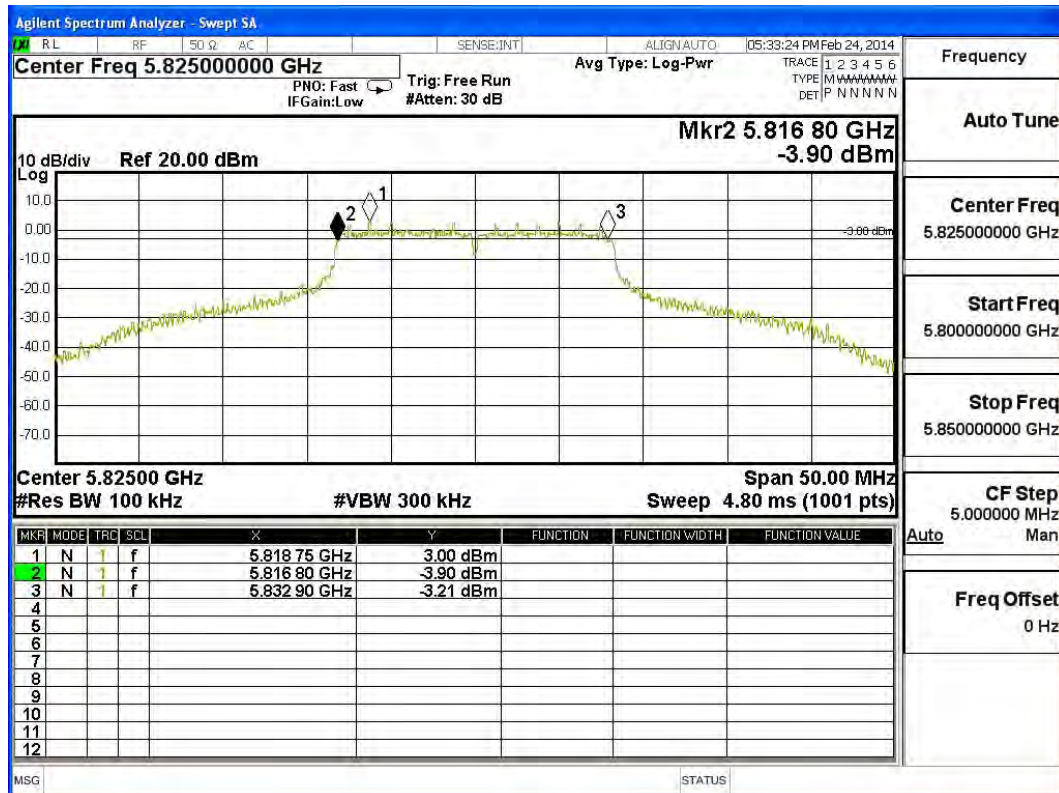

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2412MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	17700	>500	Pass

Figure Channel 1: (Chain A)

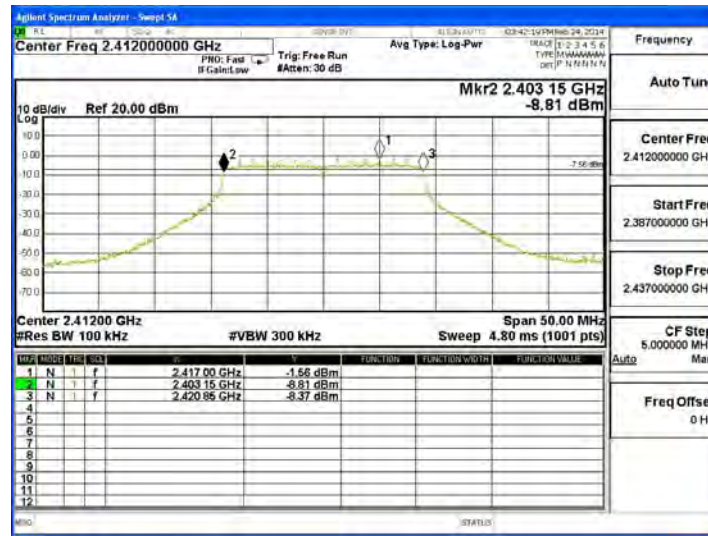

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	17650	>500	Pass


Figure Channel 1: (Chain B)

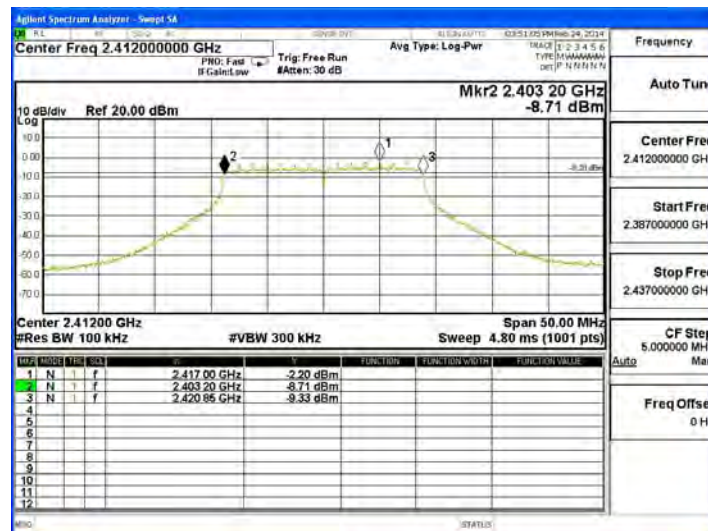

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2437MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	17700	>500	Pass

Figure Channel 6: (Chain A)

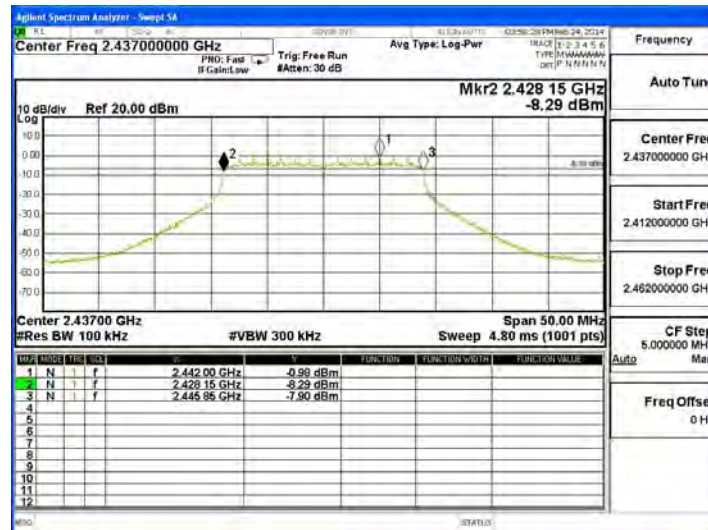

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	17650	>500	Pass


Figure Channel 6: (Chain B)

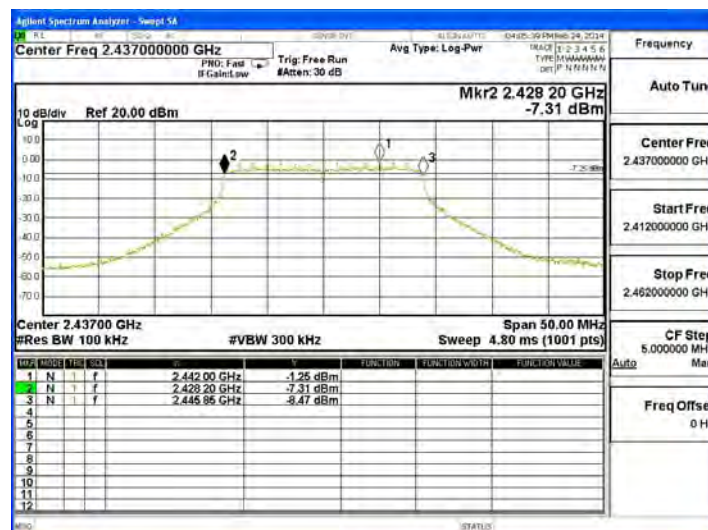

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2462MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	17700	>500	Pass

Figure Channel 11: (Chain A)

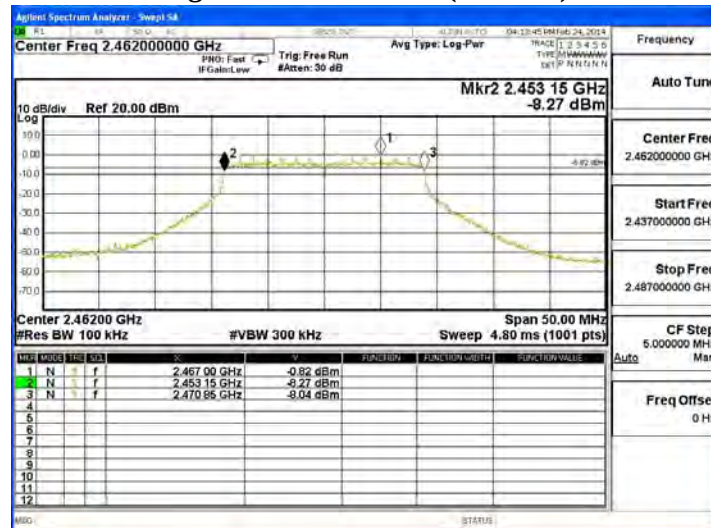

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	17700	>500	Pass

Figure Channel 11: (Chain B)

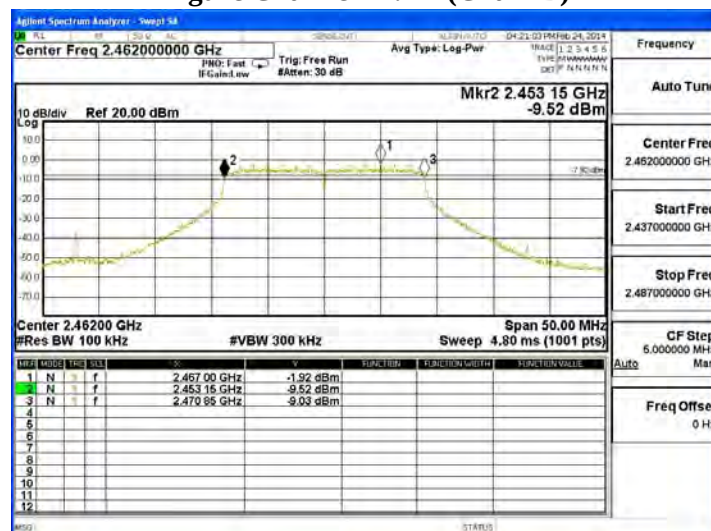

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2422MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2422.00	36600	>500	Pass

Figure Channel 1: (Chain A)



Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2422.00	36300	>500	Pass


Figure Channel 1: (Chain B)



Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
4	2437.00	36600	>500	Pass

Figure Channel 4: (Chain A)

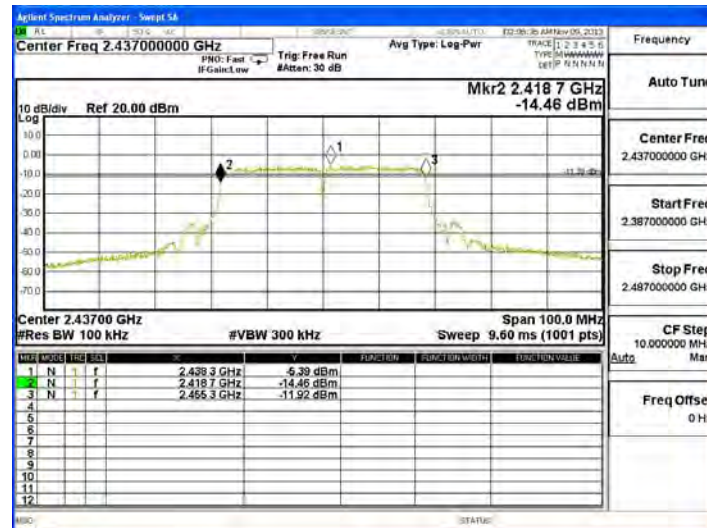

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
4	2437.00	36600	>500	Pass


Figure Channel 4: (Chain B)



Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2452MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
7	2452.00	36600	>500	Pass

Figure Channel 7: (Chain A)

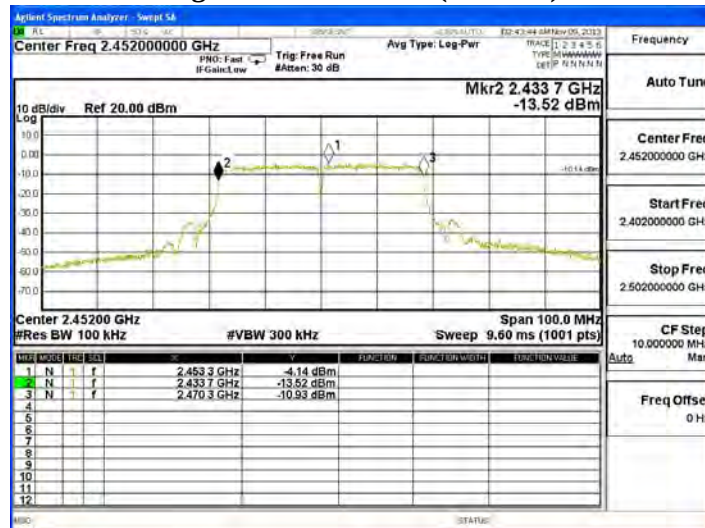

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
7	2452.00	36600	>500	Pass


Figure Channel 7: (Chain B)

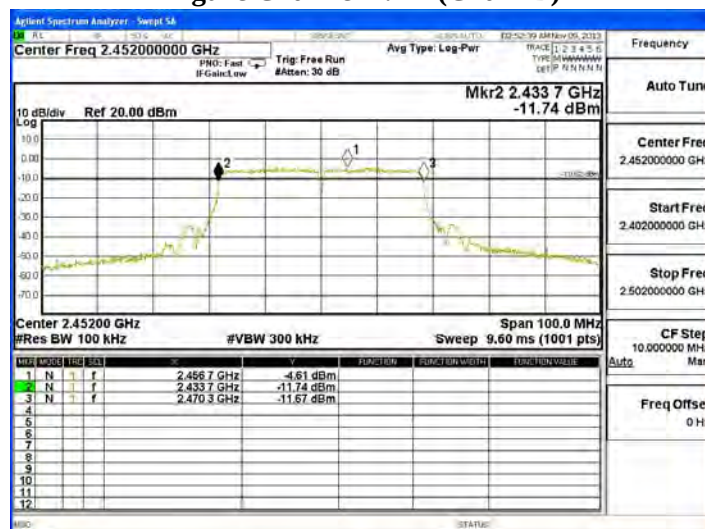

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band) (5745MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745.00	17600	>500	Pass

Figure Channel 149: (Chain A)

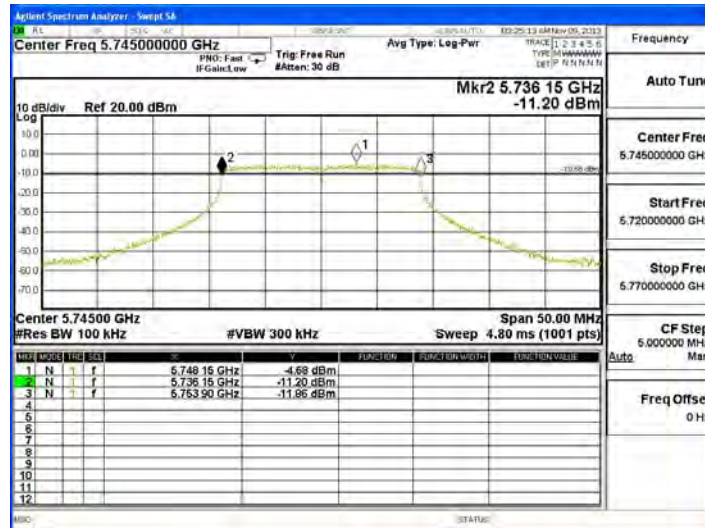

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745.00	17050	>500	Pass


Figure Channel 149: (Chain B)

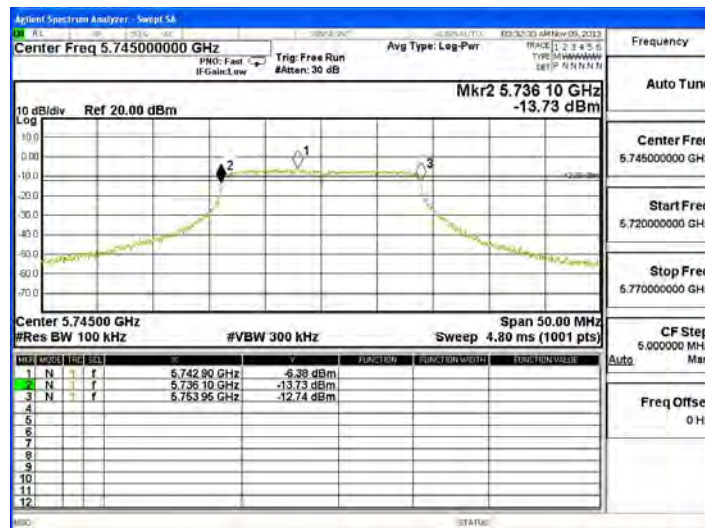

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band) (5785MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
157	5785.00	17250	>500	Pass

Figure Channel 157: (Chain A)

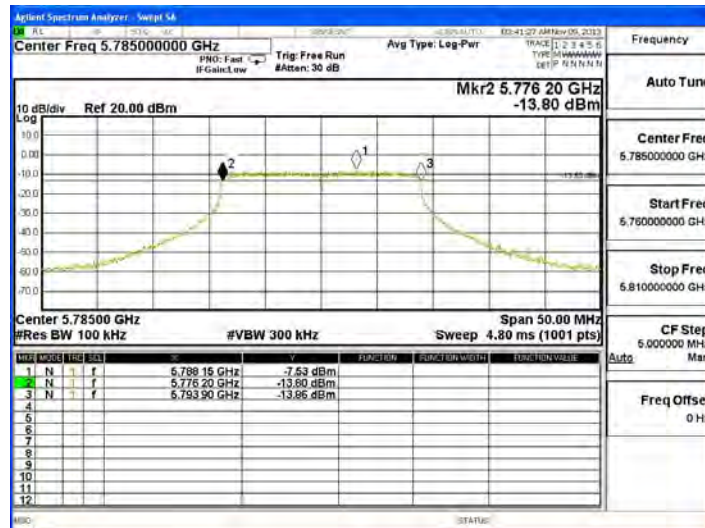

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
157	5785.00	17250	>500	Pass


Figure Channel 157: (Chain B)

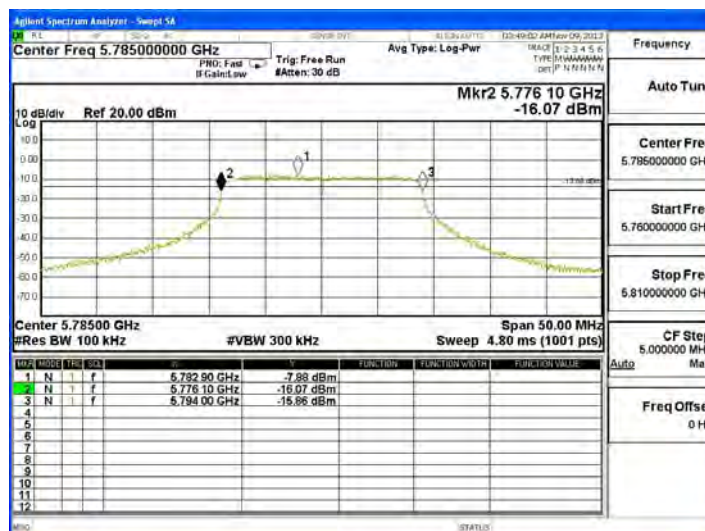

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band) (5825MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
165	5825.00	17250	>500	Pass

Figure Channel 165: (Chain A)

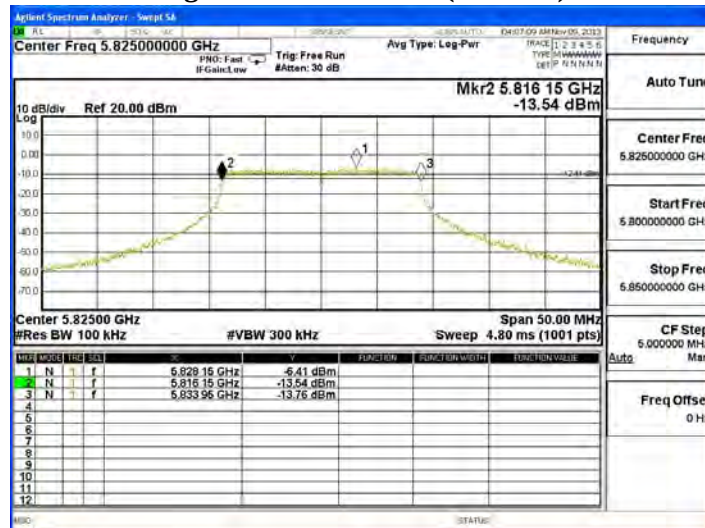

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
165	5825.00	16650	>500	Pass


Figure Channel 165: (Chain B)

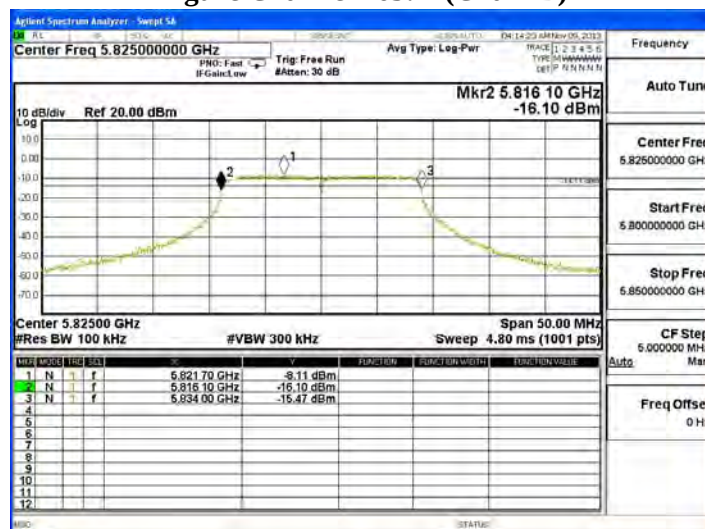

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band) (5755MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
151	5755.00	35900	>500	Pass

Figure Channel 151: (Chain A)

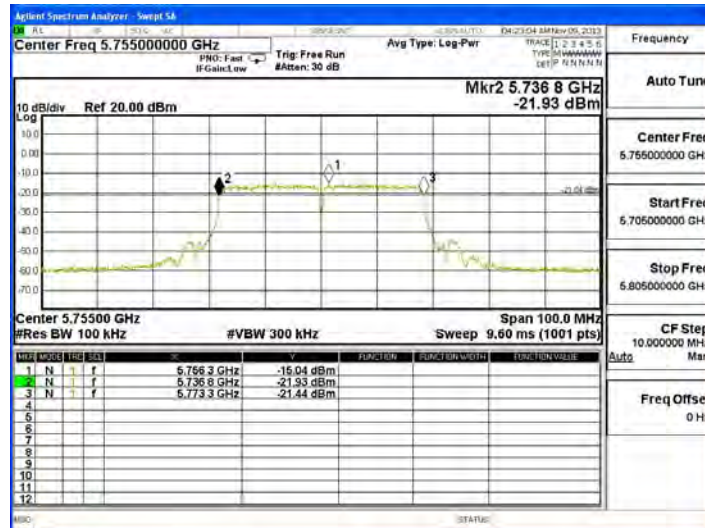

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
151	5755.00	35700	>500	Pass


Figure Channel 151: (Chain B)

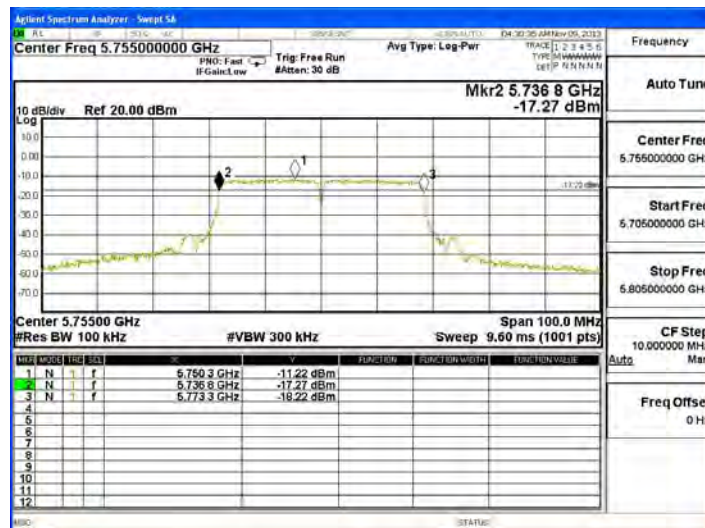

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band) (5795MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
159	5795.00	35700	>500	Pass

Figure Channel 159: (Chain A)

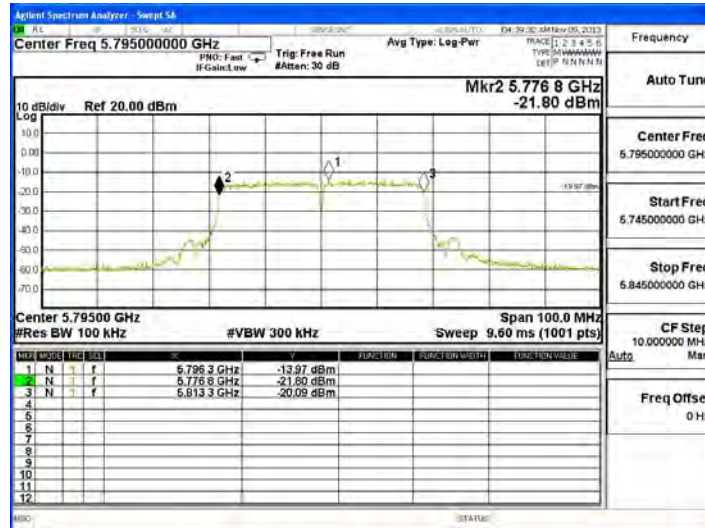

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
159	5795.00	35700	>500	Pass

Figure Channel 159: (Chain B)

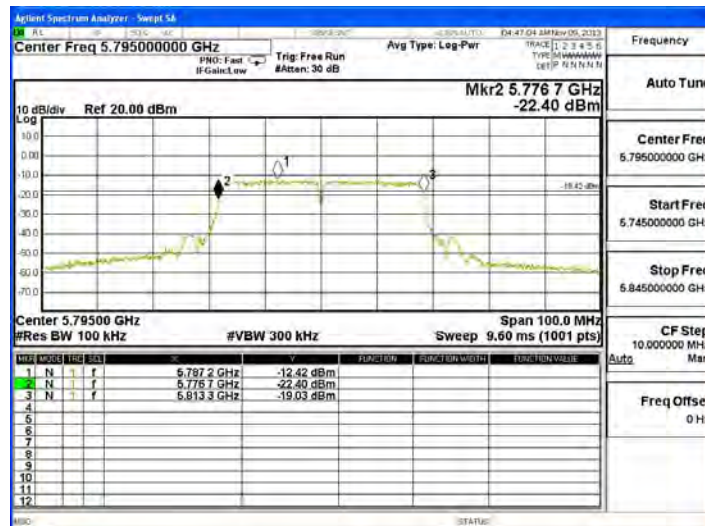

8. Power Density


8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2013
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2013
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with "X" are used to measure the final test results.

8.2. Test Setup



8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The maximum power spectral density using KDB 558074 section 10.2 PKPSD (peak PSD) method.

8.5. Uncertainty


± 1.27 dB

8.6. Test Result of Power Density

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	4.18	< 8dBm	Pass


Figure Channel 1:

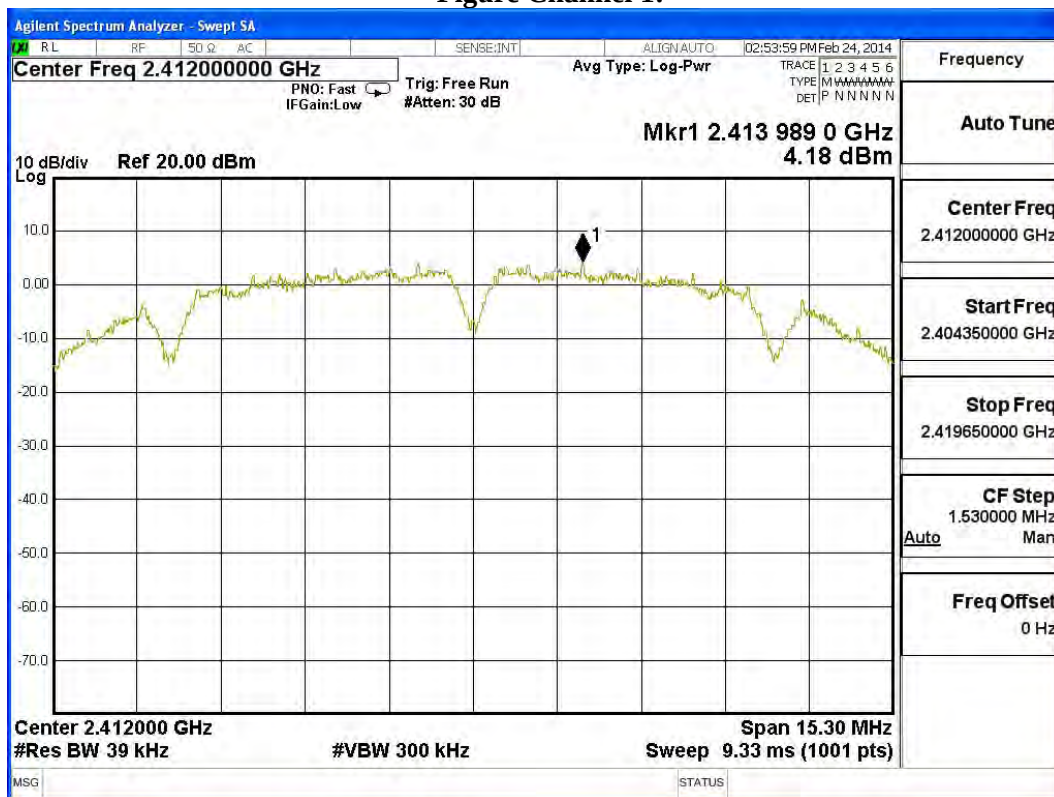

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
6	2437	4.96	< 8dBm	Pass


Figure Channel 6:

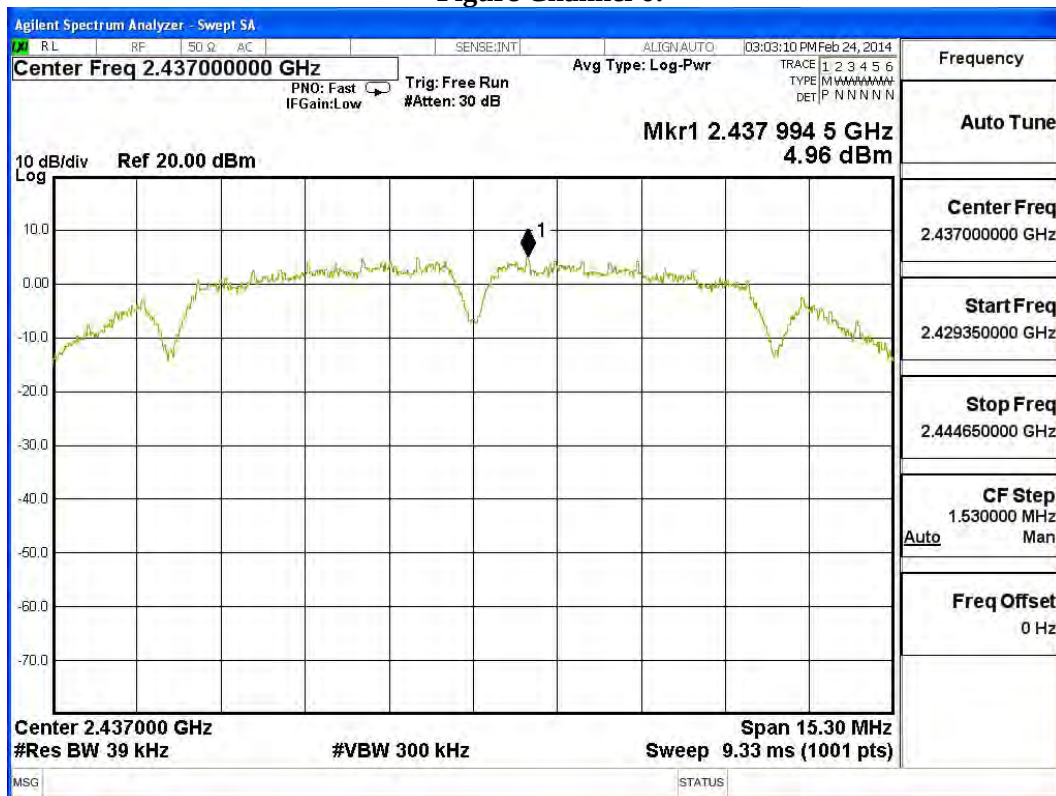

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
11	2462	4.58	< 8dBm	Pass


Figure Channel 11:

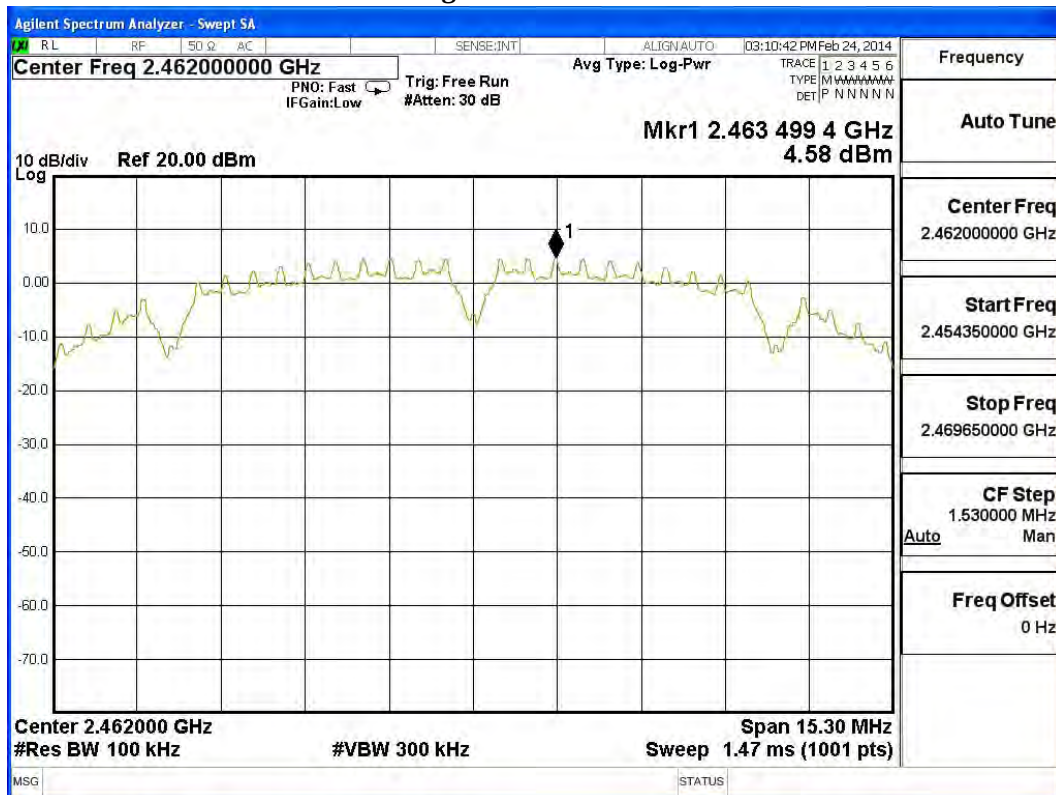

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	4.71	< 8dBm	Pass


Figure Channel 1:

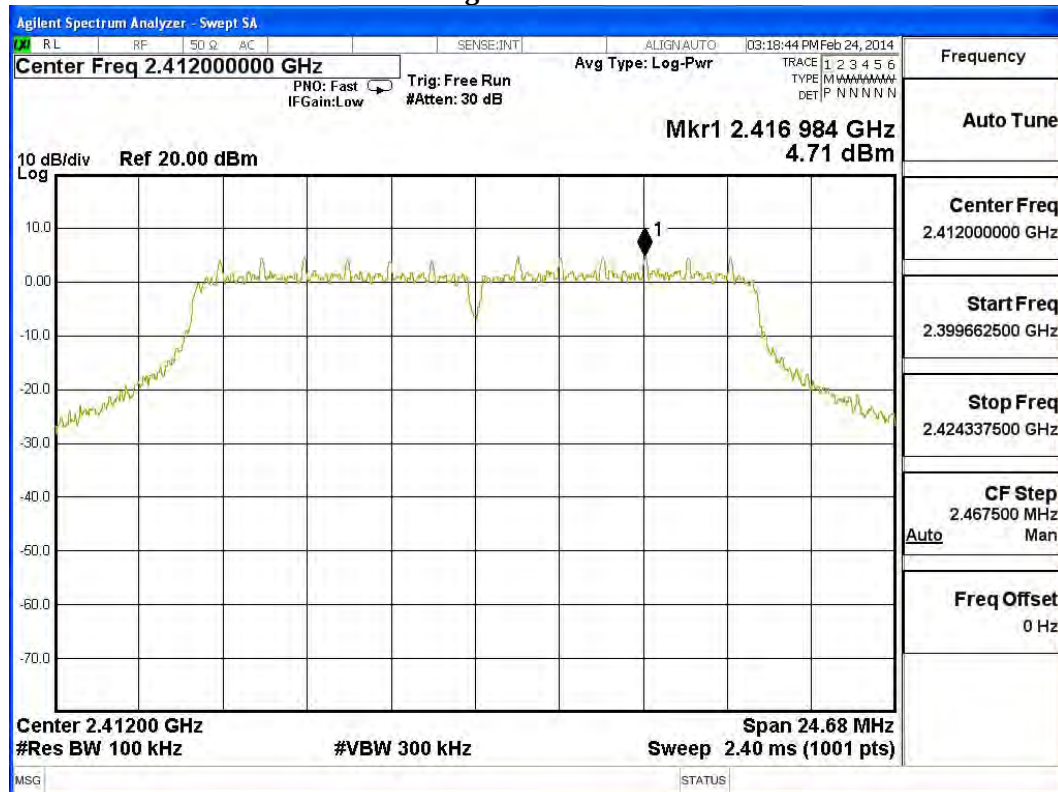

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
6	2437	4.60	< 8dBm	Pass


Figure Channel 6:

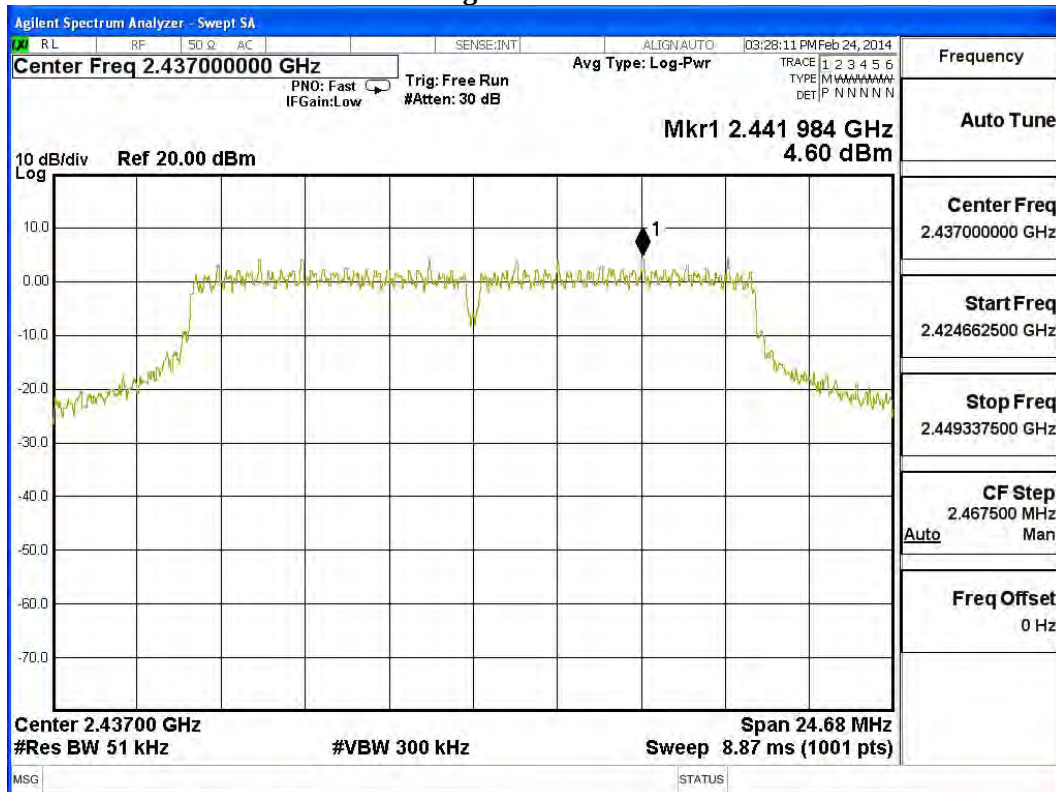

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
11	2462	2.23	< 8dBm	Pass


Figure Channel 11:

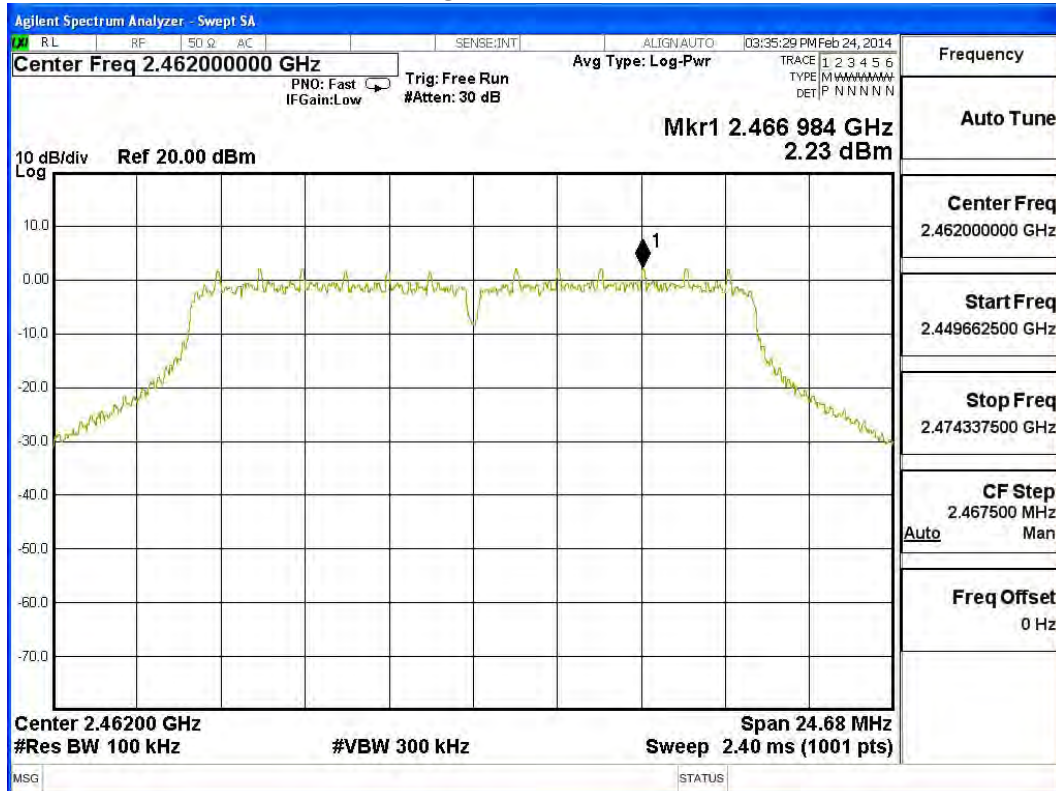

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5745MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	4.41	< 8dBm	Pass


Figure Channel 149:

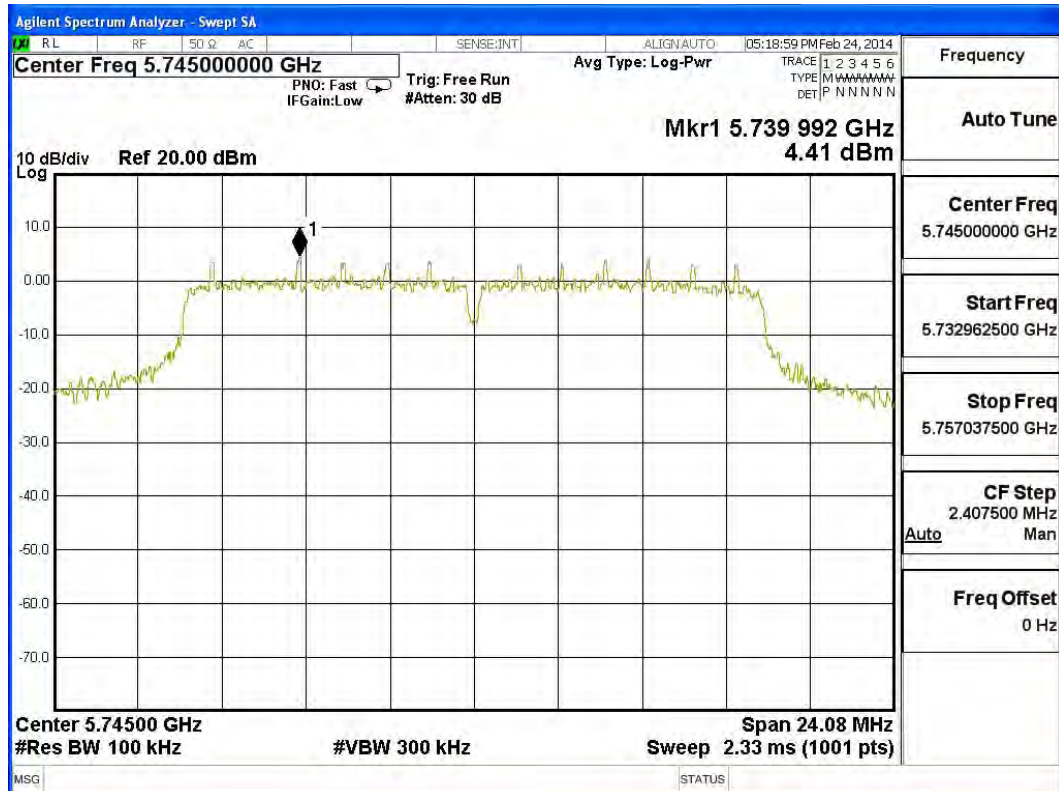

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5785MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
157	5785	3.30	< 8dBm	Pass


Figure Channel 157:

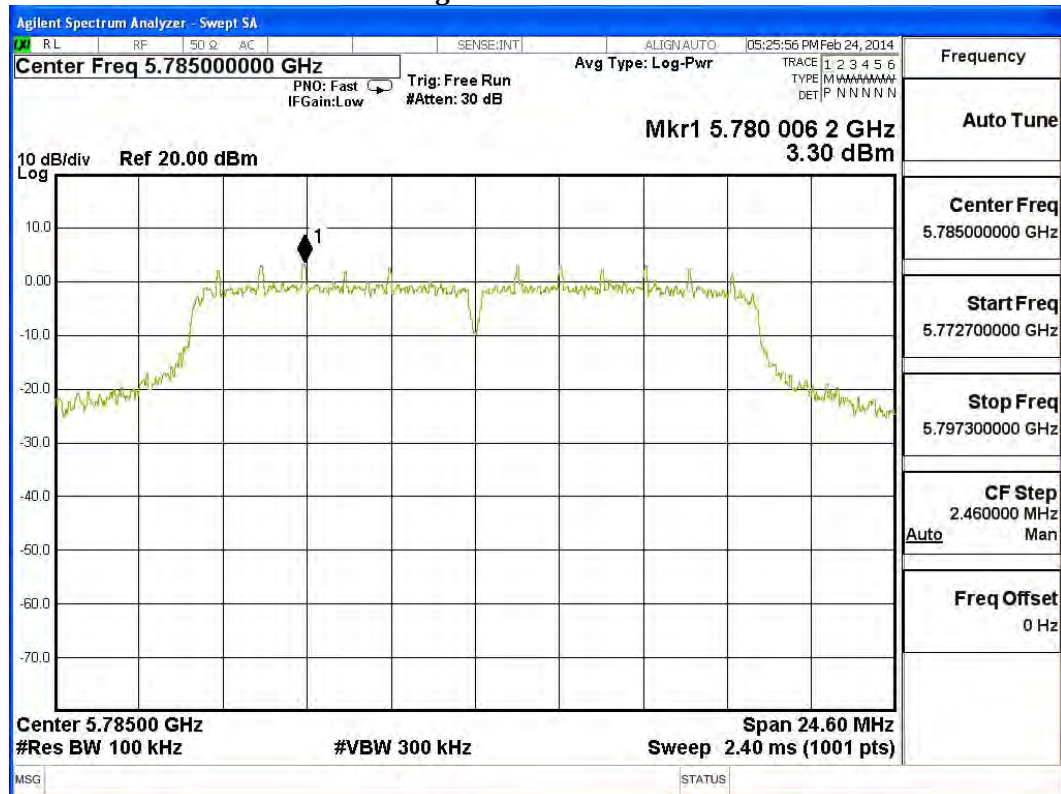

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5825MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
165	5825	2.91	< 8dBm	Pass

Figure Channel 165:

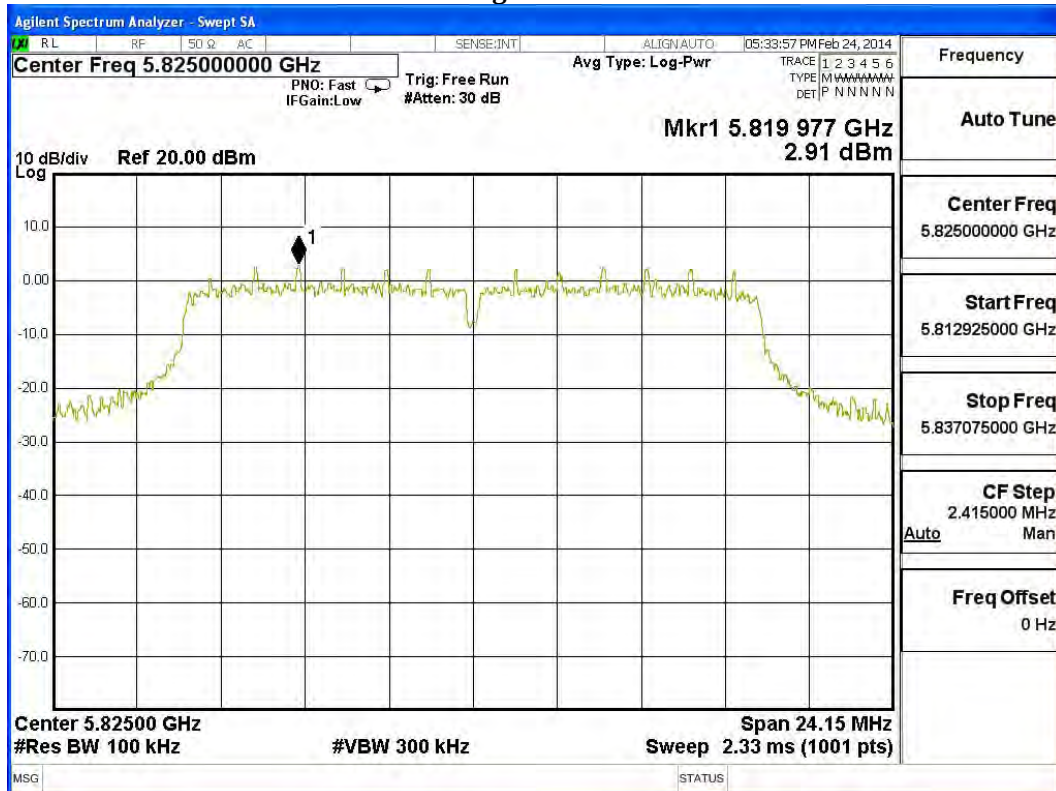

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2412MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-1.560	1.450	< 8dBm	Pass
B	-1.880	1.130	< 8dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 1: (Chain A)

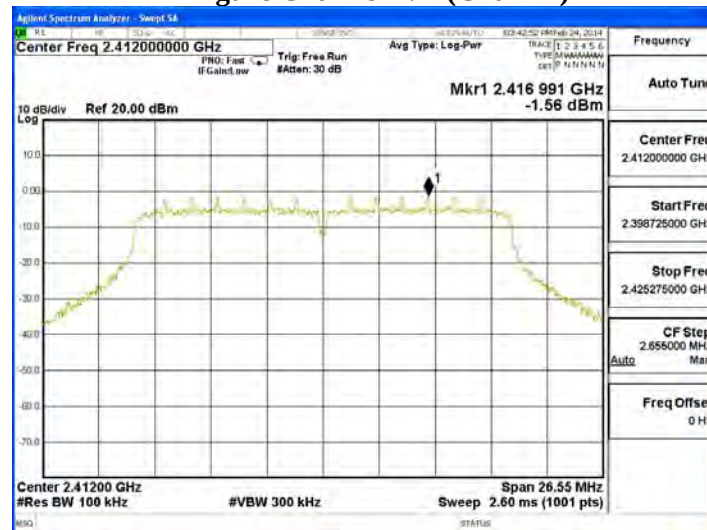


Figure Channel 1: (Chain B)



Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2437MHz)


CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-0.960	2.050	< 8dBm	Pass
B	-1.230	1.780	< 8dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 6: (Chain A)



Figure Channel 6: (Chain B)

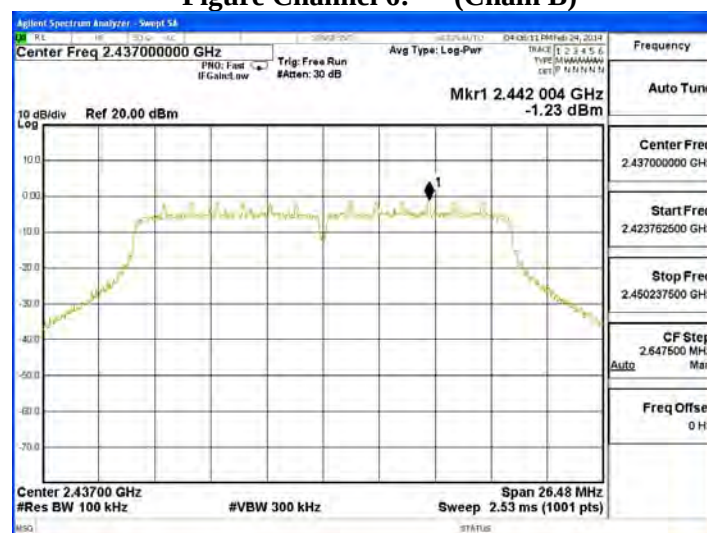

Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2462MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-0.700	2.310	< 8dBm	Pass
B	-2.000	1.010	< 8dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 11: (Chain A)



Figure Channel 11: (Chain B)



Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2422MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-3.590	-0.580	< 8dBm	Pass
B	-3.770	-0.760	< 8dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 1: (Chain A)



Figure Channel 1: (Chain B)



Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2437MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-3.400	-0.390	< 8dBm	Pass
B	-3.690	-0.680	< 8dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 4: (Chain A)



Figure Channel 4: (Chain B)



Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2452MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-3.930	-0.920	< 8dBm	Pass
B	-4.520	-1.510	< 8dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 7: (Chain A)



Figure Channel 7: (Chain B)



Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band) (5745MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm) ¹	Limit	Result
A	0.030	3.040	< 8dBm	Pass
B	-1.390	1.620	< 8dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 149: (Chain A)



Figure Channel 149: (Chain B)



Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band) (5785MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-0.050	2.960	< 8dBm	Pass
B	-0.210	2.800	< 8dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 157: (Chain A)



Figure Channel 157: (Chain B)



Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band) (5825MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-0.080	2.930	< 8dBm	Pass
B	0.370	3.380	< 8dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 165: (Chain A)



Figure Channel 165: (Chain B)



Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band) (5755MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-1.910	1.100	< 8dBm	Pass
B	-2.640	0.370	< 8dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 151: (Chain A)

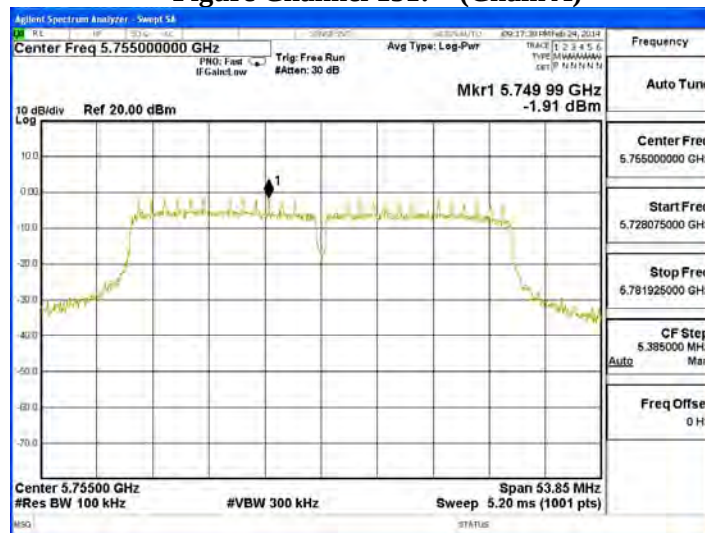


Figure Channel 151: (Chain B)



Product : MOXA IEEE 802.11a/b/g/n Wireless
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band) (5795MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-2.700	0.310	< 8dBm	Pass
B	-2.000	1.010	< 8dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 159: (Chain A)

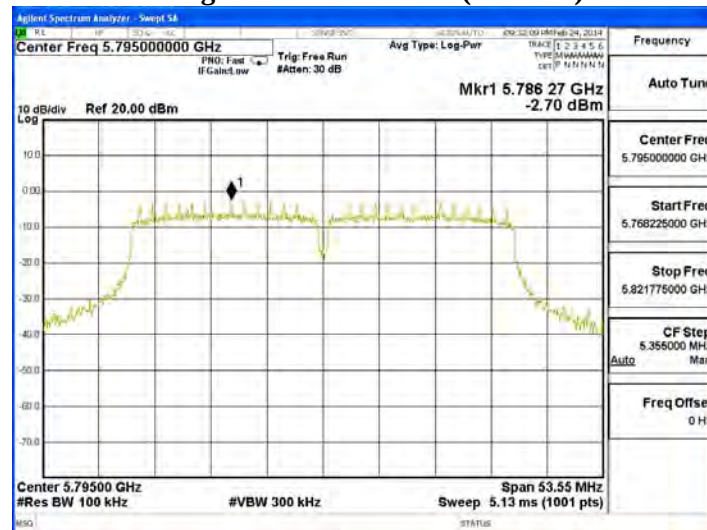


Figure Channel 159: (Chain B)



9. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs