

FCC Test Report (Class II Permissive Change)

Product Name	Industrial 802.11a/b/g/n Outdoor Access Point
Model No	AWK-4131A-XXXXXX (x=0-9,A-Z, blank or dash for marketing purpose and no impact safety related critical components and constructions)
FCC ID	SLE-WAPN008

Applicant	MOXA Inc.
Address	FL.4, NO. 135. LANE 235, BAOQIAO RD. XINDIAN DIST., NEW TAIPEI CITY, TAIWAN

Date of Receipt	Jun. 16, 2015
Issued Date	Aug. 19, 2015
Report No.	1560448R-RFUSP48V00-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report

Issued Date: Aug. 19, 2015

Report No.: 1560448R-RFUSP48V00-A



Product Name	Industrial 802.11a/b/g/n Outdoor Access Point
Applicant	MOXA Inc.
Address	FL.4, NO. 135. LANE 235, BAOQIAO RD. XINDIAN DIST., NEW TAIPEI CITY, TAIWAN
Manufacturer	MOXA Inc.
Model No.	AWK-4131A-XXXXXX (x=0-9,A-Z, blank or dash for marketing purpose and no impact safety related critical components and constructions)
FCC ID.	SLE-WAPN008
EUT Rated Voltage	DC 12~48V
EUT Test Voltage	DC 12V
Trade Name	MOXA
Applicable Standard	FCC CFR Title 47 Part 15 Subpart E: 2014 ANSI C63.4: 2014, ANSI C63.10: 2013 789033 D02 General UNII Test Procedures New Rules v01
Test Result	Complied

Documented By :

Jinn Chen

(Senior Adm. Specialist / Jinn Chen)

Tested By :

Tom Hsieh

(Vice Supervisor / Tom Hsieh)

Approved By :

(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description	7
1.3. Tested System Details.....	8
1.4. Configuration of tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
2. Conducted Emission.....	10
2.1. Test Equipment.....	10
2.2. Test Setup	10
2.3. Limits	11
2.4. Test Procedure	11
2.5. Uncertainty	11
2.6. Test Result of Conducted Emission.....	12
3. Maximun conducted output power	18
3.1. Test Equipment.....	18
3.2. Test Setup	18
3.3. Limits	19
3.4. Test Procedure	20
3.5. Uncertainty	20
3.6. Test Result of Maximum conducted output power.....	21
4. Peak Power Spectral Density.....	43
4.1. Test Equipment.....	43
4.2. Test Setup	43
4.3. Limits	43
4.4. Test Procedure	44
4.5. Uncertainty	44
4.6. Test Result of Peak Power Spectral Density	45
5. Radiated Emission.....	76
5.1. Test Equipment.....	76
5.2. Test Setup	77
5.3. Limits	78
5.4. Test Procedure	79
5.5. Uncertainty	79
5.6. Test Result of Radiated Emission.....	80
6. Band Edge	125
6.1. Test Equipment.....	125
6.2. Test Setup	126
6.3. Limits	127
6.4. Test Procedure	127
6.5. Uncertainty	127
6.6. Test Result of Band Edge	128
7. Occupied Bandwidth	166

7.1.	Test Equipment.....	166
7.2.	Test Setup	166
7.3.	Limits	166
7.4.	.Test Procedure	166
7.5.	Uncertainty	166
7.6.	Test Result of Occupied Bandwidth	167
8.	Frequency Stability.....	175
8.1.	Test Equipment.....	175
8.2.	Test Setup	175
8.3.	Limits	175
8.4.	Test Procedure	175
8.5.	Uncertainty	175
8.6.	Test Result of Frequency Stability.....	176
9.	EMI Reduction Method During Compliance Testing	186
Attachment 1: EUT Test Photographs		
Attachment 2: EUT Detailed Photographs		

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Industrial 802.11a/b/g/n Outdoor Access Point
Trade Name	MOXA
FCC ID.	SLE-WAPN008
Model No.	AWK-4131A-XXXXXX (x=0-9,A-Z, blank or dash for marketing purpose and no impact safety related critical components and constructions)
Frequency Range	802.11a/n-20MHz: 5180-5320MHz, 5500-5700MHz, 5745-5825MHz 802.11n-40MHz: 5190-5310, 5510-5670MHz, 5755-5795MHz0
Number of Channels	802.11a/n-20MHz: 24; 802.11n-40MHz: 11
Data Rate	802.11a: 6 - 54Mbps 802.11n: up to 300Mbps
Channel Control	Auto
Type of Modulation	802.11a/n:OFDM, BPSK, QPSK, 16QAM, 64QAM
Antenna type	Dipole Antenna
Antenna Gain	Refer to the table “Antenna List”

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	KINSUN	ANT-WDB-ANM-0502	Dipole	1.41dBi For 5.15~5.35GHz 1.41dBi For 5.47~5.725GHz

Note:

1. The antenna of EUT is conform to FCC 15.203

802.11a/n-20MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 36:	5180 MHz	Channel 40:	5200 MHz	Channel 44:	5220 MHz	Channel 48:	5240 MHz
Channel 52:	5260 MHz	Channel 56:	5280 MHz	Channel 60:	5300 MHz	Channel 64:	5320 MHz
Channel 100:	5500 MHz	Channel 104:	5520 MHz	Channel 108:	5540 MHz	Channel 112:	5560 MHz
Channel 116:	5580 MHz	Channel 120:	5600 MHz	Channel 124:	5620 MHz	Channel 128:	5640 MHz
Channel 132:	5660 MHz	Channel 136:	5680 MHz	Channel 140:	5700 MHz	Channel 149:	5745 MHz
Channel 153:	5765 MHz	Channel 157:	5785 MHz	Channel 161:	5805 MHz	Channel 165:	5825 MHz

802.11n-40MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 38:	5190 MHz	Channel 46:	5230 MHz	Channel 54:	5270 MHz	Channel 62:	5310 MHz
Channel 102:	5510 MHz	Channel 110:	5550 MHz	Channel 118:	5590 MHz	Channel 126:	5630 MHz
Channel 134:	5670 MHz	Channel 151:	5755 MHz	Channel 159:	5795 MHz		

Note:

1. This device is a Industrial 802.11a/b/g/n Outdoor Access Point with a built-in 802.11a/b/g/n WLAN transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. At result of pretests, module supports dual-channel transmission, only the worst case is shown in the report. (802.11a is chain A)
4. This is to request a Class II permissive change for FCC ID: SLE-WAPN008, originally granted on 08/25/2015. The major change filed under this application is:

Change #1: Integrated into a host (Brand: MOXA, Model Number:

AWK-4131A-XXXXX (x=0-9,A-Z, blank or dash for marketing purpose and no impact safety related critical components and constructions)

Control	Method		
Model No.	PoE inputf function (PoE)	Max operation Temp(-T)	Market purpose
AWK-4131A-US-T	Yes	-40°C to 75°C	Sale to North america
AWK-4131A-EU-T	Yes	-40°C to 75°C	Sale to Europe
AWK-4131A-JP-T	Yes	-40°C to 75°C	Sale to Japan

#2: Enabling “DFS detection and TPC function” in the frequency bands 5.25GHz~5.35GHz, 5.47GHz~5.725GHz by software.

This change cannot be made by end user.

#3: Reduce the Output Power through firmware (only reduce 5150~5250MHz Band).

#4: All other hardware is identical with original granted.

5. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report. (802.11a is 6Mbps 、802.11n-20BW is 14.4Mbps 、802.11n-40BW is 30Mbps)
6. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart E for Unlicensed National Information Infrastructure devices.
7. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode	Mode 1: Transmit (802.11a-6Mbps) Mode 2: Transmit (802.11n-20BW 14.4Mbps) Mode 3: Transmit (802.11n-40BW 30Mbps)
-----------	--


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
(1) Notebook PC	DELL	PPT	N/A	Non-Shielded, 1.8m
(2) Test Fixture	MOXA	N/A	N/A	N/A

Signal Cable Type	Signal cable Description
A RJ-45 Cable	Shielded, 1.8m, three PCS.

1.4. Configuration of tested System

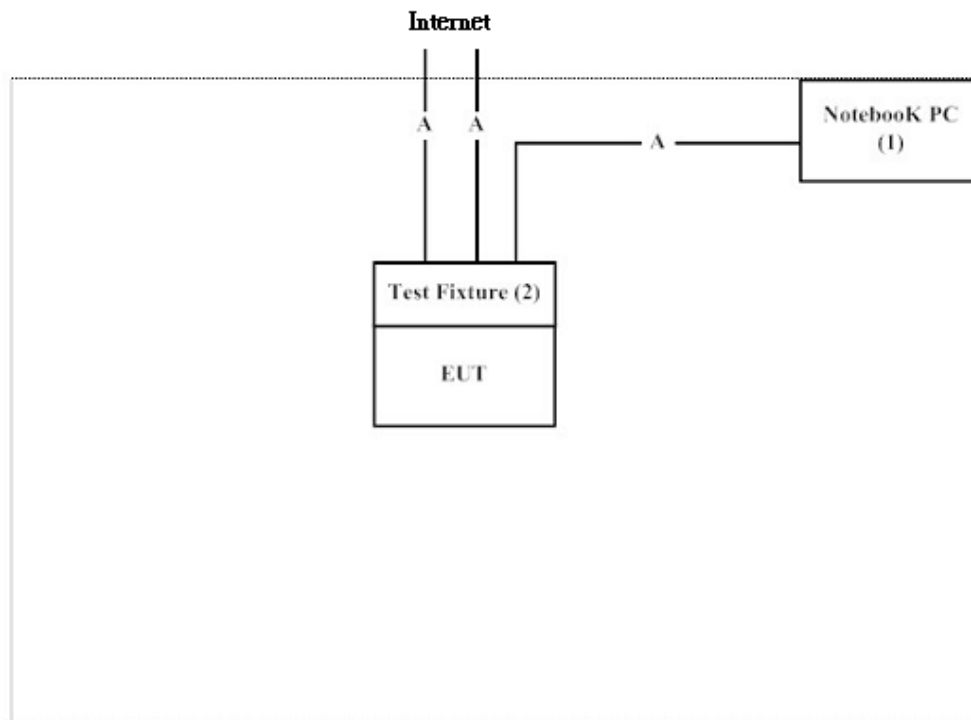

1.5. EUT Exercise Software

- (1) Setup the EUT as shown on 1.4
- (2) Execute “ART2-GUI 2.3” program on the EUT.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Start the continuous transmission.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from QuieTek Corporation's Web Site : <http://www.quietek.com/chinese/about/certificates.aspx?bval=5>

The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,
Lin-Kou Shiang, Taipei,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2014	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2015	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2015	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2015	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2015	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

2.2. Test Setup

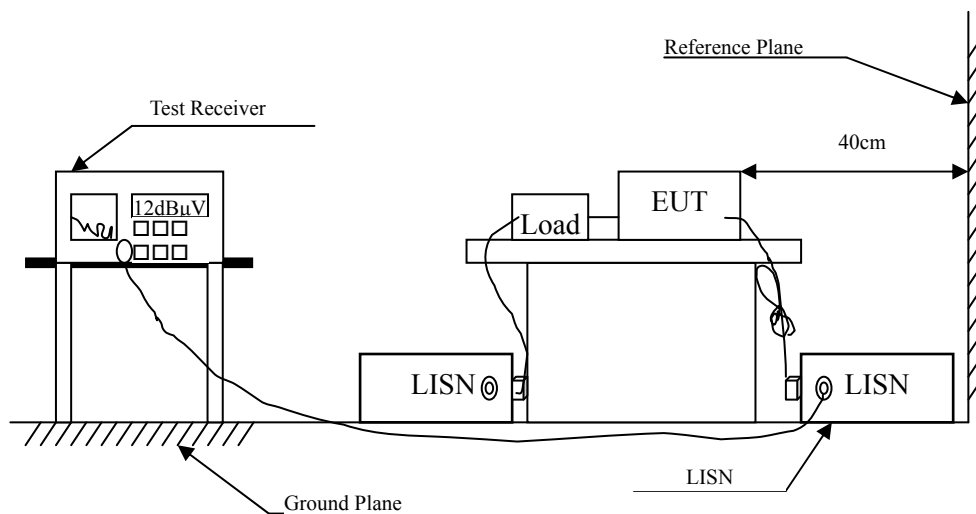

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks : In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2014; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5190MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV	Margin dB	Limit dBμV
LINE 1					
Quasi-Peak					
0.150	9.671	35.570	45.241	-20.759	66.000
0.181	9.662	33.100	42.762	-22.352	65.114
0.548	9.679	32.550	42.229	-13.771	56.000
1.576	9.745	20.380	30.125	-25.875	56.000
2.322	9.783	22.640	32.423	-23.577	56.000
18.478	10.048	10.270	20.318	-39.682	60.000
Average					
0.150	9.671	24.050	33.721	-22.279	56.000
0.181	9.662	23.290	32.952	-22.162	55.114
0.548	9.679	30.520	40.199	-5.801	46.000
1.576	9.745	13.090	22.835	-23.165	46.000
2.322	9.783	15.190	24.973	-21.027	46.000
18.478	10.048	1.300	11.348	-38.652	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Conducted Emission Test
Power Line : Line 2
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5190MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV	Margin dB	Limit dBμV
LINE 2					
Quasi-Peak					
0.181	9.662	31.280	40.942	-24.172	65.114
0.212	9.661	27.940	37.601	-26.628	64.229
0.551	9.680	31.710	41.390	-14.610	56.000
1.986	9.768	22.380	32.148	-23.852	56.000
2.369	9.784	22.370	32.154	-23.846	56.000
4.220	9.836	14.470	24.306	-31.694	56.000
Average					
0.181	9.662	19.430	29.092	-26.022	55.114
0.212	9.661	17.480	27.141	-27.088	54.229
0.551	9.680	28.880	38.560	-7.440	46.000
1.986	9.768	15.290	25.058	-20.942	46.000
2.369	9.784	14.530	24.314	-21.686	46.000
4.220	9.836	5.210	15.046	-30.954	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Conducted Emission Test
Power Line : Line 1
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5270MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV	dB	dBμV
LINE 1					
Quasi-Peak					
0.150	9.671	35.510	45.181	-20.819	66.000
0.244	9.663	27.860	37.523	-25.791	63.314
0.552	9.680	32.330	42.010	-13.990	56.000
1.552	9.744	21.870	31.614	-24.386	56.000
2.322	9.783	22.820	32.603	-23.397	56.000
18.646	10.049	12.620	22.669	-37.331	60.000
Average					
0.150	9.671	24.050	33.721	-22.279	56.000
0.244	9.663	20.040	29.703	-23.611	53.314
0.552	9.680	28.820	38.500	-7.500	46.000
1.552	9.744	16.450	26.194	-19.806	46.000
2.322	9.783	14.910	24.693	-21.307	46.000
18.646	10.049	2.290	12.339	-37.661	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Conducted Emission Test
Power Line : Line 2
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5270MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV	Margin dB	Limit dBμV
LINE 2					
Quasi-Peak					
0.154	9.670	35.710	45.380	-20.506	65.886
0.181	9.662	31.220	40.882	-24.232	65.114
0.552	9.680	31.460	41.140	-14.860	56.000
1.556	9.744	20.660	30.404	-25.596	56.000
2.318	9.782	23.000	32.782	-23.218	56.000
18.599	10.169	12.710	22.879	-37.121	60.000
Average					
0.154	9.670	22.390	32.060	-23.826	55.886
0.181	9.662	19.390	29.052	-26.062	55.114
0.552	9.680	28.070	37.750	-8.250	46.000
1.556	9.744	14.740	24.484	-21.516	46.000
2.318	9.782	15.170	24.952	-21.048	46.000
18.599	10.169	3.560	13.729	-36.271	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Conducted Emission Test
Power Line : Line 1
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5550MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV	dB	dBμV
LINE 1					
Quasi-Peak					
0.150	9.671	35.690	45.361	-20.639	66.000
0.177	9.663	27.340	37.003	-28.226	65.229
0.552	9.680	32.270	41.950	-14.050	56.000
1.548	9.744	21.330	31.074	-24.926	56.000
2.353	9.783	22.550	32.333	-23.667	56.000
4.209	9.835	16.040	25.875	-30.125	56.000
Average					
0.150	9.671	24.150	33.821	-22.179	56.000
0.177	9.663	16.940	26.603	-28.626	55.229
0.552	9.680	28.350	38.030	-7.970	46.000
1.548	9.744	15.210	24.954	-21.046	46.000
2.353	9.783	14.860	24.643	-21.357	46.000
4.209	9.835	7.290	17.125	-28.875	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Conducted Emission Test
Power Line : Line 2
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5550MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV	dB	dBμV
LINE 2					
Quasi-Peak					
0.154	9.670	35.510	45.180	-20.706	65.886
0.185	9.661	30.900	40.561	-24.439	65.000
0.548	9.679	31.610	41.289	-14.711	56.000
1.580	9.746	19.610	29.356	-26.644	56.000
2.345	9.783	22.970	32.753	-23.247	56.000
18.353	10.167	13.850	24.017	-35.983	60.000
Average					
0.154	9.670	22.250	31.920	-23.966	55.886
0.185	9.661	18.960	28.621	-26.379	55.000
0.548	9.679	29.480	39.159	-6.841	46.000
1.580	9.746	13.150	22.896	-23.104	46.000
2.345	9.783	15.260	25.043	-20.957	46.000
18.353	10.167	4.000	14.167	-35.833	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Maximun conducted output power

3.1. Test Equipment


	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2015
X	Power Sensor	Anritsu	MA2411B/0738448	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:


1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

3.2. Test Setup


26dBc Occupied Bandwidth

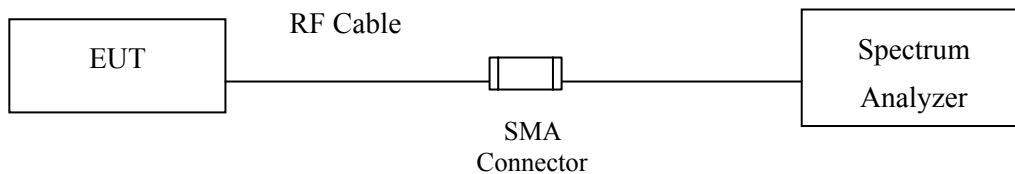

Conduction Power Measurement (for 802.11an)

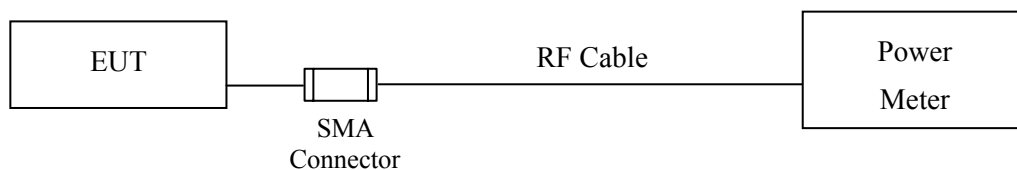

Conduction Power Measurement (for 802.11ac)

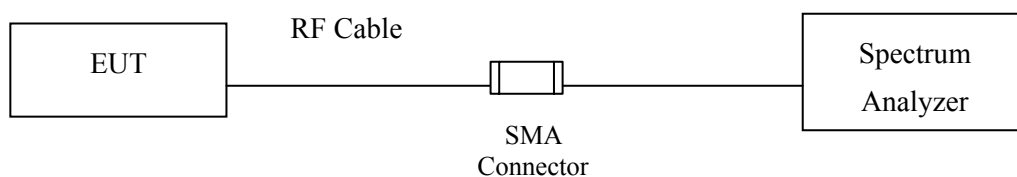

3.3. Limits

3.3.1. For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W, provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.3. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point UNII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any

corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.4. Test Procedure

As an alternative to FCC KDB-789033, the EUT maximum conducted output power was measured with an average power meter employing a video bandwidth greater the 6dB BW of the emission under test. Maximum conducted output power was read directly from the meter across all data rates, and across three channels within each sub-band. Special care was used to make sure that the EUT was transmitting in continuous mode. This method exceeds the limitations of FCC KDB-789033, and provides more accurate measurements.

802.11an (BW $\leq$ 40MHz) Maximum conducted output power using KDB 789033 section E)3)b) Method PM-G (Measurement using a gated RF average power meter)

Note: the power meter have a video bandwidth that is greater than or equal to the measurement bandwidth, (Anritsu/ MA2411B video bandwidth: 65MHz)

802.11ac (BW=80MHz) Maximum conducted output power using KDB 789033 section E)2)b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep).

When transmitted signals consist of two or more non-contiguous spectrum segments (e.g., 80+80 MHz mode) or when a single spectrum segment of a transmission crosses the boundary between two adjacent U-NII bands, KDB 644545 D01 section F) procedure is used for measurements.

3.5. Uncertainty

± 1.27 dB

3.6. Test Result of Maximum conducted output power

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Maximum conducted output power
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps)

Cable loss=1dB		Maximum conducted output power								
Channel No.	Frequency (MHz)	Data Rate (Mbps)								Required Limit
		6	9	12	18	24	36	48	54	
		Measurement Level (dBm)								
36	5180	18.29	--	--	--	--	--	--	--	<24dBm
44	5220	18.33	18.17	18.02	17.96	17.87	17.73	17.63	17.52	<24dBm
48	5240	18.32	--	--	--	--	--	--	--	<24dBm
52	5260	22.12	--	--	--	--	--	--	--	<24dBm
60	5300	22.13	22.01	21.97	21.83	21.74	21.65	21.49	21.34	<24dBm
64	5320	18.92	--	--	--	--	--	--	--	<24dBm
100	5500	16.48	--	--	--	--	--	--	--	<24dBm
116	5580	22.58	22.51	22.42	22.34	22.19	22.03	21.95	21.71	<24dBm
140	5700	15.42	--	--	--	--	--	--	--	<24dBm
149	5745	16.34	--	--	--	--	--	--	--	<30dBm
157	5785	16.19	--	--	--	--	--	--	--	<30dBm
165	5825	17.78	17.62	17.51	17.38	17.25	17.11	17.05	16.95	<30dBm

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss


Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Output Power Limit	
				(dBm)	dBm+10log(BW)
36	5180	--	18.29	30	--
44	5220	--	18.33	30	--
48	5240	--	18.32	30	--
52	5260	30.650	22.12	24	25.86
60	5300	30.600	22.13	24	25.86
64	5320	22.650	18.92	24	24.55
100	5500	22.000	16.48	24	24.42
116	5580	35.150	22.58	24	26.46
140	5700	22.150	15.42	24	24.45
149	5745	--	16.34	30	--
157	5785	--	16.19	30	--
165	5825	--	17.78	30	--


Note:

1. Power Output Value =Reading value on average power meter + cable loss
2. 26 dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.


26dBc Occupied Bandwidth: Channel 52:

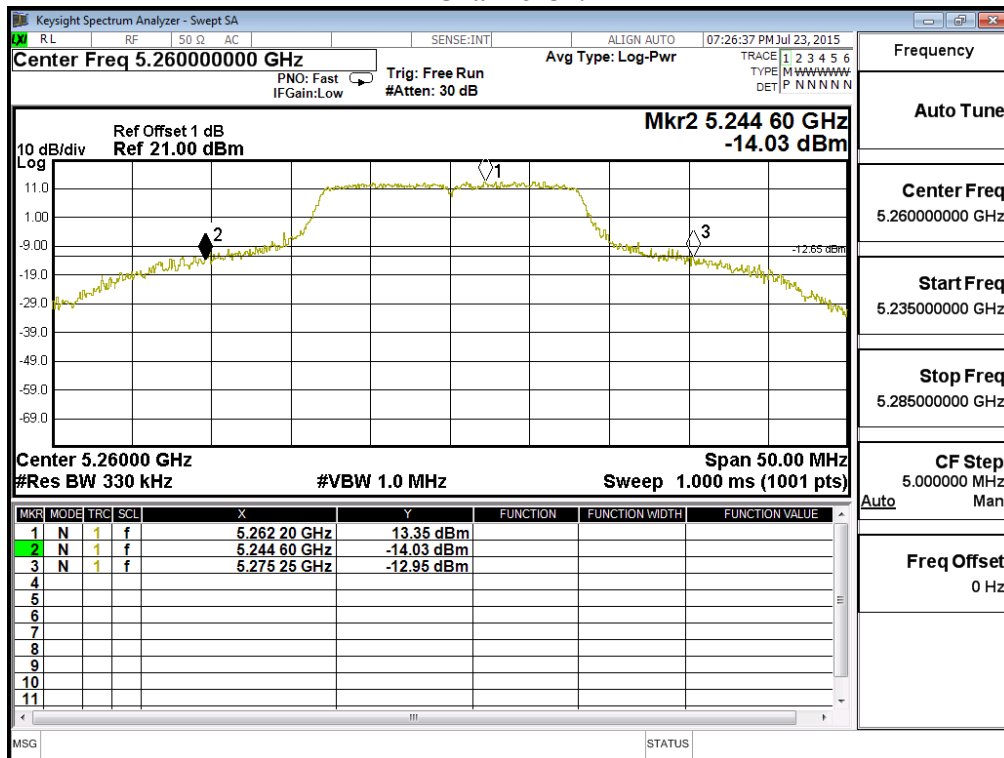


Channel 60:

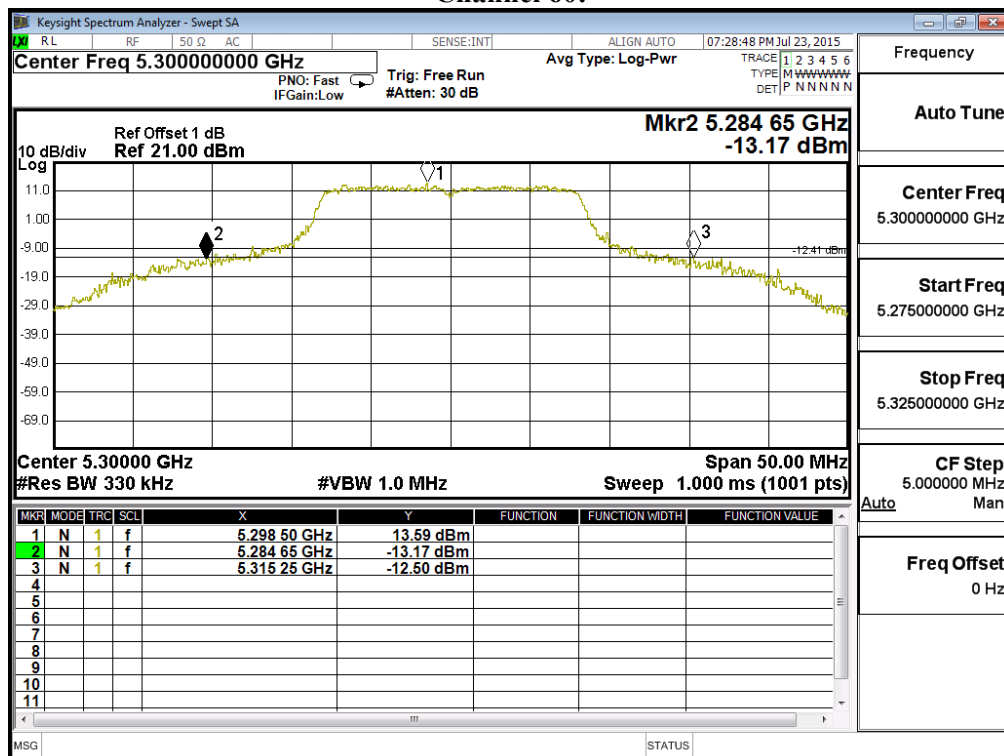


Channel 64:

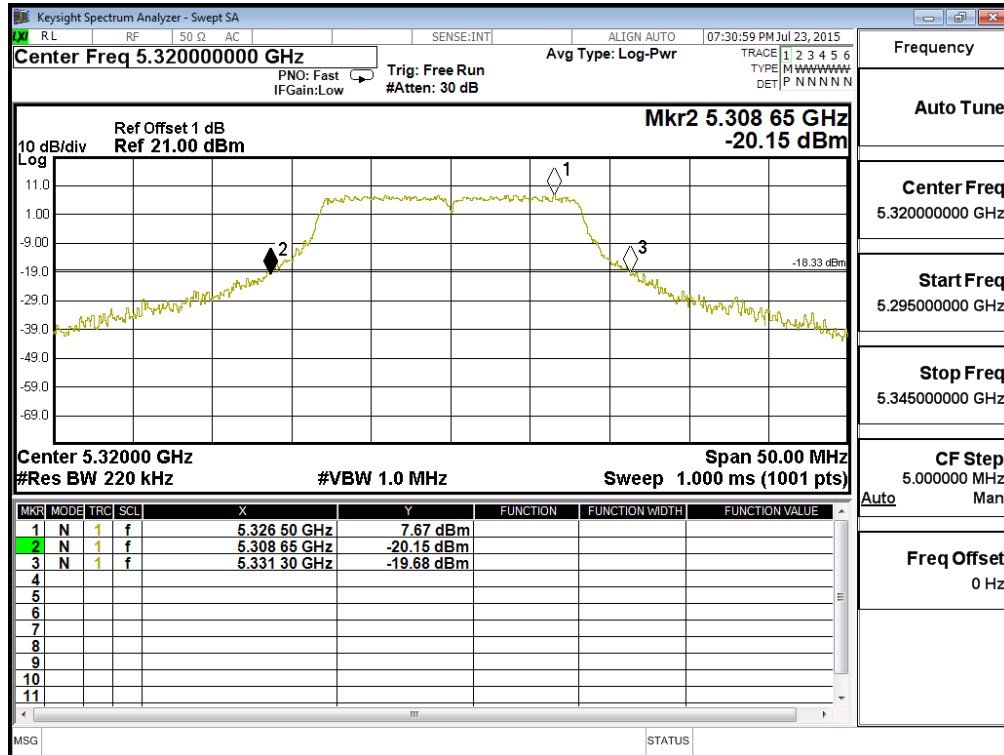


Channel 100:

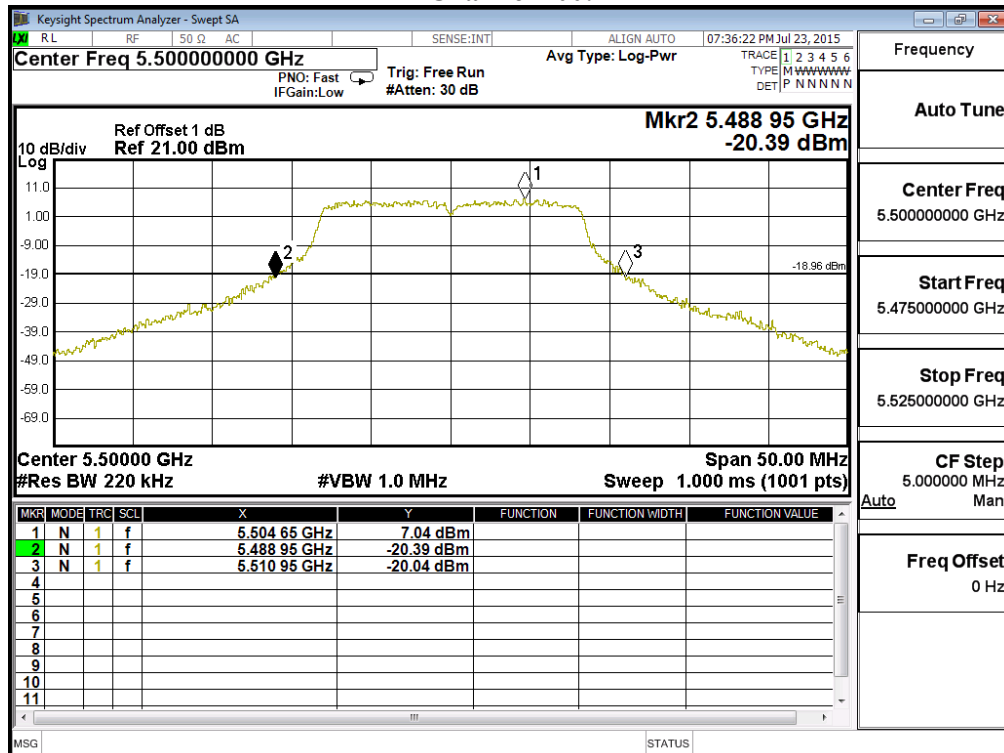

Channel 116:

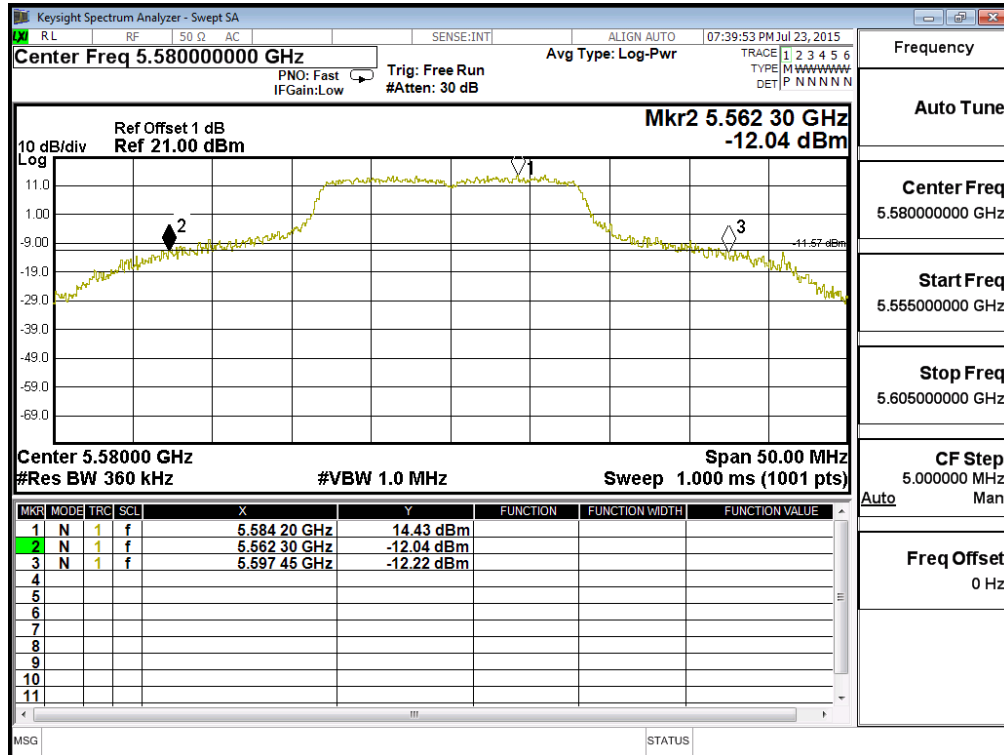

Channel 140:

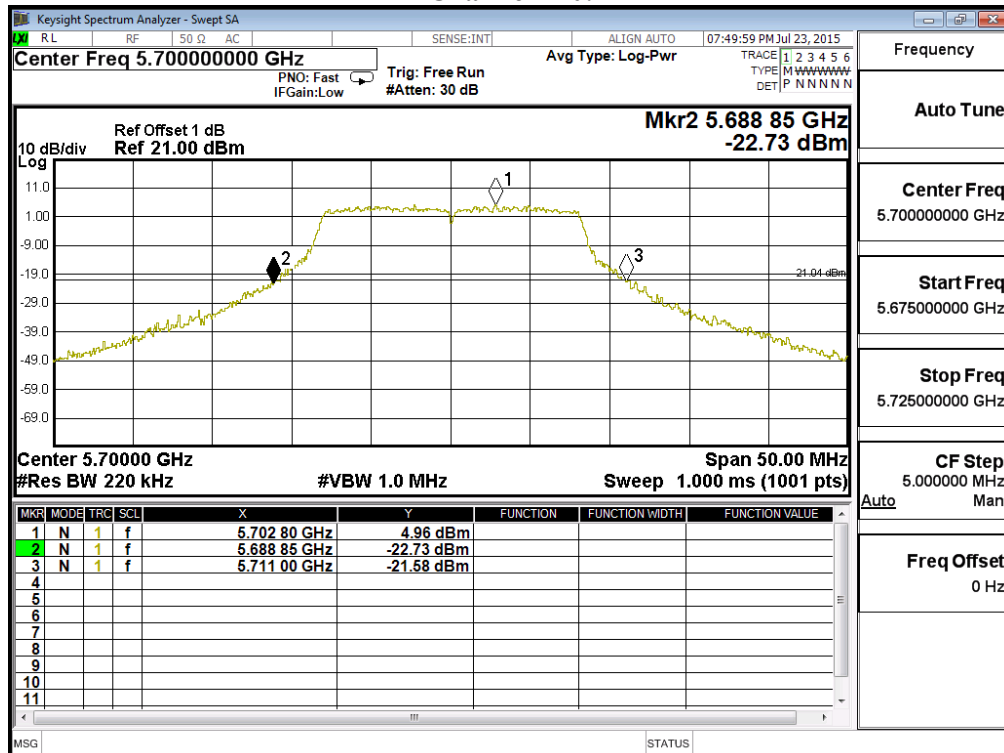

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Maximum conducted output power
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps)

CHAIN A

Cable loss=1dB		Maximum conducted output power								
Channel No.	Frequency (MHz)	Data Rate (Mbps)								Required Limit
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4	
		Measurement Level (dBm)								
36	5180	14.22	--	--	--	--	--	--	--	<24dBm
44	5220	14.19	--	--	--	--	--	--	--	<24dBm
48	5240	14.25	14.2	14.05	13.97	13.76	13.62	13.44	13.4	<24dBm
52	5260	19.51	--	--	--	--	--	--	--	<24dBm
60	5300	19.32	--	--	--	--	--	--	--	<24dBm
64	5320	20.02	19.89	19.76	19.68	19.54	19.44	19.35	19.26	<24dBm
100	5500	15.68	--	--	--	--	--	--	--	<24dBm
116	5580	19.68	19.55	19.48	19.37	19.24	19.15	18.99	18.81	<24dBm
140	5700	18.18	--	--	--	--	--	--	--	<24dBm
149	5745	18.02	--	--	--	--	--	--	--	<30dBm
157	5785	20.11	19.97	19.76	19.62	19.54	19.48	19.44	19.39	<30dBm
165	5825	19.89	--	--	--	--	--	--	--	<30dBm

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

CHAIN B

Cable loss=1dB		Maximum conducted output power								
Channel No.	Frequency (MHz)	Data Rate (Mbps)								Required Limit
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4	
		Measurement Level (dBm)								
36	5180	15.82	--	--	--	--	--	--	--	<24dBm
44	5220	15.87	15.76	15.65	15.5	15.42	15.23	15.1	15.02	<24dBm
48	5240	15.79	--	--	--	--	--	--	--	<24dBm
52	5260	19.37	19.22	19.07	18.96	18.85	18.76	18.64	18.55	<24dBm
60	5300	18.65	--	--	--	--	--	--	--	<24dBm
64	5320	19.22	--	--	--	--	--	--	--	<24dBm
100	5500	15.48	--	--	--	--	--	--	--	<24dBm
116	5580	20.1	19.75	19.71	19.6	19.48	19.37	19.29	19.23	<24dBm
140	5700	15.98	--	--	--	--	--	--	--	<24dBm
149	5745	16.02	--	--	--	--	--	--	--	<30dBm
157	5785	17.74	--	--	--	--	--	--	--	<30dBm
165	5825	18.45	18.31	18.22	18.04	17.98	17.86	17.77	17.71	<30dBm

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


(CHAIN A+ B)

Channel Number	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
36	5180	--	14.22	15.82	18.10	30	--
44	5220	--	14.19	15.87	18.12	30	--
48	5240	--	14.25	15.79	18.10	30	--
52	5260	21.700	19.51	19.37	22.45	24	24.36
60	5300	22.050	19.32	18.65	22.01	24	24.43
64	5320	21.600	20.02	19.22	22.65	24	24.34
100	5500	21.700	15.68	15.48	18.59	24	24.36
116	5580	22.400	19.68	20.10	22.91	24	24.50
140	5700	22.150	18.18	15.98	20.23	24	24.45
149	5745	--	18.02	16.02	20.14	30	--
157	5785	--	20.11	17.74	22.10	30	--
165	5825	--	19.89	18.45	22.24	30	--


Note:

1. Power Output Value = Reading value on average power meter + cable loss
2. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
3. 26 dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.


26dBc Occupied Bandwidth: Channel 52 -Chain A

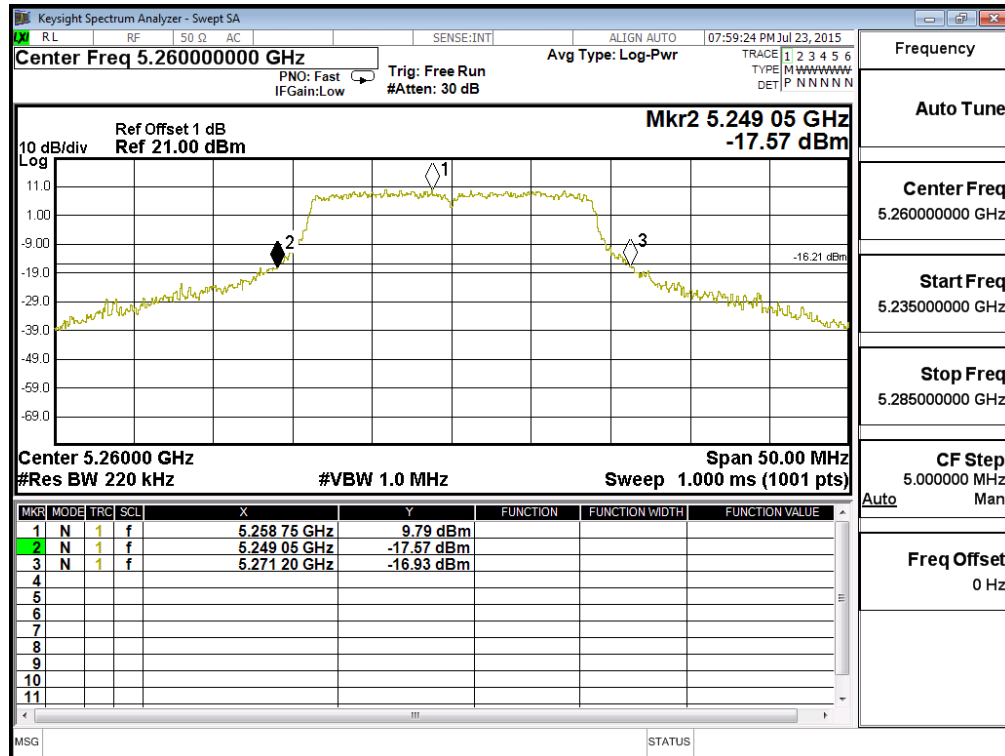


Channel 60 -Chain A

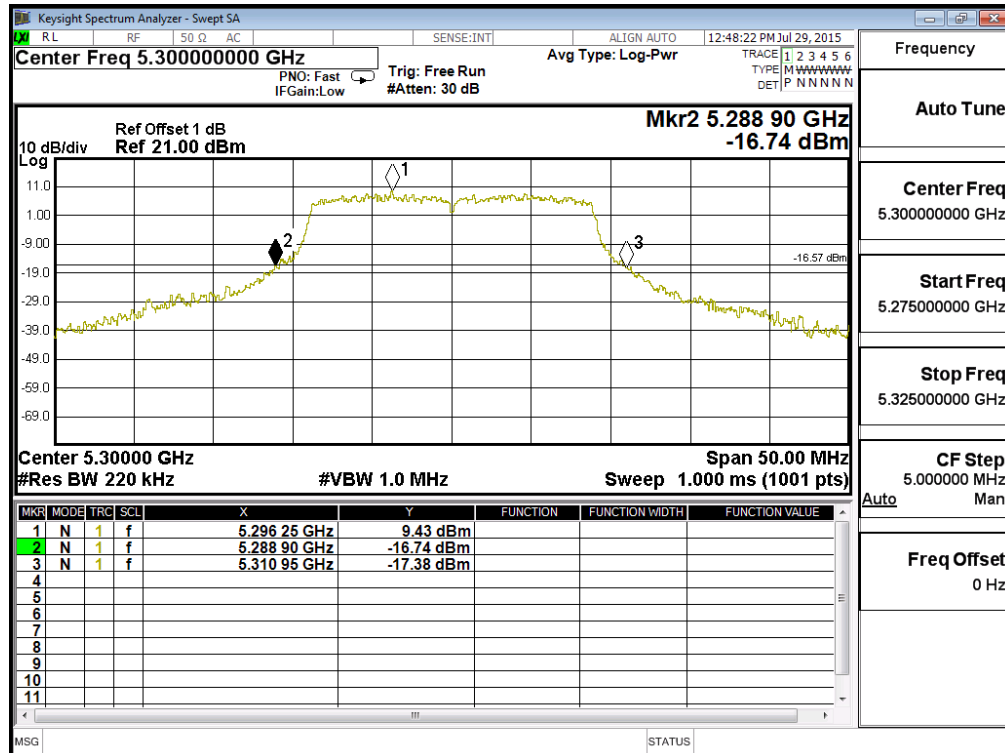


Channel 64 -Chain A

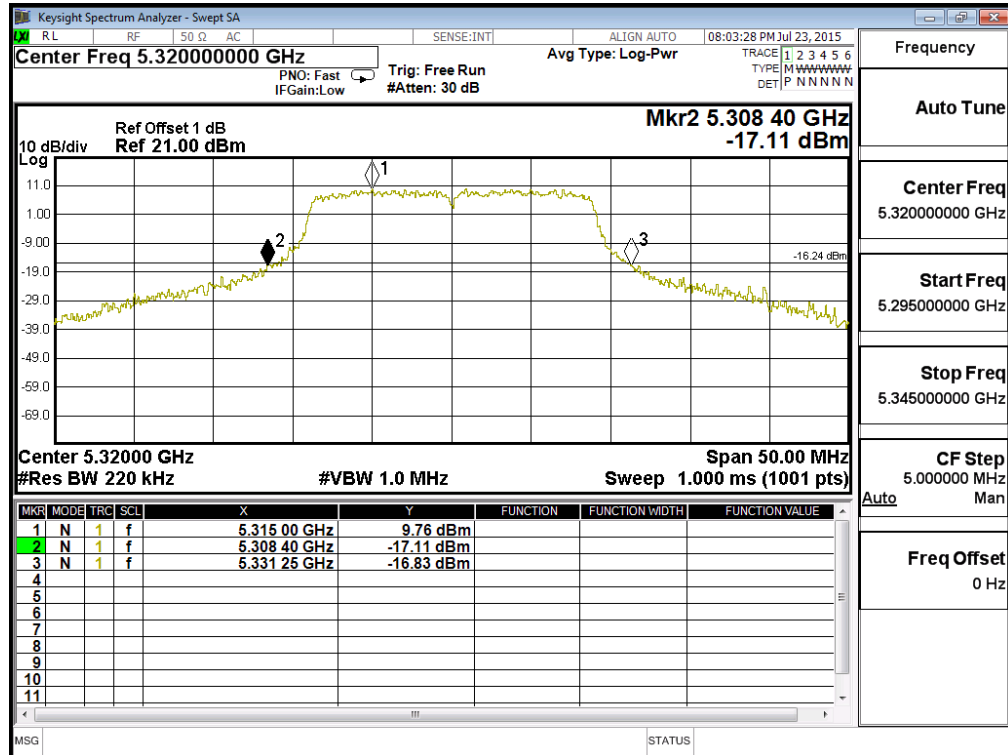


Channel 100 -Chain A

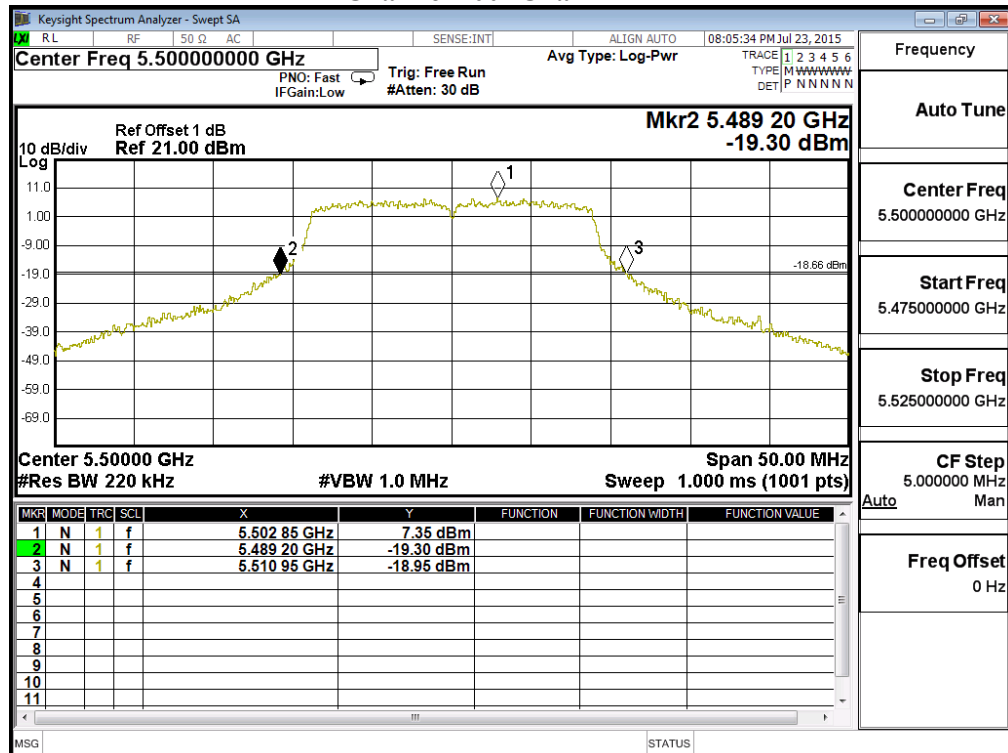

Channel 116 -Chain A

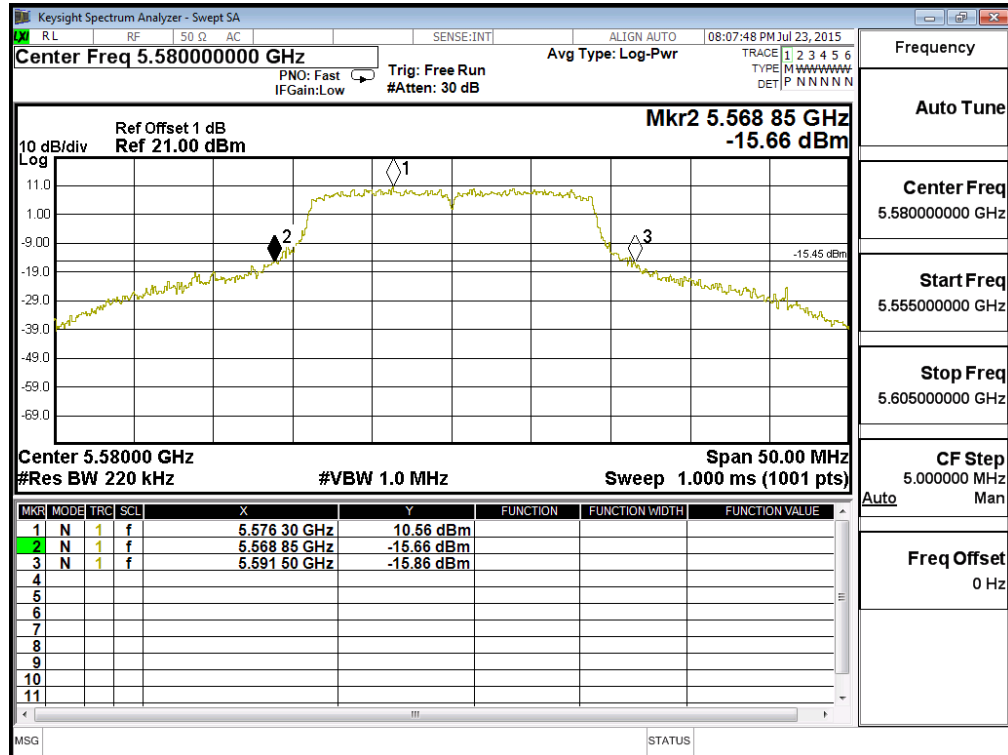

Channel 140 -Chain A

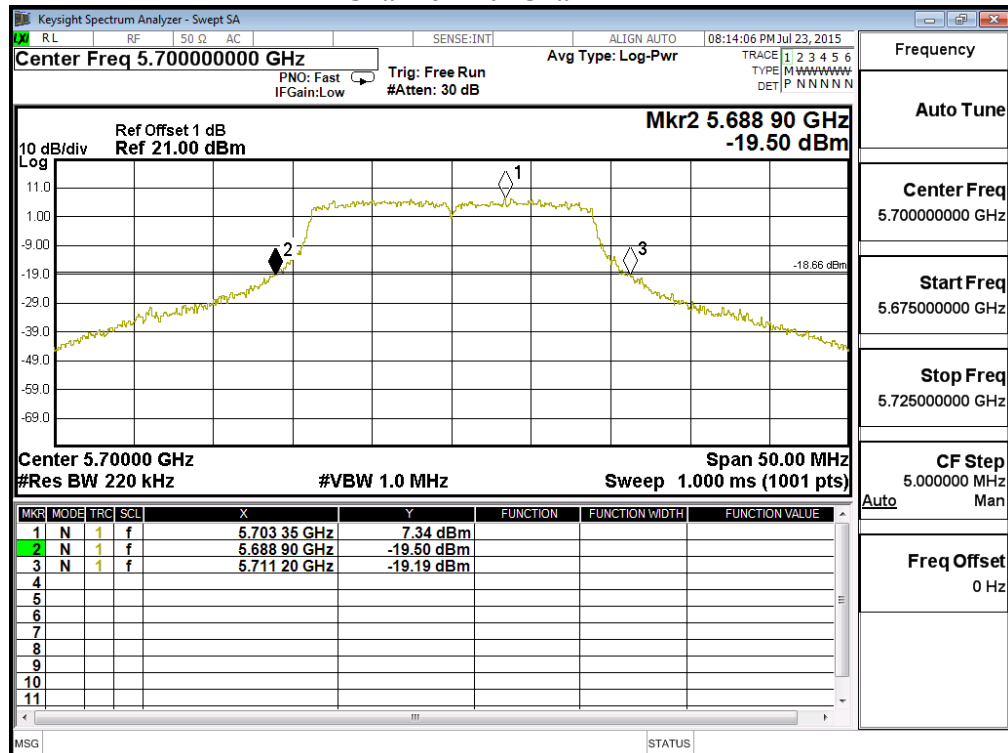

Keysight Spectrum Analyzer - Swept SA

Channel 52 - Channel B

RL RF 50 Ω AC SENSE:INT ALIGN AUTO 11:17:54 PM Jul 23, 2015

Center Freq 5.26000000 GHz PNO: Fast Trg: Free Run Avg Type: Log-Pwr

IF Gain: Low #Atten: 30 dB

TRACE 1 2 3 4 5 6
TYPE M M M M M M M M
DET P N N N N N N

Ref Offset 1 dB
Ref 21.00 dBm

Mkr2 5.249 10 GHz
-16.16 dBm

10 dB/div Log

Center 5.26000 GHz Span 50.00 MHz
#Res BW 220 kHz #VBW 1.0 MHz Sweep 1.000 ms (1001 pts)

Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	5.265 10 GHz	9.99 dBm			
2	N	1	f	5.249 10 GHz	-16.16 dBm			
3	N	1	f	5.270 80 GHz	-17.09 dBm			
4								
5								
6								
7								
8								
9								
10								
11								

MSG STATUS

Frequency

Auto Tune

Center Freq
5.260000000 GHz

Start Freq
5.235000000 GHz

Stop Freq
5.285000000 GHz


CF Step
5.000000 MHz

Auto Mar


Freq Offset
0 Hz

[illegible]


Channel 64 -Chain B

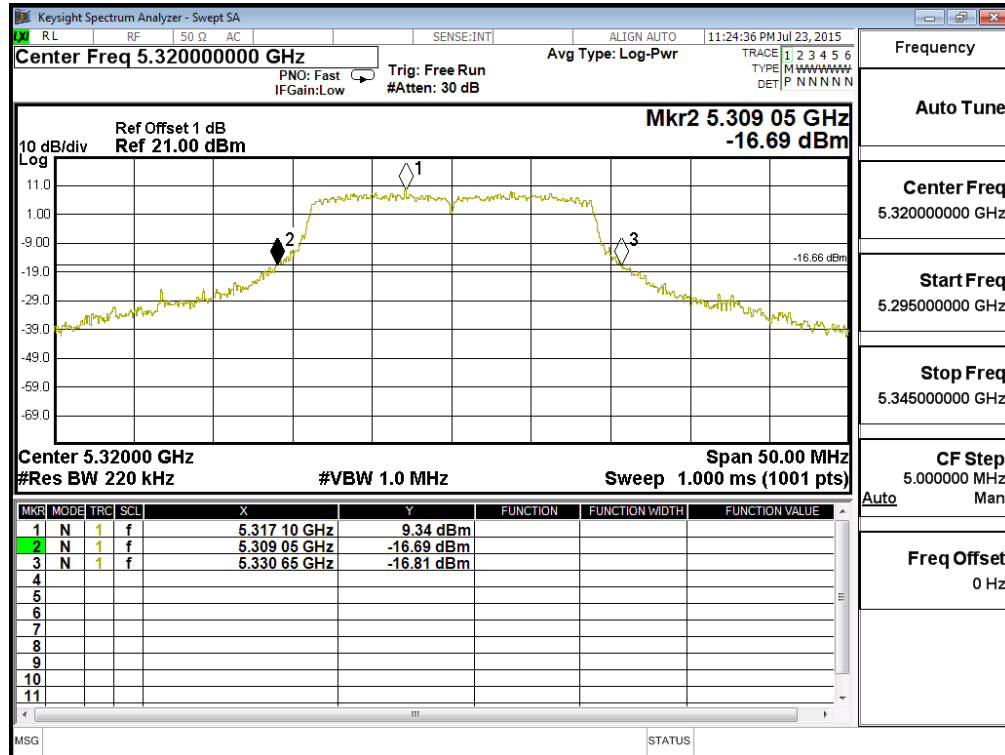


Channel 100 -Chain B

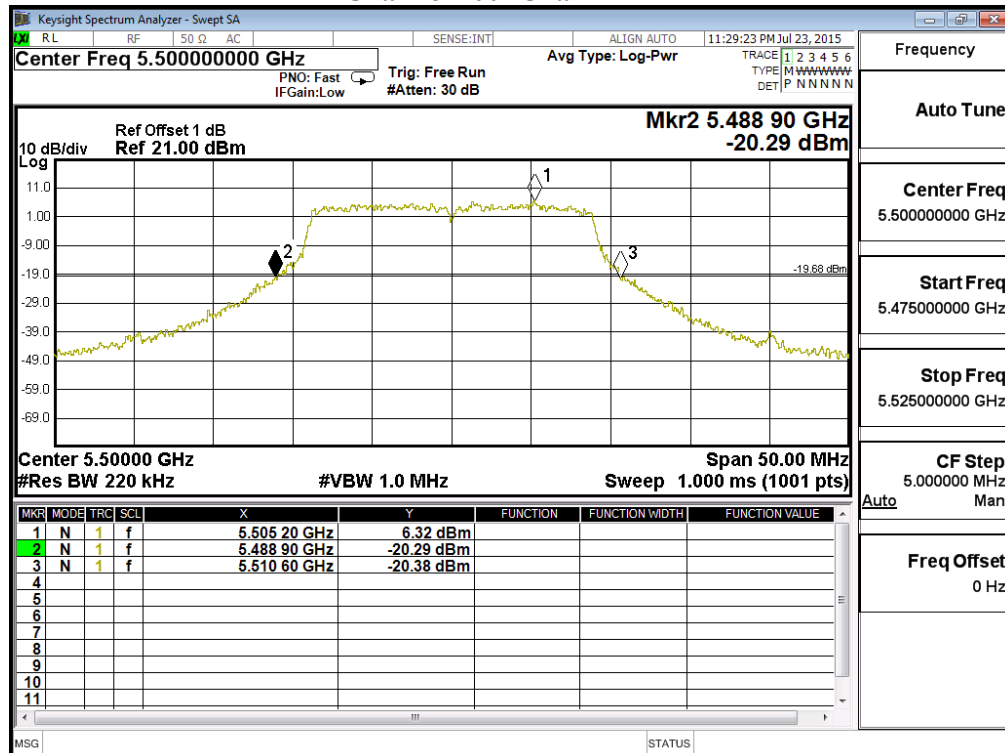

Channel 116 -Chain B

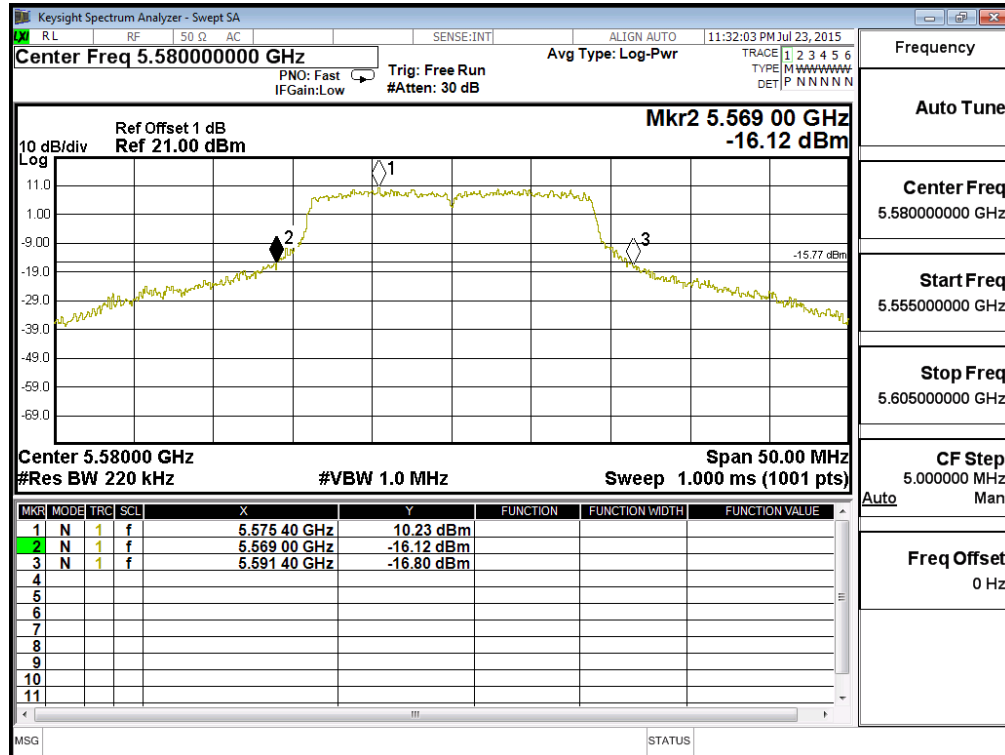

Channel 140 -Chain B

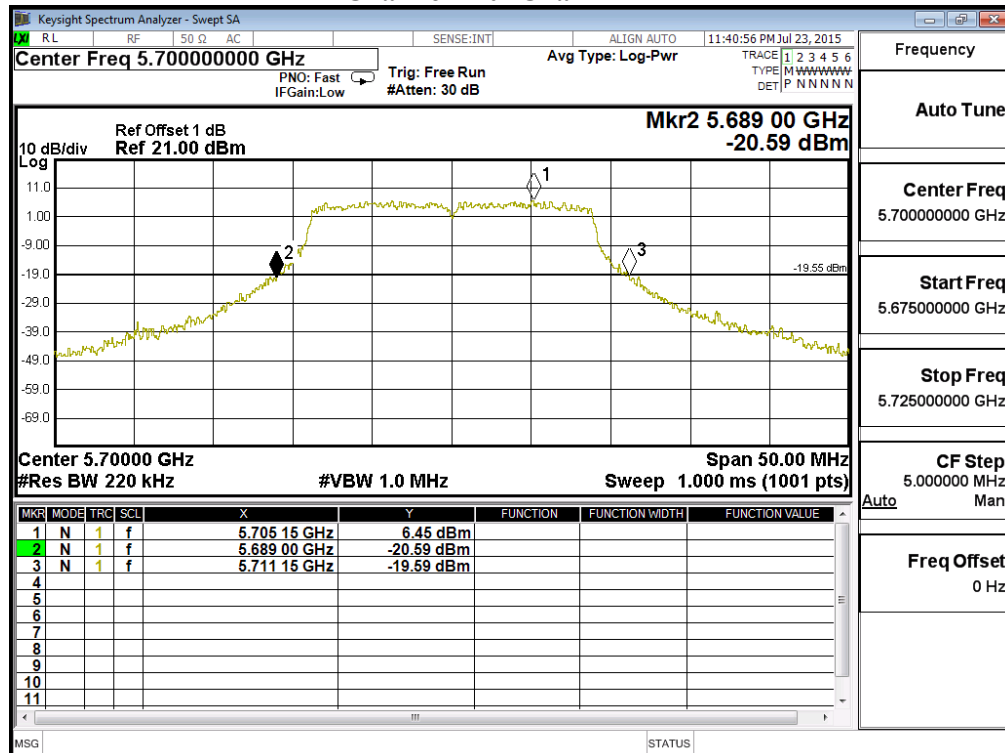

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Maximum conducted output power
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps)

CHAIN A

Cable loss=1dB		Maximum conducted output power								
Channel No.	Frequency (MHz)	Data Rate (Mbps)								Required Limit
		30	60	90	120	180	240	270	300	
		Measurement Level (dBm)								
38	5190	13.12	--	--	--	--	--	--	--	<24dBm
46	5230	15.06	14.9	14.76	14.61	14.48	14.4	14.34	14.27	<24dBm
54	5270	20.5	20.33	20.29	20.04	19.97	19.85	19.74	19.66	<24dBm
62	5310	15.68	--	--	--	--	--	--	--	<24dBm
102	5510	13.92	--	--	--	--	--	--	--	<24dBm
110	5550	20.2	19.89	19.76	19.59	19.52	19.48	19.41	19.36	<24dBm
134	5670	18.72	--	--	--	--	--	--	--	<24dBm
151	5755	15.44	--	--	--	--	--	--	--	<30dBm
159	5795	20.52	20.22	20.19	20.05	19.99	19.82	19.75	19.69	<30dBm

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

CHAIN B

Channel

Cable loss=1dB		Maximum conducted output power								
Channel No.	Frequency (MHz)	Data Rate (Mbps)								Required Limit
		30	60	90	120	180	240	270	300	
		Measurement Level (dBm)								
38	5190	14.45	--	--	--	--	--	--	--	<24dBm
46	5230	15.51	15.38	15.26	15.17	15.01	14.96	14.77	14.69	<24dBm
54	5270	20.64	20.49	20.37	20.26	20.17	20.05	19.89	19.78	<24dBm
62	5310	15.95	--	--	--	--	--	--	--	<24dBm
102	5510	13.82	--	--	--	--	--	--	--	<24dBm
110	5550	20.54	20.37	20.31	20.14	20.05	19.93	19.84	19.73	<24dBm
134	5670	18.28	--	--	--	--	--	--	--	<24dBm
151	5755	12.76	--	--	--	--	--	--	--	<30dBm
159	5795	17.68	17.6	17.48	17.39	17.31	17.1	16.92	16.85	<30dBm

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


(CHAIN A+ B)

Channel Number	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
38	5190	--	13.12	14.45	16.85	30	--
46	5230	--	15.06	15.51	18.30	30	--
54	5270	43.300	20.50	20.64	23.58	24	27.36
62	5310	43.000	15.68	15.95	18.83	24	27.33
102	5510	43.800	13.92	13.82	16.88	24	27.41
110	5550	46.400	20.20	20.54	23.38	24	27.67
134	5670	44.900	18.72	18.28	21.52	24	27.52
151	5755	--	15.44	12.76	17.31	30	--
159	5795	--	20.52	17.68	22.34	30	--


Note:

1. Power Output Value =Reading value on average power meter + cable loss
2. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
3. 26 dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.


26dBc Occupied Bandwidth: Channel 54 – Chain A

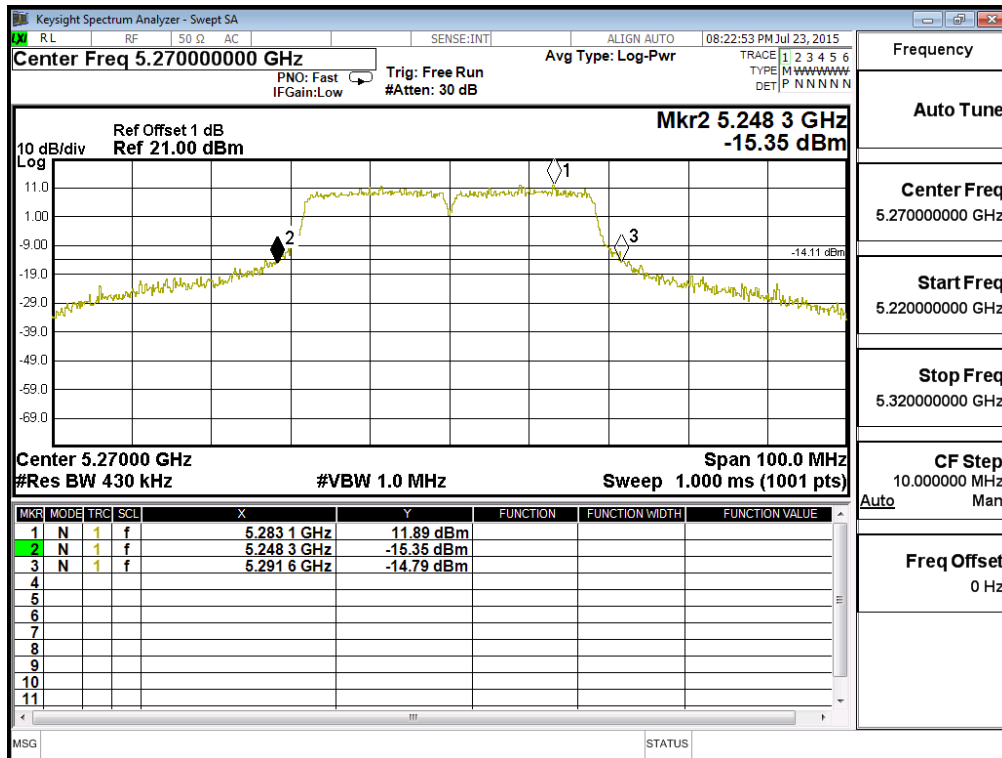


Channel 62 – Chain A

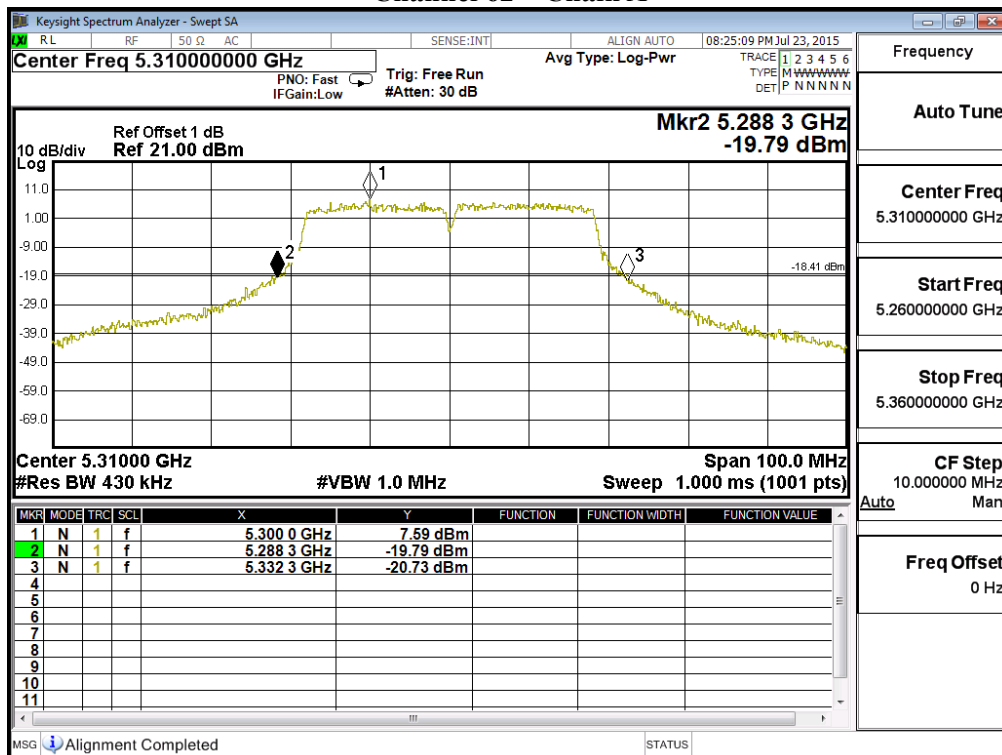


Channel 102 – Chain A

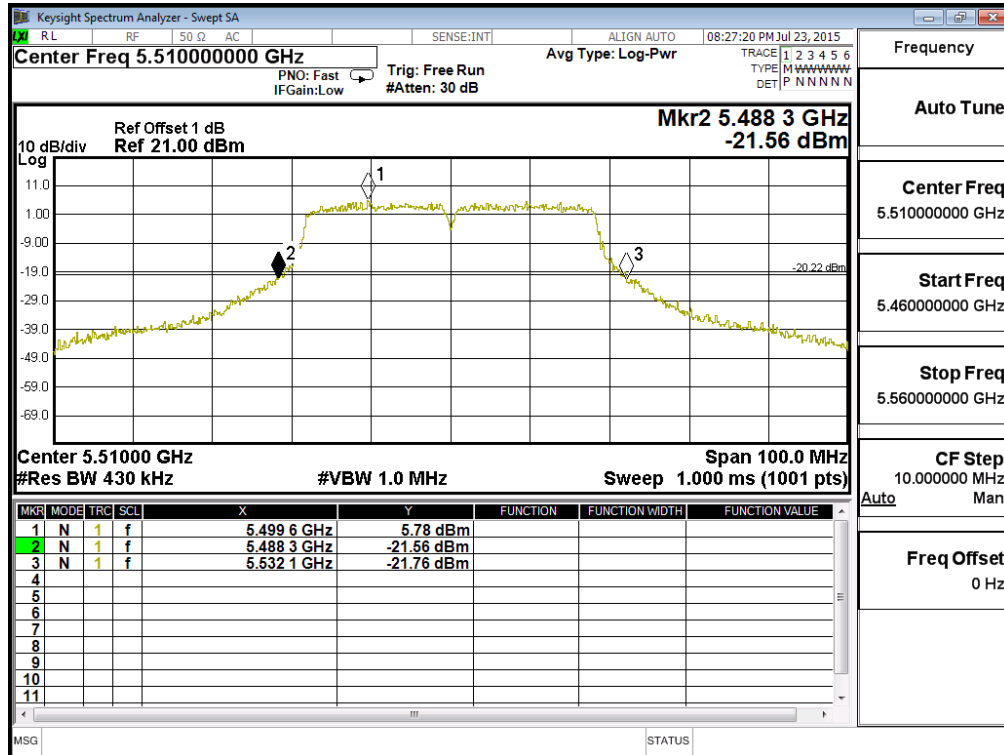


Channel 110 – Chain A

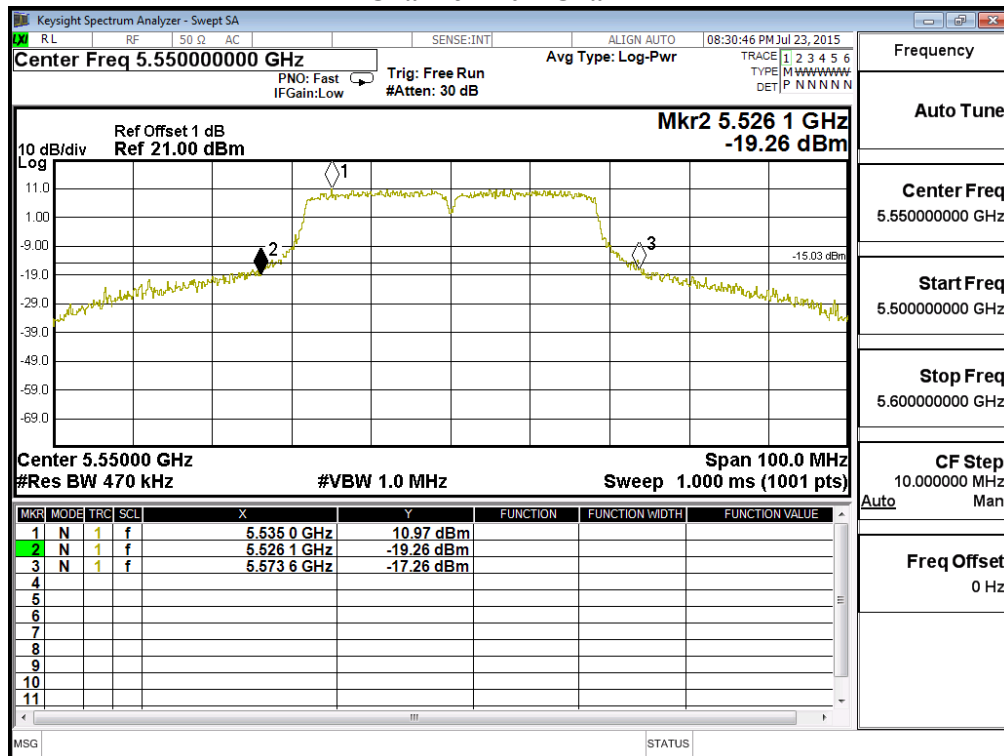


Channel 134 – Chain A

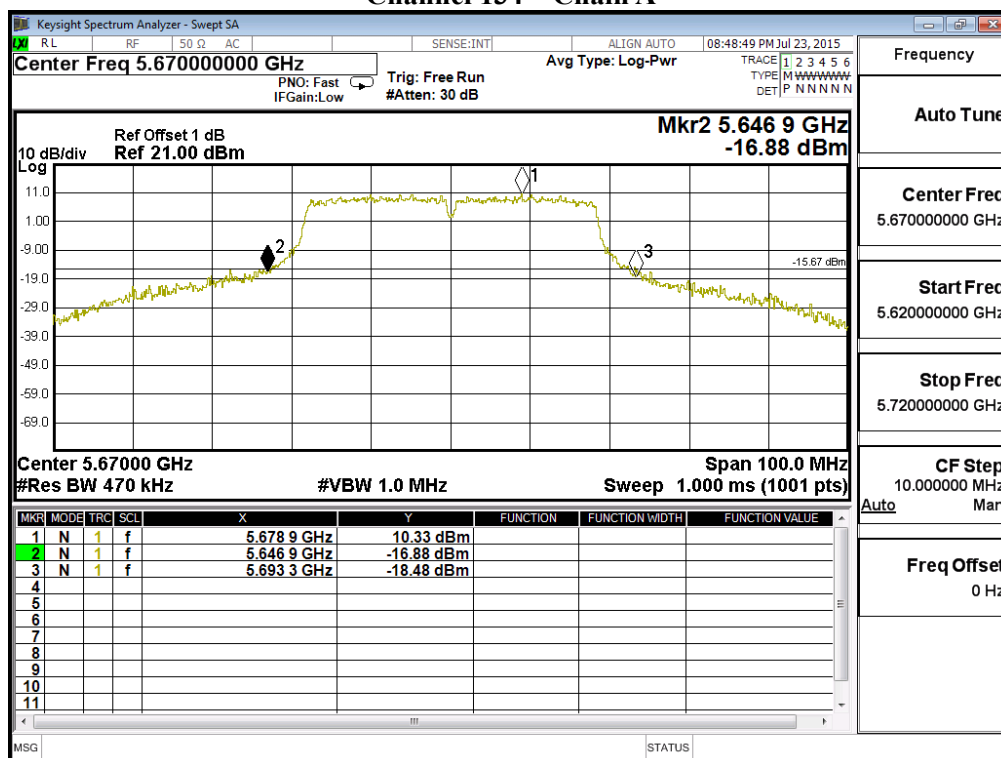


26dBc Occupied Bandwidth: Channel 54 – Chain B

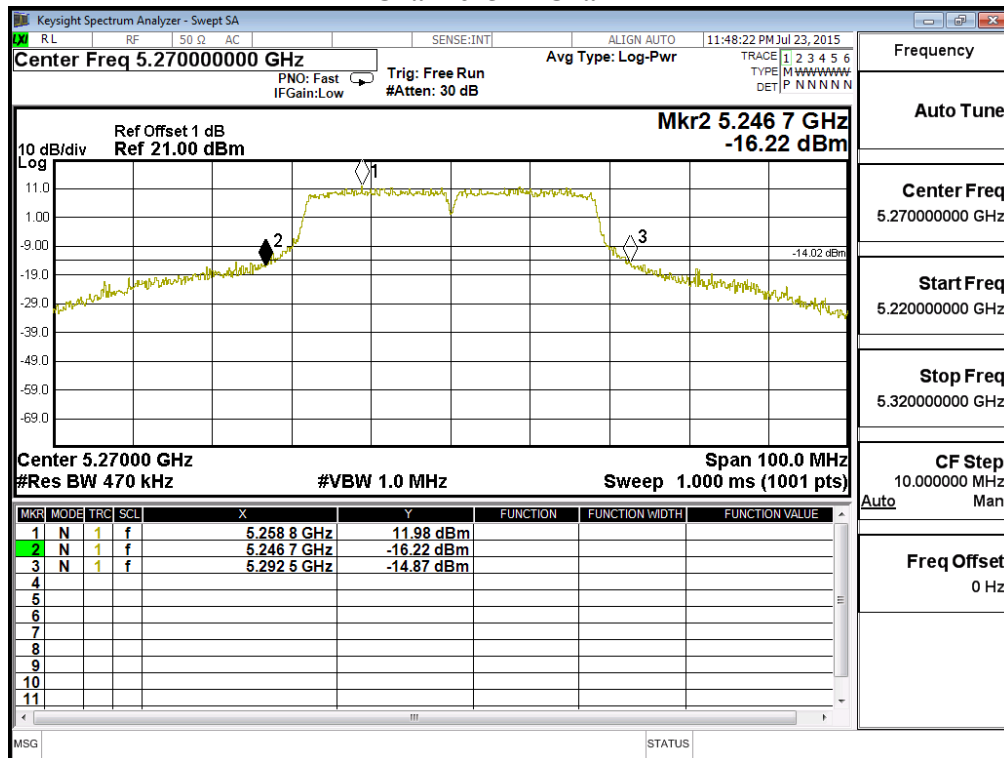


Channel 62 – Chain B

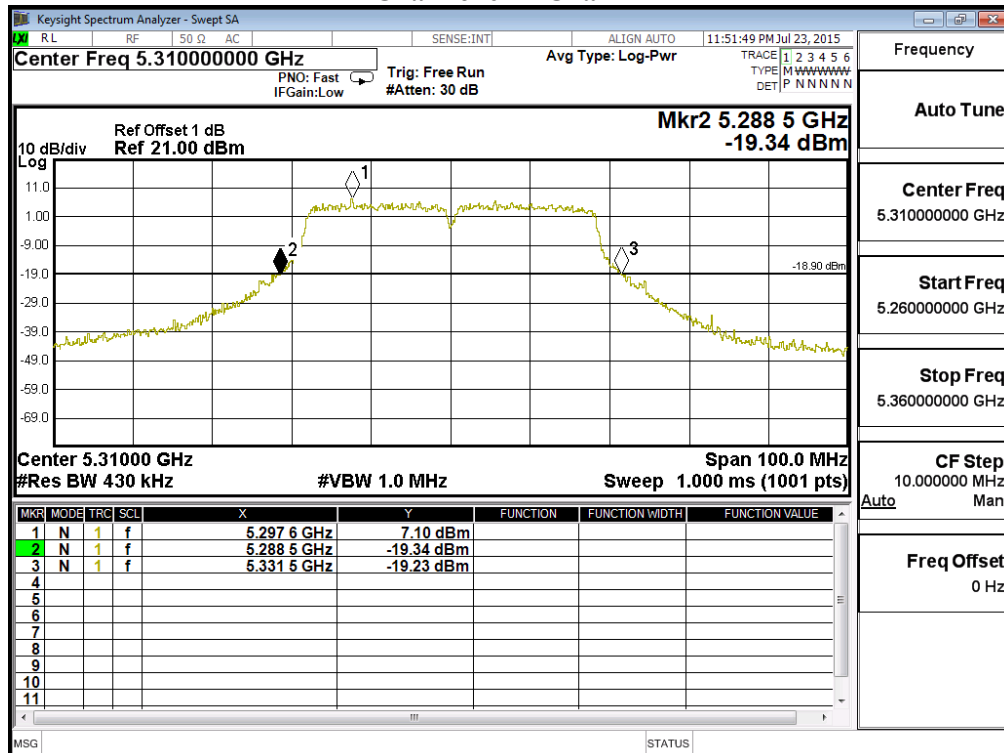


Channel 102 – Chain B

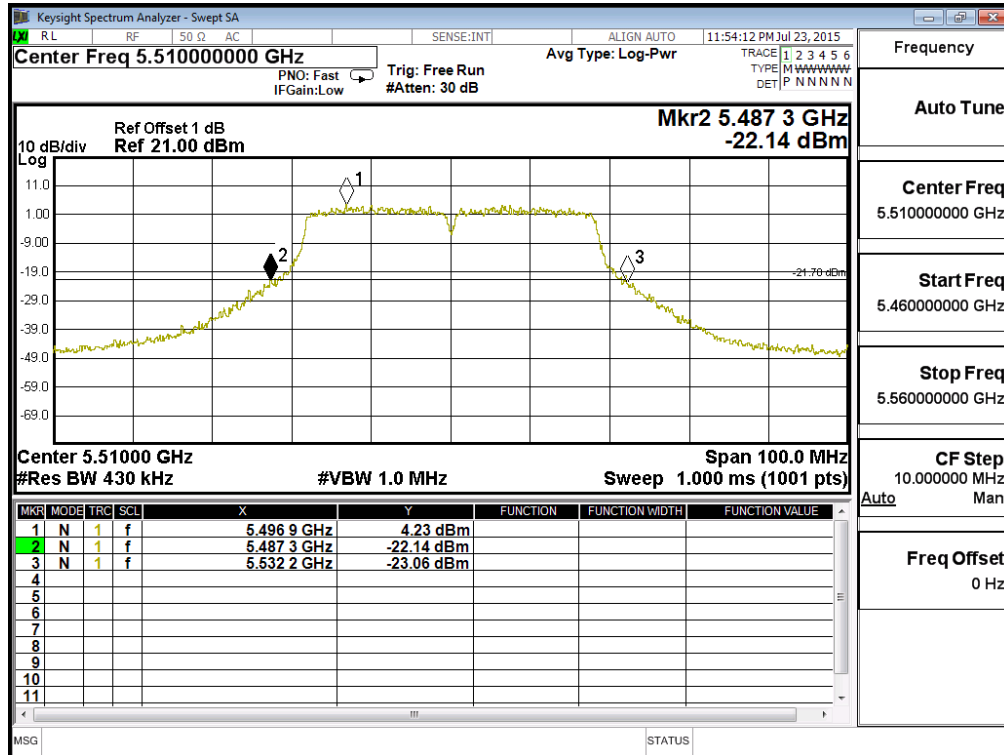

Channel 110 – Chain B

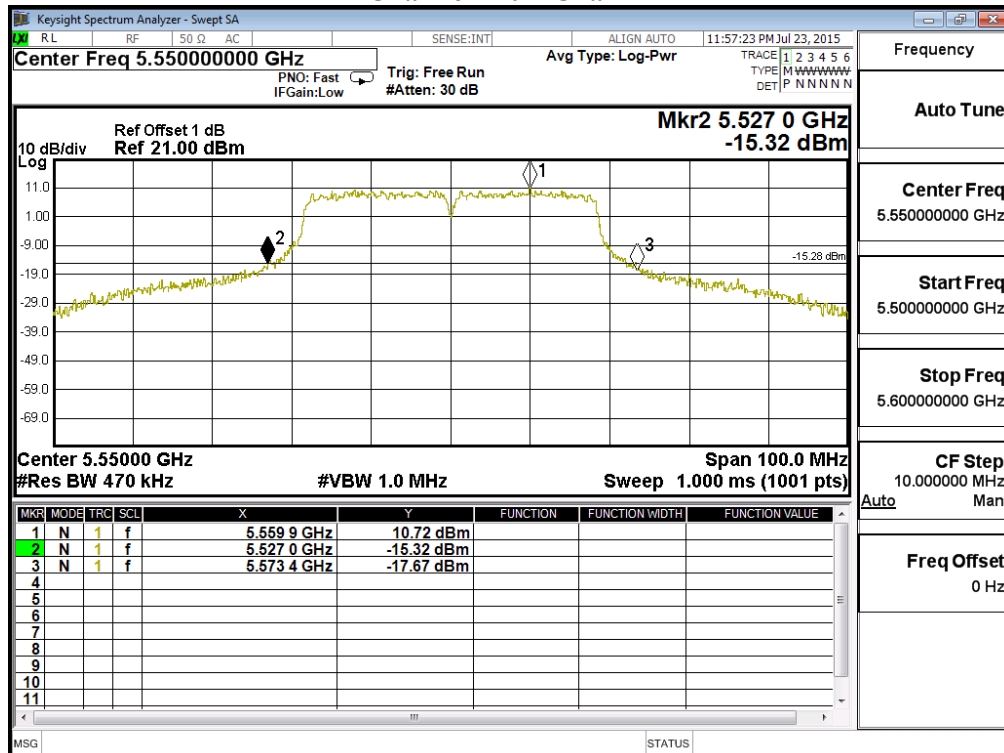

Channel 134 – Chain B

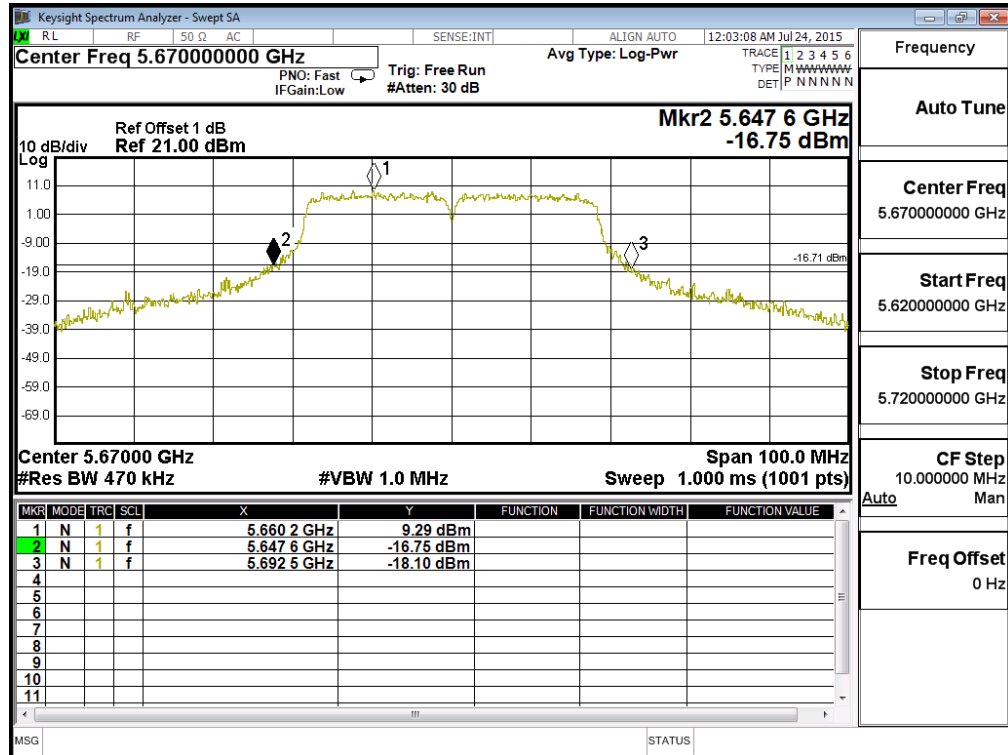

4. Peak Power Spectral Density


4.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr, 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

4.2. Test Setup

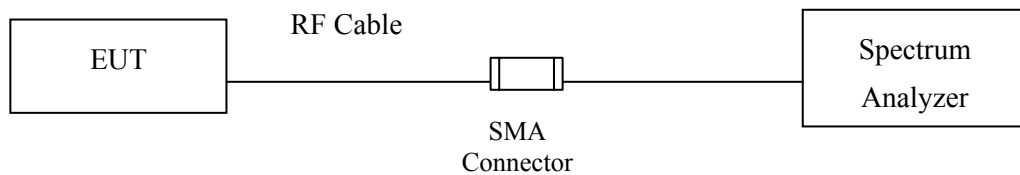

4.3. Limits

- (1) For the band 5.15-5.25 GHz,
 - (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
 - (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
 - (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the

equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.+

- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point UNII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.4. Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

The Peak Power Spectral Density using KDB 789033 section F) procedure, Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer.

SA-1 method is selected to run the test.

For the band 5.725-5.85 GHz, Scale the observed power level to an equivalent value in 500 kHz by adjusting (increase) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{ kHz}/100\text{ kHz}) = 6.98\text{ dB}$.

4.5. Uncertainty

$\pm 1.27\text{ dB}$


4.6. Test Result of Peak Power Spectral Density

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Peak Power Spectral Density
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps)


Channel Number	Frequency (MHz)	Data Rate (Mbps)	Measurement Level (dBm)	Required Limit (dBm)	Result
36	5180	6	5.704	17	Pass
44	5220	6	5.530	17	Pass
48	5240	6	5.868	17	Pass
52	5260	6	10.350	11	Pass
60	5300	6	9.970	11	Pass
64	5320	6	6.670	11	Pass
100	5500	6	5.610	11	Pass
116	5580	6	10.620	11	Pass
140	5700	6	3.850	11	Pass

Channel Number	Frequency (MHz)	Data Rate (Mbps)	PPSD (dBm)	BWCF (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
149	5745	6	-4.230	6.980	2.750	<30	Pass
157	5785	6	0.710	6.980	7.690	<30	Pass
165	5825	6	-3.020	6.980	3.960	<30	Pass


Channel 36:

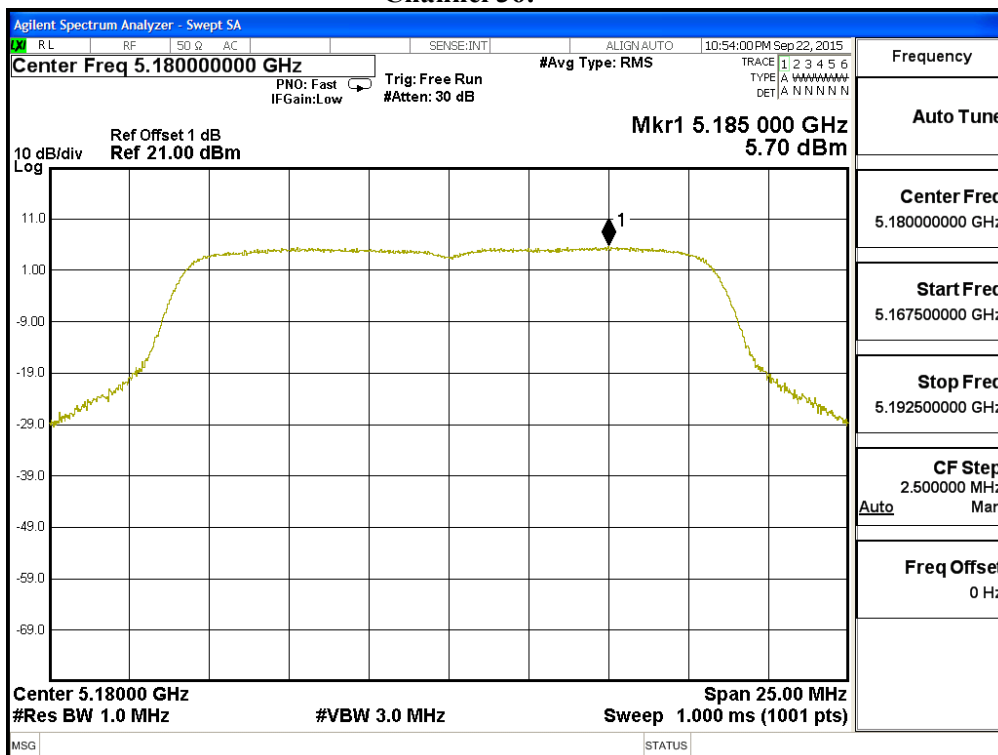


Channel 44:


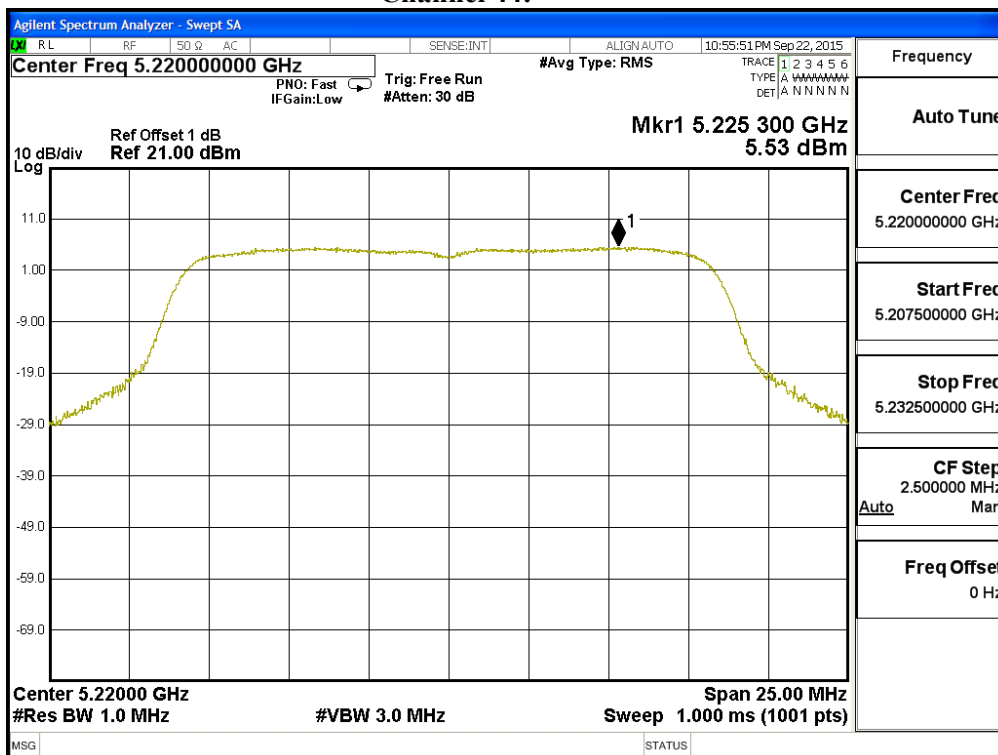


Channel 48:

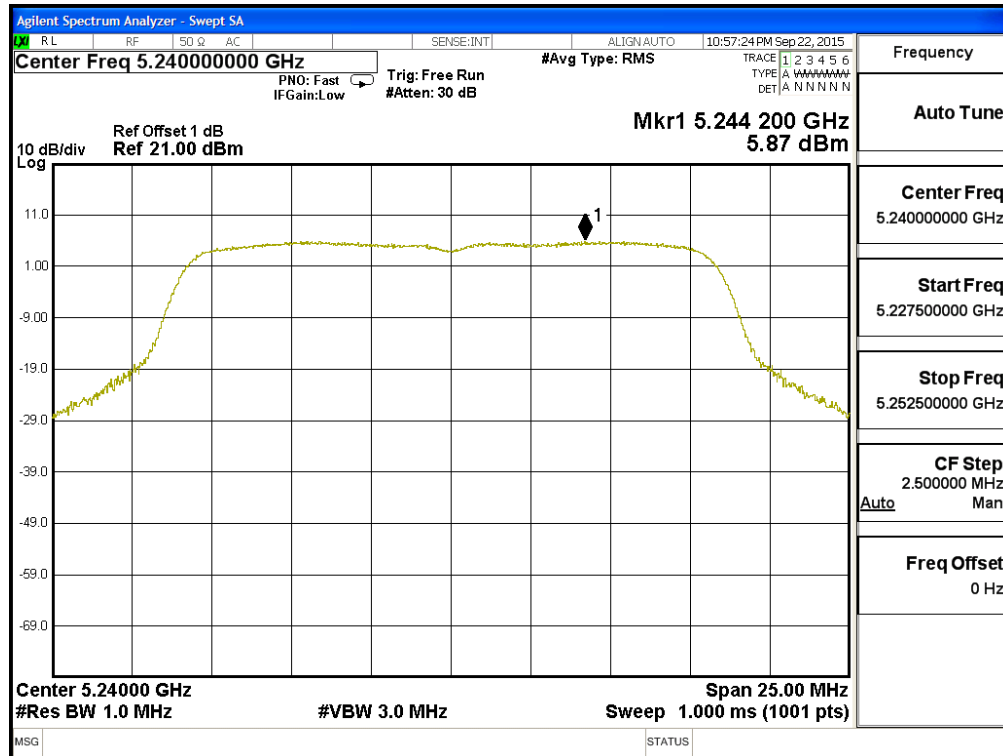


Channel 52:

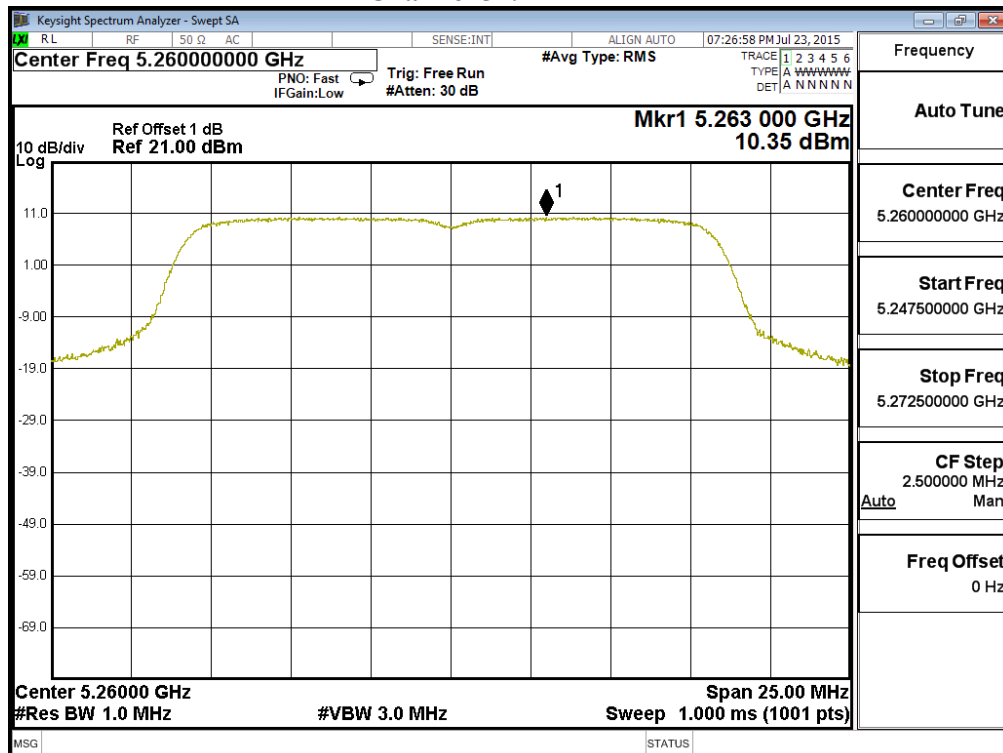


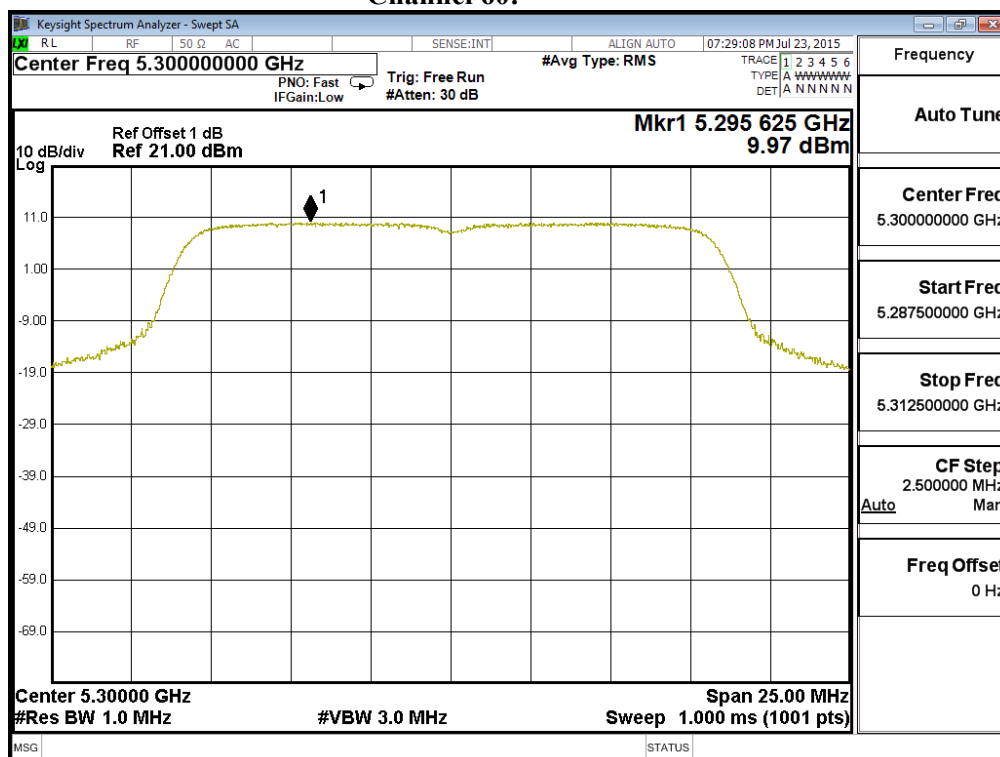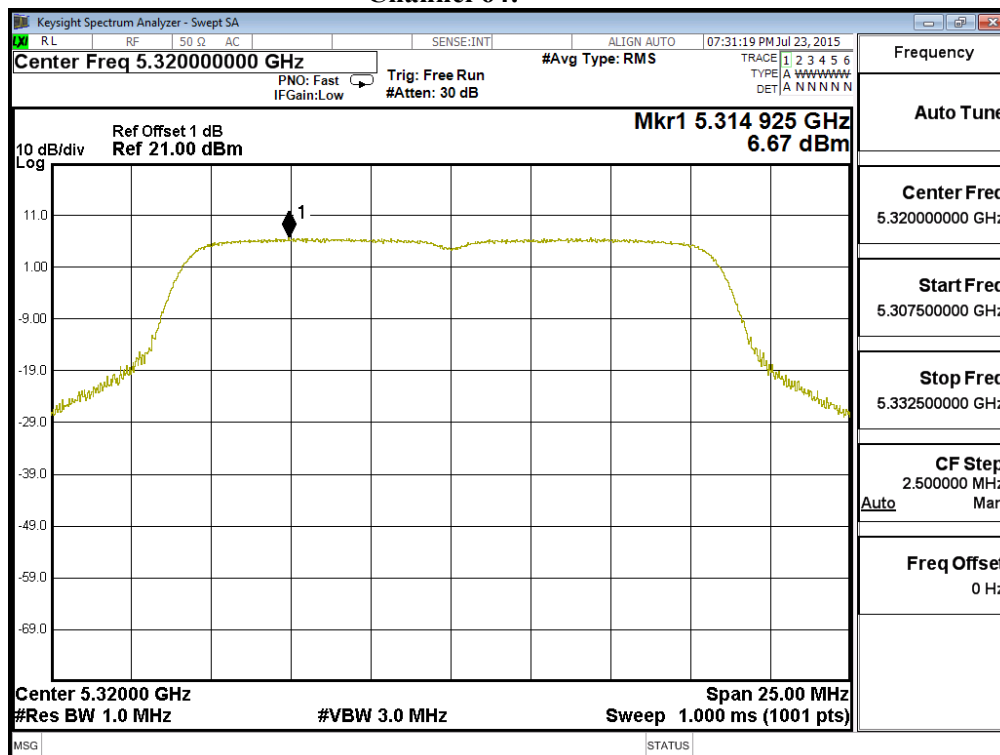


Channel 100:

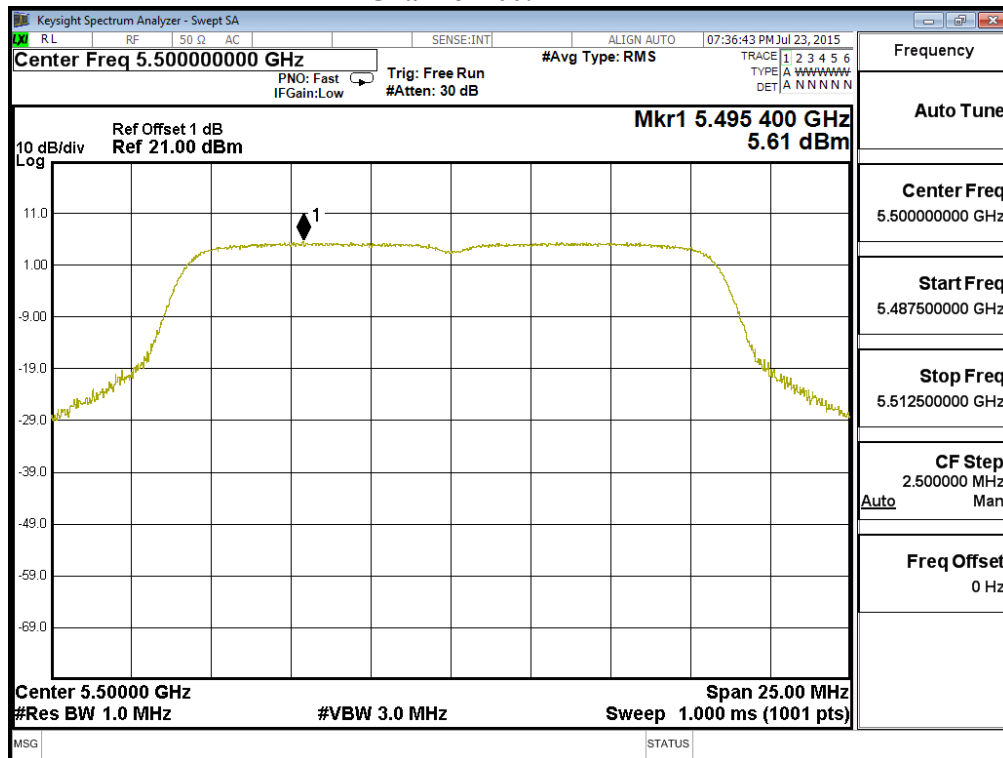


Channel 116:

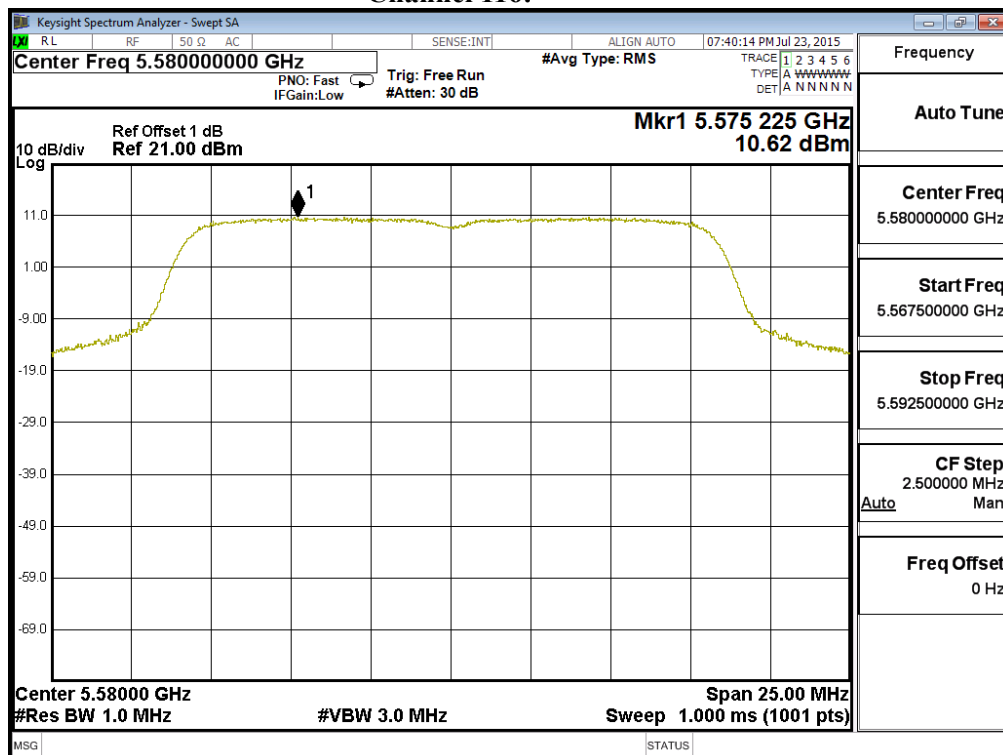


Channel 140:

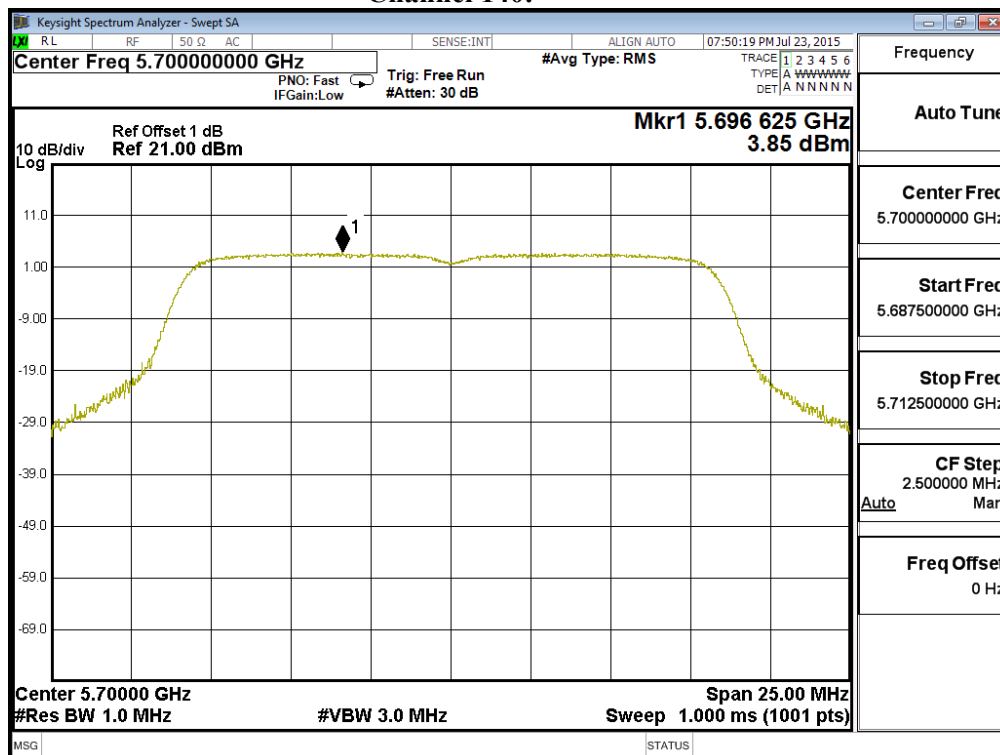


Channel 149

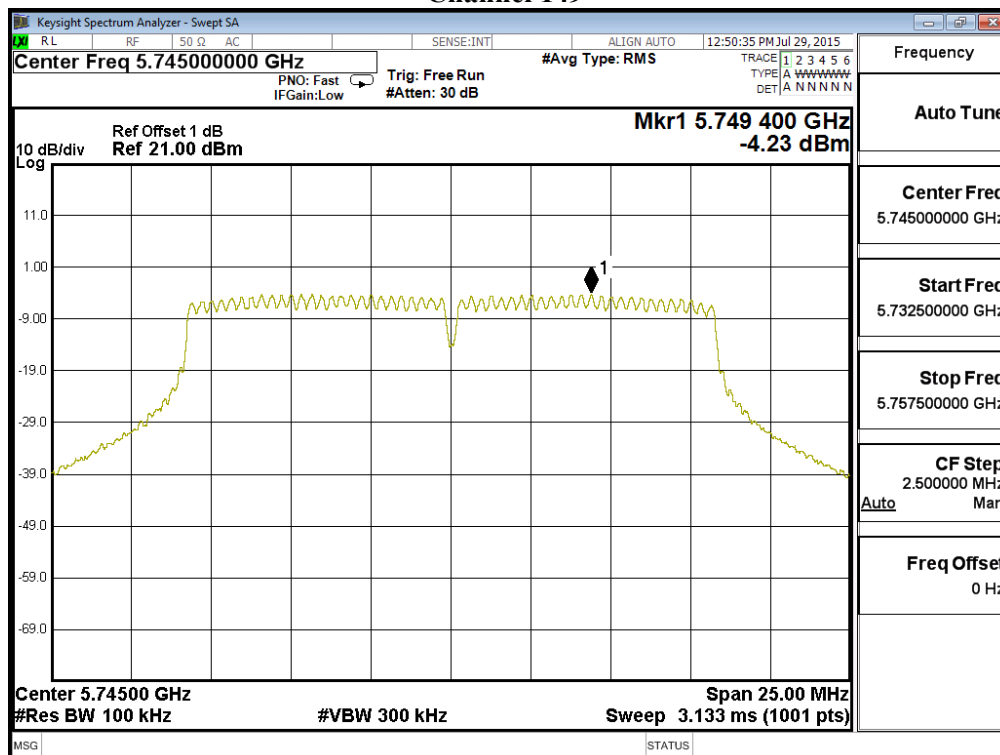

Channel 157

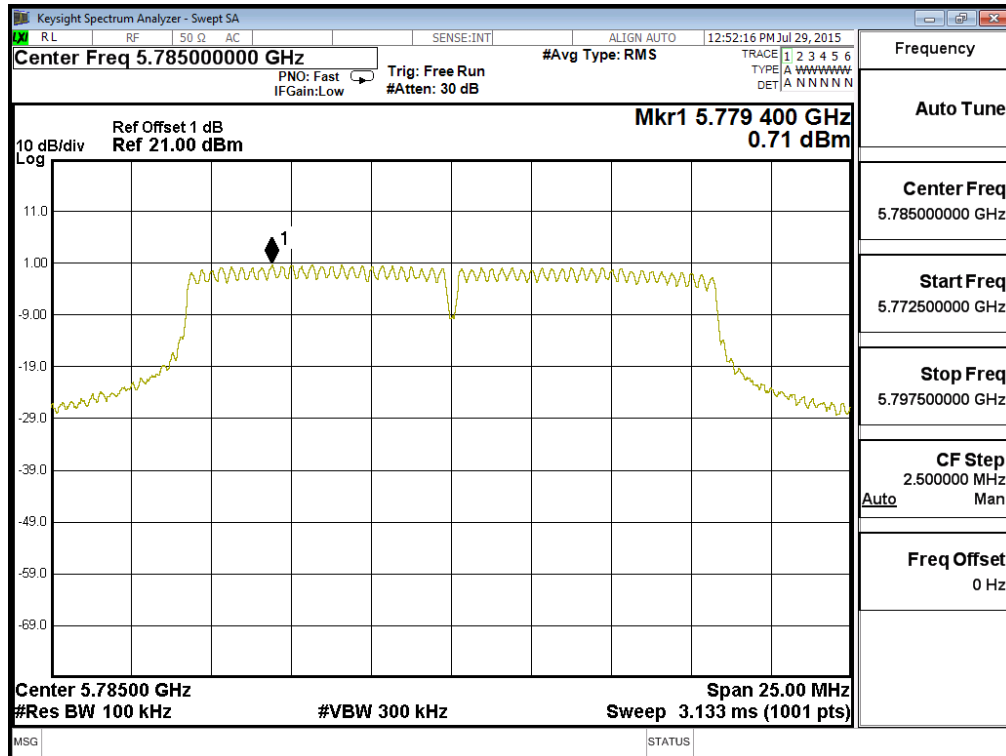

Channel 165

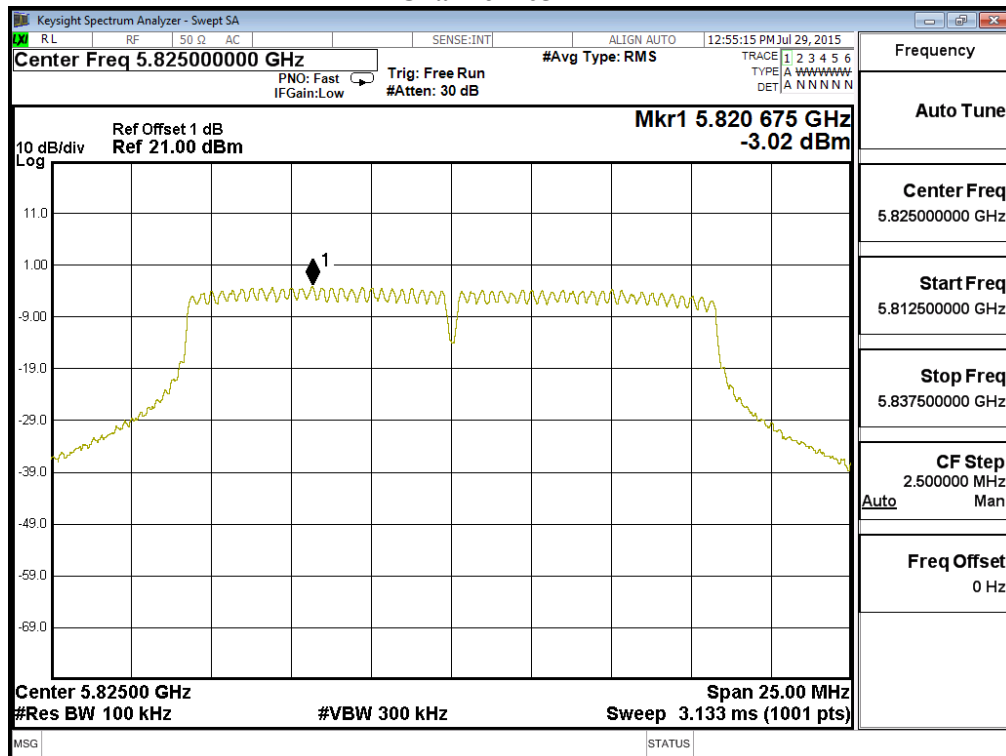


Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Peak Power Spectral Density
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps)

Channel Number	Frequency (MHz)	Chain	PPSD (dBm)	Total PSD (dBm) ¹	Required Limit (dBm)	Result
36	5180	A	0.962	3.972	17	Pass
		B	0.316	3.326	17	Pass
44	5220	A	1.559	4.569	17	Pass
		B	0.067	3.077	17	Pass
48	5240	A	2.183	5.193	17	Pass
		B	1.422	4.432	17	Pass
52	5260	A	7.910	10.920	11	Pass
		B	7.250	10.260	11	Pass
60	5300	A	6.310	9.320	11	Pass
		B	4.860	7.870	11	Pass
64	5320	A	7.740	10.750	11	Pass
		B	6.280	9.290	11	Pass
100	5500	A	4.800	7.810	11	Pass
		B	3.720	6.730	11	Pass
116	5580	A	7.820	10.830	11	Pass
		B	7.590	10.600	11	Pass
140	5700	A	5.110	8.120	11	Pass
		B	4.320	7.330	11	Pass


Channel Number	Frequency (MHz)	Chain	PPSD (dBm)	BWCF (dB)	Total PSD (dBm) ¹	Required Limit (dBm)	Result
149	5745	A	-1.610	6.980	8.380	<30	Pass
		B	-5.370	6.980	4.620	<30	Pass
157	5785	A	0.020	6.980	10.010	<30	Pass
		B	-4.580	6.980	5.410	<30	Pass
165	5825	A	0.130	6.980	10.120	<30	Pass
		B	-4.060	6.980	5.930	<30	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.


Channel 36 – Chain A

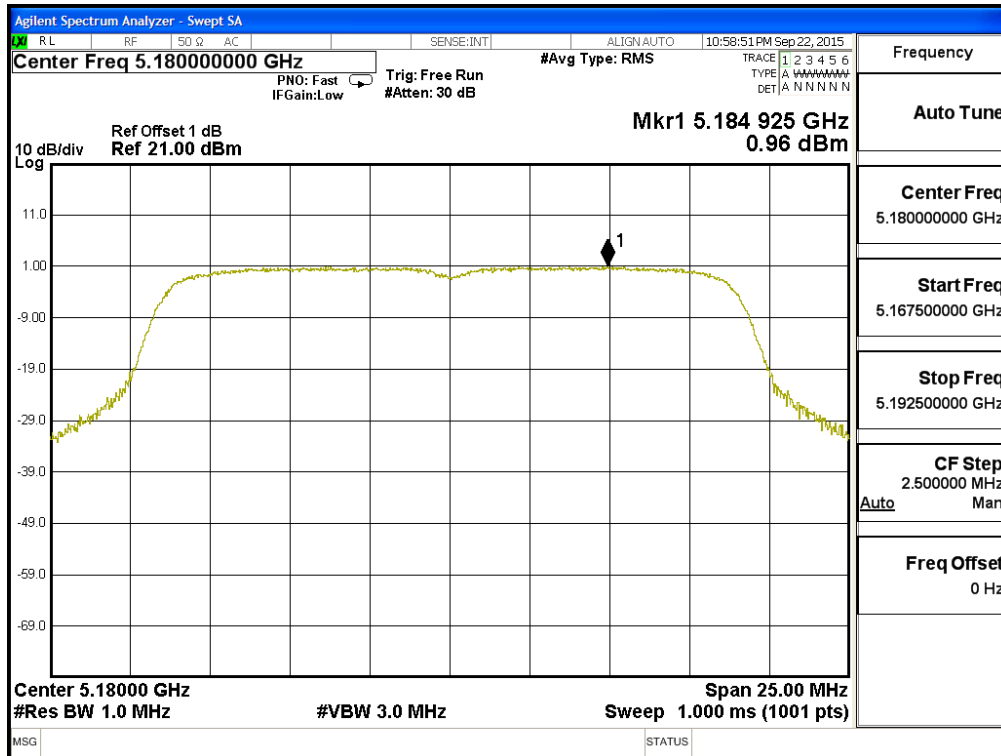


Channel 44 – Chain A

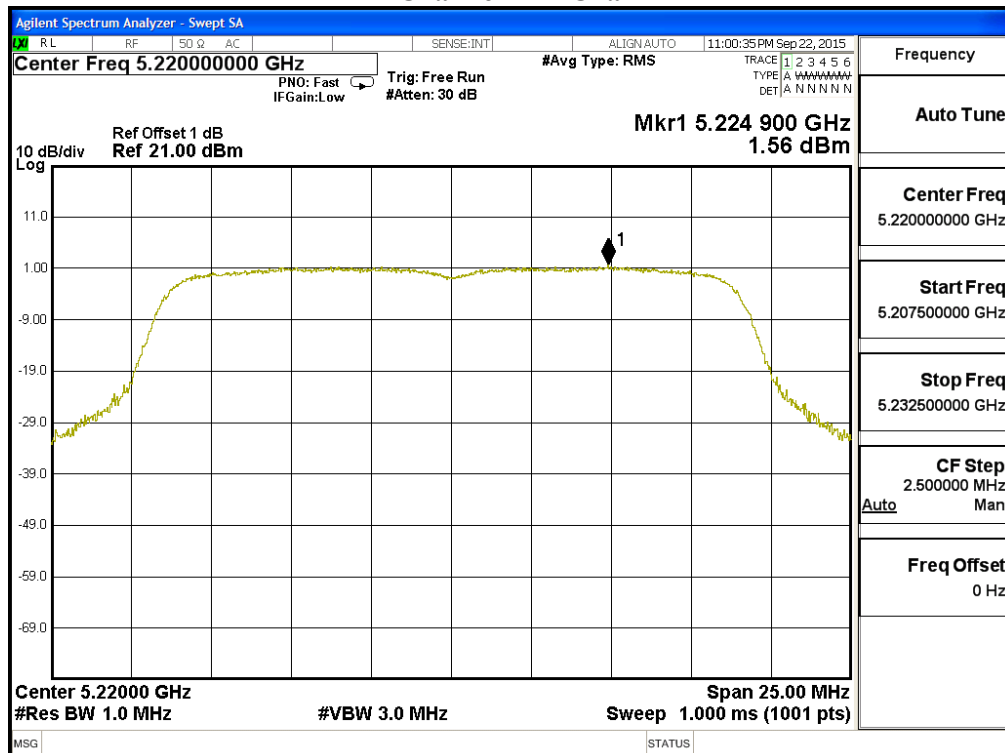


Channel 48 – Chain A

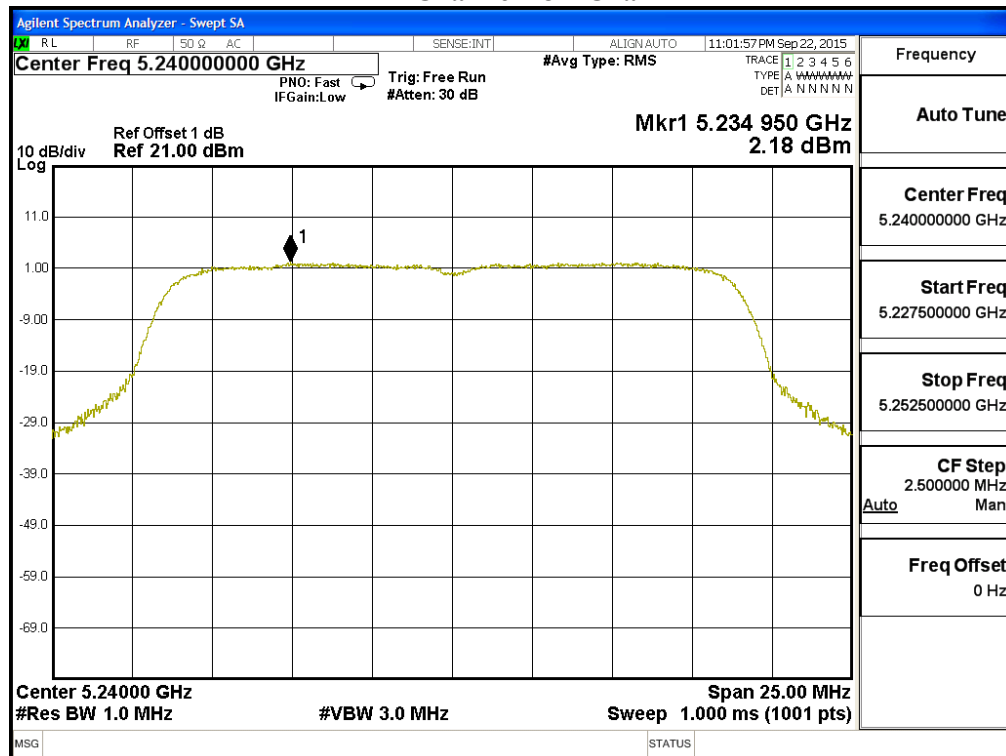


Channel 52 – Chain A

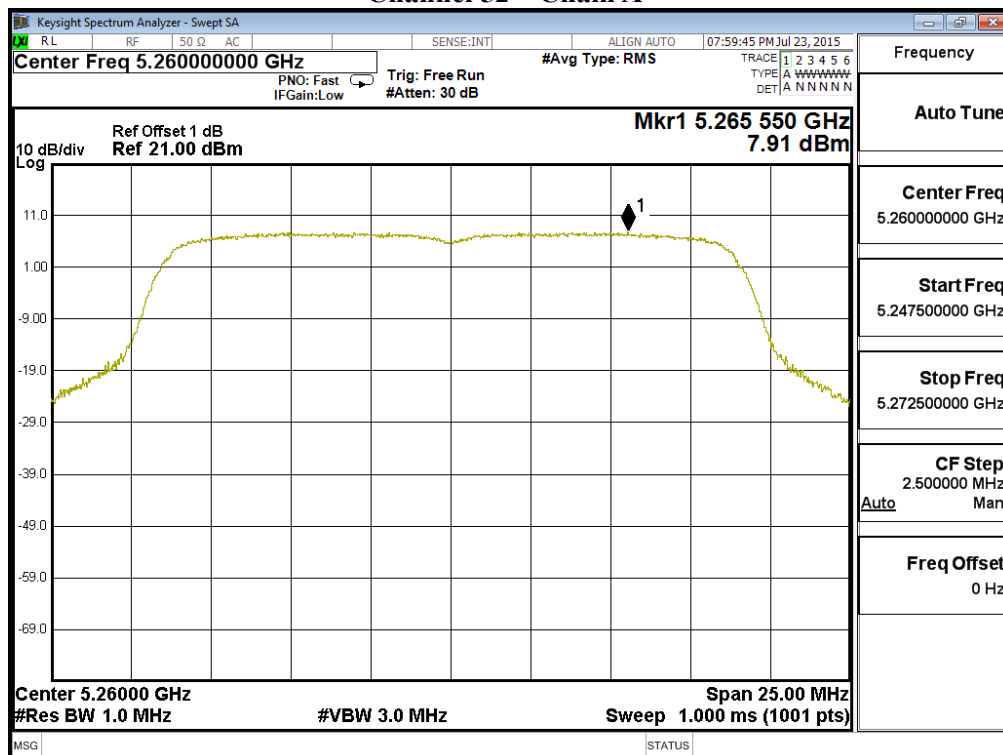


Channel 60 – Chain A

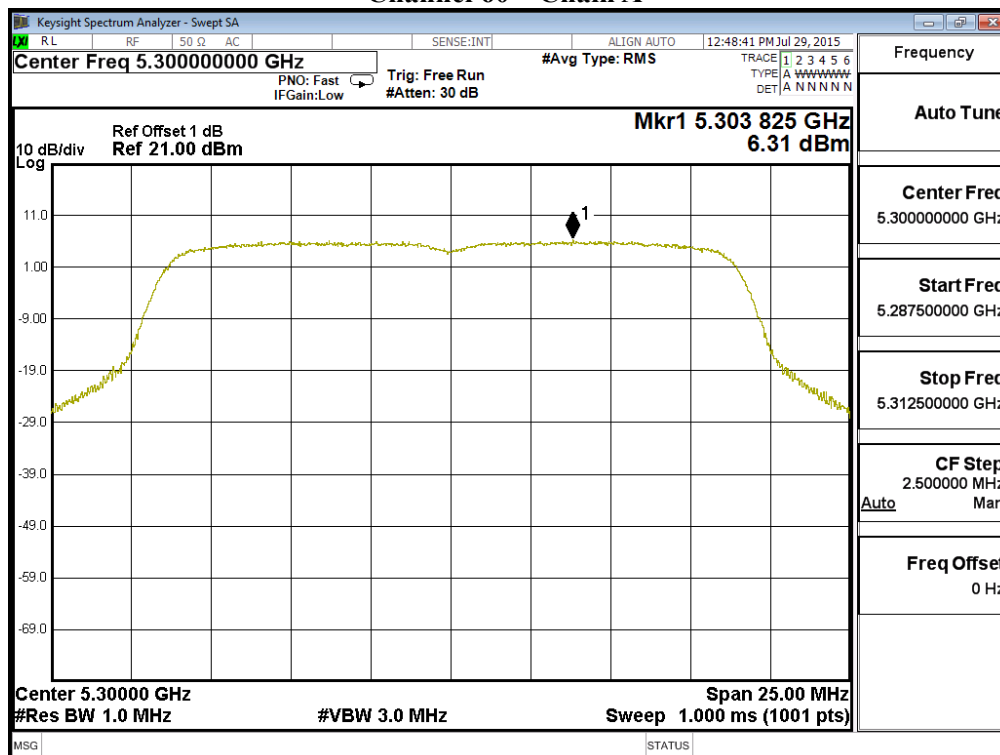


Channel 64 – Chain A

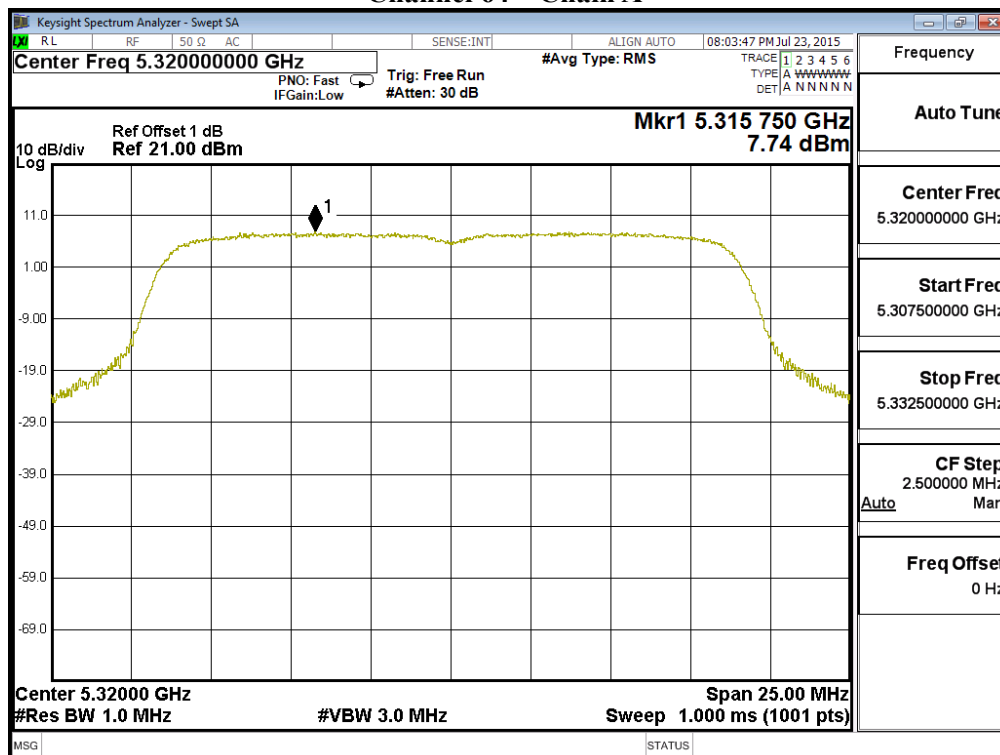


Channel 100 – Chain A

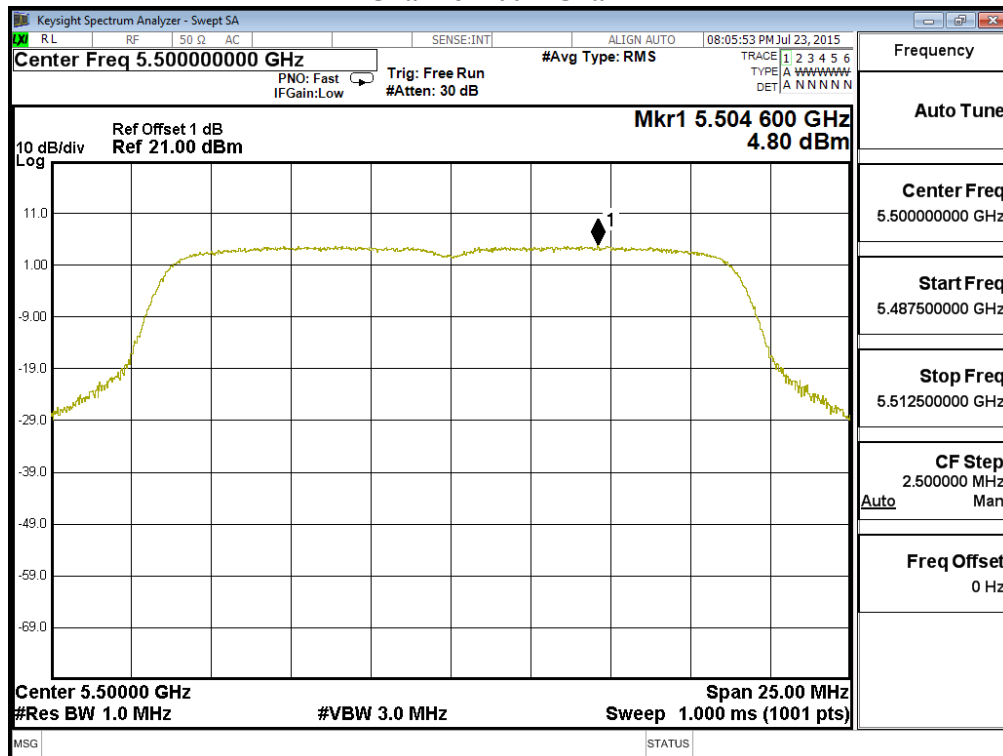


Channel 116 – Chain A

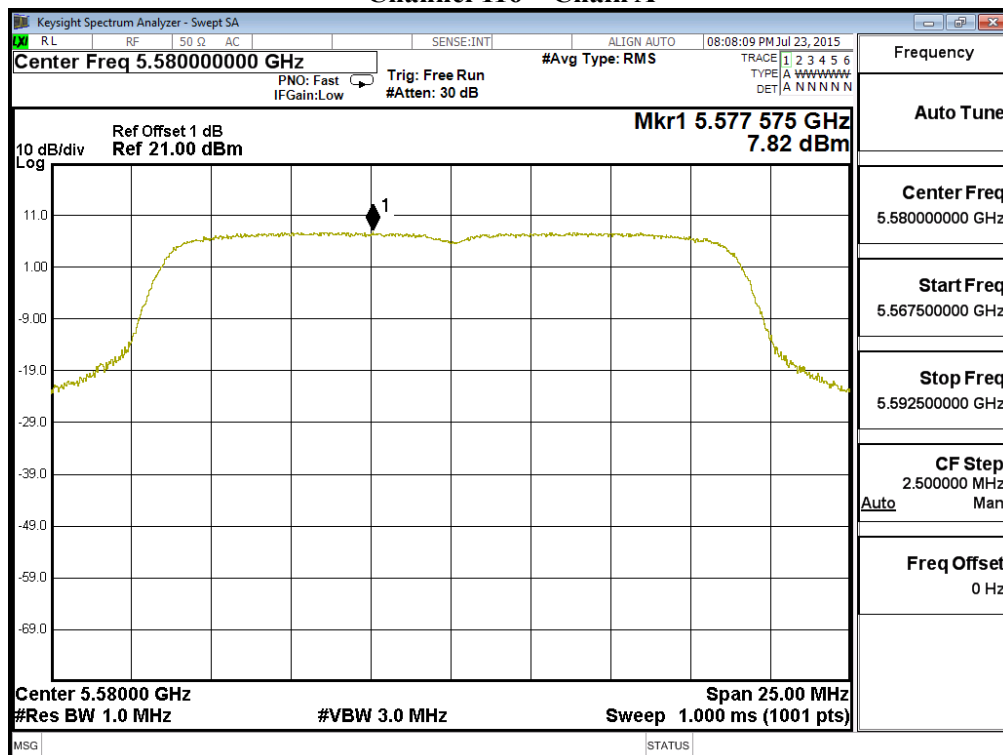


Channel 140 – Chain A

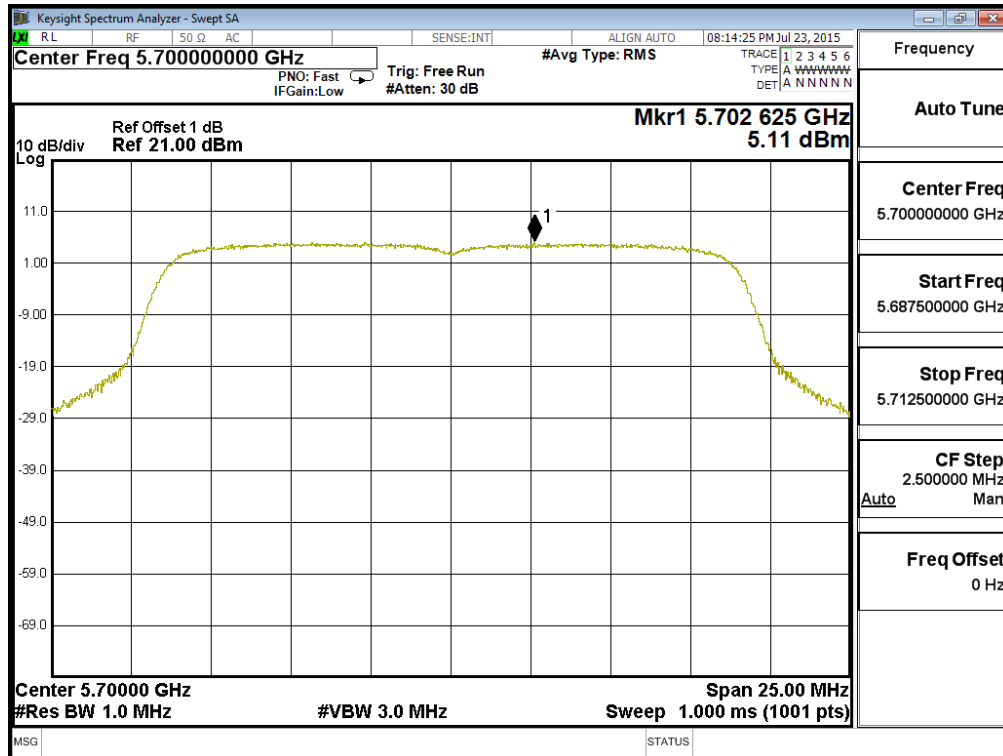


.Channel 149 – Chain A

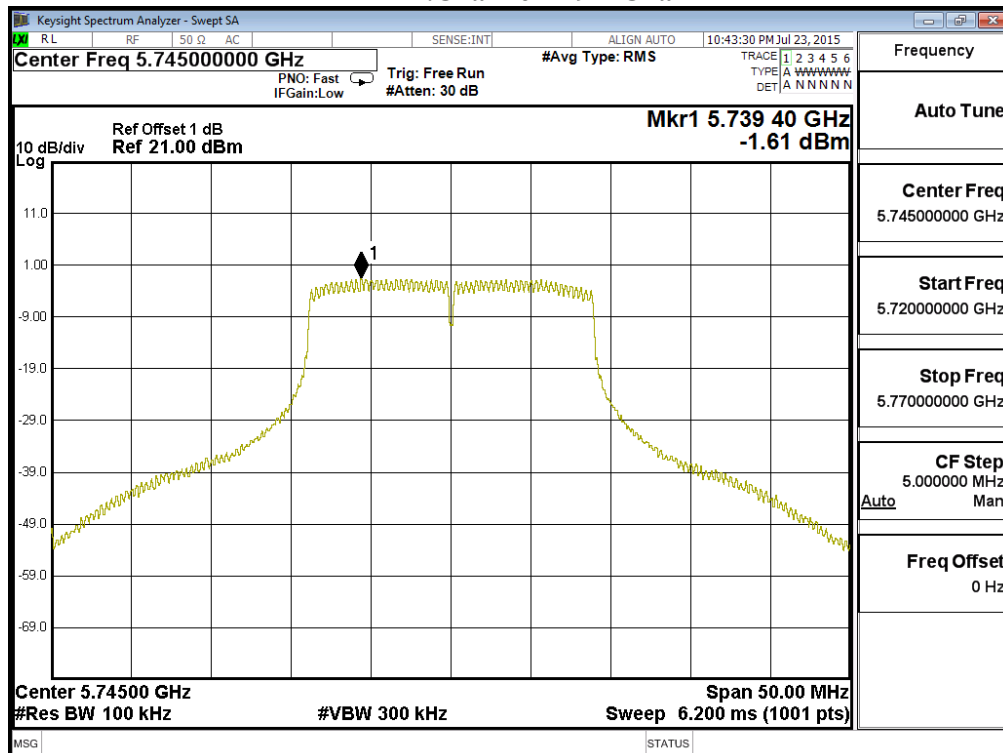


Channel 157 – Chain A

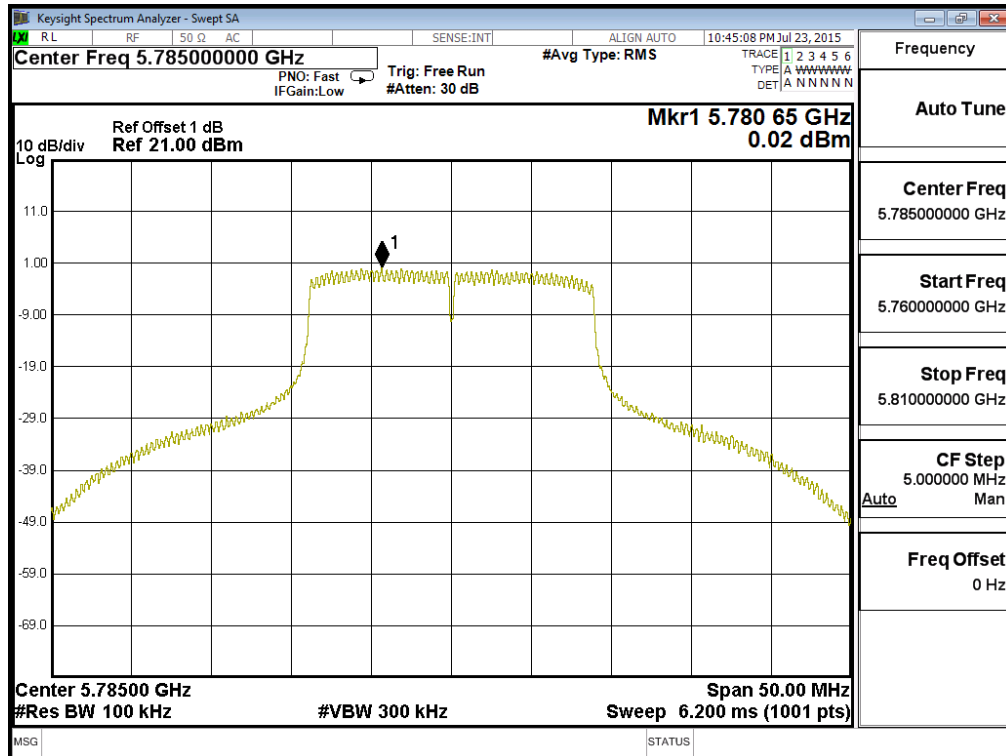


Channel 165 – Chain A

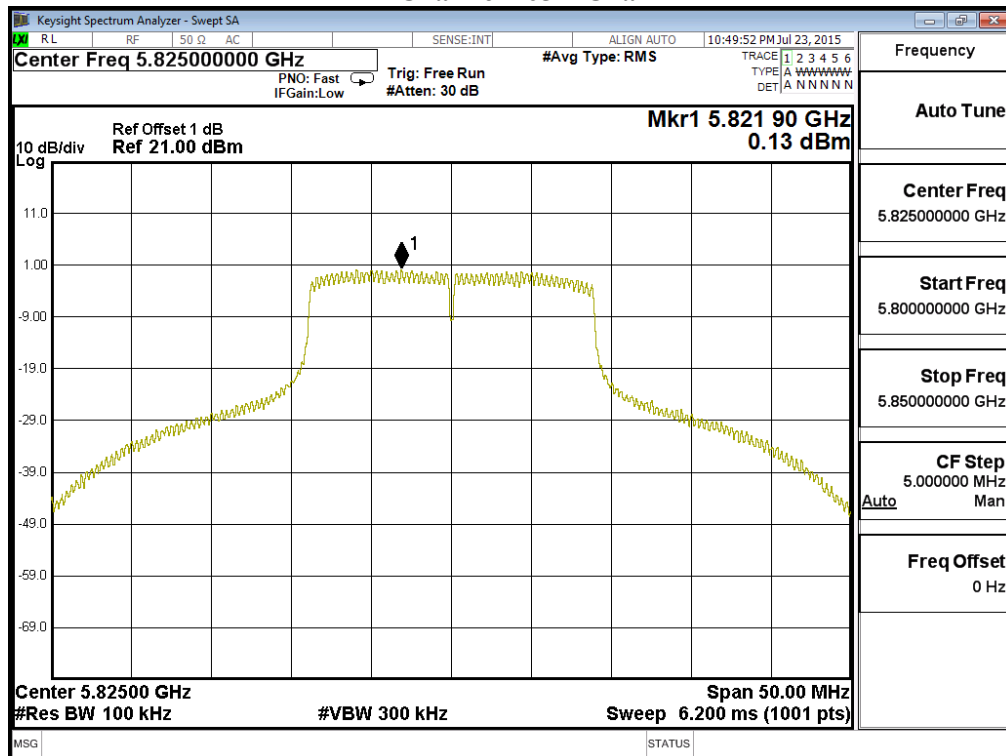


Channel 36 – Chain B

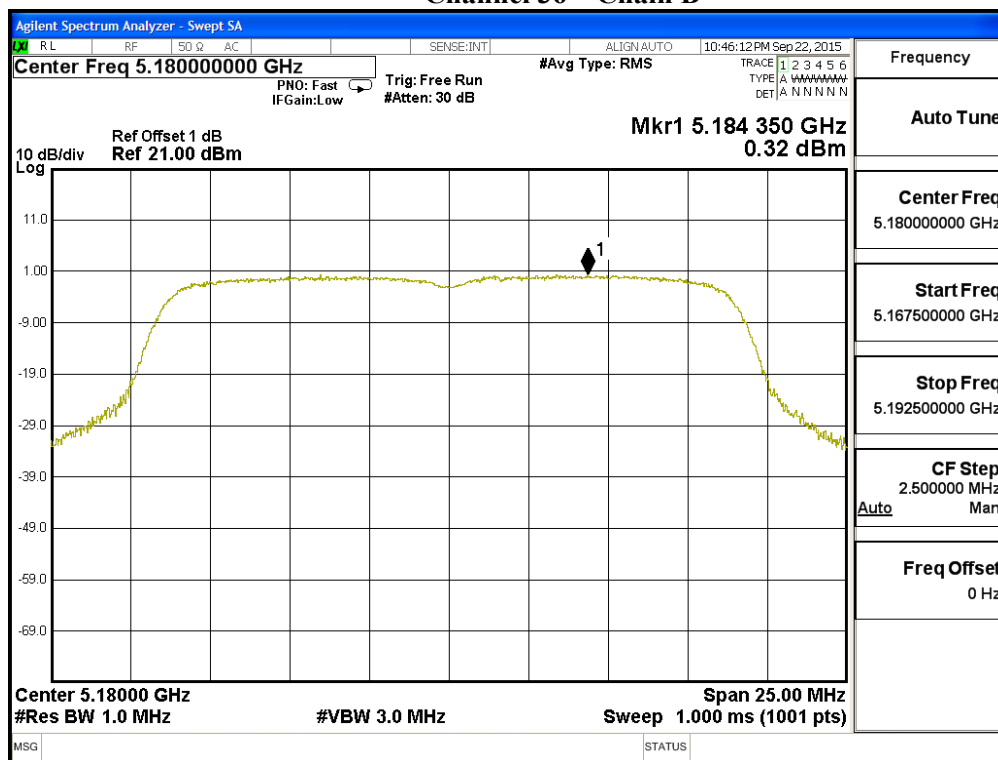


Channel 44 – Chain B

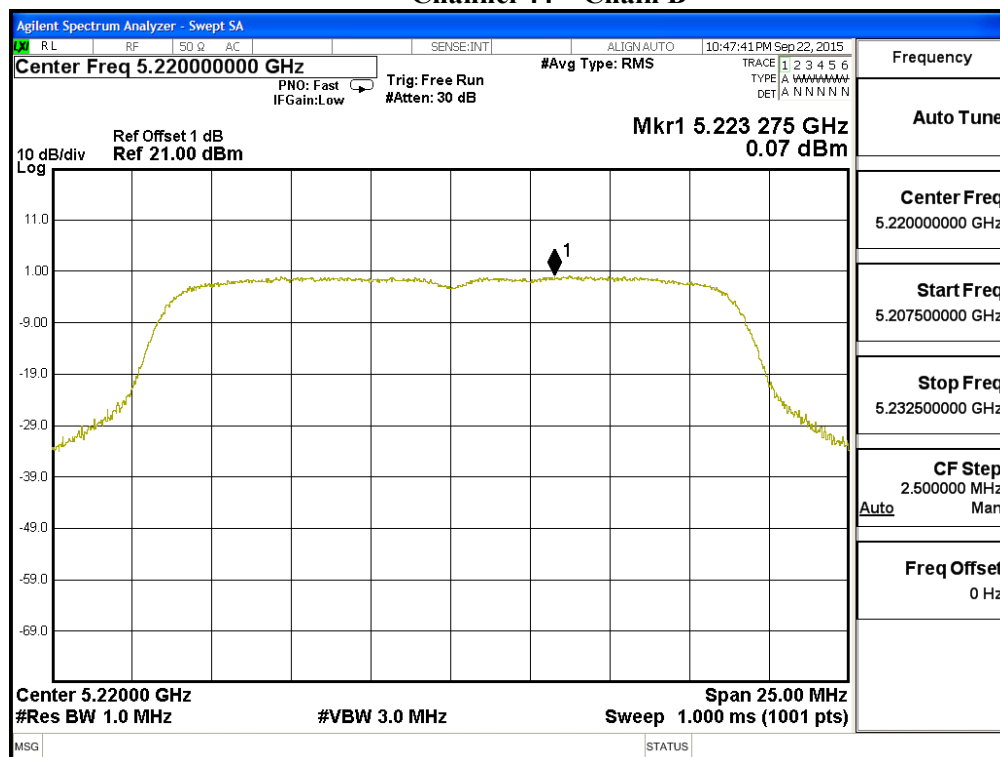


Channel 48 – Chain B

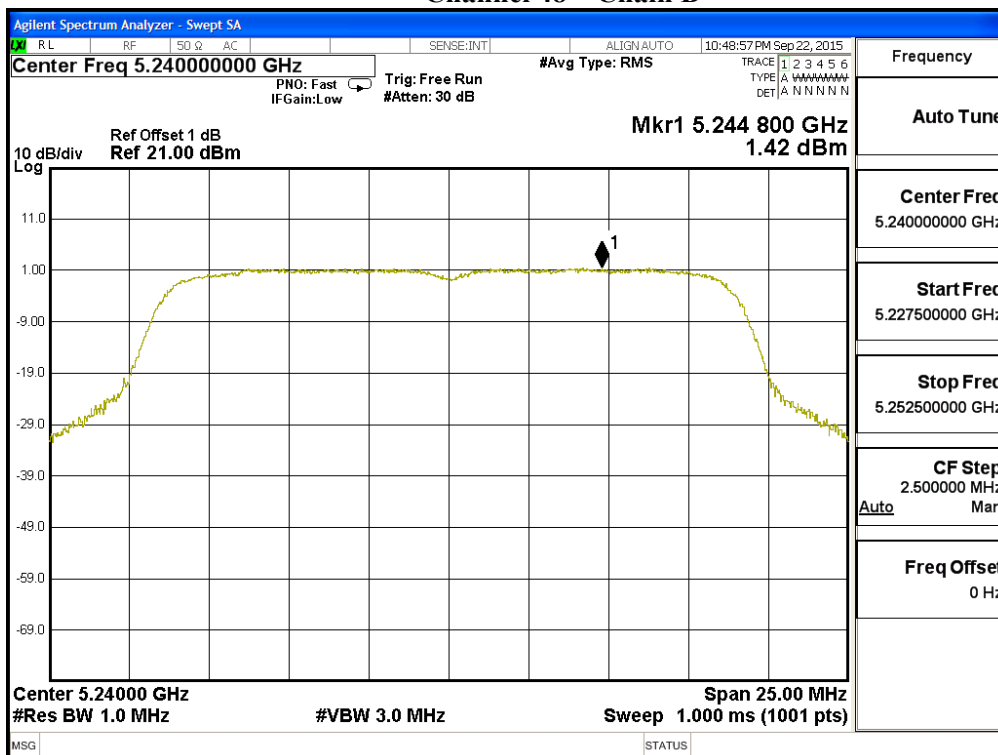


Channel 52 – Chain B

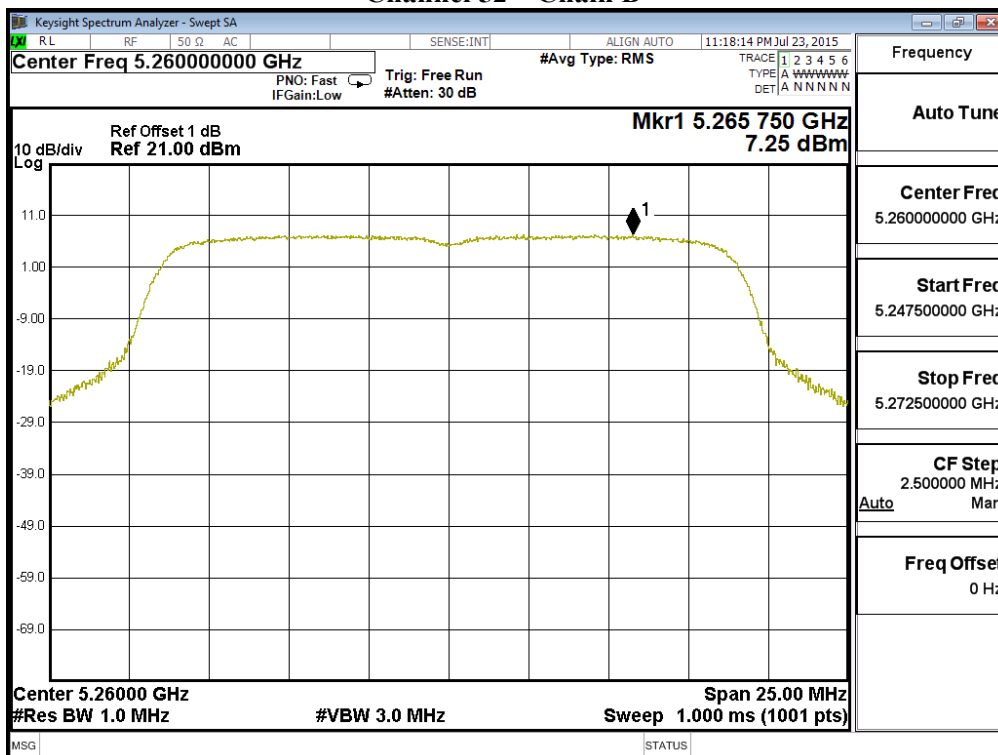


Channel 60 – Chain B

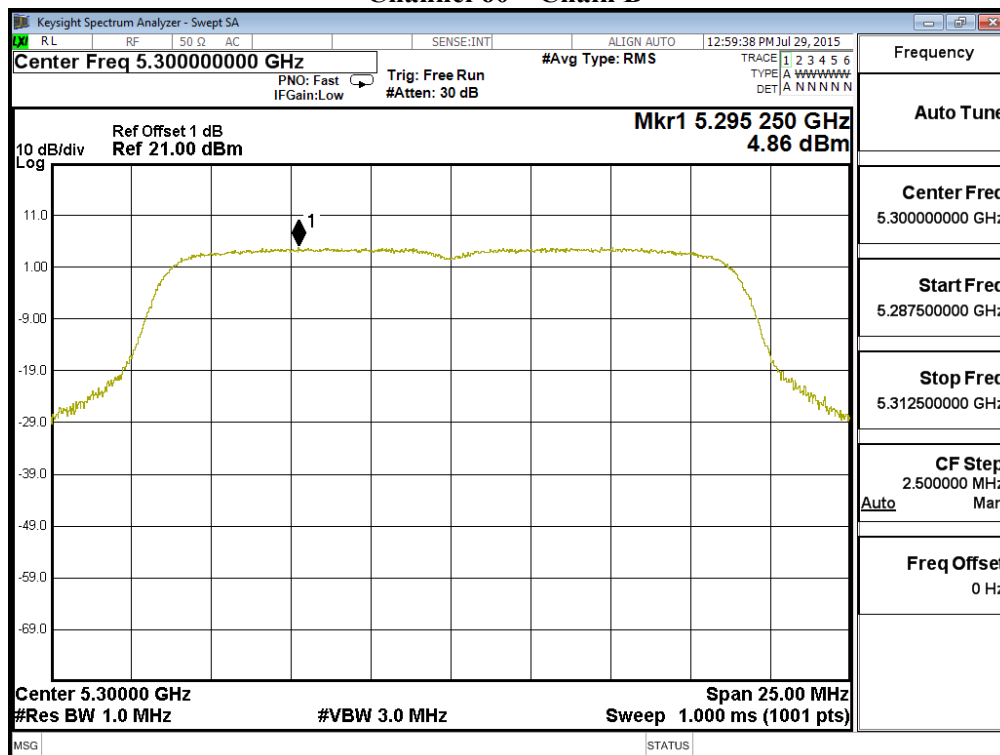


Channel 64 – Chain B

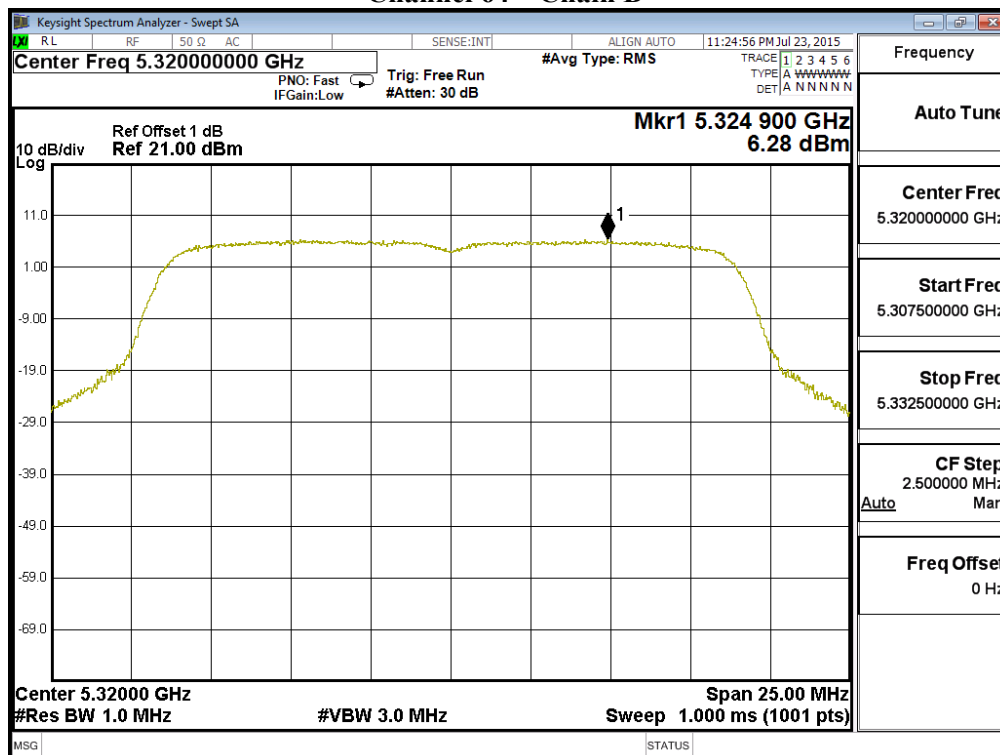


Channel 100 – Chain B

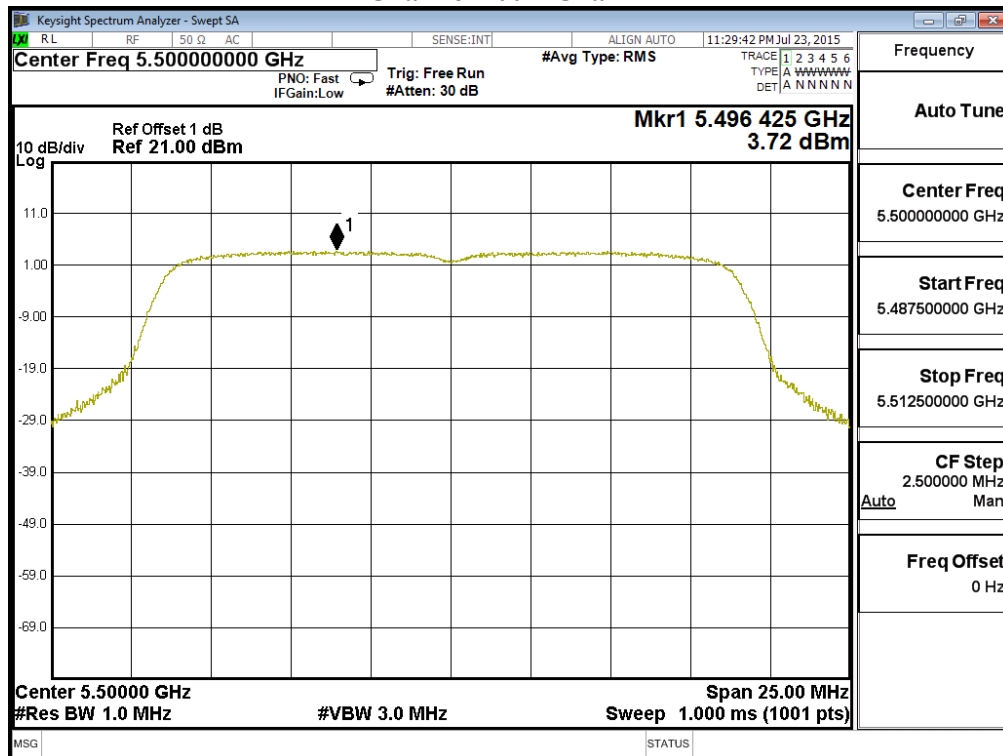


Channel 116 – Chain B

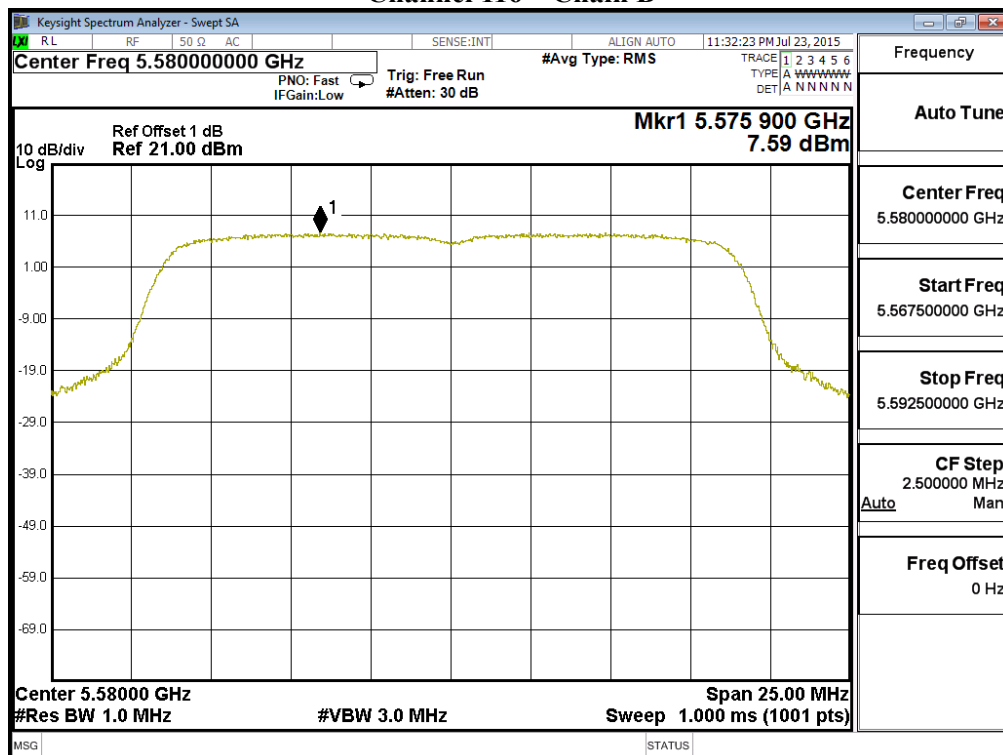


Channel 140 – Chain B

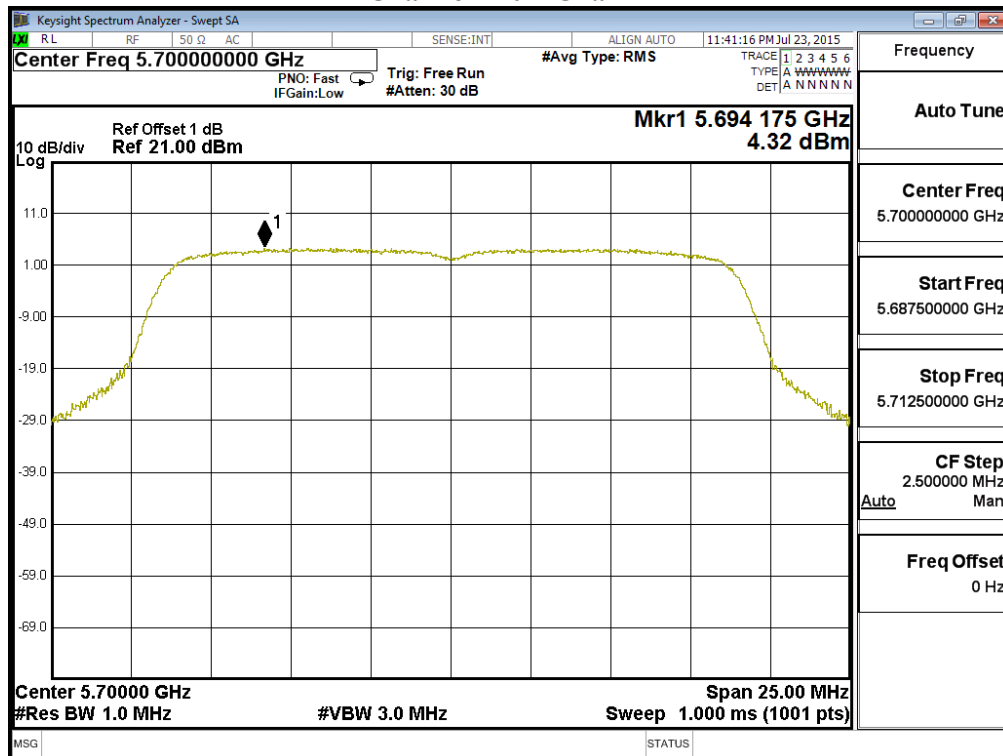


Channel 149 – Chain B

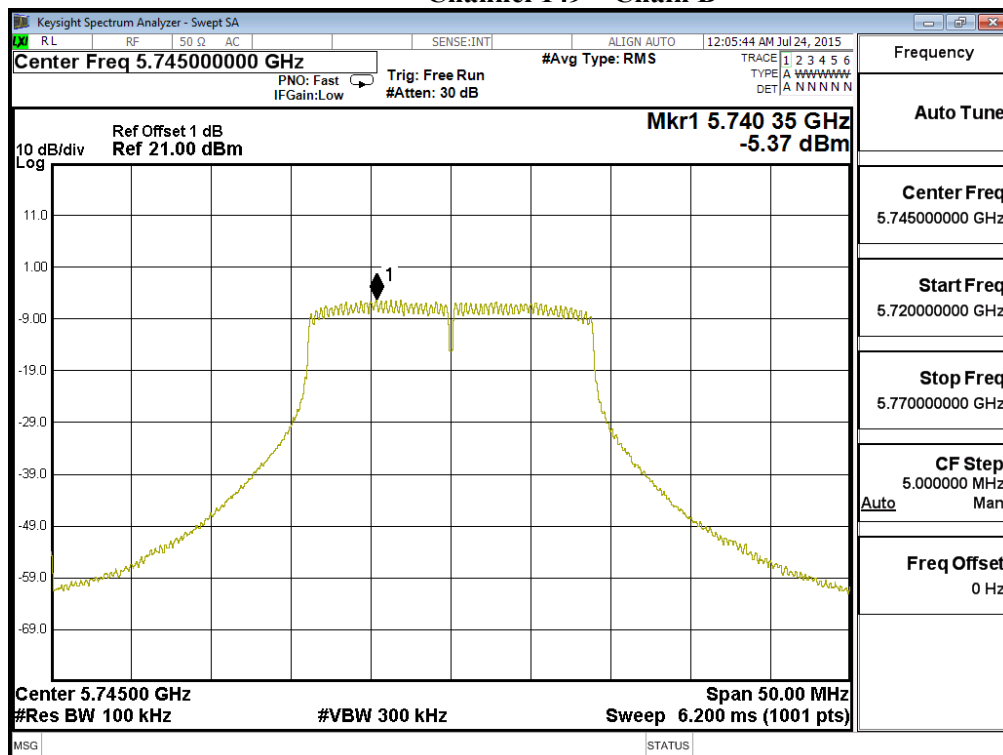

Channel 157 – Chain B

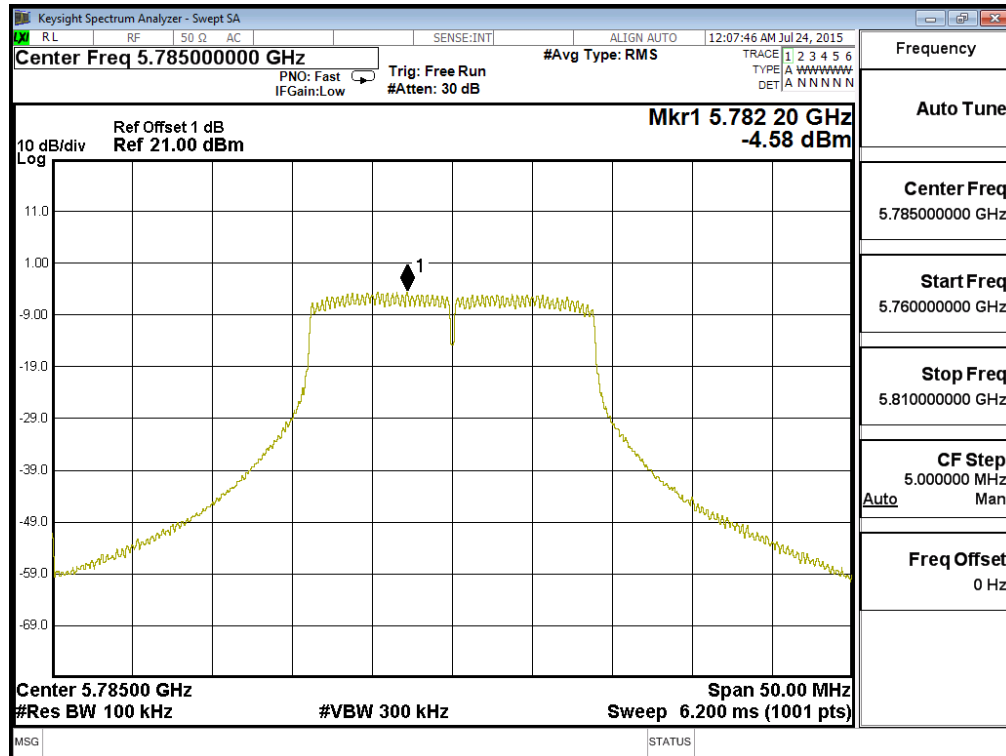

Channel 165 – Chain B

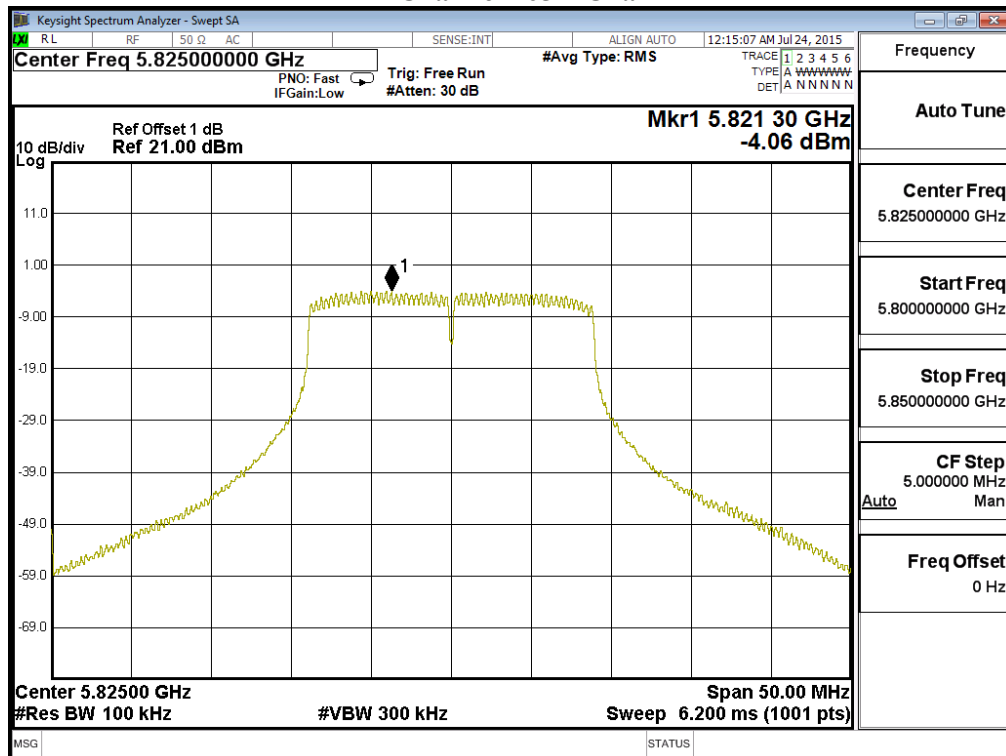


Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Peak Power Spectral Density
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps)

Channel Number	Frequency (MHz)	Chain	PPSD (dBm)	Total PSD (dBm) ¹	Required Limit (dBm)	Result
38	5190	A	-1.070	1.940	17	Pass
		B	0.020	3.030	17	Pass
46	5230	A	0.164	3.174	17	Pass
		B	-0.653	2.357	17	Pass
54	5270	A	5.720	8.730	11	Pass
		B	5.410	8.420	11	Pass
62	5310	A	1.490	4.500	11	Pass
		B	1.030	4.040	11	Pass
102	5510	A	-0.060	2.950	11	Pass
		B	-1.290	1.720	11	Pass
110	5550	A	4.940	7.950	11	Pass
		B	4.460	7.470	11	Pass
134	5670	A	4.420	7.430	11	Pass
		B	3.060	6.070	11	Pass


Channel Number	Frequency (MHz)	Chain	PPSD (dBm)	BWCF (dB)	Total PSD (dBm) ¹	Required Limit (dBm)	Result
151	5755	A	-6.660	6.980	3.330	<30	Pass
		B	-10.790	6.980	-0.800	<30	Pass
159	5795	A	-1.860	6.980	8.130	<30	Pass
		B	-6.190	6.980	3.800	<30	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.


Channel 38 – Chain A

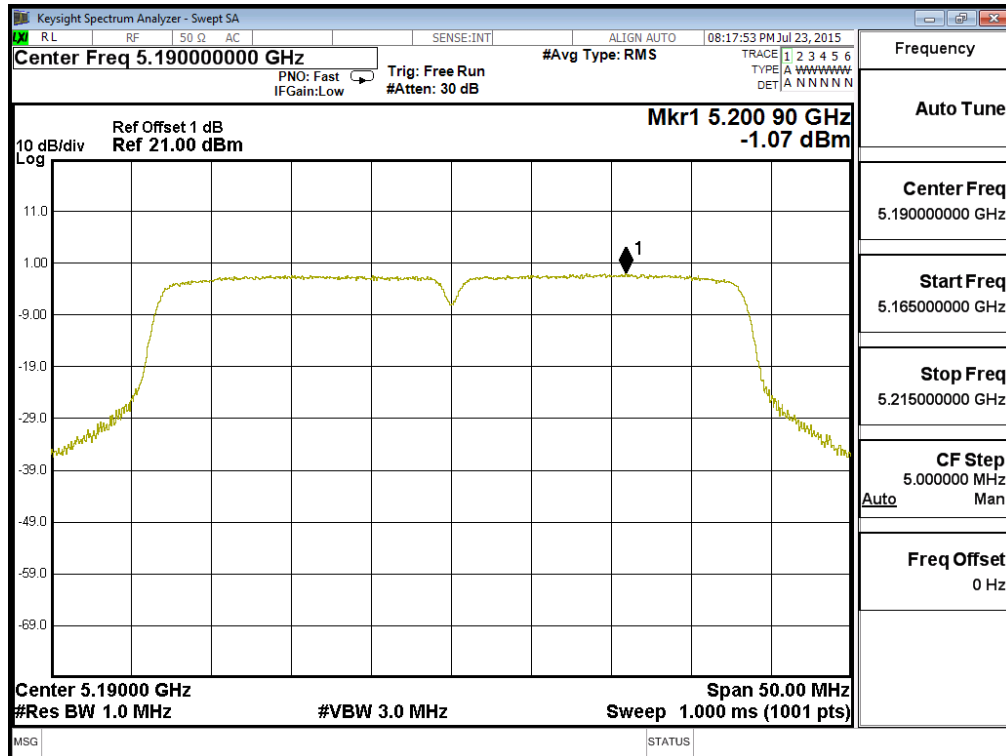


Channel 46 – Chain A

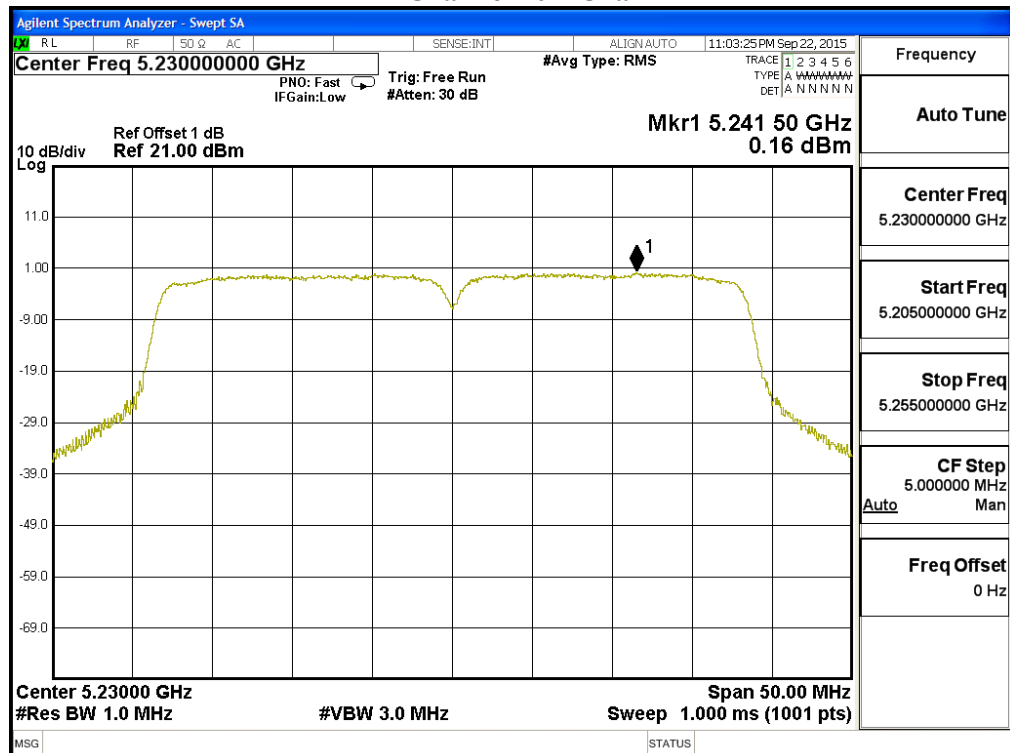


Channel 54 – Chain A

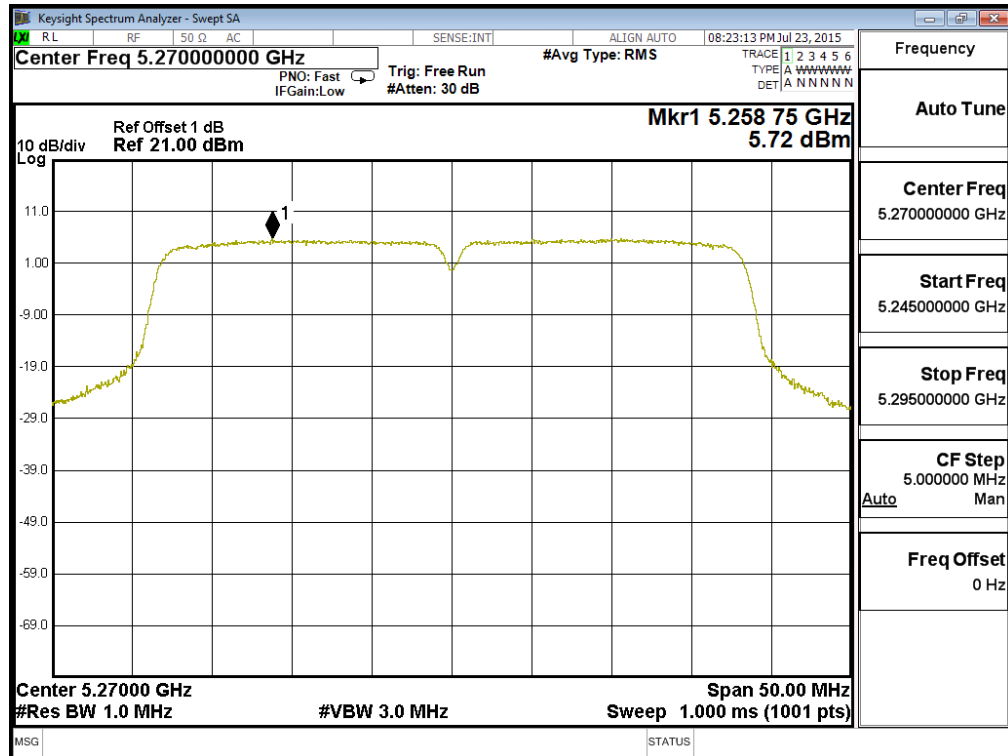


Channel 62 – Chain A

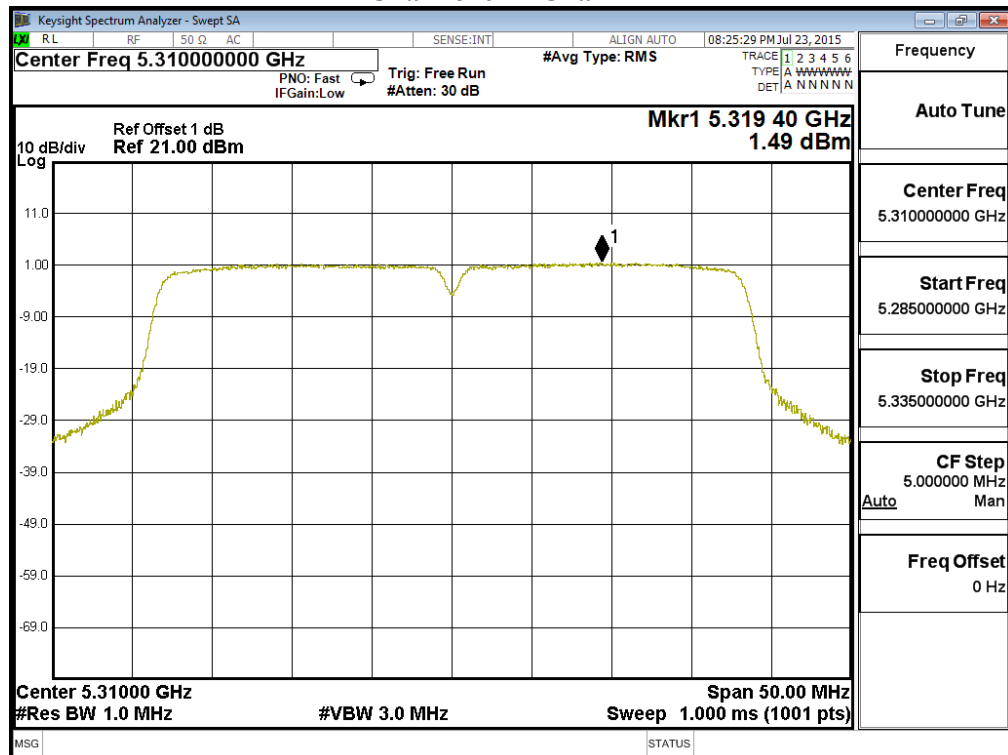


Channel 102 – Chain A

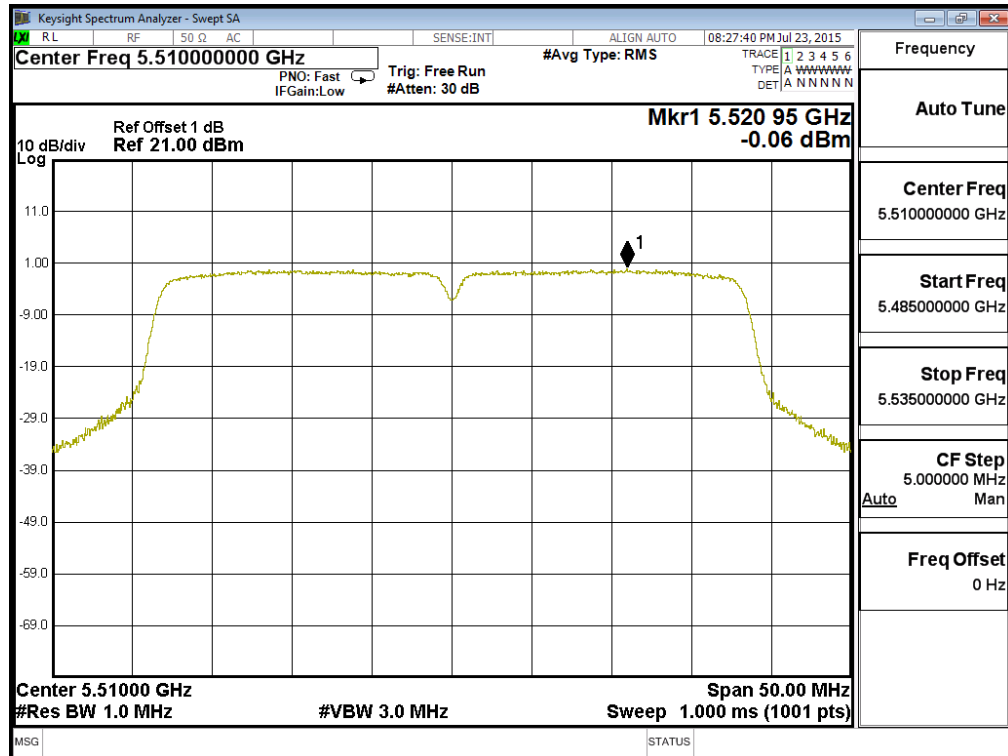


Channel 110 – Chain A

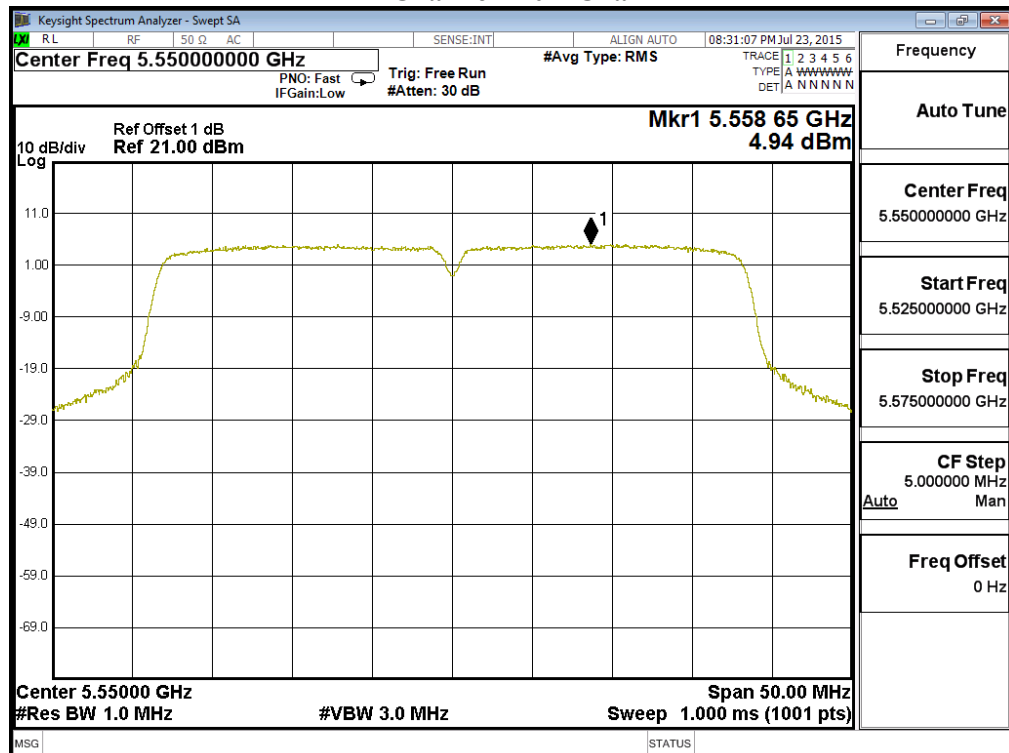


Channel 134 – Chain A

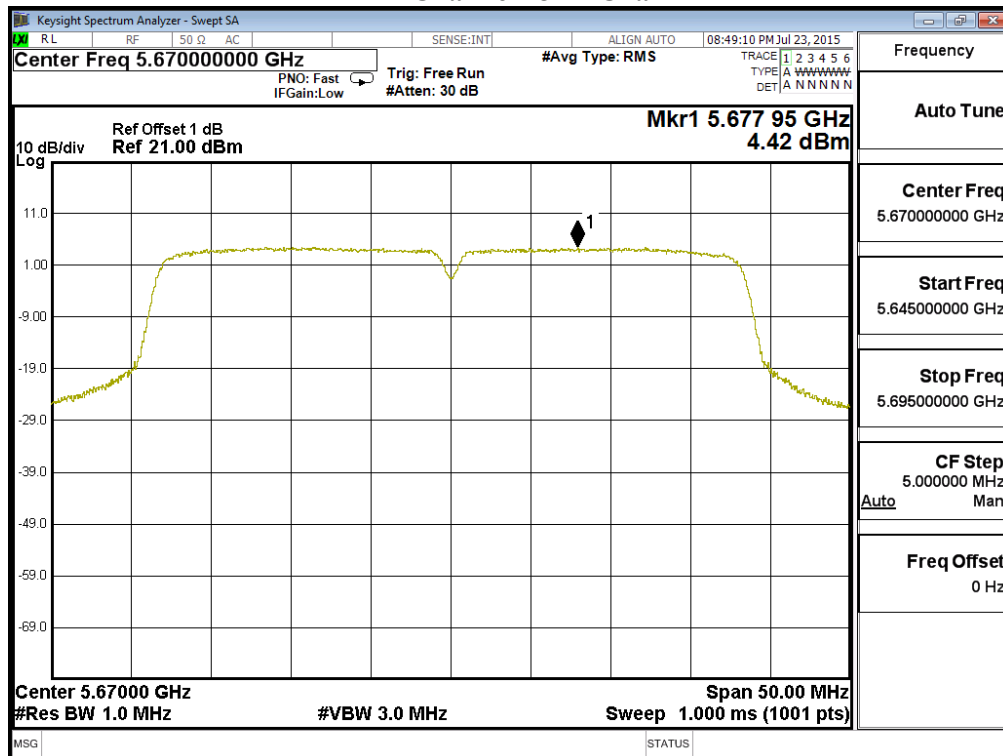


Channel 151 – Chain A

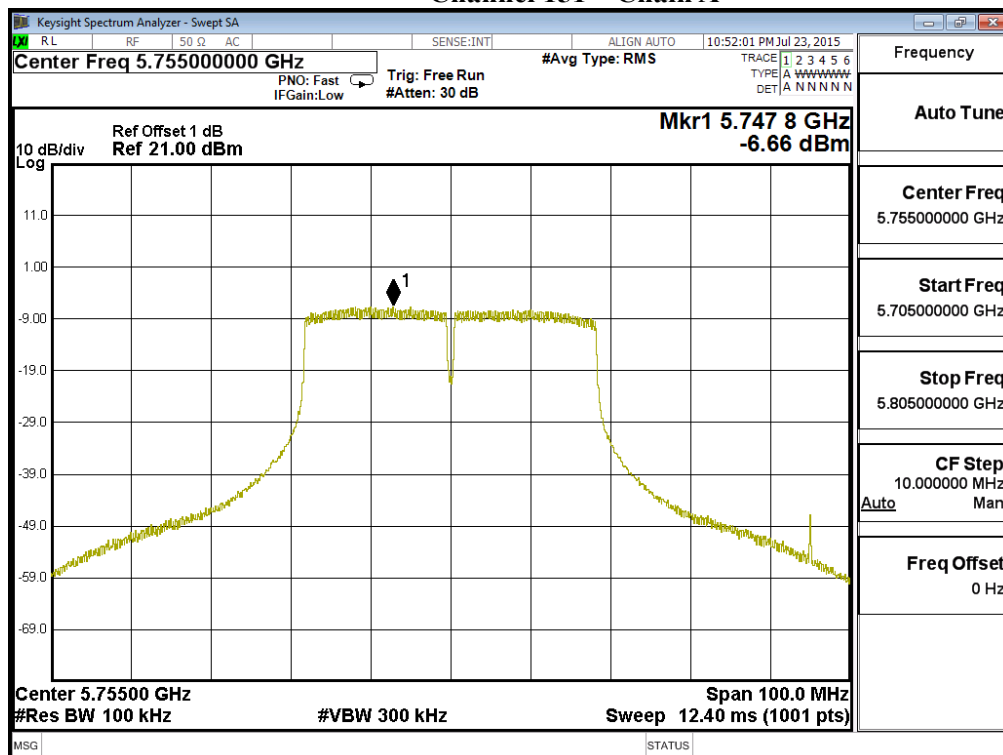


Channel 159 – Chain A

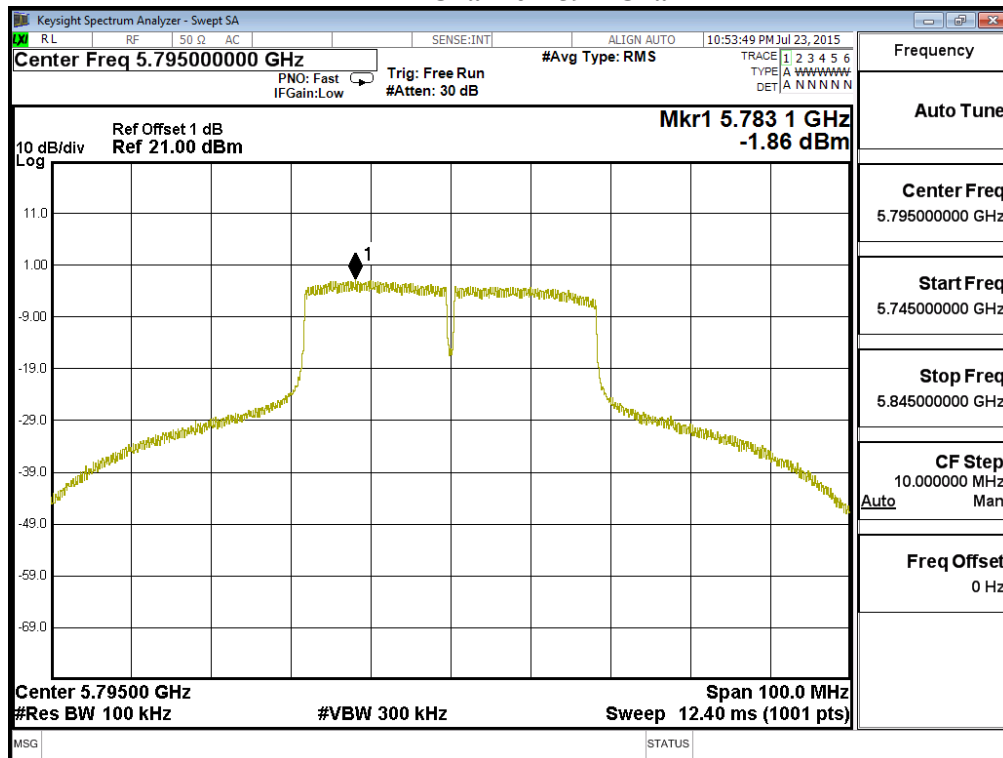


Channel 38 – Chain B

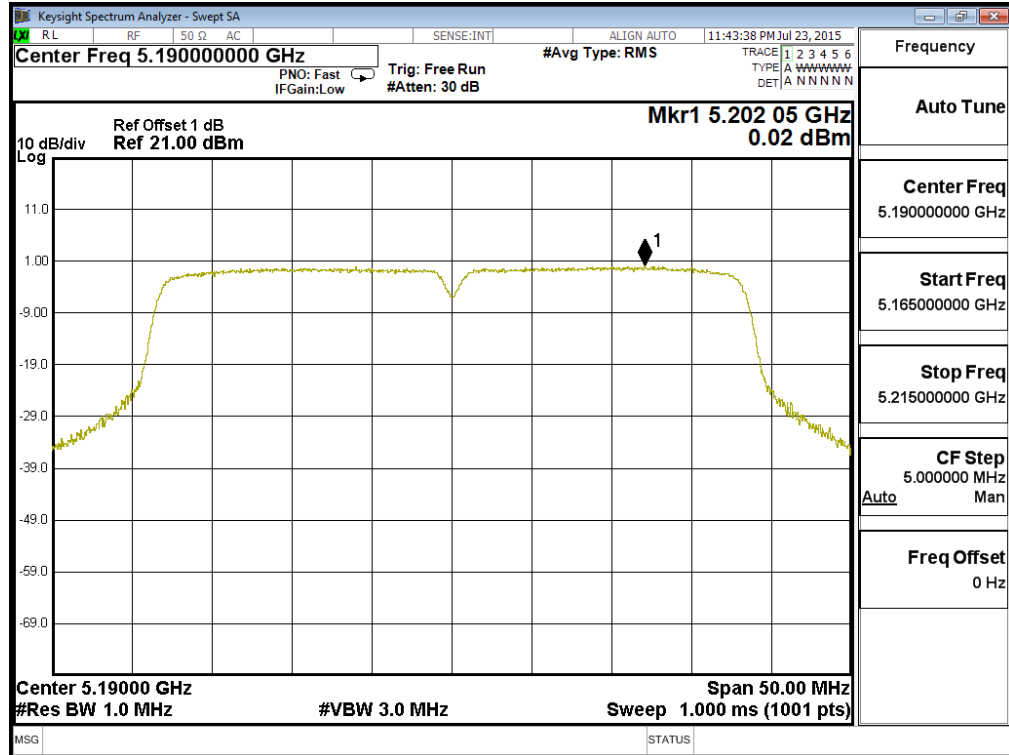


Channel 46 – Chain B

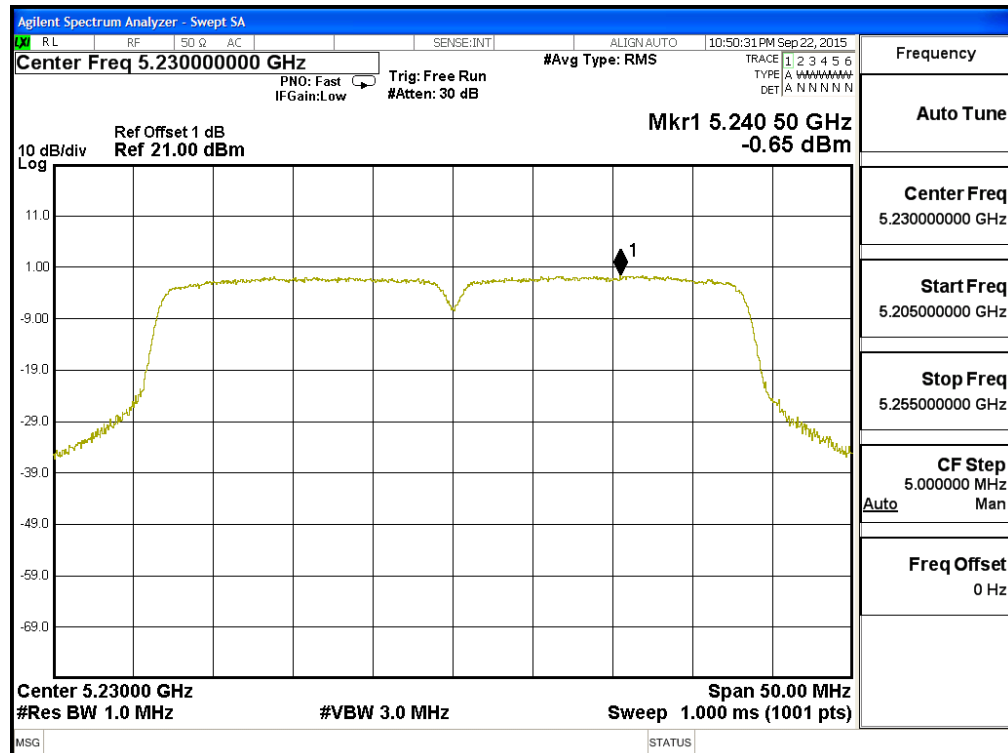


Channel 54 – Chain B

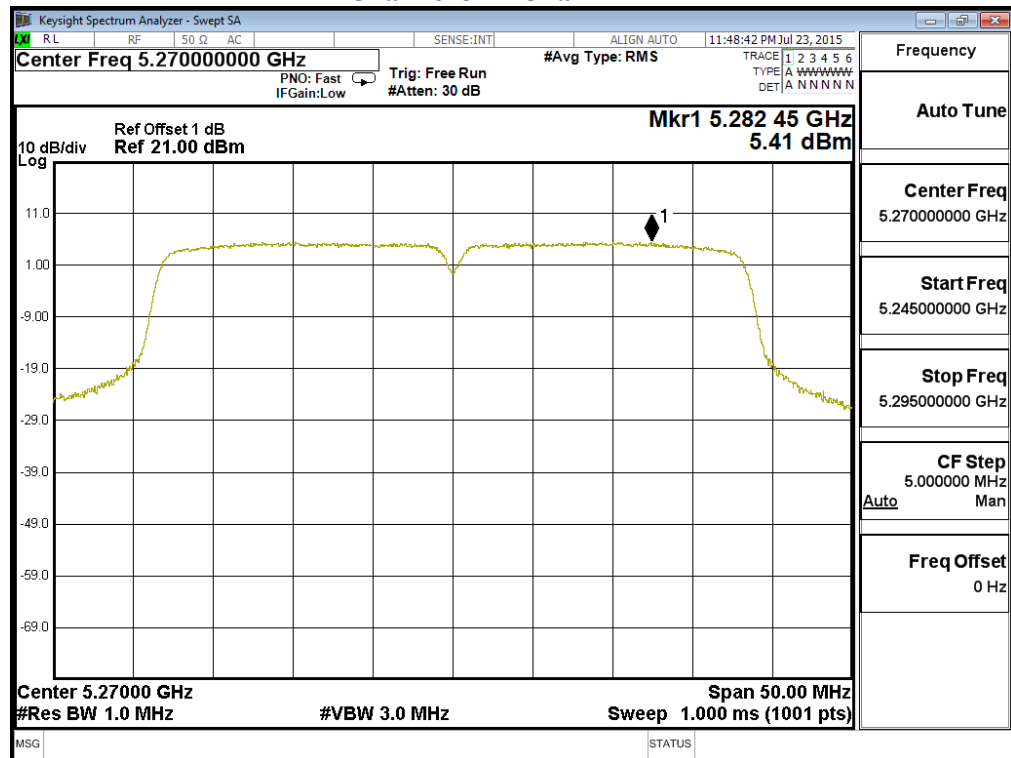


Channel 62 – Chain B

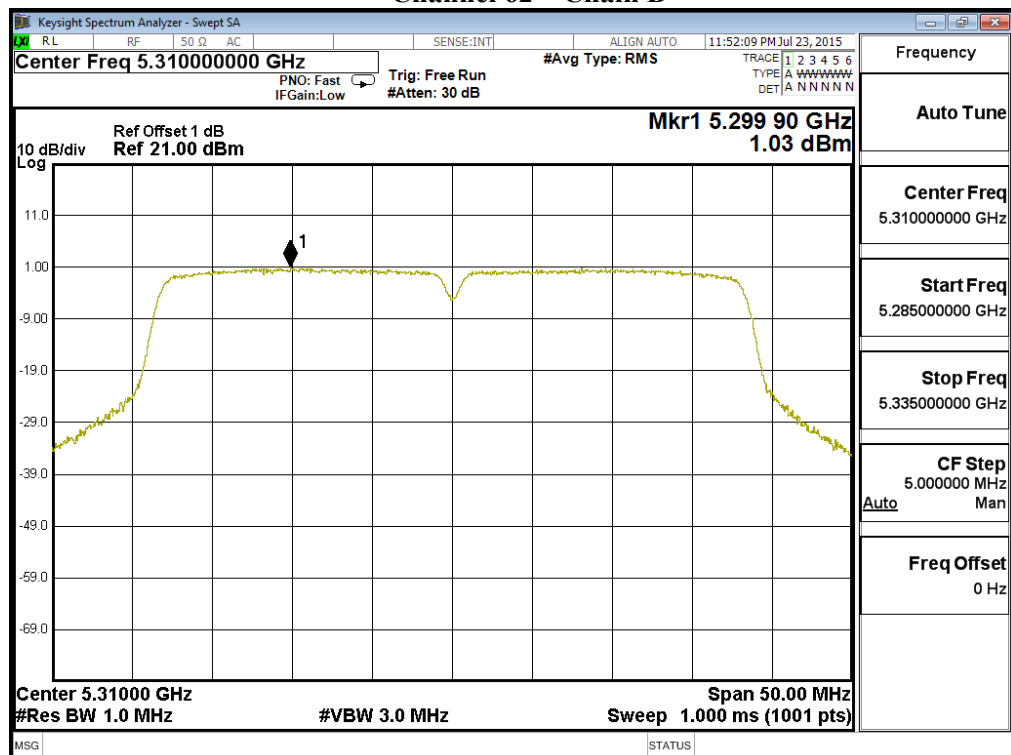


Channel 102 – Chain B

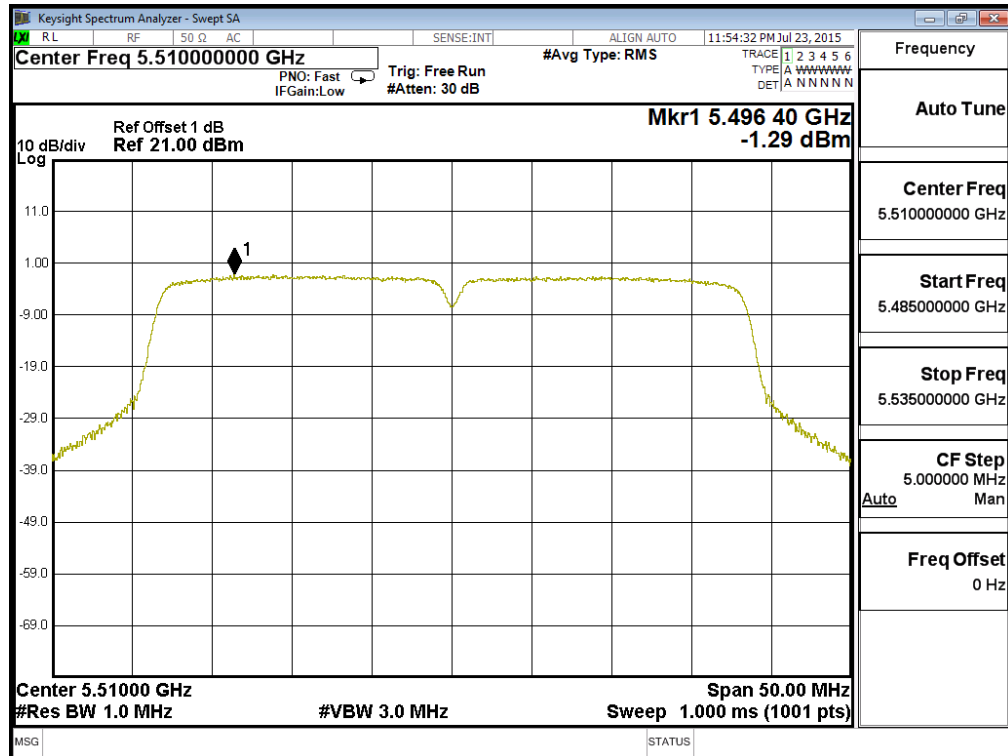


Channel 110 – Chain B

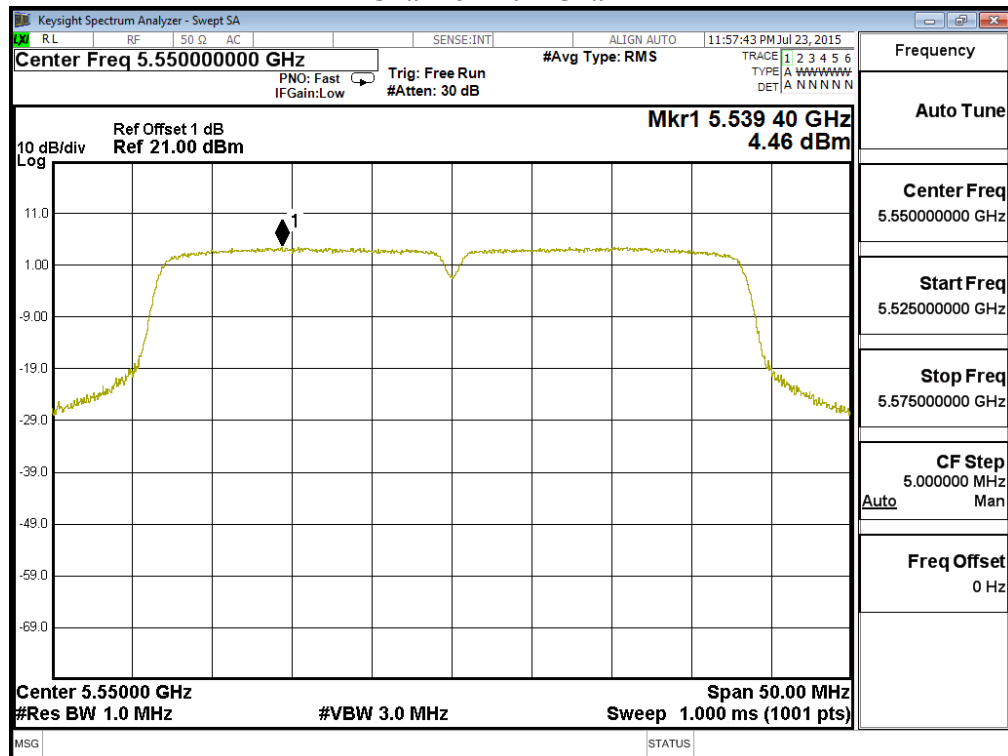


Channel 134 – Chain B

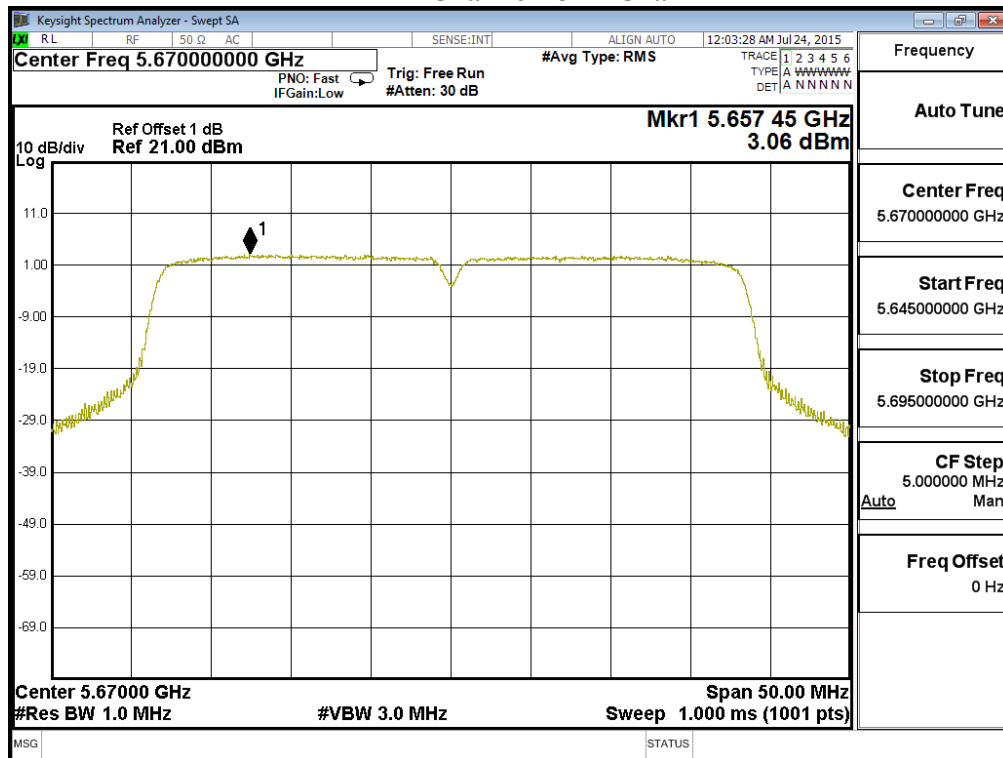

Channel 151 – Chain B

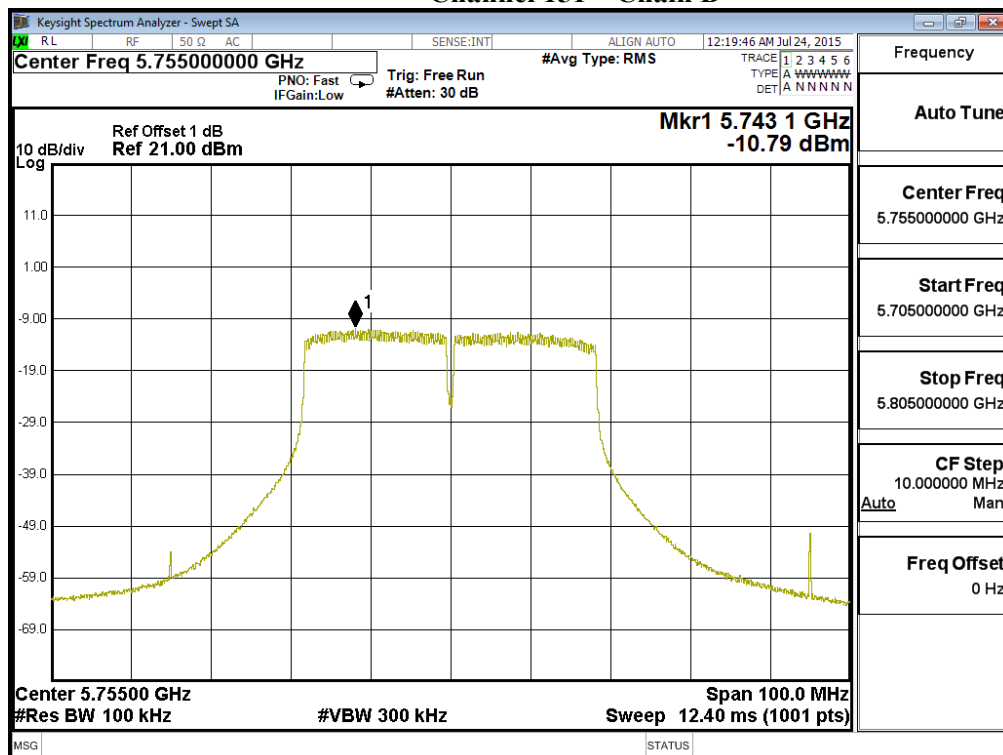

Channel 159 – Chain B

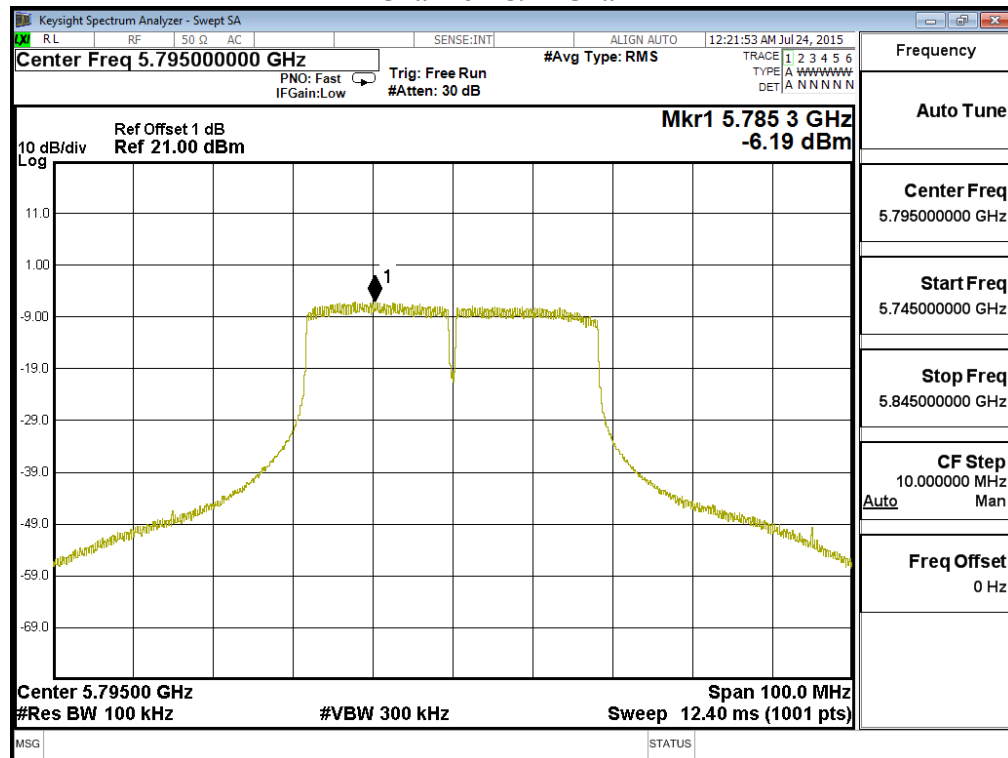

5. Radiated Emission

5.1. Test Equipment

The following test equipments are used during the radiated emission test:


Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Magnetic Loop Antenna	Teseq	HLA6121/ 37133	Sep, 2014
	X	Bilog Antenna	Schaffner Chase	CBL6112B/ 2707	Jun, 2015
	X	EMI Test Receiver	R&S	ESCS 30/838251/ 001	Jun, 2015
	X	Coaxial Cable	QTK(Armist)	RG 214/ LC003-RG	Jun, 2015
	X	Coaxial signal switch	Armist	MP59B/ 6200798682	Jun, 2015

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct, 2014
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar, 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan, 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug, 2015
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan, 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul, 2015
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul, 2015


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

5.2. Test Setup

Radiated Emission Below 1GHz

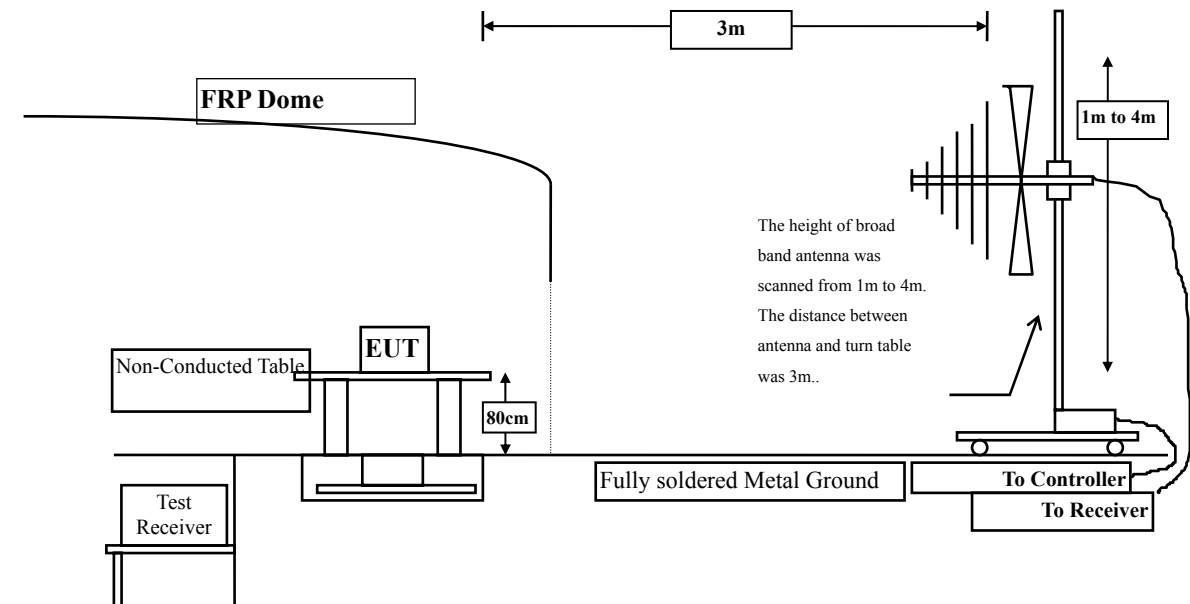

Radiated Emission Above 1GHz

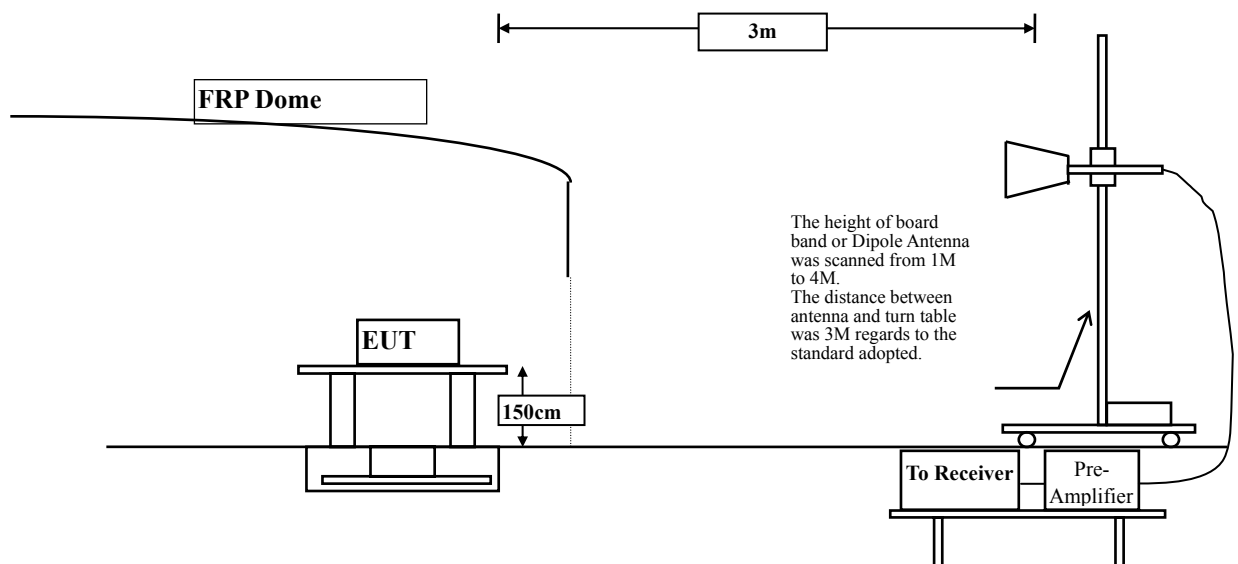

5.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBμV/m) = 20 log E field strength (uV/m)

5.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to FCC KDB-789033 test procedure for compliance to FCC 47CFR 15. 407 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

5.5. Uncertainty

± 3.8 dB below 1GHz

± 3.9 dB above 1GHz

5.6. Test Result of Radiated Emission

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector:					
10360.000	10.932	40.100	51.032	-22.968	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10360.000	12.436	40.350	52.785	-21.215	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10440.000	9.725	39.570	49.295	-24.705	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10440.000	11.505	44.670	56.175	-17.825	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average					
Detector:					
10440.000	11.505	30.030	41.535	-12.465	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5240MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10480.000	10.464	40.390	50.853	-23.147	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10480.000	12.399	42.920	55.319	-18.681	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average					
Detector:					
10480.000	12.399	31.140	43.539	-10.461	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5260MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10520.000	11.531	40.050	51.581	-22.419	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10520.000	13.441	48.070	61.511	-12.489	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average					
Detector:					
10520.000	13.441	33.690	47.131	-6.869	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5300MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10600.000	13.182	42.370	55.552	-18.448	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average Detector:					
10600.000	13.182	27.800	40.982	-13.018	54.000
Vertical					
Peak Detector:					
10600.000	14.717	46.220	60.937	-13.063	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average Detector:					
10600.000	14.717	32.600	47.317	-6.683	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5320MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10640.000	12.912	40.110	53.022	-20.978	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10640.000	14.585	43.740	58.325	-15.675	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
10640.000	14.585	29.480	44.065	-9.935	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5500MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
11000.000	12.513	39.910	52.423	-21.577	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11000.000	14.635	43.400	58.035	-15.965	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average Detector:					
11000.000	14.635	29.220	43.855	-10.145	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5580MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
11160.000	12.953	40.010	52.964	-21.036	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11160.000	15.197	52.640	67.837	-6.163	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average Detector:					
11160.000	15.197	38.150	53.347	-0.653	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5700MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
11400.000	14.753	39.090	53.843	-20.157	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11400.000	16.303	47.950	64.253	-9.747	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
11400.000	16.303	33.650	49.953	-4.047	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5745MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11490.000	15.004	46.270	61.274	-12.726	74.000
17235.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
11490.000	15.004	31.790	46.794	-7.206	54.000
Vertical					
Peak Detector:					
11490.000	16.520	50.010	66.530	-7.470	74.000
17235.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
11490.000	16.520	35.640	52.160	-1.840	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5785MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11570.000	15.207	49.000	64.207	-9.793	74.000
17355.000	*	*	*	*	74.000
20800.000	*	*	*	*	74.000
26000.000	*	*	*	*	74.000
31200.000	*	*	*	*	74.000
36400.000	*	*	*	*	74.000
Average Detector:					
11570.000	15.207	33.770	48.977	-5.023	54.000
Vertical					
Peak Detector:					
11570.000	16.573	51.490	68.062	-5.938	74.000
17355.000	*	*	*	*	74.000
20800.000	*	*	*	*	74.000
26000.000	*	*	*	*	74.000
31200.000	*	*	*	*	74.000
36400.000	*	*	*	*	74.000
Average Detector:					
11570.000	16.573	36.310	52.882	-1.118	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5825MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11650.000	13.504	51.360	64.864	-9.136	74.000
17475.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
31440000	*	*	*	*	74.000
36680.000	*	*	*	*	74.000
Average Detector:					
11650.000	13.504	35.900	49.404	-4.596	54.000
Vertical					
Peak Detector:					
11650.000	14.959	53.520	68.479	-5.521	74.000
17475.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
31440000	*	*	*	*	74.000
36680.000	*	*	*	*	74.000
Average Detector:					
11650.000	14.959	37.610	52.569	-1.431	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5180MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10360.000	10.932	40.310	51.242	-22.758	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10360.000	12.436	41.570	54.005	-19.995	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
Average Detector:					
10360.000	12.436	28.620	41.055	-12.945	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5220MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10440.000	9.725	40.420	50.145	-23.855	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10440.000	11.505	42.380	53.885	-20.115	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5240MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector:					
10480.000	10.464	41.370	51.833	-22.167	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10480.000	12.399	43.070	55.469	-18.531	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average Detector:					
10480.000	12.399	29.440	41.839	-12.161	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5260MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10520.000	11.531	39.840	51.371	-22.629	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10520.000	13.441	44.930	58.371	-15.629	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average Detector:					
10520.000	13.441	31.040	44.481	-9.519	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5300MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10600.000	13.182	39.940	53.122	-20.878	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10600.000	14.717	45.870	60.587	-13.413	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average Detector:					
10600.000	14.717	31.440	46.157	-7.843	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5320MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10640.000	12.912	40.010	52.922	-21.078	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10640.000	14.585	46.180	60.765	-13.235	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
10640.000	14.585	31.620	46.205	-7.795	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5500MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
11000.000	12.513	40.500	53.013	-20.987	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11000.000	14.635	44.540	59.175	-14.825	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average Detector:					
11000.000	14.635	29.640	44.275	-9.725	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5580MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
11160.000	12.953	44.990	57.944	-16.056	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average Detector:					
11160.000	12.953	31.520	44.474	-9.526	54.000
Vertical					
Peak Detector:					
11160.000	15.197	50.340	65.537	-8.463	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average Detector:					
11160.000	15.197	36.520	51.717	-2.283	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5700MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
11400.000	14.753	43.050	57.803	-16.197	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
11400.000	14.753	29.160	43.913	-10.087	54.000
Vertical					
Peak Detector:					
11400.000	16.303	47.860	64.163	-9.837	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
11400.000	16.303	34.600	50.903	-3.097	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5745MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11490.000	15.004	44.950	59.954	-14.046	74.000
17235.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
11490.000	15.004	30.370	45.374	-8.626	54.000
Vertical					
Peak Detector:					
11490.000	16.520	48.340	64.860	-9.140	74.000
17235.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
11490.000	16.520	35.230	51.750	-2.250	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5785MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11570.000	15.207	48.070	63.277	-10.723	74.000
17355.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
31320.000	*	*	*	*	74.000
36540.000	*	*	*	*	74.000
Average Detector:					
11570.000	15.207	33.340	48.547	-5.453	54.000
Vertical					
Peak Detector:					
11570.000	16.573	50.550	67.122	-6.878	74.000
17355.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
31320.000	*	*	*	*	74.000
36540.000	*	*	*	*	74.000
Average Detector:					
11570.000	16.573	36.330	52.902	-1.098	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5825MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11650.000	13.504	48.880	62.384	-11.616	74.000
17475.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
31440.000	*	*	*	*	74.000
36680.000	*	*	*	*	74.000
Average Detector:					
11650.000	13.504	33.970	47.474	-6.526	54.000
Vertical					
Peak Detector:					
11650.000	14.959	51.770	66.729	-7.271	74.000
17475.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
31440.000	*	*	*	*	74.000
36680.000	*	*	*	*	74.000
Average Detector:					
11650.000	14.959	36.750	51.709	-2.291	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5190MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10380.000	10.400	38.510	48.910	-25.090	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10380.000	11.965	39.190	51.156	-22.844	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5230MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10460.000	9.932	40.870	50.802	-23.198	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10460.000	11.790	43.600	55.390	-18.610	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
Average Detector:					
10460.000	11.790	29.960	41.750	-12.250	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5270MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10540.000	12.058	39.300	51.359	-22.641	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10540.000	13.868	43.380	57.248	-16.752	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
Average Detector:					
10540.000	13.868	30.170	44.038	-9.962	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5310MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10620.000	13.096	39.000	52.095	-21.905	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10620.000	14.683	39.850	54.533	-19.467	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
Average Detector:					
10620.000	14.683	27.510	42.193	-11.807	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5510MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
11020.000	12.820	39.580	52.400	-21.600	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11020.000	14.966	39.580	54.547	-19.453	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
Average Detector:					
11020.000	14.966	27.500	42.467	-11.533	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5550MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11100.000	12.752	41.580	54.332	-19.668	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
Average Detector:					
11100.000	12.752	26.680	39.432	-14.568	54.000
Vertical					
Peak Detector:					
11100.000	15.006	41.060	56.066	-17.934	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
Average Detector:					
11100.000	15.006	27.120	42.126	-11.874	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5670MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
11340.000	14.149	41.320	55.469	-18.531	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
Average Detector:					
11340.000	14.149	27.890	42.039	-11.961	54.000
Vertical					
Peak Detector:					
11340.000	15.891	45.050	60.941	-13.059	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
Average Detector:					
11340.000	15.891	30.270	46.161	-7.839	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5755MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11510.000	15.044	40.630	55.673	-18.327	74.000
17265.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
31140.000	*	*	*	*	74.000
36330.000	*	*	*	*	74.000
Average Detector:					
11510.000	15.044	27.120	42.163	-11.837	54.000
Vertical					
Peak Detector:					
11510.000	16.536	42.200	58.736	-15.264	74.000
17265.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
31140.000	*	*	*	*	74.000
36330.000	*	*	*	*	74.000
Average Detector:					
11510.000	16.536	28.150	44.686	-9.314	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5795MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11590.000	15.364	47.570	62.934	-11.066	74.000
17385.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
31380.000	*	*	*	*	74.000
36610.000	*	*	*	*	74.000
Average Detector:					
11590.000	15.364	32.760	48.124	-5.876	54.000
Vertical					
Peak Detector:					
11590.000	16.687	49.540	66.227	-7.773	74.000
17385.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
31380.000	*	*	*	*	74.000
36610.000	*	*	*	*	74.000
Average Detector:					
11590.000	16.687	34.630	51.317	-2.683	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. “*” means the emission levels are very lower than the limit and not show in test report.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector					
249.220	-6.216	44.839	38.623	-7.377	46.000
449.040	0.386	38.073	38.459	-7.541	46.000
625.580	1.419	37.310	38.730	-7.270	46.000
676.020	2.841	34.117	36.959	-9.041	46.000
875.840	5.816	38.165	43.981	-2.019	46.000
901.060	5.878	37.545	43.423	-2.577	46.000
Vertical					
Peak Detector					
179.380	-0.824	37.093	36.269	-7.231	43.500
249.220	-5.096	38.207	33.111	-12.889	46.000
375.320	0.388	37.458	37.846	-8.154	46.000
625.580	0.299	36.546	36.846	-9.154	46.000
676.020	0.451	41.915	42.367	-3.633	46.000
901.060	1.858	39.400	41.258	-4.742	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5300MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector					
210.420	-10.427	42.458	32.031	-11.469	43.500
375.320	0.918	36.943	37.861	-8.139	46.000
449.040	0.386	38.447	38.833	-7.167	46.000
625.580	1.419	33.622	35.042	-10.958	46.000
676.020	2.841	33.906	36.748	-9.252	46.000
875.840	5.816	38.577	44.393	-1.607	46.000
Vertical					
Peak Detector					
179.380	-0.824	36.899	36.075	-7.425	43.500
249.220	-5.096	41.835	36.739	-9.261	46.000
375.320	0.388	35.138	35.526	-10.474	46.000
625.580	0.299	32.631	32.931	-13.069	46.000
676.020	0.451	42.769	43.221	-2.779	46.000
901.060	1.858	38.616	40.474	-5.526	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5580MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
Peak Detector					
249.220	-6.216	42.081	35.865	-10.135	46.000
375.320	0.918	35.297	36.215	-9.785	46.000
449.040	0.386	39.436	39.822	-6.178	46.000
625.580	1.419	39.548	40.968	-5.032	46.000
850.620	6.773	32.061	38.834	-7.166	46.000
875.840	5.816	39.039	44.855	-1.145	46.000
Vertical					
Peak Detector					
179.380	-0.824	36.011	35.187	-8.313	43.500
249.220	-5.096	41.036	35.940	-10.060	46.000
375.320	0.388	37.327	37.715	-8.285	46.000
625.580	0.299	34.500	34.800	-11.200	46.000
676.020	0.451	43.009	43.461	-2.539	46.000
901.060	1.858	37.186	39.044	-6.956	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5785MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
249.220	-6.216	42.857	36.641	-9.359	46.000
375.320	0.918	36.157	37.075	-8.925	46.000
449.040	0.386	38.392	38.778	-7.222	46.000
625.580	1.419	37.668	39.088	-6.912	46.000
676.020	2.841	34.752	37.594	-8.406	46.000
875.840	5.816	35.346	41.162	-4.838	46.000
Vertical					
Peak Detector					
179.380	-0.824	37.025	36.201	-7.299	43.500
375.320	0.388	36.542	36.930	-9.070	46.000
676.020	0.451	42.904	43.356	-2.644	46.000
806.000	3.686	27.806	31.492	-14.508	46.000
875.840	0.516	33.084	33.600	-12.400	46.000
901.060	1.858	38.141	39.999	-6.001	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5220MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
249.220	-6.216	45.491	39.275	-6.725	46.000
375.320	0.918	34.546	35.464	-10.536	46.000
449.040	0.386	37.977	38.363	-7.637	46.000
625.580	1.419	39.201	40.621	-5.379	46.000
676.020	2.841	34.774	37.616	-8.384	46.000
875.840	5.816	37.248	43.064	-2.936	46.000
Vertical					
Peak Detector					
179.380	-0.824	36.767	35.943	-7.557	43.500
249.220	-5.096	43.577	38.481	-7.519	46.000
375.320	0.388	33.982	34.370	-11.630	46.000
625.580	0.299	36.380	36.680	-9.320	46.000
676.020	0.451	42.854	43.306	-2.694	46.000
901.060	1.858	38.953	40.811	-5.189	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5300MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
Peak Detector					
249.220	-6.216	45.397	39.181	-6.819	46.000
449.040	0.386	38.795	39.181	-6.819	46.000
625.580	1.419	37.287	38.707	-7.293	46.000
749.740	3.963	27.890	31.853	-14.147	46.000
875.840	5.816	36.896	42.712	-3.288	46.000
901.060	5.878	36.944	42.822	-3.178	46.000
Vertical					
Peak Detector					
179.380	-0.824	36.812	35.988	-7.512	43.500
249.220	-5.096	39.188	34.092	-11.908	46.000
375.320	0.388	35.398	35.786	-10.214	46.000
676.020	0.451	42.639	43.091	-2.909	46.000
806.000	3.686	28.238	31.924	-14.076	46.000
901.060	1.858	38.958	40.816	-5.184	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5580MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector					
375.320	0.918	34.657	35.575	-10.425	46.000
449.040	0.386	38.272	38.658	-7.342	46.000
625.580	1.419	33.732	35.152	-10.848	46.000
676.020	2.841	34.765	37.607	-8.393	46.000
875.840	5.816	36.847	42.663	-3.337	46.000
901.060	5.878	36.987	42.865	-3.135	46.000
Vertical					
Peak Detector					
179.380	-0.824	36.816	35.992	-7.508	43.500
249.220	-5.096	39.572	34.476	-11.524	46.000
375.320	0.388	37.339	37.727	-8.273	46.000
676.020	0.451	42.673	43.125	-2.875	46.000
875.840	0.516	34.243	34.759	-11.241	46.000
901.060	1.858	38.991	40.849	-5.151	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5785MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector					
375.320	0.918	34.372	35.290	-10.710	46.000
449.040	0.386	38.739	39.125	-6.875	46.000
625.580	1.419	34.824	36.244	-9.756	46.000
676.020	2.841	35.087	37.929	-8.071	46.000
875.840	5.816	36.956	42.772	-3.228	46.000
901.060	5.878	37.811	43.689	-2.311	46.000
Vertical					
Peak Detector					
179.380	-0.824	36.469	35.645	-7.855	43.500
249.220	-5.096	37.269	32.173	-13.827	46.000
375.320	0.388	37.428	37.816	-8.184	46.000
625.580	0.299	35.588	35.888	-10.112	46.000
676.020	0.451	43.026	43.478	-2.522	46.000
901.060	1.858	39.396	41.254	-4.746	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5190MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
Peak Detector					
134.760	-7.473	39.361	31.888	-11.612	43.500
449.040	0.386	38.185	38.571	-7.429	46.000
625.580	1.419	34.400	35.820	-10.180	46.000
676.020	2.841	33.755	36.597	-9.403	46.000
875.840	5.816	38.073	43.889	-2.111	46.000
901.060	5.878	38.116	43.994	-2.006	46.000
Vertical					
Peak Detector					
179.380	-0.824	36.287	35.463	-8.037	43.500
249.220	-5.096	40.625	35.529	-10.471	46.000
375.320	0.388	34.142	34.530	-11.470	46.000
625.580	0.299	36.285	36.585	-9.415	46.000
676.020	0.451	41.175	41.627	-4.373	46.000
901.060	1.858	39.454	41.312	-4.688	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5270MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
Peak Detector					
375.320	0.918	35.907	36.825	-9.175	46.000
449.040	0.386	38.632	39.018	-6.982	46.000
625.580	1.419	40.098	41.518	-4.482	46.000
676.020	2.841	34.677	37.519	-8.481	46.000
875.840	5.816	38.412	44.228	-1.772	46.000
901.060	5.878	37.614	43.492	-2.508	46.000
Vertical					
Peak Detector					
179.380	-0.824	36.624	35.800	-7.700	43.500
375.320	0.388	37.603	37.991	-8.009	46.000
625.580	0.299	34.319	34.619	-11.381	46.000
676.020	0.451	32.110	32.562	-13.438	46.000
806.000	3.686	28.404	32.090	-13.910	46.000
901.060	1.858	39.667	41.525	-4.475	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5550MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector					
249.220	-6.216	41.278	35.062	-10.938	46.000
375.320	0.918	36.950	37.868	-8.132	46.000
449.040	0.386	38.561	38.947	-7.053	46.000
625.580	1.419	34.544	35.964	-10.036	46.000
875.840	5.816	38.024	43.840	-2.160	46.000
901.060	5.878	37.940	43.818	-2.182	46.000
Vertical					
Peak Detector					
179.380	-0.824	36.557	35.733	-7.767	43.500
249.220	-5.096	41.315	36.219	-9.781	46.000
375.320	0.388	36.379	36.767	-9.233	46.000
676.020	0.451	42.399	42.851	-3.149	46.000
806.000	3.686	29.234	32.920	-13.080	46.000
901.060	1.858	38.669	40.527	-5.473	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5755MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
249.220	-6.216	40.843	34.627	-11.373	46.000
375.320	0.918	37.774	38.692	-7.308	46.000
449.040	0.386	38.876	39.262	-6.738	46.000
676.020	2.841	34.803	37.645	-8.355	46.000
875.840	5.816	36.136	41.952	-4.048	46.000
901.060	5.878	36.884	42.762	-3.238	46.000
Vertical					
Peak Detector					
179.380	-0.824	37.368	36.544	-6.956	43.500
249.220	-5.096	42.274	37.178	-8.822	46.000
375.320	0.388	34.596	34.984	-11.016	46.000
676.020	0.451	41.775	42.227	-3.773	46.000
821.520	3.036	28.823	31.859	-14.141	46.000
901.060	1.858	38.990	40.848	-5.152	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

6. Band Edge

6.1. Test Equipment

RF Conducted Measurement

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with "X" are used to measure the final test results.

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct, 2014
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar, 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan, 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug, 2015
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan, 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul, 2015
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul, 2015


- Note:
1. All instruments are calibrated every one year.
 2. The test instruments marked by "X" are used to measure the final test results.

6.2. Test Setup

RF Conducted Measurement:

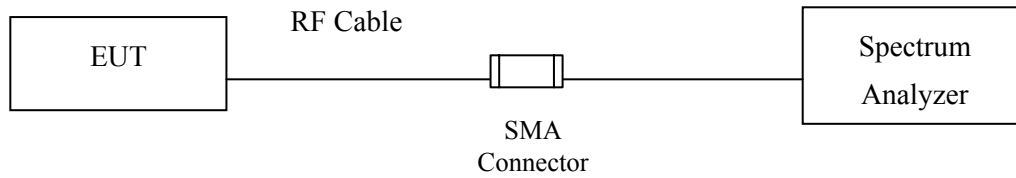

RF Radiated Measurement:

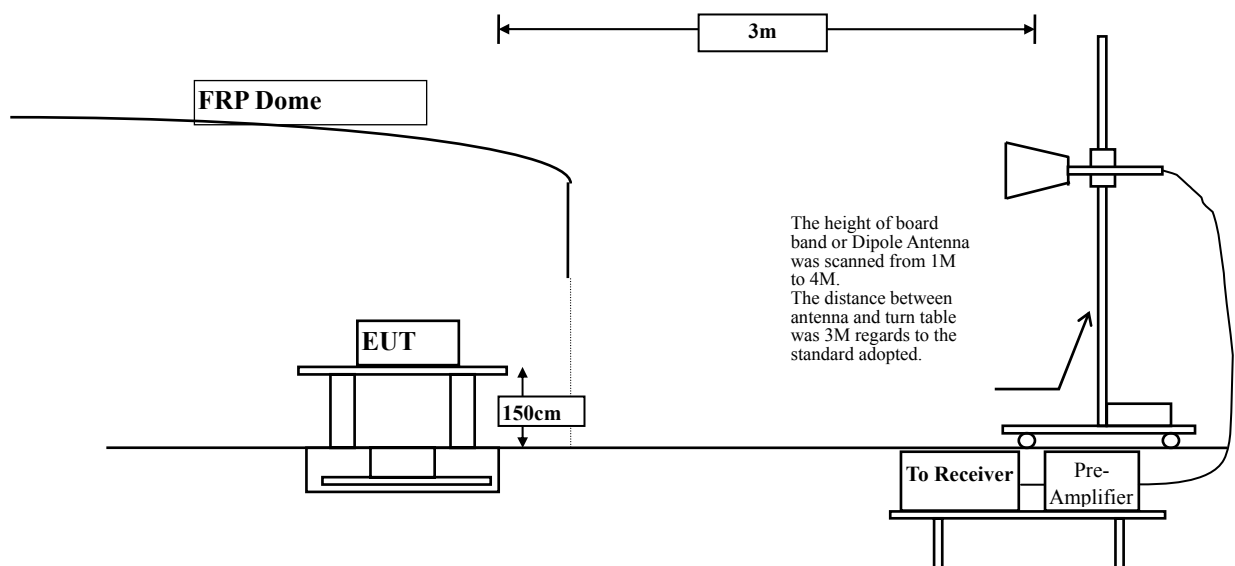

6.3. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBµV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks :

1. RF Voltage (dBµV) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

6.4. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

6.5. Uncertainty

± 3.8 dB below 1GHz

± 3.9 dB above 1GHz

6.6. Test Result of Band Edge

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 36

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5149.200	2.799	57.059	59.858	74.00	54.00	Pass
36 (Peak)	5150.000	2.796	56.411	59.207	74.00	54.00	Pass
36 (Peak)	5177.200	2.705	99.397	102.102	--	--	--
36 (Average)	5150.000	2.796	41.092	43.888	74.00	54.00	Pass
36 (Average)	5176.000	2.710	88.739	91.448	--	--	--

Figure Channel 36: Horizontal (Peak)


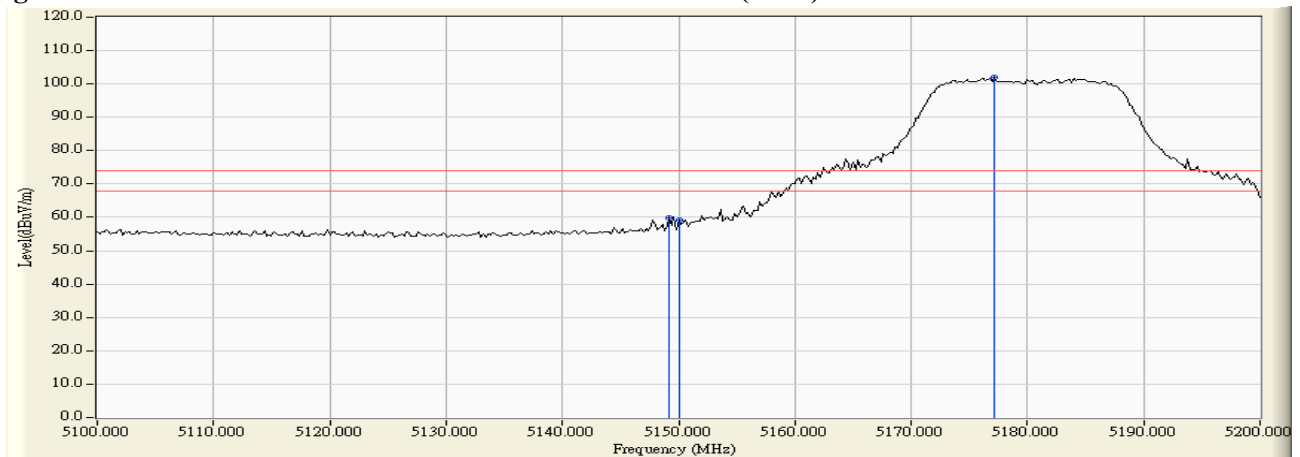


Figure Channel 36: Horizontal (Average)

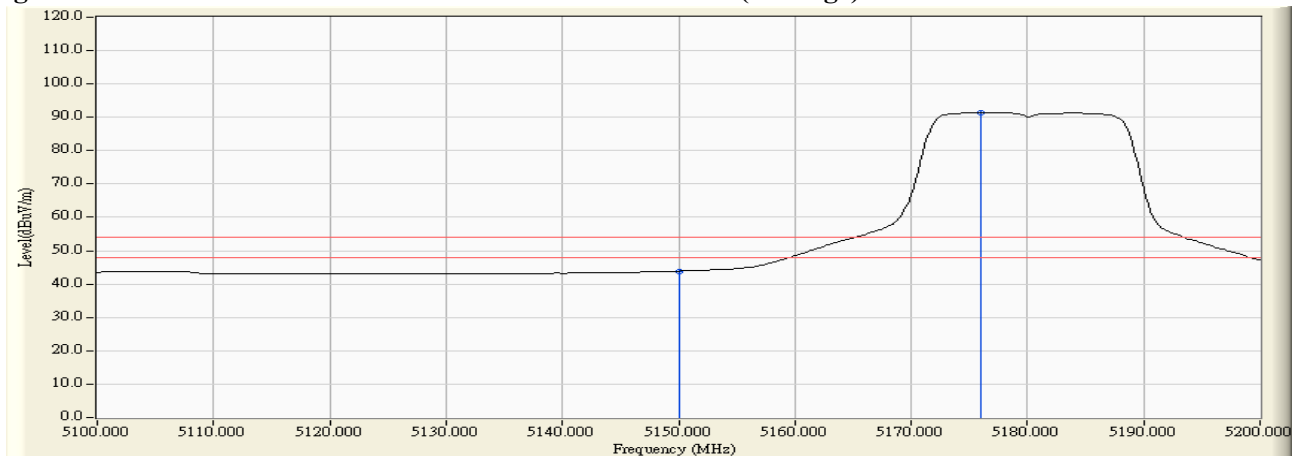

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 36

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5149.800	3.331	69.587	72.918	74.00	54.00	Pass
36 (Peak)	5150.000	3.331	67.237	70.569	74.00	54.00	Pass
36 (Peak)	5176.200	3.455	110.582	114.037	--	--	--
36 (Average)	5150.000	3.331	46.823	50.155	74.00	54.00	Pass
36 (Average)	5184.600	3.494	99.507	103.001	--	--	--

Figure Channel 36: Vertical (Peak)


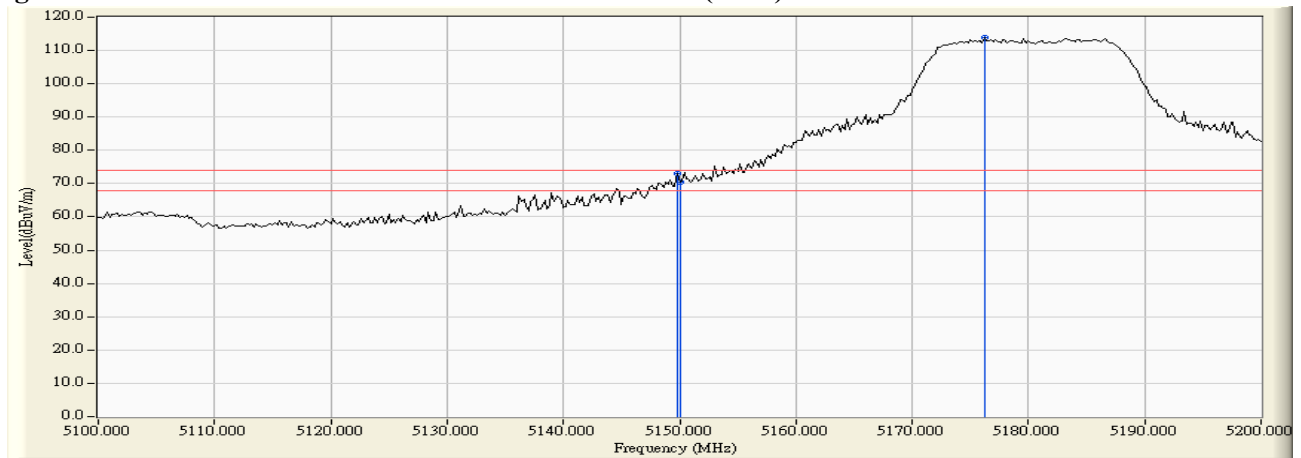


Figure Channel 36: Vertical (Average)

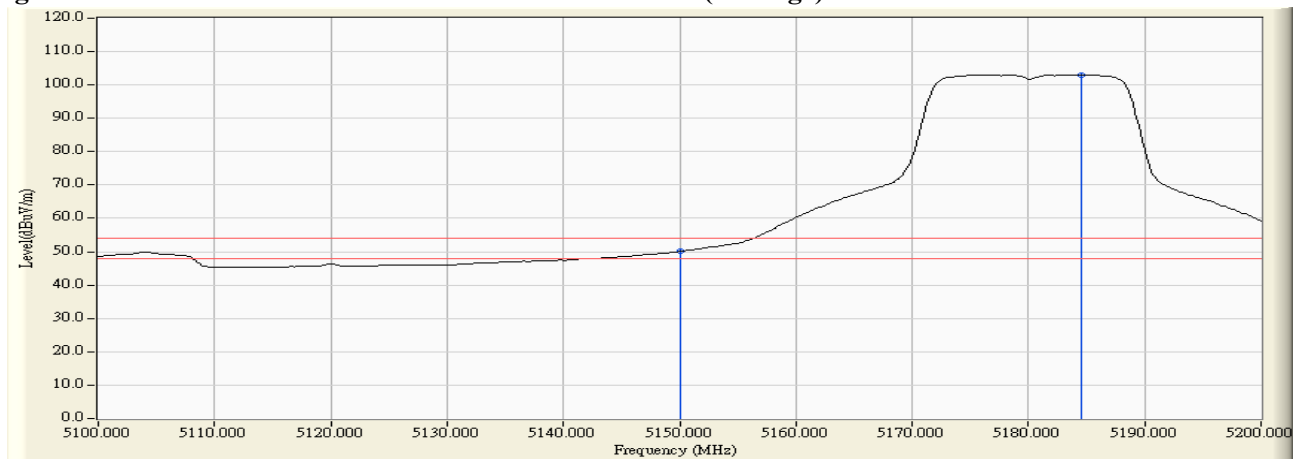

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 64

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5323.200	3.637	99.966	103.603	--	--	--
64 (Peak)	5350.000	3.575	55.876	59.451	74.00	54.00	Pass
64 (Peak)	5351.000	3.573	57.517	61.089	74.00	54.00	Pass
64 (Average)	5325.200	3.633	89.277	92.910	--	--	--
64 (Average)	5350.000	3.575	40.796	44.371	74.00	54.00	Pass

Figure Channel 64: Horizontal (Peak)


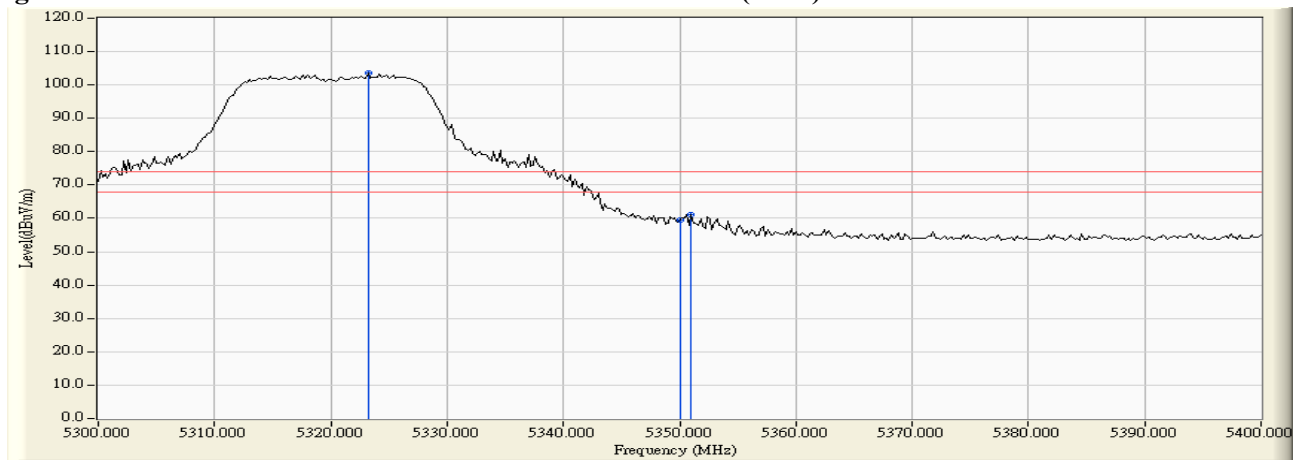


Figure Channel 64: Horizontal (Average)

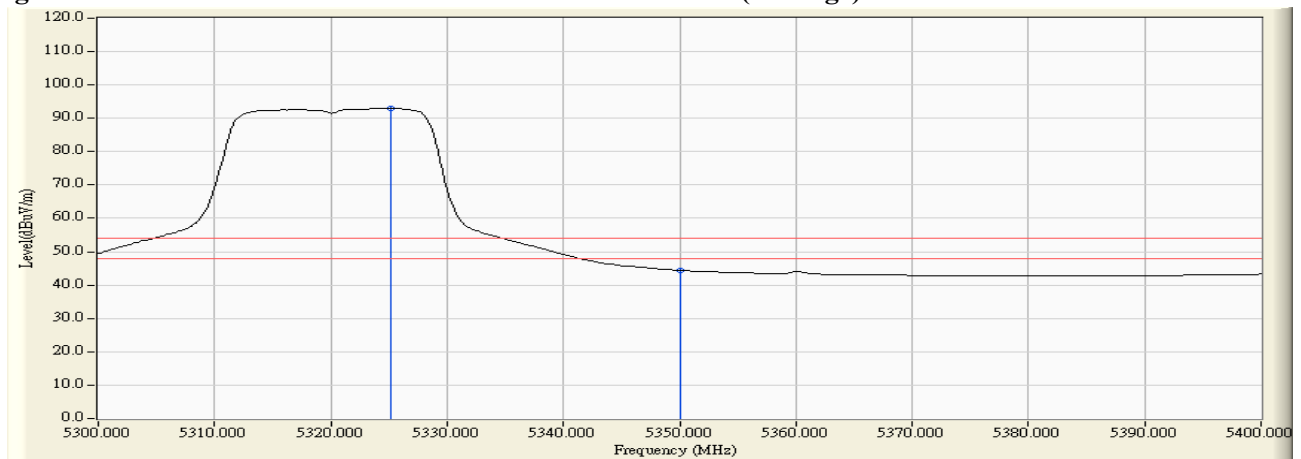

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 64

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5324.200	3.890	112.245	116.135	--	--	--
64 (Peak)	5350.000	3.900	67.502	71.402	74.00	54.00	Pass
64 (Peak)	5351.000	3.901	69.157	73.057	74.00	54.00	Pass
64 (Average)	5325.200	3.891	101.301	105.192	--	--	--
64 (Average)	5350.000	3.900	47.376	51.276	74.00	54.00	Pass

Figure Channel 64: Vertical (Peak)


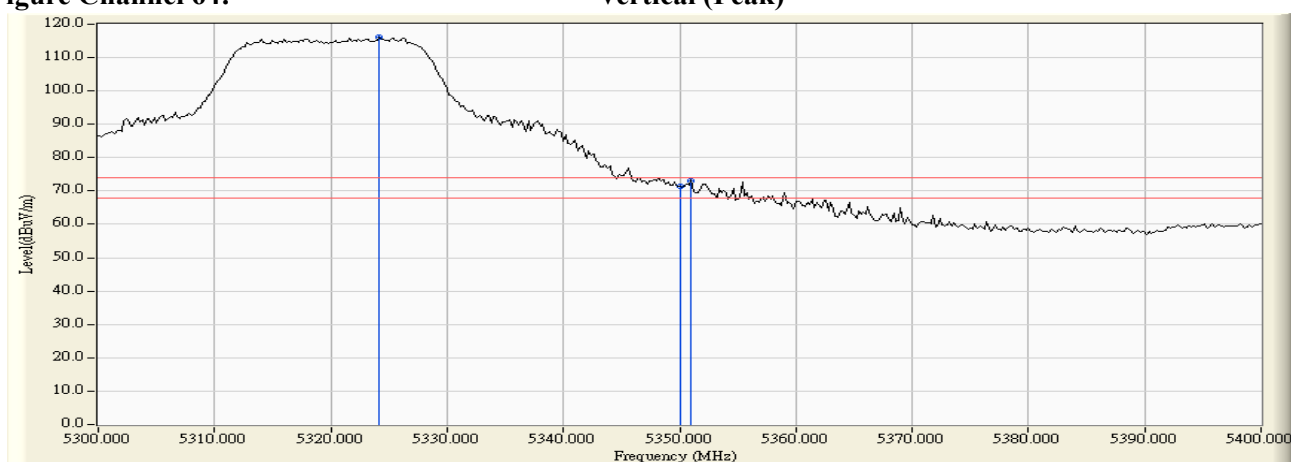


Figure Channel 64: Vertical (Average)

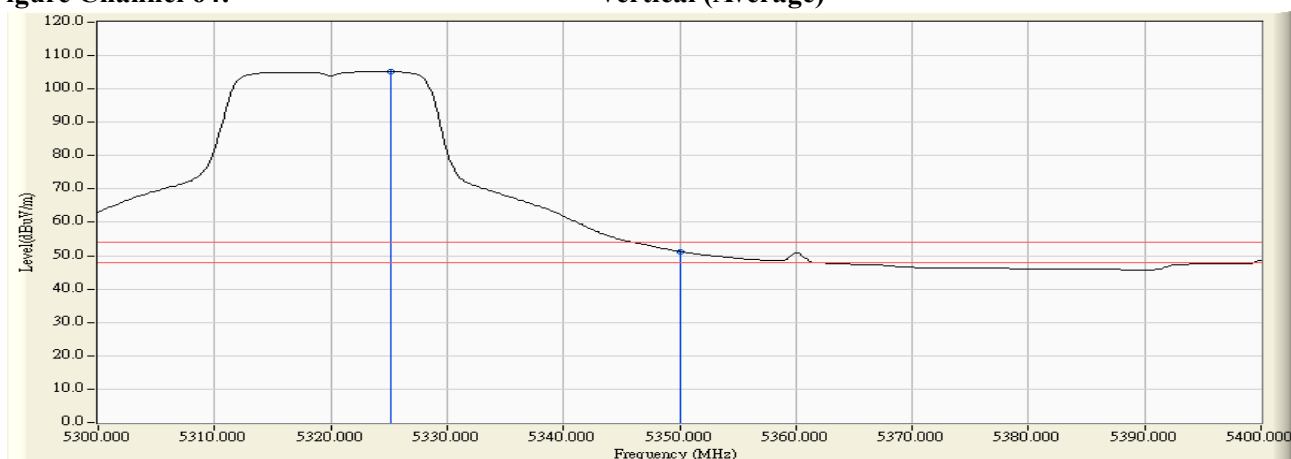

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 100

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5426.800	3.400	52.898	56.298	74.00	54.00	Pass
100 (Peak)	5460.000	3.775	51.512	55.287	74.00	54.00	Pass
100 (Peak)	5504.600	4.542	98.439	102.980	--	--	--
100 (Average)	5426.000	3.394	40.866	44.260	74.00	54.00	Pass
100 (Average)	5460.000	3.775	39.723	43.498	74.00	54.00	Pass
100 (Average)	5504.200	4.535	88.098	92.633	--	--	--

Figure Channel 100:

Horizontal (Peak)


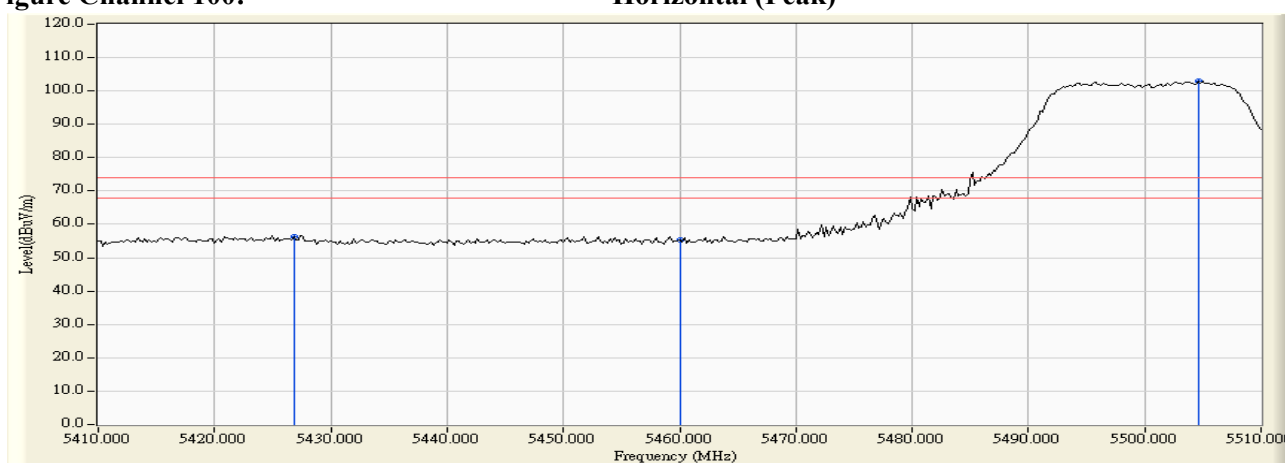


Figure Channel 100:

Horizontal (Average)

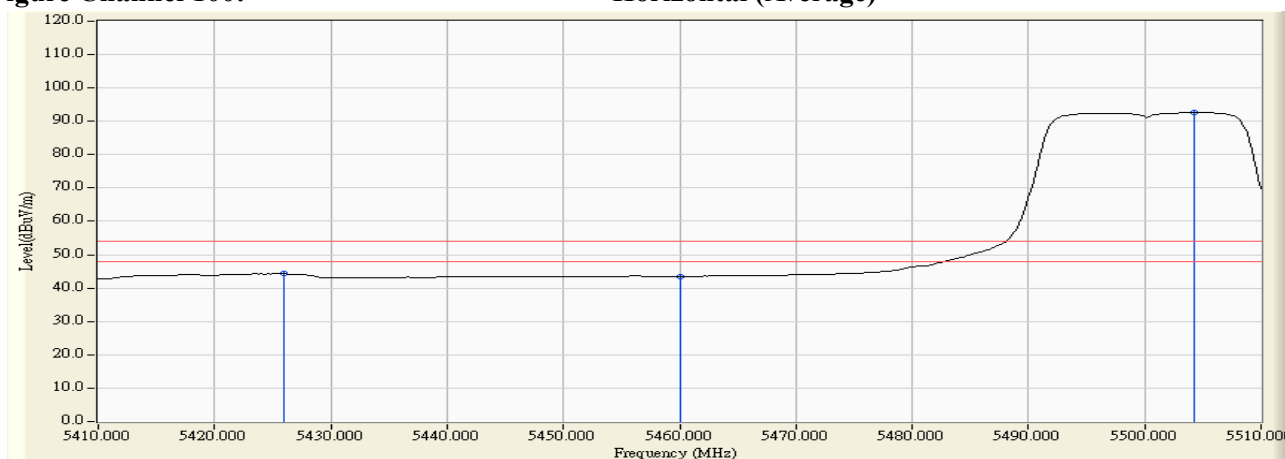

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 100

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5458.400	3.912	58.196	62.108	74.00	54.00	Pass
100 (Peak)	5460.000	3.934	54.849	58.784	74.00	54.00	Pass
100 (Peak)	5505.000	4.511	107.703	112.214	--	--	--
100 (Average)	5424.400	3.720	46.080	49.800	74.00	54.00	Pass
100 (Average)	5460.000	3.934	41.913	45.848	74.00	54.00	Pass
100 (Average)	5504.600	4.508	96.956	101.463	--	--	--

Figure Channel 100: Vertical (Peak)


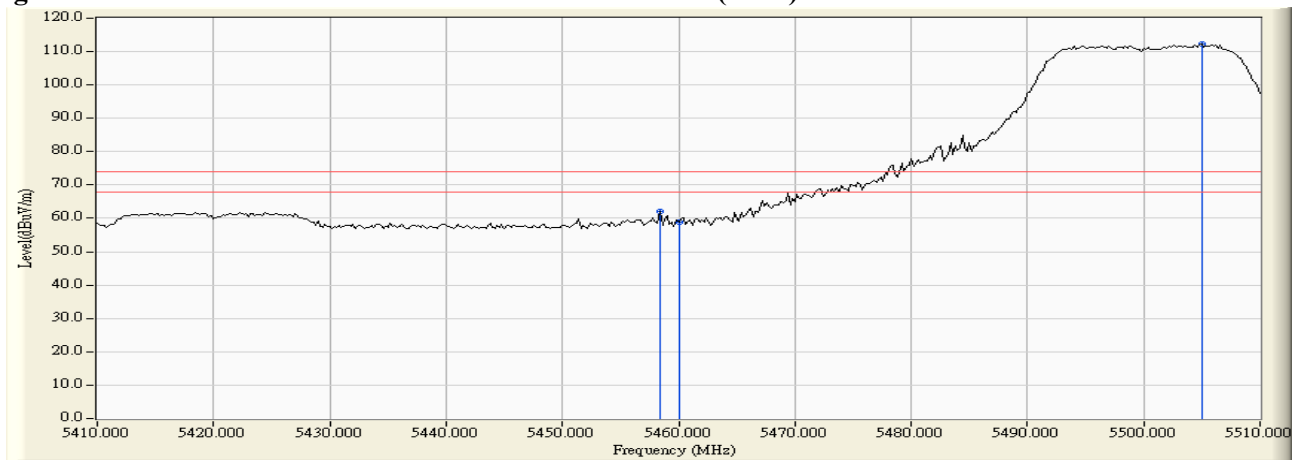



Figure Channel 100: Vertical (Average)

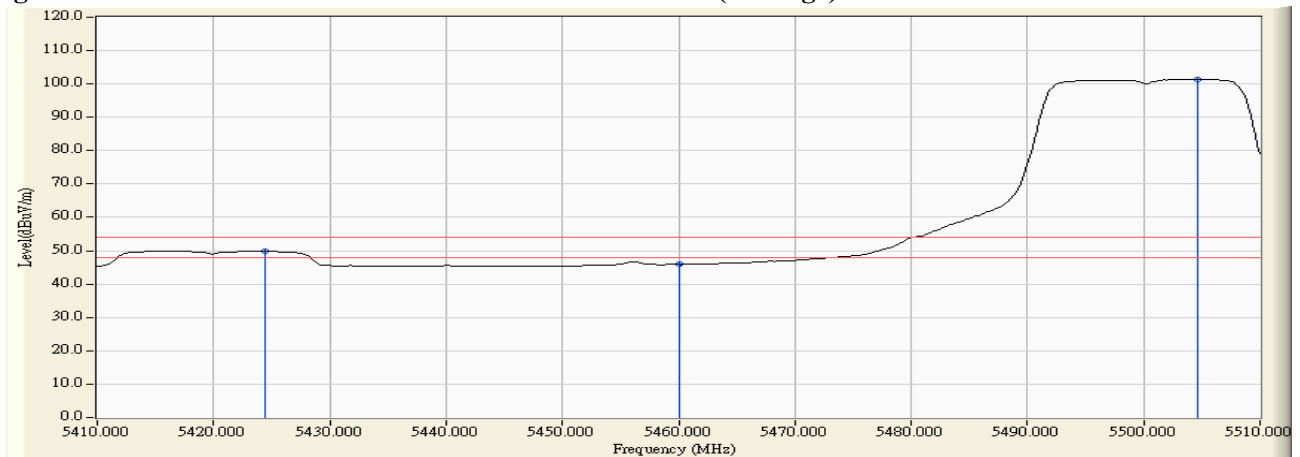

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 100

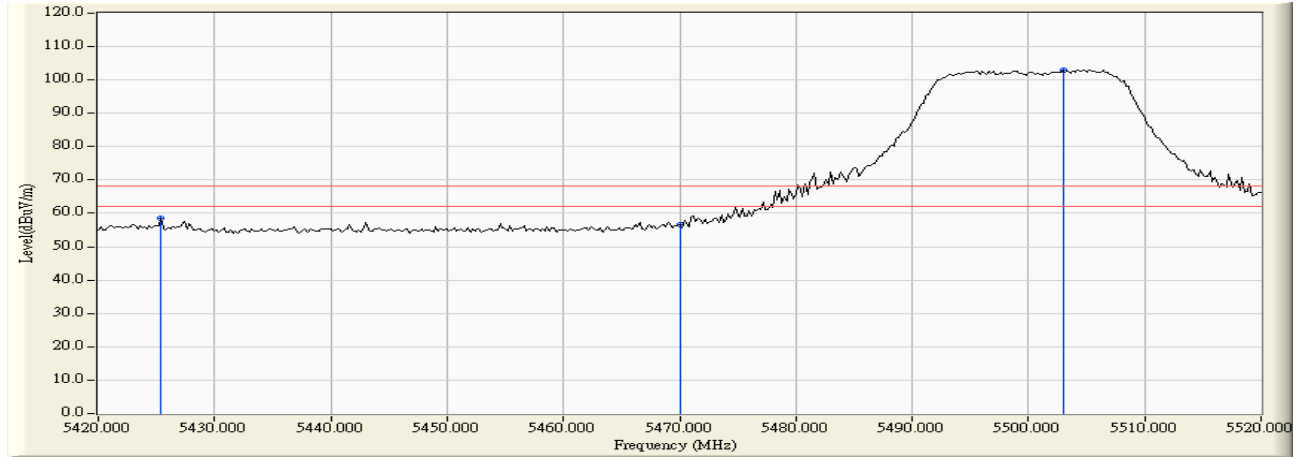

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Horizontal	5425.400	3.389	55.086	58.475	-9.745	68.220	Pass
Horizontal	5470.000	3.970	52.547	56.517	-11.703	68.220	Pass
Horizontal	5503.000	4.520	98.550	103.069	--	--	--

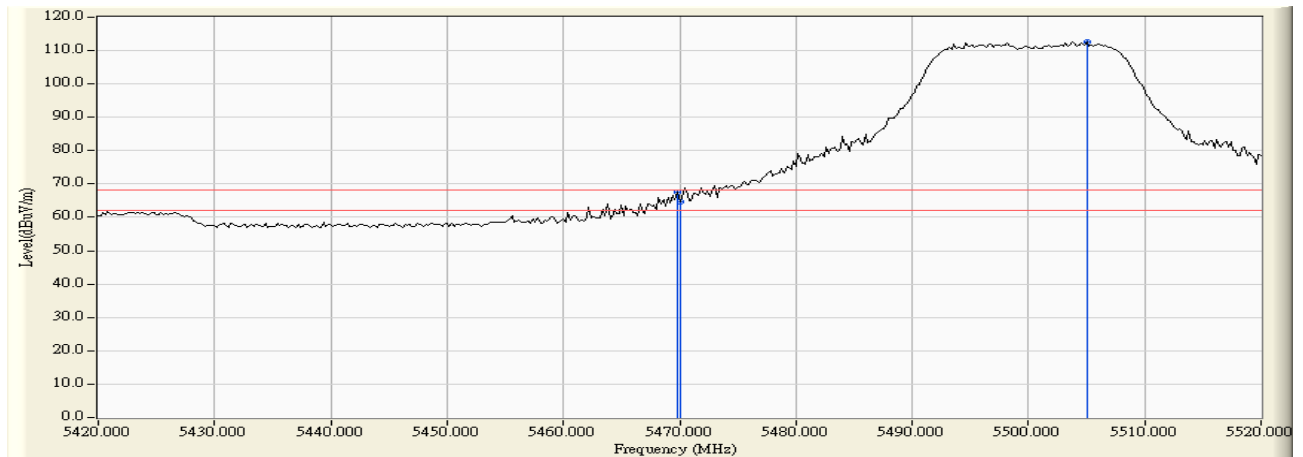

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Vertical	5469.800	4.077	63.397	67.473	-0.747	68.220	Pass
Vertical	5470.000	4.079	60.709	64.788	-3.432	68.220	Pass
Vertical	5505.000	4.511	108.059	112.570	--	--	--

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 140

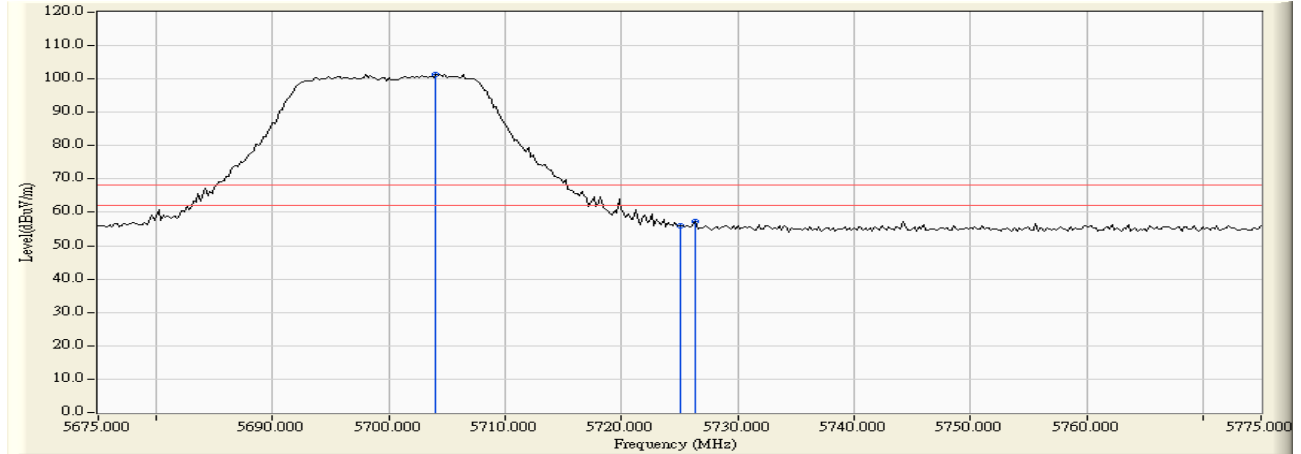

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Horizontal	5704.000	5.017	96.436	101.454	--	--	--
Horizontal	5725.000	5.104	50.775	55.878	-12.342	68.220	Pass
Horizontal	5726.400	5.109	51.998	57.107	-11.113	68.220	Pass

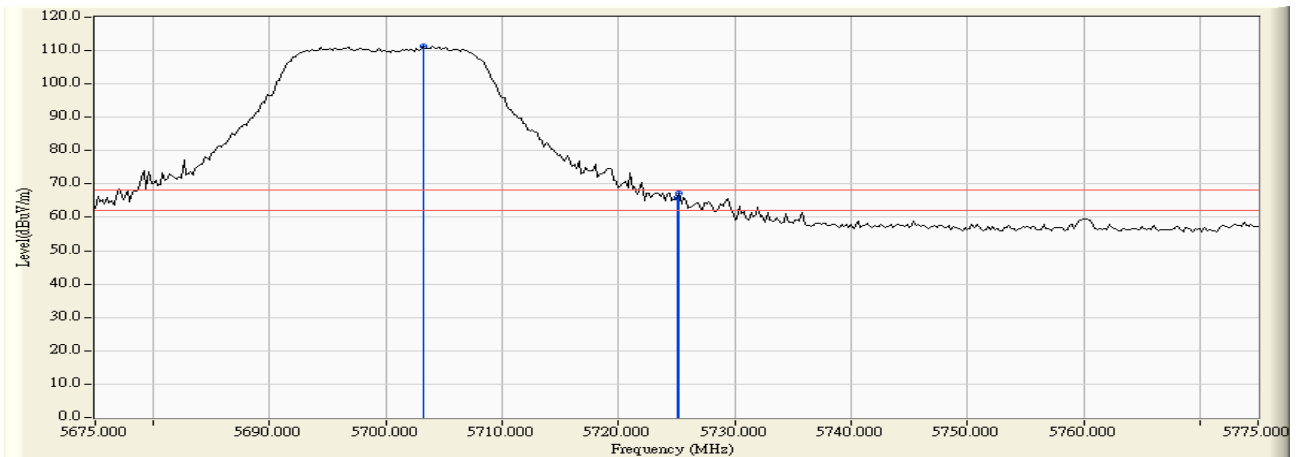

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Vertical	5703.200	4.174	107.153	111.326	--	--	--
Vertical	5725.000	4.215	61.797	66.012	-2.208	68.220	Pass
Vertical	5725.200	4.215	63.170	67.385	-0.835	68.220	Pass

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 149

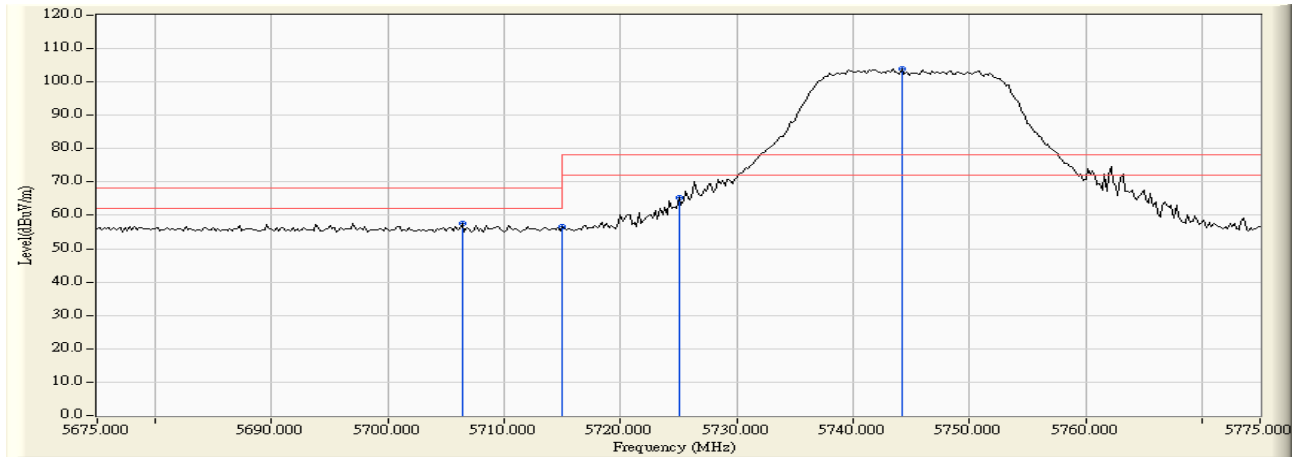

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5706.400	5.028	52.537	57.565	-10.655	68.220	Pass
Horizontal	5715.000	5.063	51.537	56.600	-11.620	68.220	Pass
Horizontal	5725.000	5.104	60.157	65.260	-12.960	78.220	Pass
Horizontal	5744.200	5.183	98.798	103.981	--	--	--

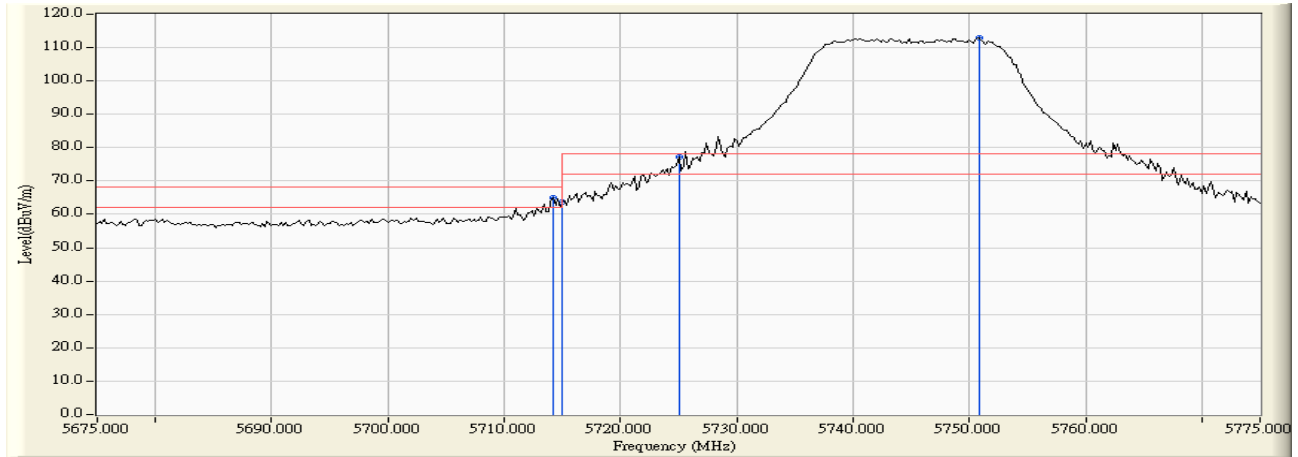

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5714.200	4.183	60.826	65.009	-3.211	68.220	Pass
Vertical	5715.000	4.186	59.652	63.838	-4.382	68.220	Pass
Vertical	5725.000	4.215	72.926	77.141	-1.079	78.220	Pass
Vertical	5750.800	4.288	108.476	112.764	--	--	--

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 165

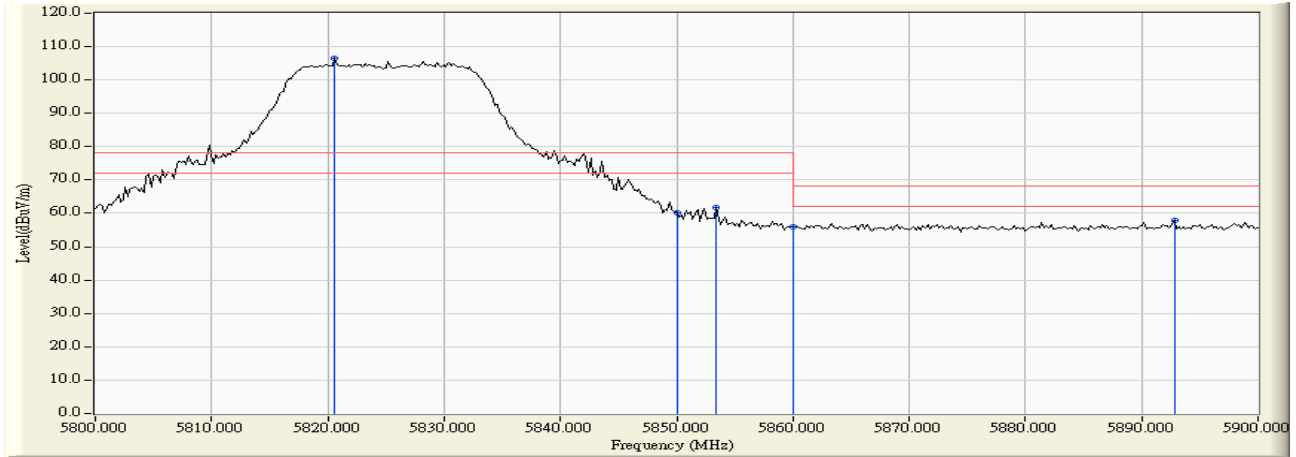

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Horizontal	5820.600	5.512	100.891	106.403	--	--	--
Horizontal	5850.000	5.715	54.532	60.247	-17.973	78.220	Pass
Horizontal	5853.400	5.742	56.123	61.866	-16.354	78.220	Pass
Horizontal	5860.000	5.798	50.171	55.969	-12.251	68.220	Pass
Horizontal	5892.800	6.094	51.756	57.849	-10.371	68.220	Pass

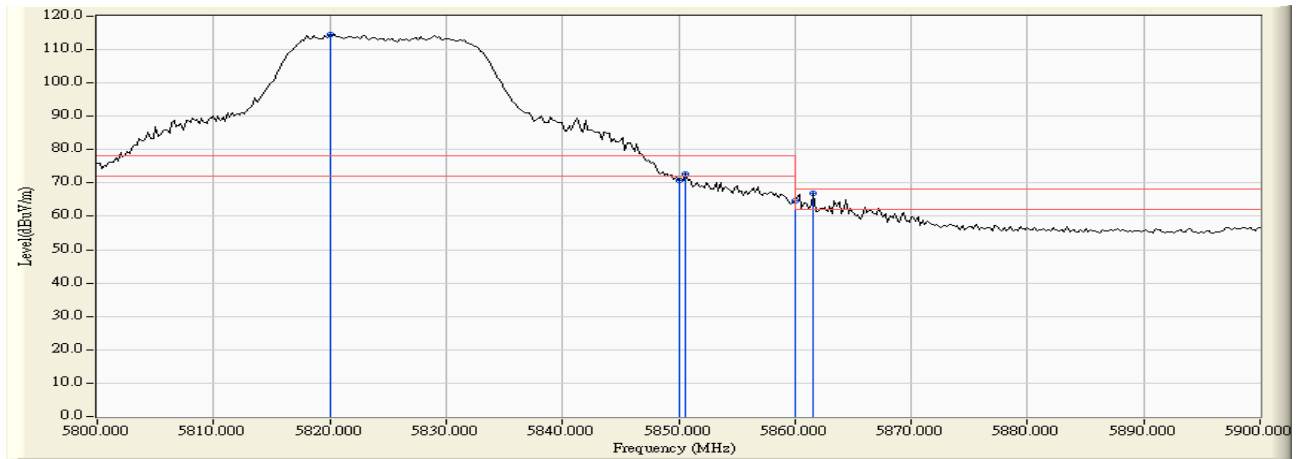

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Vertical	5820.000	4.314	110.192	114.506	--	--	--
Vertical	5850.000	4.194	66.602	70.796	-7.424	78.220	Pass
Vertical	5850.600	4.193	68.651	72.844	-5.376	78.220	Pass
Vertical	5860.000	4.168	60.503	64.671	-3.549	68.220	Pass
Vertical	5861.600	4.164	62.665	66.829	-1.391	68.220	Pass

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 36

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5149.400	2.799	56.125	58.923	74.00	54.00	Pass
36 (Peak)	5150.000	2.796	54.973	57.769	74.00	54.00	Pass
36 (Peak)	5175.200	2.712	103.757	106.469	--	--	--
36 (Average)	5105.200	2.909	42.634	45.544	74.00	54.00	Pass
36 (Average)	5150.000	2.796	42.304	45.100	74.00	54.00	Pass
36 (Average)	5175.800	2.710	92.491	95.201	--	--	--

Figure Channel 36: Horizontal (Peak)


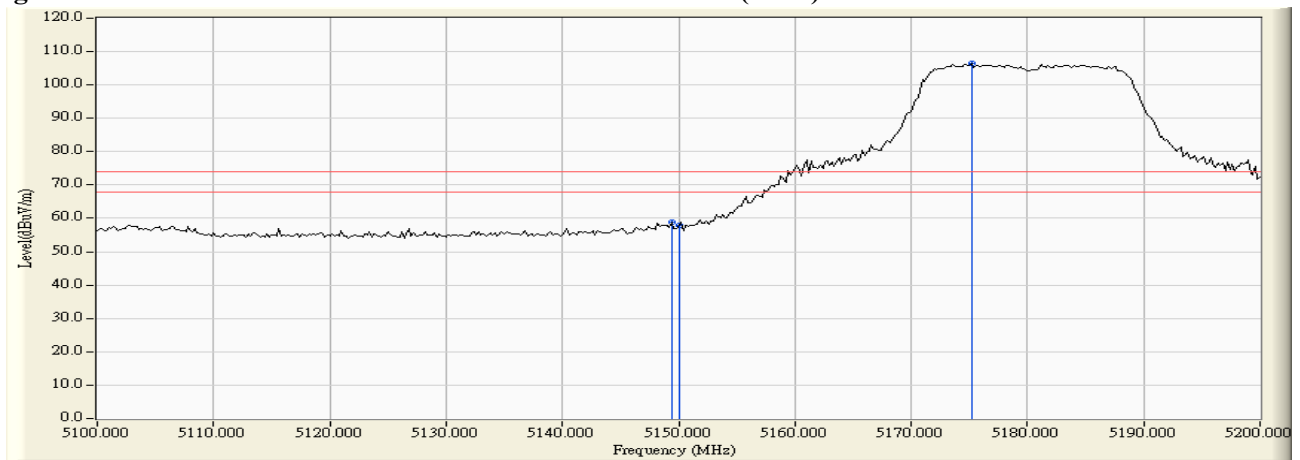


Figure Channel 36: Horizontal (Average)

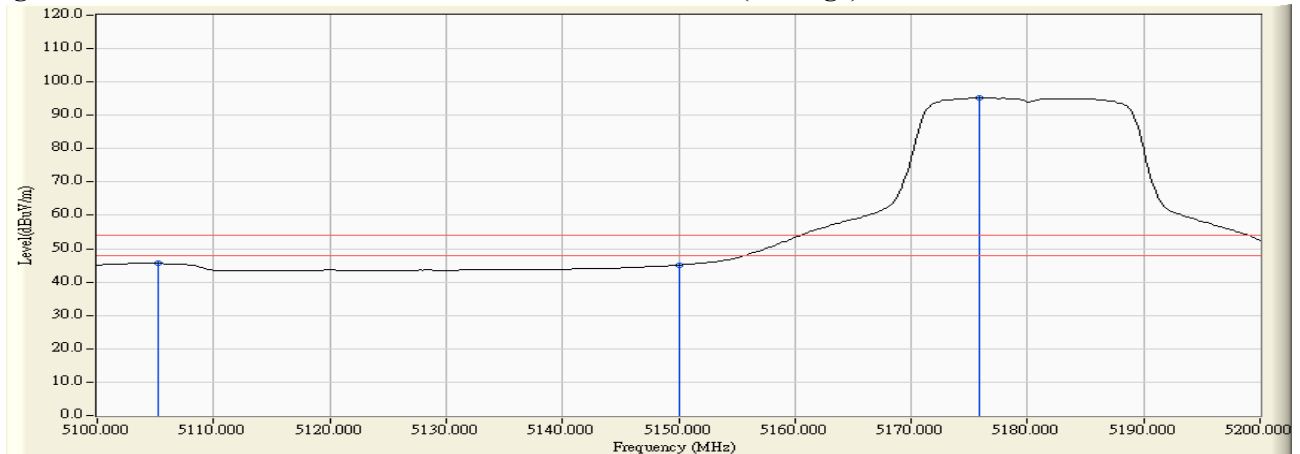

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 36

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5103.800	3.103	49.529	52.633	74.00	54.00	Pass
36 (Peak)	5150.000	3.331	49.274	52.606	74.00	54.00	Pass
36 (Peak)	5184.600	3.494	101.362	104.856	--	--	--
36 (Average)	5103.800	3.103	49.529	52.633	74.00	54.00	Pass
36 (Average)	5150.000	3.331	49.274	52.606	74.00	54.00	Pass
36 (Average)	5184.600	3.494	101.362	104.856	--	--	--

Figure Channel 36: Vertical (Peak)


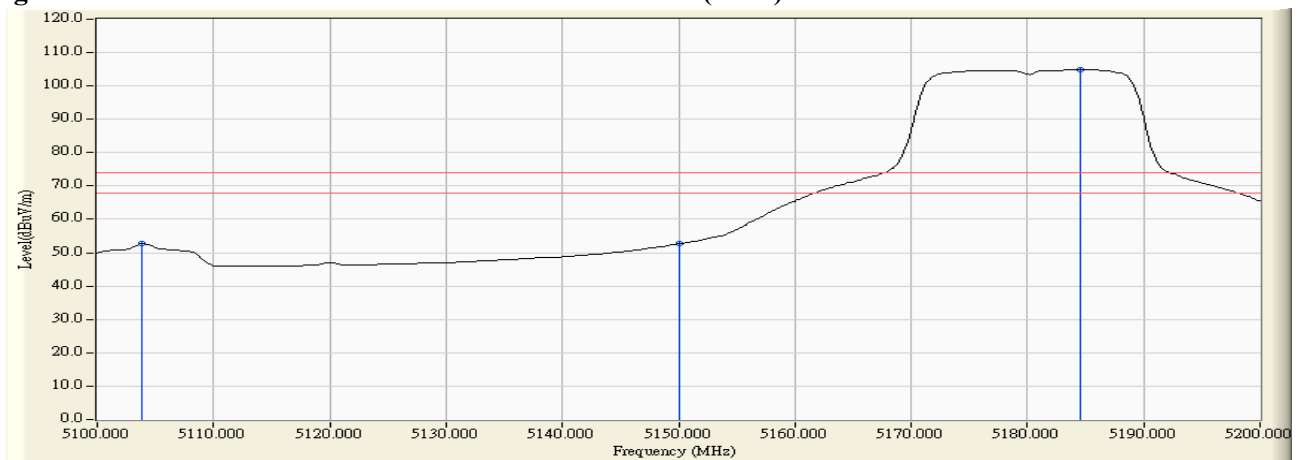


Figure Channel 36: Vertical (Average)

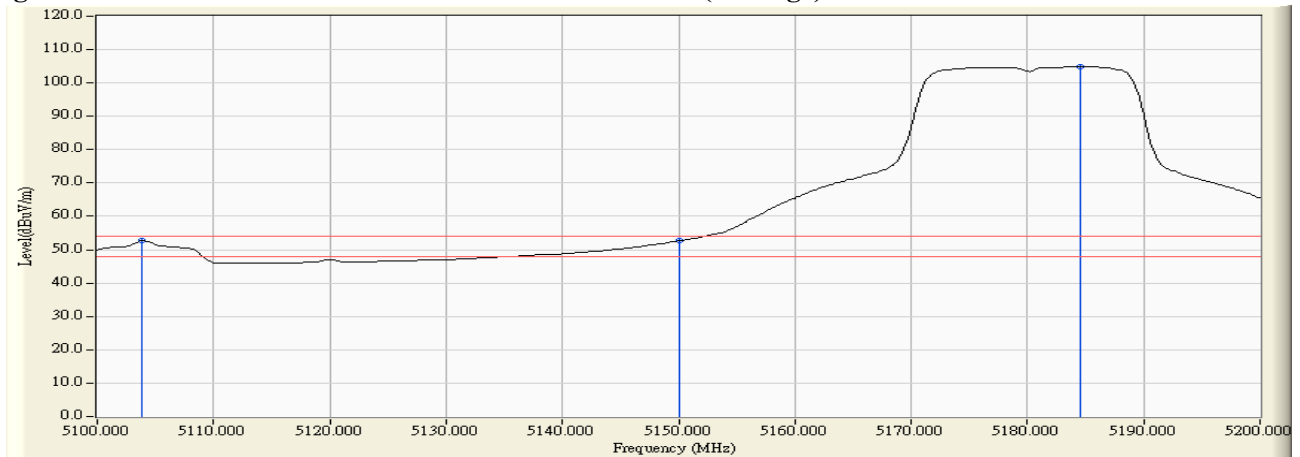

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 64

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5315.400	3.652	103.493	107.144	--	--	--
64 (Peak)	5350.000	3.575	54.369	57.944	74.00	54.00	Pass
64 (Peak)	5350.800	3.572	56.838	60.411	74.00	54.00	Pass
64 (Average)	5324.800	3.633	91.232	94.866	--	--	--
64 (Average)	5350.000	3.575	41.089	44.664	74.00	54.00	Pass

Figure Channel 64: Horizontal (Peak)


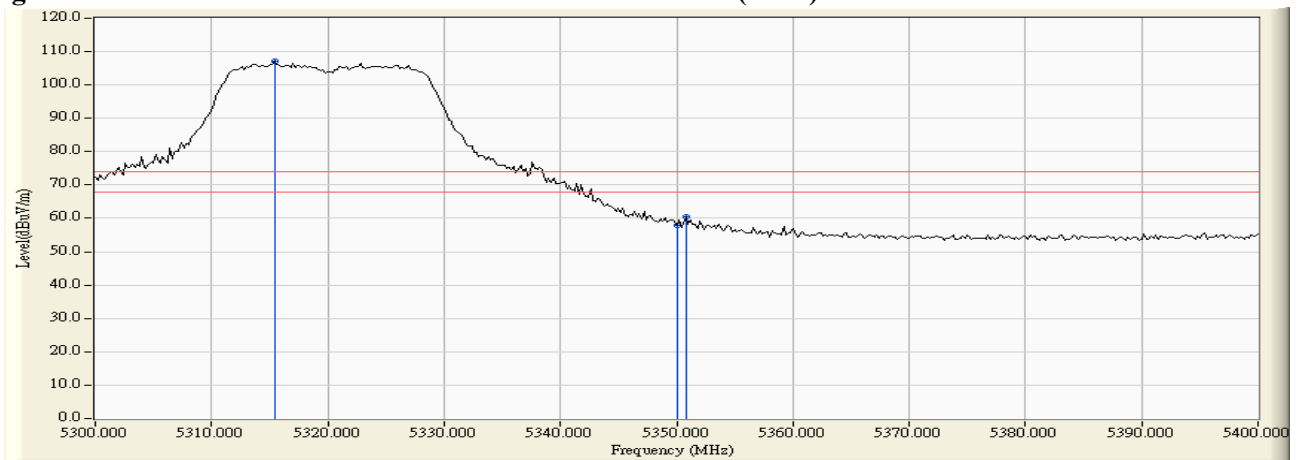


Figure Channel 64: Horizontal (Average)

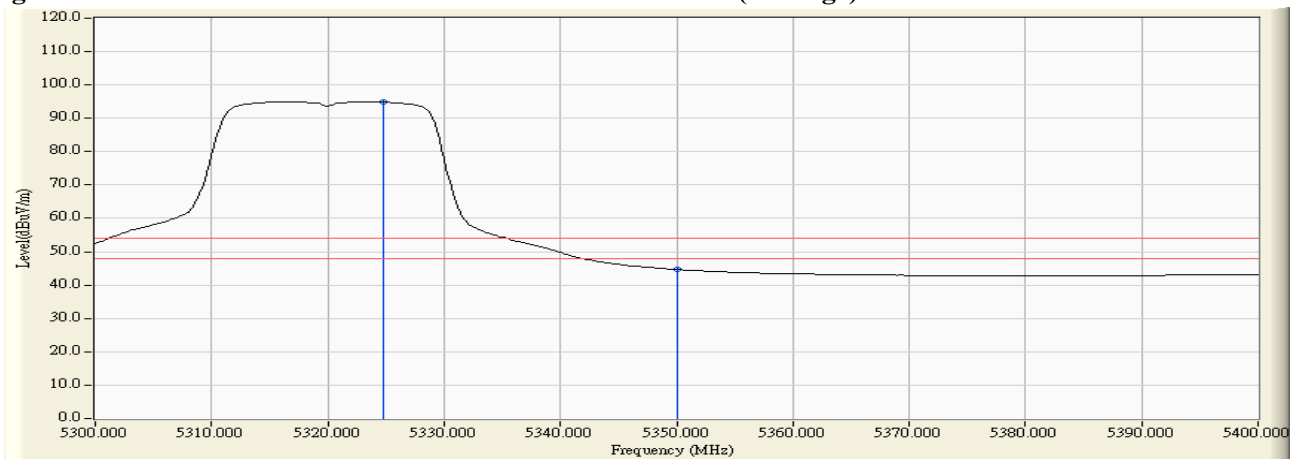

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 64

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5317.800	3.885	113.288	117.173	--	--	--
64 (Peak)	5350.000	3.900	64.964	68.864	74.00	54.00	Pass
64 (Peak)	5354.200	3.889	65.241	69.130	74.00	54.00	Pass
64 (Average)	5324.800	3.890	101.486	105.377	--	--	--
64 (Average)	5350.000	3.900	48.430	52.330	74.00	54.00	Pass

Figure Channel 64: Vertical (Peak)


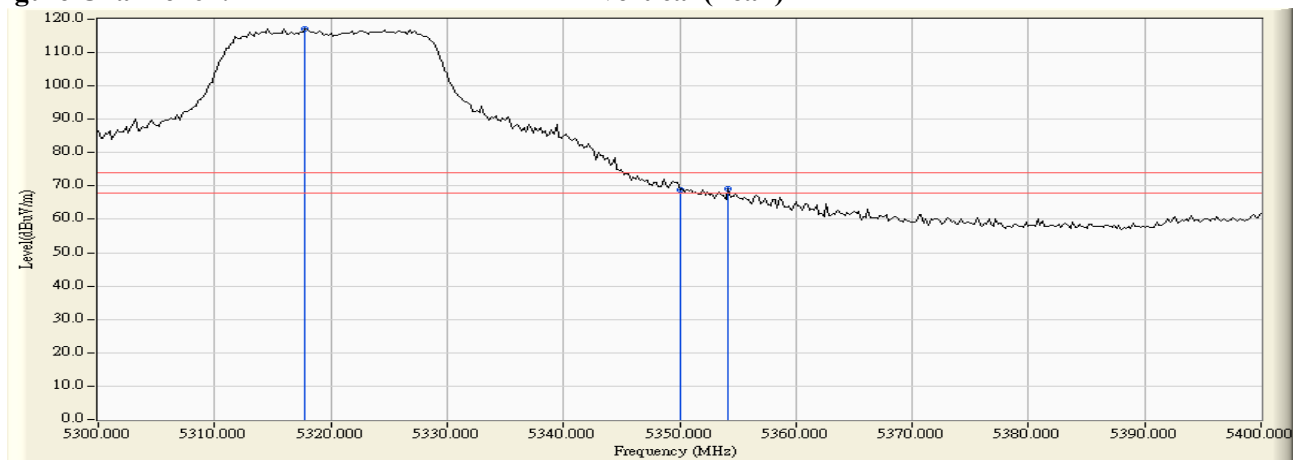


Figure Channel 64: Vertical (Average)

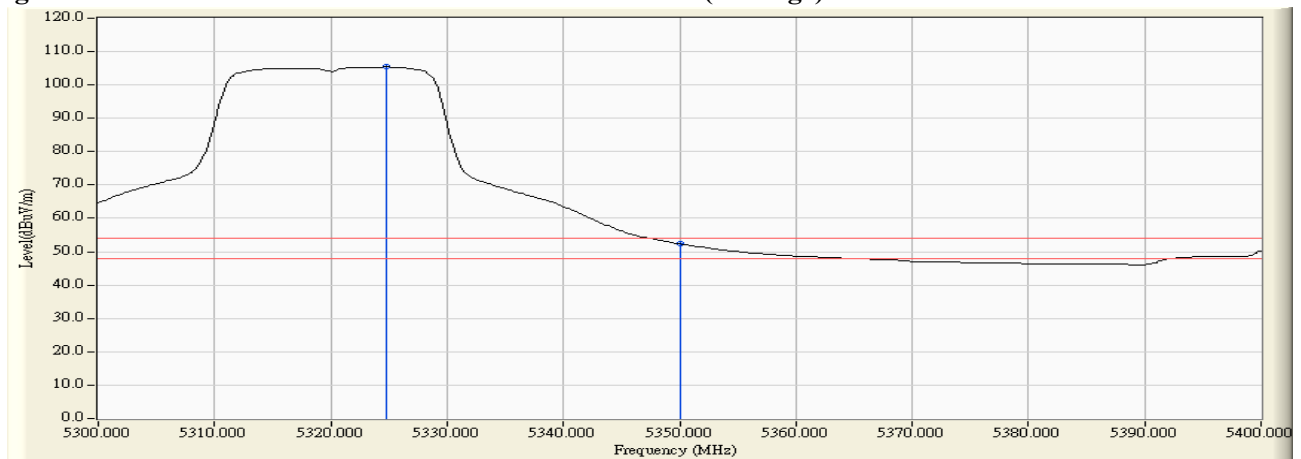

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 100

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5425.400	3.389	54.864	58.253	74.00	54.00	Pass
100 (Peak)	5460.000	3.775	52.436	56.211	74.00	54.00	Pass
100 (Peak)	5503.400	4.525	104.376	108.901	--	--	--
100 (Average)	5427.200	3.402	42.441	45.844	74.00	54.00	Pass
100 (Average)	5460.000	3.775	40.281	44.056	74.00	54.00	Pass
100 (Average)	5505.000	4.546	92.589	97.135	--	--	--

Figure Channel 100: Horizontal (Peak)


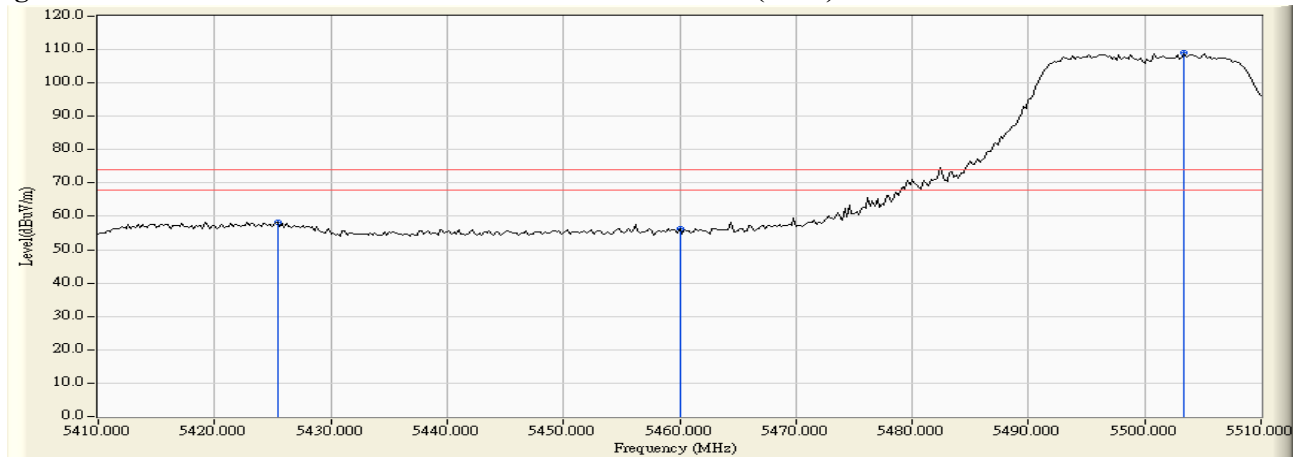


Figure Channel 100: Horizontal (Average)

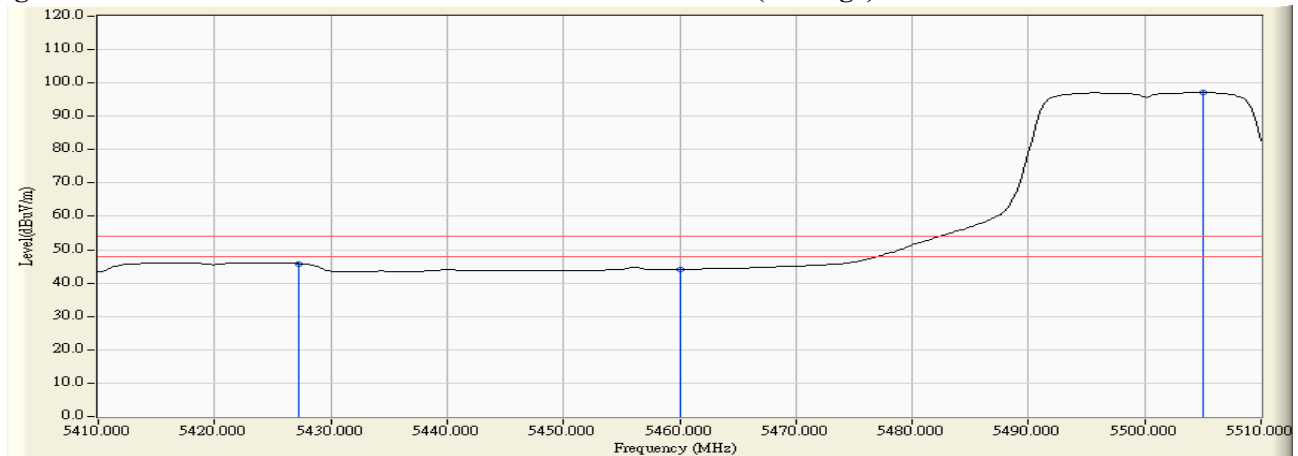

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 100

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5423.400	3.717	58.178	61.895	74.00	54.00	Pass
100 (Peak)	5460.000	3.934	55.306	59.241	74.00	54.00	Pass
100 (Peak)	5494.400	4.403	110.025	114.427	--	--	--
100 (Average)	5424.400	3.720	45.552	49.272	74.00	54.00	Pass
100 (Average)	5460.000	3.934	42.458	46.393	74.00	54.00	Pass
100 (Average)	5495.600	4.415	97.638	102.053	--	--	--

Figure Channel 100: Vertical (Peak)


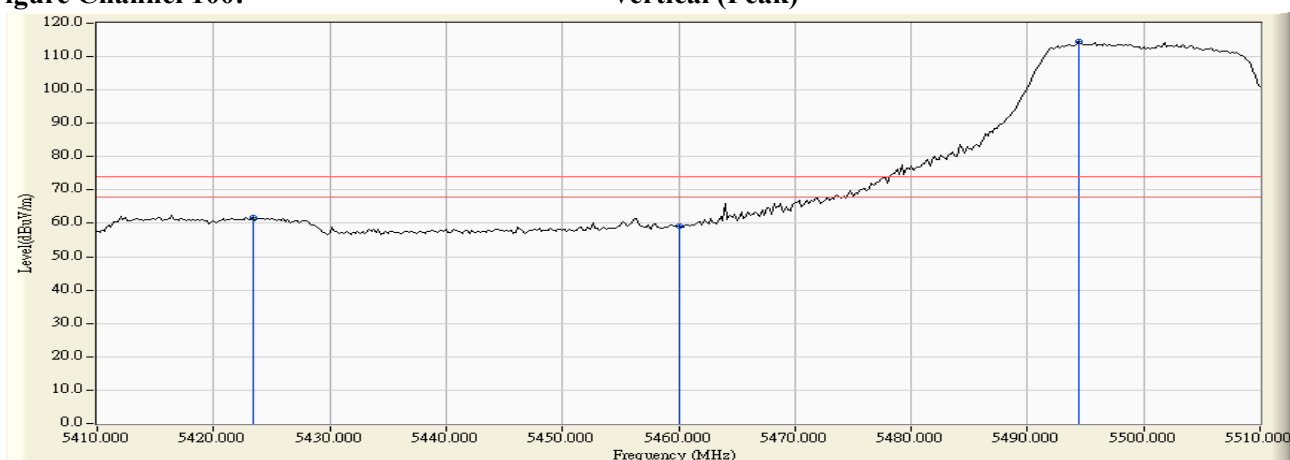



Figure Channel 100: Vertical (Average)

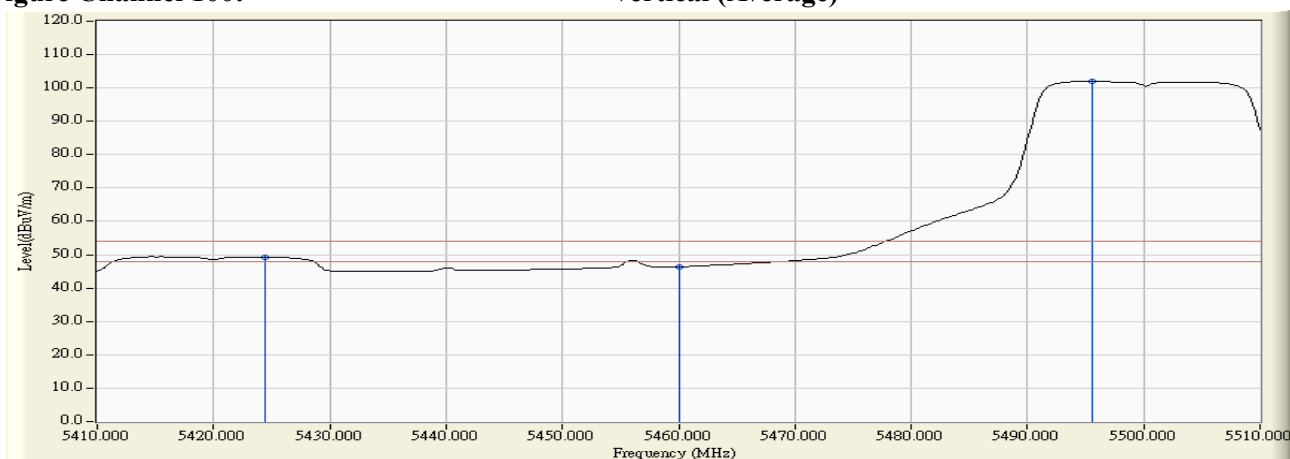

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 100

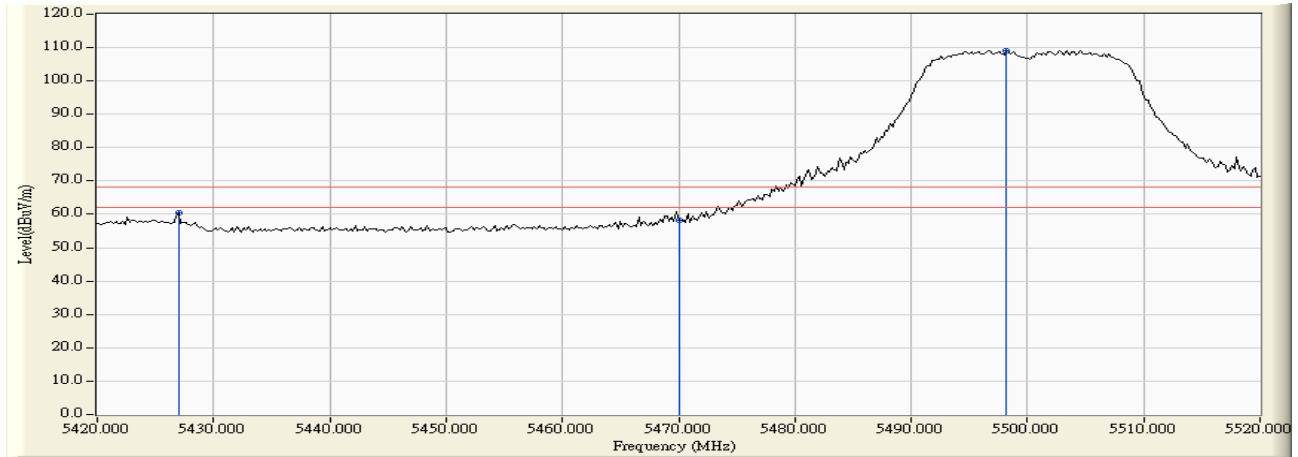

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
Horizontal	5427.000	3.402	56.969	60.371	-7.849	68.220	Pass
Horizontal	5470.000	3.970	54.268	58.238	-9.982	68.220	Pass
Horizontal	5498.200	4.454	104.691	109.145	--	--	--

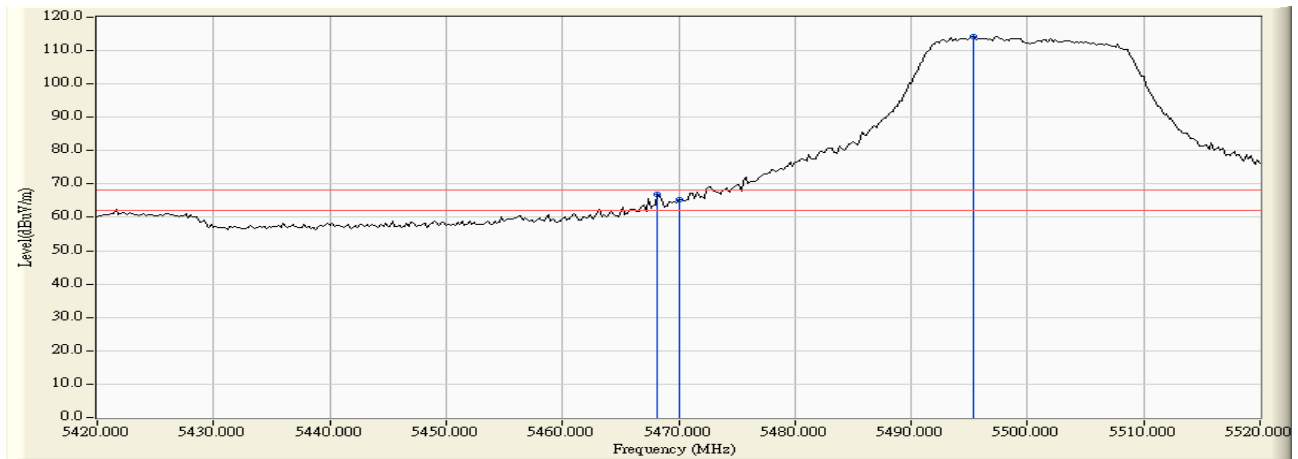

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Vertical	5468.200	4.054	62.888	66.941	-1.279	68.220	Pass
Vertical	5470.000	4.079	61.090	65.169	-3.051	68.220	Pass
Vertical	5495.400	4.413	109.929	114.341	--	--	--

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 140

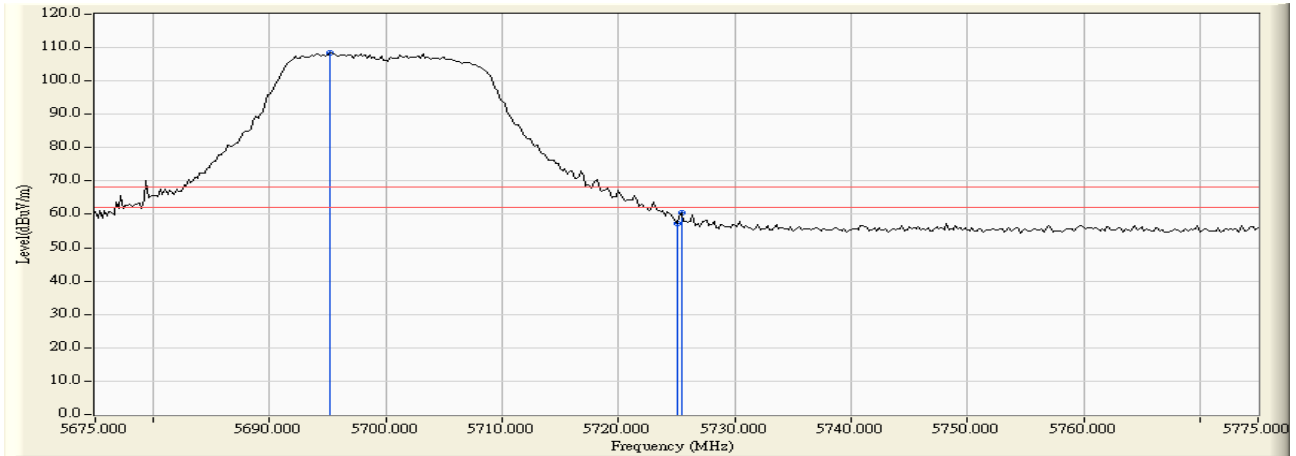

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Horizontal	5695.200	4.983	103.481	108.463	--	--	--
Horizontal	5725.000	5.104	52.127	57.230	-10.990	68.220	Pass
Horizontal	5725.400	5.106	55.361	60.466	-7.754	68.220	Pass

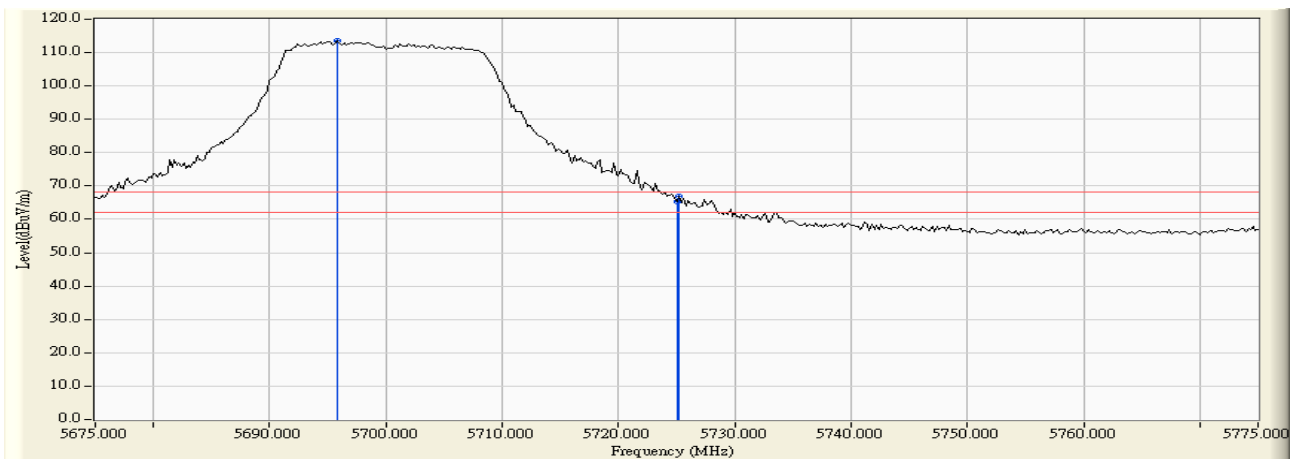

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Vertical	5695.800	4.180	109.346	113.525	--	--	--
Vertical	5725.000	4.215	61.207	65.422	-2.798	68.220	Pass
Vertical	5725.200	4.215	62.809	67.024	-1.196	68.220	Pass

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 149

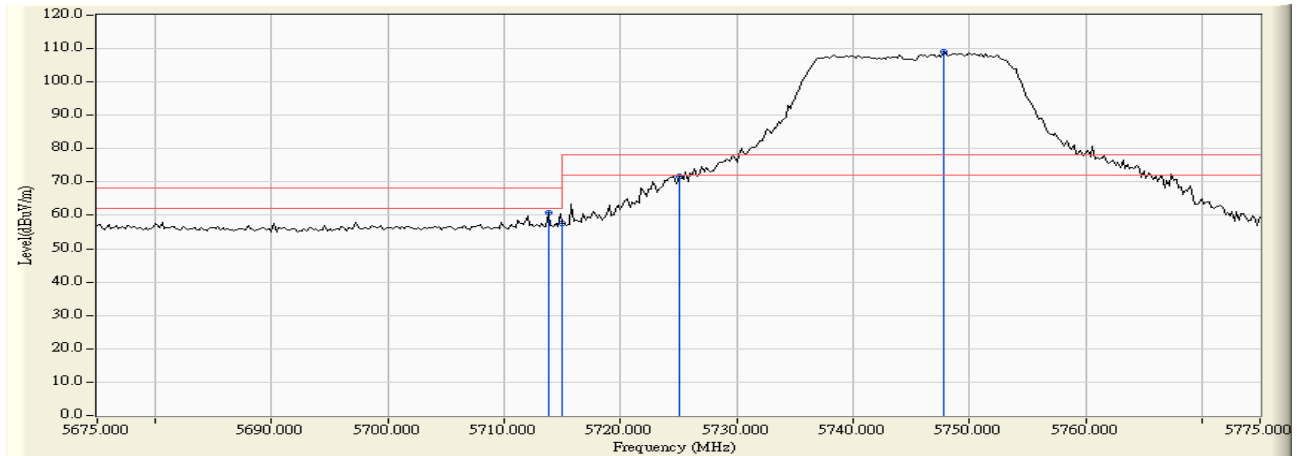

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5713.800	5.058	55.767	60.825	-7.395	68.220	Pass
Horizontal	5715.000	5.063	52.528	57.591	-10.629	68.220	Pass
Horizontal	5725.000	5.104	66.665	71.768	-6.452	78.220	Pass
Horizontal	5747.800	5.196	103.834	109.030	--	--	--

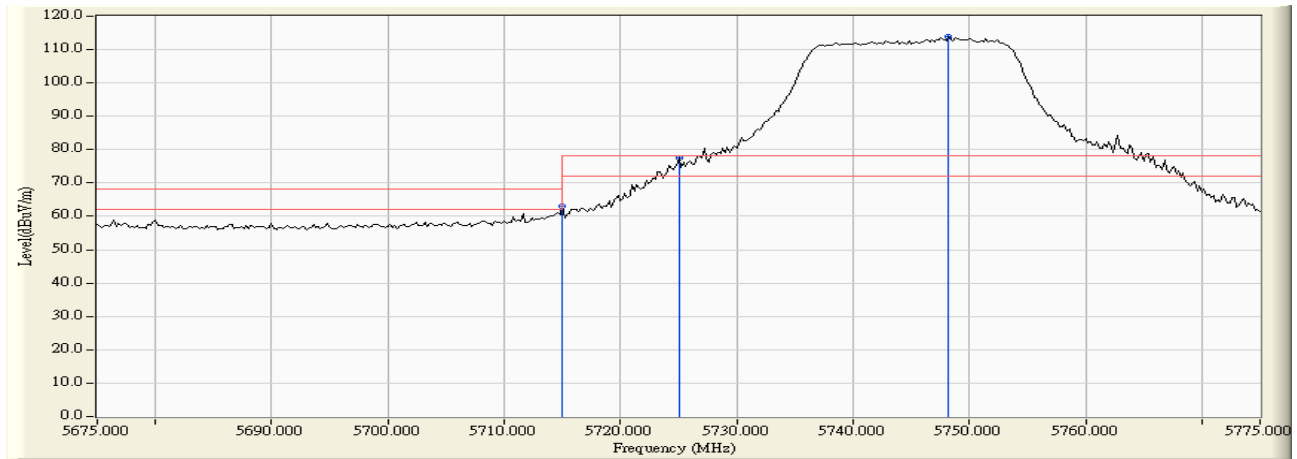

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5715.000	4.186	58.968	63.154	-5.066	68.220	Pass
Vertical	5725.000	4.215	73.213	77.428	-0.792	78.220	Pass
Vertical	5748.200	4.282	109.751	114.033	--	--	--

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 165

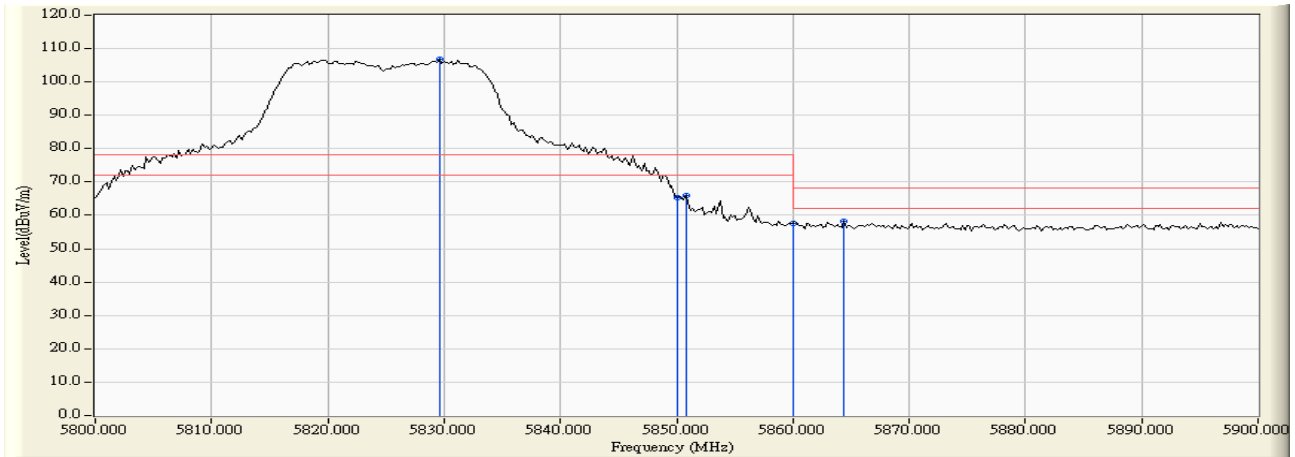

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Horizontal	5829.600	5.572	101.116	106.687	--	--	--
Horizontal	5850.000	5.715	59.601	65.316	-12.904	78.220	Pass
Horizontal	5850.800	5.722	60.214	65.936	-12.284	78.220	Pass
Horizontal	5860.000	5.798	51.755	57.553	-10.667	68.220	Pass
Horizontal	5864.400	5.836	52.254	58.090	-10.130	68.220	Pass

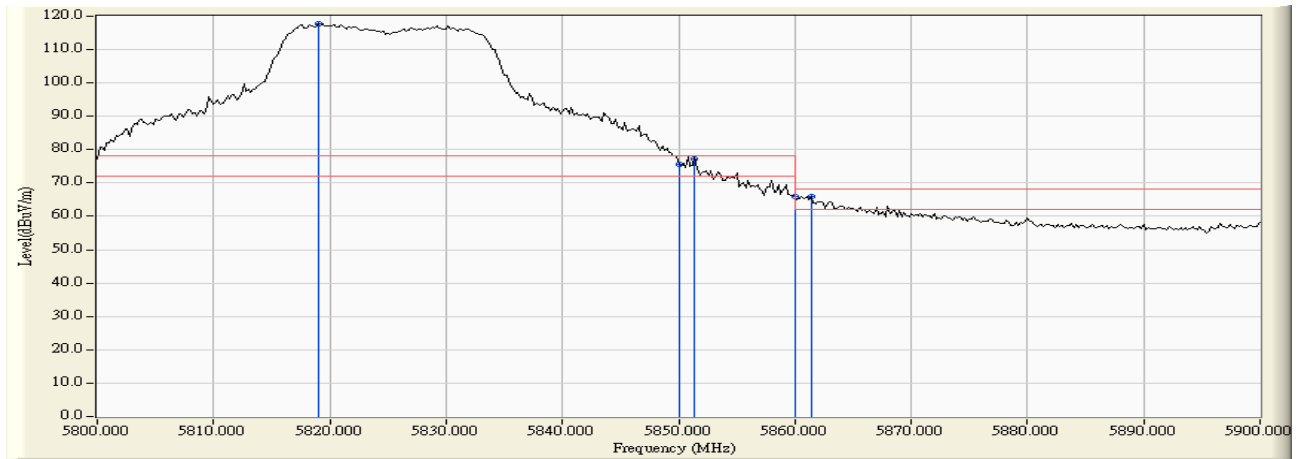

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Vertical	5819.000	4.318	113.433	117.751	--	--	--
Vertical	5850.000	4.194	71.561	75.755	-2.465	78.220	Pass
Vertical	5851.400	4.190	73.006	77.197	-1.023	78.220	Pass
Vertical	5860.000	4.168	61.635	65.803	-2.417	68.220	Pass
Vertical	5861.400	4.163	61.717	65.881	-2.339	68.220	Pass

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 38

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
38 (Peak)	5149.000	2.800	55.516	58.316	74.00	54.00	Pass
38 (Peak)	5150.000	2.796	54.228	57.024	74.00	54.00	Pass
38 (Peak)	5198.400	2.635	96.802	99.438	--	--	--
38 (Average)	5150.000	2.796	42.615	45.411	74.00	54.00	Pass
38 (Average)	5178.800	2.699	85.203	87.903	--	--	--

Figure Channel 38: Horizontal (Peak)


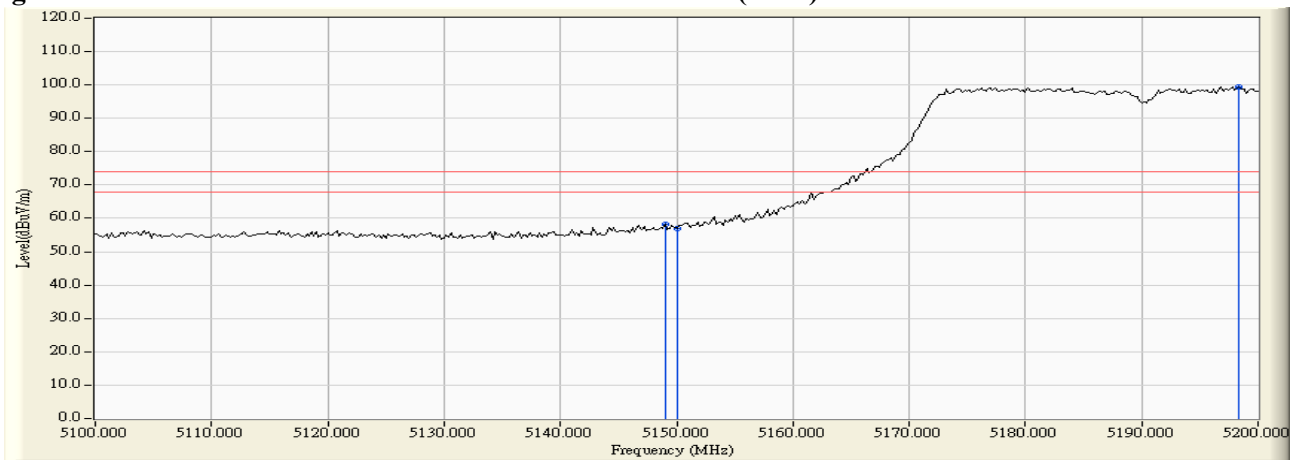


Figure Channel 38: Horizontal (Average)

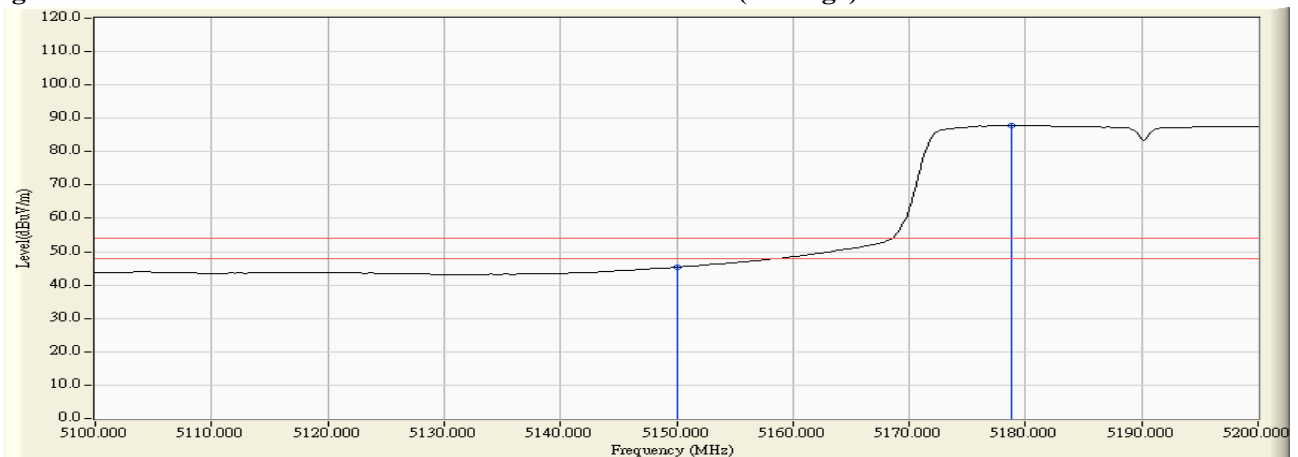

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 38

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
38 (Peak)	5148.400	3.324	64.167	67.491	74.00	54.00	Pass
38 (Peak)	5150.000	3.331	63.958	67.290	74.00	54.00	Pass
38 (Peak)	5193.400	3.538	105.562	109.099	--	--	--
38 (Average)	5150.000	3.331	49.522	52.854	74.00	54.00	Pass
38 (Average)	5178.800	3.466	93.537	97.004	--	--	--

Figure Channel 38: Vertical (Peak)


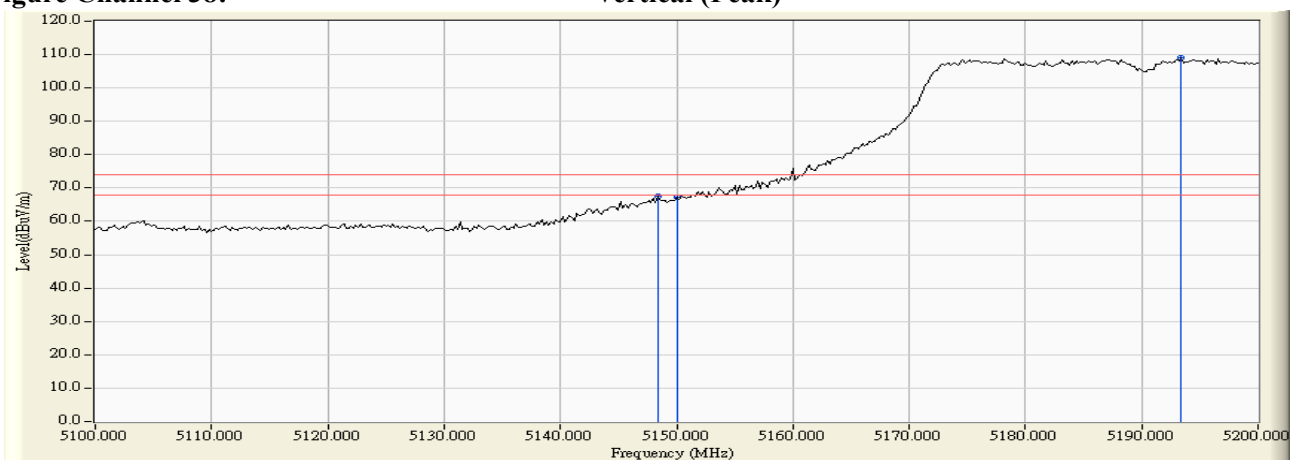


Figure Channel 38: Vertical (Average)

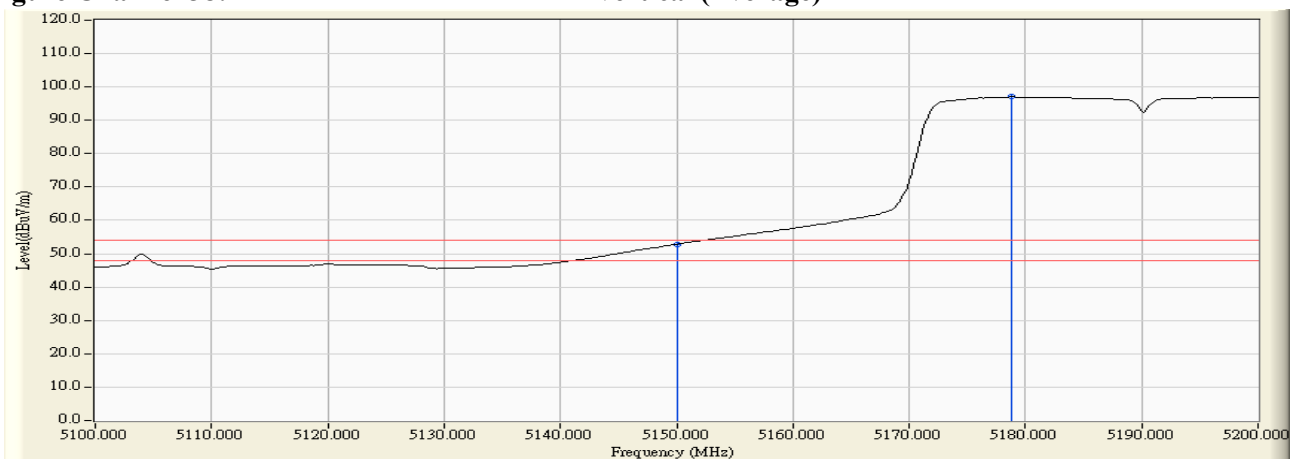

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 62

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
62 (Peak)	5314.400	3.653	98.041	101.694	--	--	--
62 (Peak)	5350.000	3.575	52.285	55.860	74.00	54.00	Pass
62 (Peak)	5350.200	3.575	56.621	60.195	74.00	54.00	Pass
62 (Average)	5301.000	3.679	86.424	90.103	--	--	--
62 (Average)	5350.000	3.575	41.004	44.579	74.00	54.00	Pass

Figure Channel 62: Horizontal (Peak)


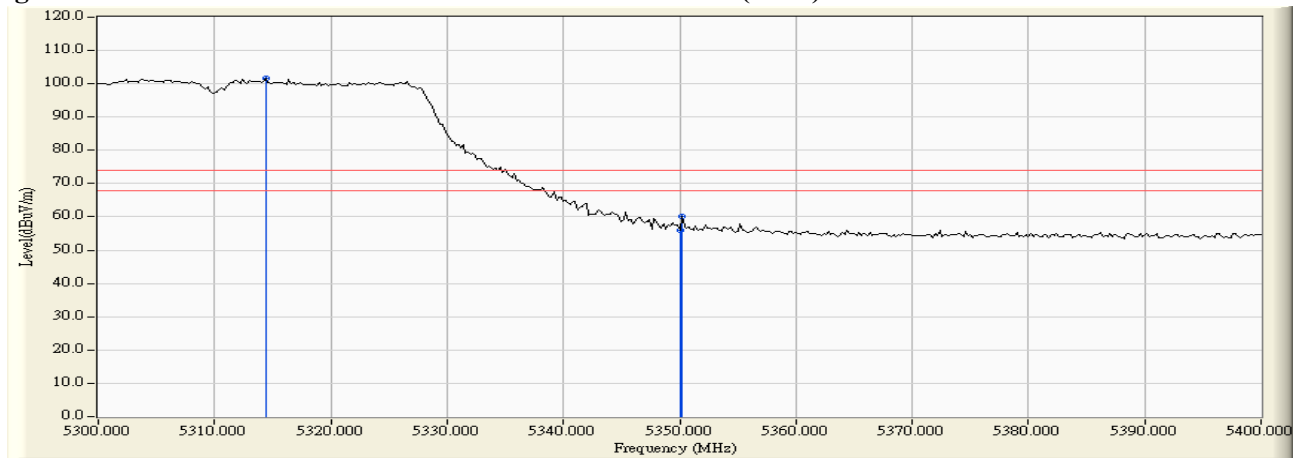


Figure Channel 62: Horizontal (Average)

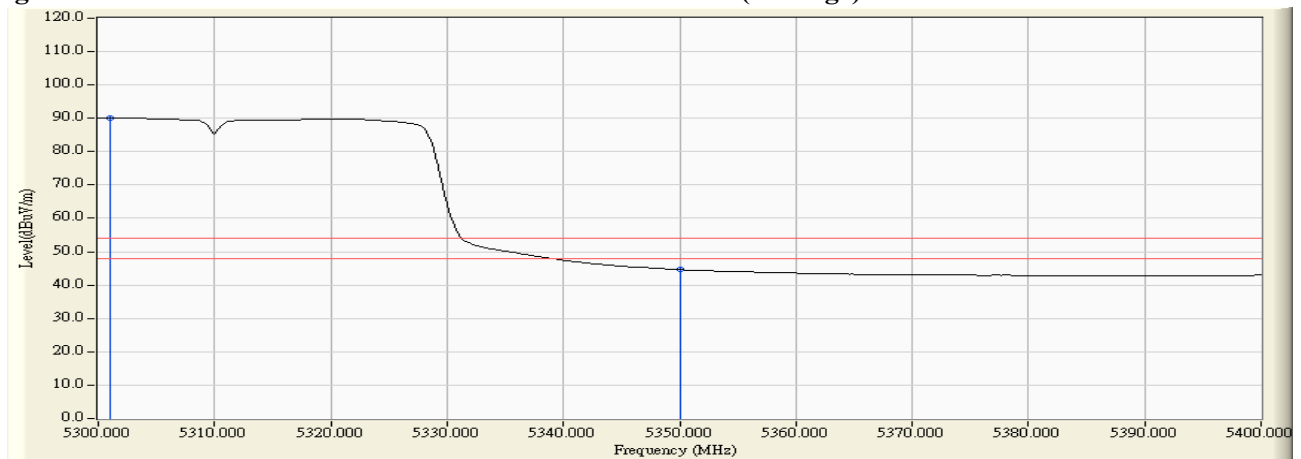

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 62

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
62 (Peak)	5320.600	3.887	107.737	111.624	--	--	--
62 (Peak)	5350.000	3.900	65.375	69.275	74.00	54.00	Pass
62 (Peak)	5350.800	3.900	68.702	72.602	74.00	54.00	Pass
62 (Average)	5321.000	3.887	95.239	99.127	--	--	--
62 (Average)	5350.000	3.900	48.229	52.129	74.00	54.00	Pass

Figure Channel 62: Vertical (Peak)


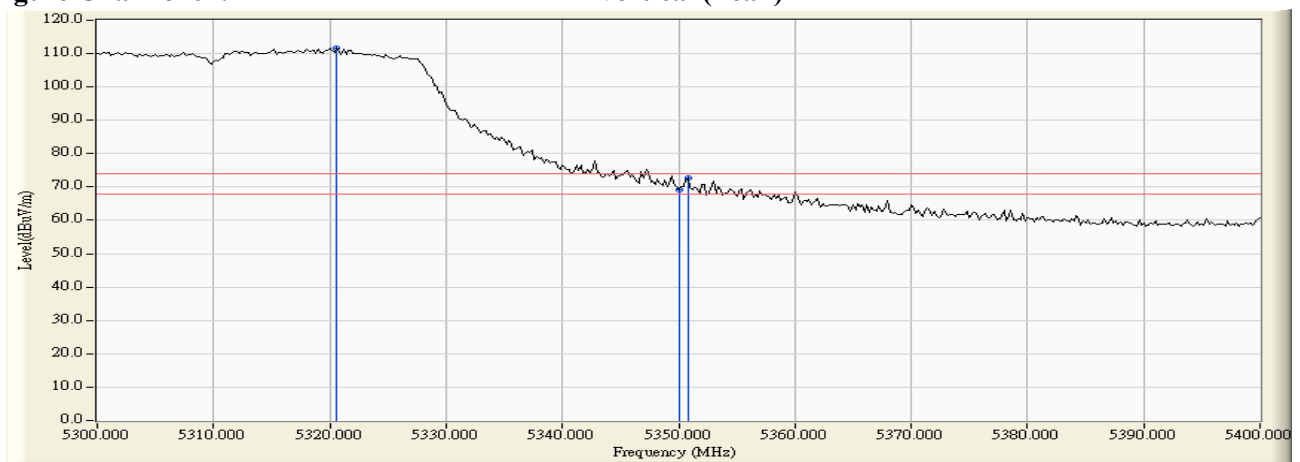


Figure Channel 62: Vertical (Average)

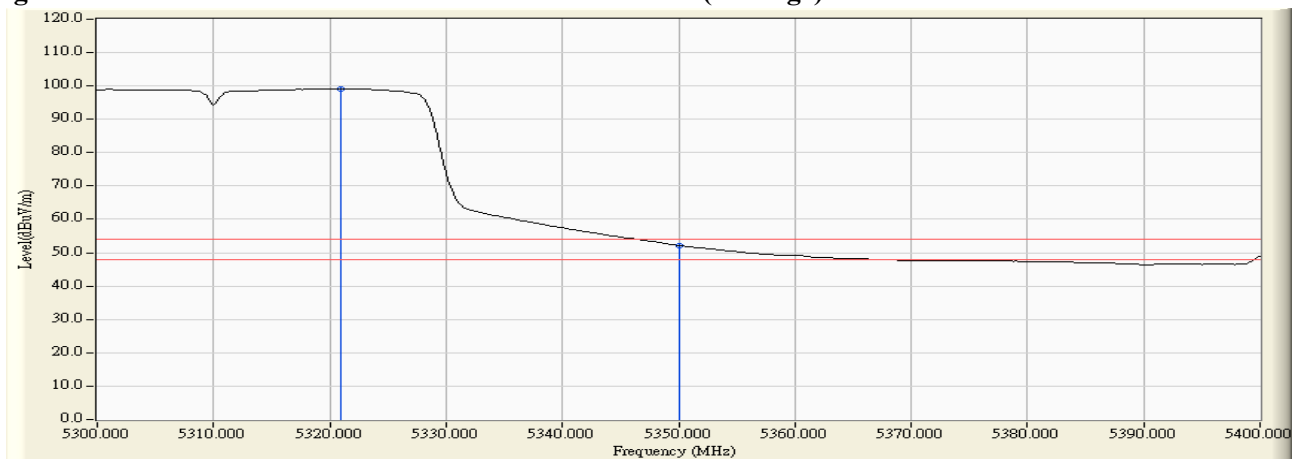

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 102

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
102 (Peak)	5458.000	3.737	52.520	56.256	74.00	54.00	Pass
102 (Peak)	5460.000	3.775	51.610	55.385	74.00	54.00	Pass
102 (Peak)	5498.000	4.451	98.800	103.252	--	--	--
102 (Average)	5460.000	3.775	40.640	44.415	74.00	54.00	Pass
102 (Average)	5500.800	4.490	86.983	91.472	--	--	--

Figure Channel 102: Horizontal (Peak)


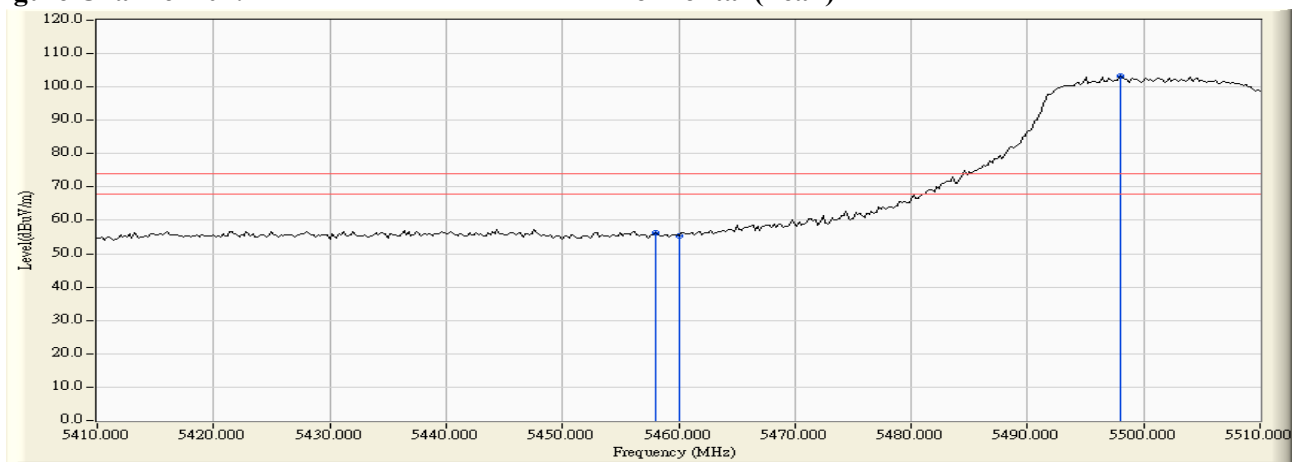


Figure Channel 102: Horizontal (Average)

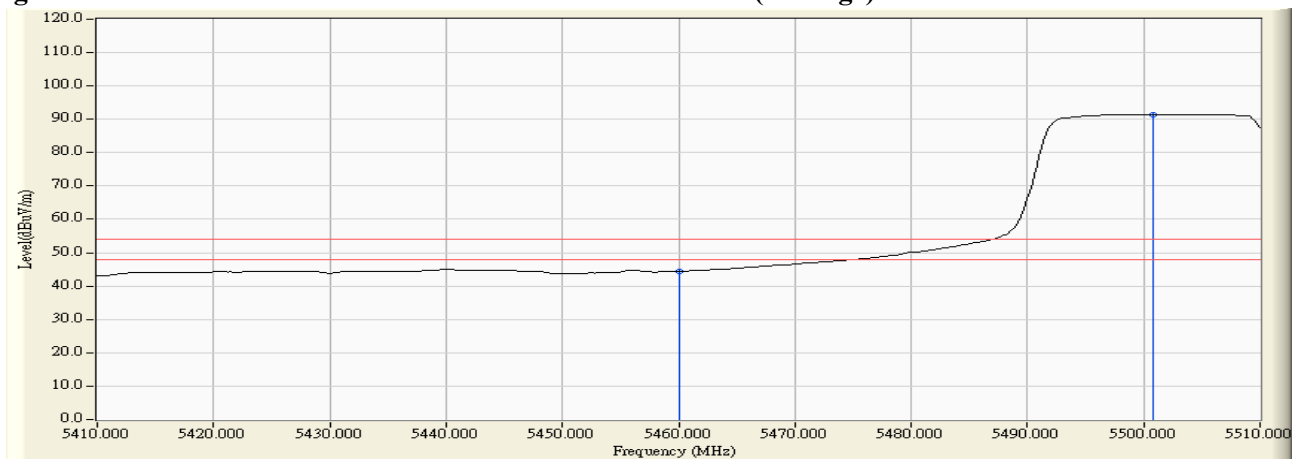

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 102

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
102 (Peak)	5457.800	3.903	56.656	60.559	74.00	54.00	Pass
102 (Peak)	5460.000	3.934	56.179	60.114	74.00	54.00	Pass
102 (Peak)	5498.200	4.441	104.581	109.022	--	--	--
102 (Average)	5455.800	3.875	44.147	48.022	74.00	54.00	Pass
102 (Average)	5460.000	3.934	42.937	46.872	74.00	54.00	Pass
102 (Average)	5498.600	4.445	92.254	96.699	--	--	--

Figure Channel 102: Vertical (Peak)


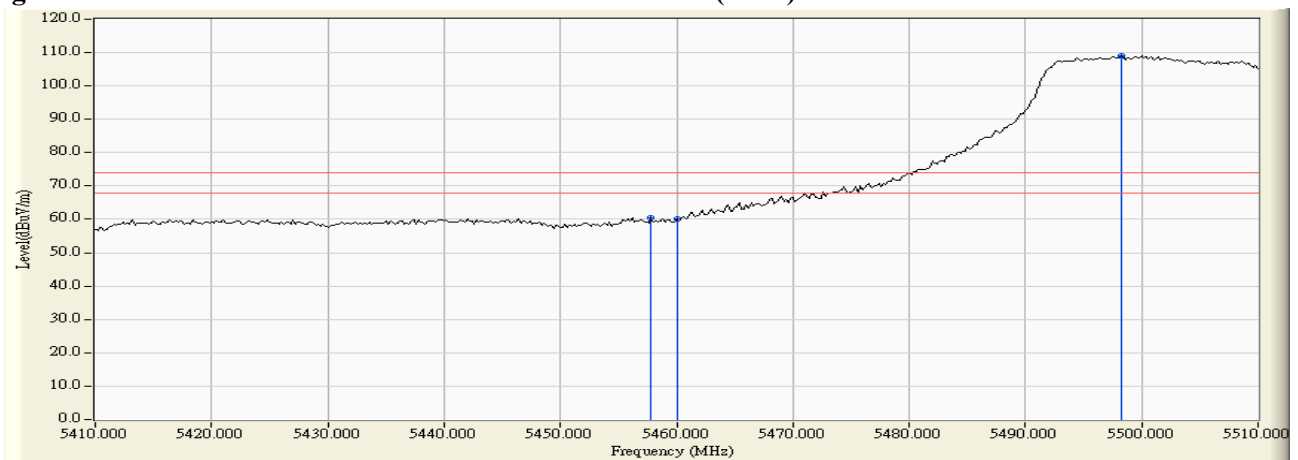



Figure Channel 102: Vertical (Average)

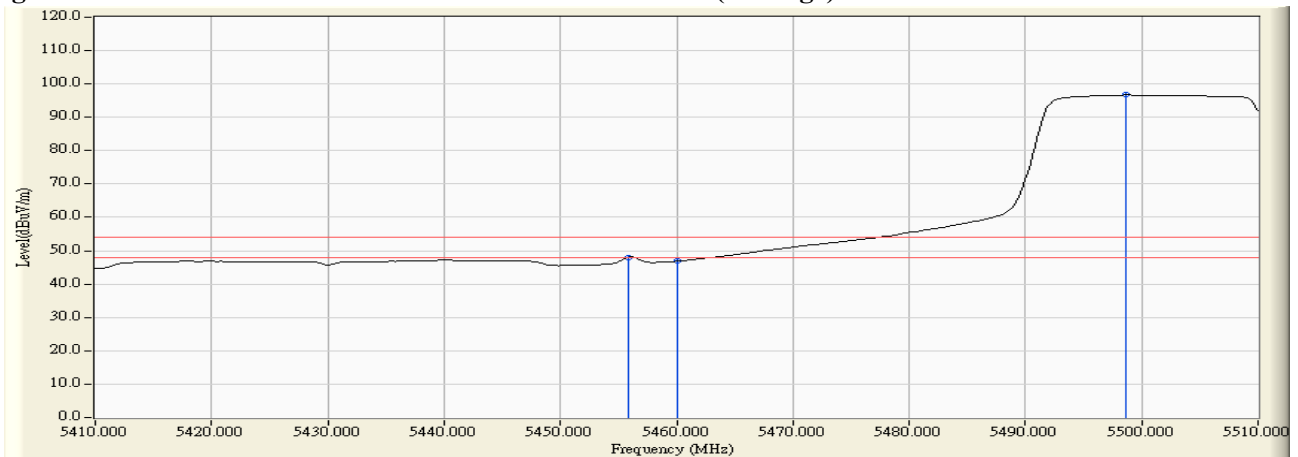

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 102

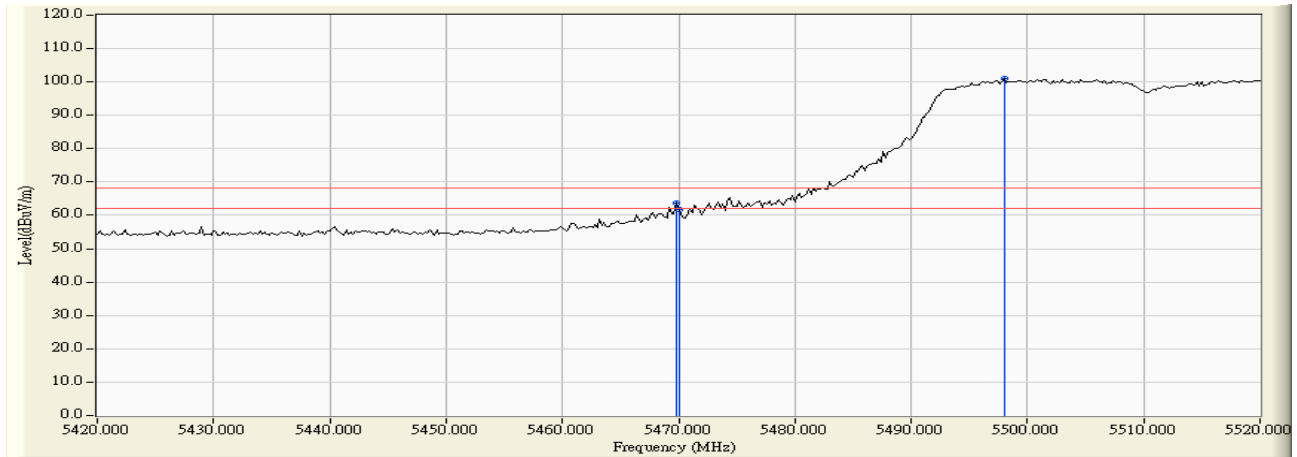

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Horizontal	5469.800	3.967	59.682	63.648	-4.572	68.220	Pass
Horizontal	5470.000	3.970	57.749	61.719	-6.501	68.220	Pass
Horizontal	5498.000	4.451	96.408	100.860	--	--	--

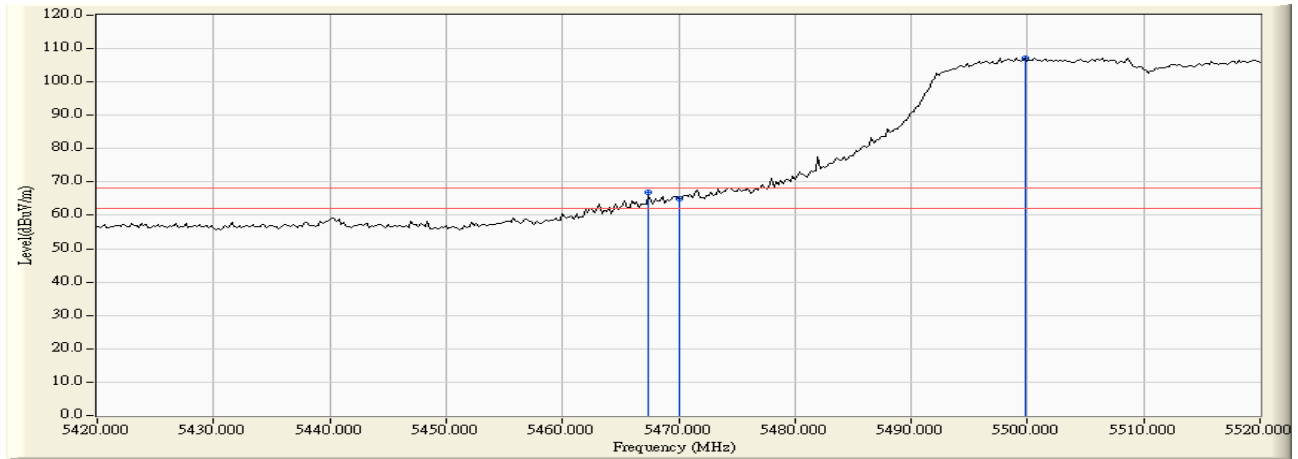

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Vertical	5467.400	4.042	62.788	66.830	-1.390	68.220	Pass
Vertical	5470.000	4.079	61.038	65.117	-3.103	68.220	Pass
Vertical	5499.800	4.458	102.694	107.152	--	--	--

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 134

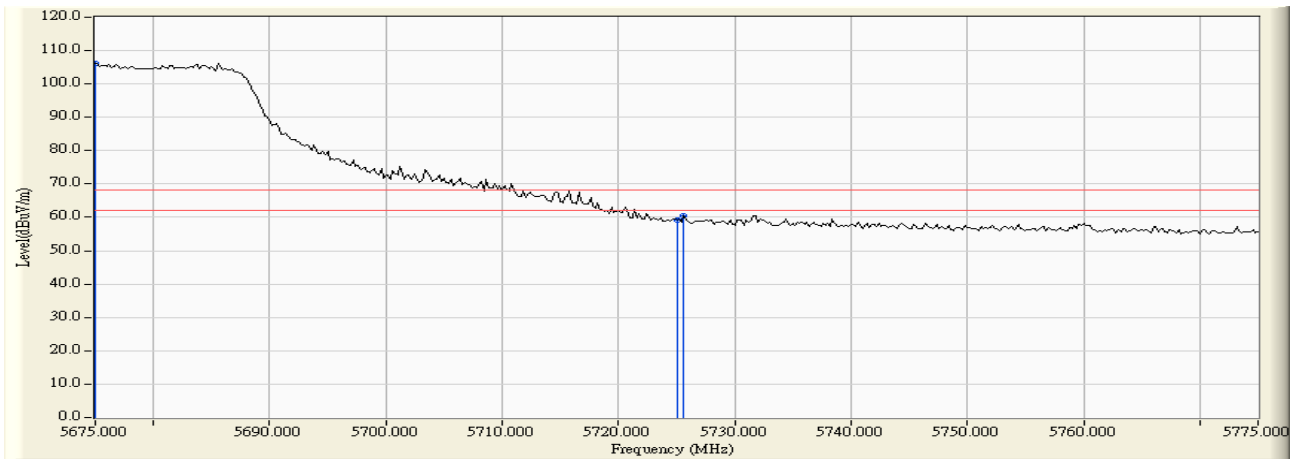

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Horizontal	5675.000	4.907	101.273	106.180	--	--	--
Horizontal	5725.000	5.104	54.163	59.266	-8.954	68.220	Pass
Horizontal	5725.600	5.106	55.380	60.486	-7.734	68.220	Pass

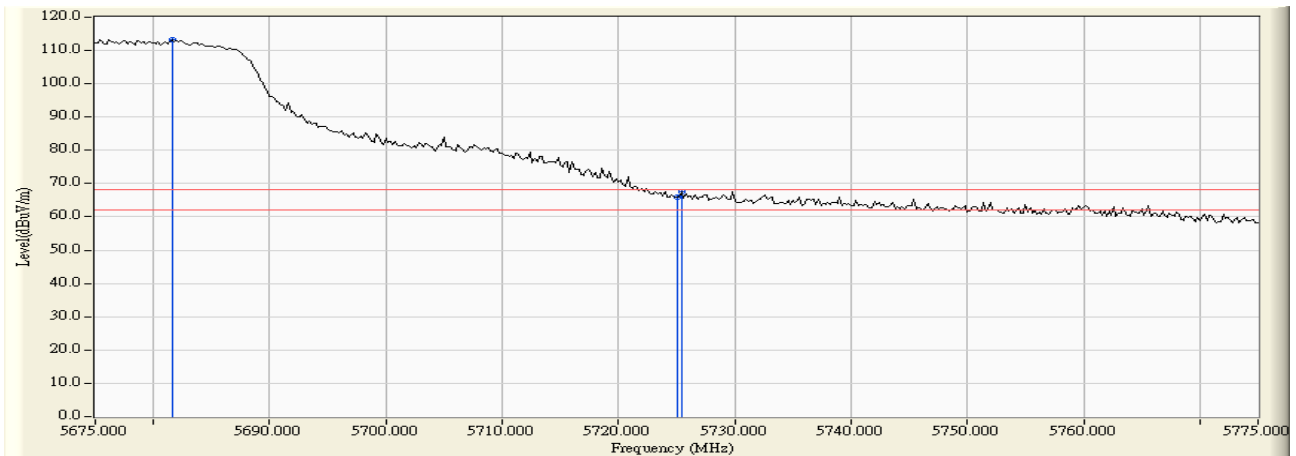

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Vertical	5681.600	4.239	109.128	113.367	--	--	--
Vertical	5725.000	4.215	61.882	66.097	-2.123	68.220	Pass
Vertical	5725.400	4.216	63.197	67.413	-0.807	68.220	Pass

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 151

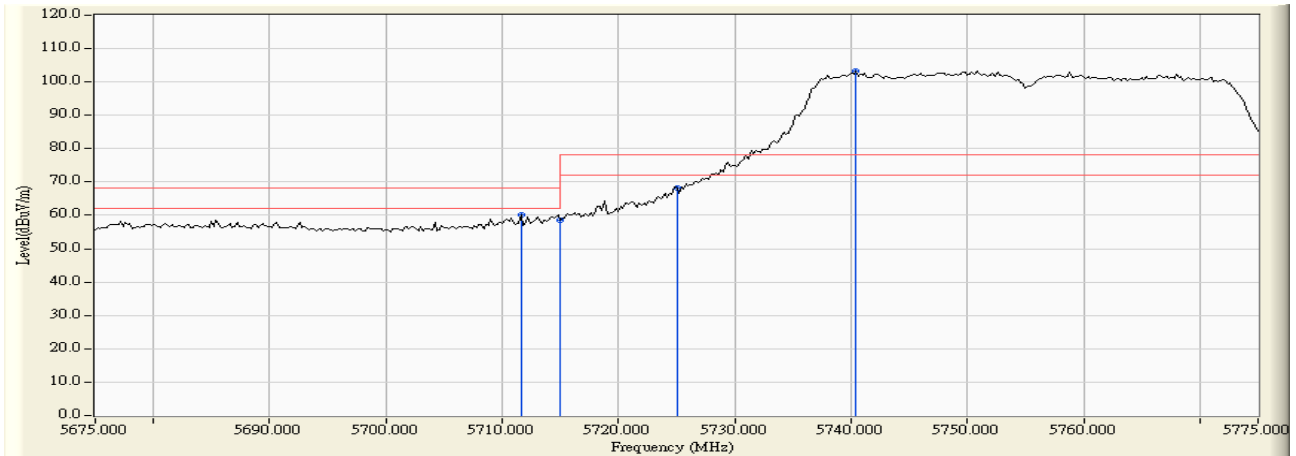

RF Radiated Measurement :


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Horizontal	5711.600	5.049	55.143	60.192	-8.028	68.220	Pass
Horizontal	5715.000	5.063	53.617	58.680	-9.540	68.220	Pass
Horizontal	5725.000	5.104	63.210	68.313	-9.907	78.220	Pass
Horizontal	5740.400	5.168	98.184	103.352	--	--	--

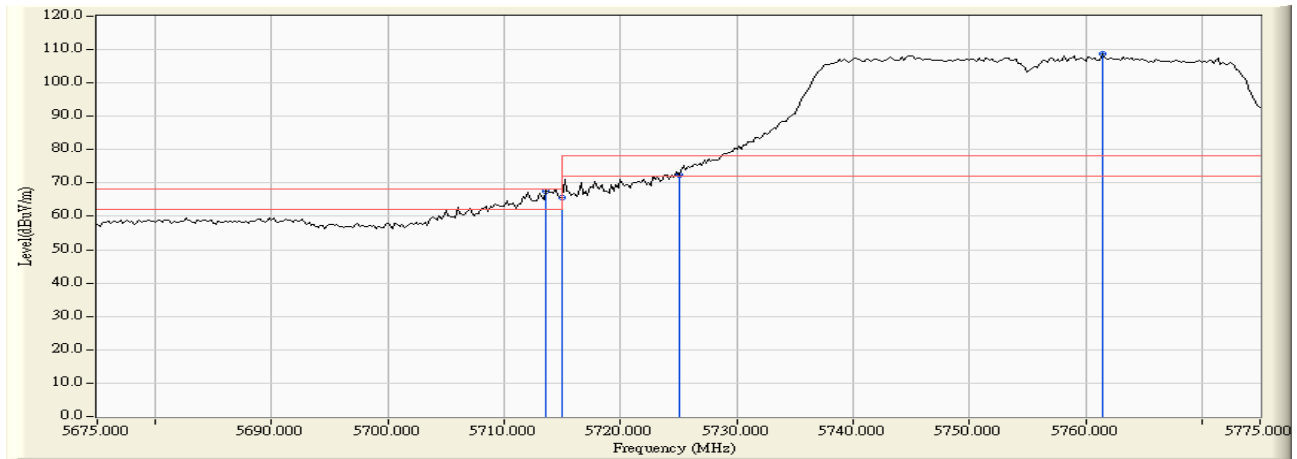

RF Radiated Measurement:


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Vertical	5713.600	4.182	63.538	67.720	-0.500	68.220	Pass
Vertical	5715.000	4.186	61.554	65.740	-2.480	68.220	Pass
Vertical	5725.000	4.215	68.210	72.425	-5.795	78.220	Pass
Vertical	5761.400	4.314	104.278	108.593	--	--	--

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 159

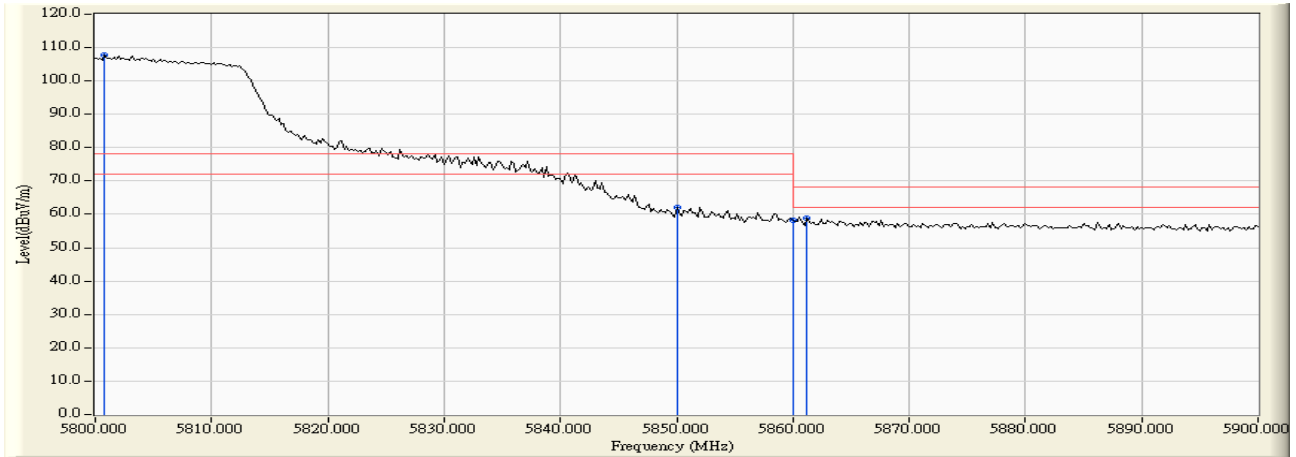

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Peak Limit (dBµV/m)	Average Limit (dBµV/m)	Result
Horizontal	5800.800	5.391	102.242	107.632	--	--	--
Horizontal	5850.000	5.715	56.478	62.193	-16.027	78.220	Pass
Horizontal	5860.000	5.798	52.544	58.342	-9.878	68.220	Pass
Horizontal	5861.200	5.808	53.027	58.835	-9.385	68.220	Pass

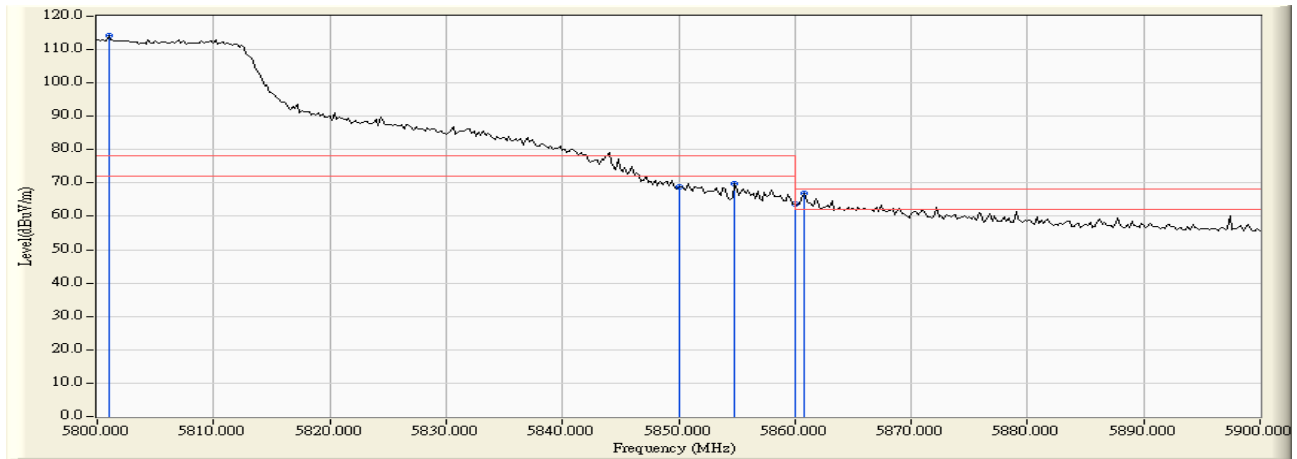

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
Vertical	5801.000	4.369	109.833	114.202	--	--	--
Vertical	5850.000	4.194	64.733	68.927	-9.293	78.220	Pass
Vertical	5854.800	4.182	65.751	69.933	-8.287	78.220	Pass
Vertical	5860.000	4.168	59.629	63.797	-4.423	68.220	Pass
Vertical	5860.800	4.166	62.907	67.073	-1.147	68.220	Pass

7. Occupied Bandwidth


7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

7.2. Test Setup

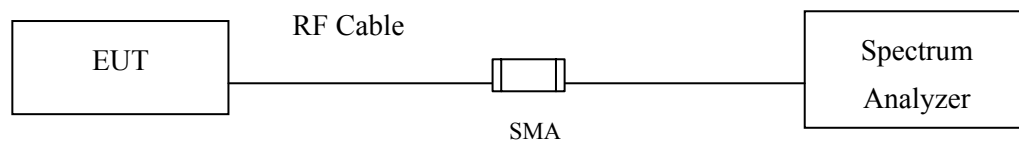

7.3. Limits

For the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz

7.4. Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

7.5. Uncertainty


$\pm 150\text{Hz}$

7.6. Test Result of Occupied Bandwidth

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5745MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745.00	16650	>500	Pass


Figure Channel 149:

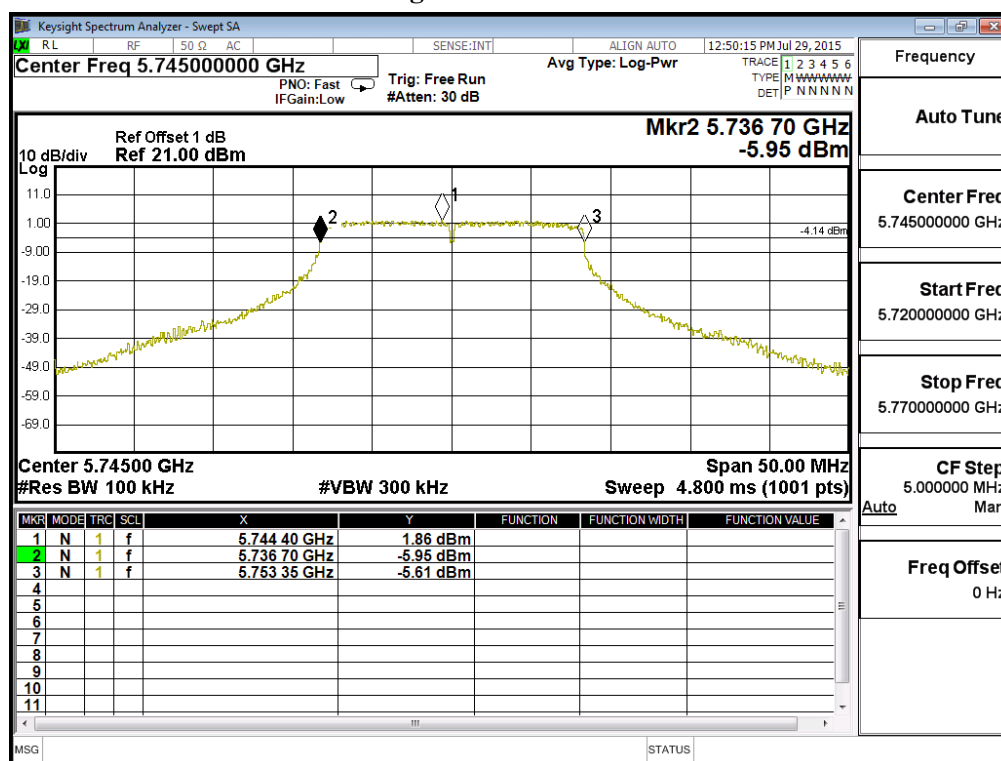

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5785MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
157	5785.00	16600	>500	Pass


Figure Channel 157:

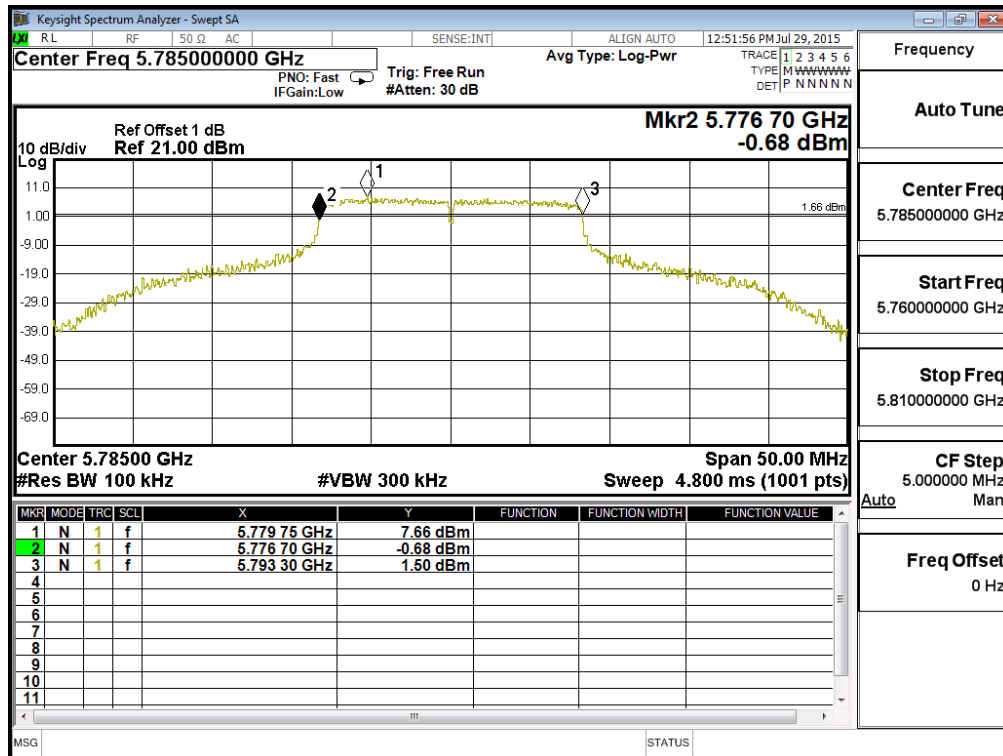

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5825MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
165	5825.00	16600	>500	Pass


Figure Channel 165:

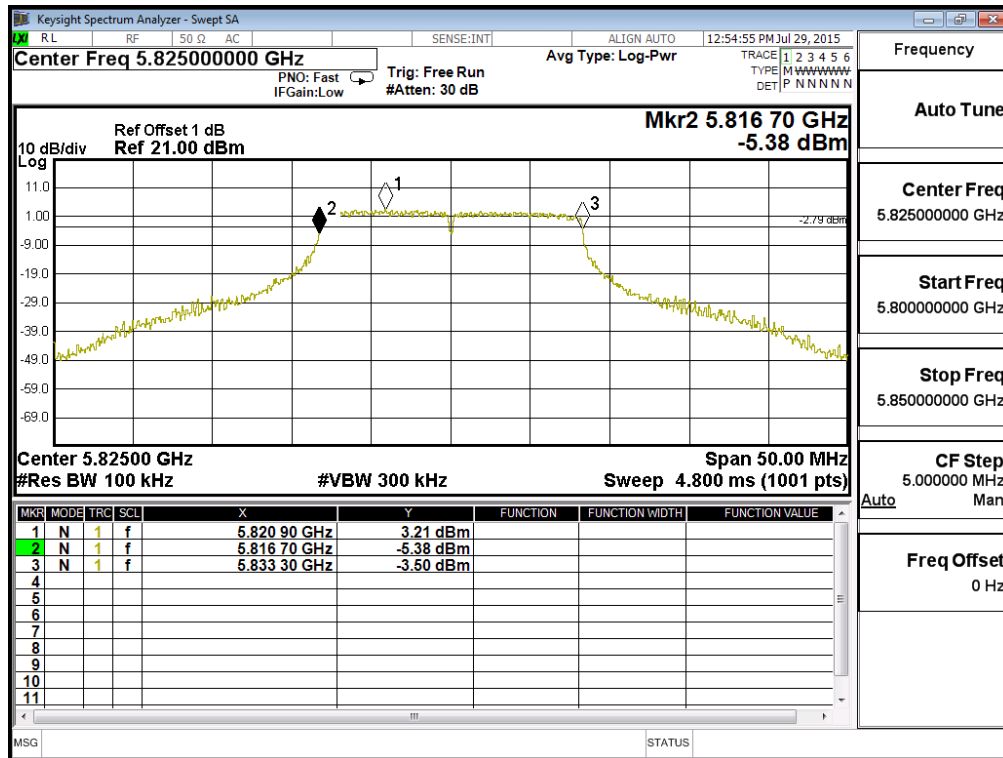

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5745MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745.00	17850	>500	Pass

Figure Channel 149: (Chain A)

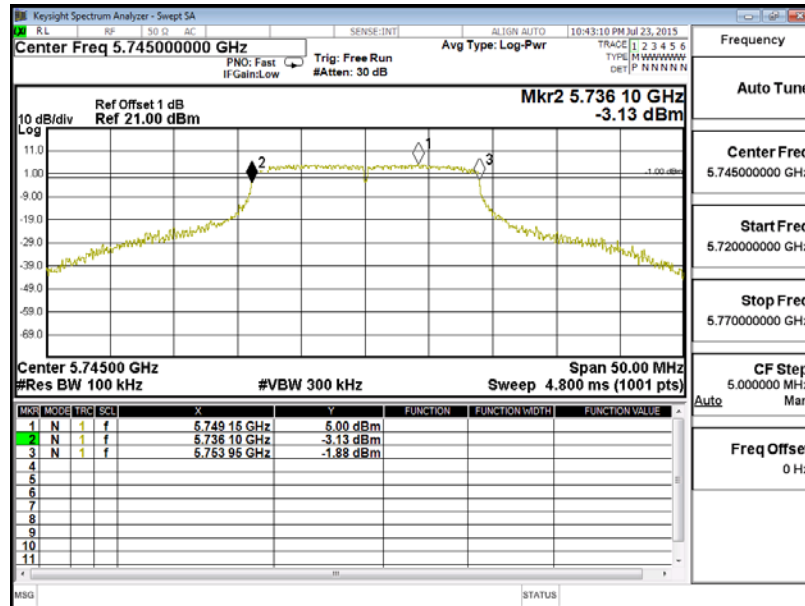

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745.00	17800	>500	Pass


Figure Channel 149: (Chain B)

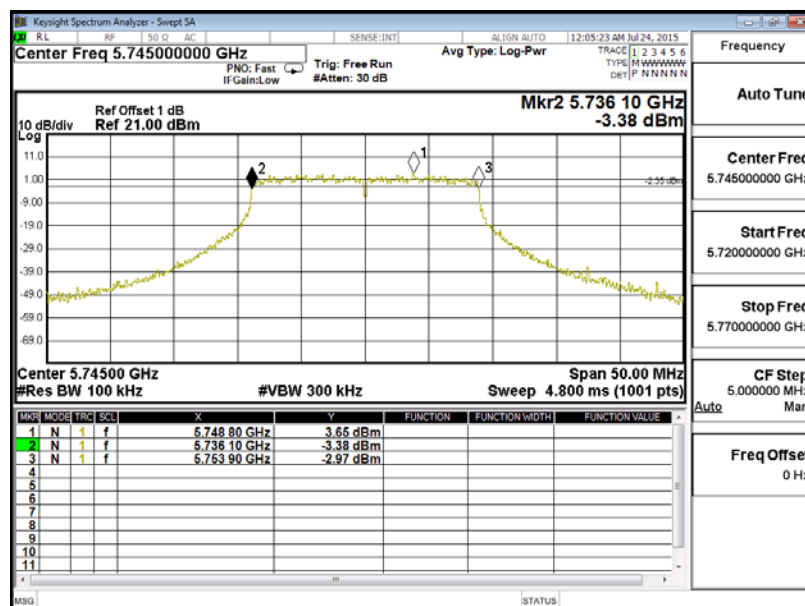

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5785MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
157	5785.00	17850	>500	Pass

Figure Channel 157: (Chain A)

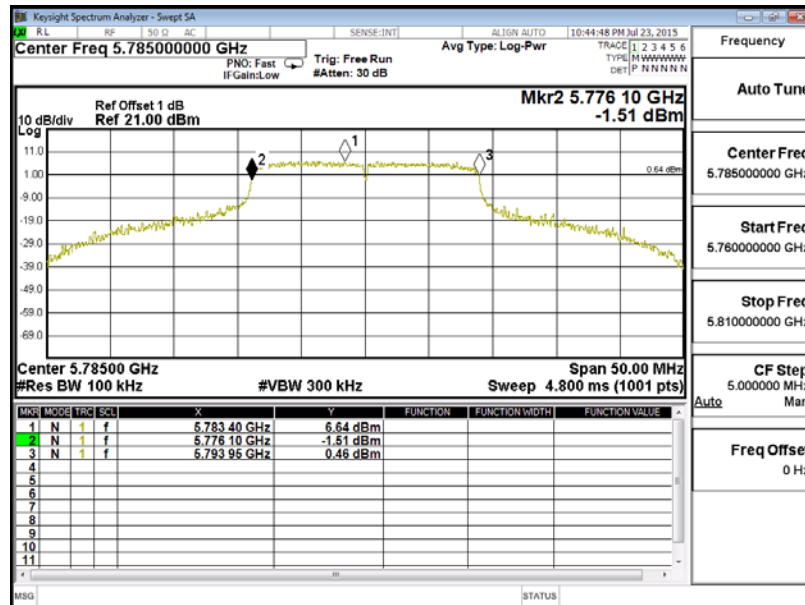

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
157	5785.00	17850	>500	Pass


Figure Channel 157: (Chain B)

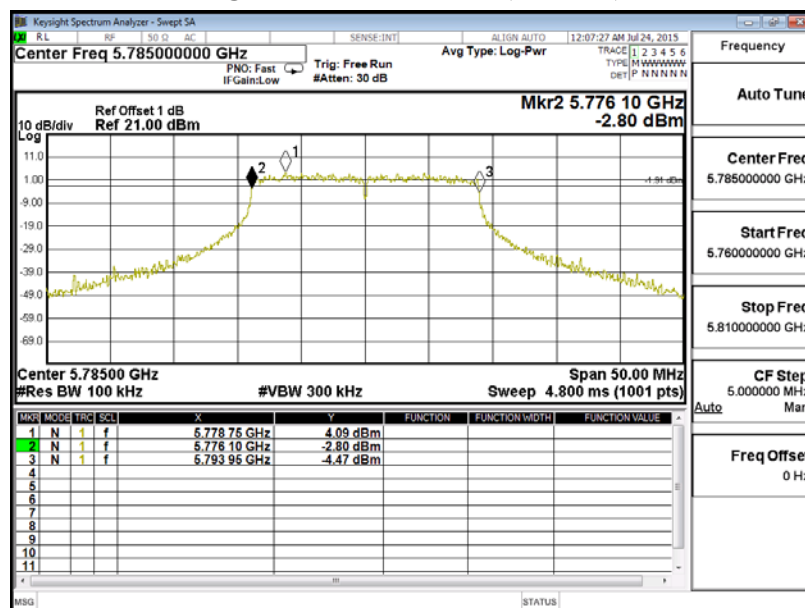

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5825MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
165	5825.00	17750	>500	Pass

Figure Channel 165: (Chain A)

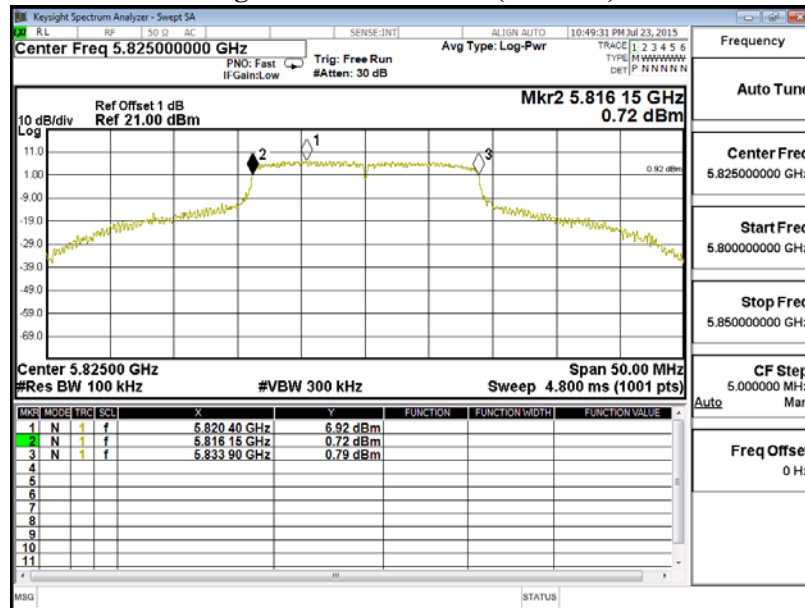

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
165	5825.00	17750	>500	Pass


Figure Channel 165: (Chain B)

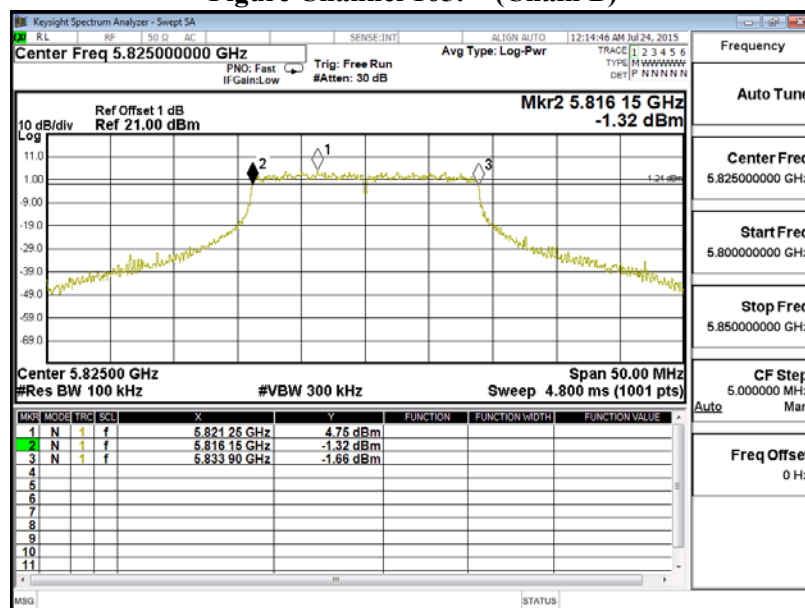

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5755MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
151	5755.00	36600	>500	Pass

Figure Channel 151: (Chain A)

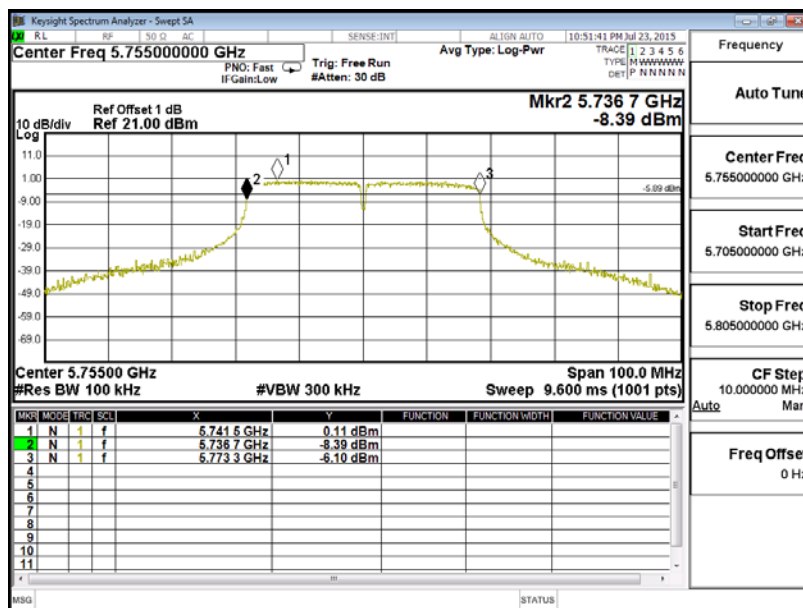

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
151	5755.00	36300	>500	Pass


Figure Channel 151: (Chain B)

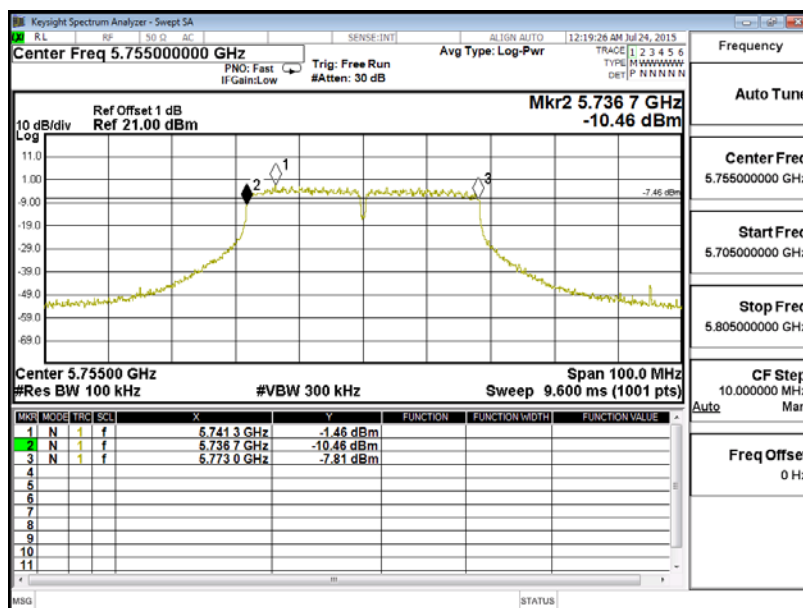

Product : Industrial 802.11a/b/g/n Outdoor Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5795MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
159	5795.00	36600	>500	Pass

Figure Channel 159: (Chain A)

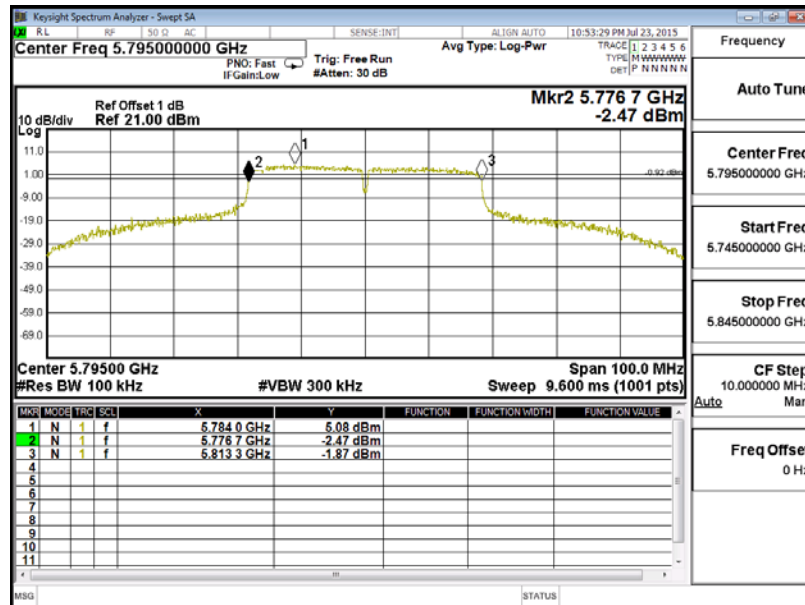

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
159	5795.00	36200	>500	Pass

Figure Channel 159: (Chain B)

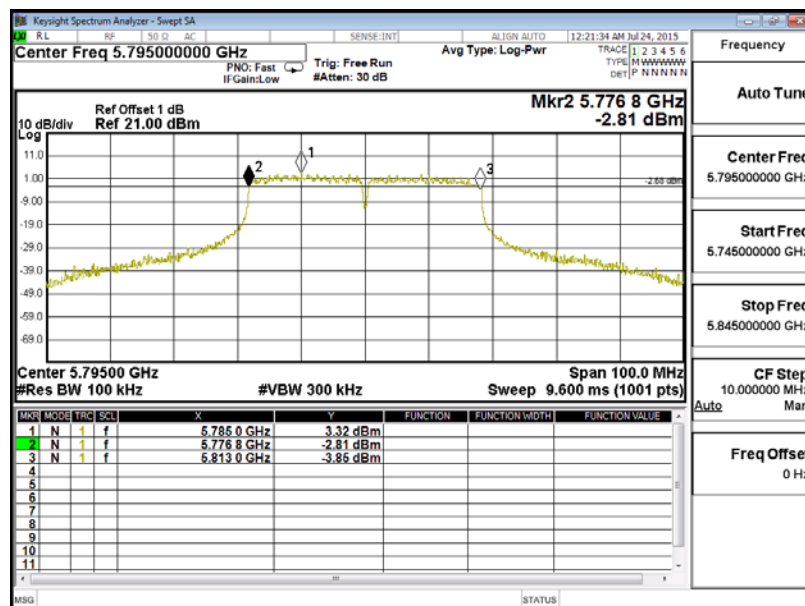

8. Frequency Stability


8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

8.2. Test Setup

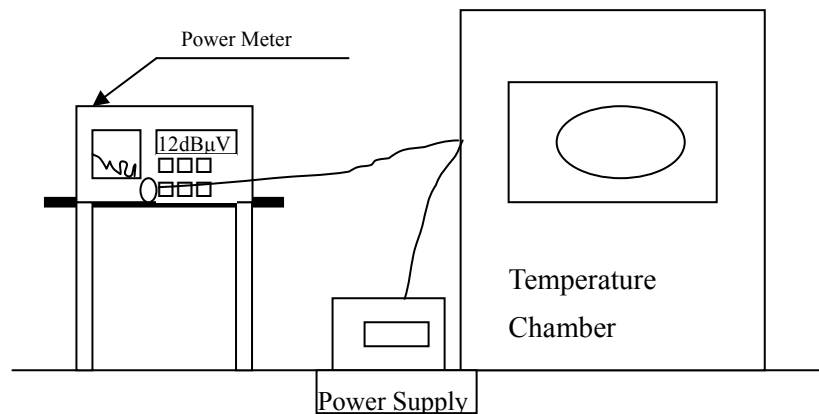

8.3. Limits

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified

8.4. Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

8.5. Uncertainty

± 150 Hz

8.6. Test Result of Frequency Stability

Product : Industrial 802.11a/b/g/n Outdoor Access Point
Test Item : Frequency Stability
Test Site : Temperature Chamber
Test Mode : Carrier Wave

Chain A

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tnom (20) oC	Vnom (120)V	36	5180.0000	5180.0016	-0.0016
		38	5190.0000	5190.0012	-0.0012
		44	5220.0000	5220.0016	-0.0016
		46	5230.0000	5230.0018	-0.0018
		48	5240.0000	5240.0011	-0.0011
		52	5260.0000	5260.0020	-0.0020
		54	5270.0000	5270.0012	-0.0012
		60	5300.0000	5300.0018	-0.0018
		62	5310.0000	5310.0011	-0.0011
		64	5320.0000	5320.0010	-0.0010
		100	5500.0000	5500.0015	-0.0015
		102	5510.0000	5510.0015	-0.0015
		110	5550.0000	5550.0014	-0.0014
		116	5580.0000	5580.0010	-0.0010
		134	5670.0000	5670.0014	-0.0014
		140	5700.0000	5700.0016	-0.0016
		149	5745.0000	5745.0012	-0.0012
		151	5755.0000	5755.0012	-0.0012
		157	5785.0000	5785.0014	-0.0014
		159	5795.0000	5795.0019	-0.0019
		165	5825.0000	5825.0011	-0.0011

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmax (50) oC	Vmax (138)V	36	5180.0000	5180.0013	-0.0013
		38	5190.0000	5190.0020	-0.0020
		44	5220.0000	5220.0012	-0.0012
		46	5230.0000	5230.0015	-0.0015
		48	5240.0000	5240.0017	-0.0017
		52	5260.0000	5260.0011	-0.0011
		54	5270.0000	5270.0018	-0.0018
		60	5300.0000	5300.0020	-0.0020
		62	5310.0000	5310.0011	-0.0011
		64	5320.0000	5320.0014	-0.0014
		100	5500.0000	5500.0017	-0.0017
		102	5510.0000	5510.0015	-0.0015
		110	5550.0000	5550.0017	-0.0017
		116	5580.0000	5580.0010	-0.0010
		134	5670.0000	5670.0013	-0.0013
		140	5700.0000	5700.0018	-0.0018
		149	5745.0000	5745.0011	-0.0011
		151	5755.0000	5755.0020	-0.0020
		157	5785.0000	5785.0018	-0.0018
		159	5795.0000	5795.0013	-0.0013
		165	5825.0000	5825.0020	-0.0020

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmax (50) °C	Vmin (102)V	36	5180.0000	5180.0014	-0.0014
		38	5190.0000	5190.0011	-0.0011
		44	5220.0000	5220.0019	-0.0019
		46	5230.0000	5230.0012	-0.0012
		48	5240.0000	5240.0014	-0.0014
		52	5260.0000	5260.0015	-0.0015
		54	5270.0000	5270.0016	-0.0016
		60	5300.0000	5300.0010	-0.0010
		62	5310.0000	5310.0019	-0.0019
		64	5320.0000	5320.0016	-0.0016
		100	5500.0000	5500.0014	-0.0014
		102	5510.0000	5510.0015	-0.0015
		110	5550.0000	5550.0017	-0.0017
		116	5580.0000	5580.0016	-0.0016
		134	5670.0000	5670.0013	-0.0013
		140	5700.0000	5700.0018	-0.0018
		149	5745.0000	5745.0019	-0.0019
		151	5755.0000	5755.0012	-0.0012
		157	5785.0000	5785.0013	-0.0013
		159	5795.0000	5795.0020	-0.0020
		165	5825.0000	5825.0013	-0.0013

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tnom (-10) oC	Vnom (138)V	36	5180.0000	5180.0018	-0.0018
		38	5190.0000	5190.0013	-0.0013
		44	5220.0000	5220.0020	-0.0020
		46	5230.0000	5230.0012	-0.0012
		48	5240.0000	5240.0012	-0.0012
		52	5260.0000	5260.0012	-0.0012
		54	5270.0000	5270.0014	-0.0014
		60	5300.0000	5300.0012	-0.0012
		62	5310.0000	5310.0018	-0.0018
		64	5320.0000	5320.0013	-0.0013
		100	5500.0000	5500.0015	-0.0015
		102	5510.0000	5510.0011	-0.0011
		110	5550.0000	5550.0011	-0.0011
		116	5580.0000	5580.0013	-0.0013
		134	5670.0000	5670.0015	-0.0015
		140	5700.0000	5700.0020	-0.0020
		149	5745.0000	5745.0015	-0.0015
		151	5755.0000	5755.0017	-0.0017
		157	5785.0000	5785.0015	-0.0015
		159	5795.0000	5795.0015	-0.0015
		165	5825.0000	5825.0010	-0.0010

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmax (-10) oC	Vmax (102)V	36	5180.0000	5180.0018	-0.0018
		38	5190.0000	5190.0013	-0.0013
		44	5220.0000	5220.0020	-0.0020
		46	5230.0000	5230.0012	-0.0012
		48	5240.0000	5240.0012	-0.0012
		52	5260.0000	5260.0012	-0.0012
		54	5270.0000	5270.0014	-0.0014
		60	5300.0000	5300.0012	-0.0012
		62	5310.0000	5310.0018	-0.0018
		64	5320.0000	5320.0013	-0.0013
		100	5500.0000	5500.0015	-0.0015
		102	5510.0000	5510.0011	-0.0011
		110	5550.0000	5550.0011	-0.0011
		116	5580.0000	5580.0013	-0.0013
		134	5670.0000	5670.0015	-0.0015
		140	5700.0000	5700.0020	-0.0020
		149	5745.0000	5745.0015	-0.0015
		151	5755.0000	5755.0017	-0.0017
		157	5785.0000	5785.0015	-0.0015
		159	5795.0000	5795.0015	-0.0015
		165	5825.0000	5825.0010	-0.0010

Chain B

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tnom (20) oC	Vnom (120)V	36	5180.0000	5180.0019	-0.0019
		38	5190.0000	5190.0017	-0.0017
		44	5220.0000	5220.0020	-0.0020
		46	5230.0000	5230.0017	-0.0017
		48	5240.0000	5240.0012	-0.0012
		52	5260.0000	5260.0011	-0.0011
		54	5270.0000	5270.0011	-0.0011
		60	5300.0000	5300.0018	-0.0018
		62	5310.0000	5310.0019	-0.0019
		64	5320.0000	5320.0019	-0.0019
		100	5500.0000	5500.0010	-0.0010
		102	5510.0000	5510.0018	-0.0018
		110	5550.0000	5550.0020	-0.0020
		116	5580.0000	5580.0010	-0.0010
		134	5670.0000	5670.0018	-0.0018
		140	5700.0000	5700.0015	-0.0015
		149	5745.0000	5745.0019	-0.0019
		151	5755.0000	5755.0014	-0.0014
		157	5785.0000	5785.0015	-0.0015
		159	5795.0000	5795.0012	-0.0012
		165	5825.0000	5825.0014	-0.0014

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmax (50) oC	Vmax (138)V	36	5180.0000	5180.0018	-0.0018
		38	5190.0000	5190.0014	-0.0014
		44	5220.0000	5220.0020	-0.0020
		46	5230.0000	5230.0014	-0.0014
		48	5240.0000	5240.0014	-0.0014
		52	5260.0000	5260.0016	-0.0016
		54	5270.0000	5270.0015	-0.0015
		60	5300.0000	5300.0011	-0.0011
		62	5310.0000	5310.0013	-0.0013
		64	5320.0000	5320.0015	-0.0015
		100	5500.0000	5500.0017	-0.0017
		102	5510.0000	5510.0019	-0.0019
		110	5550.0000	5550.0016	-0.0016
		116	5580.0000	5580.0015	-0.0015
		134	5670.0000	5670.0017	-0.0017
		140	5700.0000	5700.0019	-0.0019
		149	5745.0000	5745.0018	-0.0018
		151	5755.0000	5755.0011	-0.0011
		157	5785.0000	5785.0016	-0.0016
		159	5795.0000	5795.0014	-0.0014
		165	5825.0000	5825.0011	-0.0011

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmax (50) °C	Vmin (102)V	36	5180.0000	5180.0012	-0.0012
		38	5190.0000	5190.0018	-0.0018
		44	5220.0000	5220.0014	-0.0014
		46	5230.0000	5230.0015	-0.0015
		48	5240.0000	5240.0019	-0.0019
		52	5260.0000	5260.0020	-0.0020
		54	5270.0000	5270.0013	-0.0013
		60	5300.0000	5300.0018	-0.0018
		62	5310.0000	5310.0018	-0.0018
		64	5320.0000	5320.0015	-0.0015
		100	5500.0000	5500.0012	-0.0012
		102	5510.0000	5510.0011	-0.0011
		110	5550.0000	5550.0018	-0.0018
		116	5580.0000	5580.0018	-0.0018
		134	5670.0000	5670.0015	-0.0015
		140	5700.0000	5700.0015	-0.0015
		149	5745.0000	5745.0018	-0.0018
		151	5755.0000	5755.0012	-0.0012
		157	5785.0000	5785.0018	-0.0018
		159	5795.0000	5795.0020	-0.0020
		165	5825.0000	5825.0010	-0.0010

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tnom (-10) oC	Vnom (138)V	36	5180.0000	5180.0017	-0.0017
		38	5190.0000	5190.0016	-0.0016
		44	5220.0000	5220.0018	-0.0018
		46	5230.0000	5230.0016	-0.0016
		48	5240.0000	5240.0016	-0.0016
		52	5260.0000	5260.0011	-0.0011
		54	5270.0000	5270.0018	-0.0018
		60	5300.0000	5300.0012	-0.0012
		62	5310.0000	5310.0013	-0.0013
		64	5320.0000	5320.0011	-0.0011
		100	5500.0000	5500.0016	-0.0016
		102	5510.0000	5510.0010	-0.0010
		110	5550.0000	5550.0019	-0.0019
		116	5580.0000	5580.0018	-0.0018
		134	5670.0000	5670.0014	-0.0014
		140	5700.0000	5700.0014	-0.0014
		149	5745.0000	5745.0013	-0.0013
		151	5755.0000	5755.0018	-0.0018
		157	5785.0000	5785.0017	-0.0017
		159	5795.0000	5795.0019	-0.0019
		165	5825.0000	5825.0011	-0.0011

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmax (-10) oC	Vmax (102)V	36	5180.0000	5180.0015	-0.0015
		38	5190.0000	5190.0017	-0.0017
		44	5220.0000	5220.0020	-0.0020
		46	5230.0000	5230.0016	-0.0016
		48	5240.0000	5240.0016	-0.0016
		52	5260.0000	5260.0012	-0.0012
		54	5270.0000	5270.0011	-0.0011
		60	5300.0000	5300.0012	-0.0012
		62	5310.0000	5310.0015	-0.0015
		64	5320.0000	5320.0012	-0.0012
		100	5500.0000	5500.0013	-0.0013
		102	5510.0000	5510.0010	-0.0010
		110	5550.0000	5550.0011	-0.0011
		116	5580.0000	5580.0016	-0.0016
		134	5670.0000	5670.0019	-0.0019
		140	5700.0000	5700.0018	-0.0018
		149	5745.0000	5745.0012	-0.0012
		151	5755.0000	5755.0010	-0.0010
		157	5785.0000	5785.0018	-0.0018
		159	5795.0000	5795.0017	-0.0017
		165	5825.0000	5825.0012	-0.0012

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.