

FCC Test Report

Product Name	802.11ac Dual Band Access Point
Model No	WK-1,WK-1-B
FCC ID.	SLY-WK1X22

Applicant	Pakedge Device and Software Inc.
Address	3847 Breakwater Avenue, Hayward, CA 94545

Date of Receipt	Feb. 25, 2015
Issue Date	Apr. 02, 2015
Report No.	1520470R-RFUSP01V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report

Issue Date: Apr. 02, 2015

Report No.: 1520470R-RFUSP01V00



Product Name	802.11ac Dual Band Access Point
Applicant	Pakedge Device and Software Inc.
Address	3847 Breakwater Avenue, Hayward, CA 94545
Manufacturer	Pakedge Device and Software Inc.
Factory	Lite-On Network Communication (Dongguan) Limited
Model No.	WK-1,WK-1-B
FCC ID.	SLY-WK1X22
EUT Rated Voltage	AC 100-240V, 50-60Hz
EUT Test Voltage	AC 120V/60Hz
Trade Name	Pakedge
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2014 ANSI C63.4: 2014, ANSI C63.10: 2013 KDB 558074 D01 DTS Meas Guidance v03r02
Test Result	Complied

Documented By :

Leven Huang

(Senior Adm. Specialist / Leven Huang)

Tested By :

Eason chen

(Engineer / Eason Chen)

Approved By :

Vincent Lin

(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
2. Conducted Emission.....	10
2.1. Test Equipment.....	10
2.2. Test Setup	10
2.3. Limits	11
2.4. Test Procedure	11
2.5. Uncertainty	11
2.6. Test Result of Conducted Emission.....	12
3. Maximum Conducted Power.....	14
3.1. Test Equipment.....	14
3.2. Test Setup	14
3.3. Limits	14
3.4. Test Procedure	14
3.5. Uncertainty	14
3.6. Test Result of Maximum Conducted Power.....	15
4. Radiated Emission.....	19
4.1. Test Equipment.....	19
4.2. Test Setup	20
4.3. Limits	21
4.4. Test Procedure	22
4.5. Uncertainty	22
4.6. Test Result of Radiated Emission.....	23
5. RF Antenna conducted test.....	39
5.1. Test Equipment.....	39
5.2. Test Setup	39
5.3. Limits	39
5.4. Test Procedure	40
5.5. Uncertainty	40
5.6. Test Result of RF antenna conducted test.....	41
6. Band Edge	49
6.1. Test Equipment.....	49
6.2. Test Setup	50
6.3. Limits	51
6.4. Test Procedure	51
6.5. Uncertainty	51
6.6. Test Result of Band Edge	52

7.	Occupied Bandwidth.....	68
7.1.	Test Equipment.....	68
7.2.	Test Setup	68
7.3.	Limits	68
7.4.	Test Procedure	68
7.5.	Uncertainty	68
7.6.	Test Result of Occupied Bandwidth	69
8.	Power Density	81
8.1.	Test Equipment.....	81
8.2.	Test Setup	81
8.3.	Limits	81
8.4.	Test Procedure	81
8.5.	Uncertainty	81
8.6.	Test Result of Power Density	82
9.	EMI Reduction Method During Compliance Testing	94
Attachment 1: EUT Test Photographs		
Attachment 2: EUT Detailed Photographs		

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	802.11ac Dual Band Access Point
Trade Name	Pakedge
Model No.	WK-1,WK-1-B
FCC ID.	SLY-WK1X22
Frequency Range	802.11b/g/n-20MHz:2412-2462MHz,802.11n-40MHz:2422-2452MHz
Number of Channels	802.11b/g/n-20MHz: 11, n-40MHz: 7
Data Speed	802.11b: 1-11Mbps, 802.11a/g: 6-54Mbps, 802.11n: up to 300Mbps
Type of Modulation	802.11b:DSSS, DBPSK, DQPSK, CCK 802.11g/n: OFDM, BPSK, QPSK, 16QAM, 64QAM
Antenna type	PIFA Antenna
Antenna Gain	Refer to the table “Antenna List”
Channel Control	Auto
LAN Cable	Non-Shielded, 1.8m
Power Adapter	MFR: Asian Power Devices, M/N: WB-18D12FU Input: AC 100-240V, 50-60Hz ,0.5A Output: DC 12V==1.5A Cable out: Non-Shielded, 1.8m

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Lite-On	30100006726D 30100006556D	PIFA Antenna	7dBi For 2.4GHz

Note: The antenna of EUT is conform to FCC 15.203

802.11b/g/n-20MHz Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2412 MHz	Channel 02:	2417 MHz	Channel 03:	2422 MHz	Channel 04:	2427 MHz
Channel 05:	2432 MHz	Channel 06:	2437 MHz	Channel 07:	2442 MHz	Channel 08:	2447 MHz
Channel 09:	2452 MHz	Channel 10:	2457 MHz	Channel 11:	2462 MHz		

802.11n-40MHz (2.4G Band) Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 1:	2422 MHz	Channel 2:	2427 MHz	Channel 3:	2432 MHz	Channel 4:	2437 MHz
Channel 5:	2442 MHz	Channel 6:	2447 MHz	Channel 7:	2452 MHz		

Note:

1. This device is an 802.11ac Dual Band Access Point with a built-in WLAN transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. The EUT is including two models for different is listed as below:

Model Number	Appearance color	Spec
WK-1	white	Indoor
WK-1-B	Black	Indoor

4. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report. (802.11b is 1Mbps 、802.11g is 6Mbps 、802.11n(20M-BW) is 14.4Mbps and, 802.11n(40M-BW) is 30Mbps).
5. These tests are conducted on a sample for the purpose of demonstrating compliance of 802.11b/g/n transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.
6. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode:	Mode 1: Transmit (802.11b 1Mbps)
	Mode 2: Transmit (802.11g 6Mbps)
	Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)
	Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	PPT	N/A	Non-Shielded, 1.8m
2	Notebook PC	DELL	PPT	N/A	Non-Shielded, 1.8m

Signal Cable Type		Signal cable Description
A	LAN Cable	Non-Shielded, 1.8m
B	LAN Cable	Non-Shielded, 1.8m

1.4. Configuration of Tested System

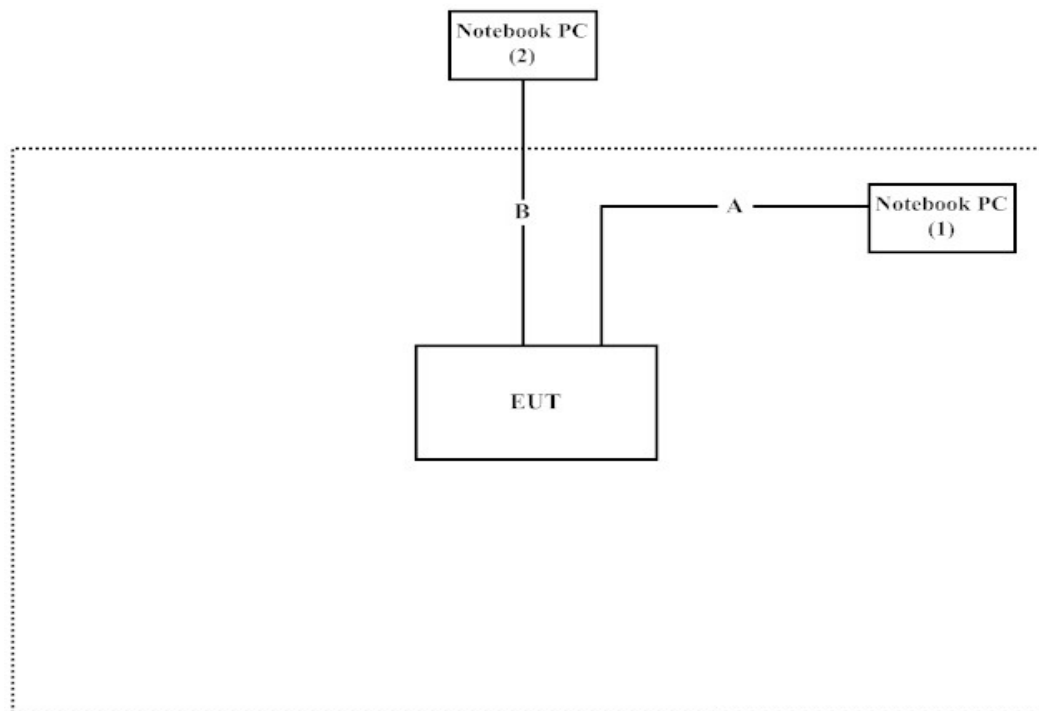

1.5. EUT Exercise Software

- (1) Setup the EUT as shown on 1.4
- (2) Execute “ART2 GUI-V2.3” program on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Start the continuous transmission.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from

Quietek Corporation's Web Site: <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site:

<http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng,
Linkou Dist. New Taipei City 24451,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2014	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2015	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2015	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2015	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2015	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

2.2. Test Setup

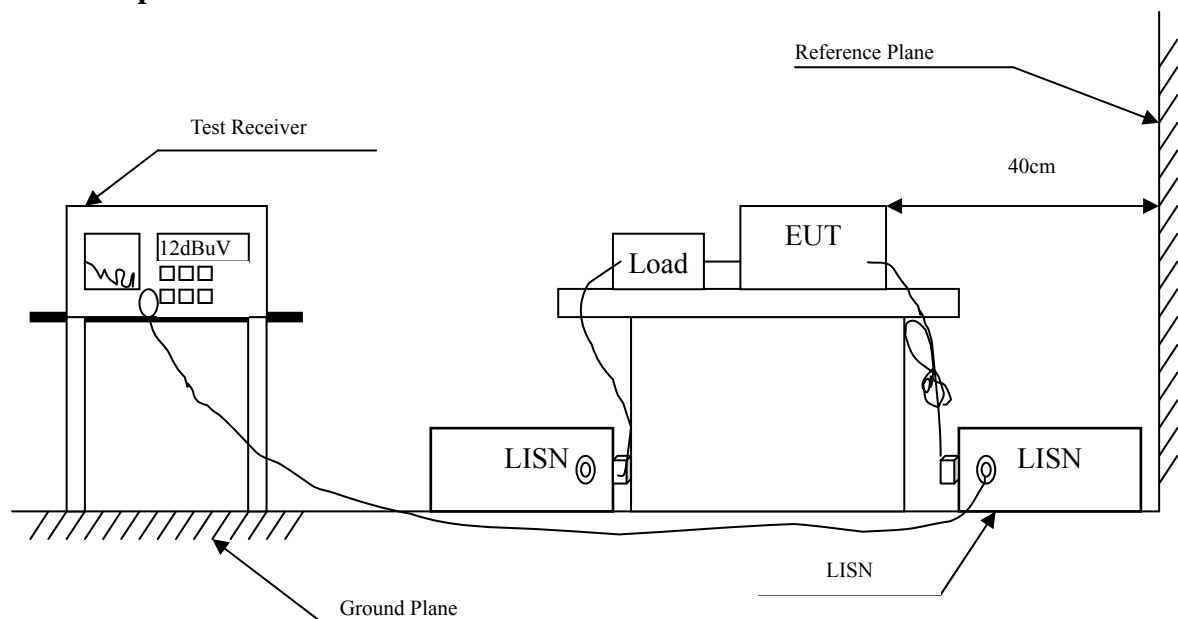

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : 802.11ac Dual Band Access Point
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2437MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 1					
Quasi-Peak					
0.158	9.668	29.870	39.538	-26.233	65.771
0.291	9.665	21.240	30.905	-31.066	61.971
0.627	9.684	13.450	23.134	-32.866	56.000
3.529	9.820	19.960	29.780	-26.220	56.000
10.209	9.963	15.670	25.633	-34.367	60.000
24.822	10.053	7.340	17.393	-42.607	60.000
Average					
0.158	9.668	24.720	34.388	-21.383	55.771
0.291	9.665	19.500	29.165	-22.806	51.971
0.627	9.684	9.580	19.264	-26.736	46.000
3.529	9.820	12.020	21.840	-24.160	46.000
10.209	9.963	9.660	19.623	-30.377	50.000
24.822	10.053	2.210	12.263	-37.737	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : 802.11ac Dual Band Access Point
Test Item : Conducted Emission Test
Power Line : Line 2
Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2437MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
Line 2					
Quasi-Peak					
0.181	9.662	28.550	38.212	-26.902	65.114
0.314	9.667	28.120	37.787	-23.527	61.314
0.619	9.683	15.080	24.763	-31.237	56.000
3.662	9.823	21.200	31.023	-24.977	56.000
9.923	9.990	15.430	25.420	-34.580	60.000
23.103	10.230	10.060	20.290	-39.710	60.000
Average					
0.181	9.662	25.120	34.782	-20.332	55.114
0.314	9.667	26.590	36.257	-15.057	51.314
0.619	9.683	11.900	21.583	-24.417	46.000
3.662	9.823	13.120	22.943	-23.057	46.000
9.923	9.990	11.140	21.130	-28.870	50.000
23.103	10.230	6.220	16.450	-33.550	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Maximum Conducted Power


3.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2014
X	Power Sensor	Anritsu	MA2411B/0738448	Jun, 2014
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

3.2. Test Setup

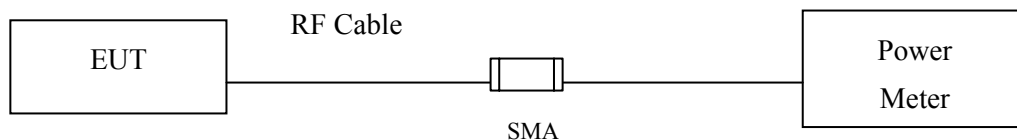

3.3. Limits

The maximum average power shall be less 1 Watt. (Section 15.247 (b)(3))

3.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 D01 DTS Meas Guidance v03r02 section 9.1.2 PKPM1 Peak power meter method.

3.5. Uncertainty

± 1.27 dB

3.6. Test Result of Maximum Conducted Power

Product : 802.11ac Dual Band Access Point
Test Item : Maximum Conducted Power
sTest Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps)

CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Required Limit	Result
		1	2	5.5	11		
		Measurement Level (dBm)					
01	2412	19.17	--	--	--	<29dBm	Pass
06	2437	25.45	25.32	25.26	25.11	<29dBm	Pass
11	2462	19.94	--	--	--	<29dBm	Pass

Note: Average Power Output Value =Reading value on power meter + cable loss

CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Required Limit	Result
		1	2	5.5	11		
		Measurement Level (dBm)					
01	2412	19.65	--	--	--	<29dBm	Pass
06	2437	25.48	25.39	25.27	25.12	<29dBm	Pass
11	2462	19.62	--	--	--	<29dBm	Pass

Note: Average Power Output Value =Reading value on power meter + cable loss

CHAIN A+B

Channel	Frequency (MHz)	Data Rate (Mbps)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
1	2412	14.4	19.17	19.65	22.43	<29dBm	Pass
6	2437	14.4	25.45	25.48	28.48	<29dBm	Pass
11	2462	14.4	19.94	19.62	22.79	<29dBm	Pass

Note: AveragePower Output Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11ac Dual Band Access Point
Test Item : Maximum Conducted Power
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps)

CHAIN A

Channel No	Frequency (MHz)	Average Power								Required Limit	Result
		For different Data Rate (Mbps)									
		6	9	12	18	24	36	48	54		
		Measurement Level (dBm)									
01	2412	15.76	--	--	--	--	--	--	--	<29dBm	Pass
06	2437	22.52	22.46	22.35	22.24	22.19	22.06	21.99	21.82	<29dBm	Pass
11	2462	16.18	--	--	--	--	--	--	--	<29dBm	Pass

Note: Average Power Output Value =Reading value on power meter + cable loss

CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Required Limit	Result
		6	9	12	18	24	36	48	54		
		Measurement Level (dBm)									
01	2412	16.28	--	--	--	--	--	--	--	<29dBm	Pass
06	2437	22.65	22.54	22.48	22.34	22.25	22.14	22.06	21.95	<29dBm	Pass
11	2462	16.37	--	--	--	--	--	--	--	<29dBm	Pass

Note: Average Power Output Value =Reading value on power meter + cable loss

CHAIN A+B

Channel	Frequency (MHz)	Data Rate (Mbps)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
1	2412	14.4	15.76	16.28	19.04	<29dBm	Pass
6	2437	14.4	22.52	22.65	25.60	<29dBm	Pass
11	2462	14.4	16.18	16.37	19.29	<29dBm	Pass

Note: Average Power Output Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11ac Dual Band Access Point
 Test Item : Maximum Conducted Power
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)

CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)							
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4
		Measurement Level (dBm)							
01	2412	14.66	--	--	--	--	--	--	--
06	2437	21.33	21.25	21.16	21.07	20.94	20.86	20.74	20.69
11	2462	14.77	--	--	--	--	--	--	--

Note: Average Power Output Value =Reading value on power meter + cable loss

CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)							
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4
		Measurement Level (dBm)							
01	2412	14.85	--	--	--	--	--	--	--
06	2437	21.39	21.32	21.27	21.16	21.04	20.98	20.86	20.77
11	2462	14.82	--	--	--	--	--	--	--

Note: Average Power Output Value =Reading value on power meter + cable loss

CHAIN A+B

Channel	Frequency (MHz)	Data Rata (Mbps)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
1	2412	14.4	14.66	14.85	17.77	<29dBm	Pass
6	2437	14.4	21.33	21.39	24.37	<29dBm	Pass
11	2462	14.4	14.77	14.82	17.81	<29dBm	Pass

Note: Average Power Output Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11ac Dual Band Access Point
 Test Item : Maximum Conducted Power
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)

CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)							
		30	60	90	120	180	240	270	300
		Measurement Level (dBm)							
3	2422	12.15	--	--	--	--	--	--	--
6	2437	17.16	17.05	16.99	16.92	16.83	16.74	16.66	16.58
9	2452	13.75	--	--	--	--	--	--	--

Note: Average Power Output Value =Reading value on power meter + cable loss

CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)							
		30	60	90	120	180	240	270	300
		Measurement Level (dBm)							
3	2422	12.07	--	--	--	--	--	--	--
6	2437	17.23	17.17	17.03	16.95	16.84	16.76	16.64	16.52
9	2452	13.71	--	--	--	--	--	--	--

Note: Average Power Output Value =Reading value on power meter + cable loss

CHAIN A+B

Channel	Frequency (MHz)	Data Rata (Mbps)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
3	2422	30	12.15	12.07	15.12	<29dBm	Pass
6	2437	30	17.16	17.23	20.21	<29dBm	Pass
9	2452	30	13.75	13.71	16.74	<29dBm	Pass

Note: Average Power Output Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

4. Radiated Emission

4.1. Test Equipment


The following test equipments are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Magnetic Loop Antenna	Teseq	HLA6121/ 37133	Sep, 2014
	X	Bilog Antenna	Schaffner Chase	CBL6112B/ 2707	Jun, 2014
	X	EMI Test Receiver	R&S	ESCS 30/838251/ 001	Jun, 2014
	X	Coaxial Cable	QTK(Arnist)	RG 214/ LC003-RG	Jun, 2014
	X	Coaxial signal switch	Arnist	MP59B/ 6200798682	Jun, 2014


Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

4.2. Test Setup

Radiated Emission Below 1GHz

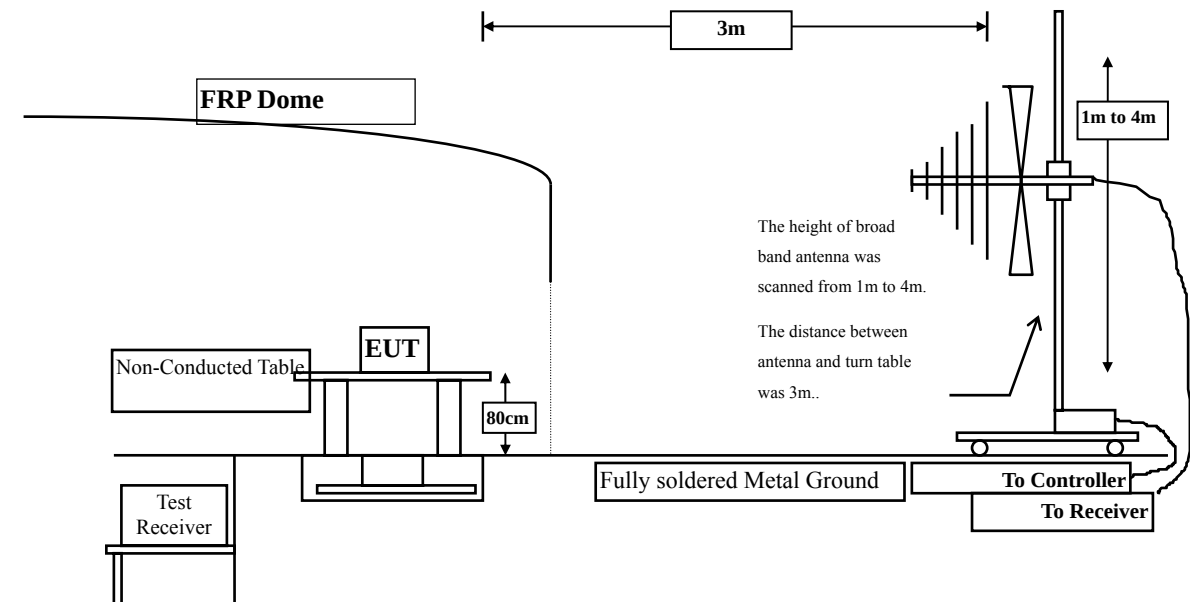

Radiated Emission Above 1GHz

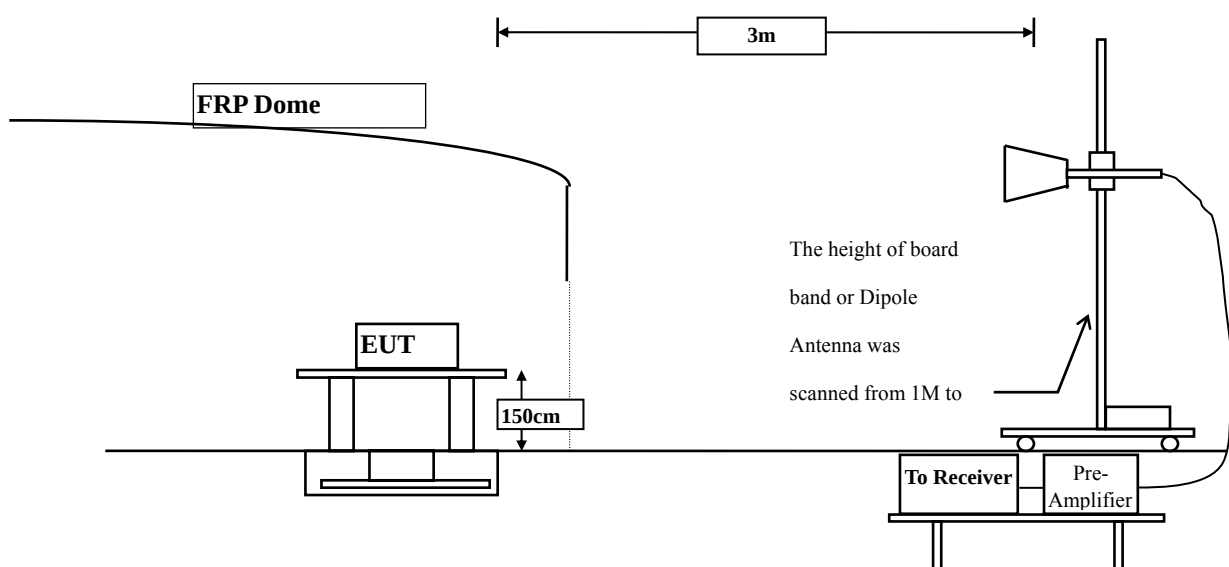

4.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 30dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Radiated Emission

Product : 802.11ac Dual Band Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4824.000	3.261	40.590	43.851	-30.149	74.000
7236.000	10.650	38.120	48.770	-25.230	74.000
9648.000	13.337	37.080	50.416	-23.584	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4824.000	6.421	40.960	47.381	-26.619	74.000
7236.000	11.495	36.450	47.945	-26.055	74.000
9648.000	13.807	37.140	50.946	-23.054	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11ac Dual Band Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4874.000	3.038	44.870	47.907	-26.093	74.000
7311.000	11.795	43.640	55.434	-18.566	74.000
9748.000	12.635	37.050	49.685	-24.315	74.000
Average					
Detector:					
7311.000	11.795	37.200	48.994	-5.006	54.000
Vertical					
Peak Detector:					
4874.000	5.812	41.330	47.141	-26.859	74.000
7311.000	12.630	37.470	50.099	-23.901	74.000
9748.000	13.126	36.670	49.796	-24.204	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11ac Dual Band Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4924.000	2.858	41.770	44.627	-29.373	74.000
7386.000	12.127	38.100	50.228	-23.772	74.000
9848.000	12.852	37.170	50.023	-23.977	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4924.000	5.521	42.640	48.160	-25.840	74.000
7386.000	13.254	35.710	48.964	-25.036	74.000
9848.000	13.367	36.820	50.187	-23.813	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11ac Dual Band Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4824.000	3.261	38.090	41.351	-32.649	74.000
7236.000	10.650	36.490	47.140	-26.860	74.000
9648.000	13.337	37.130	50.466	-23.534	74.000

Average

Detector:

--

Vertical

Peak Detector:

4824.000	6.421	38.750	45.171	-28.829	74.000
7236.000	11.495	36.430	47.925	-26.075	74.000
9648.000	13.807	36.690	50.496	-23.504	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11ac Dual Band Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4874.000	3.038	45.260	48.297	-25.703	74.000
7311.000	11.795	43.030	54.824	-19.176	74.000
9748.000	12.635	36.250	48.885	-25.115	74.000
Average					
Detector:					
7311.000	11.795	28.160	39.954	-14.046	54.000
Vertical					
Peak Detector:					
4874.000	5.812	43.770	49.581	-24.419	74.000
7311.000	12.630	37.760	50.389	-23.611	74.000
9748.000	13.126	37.080	50.206	-23.794	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11ac Dual Band Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4924.000	2.858	37.670	40.527	-33.473	74.000
7386.000	12.127	35.770	47.898	-26.102	74.000
9848.000	12.852	36.360	49.213	-24.787	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4924.000	5.521	39.300	44.820	-29.180	74.000
7386.000	13.254	35.670	48.924	-25.076	74.000
9848.000	13.367	37.640	51.007	-22.993	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11ac Dual Band Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2412MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4824.000	3.261	38.370	41.631	-32.369	74.000
7236.000	10.650	36.260	46.910	-27.090	74.000
9648.000	13.337	36.940	50.276	-23.724	74.000

Average

Detector:

--

Vertical

Peak Detector:

4824.000	6.421	37.910	44.331	-29.669	74.000
7236.000	11.495	36.670	48.165	-25.835	74.000
9648.000	13.807	36.870	50.676	-23.324	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11ac Dual Band Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4874.000	3.038	42.520	45.557	-28.443	74.000
7311.000	11.795	40.830	52.624	-21.376	74.000
9748.000	12.635	36.780	49.415	-24.585	74.000

Average

Detector:

--

Vertical

Peak Detector:

4874.000	5.812	41.450	47.261	-26.739	74.000
7311.000	12.630	36.230	48.859	-25.141	74.000
9748.000	13.126	36.530	49.656	-24.344	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11ac Dual Band Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2462 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4924.000	2.805	37.540	40.345	-33.655	74.000
7386.000	12.342	35.660	48.001	-25.999	74.000
9848.000	13.231	36.170	49.401	-24.599	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4924.000	5.542	36.870	42.412	-31.588	74.000
7386.000	13.394	35.700	49.093	-24.907	74.000
9848.000	13.833	37.160	50.994	-23.006	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11ac Dual Band Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2422MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4844.000	3.171	36.790	39.961	-34.039	74.000
7266.000	11.162	36.360	47.522	-26.478	74.000
9688.000	12.964	37.430	50.395	-23.605	74.000

Average

Detector:

--

Vertical

Peak Detector:

4844.000	6.178	37.610	43.788	-30.212	74.000
7266.000	11.982	35.860	47.842	-26.158	74.000
9688.000	13.507	36.620	50.128	-23.872	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11ac Dual Band Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4874.000	3.038	38.090	41.127	-32.873	74.000
7311.000	11.795	35.420	47.214	-26.786	74.000
9748.000	12.635	37.330	49.965	-24.035	74.000

Average

Detector:

--

Vertical

Peak Detector:

4874.000	5.812	39.040	44.851	-29.149	74.000
7311.000	12.630	35.610	48.239	-25.761	74.000
9748.000	13.126	36.650	49.776	-24.224	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11ac Dual Band Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2452 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4904.000	2.858	36.410	39.267	-34.733	74.000
7356.000	12.127	35.860	47.988	-26.012	74.000
9808.000	12.852	36.450	49.303	-24.697	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4904.000	5.521	36.420	41.940	-32.060	74.000
7356.000	13.254	35.890	49.144	-24.856	74.000
9808.000	13.367	36.180	49.547	-24.453	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11ac Dual Band Access Point
Test Item : General Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
88.200	-9.696	43.249	33.553	-9.947	43.500
367.560	-1.205	37.423	36.218	-9.782	46.000
435.460	-1.920	40.840	38.920	-7.080	46.000
625.580	1.770	35.196	36.966	-9.034	46.000
749.740	3.320	30.202	33.522	-12.478	46.000
875.840	5.271	33.900	39.171	-6.829	46.000
Vertical					
97.900	-1.400	37.116	35.715	-7.785	43.500
365.620	-2.179	35.913	33.734	-12.266	46.000
499.480	-0.852	30.745	29.893	-16.107	46.000
602.300	-2.333	31.144	28.811	-17.189	46.000
875.840	1.621	31.024	32.645	-13.355	46.000
965.080	7.932	25.527	33.459	-20.541	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11ac Dual Band Access Point
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
66.860	-12.355	45.790	33.435	-6.565	40.000
367.560	-1.205	37.891	36.686	-9.314	46.000
419.940	-3.234	37.500	34.266	-11.734	46.000
588.720	3.528	27.487	31.015	-14.985	46.000
749.740	3.320	29.317	32.637	-13.363	46.000
875.840	5.271	33.345	38.616	-7.384	46.000
Vertical					
84.320	-4.484	38.569	34.085	-5.915	40.000
158.040	-6.191	31.119	24.928	-18.572	43.500
375.320	-2.029	33.510	31.481	-14.519	46.000
625.580	-2.600	32.991	30.391	-15.609	46.000
901.060	3.331	32.484	35.815	-10.185	46.000
968.960	8.191	25.035	33.226	-20.774	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11ac Dual Band Access Point
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
90.140	-9.449	41.709	32.260	-11.240	43.500
365.620	-1.329	35.654	34.325	-11.675	46.000
435.460	-1.920	40.450	38.530	-7.470	46.000
598.420	3.991	29.273	33.264	-12.736	46.000
749.740	3.320	28.918	32.238	-13.762	46.000
875.840	5.271	33.545	38.816	-7.184	46.000
Vertical					
94.020	-3.539	41.413	37.873	-5.627	43.500
369.500	-2.868	38.985	36.117	-9.883	46.000
499.480	-0.852	29.903	29.051	-16.949	46.000
625.580	-2.600	33.866	31.266	-14.734	46.000
749.740	2.510	27.597	30.107	-15.893	46.000
967.020	8.071	25.600	33.671	-20.329	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11ac Dual Band Access Point
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
101.780	-7.141	36.928	29.787	-13.713	43.500
365.620	-1.329	41.208	39.879	-6.121	46.000
466.500	0.794	30.961	31.754	-14.246	46.000
600.360	3.977	30.984	34.961	-11.039	46.000
749.740	3.320	29.870	33.190	-12.810	46.000
901.060	5.591	29.145	34.736	-11.264	46.000
Vertical					
101.780	-0.021	33.835	33.813	-9.687	43.500
156.100	-6.201	32.091	25.889	-17.611	43.500
379.200	-1.505	28.223	26.717	-19.283	46.000
625.580	-2.600	31.759	29.159	-16.841	46.000
755.560	3.281	25.644	28.925	-17.075	46.000
903.000	2.966	27.282	30.248	-15.752	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF Antenna conducted test


5.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with “X” are used to measure the final test results.

5.2. Test Setup

RF antenna Conducted Measurement:

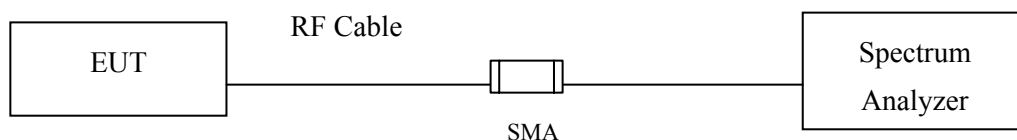

5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.5. Uncertainty


The measurement uncertainty

Conducted is defined as $\pm 1.27\text{dB}$


5.6. Test Result of RF antenna conducted test

Product : 802.11ac Dual Band Access Point
 Test Item : RF antenna conducted test
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)


Channel 01 (2412MHz) 30MHz-25GHz-Chain A

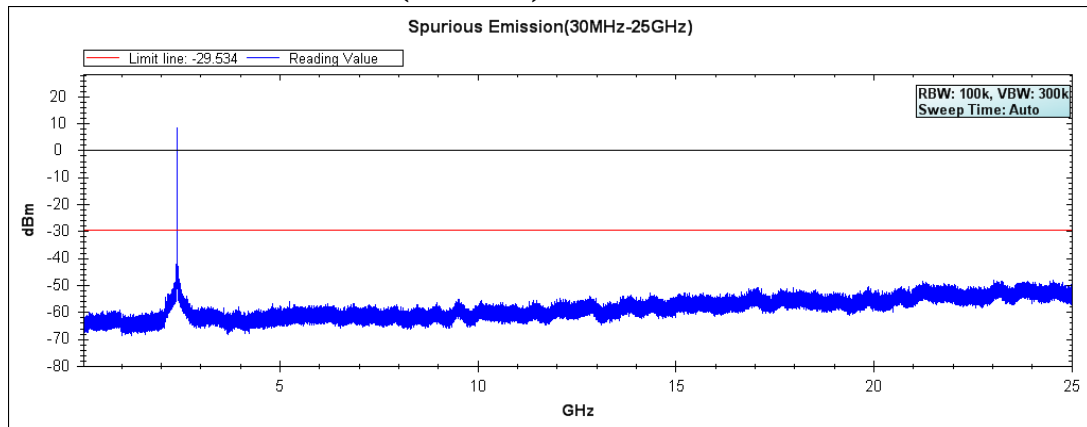

Channel 06 (2437MHz) 30MHz -25GHz-Chain A

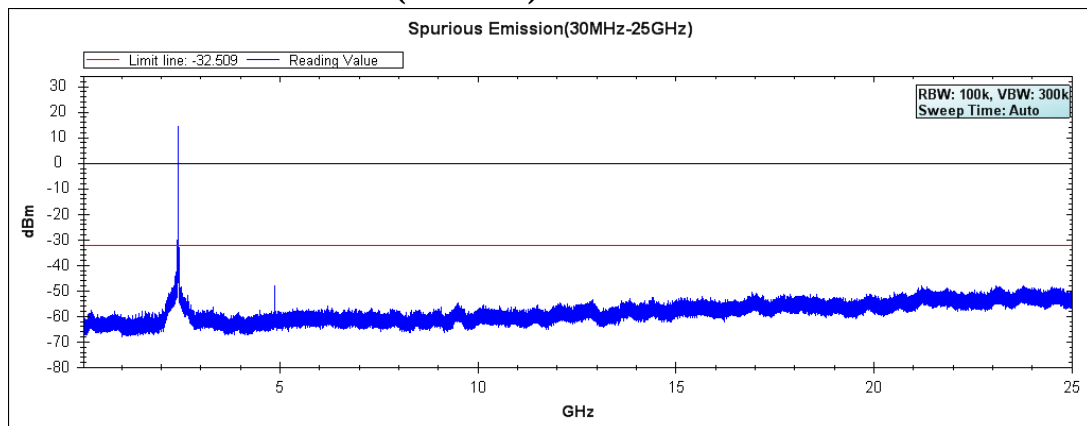


Channel 11 (2462MHz) 30MHz -25GHz-Chain A

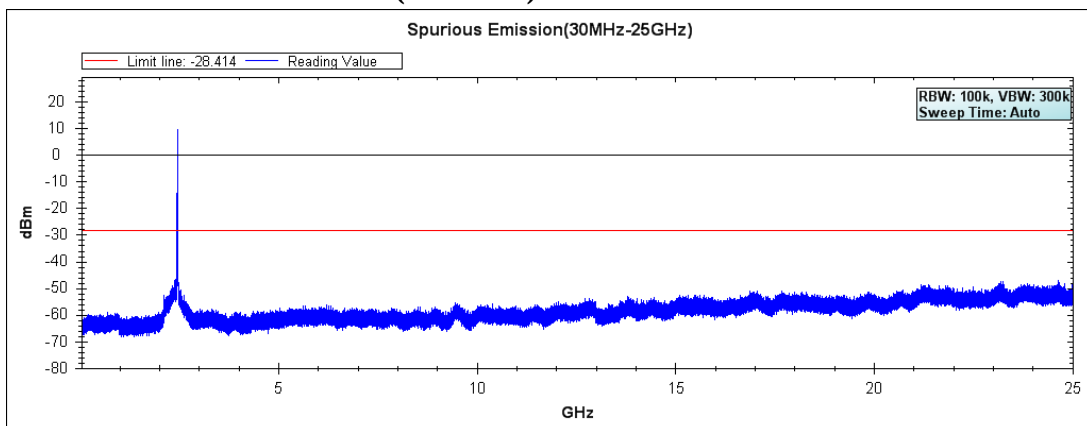


Note: The above test pattern is synthesized by multiple of the frequency range.


Channel 01 (2412MHz) 30MHz-25GHz-Chain B

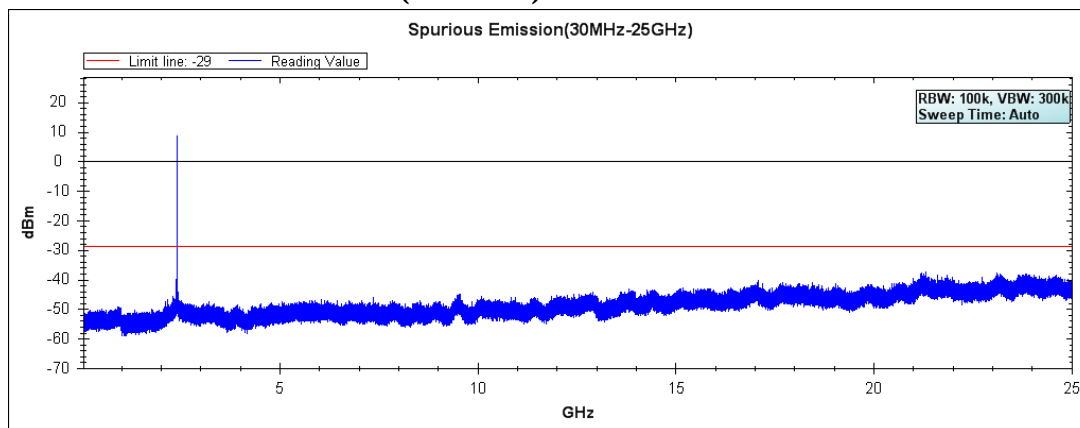

Channel 06 (2437MHz) 30MHz -25GHz-Chain B

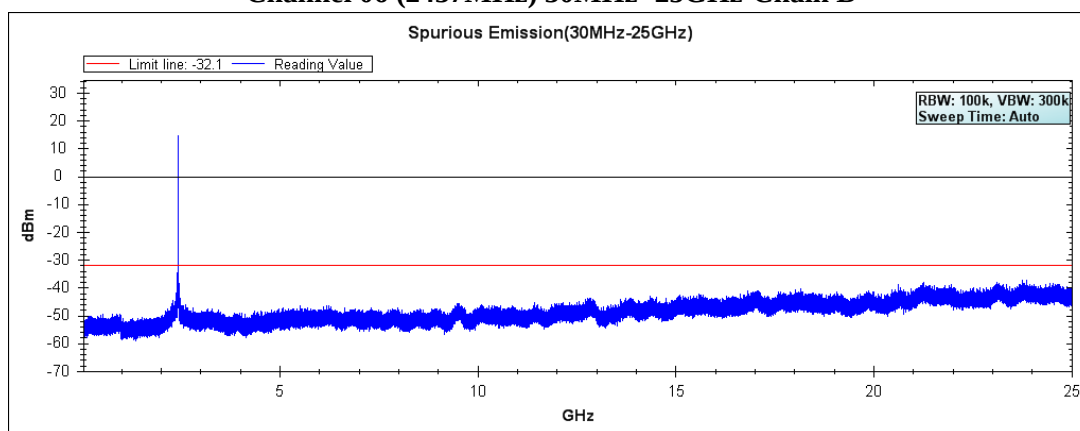


Channel 11 (2462MHz) 30MHz -25GHz-Chain B

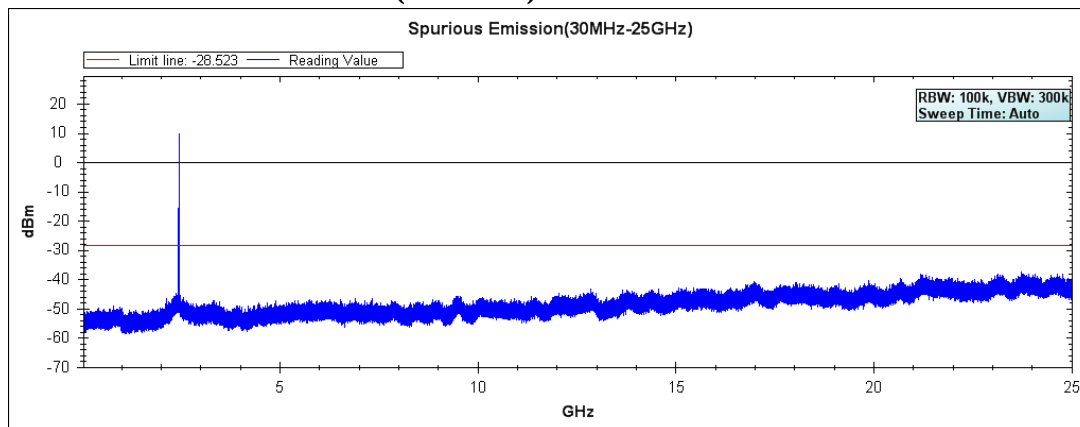


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : 802.11ac Dual Band Access Point
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)


Channel 01 (2412MHz) 30MHz -25GHz-Chain A

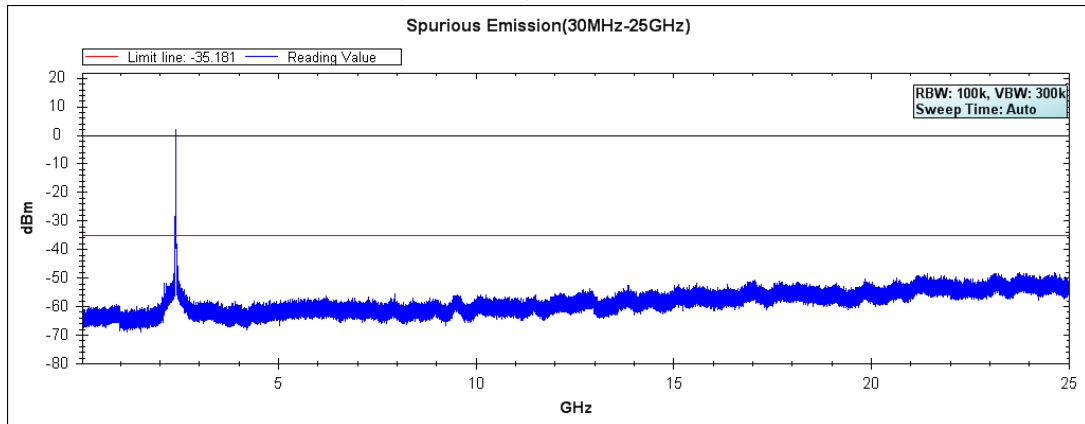

Channel 06 (2437MHz) 30MHz -25GHz-Chain A

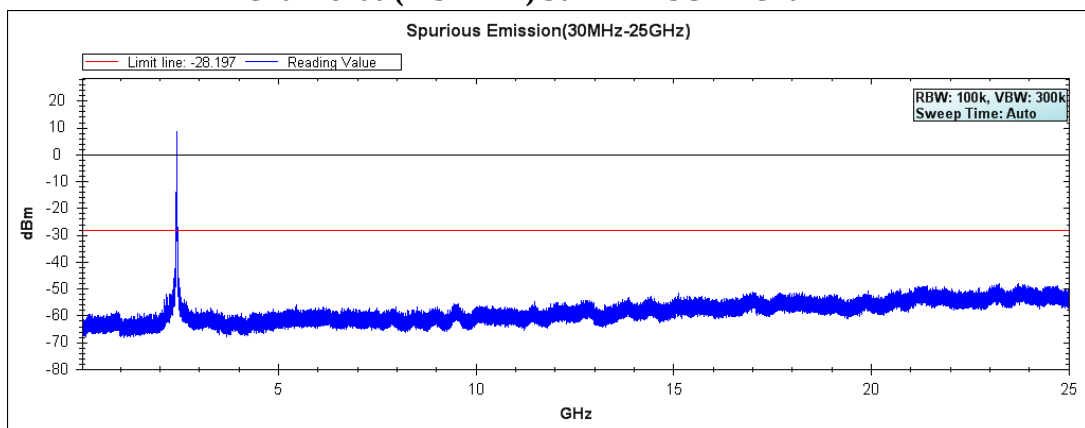


Channel 11 (2462MHz) 30MHz -25GHz-Chain A

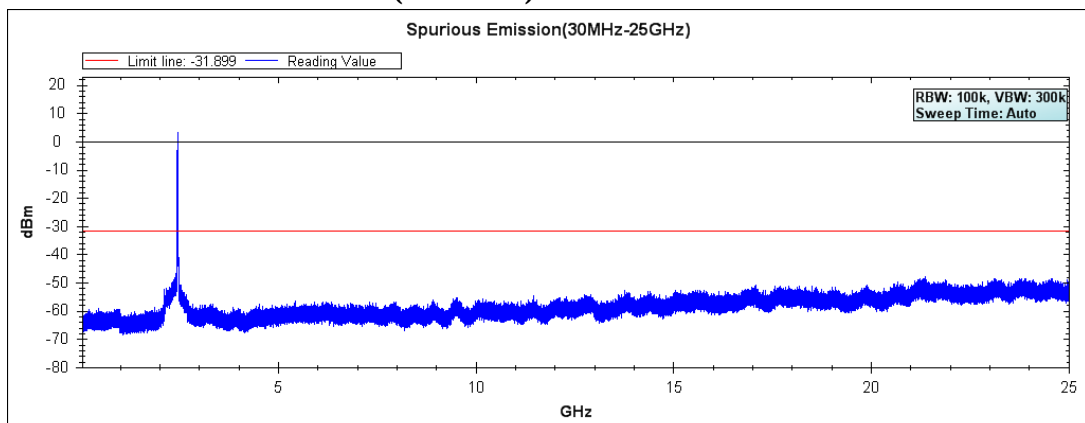


Note: The above test pattern is synthesized by multiple of the frequency range.


Channel 01 (2412MHz) 30MHz -25GHz-Chain B

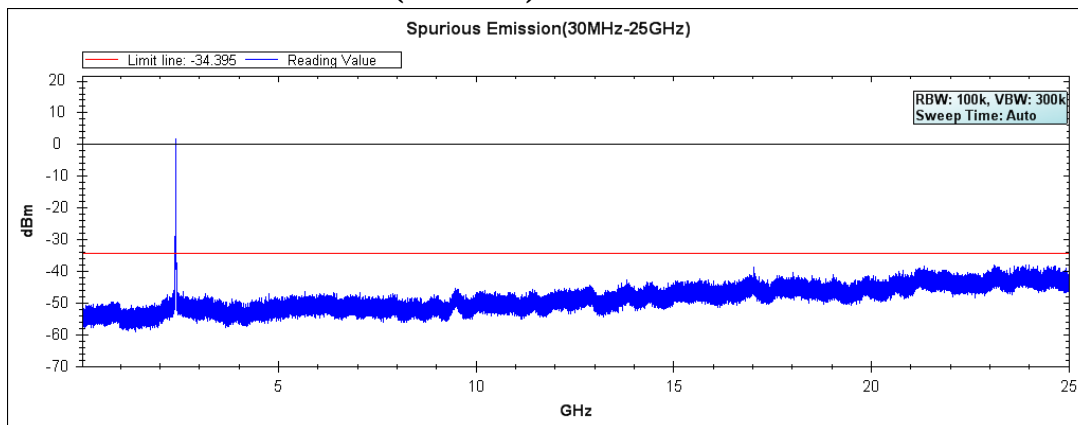

Channel 06 (2437MHz) 30MHz -25GHz-Chain B

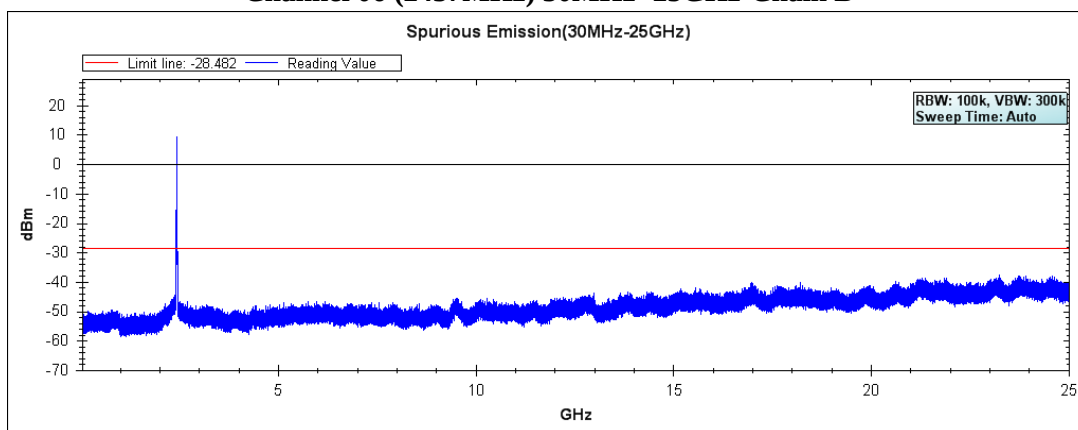


Channel 11 (2462MHz) 30MHz -25GHz-Chain B

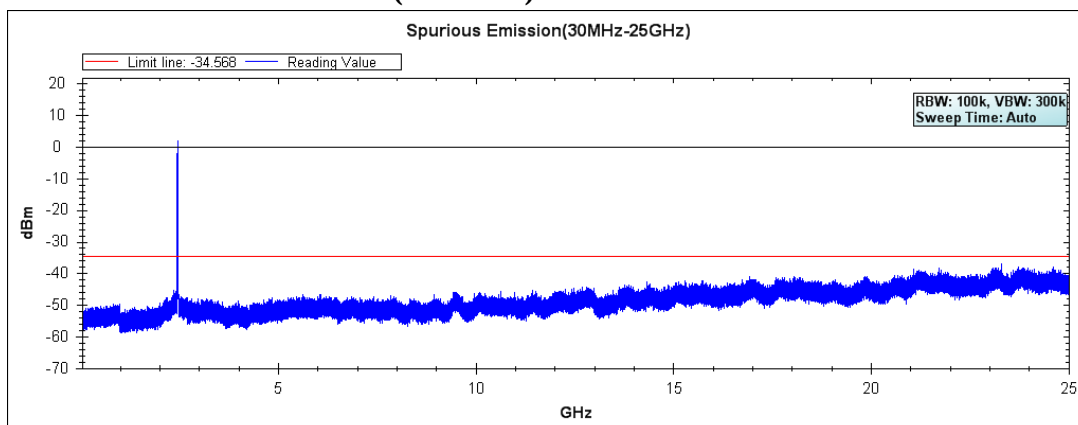


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : 802.11ac Dual Band Access Point
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)


Channel 01 (2412MHz) 30MHz -25GHz-Chain A

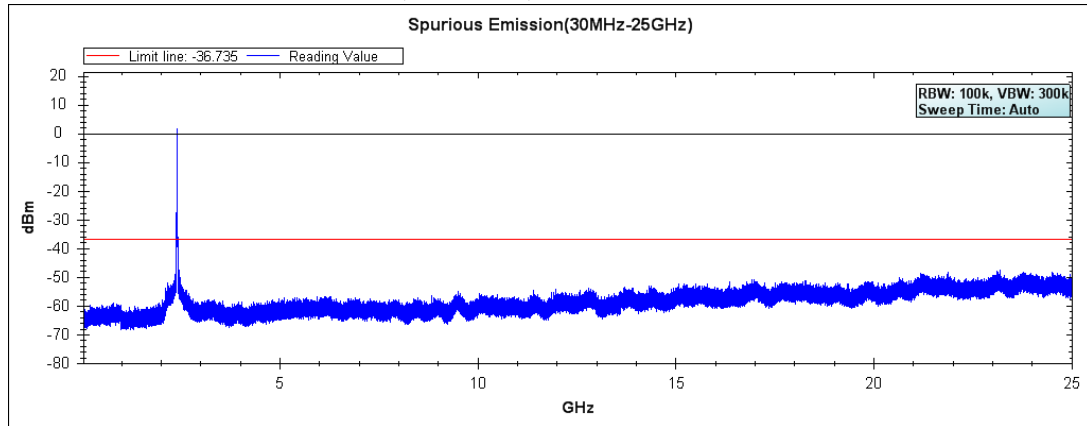

Channel 06 (2437MHz) 30MHz -25GHz-Chain A

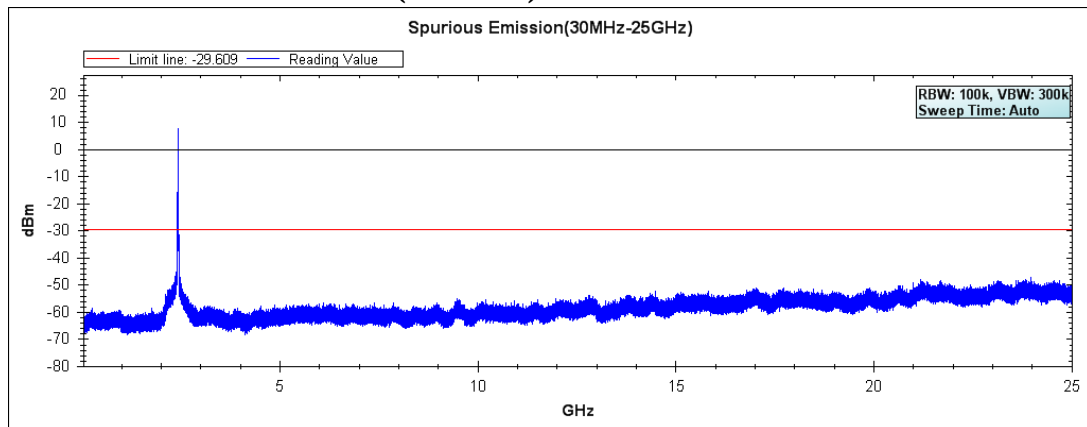


Channel 11 (2462MHz) 30MHz -25GHz-Chain A

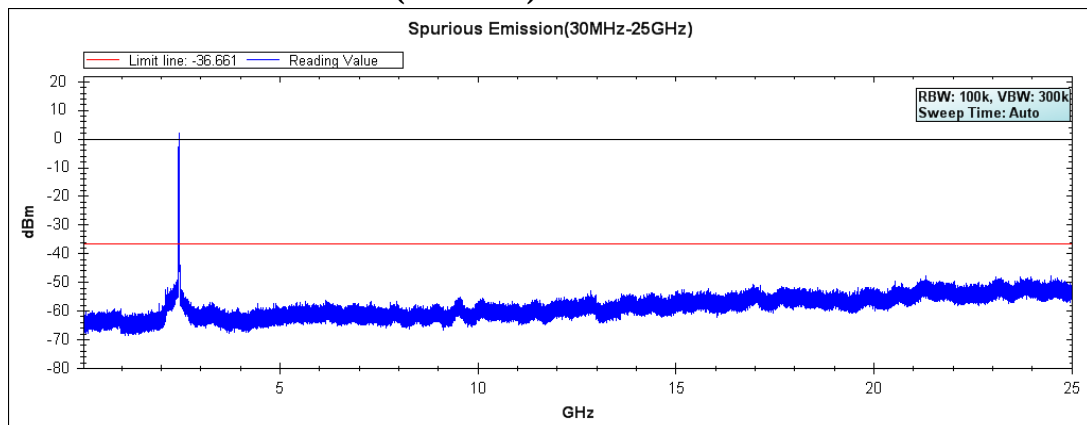


Note: The above test pattern is synthesized by multiple of the frequency range.


Channel 01 (2412MHz) 30MHz -25GHz-Chain B

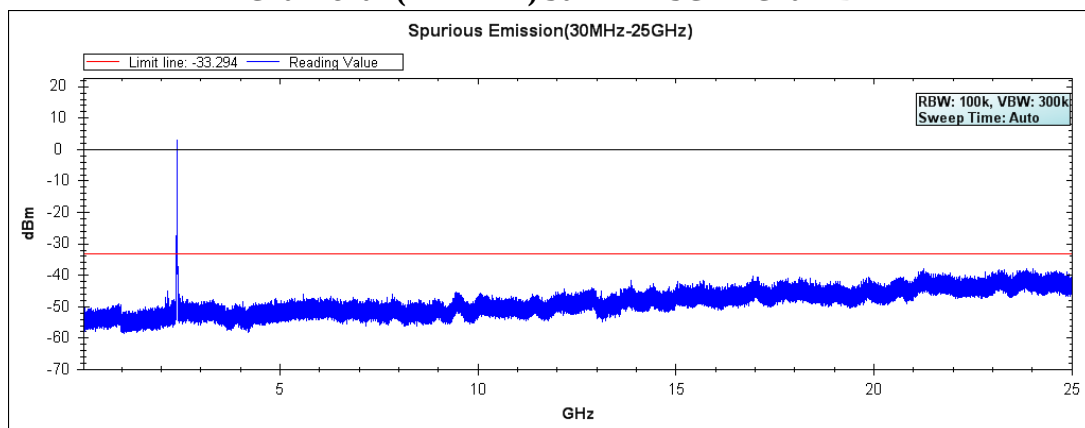

Channel 06 (2437MHz) 30MHz -25GHz-Chain B

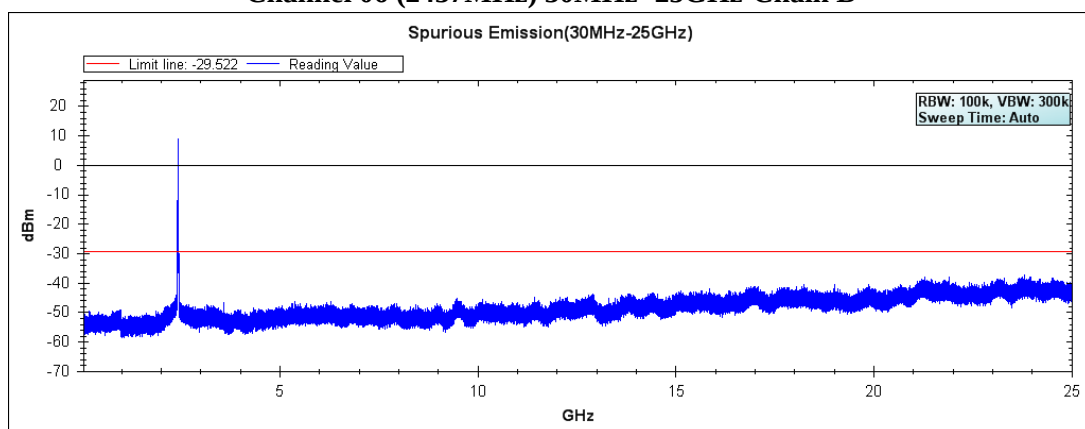


Channel 11 (2462MHz) 30MHz -25GHz-Chain B

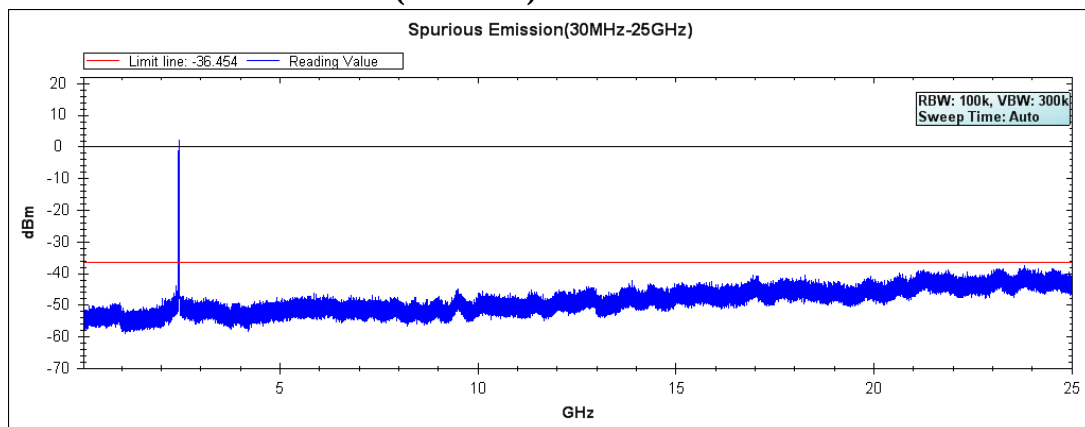


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : 802.11ac Dual Band Access Point
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)


Channel 03 (2422MHz) 30MHz -25GHz-Chain A

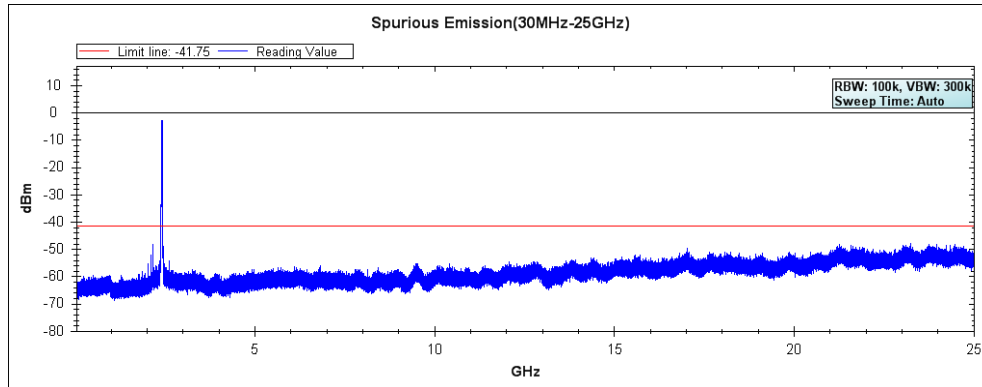

Channel 06 (2437MHz) 30MHz -25GHz-Chain A

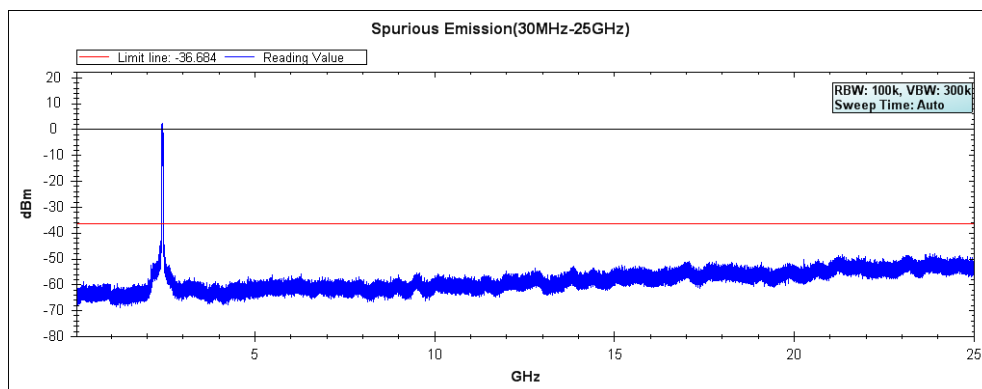

Channel 09 (2452MHz) 30MHz -25GHz-Chain A

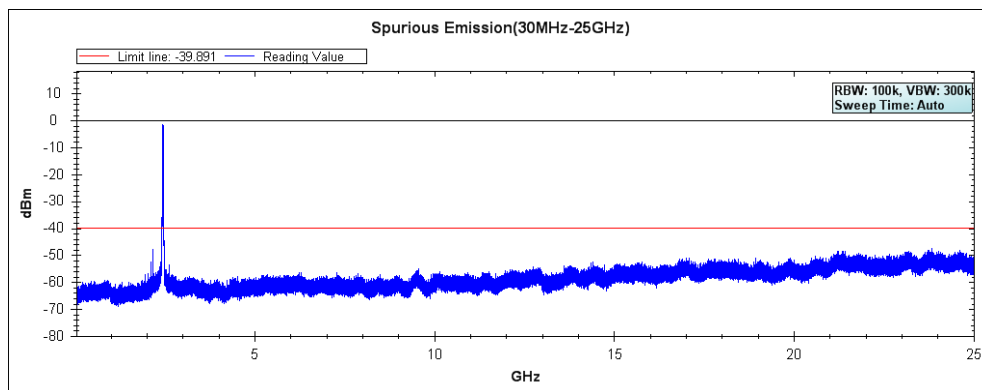

Note: The above test pattern is synthesized by multiple of the frequency range.

Spurious Emission(30MHz-25GHz)

Limit line: -41.948 Reading Value

RBW: 100k, VBW: 300k
Sweep Time: Auto

dBm

GHz

Spurious Emission(30MHz-25GHz)

Limit line: -39.831 Reading Value

RBW: 100k, VBW: 300k
Sweep Time: Auto

dBm

GHz

Page: 48 of 96

6. Band Edge

6.1. Test Equipment

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒ CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct, 2014
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar, 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan, 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug, 2014
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan, 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul, 2014
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul, 2014


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with “X” are used to measure the final test results.

6.2. Test Setup

RF Conducted Measurement

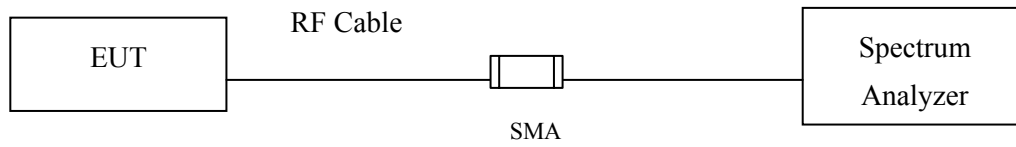

RF Radiated Measurement:

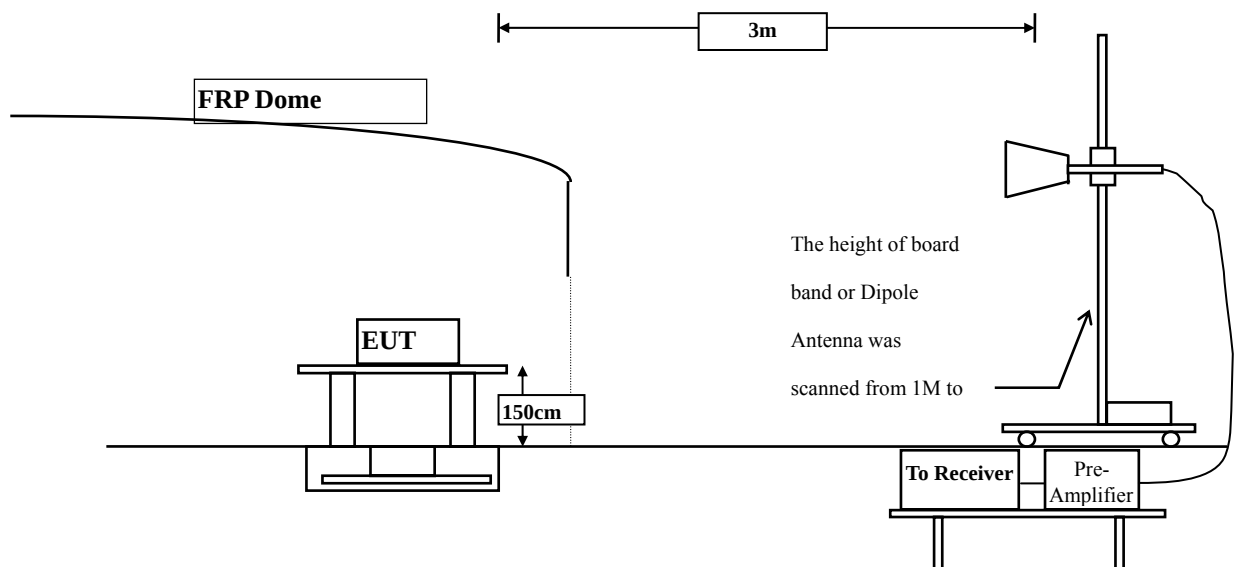

6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 30dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

6.4. Test Procedure

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The EUT was setup according to ANSI C63.10, 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

6.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

6.6. Test Result of Band Edge

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2386.000	31.493	31.635	63.129	74.00	54.00	Pass
01 (Peak)	2390.000	31.509	30.702	62.211	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	36.867	68.428	--	--	--
01 (Peak)	2413.600	31.650	83.005	114.655	--	--	--
01 (Average)	2386.400	31.495	22.109	53.604	74.00	54.00	Pass
01 (Average)	2390.000	30.415	21.008	52.517	74.00	54.00	Pass
01 (Average)	2400.000	30.468	29.723	61.284	--	--	--
01 (Average)	2414.800	30.563	79.053	110.713	--	--	--

Figure Channel 01: Horizontal (Peak)


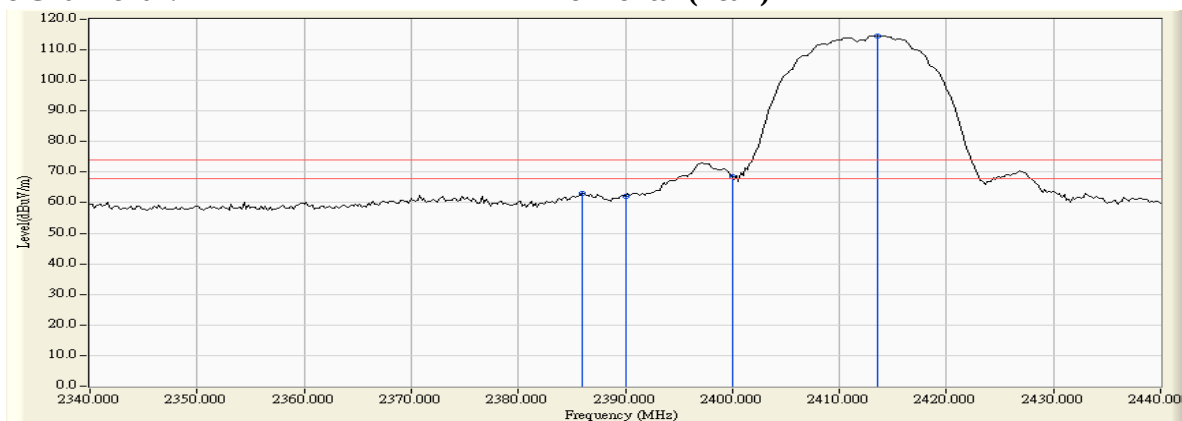


Figure Channel 01: Horizontal (Average)

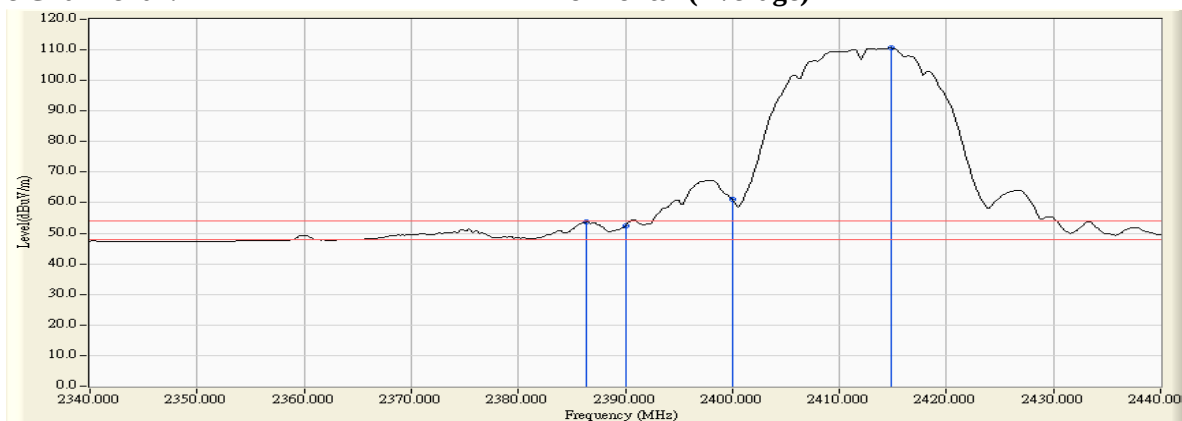

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
 4. “ * ”, means this data is the worst emission level.
 5. Measurement Level = Reading Level + Correct Factor.
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2375.000	30.985	33.628	64.613	74.00	54.00	Pass
01 (Peak)	2390.000	30.915	30.521	61.436	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	35.616	66.528	--	--	--
01 (Peak)	2411.000	30.942	81.182	112.124	--	--	--
01 (Average)	2370.200	31.007	21.032	52.039	74.00	54.00	Pass
01 (Average)	2390.000	30.915	19.615	50.530	74.00	54.00	Pass
01 (Average)	2400.000	30.912	26.290	57.202	--	--	--
01 (Average)	2409.200	30.937	77.454	108.391	--	--	--

Figure Channel 01:

Vertical (Peak)


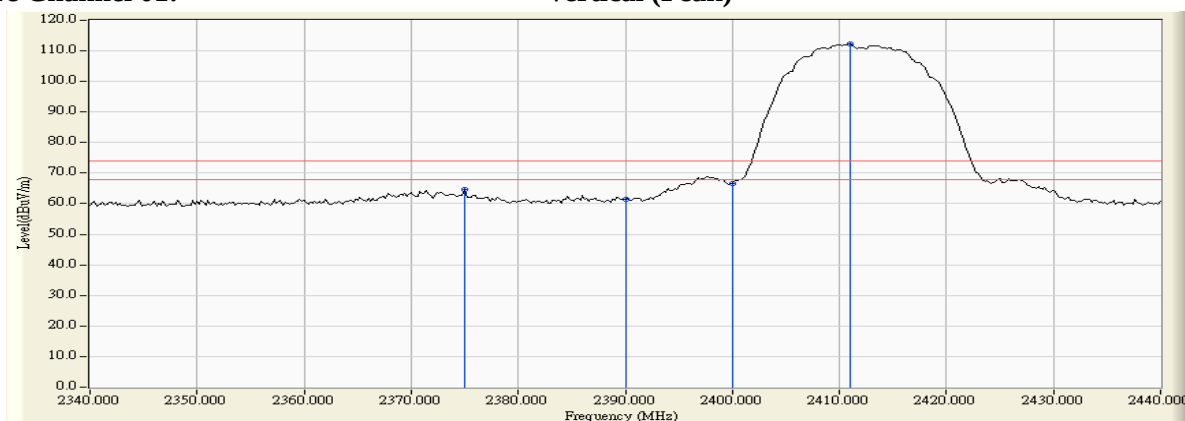


Figure Channel 01:

Vertical (Average)

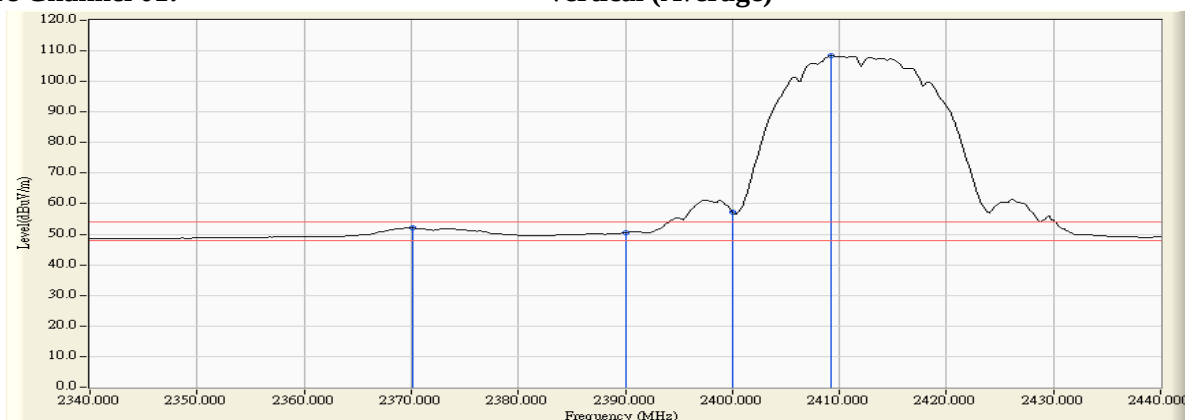

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2462.900	32.026	82.525	114.551	--	--	--
11 (Peak)	2483.500	32.182	32.276	64.458	74.00	54.00	Pass
11 (Average)	2464.700	32.039	78.518	110.558	--	--	--
11 (Average)	2483.500	32.182	21.584	53.766	74.00	54.00	Pass

Figure Channel 11: Horizontal (Peak)


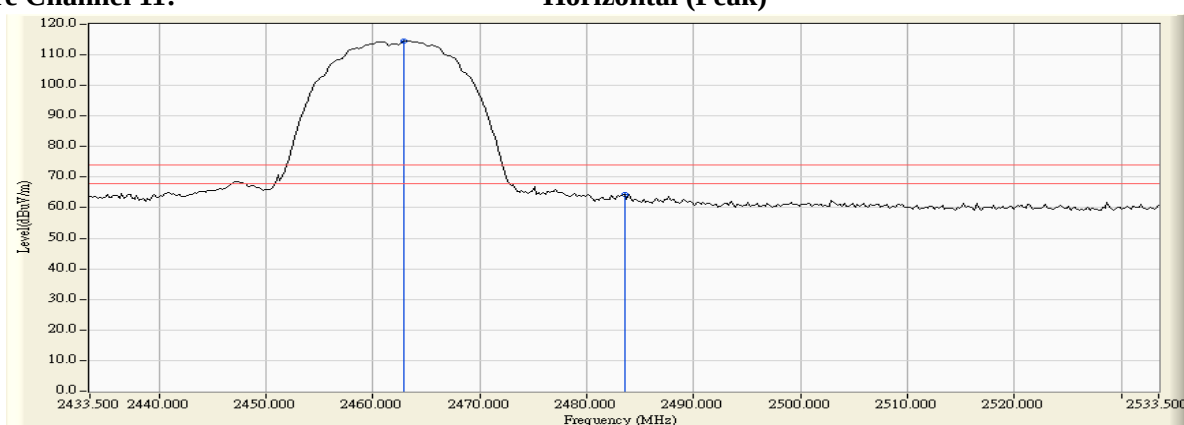


Figure Channel 11: Horizontal (Average)

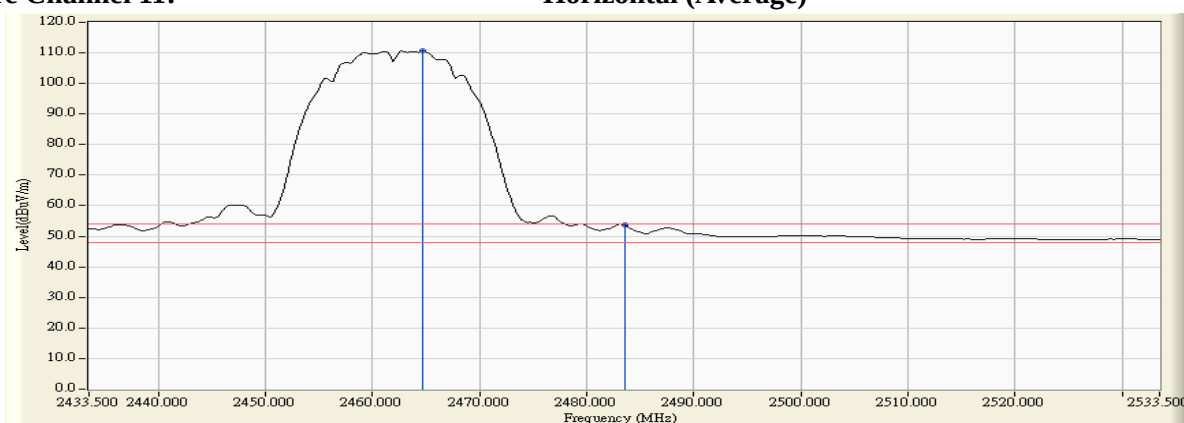

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2463.300	31.299	83.432	114.731	--	--	--
11 (Peak)	2483.500	31.435	32.368	63.803	74.00	54.00	Pass
11 (Average)	2464.700	31.308	79.405	110.714	--	--	--
11 (Average)	2483.500	31.435	20.196	51.631	74.00	54.00	Pass

Figure Channel 11: Vertical (Peak)


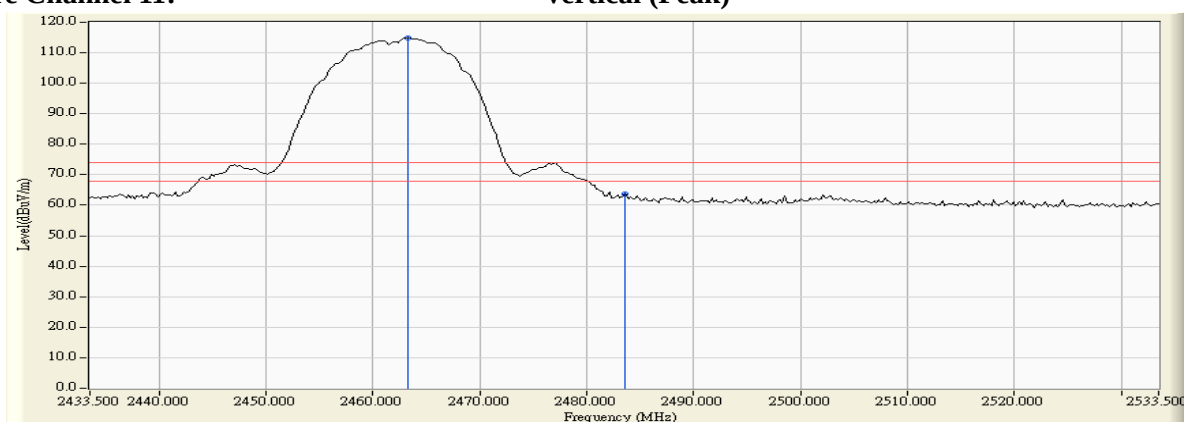


Figure Channel 11: Vertical (Average)

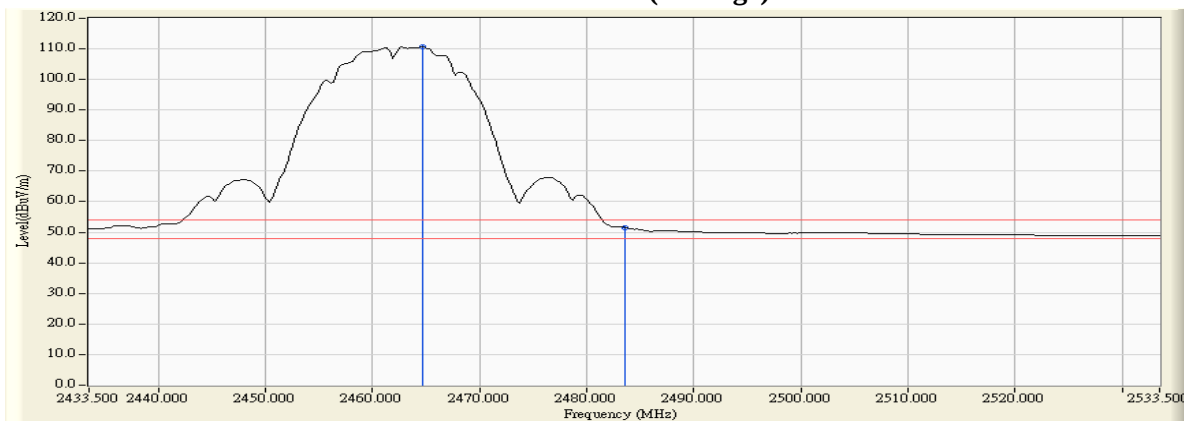

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	31.509	40.372	71.881	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	59.096	90.657	--	--	--
01 (Peak)	2405.800	31.597	83.551	115.149	--	--	--
01(Average)	2390.000	31.509	21.841	53.350	74.00	54.00	Pass
01(Average)	2400.000	31.561	34.836	66.397	--	--	--
01(Average)	2405.800	31.597	71.214	102.812	--	--	--

Figure Channel 01:

Horizontal (Peak)


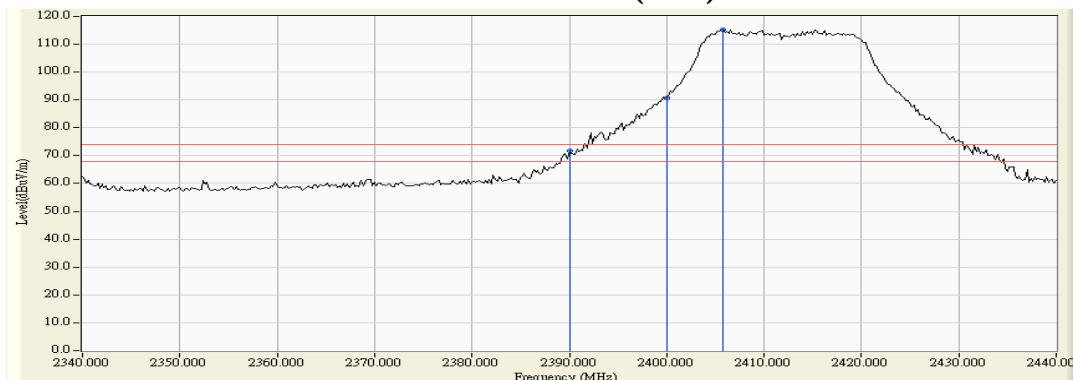


Figure Channel 01:

Horizontal (Average)

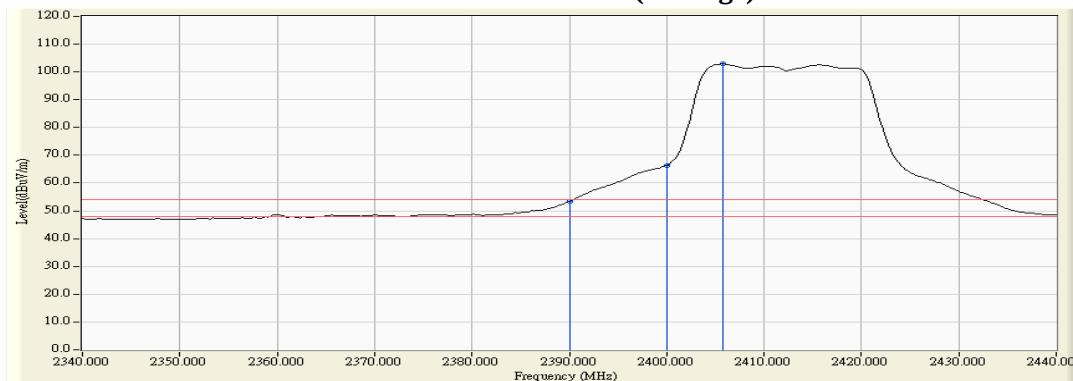

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	30.915	34.732	65.647	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	59.743	90.655	--	--	--
01 (Peak)	2416.400	30.979	81.878	112.857	--	--	--
01 (Average)	2390.000	30.915	20.537	51.452	74.00	54.00	Pass
01 (Average)	2400.000	30.912	31.784	62.696	--	--	--
01 (Average)	2416.600	30.981	70.495	101.476	--	--	--

Figure Channel 01: Vertical (Peak)


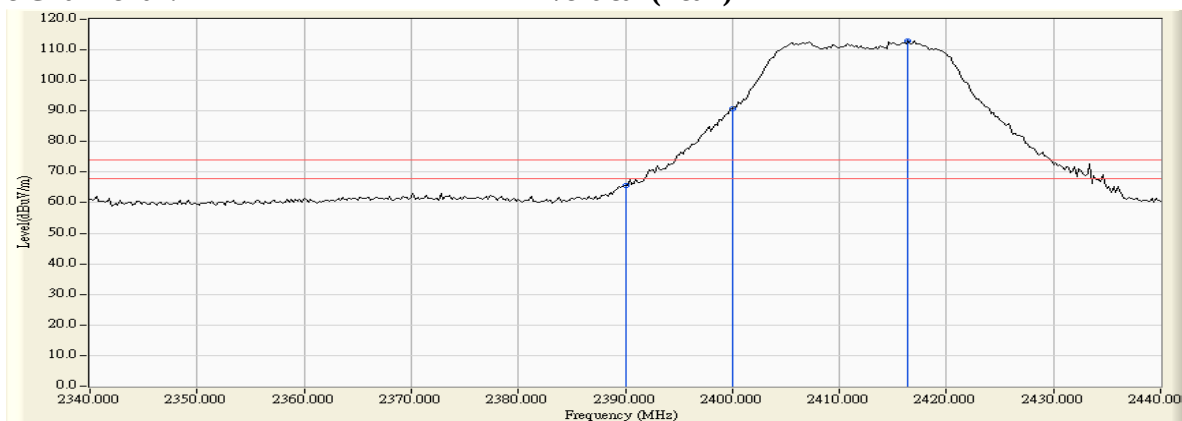


Figure Channel 01: Vertical (Average)

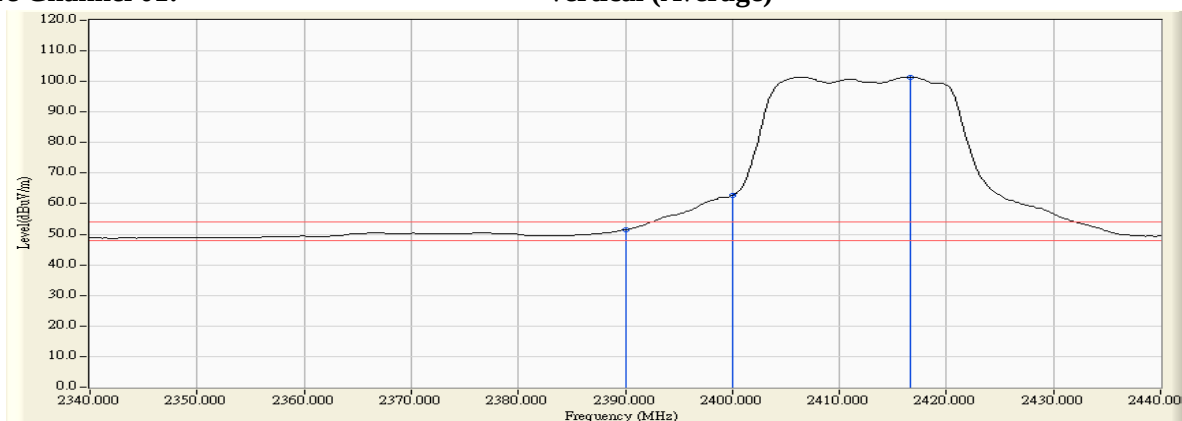

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2454.700	31.964	82.181	114.145	--	--	--
11 (Peak)	2483.500	32.182	31.658	63.840	74.00	54.00	Pass
11 (Peak)	2483.700	32.183	34.597	66.781	74.00	54.00	Pass
11 (Average)	2458.100	31.990	70.843	102.833	--	--	--
11 (Average)	2483.500	32.182	19.841	52.023	74.00	54.00	Pass

Figure Channel 11: Horizontal (Peak)


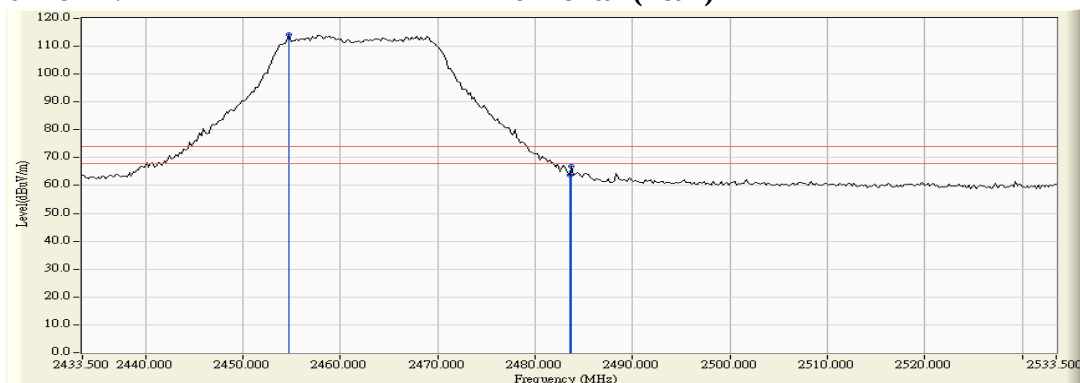


Figure Channel 11: Horizontal (Average)

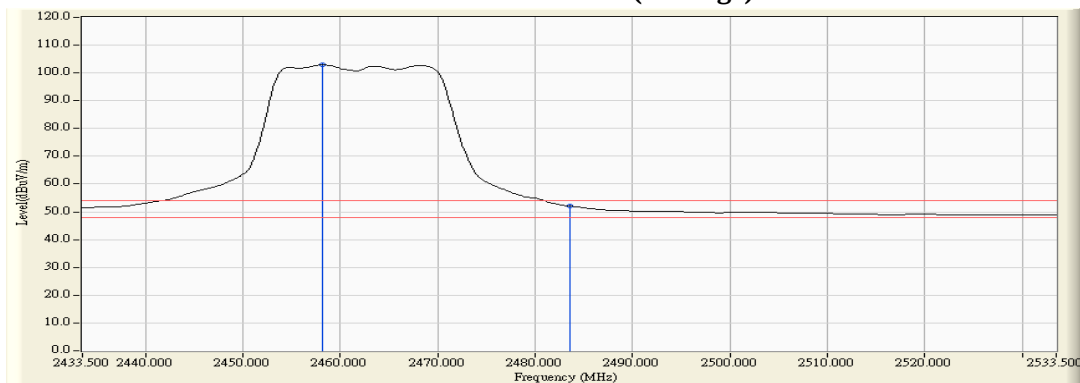

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2458.500	31.266	80.742	112.008	--	--	--
11 (Peak)	2483.500	31.435	37.812	69.247	74.00	54.00	Pass
11 (Average)	2458.900	31.270	70.484	101.753	--	--	--
11 (Average)	2483.500	31.435	20.743	52.178	74.00	54.00	Pass

Figure Channel 11: Vertical (Peak)


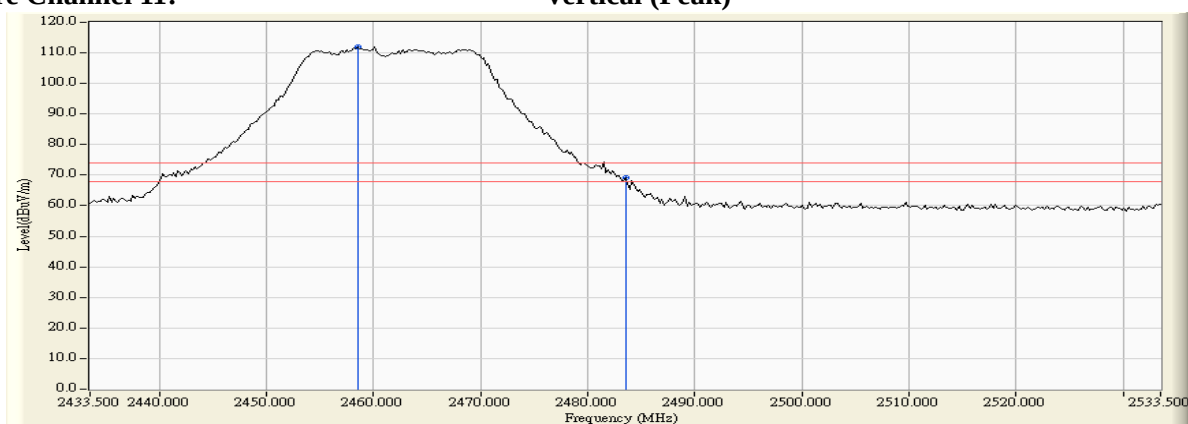


Figure Channel 11: Vertical (Average)

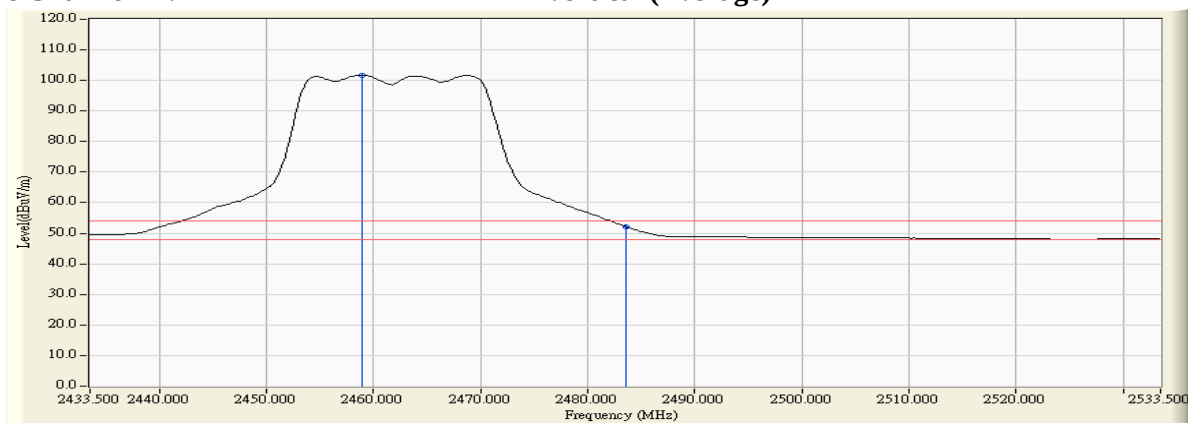

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	31.509	40.494	72.003	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	60.047	91.608	--	--	--
01 (Peak)	2405.200	31.594	82.185	113.779	--	--	--
01 (Average)	2390.000	31.509	21.824	53.333	74.00	54.00	Pass
01 (Average)	2400.000	31.561	33.537	65.098	--	--	--
01 (Average)	2405.600	31.596	67.758	99.354	--	--	--

Figure Channel 01:

Horizontal (Peak)


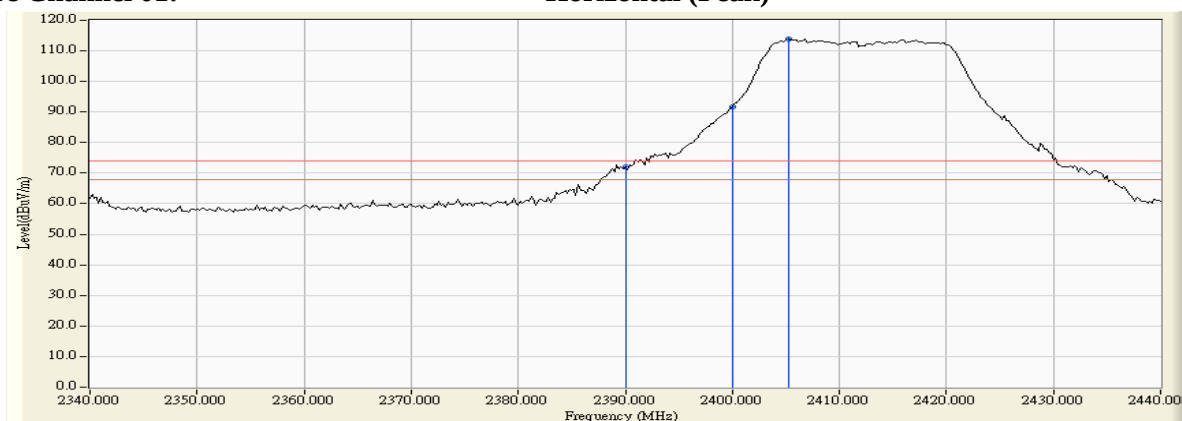


Figure Channel 01:

Horizontal (Average)

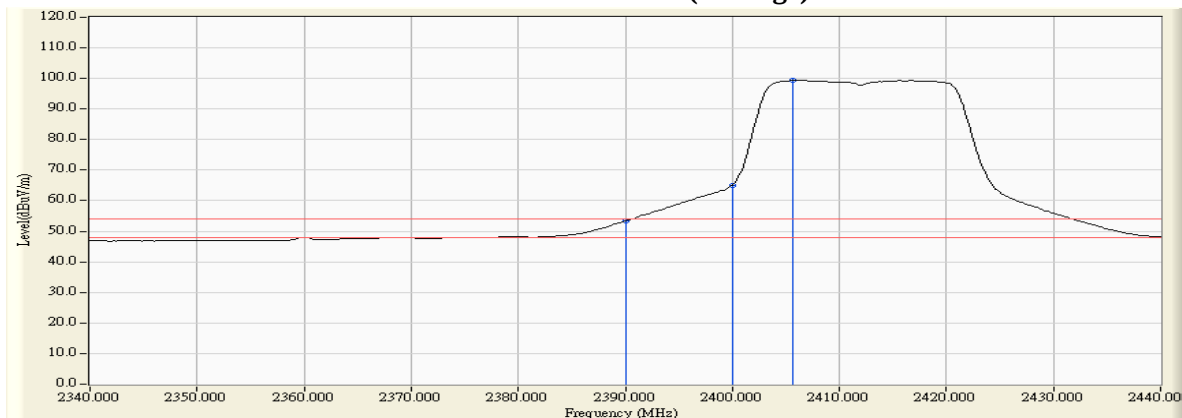

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	30.915	35.633	66.548	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	59.563	90.475	--	--	--
01 (Peak)	2414.200	30.964	81.129	112.093	--	--	--
01 (Average)	2390.000	30.915	20.824	51.739	74.00	54.00	Pass
01 (Average)	2400.000	30.912	31.895	62.807	--	--	--
01 (Average)	2406.000	30.928	67.509	98.438	--	--	--

Figure Channel 01: Vertical (Peak)


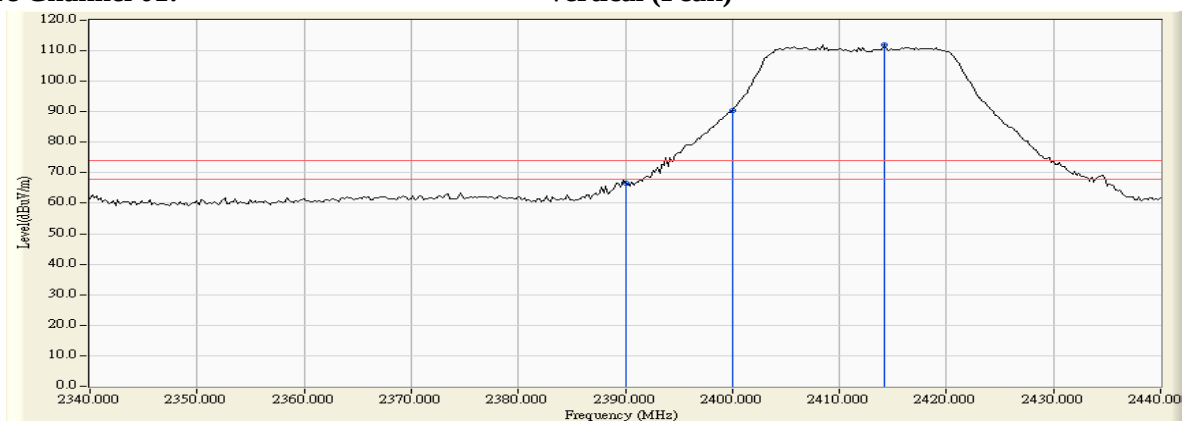


Figure Channel 01: Vertical (Average)

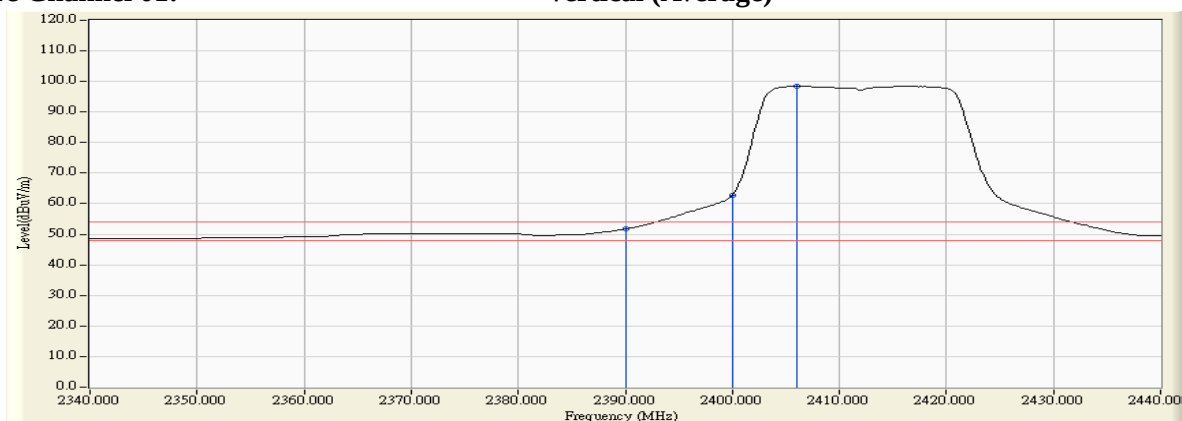

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2456.900	31.982	82.196	114.177	--	--	--
11 (Peak)	2483.500	32.182	34.868	67.050	74.00	54.00	Pass
11 (Average)	2456.100	31.974	68.224	100.199	--	--	--
11 (Average)	2483.500	32.182	20.315	52.497	74.00	54.00	Pass

Figure Channel 11: Horizontal (Peak)


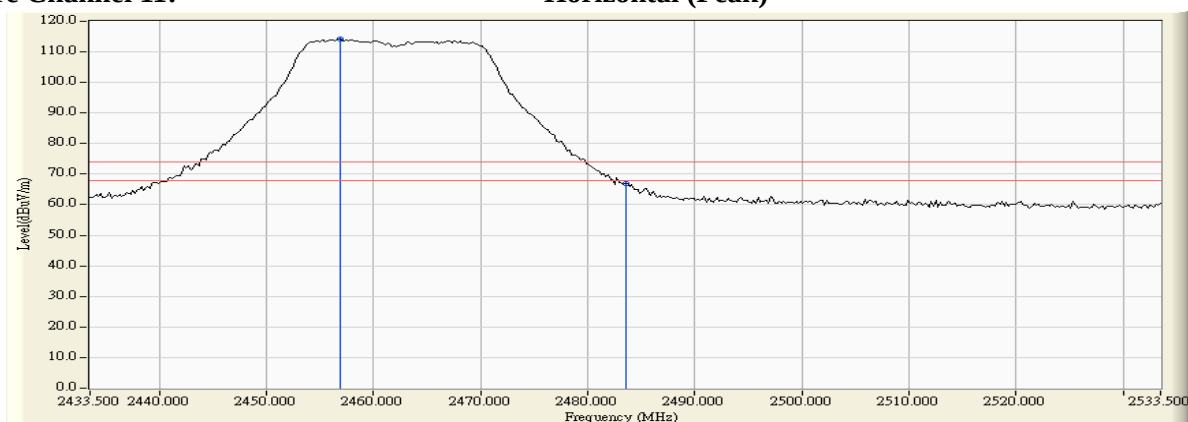


Figure Channel 11: Horizontal (Average)

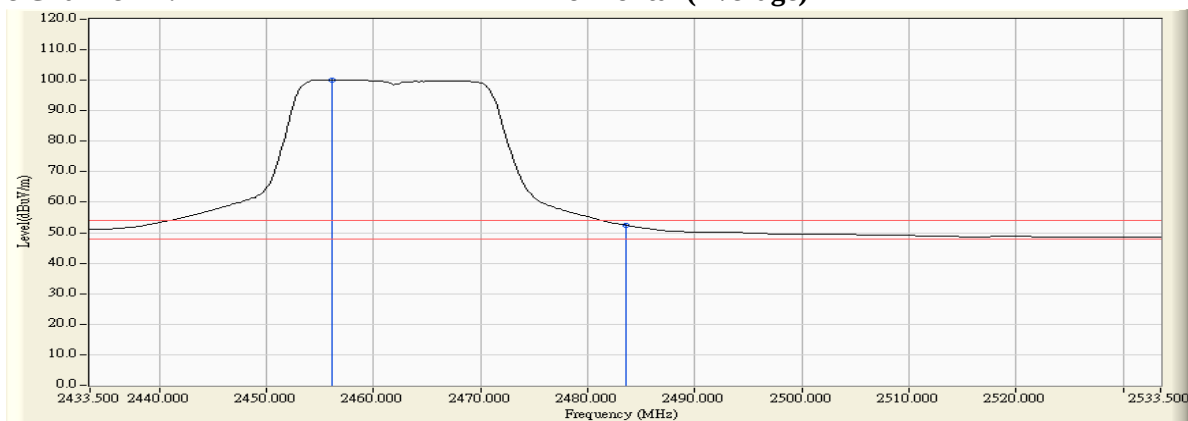

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2457.300	31.259	81.177	112.435	--	--	--
11 (Peak)	2483.500	31.435	42.016	73.451	74.00	54.00	Pass
11 (Average)	2455.900	31.248	67.093	98.342	--	--	--
11 (Average)	2483.500	31.435	22.333	53.768	74.00	54.00	Pass

Figure Channel 11: Vertical (Peak)


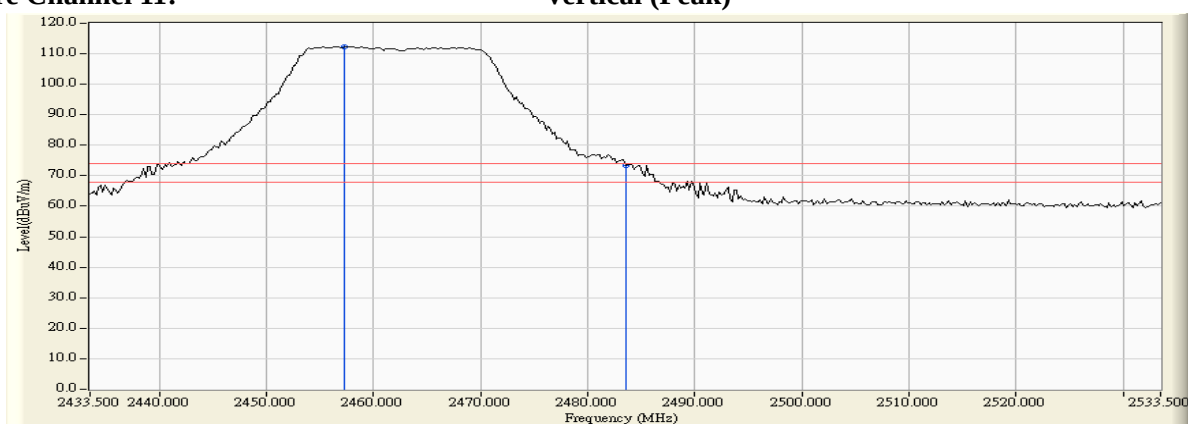


Figure Channel 11: Vertical (Average)

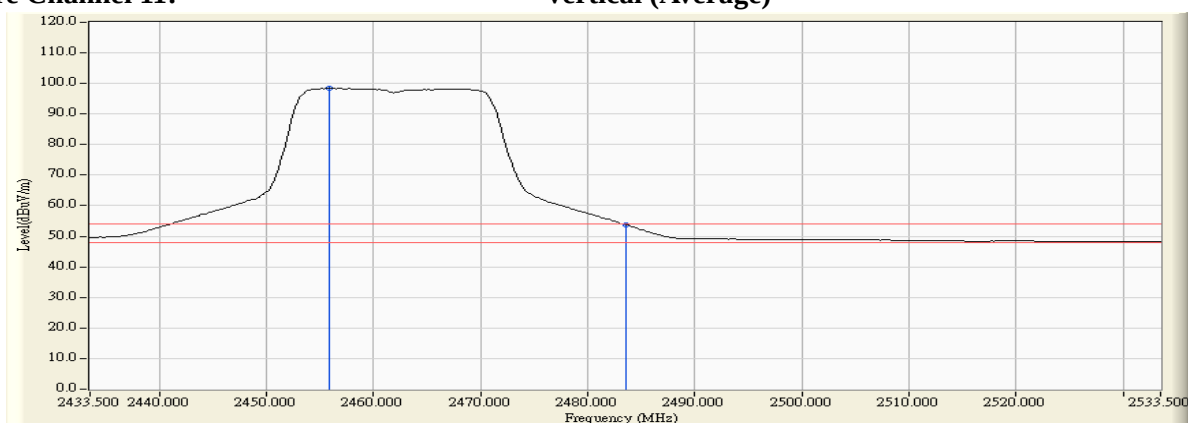

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
03 (Peak)	2386.800	31.497	40.911	72.408	74.00	54.00	Pass
03 (Peak)	2390.000	31.509	38.835	70.344	74.00	54.00	Pass
03 (Peak)	2400.000	31.561	53.759	85.320	--	--	--
03 (Peak)	2408.400	31.615	76.115	107.729	--	--	--
03 (Average)	2390.000	31.509	21.750	53.259	74.00	54.00	Pass
03 (Average)	2400.000	31.561	26.812	58.373	--	--	--
03 (Average)	2413.600	31.650	61.148	92.798	--	--	--

Figure Channel 01: Horizontal (Peak)


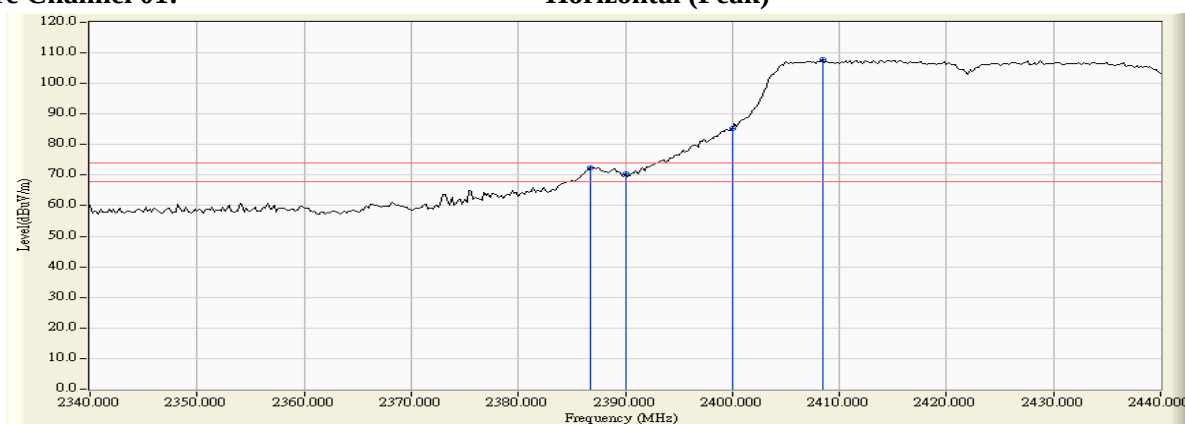


Figure Channel 01: Horizontal (Average)

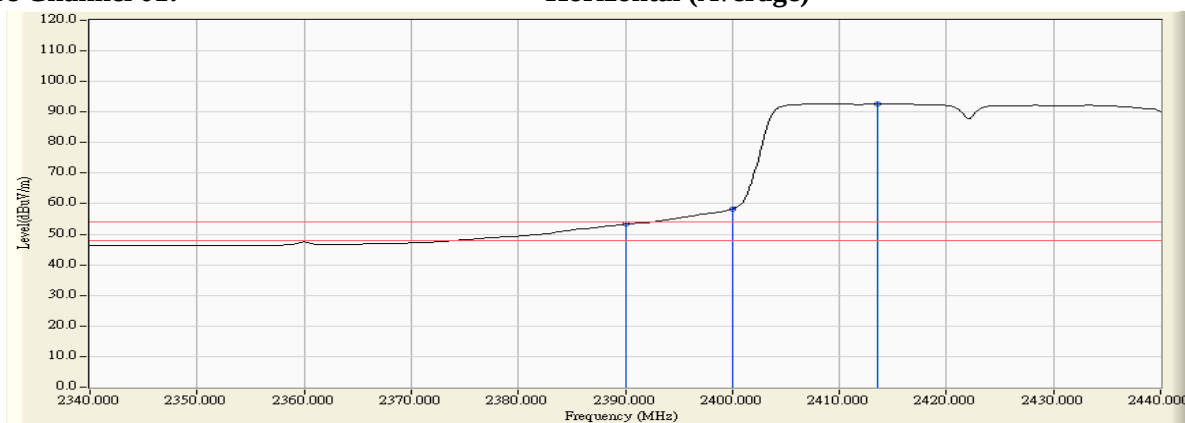

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
03 (Peak)	2390.000	30.915	39.482	70.397	74.00	54.00	Pass
03 (Peak)	2400.000	30.912	55.538	86.450	--	--	--
03 (Peak)	2436.200	31.113	75.406	106.520	--	--	--
03 (Average)	2390.000	30.915	19.636	50.551	74.00	54.00	Pass
03 (Average)	2400.000	30.912	25.231	56.143	--	--	--
03 (Average)	2413.600	30.960	61.529	92.489	--	--	--

Figure Channel 01:

Vertical (Peak)


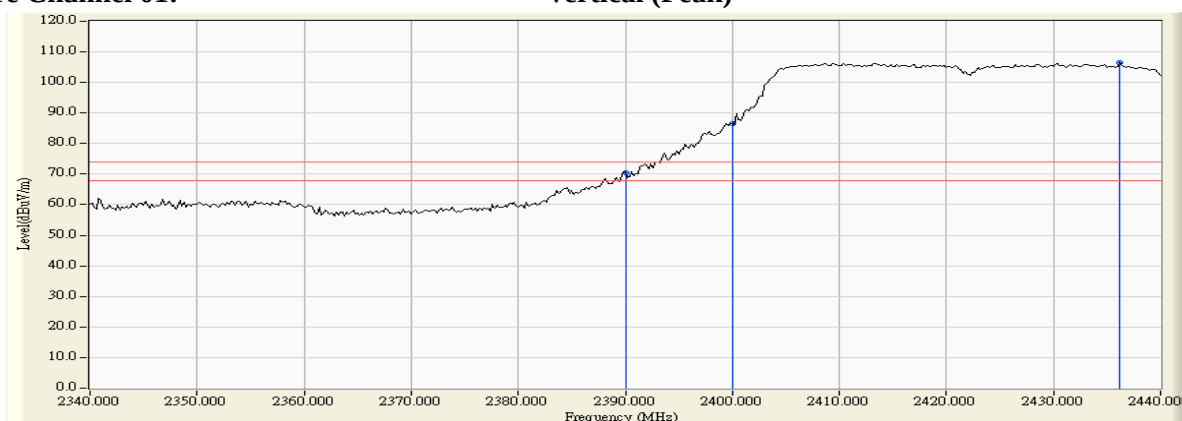


Figure Channel 01:

Vertical (Average)

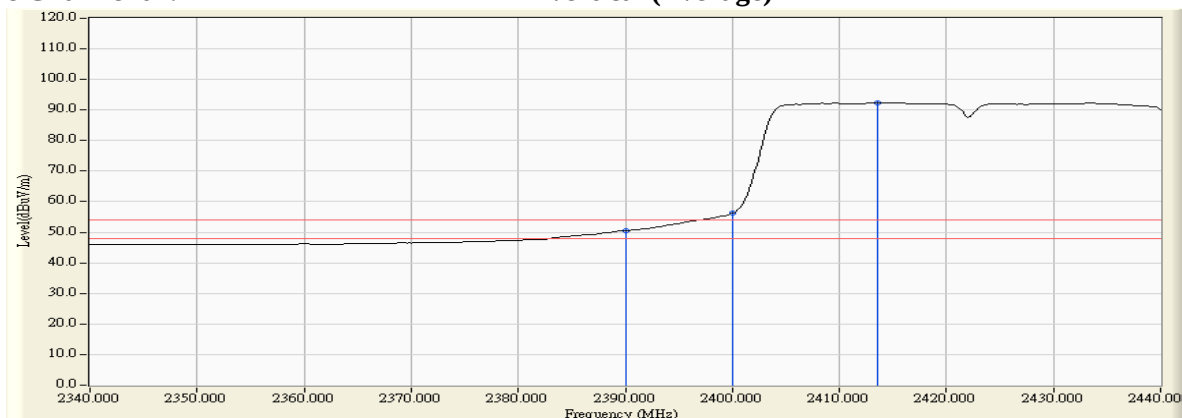

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
09 (Peak)	2440.700	31.858	78.054	109.912	--	--	--
09 (Peak)	2483.500	32.182	37.724	69.906	74.00	54.00	Pass
09 (Average)	2439.300	31.847	62.995	94.842	--	--	--
09 (Average)	2483.500	32.182	19.698	51.880	74.00	54.00	Pass

Figure Channel 07: Horizontal (Peak)


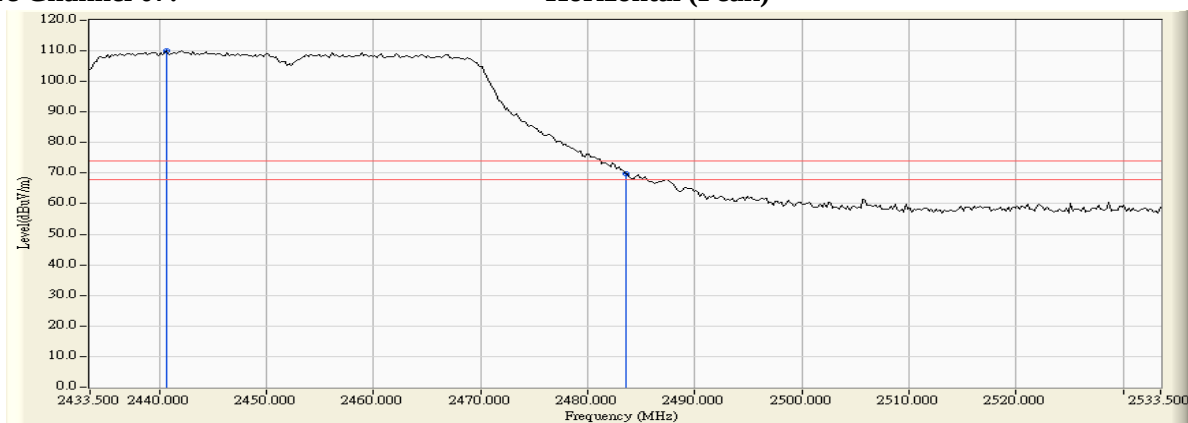


Figure Channel 07: Horizontal (Average)

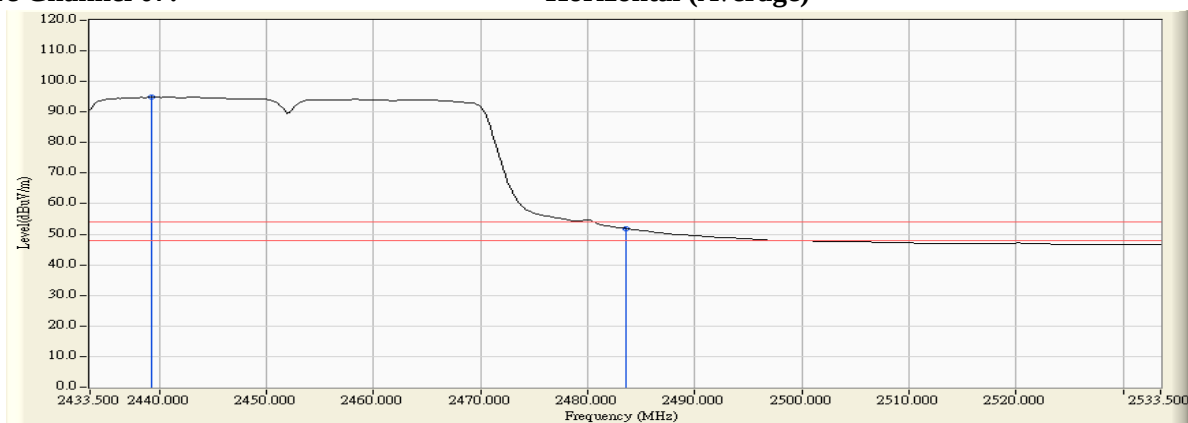

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : 802.11ac Dual Band Access Point
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
09 (Peak)	2445.500	31.177	76.957	108.134	--	--	--
09 (Peak)	2483.500	31.435	39.980	71.415	74.00	54.00	Pass
09 (Average)	2439.500	31.136	62.764	93.900	--	--	--
09 (Average)	2483.500	31.435	21.595	53.030	74.00	54.00	Pass

Figure Channel 07: Vertical (Peak)


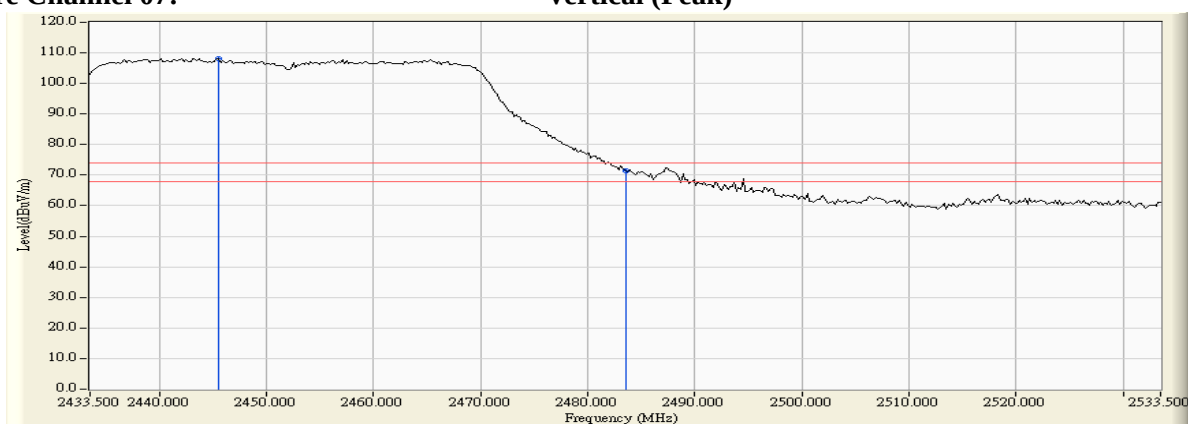


Figure Channel 07: Vertical (Average)

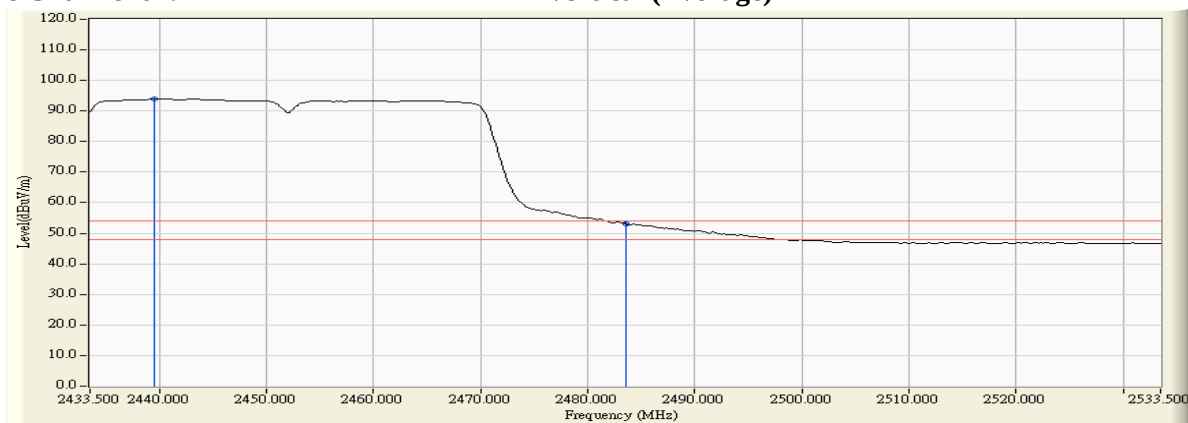

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

7. Occupied Bandwidth


7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

7.2. Test Setup

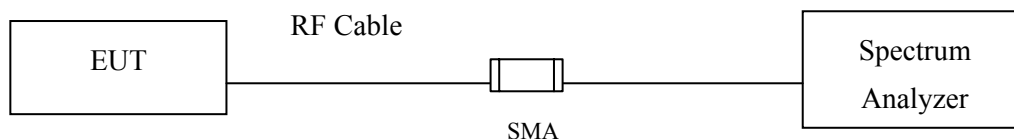

7.3. Limits

The minimum bandwidth shall be at least 500 kHz.

7.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth, VBW $\geq$ 3*RBW

7.5. Uncertainty


$\pm 150\text{Hz}$

7.6. Test Result of Occupied Bandwidth

Product : 802.11ac Dual Band Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	10200	>500	Pass

Figure Channel 1: (Chain A)

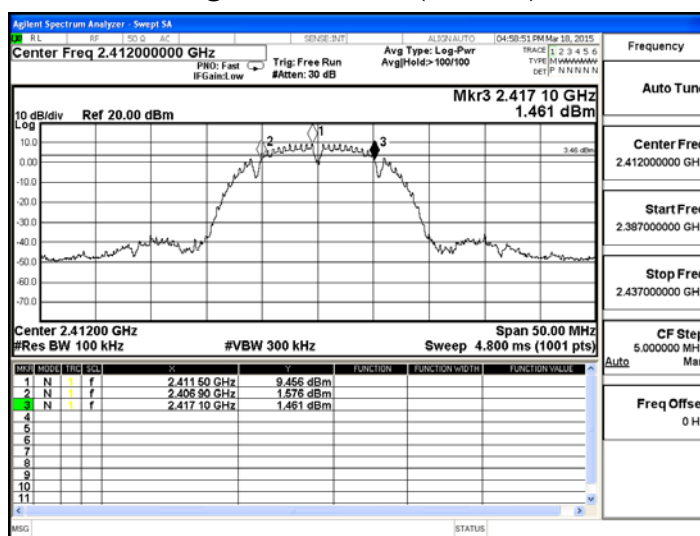

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	10200	>500	Pass


Figure Channel 1: (Chain B)

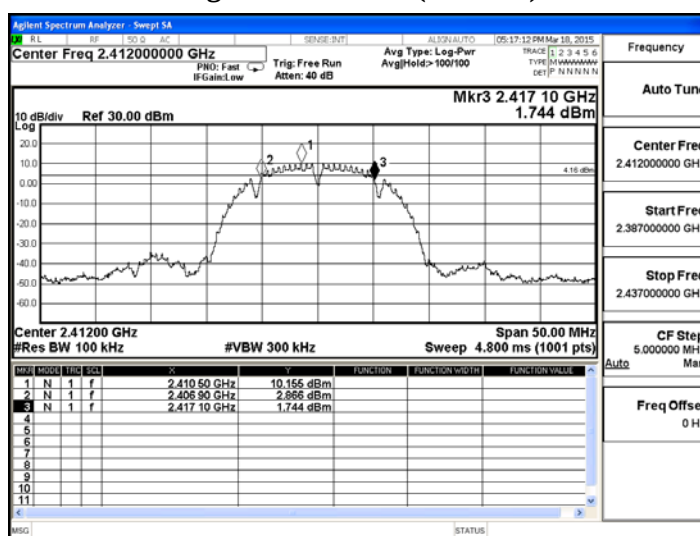

Product : 802.11ac Dual Band Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	10200	>500	Pass

Figure Channel 6: (Chain A)

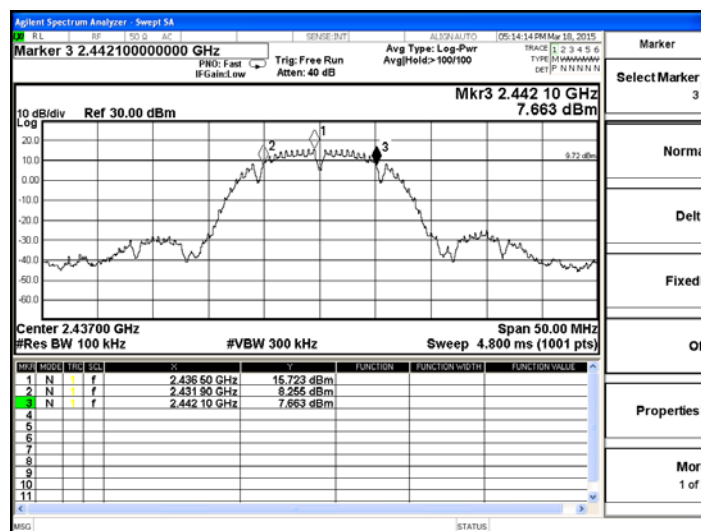

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	10150	>500	Pass


Figure Channel 6: (Chain B)

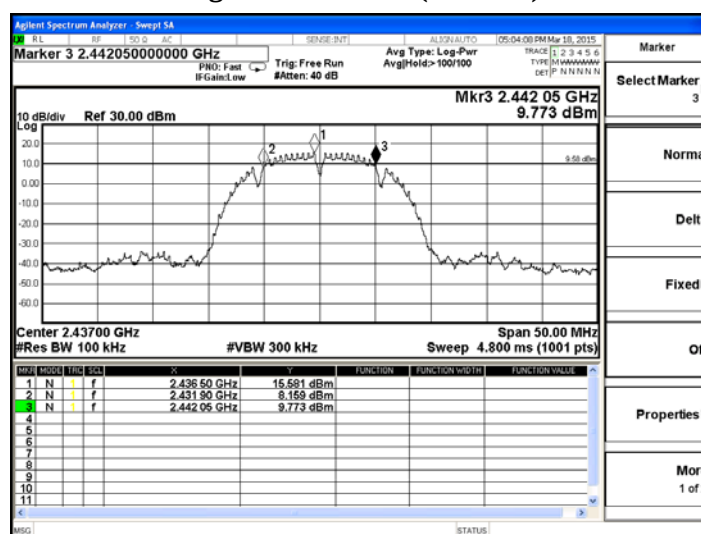

Product : 802.11ac Dual Band Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	10200	>500	Pass

Figure Channel 11: (Chain A)

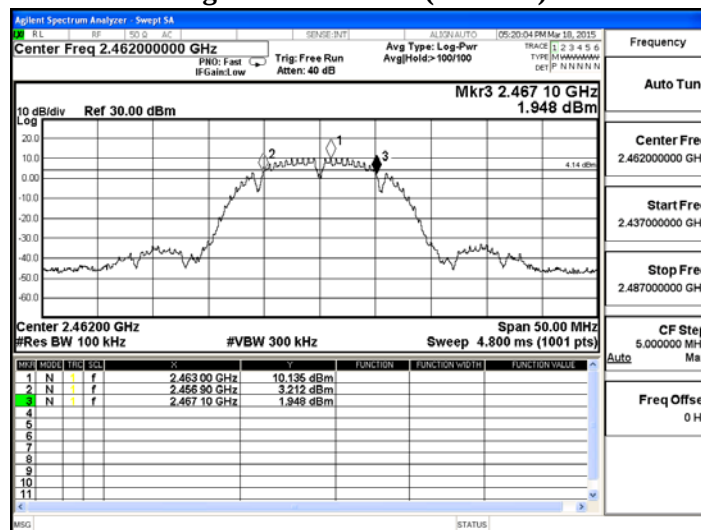

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	10200	>500	Pass


Figure Channel 11: (Chain B)

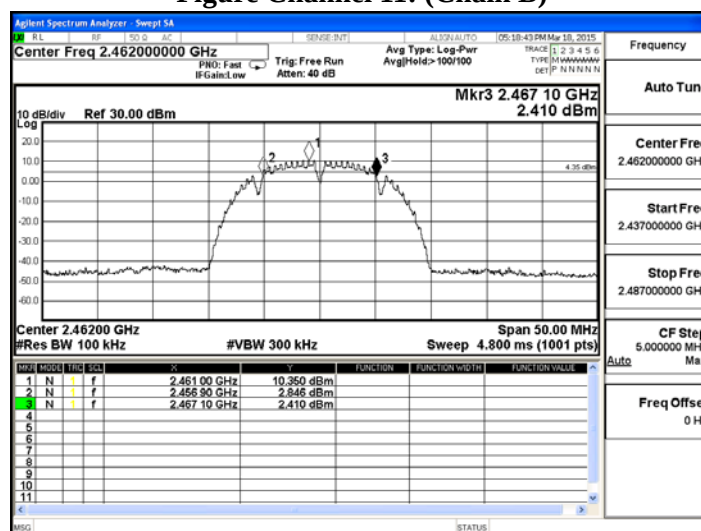

Product : 802.11ac Dual Band Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	16600	>500	Pass

Figure Channel 1: (Chain A)

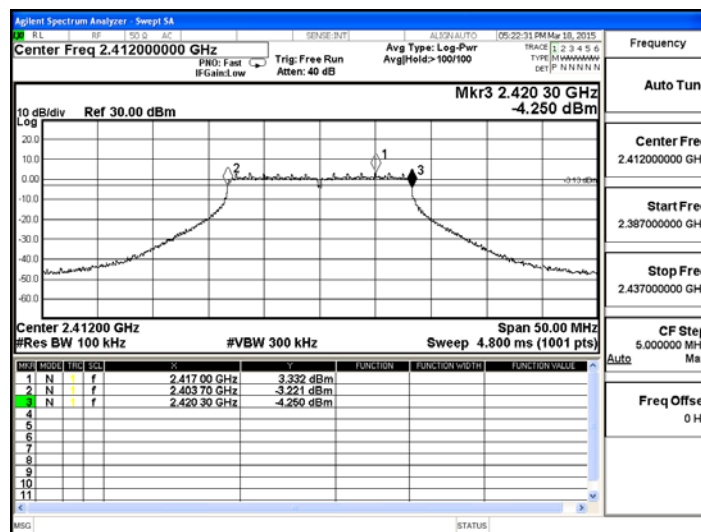

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	16500	>500	Pass


Figure Channel 1: (Chain B)

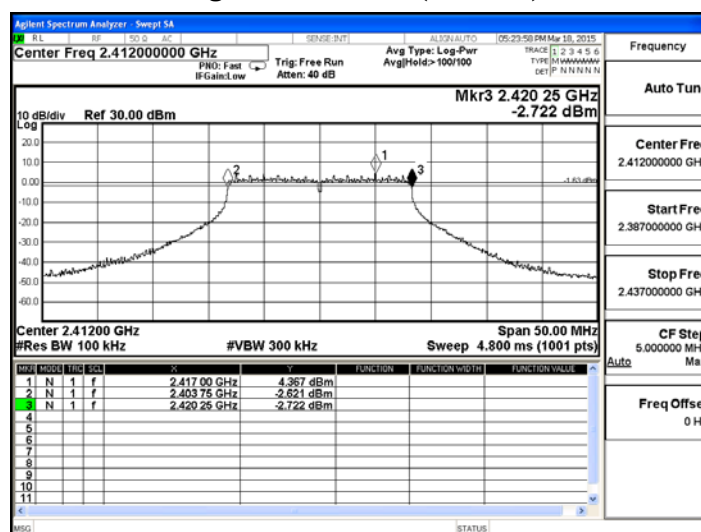

Product : 802.11ac Dual Band Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	16550	>500	Pass

Figure Channel 6: (Chain A)

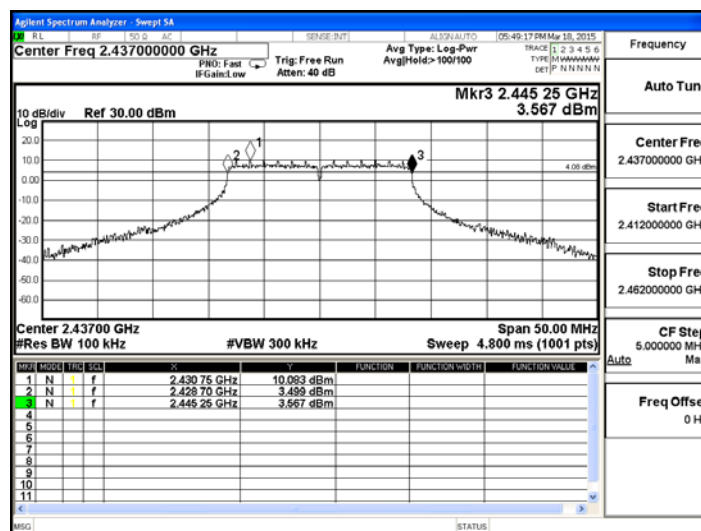

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	16550	>500	Pass


Figure Channel 6: (Chain B)

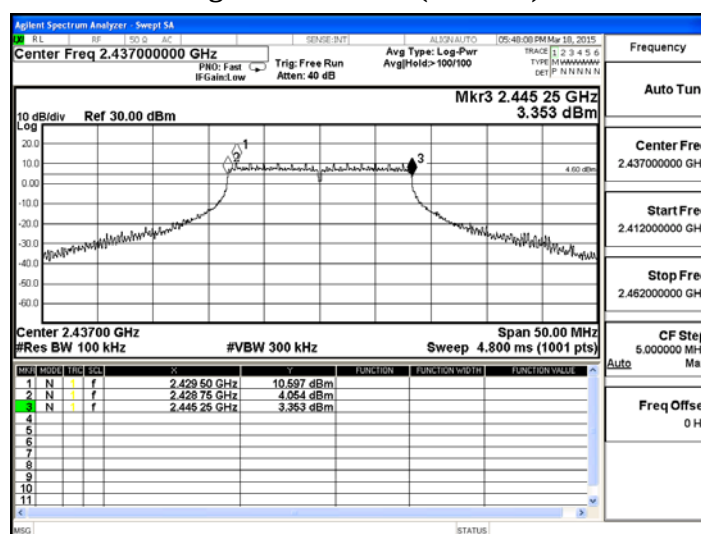

Product : 802.11ac Dual Band Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	16550	>500	Pass

Figure Channel 11: (Chain A)

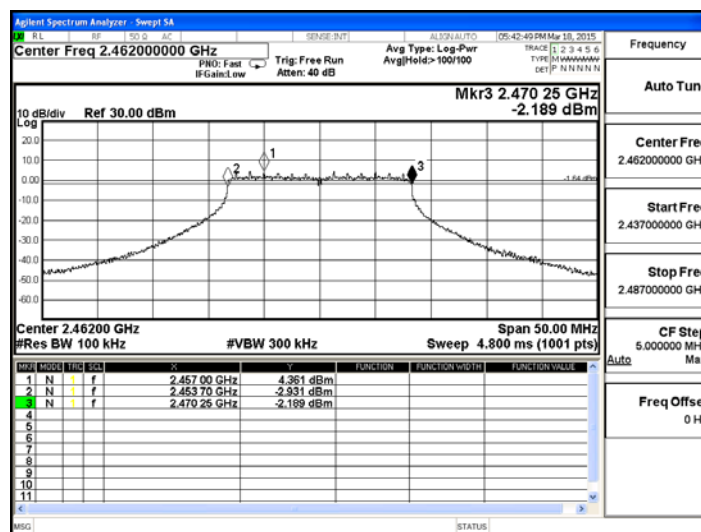

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	16500	>500	Pass


Figure Channel 11: (Chain B)

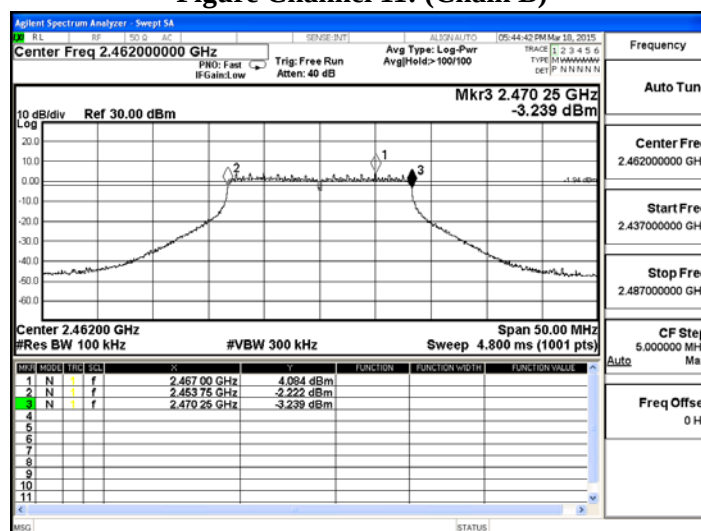

Product : 802.11ac Dual Band Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2412MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	17700	>500	Pass

Figure Channel 1: (Chain A)

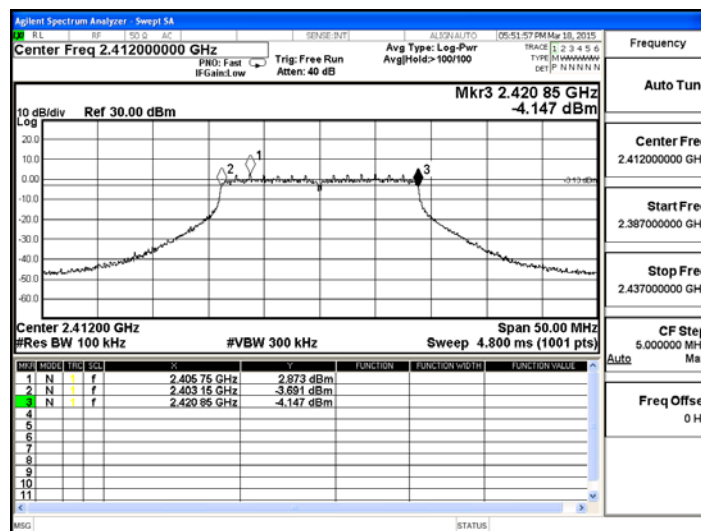

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	17700	>500	Pass


Figure Channel 1: (Chain B)

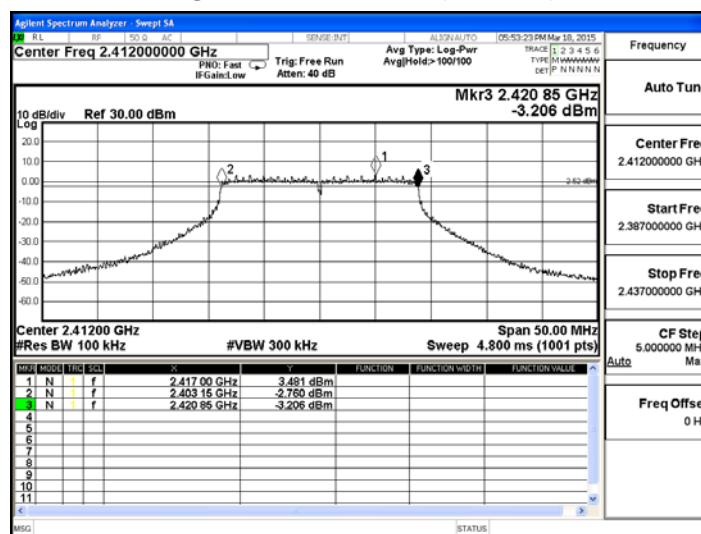

Product : 802.11ac Dual Band Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2437MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	17700	>500	Pass

Figure Channel 6: (Chain A)

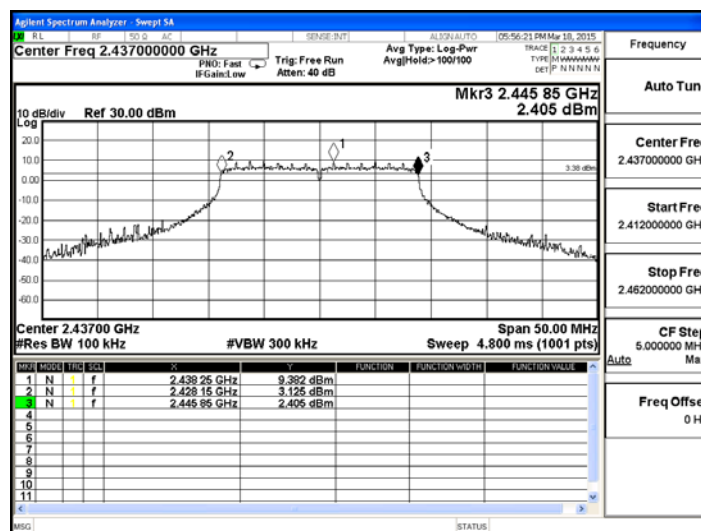

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	17750	>500	Pass


Figure Channel 6: (Chain B)

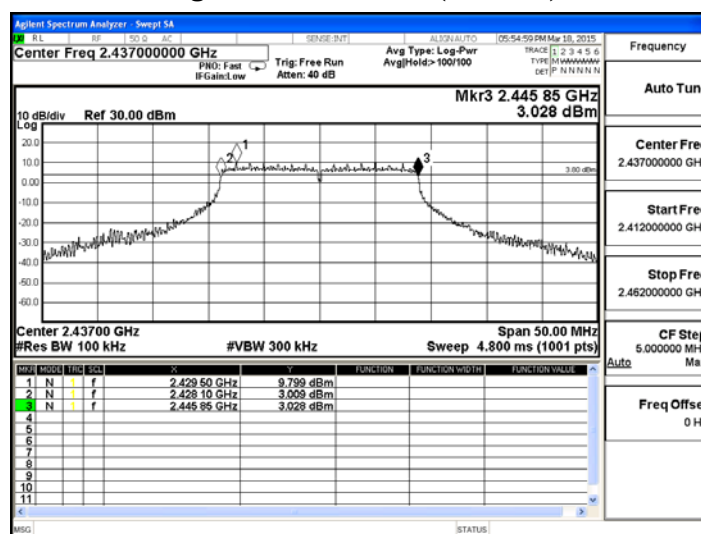

Product : 802.11ac Dual Band Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2462MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	17700	>500	Pass

Figure Channel 11: (Chain A)

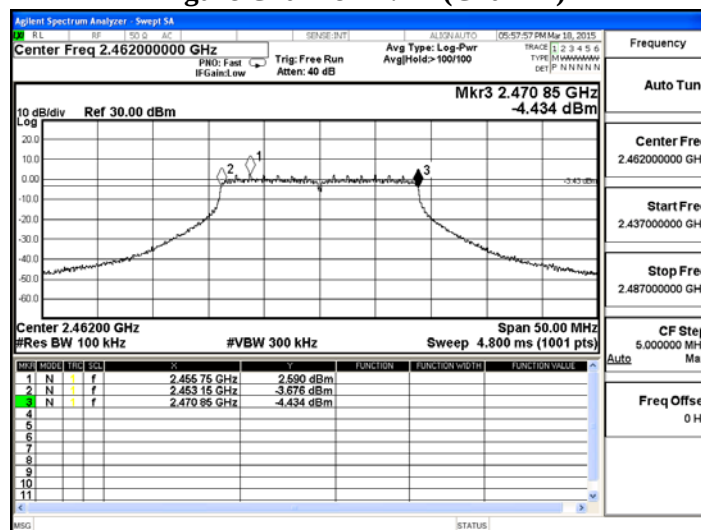

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	17700	>500	Pass


Figure Channel 11: (Chain B)

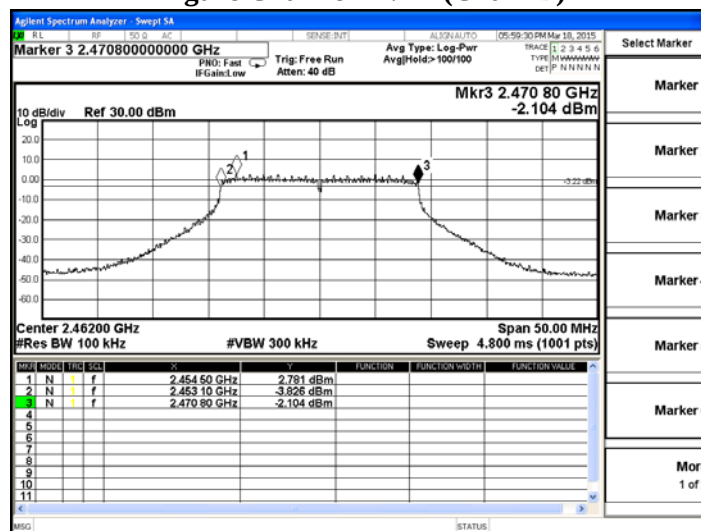

Product : 802.11ac Dual Band Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2422MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
3	2422.00	36600	>500	Pass

Figure Channel 1: (Chain A)

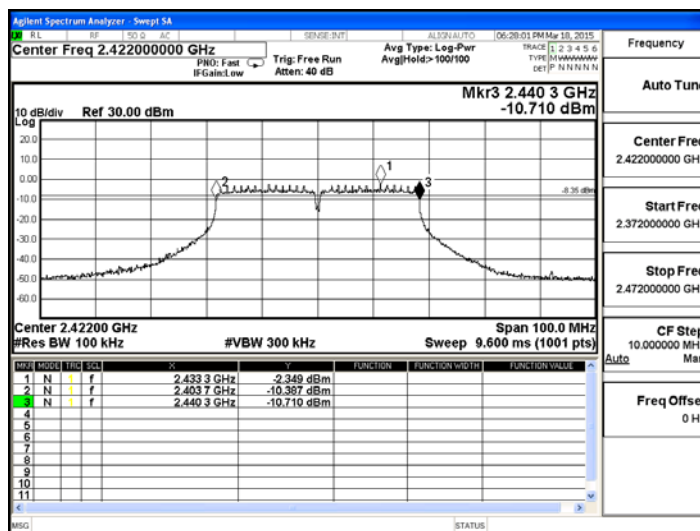

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
3	2422.00	36600	>500	Pass


Figure Channel 1: (Chain B)

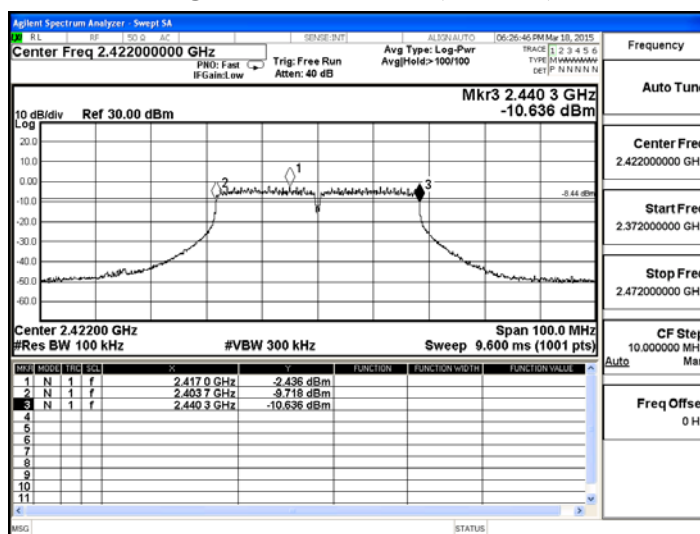

Product : 802.11ac Dual Band Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2437MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	36500	>500	Pass

Figure Channel 4: (Chain A)

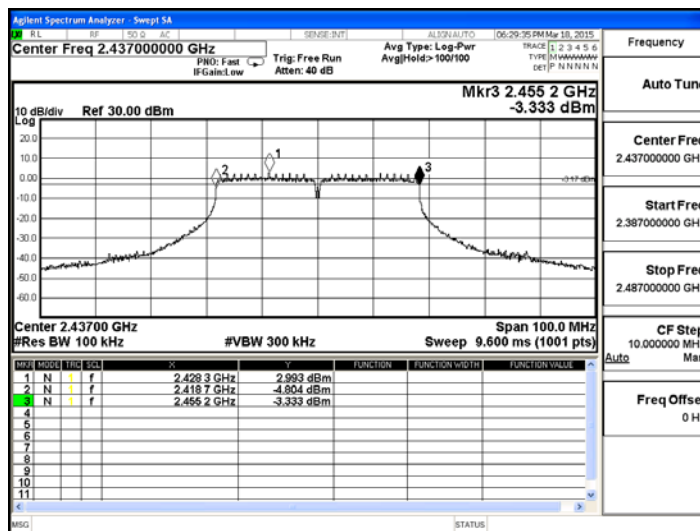

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	36600	>500	Pass


Figure Channel 4: (Chain B)

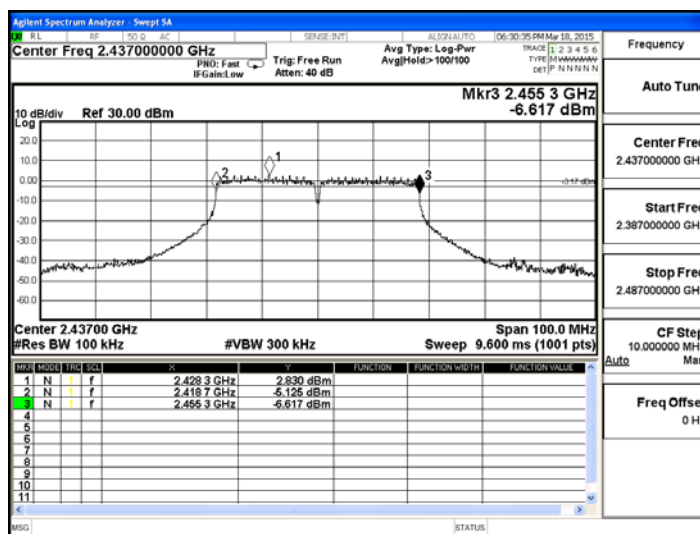

Product : 802.11ac Dual Band Access Point
Test Item : Occupied Bandwidth Data
Test Site : No.3 OATS
Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2452MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
9	2452.00	36500	>500	Pass

Figure Channel 7: (Chain A)

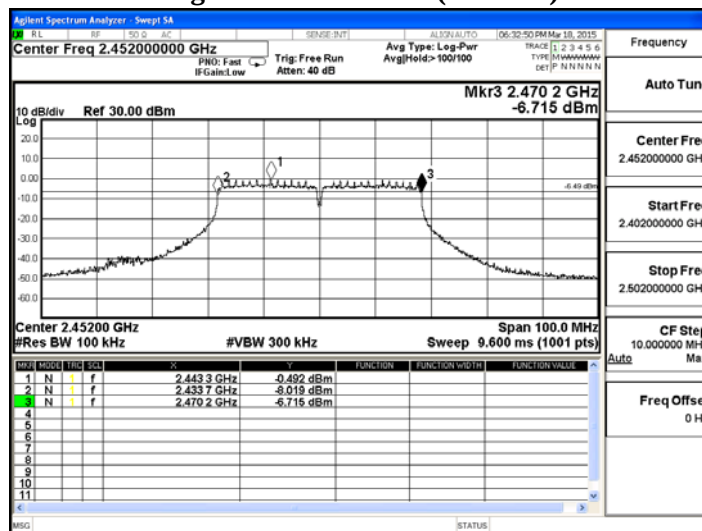

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
9	2452.00	36600	>500	Pass

Figure Channel 7: (Chain B)

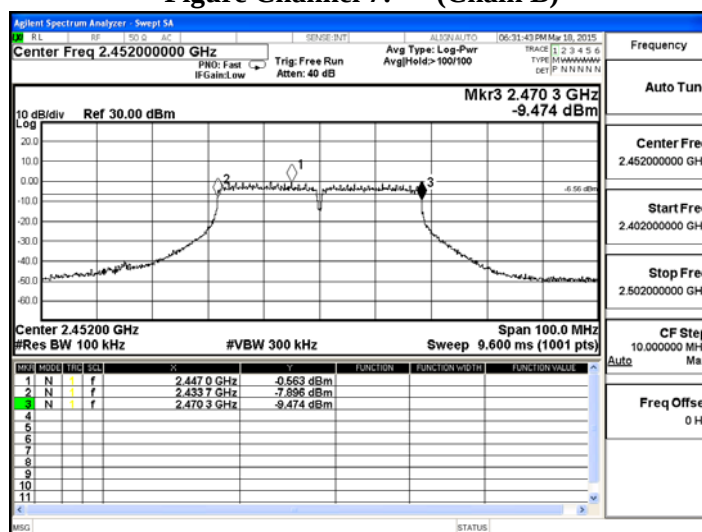

8. Power Density


8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with "X" are used to measure the final test results.

8.2. Test Setup

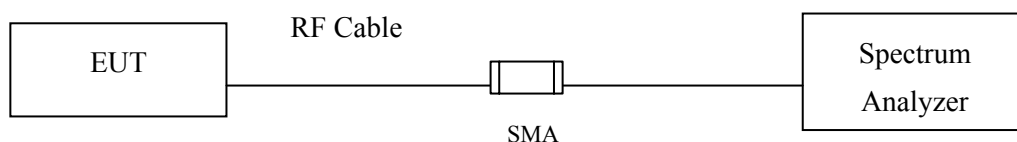

8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The maximum power spectral density using KDB 558074 section 10.2 PKPSD (peak PSD) method.

8.5. Uncertainty

± 1.27 dB

8.6. Test Result of Power Density

Product : 802.11ac Dual Band Access Point
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	0.466	3.476	< 7dBm	Pass
B	1.000	4.010	< 7dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 1: (Chain A)


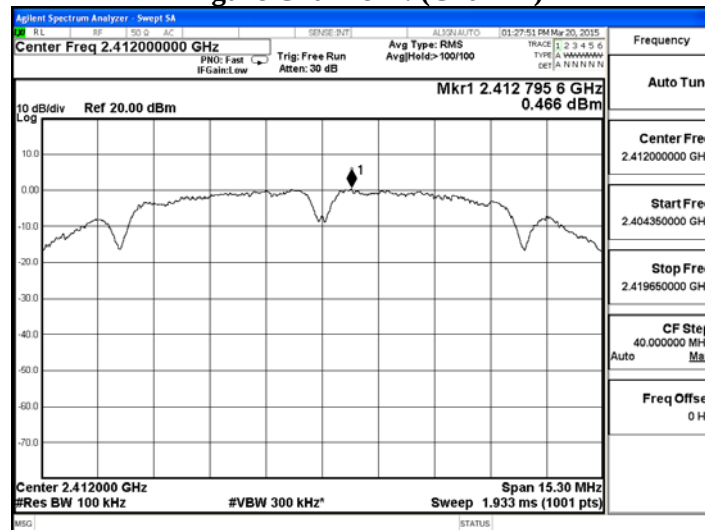


Figure Channel 1: (Chain B)

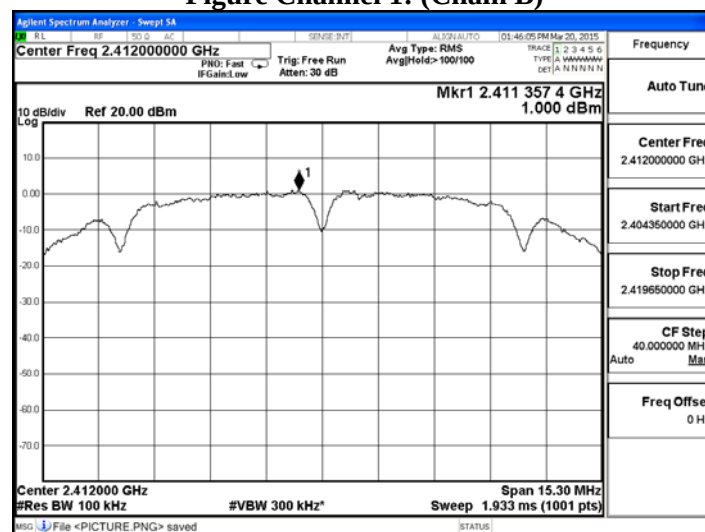

Product : 802.11ac Dual Band Access Point
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-2.509	0.501	< 7dBm	Pass
B	-2.100	0.910	< 7dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 6: (Chain A)


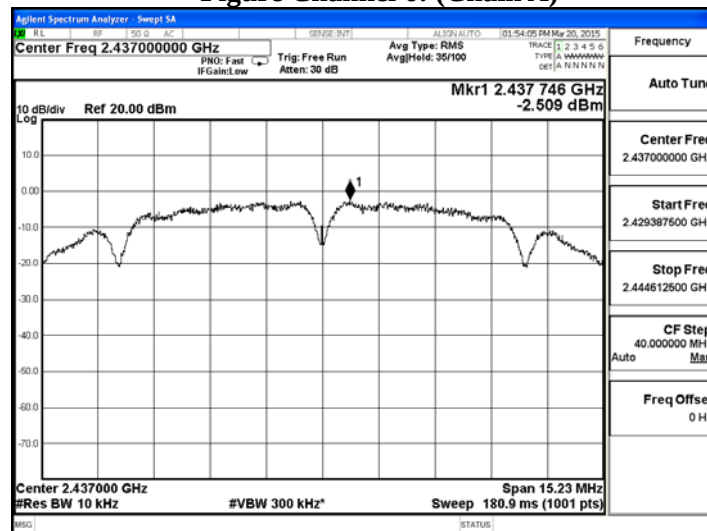


Figure Channel 6: (Chain B)

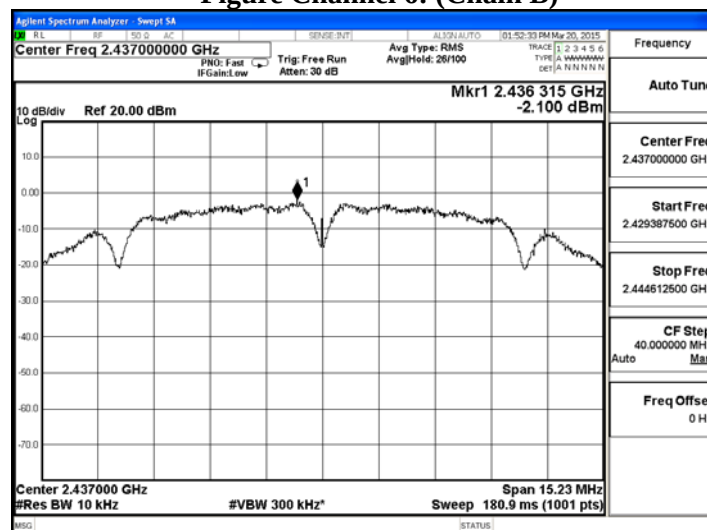

Product : 802.11ac Dual Band Access Point
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	1.586	4.596	< 7dBm	Pass
B	1.477	4.487	< 7dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 11: (Chain A)


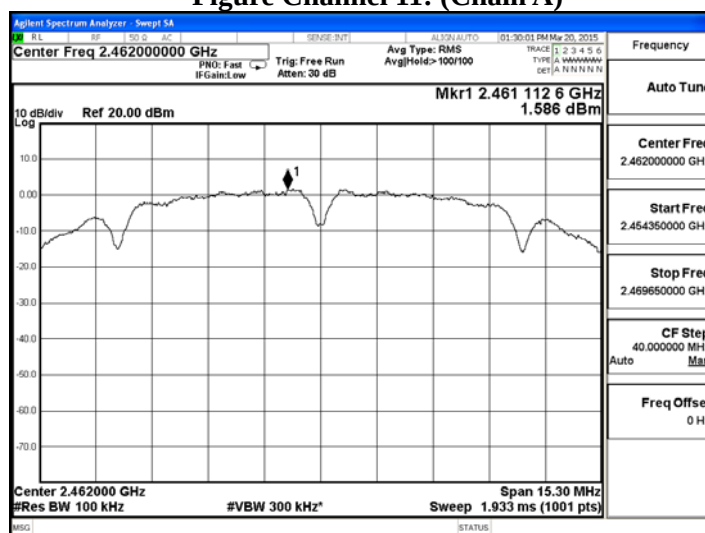


Figure Channel 11: (Chain B)

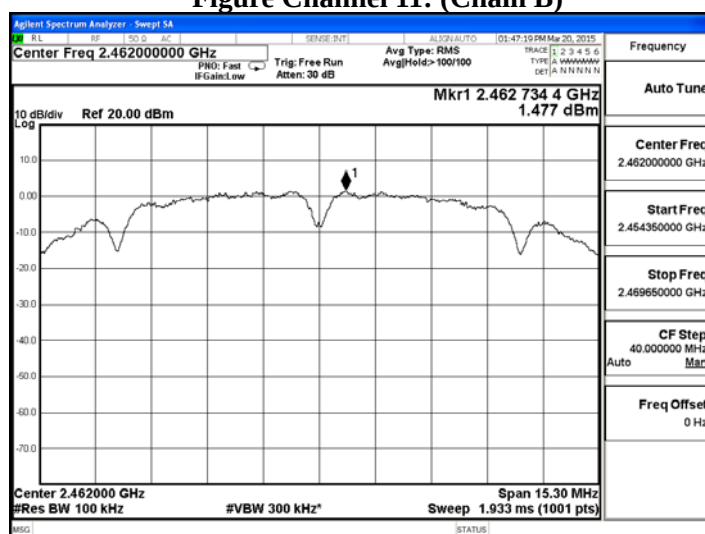

Product : 802.11ac Dual Band Access Point
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-5.181	-2.171	< 7dBm	Pass
B	-4.395	-1.385	< 7dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 1: (Chain A)


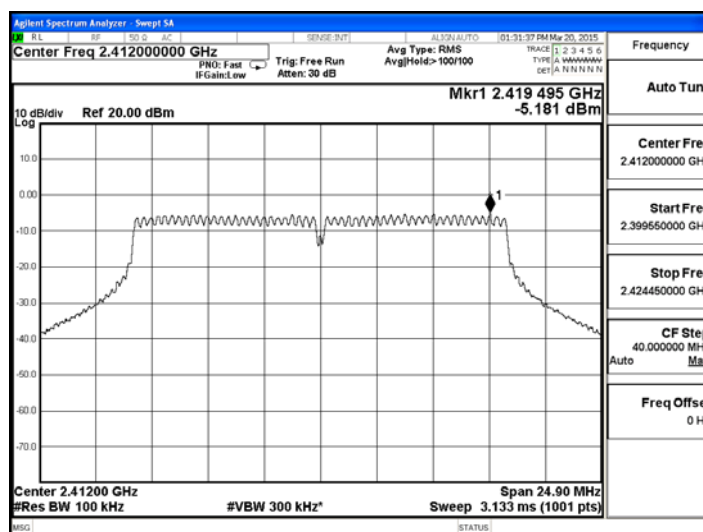


Figure Channel 1: (Chain B)

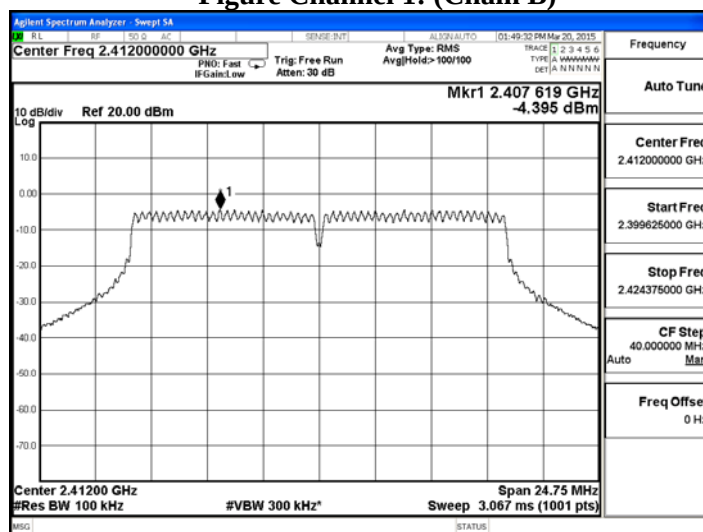

Product : 802.11ac Dual Band Access Point
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	1.803	4.813	< 7dBm	Pass
B	1.518	4.528	< 7dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 6: (Chain A)


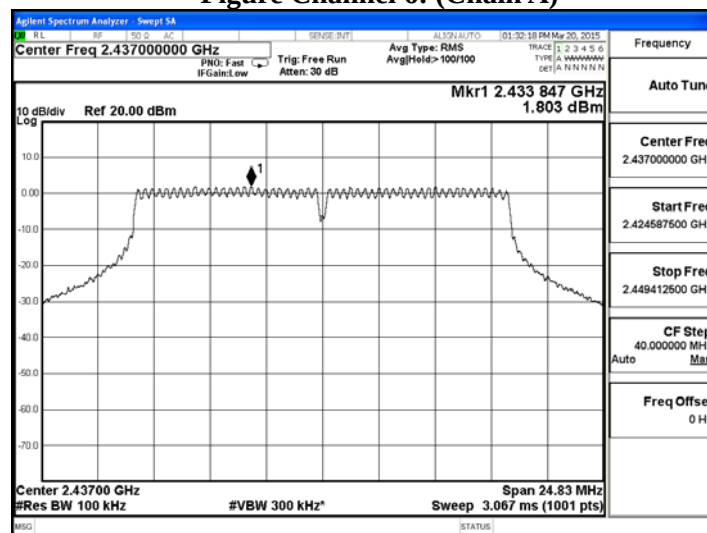


Figure Channel 6: (Chain B)

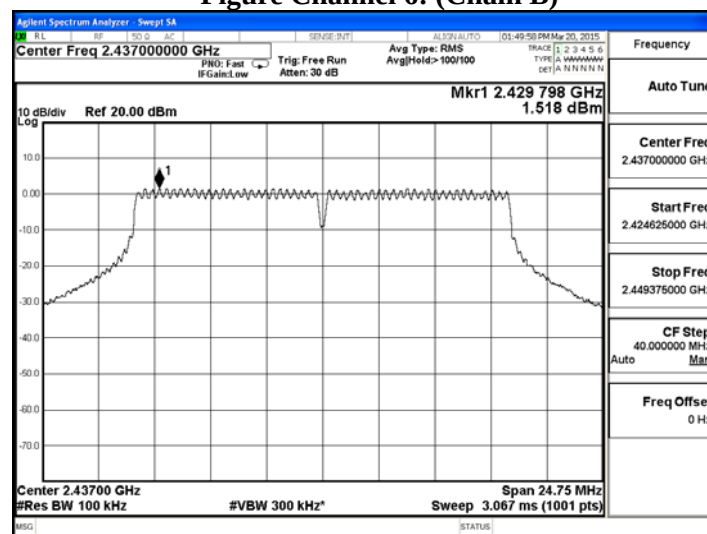

Product : 802.11ac Dual Band Access Point
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-1.899	1.111	< 7dBm	Pass
B	-4.568	-1.558	< 7dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 11: (Chain A)


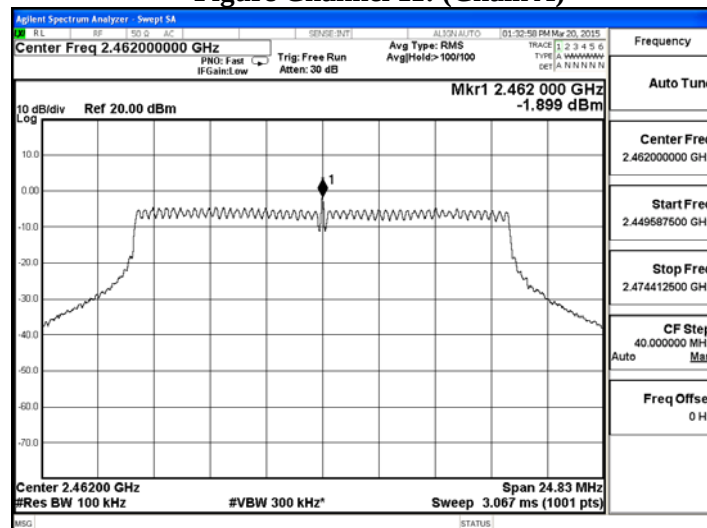


Figure Channel 11: (Chain B)

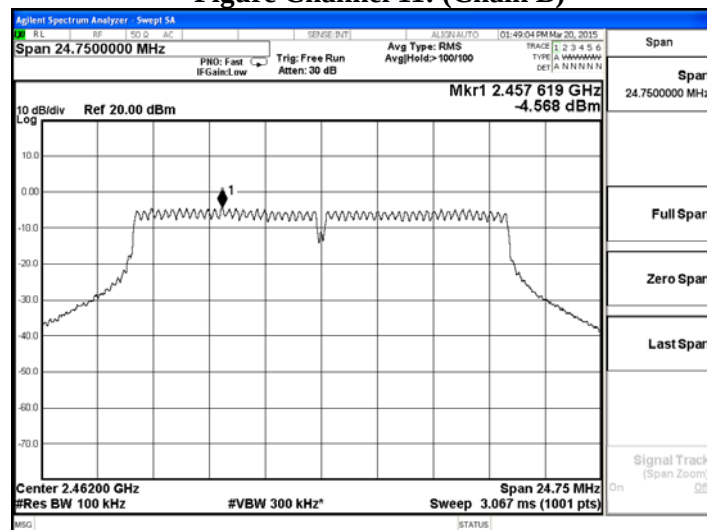

Product : 802.11ac Dual Band Access Point
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2412MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-6.735	-3.725	< 7dBm	Pass
B	-3.294	-0.284	< 7dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 1: (Chain A)


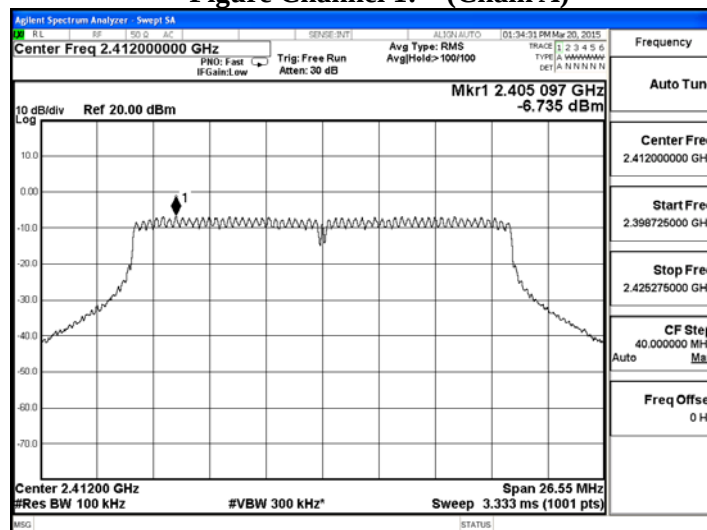


Figure Channel 1: (Chain B)

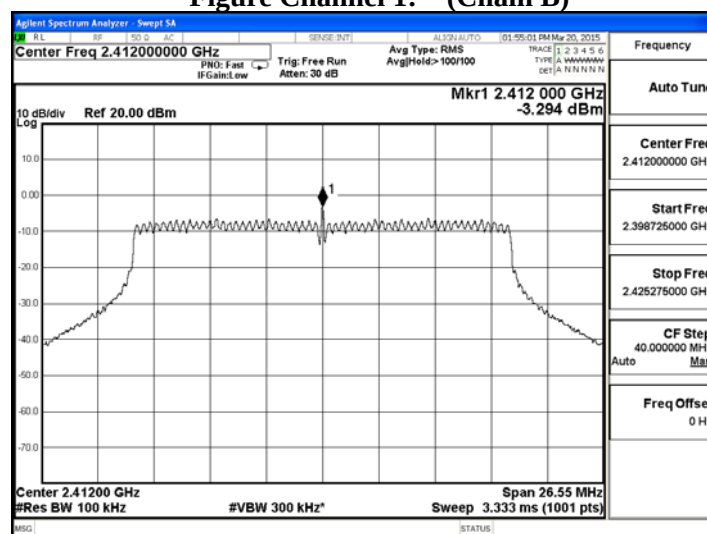

Product : 802.11ac Dual Band Access Point
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2437MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	0.391	3.401	< 7dBm	Pass
B	0.478	3.488	< 7dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 6: (Chain A)


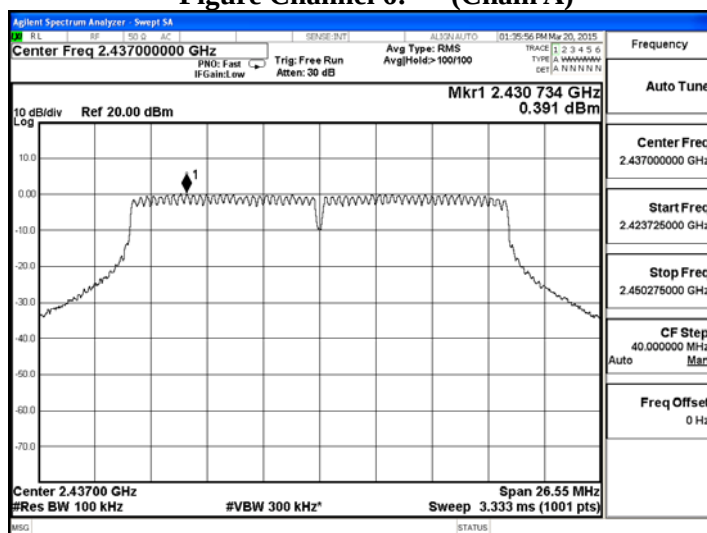


Figure Channel 6: (Chain B)

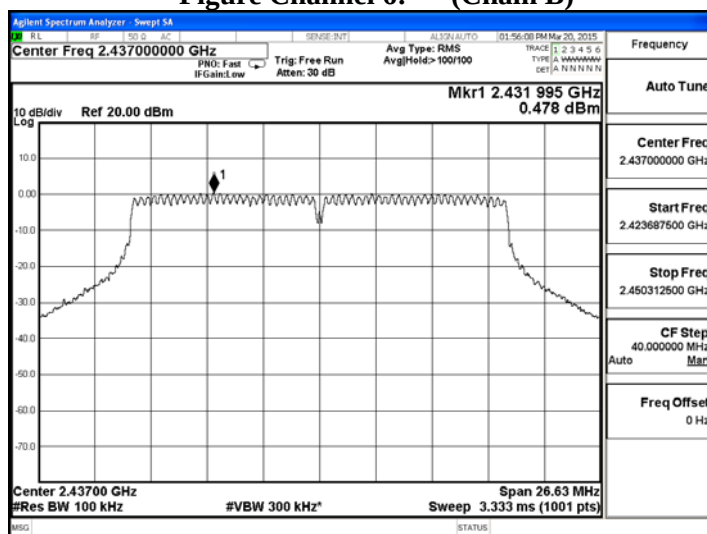

Product : 802.11ac Dual Band Access Point
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2462MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-6.661	-3.651	< 7dBm	Pass
B	-6.454	-3.444	< 7dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 11: (Chain A)


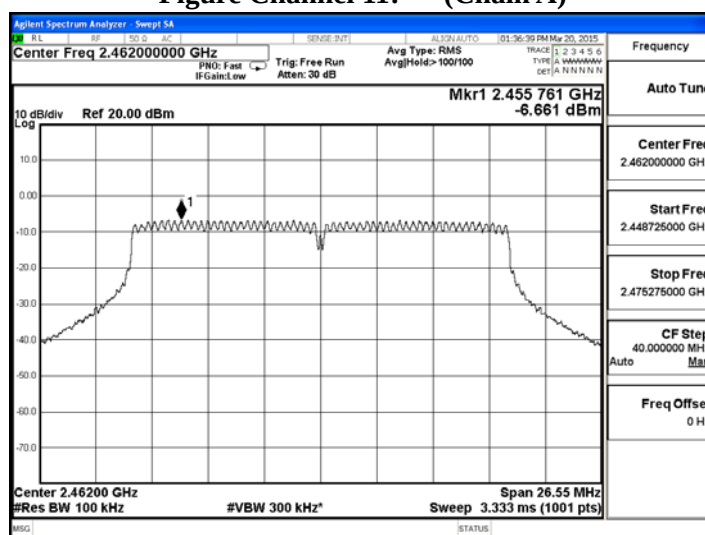


Figure Channel 11: (Chain B)

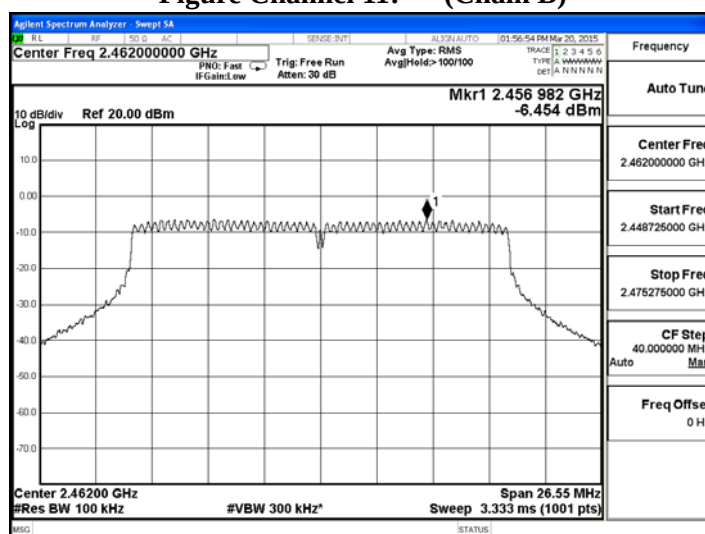

Product : 802.11ac Dual Band Access Point
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2422MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-11.750	-8.740	< 7dBm	Pass
B	-11.948	-8.938	< 7dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 3: (Chain A)


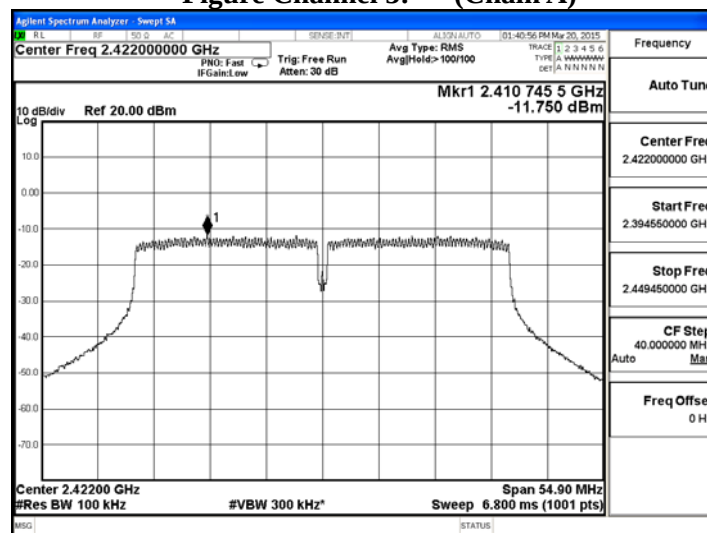


Figure Channel 3: (Chain B)

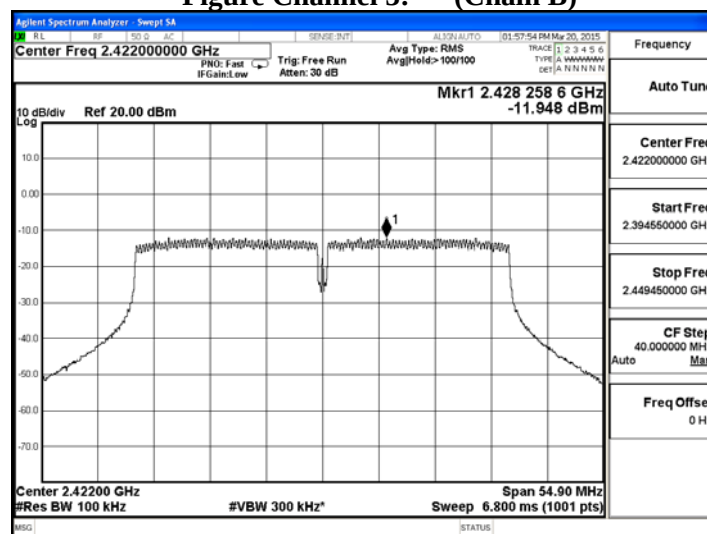

Product : 802.11ac Dual Band Access Point
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2437MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-6.684	-3.674	< 7dBm	Pass
B	-6.548	-3.538	< 7dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 6: (Chain A)


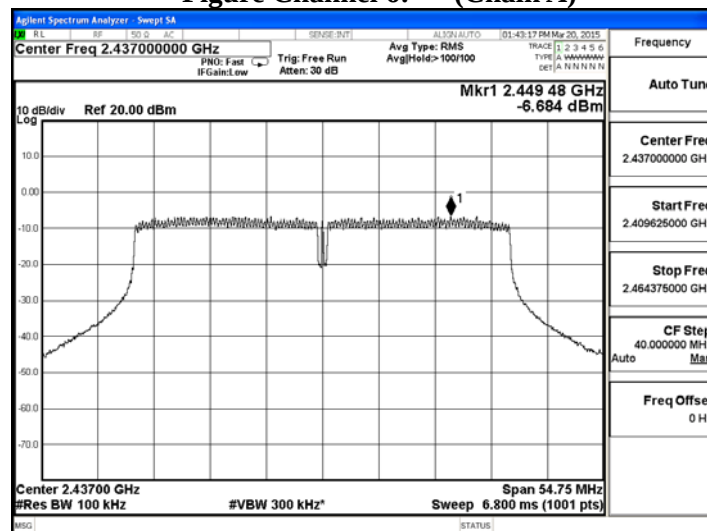


Figure Channel 6: (Chain B)

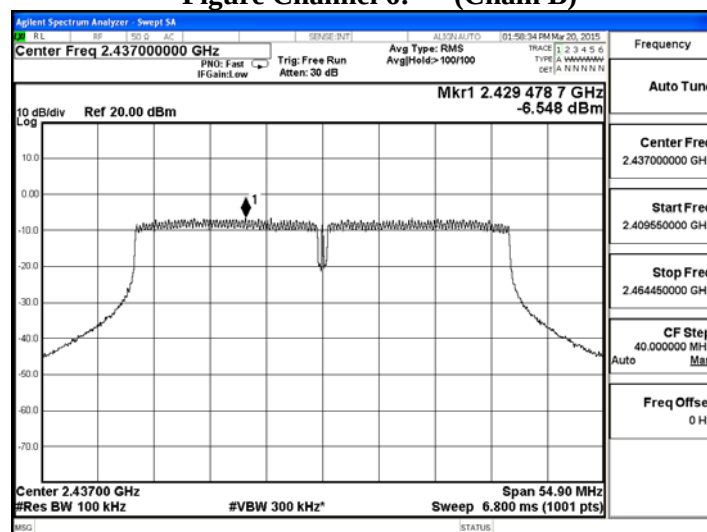

Product : 802.11ac Dual Band Access Point
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2452MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-9.891	-6.881	< 7dBm	Pass
B	-9.831	-6.821	< 7dBm	Pass

Note 1: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 9: (Chain A)


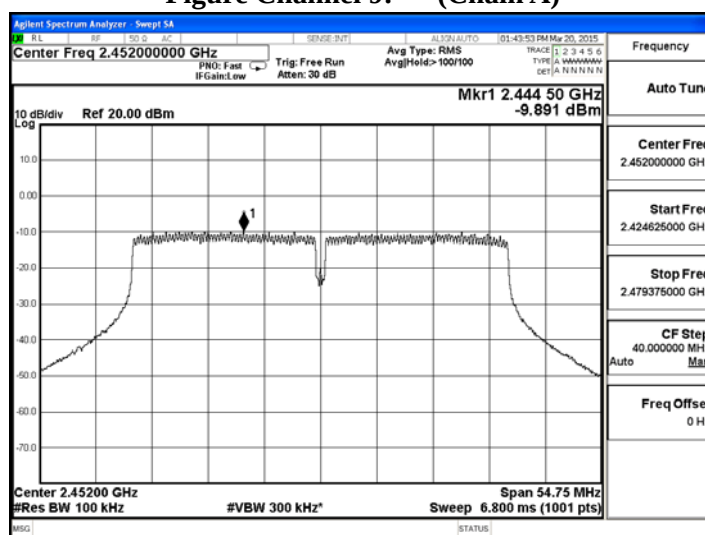


Figure Channel 9: (Chain B)

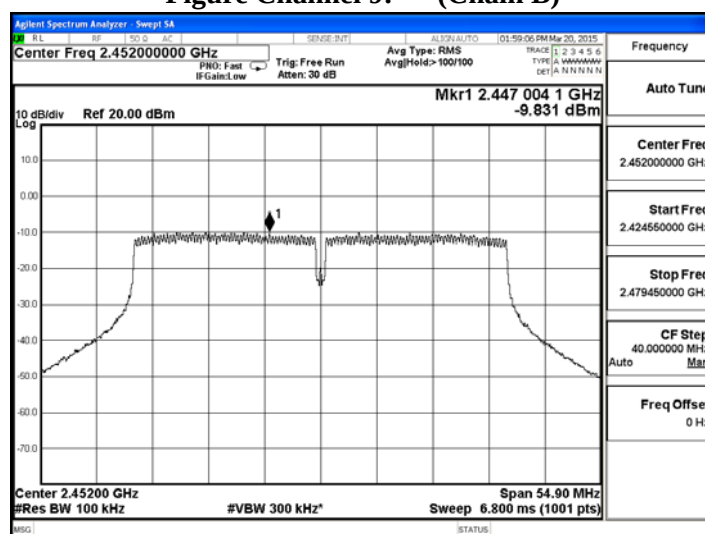

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.