

Certification Test Report

**FCC ID: SM6-HUBXRRL
IC: 9235A-HUBXRRL**

**FCC Rule Part: 15.247
IC Radio Standards Specification: RSS-247**

ACS Report Number: 15-0033.W06.1A

**Manufacturer: Mueller Systems, LLC
Model: MIHUBXR-RL**

**Test Begin Date: March 10, 2015
Test End Date: May 27, 2015**

Report Issue Date: June 5, 2015



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report is not to be used to claim certification, approval, or endorsement by NVLAP, NIST or any government agency.

Reviewed by:

A handwritten signature in black ink, appearing to read 'Kirby Munroe', is written over a horizontal line.

**Kirby Munroe
Director, Wireless Certifications
ACS, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 25 pages

TABLE OF CONTENTS

| | | |
|----------|---------------------------------------------------------------------------------------------|-----------|
| 1 | GENERAL | 3 |
| 1.1 | PURPOSE..... | 3 |
| 1.2 | PRODUCT DESCRIPTION | 3 |
| 1.3 | TEST METHODOLOGY AND CONSIDERATIONS | 4 |
| 2 | TEST FACILITIES..... | 5 |
| 2.1 | LOCATION | 5 |
| 2.2 | LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS | 5 |
| 2.3 | RADIATED EMISSIONS TEST SITE DESCRIPTION | 6 |
| 2.3.1 | <i>Semi-Anechoic Chamber Test Site</i> | 6 |
| 2.3.2 | <i>Open Area Tests Site (OATS)</i> | 7 |
| 2.4 | CONDUCTED EMISSIONS TEST SITE DESCRIPTION | 8 |
| 3 | APPLICABLE STANDARD REFERENCES..... | 8 |
| 4 | LIST OF TEST EQUIPMENT..... | 9 |
| 5 | SUPPORT EQUIPMENT..... | 10 |
| 6 | EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM..... | 10 |
| 7 | SUMMARY OF TESTS..... | 11 |
| 7.1 | ANTENNA REQUIREMENT – FCC: SECTION 15.203 | 11 |
| 7.2 | POWER LINE CONDUCTED EMISSIONS – FCC 15.207, IC: RSS-GEN 8.8 | 11 |
| 7.2.1 | <i>Measurement Procedure</i> | 11 |
| 7.2.2 | <i>Measurement Results</i> | 11 |
| 7.3 | PEAK OUTPUT POWER - FCC 15.247(B)(2) IC: RSS-247 5.4(1) | 13 |
| 7.3.1 | <i>Measurement Procedure (Conducted Method)</i> | 13 |
| 7.3.2 | <i>Measurement Results</i> | 13 |
| 7.4 | CHANNEL USAGE REQUIREMENTS | 14 |
| 7.4.1 | <i>Carrier Frequency Separation – FCC 15.247(a)(1) IC: RSS-247 5.1(2)</i> | 14 |
| 7.4.1.1 | Measurement Procedure..... | 14 |
| 7.4.1.2 | Measurement Results | 14 |
| 7.4.2 | <i>Number of Hopping Channels – FCC 15.247(a)(1)(i) IC: RSS-247 5.1(3)</i> | 15 |
| 7.4.2.1 | Measurement Procedure..... | 15 |
| 7.4.2.2 | Measurement Results | 15 |
| 7.4.3 | <i>Channel Dwell Time – FCC 15.247(a)(1)(i) IC: RSS-247 5.1(3)</i> | 16 |
| 7.4.3.1 | Measurement Procedure..... | 16 |
| 7.4.3.2 | Measurement Results | 16 |
| 7.4.4 | <i>20dB / 99% Bandwidth - FCC 15.247(a)(1)(i) IC: RSS-247 5.1(3)</i> | 17 |
| 7.4.4.1 | Measurement Procedure..... | 17 |
| 7.4.4.2 | Measurement Results | 17 |
| 7.5 | BAND-EDGE COMPLIANCE AND SPURIOUS EMISSIONS..... | 20 |
| 7.5.1 | <i>Band-Edge Compliance of RF Conducted Emissions - FCC 15.247(d); IC RSS-247 5.5</i> | 20 |
| 7.5.1.1 | Measurement Procedure..... | 20 |
| 7.5.1.2 | Measurement Results | 20 |
| 7.5.2 | <i>RF Conducted Spurious Emissions - FCC 15.247(d); IC RSS-247 5.5</i> | 21 |
| 7.5.2.1 | Measurement Procedure..... | 21 |
| 7.5.2.2 | Measurement Results | 21 |
| 7.5.3 | <i>Radiated Spurious Emissions - FCC 15.205, 15.209; RSS-Gen 8.9/8.10</i> | 23 |
| 7.5.3.1 | Measurement Procedure..... | 23 |
| 7.5.3.2 | Measurement Results | 23 |
| 7.5.3.3 | Sample Calculation: | 24 |
| 8 | CONCLUSION..... | 25 |

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-247 Certification.

1.2 Product description

The MIHUBXR-RL is intended for outdoor use as an unattended data collector for automatic meter monitoring and control applications.

Technical Information:

The 2 modes of operation are detailed as follows. Only mode 1 is addressed in this report.

| Mode of Operation | Frequency Range (MHz) | Number of Channels | Channel Separation (kHz) | Data Rates Supported (kbps) | Modulation |
|-------------------|-------------------------|--------------------|--------------------------|-----------------------------|------------|
| 1 | 912.310059 - 927.012451 | 50 | 300 | 4557.3bps and 2604.2bps | FHSS, DSSS |
| 2 | 903.649963 - 915.725525 | 24 | 525 | 10416.7bps | DTS, DSSS |

Antenna Type / Gain: LCOM HGV-906U Dipole / 6dBi
Operating Voltage: 120VAC

Manufacturer Information:
Mueller Systems, LLC
1200 Abernathy Road, NE
Suite 1200
Atlanta, GA 30328

EUT Serial Numbers: 11004411

Test Sample Condition: The test samples were provided in good working order with no visible defects.

1.3 Test Methodology and Considerations

All modes of operation, including all available data rates, were evaluated. The data presented in this report represents the worst case where applicable.

For radiated emissions the EUT was tested in an orientation representative of final installation.

Software power setting during test: 106

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program (NVLAP), Lab Code 200612-0. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 511277

Industry Canada Lab Code: IC 4175A

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 – 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 – 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

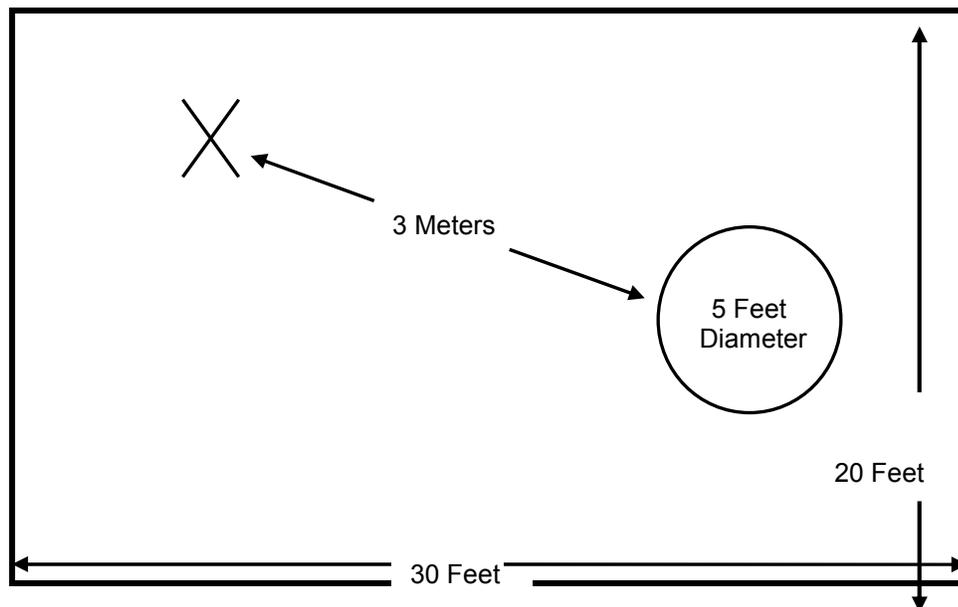


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 – 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 – 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

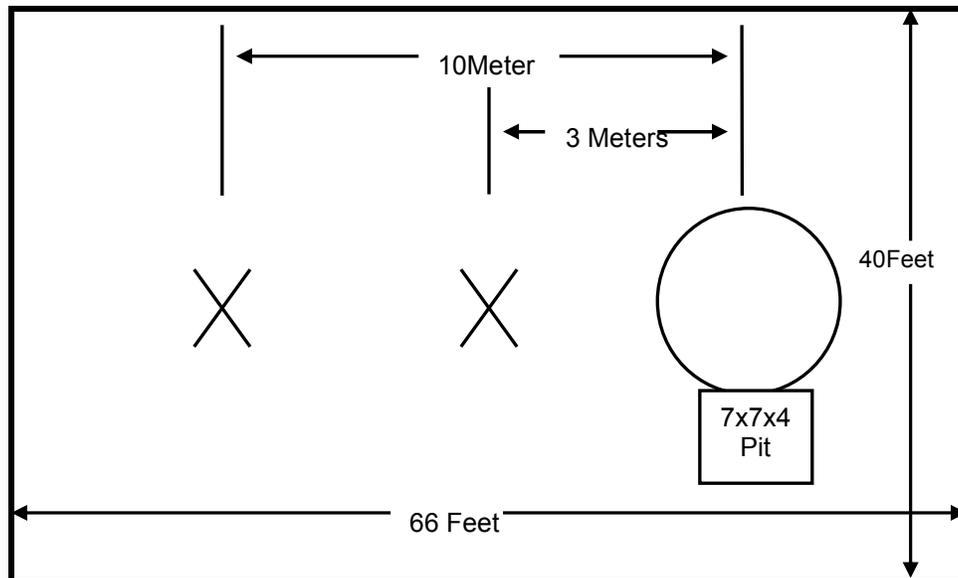


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 2.4-1:

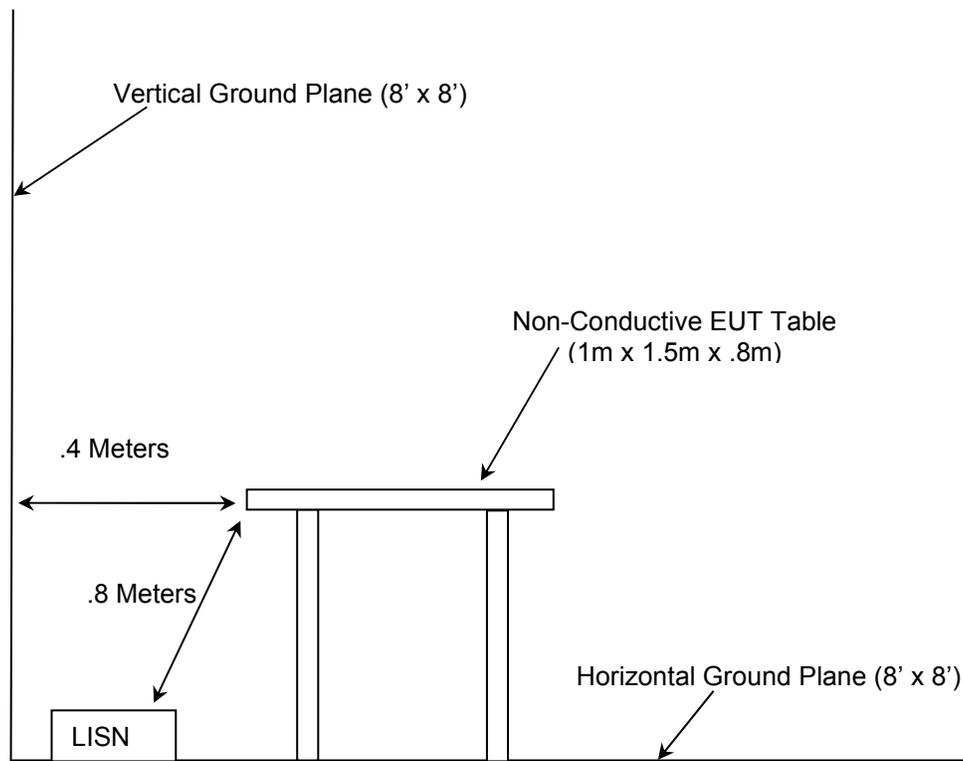


Figure 2.4-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices – Industry Canada reference only
- ❖ ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices – FCC reference only
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2015
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2015
- ❖ Industry Canada Radio Standards Specification: RSS-247 – Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices, Issue 1, May 2015.
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, Nov 2014.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

| AssetID | Manufacturer | Model # | Equipment Type | Serial # | Last Calibration Date | Calibration Due Date |
|---------|-----------------------|--------------------------|--------------------|------------|-----------------------|----------------------|
| 1 | Rohde & Schwarz | ESMI - Display | Spectrum Analyzers | 833771/007 | 7/11/2014 | 7/11/2015 |
| 2 | Rohde & Schwarz | ESMI-Receiver | Spectrum Analyzers | 839587/003 | 7/11/2014 | 7/11/2015 |
| 30 | Spectrum Technologies | DRH-0118 | Antennas | 970102 | 4/30/2015 | 4/30/2017 |
| 30 | Spectrum Technologies | DRH-0118 | Antennas | 970102 | 4/23/2013 | 4/23/2015 |
| 40 | EMCO | 3104 | Antennas | 3211 | 2/10/2015 | 2/10/2017 |
| 73 | Agilent | 8447D | Amplifiers | 2727A05624 | 7/15/2014 | 7/15/2015 |
| 167 | ACS | Chamber EMI Cable Set | Cable Set | 167 | 10/28/2014 | 10/28/2015 |
| 168 | Hewlett Packard | 11947A | Attenuators | 44829 | 1/19/2015 | 1/19/2016 |
| 267 | Agilent | N1911A | Meters | MY45100129 | 7/30/2013 | 7/30/2015 |
| 268 | Agilent | N1921A | Sensors | MY45240184 | 7/30/2013 | 7/30/2015 |
| 292 | Florida RF Cables | SMR-290AW- 480.0-SMR | Cables | None | 3/3/2015 | 3/3/2016 |
| 316 | Rohde Schwarz | ESH3-Z5 | LISN | 861189-010 | 10/30/2014 | 10/30/2015 |
| 324 | ACS | Belden | Cables | 8214 | 6/4/2014 | 6/4/2015 |
| 337 | Microwave Circuits | H1G513G1 | Filters | 282706 | 6/2/2014 | 6/2/2015 |
| 338 | Hewlett Packard | 8449B | Amplifiers | 3008A01111 | 7/30/2013 | 7/30/2015 |
| 339 | Aeroflex/Weinschel | AS-18 | Attenuators | 7142 | 6/2/2014 | 6/2/2015 |
| 412 | Electro Metrics | LPA-25 | Antennas | 1241 | 7/24/2014 | 7/24/2016 |
| 422 | Florida RF | SMS-200AW-72.0- SMR | Cables | 805 | 11/5/2014 | 11/5/2015 |
| 616 | Florida RF Cables | SMRE-200W-12.0- SMRE | Cables | N/A | 9/10/2014 | 9/10/2015 |
| 622 | Rohde & Schwarz | FSV40 | Analyzers | 101338 | 7/12/2014 | 7/12/2015 |
| RE112 | Rohde & Schwarz | ESIB26 | Receiver | 836119/012 | 10/30/2014 | 10/30/2015 |

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

| Item | Equipment Type | Manufacturer | Model Number | Serial Number |
|------|-----------------------------------------|----------------------|---------------|---------------|
| 1 | Dipole Antenna (EUT Antenna) | LCOM | HGV-906U | N/A |
| 2 | Surge Suppressor | PolyPhaser Equipment | CGXZ+15NFNF-A | N/A |
| 3 | Dipole Antenna (Cellular Radio Antenna) | Taoglas Limited | FW.91.TNC.M | N/A |
| 4 | Ethernet Hub | Netgear | GS108 v3 | 21621B32039CB |
| 5 | Wall Wart Power Supply | Netgear | T012LF1209 | N/A |

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

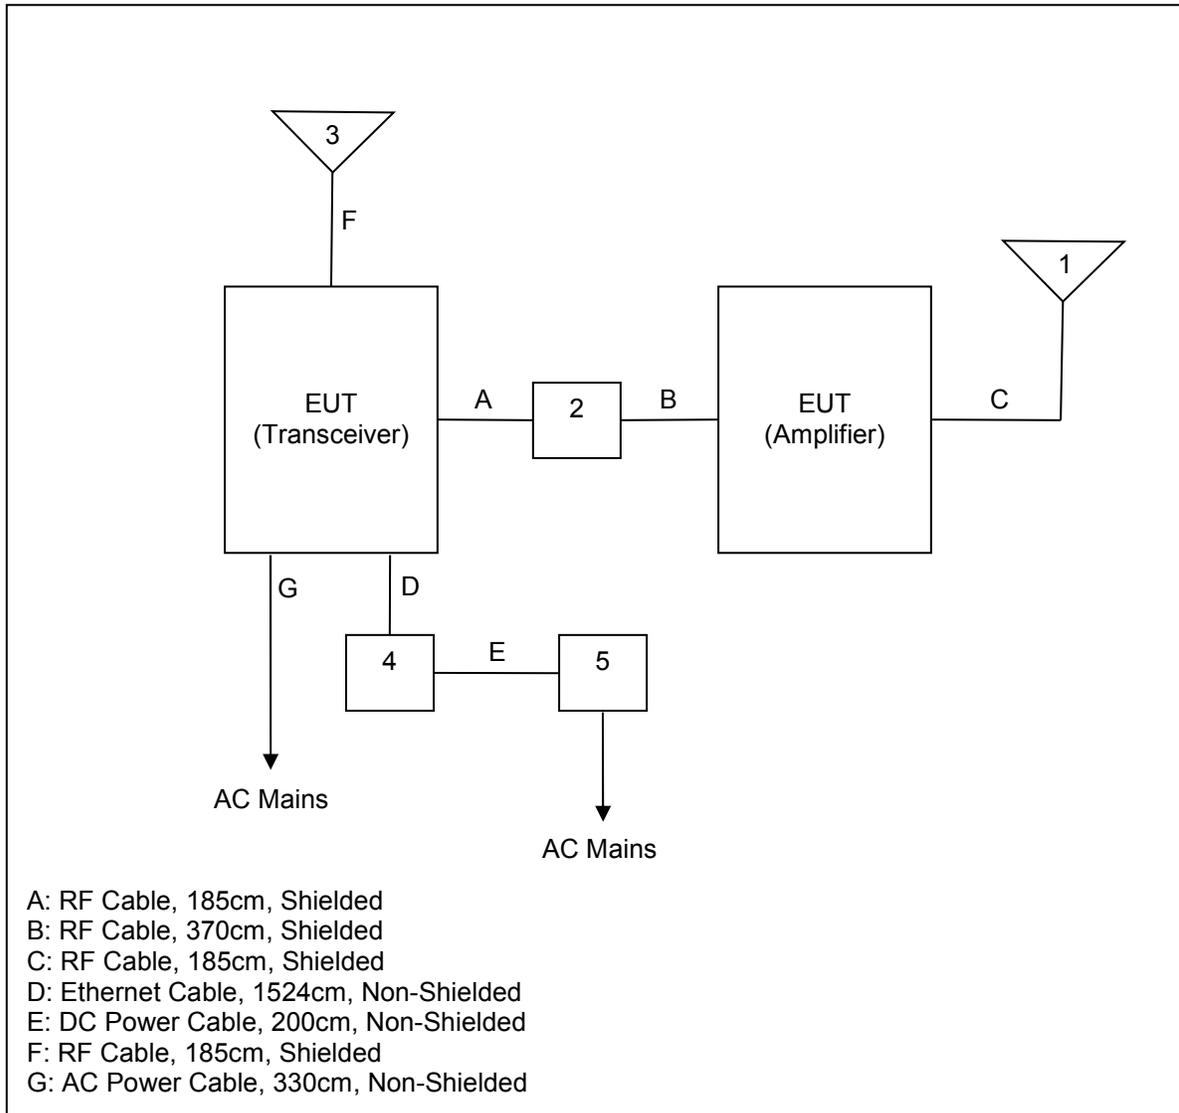


Figure 6-1: Test Setup Block Diagram

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The antenna is a detachable dipole with 6dBi gain. The antenna coupling is N-Type, therefore professional installation is required.

7.2 Power Line Conducted Emissions – FCC 15.207, IC: RSS-Gen 8.8

7.2.1 Measurement Procedure

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer's resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss

Margin = Applicable Limit - Corrected Reading

7.2.2 Measurement Results

Table 7.2.2-1: Conducted EMI Results Line 1

| Frequency (MHz) | Corrected Reading | | Limit (dBuV) | Margin (dB) | Line | Correction (dB) |
|-----------------|-------------------|----------------|--------------|-------------|------|-----------------|
| | Quasi-Peak (dBuV) | Average (dBuV) | | | | |
| 4.903307 | --- | 36.48 | 46.00 | 9.52 | L1 | 10.5 |
| 4.903307 | 43.83 | --- | 56.00 | 12.17 | L1 | 10.5 |
| 5.299699 | --- | 34.23 | 50.00 | 15.77 | L1 | 10.5 |
| 5.299699 | 45.46 | --- | 60.00 | 14.54 | L1 | 10.5 |
| 5.636574 | --- | 45.87 | 50.00 | 4.13 | L1 | 10.5 |
| 5.636574 | 48.04 | --- | 60.00 | 11.96 | L1 | 10.5 |
| 5.882866 | --- | 46.67 | 50.00 | 3.33 | L1 | 10.6 |
| 5.882866 | 49.36 | --- | 60.00 | 10.64 | L1 | 10.6 |
| 6.861023 | --- | 45.93 | 50.00 | 4.07 | L1 | 10.6 |
| 6.861023 | 47.93 | --- | 60.00 | 12.07 | L1 | 10.6 |
| 7.350801 | --- | 38.18 | 50.00 | 11.82 | L1 | 10.7 |
| 7.350801 | 41.65 | --- | 60.00 | 18.35 | L1 | 10.7 |

Table 7.2.2-2: Conducted EMI Results Line 2

| Frequency (MHz) | Corrected Reading | | Limit (dBuV) | Margin (dB) | Line | Correction (dB) |
|-----------------|-------------------|----------------|--------------|-------------|------|-----------------|
| | Quasi-Peak (dBuV) | Average (dBuV) | | | | |
| 4.806713 | --- | 30.91 | 46.00 | 15.09 | N | 10.4 |
| 4.806713 | 42.26 | --- | 56.00 | 13.74 | N | 10.4 |
| 4.906513 | --- | 35.50 | 46.00 | 10.50 | N | 10.5 |
| 4.906513 | 43.51 | --- | 56.00 | 12.49 | N | 10.5 |
| 4.979660 | --- | 32.81 | 46.00 | 13.19 | N | 10.5 |
| 4.979660 | 44.44 | --- | 56.00 | 11.56 | N | 10.5 |
| 5.194289 | --- | 34.60 | 50.00 | 15.40 | N | 10.5 |
| 5.194289 | 46.00 | --- | 60.00 | 14.00 | N | 10.5 |
| 5.383467 | --- | 34.24 | 50.00 | 15.76 | N | 10.5 |
| 5.383467 | 43.11 | --- | 60.00 | 16.89 | N | 10.5 |
| 5.879459 | --- | 45.76 | 50.00 | 4.24 | N | 10.5 |
| 5.879459 | 47.66 | --- | 60.00 | 12.34 | N | 10.5 |

7.3 Peak Output Power - FCC 15.247(b)(2) IC: RSS-247 5.4(1)

7.3.1 Measurement Procedure (Conducted Method)

The RF output port of the EUT was directly connected to the input of a peak power meter with suitable attenuation. The device employs ≥ 50 channels therefore the power is limited to 1 Watt.

All data rates were evaluated and worst case reported.

7.3.2 Measurement Results

Table 7.3.2-1: RF Output Power

| Frequency [MHz] | Level [dBm] |
|--------------------|----------------|
| 912.310059 | 29.44 |
| 919.511230 | 28.90 |
| 927.012451 | 29.01 |

7.4 Channel Usage Requirements

7.4.1 Carrier Frequency Separation – FCC 15.247(a)(1) IC: RSS-247 5.1(2)

7.4.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer with suitable attenuation. The span of the spectrum analyzer was set wide enough to capture two adjacent peaks. The RBW was set to approximately 30% of the channel spacing and the VBW was set to \geq RBW.

7.4.1.2 Measurement Results

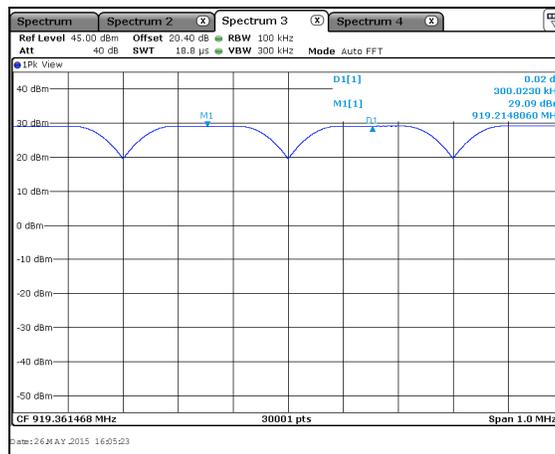


Figure 7.4.1.2-1: Carrier Frequency Separation 2604.2bps

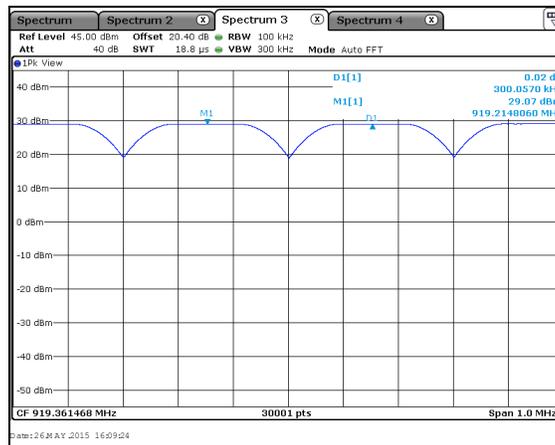


Figure 7.4.1.2-2: Carrier Frequency Separation 4557.3bps

7.4.2 Number of Hopping Channels – FCC 15.247(a)(1)(i) IC: RSS-247 5.1(3)

7.4.2.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer with suitable attenuation. The span of the spectrum analyzer was set wide enough to capture the frequency band of operation. The RBW was set to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller and VBW set to \geq RBW.

7.4.2.2 Measurement Results

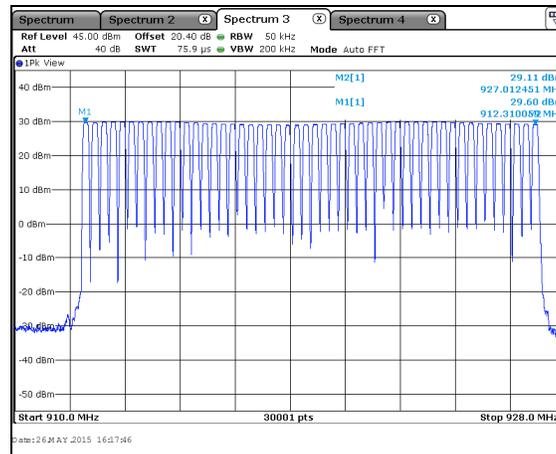


Figure 7.4.2.2-1: Number of Hopping Channels

7.4.3 Channel Dwell Time – FCC 15.247(a)(1)(i) IC: RSS-247 5.1(3)

7.4.3.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer display was set 0 Hz centered on a hopping channel. The RBW of the spectrum analyzer was set to \leq the EUT channel spacing and VBW set to \geq RBW. The Marker Delta function of the analyzer was utilized to determine the dwell time.

7.4.3.2 Measurement Results

Table 7.4.3.2-1: Channel Dwell Time

| Data Rate (bps) | Single Occurrence | Number of Occurrences / 20s | Total Dwell Time (ms) |
|-----------------|-------------------|-----------------------------|-----------------------|
| 2604.2 | 385.28 | 1 | 385.28 |
| 4557.3 | 204.75 | 1 | 204.75 |

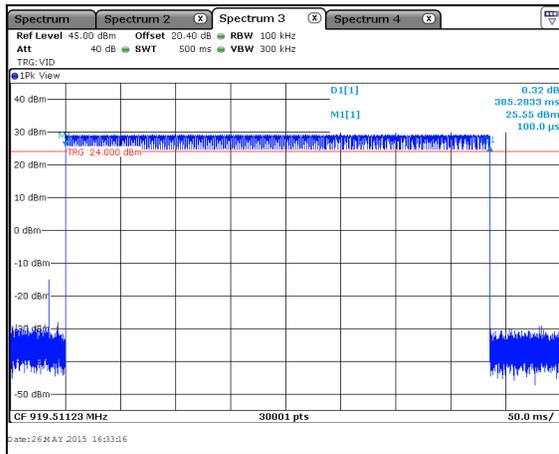


Figure 7.4.3.2-1: Dwell Time 2604.2bps

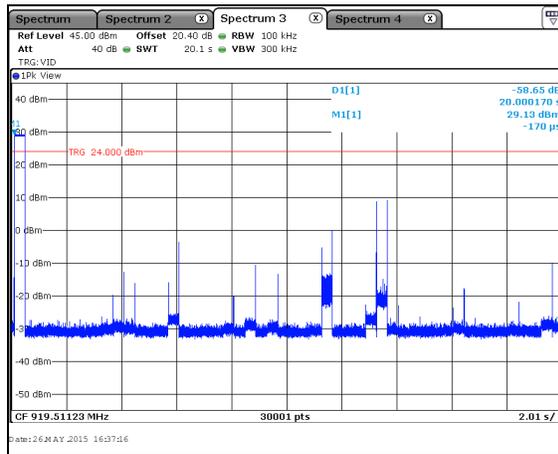


Figure 7.4.3.2-2: Dwell Time 2604.2bps

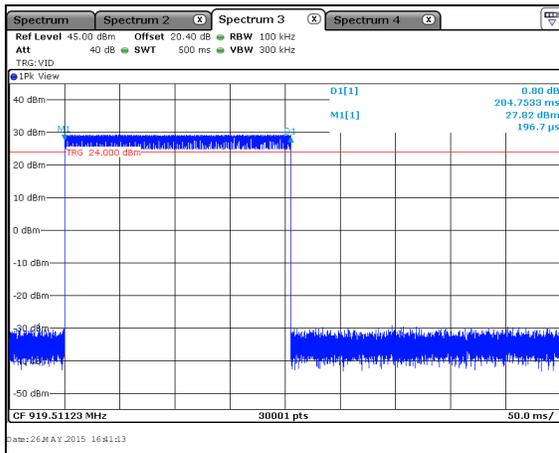


Figure 7.4.3.2-3: Dwell Time 4557.3bps

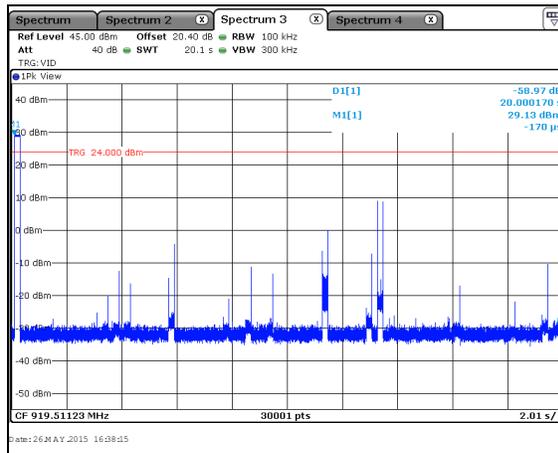


Figure 7.4.3.2-4: Dwell Time 4557.3bps

7.4.4 20dB / 99% Bandwidth - FCC 15.247(a)(1)(i) IC: RSS-247 5.1(3)

7.4.4.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer with suitable attenuation. The span of the spectrum analyzer display was set between two times and five times the occupied bandwidth (OBW) of the emission. The RBW of the spectrum analyzer was set to approximately 1 % to 5 % of the OBW. The trace was set to max hold with a peak detector active. The n dB down measurement function of the analyzer was utilized to determine the 20 dB bandwidth of the emission.

The occupied bandwidth measurement function of the spectrum analyzer was used to measure the 99% bandwidth. The span of the analyzer was set to capture all products of the modulation process, including the emission sidebands. The resolution bandwidth was set to 1% to 5% of the occupied bandwidth. The video bandwidth was set to 3 times the resolution bandwidth. A peak detector was used.

7.4.4.2 Measurement Results

Table 7.4.4.2-1: 20dB / 99% Bandwidth

| Frequency [MHz] | 20dB Bandwidth [kHz] | 99% Bandwidth [kHz] | Data Rate (bps) |
|-----------------|----------------------|---------------------|-----------------|
| 912.310059 | 141.36 | 125.12 | 2604.2 |
| 912.310059 | 144.27 | 125.58 | 4557.3 |
| 919.511230 | 141.79 | 125.54 | 2604.2 |
| 919.511230 | 144.56 | 124.98 | 4557.3 |
| 927.012451 | 141.64 | 125.36 | 2604.2 |
| 927.012451 | 141.29 | 125.09 | 4557.3 |

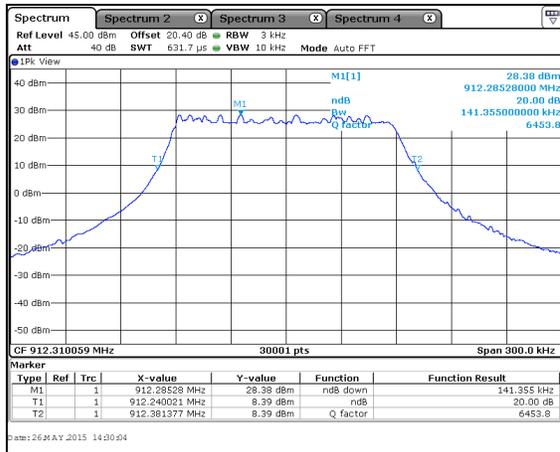


Figure 7.4.4.2-1: 20dB BW Low Channel - 2604.2bps



Figure 7.4.4.2-2: 20dB BW Low Channel – 4557.3bps

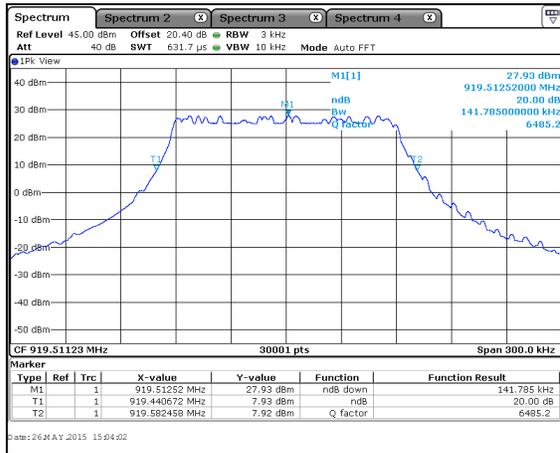


Figure 7.4.4.2-3: 20dB BW Mid Channel - 2604.2bps

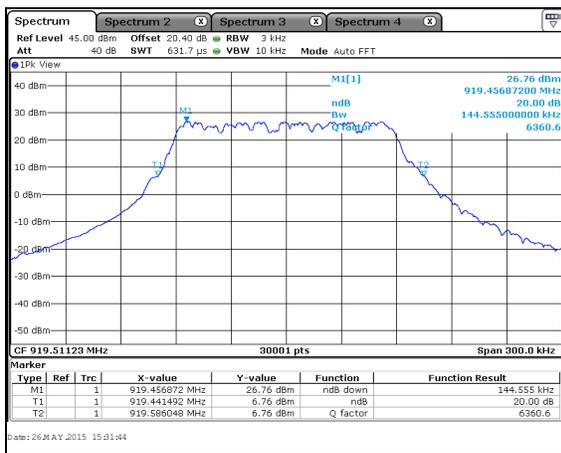


Figure 7.4.4.2-4: 20dB BW Mid Channel - 4557.3bps

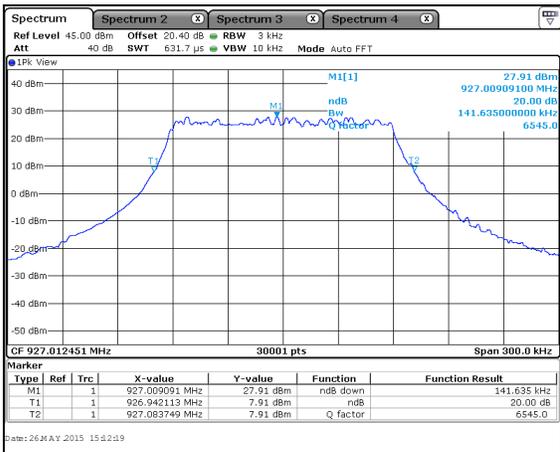


Figure 7.4.4.2-5: 20dB BW High Channel - 2604.2bps

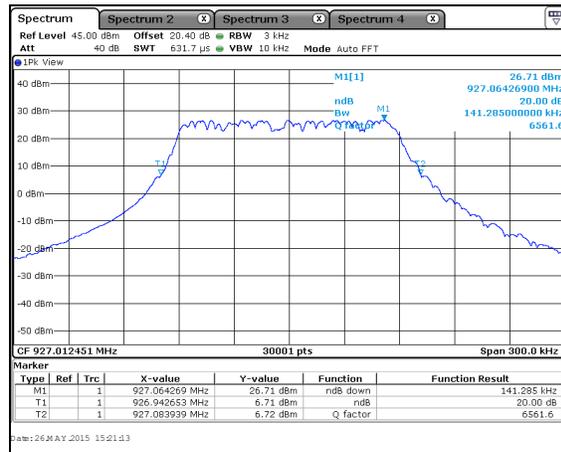


Figure 7.4.4.2-6: 20dB BW High Channel - 4557.3bps

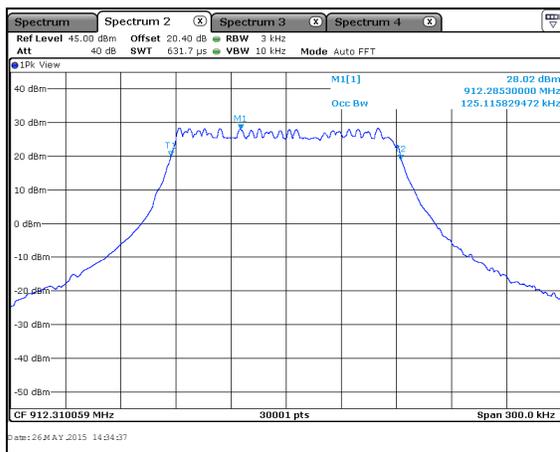


Figure 7.4.4.2-7: 99% BW Low Channel - 2604.2bps

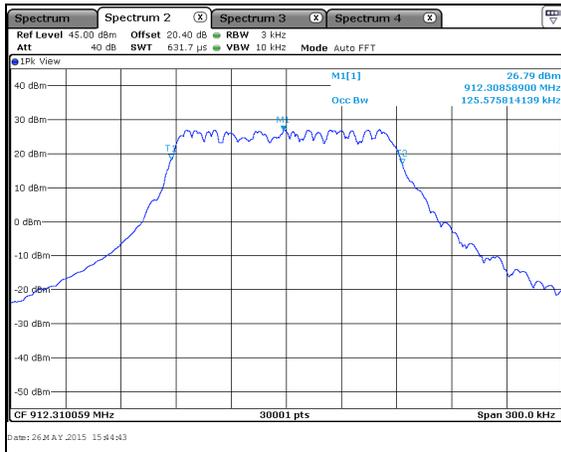


Figure 7.4.4.2-8: 99% BW Low Channel - 4557.3bps

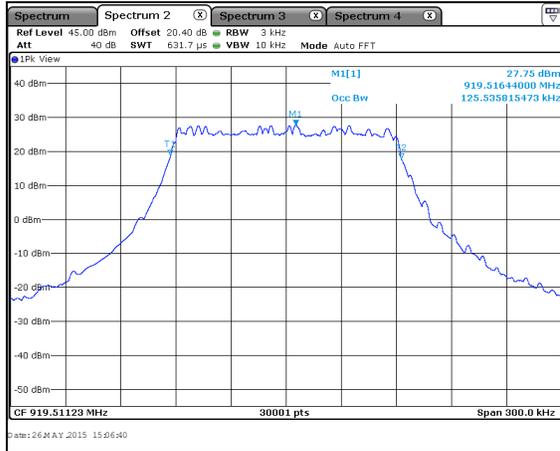


Figure 7.4.4.2-9: 99% BW Mid Channel - 2604.2bps

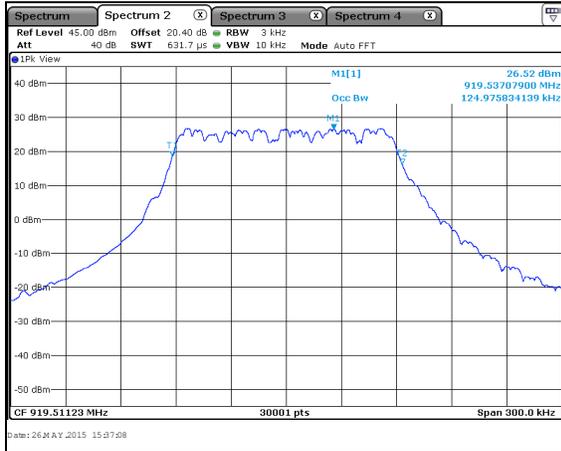


Figure 7.4.4.2-10: 99% BW Mid Channel - 4557.3bps

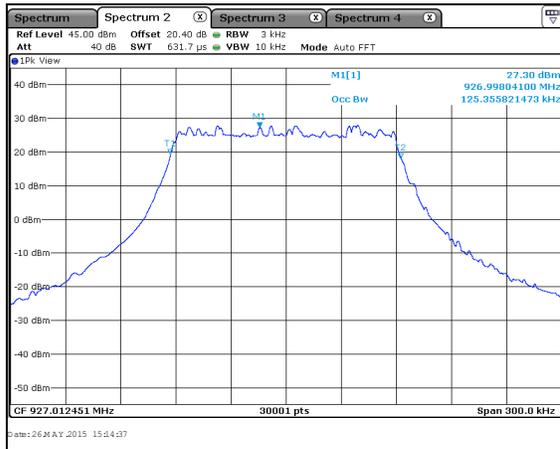


Figure 7.4.4.2-11: 99% BW High Channel - 2604.2bps

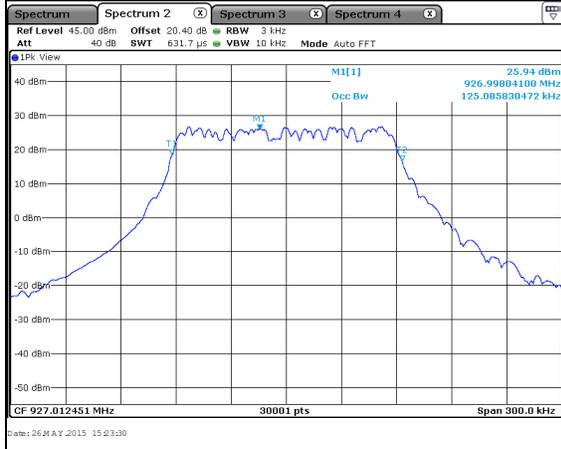


Figure 7.4.4.2-12: 99% BW High Channel - 4557.3bps

7.5 Band-Edge Compliance and Spurious Emissions

7.5.1 Band-Edge Compliance of RF Conducted Emissions - FCC 15.247(d); IC RSS-247 5.5

7.5.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer with suitable attenuation. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to 100 kHz, and the VBW was set to 300 kHz.

7.5.1.2 Measurement Results

NON-HOPPING MODE:

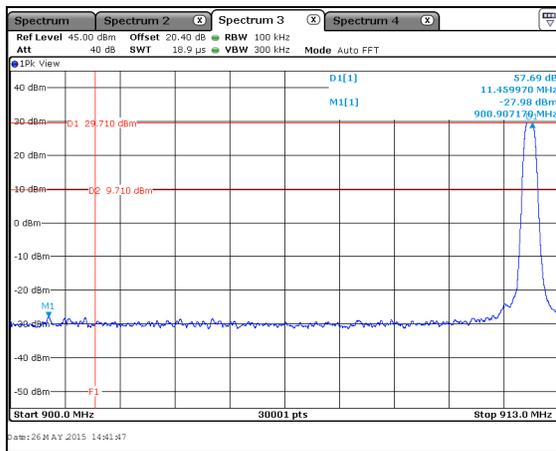


Figure 7.5.1.2-1: Lower Band-edge

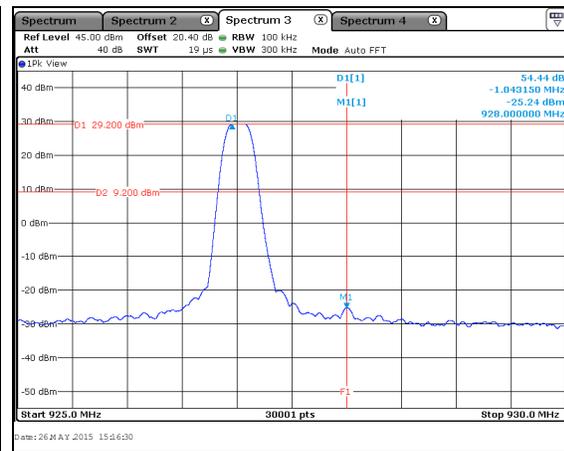


Figure 7.5.1.2-2: Upper Band-edge

HOPPING MODE:

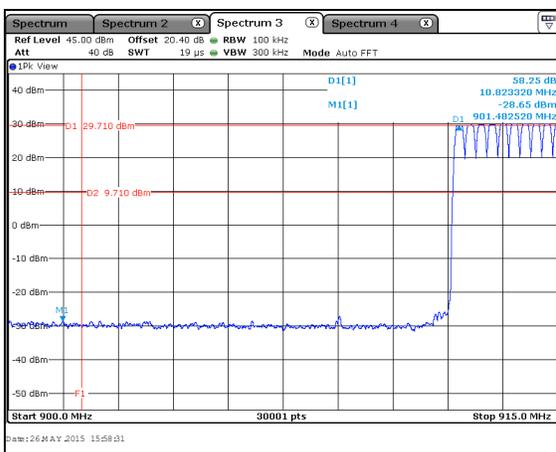


Figure 7.5.1.2-3: Lower Band-edge

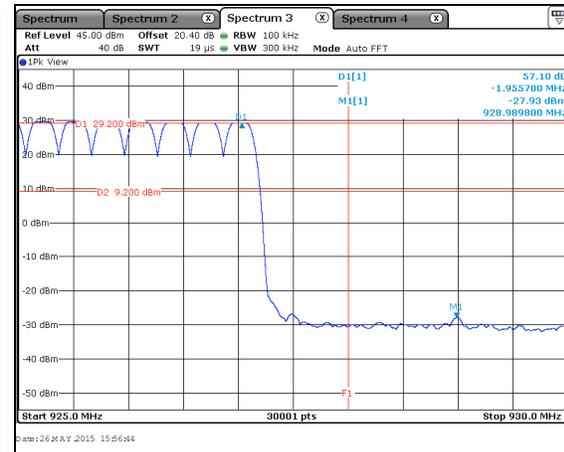


Figure 7.5.1.2-4: Upper Band-edge

7.5.2 RF Conducted Spurious Emissions - FCC 15.247(d); IC RSS-247 5.5

7.5.2.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer with suitable attenuation. The EUT was investigated for conducted spurious emissions from 30MHz to 10GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100kHz. A peak detector function was used with the trace set to max hold.

7.5.2.2 Measurement Results

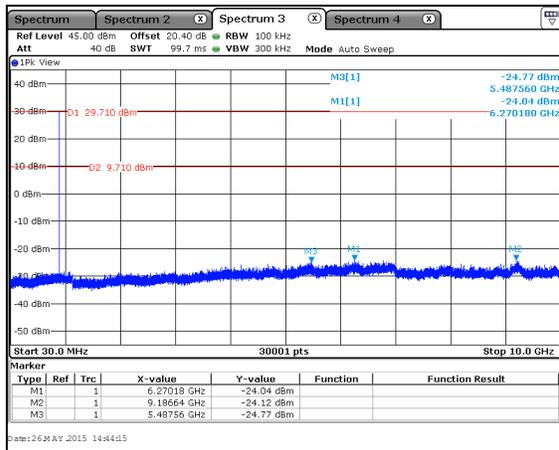


Figure 7.5.2.2-1: 30 MHz – 10 GHz – LCH 2604.2bps

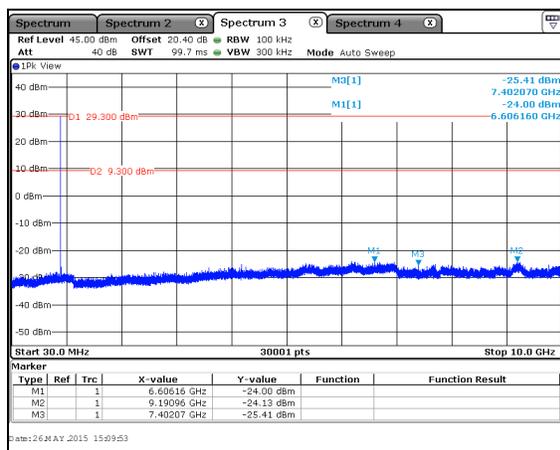


Figure 7.5.2.2-2: 30 MHz – 10 GHz –MCH 2604.2bps

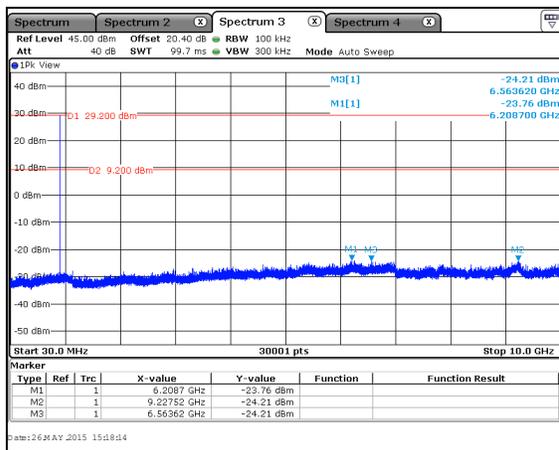


Figure 7.5.2.2-3: 30 MHz – 10 GHz – HCH 2604.2bps

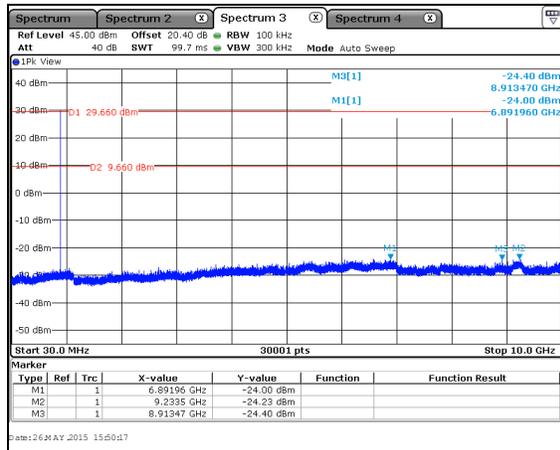


Figure 7.5.2.2-4: 30 MHz – 10 GHz – LCH 4557.3bps

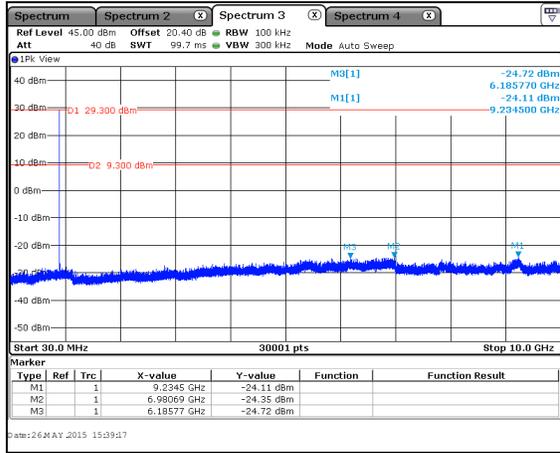


Figure 7.5.2.2-5: 30 MHz – 10 GHz – MCH 4557.3bps

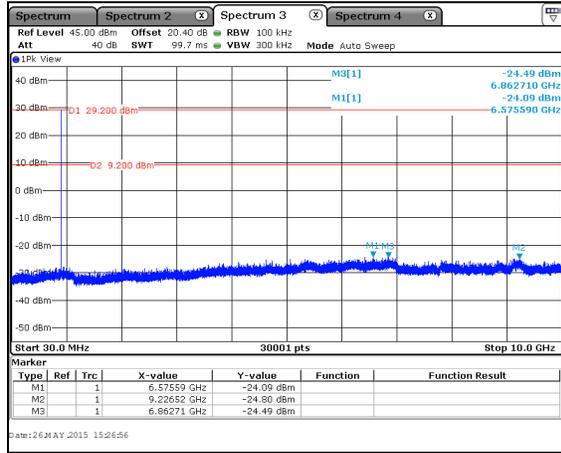


Figure 7.5.2.2-6: 30 MHz – 10 GHz – HCH 4557.3bps

7.5.3 Radiated Spurious Emissions - FCC 15.205, 15.209; RSS-Gen 8.9/8.10

7.5.3.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 30MHz to 10GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3MHz respectively.

The EUT was caused to generate a continuous modulated carrier on the hopping channel.

Each emission found to be in a restricted band was compared to the applicable radiated emission limits.

Radiated spurious emissions were evaluated for all data rates with worst case data provided.

7.5.3.2 Measurement Results

Table 7.5.3.2-1: Radiated Spurious Emissions Tabulated Data

| Frequency (MHz) | Level (dBuV) | | Antenna Polarity (H/V) | Correction Factors (dB) | Corrected Level (dBuV/m) | | Limit (dBuV/m) | | Margin (dB) | |
|-----------------------|--------------|---------|------------------------|-------------------------|--------------------------|---------|----------------|---------|-------------|---------|
| | pk | Qpk/Avg | | | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg |
| Low Channel | | | | | | | | | | |
| 1368.34 | 57.51 | 54.29 | H | -11.14 | 46.37 | 43.15 | 74.0 | 54.0 | 27.6 | 10.8 |
| 1368.34 | 64.42 | 62.87 | V | -11.14 | 53.28 | 51.73 | 74.0 | 54.0 | 20.7 | 2.3 |
| 2736.930177 | 52.04 | 47.19 | H | -4.44 | 47.60 | 42.75 | 74.0 | 54.0 | 26.4 | 11.3 |
| 2736.930177 | 52.92 | 47.80 | V | -4.44 | 48.48 | 43.36 | 74.0 | 54.0 | 25.5 | 10.6 |
| 3649.240236 | 51.15 | 44.78 | H | -1.16 | 49.99 | 43.62 | 74.0 | 54.0 | 24.0 | 10.4 |
| 3649.240236 | 51.02 | 46.10 | V | -1.16 | 49.86 | 44.94 | 74.0 | 54.0 | 24.1 | 9.1 |
| 4561.550295 | 52.96 | 48.08 | H | 0.86 | 53.82 | 48.94 | 74.0 | 54.0 | 20.2 | 5.1 |
| 4561.550295 | 49.01 | 40.82 | V | 0.86 | 49.87 | 41.68 | 74.0 | 54.0 | 24.1 | 12.3 |
| 7298.480472 | 46.82 | 36.50 | H | 7.85 | 54.67 | 44.35 | 74.0 | 54.0 | 19.3 | 9.6 |
| 7298.480472 | 46.10 | 36.40 | V | 7.85 | 53.95 | 44.25 | 74.0 | 54.0 | 20.0 | 9.7 |
| Middle Channel | | | | | | | | | | |
| 1379.22 | 54.97 | 49.38 | H | -11.06 | 43.91 | 38.32 | 74.0 | 54.0 | 30.1 | 15.7 |
| 1379.22 | 60.33 | 57.74 | V | -11.06 | 49.27 | 46.68 | 74.0 | 54.0 | 24.7 | 7.3 |
| 2758.53369 | 55.04 | 51.64 | H | -4.36 | 50.68 | 47.28 | 74.0 | 54.0 | 23.3 | 6.7 |
| 2758.53369 | 55.39 | 51.97 | V | -4.36 | 51.03 | 47.61 | 74.0 | 54.0 | 23.0 | 6.4 |
| 3678.04492 | 51.03 | 44.73 | H | -1.06 | 49.97 | 43.67 | 74.0 | 54.0 | 24.0 | 10.3 |
| 3678.04492 | 51.23 | 45.29 | V | -1.06 | 50.17 | 44.23 | 74.0 | 54.0 | 23.8 | 9.8 |
| 4597.55615 | 52.17 | 47.40 | H | 0.89 | 53.06 | 48.29 | 74.0 | 54.0 | 20.9 | 5.7 |
| 4597.55615 | 50.11 | 42.60 | V | 0.89 | 51.00 | 43.49 | 74.0 | 54.0 | 23.0 | 10.5 |
| 7356.08984 | 47.51 | 39.30 | H | 7.90 | 55.41 | 47.20 | 74.0 | 54.0 | 18.6 | 6.8 |
| 7356.08984 | 47.00 | 37.21 | V | 7.90 | 54.90 | 45.11 | 74.0 | 54.0 | 19.1 | 8.9 |
| High Channel | | | | | | | | | | |
| 1390.41 | 53.65 | 47.74 | H | -10.99 | 42.66 | 36.75 | 74.0 | 54.0 | 31.3 | 17.2 |
| 1390.41 | 59.73 | 56.47 | V | -10.99 | 48.74 | 45.48 | 74.0 | 54.0 | 25.3 | 8.5 |
| 2781.037353 | 54.07 | 50.57 | H | -4.28 | 49.79 | 46.29 | 74.0 | 54.0 | 24.2 | 7.7 |
| 2781.037353 | 56.26 | 53.46 | V | -4.28 | 51.98 | 49.18 | 74.0 | 54.0 | 22.0 | 4.8 |
| 3708.049804 | 51.54 | 45.72 | H | -0.95 | 50.59 | 44.77 | 74.0 | 54.0 | 23.4 | 9.2 |
| 3708.049804 | 52.35 | 47.09 | V | -0.95 | 51.40 | 46.14 | 74.0 | 54.0 | 22.6 | 7.9 |
| 4635.062255 | 50.62 | 44.50 | H | 0.93 | 51.55 | 45.43 | 74.0 | 54.0 | 22.5 | 8.6 |
| 4635.062255 | 48.31 | 40.26 | V | 0.93 | 49.24 | 41.19 | 74.0 | 54.0 | 24.8 | 12.8 |
| 7416.099608 | 49.27 | 42.62 | H | 7.94 | 57.21 | 50.56 | 74.0 | 54.0 | 16.8 | 3.4 |
| 7416.099608 | 51.19 | 45.11 | V | 7.94 | 59.13 | 53.05 | 74.0 | 54.0 | 14.9 | 0.9 |

7.5.3.3 Sample Calculation:

$$R_c = R_u + CF_T$$

Where:

CF_T = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)

R_u = Uncorrected Reading

R_c = Corrected Level

AF = Antenna Factor

CA = Cable Attenuation

AG = Amplifier Gain

DC = Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: $57.51 - 11.14 = 46.37\text{dBuV/m}$

Margin: $74\text{dBuV/m} - 46.37\text{dBuV/m} = 27.6\text{dB}$

Example Calculation: Average

Corrected Level: $54.29 - 11.14 - 0 = 43.15\text{dBuV}$

Margin: $54\text{dBuV} - 43.15\text{dBuV} = 10.8\text{dB}$

8 CONCLUSION

In the opinion of ACS, Inc. the MIHUBXR-RL, manufactured by Mueller Systems, LLC meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-247.

END REPORT