


Product Overview

Packing List



Projector



Remote Control




Power Adapter




User Manual

1 Appearance and Features Introduction

High transparency glasses lens




Bottom Pad



Ventilation

2 Distance and Projection Size

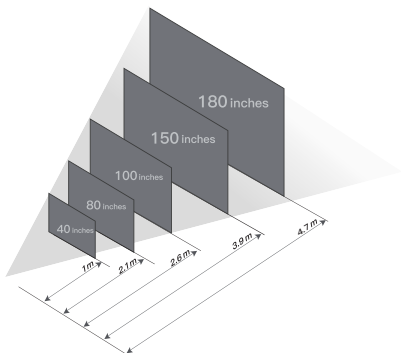

The distance between projector and wall / screen is related to the size of the screen.

The best projection distance is 0.5m~4m and the best suggested projection size is 80inches~150inches, if beyond the range, the brightness

–ss and resolution will be affected.

There is a positive correlation between projection distance and projection size, you can adjust the projection distance to get the projection size you want.

Projection distance	1m	2.1m	2.6m	3.1m	3.9m	4.7m	6.2m	7.8m
Projection size	40"	80"	100"	120"	150"	180"	240"	300"

3 On/Off Button and Indicator –Light


Power–on, press on/off button to start the projector

Turn–off, press on/off button twice to turn off the projector

Indicator Light and corresponded working status

- Standby mode: red color
- Normal mode: white color
- Bluetooth mode: blue color

4 Keystone Correction

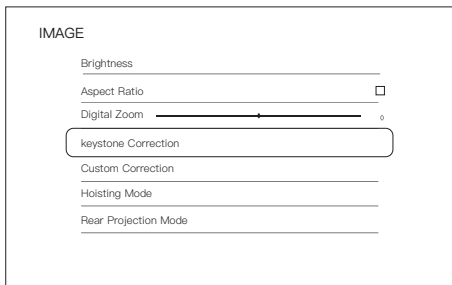

The device supports horizontal/vertical keystone correction.


Go to setting → image → keystone correction to get a standard screen.

5 Bluetooth Speaker

When the device is in standby mode, turn on the Bluetooth in your mobile phone, please search available Bluetooth device.


When the indicator light is blue, then Bluetooth pairing is successful

6 Focus Adjustment

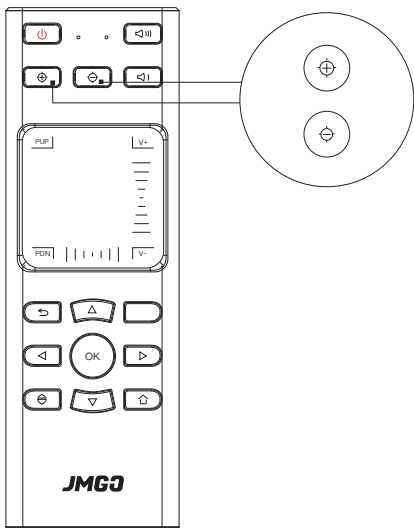


The focus can influence the clearness of the picture, if it is not clear, please press the button indicated in the picture above to adjust the focus to get it clear.

7 Remote Control

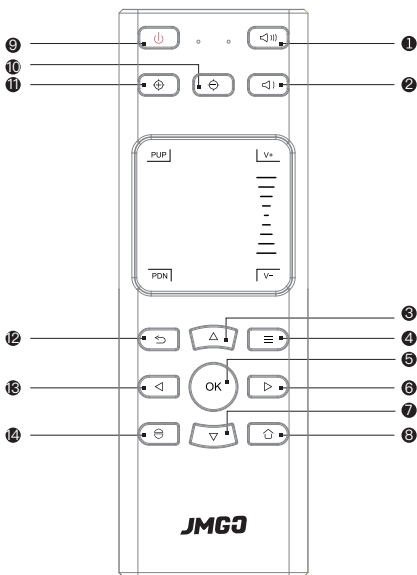

- | | | | |
|----------------|----------------|----------|----------|
| ① The volume + | ② The volume - | ③ ON | ④ Menu |
| ⑤ OK | ⑥ Right | ⑦ Down | ⑧ Home |
| ⑨ Power on/off | ⑩ Focus- | ⑪ Focus+ | ⑫ Return |
| ⑬ Left | ⑭ JMGO key | | |

8 Network Setting

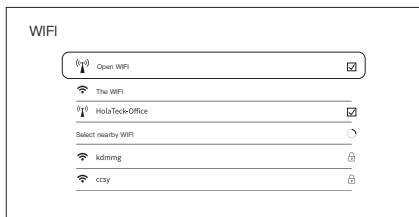

The device supports Ethernet and wireless network connection:

- When using Ethernet connection, connect network cable directly.
- Wireless connection setting, go to setting → Wi-Fi, then choose available network.

9 3D Video




When watching 3D video, press “JMGO key” to adjust 3D mode.

10 Software Upgrade

The device supports OTA and local upgrade:

- OTA Upgrade: Go to setting -> software update -> software update -> checking for update to check if the software is the latest or not, if not, please choose OTA
- Local Upgrade:
 1. Prepare a FAT32 format, USB drive.
 2. Download update_jmgo from en.jmgo.com, and copy to USB drive root directory(Please do not change file name).
 3. Connect USB drive to USB2.0 jack.
 4. Enter into JMGO UI interface--go to -> software update -> software update -> local update

Attention: Do not disconnect power cable or USB drive when upgrade is in process.

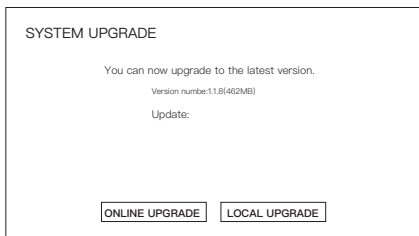

11 Source Input

SIGNAL SOURCE

Current source

 Local ✓

Optional


 HDMI1

Boot default

 Local ✓


- Go to setting → input source, then adjust local to HDMI
- Press JMGO key to adjust local to HDMI

12 System Version

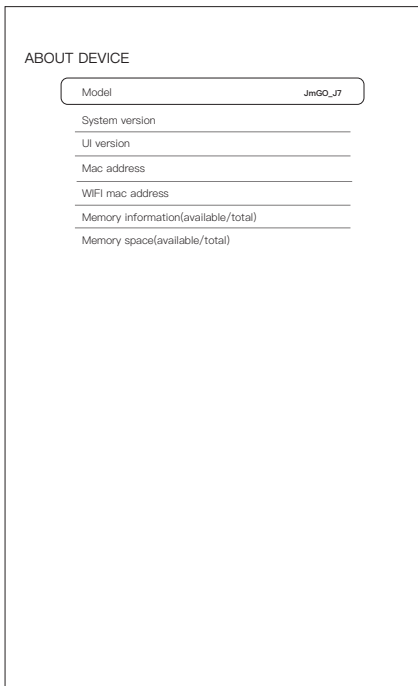

Go to setting → about → about device, then check all the system information.

13 Peripheral Connection

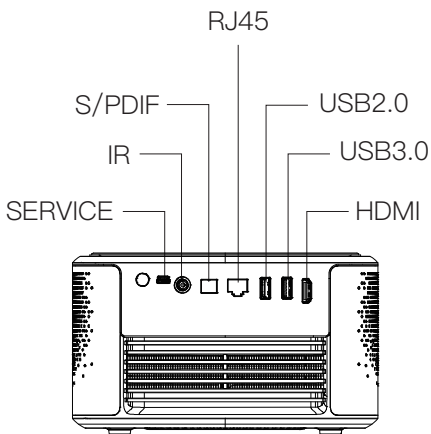



JMGO
SMART HOME THEATER

Quick guide & warranty card

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.

--This device is acting as slave and operating in the 2.4 GHz (2412 ~2462 MHz) band. Ad Hoc function is supported but not able to operate on non-US frequencies.

Operation of this device is restricted to indoor use only.

FCC ID: SMC-H70

Manufacturer's Name: SHENZHEN HOLATEK Co.,LTD

Trade Mark: JMGO

Model number:N7

Operating Temperature: 0° C to 40° C

This device was tested for typical body-worn operations. To comply with

RF exposure requirements, a minimum separation distance of 0cm must be maintained between the user's body and the handset, including the antenna. Third-party belt-clips, holsters, and similar accessories used by this device should not contain any metallic components.

Warranty Card

Customer's name:

Contact phone:

Customer's address:

SN:

Store's name:

Store's address:

Date of purchase: