

FCC Test Report

Report No. : 1812C60437412504

Applicant : SHENZHEN HOLATEK CO.,LTD.

Address : #12,Building 1,Chongwen Park, Nanshan
Zhiyuan, 3370 Liuxian Ave, Nanshan District,
Shenzhen, China

Product Name : Smart Projector

Report Date : 2026-09-30

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information	6
1.1. Client Information	6
1.2. Description of Device (EUT)	6
1.3. Auxiliary Equipment Used During Test	8
1.4. Operation channel list	8
1.5. Description of Test Mode(s)	10
1.6. Measurement Uncertainty	10
1.7. Additional Instructions	11
1.8. Test Summary	12
1.9. Description of Test Facility	13
1.10. Disclaimer	13
1.11. Test Equipment List	14
2. Conducted Emission at AC power line	16
2.1. EUT Operation	16
2.2. Test Setup	16
2.3. Test Data	17
3. Duty Cycle	21
3.1. EUT Operation	21
3.2. Test Setup	21
3.3. Test Data	21
4. Emission bandwidth and occupied bandwidth	22
4.1. EUT Operation	23
4.2. Test Setup	23
4.3. Test Data	23
5. Maximum conducted output power	24
5.1. EUT Operation	24
5.2. Test Setup	25
5.3. Test Data	25
6. Power spectral density	26
6.1. EUT Operation	26
6.2. Test Setup	27
6.3. Test Data	27
7. Frequency stability	28
7.1. EUT Operation	28
7.2. Test Setup	29
7.3. Test Data	29
8. Channel Move Time, Channel Closing Transmission Time	48
8.1. EUT Operation	49
8.2. Test Setup	49
8.3. Test Data	49
9. Band edge emissions (Conducted)	50

9.1. EUT Operation	52
9.2. Test Setup	53
9.3. Test Data	53
10. Band edge emissions (Radiated)	54
10.1. EUT Operation	56
10.2. Test Setup	57
10.3. Test Data	58
11. Undesirable emission limits (below 1GHz)	73
11.1. EUT Operation	75
11.2. Test Setup	76
11.3. Test Data	77
12. Undesirable emission limits (above 1GHz)	81
12.1. EUT Operation	83
12.2. Test Setup	84
12.3. Test Data	85
APPENDIX I -- TEST SETUP PHOTOGRAPH	89
APPENDIX II -- EXTERNAL PHOTOGRAPH	89
APPENDIX III -- INTERNAL PHOTOGRAPH	89

TEST REPORT

Applicant : SHENZHEN HOLATEK CO.,LTD.
Manufacturer : SHENZHEN HOLATEK CO.,LTD.
Product Name : Smart Projector
Model No. : J9B-9K2, J9F-9K2, J9B-9K0, J9B-9K1, J9B-9K3, J9F-9K0, J9F-9K1, J9F-9K3
Trade Mark : JMGO
Rating(s) : J9B series Input: 24V=12.5A
J9F series Input: 24V=10A
47 CFR Part 15E
KDB 789033 D02 General UNII Test Procedures New Rules v02r01*
Test Standard(s) : **KDB 905462 D03 Client Without DFS New Rules v01r02***
ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024*
KDB 662911 D01 Multiple Transmitter Output v02r01*

Note: * denotes that this test standard is not included in CNAS accredited scope.

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with above listed standard(s) requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt: 2026-07-30

Date of Test: 2026-07-30 to 2026-09-29

Prepared By:

Lene Chen

(Lene Chen)

Approved & Authorized Signer:

Jules Guo

(Jules Guo)

Revision History

Report Version	Description	Issued Date
R00	Original Issue.	2026-09-30

1. General Information

1.1. Client Information

Applicant	:	SHENZHEN HOLATEK CO.,LTD.
Address	:	#12,Building 1,Chongwen Park, Nanshan Zhiyuan, 3370 Liuxian Ave, Nanshan District, Shenzhen, China
Manufacturer	:	SHENZHEN HOLATEK CO.,LTD.
Address	:	#12,Building 1,Chongwen Park, Nanshan Zhiyuan, 3370 Liuxian Ave, Nanshan District, Shenzhen, China
Factory	:	Anhui MuKe High-tech Co., Ltd
Address	:	A15 Plant at the intersection of Hongxing Road and Lixin Road, Zhoupeng Street, Yingquan District, Fuyang, Anhui Province, China

1.2. Description of Device (EUT)

Product Name	:	Smart Projector
Model No.	:	J9B-9K2, J9F-9K2, J9B-9K0, J9B-9K1, J9B-9K3, J9F-9K0, J9F-9K1, J9F-9K3 (Note: All samples are the same except the model name, input ratings, adapter supplied with the product, laser source and J9F series reduce circuitry associated with the LED beads. So we prepare all test items for model "J9B-9K2", conducted emission and radiation spurious emission (below 1G) test for model "J9F-9K2".)
Trade Mark	:	JMGO
Test Power Supply	:	AC 120V/60Hz for Adapter
Test Sample No.	:	J9B-9K2: 1-3-1(Normal Sample), 1-3-2(Engineering Sample) J9F-9K2: 1-3-3(Normal Sample)
Adapter1 (for J9B series)	:	Manufacturer: Shenzhen JingQuanHua & Everrise Intelligent Electric Co.,Ltd. Model: NSA300EF-24012500 Input: 100-240V~ 50/60Hz 3.5A Output: 24.0V=12.5A 300.0W
Adapter2 (for J9F series)	:	Manufacturer: Shenzhen JingQuanHua & Everrise Intelligent Electric Co.,Ltd. Model: NSA240EC-2401001 Input: 100-240V~ 50/60Hz, 2.5A Output: 24.0V=10.0A
RF Specification		
Operation Frequency	:	802.11a/n(HT20)/ac(VHT20)/ax(HEW20): U-NII Band 1: 5180MHz to 5240MHz; U-NII Band 2A: 5260MHz to 5320MHz; U-NII Band 2C: 5500MHz to 5700MHz; U-NII Band 3: 5745MHz to 5825MHz; 802.11n(HT40)/ac(VHT40)/ax(HEW40): U-NII Band 1: 5190MHz to 5230MHz; U-NII Band 2A: 5270MHz to 5310MHz; U-NII Band 2C: 5510MHz to 5670MHz;

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

		U-NII Band 3: 5755MHz to 5795MHz; 802.11ac(VHT80)/ax(HEW80): U-NII Band 1: 5210MHz; U-NII Band 2A: 5290MHz; U-NII Band 2C: 5530MHz to 5610MHz; U-NII Band 3: 5775MHz
Number of Channel	:	802.11a/n(HT20)/ac(VHT20)/ax(HEW20): U-NII Band 1: 4; U-NII Band 2A: 4; U-NII Band 2C: 11; U-NII Band 3: 5; 802.11n(HT40)/ac(VHT40)/ax(HEW40): U-NII Band 1: 2; U-NII Band 2A: 2; U-NII Band 2C: 5; U-NII Band 3: 2; 802.11ac(VHT80)/ax(HEW80): U-NII Band 1: 1; U-NII Band 2A: 1; U-NII Band 2C: 2; U-NII Band 3: 1
Modulation Type	:	802.11a: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM); 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Device Type	:	Client Devices
DFS Type	:	Slave without radar detection
TPC Function	:	Without TPC
Antenna Type	:	ANT1: FPC Antenna ANT2: FPC Antenna
Antenna Gain(Peak)	:	WiFi 5.2G ANT1: 3.20dBi WiFi 5.2G ANT2: 3.30dBi WiFi 5.3G ANT1: 3.30dBi WiFi 5.3G ANT2: 3.30dBi WiFi 5.6G ANT1: 3.40dBi WiFi 5.6G ANT2: 3.40dBi WiFi 5.8G ANT1: 3.37dBi WiFi 5.8G ANT2: 3.40dBi
Directional antenna gain	:	WiFi 5.2G: 6.26dBi WiFi 5.3G: 6.31dBi WiFi 5.6G: 6.41dBi WiFi 5.8G: 6.40dBi
Remark: (1) All of the RF specification are provided by customer. (2) For a more detailed features description, please refer to the manufacturer's specifications or the		

User's Manual.

(3) Only 802.11n, 802.11ac and 802.11ax modes support MIMO.

(4) Directional gain=10 log $[(10G1/20 + 10G2/20)2/N \text{ ANT}]$ dBi

(5) The time required for the master and slave devices to fully start is 65 seconds.

1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
ROG Rapture Quad-band Gaming Router	ASUSTeK Computer Inc	GT-AXE16000 (FCC ID: MSQ-RTAX5D00, IC: 3568A-RTAX5D00)	RAIG5D2020695NL

1.4. Operation channel list

Operation Band: U-NII Band 1

Bandwidth:	20MHz	Bandwidth:	40MHz	Bandwidth:	80MHz
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230	/	/
44	5220	/	/	/	/
48	5240	/	/	/	/

Operation Band: U-NII Band 2A

Bandwidth:	20MHz	Bandwidth:	40MHz	Bandwidth:	80MHz
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310	/	/
60	5300	/	/	/	/
64	5320	/	/	/	/

Operation Band: U-NII Band 2C

Bandwidth:	20MHz	Bandwidth:	40MHz	Bandwidth:	80MHz
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	/	/
112	5560	126	5630	/	/
116	5580	134	5670	/	/
120	5600	/	/	/	/
124	5620	/	/	/	/
128	5640	/	/	/	/
132	5660	/	/	/	/
136	5680	/	/	/	/
140	5700	/	/	/	/

Operation Band: U-NII Band 3

Bandwidth:	20MHz	Bandwidth:	40MHz	Bandwidth:	80MHz
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795	/	/
157	5785	/	/	/	/
161	5805	/	/	/	/
165	5825	/	/	/	/

1.5. Description of Test Mode(s)

Test Mode(s)	Description(s)
TM1	Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11a modulation type. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report.
TM2	Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11n modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.
TM3	Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ac modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.
TM4	Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ax modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.
TM5	Keep the EUT works in normal operating mode and connect to companion device
Note: 802.11ax mode only support full resource unit size.	

1.6. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	2.8dB
Dwell Time	2%
Occupied Bandwidth	552Hz
Conducted Output Power	0.84dB
Power Spectral Density	0.84dB
Conducted Spurious Emission	1.24dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.64dB; 6G-18GHz: 4.82dB 18G-40GHz: 5.62dB
Radiated emissions (Below 30MHz)	3.14dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 4.44dB; Vertical: 4.82dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.7. Additional Instructions

Power level setup in software: SecureCRSecureFXPortable64

Operation Band: U-NII Band 1

Mode	Power level	Transmitting type
802.11a	default	data pack TX
802.11n(HT20)	default	data pack TX
802.11n(HT40)	default	data pack TX
802.11ac(VHT20)	default	data pack TX
802.11ac(VHT40)	default	data pack TX
802.11ac(VHT80)	default	data pack TX
802.11ax(HEW20)	default	data pack TX
802.11ax(HEW40)	default	data pack TX
802.11ax(HEW80)	default	data pack TX

Operation Band: U-NII Band 2A

Mode	Power level	Transmitting type
802.11a	default	data pack TX
802.11n(HT20)	default	data pack TX
802.11n(HT40)	default	data pack TX
802.11ac(VHT20)	default	data pack TX
802.11ac(VHT40)	default	data pack TX
802.11ac(VHT80)	default	data pack TX
802.11ax(HEW20)	default	data pack TX
802.11ax(HEW40)	default	data pack TX
802.11ax(HEW80)	default	data pack TX

Operation Band: U-NII Band 2C

Mode	Power level	Transmitting type
802.11a	default	data pack TX
802.11n(HT20)	default	data pack TX
802.11n(HT40)	default	data pack TX
802.11ac(VHT20)	default	data pack TX
802.11ac(VHT40)	default	data pack TX

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

802.11ac(VHT80)	default	data pack TX
802.11ax(HEW20)	default	data pack TX
802.11ax(HEW40)	default	data pack TX
802.11ax(HEW80)	default	data pack TX

Operation Band: U-NII Band 3

Mode	Power level	Transmitting type
802.11a	default	data pack TX
802.11n(HT20)	default	data pack TX
802.11n(HT40)	default	data pack TX
802.11ac(VHT20)	default	data pack TX
802.11ac(VHT40)	default	data pack TX
802.11ac(VHT80)	default	data pack TX
802.11ax(HEW20)	default	data pack TX
802.11ax(HEW40)	default	data pack TX
802.11ax(HEW80)	default	data pack TX

1.8. Test Summary

Test Items	Test Mode(s)	Status
Conducted Emission at AC power line	Mode1,2,3,4	P
Duty Cycle	Mode1,2,3,4	P
Emission bandwidth and occupied bandwidth	Mode1,2,3,4	P
Maximum conducted output power	Mode1,2,3,4	P
Power spectral density	Mode1,2,3,4	P
Frequency stability	Mode1,2,3,4	P
Channel Move Time, Channel Closing Transmission Time	Mode5	P
Band edge emissions (Conducted)	Mode1,2,3,4	P
Band edge emissions (Radiated)	Mode1,2,3,4	P
Undesirable emission limits (below 1GHz)	Mode1,2,3,4	P
Undesirable emission limits (above 1GHz)	Mode1,2,3,4	P
Note: P: Pass N: N/A, not applicable		

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.:279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.
Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

1.10. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The effect that the results relate only to the items tested.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. This report shall not be reproduced except in full without approval of the anbotek.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.
8. Unless otherwise specified, use the binary decision rule of simple acceptance ($w=0$) for conformity determination with reference to ILAC-G8:09/2019.

1.11. Test Equipment List

Conducted Emission at AC power line					
Item	Equipment	Manufacturer	Model No.	Last Cal.	Cal.Due Date
1	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	2026-06-08	2027-06-07
2	Software Name EZ-EMC	Farad Technology	ANB-03A	/	/
3	EMI Test Receiver(CE2#)	Rohde & Schwarz	ESCI3	2025-12-29	2026-12-28
4	Three Phase V-type Artificial Power Network LISN 200A	EMtrace	PWL-50-3200A	2025-12-29	2026-12-28
5	10dB Attenuator	Emtrace	10dB100W	2025-12-29	2026-12-28
6	Pulse limiter	EMtrace	PL00903-2#	2025-12-29	2026-12-28

Power spectral density
Frequency stability
Channel Move Time, Channel Closing Transmission Time
Band edge emissions (Conducted)
Duty Cycle
Emission bandwidth and occupied bandwidth
Maximum conducted output power

Item	Equipment	Manufacturer	Model No.	Last Cal.	Cal.Due Date
1	MXG RF Vector Signal Generator	Agilent	N5182A	2025-12-29	2026-12-28
2	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-HWHS80B	2026-06-08	2027-06-07
3	Signal Generator	Agilent	E4421B	2025-12-29	2026-12-28
4	DC Power Supply	IVYTECH	IV3605	2026-06-08	2027-06-07
5	RF Control Unit	Tonscend	JS0806-2	2026-06-08	2027-06-07
6	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	2025-12-29	2026-12-28
7	MXA Spectrum Analysis	KEYSIGHT	N9020A	2025-12-29	2026-12-28
8	RF Test software	Toscend	JS1120-3	/	/

Band edge emissions (Radiated)					
Undesirable emission limits (above 1GHz)					
Item	Equipment	Manufacturer	Model No.	Last Cal.	Cal.Due Date
1	EMI Test Receiver(RE2/3#)	Rohde & Schwarz	ESR26	2025-12-30	2026-12-29
2	EMI Preamplifier	SKET Electronic	LNPA-0118G-45	2025-12-30	2026-12-29
3	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	2025-10-27	2028-10-26
4	EMI Test Software EZ-EMC	SHURPLE	N/A	/	/
5	Horn Antenna	A-INFO	LB-180400-KF	2024-01-22	2027-01-21
6	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	2025-12-29	2026-12-28
7	Amplifier	Talent Microwave	TLLA18G40G-53-30	2026-01-05	2027-01-04

Undesirable emission limits (below 1GHz)					
Item	Equipment	Manufacturer	Model No.	Last Cal.	Cal.Due Date
1	EMI Test Receiver(RE2/3#)	Rohde & Schwarz	ESR26	2025-12-30	2026-12-29
2	Pre-amplifier	SONOMA	310N	2025-12-30	2026-12-29
3	Bilog Broadband Antenna	Schwarzbeck	VULB9163	2025-10-26	2028-10-25
4	EMI Preamplifier	SKET Electronic	LNPA-0118G-45	2025-12-30	2026-12-29
5	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	2025-10-27	2028-10-26
6	Loop Antenna (9K-30M)	Schwarzbeck	FMZB1519B	2026-06-24	2029-06-23
7	EMI Test Software EZ-EMC	SHURPLE	N/A	/	/
8	MXG RF Vector Signal Generator	Agilent	N5182A	2025-12-29	2026-12-28
9	DC Power Supply	LW	TPR-6420D	2025-10-10	2026-10-09
10	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-HWHS80B	2026-06-08	2027-06-07
11	Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	2025-12-29	2026-12-28
12	High-Pass Filter	CDKMV	ZHPF-BM1100-4730	2025-10-10	2026-10-09
13	High-Pass Filter	CDKMV	ZHPF-M3.5-18G-3834	2025-12-30	2026-12-29
14	MXA Spectrum Analysis	KEYSIGHT	N9020A	2026-06-08	2027-06-07

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com


2. Conducted Emission at AC power line

Test Requirement:	47 CFR Part 15.207(a)		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dBμV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.2		

2.1. EUT Operation

Operating Environment:	
Test mode:	1:802.11a mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11a modulation type. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report. 2:802.11n mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11n modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 3:802.11ac mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ac modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 4:802.11ax mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ax modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.


2.2. Test Setup

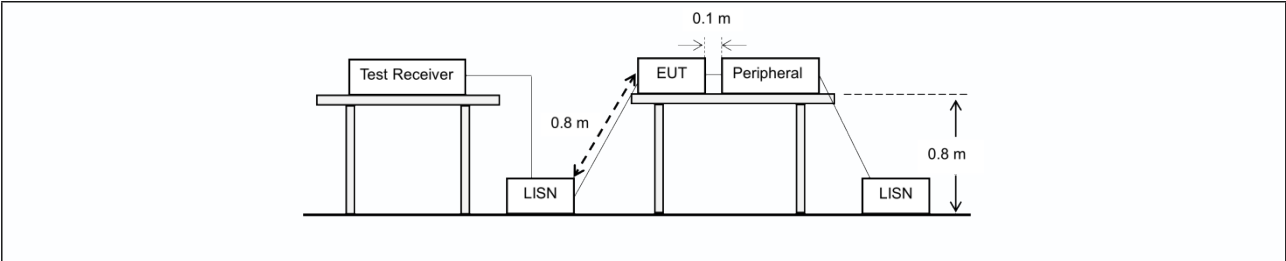


2.3. Test Data

Test Sample: **J9B-9K2**

Temperature:	23.8 °C	Humidity:	57 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

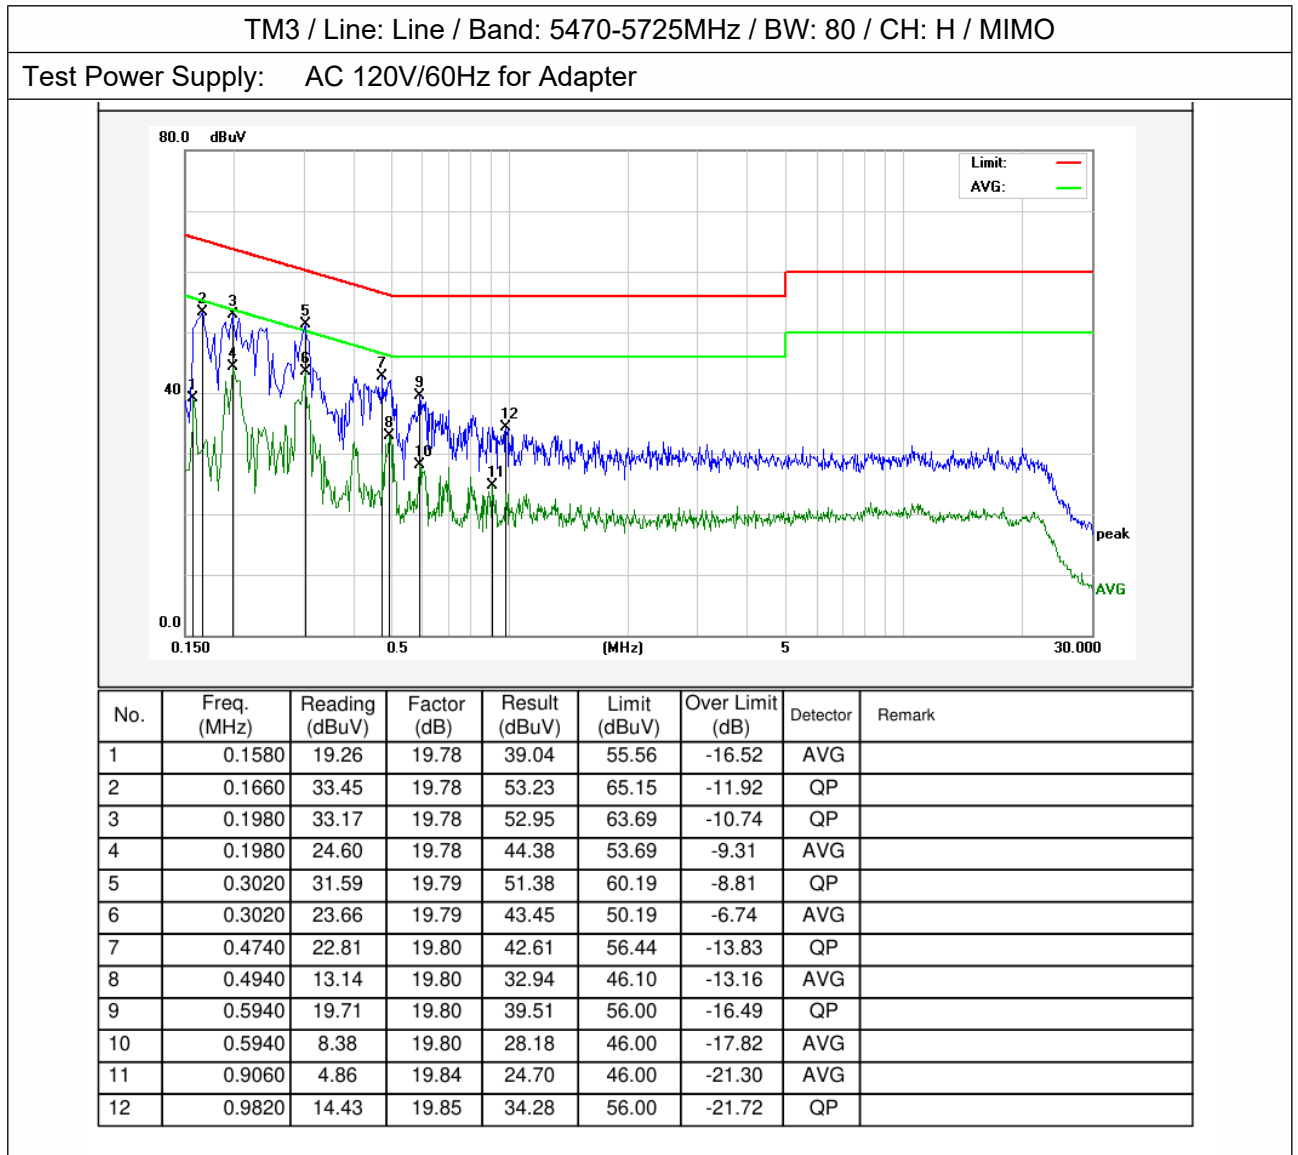

Temperature:	23.8 °C	Humidity:	57 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

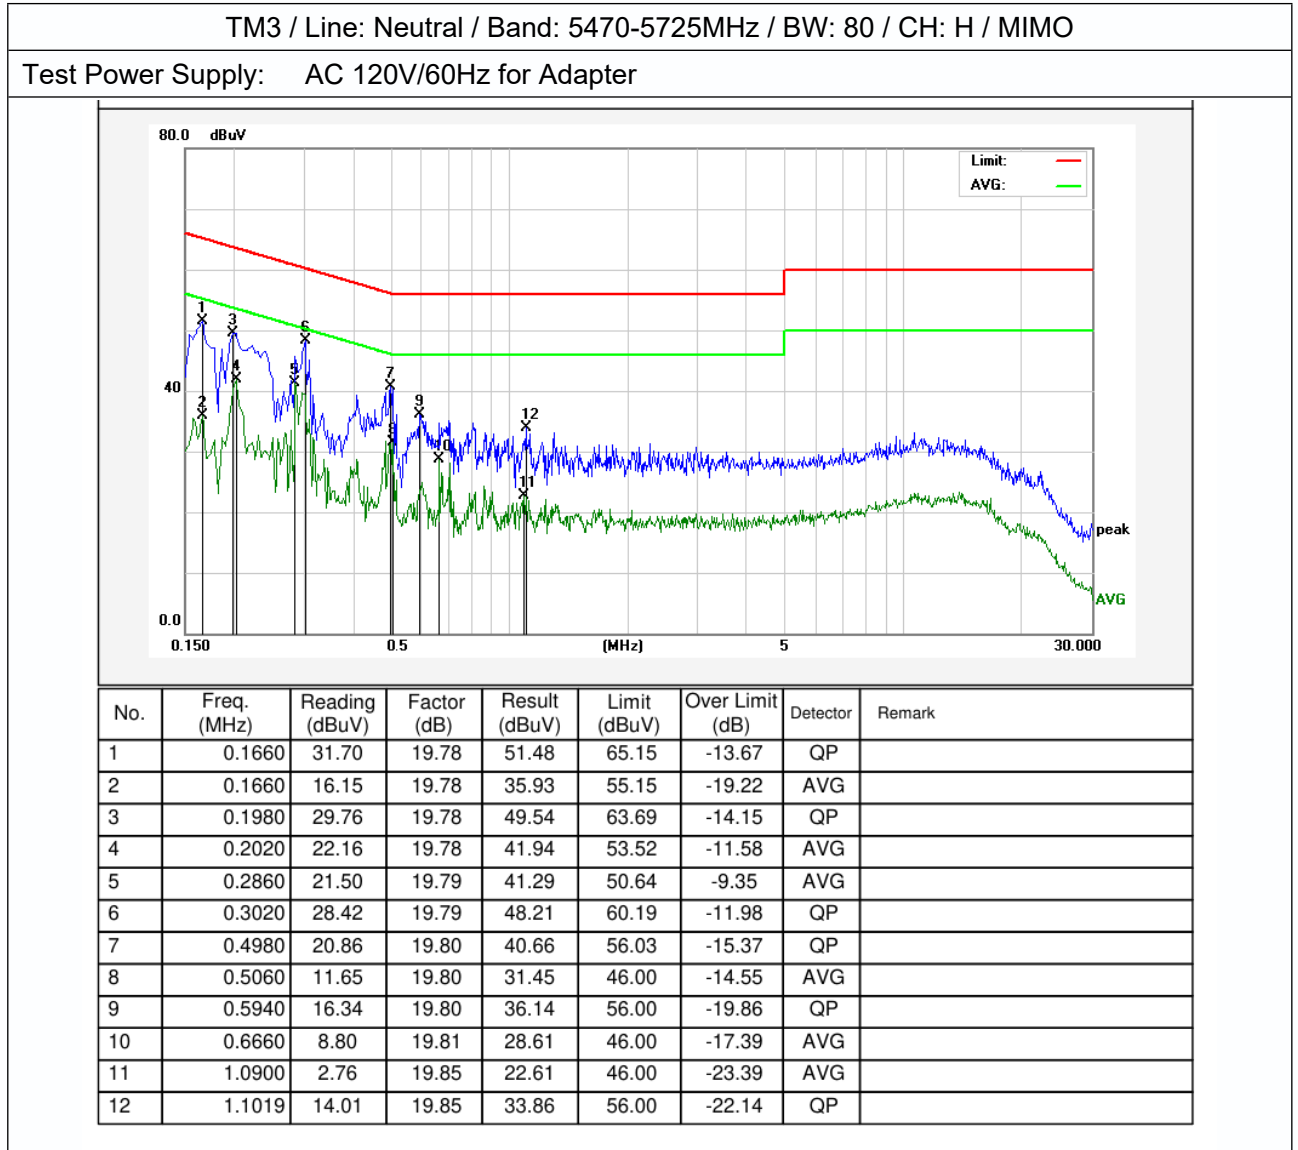

Note:


- Only record the worst data in the report.
- Result(dBμV) = Reading(dBμV) + Factor(dB);
Over Limit(dB) = Result(dBμV) - Limit(dBμV)

Test Sample: J9F-9K2

Temperature:	23.8 °C	Humidity:	57 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------


TM3 / Line: Line / Band: 5470-5725MHz / BW: 80 / CH: H / MIMO

Test Power Supply: AC 120V/60Hz for Adapter

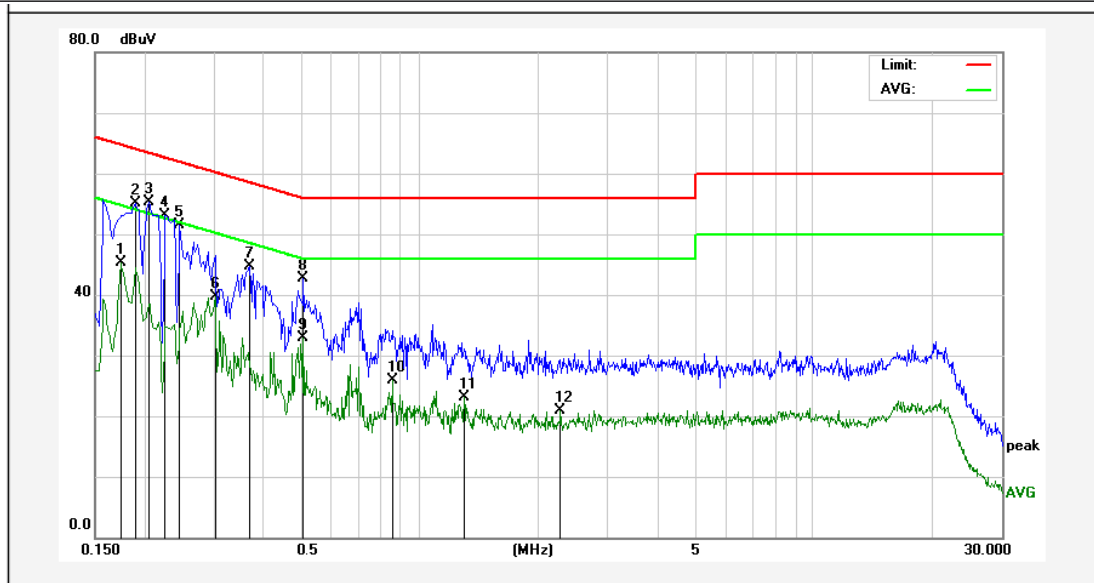

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1740	25.49	19.78	45.27	54.76	-9.49	AVG	
2	0.1900	35.28	19.78	55.06	64.03	-8.97	QP	
3	0.2060	35.55	19.78	55.33	63.36	-8.03	QP	
4	0.2260	33.40	19.79	53.19	62.59	-9.40	QP	
5	0.2460	31.80	19.79	51.59	61.89	-10.30	QP	
6	0.3020	19.97	19.79	39.76	50.19	-10.43	AVG	
7	0.3700	24.82	19.80	44.62	58.50	-13.88	QP	
8	0.5060	22.90	19.80	42.70	56.00	-13.30	QP	
9	0.5060	13.10	19.80	32.90	46.00	-13.10	AVG	
10	0.8540	6.01	19.84	25.85	46.00	-20.15	AVG	
11	1.2980	3.20	19.84	23.04	46.00	-22.96	AVG	
12	2.2820	1.11	19.84	20.95	46.00	-25.05	AVG	

Temperature:	23.8 °C	Humidity:	57 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

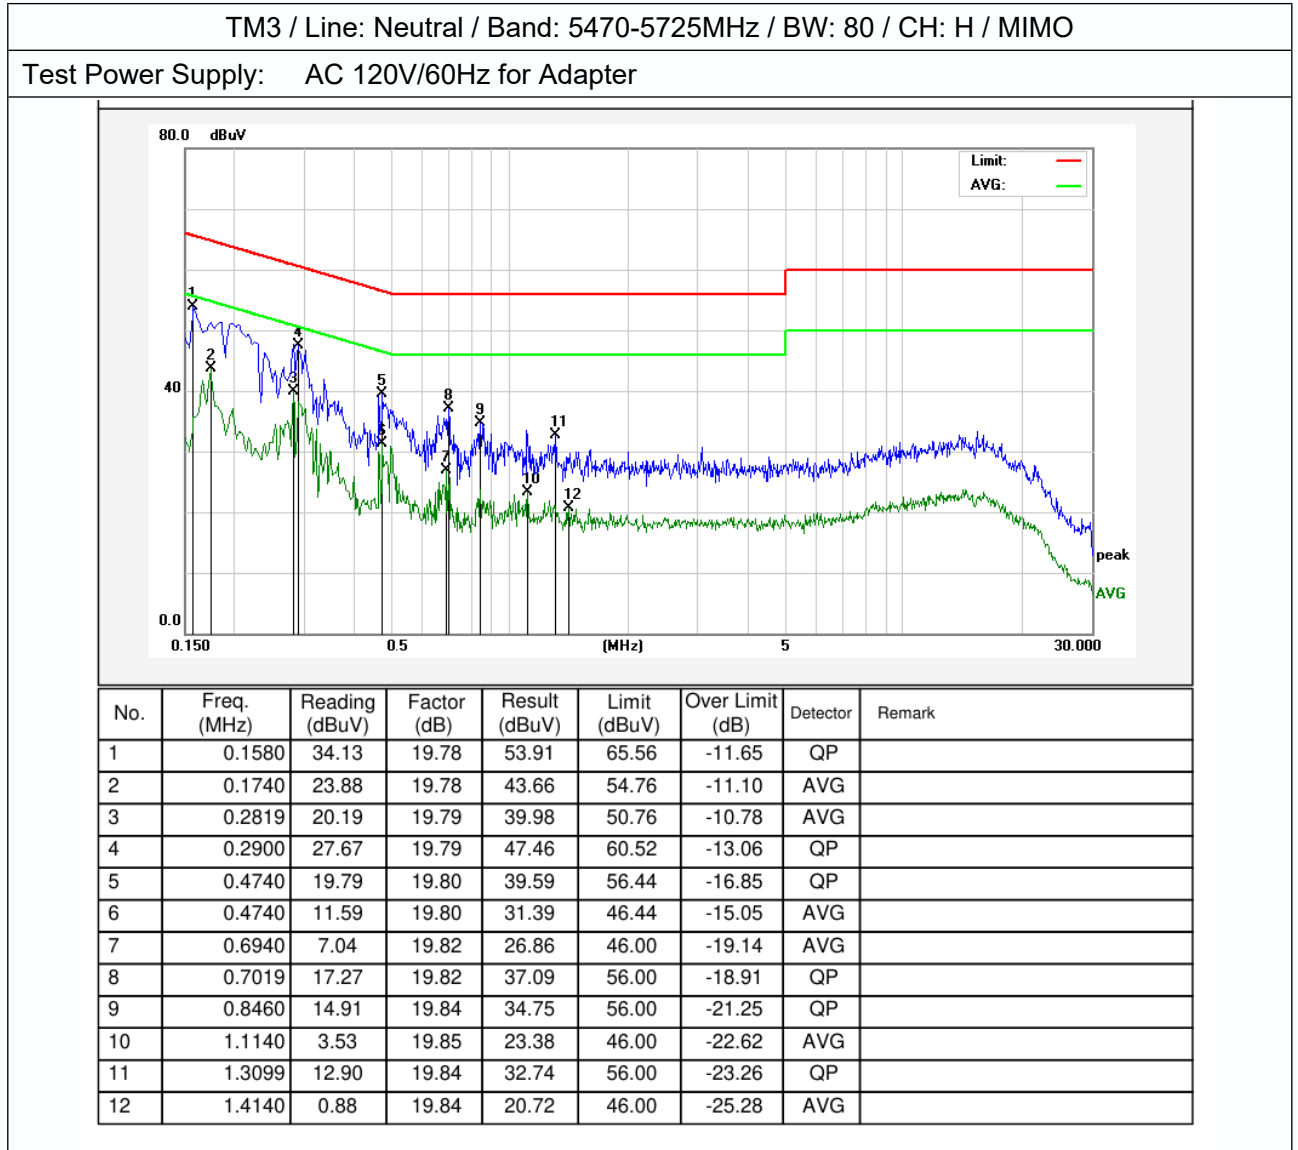

Note:

- Only record the worst data in the report.
- Result(dBμV) = Reading(dBμV) + Factor(dB);
Over Limit(dB) = Result(dBμV) - Limit(dBμV)


3. Duty Cycle

Test Requirement:	All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.
Test Limit:	No limits, only for report use.
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 12.2 (b)
Procedure:	i) Set the center frequency of the instrument to the center frequency of the transmission. ii) Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value. iii) Set VBW $\geq$ RBW. iv) Set detector = peak. v) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in item a1) of 12.2, and the number of sweep points across duration T exceeds 100.

3.1. EUT Operation

Operating Environment:	
Test mode:	1:802.11a mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11a modulation type. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report. 2:802.11n mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11n modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 3:802.11ac mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ac modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 4:802.11ax mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ax modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

3.2. Test Setup

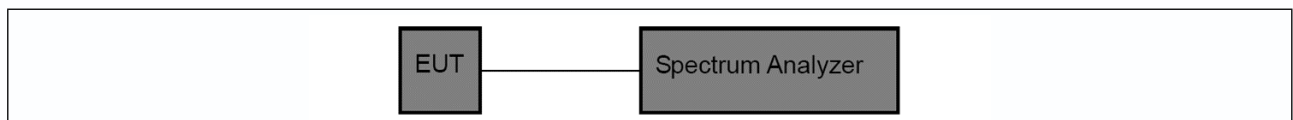

3.3. Test Data

Temperature:	23.5 °C	Humidity:	51 %	Atmospheric Pressure:	99.5 kPa
--------------	---------	-----------	------	-----------------------	----------

Please Refer to Appendix for Details.

4. Emission bandwidth and occupied bandwidth


Test Requirement:	U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use. U-NII 3, U-NII 4: 47 CFR Part 15.407(e)
Test Limit:	U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use. U-NII 3, U-NII 4: Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 6.9 & 12.5 KDB 789033 D02, Clause C.2
Procedure:	Emission bandwidth: a) Set RBW = shall be in the range of 1% to 5% of the emission bandwidth. b) Set the VBW > RBW. c) Detector = peak. d) Trace mode = max-hold. e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%. Occupied bandwidth: a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2. d) Step a) through step c) might require iteration to adjust within the specified range. e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used. f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth. g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies. h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division

	shall be clearly labeled. Tabular data may be reported in addition to the plot(s). 6 dB emission bandwidth: a) Set RBW = 100 kHz. b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW. c) Detector = Peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
--	---

4.1. EUT Operation

Operating Environment:	
Test mode:	1:802.11a mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11a modulation type. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report. 2:802.11n mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11n modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 3:802.11ac mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ac modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 4:802.11ax mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ax modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

4.2. Test Setup

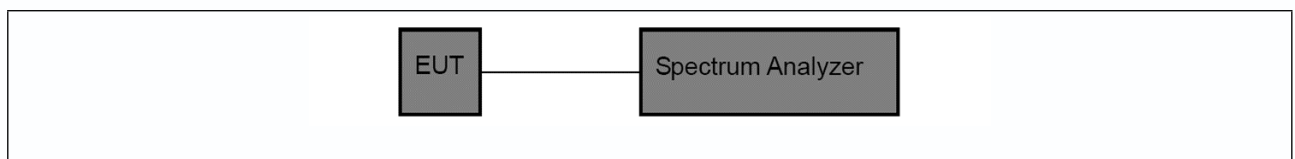

4.3. Test Data

Temperature:	23.5 °C	Humidity:	51 %	Atmospheric Pressure:	99.5 kPa
--------------	---------	-----------	------	-----------------------	----------

Please Refer to Appendix for Details.

5. Maximum conducted output power


Test Requirement:	47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(2) 47 CFR Part 15.407(a)(3)(i)
Test Limit:	For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 12.4
Procedure:	Refer to ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 12.4

5.1. EUT Operation

Operating Environment:	
Test mode:	1:802.11a mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11a modulation type. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report. 2:802.11n mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11n modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 3:802.11ac mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ac modulation type. All bandwidth and

	data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 4:802.11ax mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ax modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.
--	---

5.2. Test Setup

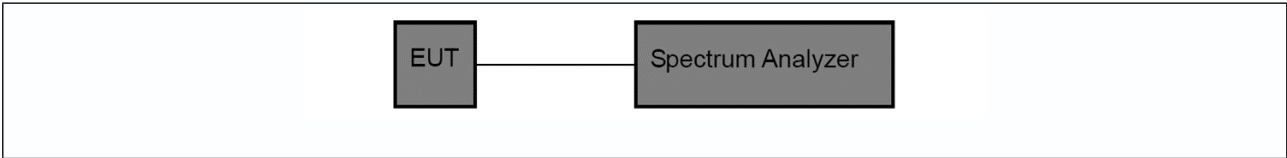

5.3. Test Data

Temperature:	23.5 °C	Humidity:	51 %	Atmospheric Pressure:	99.5 kPa
--------------	---------	-----------	------	-----------------------	----------

Please Refer to Appendix for Details.

6. Power spectral density


Test Requirement:	47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(2) 47 CFR Part 15.407(a)(3)(i)
Test Limit:	For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For the band 5.725-5.850 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 12.6
Procedure:	Refer to ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 12.6

6.1. EUT Operation

Operating Environment:	
Test mode:	1:802.11a mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11a modulation type. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report. 2:802.11n mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11n modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 3:802.11ac mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ac modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 4:802.11ax mode:Keep the EUT connect to AC power line and works in

	continuously transmitting mode with 802.11ax modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.
--	---

6.2. Test Setup

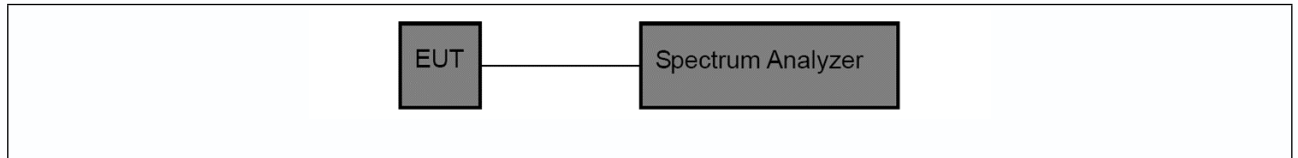

6.3. Test Data

Temperature:	23.5 °C	Humidity:	51 %	Atmospheric Pressure:	99.5 kPa
--------------	---------	-----------	------	-----------------------	----------

Please Refer to Appendix for Details.


7. Frequency stability

Test Requirement:	47 CFR Part 15.407(g)
Test Limit:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 6.8
Procedure:	Refer to ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.8

7.1. EUT Operation

Operating Environment:	
Test mode:	1:802.11a mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11a modulation type. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report. 2:802.11n mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11n modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 3:802.11ac mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ac modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 4:802.11ax mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ax modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

7.2. Test Setup

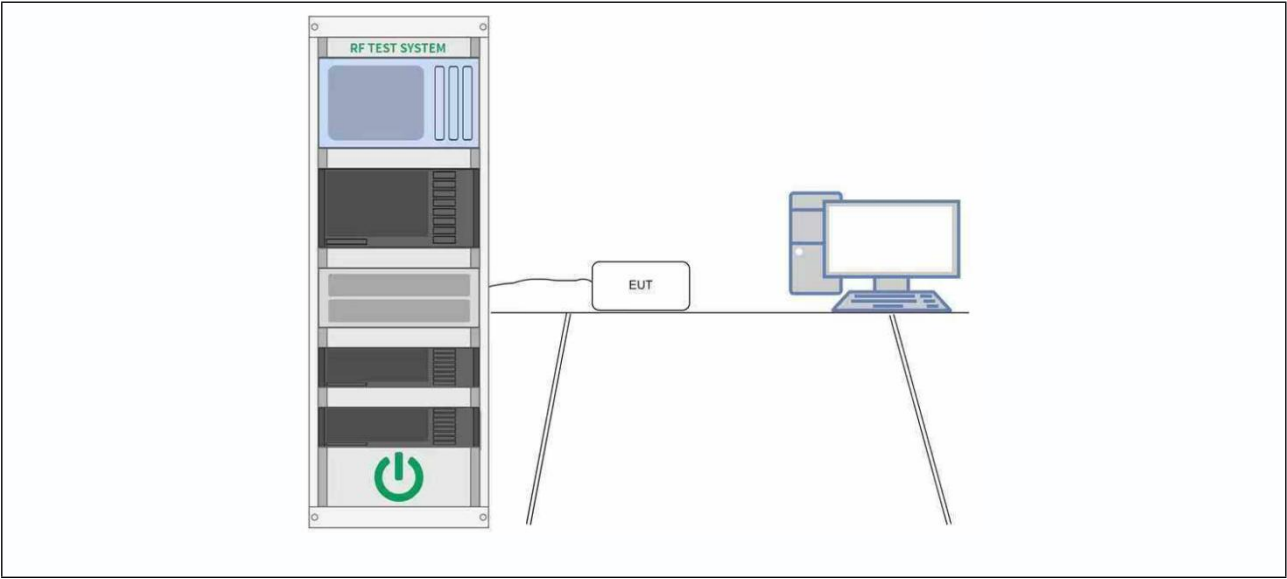

7.3. Test Data

Temperature:	23.5 °C	Humidity:	51 %	Atmospheric Pressure:	99.5 kPa
--------------	---------	-----------	------	-----------------------	----------

Test Mode: 5.2G							
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit	Verdict
802.11a	SISO	5180	20	102.00	5180.03	5172 to 5188	Pass
				120.00	5180.02	5172 to 5188	Pass
				138.00	5180.05	5172 to 5188	Pass
			-30	120.00	5180.11	5172 to 5188	Pass
			-20	120.00	5180.09	5150 to 5250	Pass
			-10	120.00	5180.05	5150 to 5250	Pass
			0	120.00	5180.05	5150 to 5250	Pass
			10	120.00	5180.05	5150 to 5250	Pass
			30	120.00	5180.09	5150 to 5250	Pass
			40	120.00	5180.12	5150 to 5250	Pass
			50	120.00	5180.01	5172 to 5188	Pass
		5220	20	102.00	5220.07	5192 to 5208	Pass
				120.00	5220.05	5192 to 5208	Pass
				138.00	5220.12	5192 to 5208	Pass
			-30	120.00	5220.01	5192 to 5208	Pass
			-20	120.00	5220.03	5150 to 5250	Pass
			-10	120.00	5220.01	5150 to 5250	Pass
			0	120.00	5220.01	5150 to 5250	Pass
			10	120.00	5220.08	5150 to 5250	Pass
			30	120.00	5220.13	5150 to 5250	Pass
			40	120.00	5220.12	5150 to 5250	Pass
			50	120.00	5220.07	5192 to 5208	Pass
		5240	20	102.00	5240.10	5232 to 5248	Pass
				120.00	5240.10	5232 to 5248	Pass
				138.00	5240.09	5232 to 5248	Pass
			-30	120.00	5240.08	5232 to 5248	Pass
			-20	120.00	5240.00	5150 to 5250	Pass
			-10	120.00	5240.07	5150 to 5250	Pass
			0	120.00	5240.08	5150 to 5250	Pass
			10	120.00	5240.11	5150 to 5250	Pass
			30	120.00	5240.06	5150 to 5250	Pass
			40	120.00	5240.02	5150 to 5250	Pass
			50	120.00	5240.06	5232 to 5248	Pass
802.11n (HT20)	MIMO	5180	20	102.00	5180.05	5172 to 5188	Pass
				120.00	5180.05	5172 to 5188	Pass
				138.00	5180.08	5172 to 5188	Pass
			-30	120.00	5180.08	5172 to 5188	Pass
			-20	120.00	5180.05	5150 to 5250	Pass
			-10	120.00	5180.08	5150 to 5250	Pass
			0	120.00	5180.04	5150 to 5250	Pass
			10	120.00	5180.06	5150 to 5250	Pass
			30	120.00	5180.06	5150 to 5250	Pass
			40	120.00	5180.00	5150 to 5250	Pass
			50	120.00	5180.05	5172 to 5188	Pass
		5220	20	102.00	5220.12	5192 to 5208	Pass
				120.00	5220.05	5192 to 5208	Pass
				138.00	5220.08	5192 to 5208	Pass
			-30	120.00	5220.09	5192 to 5208	Pass
			-20	120.00	5220.01	5150 to 5250	Pass
			-10	120.00	5220.08	5150 to 5250	Pass
			0	120.00	5220.11	5150 to 5250	Pass
			10	120.00	5220.10	5150 to 5250	Pass
			30	120.00	5220.04	5150 to 5250	Pass
			40	120.00	5220.08	5150 to 5250	Pass
			50	120.00	5220.02	5192 to 5208	Pass

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

		5240	20	102.00	5240.07	5232 to 5248	Pass
				120.00	5240.10	5232 to 5248	Pass
				138.00	5240.09	5232 to 5248	Pass
			-30	120.00	5240.03	5232 to 5248	Pass
			-20	120.00	5240.05	5150 to 5250	Pass
			-10	120.00	5240.04	5150 to 5250	Pass
			0	120.00	5240.10	5150 to 5250	Pass
			10	120.00	5240.01	5150 to 5250	Pass
			30	120.00	5240.04	5150 to 5250	Pass
			40	120.00	5240.03	5150 to 5250	Pass
			50	120.00	5240.01	5232 to 5248	Pass
802.11n (HT40)	MIMO	5190	20	102.00	5190.09	5174 to 5206	Pass
				120.00	5190.00	5174 to 5206	Pass
				138.00	5190.09	5174 to 5206	Pass
			-30	120.00	5190.12	5174 to 5206	Pass
			-20	120.00	5190.05	5150 to 5250	Pass
			-10	120.00	5190.04	5150 to 5250	Pass
			0	120.00	5190.12	5150 to 5250	Pass
			10	120.00	5190.01	5150 to 5250	Pass
			30	120.00	5190.01	5150 to 5250	Pass
			40	120.00	5190.12	5150 to 5250	Pass
			50	120.00	5190.06	5174 to 5206	Pass
		5230	20	102.00	5230.10	5214 to 5246	Pass
				120.00	5230.03	5214 to 5246	Pass
				138.00	5230.02	5214 to 5246	Pass
			-30	120.00	5230.08	5214 to 5246	Pass
			-20	120.00	5230.10	5150 to 5250	Pass
			-10	120.00	5230.06	5150 to 5250	Pass
			0	120.00	5230.03	5150 to 5250	Pass
			10	120.00	5230.08	5150 to 5250	Pass
			30	120.00	5230.11	5150 to 5250	Pass
			40	120.00	5230.05	5150 to 5250	Pass
			50	120.00	5230.10	5214 to 5246	Pass
802.11ac (VHT20)	MIMO	5180	20	102.00	5180.09	5172 to 5188	Pass
				120.00	5180.03	5172 to 5188	Pass
				138.00	5180.09	5172 to 5188	Pass
			-30	120.00	5180.13	5172 to 5188	Pass
			-20	120.00	5180.09	5150 to 5250	Pass
			-10	120.00	5180.01	5150 to 5250	Pass
			0	120.00	5180.02	5150 to 5250	Pass
			10	120.00	5180.09	5150 to 5250	Pass
			30	120.00	5180.08	5150 to 5250	Pass
			40	120.00	5180.07	5150 to 5250	Pass
			50	120.00	5180.11	5172 to 5188	Pass
		5220	20	102.00	5220.08	5192 to 5208	Pass
				120.00	5220.04	5192 to 5208	Pass
				138.00	5220.02	5192 to 5208	Pass
			-30	120.00	5220.03	5192 to 5208	Pass
			-20	120.00	5220.09	5150 to 5250	Pass
			-10	120.00	5220.08	5150 to 5250	Pass
			0	120.00	5220.07	5150 to 5250	Pass
			10	120.00	5220.07	5150 to 5250	Pass
			30	120.00	5220.12	5150 to 5250	Pass
			40	120.00	5220.13	5150 to 5250	Pass
			50	120.00	5220.08	5192 to 5208	Pass
		5240	20	102.00	5240.03	5232 to 5248	Pass
				120.00	5240.10	5232 to 5248	Pass
				138.00	5240.07	5232 to 5248	Pass

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

			-30	120.00	5240.08	5232 to 5248	Pass
			-20	120.00	5240.01	5150 to 5250	Pass
			-10	120.00	5240.10	5150 to 5250	Pass
			0	120.00	5240.09	5150 to 5250	Pass
			10	120.00	5240.02	5150 to 5250	Pass
			30	120.00	5240.11	5150 to 5250	Pass
			40	120.00	5240.05	5150 to 5250	Pass
			50	120.00	5240.08	5232 to 5248	Pass
802.11ac (VHT40)	MIMO	5190	20	102.00	5190.02	5174 to 5206	Pass
				120.00	5190.11	5174 to 5206	Pass
				138.00	5190.13	5174 to 5206	Pass
			-30	120.00	5190.01	5174 to 5206	Pass
			-20	120.00	5190.04	5150 to 5250	Pass
			-10	120.00	5190.01	5150 to 5250	Pass
			0	120.00	5190.07	5150 to 5250	Pass
			10	120.00	5190.09	5150 to 5250	Pass
			30	120.00	5190.09	5150 to 5250	Pass
			40	120.00	5190.07	5150 to 5250	Pass
			50	120.00	5190.02	5174 to 5206	Pass
		5230	20	102.00	5230.12	5214 to 5246	Pass
				120.00	5230.09	5214 to 5246	Pass
				138.00	5230.11	5214 to 5246	Pass
			-30	120.00	5230.11	5214 to 5246	Pass
			-20	120.00	5230.12	5150 to 5250	Pass
			-10	120.00	5230.10	5150 to 5250	Pass
			0	120.00	5230.09	5150 to 5250	Pass
			10	120.00	5230.08	5150 to 5250	Pass
			30	120.00	5230.10	5150 to 5250	Pass
			40	120.00	5230.08	5150 to 5250	Pass
			50	120.00	5230.07	5214 to 5246	Pass
802.11ac (VHT80)	MIMO	5210	20	102.00	5210.00	5178 to 5242	Pass
				120.00	5210.01	5178 to 5242	Pass
				138.00	5210.04	5178 to 5242	Pass
			-30	120.00	5210.02	5178 to 5242	Pass
			-20	120.00	5210.08	5150 to 5250	Pass
			-10	120.00	5210.07	5150 to 5250	Pass
			0	120.00	5210.01	5150 to 5250	Pass
			10	120.00	5210.00	5150 to 5250	Pass
			30	120.00	5210.12	5150 to 5250	Pass
			40	120.00	5210.07	5150 to 5250	Pass
			50	120.00	5210.08	5178 to 5242	Pass
802.11ax (HEW20)	MIMO	5180	20	102.00	5180.01	5172 to 5188	Pass
				120.00	5180.02	5172 to 5188	Pass
				138.00	5180.00	5172 to 5188	Pass
			-30	120.00	5180.03	5172 to 5188	Pass
			-20	120.00	5180.13	5150 to 5250	Pass
			-10	120.00	5180.12	5150 to 5250	Pass
			0	120.00	5180.01	5150 to 5250	Pass
			10	120.00	5180.03	5150 to 5250	Pass
			30	120.00	5180.04	5150 to 5250	Pass
		5220	20	102.00	5220.10	5192 to 5208	Pass
				120.00	5220.01	5192 to 5208	Pass
				138.00	5220.11	5192 to 5208	Pass
			-30	120.00	5220.11	5192 to 5208	Pass
			-20	120.00	5220.01	5150 to 5250	Pass
			-10	120.00	5220.13	5150 to 5250	Pass

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

			0	120.00	5220.03	5150 to 5250	Pass
			10	120.00	5220.06	5150 to 5250	Pass
			30	120.00	5220.02	5150 to 5250	Pass
			40	120.00	5220.01	5150 to 5250	Pass
			50	120.00	5220.11	5192 to 5208	Pass
		5240	20	102.00	5240.03	5232 to 5248	Pass
				120.00	5240.01	5232 to 5248	Pass
				138.00	5240.08	5232 to 5248	Pass
			-30	120.00	5240.09	5232 to 5248	Pass
			-20	120.00	5240.09	5150 to 5250	Pass
			-10	120.00	5240.08	5150 to 5250	Pass
			0	120.00	5240.07	5150 to 5250	Pass
			10	120.00	5240.09	5150 to 5250	Pass
			30	120.00	5240.03	5150 to 5250	Pass
			40	120.00	5240.12	5150 to 5250	Pass
			50	120.00	5240.11	5232 to 5248	Pass
802.11ax (HEW40)	MIMO	5190	20	102.00	5190.08	5174 to 5206	Pass
				120.00	5190.05	5174 to 5206	Pass
				138.00	5190.11	5174 to 5206	Pass
			-30	120.00	5190.04	5174 to 5206	Pass
			-20	120.00	5190.05	5150 to 5250	Pass
			-10	120.00	5190.07	5150 to 5250	Pass
			0	120.00	5190.06	5150 to 5250	Pass
			10	120.00	5190.04	5150 to 5250	Pass
			30	120.00	5190.08	5150 to 5250	Pass
			40	120.00	5190.13	5150 to 5250	Pass
			50	120.00	5190.09	5174 to 5206	Pass
		5230	20	102.00	5230.04	5214 to 5246	Pass
				120.00	5230.12	5214 to 5246	Pass
				138.00	5230.03	5214 to 5246	Pass
			-30	120.00	5230.08	5214 to 5246	Pass
			-20	120.00	5230.00	5150 to 5250	Pass
			-10	120.00	5230.02	5150 to 5250	Pass
			0	120.00	5230.11	5150 to 5250	Pass
			10	120.00	5230.02	5150 to 5250	Pass
			30	120.00	5230.02	5150 to 5250	Pass
			40	120.00	5230.07	5150 to 5250	Pass
			50	120.00	5230.12	5214 to 5246	Pass
802.11ax (HEW80)	MIMO	5210	20	102.00	5210.06	5178 to 5242	Pass
				120.00	5210.03	5178 to 5242	Pass
				138.00	5210.04	5178 to 5242	Pass
			-30	120.00	5210.05	5178 to 5242	Pass
			-20	120.00	5210.03	5150 to 5250	Pass
			-10	120.00	5210.09	5150 to 5250	Pass
			0	120.00	5210.06	5150 to 5250	Pass
			10	120.00	5210.08	5150 to 5250	Pass
			30	120.00	5210.08	5150 to 5250	Pass
			40	120.00	5210.10	5150 to 5250	Pass
			50	120.00	5210.03	5178 to 5242	Pass

Test Mode: 5.3G							
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit	Verdict
802.11a	SISO	5260	20	102.00	5260.01	5252 to 5268	Pass
				120.00	5260.02	5252 to 5268	Pass
				138.00	5260.00	5252 to 5268	Pass
			-30	102.00	5260.02	5252 to 5268	Pass

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

			-20	120.00	5260.05	5250 to 5350	Pass
			-10	120.00	5260.04	5250 to 5350	Pass
			0	120.00	5260.05	5250 to 5350	Pass
			10	120.00	5260.03	5250 to 5350	Pass
			30	120.00	5260.07	5250 to 5350	Pass
			40	120.00	5260.04	5250 to 5350	Pass
			50	120.00	5260.11	5252 to 5268	Pass
		5300	20	102.00	5300.12	5292 to 5308	Pass
				120.00	5300.00	5292 to 5308	Pass
				138.00	5300.01	5292 to 5308	Pass
			-30	102.00	5300.03	5292 to 5308	Pass
			-20	120.00	5300.07	5250 to 5350	Pass
			-10	120.00	5300.05	5250 to 5350	Pass
			0	120.00	5300.04	5250 to 5350	Pass
			10	120.00	5300.03	5250 to 5350	Pass
			30	120.00	5300.10	5250 to 5350	Pass
			40	120.00	5300.08	5250 to 5350	Pass
			50	120.00	5300.07	5292 to 5308	Pass
		5320	20	102.00	5320.01	5312 to 5328	Pass
				120.00	5320.04	5312 to 5328	Pass
				138.00	5320.05	5312 to 5328	Pass
			-30	102.00	5320.07	5312 to 5328	Pass
			-20	120.00	5320.00	5250 to 5350	Pass
			-10	120.00	5320.07	5250 to 5350	Pass
			0	120.00	5320.00	5250 to 5350	Pass
			10	120.00	5320.07	5250 to 5350	Pass
			30	120.00	5320.01	5250 to 5350	Pass
			40	120.00	5320.13	5250 to 5350	Pass
			50	120.00	5320.10	5312 to 5328	Pass
		5260	20	102.00	5260.04	5252 to 5268	Pass
				120.00	5260.12	5252 to 5268	Pass
				138.00	5260.09	5252 to 5268	Pass
			-30	102.00	5260.05	5252 to 5268	Pass
			-20	120.00	5260.11	5250 to 5350	Pass
			-10	120.00	5260.01	5250 to 5350	Pass
			0	120.00	5260.03	5250 to 5350	Pass
			10	120.00	5260.13	5250 to 5350	Pass
			30	120.00	5260.00	5250 to 5350	Pass
			40	120.00	5260.05	5250 to 5350	Pass
			50	120.00	5260.06	5252 to 5268	Pass
		5300	20	102.00	5300.05	5292 to 5308	Pass
				120.00	5300.12	5292 to 5308	Pass
				138.00	5300.06	5292 to 5308	Pass
			-30	102.00	5300.05	5292 to 5308	Pass
			-20	120.00	5300.13	5250 to 5350	Pass
			-10	120.00	5300.08	5250 to 5350	Pass
			0	120.00	5300.01	5250 to 5350	Pass
			10	120.00	5300.05	5250 to 5350	Pass
			30	120.00	5300.03	5250 to 5350	Pass
			40	120.00	5300.04	5250 to 5350	Pass
			50	120.00	5300.04	5292 to 5308	Pass
		5320	20	102.00	5320.07	5312 to 5328	Pass
				120.00	5320.08	5312 to 5328	Pass
				138.00	5320.03	5312 to 5328	Pass
			-30	102.00	5320.04	5312 to 5328	Pass
			-20	120.00	5320.06	5250 to 5350	Pass
			-10	120.00	5320.02	5250 to 5350	Pass
			0	120.00	5320.05	5250 to 5350	Pass

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

802.11n (HT40)	MIMO		10	120.00	5320.10	5250 to 5350	Pass
			30	120.00	5320.11	5250 to 5350	Pass
			40	120.00	5320.07	5250 to 5350	Pass
			50	120.00	5320.07	5312 to 5328	Pass
		5270	20	102.00	5270.00	5254 to 5286	Pass
				120.00	5270.11	5254 to 5286	Pass
				138.00	5270.04	5254 to 5286	Pass
			-30	102.00	5270.09	5254 to 5286	Pass
			-20	120.00	5270.02	5250 to 5350	Pass
			-10	120.00	5270.06	5250 to 5350	Pass
			0	120.00	5270.00	5250 to 5350	Pass
			10	120.00	5270.09	5250 to 5350	Pass
			30	120.00	5270.00	5250 to 5350	Pass
			40	120.00	5270.03	5250 to 5350	Pass
			50	120.00	5270.05	5254 to 5286	Pass
		5310	20	102.00	5310.11	5294 to 5326	Pass
				120.00	5310.11	5294 to 5326	Pass
				138.00	5310.01	5294 to 5326	Pass
			-30	102.00	5310.00	5294 to 5326	Pass
			-20	120.00	5310.04	5250 to 5350	Pass
			-10	120.00	5310.13	5250 to 5350	Pass
			0	120.00	5310.07	5250 to 5350	Pass
			10	120.00	5310.09	5250 to 5350	Pass
			30	120.00	5310.09	5250 to 5350	Pass
			40	120.00	5310.11	5250 to 5350	Pass
			50	120.00	5310.05	5294 to 5326	Pass
802.11ac (VHT20)	MIMO	5260	20	102.00	5260.06	5252 to 5268	Pass
				120.00	5260.12	5252 to 5268	Pass
				138.00	5260.00	5252 to 5268	Pass
			-30	102.00	5260.10	5252 to 5268	Pass
			-20	120.00	5260.07	5250 to 5350	Pass
			-10	120.00	5260.05	5250 to 5350	Pass
			0	120.00	5260.03	5250 to 5350	Pass
			10	120.00	5260.12	5250 to 5350	Pass
			30	120.00	5260.13	5250 to 5350	Pass
			40	120.00	5260.12	5250 to 5350	Pass
			50	120.00	5260.07	5252 to 5268	Pass
		5300	20	102.00	5300.10	5292 to 5308	Pass
				120.00	5300.02	5292 to 5308	Pass
				138.00	5300.05	5292 to 5308	Pass
			-30	102.00	5300.10	5292 to 5308	Pass
			-20	120.00	5300.03	5250 to 5350	Pass
			-10	120.00	5300.08	5250 to 5350	Pass
			0	120.00	5300.08	5250 to 5350	Pass
			10	120.00	5300.08	5250 to 5350	Pass
			30	120.00	5300.06	5250 to 5350	Pass
			40	120.00	5300.00	5250 to 5350	Pass
			50	120.00	5300.03	5292 to 5308	Pass
		5320	20	102.00	5300.13	5312 to 5328	Pass
				120.00	5320.07	5312 to 5328	Pass
				138.00	5320.03	5312 to 5328	Pass
			-30	102.00	5320.00	5312 to 5328	Pass
			-20	120.00	5320.00	5250 to 5350	Pass
			-10	120.00	5320.10	5250 to 5350	Pass
			0	120.00	5320.01	5250 to 5350	Pass
			10	120.00	5320.11	5250 to 5350	Pass
			30	120.00	5320.10	5250 to 5350	Pass
			40	120.00	5320.12	5250 to 5350	Pass

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

802.11ac (VHT40)	MIMO	5270	50	120.00	5320.03	5312 to 5328	Pass
			20	102.00	5270.01	5254 to 5286	Pass
				120.00	5270.06	5254 to 5286	Pass
				138.00	5270.08	5254 to 5286	Pass
			-30	102.00	5270.08	5254 to 5286	Pass
			-20	120.00	5270.12	5250 to 5350	Pass
			-10	120.00	5270.01	5250 to 5350	Pass
			0	120.00	5270.09	5250 to 5350	Pass
			10	120.00	5270.06	5250 to 5350	Pass
			30	120.00	5270.06	5250 to 5350	Pass
			40	120.00	5270.09	5250 to 5350	Pass
			50	120.00	5270.07	5254 to 5286	Pass
		5310	20	102.00	5310.03	5294 to 5326	Pass
				120.00	5310.05	5294 to 5326	Pass
				138.00	5310.04	5294 to 5326	Pass
			-30	102.00	5310.09	5294 to 5326	Pass
			-20	120.00	5310.07	5250 to 5350	Pass
			-10	120.00	5310.07	5250 to 5350	Pass
			0	120.00	5310.01	5250 to 5350	Pass
			10	120.00	5310.03	5250 to 5350	Pass
			30	120.00	5310.09	5250 to 5350	Pass
			40	120.00	5310.00	5250 to 5350	Pass
			50	120.00	5310.03	5294 to 5326	Pass
802.11ac (VHT80)	MIMO	5290	20	102.00	5290.01	5258 to 5322	Pass
				120.00	5290.02	5258 to 5322	Pass
				138.00	5290.09	5258 to 5322	Pass
			-30	102.00	5290.07	5258 to 5322	Pass
			-20	120.00	5290.11	5250 to 5350	Pass
			-10	120.00	5290.01	5250 to 5350	Pass
			0	120.00	5290.07	5250 to 5350	Pass
			10	120.00	5290.05	5250 to 5350	Pass
			30	120.00	5290.00	5250 to 5350	Pass
			40	120.00	5290.12	5250 to 5350	Pass
			50	120.00	5290.04	5258 to 5322	Pass
802.11ax (HEW20)	MIMO	5260	20	102.00	5260.04	5252 to 5268	Pass
				120.00	5260.03	5252 to 5268	Pass
				138.00	5260.06	5252 to 5268	Pass
			-30	102.00	5260.10	5252 to 5268	Pass
			-20	120.00	5260.07	5250 to 5350	Pass
			-10	120.00	5260.12	5250 to 5350	Pass
			0	120.00	5260.03	5250 to 5350	Pass
			10	120.00	5260.07	5250 to 5350	Pass
			30	120.00	5260.09	5250 to 5350	Pass
			40	120.00	5260.03	5250 to 5350	Pass
			50	120.00	5260.06	5252 to 5268	Pass
		5300	20	102.00	5300.12	5292 to 5308	Pass
				120.00	5300.02	5292 to 5308	Pass
				138.00	5300.04	5292 to 5308	Pass
			-30	102.00	5300.08	5292 to 5308	Pass
			-20	120.00	5300.09	5250 to 5350	Pass
			-10	120.00	5300.10	5250 to 5350	Pass
			0	120.00	5300.08	5250 to 5350	Pass
			10	120.00	5300.07	5250 to 5350	Pass
			30	120.00	5300.10	5250 to 5350	Pass
			40	120.00	5300.02	5250 to 5350	Pass
			50	120.00	5300.12	5292 to 5308	Pass
		5320	20	102.00	5300.12	5312 to 5328	Pass
				120.00	5320.01	5312 to 5328	Pass

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

				138.00	5320.12	5312 to 5328	Pass
			-30	102.00	5320.10	5312 to 5328	Pass
			-20	120.00	5320.11	5250 to 5350	Pass
			-10	120.00	5320.09	5250 to 5350	Pass
			0	120.00	5320.07	5250 to 5350	Pass
			10	120.00	5320.13	5250 to 5350	Pass
			30	120.00	5320.06	5250 to 5350	Pass
			40	120.00	5320.12	5250 to 5350	Pass
			50	120.00	5320.03	5312 to 5328	Pass
802.11ax (HEW40)	MIMO	5270	20	102.00	5270.07	5254 to 5286	Pass
				120.00	5270.07	5254 to 5286	Pass
				138.00	5270.04	5254 to 5286	Pass
			-30	102.00	5270.09	5254 to 5286	Pass
			-20	120.00	5270.03	5250 to 5350	Pass
			-10	120.00	5270.12	5250 to 5350	Pass
			0	120.00	5270.10	5250 to 5350	Pass
			10	120.00	5270.01	5250 to 5350	Pass
			30	120.00	5270.03	5250 to 5350	Pass
		40	120.00	5270.05	5250 to 5350	Pass	
		50	120.00	5270.08	5254 to 5286	Pass	
		5310	20	102.00	5310.04	5294 to 5326	Pass
				120.00	5310.06	5294 to 5326	Pass
				138.00	5310.11	5294 to 5326	Pass
			-30	102.00	5310.04	5294 to 5326	Pass
			-20	120.00	5310.00	5250 to 5350	Pass
			-10	120.00	5310.09	5250 to 5350	Pass
			0	120.00	5310.09	5250 to 5350	Pass
			10	120.00	5310.10	5250 to 5350	Pass
			30	120.00	5310.06	5250 to 5350	Pass
			40	120.00	5310.01	5250 to 5350	Pass
50	120.00		5310.11	5294 to 5326	Pass		
802.11ax (HEW80)	MIMO		5290	20	102.00	5290.10	5258 to 5322
		120.00			5290.00	5258 to 5322	Pass
		138.00			5290.02	5258 to 5322	Pass
		-30		102.00	5290.09	5258 to 5322	Pass
		-20		120.00	5290.08	5250 to 5350	Pass
		-10		120.00	5290.00	5250 to 5350	Pass
		0		120.00	5290.06	5250 to 5350	Pass
		10		120.00	5290.13	5250 to 5350	Pass
		30		120.00	5290.00	5250 to 5350	Pass
		40		120.00	5290.12	5250 to 5350	Pass
		50		120.00	5290.01	5258 to 5322	Pass

Test Mode: 5.6G							
Mode	Tx Type	Frequency (MHz)	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit	Verdict
802.11a	SISO	5500	20	102.00	5500.11	5492 to 5508	Pass
				120.00	5500.11	5492 to 5508	Pass
				138.00	5500.06	5492 to 5508	Pass
			-30	102.00	5500.05	5492 to 5508	Pass
			-20	120.00	5500.01	5470 to 5725	Pass
			-10	120.00	5500.12	5470 to 5725	Pass
			0	120.00	5500.08	5470 to 5725	Pass
			10	120.00	5500.03	5470 to 5725	Pass

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

			30	120.00	5500.01	5470 to 5725	Pass
			40	120.00	5500.07	5470 to 5725	Pass
			50	120.00	5500.01	5492 to 5508	Pass
		5580	20	102.00	5580.11	5572 to 5588	Pass
				120.00	5580.03	5572 to 5588	Pass
				138.00	5580.13	5572 to 5588	Pass
			-30	102.00	5580.04	5572 to 5588	Pass
			-20	120.00	5580.01	5470 to 5725	Pass
			-10	120.00	5580.12	5470 to 5725	Pass
			0	120.00	5580.03	5470 to 5725	Pass
			10	120.00	5580.06	5470 to 5725	Pass
			30	120.00	5580.02	5470 to 5725	Pass
			40	120.00	5580.02	5470 to 5725	Pass
			50	120.00	5580.12	5572 to 5588	Pass
		5700	20	102.00	5700.08	5692 to 5708	Pass
				120.00	5700.00	5692 to 5708	Pass
				138.00	5700.13	5692 to 5708	Pass
			-30	102.00	5700.12	5692 to 5708	Pass
			-20	120.00	5700.10	5470 to 5725	Pass
			-10	120.00	5700.09	5470 to 5725	Pass
			0	120.00	5700.09	5470 to 5725	Pass
			10	120.00	5700.07	5470 to 5725	Pass
			30	120.00	5700.12	5470 to 5725	Pass
			40	120.00	5700.02	5470 to 5725	Pass
50	120.00	5700.02	5692 to 5708	Pass			

802.11n (HT20)	MIMO	5500	20	102.00	5500.09	5492 to 5508	Pass
				120.00	5500.12	5492 to 5508	Pass
				138.00	5500.07	5492 to 5508	Pass
			-30	102.00	5500.07	5492 to 5508	Pass
			-20	120.00	5500.10	5470 to 5725	Pass
			-10	120.00	5500.05	5470 to 5725	Pass
			0	120.00	5500.10	5470 to 5725	Pass
			10	120.00	5500.02	5470 to 5725	Pass
			30	120.00	5500.10	5470 to 5725	Pass
			40	120.00	5500.09	5470 to 5725	Pass
			50	120.00	5500.08	5492 to 5508	Pass
		5580	20	102.00	5580.00	5572 to 5588	Pass
				120.00	5580.05	5572 to 5588	Pass
				138.00	5580.00	5572 to 5588	Pass
			-30	102.00	5580.09	5572 to 5588	Pass
			-20	120.00	5580.01	5470 to 5725	Pass
			-10	120.00	5580.01	5470 to 5725	Pass

802.11n (HT40)	MIMO	5700	0	120.00	5580.05	5470 to 5725	Pass
			10	120.00	5580.13	5470 to 5725	Pass
			30	120.00	5580.03	5470 to 5725	Pass
			40	120.00	5580.11	5470 to 5725	Pass
			50	120.00	5580.04	5572 to 5588	Pass
			20	102.00	5700.05	5692 to 5708	Pass
				120.00	5700.05	5692 to 5708	Pass
				138.00	5700.05	5692 to 5708	Pass
			-30	102.00	5700.06	5692 to 5708	Pass
			-20	120.00	5700.06	5470 to 5725	Pass
			-10	120.00	5700.01	5470 to 5725	Pass
			0	120.00	5700.07	5470 to 5725	Pass
			10	120.00	5700.10	5470 to 5725	Pass
			30	120.00	5700.13	5470 to 5725	Pass
			40	120.00	5700.02	5470 to 5725	Pass
			50	120.00	5700.09	5692 to 5708	Pass
		5510	20	102.00	5510.00	5494 to 5526	Pass
				120.00	5510.01	5494 to 5526	Pass
				138.00	5510.02	5494 to 5526	Pass
			-30	102.00	5510.11	5494 to 5526	Pass
			-20	120.00	5510.07	5470 to 5725	Pass
			-10	120.00	5510.12	5470 to 5725	Pass
			0	120.00	5510.13	5470 to 5725	Pass
			10	120.00	5510.08	5470 to 5725	Pass
			30	120.00	5510.05	5470 to 5725	Pass
			40	120.00	5510.06	5470 to 5725	Pass
			50	120.00	5510.06	5494 to 5526	Pass
		5550	20	102.00	5550.08	5534 to 5566	Pass
				120.00	5550.12	5534 to 5566	Pass
				138.00	5550.09	5534 to 5566	Pass
			-30	102.00	5550.11	5534 to 5566	Pass
			-20	120.00	5550.05	5470 to 5725	Pass
			-10	120.00	5550.10	5470 to 5725	Pass
			0	120.00	5550.10	5470 to 5725	Pass
			10	120.00	5550.09	5470 to 5725	Pass
			30	120.00	5550.02	5470 to 5725	Pass
			40	120.00	5550.11	5470 to 5725	Pass
			50	120.00	5550.06	5534 to 5566	Pass
		5670	20	102.00	5670.05	5654 to 5686	Pass
				120.00	5670.00	5654 to 5686	Pass
				138.00	5670.11	5654 to 5686	Pass
			-30	102.00	5670.08	5654 to 5686	Pass

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

802.11ac (VHT20)	MIMO		-20	120.00	5670.07	5470 to 5725	Pass
			-10	120.00	5670.07	5470 to 5725	Pass
			0	120.00	5670.04	5470 to 5725	Pass
			10	120.00	5670.05	5470 to 5725	Pass
			30	120.00	5670.11	5470 to 5725	Pass
			40	120.00	5670.09	5470 to 5725	Pass
			50	120.00	5670.06	5654 to 5686	Pass
		5500	20	102.00	5500.12	5492 to 5508	Pass
				120.00	5500.06	5492 to 5508	Pass
				138.00	5500.04	5492 to 5508	Pass
			-30	102.00	5500.02	5492 to 5508	Pass
			-20	120.00	5500.03	5470 to 5725	Pass
			-10	120.00	5500.08	5470 to 5725	Pass
			0	120.00	5500.12	5470 to 5725	Pass
			10	120.00	5500.01	5470 to 5725	Pass
			30	120.00	5500.01	5470 to 5725	Pass
			40	120.00	5500.02	5470 to 5725	Pass
			50	120.00	5500.03	5492 to 5508	Pass
		5580	20	102.00	5580.09	5572 to 5588	Pass
				120.00	5580.05	5572 to 5588	Pass
				138.00	5580.10	5572 to 5588	Pass
			-30	102.00	5580.09	5572 to 5588	Pass
			-20	120.00	5580.03	5470 to 5725	Pass
			-10	120.00	5580.03	5470 to 5725	Pass
			0	120.00	5580.07	5470 to 5725	Pass
			10	120.00	5580.01	5470 to 5725	Pass
			30	120.00	5580.10	5470 to 5725	Pass
			40	120.00	5580.06	5470 to 5725	Pass
			50	120.00	5580.05	5572 to 5588	Pass
		5700	20	102.00	5700.09	5692 to 5708	Pass
				120.00	5700.03	5692 to 5708	Pass
				138.00	5700.08	5692 to 5708	Pass
			-30	102.00	5700.09	5692 to 5708	Pass
			-20	120.00	5700.08	5470 to 5725	Pass
			-10	120.00	5700.05	5470 to 5725	Pass
			0	120.00	5700.10	5470 to 5725	Pass
			10	120.00	5700.02	5470 to 5725	Pass
			30	120.00	5700.03	5470 to 5725	Pass
			40	120.00	5700.07	5470 to 5725	Pass
			50	120.00	5700.09	5692 to 5708	Pass
802.11ac (VHT40)	MIMO	5510	20	102.00	5510.04	5494 to 5526	Pass
				120.00	5510.06	5494 to 5526	Pass

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

				138.00	5510.04	5494 to 5526	Pass
			-30	102.00	5510.10	5494 to 5526	Pass
			-20	120.00	5510.13	5470 to 5725	Pass
			-10	120.00	5510.00	5470 to 5725	Pass
			0	120.00	5510.13	5470 to 5725	Pass
			10	120.00	5510.02	5470 to 5725	Pass
			30	120.00	5510.10	5470 to 5725	Pass
			40	120.00	5510.07	5470 to 5725	Pass
			50	120.00	5510.04	5494 to 5526	Pass
		5550	20	102.00	5550.08	5534 to 5566	Pass
				120.00	5550.02	5534 to 5566	Pass
				138.00	5550.07	5534 to 5566	Pass
			-30	102.00	5550.09	5534 to 5566	Pass
			-20	120.00	5550.00	5470 to 5725	Pass
			-10	120.00	5550.12	5470 to 5725	Pass
			0	120.00	5550.05	5470 to 5725	Pass
			10	120.00	5550.01	5470 to 5725	Pass
			30	120.00	5550.02	5470 to 5725	Pass
			40	120.00	5550.06	5470 to 5725	Pass
			50	120.00	5550.03	5534 to 5566	Pass
		5670	20	102.00	5670.03	5654 to 5686	Pass
				120.00	5670.00	5654 to 5686	Pass
				138.00	5670.01	5654 to 5686	Pass
			-30	102.00	5670.09	5654 to 5686	Pass
			-20	120.00	5670.02	5470 to 5725	Pass
			-10	120.00	5670.01	5470 to 5725	Pass
			0	120.00	5670.11	5470 to 5725	Pass
			10	120.00	5670.02	5470 to 5725	Pass
			30	120.00	5670.10	5470 to 5725	Pass
			40	120.00	5670.03	5470 to 5725	Pass
			50	120.00	5670.11	5654 to 5686	Pass
802.11ac (VHT80)	MIMO	5530	20	102.00	5530.08	5498 to 5562	Pass
				120.00	5530.09	5498 to 5562	Pass
				138.00	5530.07	5498 to 5562	Pass
			-30	102.00	5530.00	5498 to 5562	Pass
			-20	120.00	5530.11	5470 to 5725	Pass
			-10	120.00	5530.10	5470 to 5725	Pass
			0	120.00	5530.07	5470 to 5725	Pass
			10	120.00	5530.11	5470 to 5725	Pass
			30	120.00	5530.00	5470 to 5725	Pass
			40	120.00	5530.04	5470 to 5725	Pass
			50	120.00	5530.08	5498 to 5562	Pass

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

802.11ax (HEW20)	MIMO	5500	20	102.00	5500.11	5492 to 5508	Pass
				120.00	5500.03	5492 to 5508	Pass
				138.00	5500.13	5492 to 5508	Pass
			-30	102.00	5500.09	5492 to 5508	Pass
			-20	120.00	5500.06	5470 to 5725	Pass
			-10	120.00	5500.08	5470 to 5725	Pass
			0	120.00	5500.07	5470 to 5725	Pass
			10	120.00	5500.02	5470 to 5725	Pass
			30	120.00	5500.11	5470 to 5725	Pass
			40	120.00	5500.09	5470 to 5725	Pass
			50	120.00	5500.03	5492 to 5508	Pass
		5580	20	102.00	5580.08	5572 to 5588	Pass
				120.00	5580.02	5572 to 5588	Pass
				138.00	5580.12	5572 to 5588	Pass
			-30	102.00	5580.05	5572 to 5588	Pass
			-20	120.00	5580.07	5470 to 5725	Pass
			-10	120.00	5580.11	5470 to 5725	Pass
			0	120.00	5580.04	5470 to 5725	Pass
			10	120.00	5580.12	5470 to 5725	Pass
			30	120.00	5580.05	5470 to 5725	Pass
			40	120.00	5580.09	5470 to 5725	Pass
			50	120.00	5580.07	5572 to 5588	Pass
		5700	20	102.00	5700.10	5692 to 5708	Pass
				120.00	5700.13	5692 to 5708	Pass
				138.00	5700.12	5692 to 5708	Pass
			-30	102.00	5700.04	5692 to 5708	Pass
			-20	120.00	5700.13	5470 to 5725	Pass
			-10	120.00	5700.05	5470 to 5725	Pass
			0	120.00	5700.02	5470 to 5725	Pass
			10	120.00	5700.12	5470 to 5725	Pass
			30	120.00	5700.07	5470 to 5725	Pass
			40	120.00	5700.13	5470 to 5725	Pass
			50	120.00	5700.00	5692 to 5708	Pass
802.11ax (HEW40)	MIMO	5510	20	102.00	5510.05	5494 to 5526	Pass
				120.00	5510.03	5494 to 5526	Pass
				138.00	5510.05	5494 to 5526	Pass
			-30	102.00	5510.00	5494 to 5526	Pass
			-20	120.00	5510.09	5470 to 5725	Pass
			-10	120.00	5510.10	5470 to 5725	Pass
			0	120.00	5510.09	5470 to 5725	Pass
			10	120.00	5510.10	5470 to 5725	Pass
			30	120.00	5510.01	5470 to 5725	Pass

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

			40	120.00	5510.01	5470 to 5725	Pass
			50	120.00	5510.05	5494 to 5526	Pass
		5550	20	102.00	5550.01	5534 to 5566	Pass
				120.00	5550.02	5534 to 5566	Pass
				138.00	5550.02	5534 to 5566	Pass
			-30	102.00	5550.08	5534 to 5566	Pass
			-20	120.00	5550.04	5470 to 5725	Pass
			-10	120.00	5550.02	5470 to 5725	Pass
			0	120.00	5550.07	5470 to 5725	Pass
			10	120.00	5550.00	5470 to 5725	Pass
			30	120.00	5550.06	5470 to 5725	Pass
			40	120.00	5550.01	5470 to 5725	Pass
			50	120.00	5550.03	5534 to 5566	Pass
		5670	20	102.00	5670.02	5654 to 5686	Pass
				120.00	5670.04	5654 to 5686	Pass
				138.00	5670.11	5654 to 5686	Pass
			-30	102.00	5670.06	5654 to 5686	Pass
			-20	120.00	5670.10	5470 to 5725	Pass
			-10	120.00	5670.10	5470 to 5725	Pass
			0	120.00	5670.12	5470 to 5725	Pass
			10	120.00	5670.08	5470 to 5725	Pass
			30	120.00	5670.07	5470 to 5725	Pass
			40	120.00	5670.05	5470 to 5725	Pass
			50	120.00	5670.10	5654 to 5686	Pass
802.11ax (HEW80)	MIMO	5530	20	102.00	5530.00	5498 to 5562	Pass
				120.00	5530.01	5498 to 5562	Pass
				138.00	5530.07	5498 to 5562	Pass
			-30	102.00	5530.02	5498 to 5562	Pass
			-20	120.00	5530.01	5470 to 5725	Pass
			-10	120.00	5530.11	5470 to 5725	Pass
			0	120.00	5530.02	5470 to 5725	Pass
			10	120.00	5530.12	5470 to 5725	Pass
			30	120.00	5530.03	5470 to 5725	Pass
			40	120.00	5530.06	5470 to 5725	Pass
			50	120.00	5530.02	5498 to 5562	Pass

Test Mode: 5.8G							
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit	Verdict
802.11a	SISO	5745	20	102.00	5745.05	5737 to 5753	Pass
				120.00	5745.01	5737 to 5753	Pass
				138.00	5745.12	5737 to 5753	Pass
			-30	102.00	5745.12	5737 to 5753	Pass
			-20	120.00	5745.03	5725 to 5850	Pass

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

				-10	120.00	5745.02	5725 to 5850	Pass
				0	120.00	5745.04	5725 to 5850	Pass
				10	120.00	5745.01	5725 to 5850	Pass
				30	120.00	5745.11	5725 to 5850	Pass
				40	120.00	5745.01	5725 to 5850	Pass
				50	120.00	5745.09	5737 to 5753	Pass
			5785	20	102.00	5785.05	5777 to 5793	Pass
					120.00	5785.13	5777 to 5793	Pass
					138.00	5785.11	5777 to 5793	Pass
				-30	102.00	5785.12	5777 to 5793	Pass
				-20	120.00	5785.06	5725 to 5850	Pass
				-10	120.00	5785.00	5725 to 5850	Pass
				0	120.00	5785.13	5725 to 5850	Pass
				10	120.00	5785.11	5725 to 5850	Pass
				30	120.00	5785.11	5725 to 5850	Pass
				40	120.00	5785.11	5725 to 5850	Pass
				50	120.00	5785.03	5777 to 5793	Pass
			5825	20	102.00	5825.10	5817 to 5833	Pass
					120.00	5825.01	5817 to 5833	Pass
					138.00	5825.08	5817 to 5833	Pass
				-30	102.00	5825.10	5817 to 5833	Pass
				-20	120.00	5825.08	5725 to 5850	Pass
				-10	120.00	5825.09	5725 to 5850	Pass
				0	120.00	5825.04	5725 to 5850	Pass
				10	120.00	5825.04	5725 to 5850	Pass
				30	120.00	5825.12	5725 to 5850	Pass
				40	120.00	5825.12	5725 to 5850	Pass
				50	120.00	5825.12	5817 to 5833	Pass
802.11n (HT20)	MIMO		5745	20	102.00	5745.05	5737 to 5753	Pass
					120.00	5745.07	5737 to 5753	Pass
					138.00	5745.08	5737 to 5753	Pass
				-30	102.00	5745.09	5737 to 5753	Pass
				-20	120.00	5745.07	5725 to 5850	Pass
				-10	120.00	5745.09	5725 to 5850	Pass
				0	120.00	5745.13	5725 to 5850	Pass
				10	120.00	5745.10	5725 to 5850	Pass
				30	120.00	5745.12	5725 to 5850	Pass
				40	120.00	5745.01	5725 to 5850	Pass
				50	120.00	5745.00	5737 to 5753	Pass
			5785	20	102.00	5785.13	5777 to 5793	Pass
					120.00	5785.06	5777 to 5793	Pass
					138.00	5785.09	5777 to 5793	Pass
				-30	102.00	5785.13	5777 to 5793	Pass
				-20	120.00	5785.12	5725 to 5850	Pass
				-10	120.00	5785.12	5725 to 5850	Pass
				0	120.00	5785.13	5725 to 5850	Pass
				10	120.00	5785.02	5725 to 5850	Pass
				30	120.00	5785.05	5725 to 5850	Pass
				40	120.00	5785.02	5725 to 5850	Pass
				50	120.00	5785.12	5777 to 5793	Pass
			5825	20	102.00	5825.05	5817 to 5833	Pass
					120.00	5825.01	5817 to 5833	Pass
					138.00	5825.09	5817 to 5833	Pass
				-30	102.00	5825.03	5817 to 5833	Pass
				-20	120.00	5825.09	5725 to 5850	Pass
				-10	120.00	5825.07	5725 to 5850	Pass
				0	120.00	5825.05	5725 to 5850	Pass
				10	120.00	5825.01	5725 to 5850	Pass

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

			30	120.00	5825.06	5725 to 5850	Pass
			40	120.00	5825.02	5725 to 5850	Pass
			50	120.00	5825.09	5817 to 5833	Pass
802.11n (HT40)	MIMO	5755	20	102.00	5755.06	5739 to 5771	Pass
				120.00	5755.00	5739 to 5771	Pass
				138.00	5755.01	5739 to 5771	Pass
			-30	102.00	5755.06	5739 to 5771	Pass
			-20	120.00	5755.07	5725 to 5850	Pass
			-10	120.00	5755.05	5725 to 5850	Pass
			0	120.00	5755.02	5725 to 5850	Pass
			10	120.00	5755.01	5725 to 5850	Pass
			30	120.00	5755.02	5725 to 5850	Pass
			40	120.00	5755.01	5725 to 5850	Pass
			50	120.00	5755.09	5739 to 5771	Pass
		5795	20	102.00	5795.02	5779 to 5811	Pass
				120.00	5795.00	5779 to 5811	Pass
				138.00	5795.02	5779 to 5811	Pass
			-30	102.00	5795.05	5779 to 5811	Pass
			-20	120.00	5795.11	5725 to 5850	Pass
			-10	120.00	5795.10	5725 to 5850	Pass
			0	120.00	5795.13	5725 to 5850	Pass
			10	120.00	5795.07	5725 to 5850	Pass
			30	120.00	5795.11	5725 to 5850	Pass
			40	120.00	5795.05	5725 to 5850	Pass
			50	120.00	5795.08	5779 to 5811	Pass
802.11ac (VHT20)	MIMO	5745	20	102.00	5745.09	5737 to 5753	Pass
				120.00	5745.13	5737 to 5753	Pass
				138.00	5745.01	5737 to 5753	Pass
			-30	102.00	5745.06	5737 to 5753	Pass
			-20	120.00	5745.10	5725 to 5850	Pass
			-10	120.00	5745.10	5725 to 5850	Pass
			0	120.00	5745.13	5725 to 5850	Pass
			10	120.00	5745.02	5725 to 5850	Pass
			30	120.00	5745.07	5725 to 5850	Pass
			40	120.00	5745.10	5725 to 5850	Pass
			50	120.00	5745.07	5737 to 5753	Pass
		5785	20	102.00	5785.08	5777 to 5793	Pass
				120.00	5785.07	5777 to 5793	Pass
				138.00	5785.06	5777 to 5793	Pass
			-30	102.00	5785.10	5777 to 5793	Pass
			-20	120.00	5785.03	5725 to 5850	Pass
			-10	120.00	5785.11	5725 to 5850	Pass
			0	120.00	5785.04	5725 to 5850	Pass
			10	120.00	5785.02	5725 to 5850	Pass
			30	120.00	5785.13	5725 to 5850	Pass
			40	120.00	5785.10	5725 to 5850	Pass
			50	120.00	5785.09	5777 to 5793	Pass
		5825	20	102.00	5825.01	5817 to 5833	Pass
				120.00	5825.02	5817 to 5833	Pass
				138.00	5825.11	5817 to 5833	Pass
			-30	102.00	5825.01	5817 to 5833	Pass
			-20	120.00	5825.02	5725 to 5850	Pass
			-10	120.00	5825.04	5725 to 5850	Pass
			0	120.00	5825.07	5725 to 5850	Pass
			10	120.00	5825.13	5725 to 5850	Pass
			30	120.00	5825.00	5725 to 5850	Pass
			40	120.00	5825.07	5725 to 5850	Pass
			50	120.00	5825.09	5817 to 5833	Pass

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

802.11ac (VHT40)	MIMO	5755	20	102.00	5755.04	5739 to 5771	Pass
				120.00	5755.12	5739 to 5771	Pass
				138.00	5755.09	5739 to 5771	Pass
			-30	102.00	5755.12	5739 to 5771	Pass
			-20	120.00	5755.07	5725 to 5850	Pass
			-10	120.00	5755.06	5725 to 5850	Pass
			0	120.00	5755.03	5725 to 5850	Pass
			10	120.00	5755.03	5725 to 5850	Pass
			30	120.00	5755.06	5725 to 5850	Pass
			40	120.00	5755.13	5725 to 5850	Pass
			50	120.00	5755.03	5739 to 5771	Pass
		5795	20	102.00	5795.00	5779 to 5811	Pass
				120.00	5795.02	5779 to 5811	Pass
				138.00	5795.02	5779 to 5811	Pass
			-30	102.00	5795.07	5779 to 5811	Pass
			-20	120.00	5795.10	5725 to 5850	Pass
			-10	120.00	5795.06	5725 to 5850	Pass
			0	120.00	5795.04	5725 to 5850	Pass
			10	120.00	5795.06	5725 to 5850	Pass
			30	120.00	5795.12	5725 to 5850	Pass
			40	120.00	5795.13	5725 to 5850	Pass
			50	120.00	5795.13	5779 to 5811	Pass
802.11ac (VHT80)	MIMO	5775	20	102.00	5775.10	5743 to 5807	Pass
				120.00	5775.02	5743 to 5807	Pass
				138.00	5775.08	5743 to 5807	Pass
			-30	102.00	5775.12	5743 to 5807	Pass
			-20	120.00	5775.04	5725 to 5850	Pass
			-10	120.00	5775.06	5725 to 5850	Pass
			0	120.00	5775.02	5725 to 5850	Pass
			10	120.00	5775.11	5725 to 5850	Pass
			30	120.00	5775.11	5725 to 5850	Pass
			40	120.00	5775.06	5725 to 5850	Pass
			50	120.00	5775.00	5743 to 5807	Pass
802.11ax (HEW20)	MIMO	5745	20	102.00	5745.04	5737 to 5753	Pass
				120.00	5745.11	5737 to 5753	Pass
				138.00	5745.03	5737 to 5753	Pass
			-30	102.00	5745.03	5737 to 5753	Pass
			-20	120.00	5745.12	5725 to 5850	Pass
			-10	120.00	5745.03	5725 to 5850	Pass
			0	120.00	5745.04	5725 to 5850	Pass
			10	120.00	5745.08	5725 to 5850	Pass
			30	120.00	5745.08	5725 to 5850	Pass
			40	120.00	5745.12	5725 to 5850	Pass
			50	120.00	5745.08	5737 to 5753	Pass
		5785	20	102.00	5785.08	5777 to 5793	Pass
				120.00	5785.03	5777 to 5793	Pass
				138.00	5785.07	5777 to 5793	Pass
			-30	102.00	5785.02	5777 to 5793	Pass
			-20	120.00	5785.03	5725 to 5850	Pass
			-10	120.00	5785.06	5725 to 5850	Pass
			0	120.00	5785.04	5725 to 5850	Pass
			10	120.00	5785.10	5725 to 5850	Pass
			30	120.00	5785.06	5725 to 5850	Pass
			40	120.00	5785.03	5725 to 5850	Pass
			50	120.00	5785.02	5777 to 5793	Pass
		5825	20	102.00	5825.01	5817 to 5833	Pass
				120.00	5825.11	5817 to 5833	Pass
				138.00	5825.10	5817 to 5833	Pass

Shenzhen Anbotek Compliance Laboratory Limited


Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

			-30	102.00	5825.10	5817 to 5833	Pass
			-20	120.00	5825.07	5725 to 5850	Pass
			-10	120.00	5825.08	5725 to 5850	Pass
			0	120.00	5825.07	5725 to 5850	Pass
			10	120.00	5825.04	5725 to 5850	Pass
			30	120.00	5825.08	5725 to 5850	Pass
			40	120.00	5825.06	5725 to 5850	Pass
			50	120.00	5825.10	5817 to 5833	Pass
802.11ax (HEW40)	MIMO	5755	20	102.00	5755.00	5739 to 5771	Pass
				120.00	5755.08	5739 to 5771	Pass
				138.00	5755.06	5739 to 5771	Pass
			-30	102.00	5755.02	5739 to 5771	Pass
			-20	120.00	5755.12	5725 to 5850	Pass
			-10	120.00	5755.12	5725 to 5850	Pass
			0	120.00	5755.10	5725 to 5850	Pass
			10	120.00	5755.09	5725 to 5850	Pass
		5795	30	120.00	5755.03	5725 to 5850	Pass
			40	120.00	5755.12	5725 to 5850	Pass
			50	120.00	5755.09	5739 to 5771	Pass
			20	102.00	5795.09	5779 to 5811	Pass
				120.00	5795.05	5779 to 5811	Pass
				138.00	5795.07	5779 to 5811	Pass
			-30	102.00	5795.07	5779 to 5811	Pass
			-20	120.00	5795.12	5725 to 5850	Pass
			-10	120.00	5795.10	5725 to 5850	Pass
			0	120.00	5795.07	5725 to 5850	Pass
			10	120.00	5795.02	5725 to 5850	Pass
			30	120.00	5795.12	5725 to 5850	Pass
			40	120.00	5795.02	5725 to 5850	Pass
			50	120.00	5795.01	5779 to 5811	Pass
802.11ax (HEW80)	MIMO	5775	20	102.00	5775.04	5743 to 5807	Pass
				120.00	5775.03	5743 to 5807	Pass
				138.00	5775.04	5743 to 5807	Pass
			-30	102.00	5775.13	5743 to 5807	Pass
			-20	120.00	5775.12	5725 to 5850	Pass
			-10	120.00	5775.08	5725 to 5850	Pass
			0	120.00	5775.06	5725 to 5850	Pass
			10	120.00	5775.05	5725 to 5850	Pass
			30	120.00	5775.06	5725 to 5850	Pass
			40	120.00	5775.06	5725 to 5850	Pass
			50	120.00	5775.05	5743 to 5807	Pass

8. Channel Move Time, Channel Closing Transmission Time


Test Requirement:	47 CFR Part 15.407(h)(2)(iii)
Test Limit:	Channel Move Time: within 10 seconds Channel Closing Transmission Time: 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. (The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.)
Test Method:	KDB 905462 D02, Clause 7.8.3
Procedure:	The steps below define the procedure to determine the above-mentioned parameters when a radar <i>Burst</i> with a level equal to the <i>DFS Detection Threshold</i> + 1dB is generated on the <i>Operating Channel</i> of the U-NII device (<i>In- Service Monitoring</i>). 1. One frequency will be chosen from the <i>Operating Channels</i> of the UUT within the 5250-5350 MHz or 5470-5725 MHz bands. For 802.11 devices, the test frequency must contain control signals. This can be verified by disabling channel loading and monitoring the spectrum analyzer. If no control signals are detected, another frequency must be selected within the emission bandwidth where control signals are detected. 2. In case the UUT is a U-NII device operating as a <i>Client Device</i> (with or without DFS), a U-NII device operating as a <i>Master Device</i> will be used to allow the UUT (Client device) to <i>Associate</i> with the <i>Master Device</i>. In case the UUT is a <i>Master Device</i>, a U-NII device operating as a <i>Client Device</i> will be used and it is assumed that the Client will <i>Associate</i> with the UUT (Master). In both cases for conducted tests, the <i>Radar Waveform</i> generator will be connected to the <i>Master Device</i>. For radiated tests, the emissions of the <i>Radar Waveform</i> generator will be directed towards the <i>Master Device</i>. If the <i>Master Device</i> has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing. 3. Stream the channel loading test file from the <i>Master Device</i> to the <i>Client Device</i> on the test <i>Channel</i> for the entire period of the test. 4. At time T0 the <i>Radar Waveform</i> generator sends a <i>Burst</i> of pulses for one of the Radar Type 0 in Table 5 at levels defined in Table 3, on the <i>Operating Channel</i>. An additional 1 dB is added to the radar test signal to ensure it is at or above the <i>DFS Detection Threshold</i>, accounting for equipment variations/errors. 5. Observe the transmissions of the UUT at the end of the radar <i>Burst</i> on the <i>Operating Channel</i> for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (<i>Channel Move Time</i>). Measure and record the <i>Channel Move Time</i> and <i>Channel Closing Transmission Time</i> if radar detection occurs. Figure 17 illustrates <i>Channel Closing Transmission Time</i>. 6. When operating as a <i>Master Device</i>, monitor the UUT for more than 30 minutes following instant T2 to verify that the UUT does not resume any transmissions on this <i>Channel</i>. Perform this test once and record the measurement result. 7. In case the UUT is a U-NII device operating as a <i>Client Device</i> with <i>In-</i>

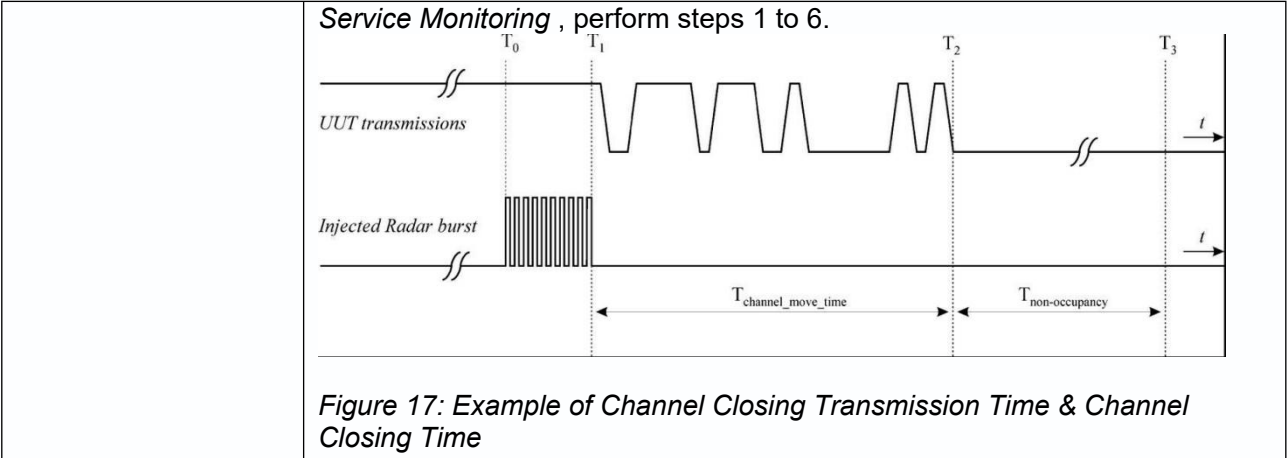

8.1. EUT Operation

Operating Environment:	
Test mode:	5:Normal Operating:Keep the EUT works in normal operating mode and connect to companion device

8.2. Test Setup

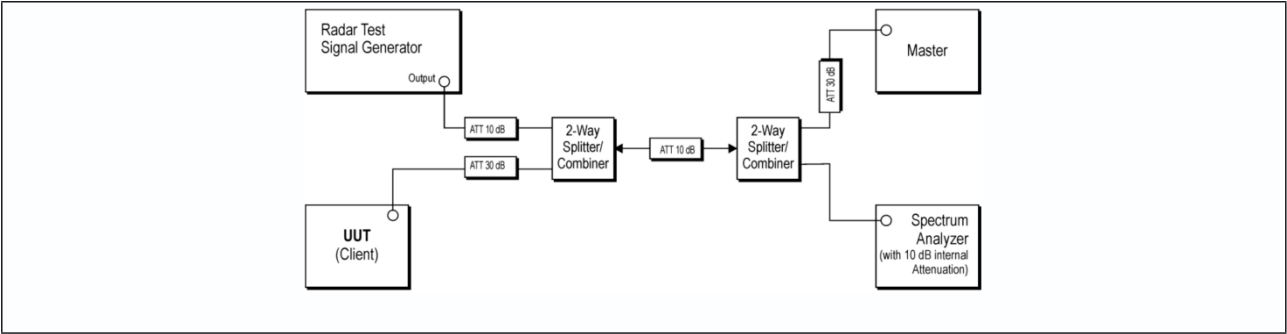

8.3. Test Data

Temperature:	23.5 °C	Humidity:	51 %	Atmospheric Pressure:	99.5 kPa
--------------	---------	-----------	------	-----------------------	----------

Please Refer to Appendix for Details.

9. Band edge emissions (Conducted)

Test Requirement:	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(3) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)			
Test Limit:	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.			
	MHz	MHz	MHz	GHz
	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
	¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
	6.31175-6.31225	123-138	2200-2300	14.47-14.5
	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
	8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
	12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41				
¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.				
² Above 38.6				


	The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: <table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100 **</td><td>3</td></tr><tr><td>88-216</td><td>150 **</td><td>3</td></tr><tr><td>216-960</td><td>200 **</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table> ** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																							
0.009-0.490	2400/F(kHz)	300																							
0.490-1.705	24000/F(kHz)	30																							
1.705-30.0	30	30																							
30-88	100 **	3																							
88-216	150 **	3																							
216-960	200 **	3																							
Above 960	500	3																							
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 12.7.4, 12.7.6, 12.7.7																								
Procedure:	Above 1GHz: a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the																								

	limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
--	---

9.1. EUT Operation

Operating Environment:	
Test mode:	1:802.11a mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11a modulation type. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report. 2:802.11n mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11n modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 3:802.11ac mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ac modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 4:802.11ax mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ax modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

9.2. Test Setup

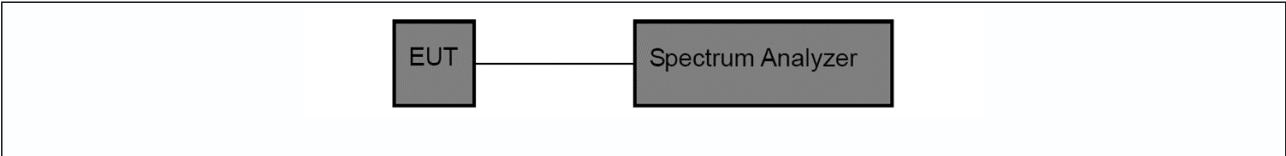

9.3. Test Data

Temperature:	23.5 °C	Humidity:	51 %	Atmospheric Pressure:	99.5 kPa
--------------	---------	-----------	------	-----------------------	----------

Please Refer to Appendix for Details.

10. Band edge emissions (Radiated)

Test Requirement:	47 CFR Part 15.407(b)(1), 15.205, 15.209 47 CFR Part 15.407(b)(2), 15.205, 15.209 47 CFR Part 15.407(b)(3), 15.205, 15.209 47 CFR Part 15.407(b)(4), 15.205, 15.209 47 CFR Part 15.407(b)(10), 15.205, 15.209			
Test Limit:	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.			
	MHz	MHz	MHz	GHz
	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
	¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
	6.31175-6.31225	123-138	2200-2300	14.47-14.5
	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
	8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
	12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41				
¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.				
² Above 38.6				


	The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: <table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100 **</td><td>3</td></tr><tr><td>88-216</td><td>150 **</td><td>3</td></tr><tr><td>216-960</td><td>200 **</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table> ** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																							
0.009-0.490	2400/F(kHz)	300																							
0.490-1.705	24000/F(kHz)	30																							
1.705-30.0	30	30																							
30-88	100 **	3																							
88-216	150 **	3																							
216-960	200 **	3																							
Above 960	500	3																							
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 12.7.4, 12.7.6, 12.7.7																								
Procedure:	Above 1GHz: a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.																								

	f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Remark: 1. $\text{Result(dB}\mu\text{V/m)} = \text{Reading(dB}\mu\text{V)} + \text{Factor(dB/m)}; \text{Over Limit(dB)} = \text{Result(dB}\mu\text{V/m)} - \text{Limit(dB}\mu\text{V/m)}$ 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
--	--

10.1. EUT Operation

Operating Environment:	
Test mode:	1:802.11a mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11a modulation type. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report. 2:802.11n mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11n modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 3:802.11ac mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ac modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 4:802.11ax mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ax modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

10.2. Test Setup

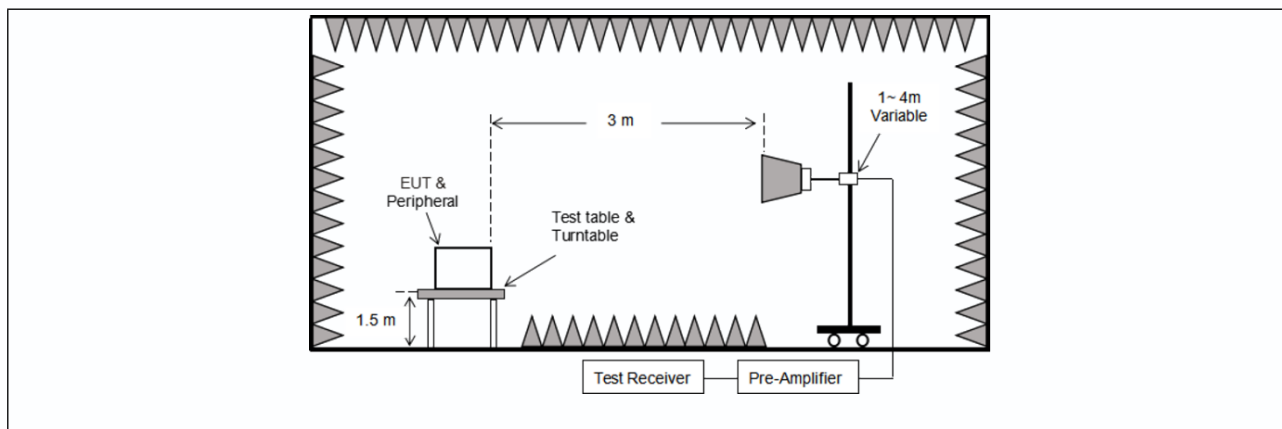

10.3. Test Data

Temperature:	23.5 °C	Humidity:	51 %	Atmospheric Pressure:	99.5 kPa
--------------	---------	-----------	------	-----------------------	----------

TM1 / Band: 5150-5350 MHz / BW: 20 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	37.29	15.99	53.28	68.20	-14.92	H	Peak
5150.00	39.42	15.99	55.41	68.20	-12.79	V	Peak
5150.00	27.14	15.99	43.13	54.00	-10.87	H	AVG
5150.00	29.28	15.99	45.27	54.00	-8.73	V	AVG
TM1 / Band: 5150-5350 MHz / BW: 20 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	37.65	16.43	54.08	68.20	-14.12	H	Peak
5350.00	40.80	16.43	57.23	68.20	-10.97	V	Peak
5350.00	29.09	16.43	45.52	54.00	-8.48	H	AVG
5350.00	29.87	16.43	46.30	54.00	-7.70	V	AVG

Remark:

1. Result=Reading + Factor

2. During the test, all antenna chains has been tested, and only worst case (ANT1) data is listed in the report.

TM2 / Band: 5150-5350 MHz / BW: 20 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.13	15.99	52.12	68.20	-16.08	H	Peak
5150.00	37.60	15.99	53.59	68.20	-14.61	V	Peak
5150.00	26.85	15.99	42.84	54.00	-11.16	H	AVG
5150.00	27.81	15.99	43.80	54.00	-10.20	V	AVG
TM2 / Band: 5150-5350 MHz / BW: 20 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	38.00	16.43	54.43	68.20	-13.77	H	Peak
5350.00	38.99	16.43	55.42	68.20	-12.78	V	Peak
5350.00	28.06	16.43	44.49	54.00	-9.51	H	AVG
5350.00	29.60	16.43	46.03	54.00	-7.97	V	AVG

Remark:

1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM2 / Band: 5150-5350 MHz / BW: 40 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.81	15.99	52.80	68.20	-15.40	H	Peak
5150.00	38.63	15.99	54.62	68.20	-13.58	V	Peak
5150.00	27.41	15.99	43.40	54.00	-10.60	H	AVG
5150.00	28.89	15.99	44.88	54.00	-9.12	V	AVG
TM2 / Band: 5150-5350 MHz / BW: 40 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	38.30	16.43	54.73	68.20	-13.47	H	Peak
5350.00	37.09	16.43	53.52	68.20	-14.68	V	Peak
5350.00	28.66	16.43	45.09	54.00	-8.91	H	AVG
5350.00	29.92	16.43	46.35	54.00	-7.65	V	AVG

Remark:

1. Result=Reading + Factor
2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM3 / Band: 5150-5350 MHz / BW: 20 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	37.30	15.99	53.29	68.20	-14.91	H	Peak
5150.00	39.11	15.99	55.10	68.20	-13.10	V	Peak
5150.00	26.76	15.99	42.75	54.00	-11.25	H	AVG
5150.00	29.06	15.99	45.05	54.00	-8.95	V	AVG
TM3 / Band: 5150-5350 MHz / BW: 20 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	38.08	16.43	54.51	68.20	-13.69	H	Peak
5350.00	38.30	16.43	54.73	68.20	-13.47	V	Peak
5350.00	28.04	16.43	44.47	54.00	-9.53	H	AVG
5350.00	28.72	16.43	45.15	54.00	-8.85	V	AVG

Remark:

1. Result=Reading + Factor
2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM3 / Band: 5150-5350 MHz / BW: 40 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.22	15.99	52.21	68.20	-15.99	H	Peak
5150.00	36.55	15.99	52.54	68.20	-15.66	V	Peak
5150.00	26.55	15.99	42.54	54.00	-11.46	H	AVG
5150.00	27.14	15.99	43.13	54.00	-10.87	V	AVG
TM3 / Band: 5150-5350 MHz / BW: 40 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	38.31	16.43	54.74	68.20	-13.46	H	Peak
5350.00	37.38	16.43	53.81	68.20	-14.39	V	Peak
5350.00	27.69	16.43	44.12	54.00	-9.88	H	AVG
5350.00	27.92	16.43	44.35	54.00	-9.65	V	AVG

Remark:

1. Result=Reading + Factor
2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM3 / Band: 5150-5350 MHz / BW: 80 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.22	15.99	52.21	68.20	-15.99	H	Peak
5150.00	36.85	15.99	52.84	68.20	-15.36	V	Peak
5150.00	27.02	15.99	43.01	54.00	-10.99	H	AVG
5150.00	27.14	15.99	43.13	54.00	-10.87	V	AVG
TM3 / Band: 5150-5350 MHz / BW: 80 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	38.71	16.43	55.14	68.20	-13.06	H	Peak
5350.00	37.77	16.43	54.20	68.20	-14.00	V	Peak
5350.00	29.29	16.43	45.72	54.00	-8.28	H	AVG
5350.00	28.41	16.43	44.84	54.00	-9.16	V	AVG

Remark:

1. Result=Reading + Factor
2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM4 / Band: 5150-5350 MHz / BW: 20 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	37.49	15.99	53.48	68.20	-14.72	H	Peak
5150.00	39.33	15.99	55.32	68.20	-12.88	V	Peak
5150.00	26.86	15.99	42.85	54.00	-11.15	H	AVG
5150.00	29.22	15.99	45.21	54.00	-8.79	V	AVG
TM4 / Band: 5150-5350 MHz / BW: 20 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	38.18	16.43	54.61	68.20	-13.59	H	Peak
5350.00	38.38	16.43	54.81	68.20	-13.39	V	Peak
5350.00	28.18	16.43	44.61	54.00	-9.39	H	AVG
5350.00	28.91	16.43	45.34	54.00	-8.66	V	AVG

Remark:

1. Result=Reading + Factor
2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM4 / Band: 5150-5350 MHz / BW: 40 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.40	15.99	52.39	68.20	-15.81	H	Peak
5150.00	36.67	15.99	52.66	68.20	-15.54	V	Peak
5150.00	26.80	15.99	42.79	54.00	-11.21	H	AVG
5150.00	27.32	15.99	43.31	54.00	-10.69	V	AVG
TM4 / Band: 5150-5350 MHz / BW: 40 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	38.46	16.43	54.89	68.20	-13.31	H	Peak
5350.00	37.48	16.43	53.91	68.20	-14.29	V	Peak
5350.00	27.79	16.43	44.22	54.00	-9.78	H	AVG
5350.00	28.15	16.43	44.58	54.00	-9.42	V	AVG

Remark:

1. Result=Reading + Factor
2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM4 / Band: 5150-5350 MHz / BW: 80 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.32	15.99	52.31	68.20	-15.89	H	Peak
5150.00	37.07	15.99	53.06	68.20	-15.14	V	Peak
5150.00	27.25	15.99	43.24	54.00	-10.76	H	AVG
5150.00	27.30	15.99	43.29	54.00	-10.71	V	AVG
TM4 / Band: 5150-5350 MHz / BW: 80 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	38.93	16.43	55.36	68.20	-12.84	H	Peak
5350.00	37.95	16.43	54.38	68.20	-13.82	V	Peak
5350.00	29.55	16.43	45.98	54.00	-8.02	H	AVG
5350.00	28.57	16.43	45.00	54.00	-9.00	V	AVG

Remark:

1. Result=Reading + Factor
2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM1 / Band: 5470-5725 MHz / BW: 20 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5470.00	39.42	16.70	56.12	68.20	-12.08	H	Peak
5470.00	40.27	16.70	56.97	68.20	-11.23	V	Peak
5470.00	29.26	16.70	45.96	54.00	-8.04	H	AVG
5470.00	30.40	16.70	47.10	54.00	-6.90	V	AVG
TM1 / Band: 5470-5725 MHz / BW: 20 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	38.30	17.05	55.35	68.20	-12.85	H	Peak
5725.00	39.72	17.05	56.77	68.20	-11.43	V	Peak
5725.00	29.12	17.05	46.17	54.00	-7.83	H	AVG
5725.00	30.25	17.05	47.30	54.00	-6.70	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, all antenna chains has been tested, and only worst case (ANT1) data is listed in the report.

TM2 / Band: 5470-5725 MHz / BW: 20 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5470.00	38.60	16.70	55.30	68.20	-12.90	H	Peak
5470.00	39.10	16.70	55.80	68.20	-12.40	V	Peak
5470.00	27.77	16.70	44.47	54.00	-9.53	H	AVG
5470.00	28.38	16.70	45.08	54.00	-8.92	V	AVG
TM2 / Band: 5470-5725 MHz / BW: 20 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	38.28	17.05	55.33	68.20	-12.87	H	Peak
5725.00	38.89	17.05	55.94	68.20	-12.26	V	Peak
5725.00	27.67	17.05	44.72	54.00	-9.28	H	AVG
5725.00	28.23	17.05	45.28	54.00	-8.72	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM2 / Band: 5470-5725 MHz / BW: 40 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5470.00	38.90	16.70	55.60	68.20	-12.60	H	Peak
5470.00	39.64	16.70	56.34	68.20	-11.86	V	Peak
5470.00	27.30	16.70	44.00	54.00	-10.00	H	AVG
5470.00	28.57	16.70	45.27	54.00	-8.73	V	AVG
TM2 / Band: 5470-5725 MHz / BW: 40 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	37.86	17.05	54.91	68.20	-13.29	H	Peak
5725.00	38.77	17.05	55.82	68.20	-12.38	V	Peak
5725.00	27.15	17.05	44.20	54.00	-9.80	H	AVG
5725.00	28.47	17.05	45.52	54.00	-8.48	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM3 / Band: 5470-5725 MHz / BW: 20 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5470.00	38.23	16.70	54.93	68.20	-13.27	H	Peak
5470.00	38.47	16.70	55.17	68.20	-13.03	V	Peak
5470.00	28.49	16.70	45.19	54.00	-8.81	H	AVG
5470.00	29.44	16.70	46.14	54.00	-7.86	V	AVG
TM3 / Band: 5470-5725 MHz / BW: 20 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	37.48	17.05	54.53	68.20	-13.67	H	Peak
5725.00	37.58	17.05	54.63	68.20	-13.57	V	Peak
5725.00	28.37	17.05	45.42	54.00	-8.58	H	AVG
5725.00	29.23	17.05	46.28	54.00	-7.72	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM3 / Band: 5470-5725 MHz / BW: 40 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5470.00	37.00	16.70	53.70	68.20	-14.50	H	Peak
5470.00	38.35	16.70	55.05	68.20	-13.15	V	Peak
5470.00	27.77	16.70	44.47	54.00	-9.53	H	AVG
5470.00	28.43	16.70	45.13	54.00	-8.87	V	AVG
TM3 / Band: 5470-5725 MHz / BW: 40 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	36.42	17.05	53.47	68.20	-14.73	H	Peak
5725.00	37.91	17.05	54.96	68.20	-13.24	V	Peak
5725.00	27.65	17.05	44.70	54.00	-9.30	H	AVG
5725.00	28.33	17.05	45.38	54.00	-8.62	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM3 / Band: 5470-5725 MHz / BW: 80 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5470.00	36.18	16.70	52.88	68.20	-15.32	H	Peak
5470.00	38.39	16.70	55.09	68.20	-13.11	V	Peak
5470.00	26.98	16.70	43.68	54.00	-10.32	H	AVG
5470.00	27.41	16.70	44.11	54.00	-9.89	V	AVG
TM3 / Band: 5470-5725 MHz / BW: 80 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	35.68	17.05	52.73	68.20	-15.47	H	Peak
5725.00	37.25	17.05	54.30	68.20	-13.90	V	Peak
5725.00	26.76	17.05	43.81	54.00	-10.19	H	AVG
5725.00	27.27	17.05	44.32	54.00	-9.68	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM4 / Band: 5470-5725 MHz / BW: 20 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5470.00	38.32	16.70	55.02	68.20	-13.18	H	Peak
5470.00	38.51	16.70	55.21	68.20	-12.99	V	Peak
5470.00	28.55	16.70	45.25	54.00	-8.75	H	AVG
5470.00	29.55	16.70	46.25	54.00	-7.75	V	AVG
TM4 / Band: 5470-5725 MHz / BW: 20 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	37.44	17.05	54.49	68.20	-13.71	H	Peak
5725.00	37.56	17.05	54.61	68.20	-13.59	V	Peak
5725.00	28.34	17.05	45.39	54.00	-8.61	H	AVG
5725.00	29.18	17.05	46.23	54.00	-7.77	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM4 / Band: 5470-5725 MHz / BW: 40 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5470.00	37.08	16.70	53.78	68.20	-14.42	H	Peak
5470.00	38.40	16.70	55.10	68.20	-13.10	V	Peak
5470.00	27.83	16.70	44.53	54.00	-9.47	H	AVG
5470.00	28.48	16.70	45.18	54.00	-8.82	V	AVG
TM4 / Band: 5470-5725 MHz / BW: 40 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	36.38	17.05	53.43	68.20	-14.77	H	Peak
5725.00	37.88	17.05	54.93	68.20	-13.27	V	Peak
5725.00	27.62	17.05	44.67	54.00	-9.33	H	AVG
5725.00	28.30	17.05	45.35	54.00	-8.65	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM4 / Band: 5470-5725 MHz / BW: 80 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5470.00	36.25	16.70	52.95	68.20	-15.25	H	Peak
5470.00	38.49	16.70	55.19	68.20	-13.01	V	Peak
5470.00	27.10	16.70	43.80	54.00	-10.20	H	AVG
5470.00	27.48	16.70	44.18	54.00	-9.82	V	AVG
TM4 / Band: 5470-5725 MHz / BW: 80 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	35.65	17.05	52.70	68.20	-15.50	H	Peak
5725.00	37.20	17.05	54.25	68.20	-13.95	V	Peak
5725.00	26.70	17.05	43.75	54.00	-10.25	H	AVG
5725.00	27.24	17.05	44.29	54.00	-9.71	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM1 / Band: 5725-5850 MHz / BW: 20 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	38.13	17.05	55.18	68.20	-13.02	H	Peak
5725.00	39.50	17.05	56.55	68.20	-11.65	V	Peak
5725.00	29.01	17.05	46.06	54.00	-7.94	H	AVG
5725.00	30.11	17.05	47.16	54.00	-6.84	V	AVG
TM1 / Band: 5725-5850 MHz / BW: 20 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	39.49	17.21	56.70	68.20	-11.50	H	Peak
5850.00	39.91	17.21	57.12	68.20	-11.08	V	Peak
5850.00	29.42	17.21	46.63	54.00	-7.37	H	AVG
5850.00	29.37	17.21	46.58	54.00	-7.42	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, all antenna chains has been tested, and only worst case (ANT1) data is listed in the report.

TM2 / Band: 5725-5850 MHz / BW: 20 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	38.10	17.05	55.15	68.20	-13.05	H	Peak
5725.00	38.67	17.05	55.72	68.20	-12.48	V	Peak
5725.00	27.58	17.05	44.63	54.00	-9.37	H	AVG
5725.00	28.09	17.05	45.14	54.00	-8.86	V	AVG
TM2 / Band: 5725-5850 MHz / BW: 20 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	37.73	17.21	54.94	68.20	-13.26	H	Peak
5850.00	38.25	17.21	55.46	68.20	-12.74	V	Peak
5850.00	28.08	17.21	45.29	54.00	-8.71	H	AVG
5850.00	28.80	17.21	46.01	54.00	-7.99	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM2 / Band: 5725-5850 MHz / BW: 40 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	37.68	17.05	54.73	68.20	-13.47	H	Peak
5725.00	38.55	17.05	55.60	68.20	-12.60	V	Peak
5725.00	27.01	17.05	44.06	54.00	-9.94	H	AVG
5725.00	28.38	17.05	45.43	54.00	-8.57	V	AVG
TM2 / Band: 5725-5850 MHz / BW: 40 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	38.43	17.21	55.64	68.20	-12.56	H	Peak
5850.00	38.72	17.21	55.93	68.20	-12.27	V	Peak
5850.00	28.63	17.21	45.84	54.00	-8.16	H	AVG
5850.00	29.63	17.21	46.84	54.00	-7.16	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM3 / Band: 5725-5850 MHz / BW: 20 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	37.33	17.05	54.38	68.20	-13.82	H	Peak
5725.00	37.51	17.05	54.56	68.20	-13.64	V	Peak
5725.00	28.27	17.05	45.32	54.00	-8.68	H	AVG
5725.00	29.05	17.05	46.10	54.00	-7.90	V	AVG
TM3 / Band: 5725-5850 MHz / BW: 20 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	38.39	17.21	55.60	68.20	-12.60	H	Peak
5850.00	39.22	17.21	56.43	68.20	-11.77	V	Peak
5850.00	28.21	17.21	45.42	54.00	-8.58	H	AVG
5850.00	29.40	17.21	46.61	54.00	-7.39	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM3 / Band: 5725-5850 MHz / BW: 40 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	36.28	17.05	53.33	68.20	-14.87	H	Peak
5725.00	37.82	17.05	54.87	68.20	-13.33	V	Peak
5725.00	27.55	17.05	44.60	54.00	-9.40	H	AVG
5725.00	28.24	17.05	45.29	54.00	-8.71	V	AVG
TM3 / Band: 5725-5850 MHz / BW: 40 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	37.89	17.21	55.10	68.20	-13.10	H	Peak
5850.00	38.84	17.21	56.05	68.20	-12.15	V	Peak
5850.00	27.92	17.21	45.13	54.00	-8.87	H	AVG
5850.00	27.63	17.21	44.84	54.00	-9.16	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM3 / Band: 5725-5850 MHz / BW: 80 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	35.57	17.05	52.62	68.20	-15.58	H	Peak
5725.00	37.08	17.05	54.13	68.20	-14.07	V	Peak
5725.00	26.56	17.05	43.61	54.00	-10.39	H	AVG
5725.00	27.16	17.05	44.21	54.00	-9.79	V	AVG
TM3 / Band: 5725-5850 MHz / BW: 80 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	38.07	17.21	55.28	68.20	-12.92	H	Peak
5850.00	38.26	17.21	55.47	68.20	-12.73	V	Peak
5850.00	28.61	17.21	45.82	54.00	-8.18	H	AVG
5850.00	28.61	17.21	45.82	54.00	-8.18	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM4 / Band: 5725-5850 MHz / BW: 20 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	37.22	17.05	54.27	68.20	-13.93	H	Peak
5725.00	37.45	17.05	54.50	68.20	-13.70	V	Peak
5725.00	28.19	17.05	45.24	54.00	-8.76	H	AVG
5725.00	28.92	17.05	45.97	54.00	-8.03	V	AVG
TM4 / Band: 5725-5850 MHz / BW: 20 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	38.48	17.21	55.69	68.20	-12.51	H	Peak
5850.00	39.29	17.21	56.50	68.20	-11.70	V	Peak
5850.00	28.28	17.21	45.49	54.00	-8.51	H	AVG
5850.00	29.51	17.21	46.72	54.00	-7.28	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM4 / Band: 5725-5850 MHz / BW: 40 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	36.19	17.05	53.24	68.20	-14.96	H	Peak
5725.00	37.75	17.05	54.80	68.20	-13.40	V	Peak
5725.00	27.47	17.05	44.52	54.00	-9.48	H	AVG
5725.00	28.17	17.05	45.22	54.00	-8.78	V	AVG
TM4 / Band: 5725-5850 MHz / BW: 40 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	37.96	17.21	55.17	68.20	-13.03	H	Peak
5850.00	38.95	17.21	56.16	68.20	-12.04	V	Peak
5850.00	28.00	17.21	45.21	54.00	-8.79	H	AVG
5850.00	27.74	17.21	44.95	54.00	-9.05	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

TM4 / Band: 5725-5850 MHz / BW: 80 / L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	35.48	17.05	52.53	68.20	-15.67	H	Peak
5725.00	36.96	17.05	54.01	68.20	-14.19	V	Peak
5725.00	26.42	17.05	43.47	54.00	-10.53	H	AVG
5725.00	27.07	17.05	44.12	54.00	-9.88	V	AVG
TM4 / Band: 5725-5850 MHz / BW: 80 / H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	38.22	17.21	55.43	68.20	-12.77	H	Peak
5850.00	38.37	17.21	55.58	68.20	-12.62	V	Peak
5850.00	28.80	17.21	46.01	54.00	-7.99	H	AVG
5850.00	28.71	17.21	45.92	54.00	-8.08	V	AVG

Remark: 1. Result=Reading + Factor

2. During the test, SISO and MIMO modes have been tested, and only worst case (MIMO) data is listed in the report.

11. Undesirable emission limits (below 1GHz)

Test Requirement:	47 CFR Part 15.407(b)(9), 15.205, 15.209		
Test Limit:	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.		
	Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:		
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 12.7.4, 12.7.5		
Procedure:	Below 1GHz: a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin		


	would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. Above 1GHz: a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB
--	--

	below the limit need not be reported. 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
--	--

11.1. EUT Operation

Operating Environment:	
Test mode:	1:802.11a mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11a modulation type. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report. 2:802.11n mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11n modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 3:802.11ac mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ac modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 4:802.11ax mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ax modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

11.2. Test Setup

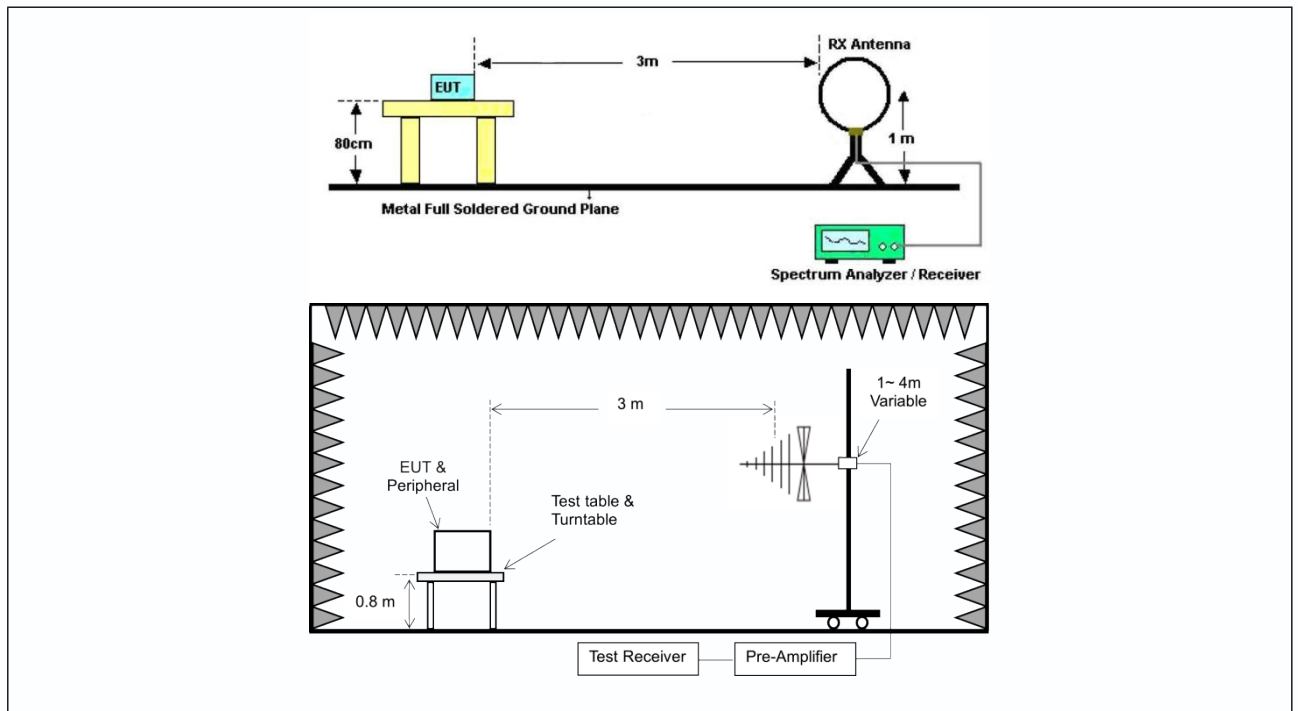


11.3. Test Data


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Sample: J9B-9K2

Temperature:	24.8 °C	Humidity:	51 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

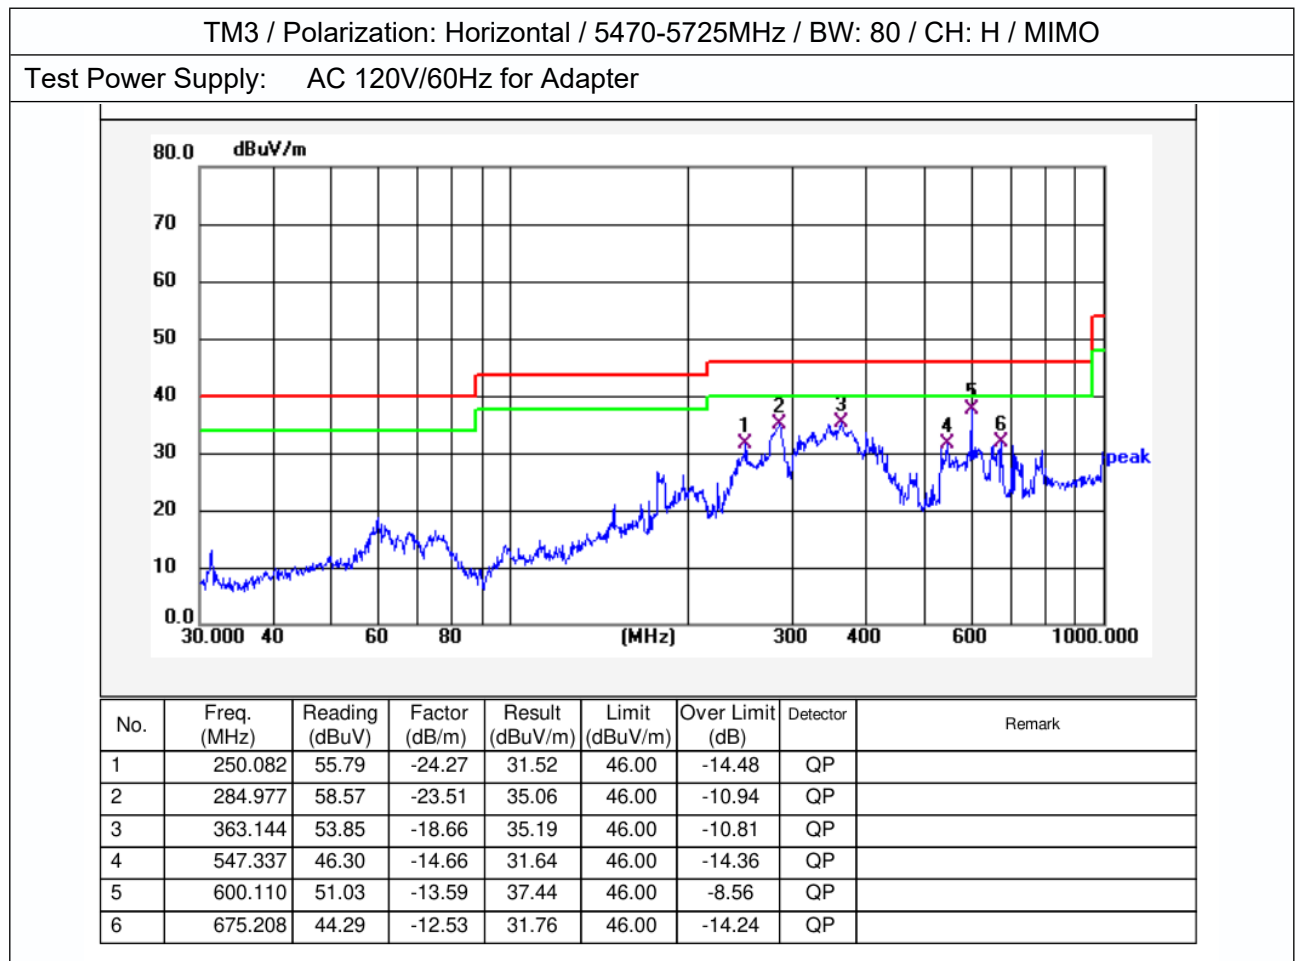

Temperature:	24.8 °C	Humidity:	51 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

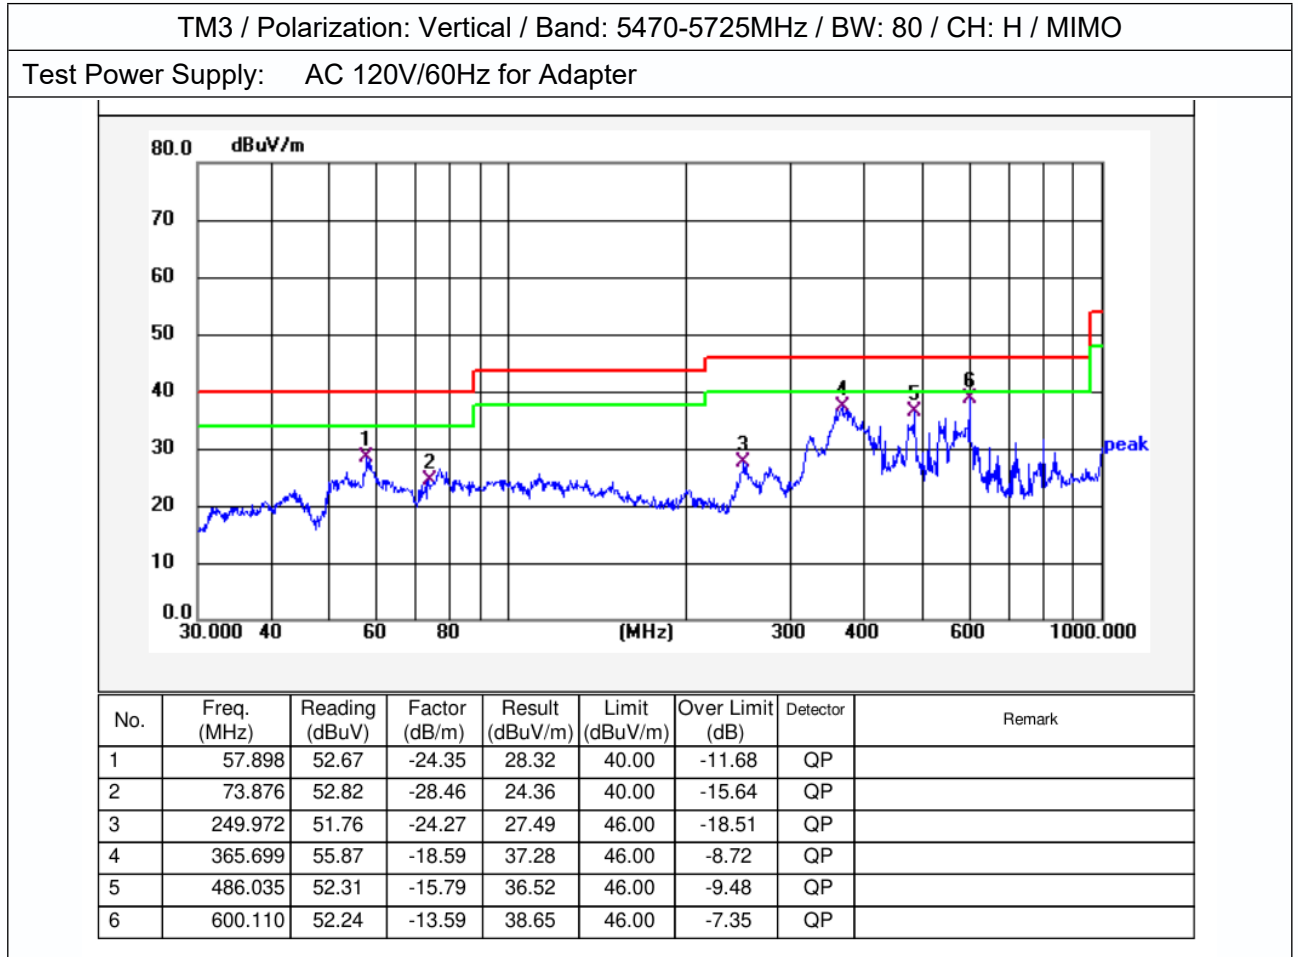


Note:


1. Only record the worst data in the report.
2. $\text{Result(dBuV/m)} = \text{Reading(dBuV)} + \text{Factor(dB/m)}$;
 $\text{Over Limit(dB)} = \text{Result(dBuV/m)} - \text{Limit(dBuV/m)}$

Test Sample: J9F-9K2

Temperature:	24.8 °C	Humidity:	51 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

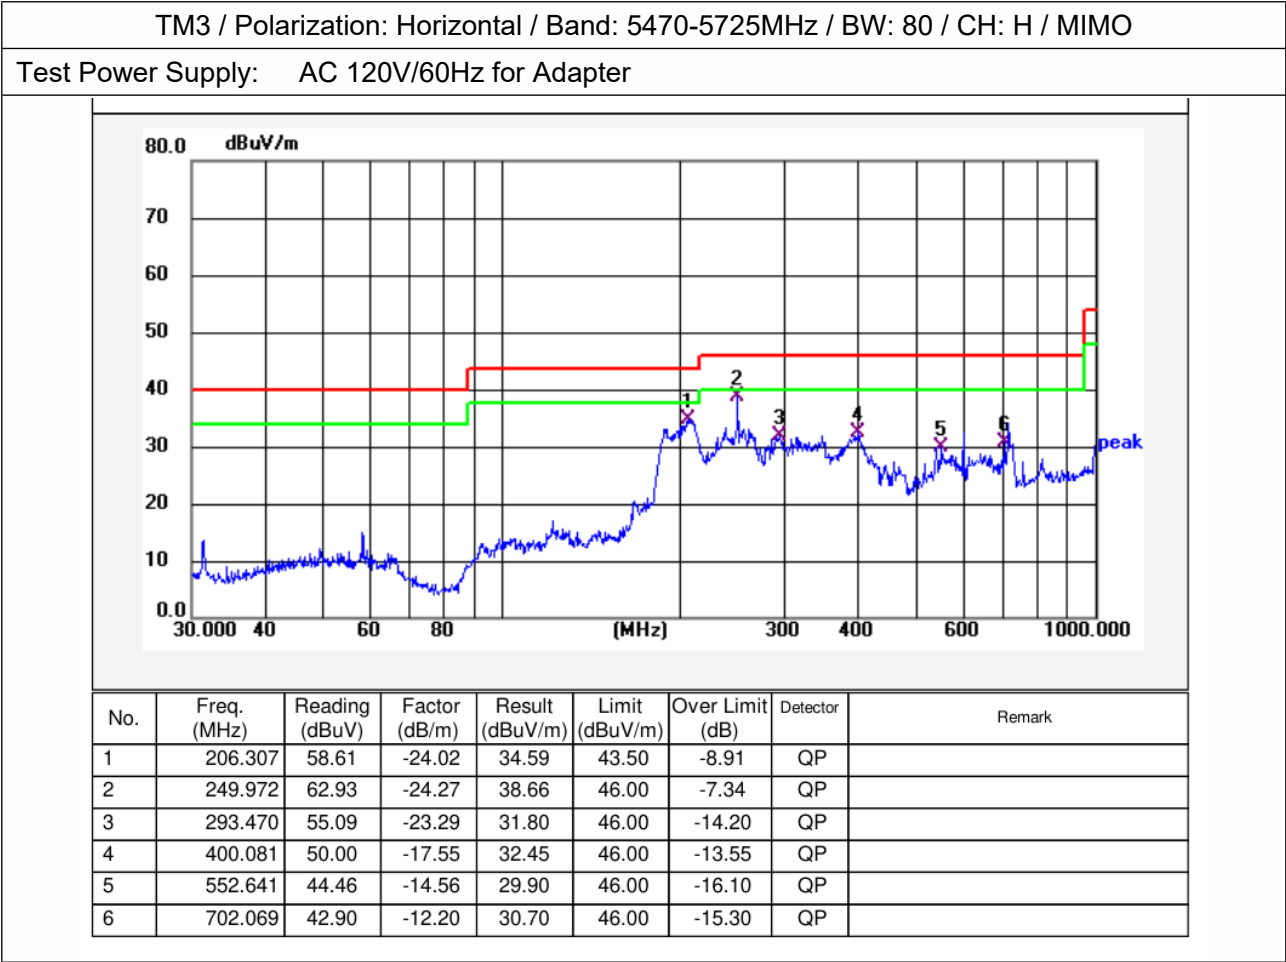

Temperature:	24.8 °C	Humidity:	51 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

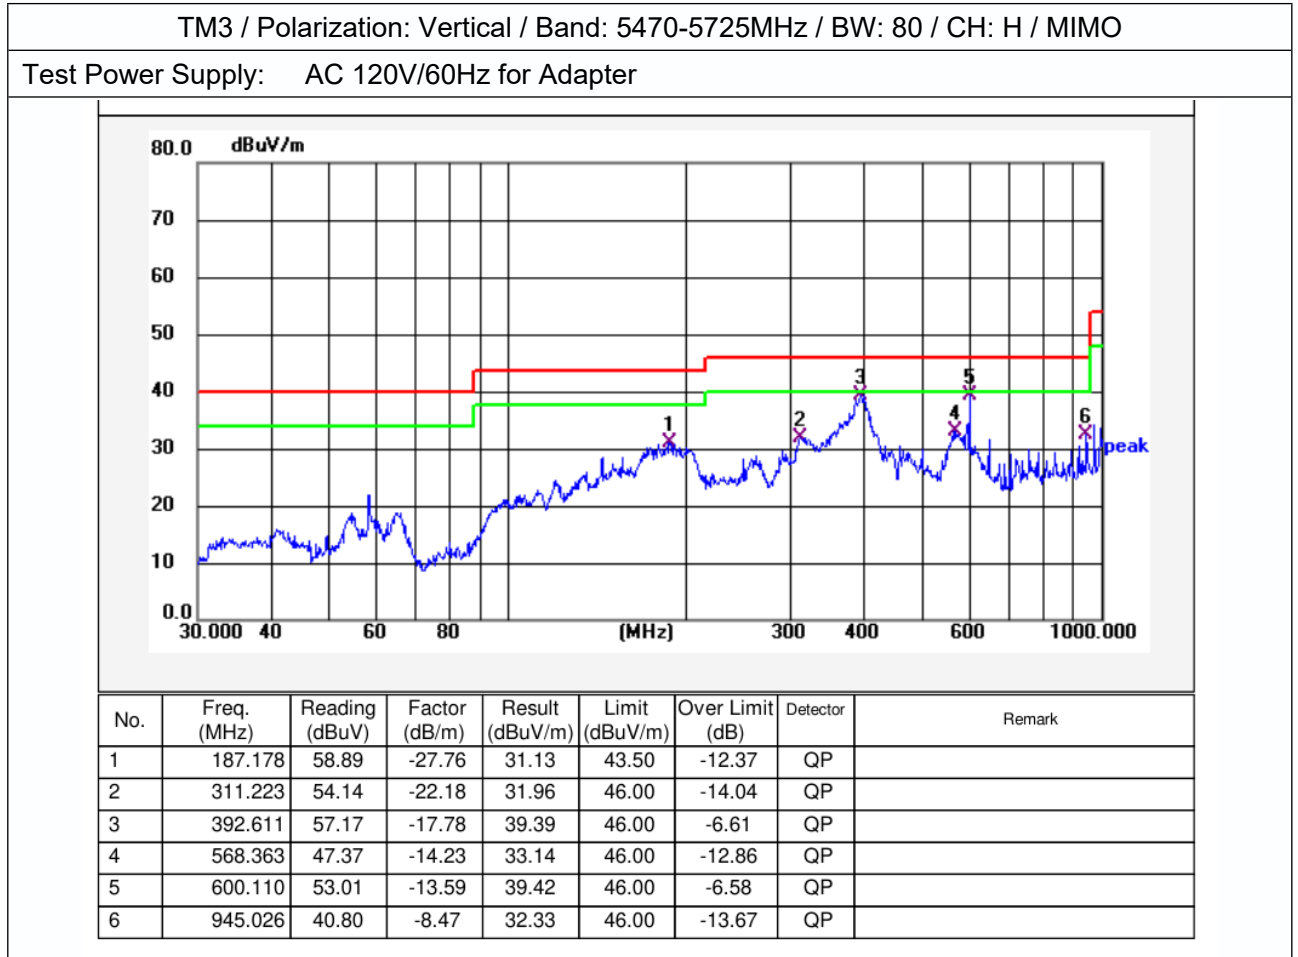

Note:

- Only record the worst data in the report.
- Result(dBuV/m) = Reading(dBuV) + Factor(dB/m);
Over Limit(dB) = Result(dBuV/m) - Limit(dBuV/m)

12. Undesirable emission limits (above 1GHz)

Test Requirement:	47 CFR Part 15.407(b)(1), 15.205, 15.209 47 CFR Part 15.407(b)(2), 15.205, 15.209 47 CFR Part 15.407(b)(3), 15.205, 15.209 47 CFR Part 15.407(b)(4), 15.205, 15.209 47 CFR Part 15.407(b)(10), 15.205, 15.209			
Test Limit:	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.			
	MHz	MHz	MHz	GHz
	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
	¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
	6.31175-6.31225	123-138	2200-2300	14.47-14.5
	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
	8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
	12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41				
¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.				
² Above 38.6				


	The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: <table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100 **</td><td>3</td></tr><tr><td>88-216</td><td>150 **</td><td>3</td></tr><tr><td>216-960</td><td>200 **</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table> ** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																							
0.009-0.490	2400/F(kHz)	300																							
0.490-1.705	24000/F(kHz)	30																							
1.705-30.0	30	30																							
30-88	100 **	3																							
88-216	150 **	3																							
216-960	200 **	3																							
Above 960	500	3																							
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 12.7.4, 12.7.6, 12.7.7																								
Procedure:	Above 1GHz: a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the																								

	limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
--	---

12.1. EUT Operation

Operating Environment:	
Test mode:	1:802.11a mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11a modulation type. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report. 2:802.11n mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11n modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 3:802.11ac mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ac modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report. 4:802.11ax mode:Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ax modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

12.2. Test Setup

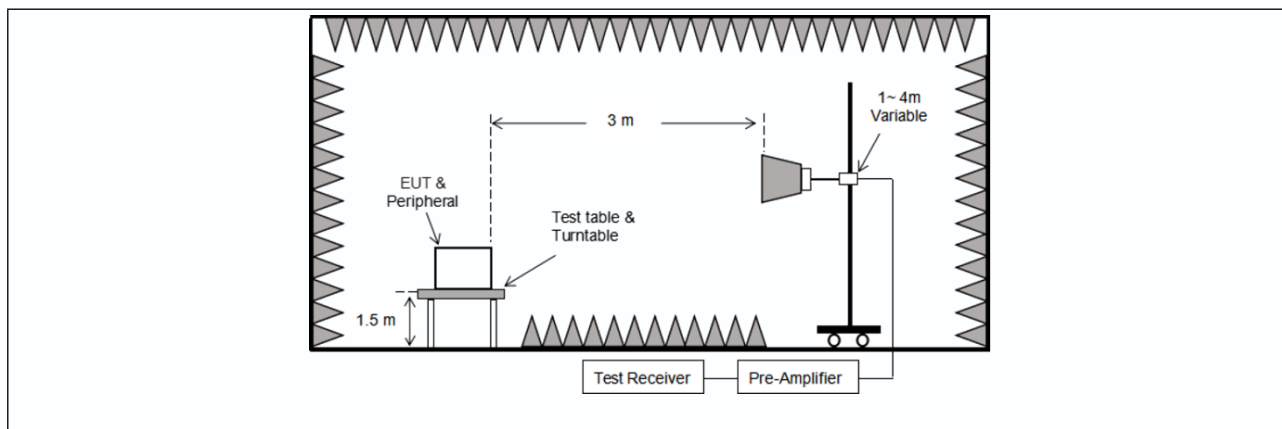

12.3. Test Data

Temperature:	23.5 °C	Humidity:	51 %	Atmospheric Pressure:	99.5 kPa
--------------	---------	-----------	------	-----------------------	----------

TM4 / Band: 5150-5250 MHz / BW: 40 / CH: L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
10380.00	29.63	23.81	53.44	68.20	-14.76	V	Peak
15570.00	30.97	28.91	59.88	68.20	-8.32	V	Peak
10380.00	30.81	23.81	54.62	68.20	-13.58	H	Peak
15570.00	31.59	28.91	60.50	68.20	-7.70	H	Peak
10380.00	20.37	23.81	44.18	54.00	-9.82	V	AVG
15570.00	20.88	28.91	49.79	54.00	-4.21	V	AVG
10380.00	20.76	23.81	44.57	54.00	-9.43	H	AVG
15570.00	21.06	28.91	49.97	54.00	-4.03	H	AVG
TM4 / Band: 5150-5250 MHz / BW: 40 / CH: H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
10460.00	30.01	23.80	53.81	68.20	-14.39	V	Peak
15690.00	31.17	30.03	61.20	68.20	-7.00	V	Peak
10460.00	30.48	23.80	54.28	68.20	-13.92	H	Peak
15690.00	31.72	30.03	61.75	68.20	-6.45	H	Peak
10460.00	20.65	23.80	44.45	54.00	-9.55	V	AVG
15690.00	20.78	30.03	50.81	54.00	-3.19	V	AVG
10460.00	20.52	23.80	44.32	54.00	-9.68	H	AVG
15690.00	20.69	30.03	50.72	54.00	-3.28	H	AVG

Remark:

1. Result =Reading + Factor
2. Only the worst case (802.11ax(HEW40) MIMO) is recorded in the report.
3. Test frequency are from 1GHz to 40GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

TM4 / Band: 5250-5350 MHz / BW: 80							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
10580.00	27.64	23.86	51.50	68.20	-16.70	V	Peak
15870.00	28.07	31.16	59.23	68.20	-8.97	V	Peak
10580.00	27.86	23.86	51.72	68.20	-16.48	H	Peak
15870.00	28.10	31.16	59.26	68.20	-8.94	H	Peak
10580.00	17.84	23.86	41.70	54.00	-12.30	V	AVG
15870.00	18.61	31.16	49.77	54.00	-4.23	V	AVG
10580.00	18.14	23.86	42.00	54.00	-12.00	H	AVG
15870.00	18.49	31.16	49.65	54.00	-4.35	H	AVG

Remark:

1. Result =Reading + Factor
2. Only the worst case (802.11ax(HEW80) MIMO) is recorded in the report.
3. Test frequency are from 1GHz to 40GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

TM3 / Band: 5470-5725 MHz / BW: 80 / CH: L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11060.00	27.62	24.12	51.74	68.20	-16.46	V	Peak
16590.00	27.94	32.96	60.90	68.20	-7.30	V	Peak
11060.00	28.78	24.12	52.90	68.20	-15.30	H	Peak
16590.00	27.58	32.96	60.54	68.20	-7.66	H	Peak
11060.00	17.36	24.12	41.48	54.00	-12.52	V	AVG
16590.00	18.06	32.96	51.02	54.00	-2.98	V	AVG
11060.00	16.98	24.12	41.10	54.00	-12.90	H	AVG
16590.00	17.68	32.96	50.64	54.00	-3.36	H	AVG
TM3 / Band: 5470-5725 MHz / BW: 80 / CH: H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11220.00	27.98	23.60	51.58	68.20	-16.62	V	Peak
16830.00	28.16	31.58	59.74	68.20	-8.46	V	Peak
11220.00	26.47	23.60	50.07	68.20	-18.13	H	Peak
16830.00	27.16	31.58	58.74	68.20	-9.46	H	Peak
11220.00	17.41	23.60	41.01	54.00	-12.99	V	AVG
16830.00	18.01	31.58	49.59	54.00	-4.41	V	AVG
11220.00	16.99	23.60	40.59	54.00	-13.41	H	AVG
16830.00	17.82	31.58	49.40	54.00	-4.60	H	AVG

Remark:

1. Result =Reading + Factor
2. Only the worst case (802.11ac(VHT80) MIMO) is recorded in the report.
3. Test frequency are from 1GHz to 40GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

TM3 / Band: 5725-5850 MHz / BW: 20 / CH: L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11490.00	28.47	23.36	51.83	68.20	-16.37	V	Peak
17235.00	29.77	31.97	61.74	68.20	-6.46	V	Peak
11490.00	28.86	23.36	52.22	68.20	-15.98	H	Peak
17235.00	30.02	31.97	61.99	68.20	-6.21	H	Peak
11490.00	17.72	23.36	41.08	54.00	-12.92	V	AVG
17235.00	18.45	31.97	50.42	54.00	-3.58	V	AVG
11490.00	17.89	23.36	41.25	54.00	-12.75	H	AVG
17235.00	18.00	31.97	49.97	54.00	-4.03	H	AVG
TM3 / Band: 5725-5850 MHz / BW: 20 / CH: M							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11570.00	29.05	23.42	52.47	68.20	-15.73	V	Peak
17355.00	29.65	32.18	61.83	68.20	-6.37	V	Peak
11570.00	29.06	23.42	52.48	68.20	-15.72	H	Peak
17355.00	30.11	32.18	62.29	68.20	-5.91	H	Peak
11570.00	18.994	23.42	42.41	54.00	-11.59	V	AVG
17355.00	18.767	32.18	50.95	54.00	-3.05	V	AVG
11570.00	18.880	23.42	42.30	54.00	-11.70	H	AVG
17355.00	18.381	32.18	50.56	54.00	-3.44	H	AVG
TM3 / Band: 5725-5850 MHz / BW: 20 / CH: H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11650.00	28.56	23.49	52.05	68.20	-16.15	V	Peak
17475.00	29.89	32.39	62.28	68.20	-5.92	V	Peak
11650.00	28.80	23.49	52.29	68.20	-15.91	H	Peak
17475.00	29.72	32.39	62.11	68.20	-6.09	H	Peak
11650.00	18.06	23.49	41.55	54.00	-12.45	V	AVG
17475.00	18.57	32.39	50.96	54.00	-3.04	V	AVG
11650.00	18.06	23.49	41.55	54.00	-12.45	H	AVG
17475.00	18.35	32.39	50.74	54.00	-3.26	H	AVG

Remark:

1. Result =Reading + Factor
2. Only the worst case (802.11ac(VHT20) MIMO) is recorded in the report.
3. Test frequency are from 1GHz to 40GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_RF

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----