



Nemko Test Report: 5L0190RUS1Rev1

Applicant: Siemens Subscriber Networks, Inc.
4849 Alpha Rd.
Dallas, Texas 75244

**Equipment Under Test:
(E.U.T.)** SpeedStream 6520 (060-N652-AXX) /
SpeedStream 6515 (060-N552-AXX)

In Accordance With: **FCC Part 15, Subpart C, 15.247**
Spread Spectrum Transmitters

Tested By: Nemko Dallas Inc.
802 N. Kealy
Lewisville, Texas 75057-3136

Authorized By:

A handwritten signature in blue ink, appearing to read 'Jon Fickel', is positioned above the 'Authorized By' label.

Date: 16 August 2005



NVLAP LAB CODE: 100426-0

Table of Contents

Section 1.	Summary of Test Results	3
Section 2.	Equipment Under Test (E.U.T.).....	6
Section 3.	Powerline Conducted Emissions	8
Section 4.	Minimum 6 dB Bandwidth	12
Section 5.	Maximum Peak Output Power.....	19
Section 6.	Spurious Emissions (conducted)	20
Section 7.	Spurious Emissions (Restricted Bands)	26
Section 8.	Peak Power Spectral Density.....	29
Section 9.	Test Equipment List	36
ANNEX A - TEST DETAILS.....		37
ANNEX B - TEST DIAGRAMS		45

EQUIPMENT: SpeedStream 6520 / 6515 Annex APROJECT NO. 5L0190RUS1Rev1**Section 1. Summary of Test Results**

Manufacturer: Siemens Subscriber Networks, Inc.
Model No.: SpeedStream 6520 Annex A (Model Tested)
SpeedStream 6515 Annex A
Serial No.: MAE:00:0B:23:CC:2C:BF

REMARKS:

This report contains the test results for the Siemens Subscribers Networks Model SpeedStream 6520 / 6515 Annex A. An external power adapter provided power.

Model No's:	Part No's:
SpeedStream 6520	060-N652-AXX
Speedstream 6515	060-N552-AXX

Small black box with SpeedStream written in Silver lettering on the top front bezel. Front bezel has LED indicators with writing: Power, Ethernet, Wireless, DSL, Internet, & USB. Back part of modem has DSL, USB, Ethernet ports 4-1, Power connection, Antenna and on/off push switch.

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.247 for Direct Sequence Spread Spectrum devices. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST
SPECIFICATIONS HAVE BEEN MADE. NONE

See “ Summary of Test Data”.



NVLAP LAB CODE: 100426-0

Nemko Dallas Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Dallas Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

NAME OF TEST	PARA. NO.	RESULT
Powerline Conducted Emissions	15.207(a)	Complies
Minimum 6 dB Bandwidth	15.247(a)(2)	Complies
Maximum Peak Power Output	15.247(b)(1)	Complies
Spurious Emissions (Antenna Conducted)	15.247(c)	Complies
Spurious Emissions (Restricted Bands)	15.247(c)	Complies
Peak Power Spectral Density	15.247(d)	Complies

Footnotes:

General Equipment Information

User Frequency Adjustment:	Software controlled
-----------------------------------	---------------------


Description of EUT

Small black box with SpeedStream written in Silver lettering on the top front bezel. Front bezel has LED indicators with writing: Power, Ethernet, Wireless, DSL, Internet, & USB. Back part of modem has DSL, USB, Ethernet ports 4-1, Power connection, Antenna and on/off push switch.

Antenna connection

The antenna is permanently attached. The antenna is installed during the manufacturing process and can only be replaced by opening the device. Internal to the device the antenna is connected to the PCB via a miniature, reverse gender connector.

System Diagram

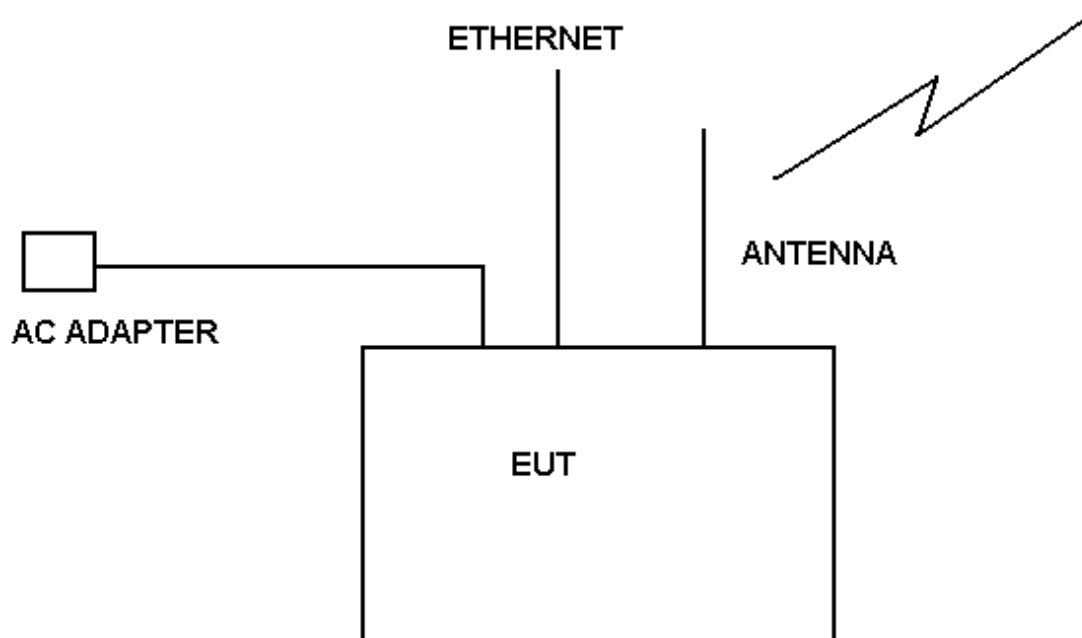

Section 3. Powerline Conducted Emissions

NAME OF TEST: Powerline Conducted Emissions	PARA. NO.: 15.207(a)
TESTED BY: Kevin Rose	DATE: 04/25/05

Test Results: Complies.


Measurement Data: See attached plots.

Measurement Uncertainty: +/- 1.7 dB

Test Data – Powerline Conducted Emissions

 Nemko NEMKO Dallas, Inc.		Dallas Headquarters: 802 N. Kealy Lewisville, TX 75057 Tel: (972) 436-9600 Fax: (972) 436-2667									
Conducted Emissions Powerline Voltage Measurement											
Complete	x	Job # : 5L0190E	Test # : CEPV-01								
Preliminary		Page 1	of 2								
Client Name : Siemens EUT Name : Compact Wireless Gateway EUT Model # : SpeedStream 6520 / 6515 Annex A EUT Part # : 060-N652-AXX / 060-N552-AXX EUT Serial # : MAE:00:0B:23:CC:2C:BF EUT Config. : CHANNEL 6 MAX TRANSMIT											
Specification : PART 15.247 Transducer # : 545 HP Filter # : 958 Cable 1 # : 1113 Cable 2 # : 1019 Detector 1 # : 716 Detector 2 # : 1464 Limiter # : 674		Reference : PART 15 SUB B CLASS B Date : 04/25/05 Time : 16:00 Staff : Kevin Rose Location : Lab 2 Photo ID: 5L0190ECEPV-01									
Temp. (deg. C) : 21 Humidity (%) : 49 EUT Voltage : 120VAC EUT Frequency : 60Hz Peak Bandwidth: 10kHz QP Bandwidth : 9kHz Avg. Bandwidth : 9kHz											
Meas. Freq. (MHz)	EUT Test Point	Detector Type (P, QP, A)	Limit Type (QP, A)	Meter Reading (dBuV)	Path Loss (dB)	Transducer Factor (dB)	Corrected Reading (dBuV)	Spec. limit (dBuV)	CR/SL Diff. (dB)	Pass Fail Unc.	Comment
0.15	H	QP	QP	49.2	0.2	2.6	52.0	66	56	-14.0	Pass
0.15	H	A	A	15.0	0.2	2.6	17.8	66	56	-38.2	Pass

Date: 04/25/2005 Time: 12:17:28 VOP: BNS502 B COND [QP] Test: Less Back Sequence: 3

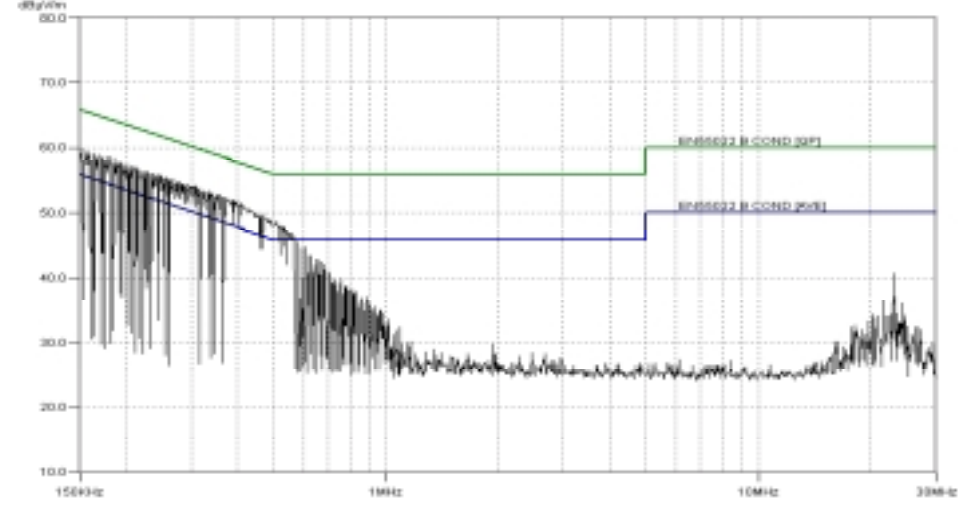

..\EMCShare\AUTOMATE\DATASHTS\CEP_Voltage Rev C.xl: Document Control #EMC DS EM COND VOLT



NEMKO Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Conducted Emissions

Powerline Voltage Measurement


Complete x
Preliminary

Job # 5I0190E Test # : CEPV-01
Page 2 of 2

Client Name : Siemens
EUT Name : Compact Wireless Gateway
EUT Model # : SpeedStream 6520 / 6515 Annex A
EUT Part # : 060-N652-AXX / 060-N552-AXX
EUT Serial # : MAE:00:0B:23:CC:2C:BF
EUT Config. : CHANNEL 6 MAX TRANSMIT

Specification : PART 15.247 Reference : PART 15 SUB B CLASS B

Meas. Freq. (MHz)	EUT Test Point	Detector Type (P, QP, A)	Limit Type (QP, A)	Meter Reading (dBuV)	Path Loss (dB)	Transducer Factor (dB)	Corrected Reading (dBuV)	Spec. limit (dBuV)		CR/SL Diff. (dB)	Pass Fail Unc.	Comment
								Q.P.	Avg.			
0.15	N	QP	QP	48.6	0.2	2.6	51.4	66	56.0003	-14.6	Pass	
0.15	N	A	A	14.2	0.2	2.6	17.0	66	56.0003	-39.0	Pass	

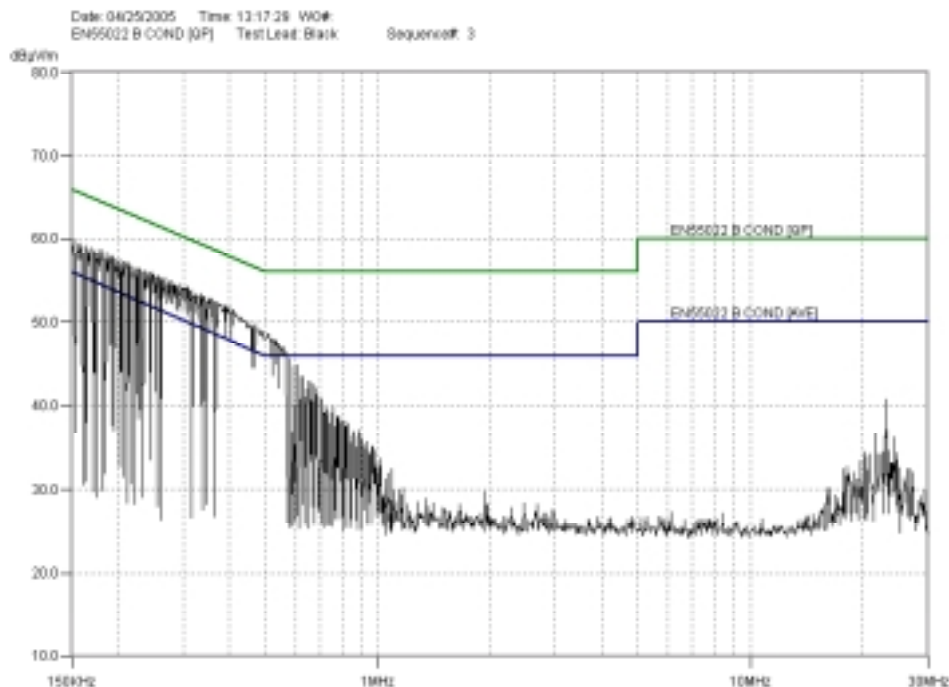

..\\EMCShare\\AUTOMATE\\DATASHTS\\CEPV_Voltage Rev C.xls Document Control #EMC DS EM COND VOLT

Photos – Powerline Conducted Emissions




Section 4. Minimum 6 dB Bandwidth

NAME OF TEST: Minimum 6 dB Bandwidth	PARA. NO.: 15.247(a)(2)
TESTED BY: Kevin Rose	DATE: 04/25/05

Test Results: Complies.

Measurement Data: See 6 dB BW plot
Measured 6 dB bandwidth: 16.6 MHz Max
Channel Separation: 5 MHz

Test Data – Occupied Bandwidth

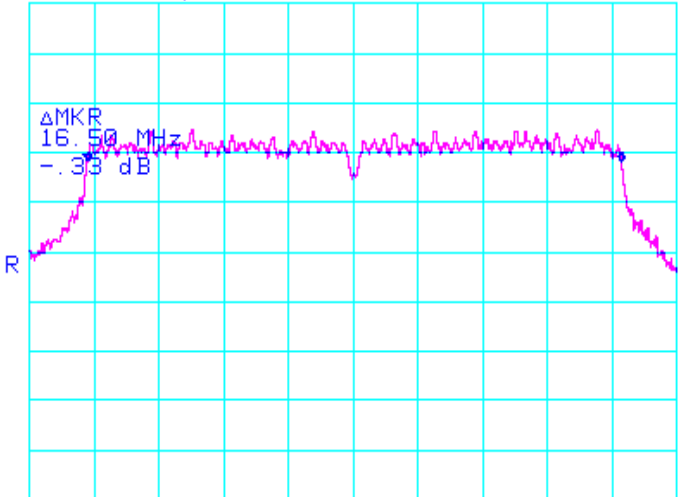 Nemko Dallas, Inc.		Dallas Headquarters: 802 N. Kealy Lewisville, TX 75057 Tel: (972) 436-9600 Fax: (972) 436-2667	
Data Plot		Occupied Bandwidth	
Page <u>1</u> of <u>6</u>			
Job No.:	5L0190R	Date:	4/25/2005
Specification:	15.247	Temperature(°C):	19
Tested By:	Kevin Rose	Relative Humidity(%):	56
E.U.T.:	SpeedStream 6520 / 6515 Annex A		
Configuration:	TX		
Sample Number:	1		
Location:	Lab 2	RBW:	100 kHz
Detector Type:	Peak	VBW:	100 kHz
		Measurement Distance:	NA m
Test Equipment Used			
Antenna:		Directional Coupler:	
Pre-Amp:		Cable #1:	1973
Filter:		Cable #2:	
Receiver:	1036	Cable #3:	
Attenuator #1:	1472	Cable #4:	
Attenuator #2:		Mixer:	
Additional equipment used:			
Measurement Uncertainty:	+/-1.7 dB		
ATTEN 10dBΔMKR -.33dB RL 128.3dBμV10dB/16.50MHz  CENTER 2.41200GHzSPAN 20.00MHz *RBW 100kHz*VBW 100kHzSWP 50.0ms			
Notes: CHANNEL 1 - 54 Mbs			

Test Data – Occupied Bandwidth




Nemko Dallas, Inc.

Dallas Headquarters:
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Occupied Bandwidth

Page 2 of 6
Job No.: 5L0190R Date: 4/25/2005
Specification: 15.247 Temperature(°C): 19
Tested By: Kevin Rose Relative Humidity(%) 56
E.U.T.: SpeedStream 6520 / 6515 Annex A
Configuration: TX

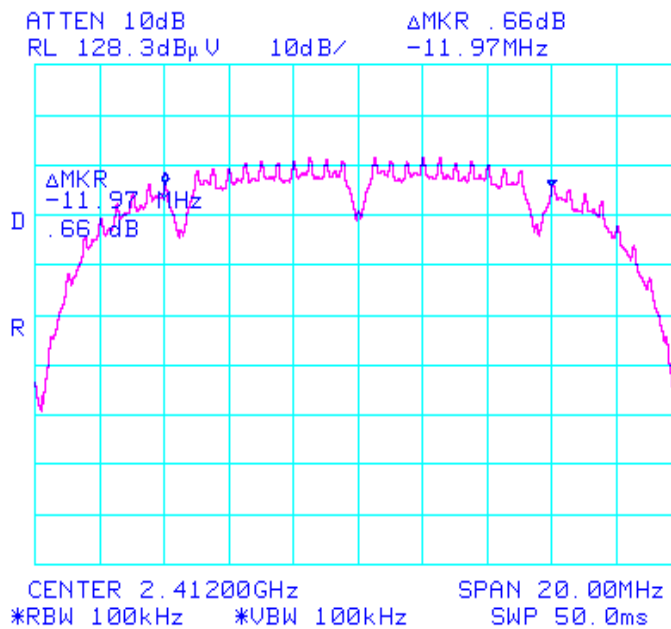

Notes: CHANNEL 1
1 Mbs

Test Data – Occupied Bandwidth



Nemko Dallas, Inc.

Dallas Headquarters:


802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Page 3 of 6

Job No.:	5L0190R	Date:	4/25/2005
Specification:	15.247	Temperature(°C):	19
Tested By:	Kevin Rose	Relative Humidity(%)	56
E.U.T.:	SpeedStream 6520 / 6515 Annex A		
Configuration:	TX		

Occupied Bandwidth

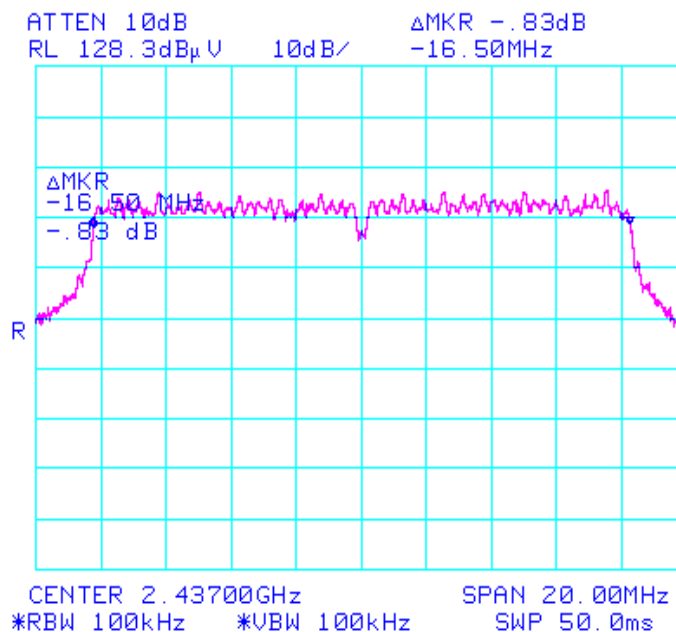

Notes: CHANNEL 6
54 Mbps

Test Data – Occupied Bandwidth



Nemko Dallas, Inc.

Dallas Headquarters:


802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Page 5 of 6

Job No.: 5L0190R Date: 4/25/2005
Specification: 15.247 Temperature(°C): 19
Tested By: Kevin Rose Relative Humidity(%) 56
E.U.T.: SpeedStream 6520 / 6515 Annex A
Configuration: TX

Occupied Bandwidth

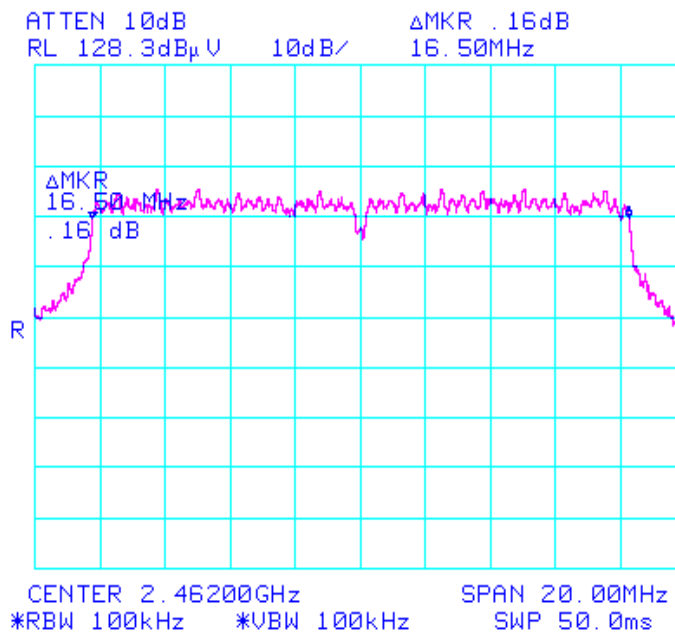

Notes: CHANNEL 11
54 Mbps

Test Data – Occupied Bandwidth



Nemko Dallas, Inc.

Dallas Headquarters:


802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Occupied Bandwidth

Page 6 of 6

Job No.:	5L0190R	Date:	4/25/2005
Specification:	15.247	Temperature(°C):	19
Tested By:	Kevin Rose	Relative Humidity(%)	56
E.U.T.:	SpeedStream 6520 / 6515 Annex A		
Configuration:	TX		

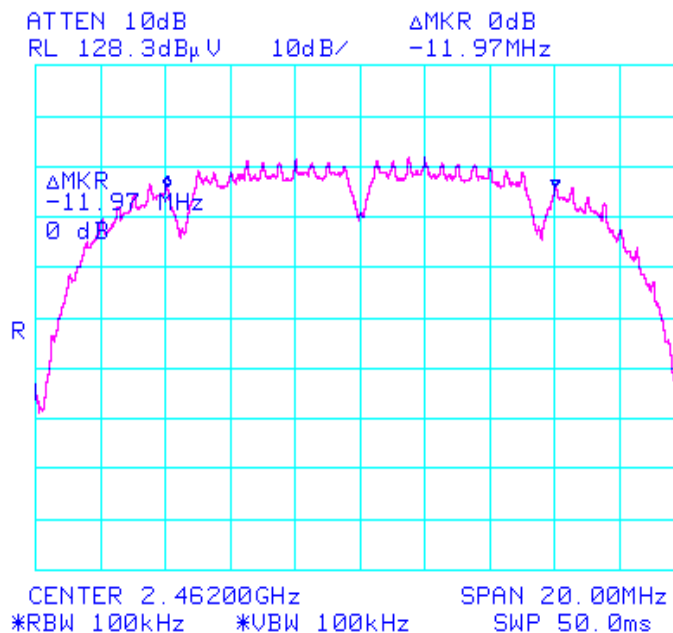

Notes: CHANNEL 11
1 Mbps

Section 5. Maximum Peak Output Power

NAME OF TEST: Maximum Peak Output power	PARA. NO.: 15.247(b)(1)
TESTED BY: Kevin Rose	DATE: 04/22/05

Test Results: Complies.

Measurement Data:

Antennas: Monopole

Frequency (MHz)	Data Rate (Bps)	Antenna Gain (dBi)	Peak Power (dBm)	Peak Power (mW)	EIRP (dBm)
2412	1	2.5	15	31.6	17.5
2437	1	2.5	15.5	35.5	18
2462	1	2.5	15.9	38.8	18.4
2412	54	2.5	15.5	35.5	18
2437	54	2.5	15.9	38.8	18.4
2462	54	2.5	16.4	43.7	18.9

Note: The AC input voltage was varied from 102 VAC to 138 VAC with no change in rf output power noted.

Equipment Used: 1082-1477-2071-2072-1036

Measurement Uncertainty: +/- 0.7 dB

Temperature: 22 °C

Relative Humidity: 48 %


Section 6. Spurious Emissions (conducted)

NAME OF TEST: Spurious Emissions (conducted)	PARA. NO.: 15.247(c)
TESTED BY: Kevin Rose	DATE: 04/25/05

Test Results: Complies.

Measurement Data: See attached plots.

Test Data – Spurious Emissions at Antenna Terminals

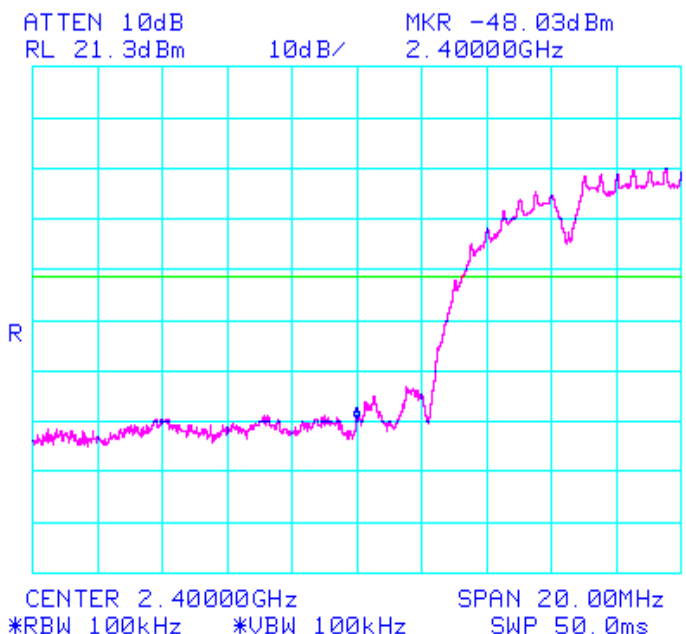		Dallas Headquarters: 802 N. Kealy Lewisville, TX 75057 Tel: (972) 436-9600 Fax: (972) 436-2667	
Nemko Dallas, Inc.			
Data Plot Page <u>1</u> of <u>5</u> Job No.: 5L0190R Specification: 15.247 Tested By: Kevin Rose E.U.T.: SpeedStream 6520 / 6515 Annex A Configuration: TX Sample Number: 1 Location: Lab 2 Detector Type: Peak		Spurious Emissions at Antenna Terminals Date: 25-Apr-05 Temperature(°C): 19 Relative Humidity(%): 56 Complete <u>X</u> Preliminary: _____ RBW: 100 kHz VBW: 100 kHz Measurement Distance: <u>NA</u> m	
Test Equipment Used			
Antenna: _____ Pre-Amp: _____ Filter: _____ Receiver: 1036 Attenuator #1: 1472 Attenuator #2: _____ Additional equipment used: _____ Measurement Uncertainty: +/-1.7 dB		Directional Coupler: _____ Cable #1: 1973 Cable #2: _____ Cable #3: _____ Cable #4: _____ Mixer: _____	
			
Notes: CHANNEL 1 1 Mbps Lower band edge			

Test Data – Spurious Emissions at Antenna Terminals




Nemko Dallas, Inc.

Dallas Headquarters:
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Spurious Emissions at Antenna Terminals

Page 2 of 5
Job No.: 5L0190R Date: 4/25/2005
Specification: 15.247 Temperature(°C): 19
Tested By: Kevin Rose Relative Humidity(%) 56
E.U.T.: SpeedStream 6520 / 6515 Annex A
Configuration: TX

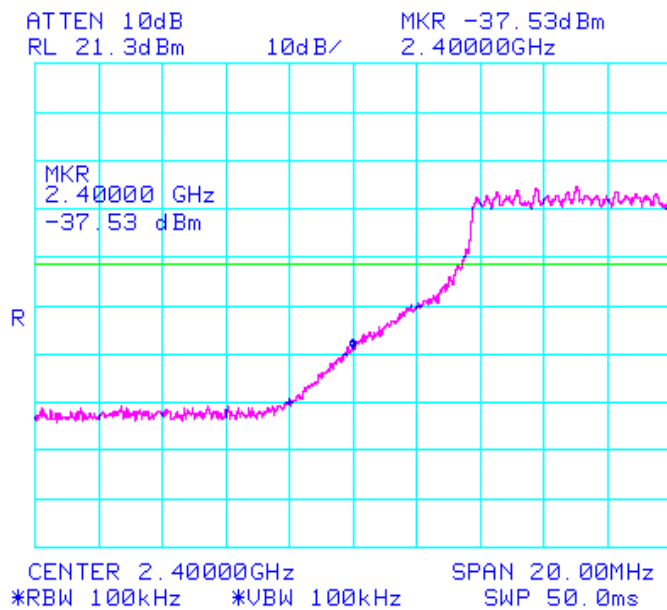

Notes: CHANNEL 1
54 Mbps
Lower band edge

Test Data – Spurious Emissions at Antenna Terminals




Nemko Dallas, Inc.

Dallas Headquarters:
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Spurious Emissions at Antenna Terminals

Page 3 of 5
Job No.: 5L0190R Date: 4/25/2005
Specification: 15.247 Temperature(°C): 19
Tested By: Kevin Rose Relative Humidity(%) 56
E.U.T.: SpeedStream 6520 / 6515 Annex A
Configuration: TX

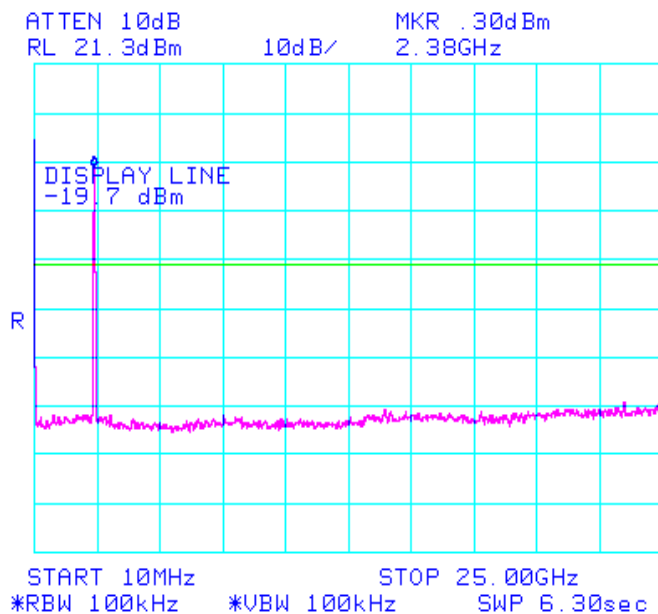

Notes: CHANNEL 1
54 Mbs

Test Data – Spurious Emissions at Antenna Terminals



Nemko Dallas, Inc.


Dallas Headquarters:
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Spurious Emissions at Antenna Terminals

Page 4 of 5

Job No.:	5L0190R	Date:	4/25/2005
Specification:	15.247	Temperature(°C):	19
Tested By:	Kevin Rose	Relative Humidity(%)	56
E.U.T.:	SpeedStream 6520 / 6515 Annex A		
Configuration:	TX		

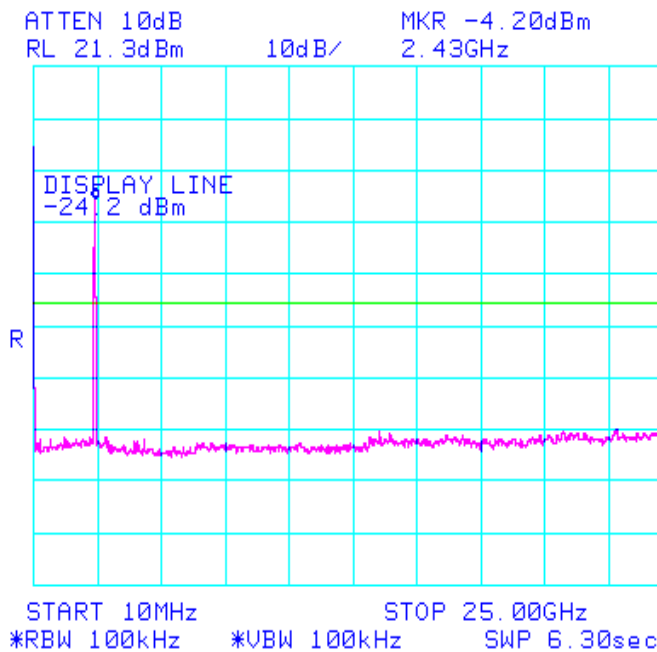

Notes: CHANNEL 6
54 Mbs

Test Data – Spurious Emissions at Antenna Terminals



Nemko Dallas, Inc.

Dallas Headquarters:


802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Spurious Emissions at Antenna Terminals

Page 5 of 5

Job No.:	5L0190R	Date:	4/25/2005
Specification:	15.247	Temperature(°C):	19
Tested By:	Kevin Rose	Relative Humidity(%)	56
E.U.T.:	SpeedStream 6520 / 6515 Annex A		
Configuration:	TX		

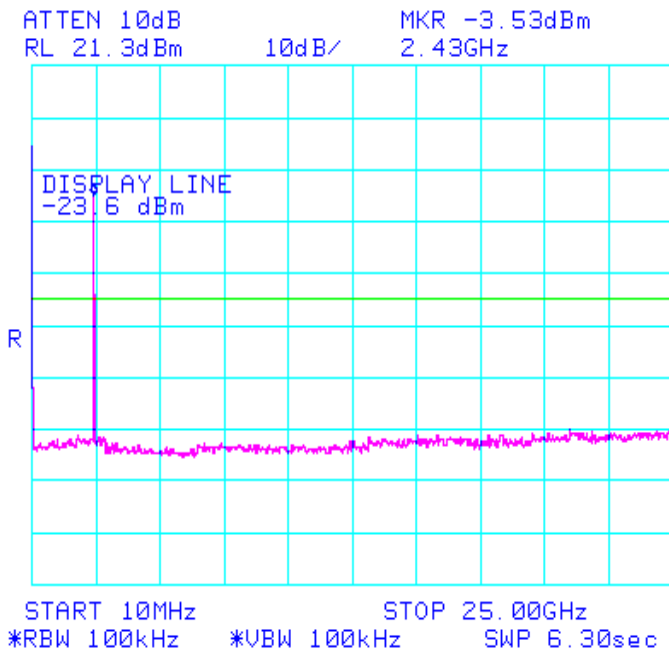

Notes: CHANNEL 11

54 Mbs

Section 7. Spurious Emissions (Restricted Bands)

NAME OF TEST: Spurious Emissions (Restricted Bands)	PARA. NO.: 15.247 (c)
TESTED BY: Kevin Rose	DATE: 04/18/05

Test Results: Complies.

Measurement Data: See attached table.

Test Data – Radiated Emissions

		Dallas Headquarters: 802 N. Kealy Lewisville, TX 75057 Tel: (972) 436-9600 Fax: (972) 436-2667						
Nemko Dallas,								
Radiated Emissions								
Page 1 of 1								
Job No.:	5L0190R	Date:	4/18/2005					
Specification:	15.247	Temperature(°C):	20					
Tested By:	Kevin Rose	Relative Humidity(%)	39					
E.U.T.:	SpeedStream 6520 / 6515 Annex A							
Configuration:	TX							
Sample Number:	1							
Location:	AC 3	RBW:	1 MHz (Peak and Average)					
Detector Type:	Peak	VBW:	1 MHz (Peak), 10 Hz Average					
Test Equipment Used								
Antenna:	1304	Directional Coupler:	#N/A					
Pre-Amp:	#N/A	Cable #1:	1484					
Filter:	#N/A	Cable #2:	1485					
Receiver:	1464	Cable #3:	0					
Attenuator #1	1472	Cable #4:	#N/A					
Attenuator #2:	#N/A	Mixer:	#N/A					
Measurement Uncertainty: +/- 3.6 dB								
Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Detector /
2.4835	37.5	28.2	3.1	0.0	68.8	74	54	Peak - / Vertical
2.4835	22.5	28.2	3.1	0.0	53.8	74	54	Average - / Vertical
2.4835	33.8	28.2	3.1	0.0	65.1	74	54	Peak - / Horizontal
2.4835	22.2	28.2	3.1	0.0	53.5	74	54	Average - NF / Horizontal
Notes:								
The spectrum was searched to 25								
The device was tested at 2.412, 2.437 and 2.462 MHz and no emissions were found above the								
Data presented is to demonstrate upper bandedge compliance on								

Setup Photos




Section 8. Peak Power Spectral Density

NAME OF TEST: Peak Power Spectral Density	PARA. NO.: 15.247(d)
TESTED BY: Kevin Rose	DATE: 04/25/05

Test Results: Complies.

Measurement Data: See attached plots.

Test Data – Spectral Density

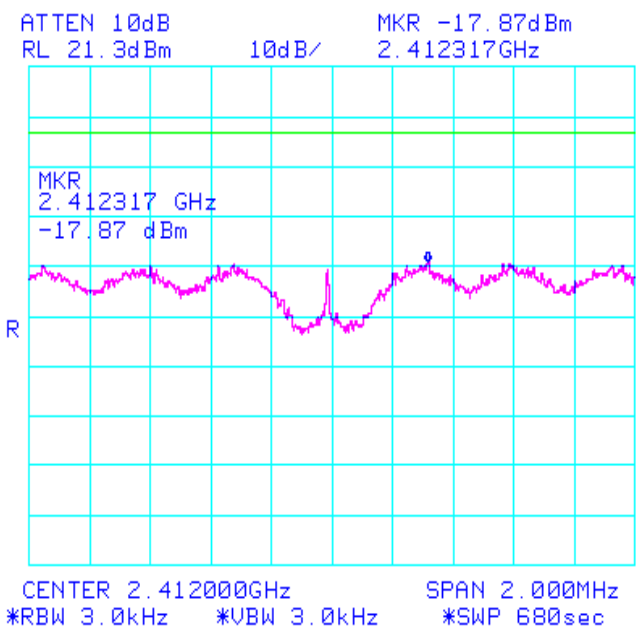		Dallas Headquarters: 802 N. Kealy Lewisville, TX 75057 Tel: (972) 436-9600 Fax: (972) 436-2667	
		Nemko Dallas, Inc.	
Data Plot		Peak Power Spectral Density	
Page 1 of 6		Complete <u>X</u>	
Job No.:	5L0190R	Date:	25-Apr-05
Specification:	15.247	Temperature(°C):	19
Tested By:	Kevin Rose	Relative Humidity(%)	56
E.U.T.:	SpeedStream 6520 / 6515 Annex A		
Configuration:	TX		
Sample Number:	1		
Location:	#N/A	RBW:	#N/A
Detector Type:	#N/A	VBW:	#N/A
Test Equipment Used			
Antenna:	1304	Directional Coupler:	#N/A
Pre-Amp:	#N/A	Cable #1:	1973
Filter:	#N/A	Cable #2:	#N/A
Receiver:	#N/A	Cable #3:	#N/A
Attenuator #1:	#N/A	Cable #4:	#N/A
Attenuator #2:	#N/A	Mixer:	#N/A
Additional equipment used:			
Measurement Uncertainty:	+/-1.7 dB		
			
Notes: channel 1 54Mbs			

Test Data – Spectral Density



Nemko Dallas, Inc.


Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Peak Power Spectral Density

Page 2 of 6
Job No.: 5L0190R Date: 4/25/2005
Specification: 15.247 Temperature(°C): 19
Tested By: Kevin Rose Relative Humidity(%) 56
E.U.T.: SpeedStream 6520 / 6515 Annex A
Configuration: TX

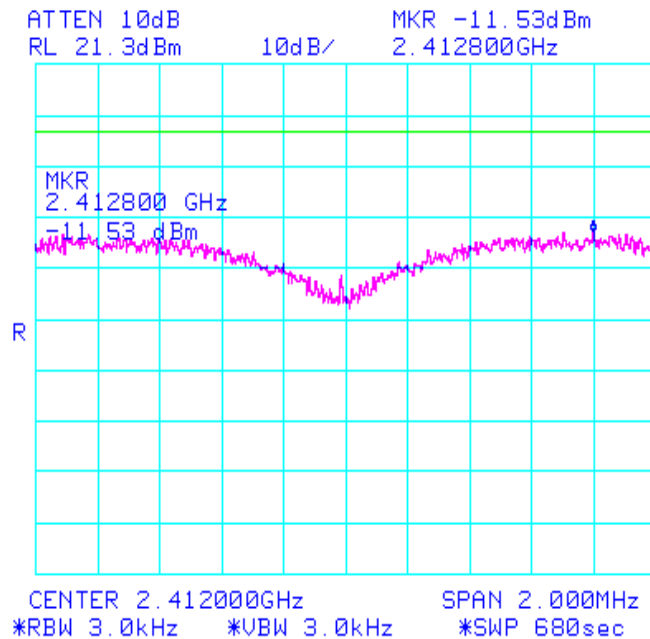

Notes: channel 1 1Mbps

Test Data – Spectral Density



Nemko Dallas, Inc.

Dallas Headquarters:


802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Peak Power Spectral Density

Page 3 of 6

Job No.: 5L0190R Date: 4/25/2005
Specification: 15.247 Temperature(°C): 19
Tested By: Kevin Rose Relative Humidity(%) 56
E.U.T.: SpeedStream 6520 / 6515 Annex A
Configuration: TX

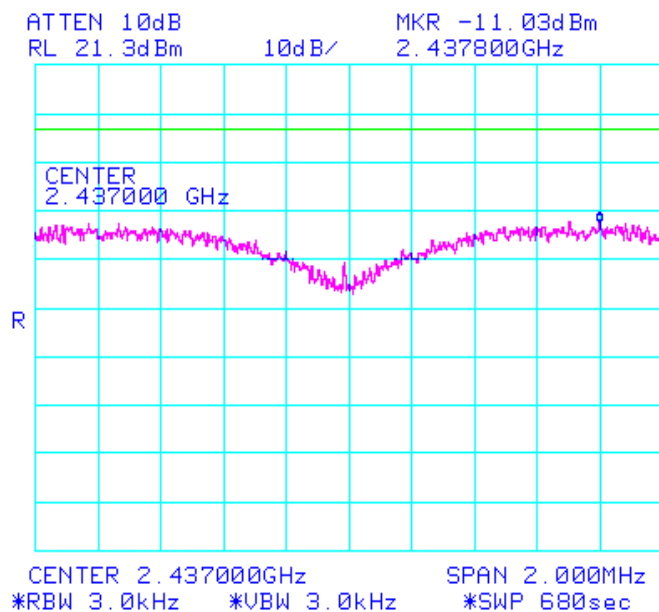

Notes: channel 6 1Mbps

Test Data – Spectral Density




Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667**Data Plot**

Page 4 of 6

Job No.: 5L0190R Date: 4/25/2005
Specification: 15.247 Temperature(°C): 19
Tested By: Kevin Rose Relative Humidity(%) 56
E.U.T.: SpeedStream 6520 / 6515 Annex A
Configuration: TX

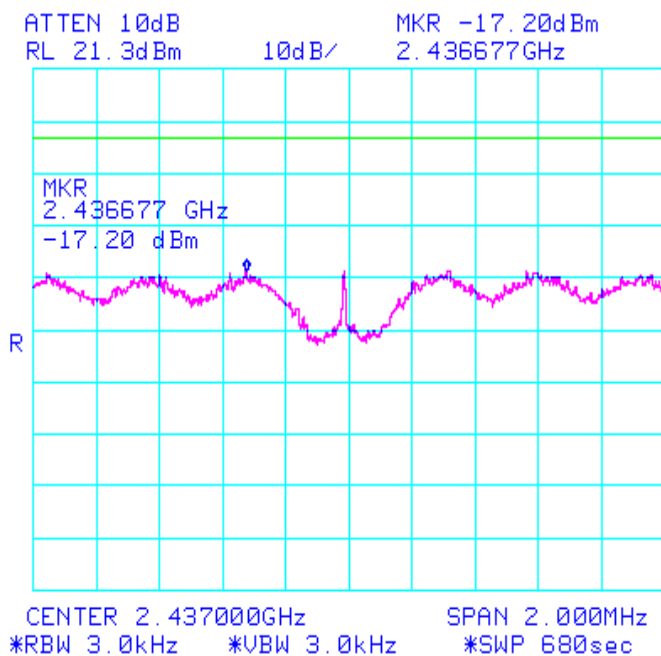Peak Power Spectral Density

Notes: channel 6 54Mbps

Test Data – Spectral Density




Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667**Data Plot**

Page 5 of 6

Job No.: 5L0190R Date: 4/25/2005
Specification: 15.247 Temperature(°C): 19
Tested By: Kevin Rose Relative Humidity(%) 56
E.U.T.: SpeedStream 6520 / 6515 Annex A
Configuration: TX

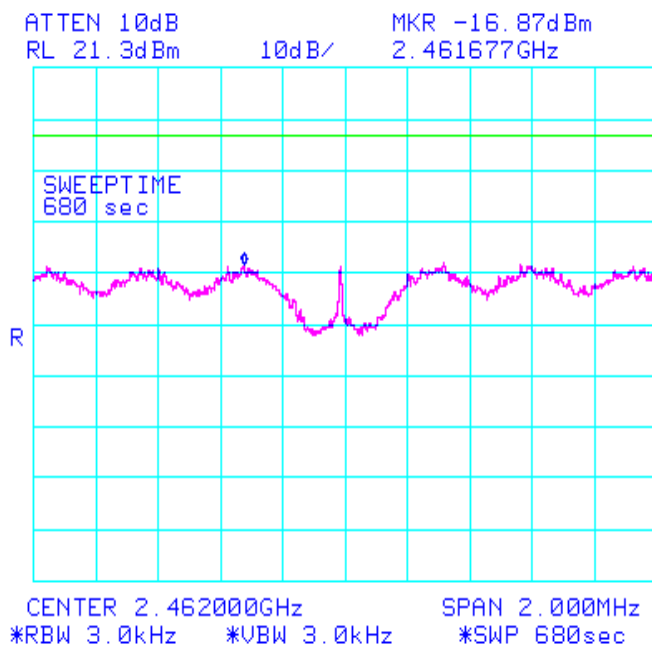Peak Power Spectral Density

Notes: channel 11 54Mbps

Test Data – Spectral Density



Nemko Dallas, Inc.


Dallas Headquarters:
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Peak Power Spectral Density

Page 6 of 6

Job No.: 5L0190R Date: 4/25/2005
Specification: 15.247 Temperature(°C): 19
Tested By: Kevin Rose Relative Humidity(%) 56
E.U.T.: SpeedStream 6520 / 6515 Annex A
Configuration: TX

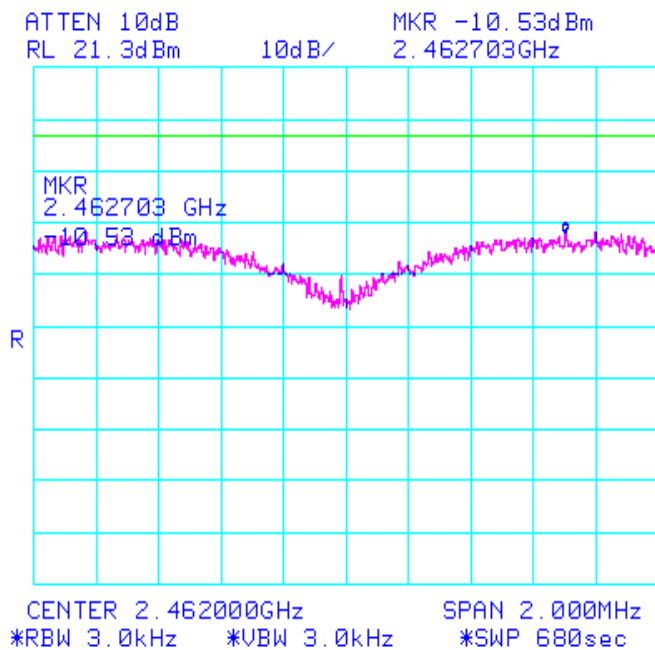

Notes: channel 11 1Mbps

Section 9. Test Equipment List

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
966	Receiver	Rohde & Schwartz ESH2	880370/029	09/20/04	09/20/05
545	LISN	Schwarz Beck 8120	8120350	09/17/04	09/17/05
968	Filter, High pass 5khz	Solartron 7930-5.0	933124	08/17/04	08/17/05
1986	CABLE, 1m	KTL RG223	N/A	06/09/04	06/09/05
1019	CABLE, 9.5m	KTL RG223	N/A	07/27/04	07/27/05
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	07/30/04	07/31/06
1472	20db Attenuator DC 18 Ghz	Omni Spectra 20600-20db	NONE	CBU	N/A
1973	CABLE, 1m	KTL 0	N/A	08/02/04	08/02/05
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	11/12/04	11/12/05
1082	CABLE 2m	Astrolab 32027-2-29094-72TC	N/A	CBU	N/A
1480	Bilog Antenna	Schaffner-Chase CBL6111C	2572	CalNotReq	N/A
1484	Cable 2.0-18.0 Ghz	Storm PR90-010-072	N/A	08/26/04	08/26/05
1485	Cable 2.0-18.0 Ghz	Storm PR90-010-216	N/A	08/02/04	08/02/05
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	07/30/04	07/31/06
1472	20db Attenuator DC 18 Ghz	Omni Spectra 20600-20db	NONE	CBU	N/A
1304	HORN ANTENNA	ELECTRO METRICS RGA-60	6151	09/22/03	09/22/05
1477	20db Attenuator DC 18 Ghz	MCL Inc. BW-S20W5	NONE	CBU	N/A
1036	SPECTRUM ANALYZER	ROHDE & SCHWARZ FSEK30	830844/006	03/22/04	03/23/06

ANNEX A - TEST DETAILS

EQUIPMENT: SpeedStream 6520 / 6515 Annex A

PROJECT NO. 5L0190RUS1Rev1

NAME OF TEST: Powerline Conducted Emissions	PARA. NO.: 15.207(a)
---	----------------------

Minimum Standard:

The R.F. that is conducted back onto the AC power line on any frequency within the band 0.15 to 30 MHz shall not exceed 250 μ V (48 dB μ V) across 50 ohms.

EQUIPMENT: SpeedStream 6520 / 6515 Annex A

PROJECT NO. 5L0190RUS1Rev1

NAME OF TEST: Minimum 6 dB bandwidth	PARA. NO.: 15.247(a)(2)
--------------------------------------	-------------------------

Minimum Standard: The minimum 6 dB bandwidth shall be at least 500 kHz

NAME OF TEST: Maximum Peak Output Power

PARA. NO.: 15.247(b)(1)

Minimum Standard:

The maximum peak output power shall not exceed 1 watt.

If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point to point operation may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceed 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operation may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Direct Measurement Method For Detachable Antennas:

If the antenna is detachable, a peak power meter is used to measure the power output with the transmitter operating into a 50 ohm load. The dBi gain of the antenna(s) employed shall be reported.

Calculation Of EIRP For Integral Antenna:

If the antenna is not detachable from the circuit then the Peak Power Output is derived from the peak radiated field strength of the fundamental emission by using the plane wave relation $GP/4\pi R^2 = E^2/120\pi$ and proceeding as follows:

$$P = \frac{E^2 R^2}{30G} = \frac{E^2 3^2}{30G}$$

where,

P = the equivalent isotropic radiated power in watts

E = the maximum measured field strength in V/m

R = the measurement range (3 meters)

G = the numeric gain of the transmit antenna in relation to an isotropic radiator

The RBW of the spectrum analyzer shall be set to a value greater than the measured 6 dB occupied bandwidth of the E.U.T.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Spurious Emissions (conducted)

PARA. NO.: 15.247(c)

Minimum Standard:

In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits. Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM IS SEARCHED TO THE 10th HARMONIC OF THE HIGHEST FREQUENCY GENERATED IN THE EUT.

Method Of Measurement:30 MHz - 10th harmonic plot

RBW: 100 kHz

VBW: 300 kHz

Sweep: Auto

Display line: -20 dBc

Lower Band Edge

RBW: At least 1% of span/div.

VBW: >RBW

Span: As necessary to display any spurious at band edge.

Sweep: Auto

Center Frequency: 902 MHz, 2400 MHz, or 5725 MHz

Marker: Peak of fundamental emission

Marker Δ : Peak of highest spurious level below center frequency.Upper Band Edge

RBW: At least 1% of span/div.

VBW: >RBW

Span: As necessary to display any spurious at band edge.

Sweep: Auto

Center Frequency: 928 MHz, 2483.5 MHz, or 5850 MHz

Marker: Peak of fundamental emission

Marker Δ : Peak of highest spurious level above center frequency.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

EQUIPMENT: SpeedStream 6520 / 6515 Annex APROJECT NO. 5L0190RUS1Rev1

NAME OF TEST: Radiated Spurious Emissions

PARA. NO.: 15.247(c)

Minimum Standard:

In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits:

Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM WAS SEARCHED TO THE 10th HARMONIC**15.205 Restricted Bands**

MHz	MHz	MHz	GHz
0.09-0.11	16.42-16.423	399.9-410	4.5-5.25
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.125-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41	1718		

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

EQUIPMENT: SpeedStream 6520 / 6515 Annex APROJECT NO. 5L0190RUS1Rev1

NAME OF TEST: Transmitter Power Density

PARA. NO.: 15.247(d)

Minimum Standard: The transmitted power density averaged over any 1 second interval shall not be greater than +8 dBm in any 3 kHz bandwidth.

Method Of Measurement: The spectrum analyzer is set as follows:

RBW: 3 kHz

VBW: >3 kHz

Span: => measured 6 dB bandwidth

Sweep: Span(kHz)/3 (i.e. for a span of 1.5 MHz the sweep rate is $1500/3 = 500$ sec.

LOG dB/div.: 2 dB

Note: For devices with spectrum line spacing ≤ 3 kHz, the RBW of the analyzer is reduced until the spectral lines are resolved. The measurement data is normalized to 3 kHz by summing the power of all the individual spectral lines within a 3 kHz band in linear power units.

For Devices With Integral Antenna:


For devices with non-detachable antennas, the received field strength is peaked and the spectrum analyzer is set as above. The peak emission level is then measured and converted to a field strength by adding the appropriate antenna factor and cable loss. This field strength is then converted to an equivalent isotropic radiated power using the same method as described for Peak Power output.

Number of channels tested:


Tuning Range	Number Of Channels Tested	Channel Location In Band
1 MHz or Less	1	Middle
1 to 10 MHz	2	Top And Bottom
More Than 10 MHz	3	Top, Middle, Bottom

ANNEX B - TEST DIAGRAMS


Test Site For Radiated Emissions

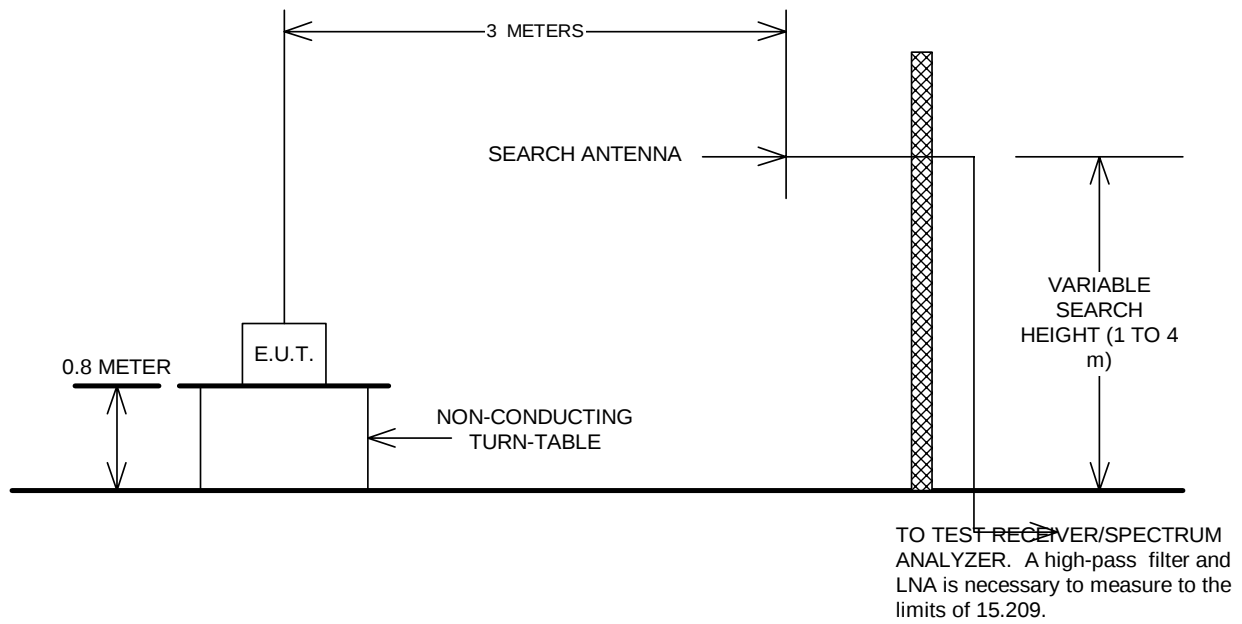

Conducted Emissions

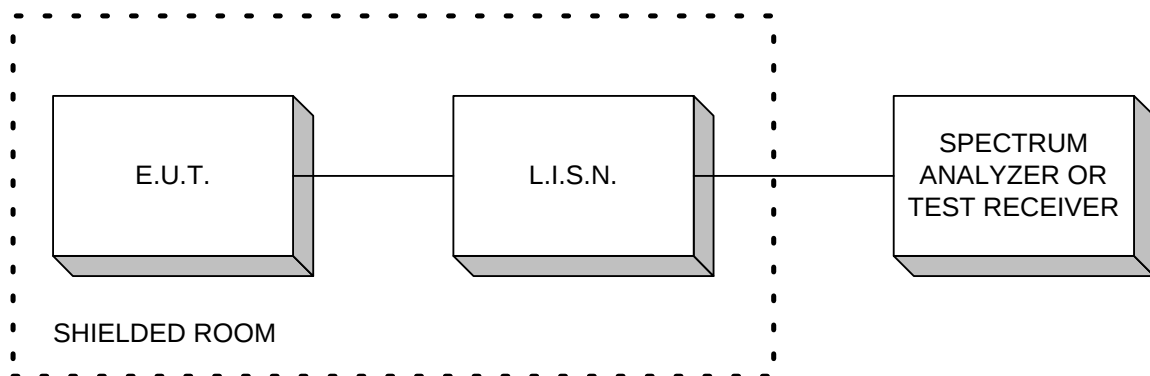

Peak Power At Antenna Terminals

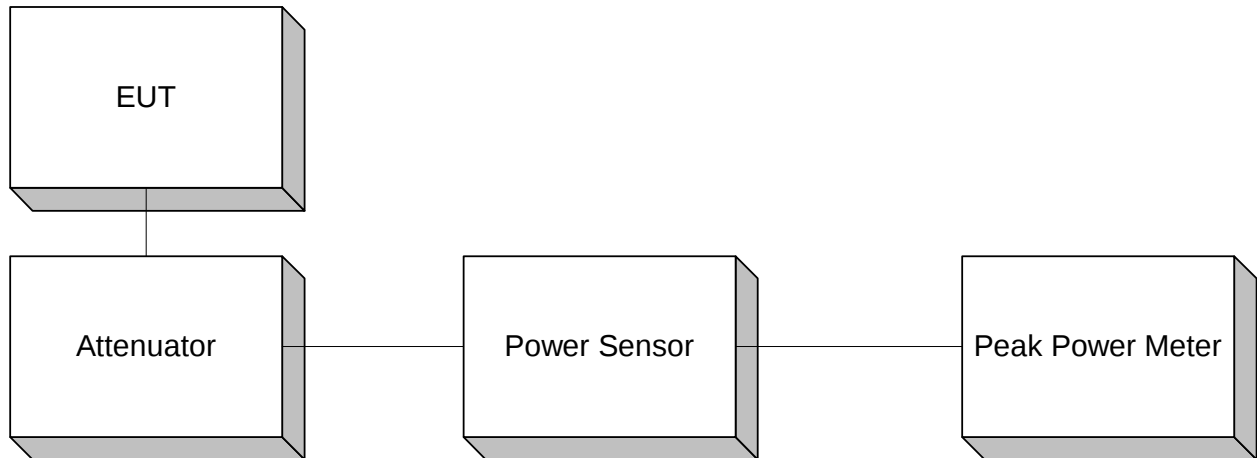

**Minimum 6 dB Bandwidth
Peak Power Spectral Density
Spurious Emissions (conducted)**

