

FCC TYPE APPROVAL EMI MEASUREMENT AND TEST REPORT

For

Waxess Inc.

34 Executive Park, Suite 250, Irvine, CA 92614

FCC ID: SNBDM100HS

This Report Concerns: ☒ Original Report	Equipment Type: Dual Mode CDMA 850/1900 & 2.4GHz FHSS Cordless Phone
Test Engineer: Ming Jin / 	
Report No.: R0502172(HS)	
Report Date: 2005-03-13	
Reviewed By: Daniel Deng / 	
Prepared By: Bay Area Compliance Laboratory Corporation (BACL) 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: The test report is specially limited to the above company and the product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the US Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
BLOCK DIAGRAM.....	6
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
REMOTE SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLING LIST AND DETAILS	6
POWER SUPPLY LIST AND DETAILS	6
CONFIGURATION OF TEST SYSTEM	7
TEST SETUP BLOCK DIAGRAM	7
SUMMARY OF TEST RESULTS	8
ANTENNA REQUIREMENT	9
§15.207(A) - CONDUCTED EMISSION.....	10
MEASUREMENT UNCERTAINTY	10
TEST SETUP.....	10
RECEIVER ANALYZER SETUP	10
TEST EQUIPMENT LIST AND DETAILS.....	10
TEST PROCEDURE	10
ENVIRONMENTAL CONDITIONS	11
SUMMARY OF TEST RESULTS	11
CONDUCTED EMISSIONS TEST DATA	11
PLOT OF CONDUCTED EMISSIONS TEST DATA	11
§15.205 & §15.209 - RADIATED EMISSION.....	14
MEASUREMENT UNCERTAINTY	14
TEST SETUP.....	14
SPECTRUM ANALYZER SETUP	14
TEST EQUIPMENT LIST AND DETAILS.....	14
ENVIRONMENTAL CONDITIONS	15
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
SUMMARY OF TEST RESULTS	15
HANDSET, RADIATED EMISSION TEST DATA @ 3 METER	16
§15.247 (A) (1) - HOPPING CHANNEL SEPARATION	18
STANDARD APPLICABLE	18
MEASUREMENT PROCEDURE.....	18
TEST EQUIPMENT	18
ENVIRONMENTAL CONDITIONS	18
MEASUREMENT RESULTS.....	19
PLOTS OF HOPPING CHANNEL SEPARATION	20
§15.247 (A) (1) - CHANNEL BANDWIDTH	22
STANDARD APPLICABLE	22
MEASUREMENT PROCEDURE.....	22
TEST EQUIPMENT	22
ENVIRONMENTAL CONDITIONS	22
MEASUREMENT RESULT	23

PLOT OF CHANNEL BANDWIDTH	23
§15.247 (A) (1) (III) - NUMBER OF HOPPING FREQUENCY USED	25
STANDARD APPLICABLE	25
MEASUREMENT PROCEDURE.....	25
TEST EQUIPMENT	25
ENVIRONMENTAL CONDITIONS	25
MEASUREMENT RESULTS.....	25
PLOTS OF NUMBER OF HOPPING FREQUENCY	26
§15.247 9 (A) (1) (III) - DWELL TIME	27
STANDARD APPLICABLE	27
MEASUREMENT PROCEDURE.....	27
TEST EQUIPMENT	27
ENVIRONMENTAL CONDITIONS	27
MEASUREMENT RESULTS.....	27
PLOTS OF DWELL TIME	27
§15.247 (B) (1) - MAXIMUM PEAK OUTPUT POWER.....	31
STANDARD APPLICABLE	31
MEASUREMENT PROCEDURE.....	31
TEST EQUIPMENT	31
ENVIRONMENTAL CONDITIONS	31
MEASUREMENT RESULT	31
§15.247 (C) - 100 KHZ BANDWIDTH OF BAND EDGES	32
STANDARD APPLICABLE	32
MEASUREMENT PROCEDURE.....	32
TEST EQUIPMENT	32
ENVIRONMENTAL CONDITIONS	32
PLOTS OF 100kHz BANDWIDTH OF BAND EDGE	32
§2.1051 - SPURIOUS EMISSION AT ANTENNA PORT.....	34
STANDARD APPLICABLE	34
MEASUREMENT PROCEDURE.....	34
TEST EQUIPMENT	34
ENVIRONMENTAL CONDITIONS	34
MEASUREMENT RESULTS.....	34

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Waxess Inc.*'s product, FCC ID: SNBDM100HS, or the "EUT" as referred to this report is a handset of Dual Mode CDMA 850/1900 & 2.4GHz FHSS Cordless Phone. The EUT is measured approximately 195mmL x 53mmW x 28mmH.

** The test data gathered are from typical production sample, serial number: F60AD60C, F60AD609, provided by the manufacturer.*

Objective

This type approval report is prepared on behalf of *Waxess Inc.* in accordance with Part 2, Subpart J, and Part 15, Subparts A, B, C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC 15.247 rules for the FHSS:

- Maximum Peak Output Power
- Hopping Channel Separation
- Number of Hopping Frequency Used
- 20 dB Bandwidth
- Dwell Time on Each Channel
- 100 kHz Bandwidth of Band Edge
- Conducted Emission
- Spurious Emission
- Radiated Emission
- Antenna Requirement

Related Submittal(s)/Grant(s)

No Related Submittals

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003& TIA/EIA-603.

Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules and Article 8 of the VCCI regulations. The facility also complies with the test methods and procedures set forth in ANSI C63.4-2003.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations is attached hereinafter and can also be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA 603A.

The final qualification test was performed with the EUT operating at normal mode.

Block Diagram

Please refer to Exhibit D.

Equipment Modifications

No modifications were made to the EUT.

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
Southern Telecom	Telephone	None	None	None
Teltone Corp	Simulator	TLS-3B-01	80071	None

Remote Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
Agilent	Wireless CDMA Tester	Agilent E6393A	JP1MJ00416	None

External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
None-Shielded RJ-11 Cable	1.5	RJ-11 Port/EUT	Simulator RJ11Port
None-Shielded RJ-11 Cable	1.5	Support telephone	Simulator RJ11Port

Power Supply List and Details


Manufacturer	Description	Model	Serial Number	FCC ID
Maxess	AC Adaptor	AD-48081000	None	None

Configuration of Test System



Handset

Test Setup Block Diagram

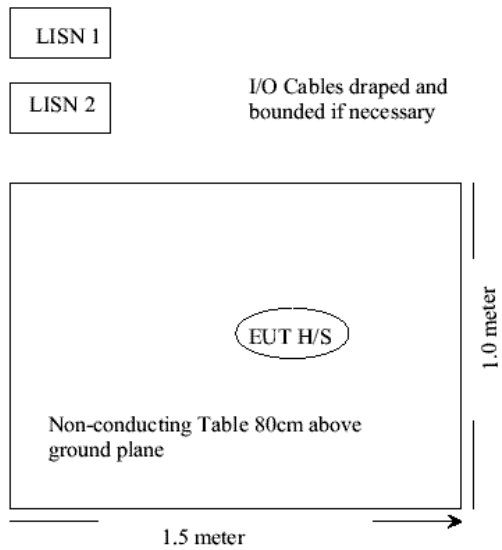

SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	Compliant
§ 15.205	Restricted Bands	Compliant
§15.207 (a)	Conducted Emission	Compliant
§15.209	Radiated Emission	Within Measurement Uncertainty
§15.247 (a) (1)	Hopping Channel Separation	Compliant
§15.247 (a) (1)	Channel Bandwidth	Compliant
§15.247 (a) (1) (iii)	Number of Hopping Frequencies Used	Compliant
§15.247 (a) (1) (iii)	Dwell Time of Each Frequency within a 10 Second Period of time (0.4 x Number of Channel)	Compliant
§15.247 (b) (1)	Maximum Peak Output Power	Compliant
§ 15.247 (b)(4) § 2.1093	RF Safety Requirements	Compliant
§ 15.247 (c)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§ 2.1051	Spurious Emission at Antenna Port	Compliant

ANTENNA REQUIREMENT

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (1), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The gain of antenna used for transmitting is 0 dBi by default, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

§15.207(a) - CONDUCTED EMISSION

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is ± 2.4 dB.

Test Setup

The measurement was performed at shield room, using the same setup per ANSI C63.4 – 2003 measurement procedure. The specification used was FCC Class B limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The adapter was connected with LISN-1.

Receiver Analyzer Setup

The receiver was set to investigate the spectrum from 150 kHz to 30MHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
Rohde & Schwarz	LISN	ESH2-Z5	871884/039	2004-03-28
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2004-09-15
Fluke	Calibrated Voltmeter	189	18485-38	2004-07-18

*** Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the power cord of the adapter was connected to the mains outlet of the LISN-1.

Maximizing procedure were performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Quasi-Peak readings are distinguished with an "QP". Average readings are distinguished with an "Ave".

Environmental Conditions

Temperature:	23° C
Relative Humidity:	35%
ATM Pressure:	1019 mbar

The testing was performed by Ming Jin on 2004-11-01.

Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC Conducted limit for a Class B device, with the *worst* margin reading of:

-17.3 dB at 0.150 MHz in the Neutral conductor

Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC CLASS B	
Frequency MHz	Amplitude dBμV	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dBμV	Margin dB
0.150	48.7	Qp	Neutral	66	-17.3
0.150	41.2	Qp	Line	66	-24.8
0.150	19.4	Ave	Neutral	56	-36.6
12.300	9.7	Ave	Neutral	50	-40.3
4.930	2.0	Ave	Line	46	-44.0
0.150	11.9	Ave	Line	56	-44.1
12.300	15.2	Qp	Neutral	60	-44.8
19.100	3.8	Ave	Line	50	-46.2
4.670	2.8	Ave	Neutral	50	-47.2
19.100	7.2	Qp	Line	60	-52.8
4.900	2.3	Qp	Line	56	-53.7
4.660	3.0	Qp	Neutral	60	-57.0

Plot of Conducted Emissions Test Data

Plot(s) of Conducted Emissions Test Data is presented in the following page as reference.


Bay Area Compliance Laboratory Corp
Class B

01. Nov 04 13:03

EUT: DM100S
Manuf: WAXESS
Op Cond: Normal
Operator: Ming
Comment: N

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
180k	1M	5k	9k	QP+AV	20ms	18dB LN	OFF
1M	5M	10k	9k	QP+AV	1ms	18dB LN	OFF
5M	30M	100k	9k	QP+AV	1ms	18dB LN	OFF

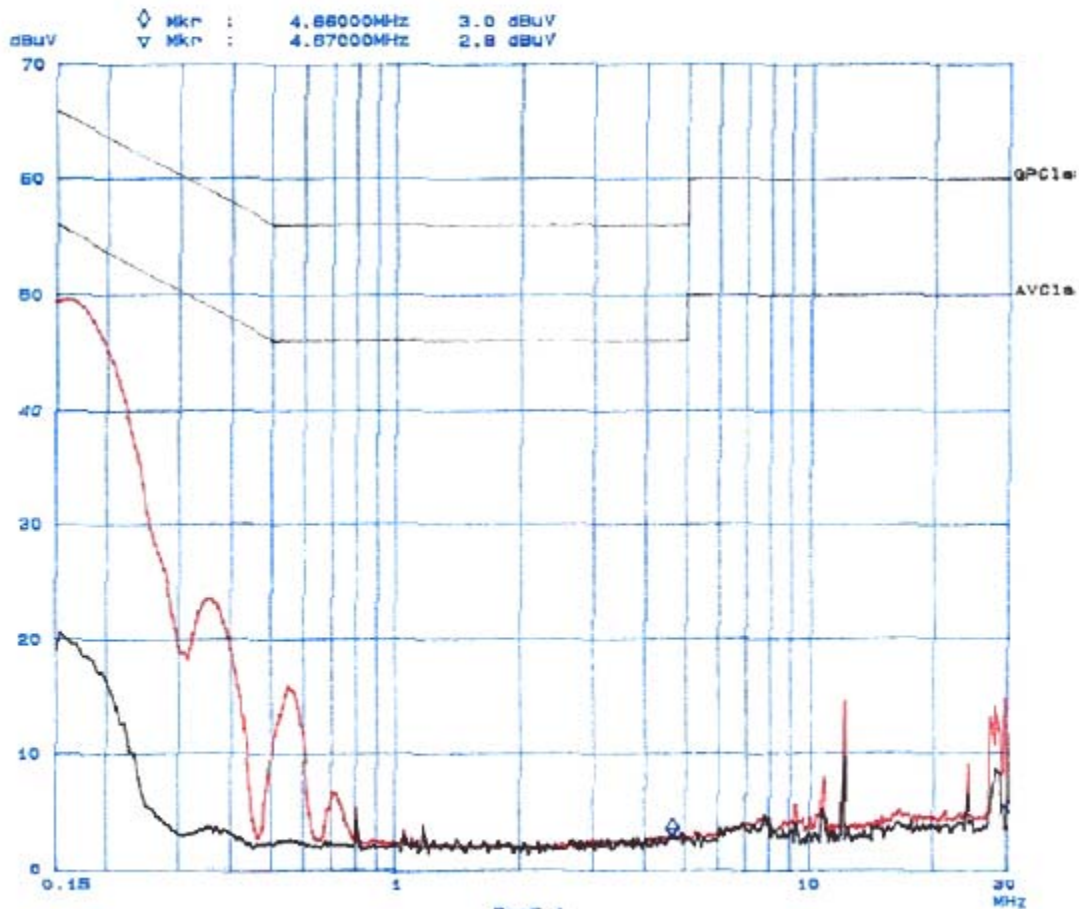


Bay Area Compliance Laboratory Corp
Class B

01. Nov 04 11:23

EUT: DM1006
Manuf: WAXESS
Op Cond: Normal
Operator: Ming
Comment: L

Scan Settings (3 Ranges)

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	15dB LN	OFF
1M	5M	10k	9k	QP+AV	1ms	15dB LN	OFF
5M	30M	100k	9k	QP+AV	1ms	15dB LN	OFF

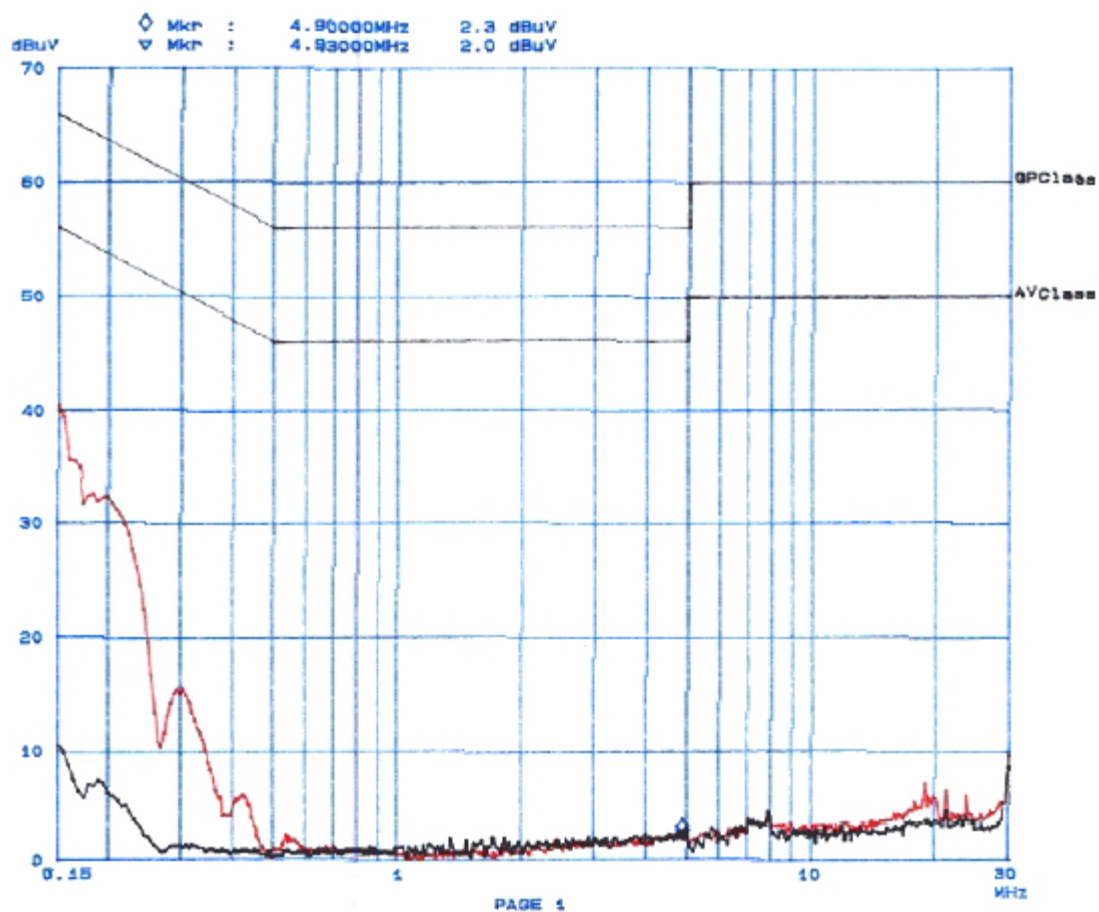

§15.205 & §15.209 - RADIATED EMISSION

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

Test Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with ANSI C63.4-2003. The specification used was the FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The adapter was connected with 120Vac/60Hz power source.

Spectrum Analyzer Setup

According to FCC Rules, 47 CFR §15.33 (a) (1), the system was tested to 25GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
Below 30MHz	10kHz	10kHz
30 – 1000MHz	100kHz	100kHz
Above 1000MHz	1MHz	1MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Due Date
HP	Amplifier, Pre, microwave	8449B	3147A00400	2004-03-14
HP	Amplifier, Pre	8447E	1937A01057	2004-08-04
HP	Analyzer, Spectrum	8565EC	3946A00131	2004-08-06
ETS	Antenna, Biconical	3110B	9603-2315	2004-01-11
A.R.A.	Antenna, Horn, DRG	DRG-118/A	1132	2004-09-30
A. H. Systems	Antenna, Horn, DRG	SAS-200/571	2455-261	2004-08-01
ETS	Antenna, logperiodic	3148	0004-1155	2004-10-11

*** Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	23° C
Relative Humidity:	35%
ATM Pressure:	1019 mbar

The testing was performed by Ming Jin on 2004-11-09.

Test Procedure

For the radiated emissions test, both the laptop and all peripheral power cords were connected to the AC floor outlet since the power supply used in the laptop did not provide an accessory power outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limits), and are distinguished with a "**Qp**" in the data table.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

Summary of Test Results

According to the recorded data in following table, for base, the EUT measures within the measurement uncertainty, and had the worst margin of:

- 5.1 dB at 7203.17 MHz in the **Horizontal** polarization, Low Channel.
- 8.6 dB at 7324.99 MHz in the **Horizontal** polarization, Middle Channel.
- 6.9 dB at 2483.50 MHz in the **Vertical** polarization, High Channel.
- 12.0 dB at 36.79 MHz in the **Horizontal** polarization, Unintentional Emission.

Handset, Radiated Emission Test Data @ 3 Meter

Indicated			Antenna	Antenna		Correction Factor			FCC 15 Subpart C		
Frequency	Ampl.	Direction	Height	Polar	Antenna	Cable Loss	Amp.	Corr. Ampl.	Limit	Margin	Comments
MHz	dBμV/m	Degree	Meter	H/V	dB	dB	dB	dBμV/m	dBμV/m	dB	
Low Channel											
2401.06	113.9	290	1.8	v	28.1	2.0	35.5	108.5			Fund/Peak
2401.06	106.4	330	1.5	h	28.1	2.0	35.5	101.0			Fund/Peak
2401.06	84.8	290	1.8	v	28.1	2.0	35.5	79.4			Fund/Ave.
2401.06	78.9	330	1.5	h	28.1	2.0	35.5	73.5			Fund/Ave.
7203.17	45.9	0	1.5	h	34.1	3.4	34.5	48.9	54	-5.1	Ave.
7203.17	43.7	45	1.5	v	34.1	3.4	34.5	46.7	54	-7.3	Ave.
4802.11	44.7	15	1.5	h	32.5	3.1	34.6	45.7	54	-8.3	Ave.
7203.17	61.1	0	1.5	h	34.1	3.4	34.5	64.1	74	-9.9	Peak
4802.11	42.4	0	1.6	v	32.5	3.1	34.6	43.4	54	-10.6	Ave.
7203.17	59.2	45	1.5	v	34.1	3.4	34.5	62.2	74	-11.8	Peak
4802.11	57.8	15	1.5	h	32.5	3.1	34.6	58.8	74	-15.2	Peak
4802.11	55.3	0	1.6	v	32.5	3.1	34.6	56.3	74	-17.7	Peak
2390.00	39.2	290	1.8	h	28.1	2.0	35.5	33.8	54	-20.2	Ave.
2390.00	38.7	15	1.6	v	28.1	2.0	35.5	33.3	54	-20.7	Ave.
2390.00	47.6	290	1.8	h	28.1	2.0	35.5	42.2	74	-31.8	Peak
2390.00	47.2	15	1.6	v	28.1	2.0	35.5	41.8	74	-32.2	Peak
Middle Channel											
2441.66	111.3	330	1.6	v	28.1	2.0	35.5	105.9			Fund/Peak
2441.66	106.7	0	1.5	h	28.1	2.0	35.5	101.3			Fund/Peak
2441.66	84.2	330	1.6	v	28.1	2.0	35.5	78.8			Fund/Ave.
2441.66	80.3	0	1.5	h	28.1	2.0	35.5	74.9			Fund/Ave.
7324.99	42.4	45	1.8	h	34.1	3.4	34.5	45.4	54	-8.6	Ave.
7324.99	41.1	310	1.6	v	34.1	3.4	34.5	44.1	54	-9.9	Ave.
4883.33	40.5	0	1.6	h	32.5	3.1	34.6	41.5	54	-12.5	Ave.
4883.33	39.4	310	1.6	v	32.5	3.1	34.6	40.4	54	-13.6	Ave.
7324.99	55.7	45	1.8	h	34.1	3.4	34.5	58.7	74	-15.3	Peak
7324.99	54.1	310	1.6	v	34.1	3.4	34.5	57.1	74	-16.9	Peak
4883.33	52.3	0	1.6	h	32.5	3.1	34.6	53.3	74	-20.7	Peak
4883.33	51.1	310	1.6	v	32.5	3.1	34.6	52.1	74	-21.9	Peak

Indicated			Antenna	Antenna		Correction Factor			FCC 15 Subpart C		
Frequency	Ampl.	Direction	Height	Polar	Antenna	Cable Loss	Amp.	Corr. Ampl.	Limit	Margin	Comments
MHz	dBμV/m	Degree	Meter	H/V	dB	dB	dB	dBμV/m	dBμV/m	dB	
High Channel											
2482.27	113.8	0	1.8	v	28.1	2.0	35.5	108.4			Fund/Peak
2482.27	107.1	15	1.5	h	28.1	2.0	35.5	101.7			Fund/Peak
2482.27	86.7	0	1.8	v	28.1	2.0	35.5	81.3			Fund/Ave.
2482.27	80.6	15	1.5	h	28.1	2.0	35.5	75.2			Fund/Ave.
2483.50	52.5	0	1.8	v	28.1	2.0	35.5	47.1	54	-6.9	Ave.
7446.81	43.5	90	1.2	h	34.1	3.4	34.5	46.5	54	-7.5	Ave.
2483.50	51.7	15	1.6	h	28.1	2.0	35.5	46.3	54	-7.7	Note
7446.81	43.1	45	1.2	v	34.1	3.4	34.5	46.1	54	-7.9	Ave.
4964.54	42.8	270	1.6	h	32.5	3.1	34.6	43.8	54	-10.2	Ave.
2483.50	68.2	0	1.8	v	28.1	2.0	35.5	62.8	74	-11.2	Peak
4964.54	40.1	45	1.5	v	32.5	3.1	34.6	41.1	54	-12.9	Ave.
7446.81	56.9	90	1.2	h	34.1	3.4	34.5	59.9	74	-14.1	Peak
7446.81	56.7	45	1.2	v	34.1	3.4	34.5	59.7	74	-14.3	Peak
2483.50	61.9	15	1.6	h	28.1	2.0	35.5	56.5	74	-17.5	Peak
4964.54	55.2	270	1.6	h	32.5	3.1	34.6	56.2	74	-17.8	Peak
4964.54	51.4	45	1.5	v	32.5	3.1	34.6	52.4	74	-21.6	Peak

FUND: Fundamental

AVG: Average

Unintentional Emission

Indicated			Antenna	Antenna		Correction Factor			FCC 15 Subpart B	
Frequency	Ampl.	Direction	Height	Polar	Antenna	Cable Loss	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/m	Degree	Meter	H/V	dB	dB	dB	dBμV/m	dBμV/m	dB
36.79	43.2	270	1.5	h	11.5	2.2	28.9	28.0	40	-12.0
987.39	47.3	330	1.8	h	11.8	2.2	28.4	32.9	46	-13.1
73.20	39.7	60	1.2	v	11.8	2.2	28.8	24.9	40	-15.1

§15.247 (a) (1) - HOPPING CHANNEL SEPARATION

Standard Applicable

According to §15.247(a)(1), frequency hopping system shall have, hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies.

Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the Max-Hold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function, and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Model No.	Description	Calibration Date
Agilent	8564E	Spectrum Analyzer	2004-10-04

*** Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	21° C
Relative Humidity:	40%
ATM Pressure:	1019 mbar



The testing was performed by Ming Jin on 2004-10-27.


Measurement Results

Unit	Channel	Measurement (KHz)	Result
Handset	Low	893	Compliant
	Middle	890	Compliant
	High	883	Compliant

Plots of Hopping Channel Separation

Please refer to the following plots.

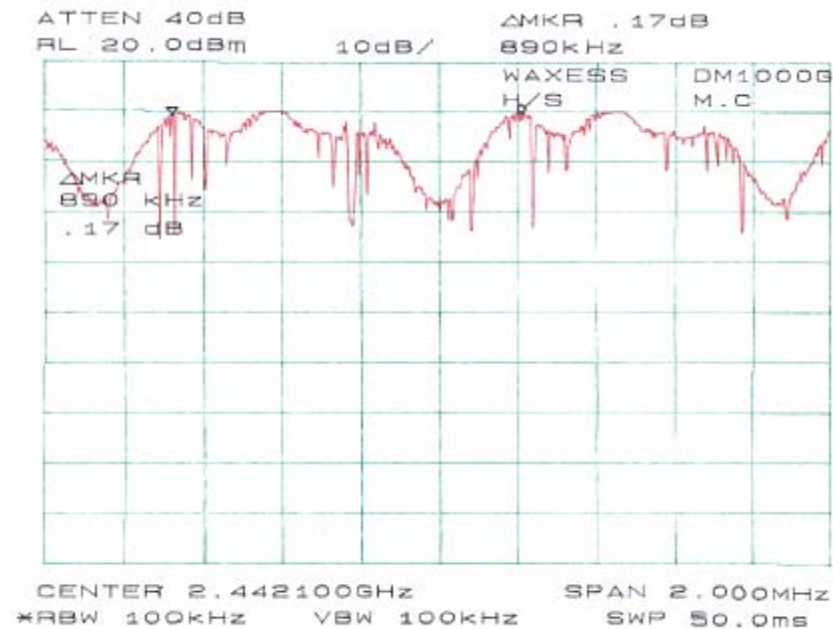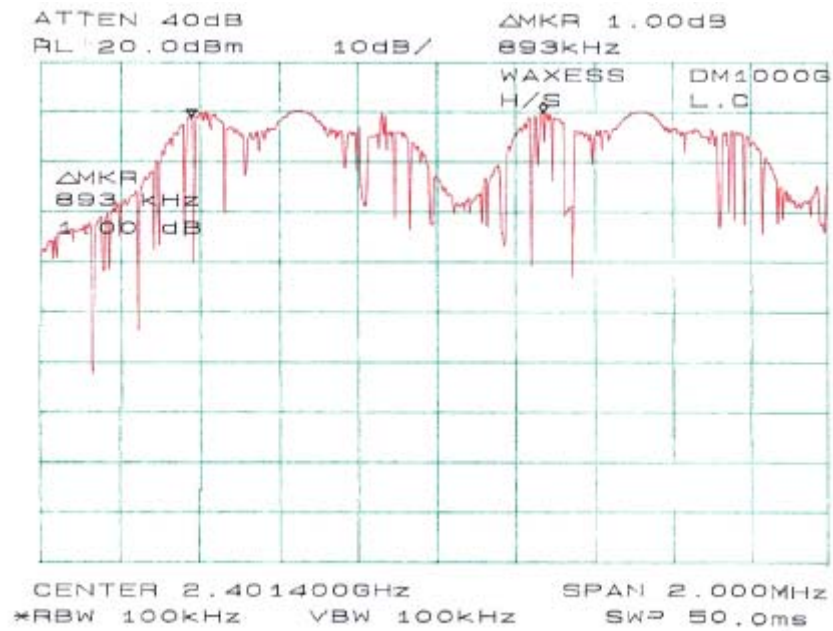

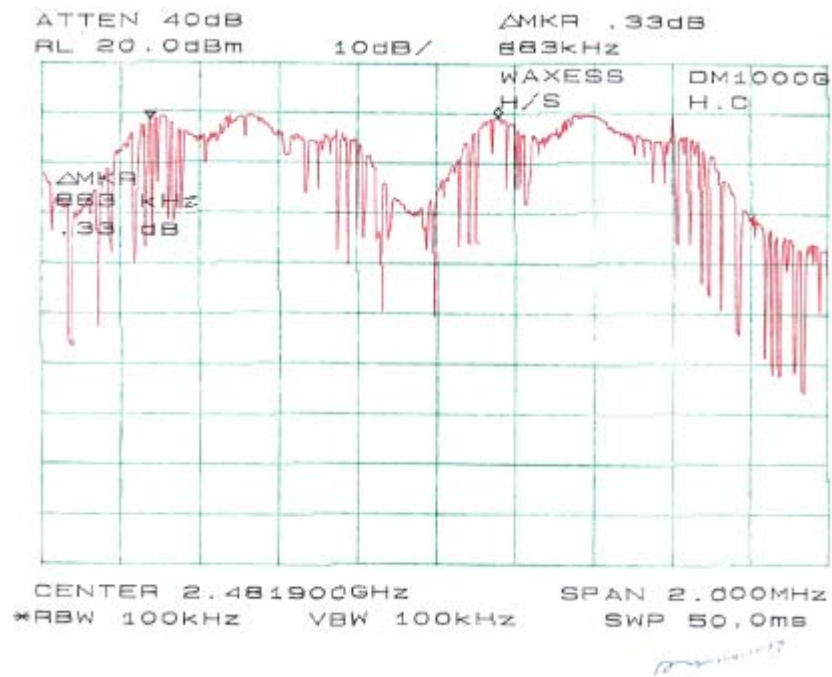

§15.247 (a) (1) - CHANNEL BANDWIDTH

Standard Applicable

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Date
Agilent	8564E	Spectrum Analyzer	2004-10-04

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	21° C
Relative Humidity:	40%
ATM Pressure:	1019 mbar


The testing was performed by Ming Jin on 2004-10-27.



Measurement Result

Unit	Frequency	Measurement (kHz)	Result
Handset	Low	873	Compliant
	Middle	867	Compliant
	High	877	Compliant

Plot of Channel Bandwidth

Please see the following plots

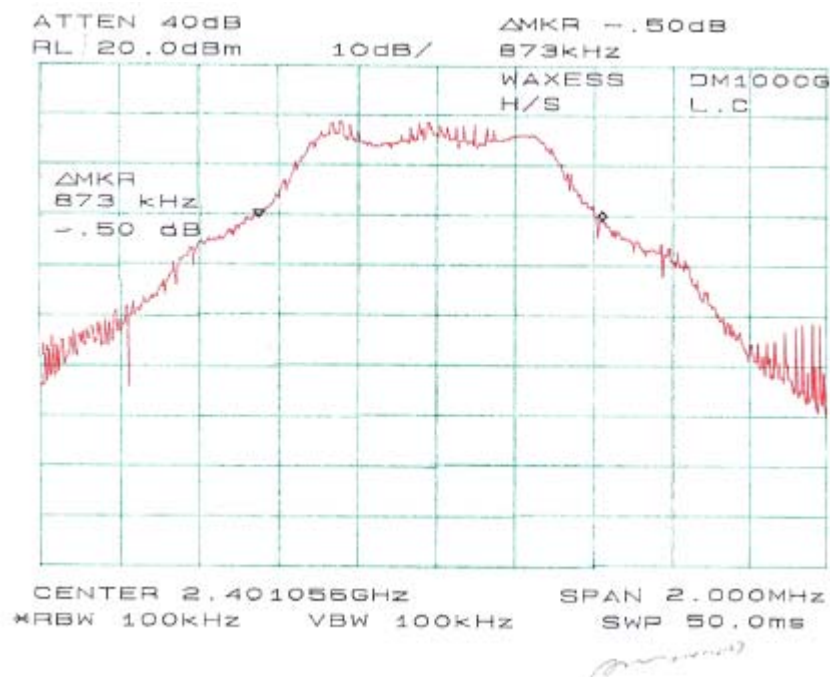

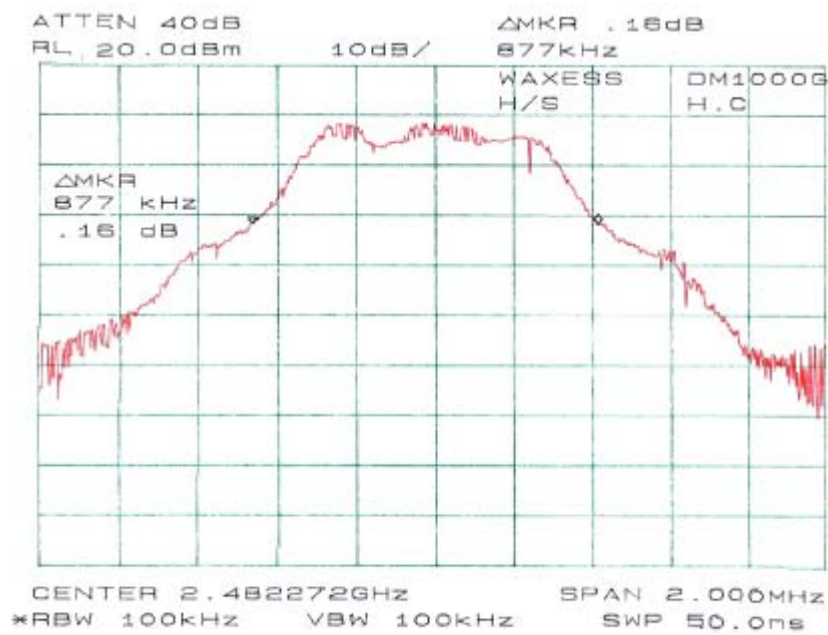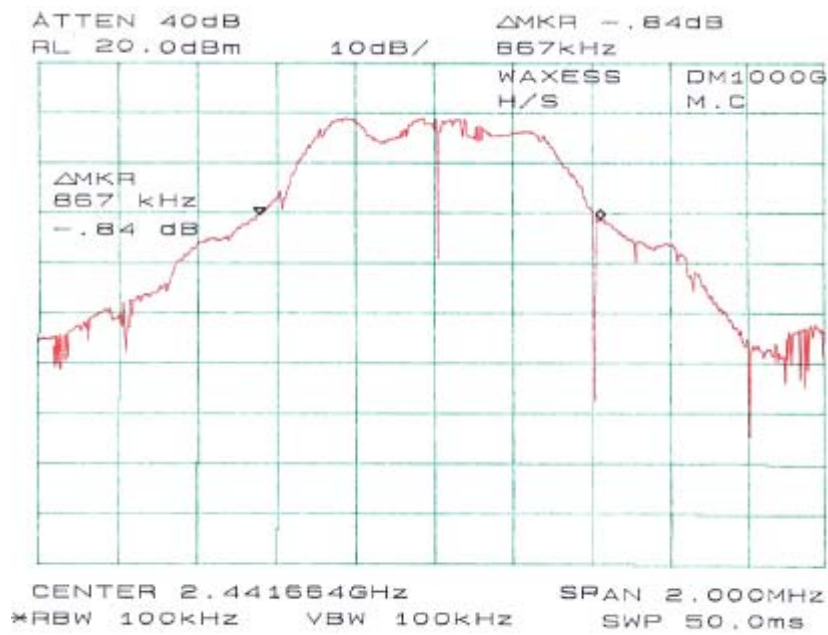

§15.247 (a) (1) (iii) - NUMBER OF HOPPING FREQUENCY USED

Standard Applicable

According to §15.247(a)(1)(iii), frequency hopping systems operating in the 2400-2483.5Mhz band shall use at least 75 hopping frequencies.

Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the bench without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Date
Agilent	8564E	Spectrum Analyzer	2004-10-04

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	21° C
Relative Humidity:	40%
ATM Pressure:	1019 mbar



The testing was performed by Ming Jin on 2004-10-27.

Measurement Results

UNIT	Measurement	Standard	Result
Handset	95	75	Compliant

Plots of Number of Hopping Frequency

Please refer to the following plots.

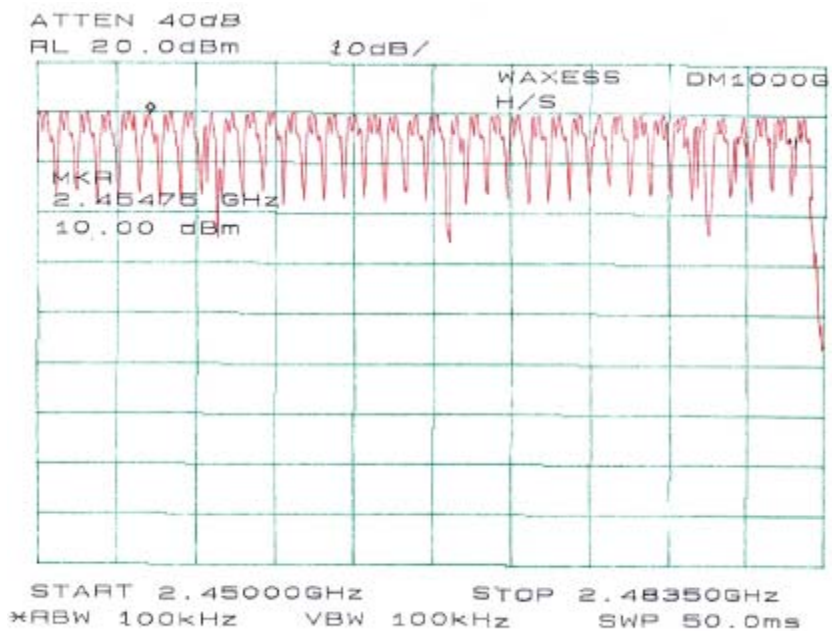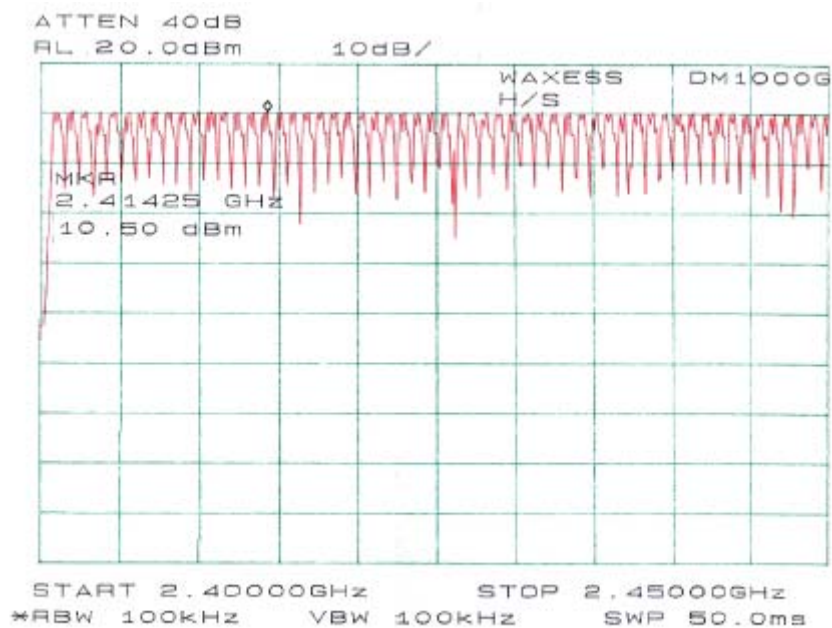

§15.247 9 (a) (1) (iii) - DWELL TIME

Standard Applicable

According to §15.247 (a)(1)(iii), the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Date
Agilent	8564E	Spectrum Analyzer	2004-10-04

* **Statement of Traceability: BACL Corp.** certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	21° C
Relative Humidity:	40%
ATM Pressure:	1019 mbar

The testing was performed by Ming Jin on 2004-10-27.

Measurement Results

Handset:



Low Channel: $5 \times 0.805(\text{ms}) \times [(95 \times 0.4) / 5 (\text{s})] = 0.0306 \text{ s} < 0.4 \text{ s}$



Middle Channel: $5 \times 0.800(\text{ms}) \times [(95 \times 0.4) / 5 (\text{s})] = 0.0304 \text{ s} < 0.4 \text{ s}$



High Channel: $5 \times 0.805(\text{ms}) \times [(95 \times 0.4) / 5 (\text{s})] = 0.0306 \text{ s} < 0.4 \text{ s}$

Plots of Dwell Time

Please refer the following plots.

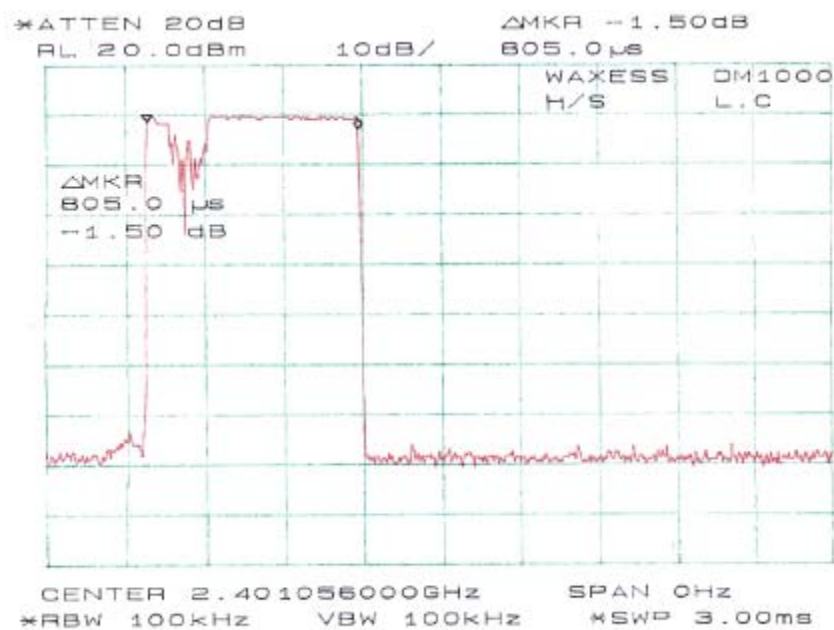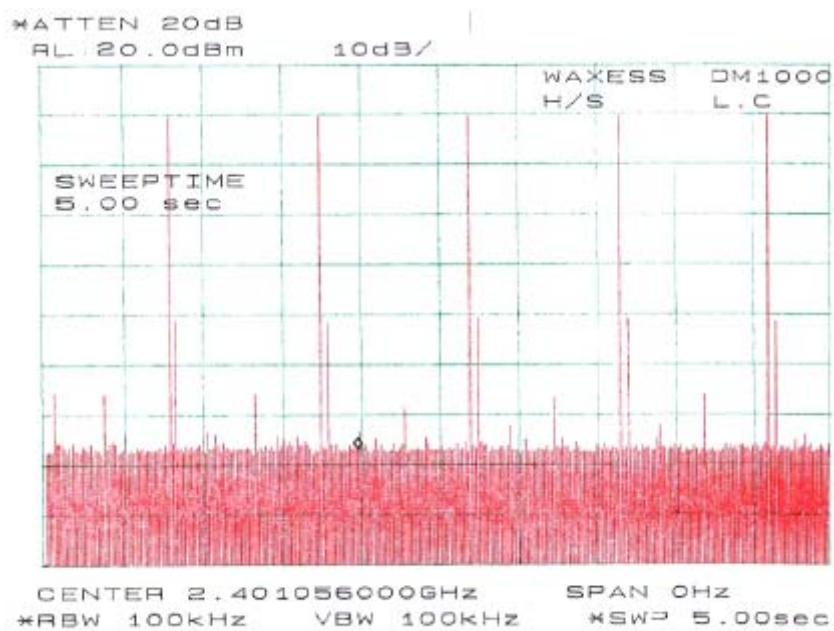

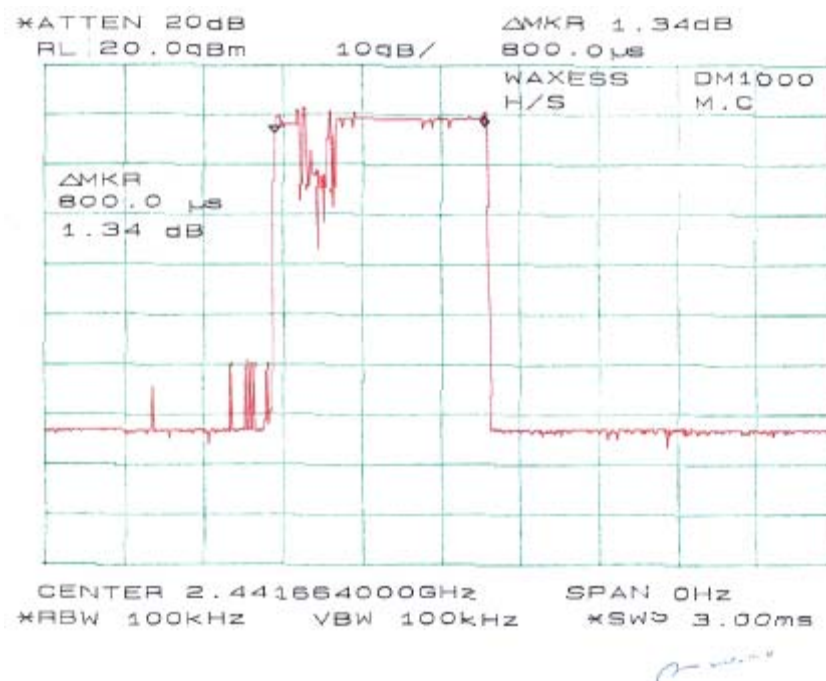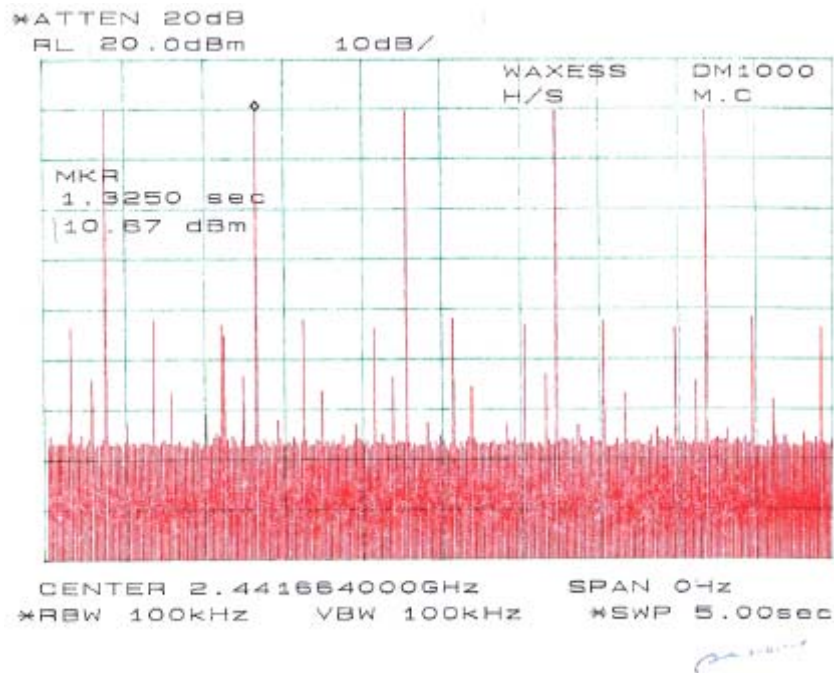

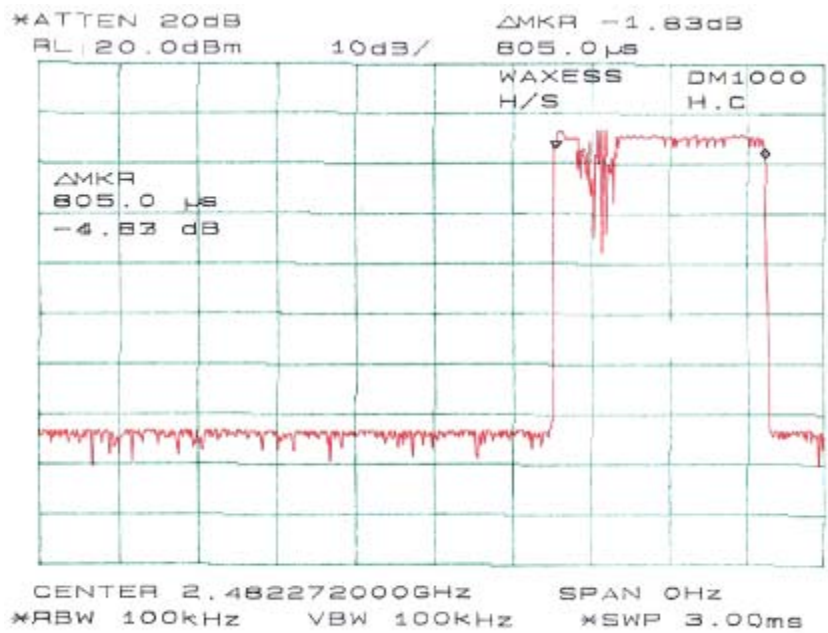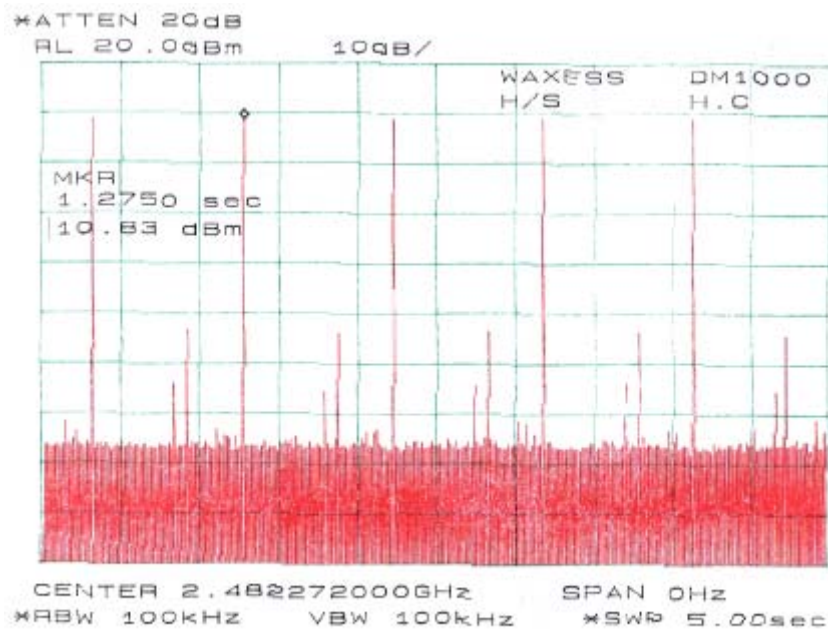

§15.247 (b) (1) - MAXIMUM PEAK OUTPUT POWER

Standard Applicable

According to §15.247(b) (1), for frequency hopping systems in the 2400-2483.5MHz band employing at least 75 hopping channels, and all direct sequence systems, the maximum peak output power of the transmitter shall not exceed 1 Watt.

Measurement Procedure

1. Place the EUT on the turntable and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Date
Agilent	8564E	Spectrum Analyzer	2004-10-04

* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	21° C
Relative Humidity:	40%
ATM Pressure:	1019 mbar

The testing was performed by Ming Jin on 2004-10-27.

Measurement Result

Unit	Channel	Frequency	Output Power in dBm	Output Power in mW	Standard	Result
Handset	Low	2401.056	16.1	40.7	≤ 1W	Compliant
	Middle	2441.664	16.3	41.7	≤ 1W	Compliant
	High	2482.272	15.9	38.9	≤ 1W	Compliant

§15.247 (c) - 100 KHZ BANDWIDTH OF BAND EDGES

Standard Applicable

According to §15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required.

Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Date
Agilent	8564E	Spectrum Analyzer	2004-10-04

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.



Environmental Conditions

Temperature:	21° C
Relative Humidity:	40%
ATM Pressure:	1019 mbar

The testing was performed by Ming Jin on 2004-10-27.

Plots of 100kHz Bandwidth of Band Edge

Please refer the following plots.

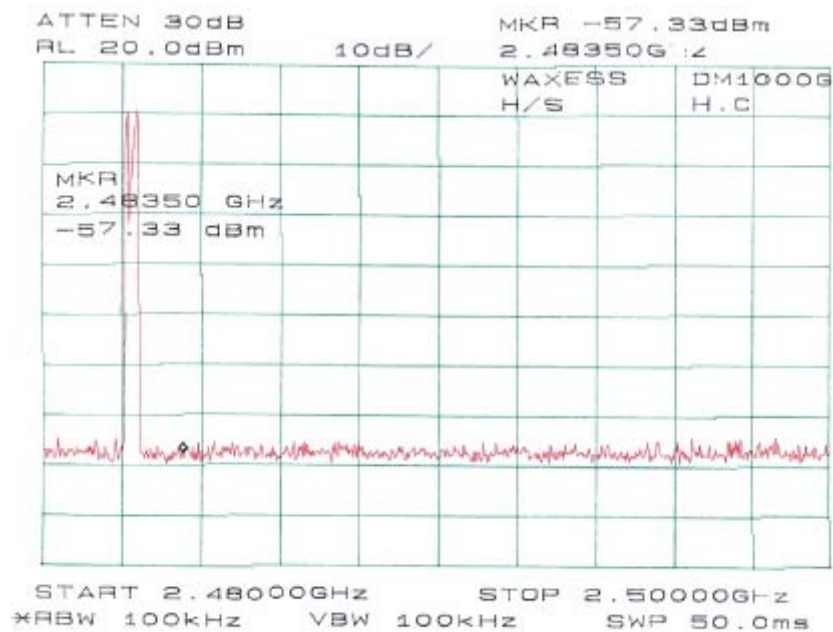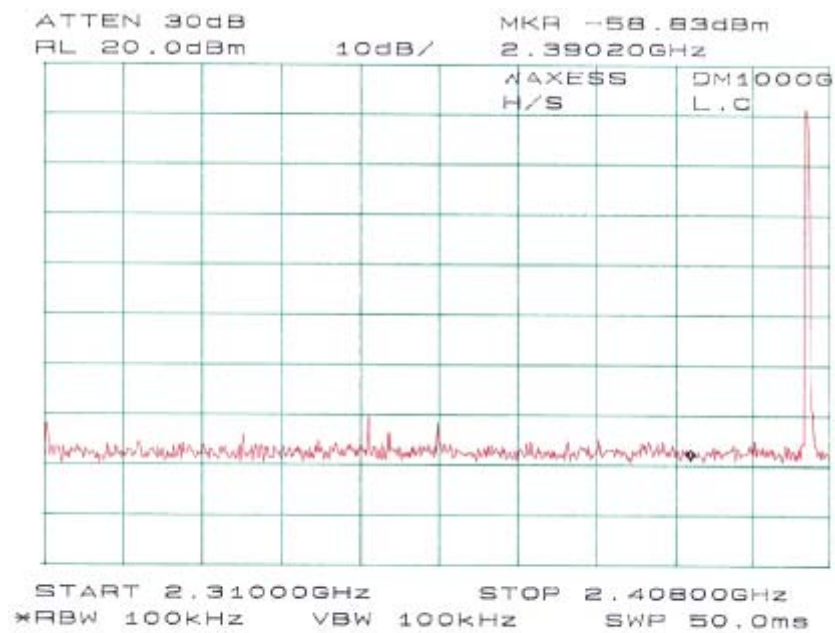

§2.1051 - SPURIOUS EMISSION AT ANTENNA PORT

Standard Applicable

According to §15.209 (f) and §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit.

Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Date
Agilent	8564E	Spectrum Analyzer	2004-10-04

* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	21° C
Relative Humidity:	40%
ATM Pressure:	1019 mbar

The testing was performed by Ming Jin on 2004-10-27.

Measurement Results

Please refer to the following plots.

