

47 CFR PART 15 SUBPART C TEST REPORT

for

Eve Light Switch US

Model No.: 20ECE4101

FCC ID: SNE-ELS-003

of

Applicant: Eve Systems LLC

Address: 100 Pine St., Suite 1250, San Francisco CA 94111 USA

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A



Report No.: W6M22112-21453-C-1


6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com



Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

TABLE OF CONTENTS

1	GENERAL INFORMATION	2
1.1	NOTES.....	2
1.2	TESTING LABORATORY	3
1.2.1	Location	3
1.2.2	Details of accreditation status	3
1.3	DETAILS OF APPROVAL HOLDER.....	3
1.4	APPLICATION DETAILS	3
1.5	GENERAL INFORMATION OF TEST ITEM.....	4
1.6	TEST STANDARDS.....	5
2	TECHNICAL TEST	6
2.1	SUMMARY OF TEST RESULTS.....	6
2.2	TEST ENVIRONMENT	6
2.3	TEST EQUIPMENT LIST	7
2.4	GENERAL TEST PROCEDURE	10
3	TEST RESULTS (ENCLOSURE).....	12
3.1	PEAK OUTPUT POWER (TRANSMITTER).....	13
3.2	EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)	19
3.3	EXEMPTION LIMITS FOR ROUTINE EVALUATION ACCORDING TO 47 CFR FCC PART 2 SUBPART J, SECTION 2.1091	19
3.4	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS	21
3.5	SPURIOUS EMISSIONS (TX)	22
3.6	RADIATED EMISSION ON THE BAND EDGE	24
3.7	MINIMUM 6 DB BANDWIDTH	28
3.8	PEAK POWER SPECTRAL DENSITY	39
3.9	RADIATED EMISSION FROM RECEIVER PART	45
3.10	POWER LINE CONDUCTED EMISSION	46
	APPENDIX.....	44



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Specific Conditions:

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.

Tester:

June 15, 2022

Rick Chen

Rick Chen.

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

June 15, 2022

Kevin Wang

Kevin Wang

Date

WTS

Name

Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Lishui, Shuang Sing Village,

Wanli Dist., New Taipei City 207,

Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

FCC filed test laboratory Reg. No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.

Accredited number: ./.

Street: ./.

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.

1.3 Details of approval holder

Name: Eve Systems LLC

Street: 100 Pine St., Suite 1250,

Town: San Francisco CA 94111

Country: USA

1.4 Application details

Date of receipt of test item: February 23, 2022

Date of test: from February 24, 2022 to March 21, 2022



Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

1.5 General information of Test item

Type of test item: Eve Water Guard

Model Number: 20EBZ8701

Brand Name: Eve

Multi-listing model number: ./.

Photos: ./.

Sample No.: #05

Technical data

Frequency band: 2400 MHz–2483.5 MHz

BLE 1M & 2M

Frequency (ch 0 or A): 2402 MHz

Frequency (ch 19 or B): 2440 MHz

Frequency (ch 39 or C): 2480 MHz

Thread

Frequency (ch 11 or A): 2405 MHz

Frequency (ch 18 or B): 2440 MHz

Frequency (ch 26 or C): 2480 MHz

Number of Channels: 40 (for BLE), 16 (for Thread)

Operation modes: Duplex

Modulation Type: GFSK

Fixed point-to-point operation: ☐ Yes / ☒ No

Type of Antenna: Multilayer Chip Antenna

Antenna gain: 1.5 dBi (Testing laboratory assumes no responsibility for affecting any validity of the result while the information which is provided by clients.)

Power supply: 120Va.c.

Emission designator: BLE 1M: 1M05G1D


BLE 2M: 2M05G1D

Thread: 2M24G1D

Host device: none

Classification:

Fixed Device	☒
Mobile Device (Human Body distance > 20cm)	☐
Portable Device (Human Body distance < 20cm)	☐



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

Transmitter

Unom

BLE 1M

Power (ch 0 or A):	Conducted: -2.21 dBm
Power (ch 19 or B):	Conducted: -2.84 dBm
Power (ch 39 or C):	Conducted: -3.63 dBm

BLE 2M

Power (ch 0 or A):	Conducted: -2.10 dBm
Power (ch 19 or B):	Conducted: -2.77 dBm
Power (ch 39 or C):	Conducted: -3.55 dBm

Thread


Power (ch 11 or A):	Conducted: 4.97 dBm
Power (ch 18 or B):	Conducted: 5.04 dBm
Power (ch 26 or C):	Conducted: 4.55 dBm

Manufacturer: (if applicable)

Name:	Dexatek Technology Ltd.
Street:	16F., No.81, Sec. 1, Xintai 5th Rd., Xizhi Dist.,
Town:	New Taipei City 221,
Country:	Taiwan (R.O.C.)

1.6 Test standards

Technical standard: 47 CFR PART 15 SUBPART C § 15.247 (10-1-20 Edition)
KDB 558074 D01 15.247 Measurement Guide v05r02 (April 2, 2019)
ANSI C63.10-2013



Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed. ☒

or

The deviations were ascertained in the course of the tests performed. ☐

2.2 Test environment

Relative humidity content: 20 ... 75 %


Air pressure: 86 ... 103 kPa

Power supply: 120Va.c.

Extreme conditions parameters: /.

Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Emission (Power Line Conducted Emission)	Expanded Uncertainty : AMN : 1.03 dB Voltage probe : 1.05 dB
Estimation Result of Uncertainty of Radiated Emission(3M) (Transmitter Radiated Emissions in Restricted Bands , Spurious Emissions (tx), Radiated Emission from Receiver Part)	Expanded Uncertainty : 0.009-30 MHz : 3.48 dB 30-1000 MHz : 4.48 dB 1-18 GHz : 4.15 dB 18-40 GHz : 3.78 dB
Estimation Result of Uncertainty of Bandwidth Measurement (Minimum 6 dB Bandwidth, 99% Occupied Bandwidth)	Expanded Uncertainty : 0.45 kHz
Estimation Result of Uncertainty of Conducted Output Power Measurement (Peak Output Power (transmitter))	Expanded Uncertainty : 3.07 dB
Estimation Result of Uncertainty of Power Density Measurement (Peak Power Spectral Density)	Expanded Uncertainty : 3.63 dB
Estimation Result of Uncertainty of Band Edge Measurement (Radiated Emission on the band edge)	Expanded Uncertainty : 0.67 dBc

The decision rule is: Measurement uncertainty is not included in the calculation of test results.




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2021/6/17	2022/6/16
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2021/11/9	2022/11/8
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2021/9/22	2022/9/21
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2021/7/29	2022/7/28
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2021/11/8	2022/11/7
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2021/7/28	2022/7/27
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2021/6/17	2022/6/16
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2021/9/28	2022/9/27
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2021/8/4	2022/8/3
ETSTW-RE 019	MICROWAVE HORN ANTENNA	22240-25	121074	FM	2021/5/31	2022/5/30
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2021/6/16	2022/6/15
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2021/5/5	2022/5/4
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2022/2/3	2023/2/2
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2021/5/21	2022/5/20
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2021/7/14	2022/7/13
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2022/2/18	2023/2/17
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2022/2/18	2023/2/17
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2022/2/18	2023/2/17
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2022/3/4	2023/3/3
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2022/2/18	2023/2/17
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2021/5/14	2022/5/13
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2021/10/27	2022/10/26
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2021/9/17	2022/9/16
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2021/5/27	2022/5/26
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2022/2/18	2023/2/17
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2022/1/5	2023/1/4
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	2021/10/29	2022/10/28
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2021/6/8	2022/6/7
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2021/8/6	2022/8/5
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2021/8/6	2022/8/5
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2022/2/18	2023/2/17
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2021/8/6	2022/8/5
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2021/8/6	2022/8/5
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2021/5/14	2022/5/13
ETSTW-RE 146	Preamplifier	JPA-10M1G	15090004	JPT	2021/6/4	2022/6/3
ETSTW-RE 152	Bi-log Hybrid Antenna	MCTD 2786B	BLB20J04029	ETC	2021/10/5	2022/10/4
ETSTW-RE 153	Signal Analyzer	FSV40	101929	R&S	2021/10/6	2022/10/5
ETSTW-RE 159	Bi-log Hybrid Antenna (30M~1000 MHz)	MCTD 2786B	BLB21N04035	ETC	2021/12/06	2022/12/05
ETSTW-RF 002	Electromagnetic field probe	LF-30	K-0007	STT	2021/7/19	2022/7/18
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2021/6/2	2022/6/1
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2022/3/4	2023/3/3
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2021/4/27	2022/4/26
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2021/10/29	2022/10/28
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2022/1/5	2023/1/4
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2022/1/5	2023/1/4
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2022/1/5	2023/1/4
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2022/1/5	2023/1/4
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2021/9/7	2022/9/6
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2021/4/1	2022/3/31
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2021/8/6	2022/8/5
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test Use NCR	
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2022/2/18	2023/2/17
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2022/2/18	2023/2/17
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2022/2/18	2023/2/17
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2022/2/18	2023/2/17
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2021/7/1	2022/6/30
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2021/5/7	2022/5/6
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2021/9/17	2022/9/16
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2021/9/17	2022/9/16
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S Cable 9)	279067	HUBER+SUHNER	2022/2/18	2023/2/17




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2021/5/14	2022/5/13
ETSTW-Cable 047	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2021/7/2	2022/7/1
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2021/6/4	2022/6/3
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2021/5/14	2022/5/13
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM-NM-25000	170239	EMCI	2021/6/4	2022/6/3
ETSTW-Cable 072	SMA type cable (8m)	SUCOFLEX 104	805800/4	HUBER+SUHNER	2021/5/14	2022/5/13
ETSTW-Cable 074	SMA type cable (2m)	SUCOFLEX 104	802563/4	HUBER+SUHNER	2021/5/14	2022/5/13
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1 Version EMEC-3A1+	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	
ETSTW-TH 002	Thermohygrometer	608-H1	45204317	Testo	2021/10/18	2022/10/17
ETSTW-TH 003	Wireless weather station	GAIA	N/A	TFA	2021/10/18	2022/10/17



Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBμV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:


Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dBμV + 10.36 dB + 6 dB = 36.36 dBμV/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 6.2.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:


Average = Peak + Duty Factor

Duty Factor = $20 \log (\text{dwell time}/T)$

$T = 100\text{ms}$ when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

3 Test results (enclosure)

Test case	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)	☒	☒	☐
Equivalent isotropically radiated Power	15.247(b)	☒	☒	☐
Spurious Emissions radiated – Transmitter operating	15.247(d): 15.209	☒	☒	☐
Band Edge Measurement	15.247(d)	☒	☒	☐
Minimum 6 dB Bandwidth	15.247(a)(2)	☒	☒	☐
Peak Power Spectral Density	15.247(e)	☒	☒	☐
Radiated Emission from Receiver Part	15.109	☐	☐	☐
Power Line Conducted Emission	15.207(a)	☒	☒	☐

The following is intentionally left blank.



Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(b)(3),

Subclause 11.9.1.1 of ANSI C63.10 is applicable.

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.


Test date: March 14, 2022

Temperature: 23.0°C

Humidity: 53.0%


Tester: Rick

BLE 1M

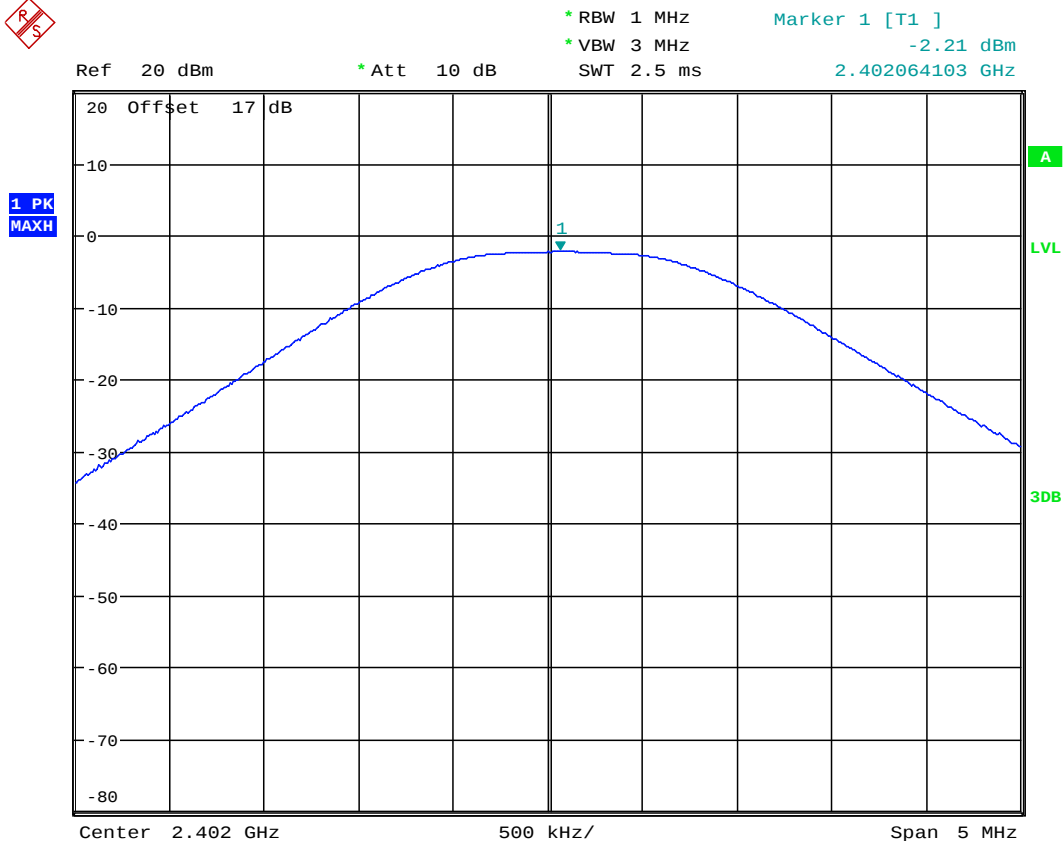


MAX OUTPUT POWER BT4.0 CH00


Date: 14.MAR.2022 20:45:37



Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

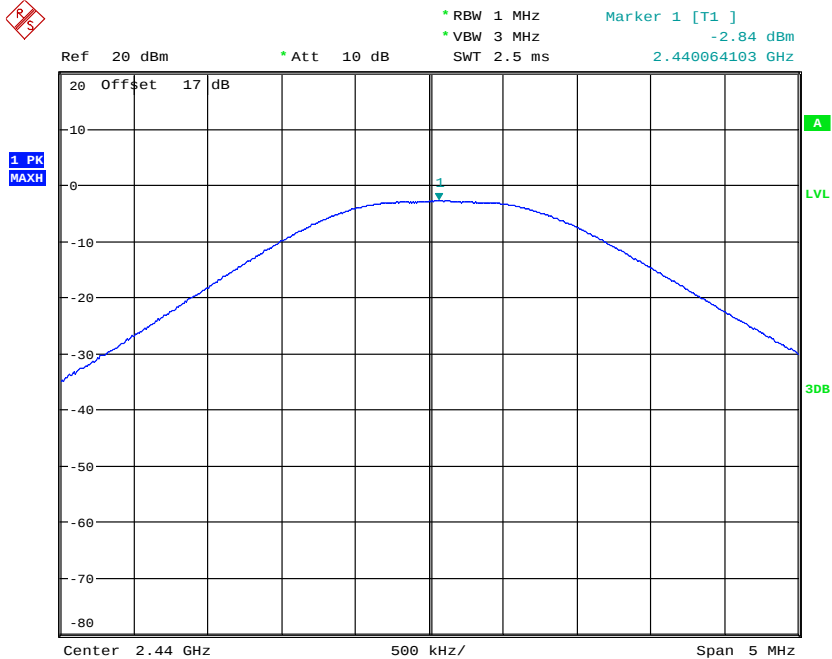


MAX OUTPUT POWER BT4.0 CH19
Date: 14.MAR.2022 20:52:15

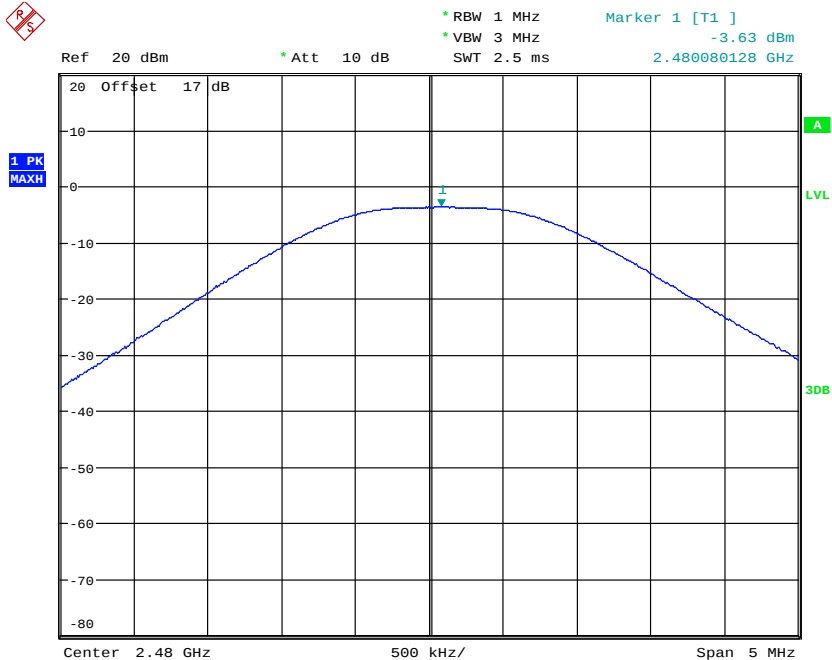


MAX OUTPUT POWER BT4.0 CH39
Date: 14.MAR.2022 20:50:09




Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003
BLE 2M

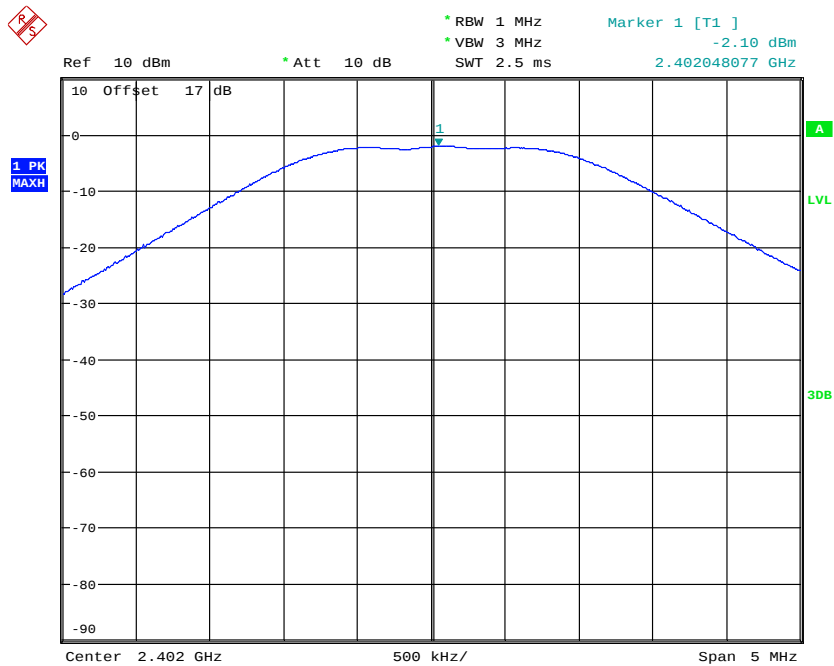

MAX OUTPUT POWER BT5.0 CH00
Date: 14.MAR.2022 21:13:57

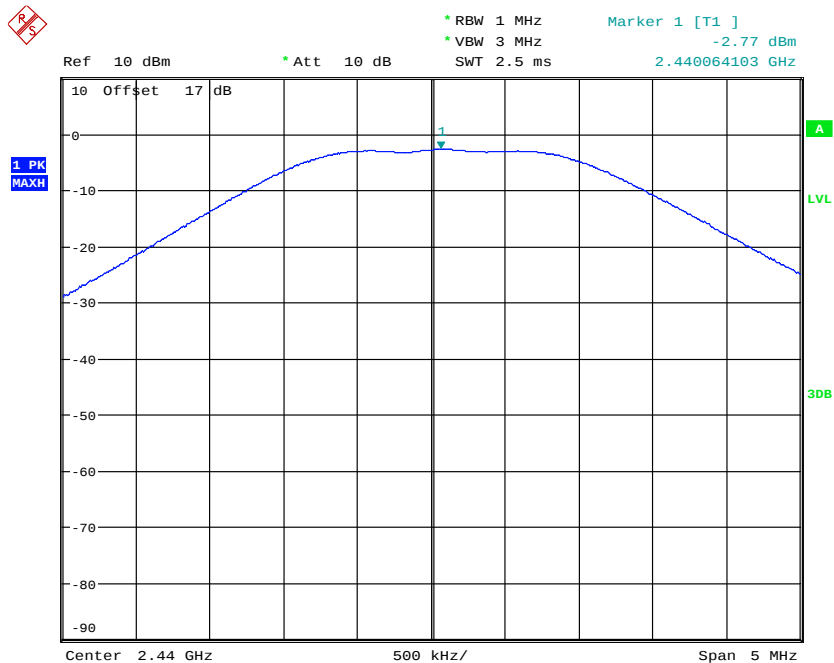


MAX OUTPUT POWER BT5.0 CH19
Date: 14.MAR.2022 21:13:23




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

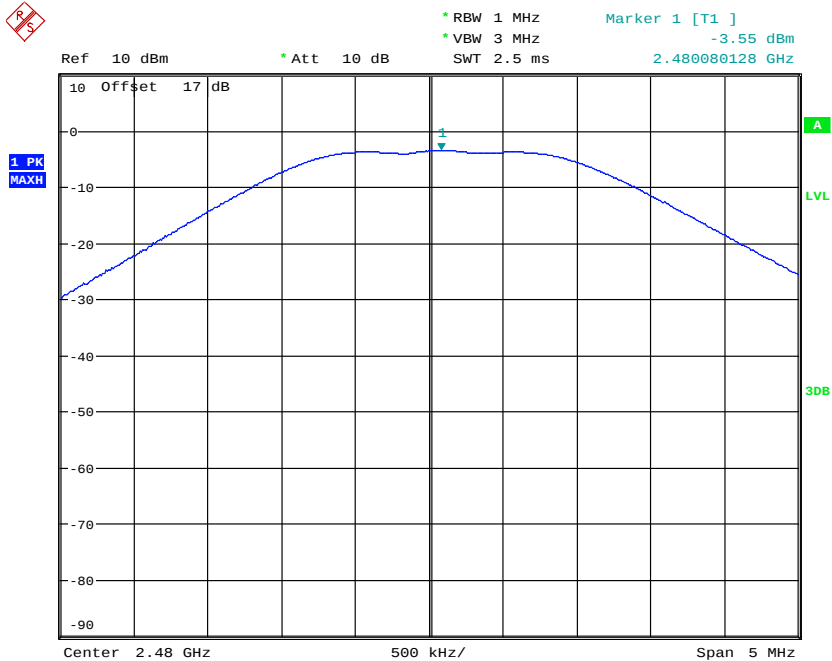


MAX OUTPUT POWER BT5.0 CH39
Date: 14.MAR.2022 21:12:54


Thread

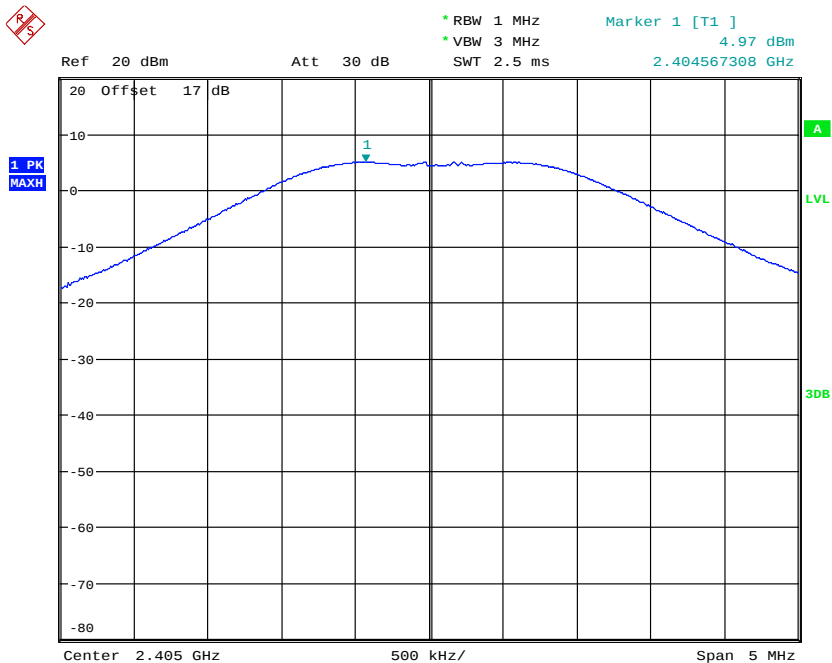


MAX OUTPUT POWER 2405MHz
Date: 14.MAR.2022 20:09:32




Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

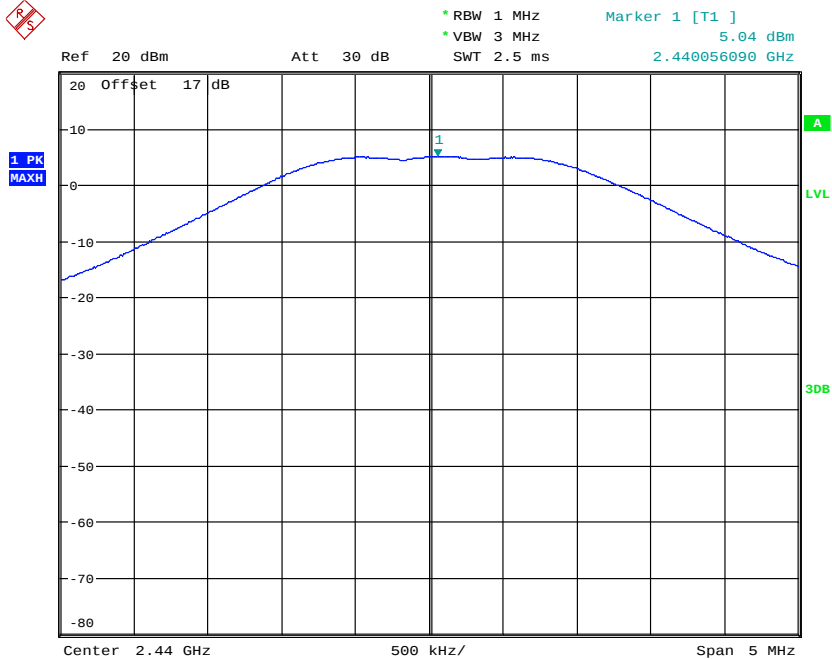

MAX OUTPUT POWER 2440MHz
Date: 14.MAR.2022 20:10:31

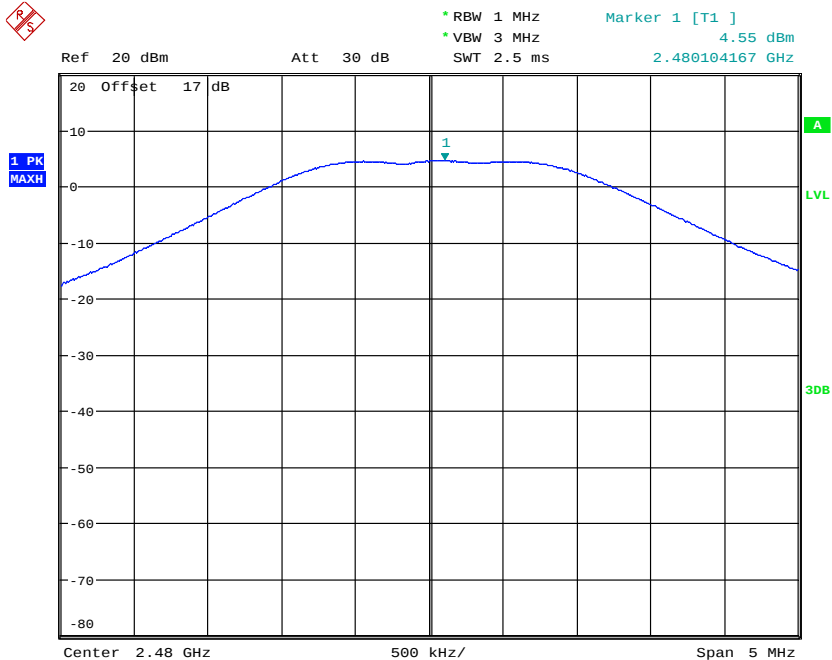

MAX OUTPUT POWER 2480MHz
Date: 14.MAR.2022 20:11:01



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1


FCC ID: SNE-ELS-003

Limits:

Frequency MHz	Power dBm
902 - 928	30
2400 – 2483.5	30
5725 – 5850	30

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to point operation consider §15.247 (b)(4)

Test equipment used: ETSTW-RE 055, ETSTW-RE 050, ETSTW-RE 064



Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

3.2 Equivalent Isotropic Radiated Power (EIRP)

FCC Rule: 15.247(b)(3)

BLE 1M

EIRP = max. conducted output power + antenna gain

EIRP = -2.21 dBm + 1.5 dBi [antenna gain claimed by manufacturer] = -0.71 dBm = 0.85 mW

BLE 2M

EIRP = max. conducted output power + antenna gain

EIRP = -2.10 dBm + 1.5 dBi [antenna gain claimed by manufacturer] = -0.60 dBm = 0.87 mW

Thread

EIRP = max. conducted output power + antenna gain

EIRP = 5.04 dBm + 1.5 dBi [antenna gain claimed by manufacturer] = 6.54 dBm = 4.51 mW

3.3 Exemption Limits for Routine Evaluation according to 47 CFR FCC Part 2 Subpart J, section 2.1091

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a “worst case” or conservative prediction.

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 20 cm normally can be maintained between the user and the device.

MPE Calculation Method

(A) Limits for Occupational/Controlled Exposure


Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f ²)*	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6

(B) Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

f = frequency in MHz

*Plane-wave equivalent power density



Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

E = Electric field (V/m) P = output power (W) G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to mW/m².

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

BLE 1M

Established separation distance is 20 cm.

Operating frequency band: 2402~2480 MHz

The product meets RF exposure requirement.

Because the power density of 0.0002 mW/cm² at 2402MHz is below the power density limit of 1 mW/cm².

BLE 2M

Established separation distance is 20 cm.

Operating frequency band: 2402~2480 MHz

The product meets RF exposure requirement.

Because the power density of 0.0002 mW/cm² at 2402MHz is below the power density limit of 1 mW/cm².


Thread

Established separation distance is 20 cm.

Operating frequency band: 2405~2480 MHz

The product meets RF exposure requirement.

Because the power density of 0.0009 mW/cm² at 2440MHz is below the power density limit of 1 mW/cm².



Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

3.4 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (d), 15.205, 15.209, 15.35,

Subclause 11.12 of ANSI C63.10 is applicable [see also 8.1 c) 3)].

Radiated emission measurements were performed from 30 MHz to 26500 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency $\leq$ 1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements)

Frequency $>$ 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements)

Frequency $>$ 1 GHz , RBW:1 MHz , VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:


“If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = $20 \log (\text{dwell time} / 100\text{ms})$

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: See attached diagrams in Appendix.



Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

3.5 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(d), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies above 1GHz (Peak measurements).

Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements).

Max. reading – 20dB

Max. reading – 20 dB


Guidance on Measurement of Digit Transmission Systems:

“If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = $20 \log (\text{dwell time}/100\text{ms})$

Note: No duty cycle correction was added to the reading of EUT.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Correction Factor".

Summary table with radiated data of the test plots

Model: 20ECE4101

Date: --

Mode: --

Temperature: -- °C Engineer: --

Polarization: --

Humidity: --

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (m)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

Note

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. After evaluated, the test result in this report adopt the worst case to measure, please see attached diagrams in appendix.

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 030, ETSTW-RE 111, ETSTW-RE 088, ETSTW-RE 018, ETSTW-RE 064



Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

3.6 Radiated Emission on the band edge


FCC Rules: 15.247 (d),
Subclause 11.13.2 of ANSI C63.10 is applicable.

According to FCC rules part 15 subpart C §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.


Test date: March 14, 2022
Temperature: 23.0°C
Humidity: 53.0%
Tester: Rick

BLE 1M

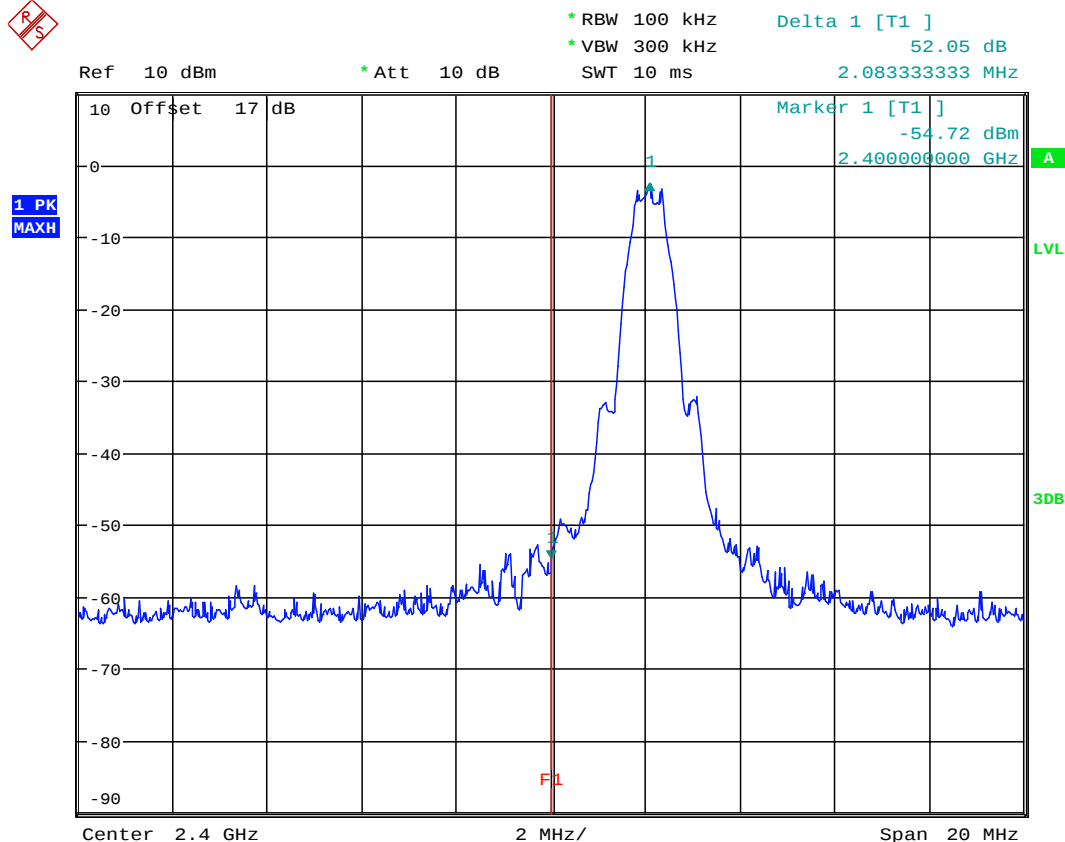


BANDEDGE BT4.0 CH00

Date: 14.MAR.2022 20:46:05




Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

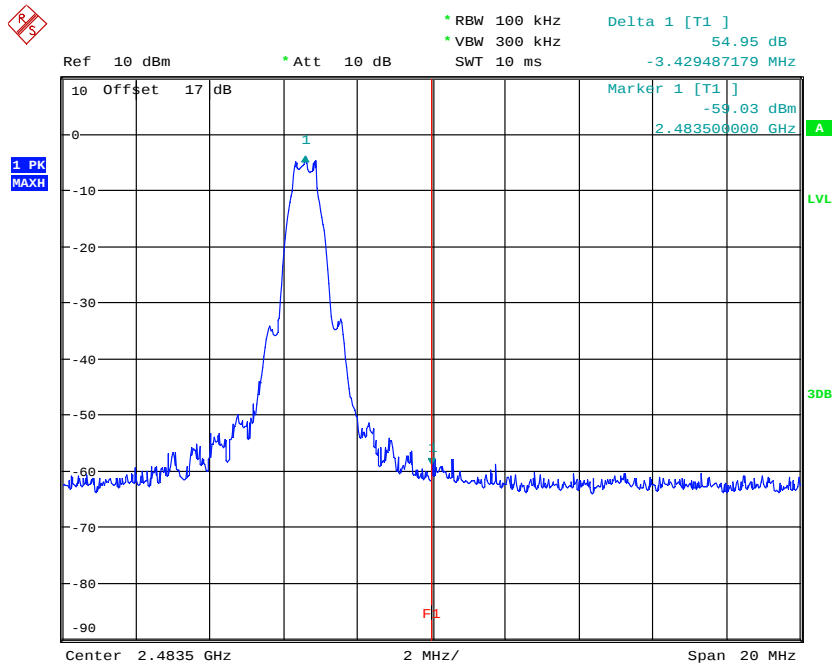


BANDEDGE BT4.0 CH39
Date: 14.MAR.2022 20:50:37

BLE 2M

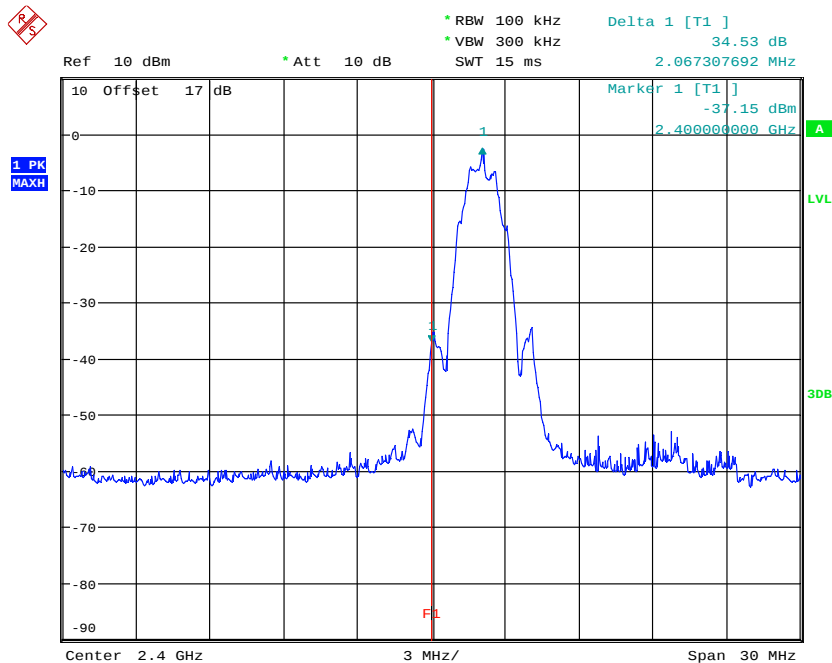


BANDEDGE BT5.0 CH00
Date: 14.MAR.2022 21:19:59




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

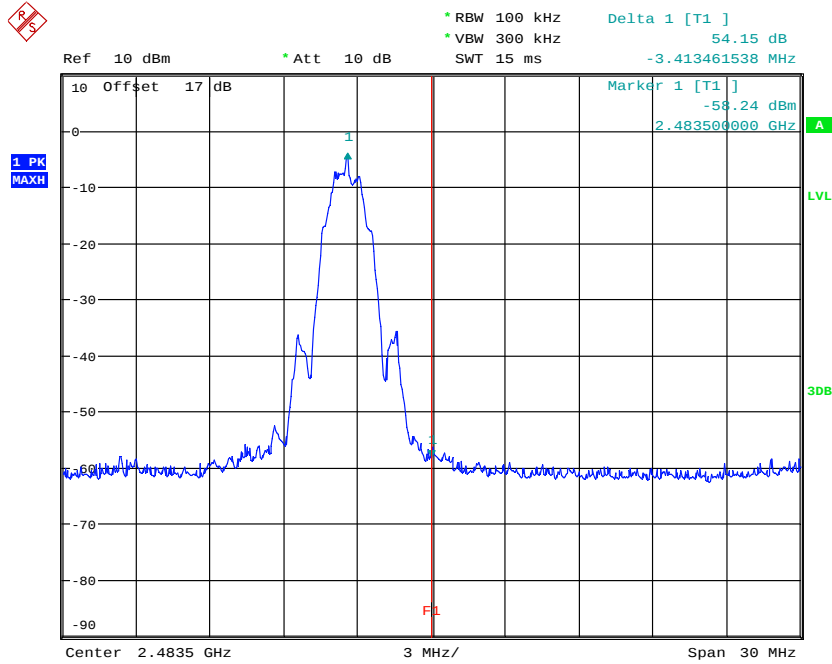


BANDEDGE BT5.0 CH39
Date: 14.MAR.2022 21:18:53

Thread

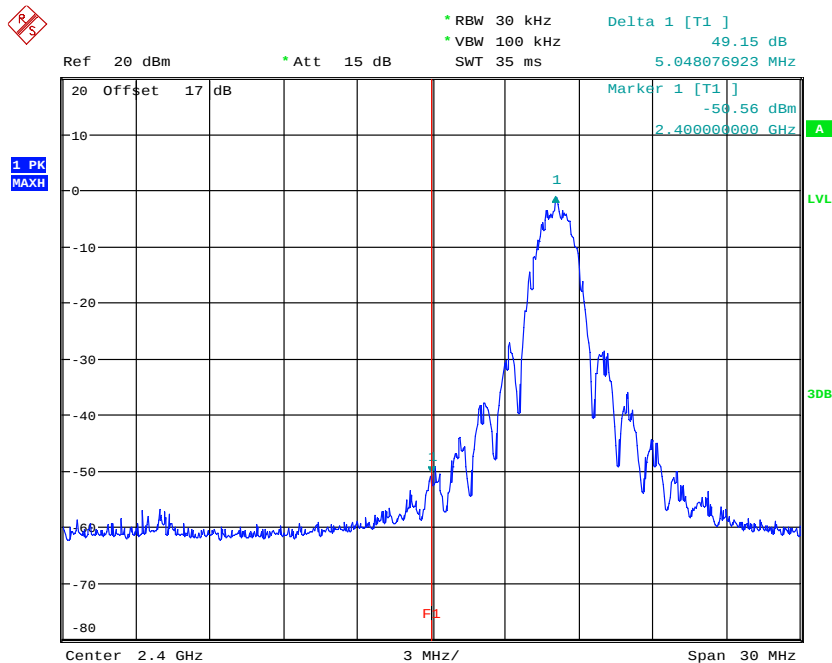


BANDEDGE 2405MHz
Date: 14.MAR.2022 20:30:18



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

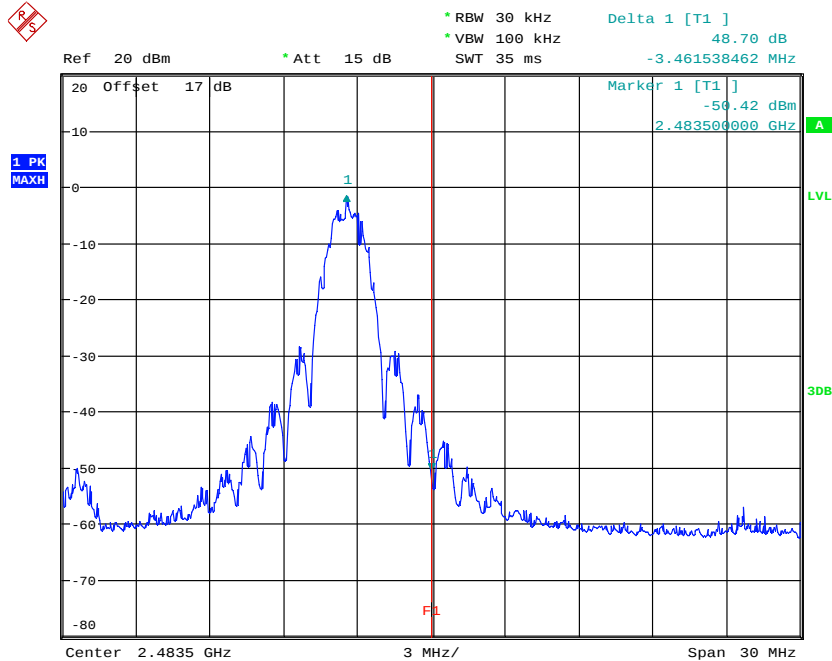


BANDEDGE 2480MHz

Date: 14.MAR.2022 20:31:30

Limit:

Frequency Range / MHz	Limit
902 – 928	- 20 dB
2400 – 2483.5	
5725 - 5850	

Test equipment used: ETSTW-RE 055, ETSTW-RE 050, ETSTW-RE 064



Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

3.7 Minimum 6 dB Bandwidth

FCC Rules: 15.247(a)(2)

Subclause 11.8.1 of ANSI C63.10 is applicable.

The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission.

The 6 dB bandwidth is the frequency difference between the two markers.


Test date: March 14, 2022

Temperature: 23.0°C

Humidity: 53.0%


Tester: Rick

BLE 1M

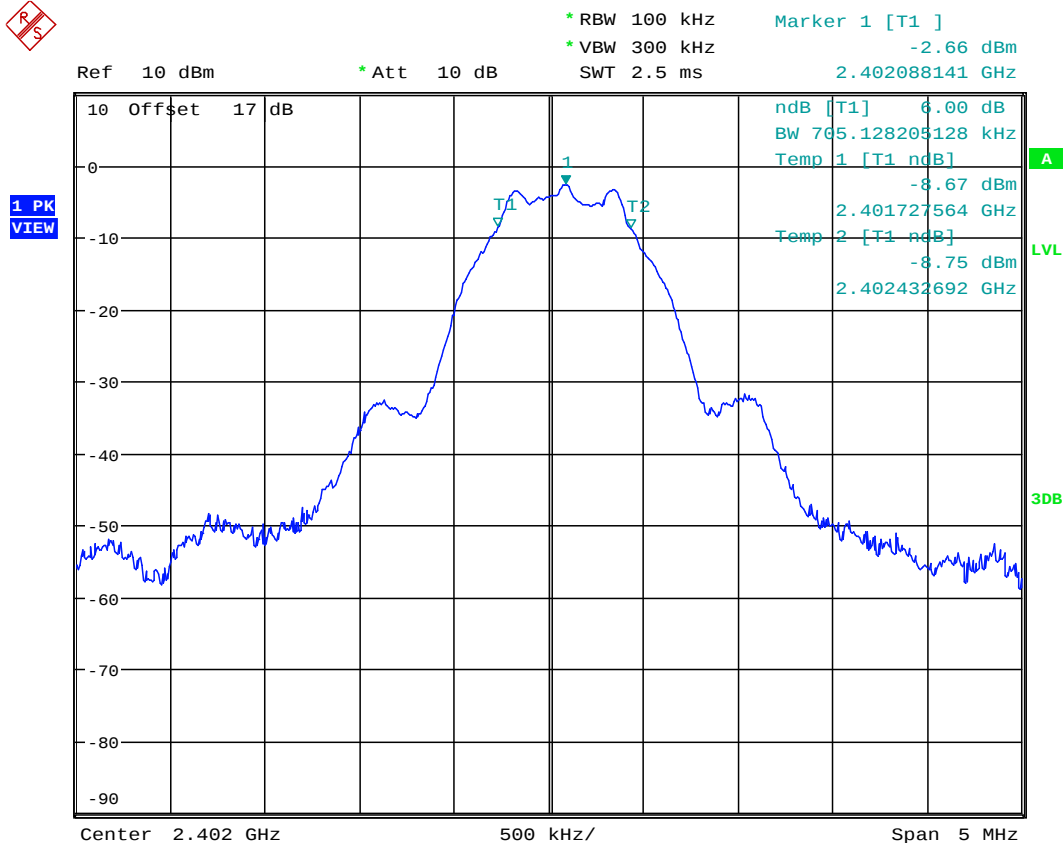


6DB BANDWIDTH BT4.0 CH00


Date: 14.MAR.2022 20:45:47




Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

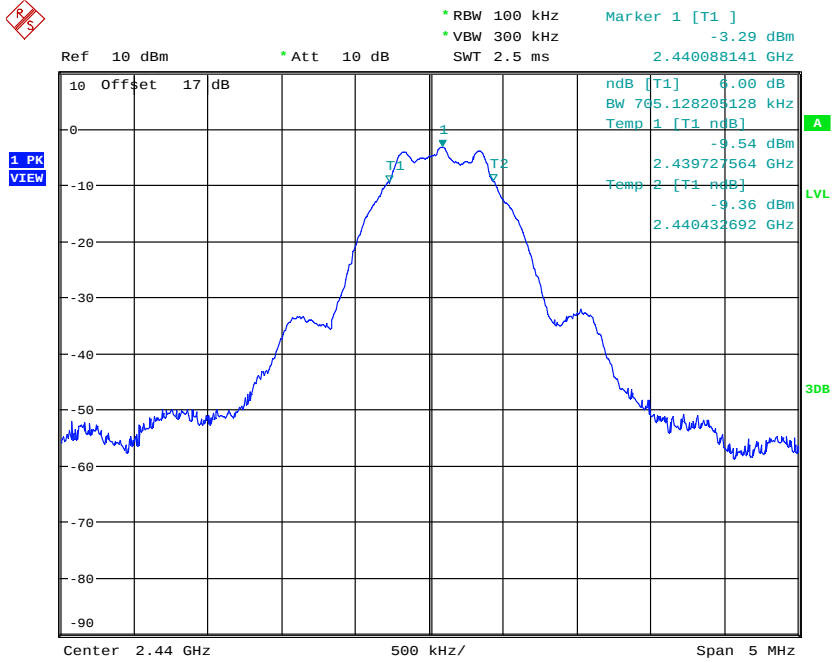


6DB BANDWIDTH BT4.0 CH19
Date: 14.MAR.2022 20:52:25

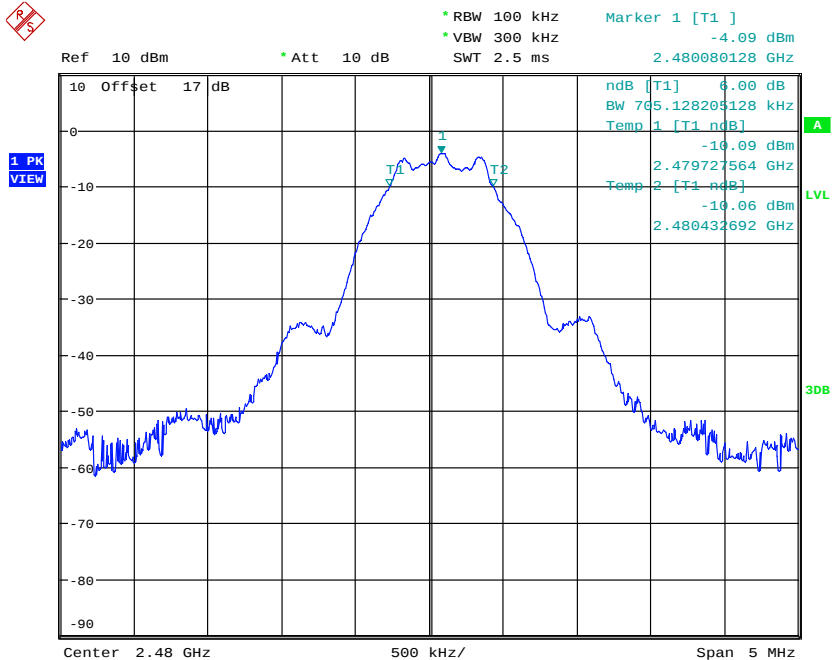


6DB BANDWIDTH BT4.0 CH39
Date: 14.MAR.2022 20:50:19




Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003
BLE 2M

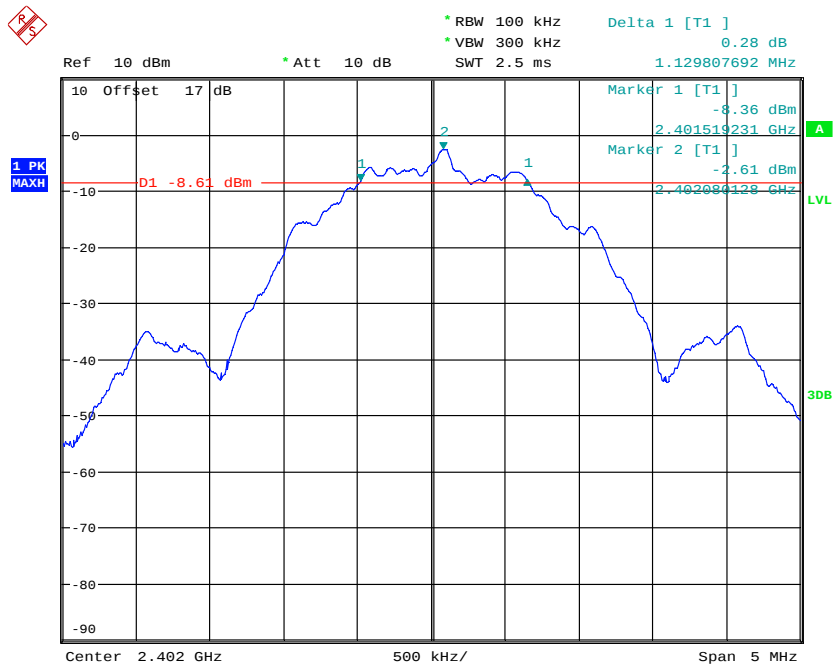

6DB BANDWIDTH BT5.0 CH00
Date: 14.MAR.2022 21:15:16

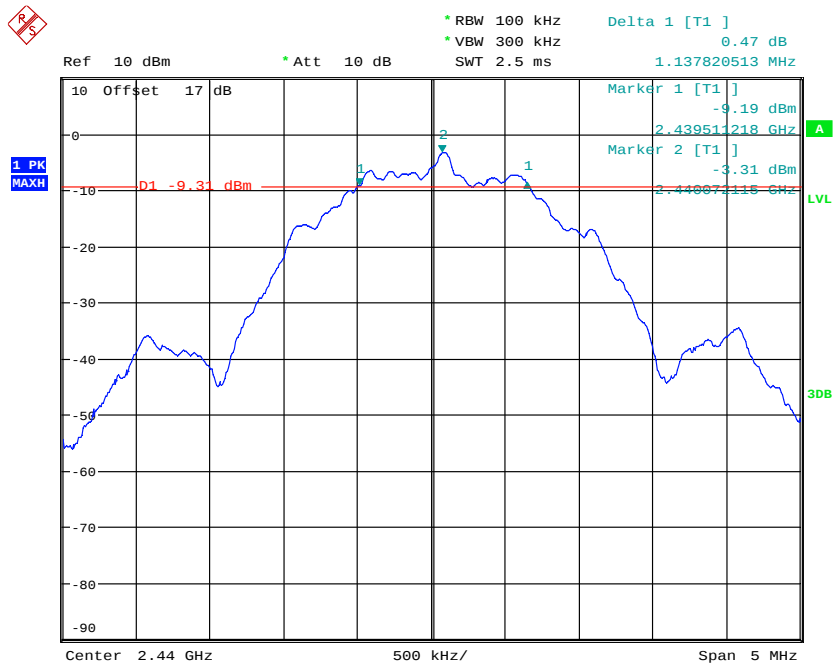


6DB BANDWIDTH BT5.0 CH19
Date: 14.MAR.2022 21:16:31



Registration number: W6M22112-21453-C-1


FCC ID: SNE-ELS-003

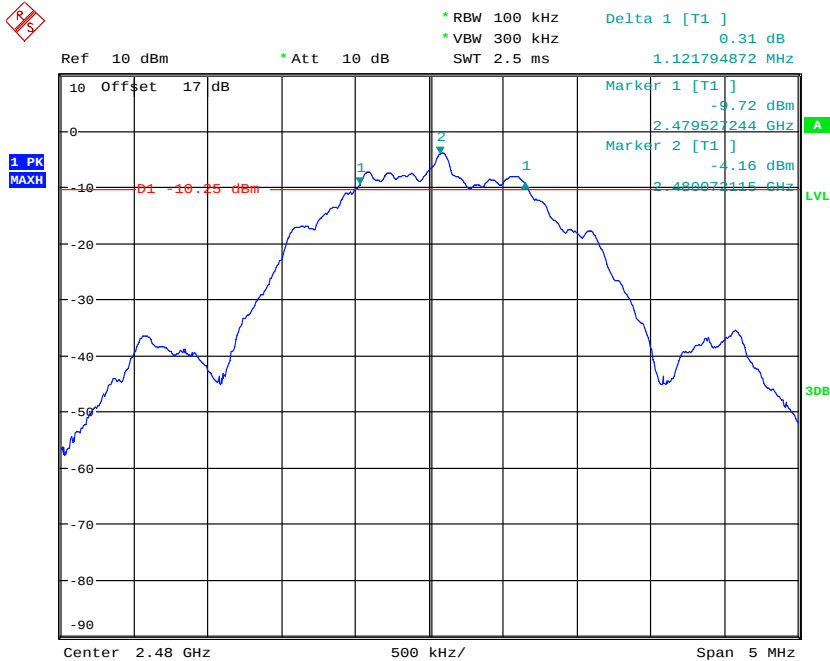

6DB BANDWIDTH BT5.0 CH39


Date: 14.MAR.2022 21:17:47

Thread

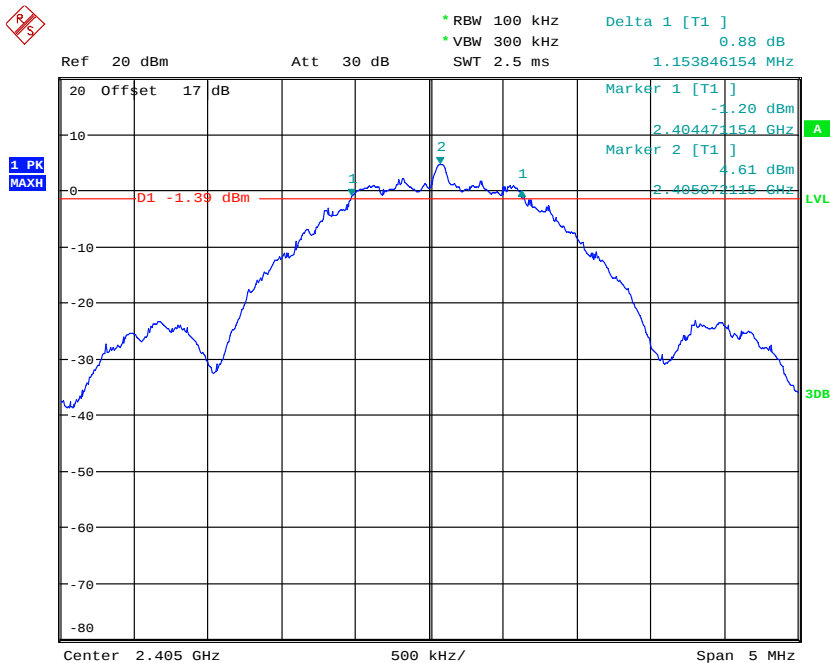


6DB BANDWIDTH 2405MHz

Date: 14.MAR.2022 20:21:43




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

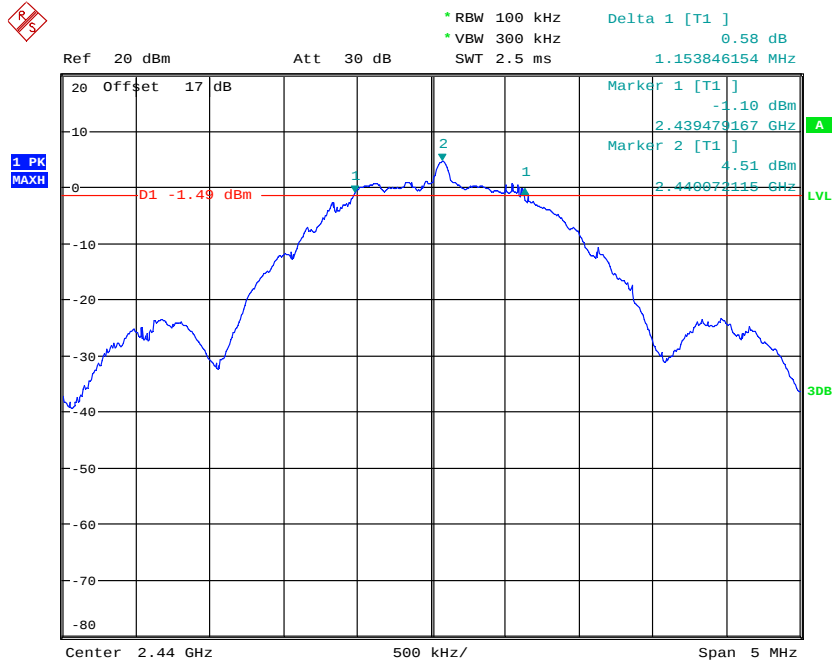

6DB BANDWIDTH 2440MHz
Date: 14.MAR.2022 20:23:00

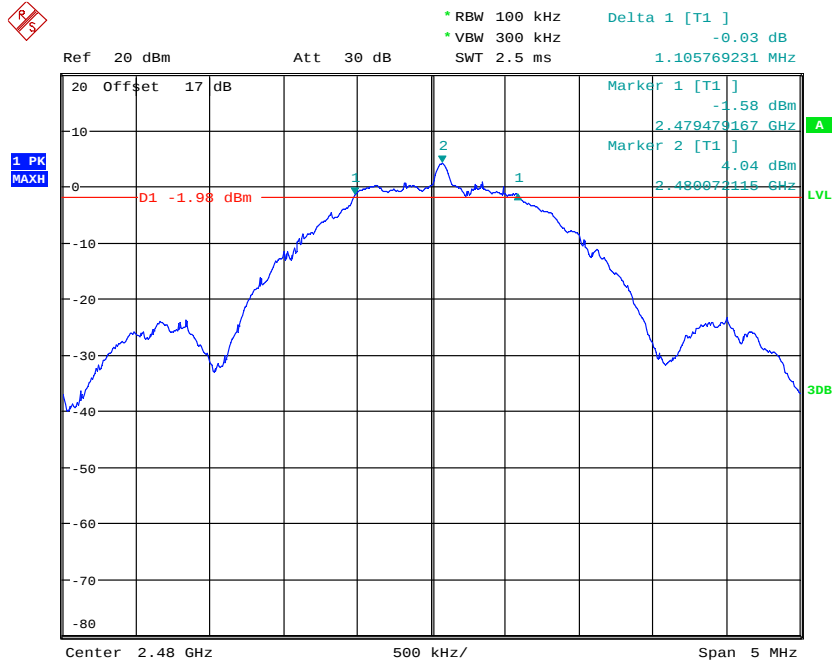

6DB BANDWIDTH 2480MHz
Date: 14.MAR.2022 20:24:58



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

Limits:

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

99% Occupied Bandwidth


Test date: March 14, 2022

Temperature: 23.0°C

Humidity: 53.0%


Tester: Rick

BLE 1M

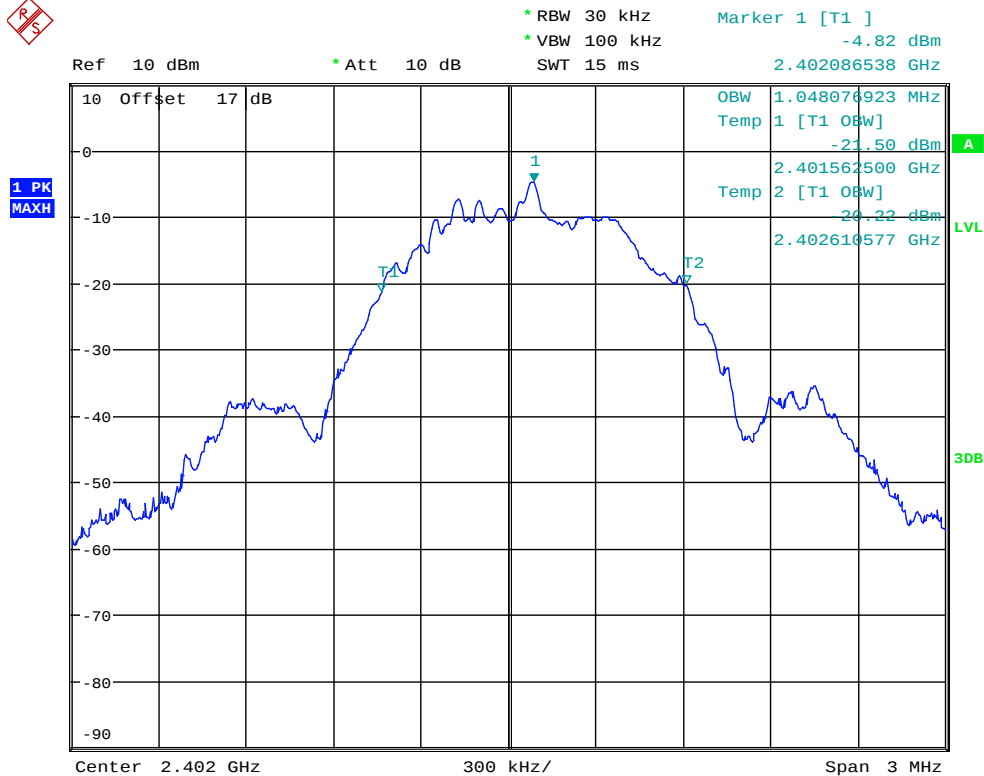


OCCUPIED BANDWIDTH BT4.0 CH00


Date: 14.MAR.2022 20:54:56




Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

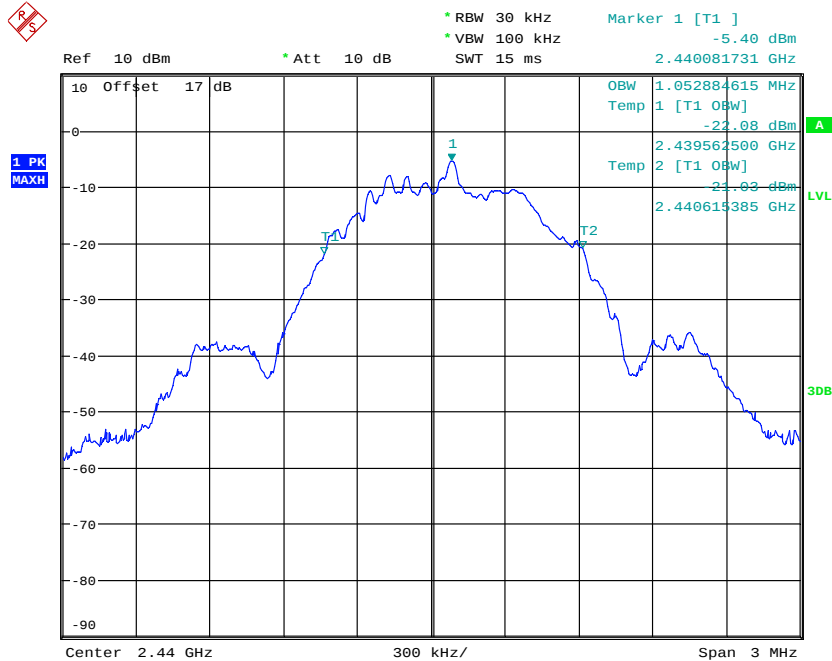

OCCUPIED BANDWIDTH BT4.0 CH19
Date: 14.MAR.2022 20:54:22

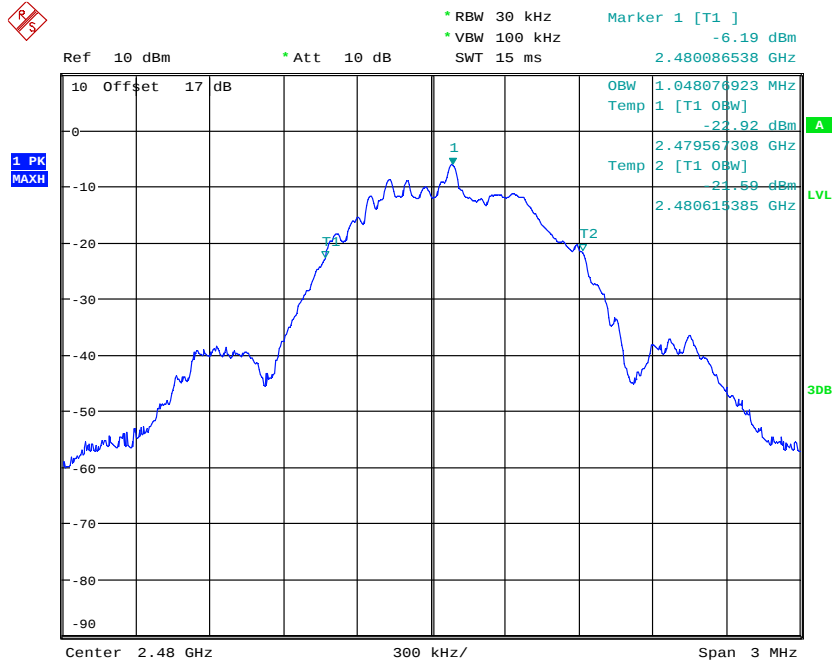

OCCUPIED BANDWIDTH BT4.0 CH39
Date: 14.MAR.2022 20:55:28




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1


FCC ID: SNE-ELS-003

BLE 2M

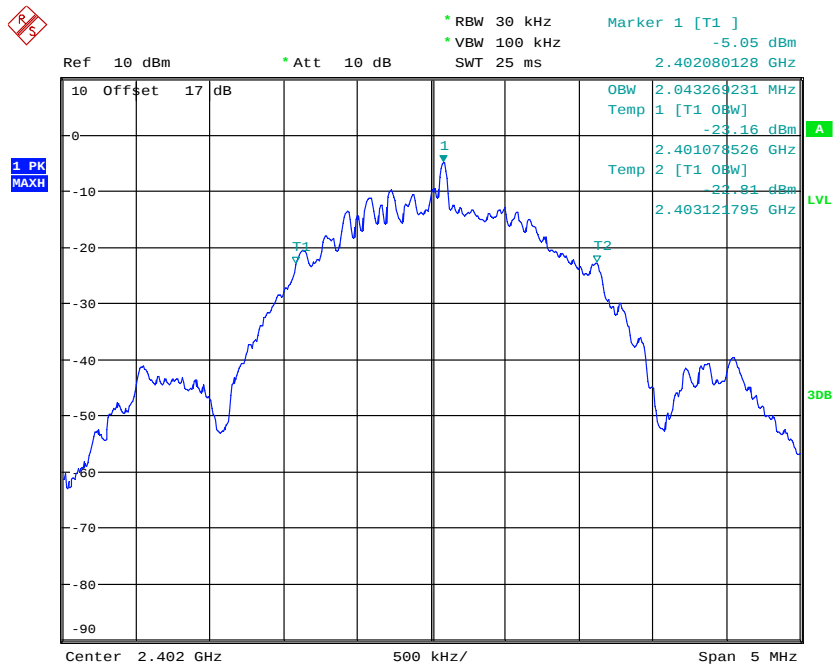


OCCUPIED BANDWIDTH BT5.0 CH00

Date: 14.MAR.2022 21:10:07

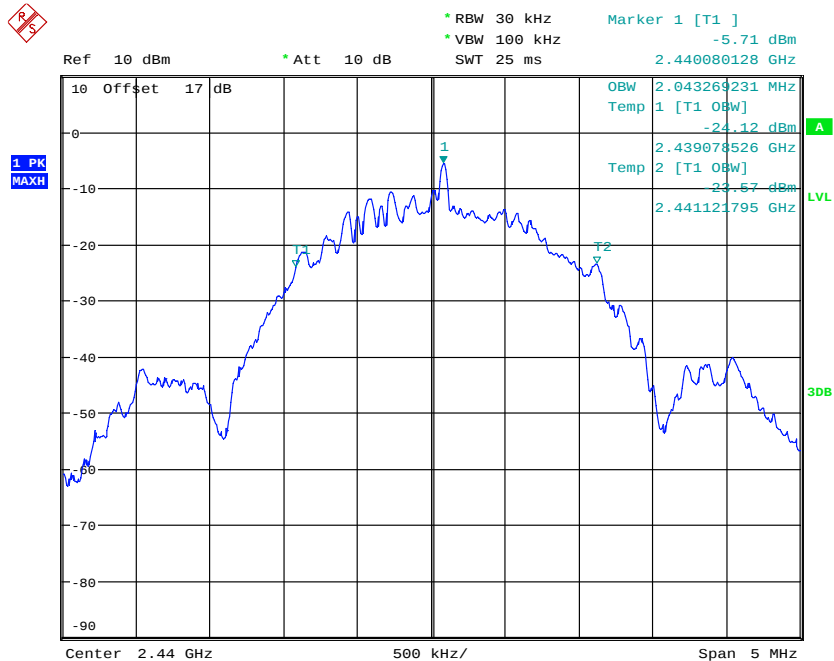


OCCUPIED BANDWIDTH BT5.0 CH19

Date: 14.MAR.2022 21:09:34




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

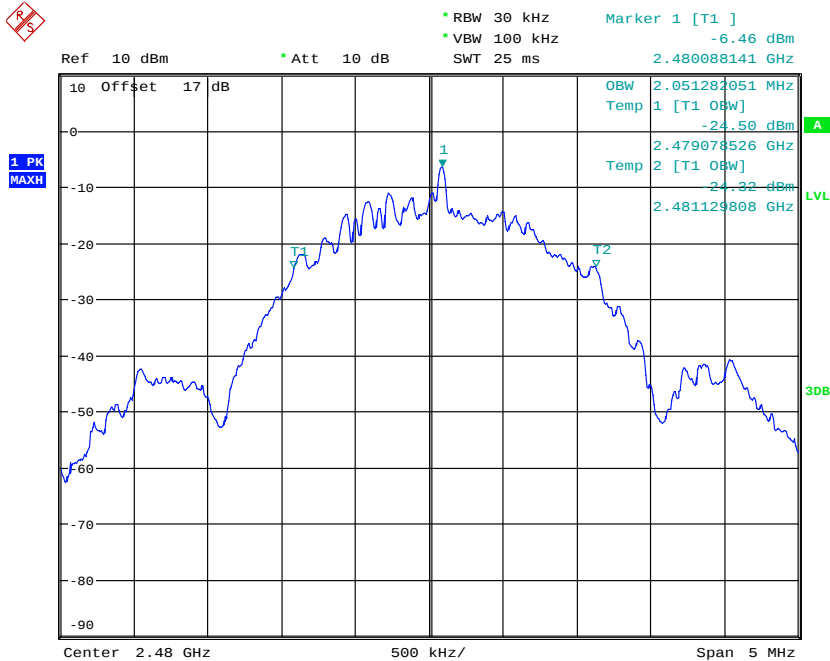


OCCUPIED BANDWIDTH BT5.0 CH39
Date: 14.MAR.2022 21:09:00

Thread

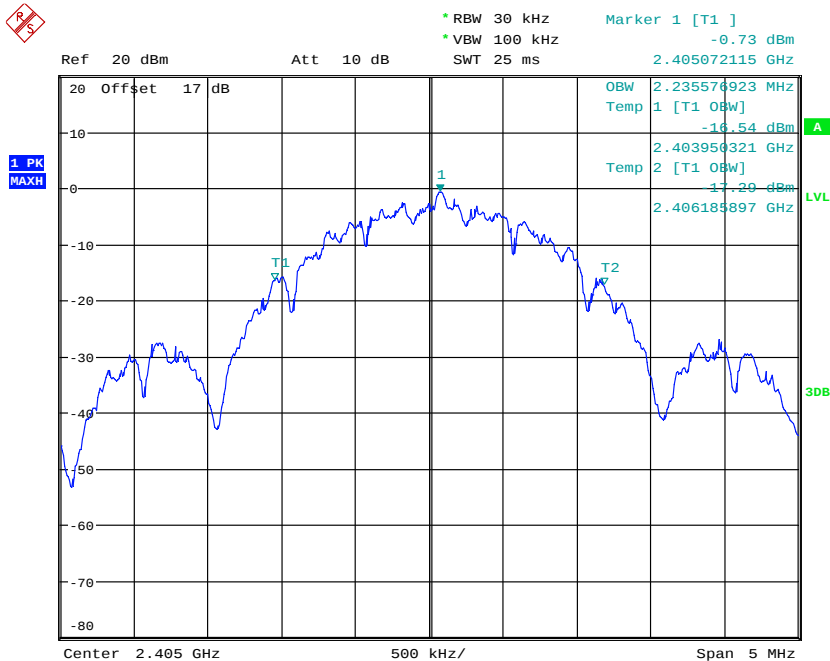


OCCUPIED BANDWIDTH 2405MHz
Date: 14.MAR.2022 20:29:00




Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

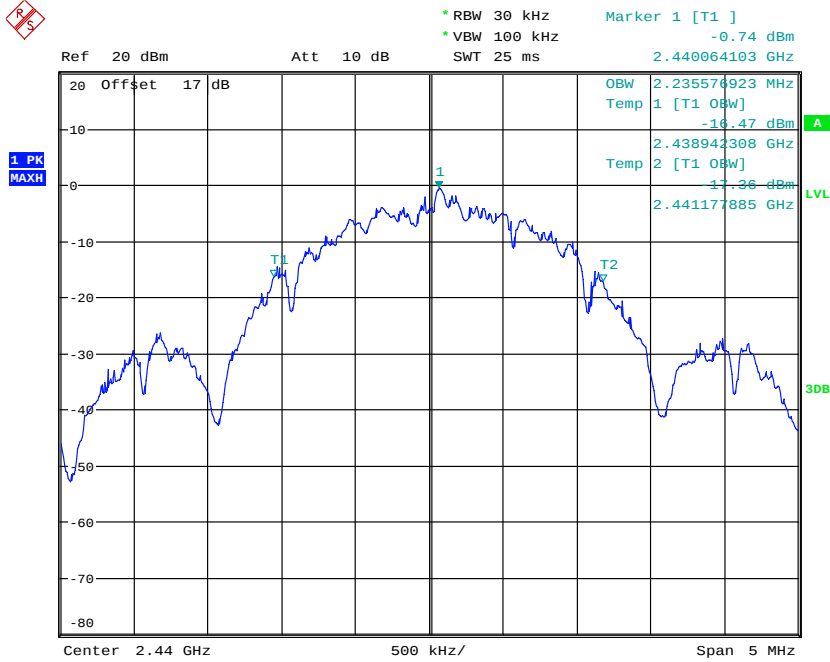

OCCUPIED BANDWIDTH 2440MHz
Date: 14.MAR.2022 20:28:28

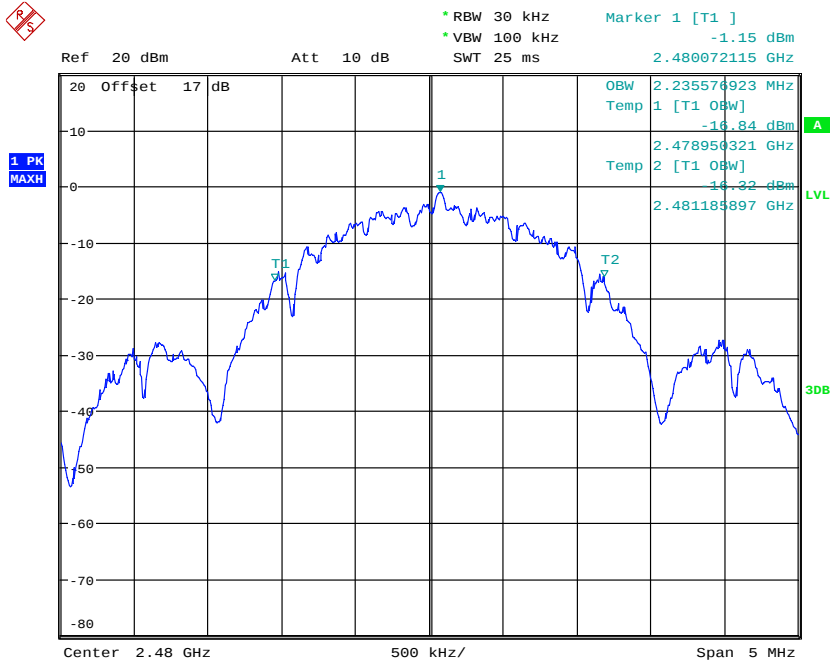

OCCUPIED BANDWIDTH 2480MHz
Date: 14.MAR.2022 20:27:56



Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

3.8 Peak Power Spectral Density

FCC Rules: 15.247(e)

Subclause 11.10.2 of ANSI C63.10 is applicable.

Peak Power Spectral density is a measured at low, middle and high channel.

The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.


Test date: March 14, 2022

Temperature: 23.0°C

Humidity: 53.0%


Tester: Rick

BLE 1M

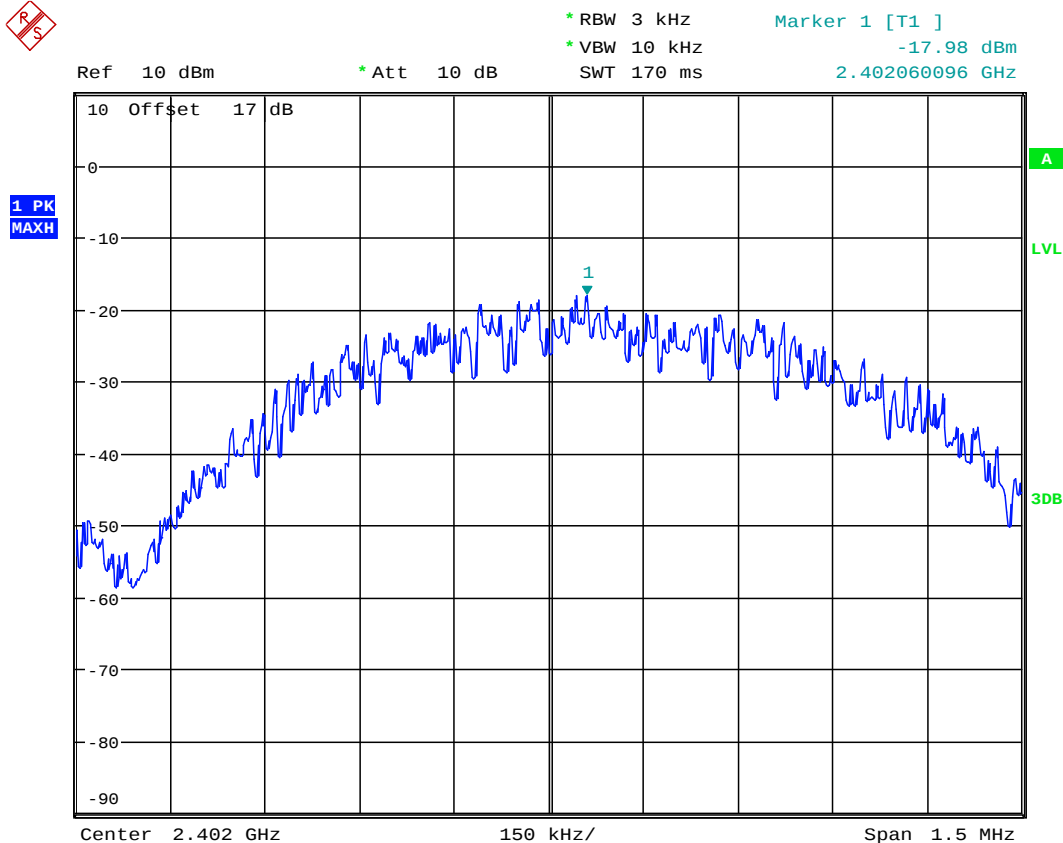


POWER DENSITY BT4.0 CH00


Date: 14.MAR.2022 20:45:57




Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

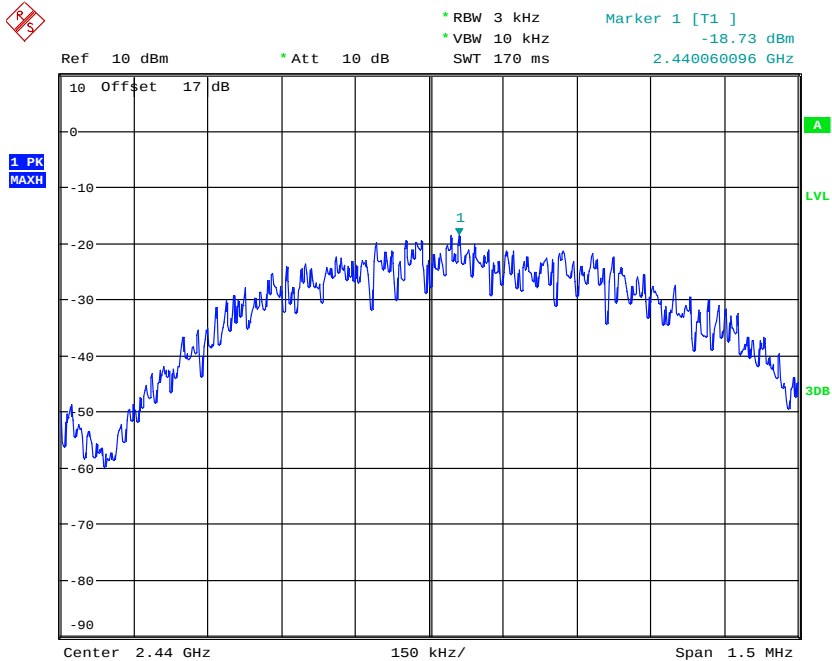

POWER DENSITY BT4.0 CH19
Date: 14.MAR.2022 20:52:35

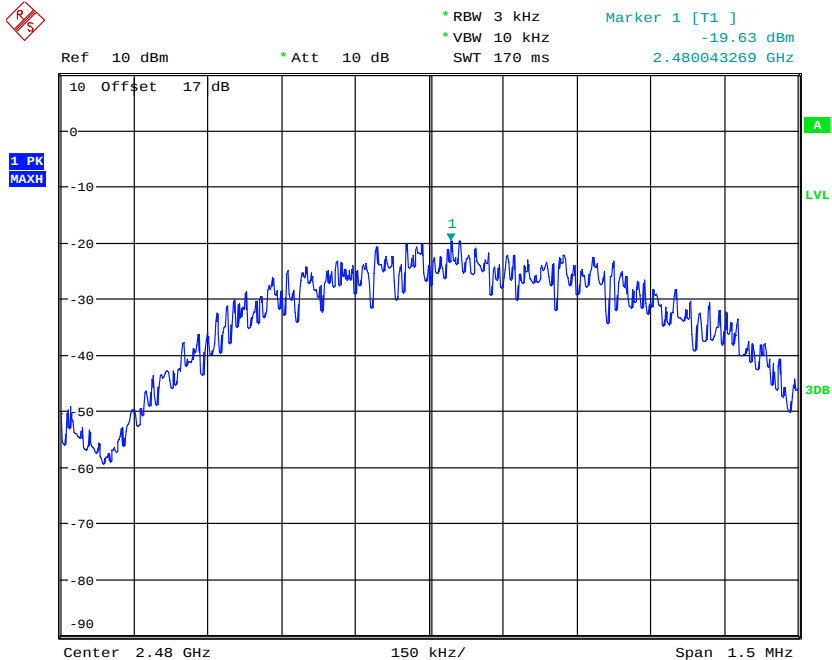

POWER DENSITY BT4.0 CH39
Date: 14.MAR.2022 20:50:29




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1


FCC ID: SNE-ELS-003

BLE 2M

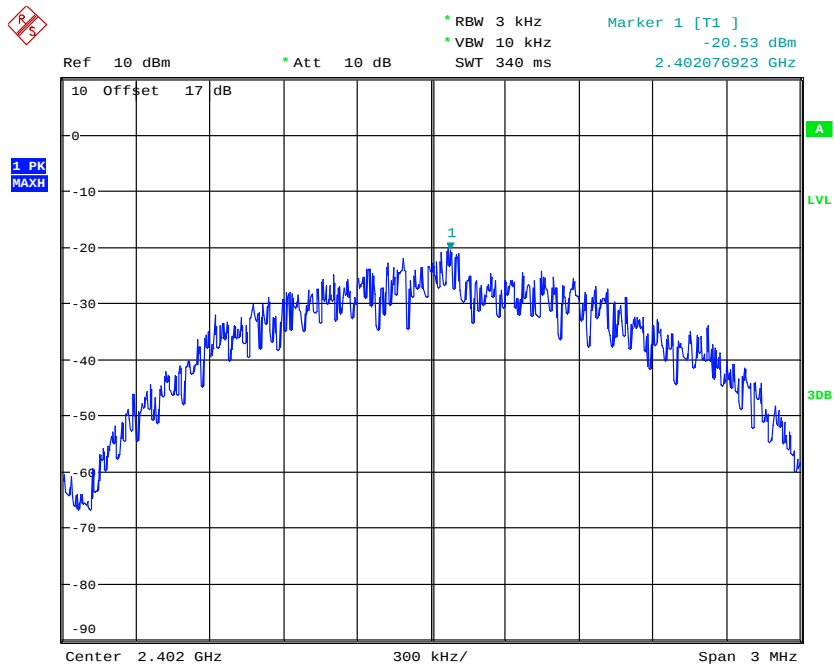


POWER DENSITY BT5.0 CH00

Date: 14.MAR.2022 21:11:01

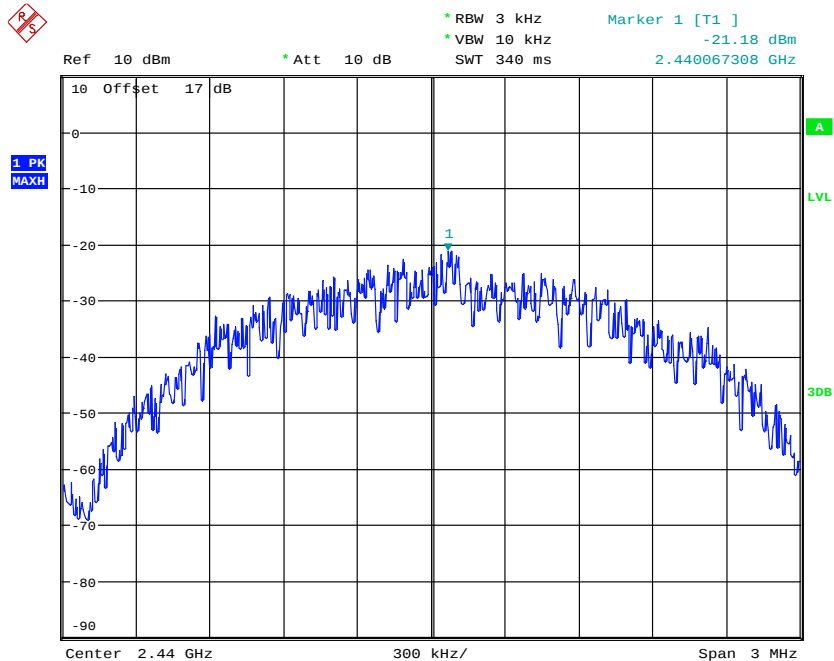

POWER DENSITY BT5.0 CH19


Date: 14.MAR.2022 21:11:35



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1


FCC ID: SNE-ELS-003

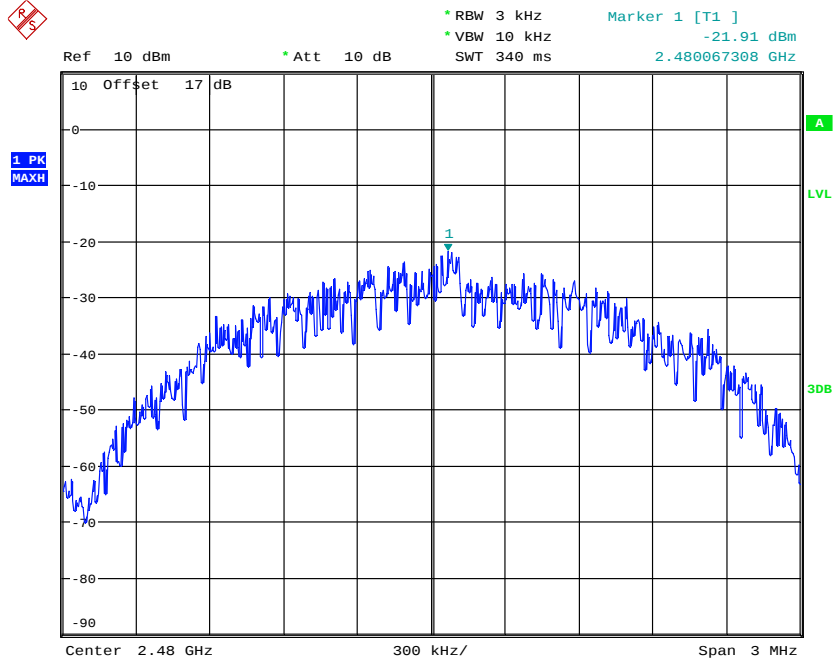

POWER DENSITY BT5.0 CH39


Date: 14.MAR.2022 21:12:05

Thread

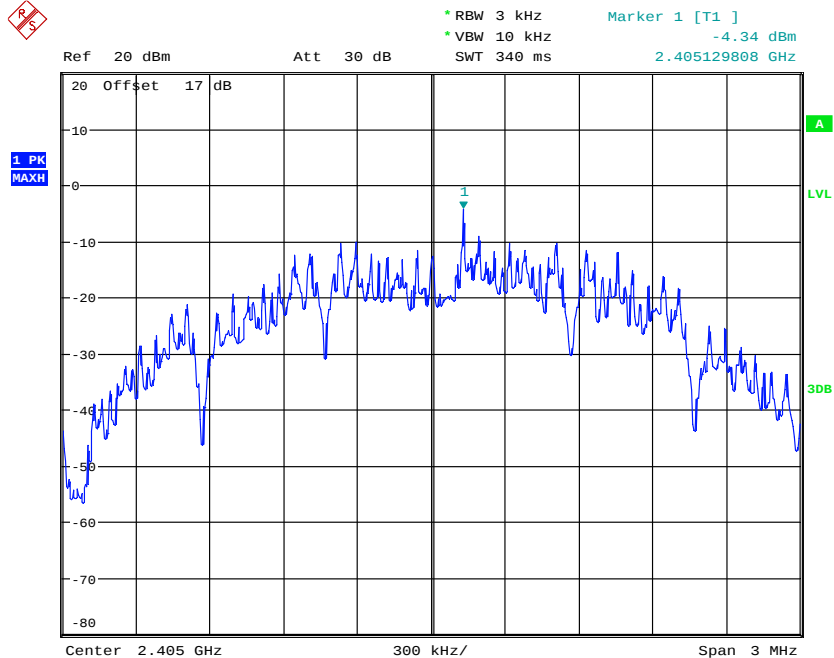


POWER DENSITY 2405MHz


Date: 14.MAR.2022 20:15:19



Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

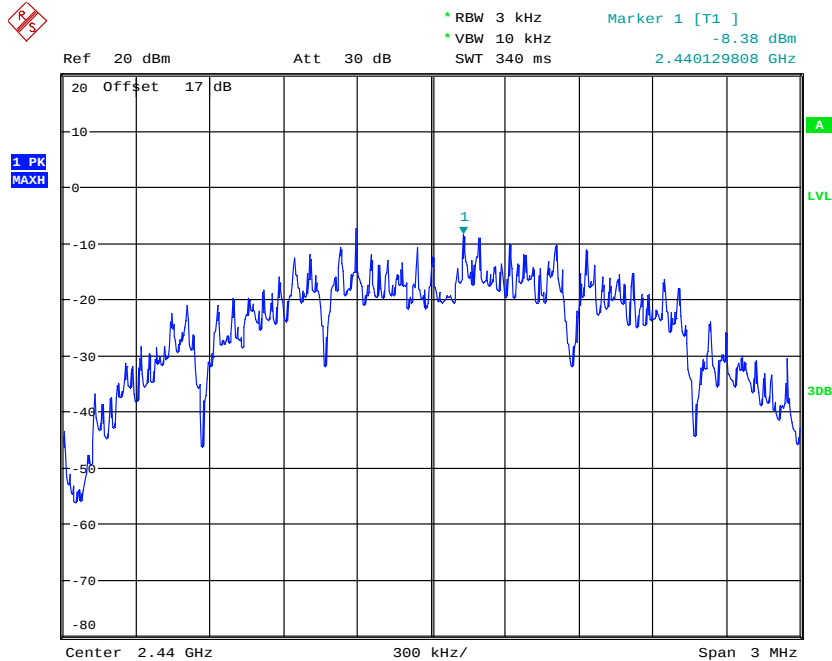

POWER DENSITY 2440MHz
Date: 14.MAR.2022 20:14:20

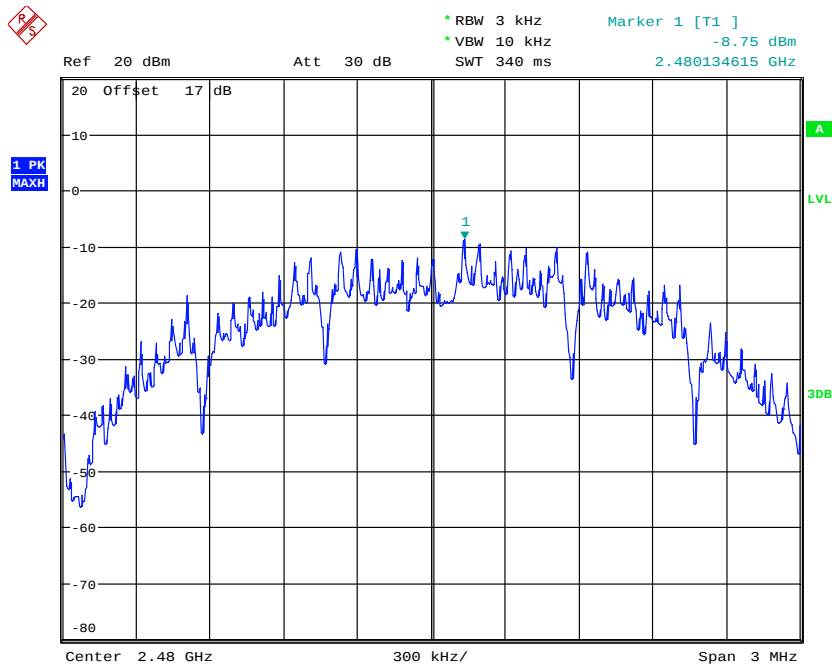

POWER DENSITY 2480MHz
Date: 14.MAR.2022 20:13:40



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

Limits:

Frequency Range MHz	dBm
902-928	8
2400-2483.5	8
5725-5850	8

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

3.9 Radiated Emission from Receiver Part

FCC Rule: 15.109


Summary table with radiated data of the test plots

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 030, ETSTW-RE 055, ETSTW-RE 064, ETSTW-RE 111

Explanation: Please refer to separated test report no.: W6M22112-21453-P-15B.




Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003


3.10 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

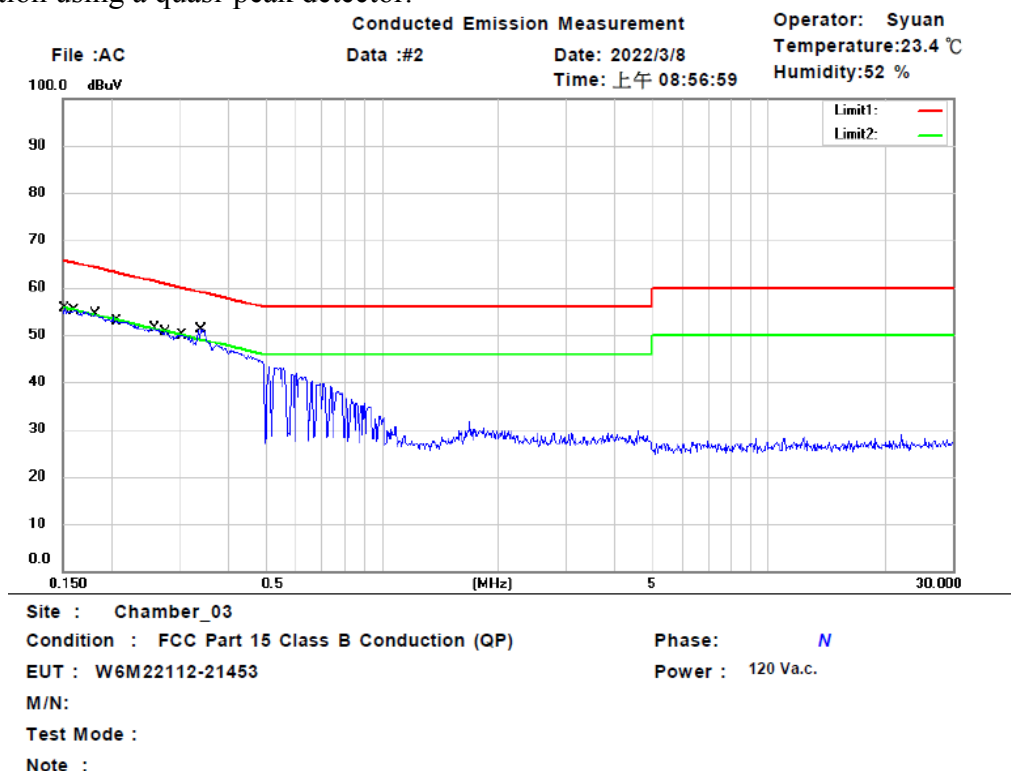


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1514	38.15	QP	9.61	47.76	65.92	-18.16	
	0.1514	15.48	AVG	9.61	25.09	55.92	-30.83	
	0.1616	38.09	QP	9.61	47.70	65.38	-17.68	
	0.1616	15.42	AVG	9.61	25.03	55.38	-30.35	
	0.1813	37.33	QP	9.61	46.94	64.43	-17.49	
	0.1813	15.67	AVG	9.61	25.28	54.43	-29.15	
	0.2088	35.99	QP	9.60	45.59	63.25	-17.66	
	0.2088	12.95	AVG	9.60	22.55	53.25	-30.70	
	0.2580	34.11	QP	9.56	43.67	61.50	-17.83	
	0.2580	11.69	AVG	9.56	21.25	51.50	-30.25	
	0.2754	33.15	QP	9.55	42.70	60.95	-18.25	
	0.2754	11.56	AVG	9.55	21.11	50.95	-29.84	
	0.3048	32.69	QP	9.52	42.21	60.11	-17.90	
	0.3048	11.21	AVG	9.52	20.73	50.11	-29.38	
*	0.3397	33.32	QP	9.49	42.81	59.21	-16.40	
	0.3397	12.32	AVG	9.49	21.81	49.21	-27.40	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22112-21453-C-1

FCC ID: SNE-ELS-003

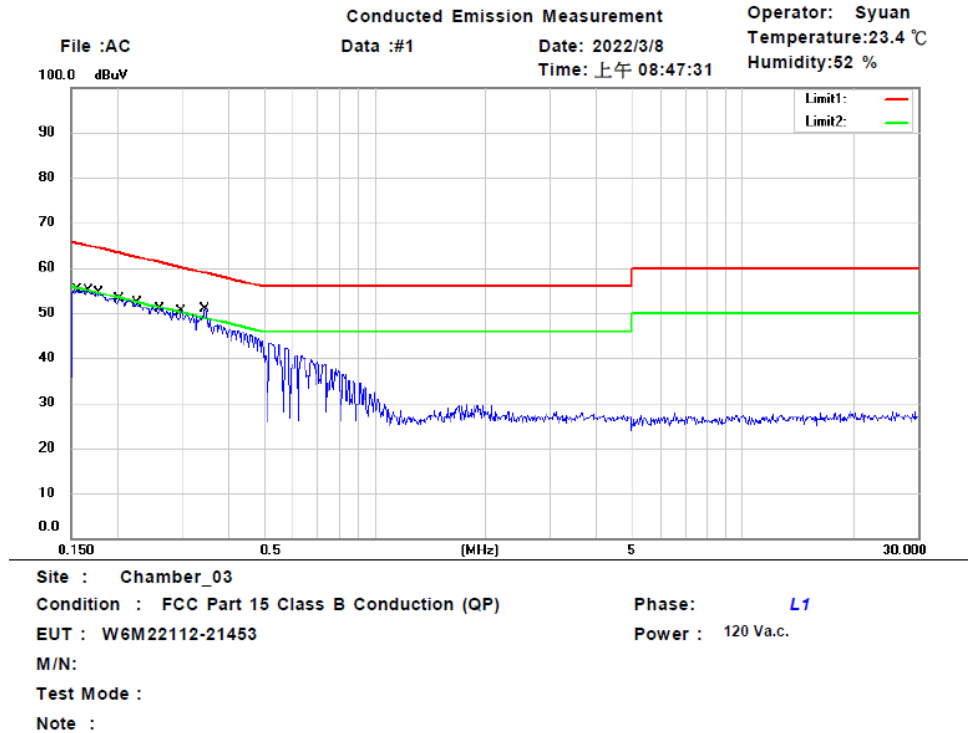


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1553	46.79	QP	9.62	56.41	65.71	-9.30	
*	0.1553	44.83	AVG	9.62	54.45	55.71	-1.26	
	0.1660	38.17	QP	9.62	47.79	65.16	-17.37	
	0.1660	29.61	AVG	9.62	39.23	55.16	-15.93	
	0.1775	37.77	QP	9.62	47.39	64.60	-17.21	
	0.1775	30.93	AVG	9.62	40.55	54.60	-14.05	
	0.2010	35.49	QP	9.62	45.11	63.57	-18.46	
	0.2010	20.52	AVG	9.62	30.14	53.57	-23.43	
	0.2265	34.87	QP	9.60	44.47	62.58	-18.11	
	0.2265	24.27	AVG	9.60	33.87	52.58	-18.71	
	0.2594	33.55	QP	9.57	43.12	61.45	-18.33	
	0.2594	21.15	AVG	9.57	30.72	51.45	-20.73	
	0.2975	33.33	QP	9.54	42.87	60.31	-17.44	
	0.2975	25.76	AVG	9.54	35.30	50.31	-15.01	
	0.3463	33.16	QP	9.50	42.66	59.05	-16.39	
	0.3463	22.23	AVG	9.50	31.73	49.05	-17.32	

- Note:
1. The formula of measured value as: Test Result = Reading + Correction Factor
 2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
 4. All not in the table noted test results are more than 20 dB below the relevant limits.
 5. Up Line: QP Limit Line, Down Line: Ave Limit Line.

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045.



Registration number: W6M22112-21453-C-1
FCC ID: SNE-ELS-003

Appendix

Measurement diagrams

Spurious Emissions radiated



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879


Radiated Emission Measurement

Operator: Sky
Temperature:24.3 °C
Humidity:53.0 %

File :1_BLE(1M)_TX 2402MHz Data :#1

Date: 3/12/2022
Time: 5:22:31 PM

80.0 dBuV/m

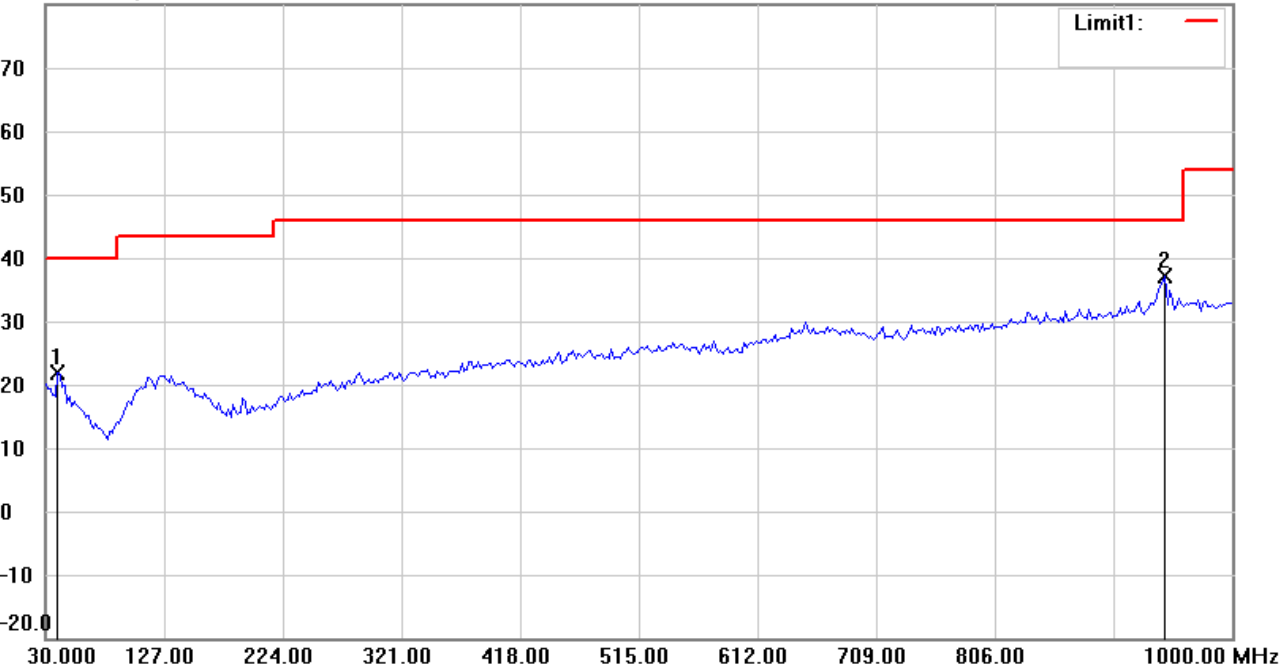

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	39.7194	30.64	peak	-8.80	21.84	40.00	110	13	-18.16	
*	945.5711	31.44	peak	5.71	37.15	46.00	100	107	-8.85	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File: 1_BLE(1M)_TX 2402MHz Data: #2


Date: 3/12/2022

Temperature: 24.3 °C

80.0 dBuV/m

Time: 5:23:51 PM

Humidity: 53.0 %

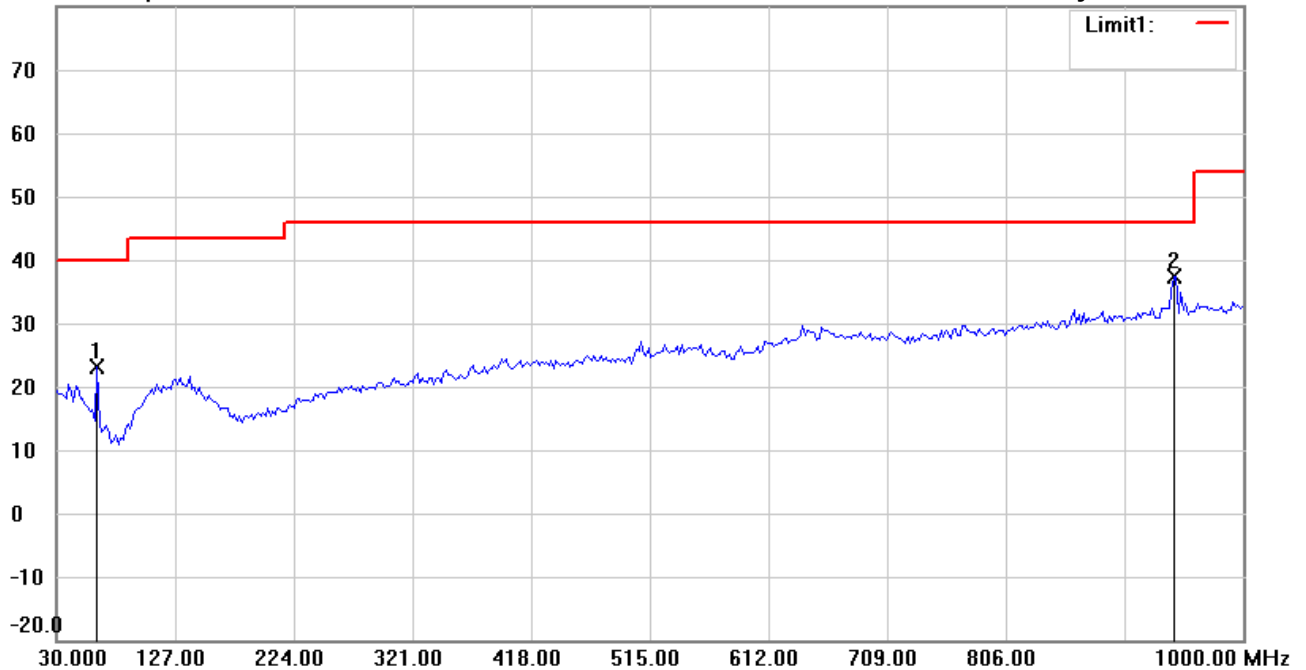

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	63.0461	35.41	peak	-12.32	23.09	40.00	100	21	-16.91	
*	943.6272	31.80	peak	5.66	37.46	46.00	105	6	-8.54	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:59:55 PM

Humidity: 53.0 %

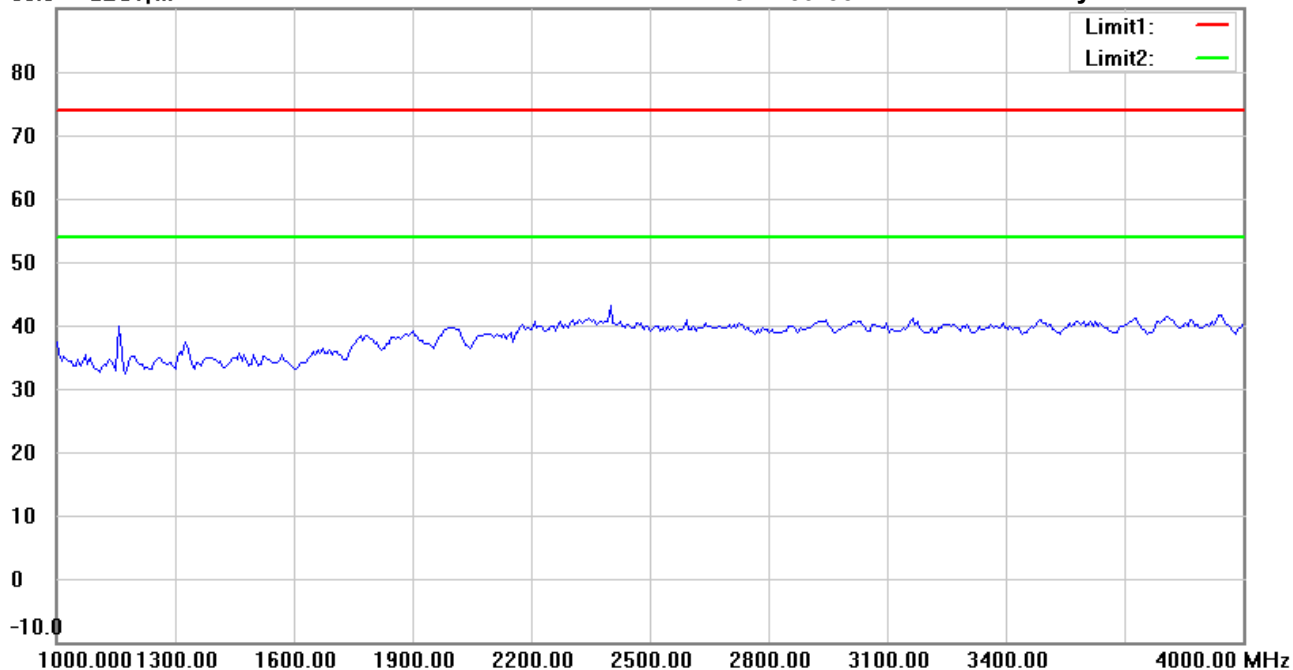

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #6


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:03:26 PM

Humidity: 53.0 %

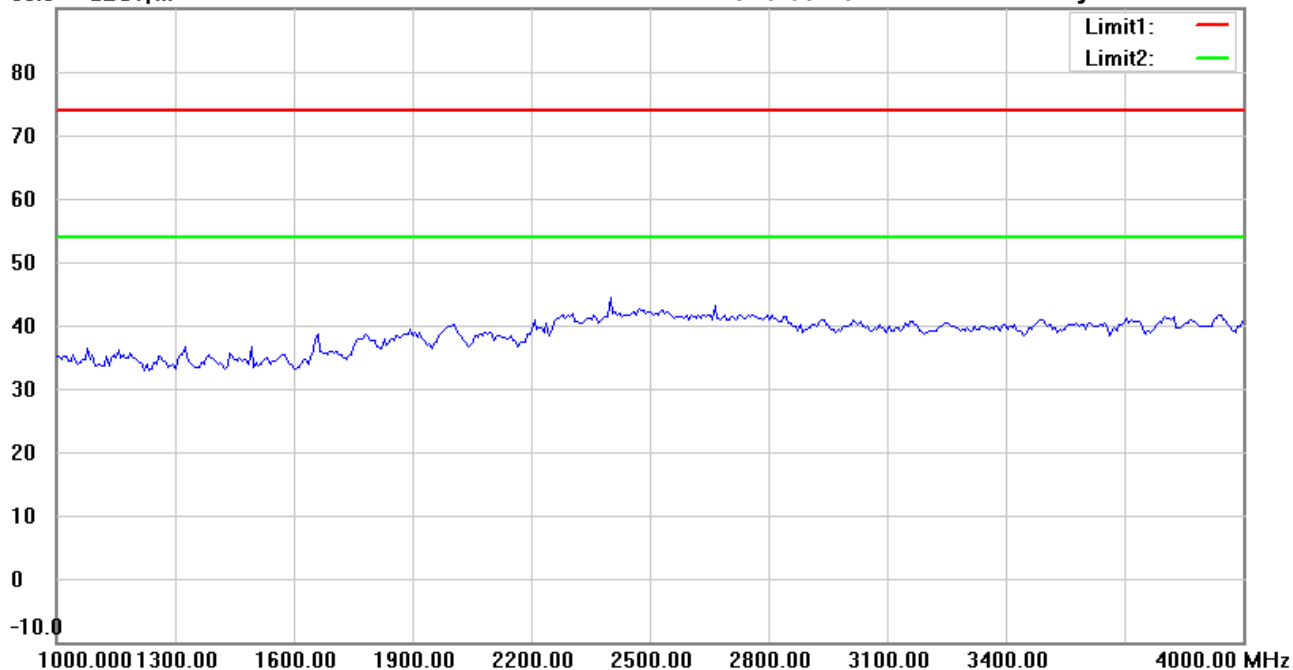

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#2


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:00:56 PM

Humidity: 53.0 %

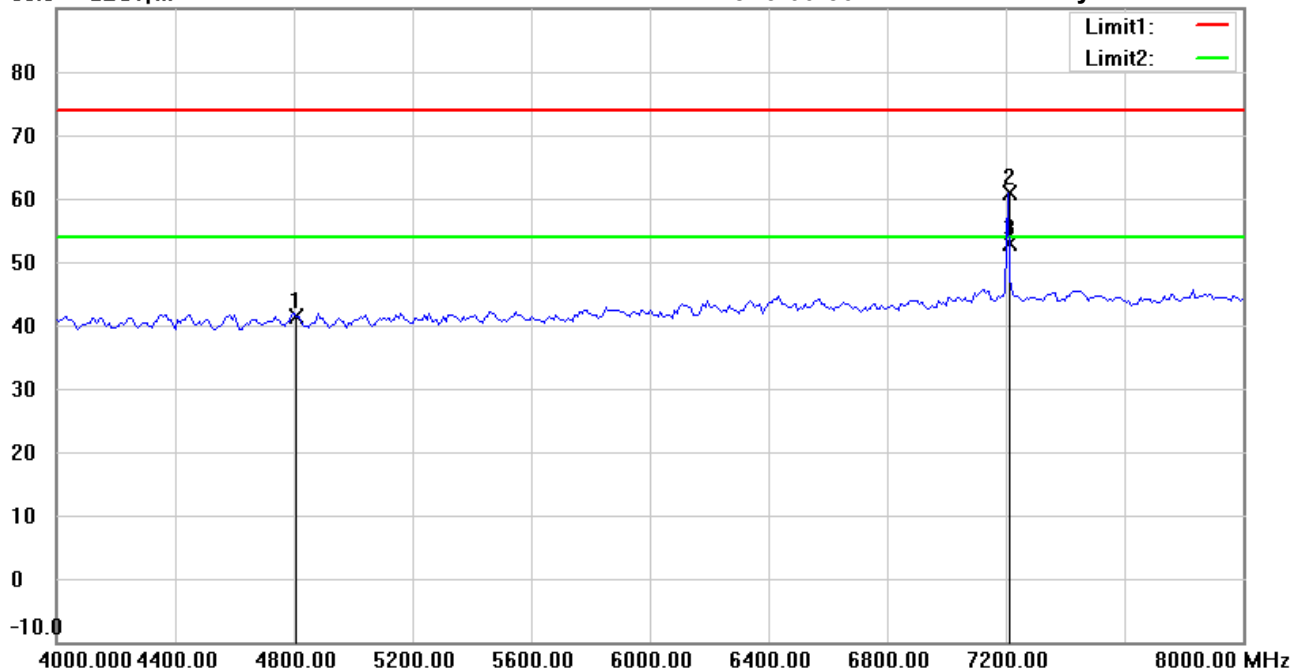

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4804.000	39.95	peak	1.36	41.31	74.00	150	331	-32.69	
	7206.413	54.94	peak	6.03	60.97	74.00	150	50	-13.03	
*	7206.413	46.82	AVG	6.03	52.85	54.00	150	50	-1.15	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#7


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:04:27 PM

Humidity: 53.0 %

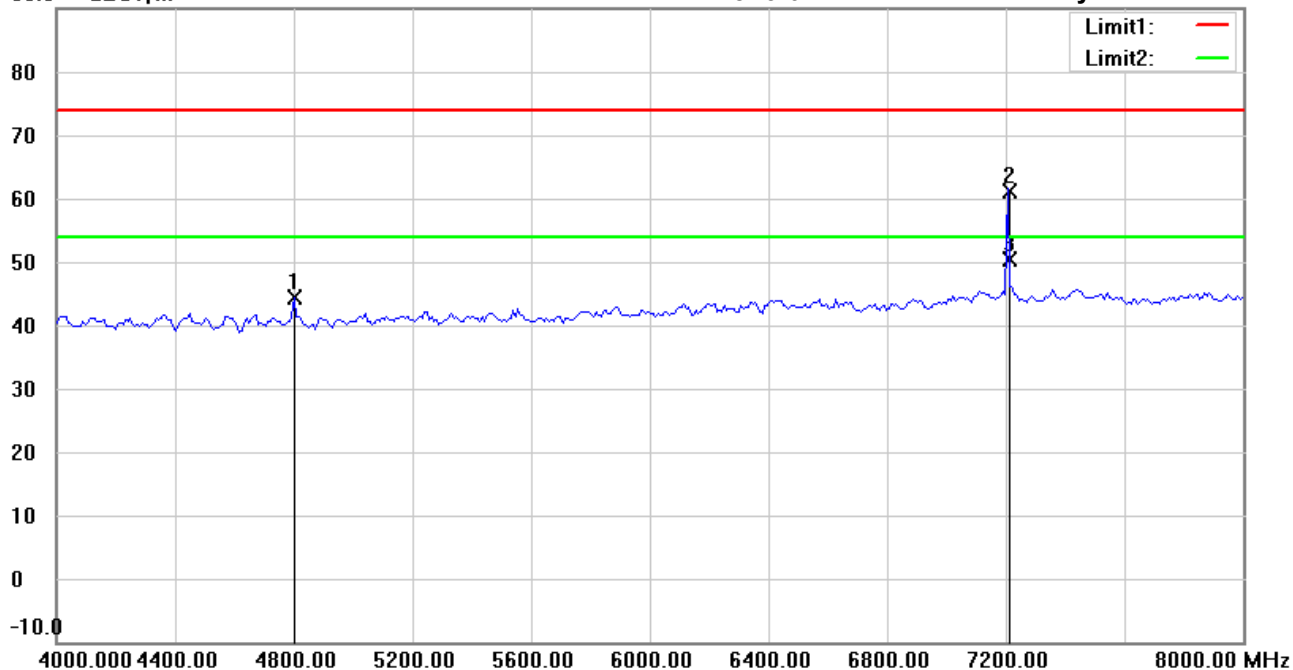

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4801.603	43.08	peak	1.35	44.43	74.00	150	92	-29.57	
	7206.413	55.19	peak	6.03	61.22	74.00	150	18	-12.78	
*	7206.413	44.32	AVG	6.03	50.35	54.00	150	18	-3.65	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:02:02 PM

Humidity: 53.0 %

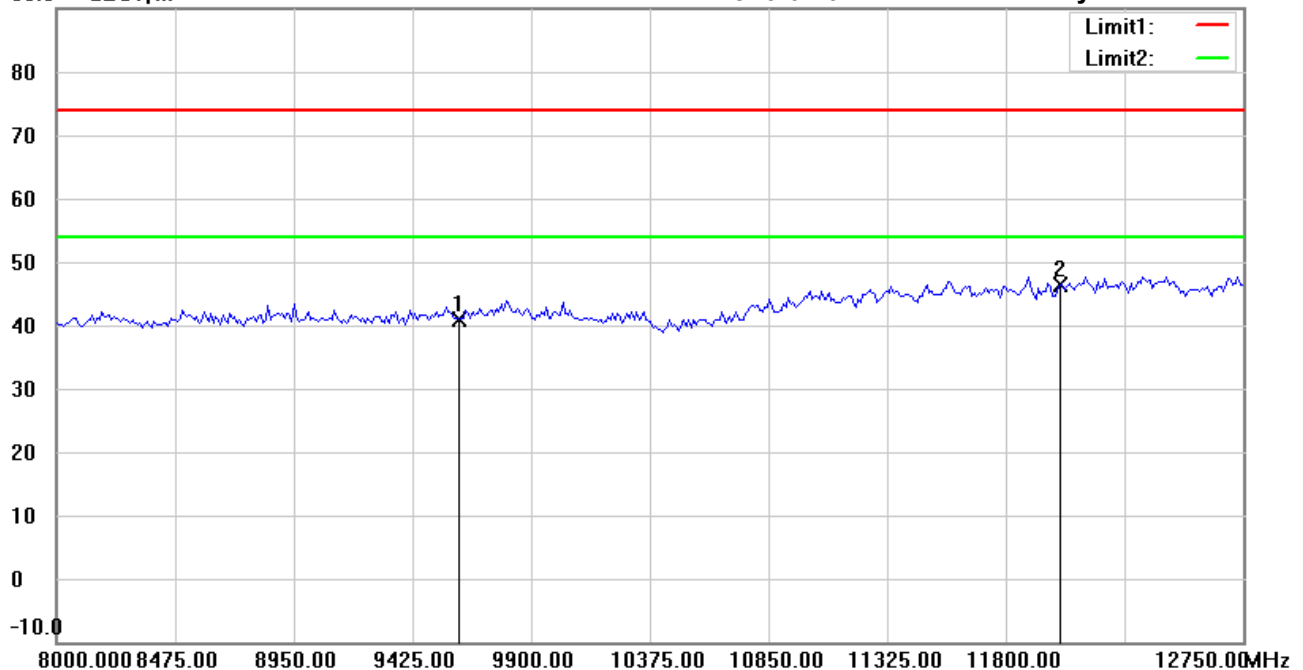

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	32.29	peak	8.71	41.00	74.00	150	102	-33.00	
*	12010.000	32.95	peak	13.53	46.48	74.00	150	47	-27.52	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #8


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:05:27 PM

Humidity: 53.0 %

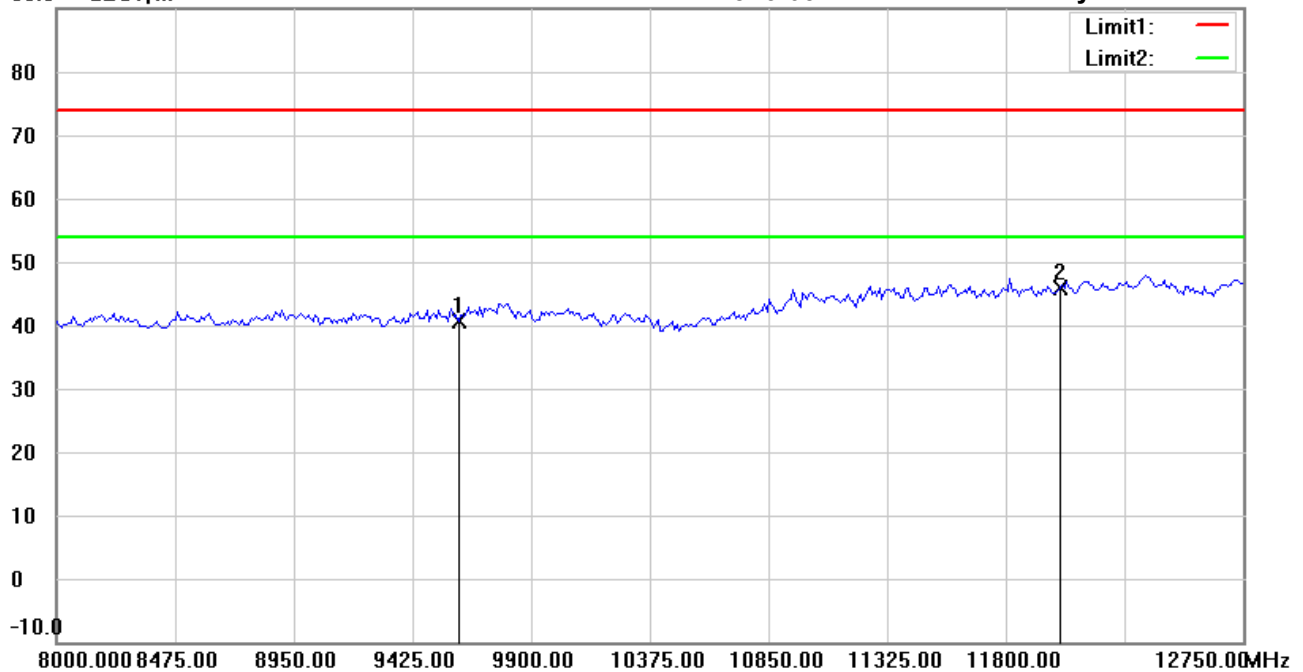

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	31.99	peak	8.71	40.70	74.00	150	40	-33.30	
*	12010.000	32.33	peak	13.53	45.86	74.00	150	113	-28.14	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #4


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:02:16 PM

Humidity: 53.0 %

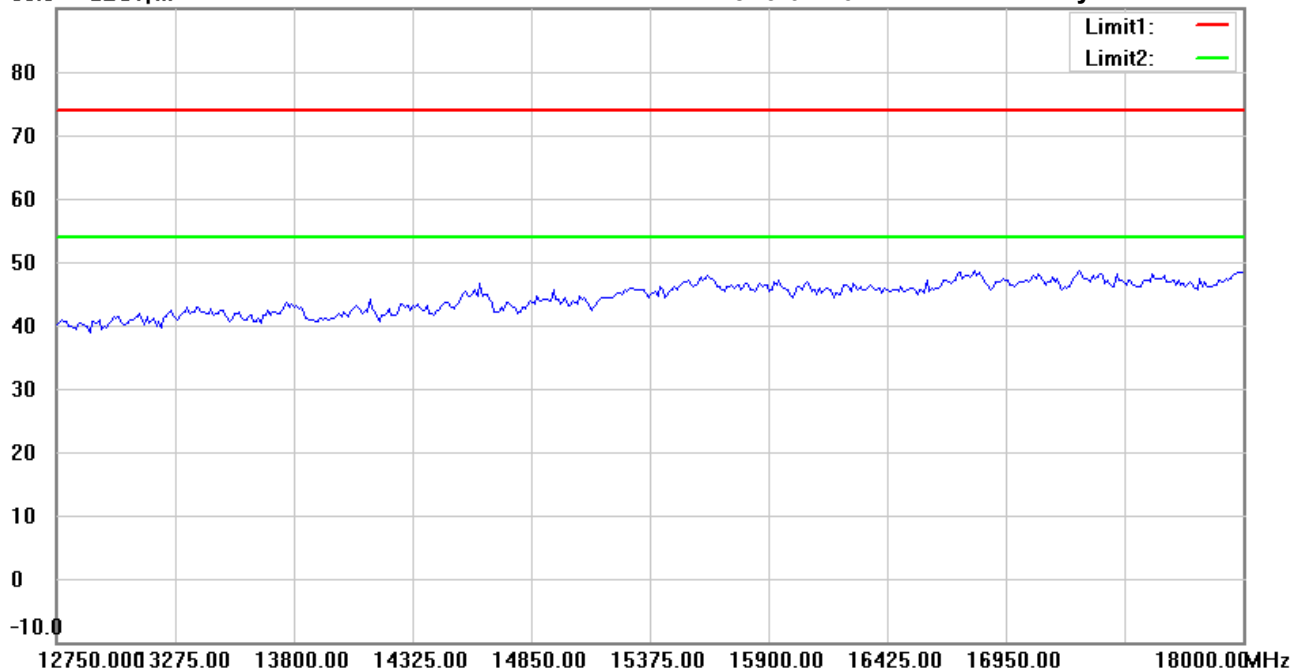

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #9


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:05:41 PM

Humidity: 53.0 %

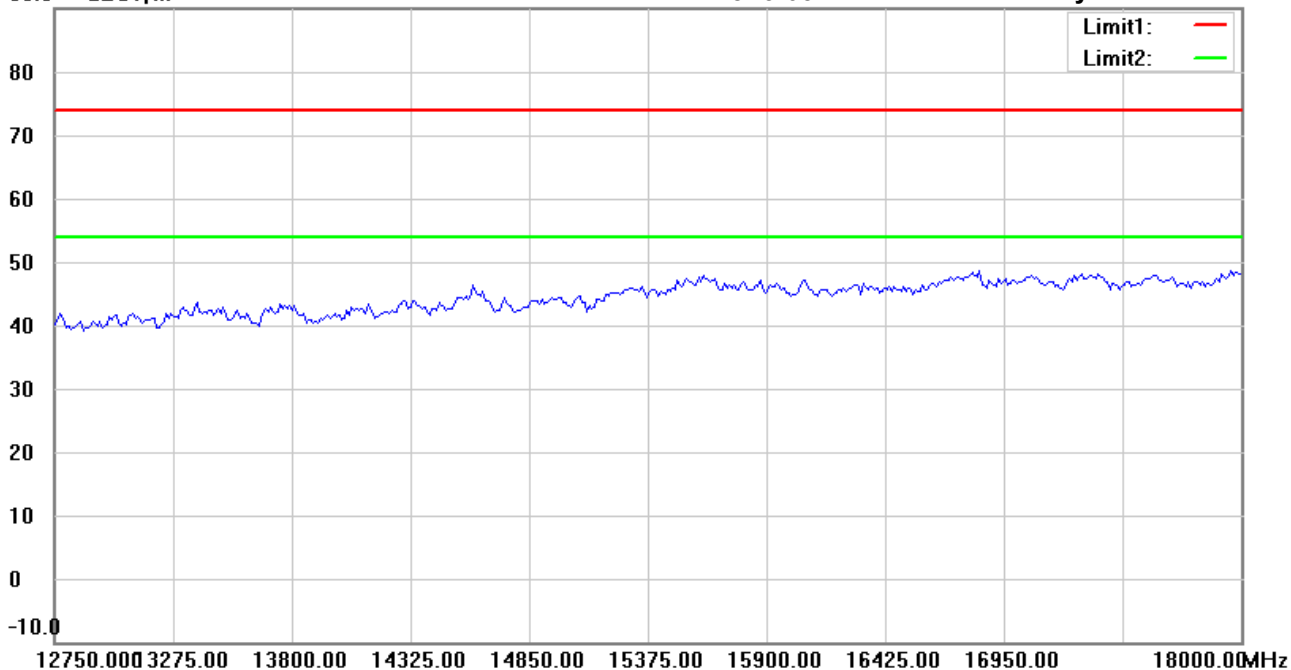

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #5


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:02:26 PM

Humidity: 53.0 %

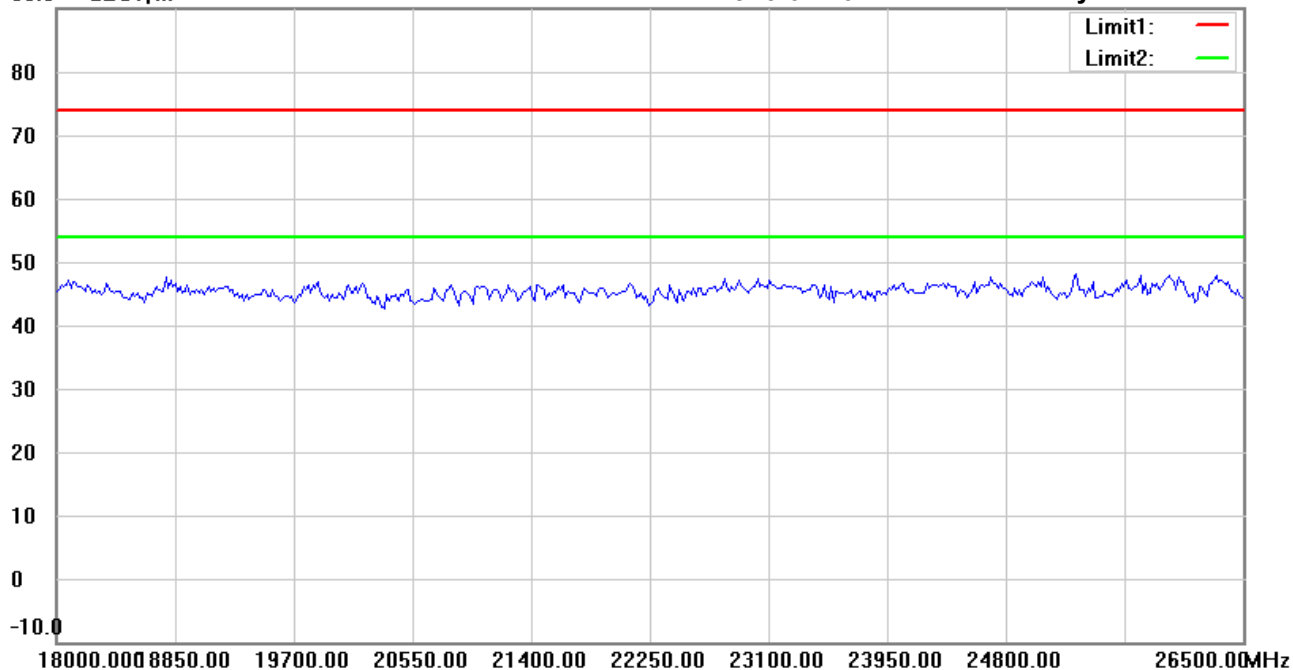

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #10


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:05:50 PM

Humidity: 53.0 %

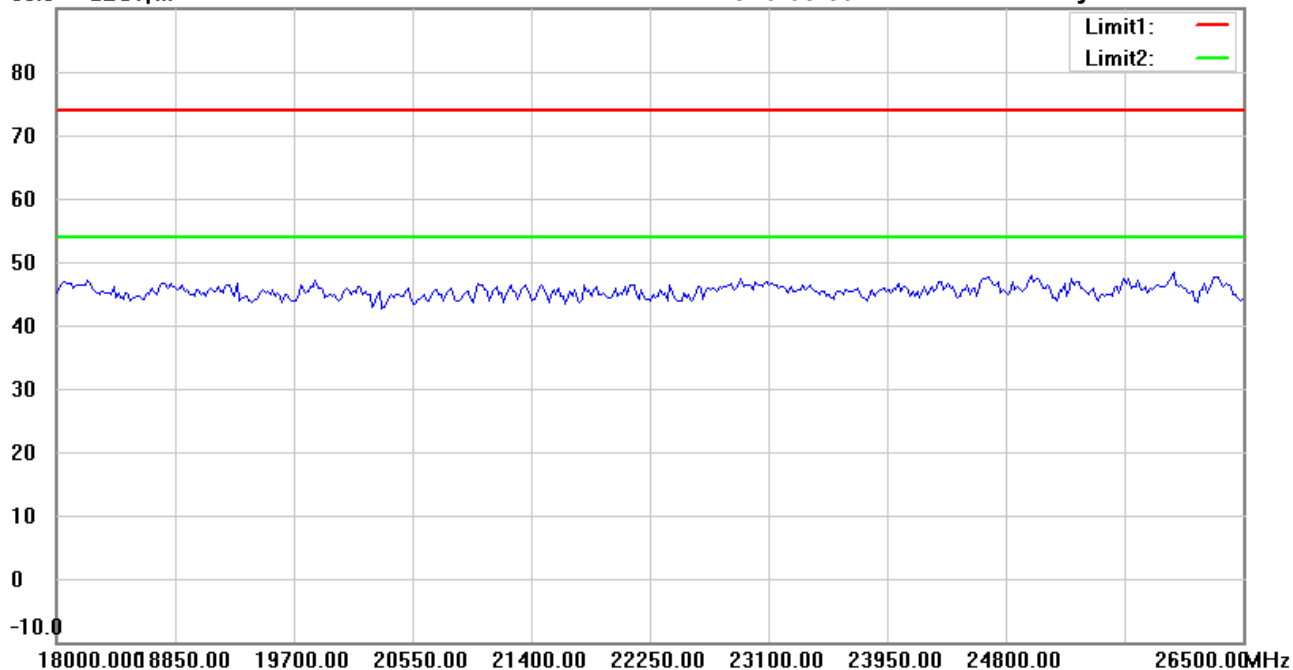

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:49:22 PM

Humidity: 53.0 %

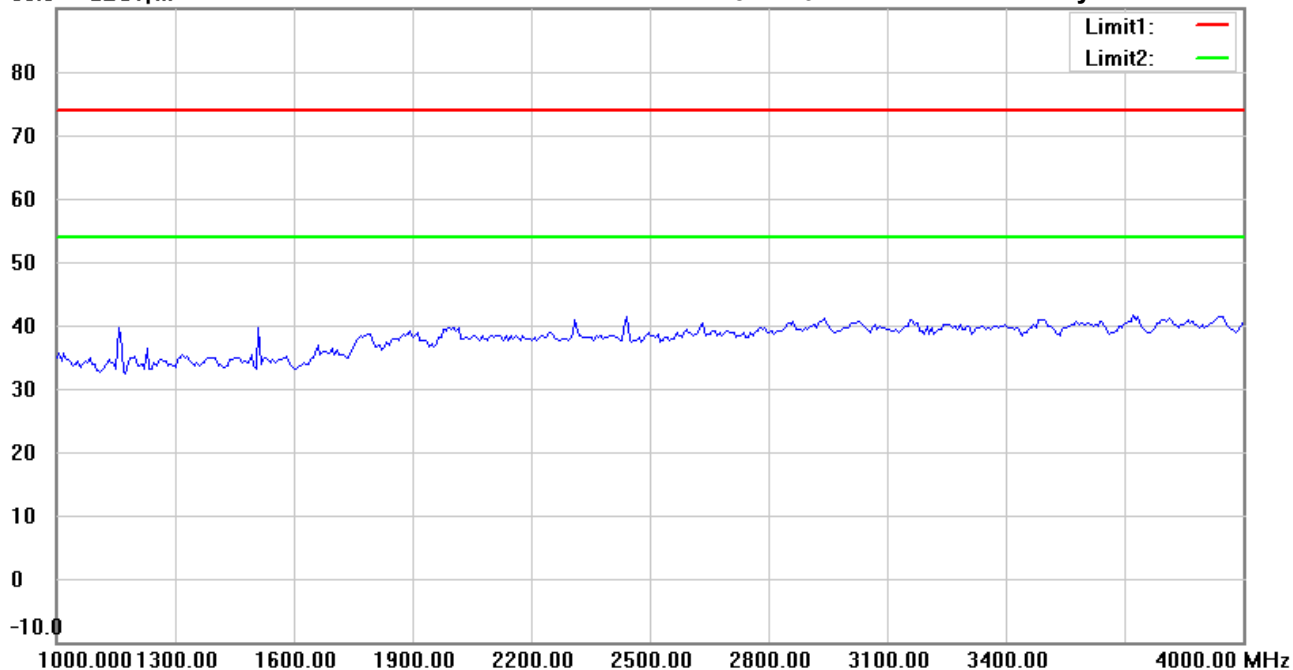

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #6


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:52:53 PM

Humidity: 53.0 %

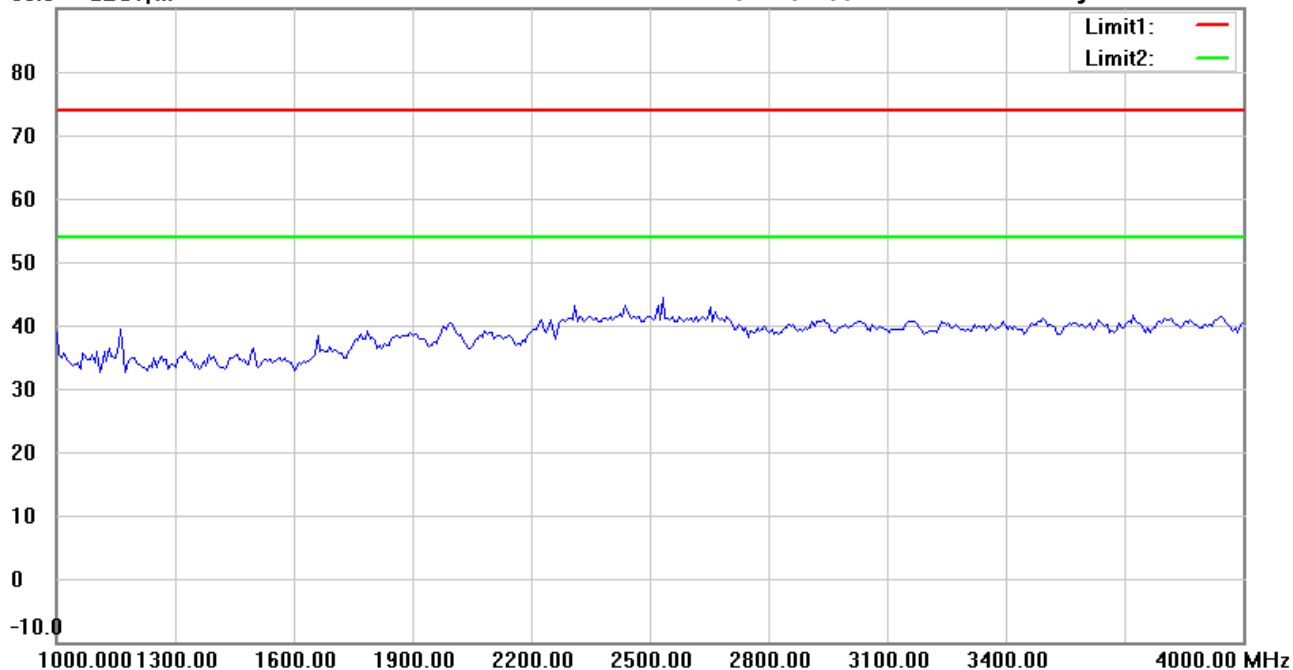

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#2


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:50:22 PM

Humidity: 53.0 %

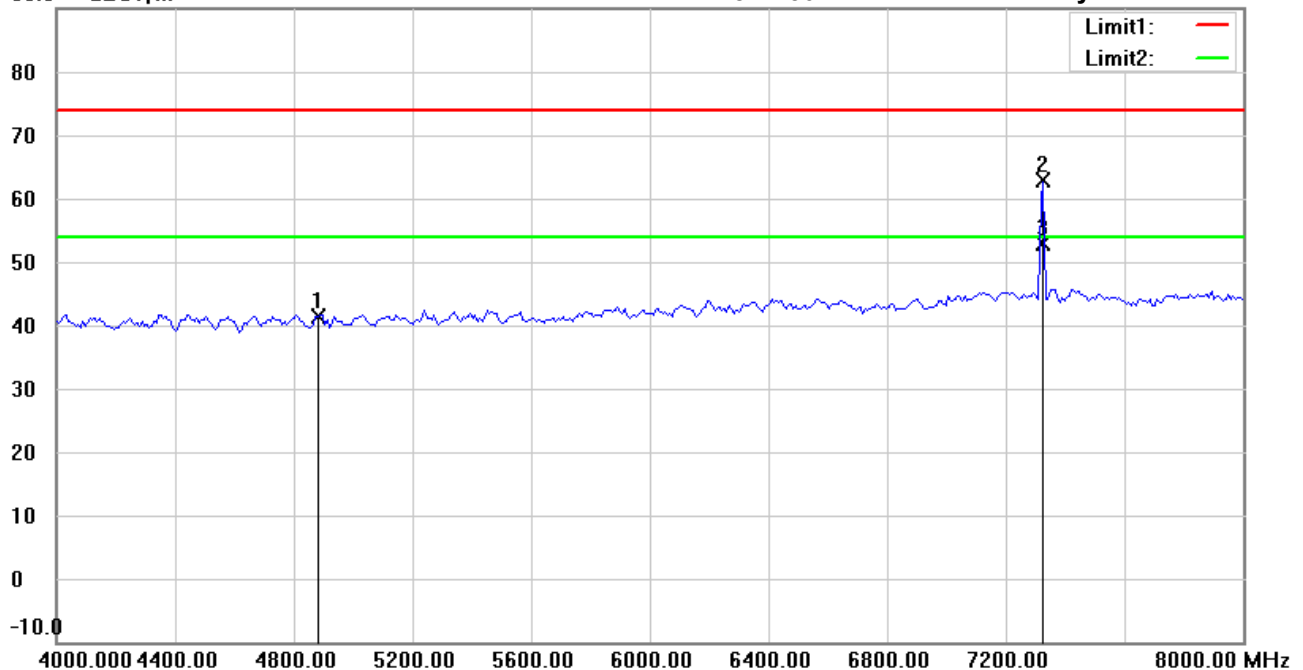

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4880.000	39.62	peak	1.75	41.37	74.00	150	331	-32.63	
	7326.653	56.92	peak	5.89	62.81	74.00	150	108	-11.19	
*	7326.653	46.93	AVG	5.89	52.82	54.00	150	108	-1.18	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:53:54 PM

Humidity: 53.0 %

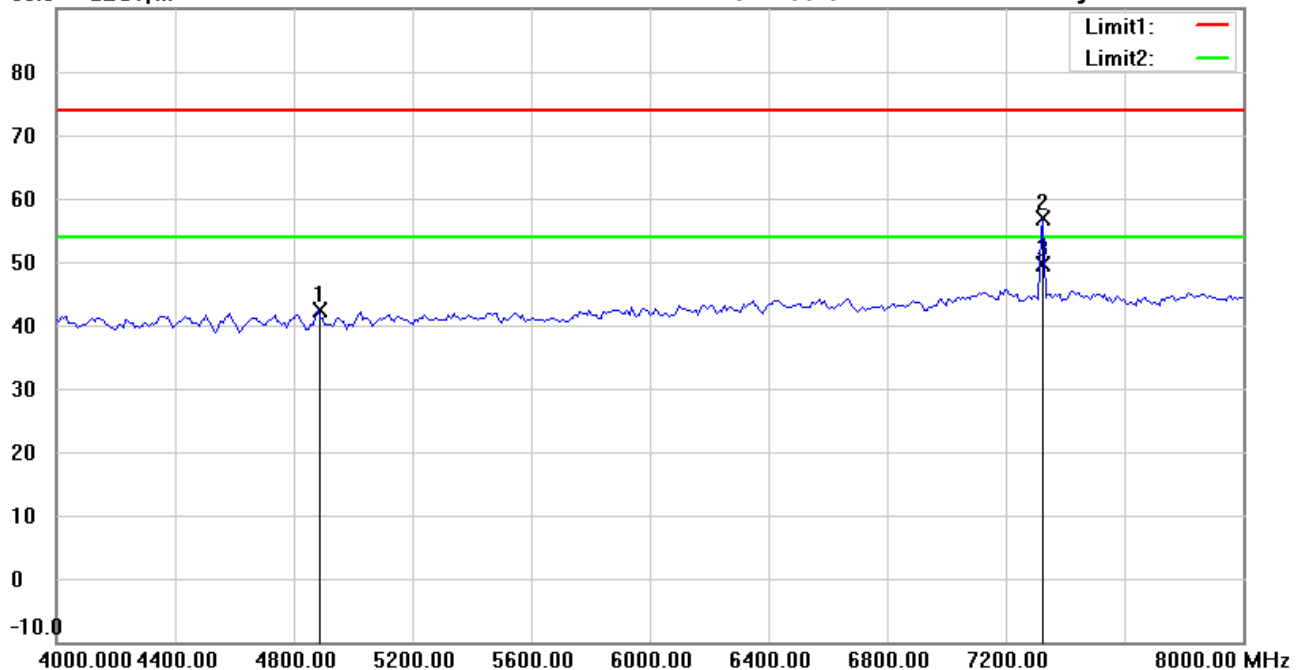

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4881.764	40.70	peak	1.76	42.46	74.00	150	19	-31.54	
	7326.653	50.87	peak	5.89	56.76	74.00	150	273	-17.24	
*	7326.653	43.75	AVG	5.89	49.64	54.00	150	273	-4.36	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:51:29 PM

Humidity: 53.0 %

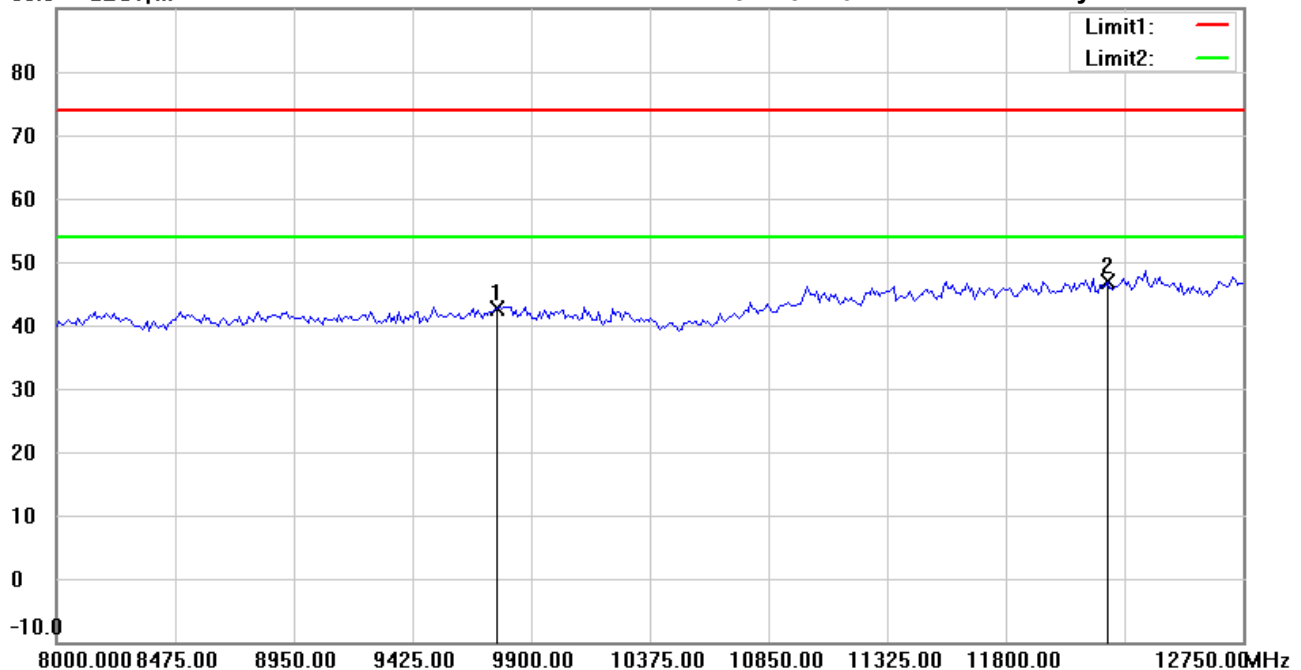

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	33.05	peak	9.64	42.69	74.00	150	21	-31.31	
*	12200.000	31.97	peak	14.79	46.76	74.00	150	119	-27.24	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#8


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:54:53 PM

Humidity: 53.0 %

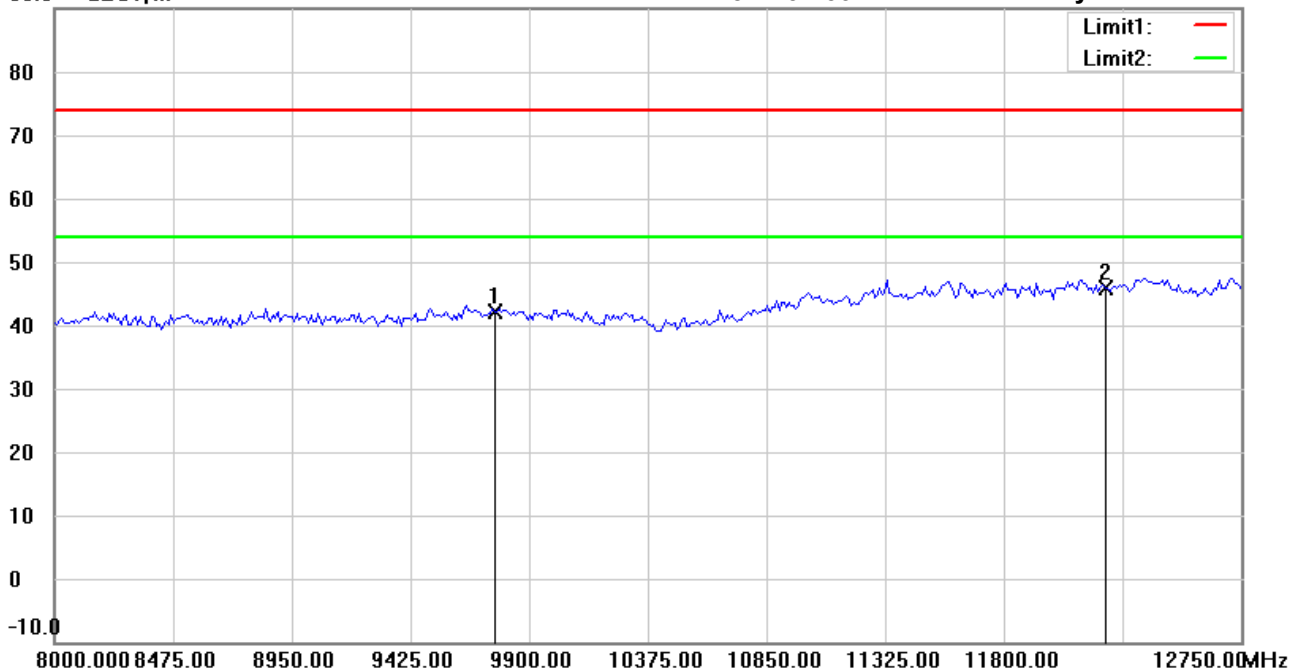

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	32.55	peak	9.64	42.19	74.00	150	14	-31.81	
*	12200.000	31.01	peak	14.79	45.80	74.00	150	277	-28.20	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #4


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:51:43 PM

Humidity: 53.0 %

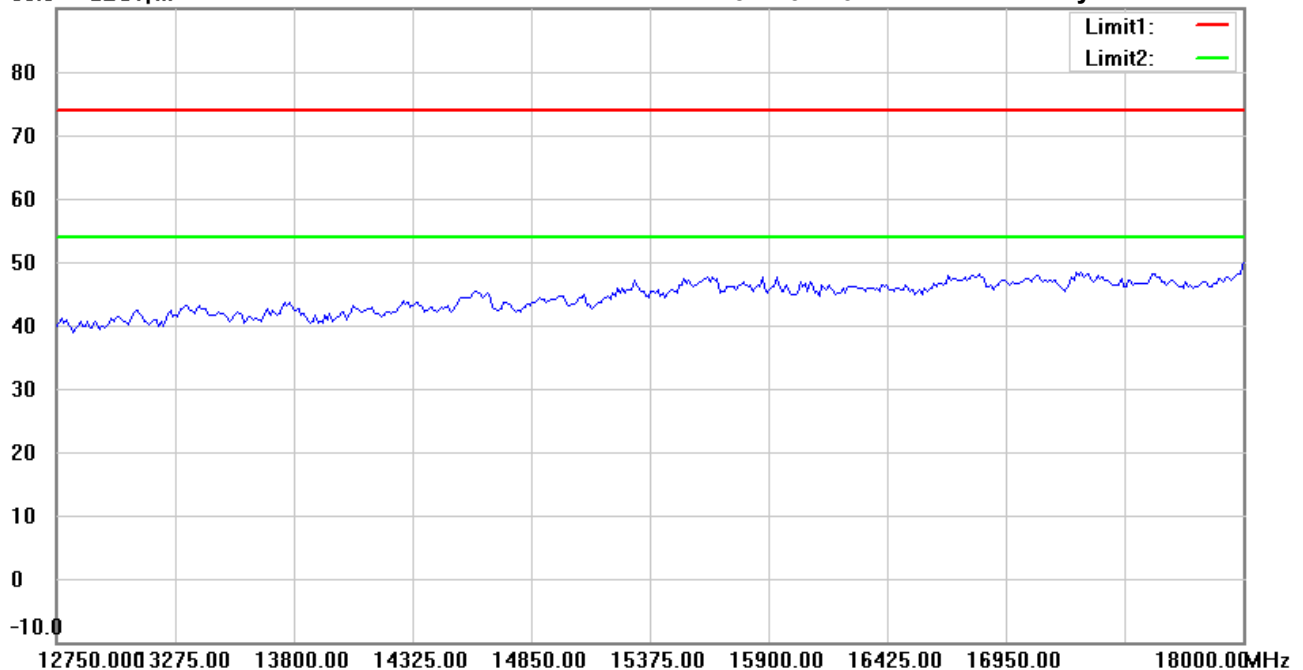

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 3/12/2022

Temperature:24.3 °C

90.0 dBuV/m

Time: 2:55:07 PM

Humidity:53.0 %

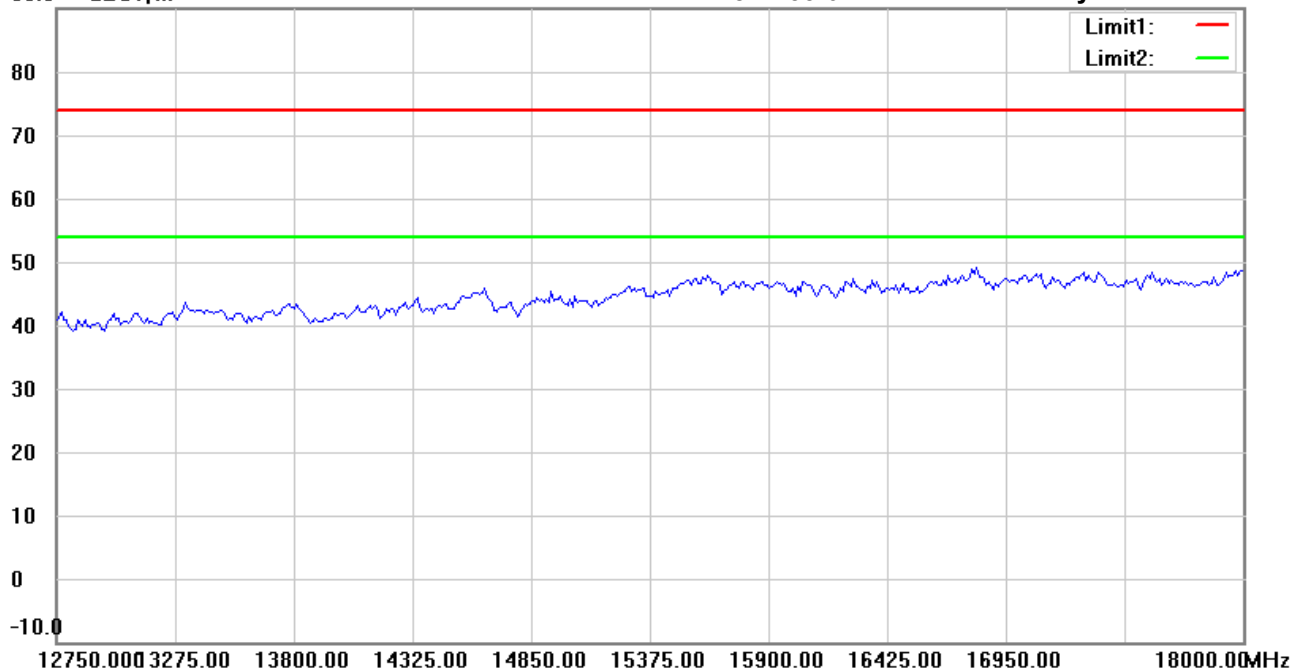

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #5


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:51:53 PM

Humidity: 53.0 %

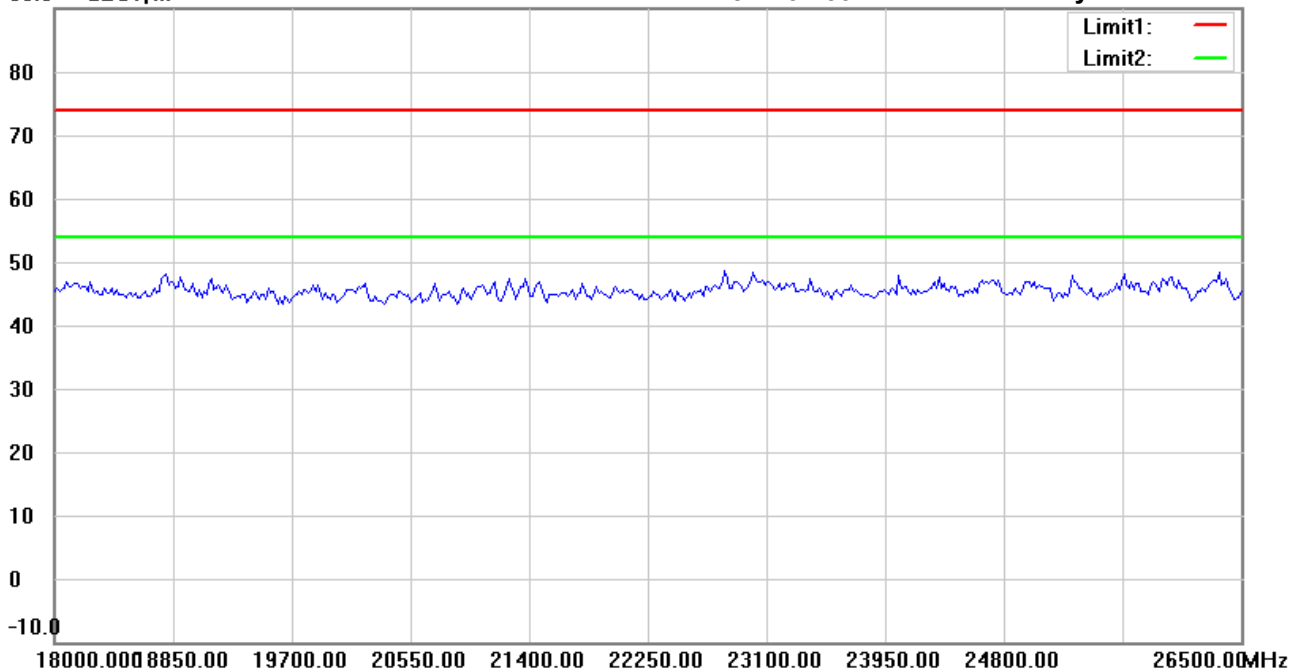

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 3/12/2022

Temperature:24.3 °C

90.0 dBuV/m

Time: 2:55:17 PM

Humidity:53.0 %

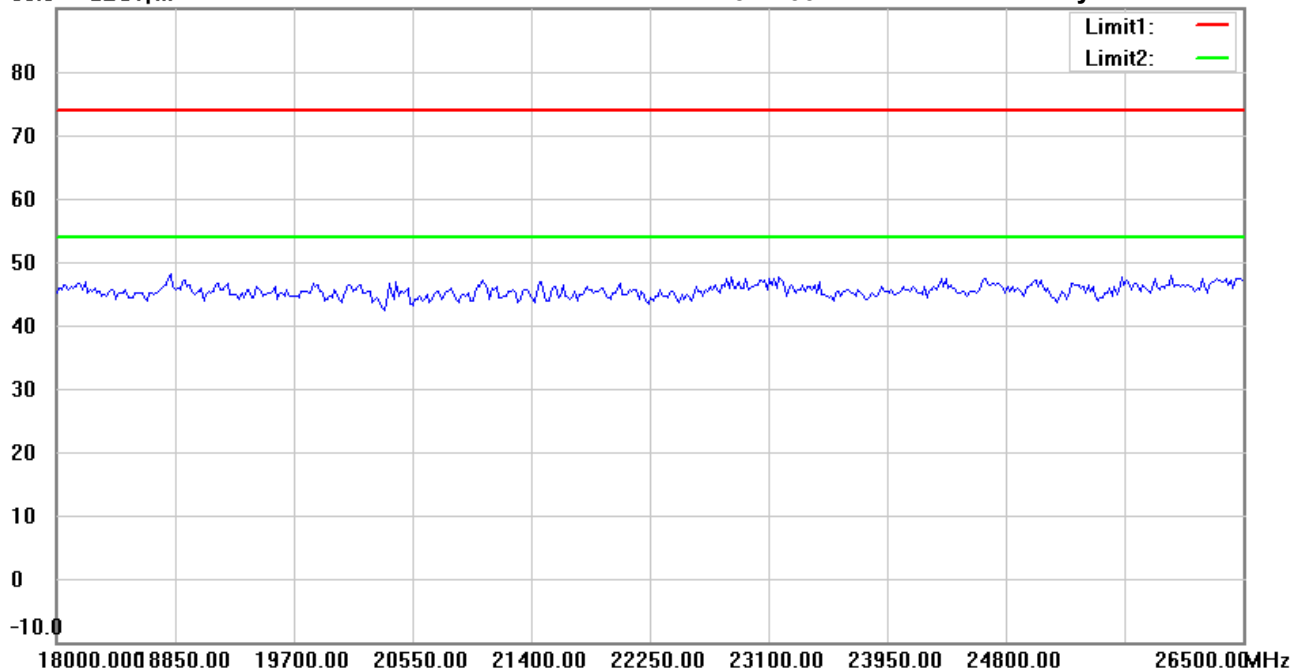

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:39:13 PM

Humidity: 53.0 %

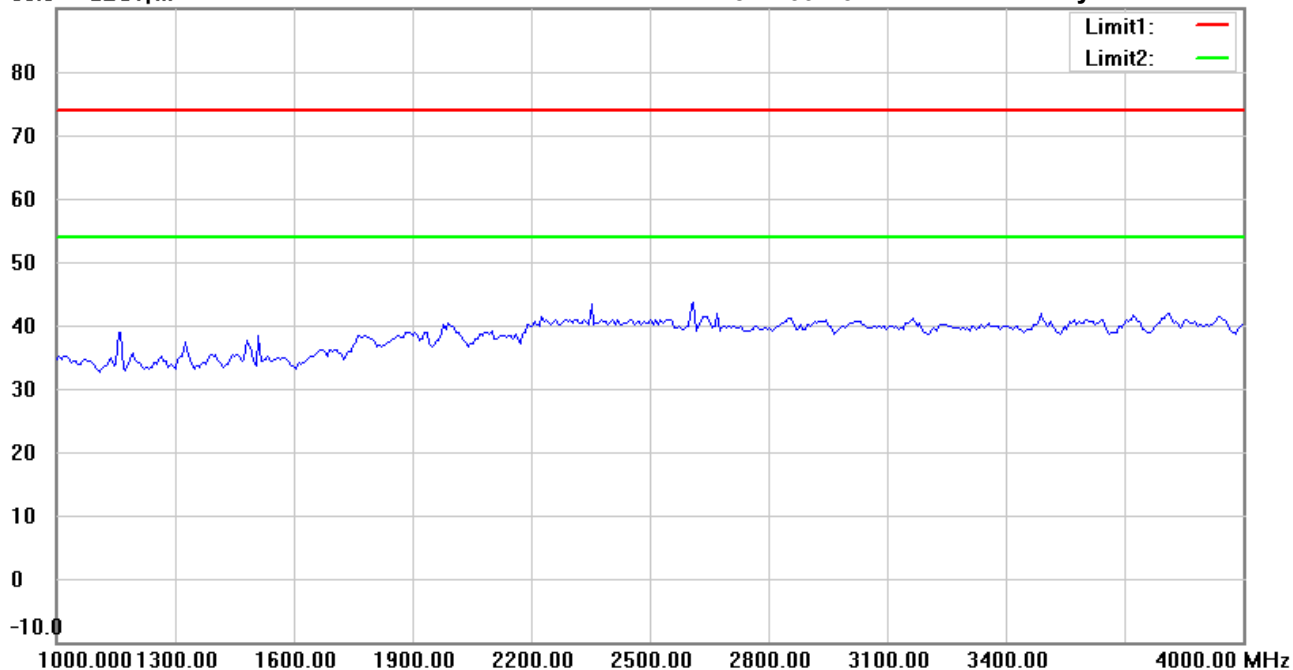

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #6


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:42:44 PM

Humidity: 53.0 %

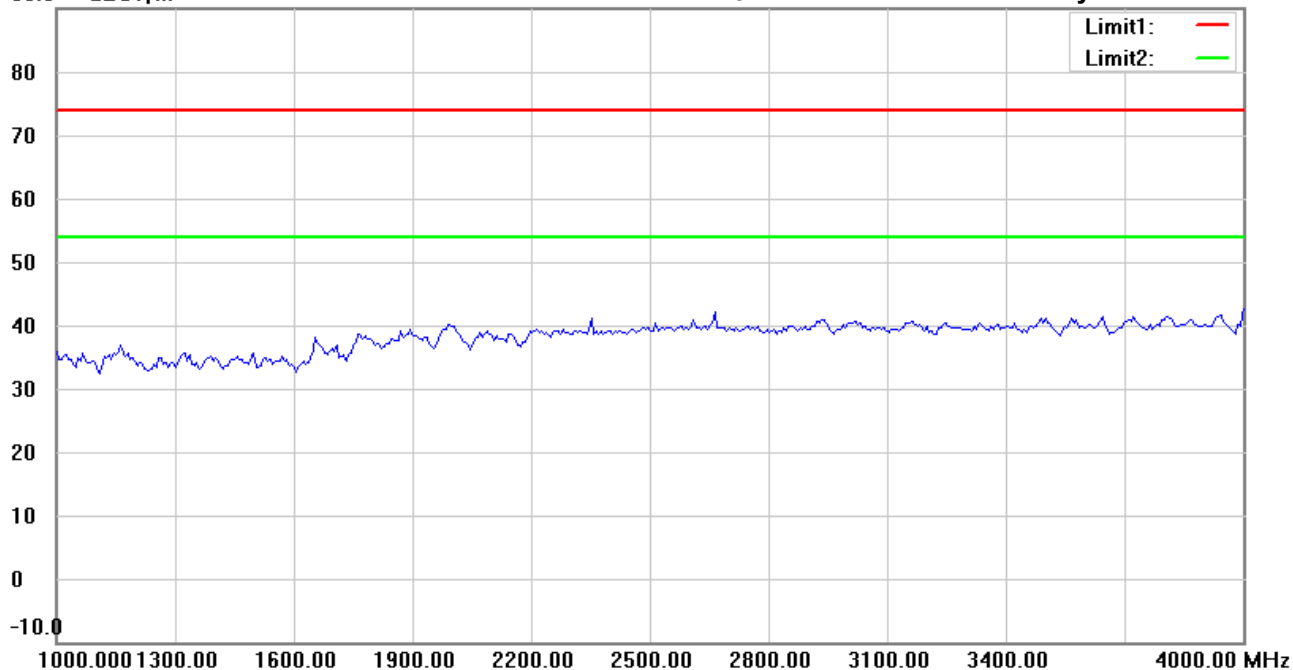

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:40:14 PM

Humidity: 53.0 %

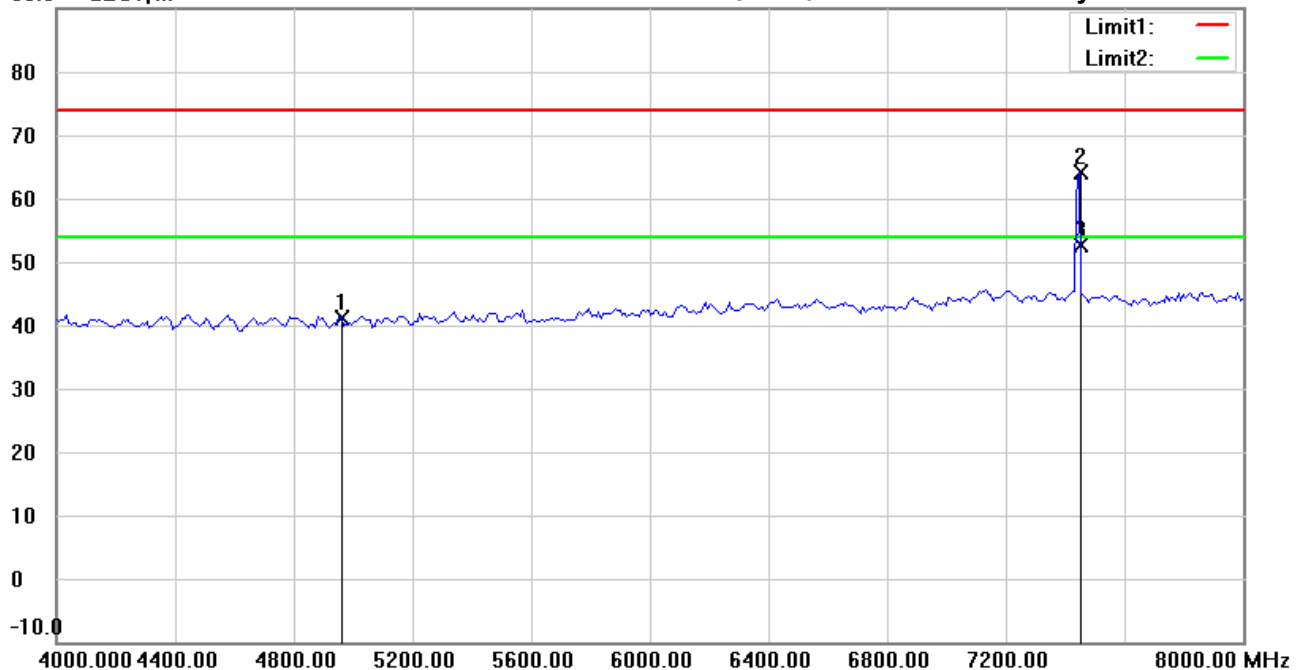

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	39.15	peak	1.91	41.06	74.00	150	217	-32.94	
	7446.894	57.92	peak	6.26	64.18	74.00	150	180	-9.82	
*	7446.894	46.32	AVG	6.26	52.58	54.00	150	180	-1.42	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:43:45 PM

Humidity: 53.0 %

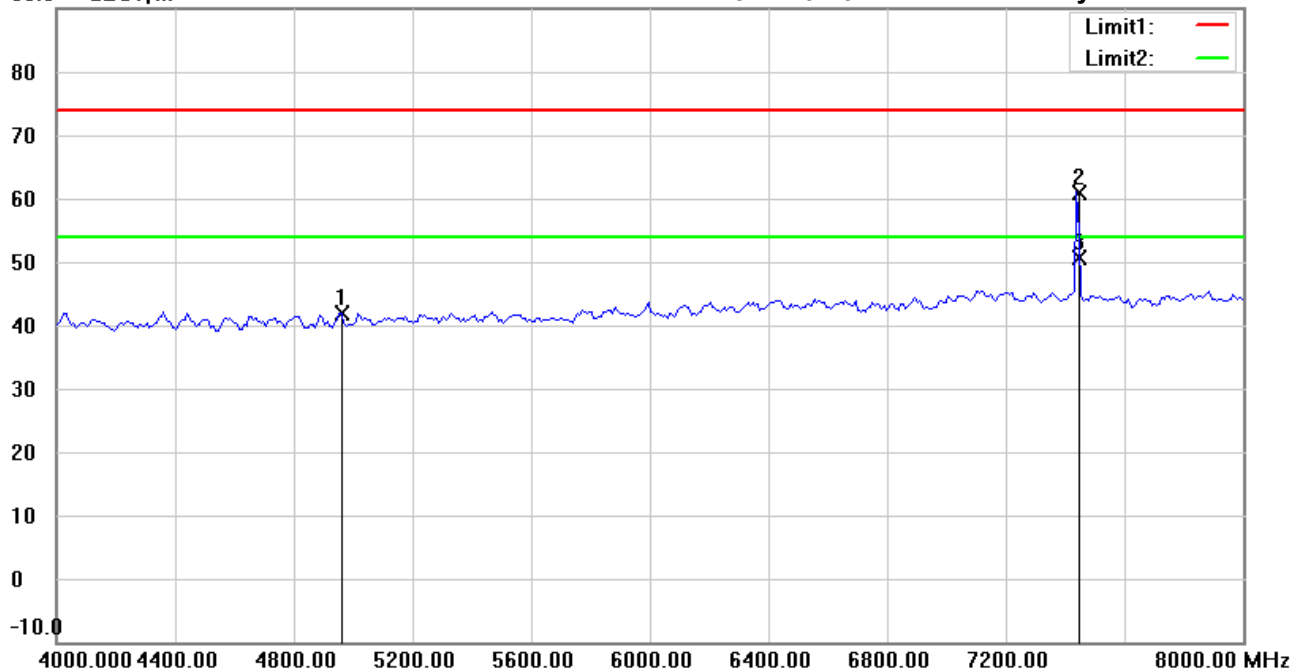

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	39.87	peak	1.91	41.78	74.00	150	221	-32.22	
	7438.878	54.69	peak	6.27	60.96	74.00	150	100	-13.04	
*	7438.878	44.32	AVG	6.27	50.59	54.00	150	100	-3.41	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #3


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:41:20 PM

Humidity: 53.0 %

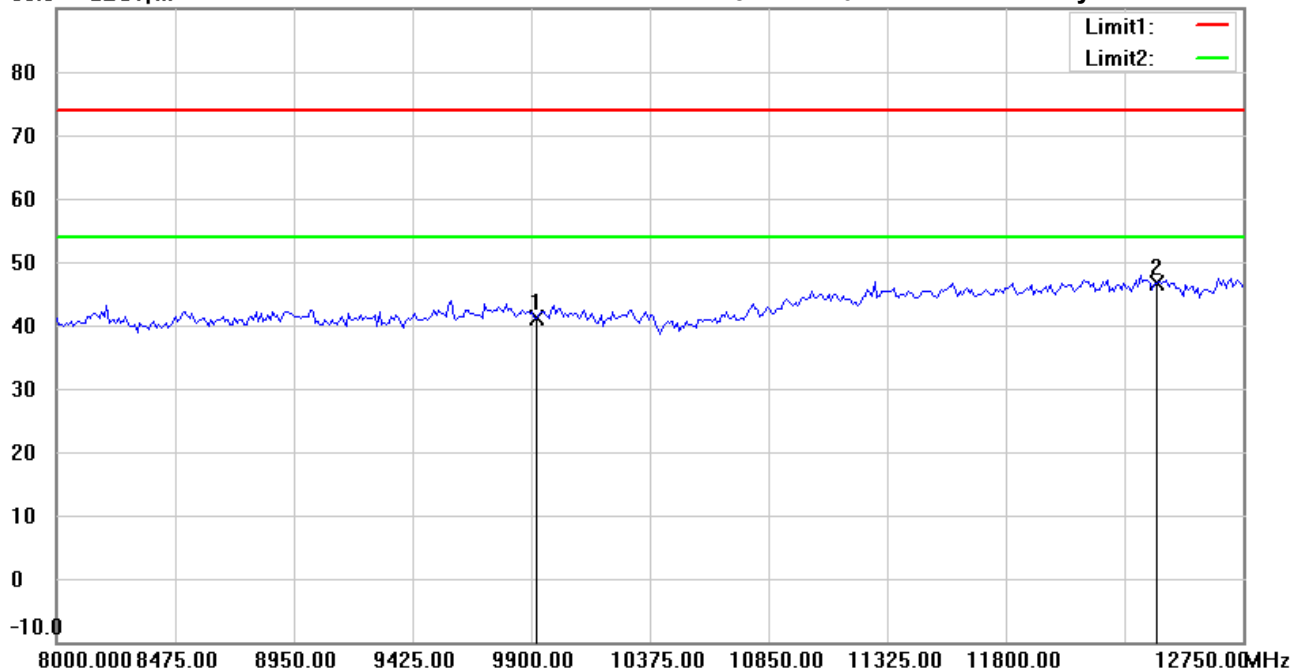

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	32.13	peak	9.11	41.24	74.00	150	19	-32.76	
*	12400.000	31.82	peak	14.87	46.69	74.00	150	62	-27.31	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #8


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:44:45 PM

Humidity: 53.0 %

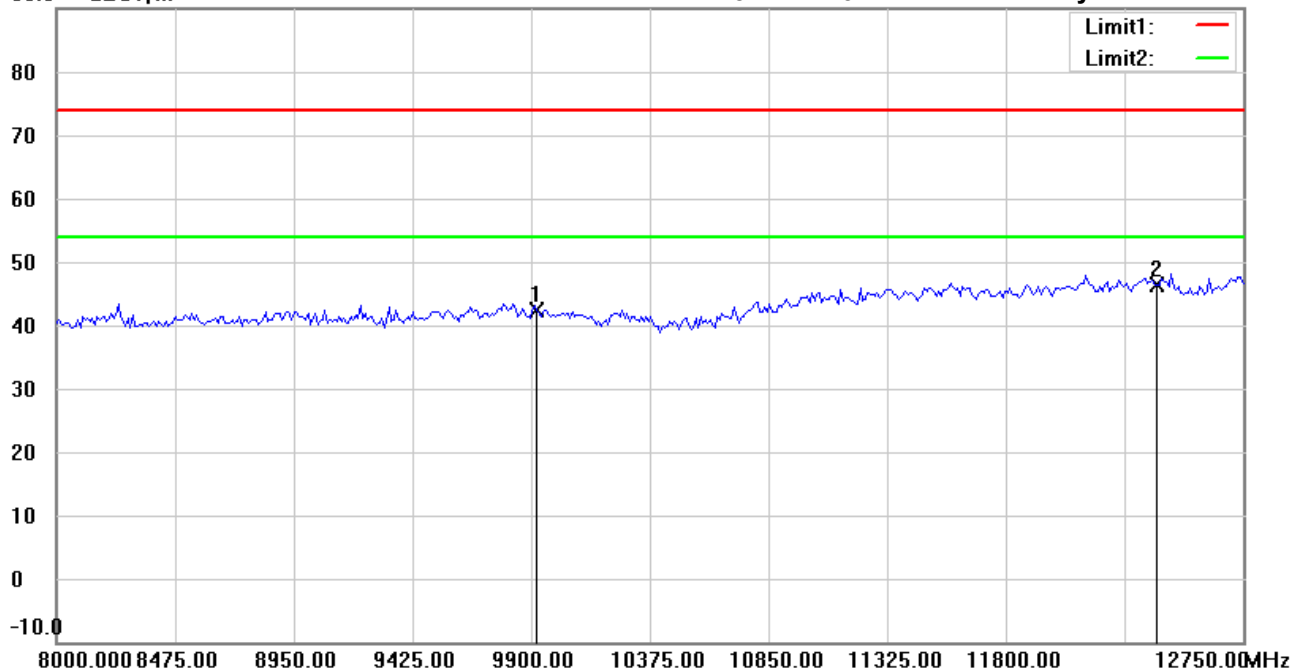

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	33.24	peak	9.11	42.35	74.00	150	40	-31.65	
*	12400.000	31.58	peak	14.87	46.45	74.00	150	330	-27.55	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #4


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:41:34 PM

Humidity: 53.0 %

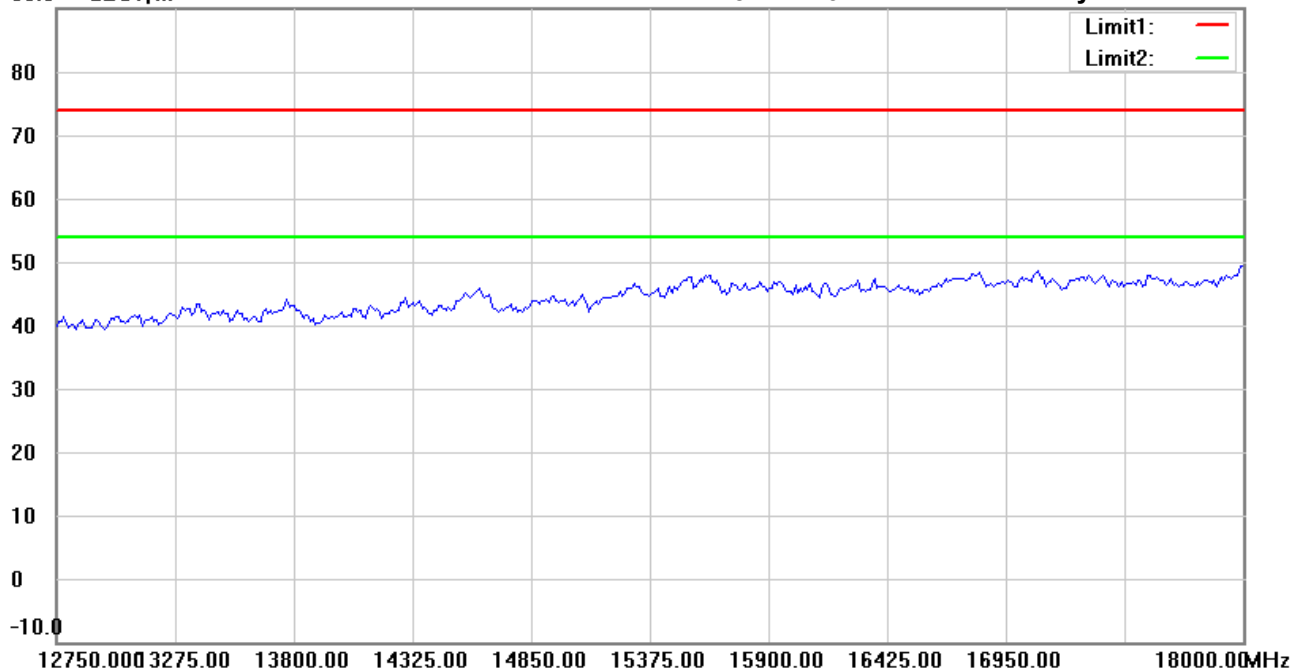

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #9


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:44:58 PM

Humidity: 53.0 %

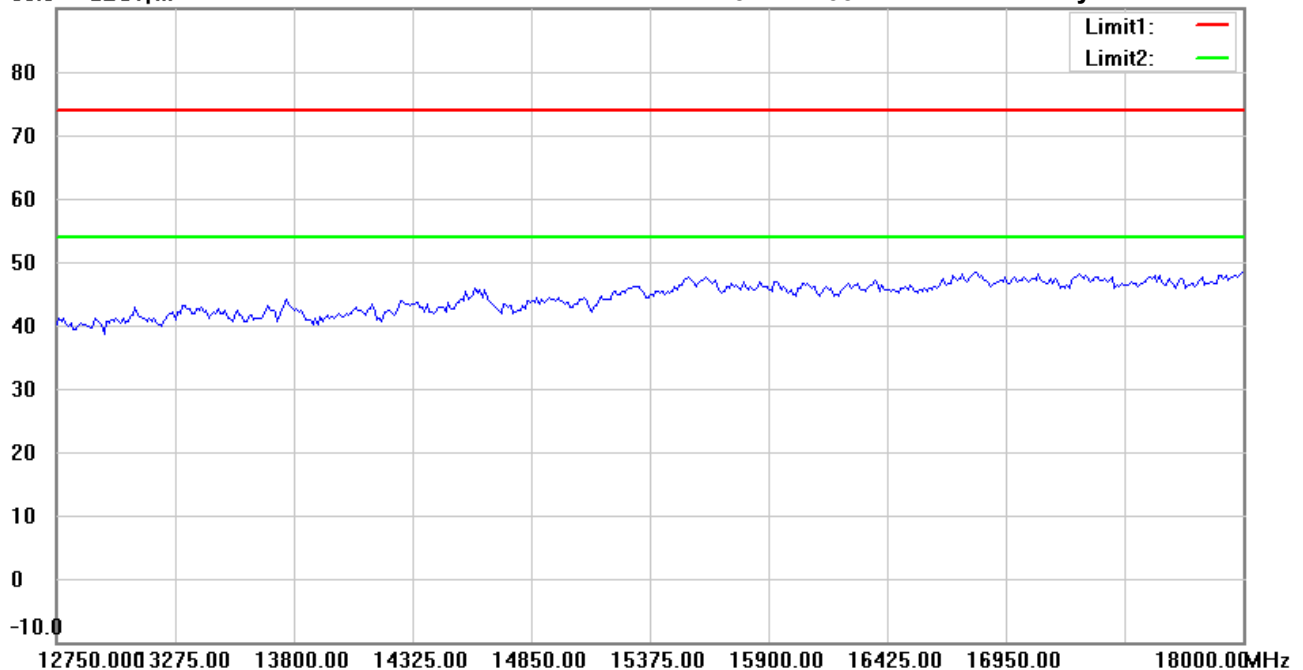

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:41:44 PM

Humidity: 53.0 %

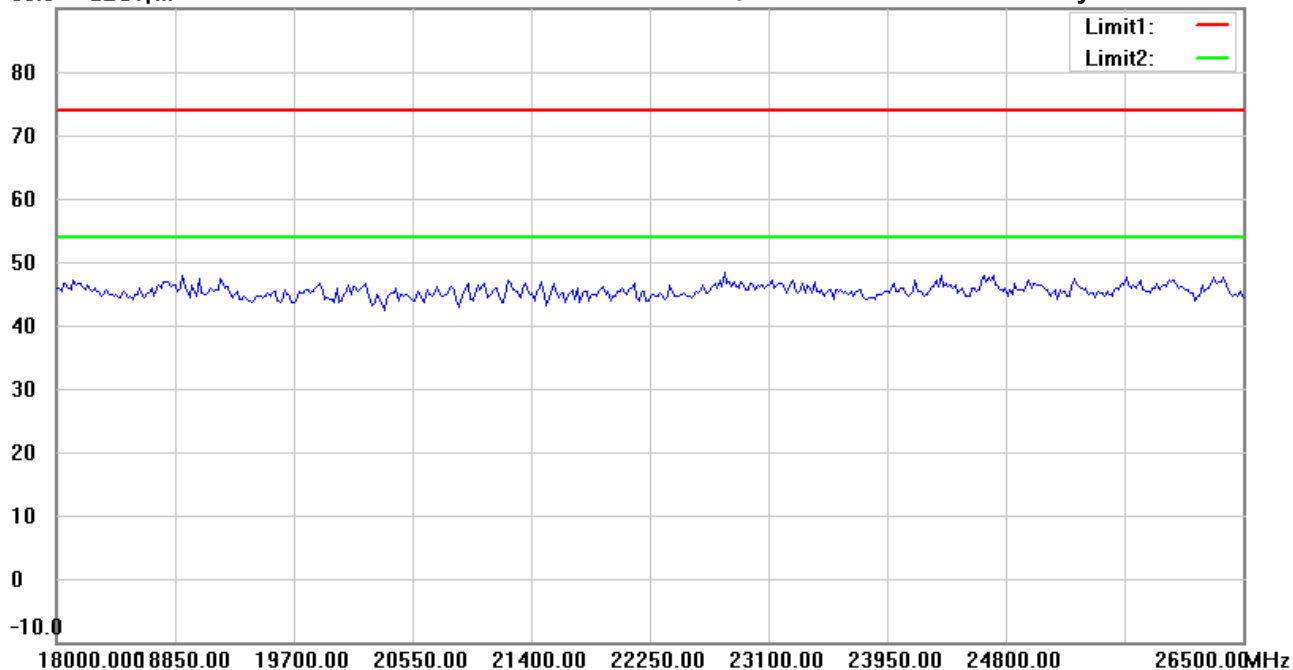

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #10


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:45:08 PM

Humidity: 53.0 %

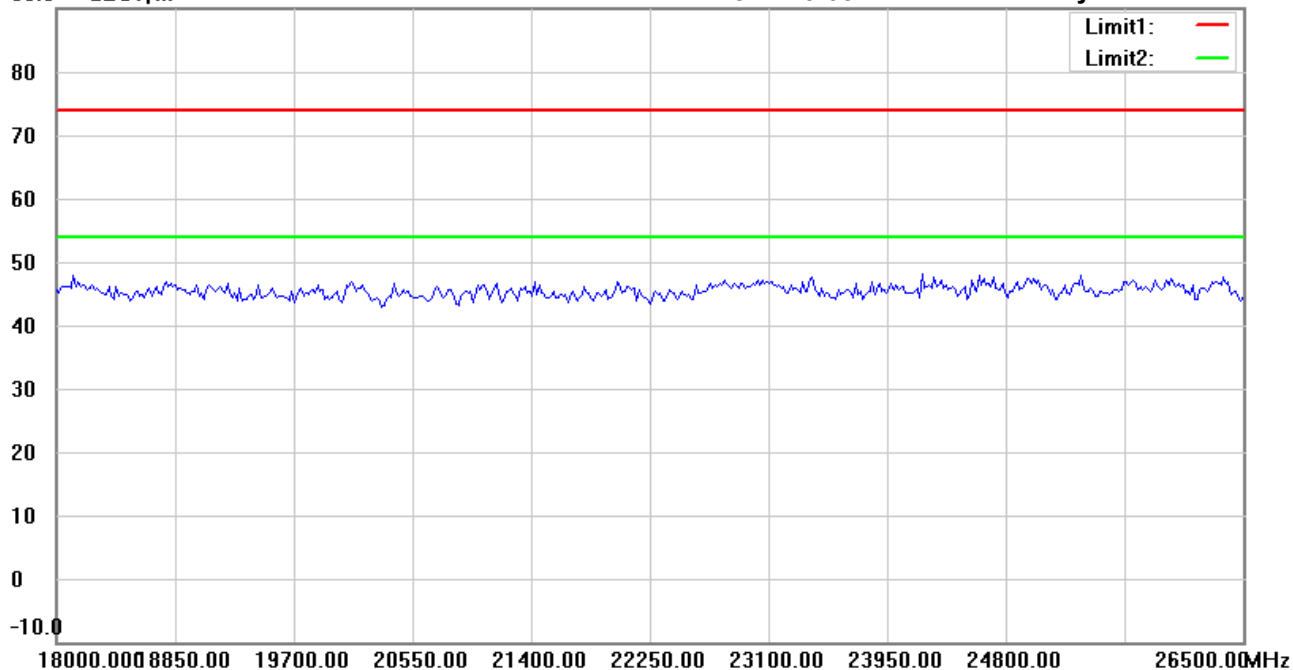

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Sky

File : 1_BLE(2M)_TX 2402MHz Data : #1


Date: 3/12/2022

Temperature: 24.3 °C

80.0 dBuV/m

Time: 5:26:48 PM

Humidity: 53.0 %

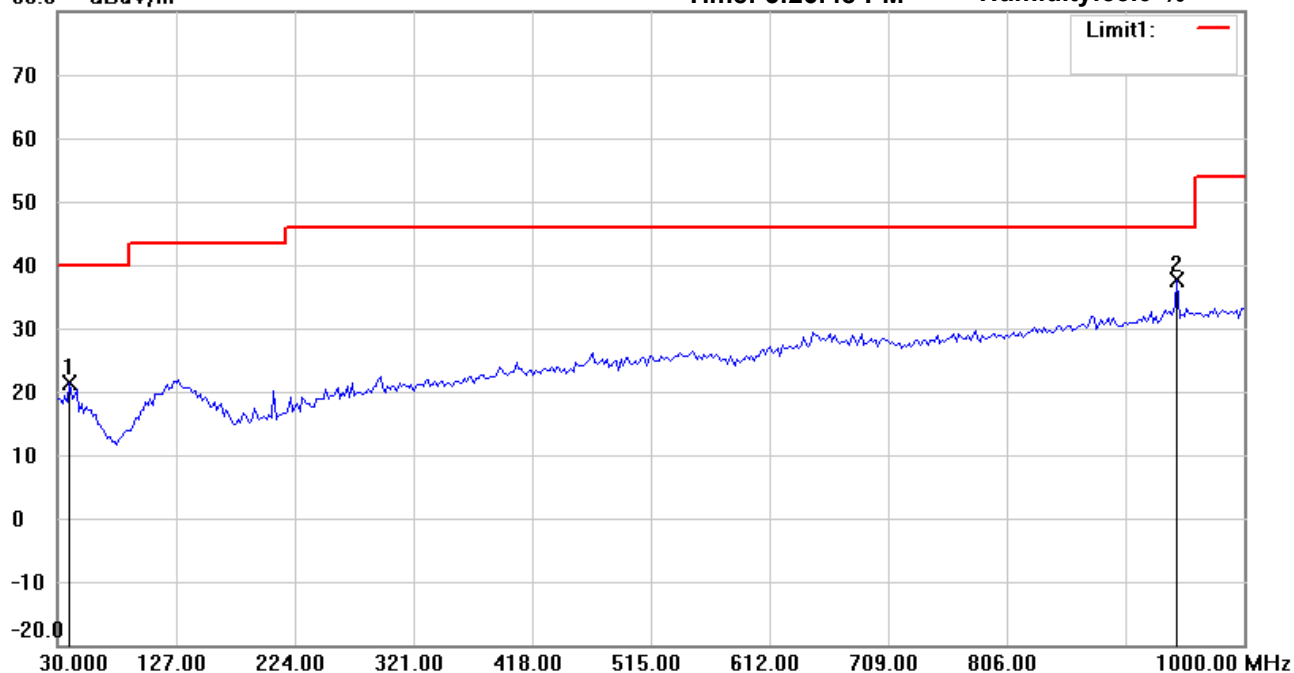

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	39.7194	30.22	peak	-8.80	21.42	40.00	107	21	-18.58	
*	945.5711	31.89	peak	5.71	37.60	46.00	100	69	-8.40	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File: 1_BLE(2M)_TX 2402MHz Data: #2


Date: 3/12/2022

Temperature: 24.3 °C

80.0 dBuV/m

Time: 5:27:48 PM

Humidity: 53.0 %

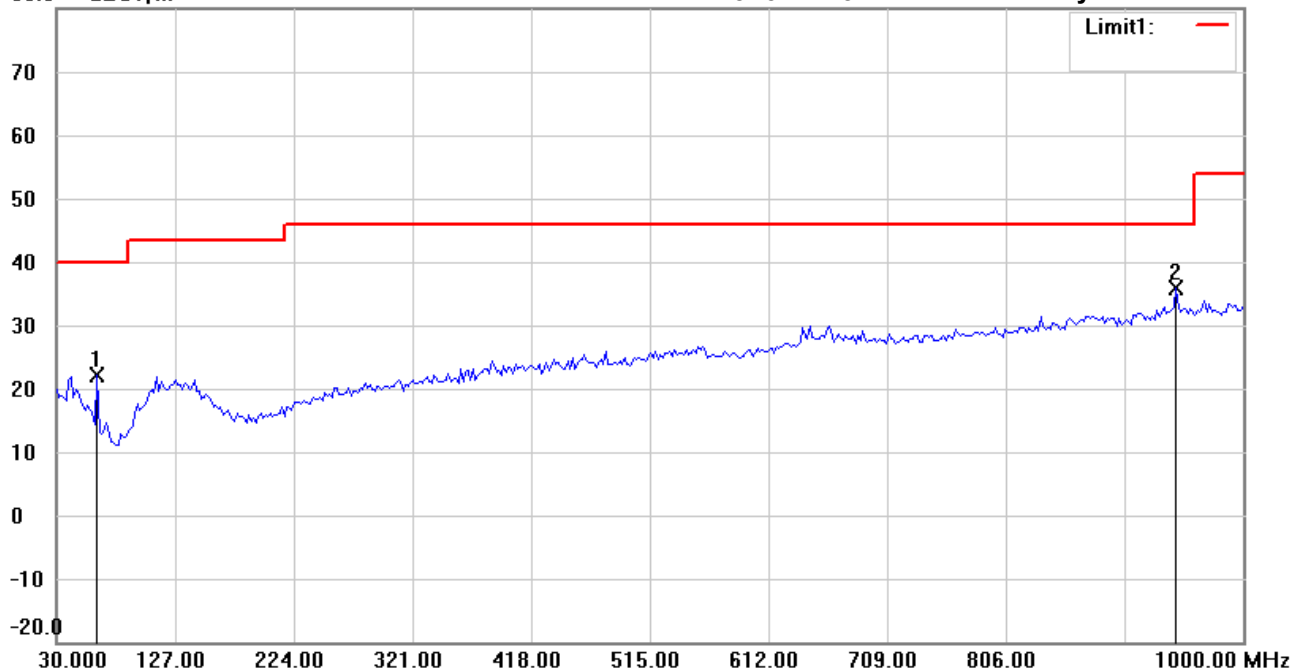

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	63.0461	34.39	peak	-12.32	22.07	40.00	105	32	-17.93	
*	945.5711	30.29	peak	5.71	36.00	46.00	100	110	-10.00	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 1:38:50 PM

Humidity: 53.0 %

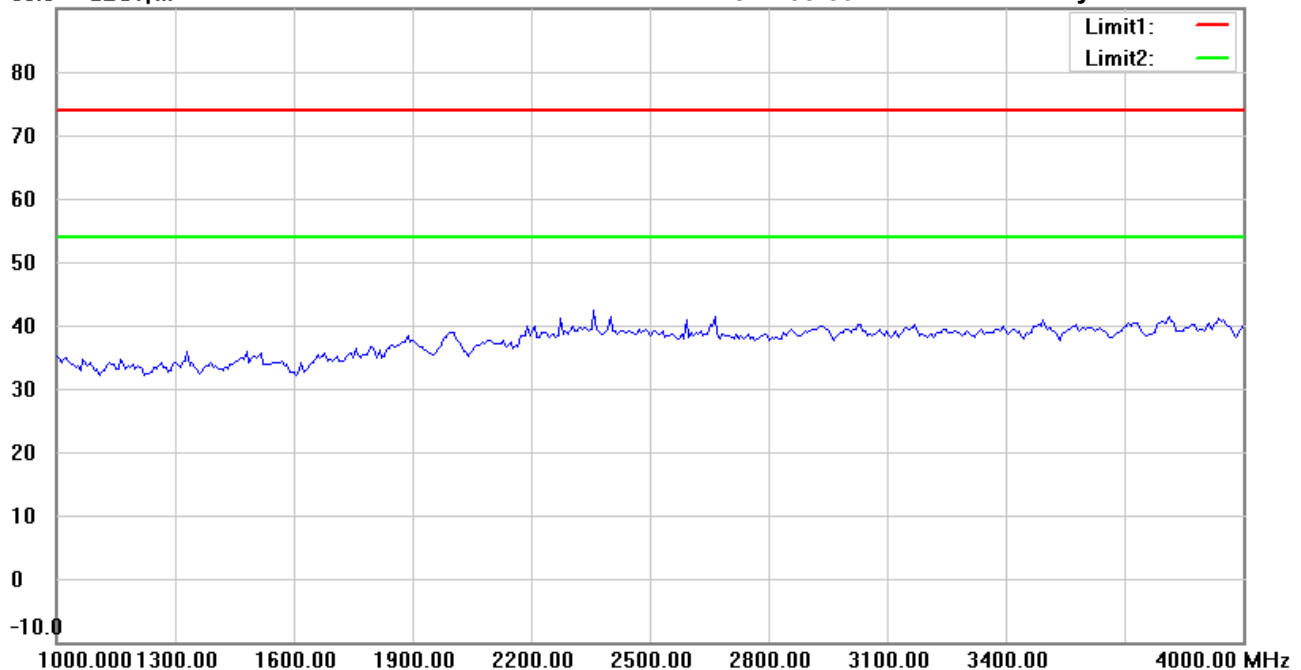

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #6


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 1:42:21 PM

Humidity: 53.0 %

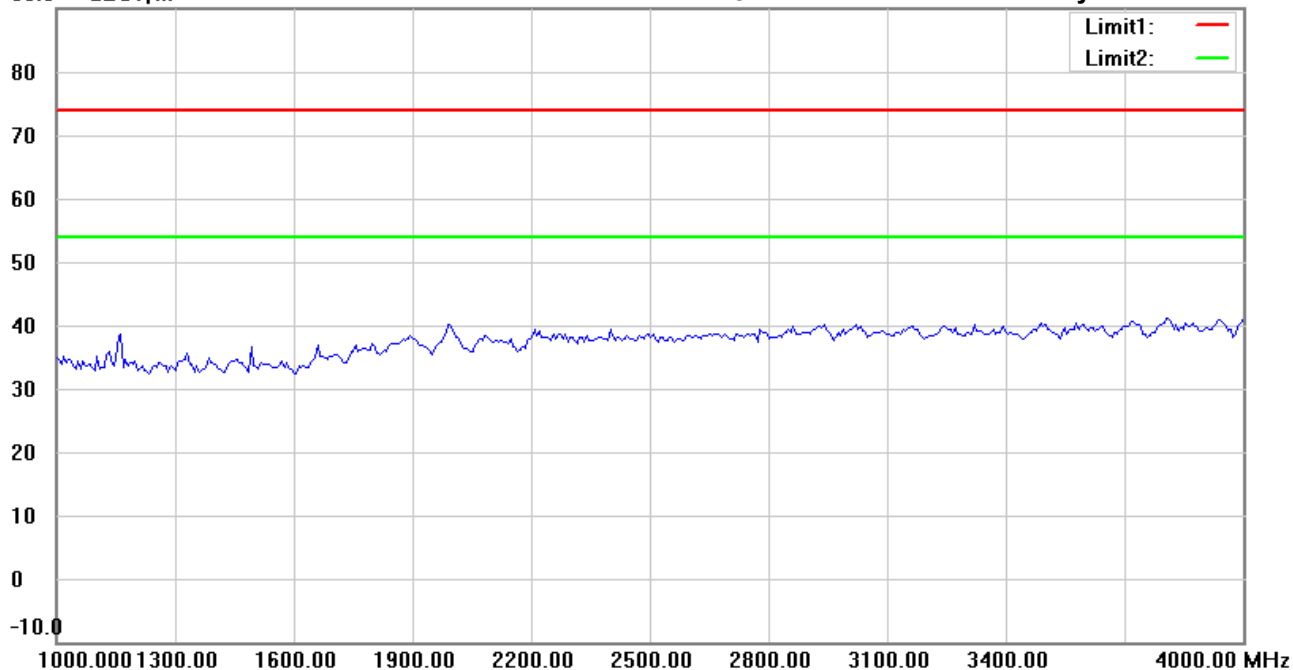

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#2


Date: 3/12/2022

Temperature:24.3 °C

90.0 dBuV/m

Time: 1:39:51 PM

Humidity:53.0 %

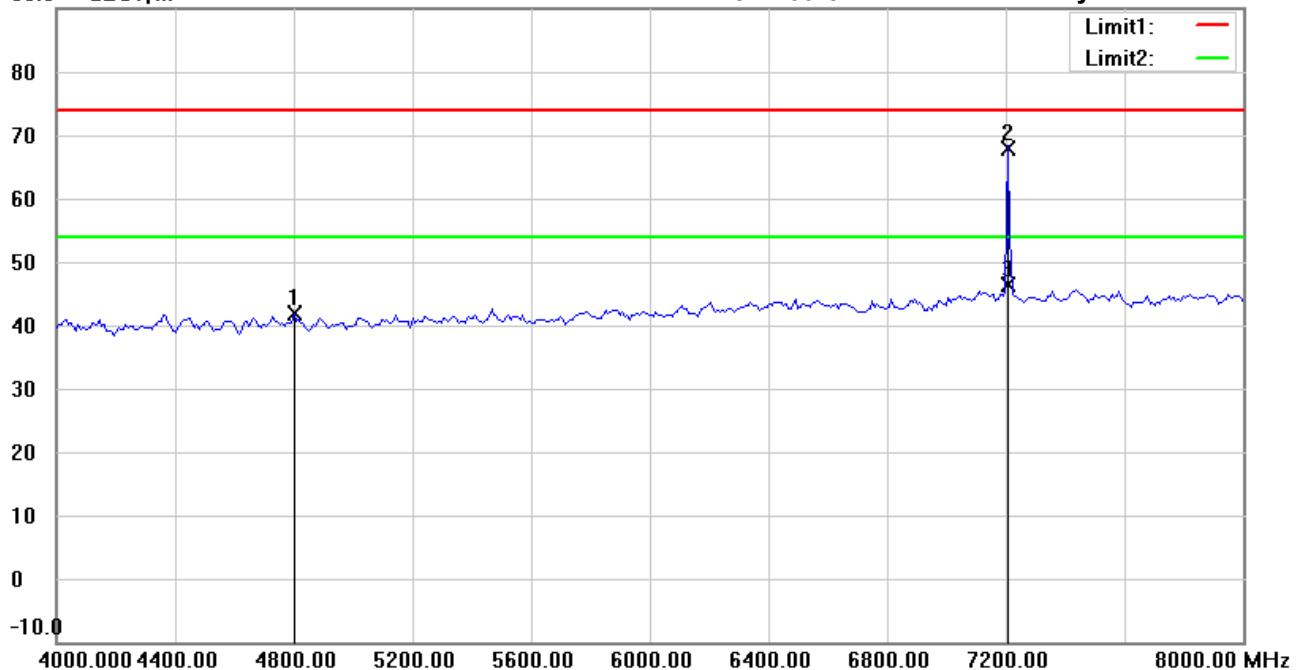

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4801.603	40.45	peak	1.35	41.80	74.00	150	21	-32.20	
*	7205.223	61.79	peak	6.03	67.82	74.00	160	59	-6.18	
	7205.223	40.37	AVG	6.03	46.40	54.00	160	59	-7.60	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#7


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 1:43:22 PM

Humidity: 53.0 %

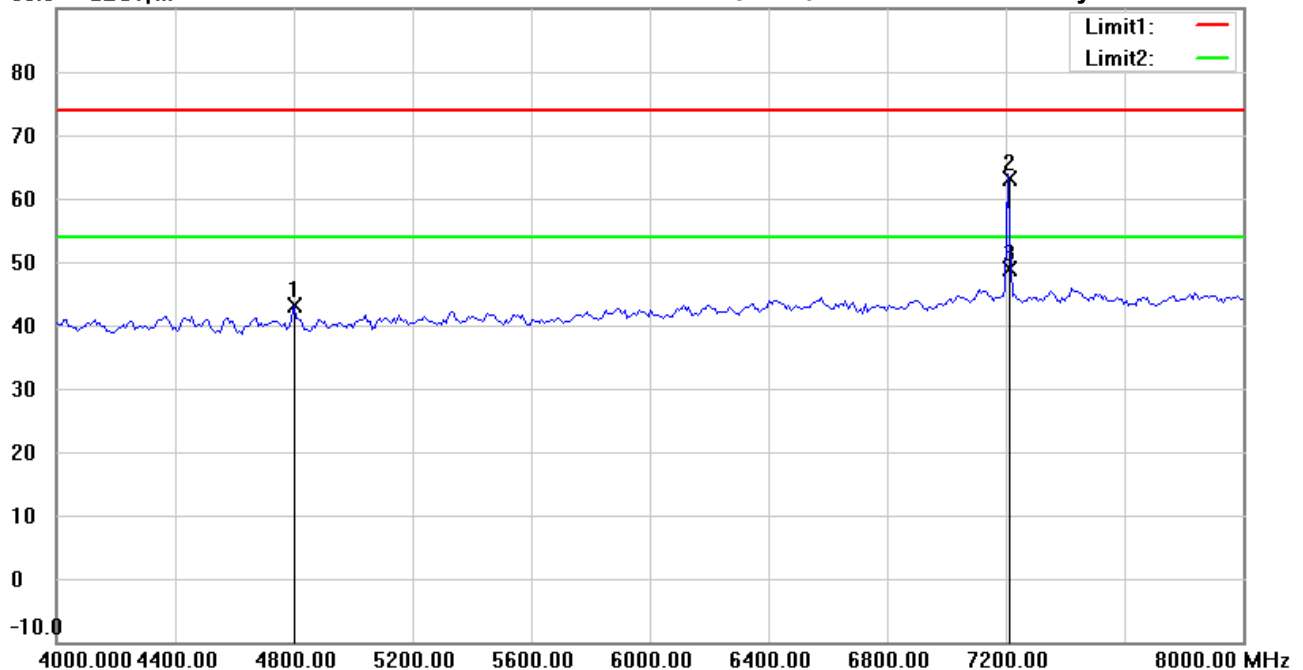

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4801.603	41.82	peak	1.35	43.17	74.00	150	108	-30.83	
	7206.413	57.21	peak	6.03	63.24	74.00	150	330	-10.76	
*	7206.413	42.86	AVG	6.03	48.89	54.00	150	330	-5.11	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 1:40:57 PM

Humidity: 53.0 %

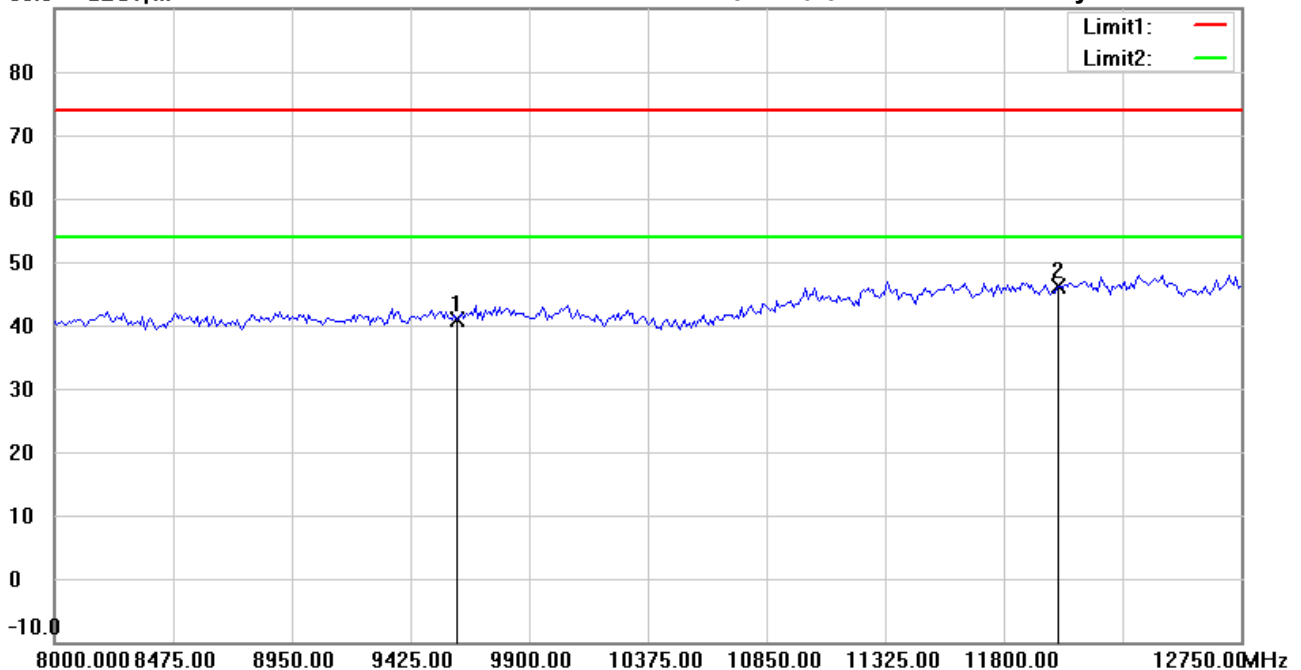

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	32.14	peak	8.71	40.85	74.00	150	31	-33.15	
*	12010.000	32.48	peak	13.53	46.01	74.00	150	2	-27.99	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #4


Date: 3/12/2022

Temperature: 24.3 °C

Time: 1:41:11 PM

Humidity: 53.0 %

90.0 dBuV/m

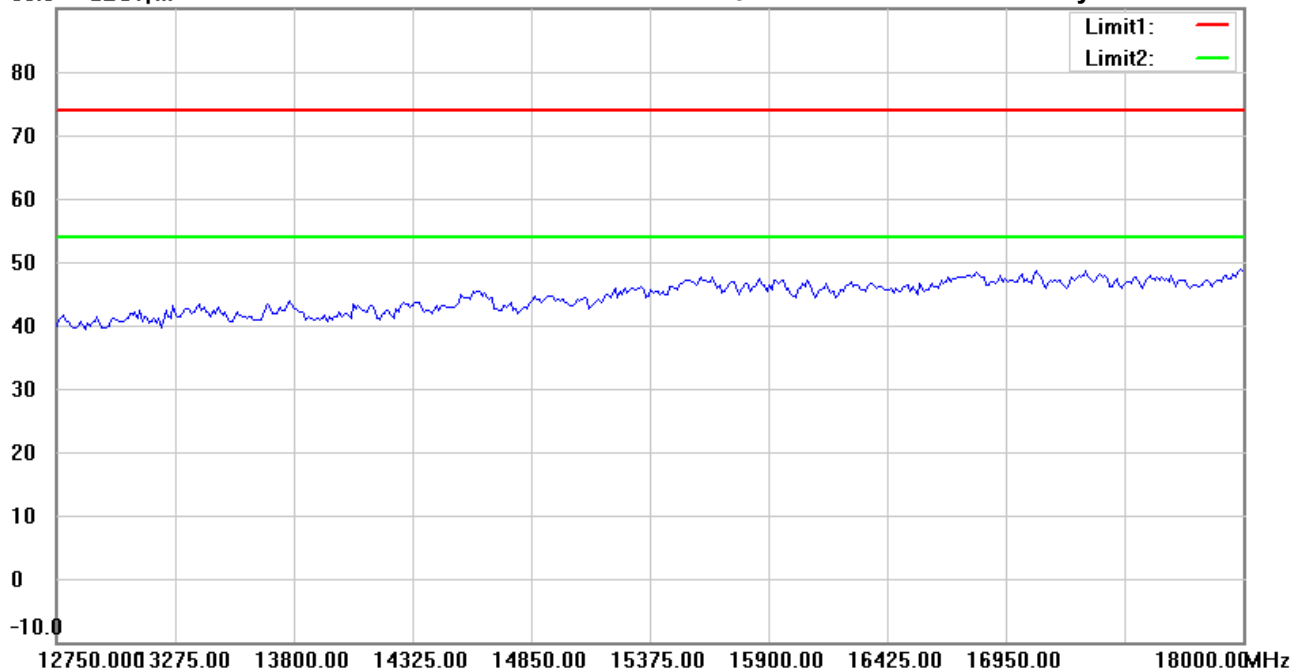

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 3/12/2022

Temperature:24.3 °C

Time: 1:41:21 PM

Humidity:53.0 %

90.0 dBuV/m

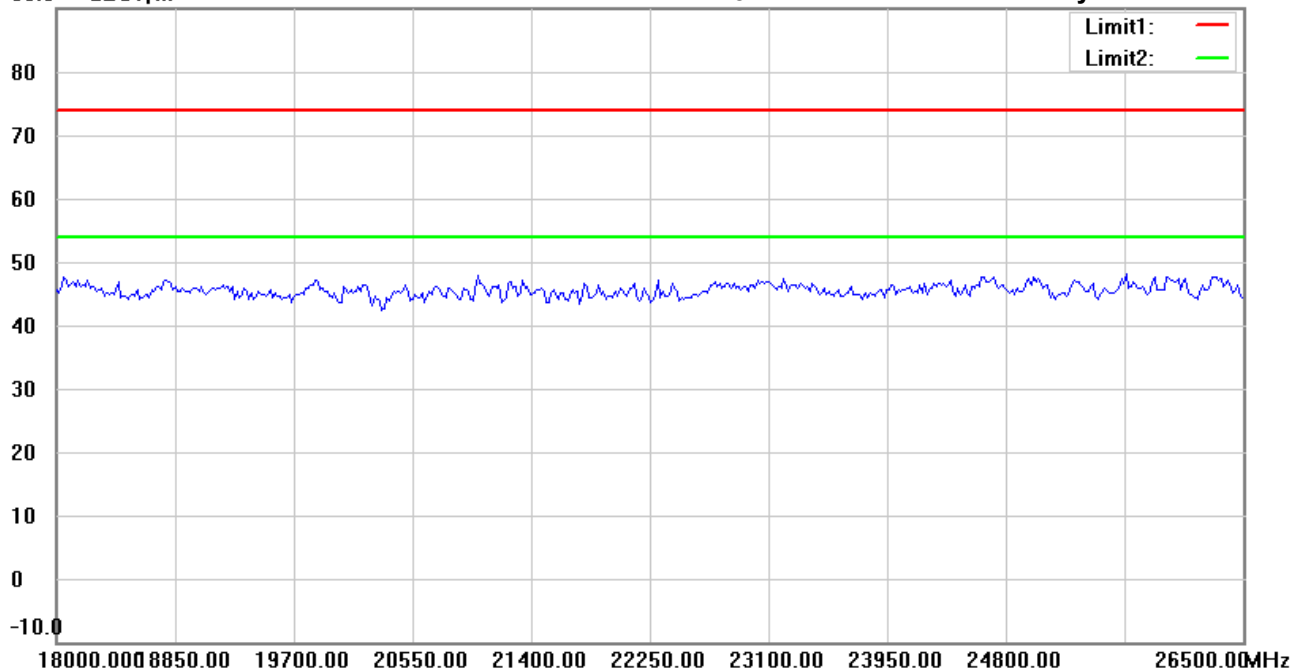

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #8


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 1:44:22 PM

Humidity: 53.0 %

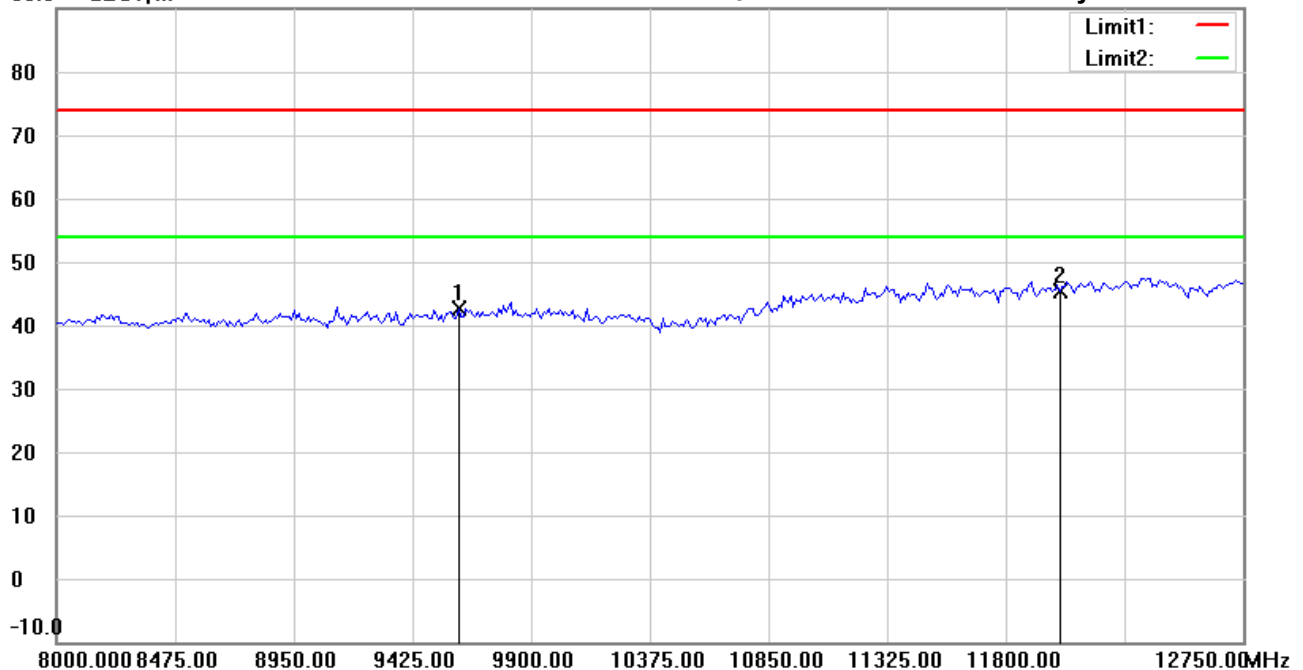

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	33.97	peak	8.71	42.68	74.00	150	90	-31.32	
*	12010.000	31.78	peak	13.53	45.31	74.00	150	14	-28.69	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #9


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 1:44:36 PM

Humidity: 53.0 %

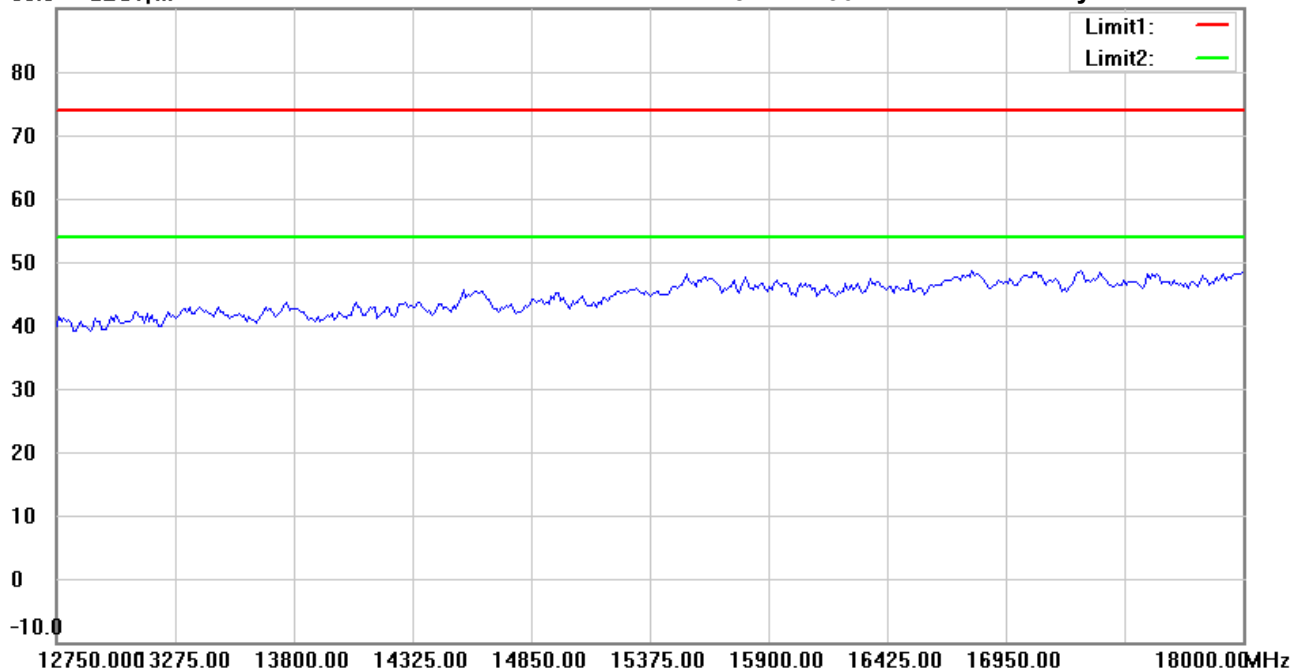

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #10


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 1:44:45 PM

Humidity: 53.0 %

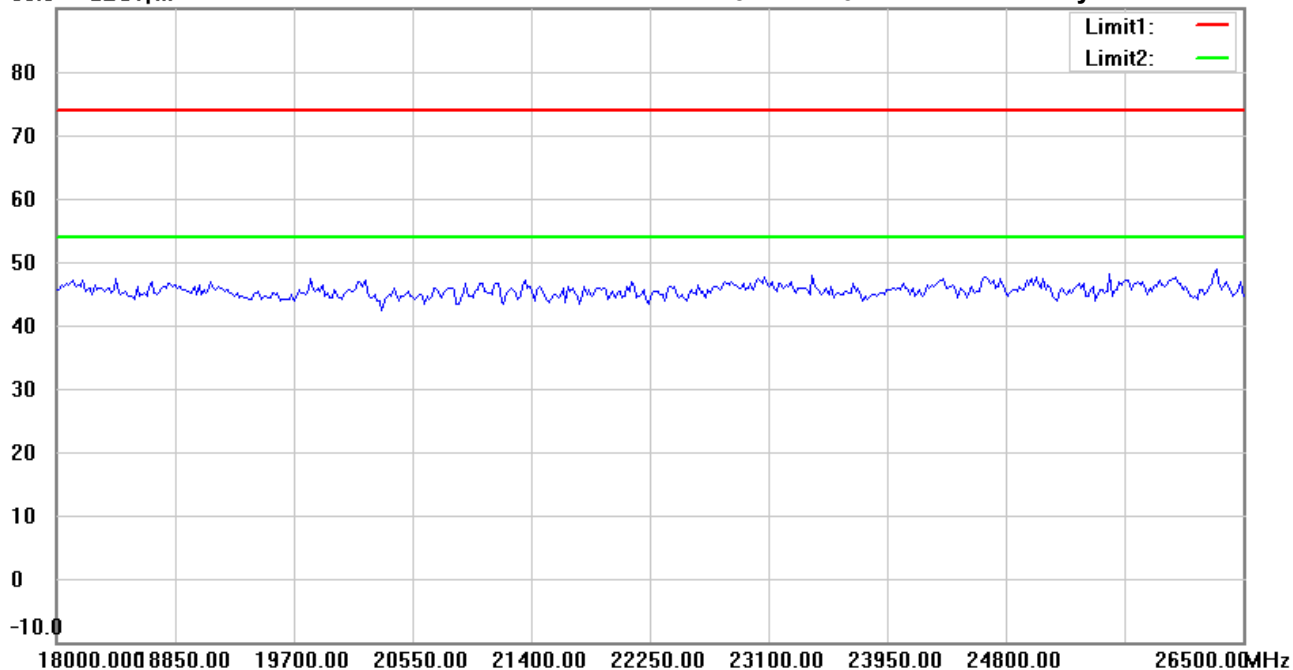

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:08:14 PM

Humidity: 53.0 %

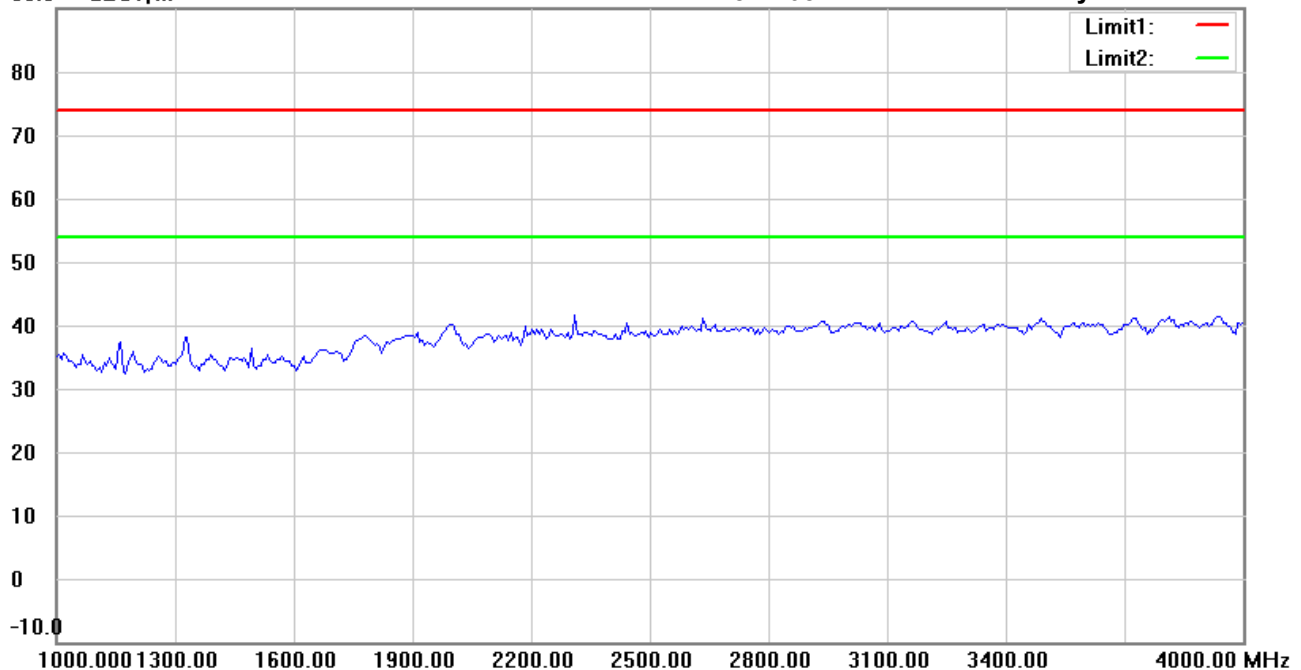

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #6


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:11:46 PM

Humidity: 53.0 %

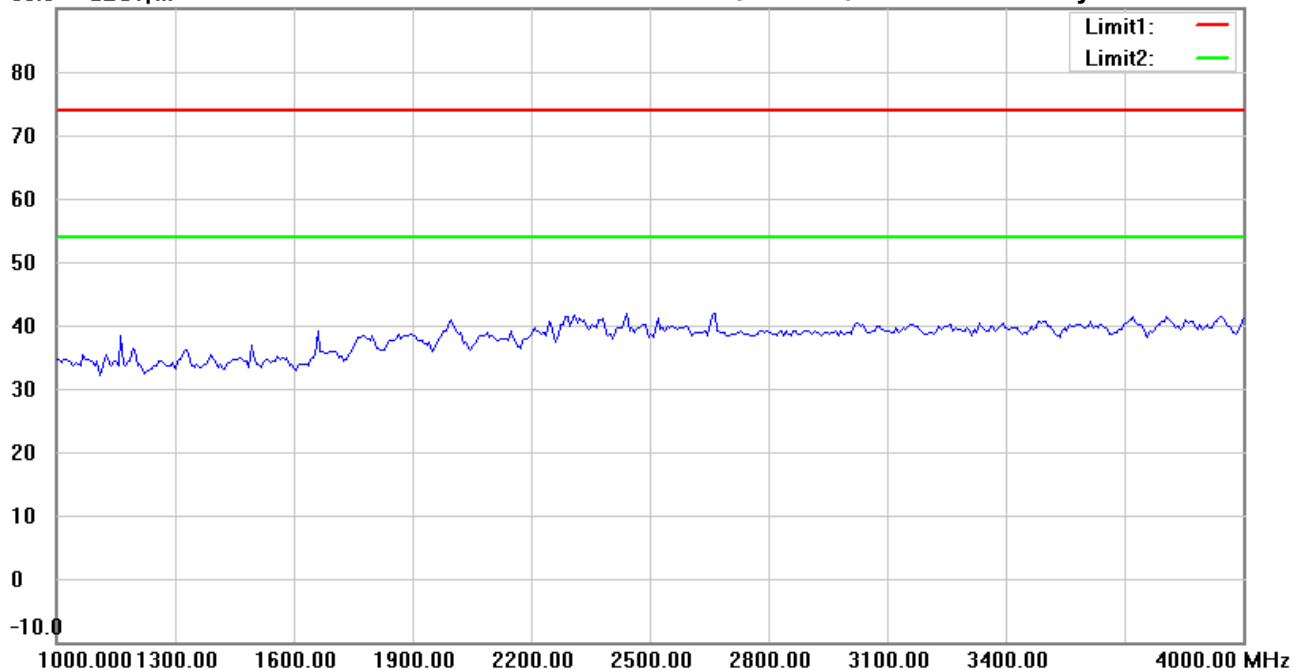

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#2


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:09:15 PM

Humidity: 53.0 %

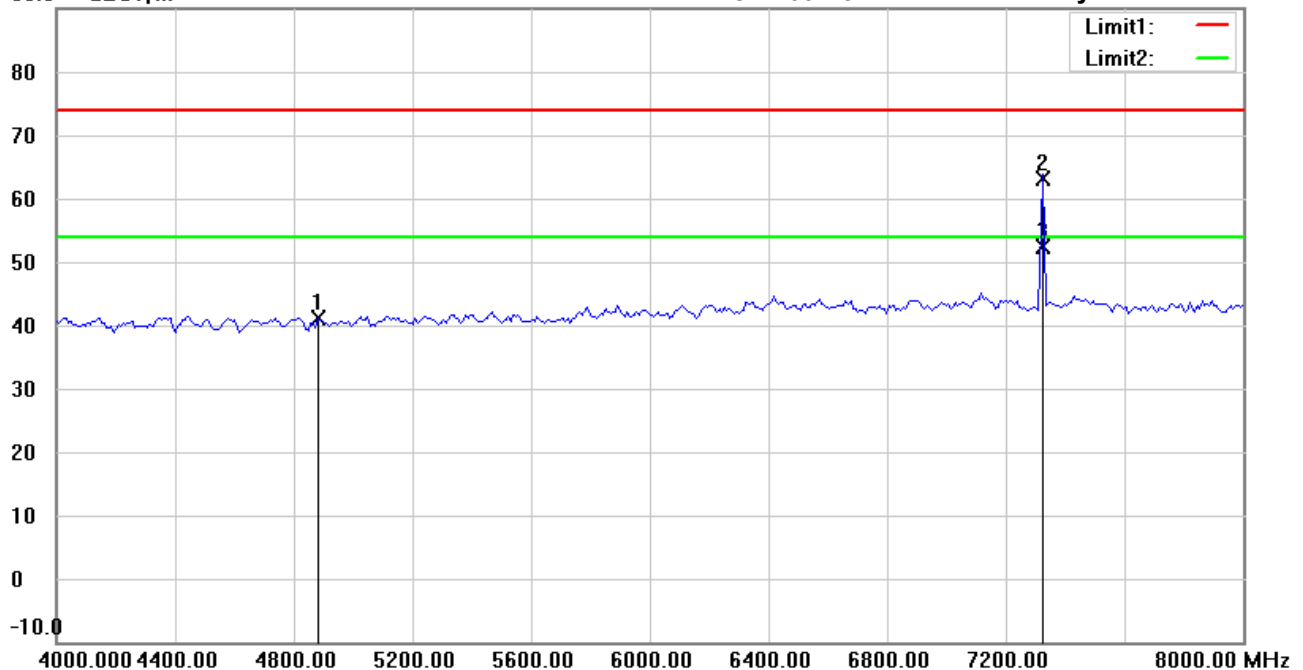

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4880.000	39.35	peak	1.75	41.10	74.00	150	16	-32.90	
	7326.653	57.12	peak	5.89	63.01	74.00	150	300	-10.99	
*	7326.653	46.39	AVG	5.89	52.28	54.00	150	300	-1.72	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:12:46 PM

Humidity: 53.0 %

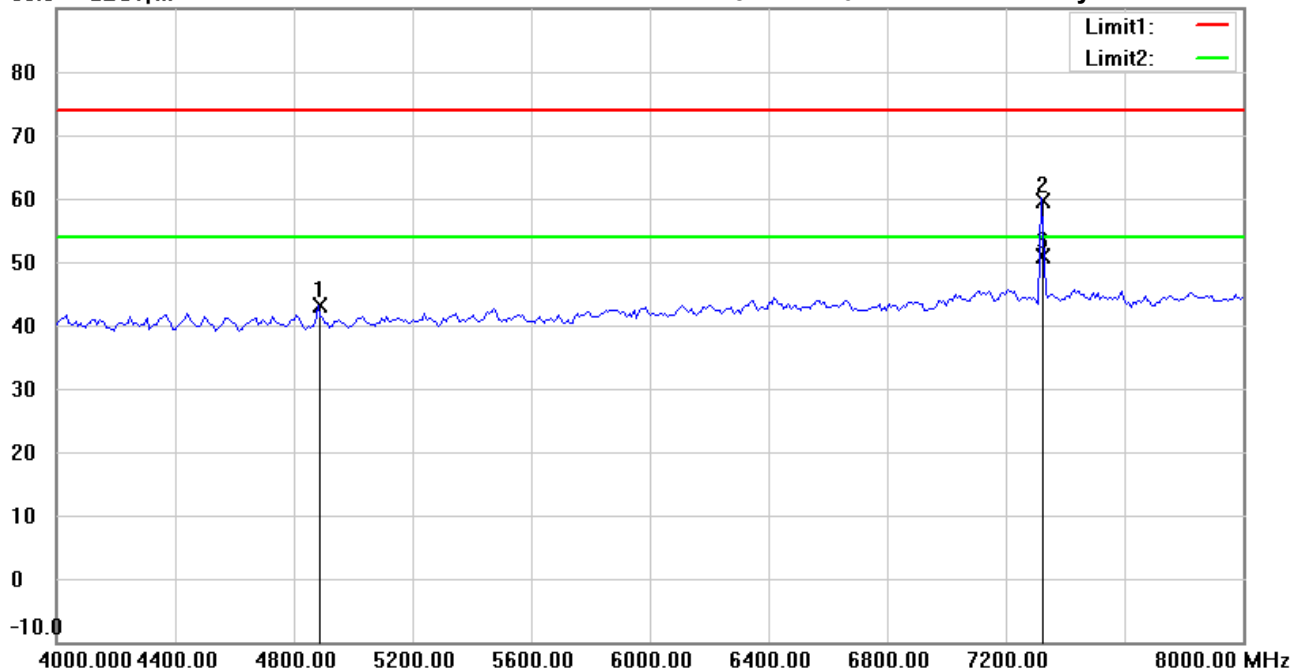

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4881.764	41.31	peak	1.76	43.07	74.00	150	110	-30.93	
	7326.653	53.62	peak	5.89	59.51	74.00	150	20	-14.49	
*	7326.653	44.92	AVG	5.89	50.81	54.00	150	20	-3.19	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:10:22 PM

Humidity: 53.0 %

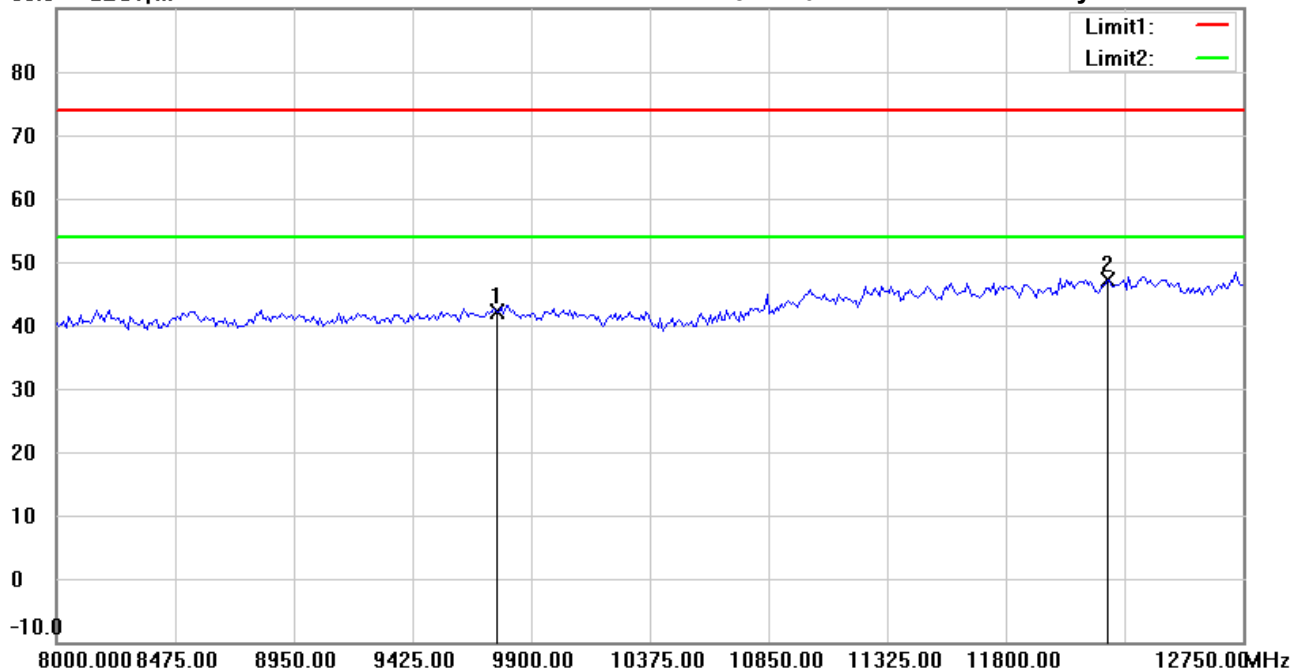

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	32.51	peak	9.64	42.15	74.00	150	91	-31.85	
*	12200.000	32.31	peak	14.79	47.10	74.00	150	277	-26.90	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#8


Date: 3/12/2022

Temperature:24.3 °C

90.0 dBuV/m

Time: 2:13:46 PM

Humidity:53.0 %

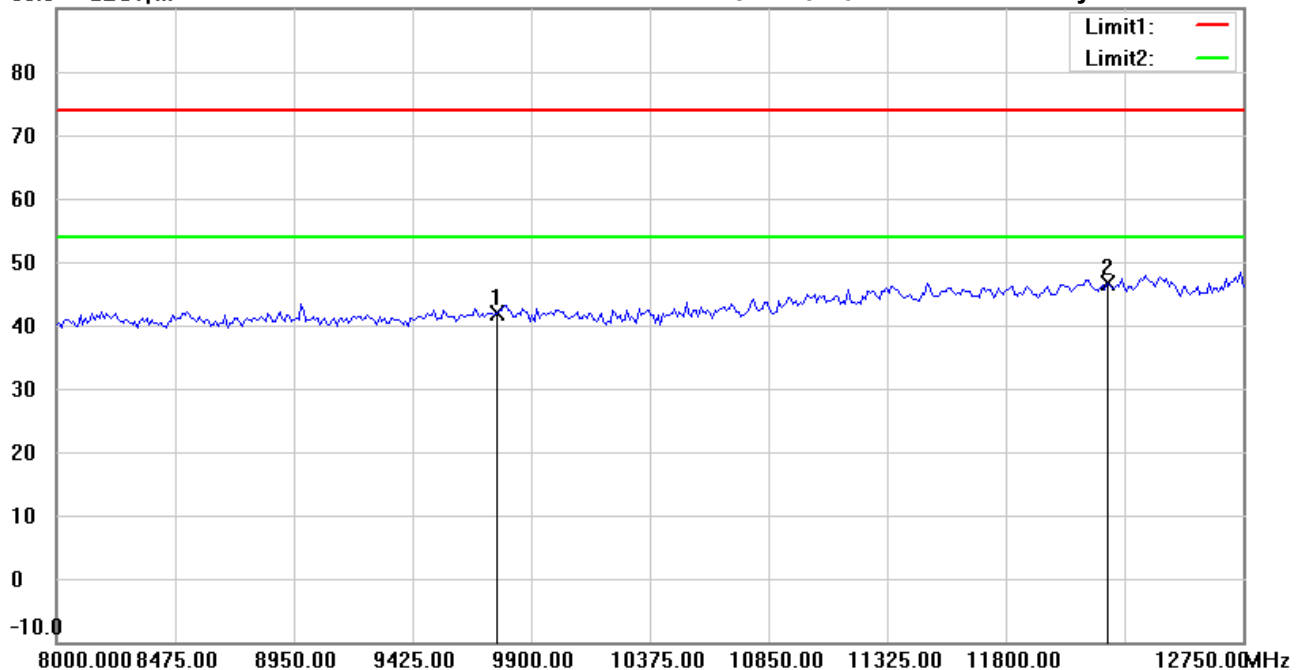

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	32.23	peak	9.64	41.87	74.00	150	240	-32.13	
*	12200.000	31.83	peak	14.79	46.62	74.00	150	71	-27.38	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 3/12/2022

Temperature:24.3 °C

90.0 dBuV/m

Time: 2:10:35 PM

Humidity:53.0 %

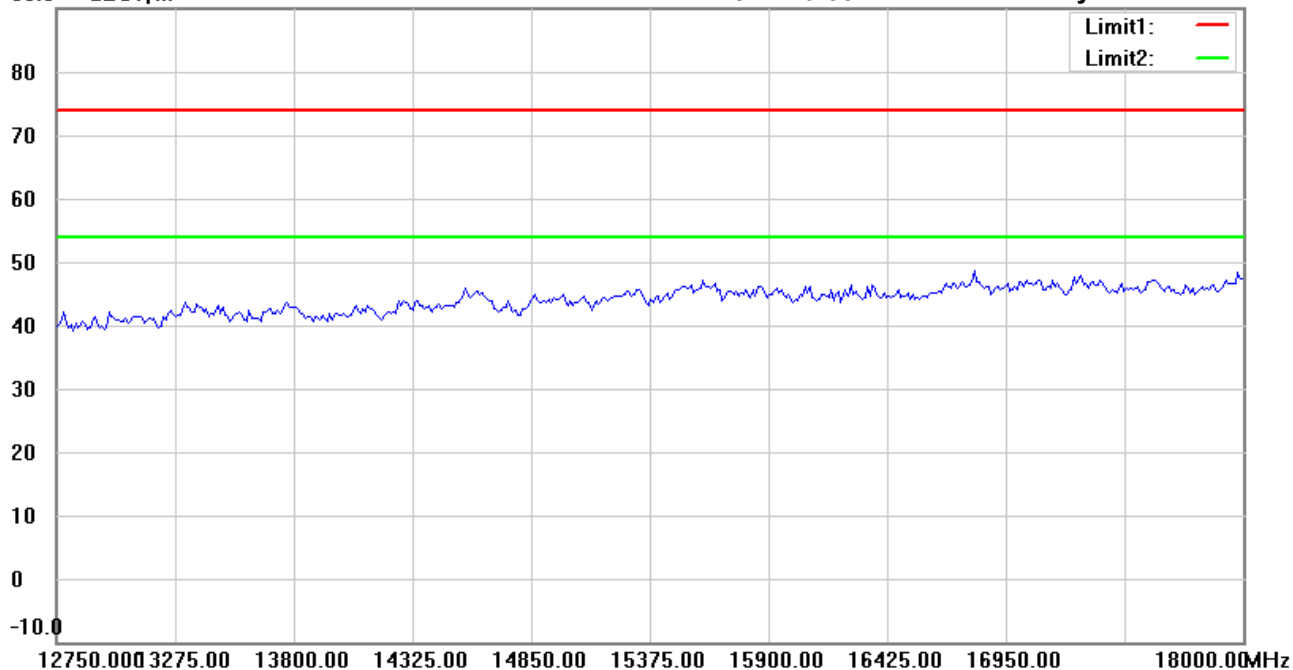

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #9


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:14:00 PM

Humidity: 53.0 %

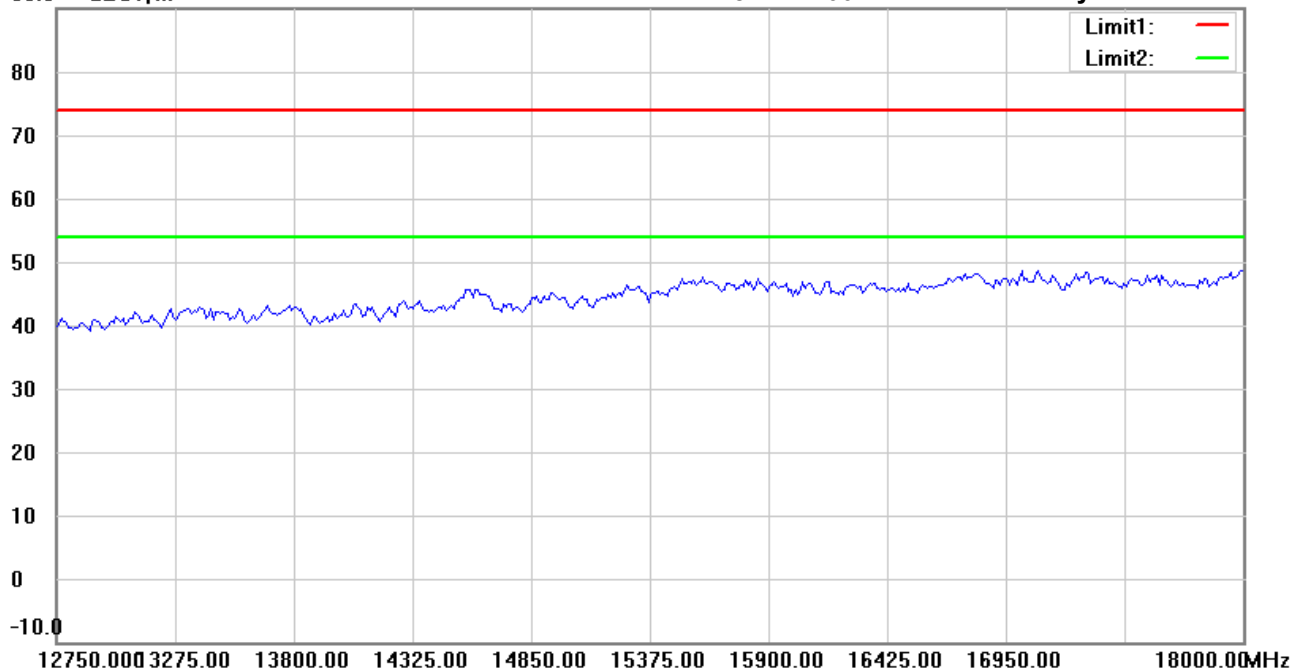

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 3/12/2022

Temperature:24.3 °C

Time: 2:10:45 PM

Humidity:53.0 %

90.0 dBuV/m

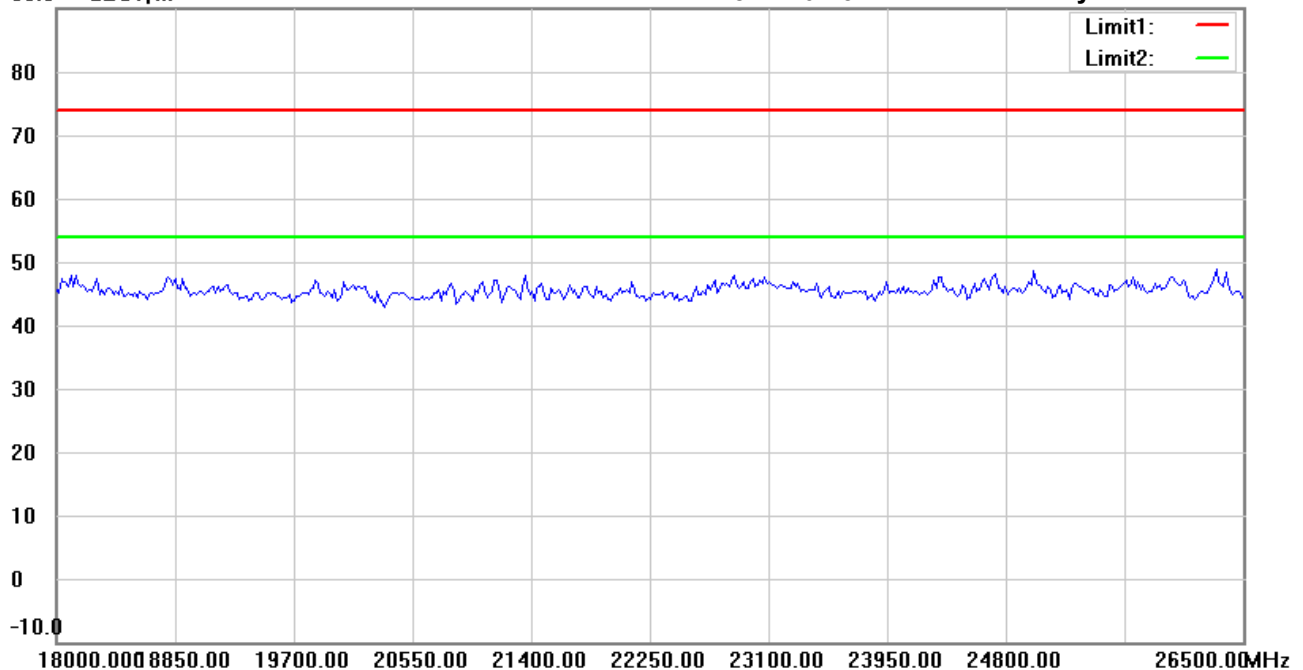

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:14:10 PM

Humidity: 53.0 %

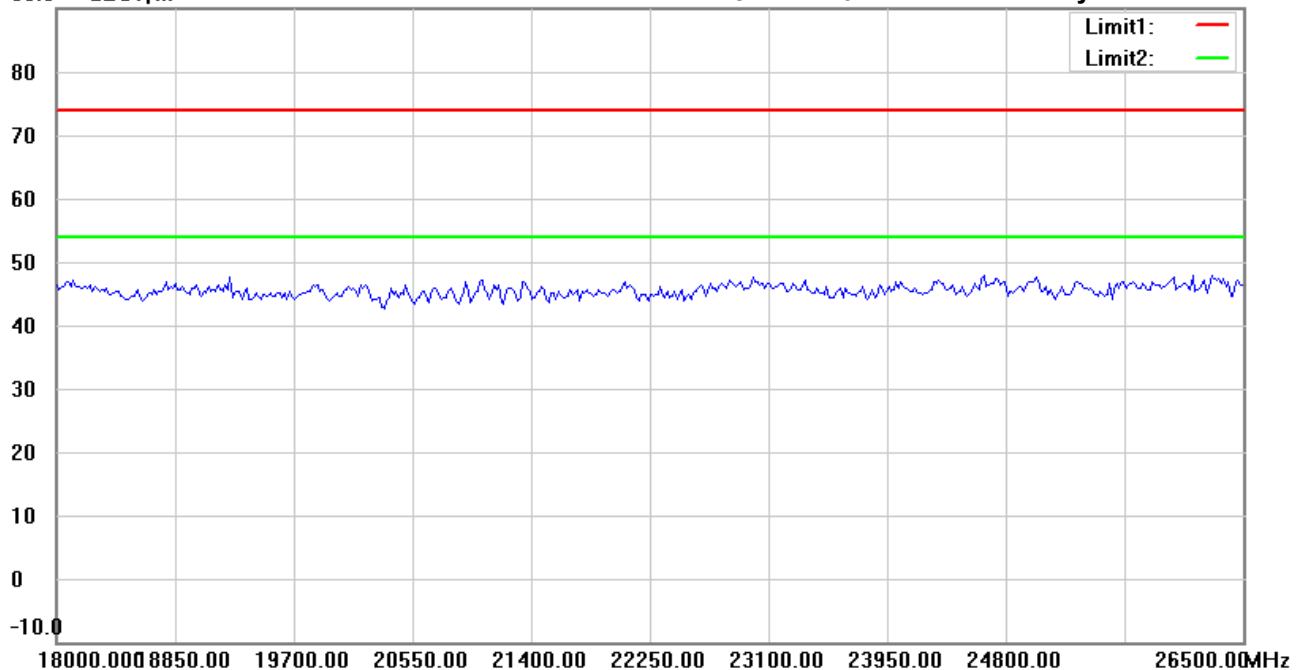

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:20:11 PM

Humidity: 53.0 %

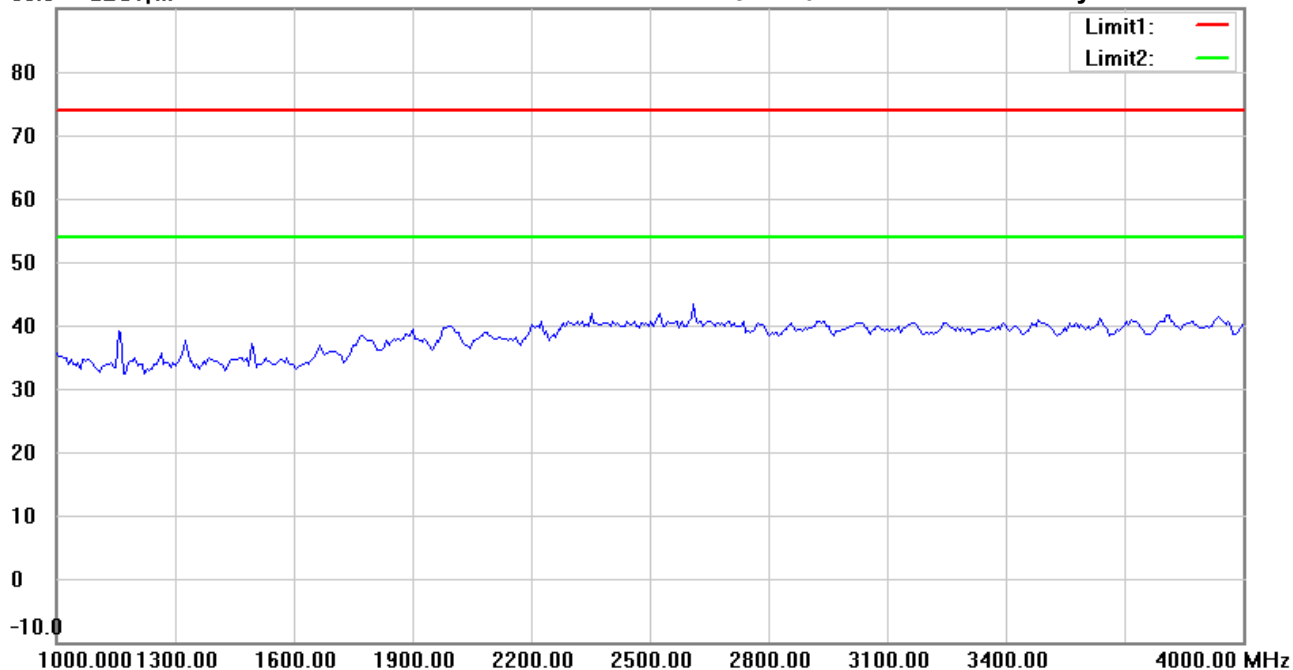

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #6


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:23:42 PM

Humidity: 53.0 %

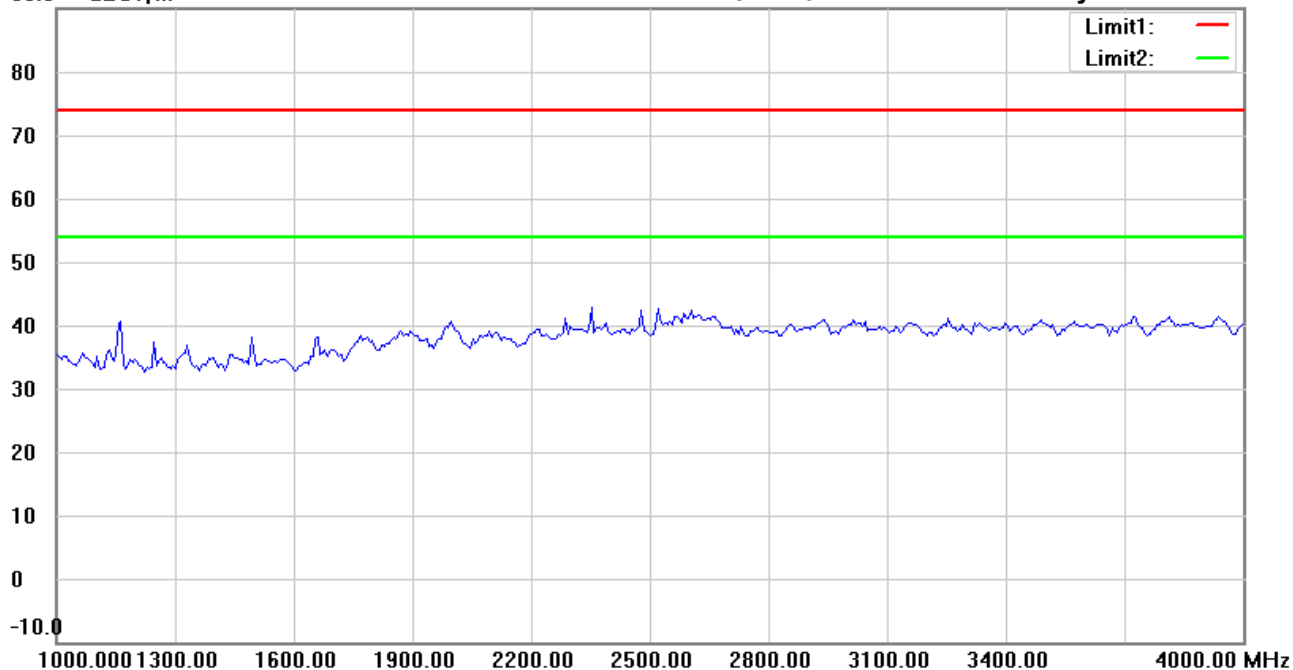

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:21:11 PM

Humidity: 53.0 %

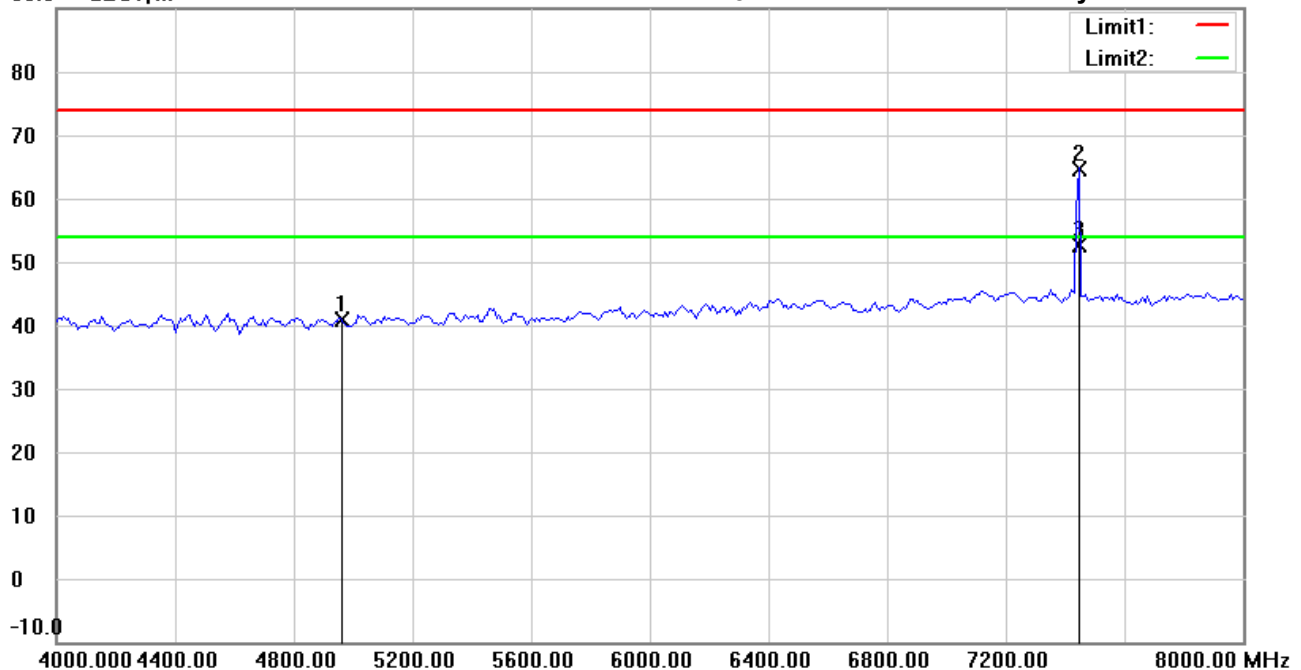

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	38.90	peak	1.91	40.81	74.00	150	50	-33.19	
	7440.226	58.44	peak	6.27	64.71	74.00	150	345	-9.29	
*	7440.226	46.38	AVG	6.27	52.65	54.00	150	345	-1.35	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:24:43 PM

Humidity: 53.0 %

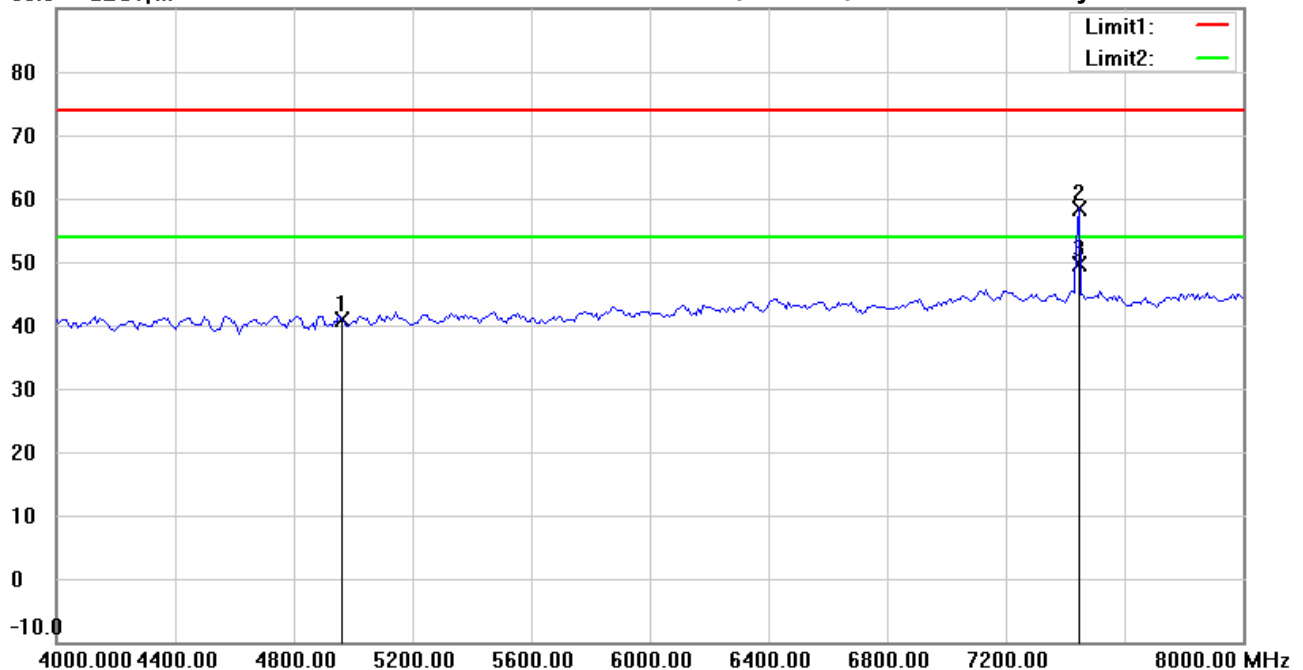

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	39.07	peak	1.91	40.98	74.00	150	20	-33.02	
	7438.878	52.19	peak	6.27	58.46	74.00	150	331	-15.54	
*	7438.878	43.26	AVG	6.27	49.53	54.00	150	331	-4.47	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #3


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:22:18 PM

Humidity: 53.0 %

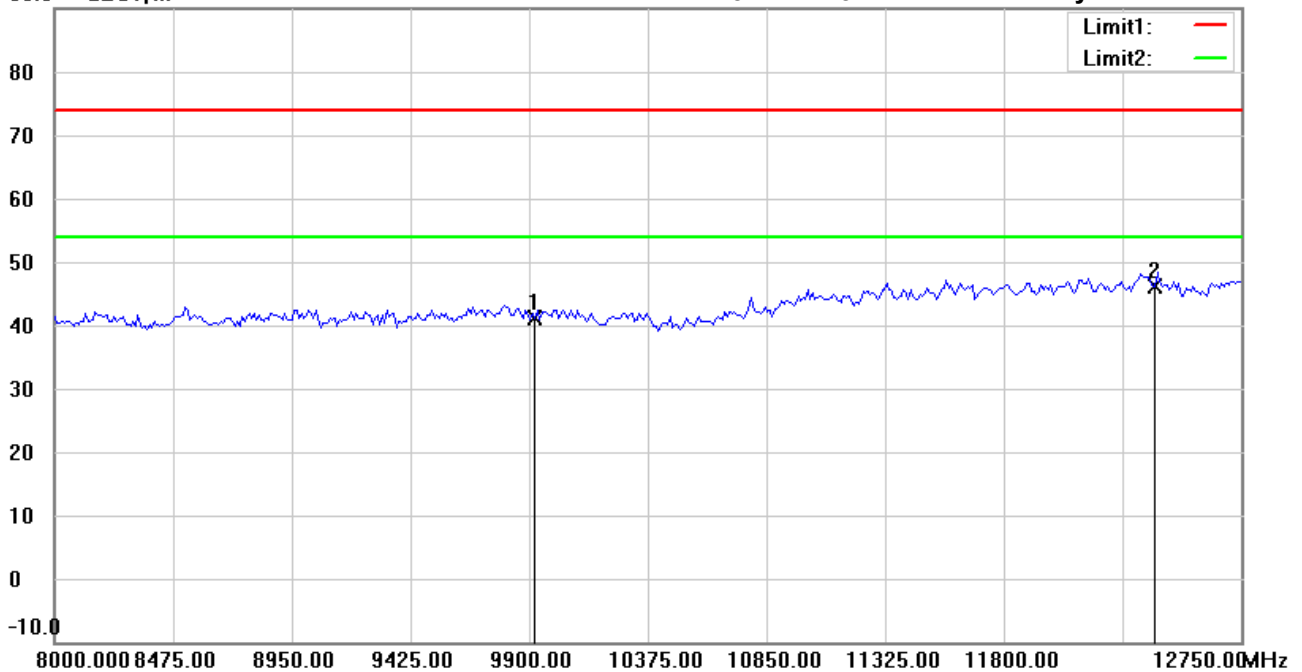

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	31.91	peak	9.11	41.02	74.00	150	91	-32.98	
*	12400.000	31.36	peak	14.87	46.23	74.00	150	247	-27.77	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#8


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:25:42 PM

Humidity: 53.0 %

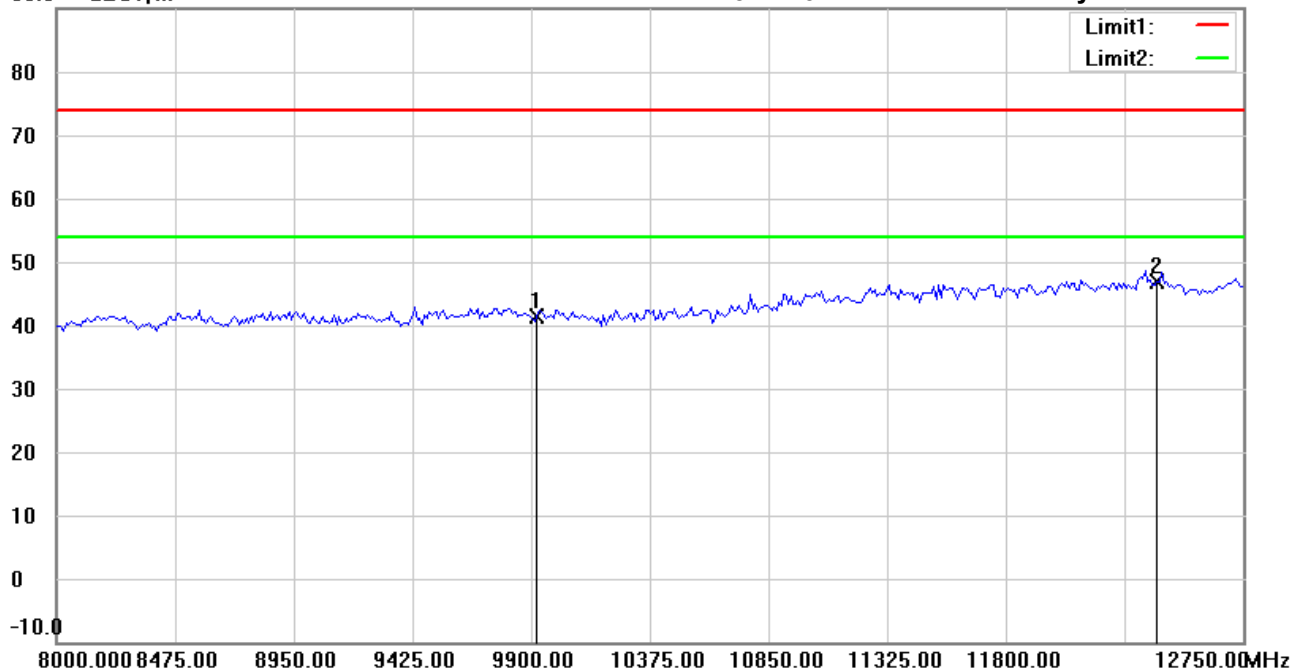

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	32.36	peak	9.11	41.47	74.00	150	331	-32.53	
*	12400.000	31.93	peak	14.87	46.80	74.00	150	60	-27.20	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #4


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:22:32 PM

Humidity: 53.0 %

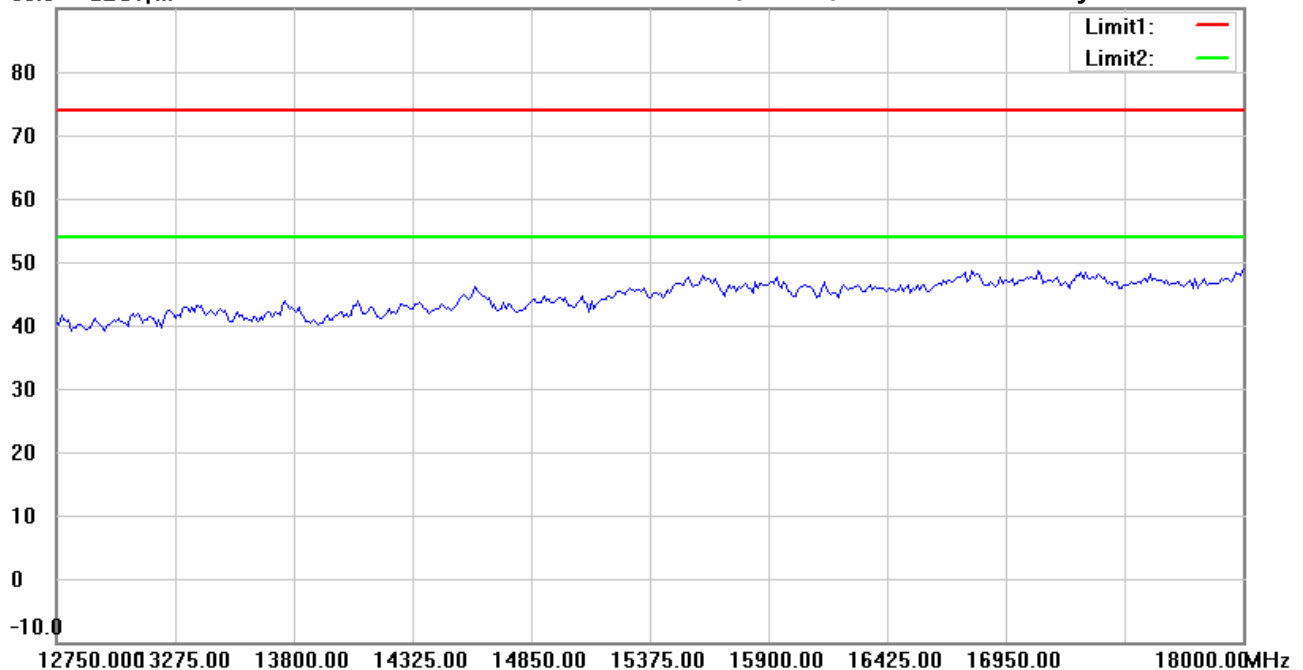

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #9


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:25:56 PM

Humidity: 53.0 %

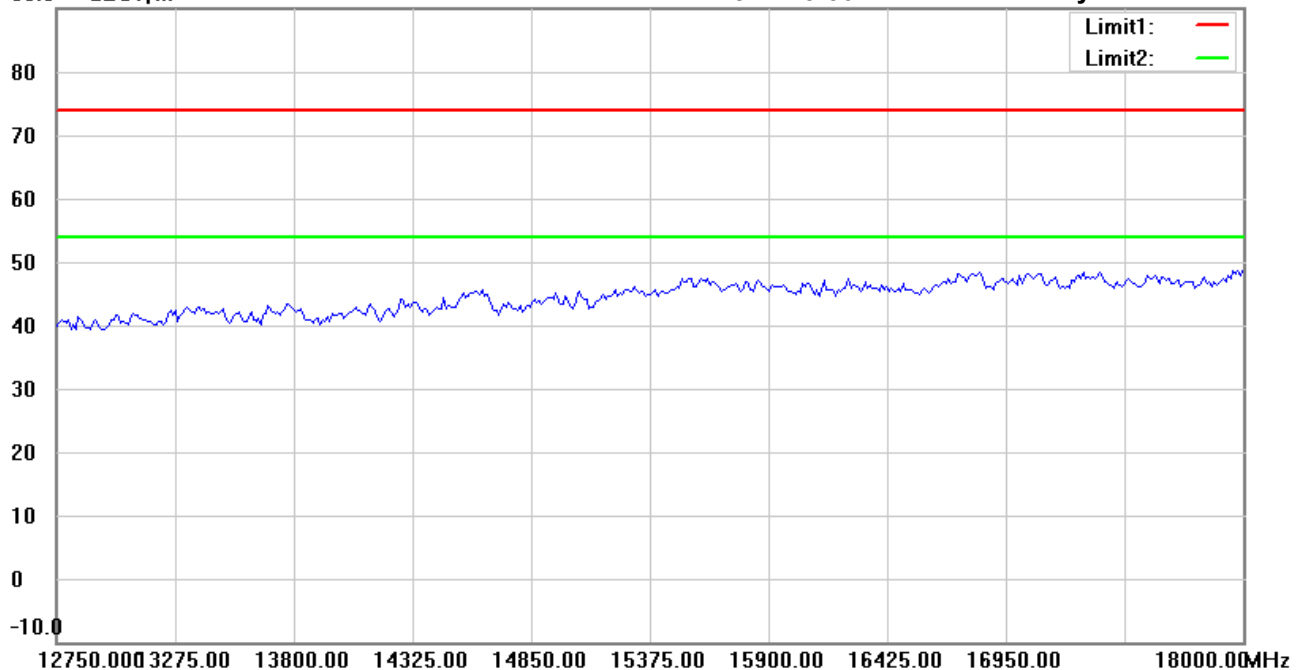

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:22:42 PM

Humidity: 53.0 %

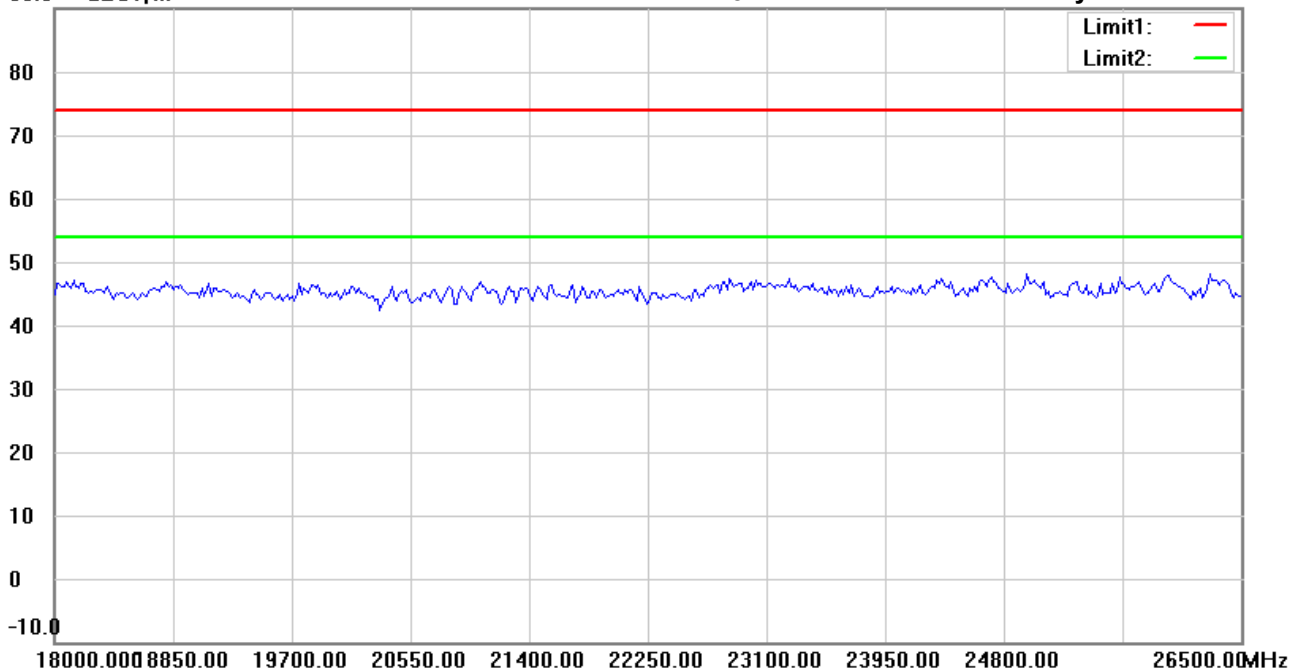

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #10


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 2:26:06 PM

Humidity: 53.0 %

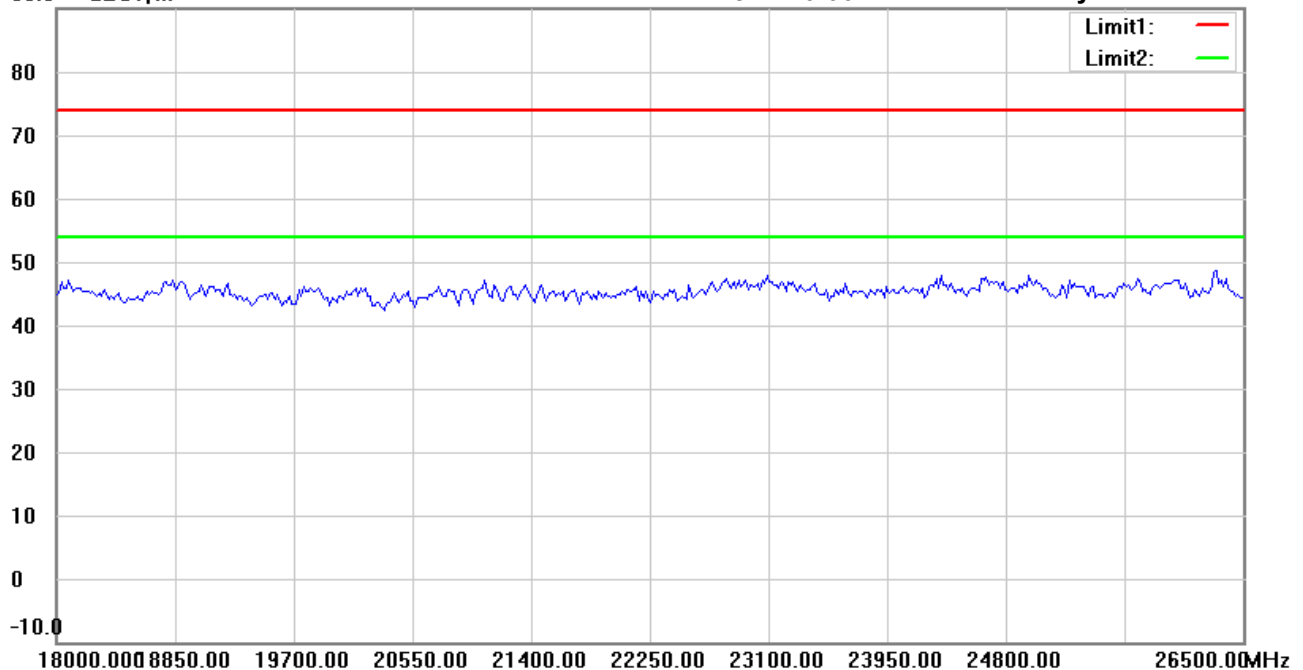

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
 Tel: +886-2-6606-8877
 Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 1_TX 2405MHz_30M-1G

Data : #1


Date: 3/12/2022

Temperature: 24.3 °C

80.0 dBuV/m

Time: 4:56:48 PM

Humidity: 53.0 %

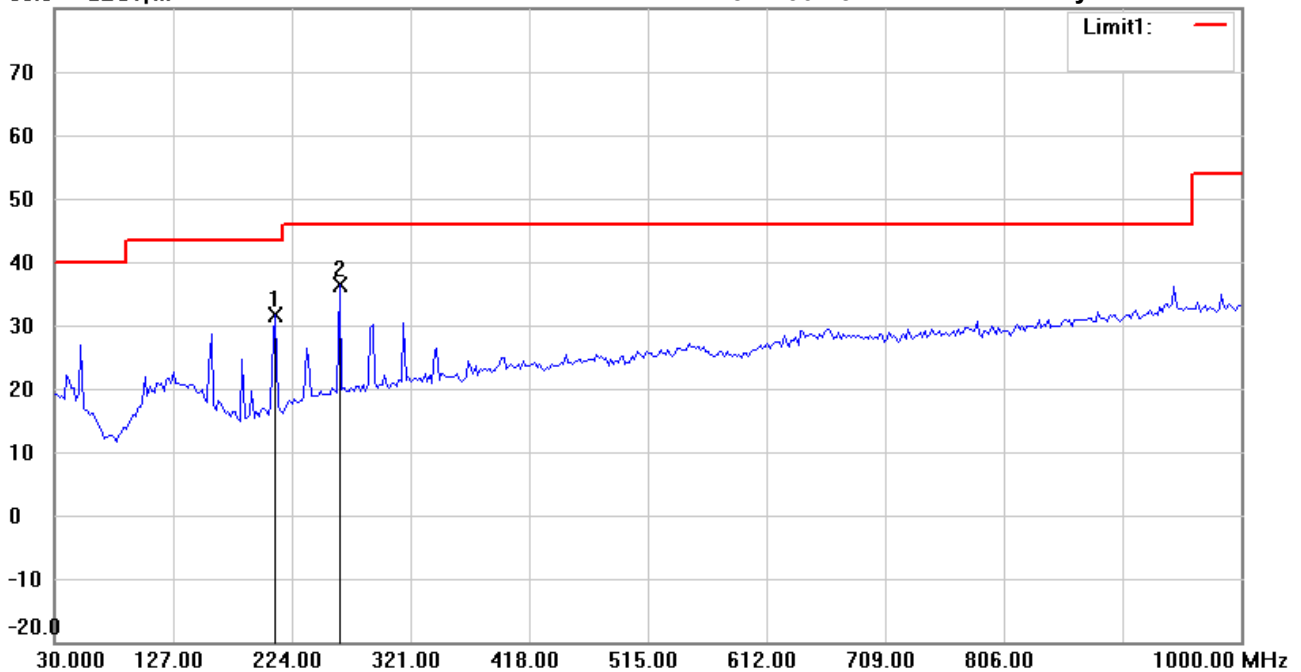

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M22112-21453

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2405MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	210.7816	41.96	peak	-10.22	31.74	43.50	106	20	-11.76	
*	263.2664	43.01	peak	-6.55	36.46	46.00	100	3	-9.54	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 1_TX 2405MHz_30M-1G

Data : #2


Date: 3/12/2022

Temperature: 24.3 °C

Time: 4:58:16 PM

Humidity: 53.0 %

80.0 dBuV/m

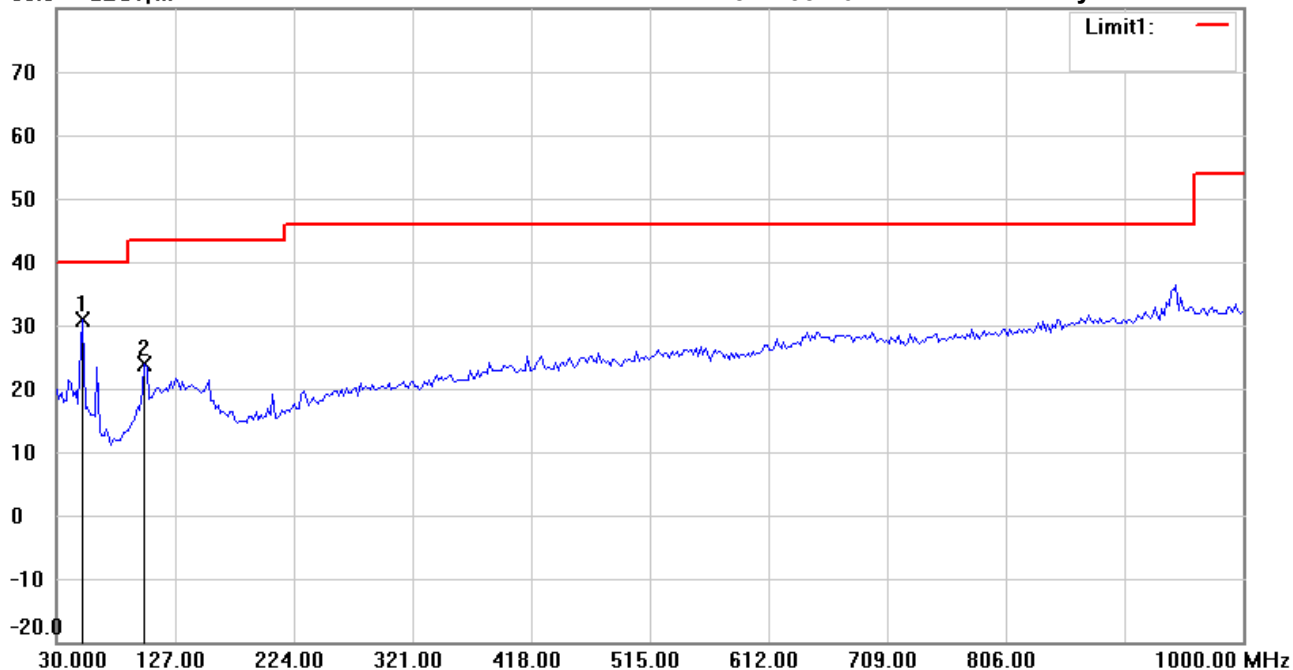

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22112-21453

M/N:

Test Mode : TX 2405MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	51.3828	40.69	peak	-9.91	30.78	40.00	100	92	-9.22	
	101.9238	32.87	peak	-8.92	23.95	43.50	108	216	-19.55	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 3/8/2022

Temperature: 21.1 °C

Time: 2:07:47 PM

Humidity: 60.7 %

90.0 dBuV/m

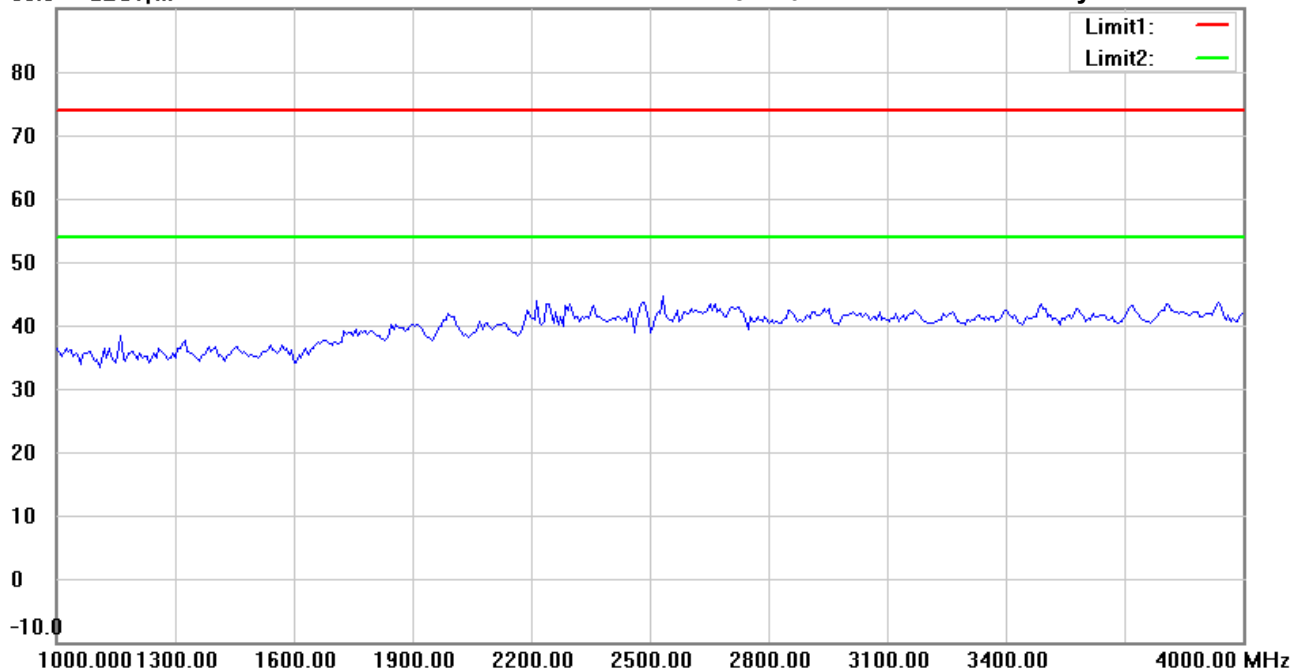

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2405MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #6


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:11:18 PM

Humidity: 60.7 %

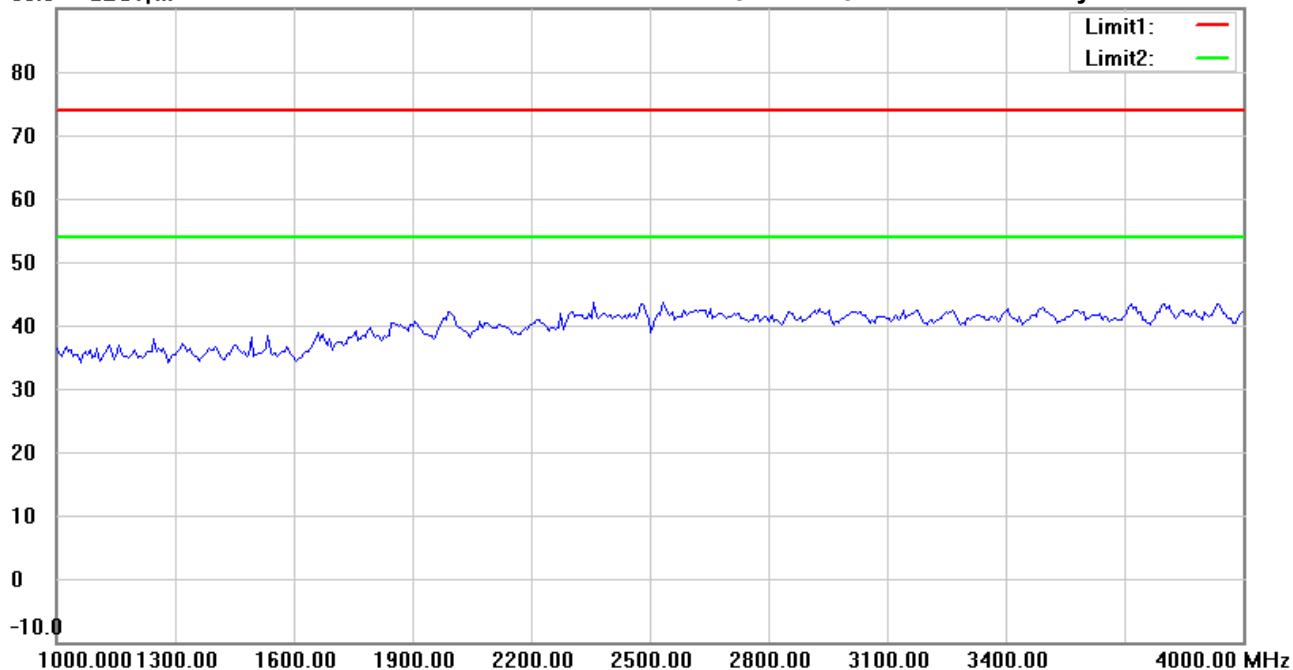

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2405MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:08:47 PM

Humidity: 60.7 %

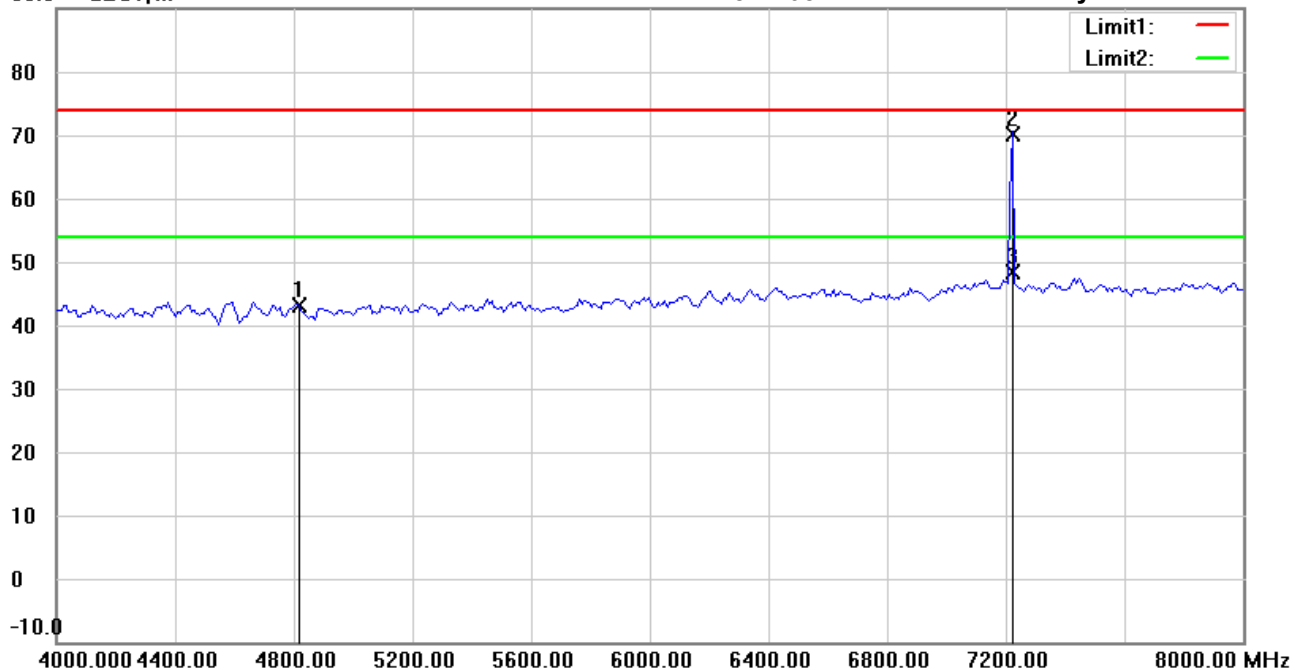

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2405MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4810.000	41.82	peak	1.39	43.21	74.00	150	110	-30.79	
*	7215.000	64.04	peak	6.00	70.04	74.00	150	130	-3.96	
	7215.000	42.36	AVG	6.00	48.36	54.00	150	130	-5.64	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#7


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:12:19 PM

Humidity: 60.7 %

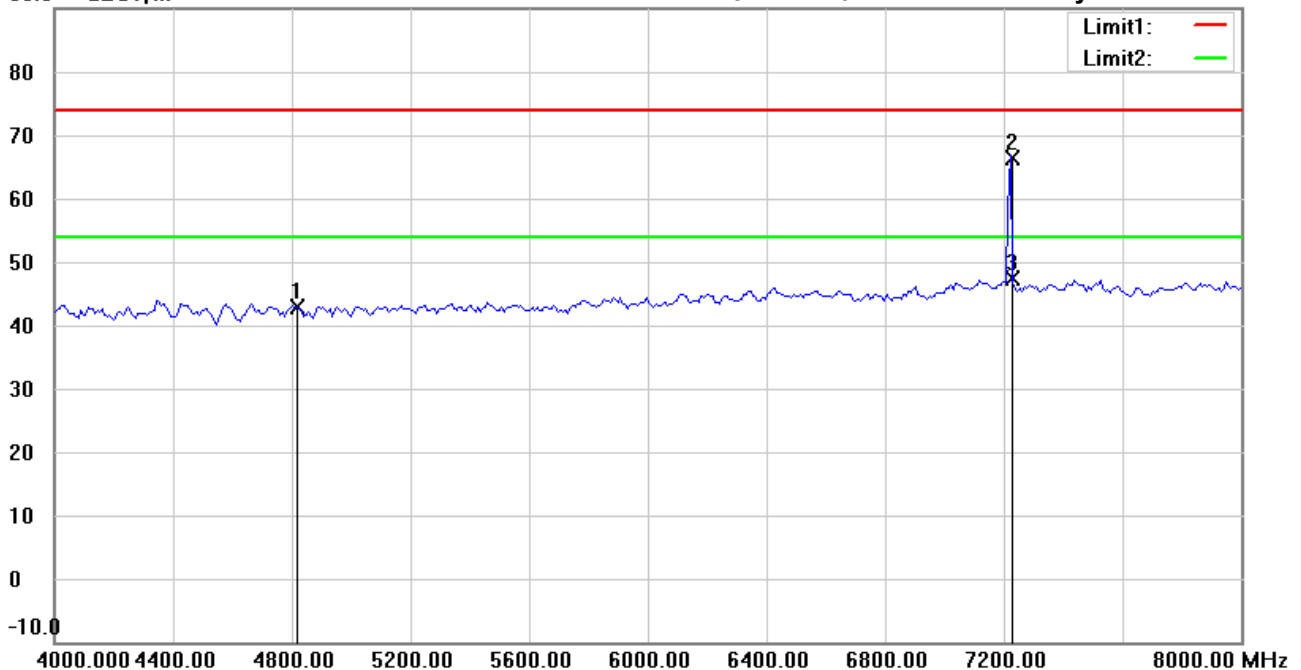

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2405MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4810.000	41.54	peak	1.39	42.93	74.00	150	309	-31.07	
	7222.445	60.32	peak	5.98	66.30	74.00	150	114	-7.70	
*	7222.445	41.36	AVG	5.98	47.34	54.00	150	114	-6.66	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #3


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:09:54 PM

Humidity: 60.7 %

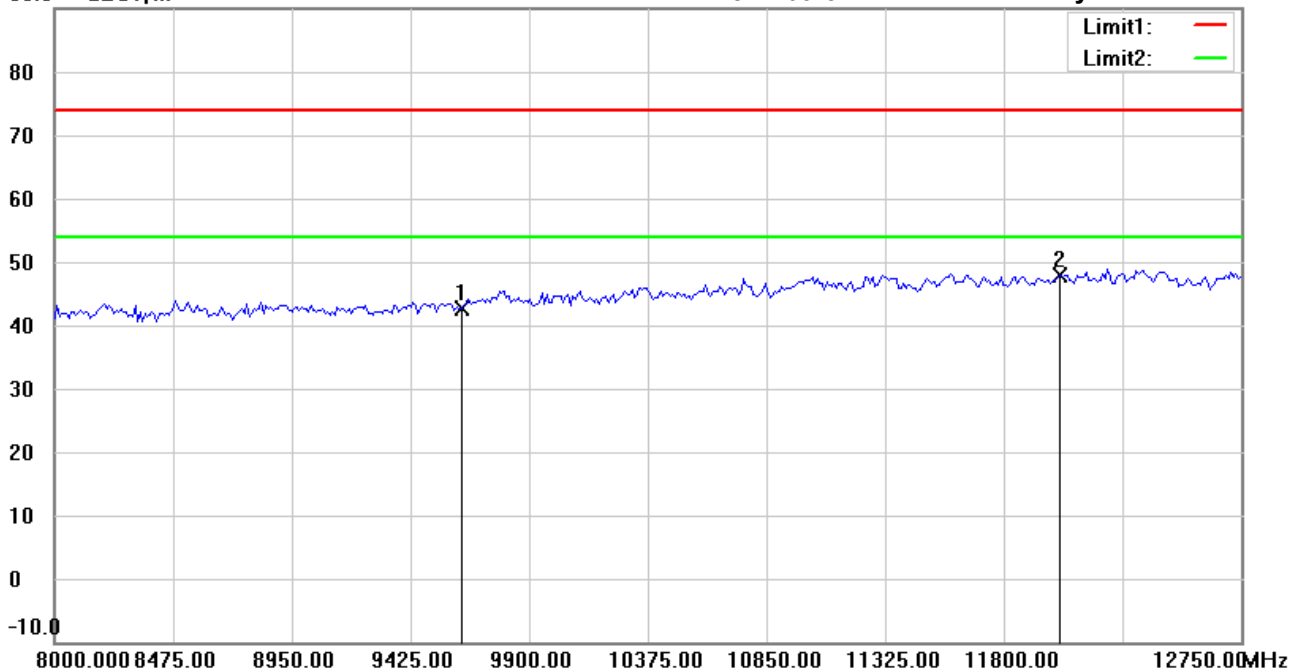

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2405MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9620.000	33.74	peak	8.78	42.52	74.00	150	104	-31.48	
*	12025.000	34.29	peak	13.66	47.95	74.00	150	13	-26.05	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#8


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:13:19 PM

Humidity: 60.7 %

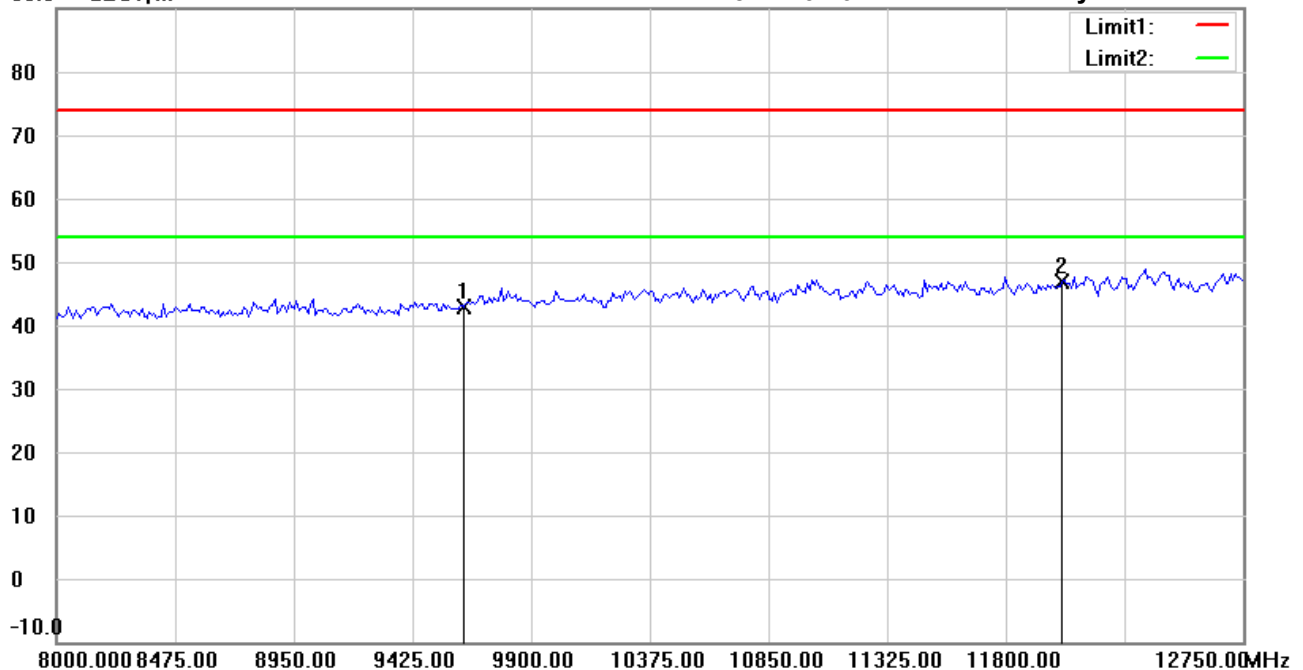

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2405MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9620.000	34.13	peak	8.78	42.91	74.00	150	28	-31.09	
*	12025.000	33.27	peak	13.66	46.93	74.00	150	130	-27.07	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #4


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:10:08 PM

Humidity: 60.7 %

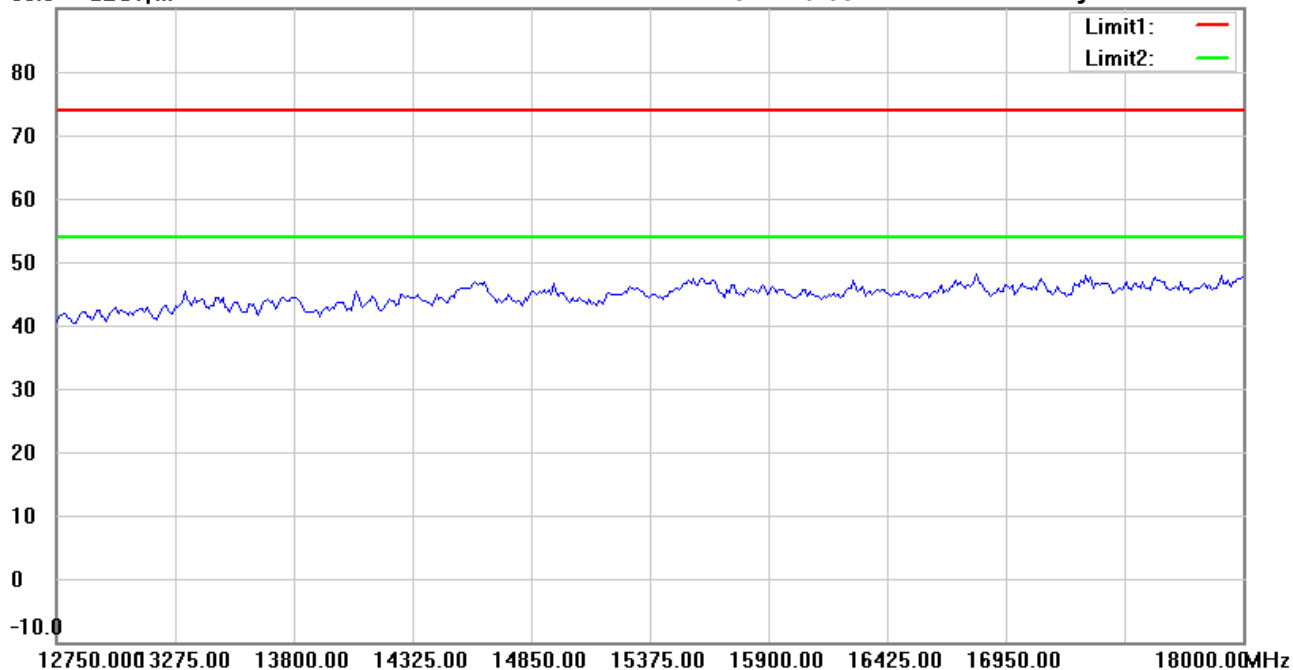

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2405MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #9


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:13:33 PM

Humidity: 60.7 %

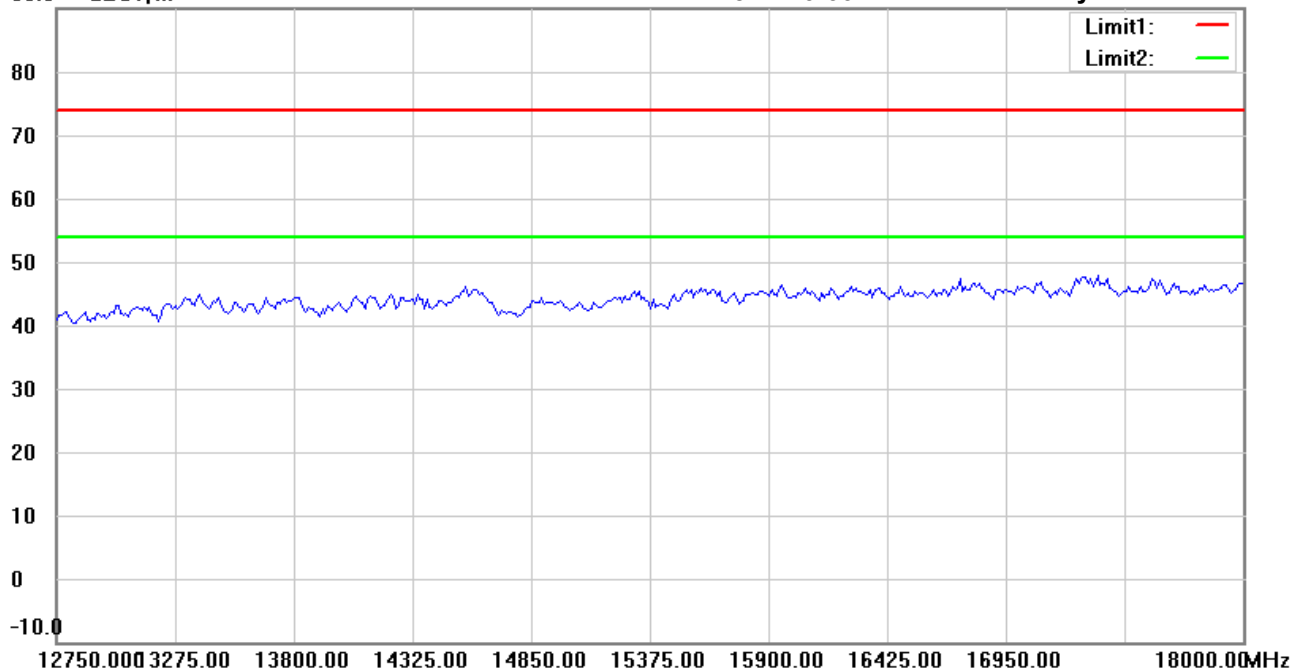

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2405MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 3/8/2022

Temperature: 21.1 °C

Time: 2:10:18 PM

Humidity: 60.7 %

90.0 dBuV/m

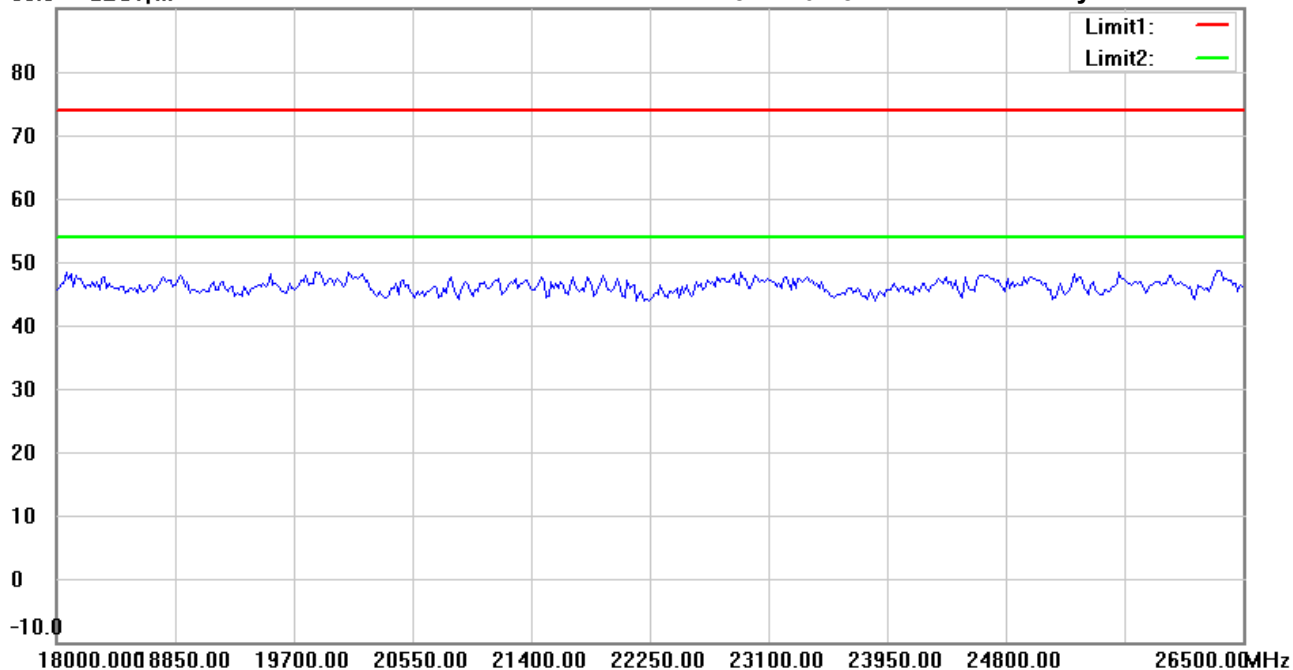

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2405MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #10


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:13:43 PM

Humidity: 60.7 %

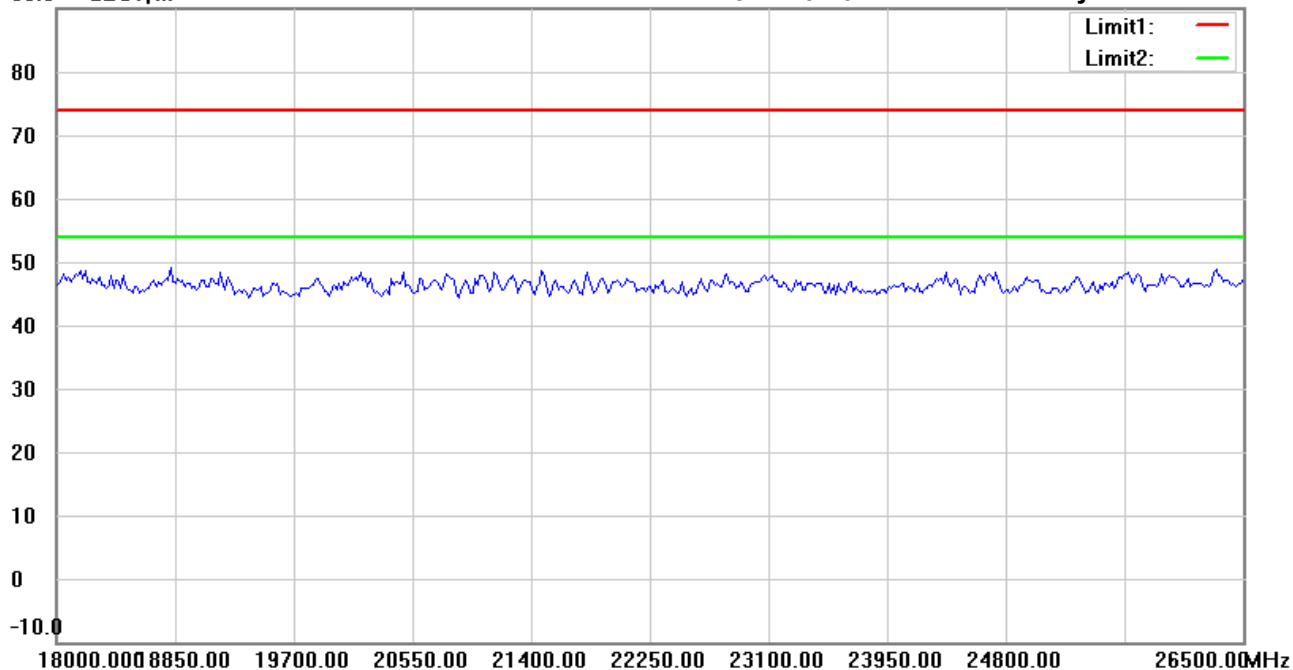

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2405MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 3/8/2022

Temperature: 21.1 °C

Time: 2:30:30 PM

Humidity: 60.7 %

90.0 dBuV/m

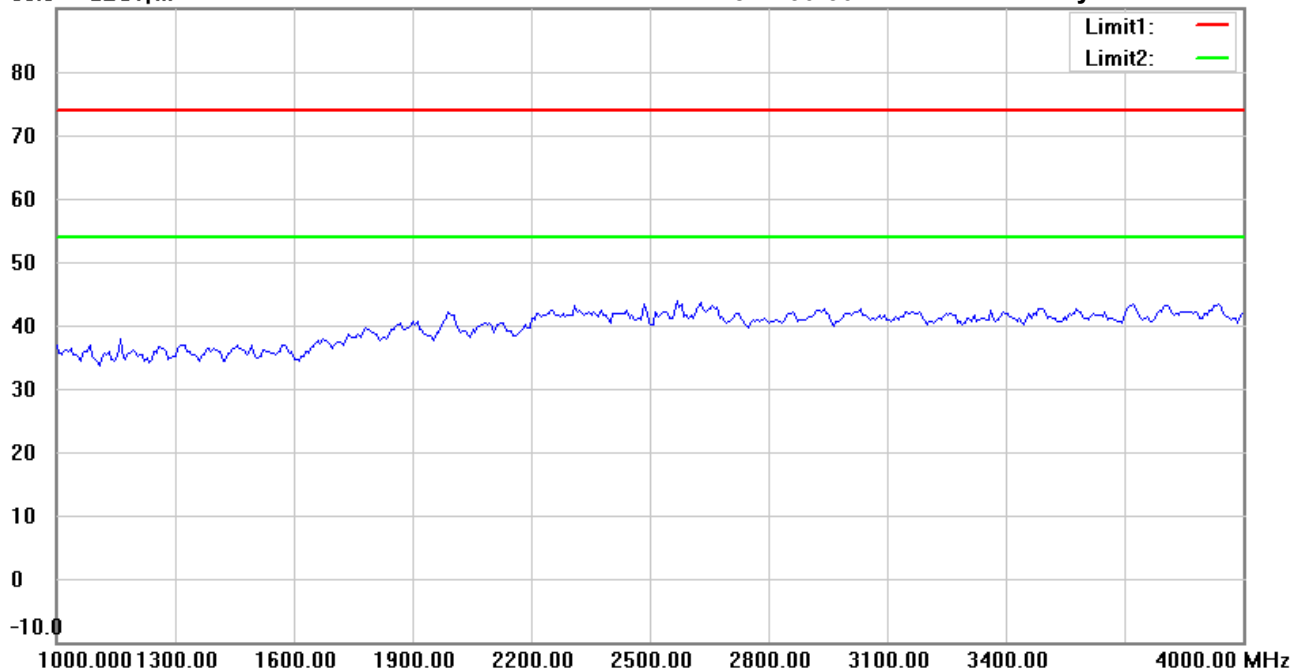

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #6


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:34:01 PM

Humidity: 60.7 %

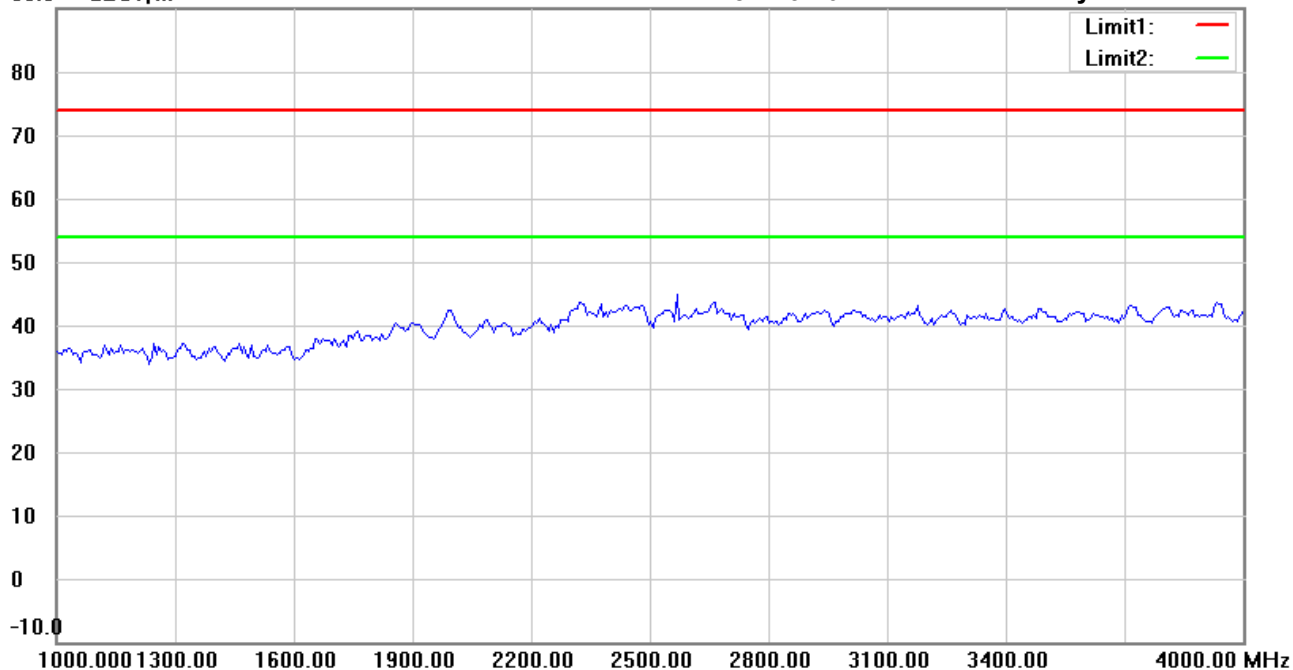

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:31:30 PM

Humidity: 60.7 %

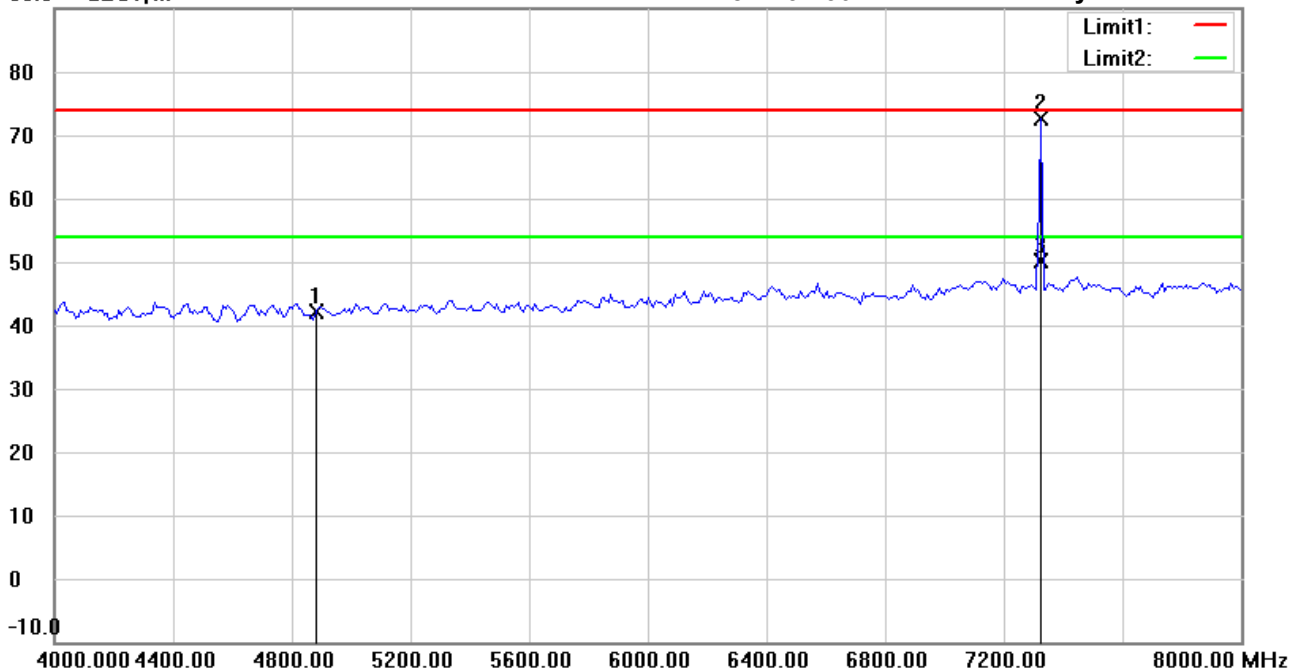

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4880.000	40.44	peak	1.75	42.19	74.00	150	150	-31.81	31
*	7318.848	66.85	peak	5.84	72.69	74.00	190	330	-1.31	6
	7318.848	44.38	AVG	5.84	50.22	54.00	190	330	-3.78	6

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:35:02 PM

Humidity: 60.7 %

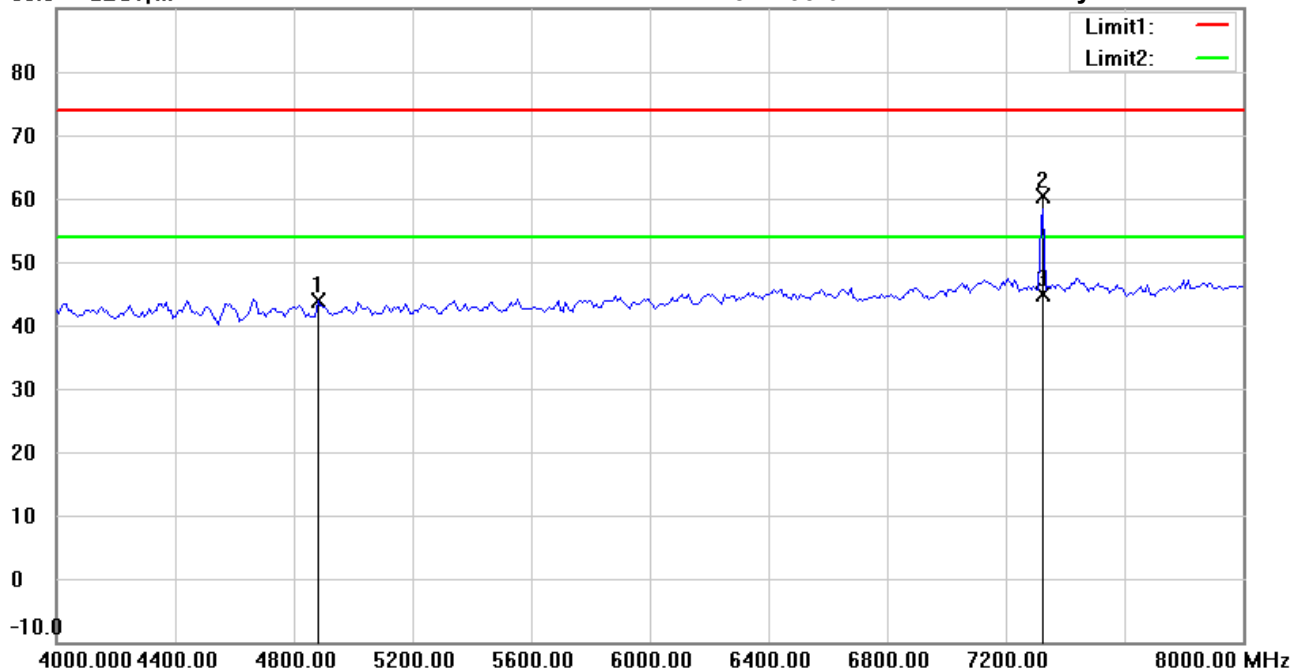

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4880.000	42.04	peak	1.75	43.79	74.00	150	119	-30.21	
	7326.653	54.59	peak	5.89	60.48	74.00	150	3	-13.52	
*	7326.653	38.92	AVG	5.89	44.81	54.00	150	3	-9.19	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #3


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:32:37 PM

Humidity: 60.7 %

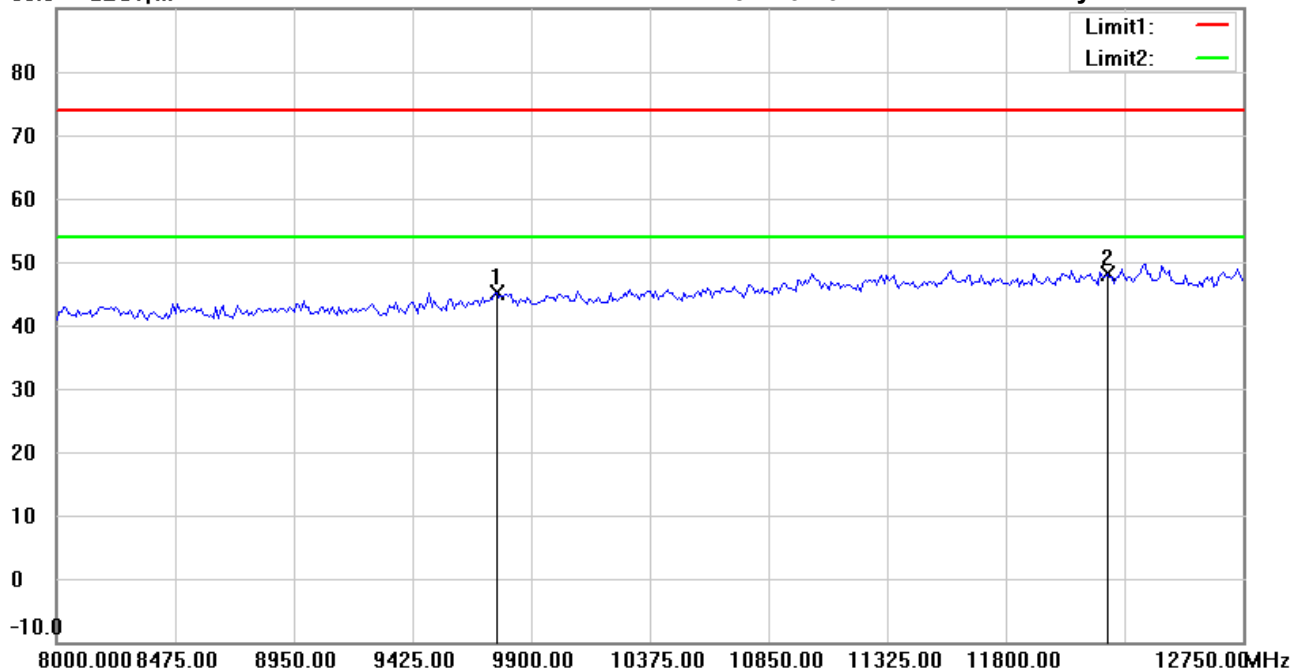

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	35.50	peak	9.64	45.14	74.00	150	100	-28.86	
*	12200.000	33.27	peak	14.79	48.06	74.00	150	19	-25.94	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #8


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:36:01 PM

Humidity: 60.7 %

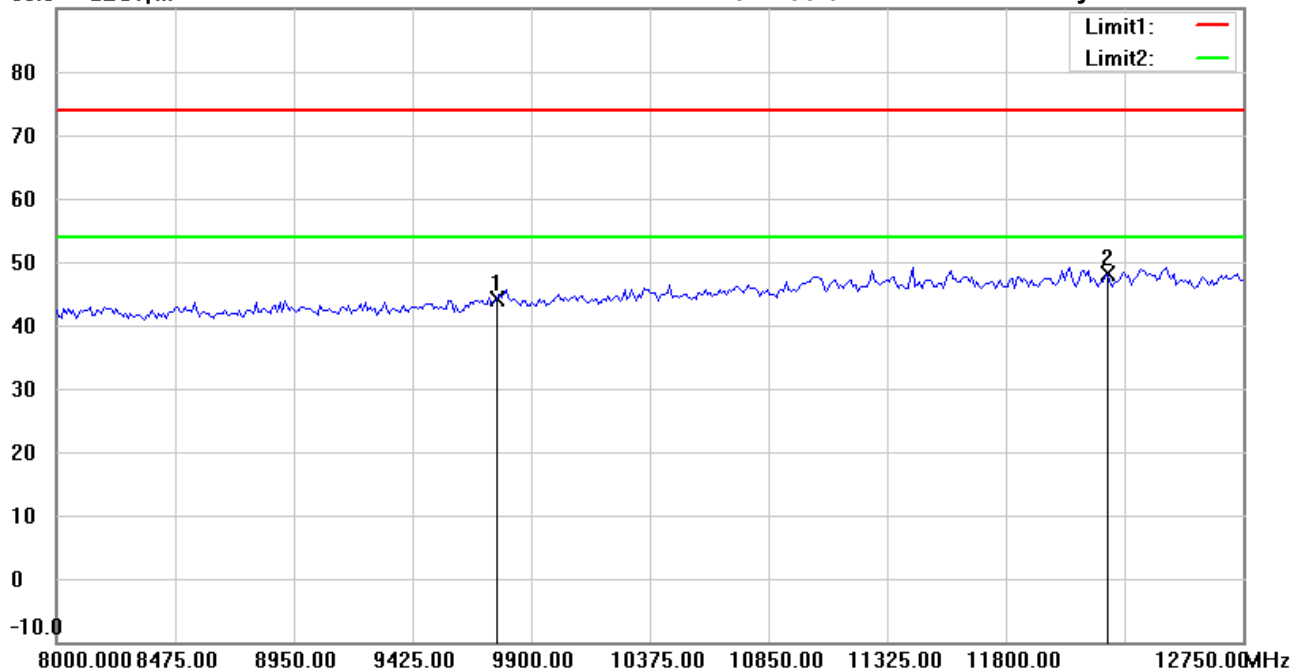

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	34.46	peak	9.64	44.10	74.00	150	10	-29.90	
*	12200.000	33.27	peak	14.79	48.06	74.00	150	93	-25.94	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #4


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:32:51 PM

Humidity: 60.7 %

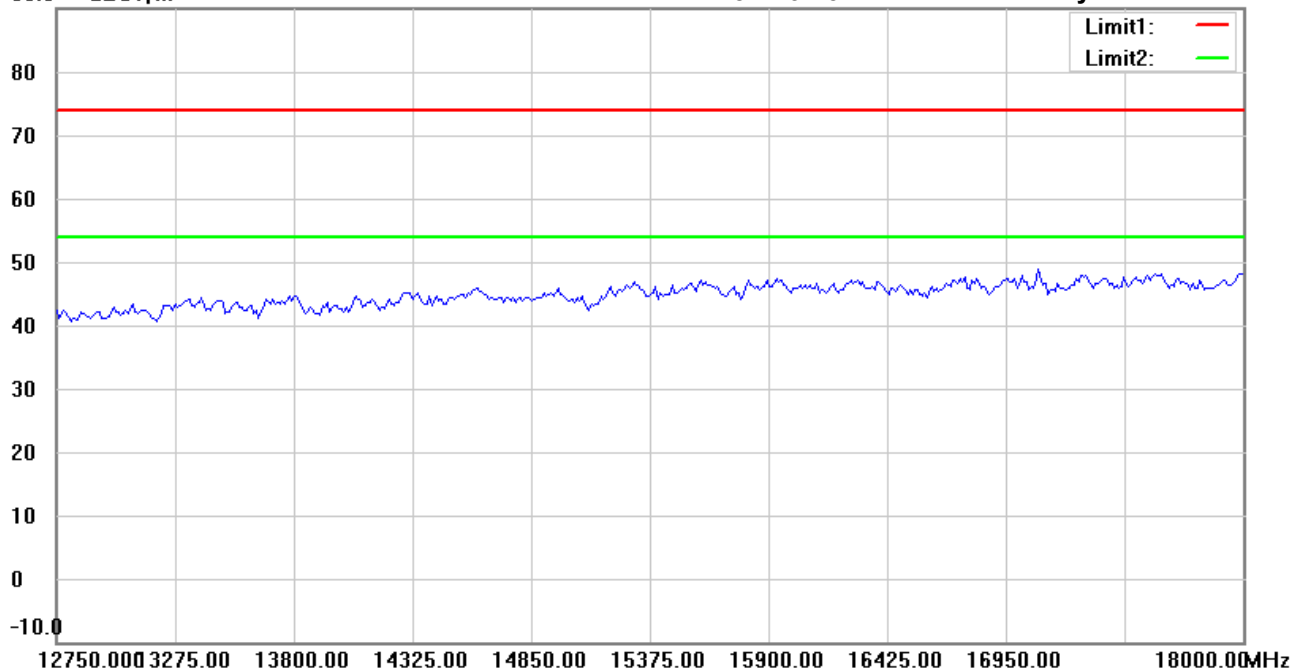

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #9


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:36:15 PM

Humidity: 60.7 %

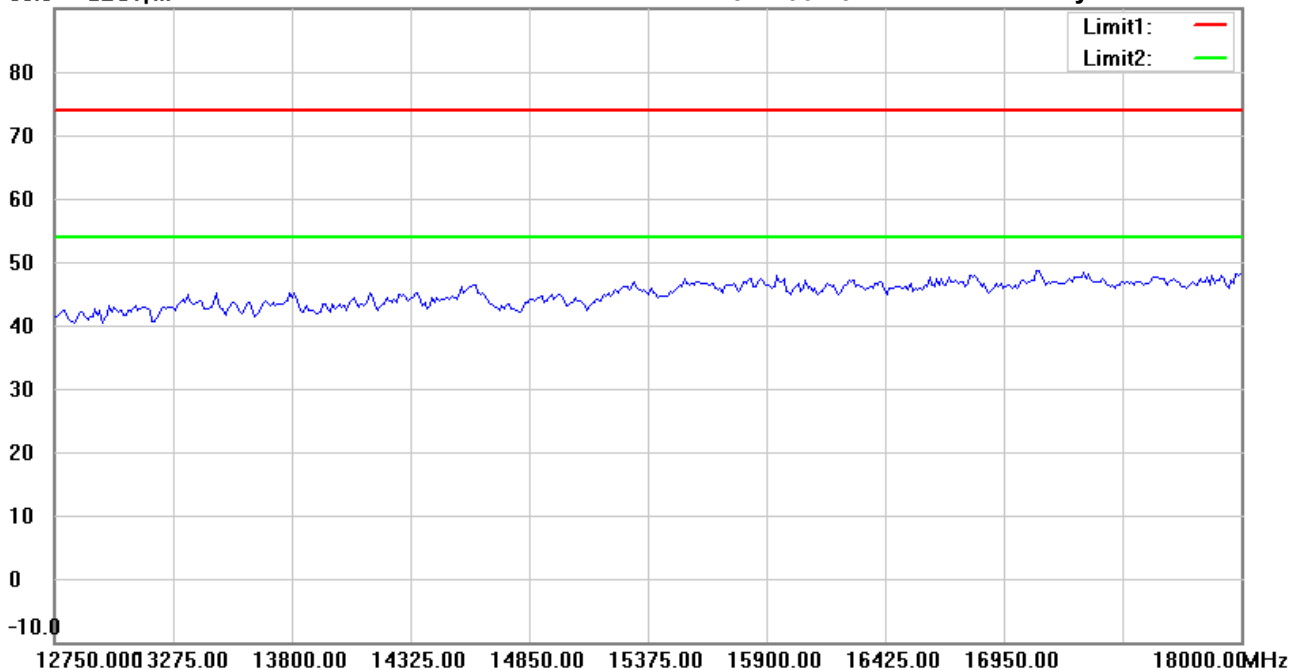

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:33:00 PM

Humidity: 60.7 %

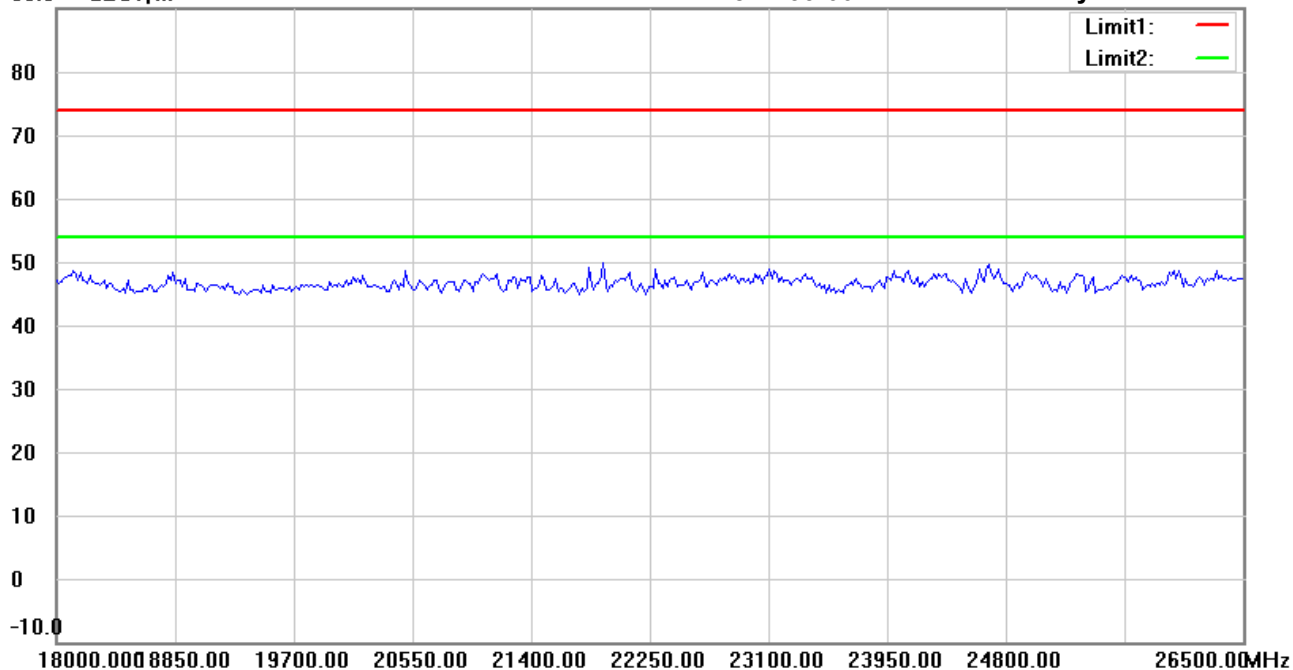

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 3/8/2022

Temperature: 21.1 °C

90.0 dBuV/m

Time: 2:36:25 PM

Humidity: 60.7 %

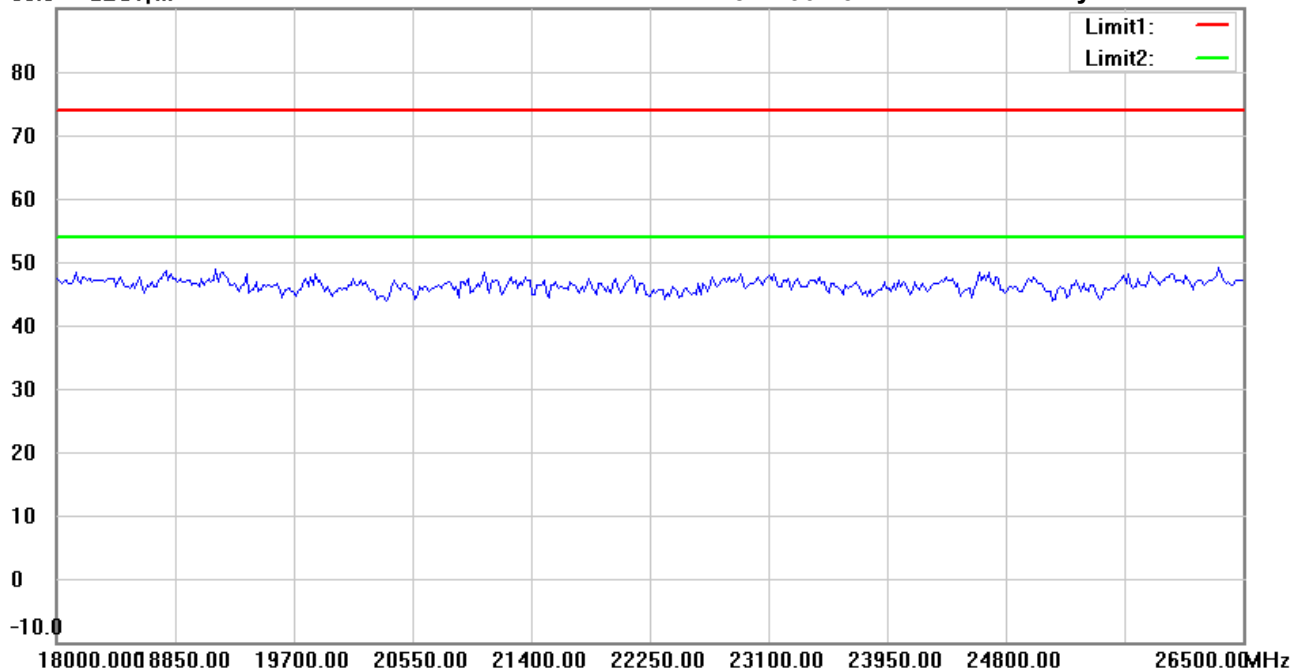

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:38:21 PM

Humidity: 53.0 %

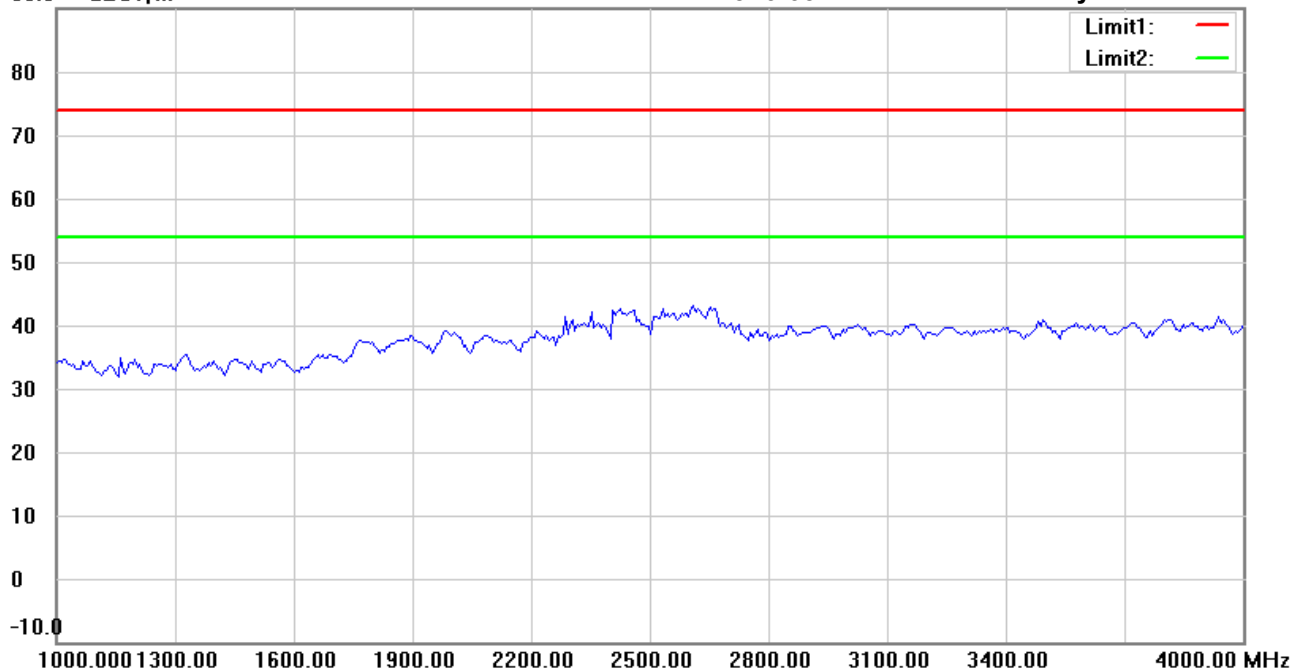

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 3/12/2022

Temperature:24.3 °C

90.0 dBuV/m

Time: 3:41:51 PM

Humidity:53.0 %

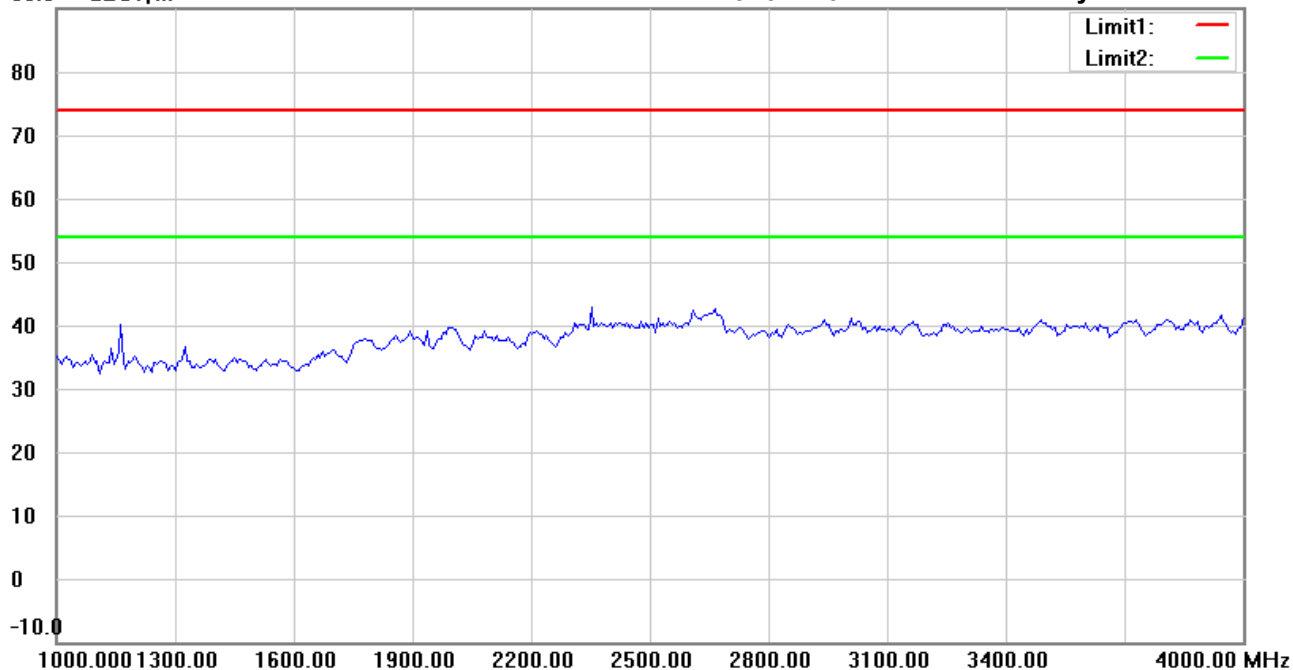

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#2


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:39:21 PM

Humidity: 53.0 %

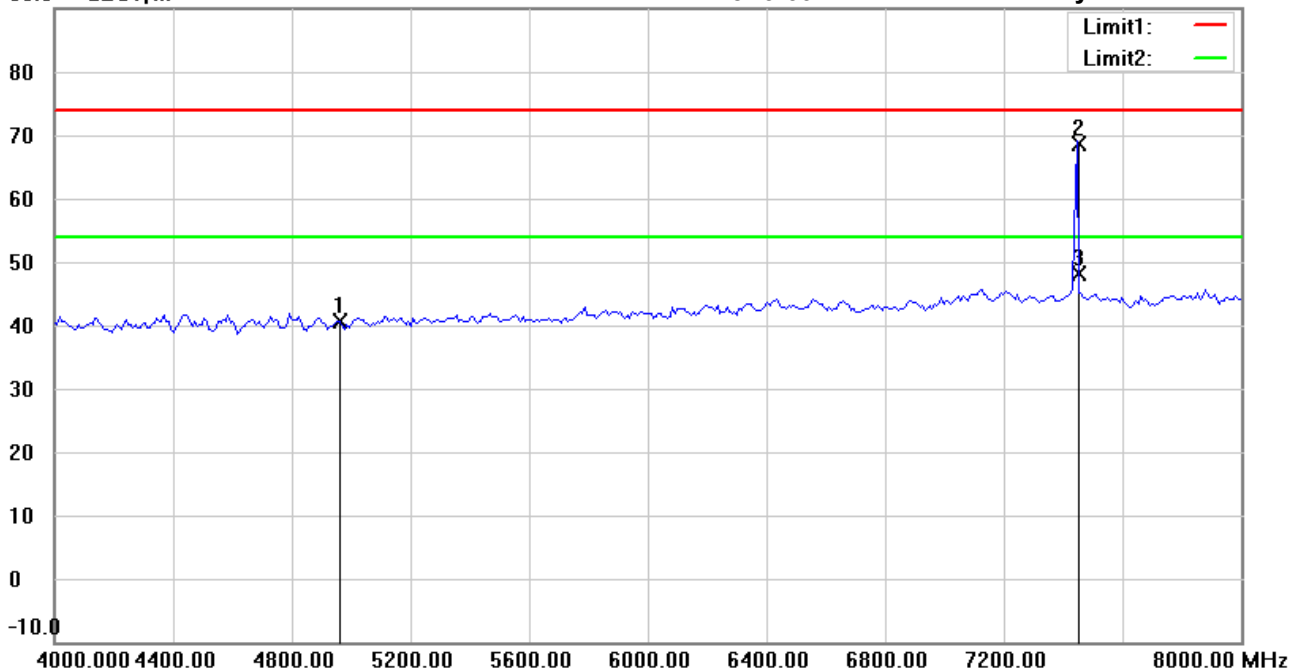

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	38.67	peak	1.91	40.58	74.00	150	200	-33.42	
*	7446.894	62.29	peak	6.26	68.55	74.00	150	334	-5.45	
	7446.894	41.77	AVG	6.26	48.03	54.00	150	334	-5.97	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:42:52 PM

Humidity: 53.0 %

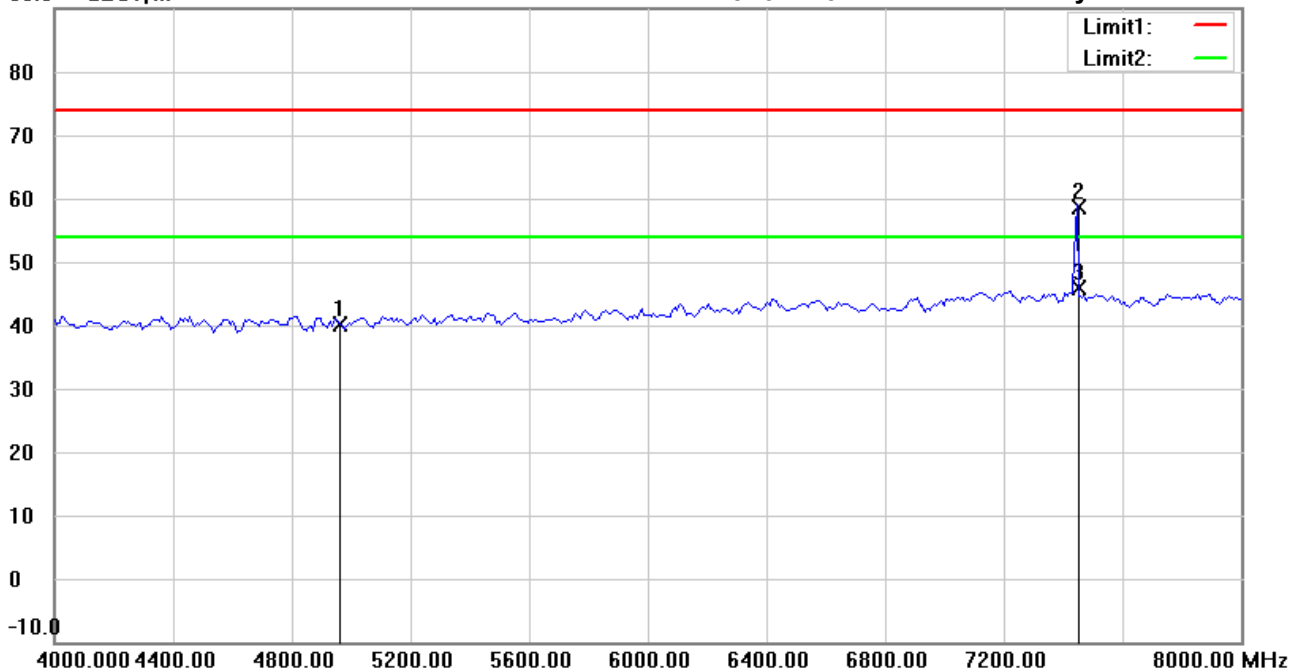

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	38.19	peak	1.91	40.10	74.00	150	180	-33.90	
	7446.894	52.32	peak	6.26	58.58	74.00	150	130	-15.42	
*	7446.894	39.67	AVG	6.26	45.93	54.00	150	130	-8.07	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:40:28 PM

Humidity: 53.0 %

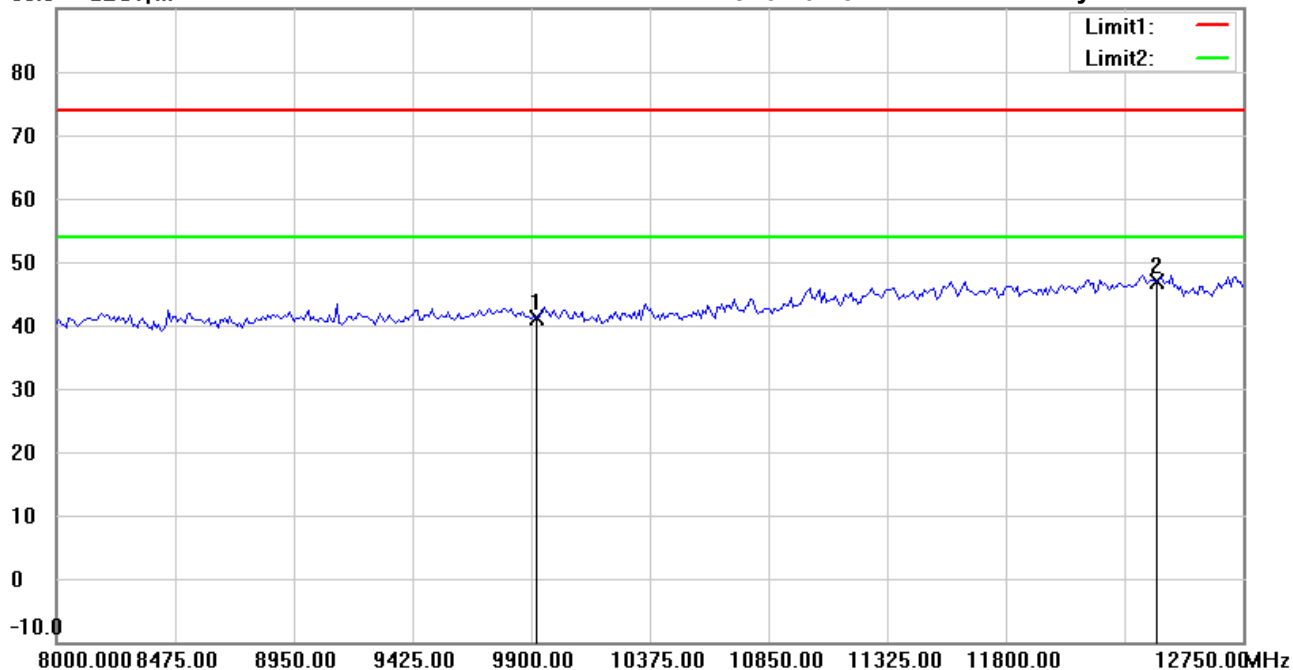

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	32.03	peak	9.11	41.14	74.00	150	117	-32.86	
*	12400.000	31.94	peak	14.87	46.81	74.00	150	62	-27.19	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #8


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:43:52 PM

Humidity: 53.0 %

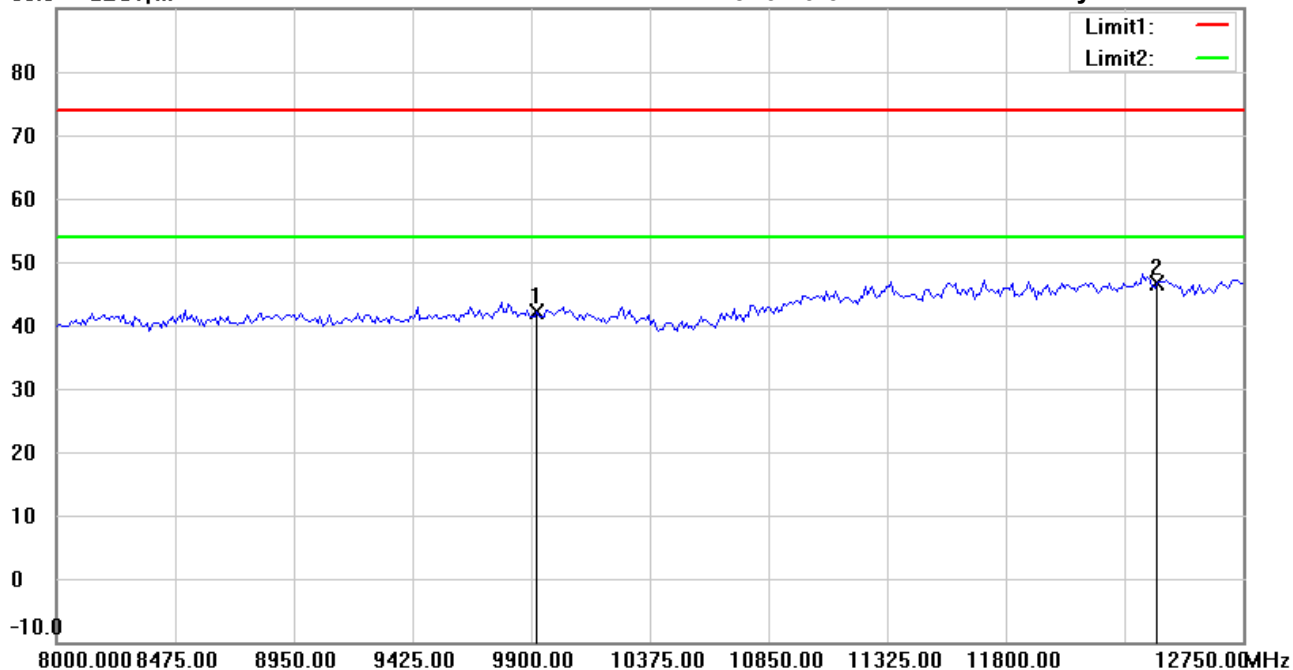

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	33.13	peak	9.11	42.24	74.00	150	18	-31.76	
*	12400.000	31.84	peak	14.87	46.71	74.00	150	332	-27.29	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #4


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:40:41 PM

Humidity: 53.0 %

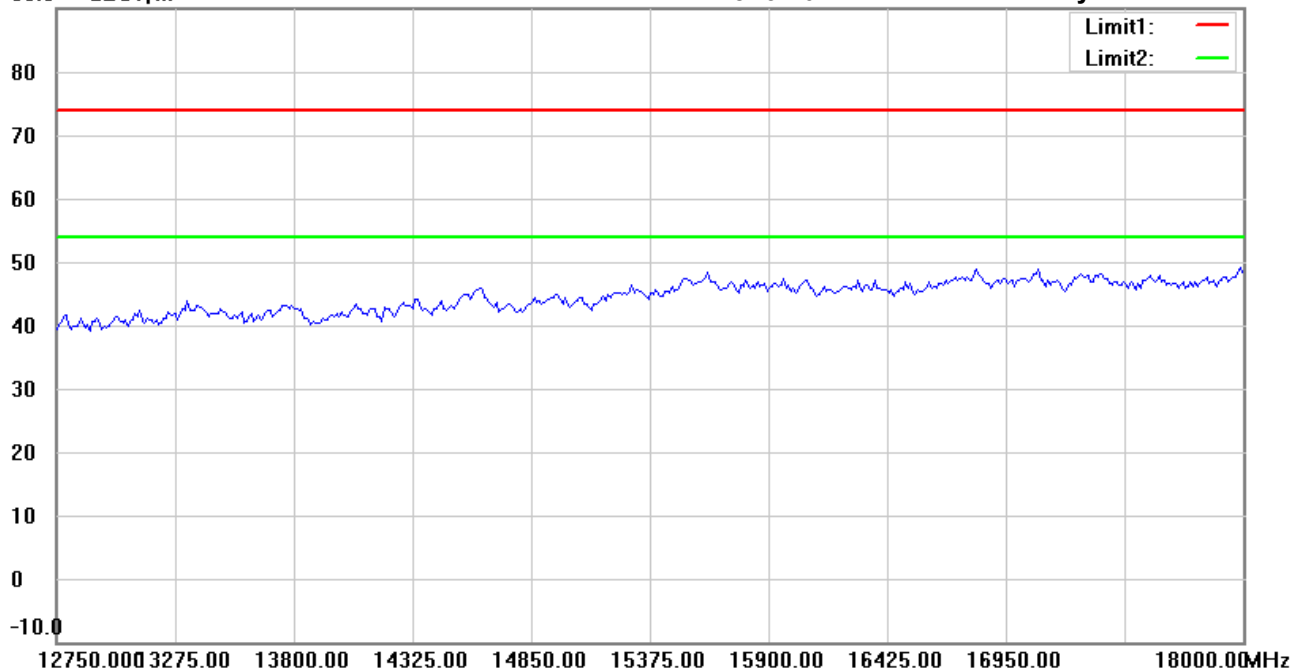

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #9


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:44:06 PM

Humidity: 53.0 %

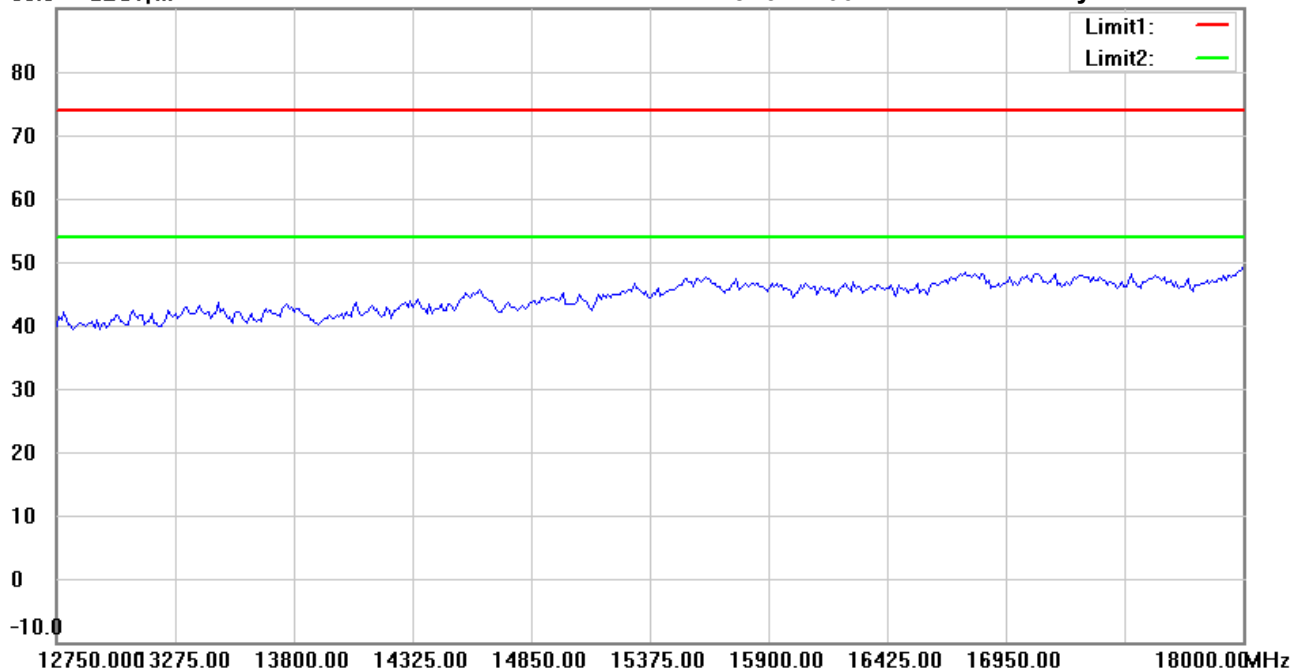

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:40:51 PM

Humidity: 53.0 %

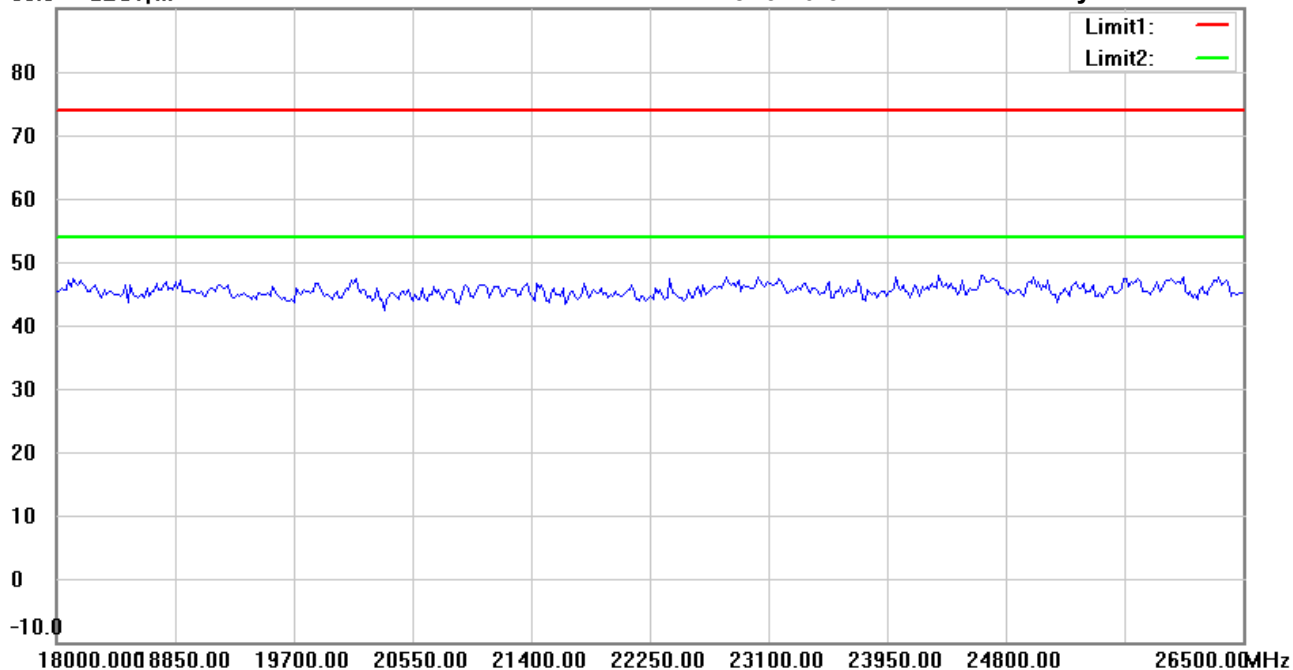

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #10


Date: 3/12/2022

Temperature: 24.3 °C

90.0 dBuV/m

Time: 3:44:16 PM

Humidity: 53.0 %

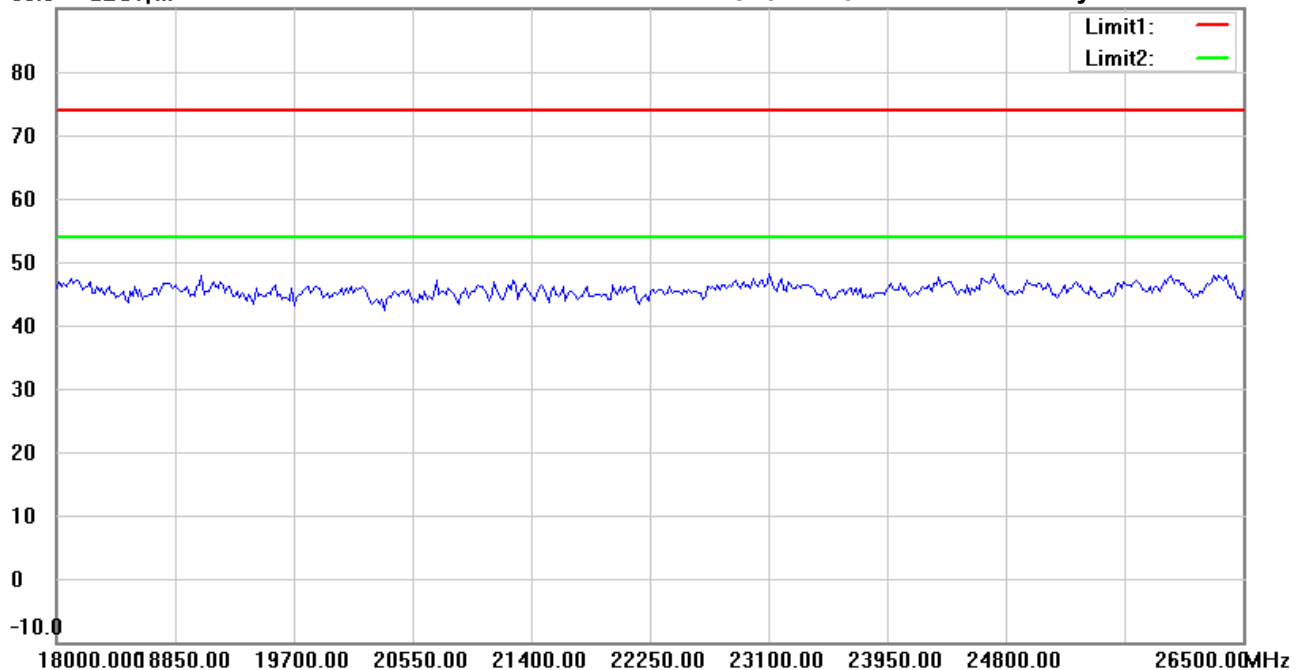

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 3/12/2022

Temperature: 24.3 °C

122.0 dBuV/m

Time: 12:51:28 PM

Humidity: 53.0 %

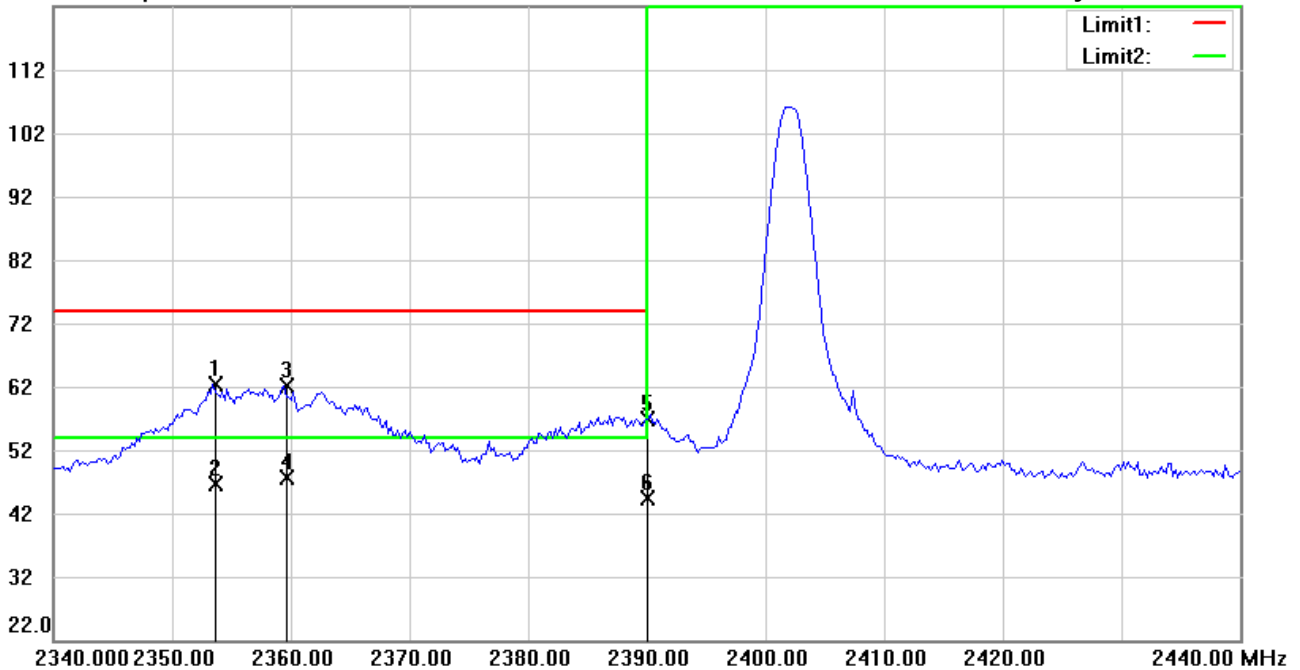

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2353.427	24.07	peak	38.34	62.41	74.00	150	21	-11.59	
	2353.427	8.21	AVG	38.34	46.55	54.00	150	21	-7.45	
	2359.439	23.66	peak	38.35	62.01	74.00	150	159	-11.99	
*	2359.439	9.31	AVG	38.35	47.66	54.00	150	159	-6.34	
	2390.000	18.49	peak	38.42	56.91	74.00	220	315	-17.09	
	2390.000	5.86	AVG	38.42	44.28	54.00	220	315	-9.72	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #2


Date: 3/12/2022

Temperature: 24.3 °C

122.0 dBuV/m

Time: 12:58:56 PM

Humidity: 53.0 %

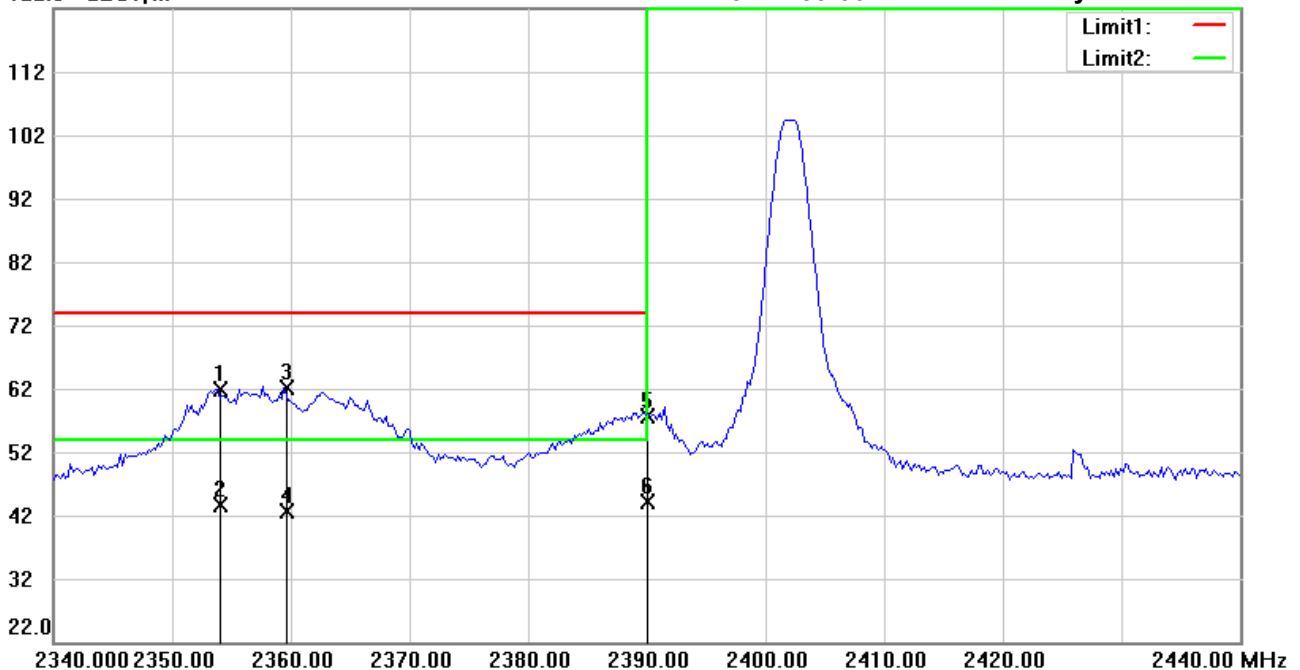

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2353.828	23.65	peak	38.34	61.99	74.00	150	30	-12.01	
	2353.828	5.39	AVG	38.34	43.73	54.00	150	30	-10.27	
	2359.439	23.78	peak	38.35	62.13	74.00	150	21	-11.87	
	2359.439	4.29	AVG	38.35	42.64	54.00	150	21	-11.36	
	2390.000	19.27	peak	38.42	57.69	74.00	150	51	-16.31	
*	2390.000	5.76	AVG	38.42	44.18	54.00	150	51	-9.82	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 3/12/2022

Temperature: 24.3 °C

122.0 dBuV/m

Time: 1:07:28 PM

Humidity: 53.0 %

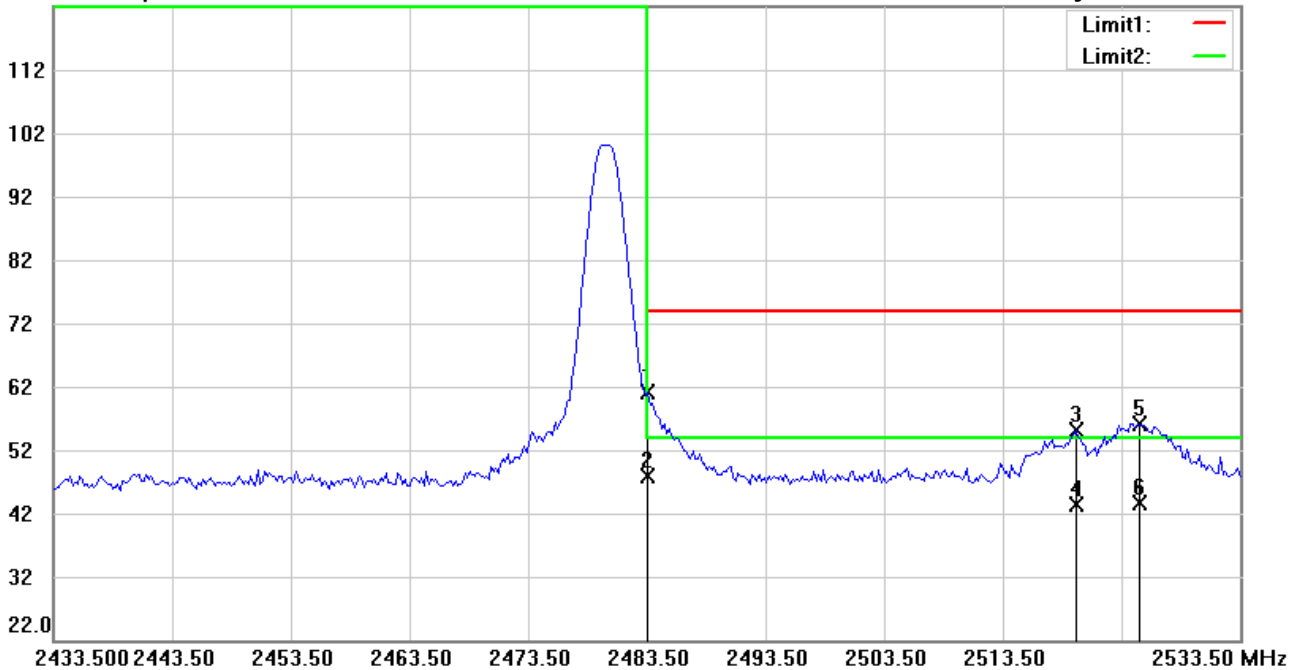

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	22.27	peak	38.75	61.02	74.00	150	335	-12.98	
*	2483.500	9.24	AVG	38.75	47.99	54.00	150	335	-6.01	
	2519.672	16.18	peak	38.83	55.01	74.00	150	12	-18.99	
	2519.672	4.57	AVG	38.83	43.40	54.00	150	12	-10.60	
	2524.883	17.31	peak	38.83	56.14	74.00	150	143	-17.86	
	2524.883	4.90	AVG	38.83	43.73	54.00	150	143	-10.27	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #2


Date: 3/12/2022

Temperature: 24.3 °C

122.0 dBuV/m

Time: 1:10:35 PM

Humidity: 53.0 %

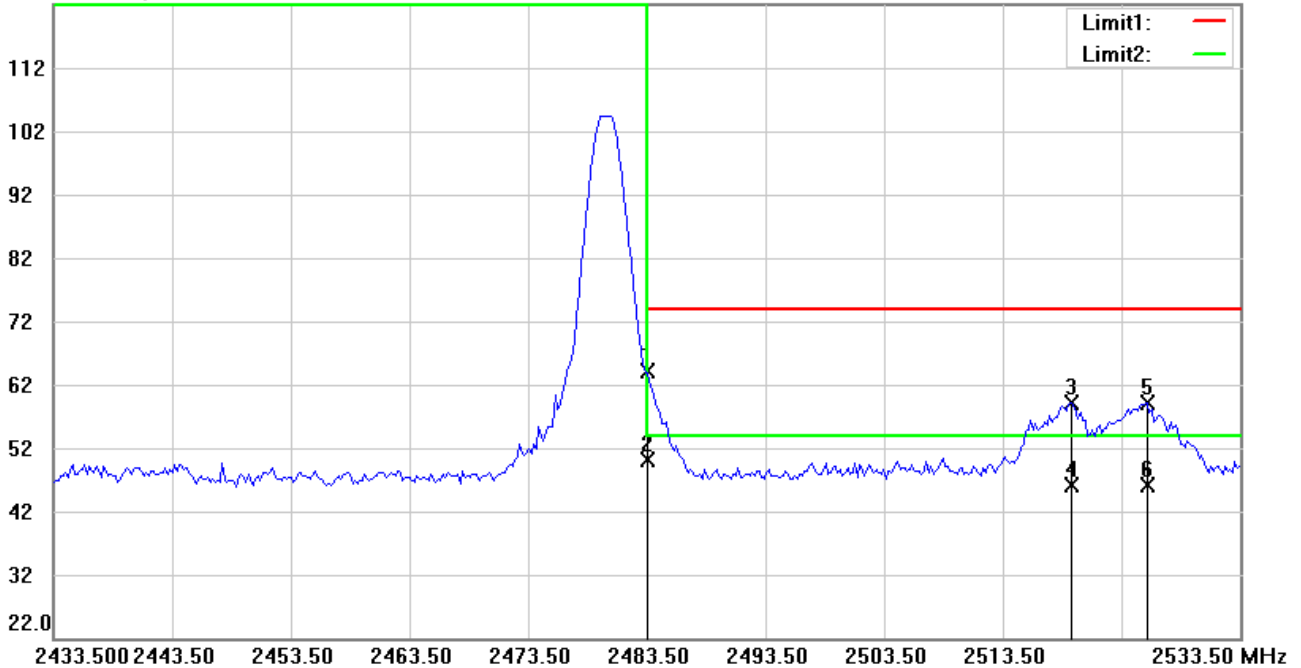

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	25.40	peak	38.75	64.15	74.00	150	55	-9.85	
*	2483.500	11.47	AVG	38.75	50.22	54.00	150	55	-3.78	
	2519.271	20.36	peak	38.83	59.19	74.00	150	137	-14.81	
	2519.271	7.33	AVG	38.83	46.16	54.00	150	137	-7.84	
	2525.684	20.24	peak	38.83	59.07	74.00	150	79	-14.93	
	2525.684	7.28	AVG	38.83	46.11	54.00	150	79	-7.89	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 3/12/2022

Temperature: 24.3 °C

122.0 dBuV/m

Time: 1:21:47 PM

Humidity: 53.0 %

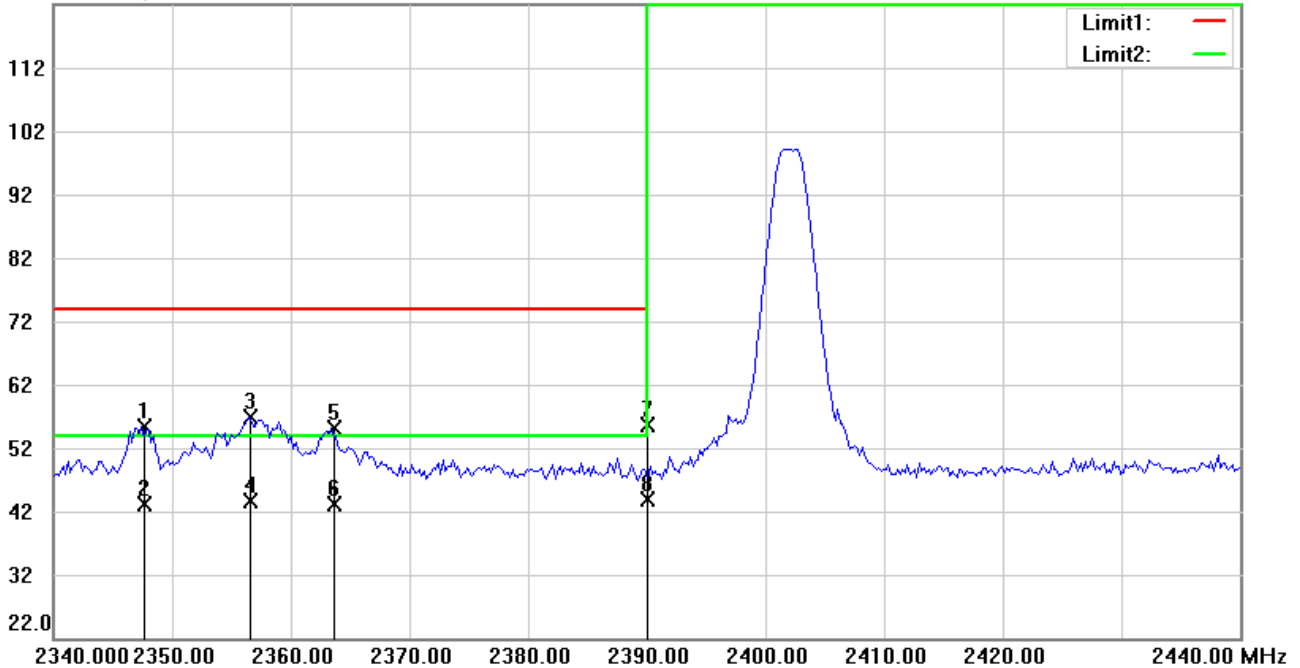

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 110 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2347.415	16.96	peak	38.32	55.28	74.00	150	304	-18.72	
	2347.415	4.72	AVG	38.32	43.04	54.00	150	304	-10.96	
	2356.433	18.53	peak	38.34	56.87	74.00	150	172	-17.13	
	2356.433	5.38	AVG	38.34	43.72	54.00	150	172	-10.28	
	2363.447	16.67	peak	38.36	55.03	74.00	150	83	-18.97	
	2363.447	4.79	AVG	38.36	43.15	54.00	150	83	-10.85	
	2390.000	17.25	peak	38.42	55.67	74.00	150	315	-18.33	
*	2390.000	5.55	AVG	38.42	43.97	54.00	150	315	-10.03	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #2


Date: 3/12/2022

Temperature: 24.3 °C

122.0 dBuV/m

Time: 1:25:06 PM

Humidity: 53.0 %

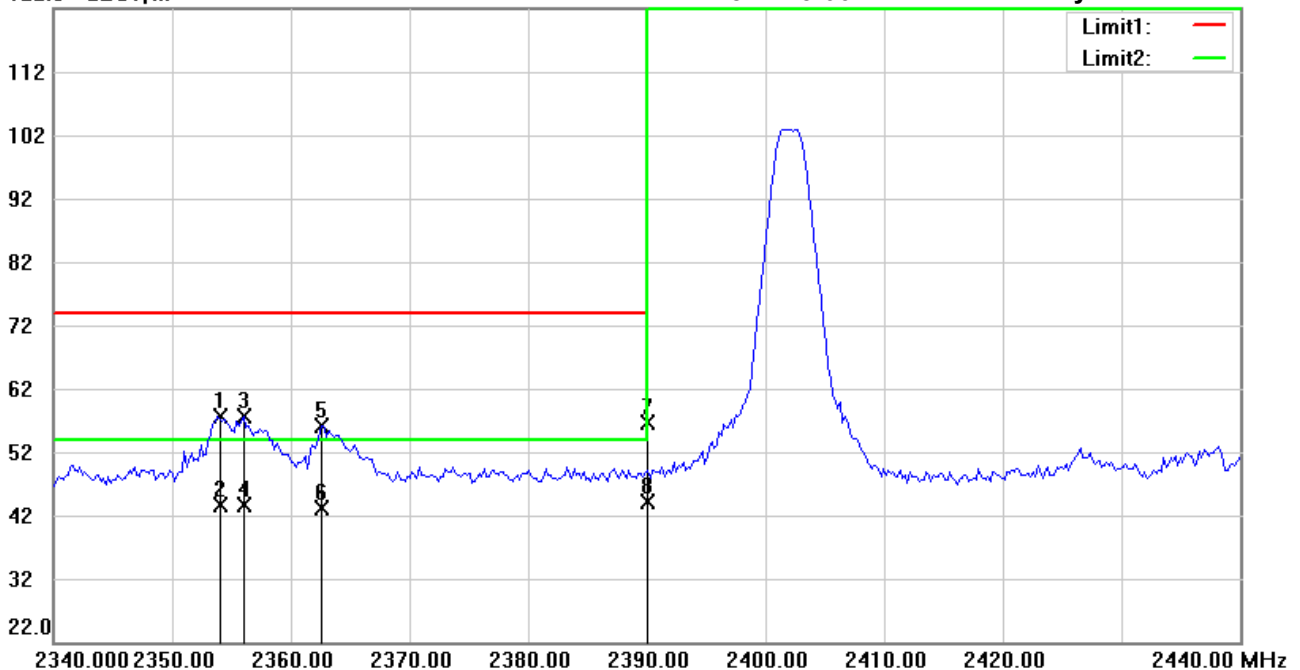

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22112-21453

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 110 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2353.828	19.28	peak	38.34	57.62	74.00	150	102	-16.38	
	2353.828	5.32	AVG	38.34	43.66	54.00	150	102	-10.34	
	2356.032	19.32	peak	38.34	57.66	74.00	150	197	-16.34	
	2356.032	5.41	AVG	38.34	43.75	54.00	150	197	-10.25	
	2362.645	17.68	peak	38.36	56.04	74.00	150	45	-17.96	
	2362.645	4.65	AVG	38.36	43.01	54.00	150	45	-10.99	
	2390.000	18.10	peak	38.42	56.52	74.00	150	55	-17.48	
*	2390.000	5.64	AVG	38.42	44.06	54.00	150	55	-9.94	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 3/12/2022

Temperature: 24.3 °C

Time: 1:15:16 PM

Humidity: 53.0 %

122.0 dBuV/m

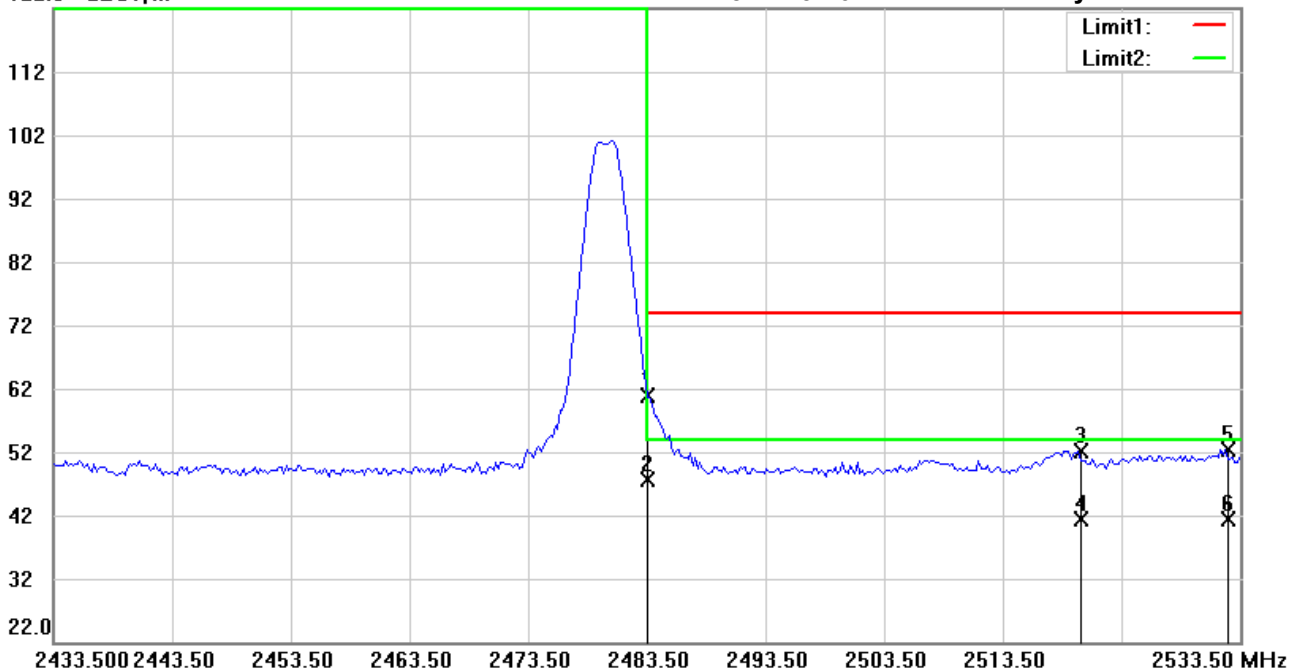

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Horizontal

Power : 110 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	22.06	peak	38.75	60.81	74.00	150	338	-13.19	
*	2483.500	8.79	AVG	38.75	47.54	54.00	150	338	-6.46	
	2519.873	13.37	peak	38.83	52.20	74.00	150	315	-21.80	
	2519.873	2.55	AVG	38.83	41.38	54.00	150	315	-12.62	
	2532.298	13.62	peak	38.84	52.46	74.00	150	213	-21.54	
	2532.298	2.61	AVG	38.84	41.45	54.00	150	213	-12.55	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #2


Date: 3/12/2022

Temperature: 24.3 °C

122.0 dBuV/m

Time: 1:18:15 PM

Humidity: 53.0 %

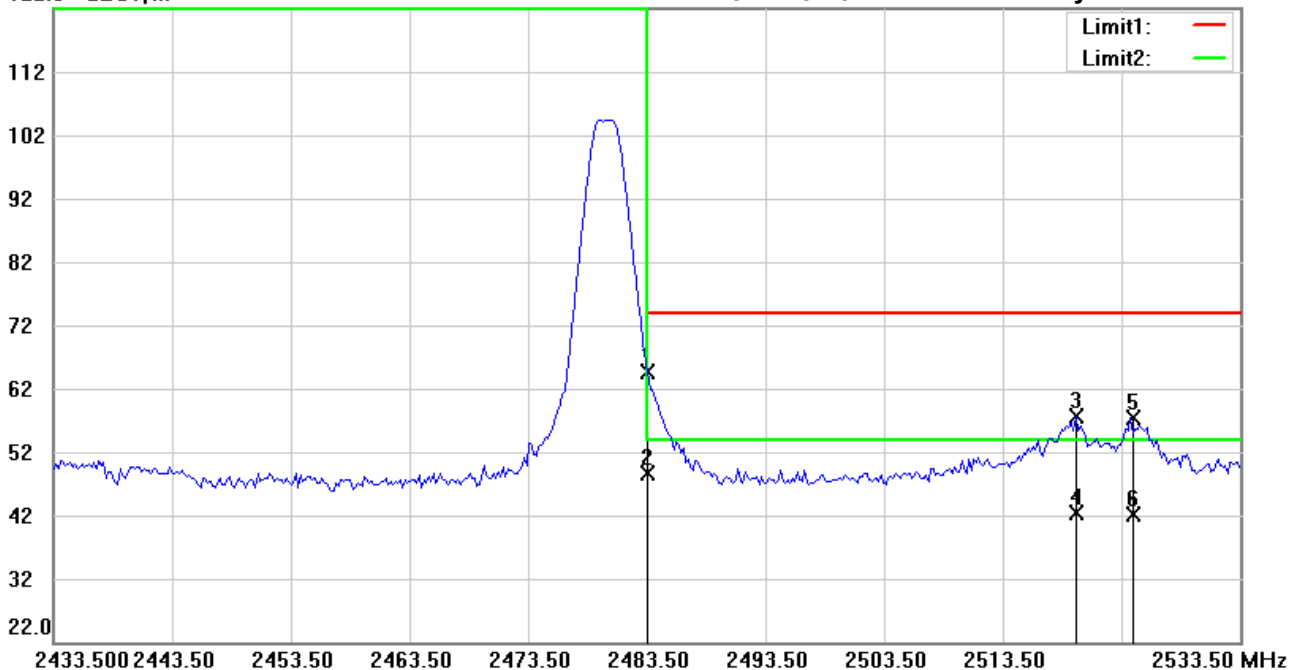

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 110 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	25.79	peak	38.75	64.54	74.00	150	55	-9.46	
*	2483.500	9.86	AVG	38.75	48.61	54.00	150	55	-5.39	
	2519.672	18.74	peak	38.83	57.57	74.00	150	137	-16.43	
	2519.672	3.51	AVG	38.83	42.34	54.00	150	137	-11.66	
	2524.282	18.53	peak	38.83	57.36	74.00	150	126	-16.64	
	2524.282	3.42	AVG	38.83	42.25	54.00	150	126	-11.75	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 3/8/2022

Temperature: 21.1 °C

122.0 dBuV/m

Time: 10:28:51 AM

Humidity: 60.7 %

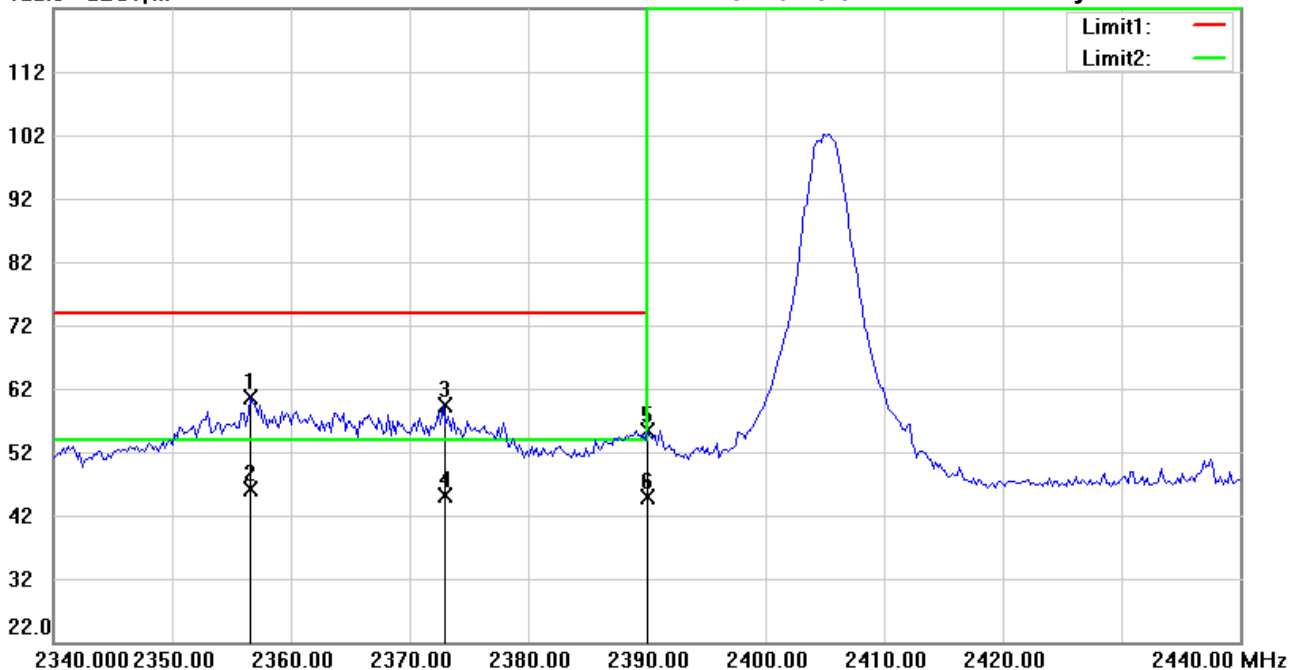

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22112-21453

M/N:

Test Mode : TX 2405MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2356.633	22.20	peak	38.34	60.54	74.00	150	104	-13.46	
*	2356.633	7.80	AVG	38.34	46.14	54.00	150	104	-7.86	
	2372.866	21.12	peak	38.38	59.50	74.00	150	112	-14.50	
	2372.866	6.72	AVG	38.38	45.10	54.00	150	112	-8.90	
	2390.000	16.97	peak	38.42	55.39	74.00	150	289	-18.61	
	2390.000	6.38	AVG	38.42	44.80	54.00	150	289	-9.20	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #2


Date: 3/8/2022

Temperature: 21.1 °C

122.0 dBuV/m

Time: 10:34:46 AM

Humidity: 60.7 %

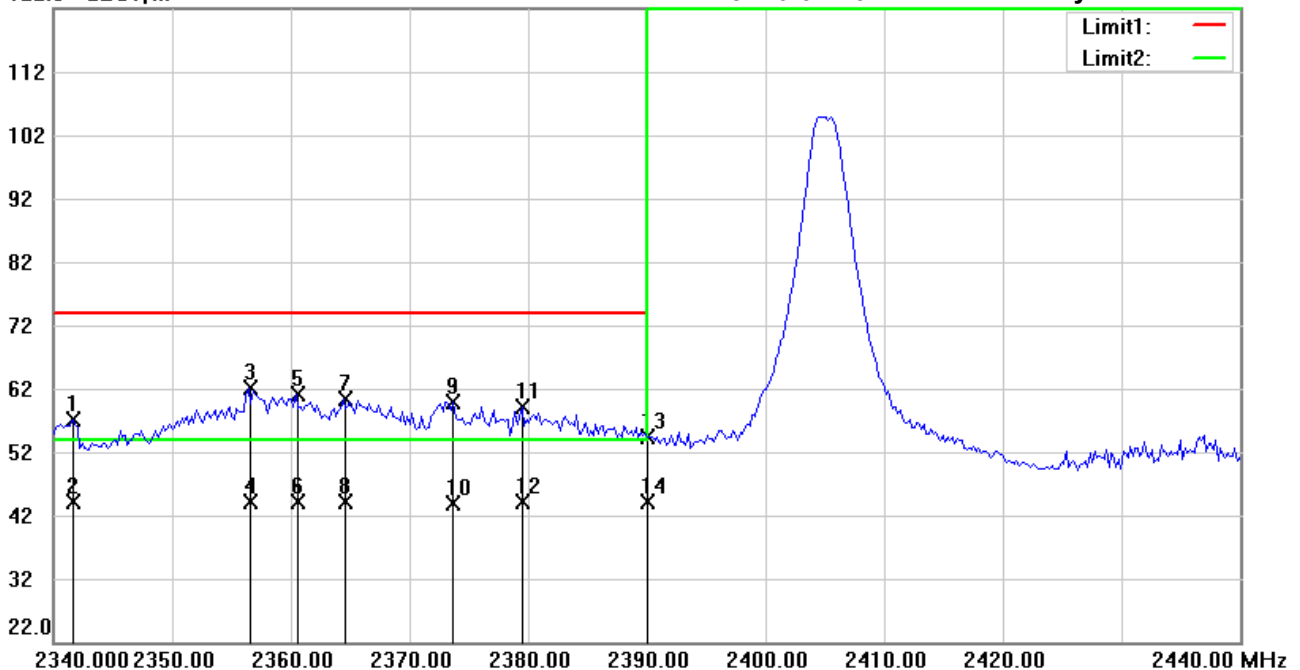

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22112-21453

M/N:

Test Mode : TX 2405MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2341.603	18.74	peak	38.31	57.05	74.00	150	227	-16.95	
*	2341.603	5.86	AVG	38.31	44.17	54.00	150	227	-9.83	
	2356.433	23.87	peak	38.34	62.21	74.00	150	130	-11.79	
	2356.433	5.79	AVG	38.34	44.13	54.00	150	130	-9.87	
	2360.441	22.74	peak	38.35	61.09	74.00	150	75	-12.91	
	2360.441	5.75	AVG	38.35	44.10	54.00	150	75	-9.90	
	2364.449	22.04	peak	38.36	60.40	74.00	150	124	-13.60	
	2364.449	5.67	AVG	38.36	44.03	54.00	150	124	-9.97	
	2373.667	21.61	peak	38.38	59.99	74.00	150	67	-14.01	
	2373.667	5.59	AVG	38.38	43.97	54.00	150	67	-10.03	
	2379.479	20.66	peak	38.39	59.05	74.00	150	125	-14.95	
	2379.479	5.73	AVG	38.39	44.12	54.00	150	125	-9.88	
	2390.000	16.08	peak	38.42	54.50	74.00	150	50	-19.50	
	2390.000	5.73	AVG	38.42	44.15	54.00	150	50	-9.85	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 3/8/2022

Temperature: 21.1 °C

Time: 10:41:43 AM

Humidity: 60.7 %

122.0 dBuV/m

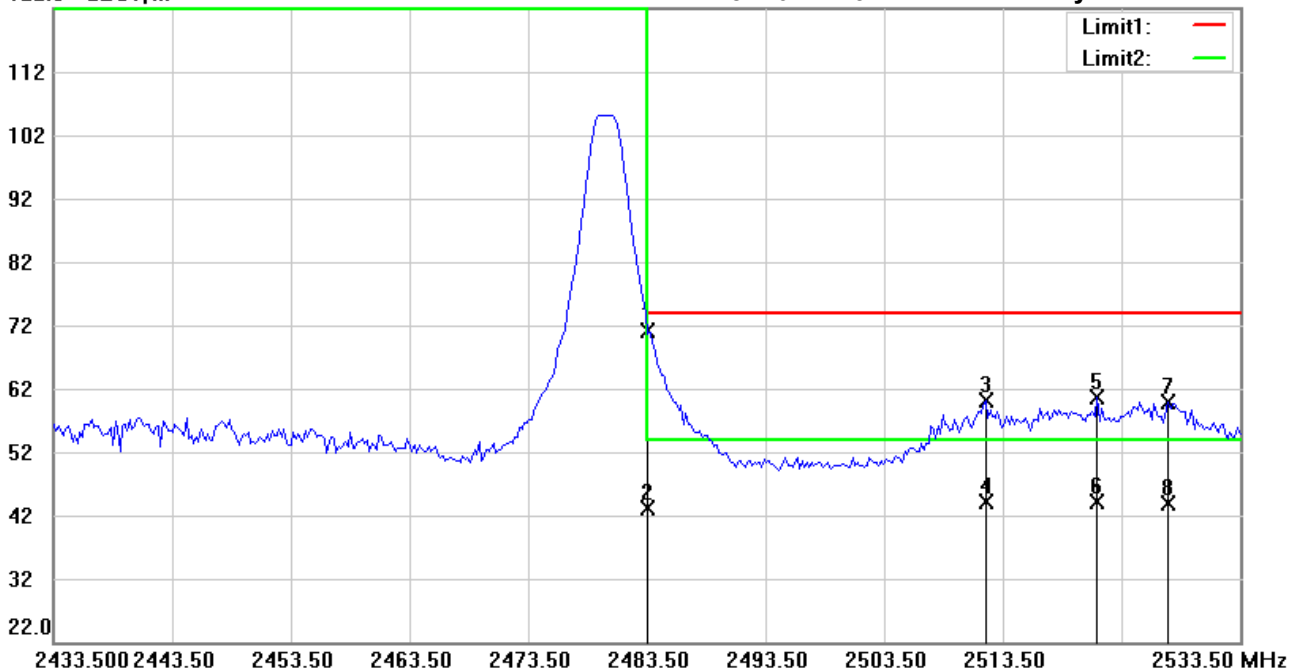

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2483.500	32.36	peak	38.75	71.11	74.00	150	230	-2.89	
	2483.500	4.31	AVG	38.75	43.06	54.00	150	230	-10.94	
	2512.057	21.22	peak	38.82	60.04	74.00	150	105	-13.96	
	2512.057	5.29	AVG	38.82	44.11	54.00	150	105	-9.89	
	2521.476	21.84	peak	38.83	60.67	74.00	150	220	-13.33	
	2521.476	5.32	AVG	38.83	44.15	54.00	150	220	-9.85	
	2527.488	20.97	peak	38.83	59.80	74.00	150	173	-14.20	
	2527.488	5.07	AVG	38.83	43.90	54.00	150	173	-10.10	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #2


Date: 3/8/2022

Temperature: 21.1 °C

122.0 dBuV/m

Time: 1:58:40 PM

Humidity: 60.7 %

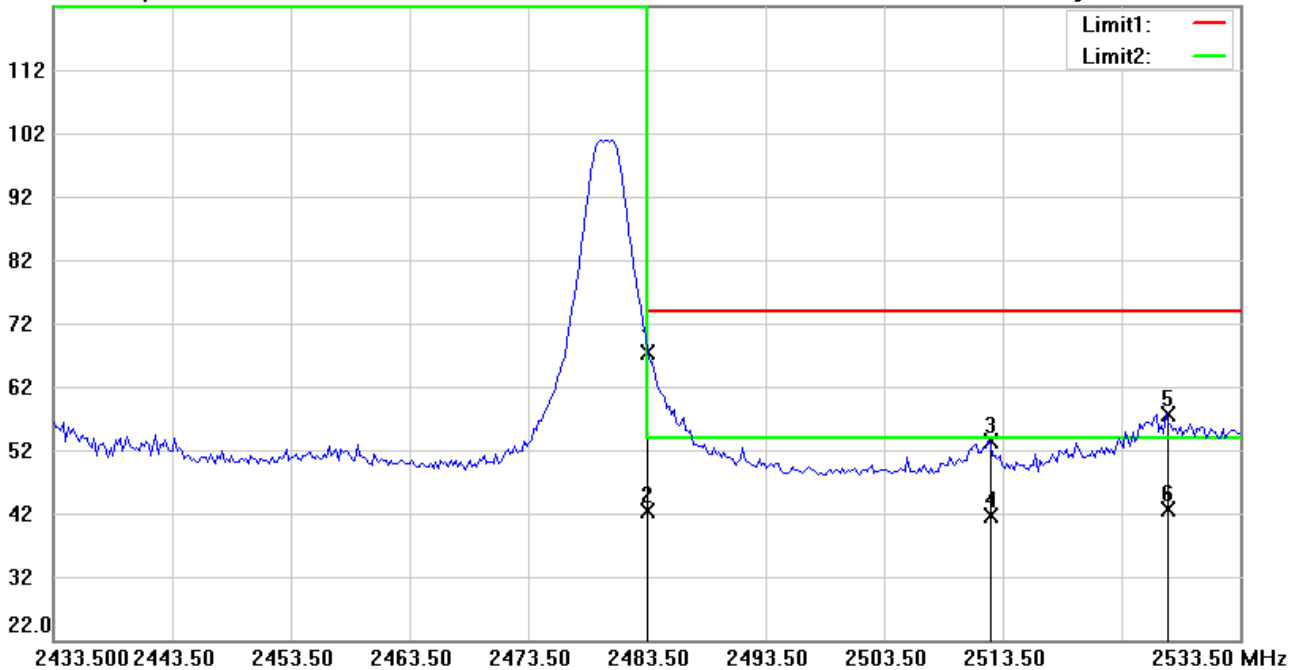

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22112-21453

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2483.500	28.51	peak	38.75	67.26	74.00	150	35	-6.74	
	2483.500	3.73	AVG	38.75	42.48	54.00	150	35	-11.52	
	2512.258	14.68	peak	38.82	53.50	74.00	150	33	-20.50	
	2512.258	2.76	AVG	38.82	41.58	54.00	150	33	-12.42	
	2527.288	18.82	peak	38.83	57.65	74.00	150	215	-16.35	
	2527.288	3.68	AVG	38.83	42.51	54.00	150	215	-11.49	

*:Maximum data x:Over limit !:over margin