

Test Report of FCC CFR 47 Part 15 Subpart C and Industry Canada RSS-247 Issue 2

On Behalf of

Graupner CO., Ltd

202Dong 8th F,18, Bucheon-ro 198beon-gil, Wonmi-gu, Bucheon-Si, Gyeonggi-do, South Korea

Product Name:	2.4GHz transmitter
Model/Type No.:	MZ-12PRO
FCC ID:	SNL-16007812
Prepared By:	Shenzhen Hongcai Testing Technology Co., Ltd. 1st-3rd Floor, Building C, Shuanghuan Xin Yi Dai Hi-Tech Industrial Park, No.8 Baoqing Road, Baolong Industrial Zone, Longgang District, Shenzhen, Guangdong, China Tel: +86-755-86337020 Fax: +86-755-86337028
Report Number:	HCT17GR174E-1
Tested Date:	July 5~10, 2017
Issued Date:	July 12, 2017
Tested By:	Jerry Zhao/ 


Reviewed By:



Owen.Yang

EMC Technical Supervisor

Approved By:



Tony Wu

EMC Technical Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 RELATED SUBMITTAL(S) / GRANT (S) AND TEST METHODOLOGY	6
1.3 TEST FACILITY	6
2. SYSTEM TEST CONFIGURATION	7
2.1 EUT CONFIGURATION	7
2.2 EUT EXERCISE	7
2.3 GENERAL TEST PROCEDURES	7
2.4 MEASUREMENT UNCERTAINTY	7
2.5 MEASURE RESULTS EXPLANATION EXAMPLE	8
2.6. INFORMATION OF EUT CONFIGURATION FOR TEST	9
2.7 LIST OF MEASURING EQUIPMENTS USED	9
3. SUMMARY OF TEST RESULTS	10
4. TEST OF AC POWER LINE CONDUCTED EMISSION	11
4.1 APPLICABLE STANDARD	11
4.2 TEST SETUP DIAGRAM	11
5. TEST OF HOPPING CHANNEL BANDWIDTH	12
5.1 APPLICABLE STANDARD	12
5.2 EUT SETUP	12
5.3 TEST EQUIPMENT LIST AND DETAILS	12
5.4 TEST PROCEDURE	12
5.5 TEST RESULT	13
6. TEST OF HOPPING CHANNEL SEPARATION	15
6.1 APPLICABLE STANDARD	15
6.2 EUT SETUP	15
6.3 TEST EQUIPMENT LIST AND DETAILS	15
6.4 TEST PROCEDURE	15
6.5 TEST RESULT	15
7. TEST OF NUMBER OF HOPPING FREQUENCY	18
7.1 APPLICABLE STANDARD	18
7.2 EUT SETUP	18
7.3 TEST EQUIPMENT LIST AND DETAILS	18
7.4 TEST PROCEDURE	18
7.5 TEST RESULT	18
8. TEST OF DWELL TIME OF EACH FREQUENCY	20
8.1 APPLICABLE STANDARD	20
8.2 EUT SETUP	20
8.3 TEST EQUIPMENT LIST AND DETAILS	20
8.4 TEST PROCEDURE	20
8.5 TEST RESULT	20
9. TEST OF MAXIMUM PEAK OUTPUT POWER	25
9.1 APPLICABLE STANDARD	25
9.2 EUT SETUP	25
9.3 TEST EQUIPMENT LIST AND DETAILS	25
9.4 TEST PROCEDURE	25
9.5 TEST RESULT	25
10. TEST OF BAND EDGES EMISSION	28
10.1 APPLICABLE STANDARD	28
10.2 EUT SETUP	28
10.3 TEST EQUIPMENT LIST AND DETAILS	28

10.4 TEST PROCEDURE	29
10.5 TEST RESULT	30
11. TEST OF SPURIOUS RADIATED EMISSION	37
11.1 APPLICABLE STANDARD	37
11.1.2 LIMITS	37
11.2 EUT SETUP	37
11.3 TEST EQUIPMENT LIST AND DETAILS	38
11.4 TEST PROCEDURE	39
11.5 TEST RESULT	39
12. ANTENNA REQUIREMENT	55
12.1 STANDARD APPLICABLE	55
12.2 ANTENNA CONNECTED CONSTRUCTION	55



1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant:	Graupner CO., Ltd
Address of applicant:	202Dong 8th F,18, Bucheon-ro 198beon-gil, Wonmi-gu, Bucheon-Si, Gyeonggi-do, South Korea
Manufacturer :	Graupner CO., Ltd
Address of manufacturer:	202Dong 8th F,18, Bucheon-ro 198beon-gil, Wonmi-gu, Bucheon-Si, Gyeonggi-do, South Korea

General Description of E.U.T

Items	Description
EUT Description:	2.4GHz transmitter
Model No.:	MZ-12PRO
Trade Name:	HoTT
Frequency Band:	2404~2480MHz
Mini Channel Spacing:	1 MHz
Number of Channels:	75
Type of Modulation:	MSK and FHSS
Antenna Gain	1.58dBi
Antenna Type:	Dipole Antenna
Rated Voltage:	DC 6V from battery

Remark: * The test data gathered are from the production sample provided by the manufacturer.

Hopping Channels:

Number	Channel	Frequency	Number	Channel	Frequency
[0]	52	2456.786	[38]	29	2433.463
[1]	70	2475.039	[39]	32	2436.505
[2]	5	2409.126	[40]	49	2453.744
[3]	25	2429.407	[41]	72	2477.067
[4]	42	2446.646	[42]	4	2408.112
[5]	47	2451.716	[43]	19	2423.323
[6]	63	2467.940	[44]	33	2437.519
[7]	9	2413.182	[45]	53	2457.800
[8]	17	2421.295	[46]	67	2471.997
[9]	44	2448.674	[47]	12	2416.225
[10]	56	2460.842	[48]	22	2426.365
[11]	61	2465.912	[49]	43	2447.660
[12]	14	2418.253	[50]	59	2463.884
[13]	24	2428.393	[51]	74	2479.095
[14]	35	2439.547	[52]	8	2412.169
[15]	48	2452.730	[53]	26	2430.421
[16]	60	2464.898	[54]	31	2435.491
[17]	10	2414.197	[55]	58	2462.870
[18]	28	2432.449	[56]	71	2476.053
[19]	34	2438.533	[57]	3	2407.098
[20]	45	2449.688	[58]	18	2422.309
[21]	62	2466.927	[59]	41	2445.632
[22]	11	2415.210	[60]	50	2454.758
[23]	20	2424.337	[61]	69	2474.025
[24]	38	2442.590	[62]	13	2417.239
[25]	46	2450.702	[63]	23	2427.379
[26]	65	2469.969	[64]	36	2440.561
[27]	0	2404.056	[65]	55	2459.828
[28]	27	2431.435	[66]	66	2470.983
[29]	30	2434.477	[67]	7	2411.154
[30]	57	2461.856	[68]	16	2420.281
[31]	64	2468.955	[69]	37	2441.575
[32]	2	2406.084	[70]	54	2458.814
[33]	21	2425.351	[71]	68	2473.011
[34]	39	2443.604	[72]	1	2405.070
[35]	51	2455.772	[73]	15	2419.267
[36]	73	2478.081	[74]	40	2444.618
[37]	6	2410.140			

1.2 Related Submittal(s) / Grant (s) and Test Methodology

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

DA 00-705: Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

RSS-GEN Issue 4: General Requirements for Compliance of Radio Apparatus.

RSS-247, Issue 2: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

1.3 Test Facility

All measurement required was performed at laboratory of Shenzhen CTL Testing Technology Co., Ltd. Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China. There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

FCC – Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December, 2013.

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions: The EUT is placed on the table, which is 0.8 m above ground plane According to the requirements in ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is placed on a turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10-2013.

2.4 Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Transmitter power conducted	+/- 0.57 dB
Transmitter power Radiated	+/- 2.20 dB
Conducted spurious emission 9KHz-40 GHz	+/- 2.20 dB
Power Line Conducted Emission	+/- 3.20 dB
Radiated Emission	+/- 4.32 dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.5 Measure Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.
 $\text{Offset} = \text{RF cable loss} + \text{attenuator factor}$

Note: Using a temporary antenna connector for the EUT when the conducted measurements are performed.

Equipment	Manufacturer	Model No.	Frequency range(GHz)	Attenuation values(dBm)
Line	Zhenjiang south electronic	RG316	1-12	0.07
			<1G	0.02
			>12G	0.95
Connector	Zhenjiang south electronic	SMA-K/N-J	1-12	0.01
			<1G	0.005
			>12G	0.03



2.6. Information of EUT Configuration for Test

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

Test Channel List:

Test Channel	Channel No.
2404	0
2440	36
2479	74

2.7 List of Measuring Equipments Used

No.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	EMI Test Receiver	R&S	ESCI	100687	2016-7-25	2017-7-24
2	EMI Test Receiver	R&S	ESPI	100097	2016-10-1	2017-10-31
3	Teo Line Single Phase Module	SCHWARZBECK	NSLK8128	8128247	2016-10-1	2017-10-31
4	Amplifier	HP	8447D	1937A02492	2016-7-25	2017-7-24
5	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	2016-7-25	2017-7-24
6	Power Sensor	Anritsu	ML2438A	1241002	2016-7-25	2017-7-24
7	Power Sensor	Anritsu	MA2411B	1207366	2016-7-25	2017-7-24
8	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2016-7-25	2017-7-24
9	Spectrum Analyzer	R&S	FSP	100397	2016-10-1	2017-10-31
10	Broadband preamplifier	SCHWARZBECK	BBV9718	9718-182	2016-7-25	2017-7-24
11	Horn Antenna	SCHWARZBECK	BBHA 9120D	0437	2016-7-25	2017-7-24
12	Horn Antenna	SCHWARZBECK	BBHA9170	0483	2016-7-25	2017-7-24

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207 IC RSS-GEN Clause 8.8	AC Power Line Conducted Emission	N/A
FCC §15.247(a)(1) IC RSS-247 Issue2 Clause 5.1	Hopping Channel Bandwidth	Pass
RSS-Gen Clause 6.6	Occupied Bandwidth	Pass
FCC §15.247(a)(1) IC RSS-247 Issue2 Clause 5.1	Hopping Channel Separation	Pass
FCC §15.247(a)(1) IC RSS-247 Issue2 Clause 5.1	Number of Hopping Frequency Used	Pass
FCC §15.247(a)(1)(iii) IC RSS-247 Issue2 Clause 5.1	Dwell Time of Each Frequency	Pass
FCC §15.247(b)(1) IC RSS-247 Issue2 Clause 5.4	Maximum Peak Output Power	Pass
FCC §15.247(d) IC RSS-247 Issue2 Clause 5.5	Band Edges Emission	Pass
FCC §15.247(d) IC RSS-247 Issue2 Clause 5.5	Spurious Radiated Emission	Pass
FCC §15.203/15.247(b)/(c) IC RSS-GEN Clause 8.3	Antenna Requirement	Pass

4. TEST OF AC POWER LINE CONDUCTED EMISSION


4.1 Applicable Standard

Refer to FCC §15.207, RSS-GEN Clause 8.8.

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 Test Setup Diagram

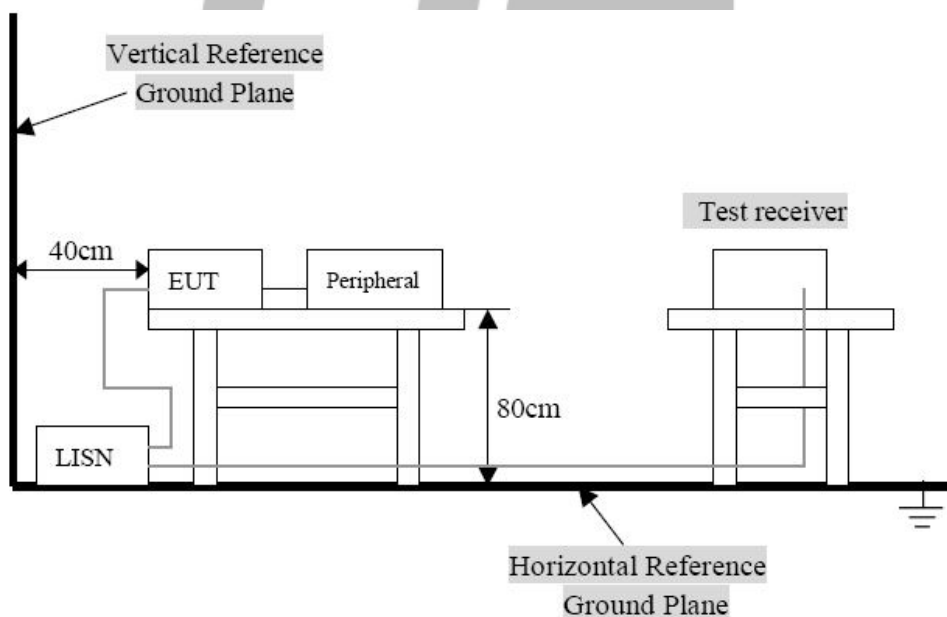

Remark: The EUT was connected to a 120VAC/ 60Hz power source. Not applicable, The EUT is powered by battery.

5. Test of Hopping Channel Bandwidth

5.1 Applicable Standard

Section 15.247(a)(1), RSS-247 Issue2 Clause 5.1, RSS-Gen Clause 6.6:
FHSS shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSS operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater

5.2 EUT Setup



5.3 Test Equipment List and Details

See section 2.7.

5.4 Test Procedure

1. Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = Auto

Detector function = peak

Trace = max hold


2. The spectrum width with level higher than 20dB below the peak level.
3. Repeat above 1~3 points for the middle and highest channel of the EUT.

5.5 Test Result


Temperature (°C) : 22~23	EUT: 2.4GHz transmitter
Humidity (%RH) : 50~54	M/N: MZ-12PRO
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Channel No.	Frequency (MHz)	99%OBW (MHz)	20dB Bandwidth (kHz)	Min. Limit (kHz)
FHSS	Low	2404.100	0.546	348	>25
FHSS	Middle	2440.591	0.540	396	>25
FHSS	High	2479.130	0.534	354	>25


Channel Low:

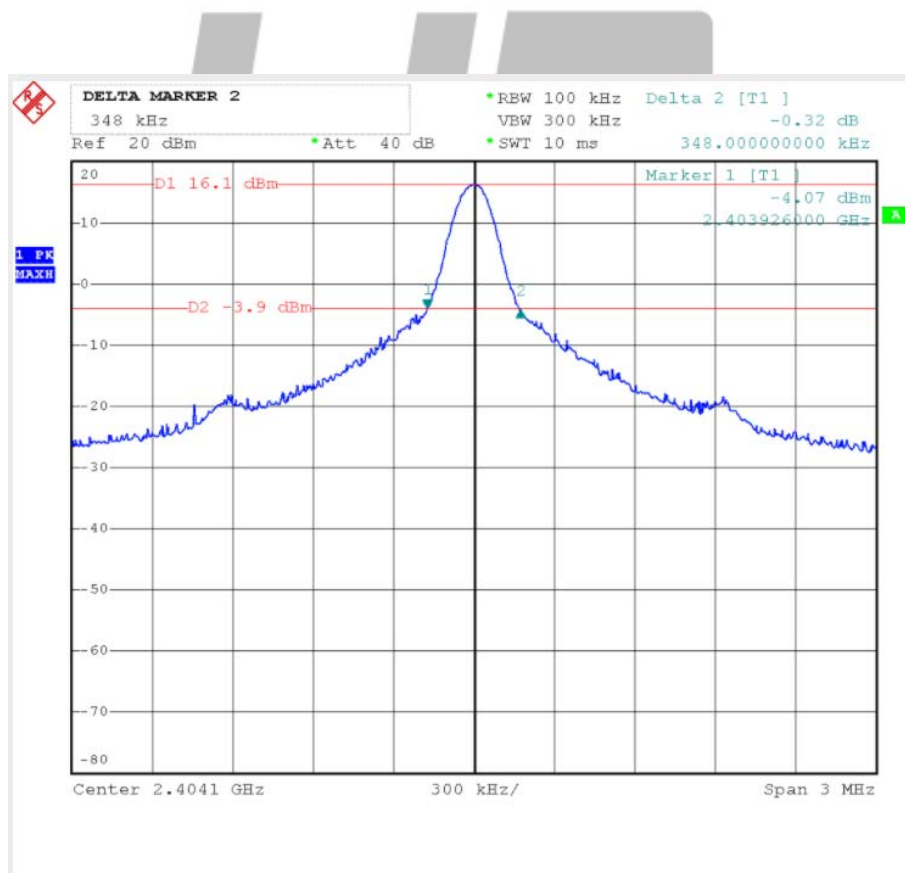

Channel Middle:

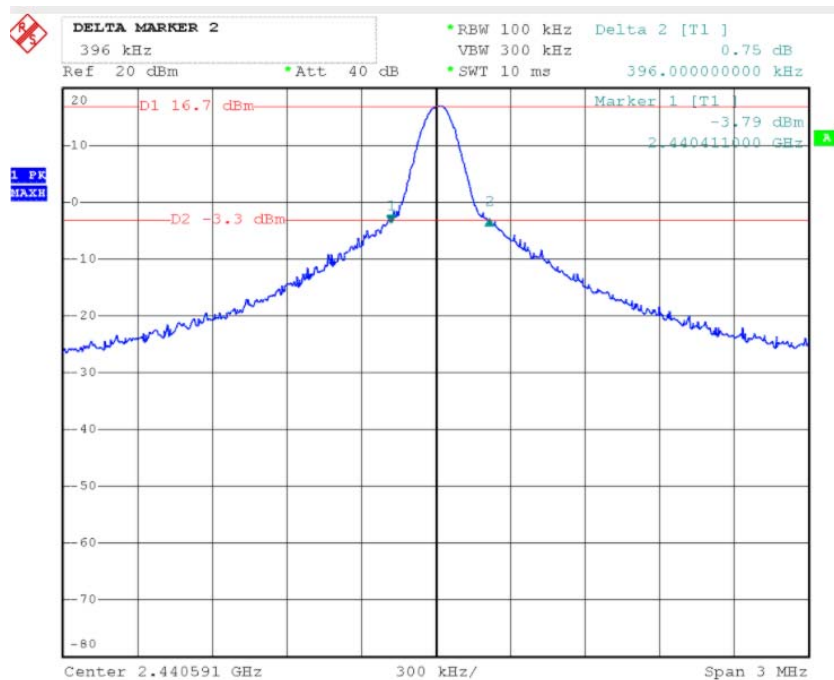

Channel High:

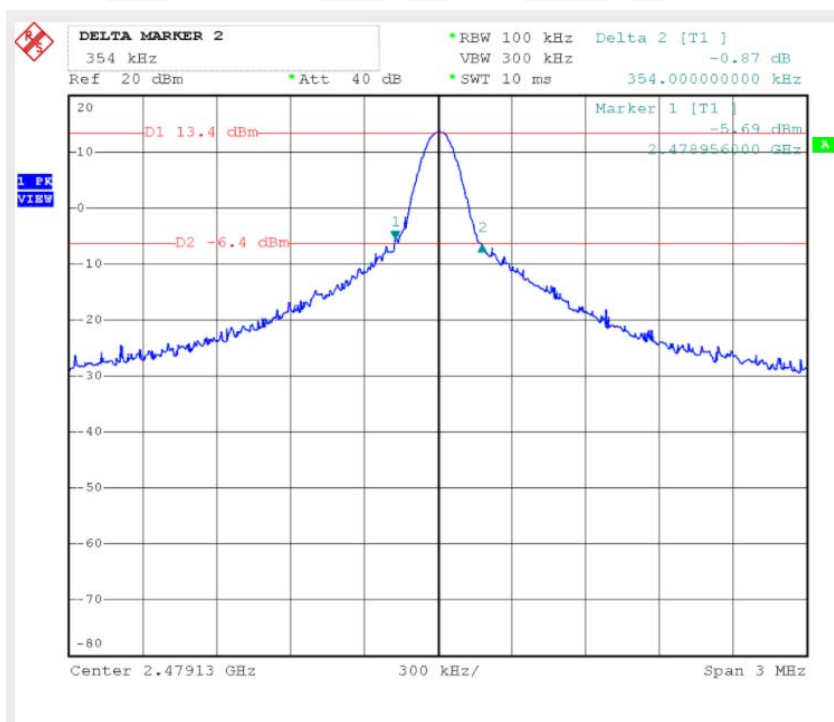

6. Test of Hopping Channel Separation

6.1 Applicable Standard

Section 15.247(a)(1), RSS-247 Issue2 Clause 5.1: FHSS shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSS operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater

6.2 EUT Setup



6.3 Test Equipment List and Details

See section 2.7.

6.4 Test Procedure


1. The EUT must have its hopping function enabled.
2. Use the following spectrum analyzer settings:
 Span = wide enough to capture the peaks of two adjacent channels
 Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span
 Video (or Average) Bandwidth (VBW) $\geq$ RBW
 Sweep = auto
 Detector function = peak
 Trace = max hold
3. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

6.5 Test Result


Temperature (°C) : 22~23	EUT: 2.4GHz transmitter
Humidity (%RH) : 50~54	M/N: MZ-12PRO
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Frequency (MHz)	Channel Separation (MHz)
FHSS	2404.056~2405.056	1.024
FHSS	2439.561~2441.061	0.956
FHSS	2478.595~2479.095	1.012


Channel Low:

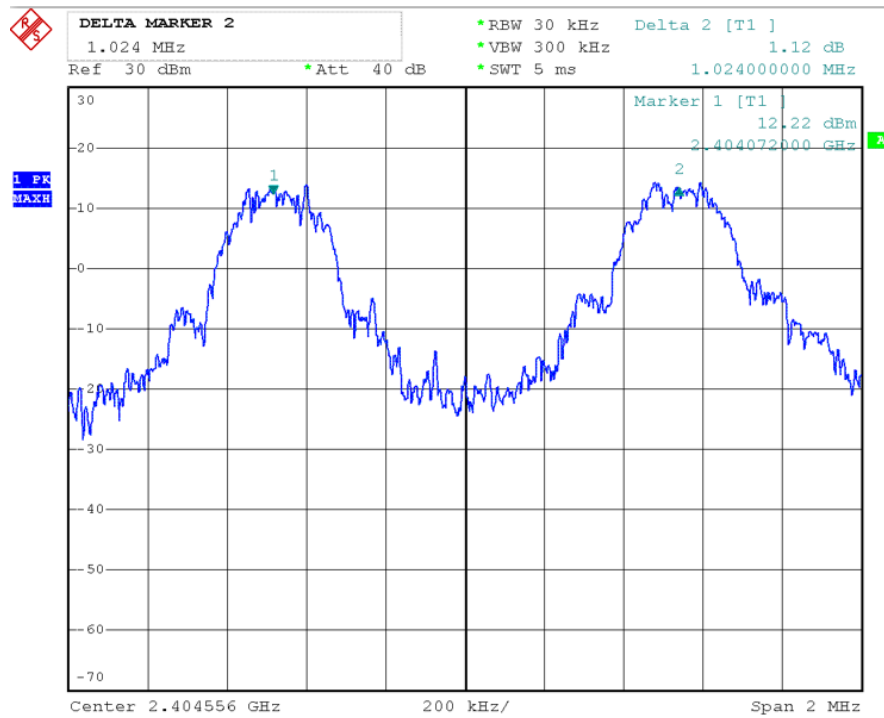

Channel Middle:

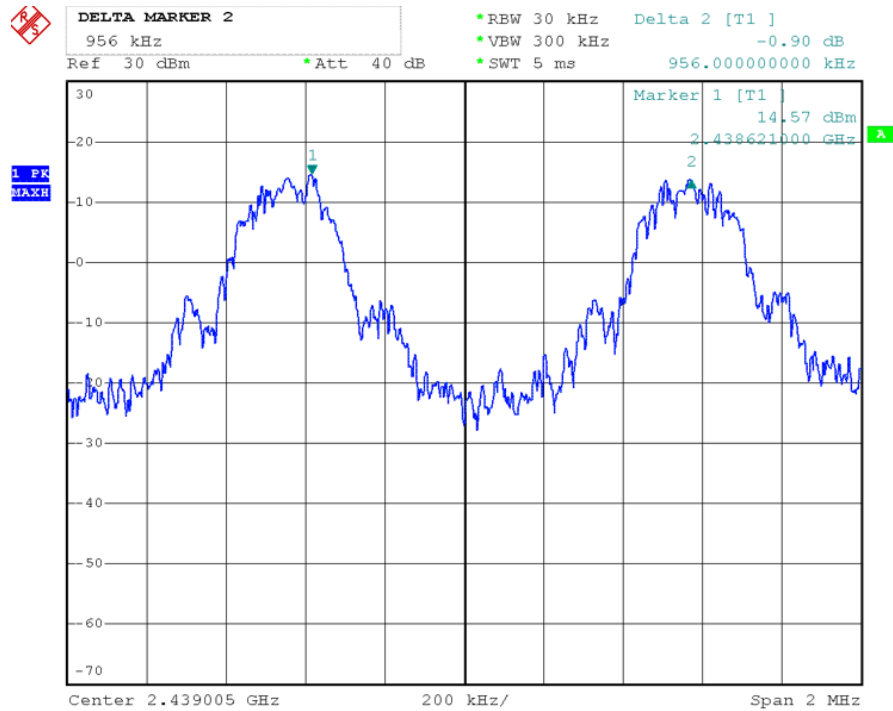

Channel High:

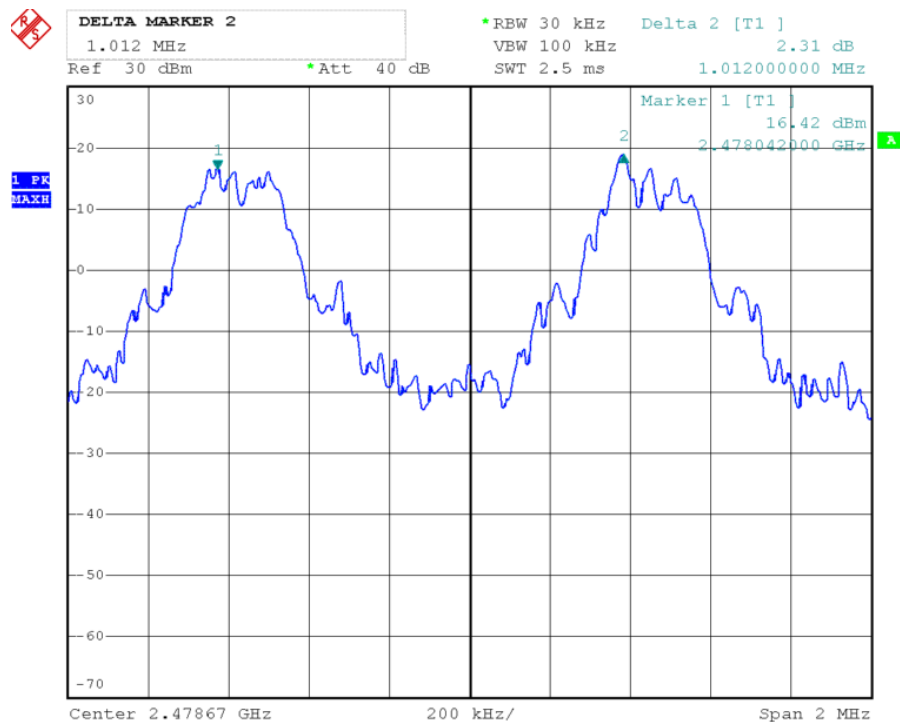


7. Test of Number of Hopping Frequency

7.1 Applicable Standard

Section 15.247(a)(1)(iii), RSS-247 Issue2 Clause 5.1: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 15 non-overlapping hopping channels. Frequency hopping system which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping system may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

7.2 EUT Setup

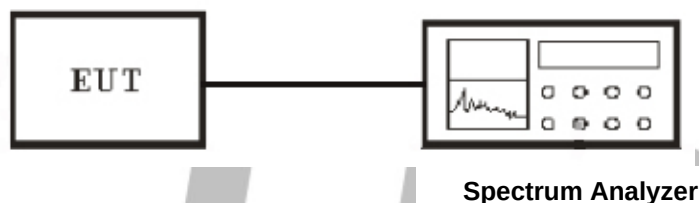

7.3 Test Equipment List and Details

See section 2.7.

7.4 Test Procedure

1. The EUT must have its hopping function enabled.

2. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = Auto

Detector function = peak

Trace = max hold


3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 32 non-overlapping channels.

4. Repeat above 1~3 points for the middle and highest channel of the EUT.

7.5 Test Result

Temperature (°C) : 22~23	EUT: 2.4GHz transmitter
Humidity (%RH) : 50~54	M/N: MZ-12PRO
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Frequency (MHz)	Number of Hopping Channels	Min. Limit
FHSS	2404.056~2479.095	75	≥15

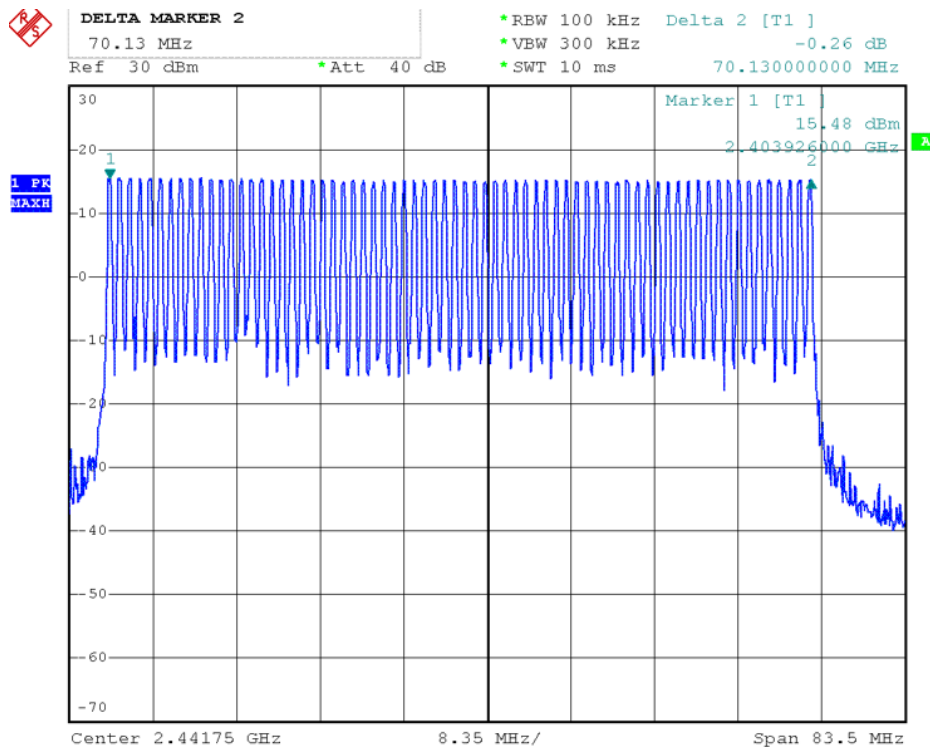


8. Test of Dwell Time of Each Frequency

8.1 Applicable Standard

Section 15.247(a)(1)(iii), RSS-247 Issue2 Clause 5.1: For frequency hopping systems operating in the 2400-2483.5 MHz band The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

8.2 EUT Setup

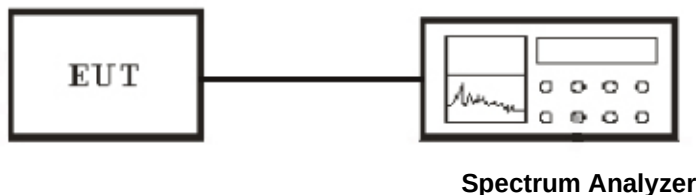

8.3 Test Equipment List and Details

See section 2.7.

8.4 Test Procedure

1. The EUT must have its hopping function enabled.
2. Use the following spectrum analyzer settings:
 - Span = zero span, centered on a hopping channel
 - RBW = 1 MHz
 - VBW $\geq$ RBW
 - Sweep = as necessary to capture the entire dwell time per hopping channel
 - Detector function = peak
 - Trace = max hold
3. Measure the maximum time duration of one single pulse.

8.5 Test Result

Temperature (°C) : 22~23	EUT: 2.4GHz transmitter
Humidity (%RH) : 50~54	M/N: MZ-12PRO
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Channel No.	Frequency (MHz)	Dwell Time (ms)	Limit (ms)
FHSS	Low	2404.056	159.96	400
FHSS	Middle	2440.056	157.38	400
FHSS	High	2479.095	157.38	400

A period time = 0.4 (s) * 75= 30 (s)

CH Low:
N=43

Time slot =3.72(ms)
Dwell time=N*T= 43*3.69=159.96 (ms)

CH Mid:
N=43



Time slot =3.66(ms)
Dwell time=N*T= 43*3.69=157.38(ms)

CH High:
N=43



Time slot =3.66(ms)
Dwell time=N*T= 43*3.69=157.38(ms)





Channel Low:

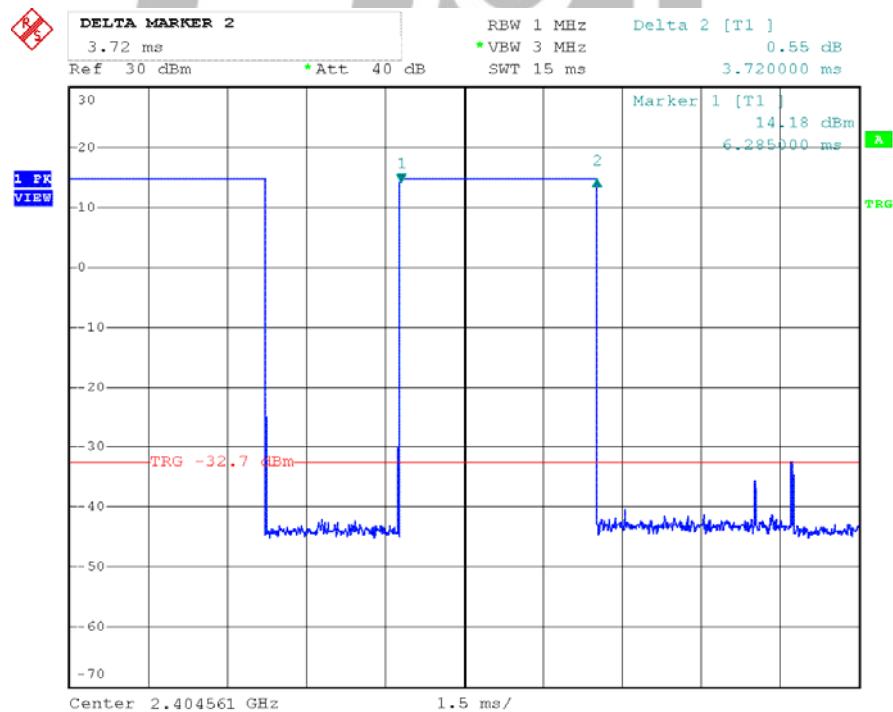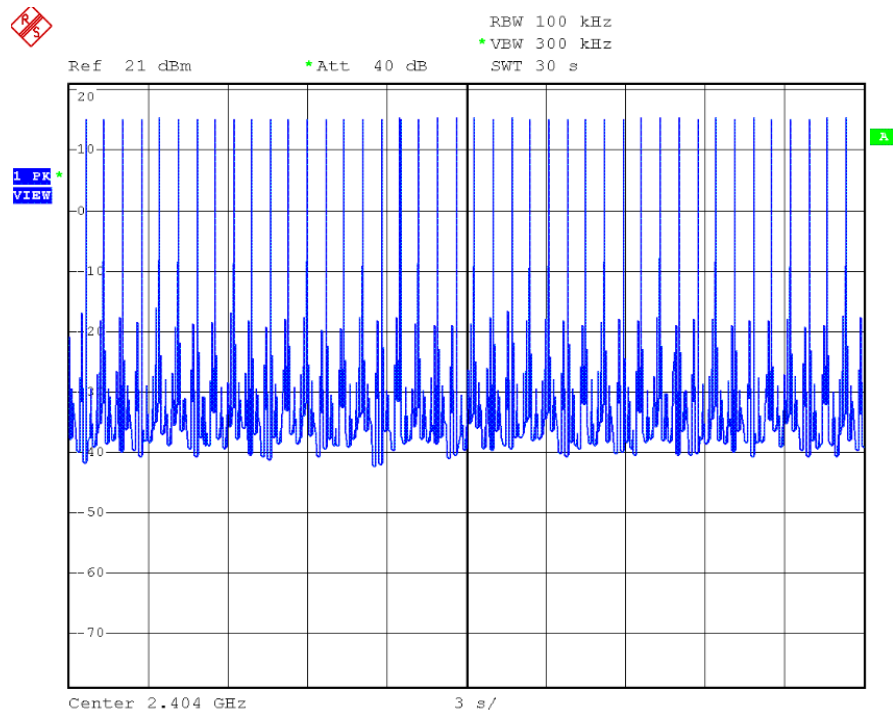

Channel Middle:

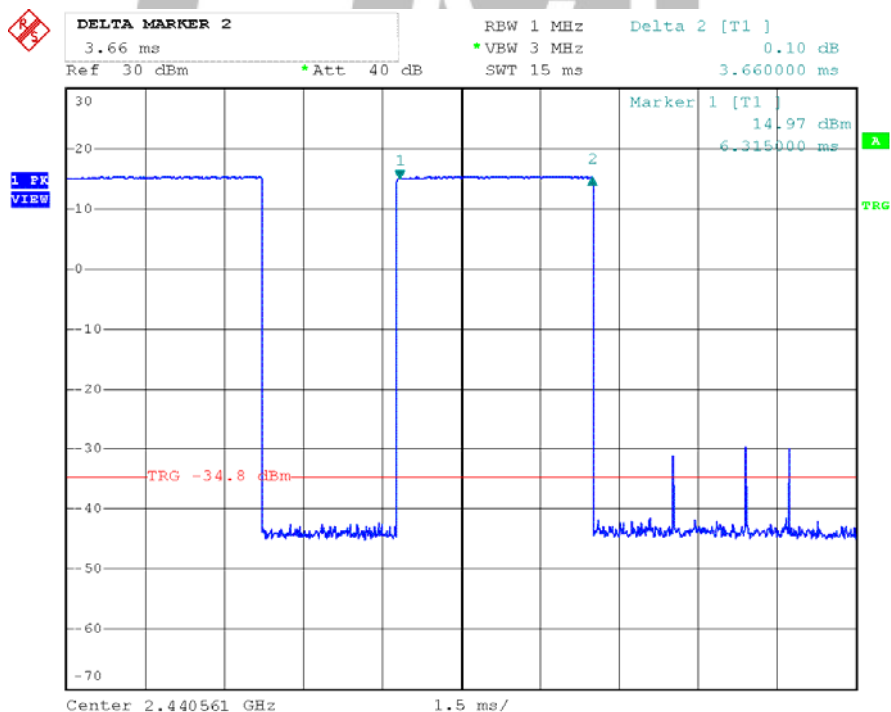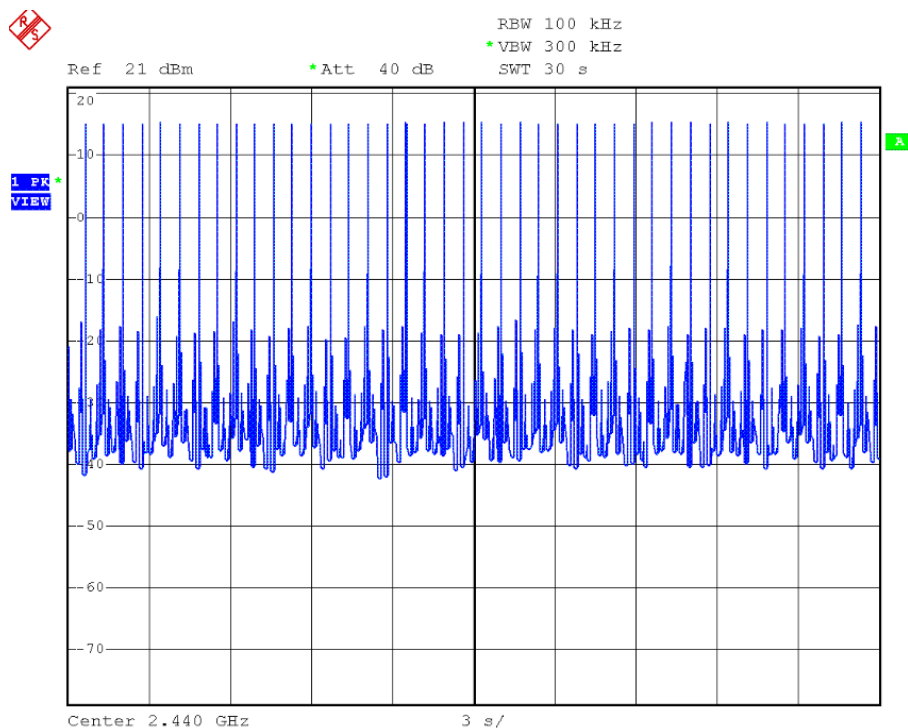

Channel High:

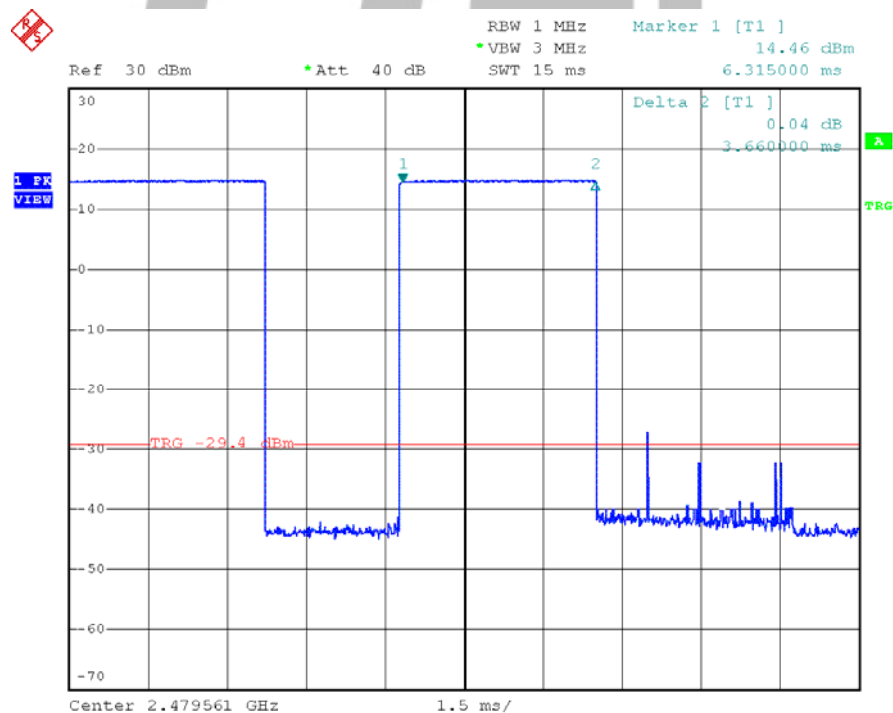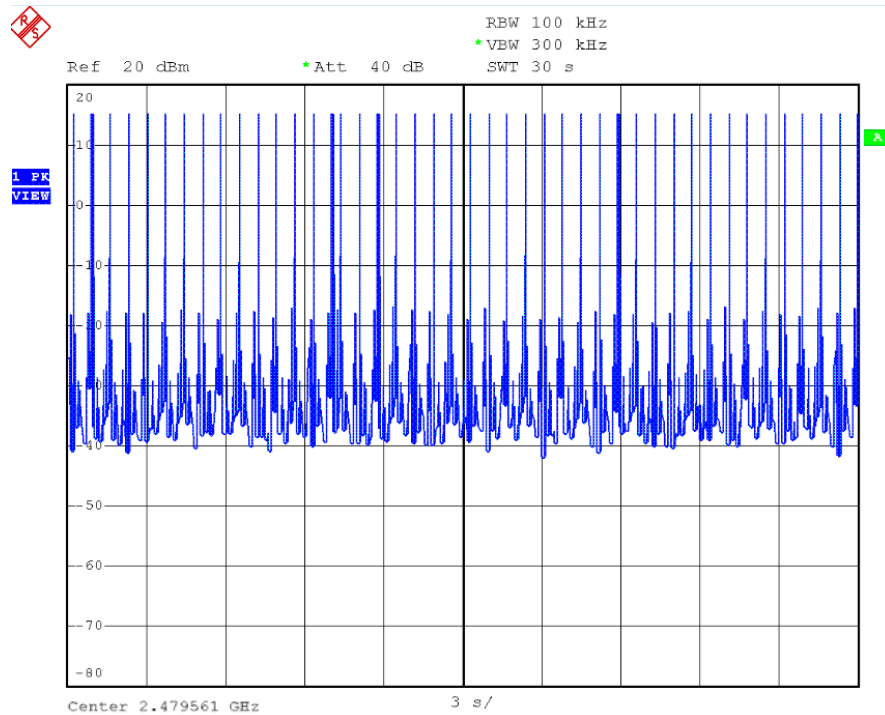


9. Test of Maximum Peak Output Power

9.1 Applicable Standard

Section 15.247(b)(1), RSS-247 Issue2 Clause 5.4: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt. For all other frequency hopping systems in this frequency band, The maximum peak output power shall not exceed 0.125 watt.

9.2 EUT Setup

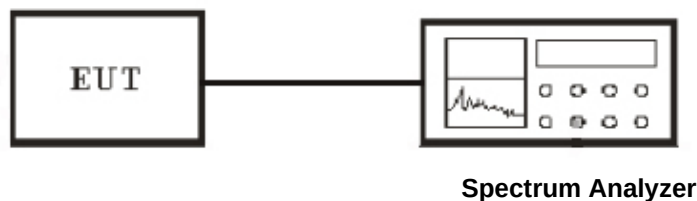

9.3 Test Equipment List and Details

See section 2.7.

9.4 Test Procedure


1. The transmitter output was connected to the peak power meter and recorded the peak value.
2. Peak power meter parameter set to auto attenuator and filter is the same as.
3. Repeated the 1 for the middle and highest channel of the EUT.

9.5 Test Result


Temperature (°C) : 22~23	EUT: 2.4GHz transmitter
Humidity (%RH) : 50~54	M/N: MZ-12PRO
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
FHSS	Low	2404.064	16.41	30	Pass
FHSS	Middle	2440.604	16.54	30	Pass
FHSS	High	2479.064	13.76	30	Pass


Channel Low:

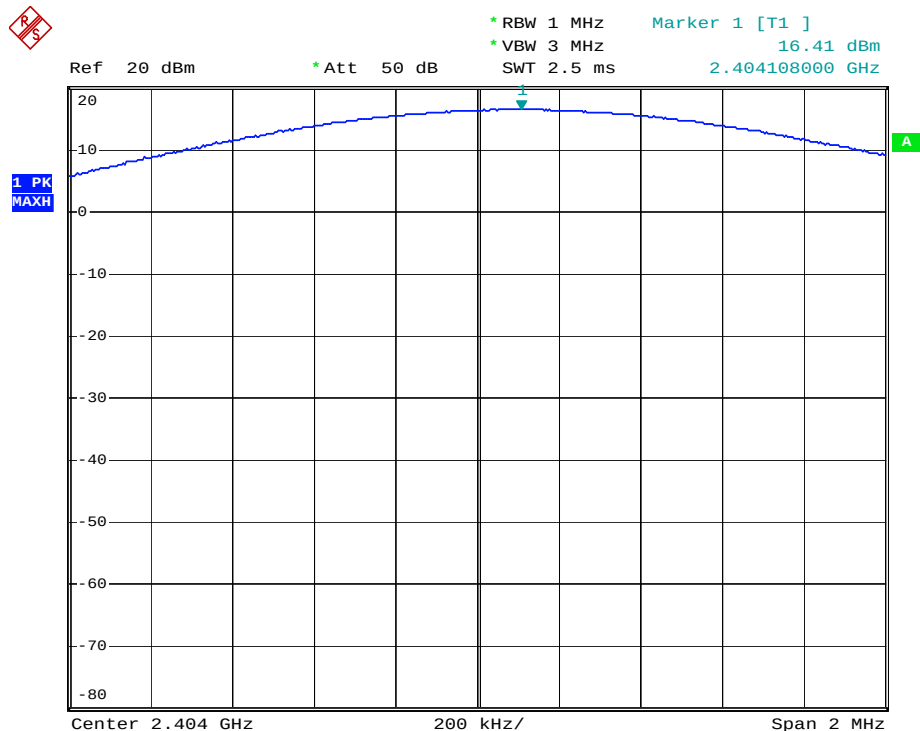

Channel Middle:

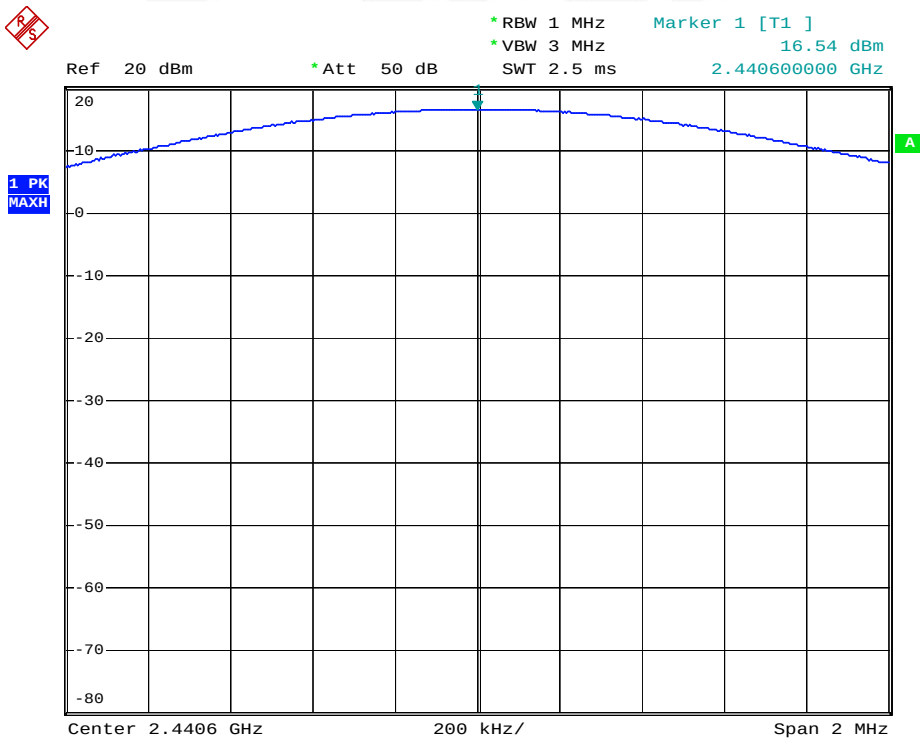

Channel High:

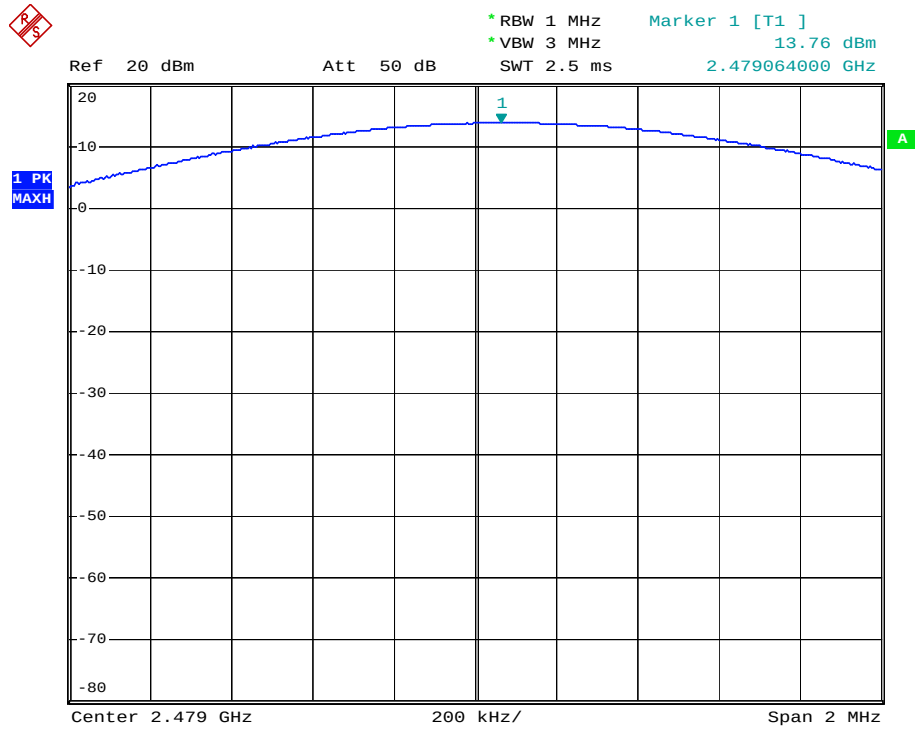


10. Test of Band Edges Emission

10.1 Applicable Standard


Section 15.247(d), RSS-247 Issue1 Clause 5.5: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

10.2 EUT Setup

Radiated Measurement Setup

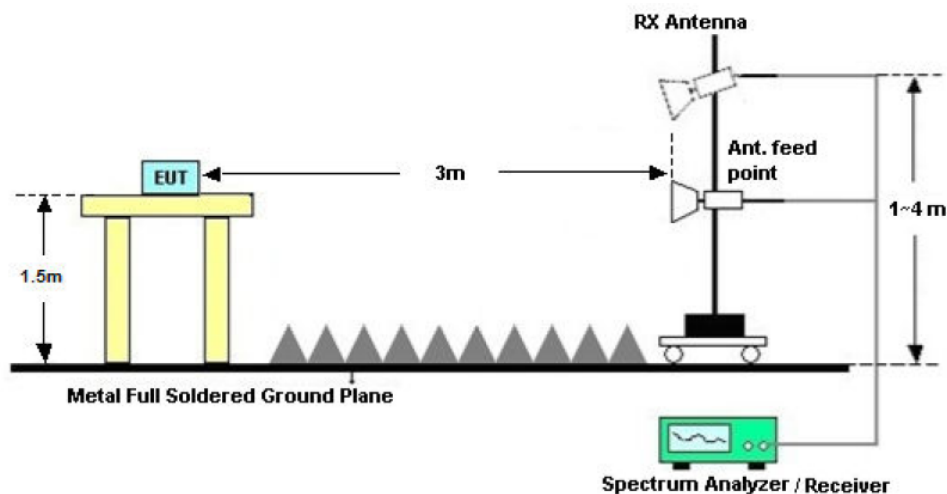

Conducted Measurement Setup

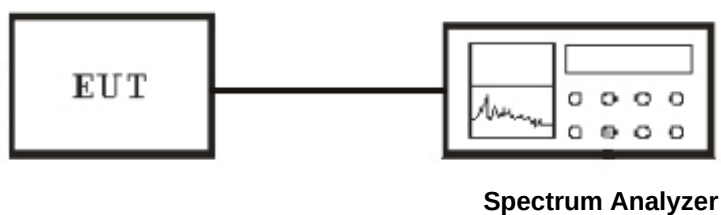

10.3 Test Equipment List and Details

See section 2.7.

10.4 Test Procedure

Conducted Measurement

1. Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation.
2. Set the RBW $\geq$ 1% of the span
3. Set the VBW $\geq$ RBW.
4. Detector = peak.
5. Sweep time = auto
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level.

Radiated Measurement

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Set RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz
3. Set VBW $\geq$ RBW
4. Detector = Peak
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Set RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz
3. Set VBW $\geq$ RBW
4. Detector = power average (RMS)
5. Sweep = auto couple.
6. Trace (RMS) averaging was performed over at least 100 traces

NOTE :

1. Configure the EUT according to ANSI C63.10-2013
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.


10.5 Test Result

Temperature (°C) : 22~23	EUT: 2.4GHz transmitter
Humidity (%RH) : 50~54	M/N: MZ-12PRO
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Radiated Test Result

Polarization: Horizontal
Low Channel: 2404MHz

PK:

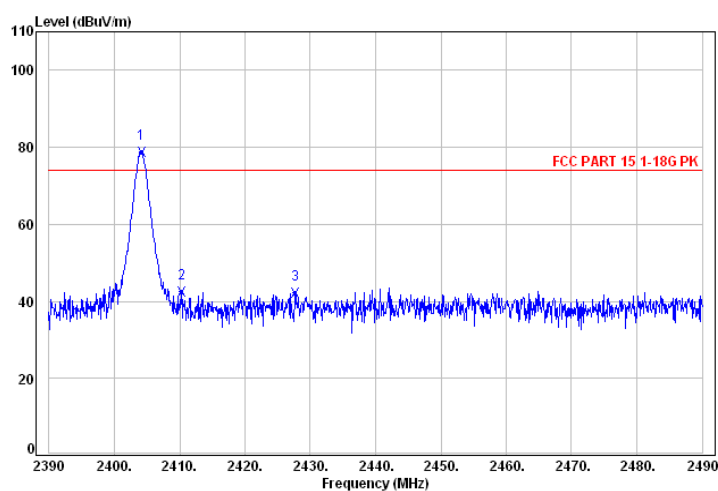


HONGCAI TESTING

Ant Read Limit Over
Freq Factor Level Level Line Limit Remark

	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2404.10	30.74	76.61	78.75	74.00	4.75	Peak
2	2410.30	30.74	40.36	42.50	74.00	-31.50	Peak
3	2427.70	30.73	40.04	42.19	74.00	-31.81	Peak

AV:

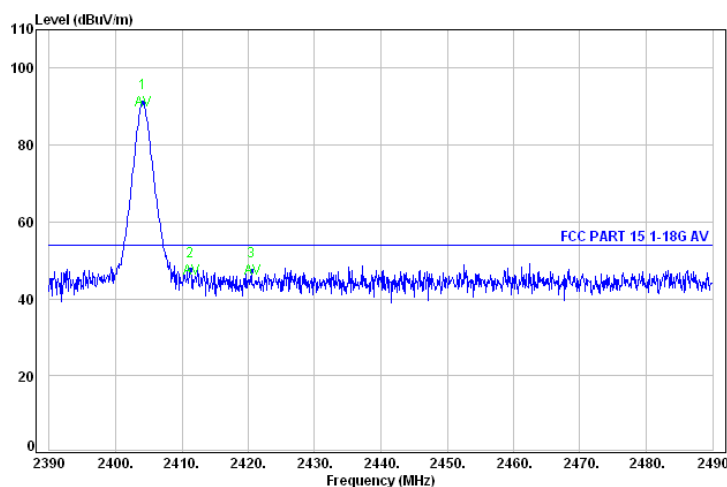


Ant	Read	Limit	Over
Freq	Factor	Level	Level

	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	2404.10	30.74	89.07	91.21	54.00	37.21 Average
2	2411.30	30.74	45.41	47.55	54.00	-6.45 Average
3	2420.50	30.73	45.24	47.38	54.00	-6.62 Average

Polarization: Vertical
Low Channel:2404MHz


PK:

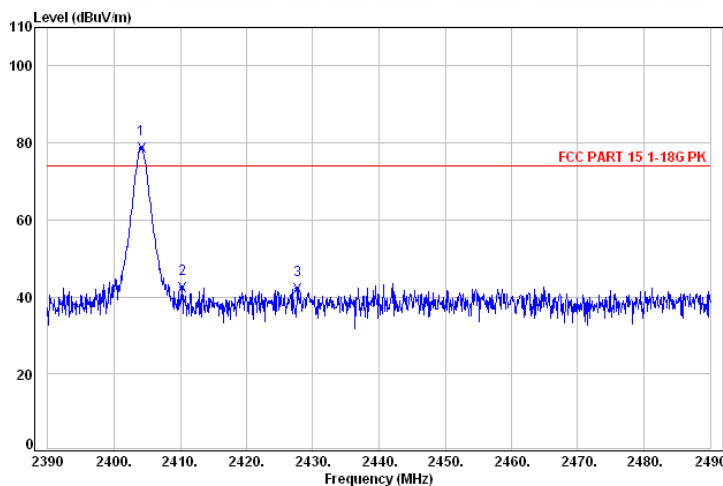

Ant	Read	Limit	Over
Freq	Factor	Level	Level

	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	2404.10	30.74	76.61	78.75	74.00	4.75 Peak
2	2410.30	30.74	40.36	42.50	74.00	-31.50 Peak
3	2427.70	30.73	40.04	42.19	74.00	-31.81 Peak

AV:

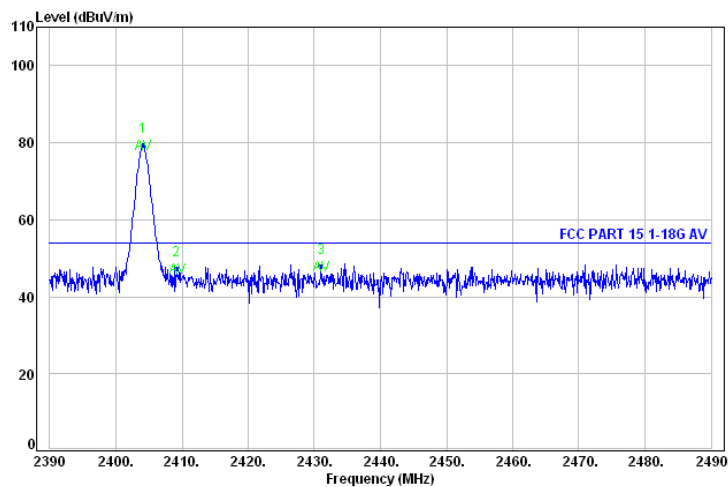


Ant	Read	Limit	Over			
Freq	Factor	Level	Level	Line	Limit	Remark

	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	2404.10	30.74	77.20	79.34	54.00	25.34 Average
2	2409.20	30.74	45.12	47.26	54.00	-6.74 Average
3	2431.00	30.73	45.79	47.94	54.00	-6.06 Average

Polarization: Horizontal
High Channel: 2479 MHz


PK:

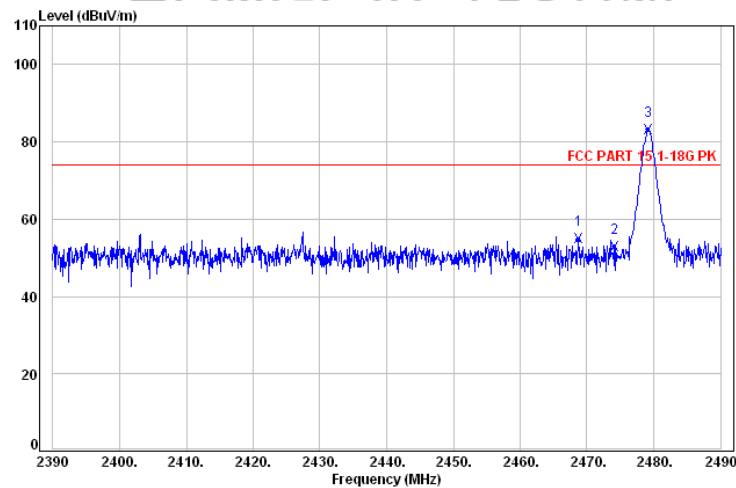

Ant	Read	Limit	Over			
Freq	Factor	Level	Level	Line	Limit	Remark

	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	2468.70	30.71	52.81	54.97	74.00	-19.03 Peak
2	2474.10	30.71	50.77	52.94	74.00	-21.06 Peak
3	2479.20	30.71	81.14	83.31	74.00	9.31 Peak

AV:

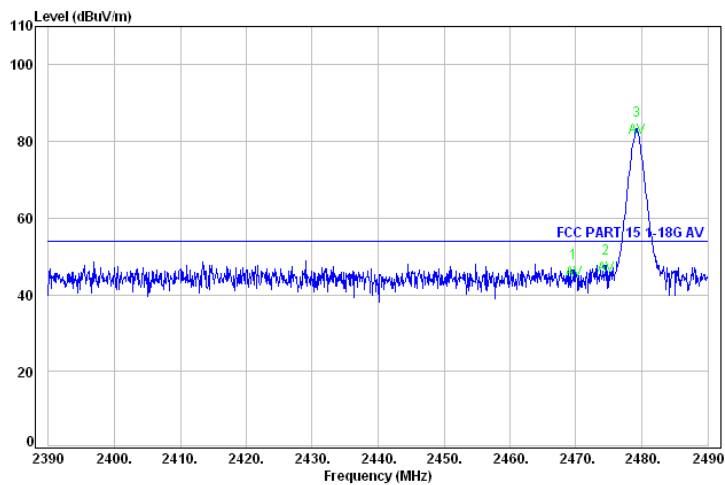


	Ant	Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit Remark

	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	2469.60	30.71	43.85	46.01	54.00	-7.99 Average
2	2474.50	30.71	45.17	47.34	54.00	-6.66 Average
3	2479.20	30.71	80.90	83.07	54.00	29.07 Average

Polarization: Vertical
High Channel: 2479 MHz


PK:

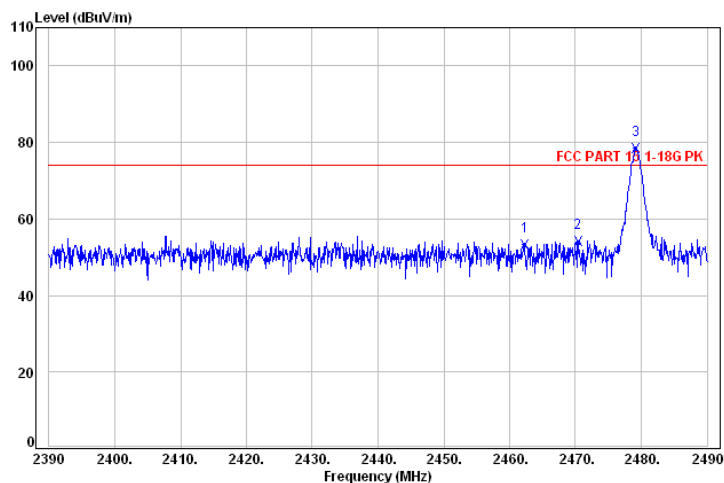

	Ant	Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit Remark

	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	2462.30	30.72	51.05	53.22	74.00	-20.78 Peak
2	2470.40	30.71	51.88	54.04	74.00	-19.96 Peak
3	2479.20	30.71	76.22	78.39	74.00	4.39 Peak

AV:

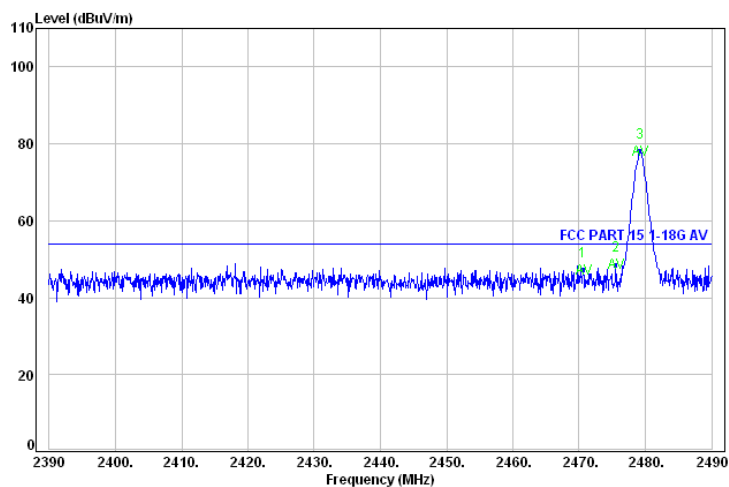


	Ant	Read		Limit	Over	
Freq	Factor	Level	Level	Line	Limit	Remark


	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2470.60	30.71	45.16	47.32	54.00	-6.68	Average
2	2475.50	30.71	46.46	48.63	54.00	-5.37	Average
3	2479.20	30.71	75.94	78.11	54.00	24.11	Average




Low Channel

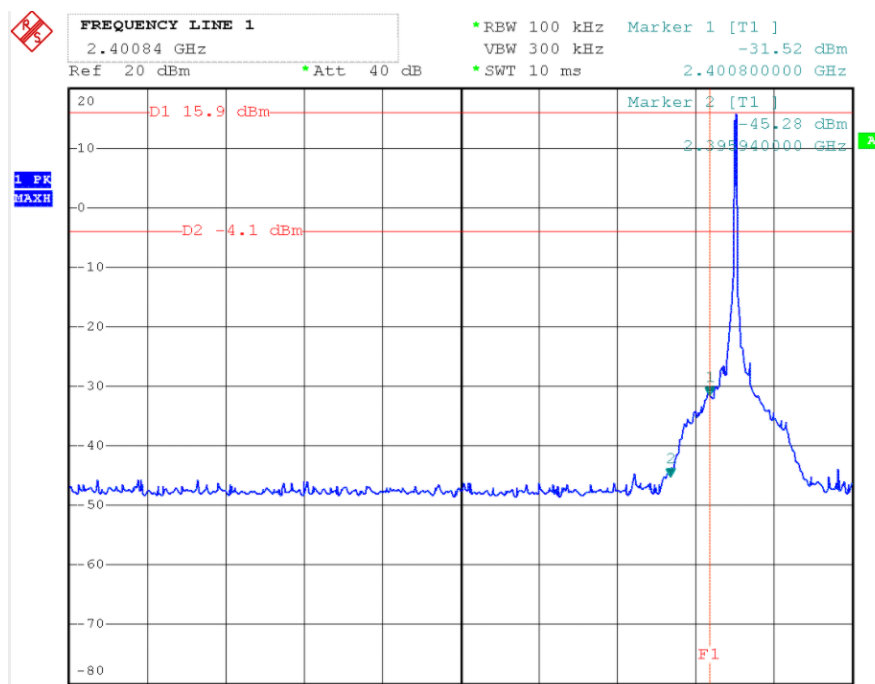


High Channel

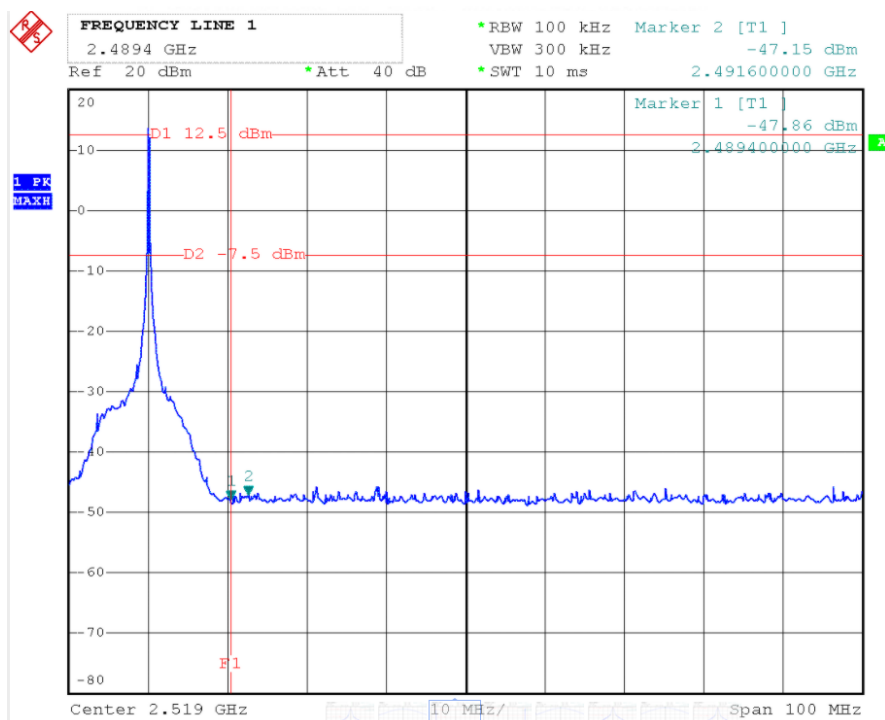

Hopping Conducted Test Result Low Channel

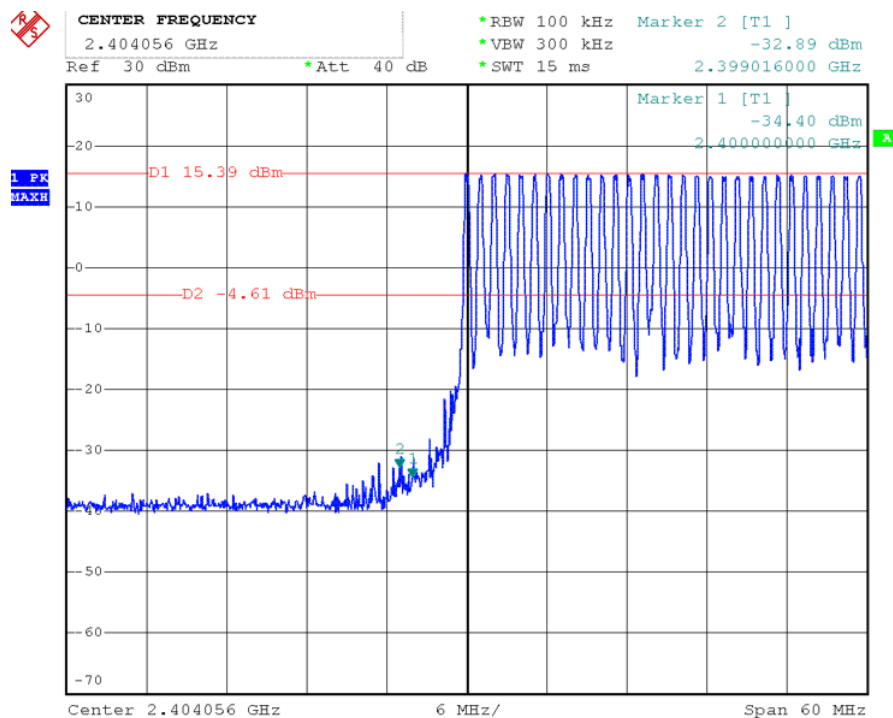

High Channel

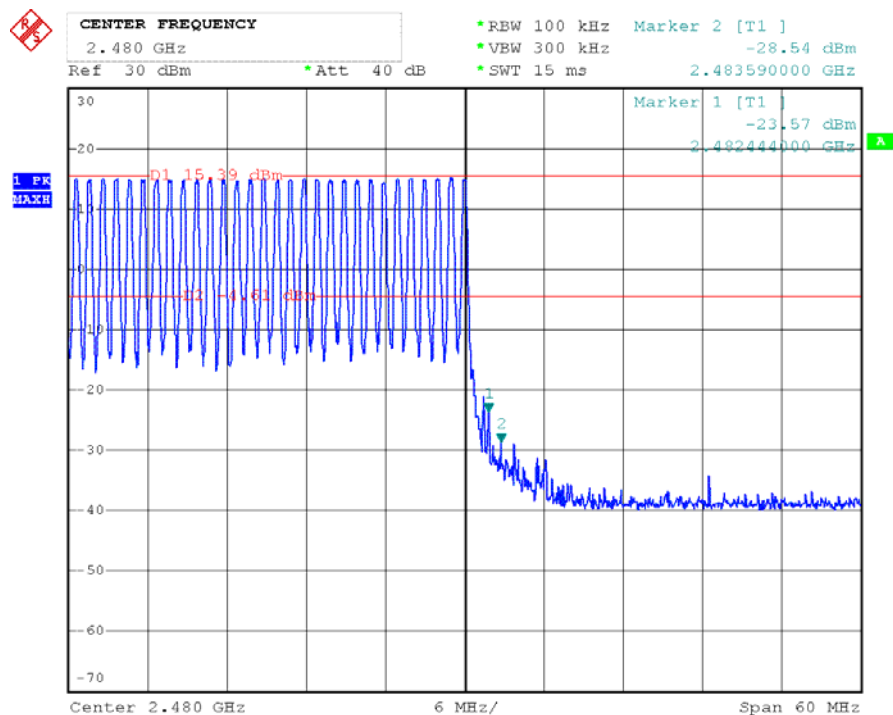

11. Test of Spurious Radiated Emission

11.1 Applicable Standard

Refer to FCC §15.205 and §15.209, RSS-247 Issue2 Clause 5.5.

11.1.2 Limits

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.


All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3


11.2 EUT Setup

Radiated Measurement Setup


For radiated emission below 30MHz

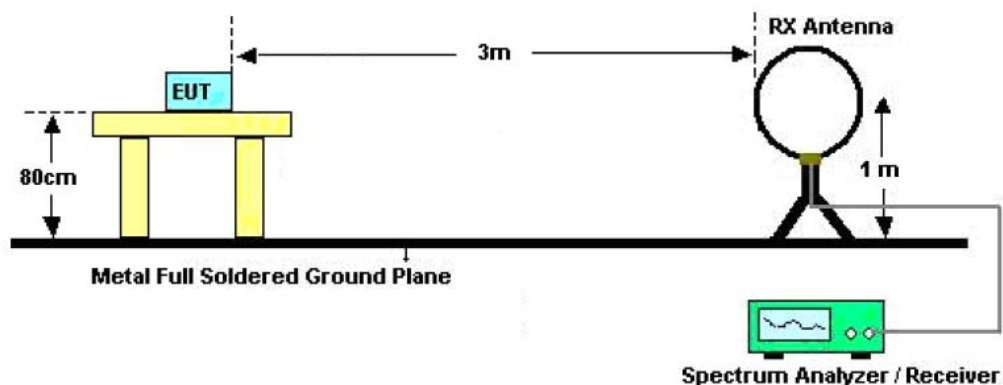


For radiated emission from 30MHz to 1GHz

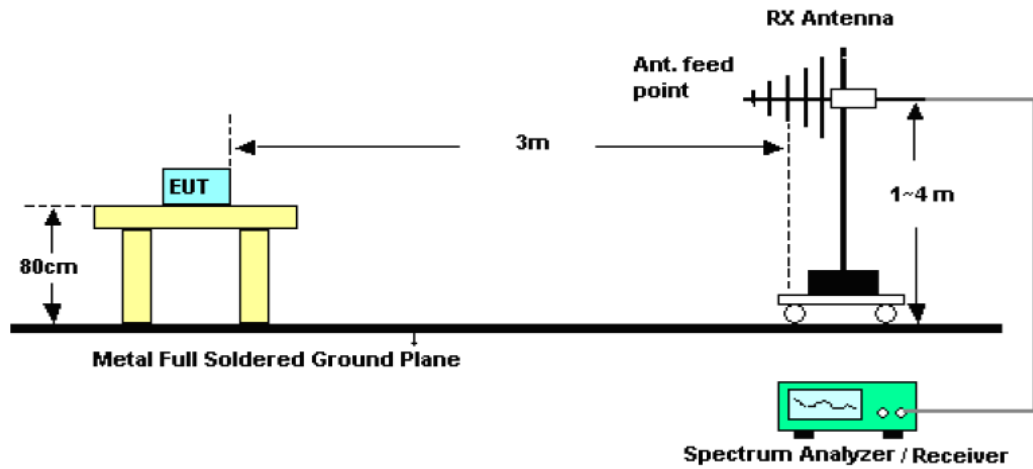

For radiated emission from above 1GHz

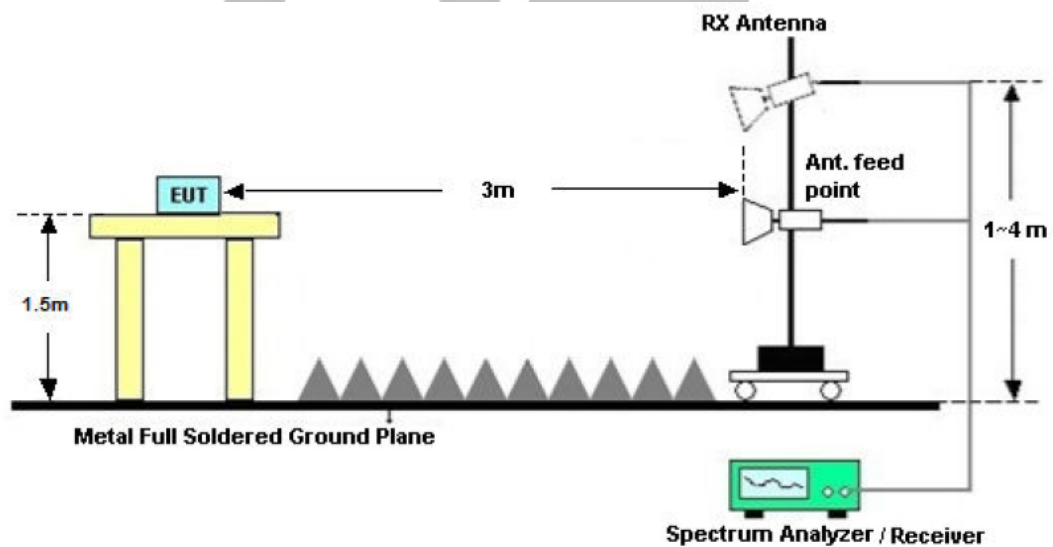

Conducted Measurement Setup

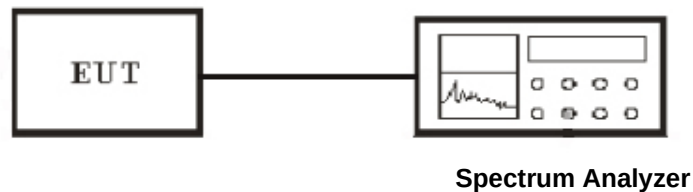

11.3 Test Equipment List and Details

See section 2.7.

11.4 Test Procedure

Conducted Measurement

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.
3. Set the VBW $\geq$ RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level.

Radiated Measurement

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Set RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz
3. Set VBW $\geq$ RBW
4. Detector = Peak
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Set RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz
3. Set VBW $\geq$ RBW
4. Detector = power average (RMS)
5. Sweep = auto couple.
6. Trace (RMS) averaging was performed over at least 100 traces

NOTE:

1. Configure the EUT according to ANSI C63.10-2013
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.

11.5 Test Result

Temperature (°C) : 22~23	EUT: 2.4GHz transmitter
Humidity (%RH) : 50~54	M/N: MZ-12PRO
Barometric Pressure (mbar) : 950~1000	Operation Condition: TX Mode

Radiated Spurious Emission Data Below 1GHz Channel Low:

EUT: 2.4GHz transmitter
M/N: mz-12pro
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC 6V from battery
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	9163-2015



MEASUREMENT RESULT: "081802_red"


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
37.760000	28.70	13.7	40.0	11.3	---	100.0	0.00	HORIZONTAL
59.100000	26.70	15.7	40.0	13.3	---	100.0	0.00	HORIZONTAL
144.460000	30.90	12.2	43.5	12.6	---	100.0	0.00	HORIZONTAL
288.020000	37.50	15.0	46.0	8.5	---	100.0	0.00	HORIZONTAL
551.860000	32.10	20.5	46.0	13.9	---	100.0	0.00	HORIZONTAL
903.000000	38.20	25.8	46.0	7.8	---	100.0	0.00	HORIZONTAL

Radiated Spurious Emission Data Below 1GHz Channel Low:

EUT: 2.4GHz transmitter
M/N: mz-12pro
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC 6V from battery
Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	9163-2015

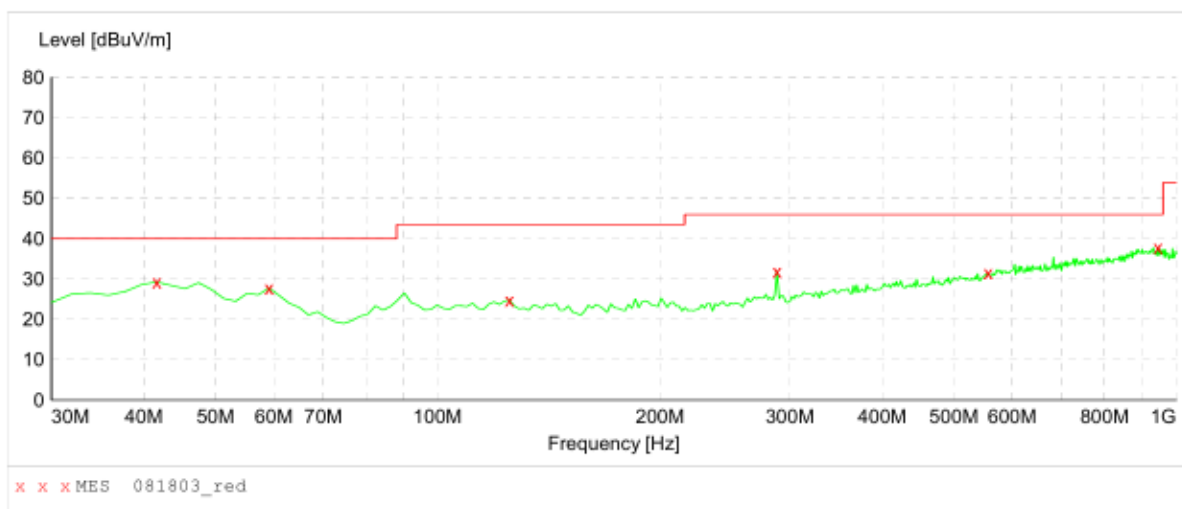

MEASUREMENT RESULT: "081803_red"


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
41.640000	29.30	15.4	40.0	10.7	---	100.0	0.00	VERTICAL
59.100000	27.80	15.7	40.0	12.2	---	100.0	0.00	VERTICAL
125.060000	24.80	13.0	43.5	18.7	---	100.0	0.00	VERTICAL
288.020000	31.90	15.0	46.0	14.1	---	100.0	0.00	VERTICAL
555.740000	31.50	20.4	46.0	14.5	---	100.0	0.00	VERTICAL
943.740000	37.80	25.3	46.0	8.2	---	100.0	0.00	VERTICAL

Radiated Spurious Emission Data Below 1GHz Channel Middle:

EUT: 2.4GHz transmitter
M/N: mz-12pro
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC 6V from battery
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	9163-2015

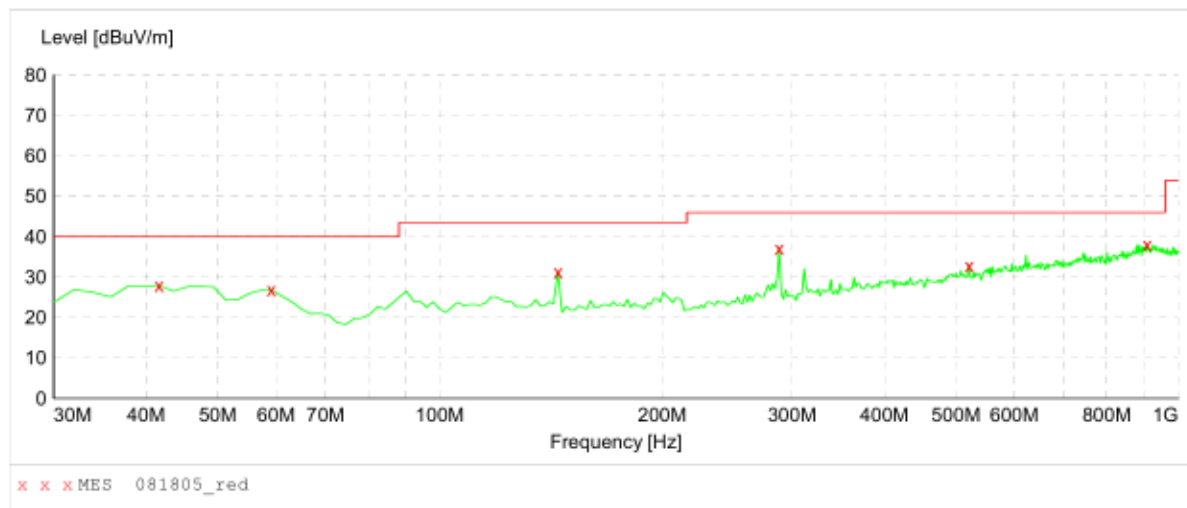

MEASUREMENT RESULT: "081805_red"


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
41.640000	28.00	15.4	40.0	12.0	---	100.0	0.00	HORIZONTAL
59.100000	26.90	15.7	40.0	13.1	---	100.0	0.00	HORIZONTAL
144.460000	31.30	12.2	43.5	12.2	---	100.0	0.00	HORIZONTAL
288.020000	37.10	15.0	46.0	8.9	---	100.0	0.00	HORIZONTAL
520.820000	32.90	19.6	46.0	13.1	---	100.0	0.00	HORIZONTAL
906.880000	38.10	25.8	46.0	7.9	---	100.0	0.00	HORIZONTAL

Radiated Spurious Emission Data Below 1GHz Channel Middle:

EUT: 2.4GHz transmitter
M/N: mz-12pro
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC 6V from battery
Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			Transducer
Start	Stop	Detector	Meas. Time	IF Bandw.	
Frequency 30.0 MHz	Frequency 1.0 GHz	MaxPeak	Coupled	100 kHz	9163-2015

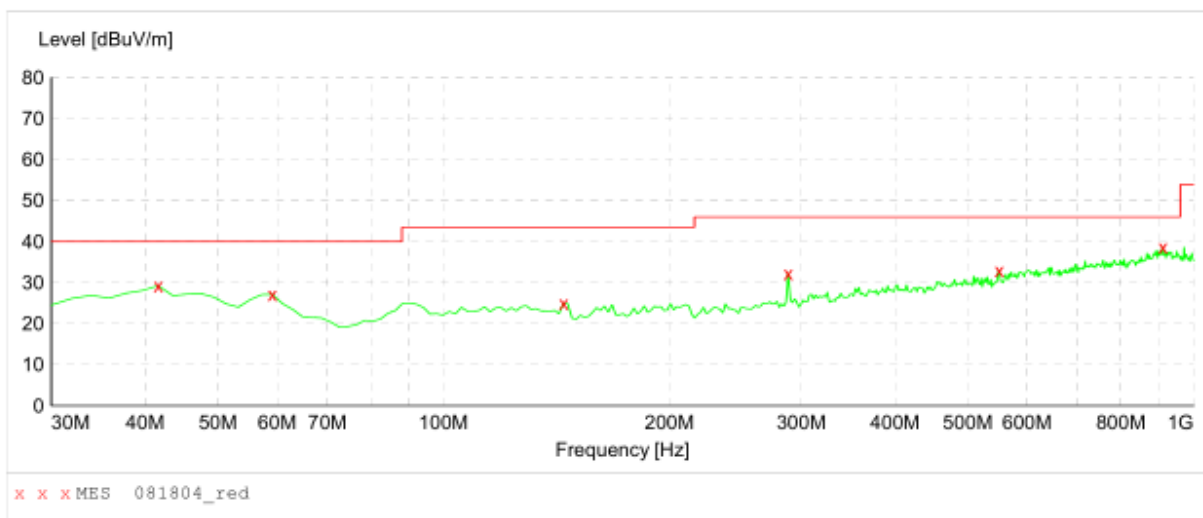

MEASUREMENT RESULT: "081804_red"


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
41.640000	29.30	15.4	40.0	10.7	---	100.0	0.00	VERTICAL
59.100000	27.10	15.7	40.0	12.9	---	100.0	0.00	VERTICAL
144.460000	25.00	12.2	43.5	18.5	---	100.0	0.00	VERTICAL
288.020000	32.30	15.0	46.0	13.7	---	100.0	0.00	VERTICAL
549.920000	33.00	20.5	46.0	13.0	---	100.0	0.00	VERTICAL
908.820000	38.70	25.8	46.0	7.3	---	100.0	0.00	VERTICAL

Radiated Spurious Emission Data Below 1GHz Channel High:

EUT: 2.4GHz transmitter
M/N: mz-12pro
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC 6V from battery
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency 30.0 MHz	Frequency 1.0 GHz	MaxPeak	Coupled	100 kHz	9163-2015

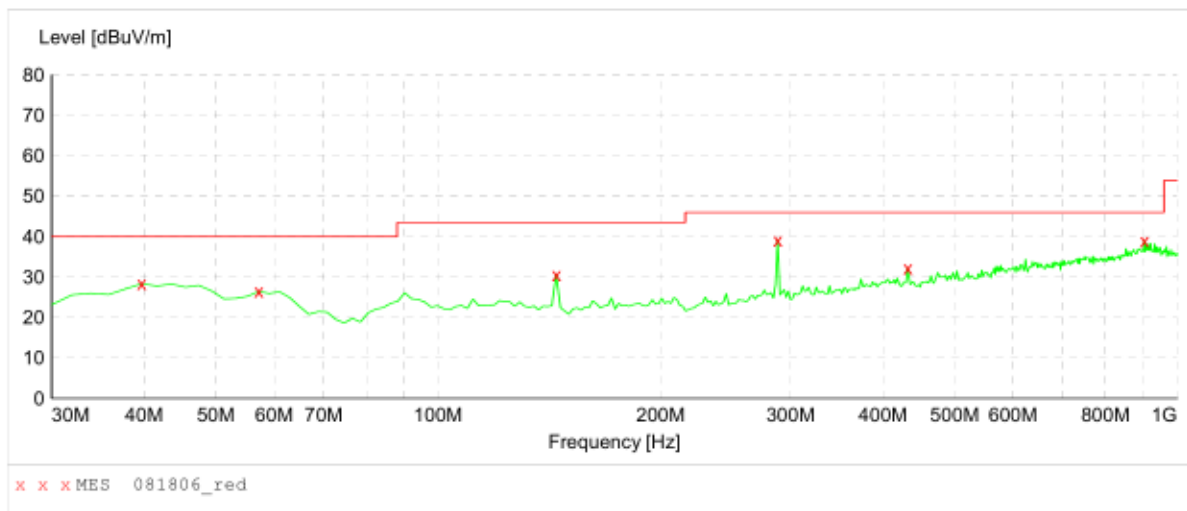

MEASUREMENT RESULT: "081806_red"


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
39.700000	28.40	15.7	40.0	11.6	---	100.0	0.00	HORIZONTAL
57.160000	26.50	15.7	40.0	13.5	---	100.0	0.00	HORIZONTAL
144.460000	30.60	12.2	43.5	12.9	---	100.0	0.00	HORIZONTAL
288.020000	39.20	15.0	46.0	6.8	---	100.0	0.00	HORIZONTAL
431.580000	32.20	18.0	46.0	13.8	---	100.0	0.00	HORIZONTAL
903.000000	39.00	25.8	46.0	7.0	---	100.0	0.00	HORIZONTAL

Radiated Spurious Emission Data Below 1GHz Channel High:

EUT: 2.4GHz transmitter
M/N: mz-12pro
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC 6V from battery
Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	9163-2015

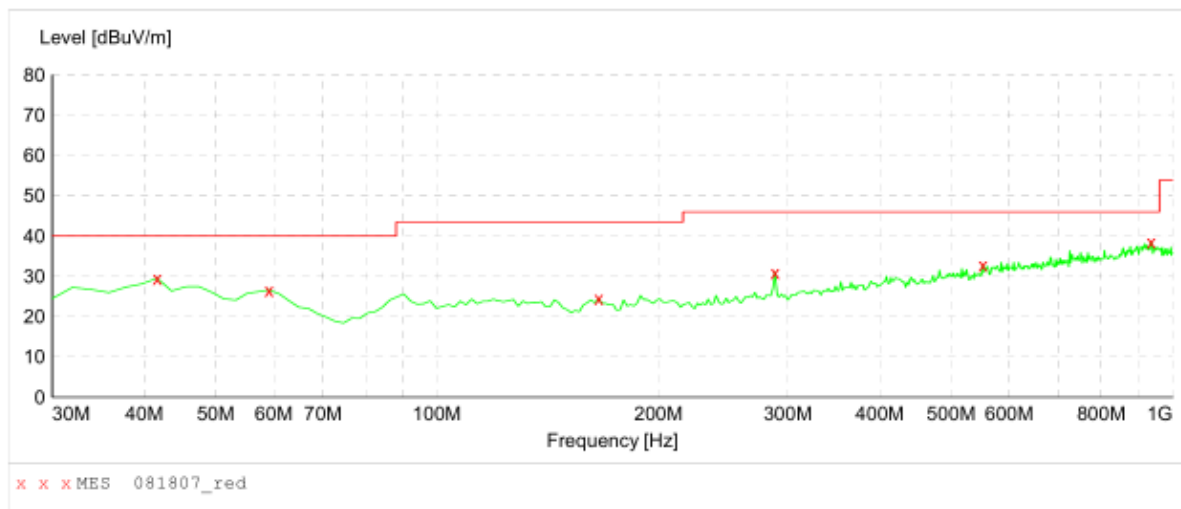

MEASUREMENT RESULT: "081807_red"


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
41.640000	29.60	15.4	40.0	10.4	---	100.0	0.00	VERTICAL
59.100000	26.60	15.7	40.0	13.4	---	100.0	0.00	VERTICAL
165.800000	24.50	12.9	43.5	19.0	---	100.0	0.00	VERTICAL
288.020000	31.00	15.0	46.0	15.0	---	100.0	0.00	VERTICAL
551.860000	32.80	20.5	46.0	13.2	---	100.0	0.00	VERTICAL
934.040000	38.50	25.7	46.0	7.5	---	100.0	0.00	VERTICAL

Radiated Spurious Emission Test Data Above 1GHz

Polarization: Vertical


Low Channel: 2404MHz

PK:

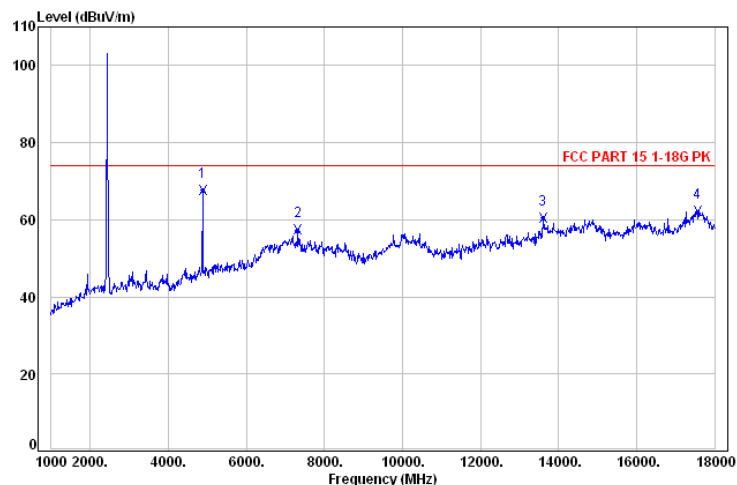


	Ant	Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	4876.00	35.35	58.40	67.69	74.00 -6.31 Peak
2	7324.00	39.44	39.14	57.26	74.00 -16.74 Peak
3	13597.00	42.38	41.08	60.41	74.00 -13.59 Peak
4	17558.00	44.31	44.75	62.17	74.00 -11.83 Peak

AV:

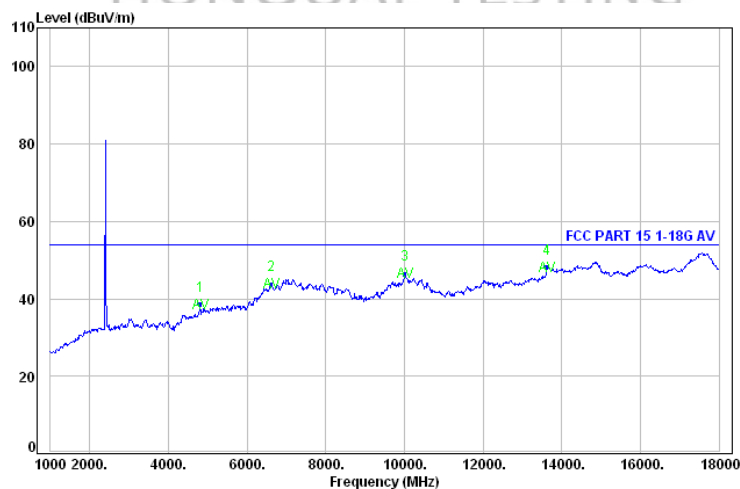

	Ant	Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	4808.00	35.16	29.62	38.60	54.00 -15.40 Average
2	6610.00	38.56	27.47	43.91	54.00 -10.09 Average
3	10010.00	39.40	29.11	46.50	54.00 -7.50 Average
4	13614.00	42.39	33.88	48.23	54.00 -5.77 Average


Polarization: Horizontal
Low Channel: 2404MHz
PK:

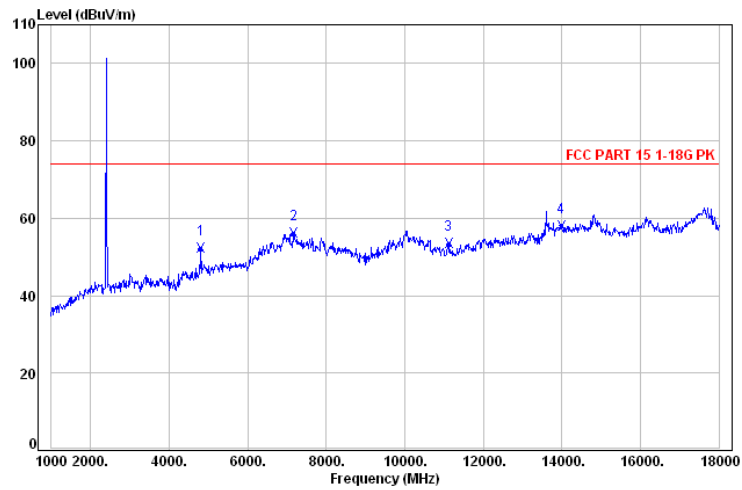

Ant	Read	Limit	Over			
Freq	Factor	Level	Level	Line	Limit	Remark

	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	4808.00	35.16	43.27	52.25	74.00	-21.75 Peak
2	7171.00	39.47	37.52	56.06	74.00	-17.94 Peak
3	11115.00	39.81	38.86	53.47	74.00	-20.53 Peak
4	13988.00	42.69	43.37	58.12	74.00	-15.88 Peak


AV:

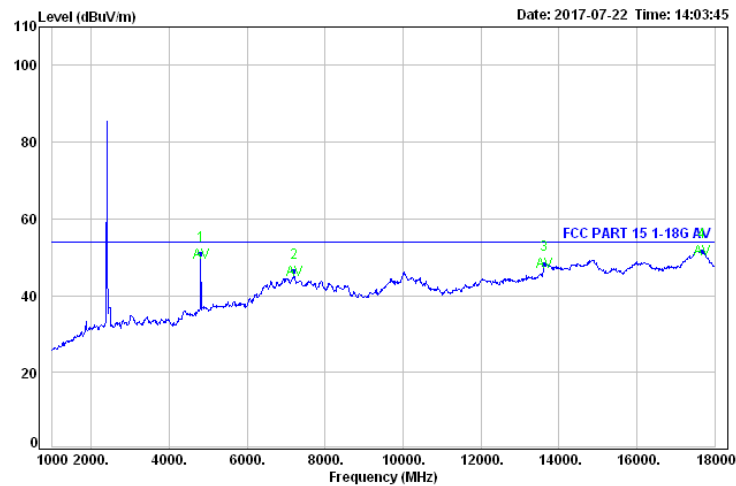

Ant	Read	Limit	Over			
Freq	Factor	Level	Level	Line	Limit	Remark

	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	4808.00	35.16	41.84	50.82	54.00	-3.18 Average
2	7205.00	39.46	27.95	46.40	54.00	-7.60 Average
3	13614.00	42.39	33.92	48.27	54.00	-5.73 Average
4	17677.00	43.31	34.85	51.68	54.00	-2.32 Average

Polarization: Vertical
Mid Channel: 2440MHz
PK:

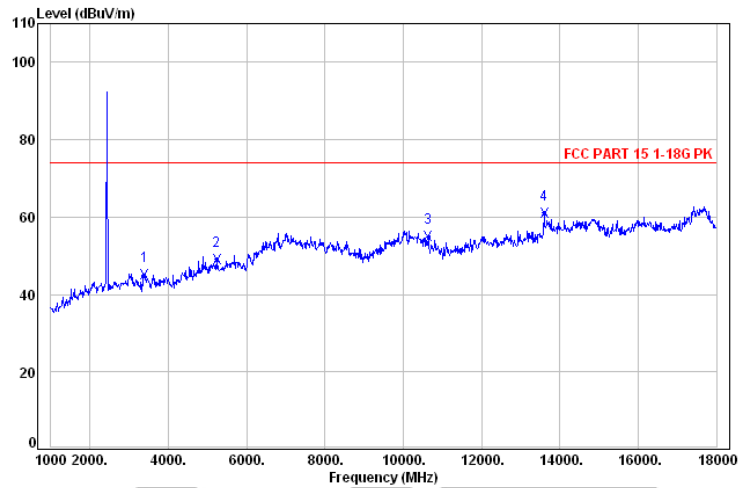


Ant	Read	Limit	Over			
Freq	Factor	Level	Level	Line	Limit	Remark

MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
-----	------	------	--------	--------	----

1	3380.00	31.60	41.29	44.99	74.00	-29.01 Peak
2	5233.00	35.56	39.08	49.06	74.00	-24.94 Peak
3	10639.00	39.60	39.55	54.95	74.00	-19.05 Peak
4	13597.00	42.38	41.67	61.00	74.00	-13.00 Peak

AV:

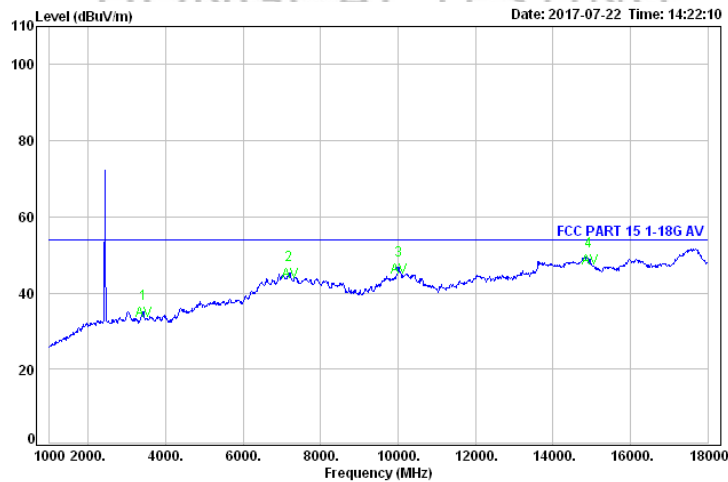


Ant	Read	Limit	Over			
Freq	Factor	Level	Level	Line	Limit	Remark

MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
-----	------	------	--------	--------	----

1	3414.00	31.60	31.08	34.80	54.00	-19.20 Average
2	7188.00	39.46	26.56	45.05	54.00	-8.95 Average
3	10010.00	39.40	28.95	46.34	54.00	-7.66 Average
4	14940.00	42.20	35.40	48.66	54.00	-5.34 Average


Polarization: Horizontal
Mid Channel: 2440MHz
PK:

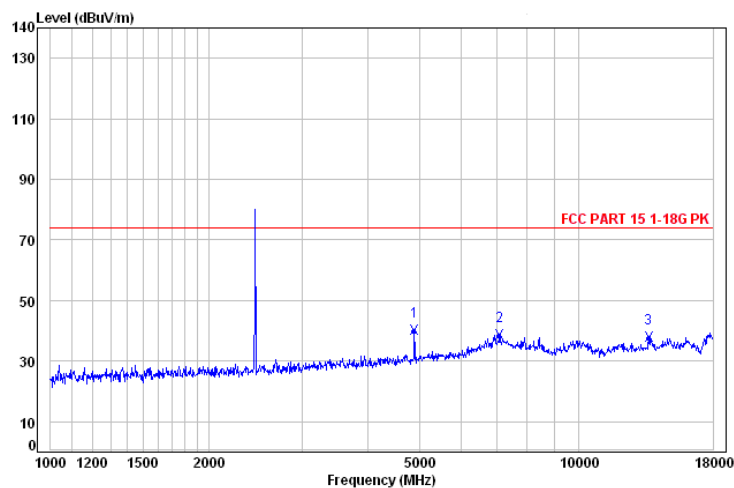

Ant	Read	Limit	Over
Freq	Factor	Level	Level
MHz	dB/m	dBuV	dBuV/m

1	4888.15	0.00	66.20	40.16	74.00	-33.84	Peak
2	7097.00	0.00	59.41	38.68	74.00	-35.32	Peak
3	13599.13	0.00	60.81	37.77	74.00	-36.23	Peak


AV:

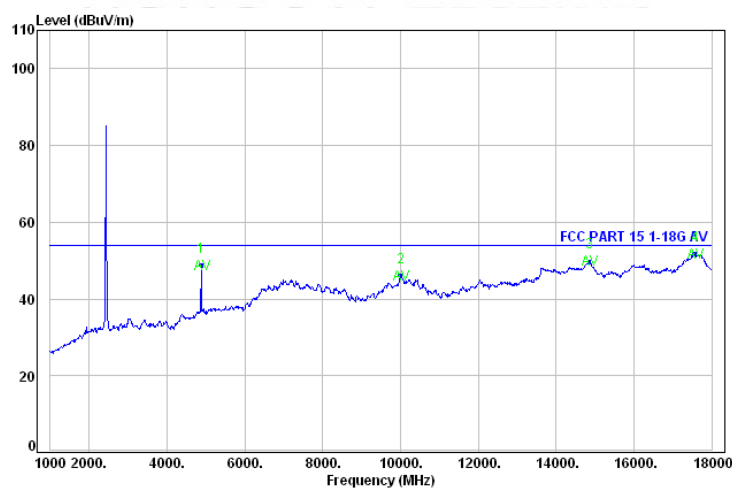

Ant	Read	Limit	Over
Freq	Factor	Level	Level
MHz	dB/m	dBuV	dBuV/m

1	4876.00	35.35	39.47	48.76	54.00	-5.24	Average
2	10010.00	39.40	28.65	46.04	54.00	-7.96	Average
3	14855.00	42.33	36.40	49.88	54.00	-4.12	Average
4	17575.00	44.17	34.36	51.70	54.00	-2.30	Average

Polarization: Vertical
High Channel: 2479MHz
PK:

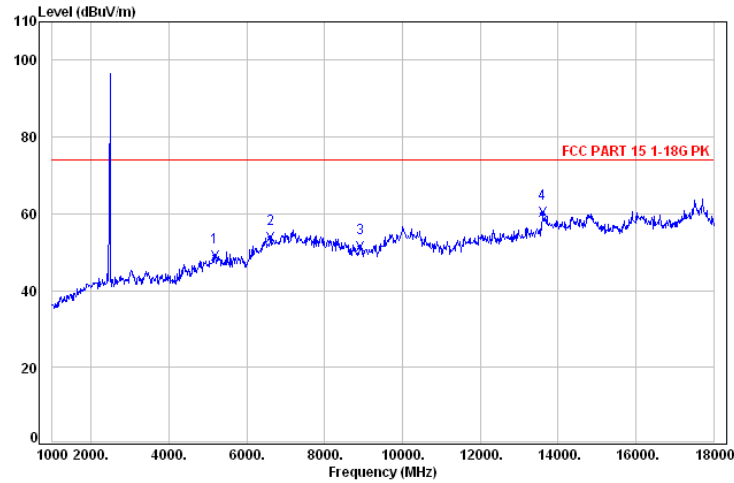


Ant	Read	Limit	Over			
Freq	Factor	Level	Level	Line	Limit	Remark

MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
-----	------	------	--------	--------	----

1	5182.00	35.59	39.11	49.07	74.00	-24.93 Peak
2	6610.00	38.56	37.41	53.85	74.00	-20.15 Peak
3	8922.00	38.58	37.56	51.44	74.00	-22.56 Peak
4	13597.00	42.38	40.98	60.31	74.00	-13.69 Peak

AV:

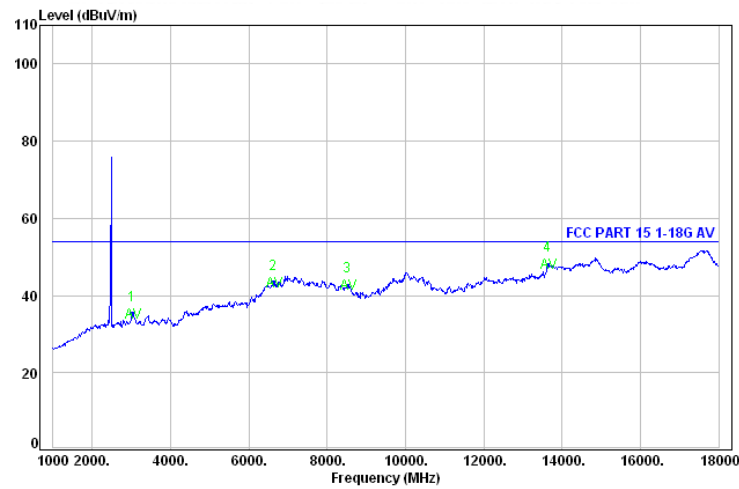


Ant	Read	Limit	Over			
Freq	Factor	Level	Level	Line	Limit	Remark

MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
-----	------	------	--------	--------	----


1	3023.00	31.60	31.78	35.31	54.00	-18.69 Average
2	6627.00	38.60	26.83	43.39	54.00	-10.61 Average
3	8514.00	38.50	26.75	42.57	54.00	-11.43 Average
4	13631.00	42.40	33.68	48.05	54.00	-5.95 Average

Polarization: Horizontal
High Channel: 2479MHz
PK:

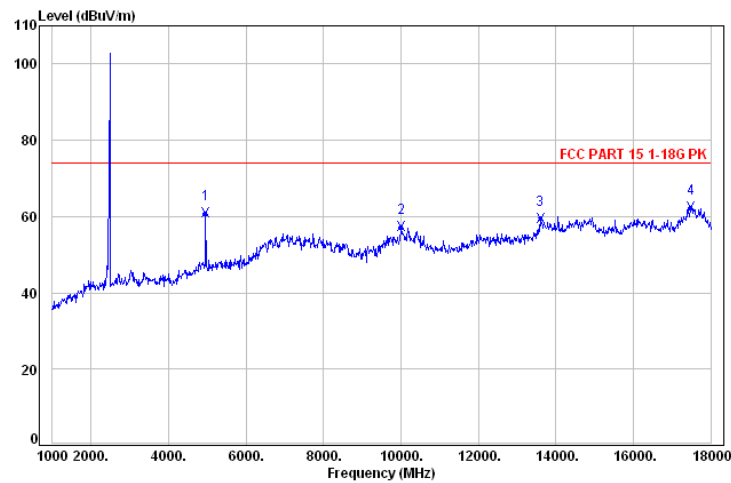

	Ant	Read	Limit	Over	
	Freq	Factor	Level	Level	Line Limit Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m dB
1	4961.00	35.59	51.27	60.95	74.00 -13.05 Peak
2	10010.00	39.40	39.88	57.27	74.00 -16.73 Peak
3	13597.00	42.38	40.29	59.62	74.00 -14.38 Peak
4	17490.00	44.79	44.76	62.43	74.00 -11.57 Peak

AV:

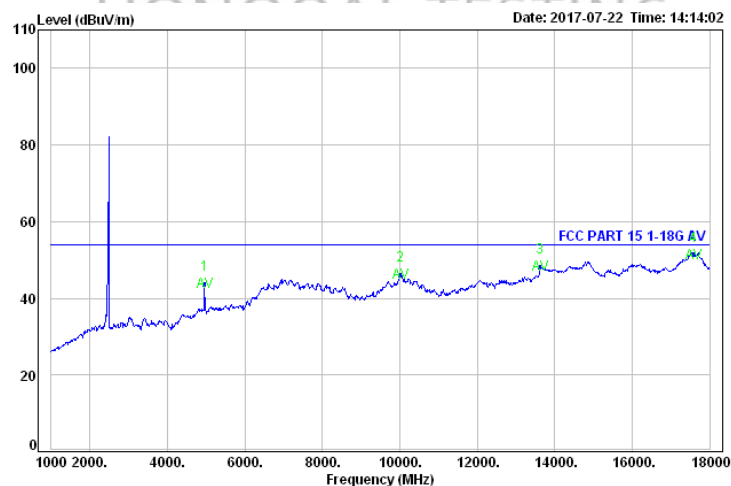


	Ant	Read	Limit	Over	
	Freq	Factor	Level	Level	Line Limit Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m dB
1	4961.00	35.59	34.10	43.78	54.00 -10.22 Average
2	10010.00	39.40	28.87	46.26	54.00 -7.74 Average
3	13614.00	42.39	34.03	48.38	54.00 -5.62 Average
4	17575.00	44.17	34.21	51.55	54.00 -2.45 Average

Radiated Emission Below 30 MHz TX (CH Low)


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Levels (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Mode
0.62	24.88	8.21	-1.01	32.08	71.7	-39.62	QP
20.24	23.48	8.68	1.26	33.42	69.5	-36.08	QP
24.94	25.7	8.92	1.15	35.77	69.5	-33.73	QP
26.21	26.24	8.22	1.73	36.19	69.5	-33.31	QP

Note:


1. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report.
2. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
4. The other emission levels were very low against the limit.
5. Margin value = Emission level.- Limit value

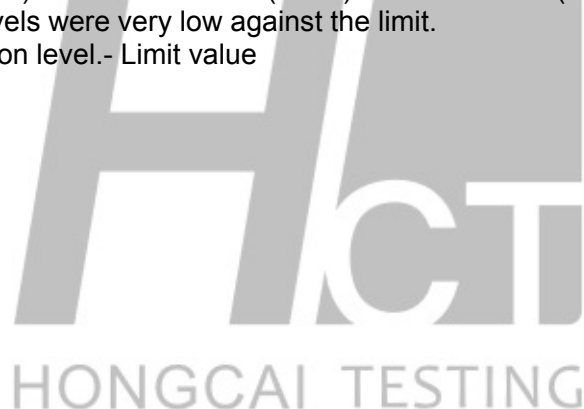


Conducted Spurious Emission Test Data 30MHz-26.5GHz Channel Low

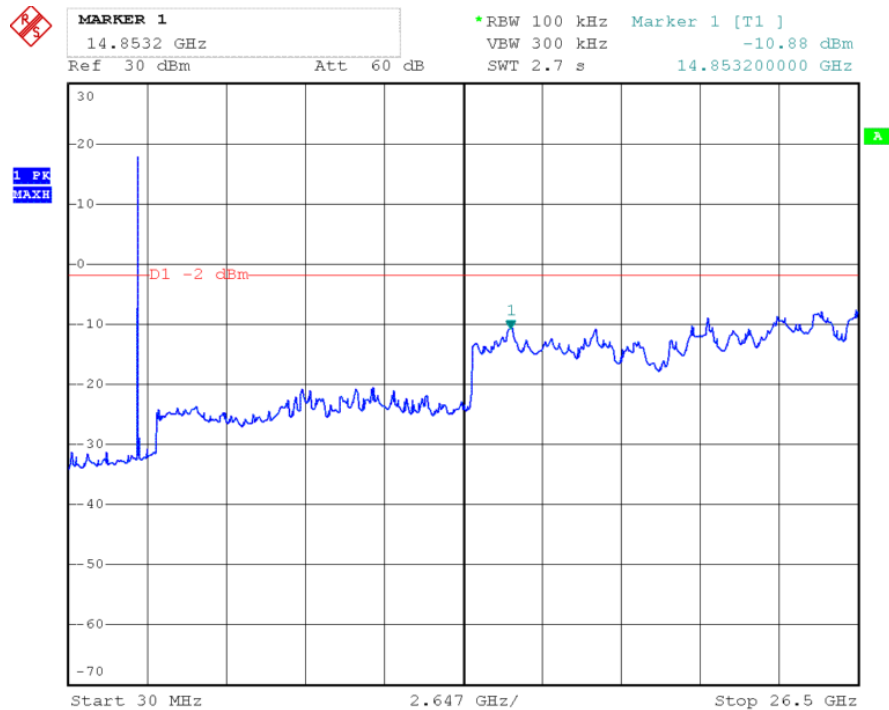

Channel Mid

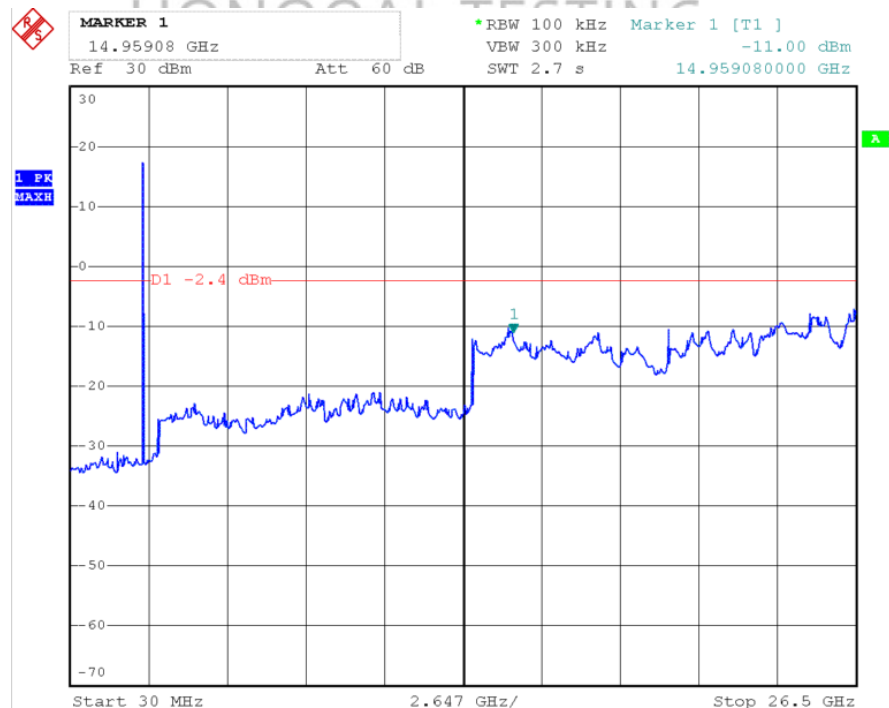

Channel High

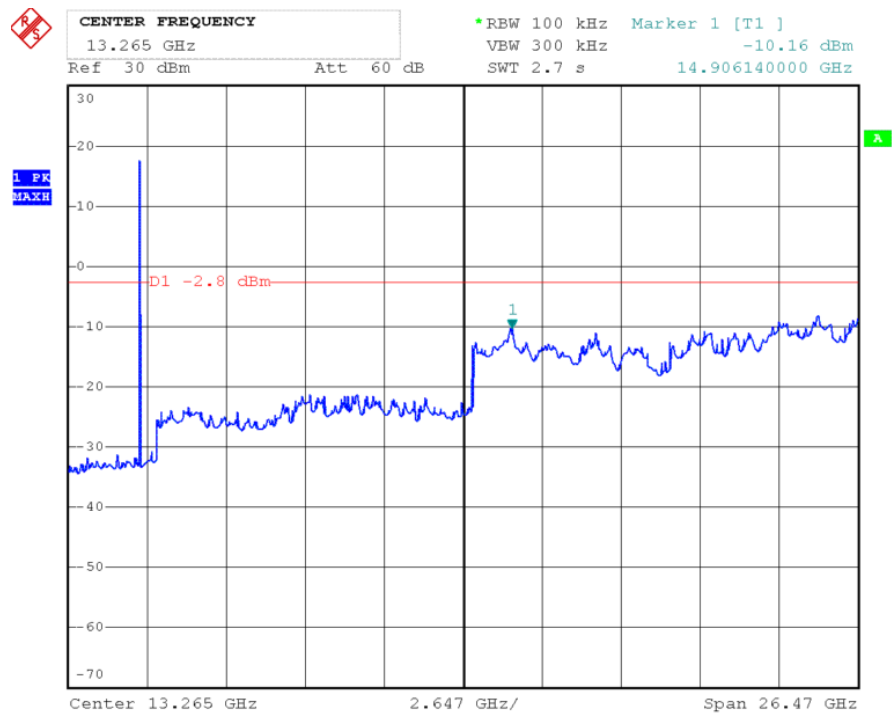

12. ANTENNA REQUIREMENT

12.1 Standard Applicable

Section 15.203, RSS-GEN Clause 8.3:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

12.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement. The antenna used in this product is complied with Standard. The maximum Gain of the antenna lower than 6.0dBi and have the definite antenna Specification.

...End of Report...