99% Occupied Power Bandwidth Plots

Pacifica International
Booster Amplifier
Model Number GP850A

Please Note:

FM is modulated with a 2.5 kHz sinewave
+/- 8 kHz peak frequency deviation

Carrier Frequency 824.0 MHz, Modulation TDMA, Input

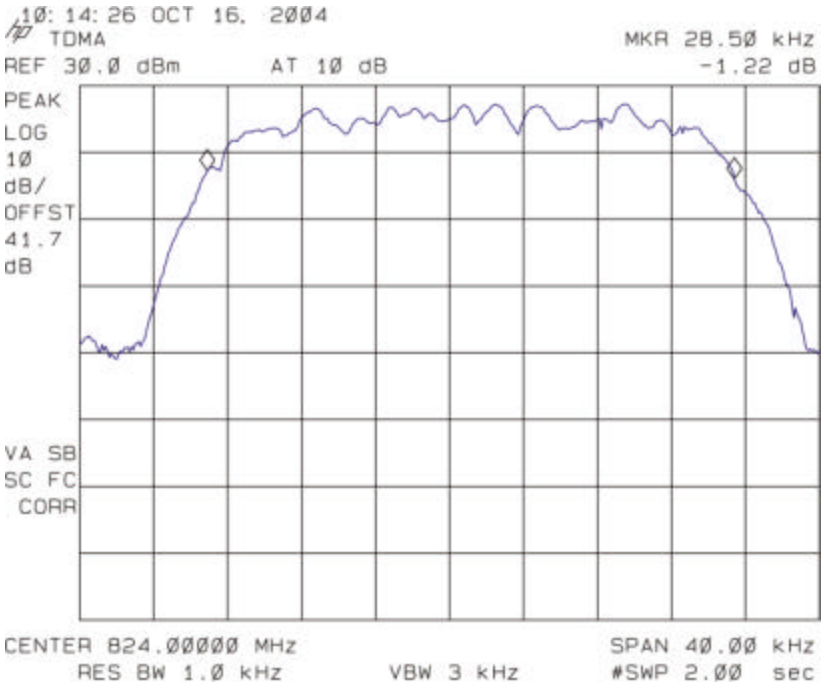

Carrier Frequency 824.0 MHz, Modulation TDMA, Output

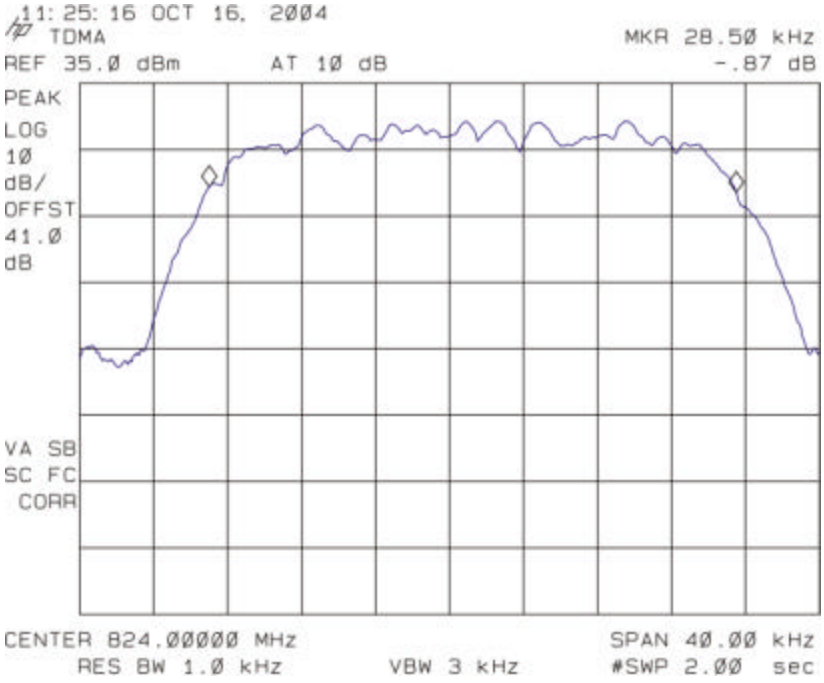

Carrier Frequency 836.0 MHz, Modulation TDMA, Input

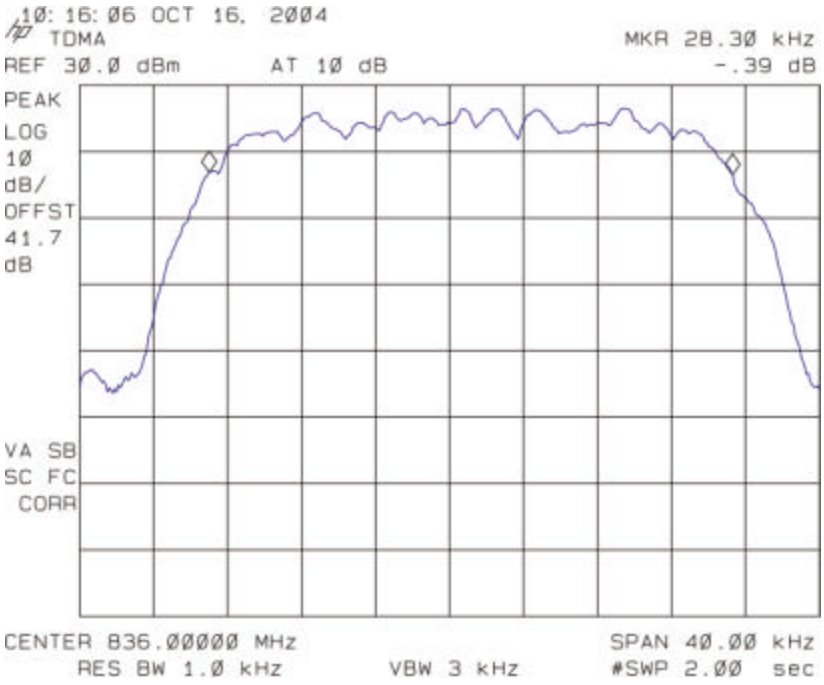

Carrier Frequency 836.0 MHz, Modulation TDMA, Output

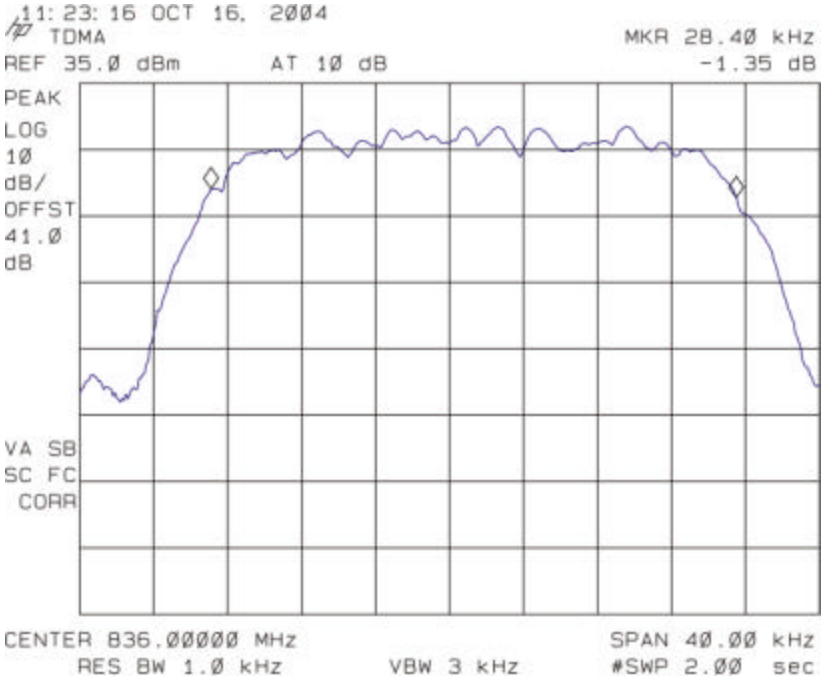

Carrier Frequency 849.0 MHz, Modulation TDMA, Input

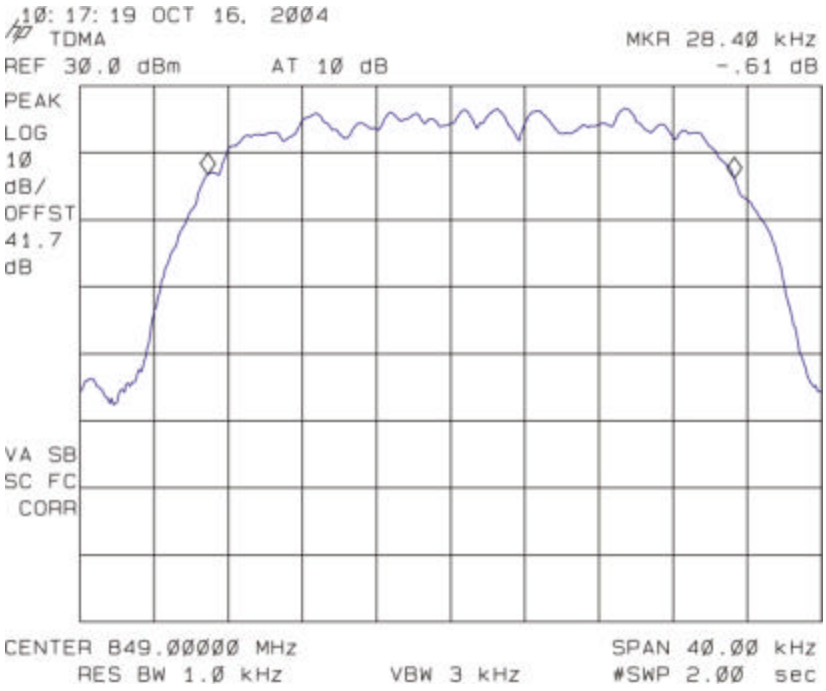

Carrier Frequency 849.0 MHz, Modulation TDMA, Output

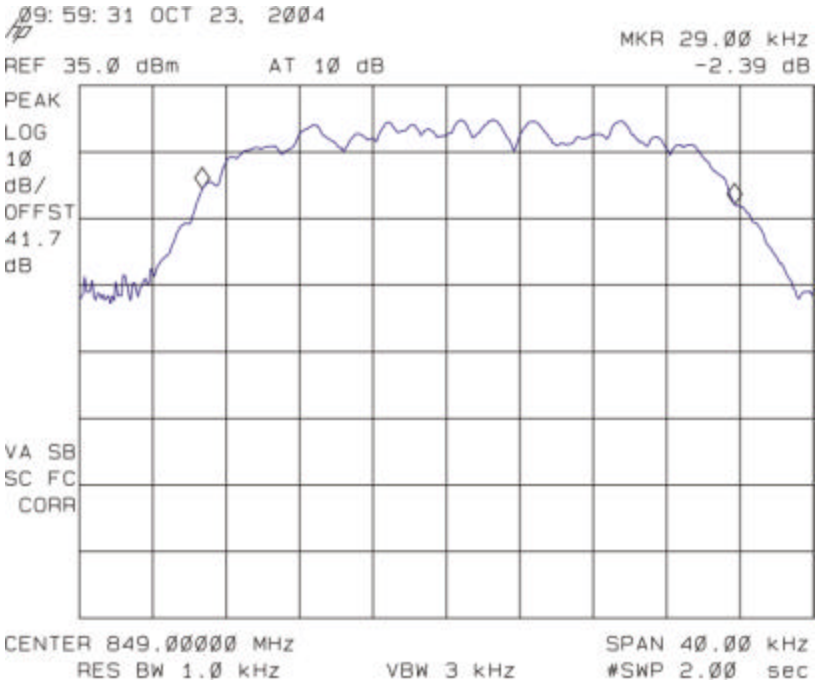

Carrier Frequency 824.0 MHz, Modulation GSM, Input

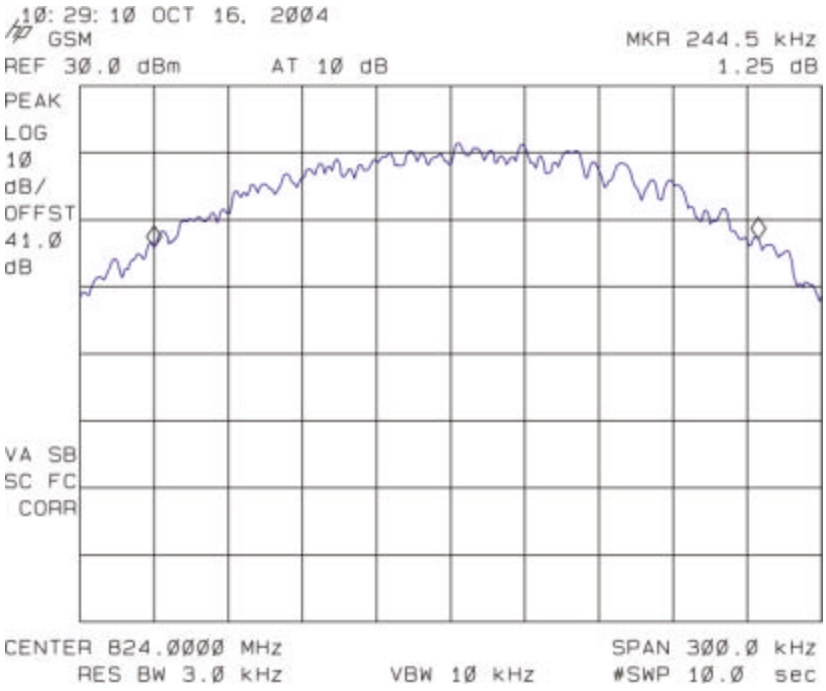

Carrier Frequency 824.0 MHz, Modulation GSM, Output

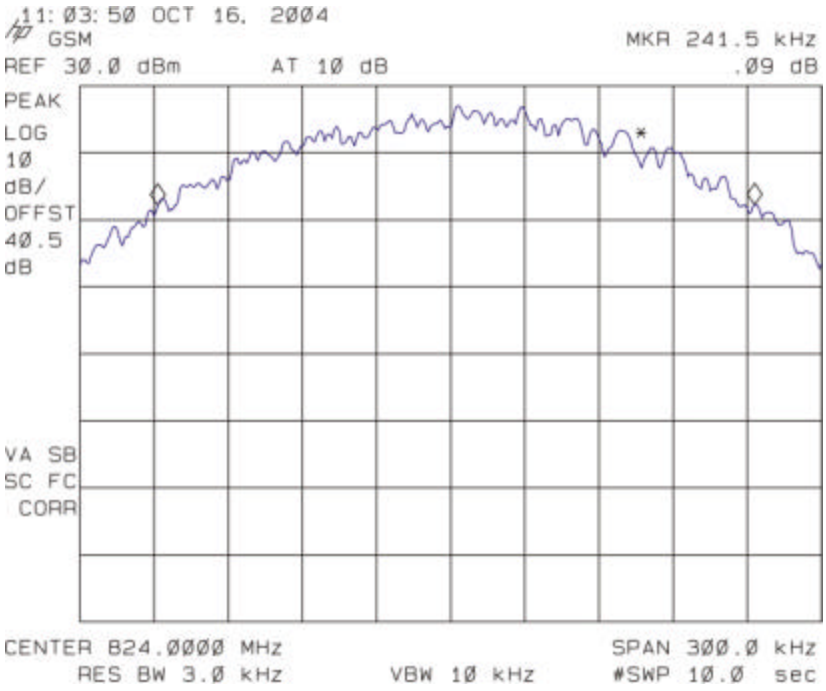

Carrier Frequency 836.0 MHz, Modulation GSM, Input

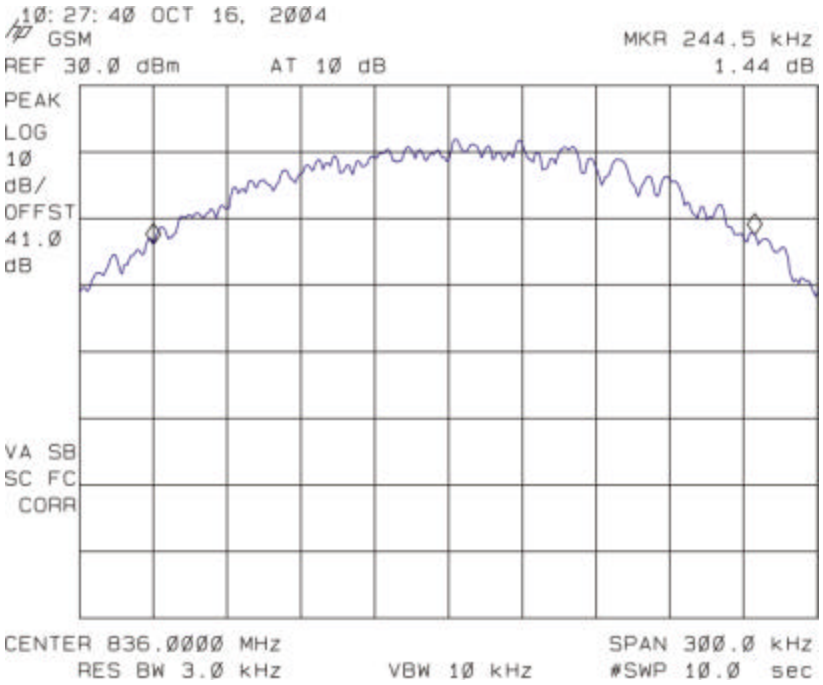

Carrier Frequency 836.0 MHz, Modulation GSM, Output

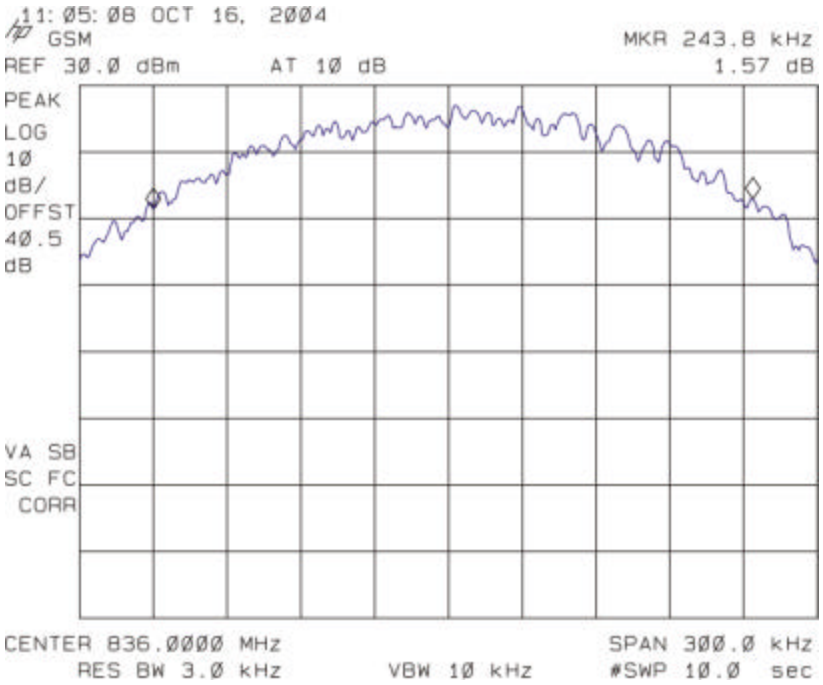

Carrier Frequency 849.0 MHz, Modulation GSM, Input

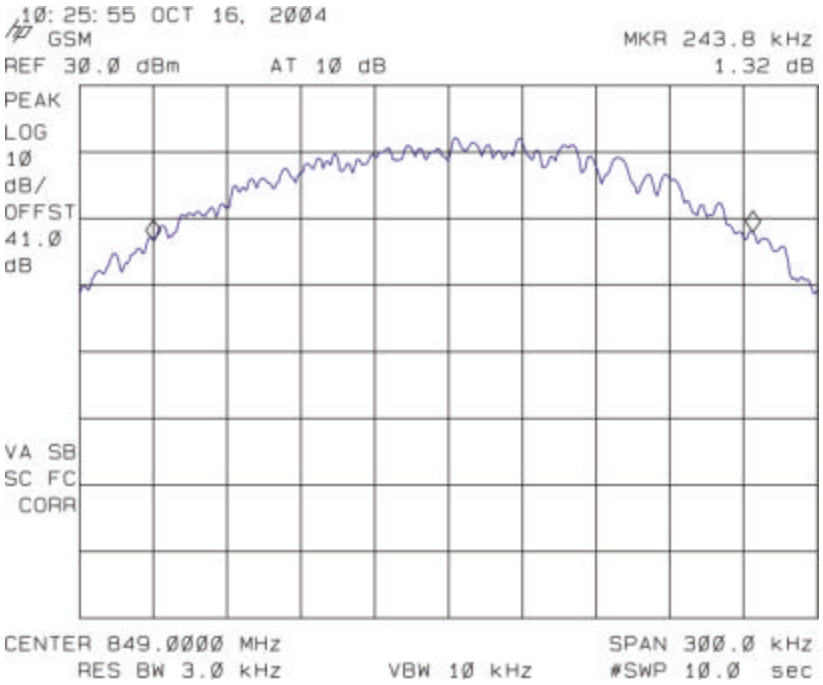

Carrier Frequency 849.0 MHz, Modulation GSM, Output

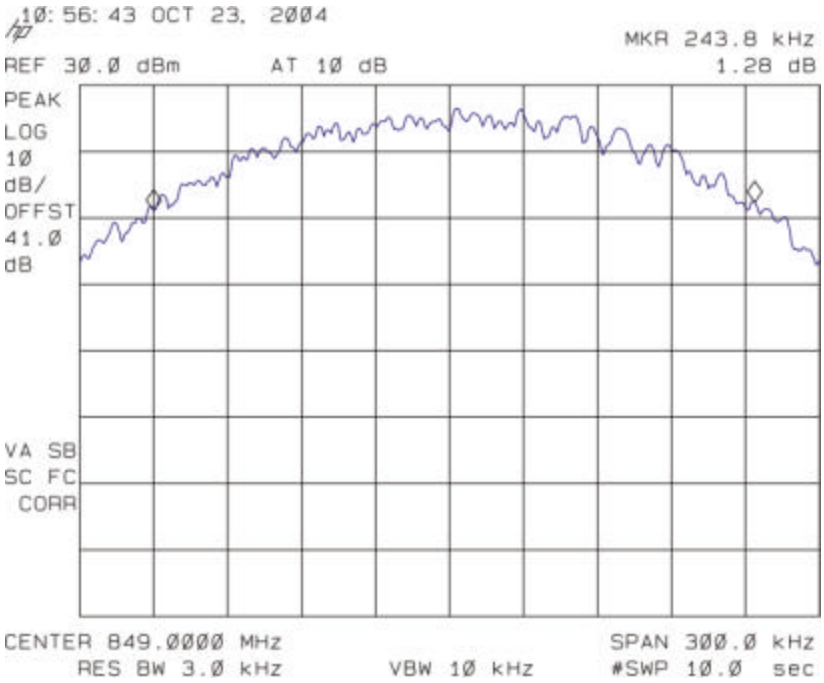

Carrier Frequency 824.0 MHz, Modulation FM, Input

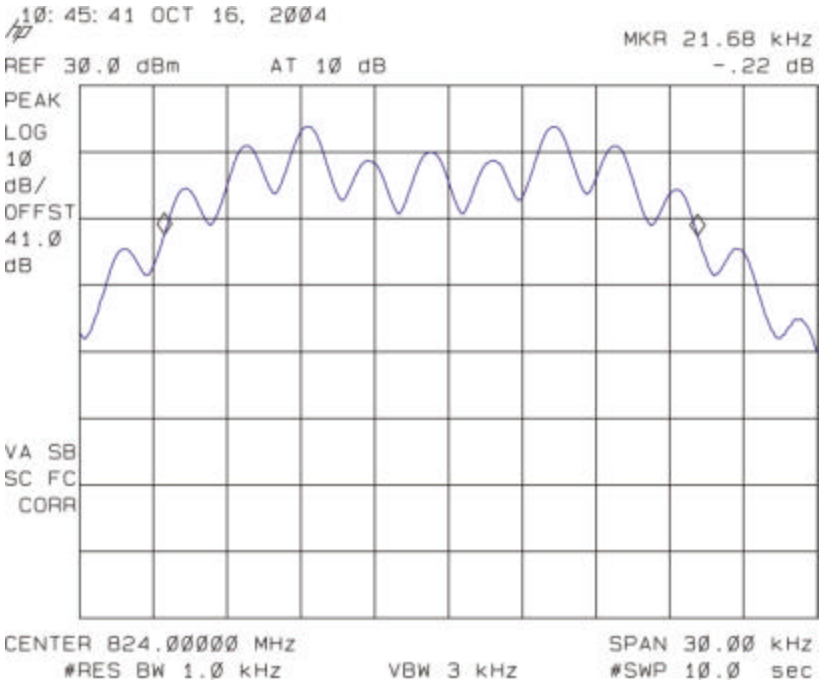

Carrier Frequency 824.0 MHz, Modulation FM, Output

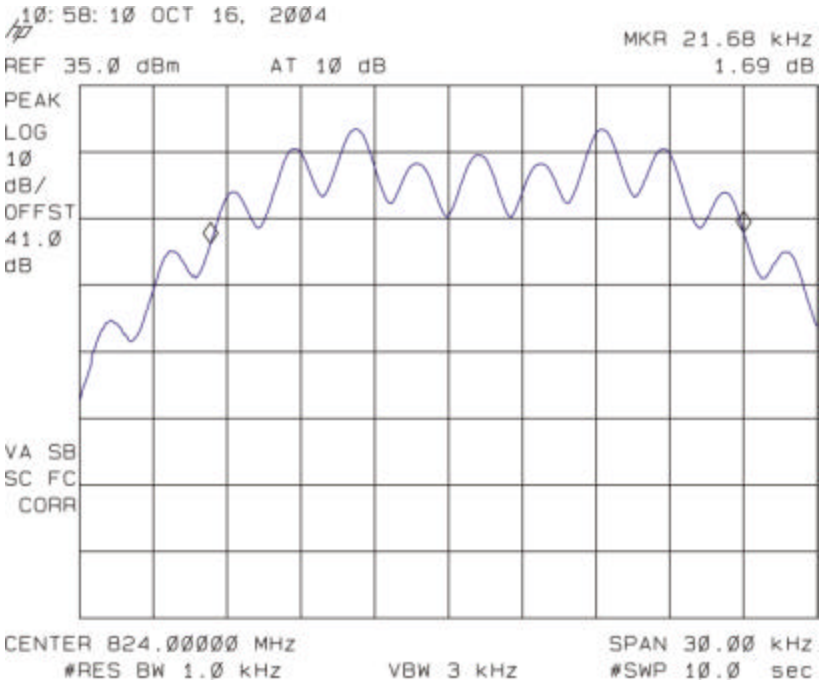

Carrier Frequency 836.0 MHz, Modulation FM, Input

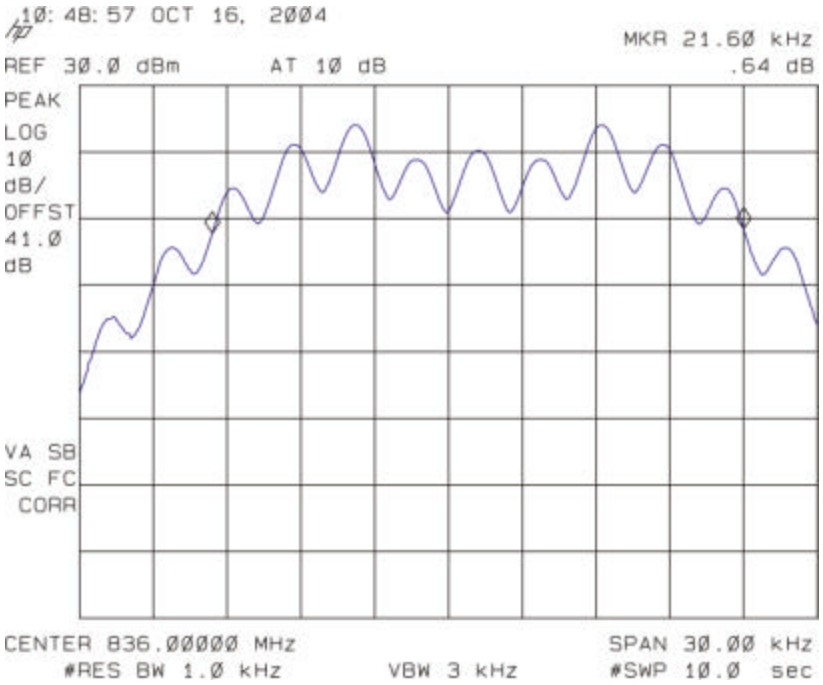

Carrier Frequency 836.0 MHz, Modulation FM, Output

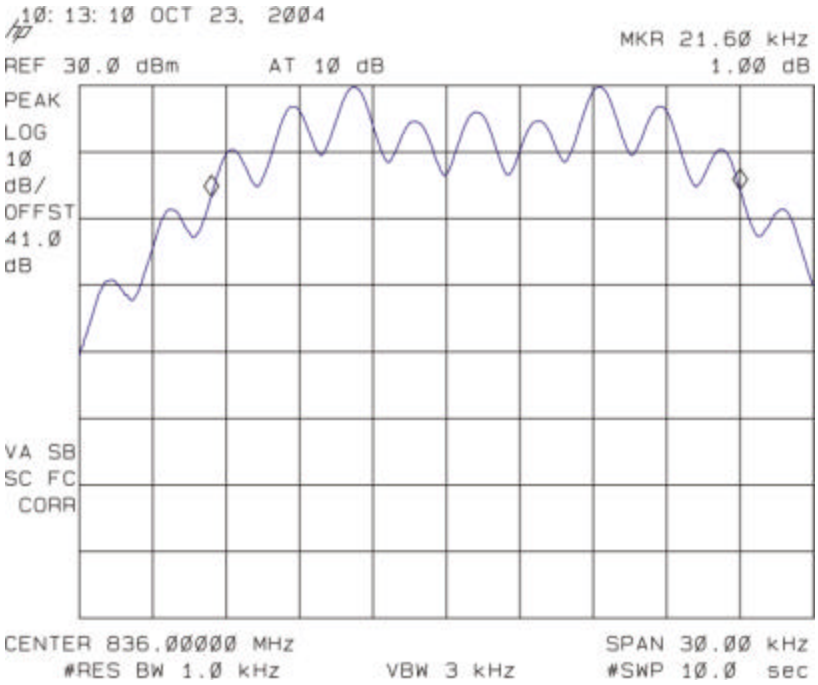

Carrier Frequency 849.0 MHz, Modulation FM, Input

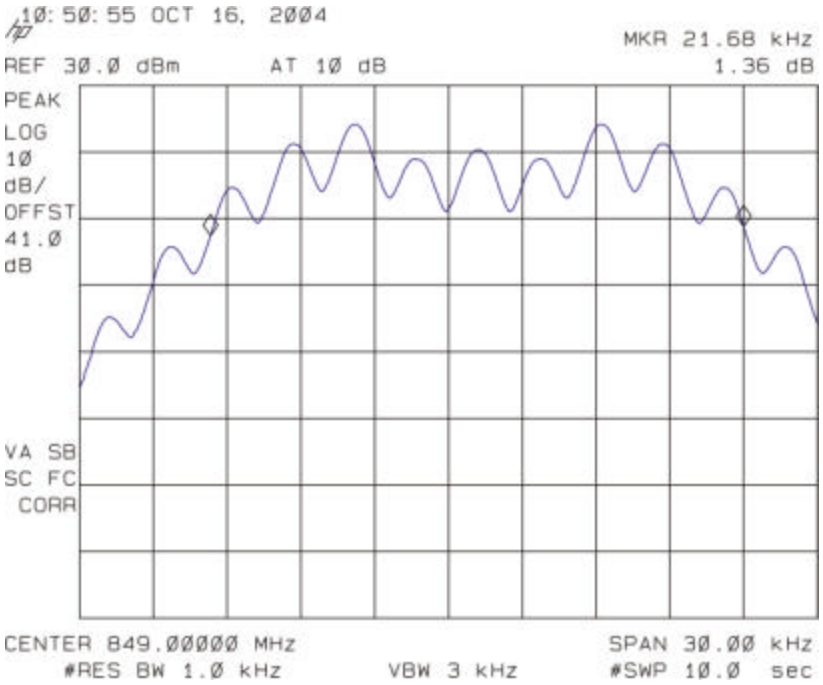

Carrier Frequency 849.0 MHz, Modulation FM, Output

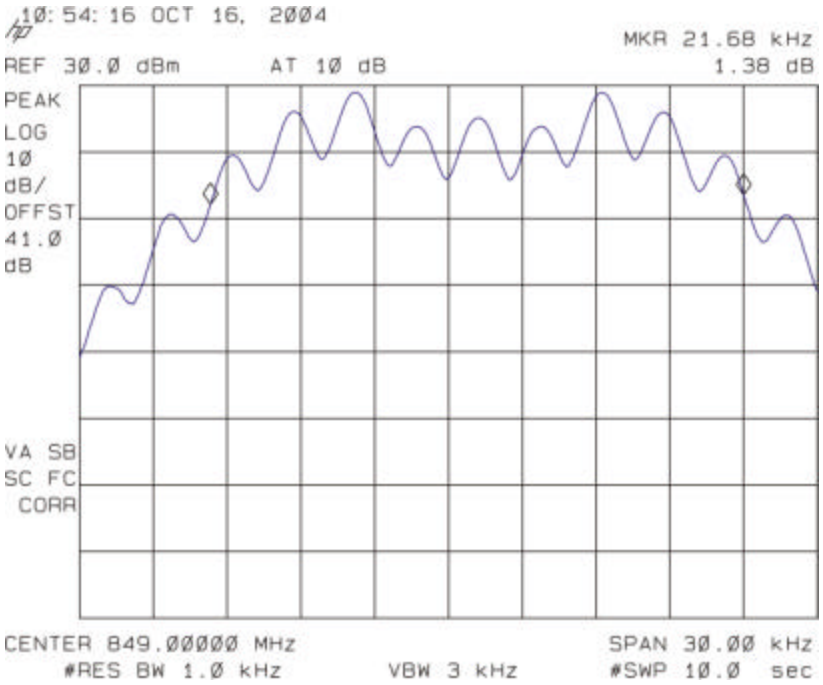

Carrier Frequency 1.850.0 MHz, Modulation TDMA, Input

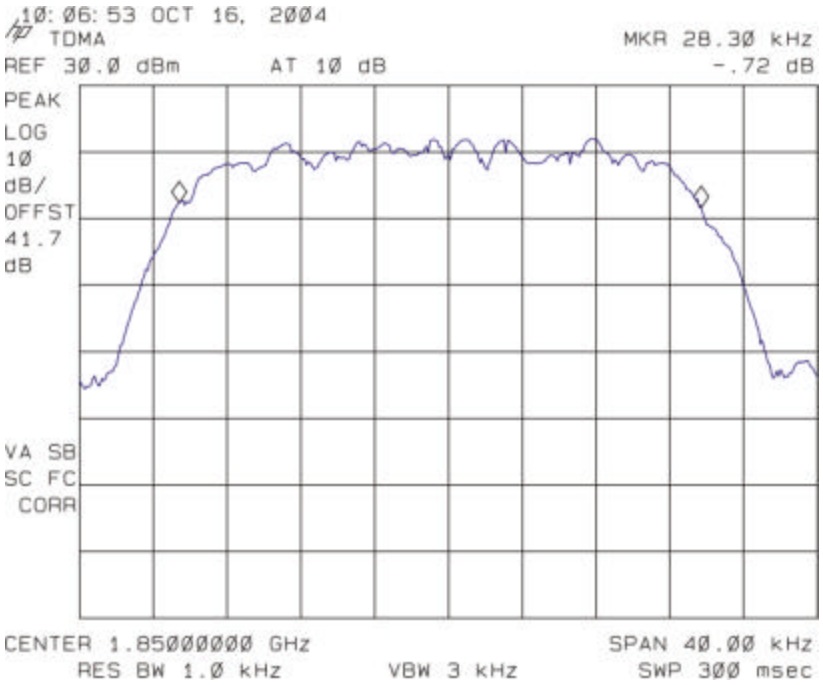

Carrier Frequency 1.850.0 MHz, Modulation TDMA, Output

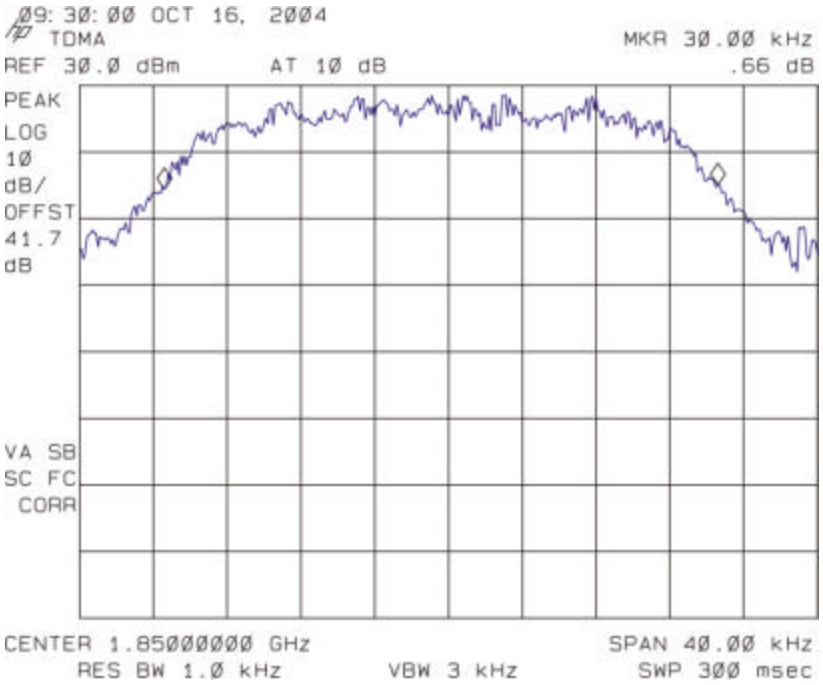

Carrier Frequency 1.880.0 MHz, Modulation TDMA, Input

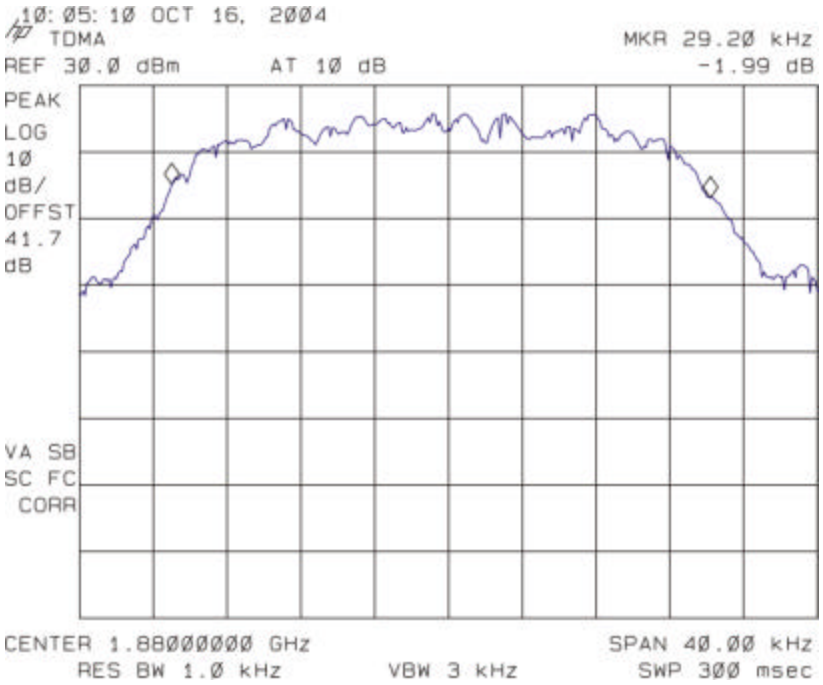

Carrier Frequency 1.880.0 MHz, Modulation TDMA, Output

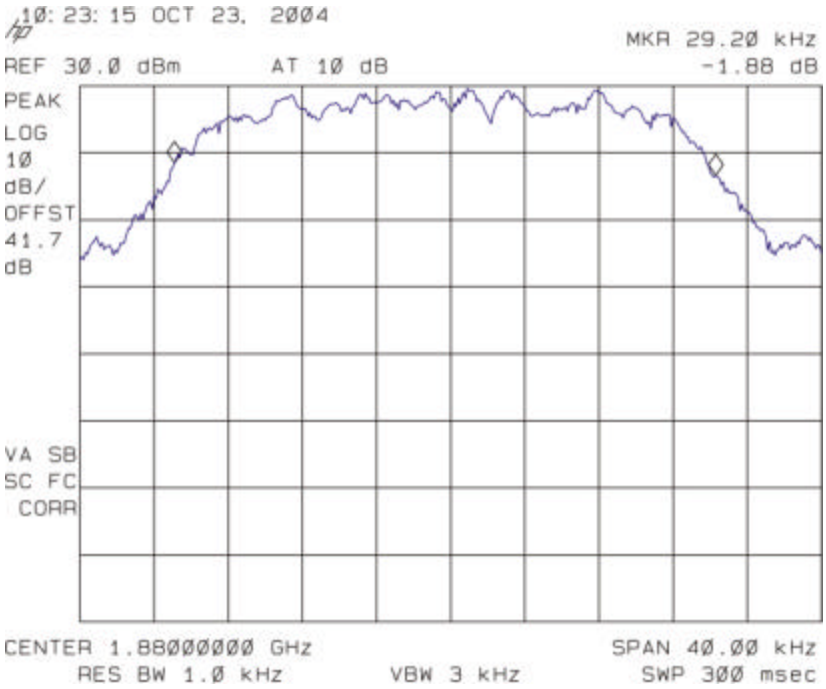

Carrier Frequency 1.910.0 MHz, Modulation TDMA, Input

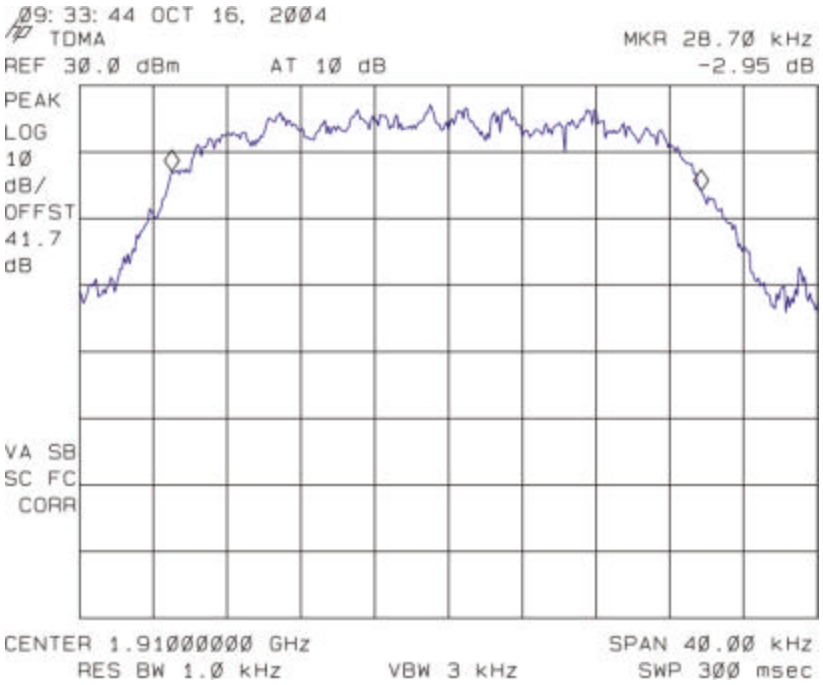

Carrier Frequency 1.910.0 MHz, Modulation TDMA, Output

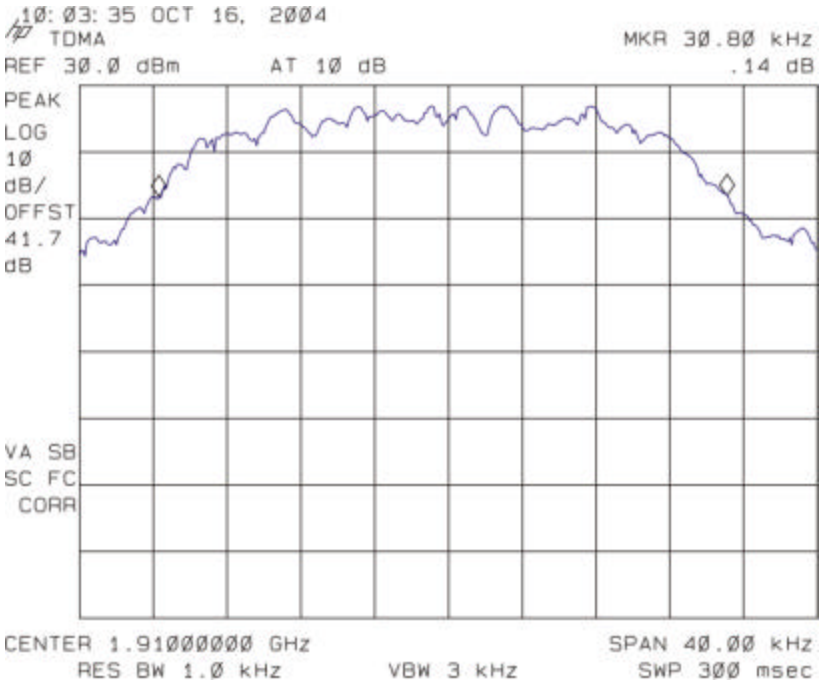

Carrier Frequency 1.850.0 MHz, Modulation GSM, Input

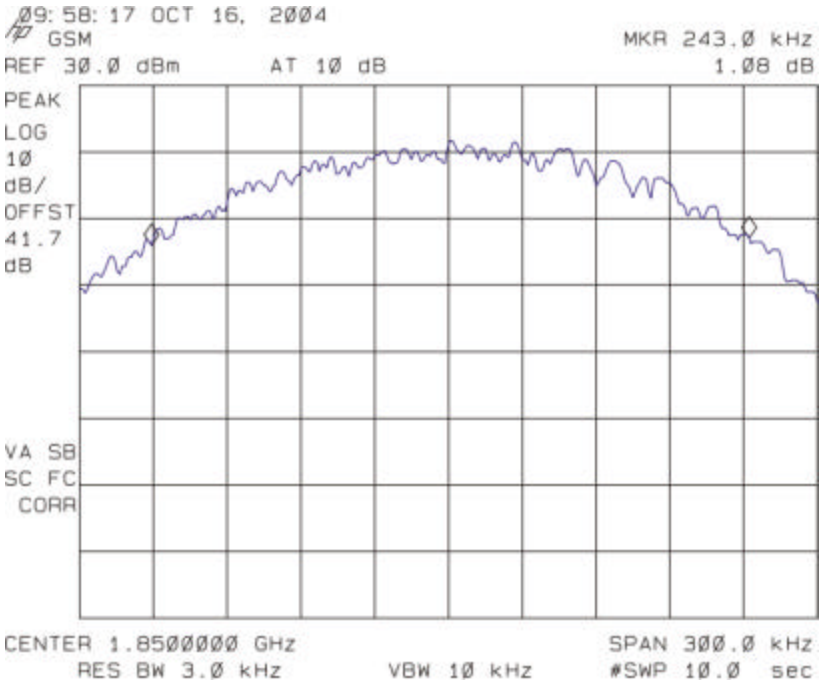

Carrier Frequency 1.850.0 MHz, Modulation GSM, Output

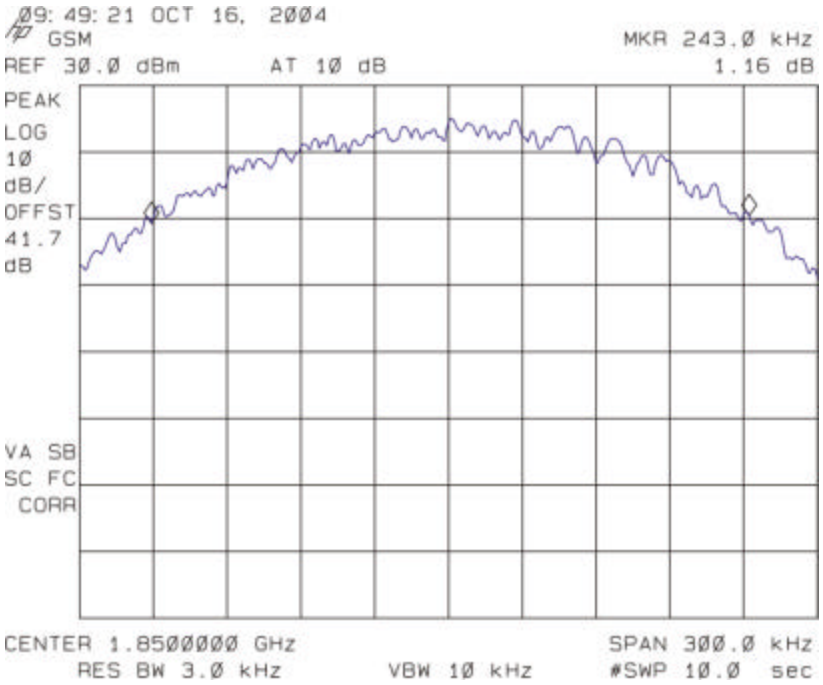

Carrier Frequency 1.880.0 MHz, Modulation GSM, Input

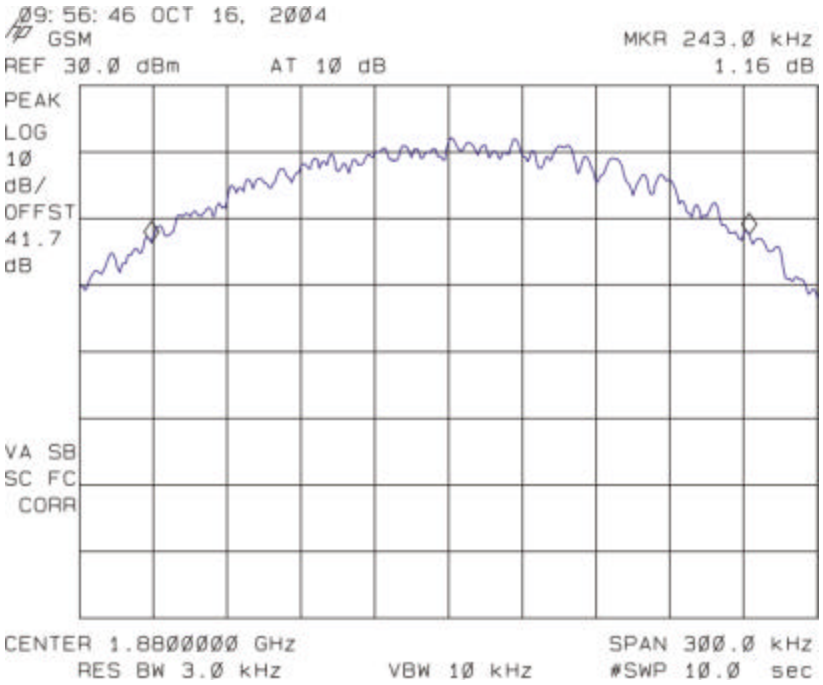

Carrier Frequency 1.880.0 MHz, Modulation GSM, Output

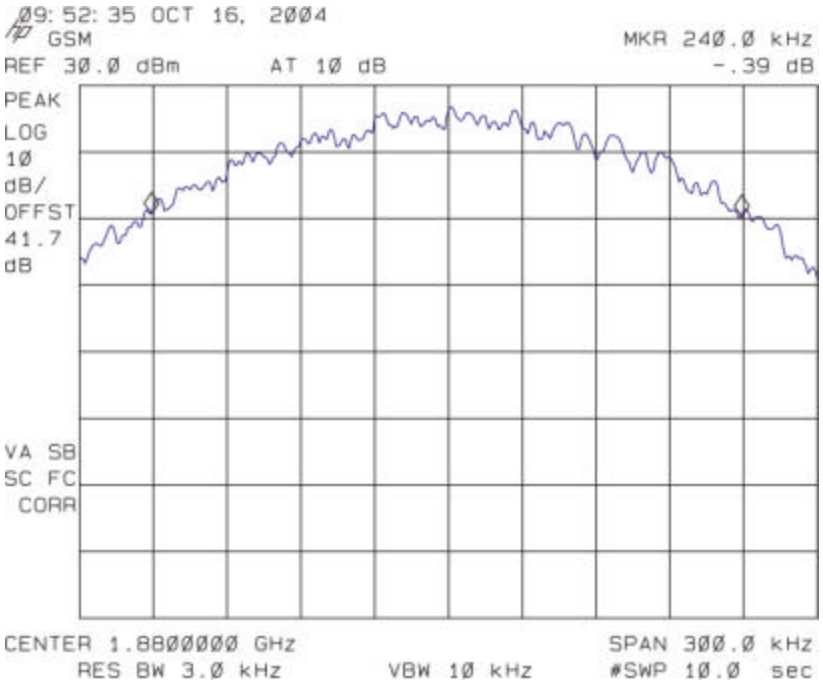

Carrier Frequency 1.910.0 MHz, Modulation GSM, Input

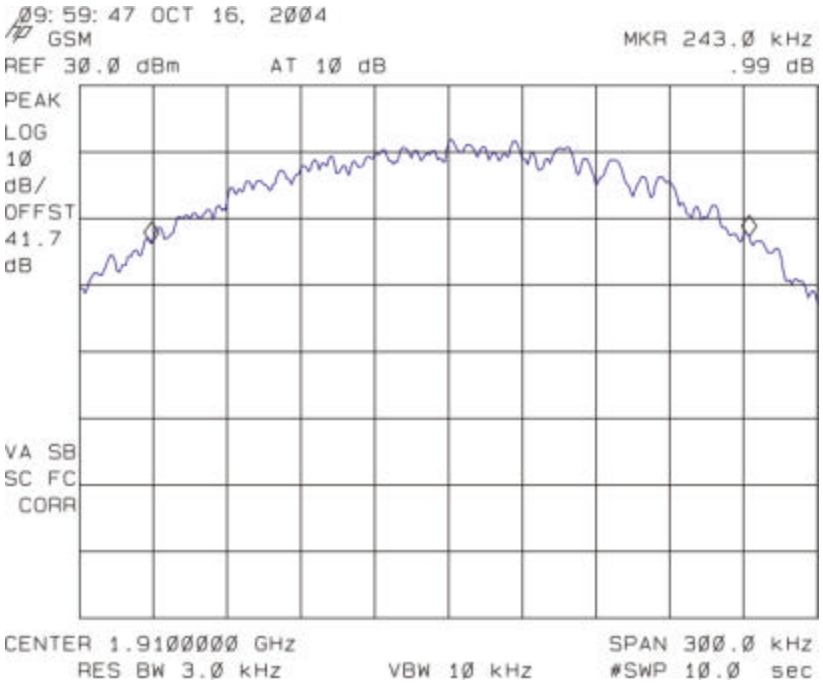
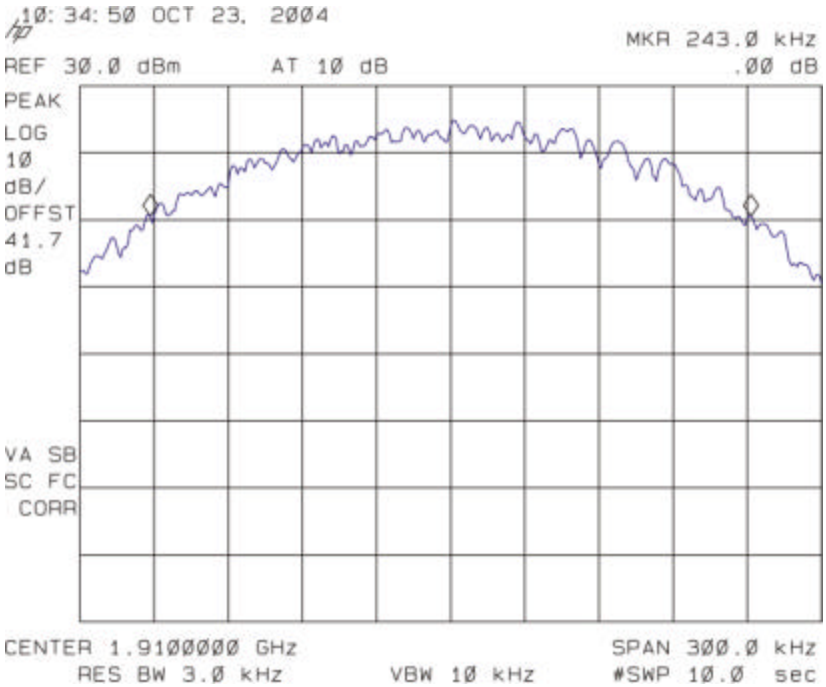
Carrier Frequency 1.910.0 MHz, Modulation GSM, Output