Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION
OF
FCC PART15 Subpart B COMPLIANCE

PRODUCT	:	Personal Computer
MODEL/TYPE NO	:	CP370
FCC ID	:	SOLCP370
TRADE NAME	:	COUPDEN
APPLICANT	:	CoupDEN Co., Ltd. 4F., 373-4 Seogyo-dong, Mapo-ku, Seoul, Korea
FCC CLASSIFICATION	:	JBP : Part 15 Class B Computer Device Peripheral
FCC RULE PART(S)	:	FCC Part 15 Subpart B Class B
FCC PROCEDURE	:	Certification
DATES OF TEST	:	May 16, 2006
DATES OF ISSUE	:	May 30, 2006
TEST REPORT No.	:	BWS-06-EF-0039
TEST LAB.	:	BWS TECH Inc. (Registration No. : 553281)

This Personal Computer(CP370) has been tested in accordance with the measurement procedures specified in ANSI C63.4-2000 at the BWS TECH/EMC Test Laboratory and has been shown to be complied with the electromagnetic emission limits specified in FCC Rule Part15 Subpart B Section15.107 and 15.109
I attest to the accuracy of data. All measurement herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Prepared by : Lee, Cheol Ho/EMC Engineer
BWS TECH INC.

Reviewed by: Nam, Tae-hyun/Chief Engineer
BWS TECH INC.

BWS TECH INC.

611-1, Maesan-ri, Mohyeon-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do 449-853, Korea
TEL: +82-31-333-5997, FAX: +82-31-333-0017
http://www.bws.co.kr

TABLE OF CONTENTS

	Pages
1. General Information	3
2. Description of Test Facility	4
3. Product Information	5
4. Description of Tests	6~7
5. Test Condition	8~9
6. Test Results	10~14
7. Sample Calculation and Other Information	15
8. Test Equipment List	16

Appendix 1. Test Setup Photos
Appendix 2. FCC ID Label and location
Appendix 3. External Photos of EUT
Appendix 4. Internal Photos of EUT
Appendix 5. Block Diagram
Appendix 6. User Manual

FCC TEST REPORT

Scope – *Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC).*

1. General Information

Applicant Name	:	CoupDEN Co., Ltd.
Applicant Address	:	3F, Duckyoung B/D, 1357-7, Secho-Dong, Secho-Gu, Seoul 137-070, Korea
Manufacturer Name	:	CoupDEN Co., Ltd.
Manufacturer Address	:	3F, Duckyoung B/D, 1357-7, Secho-Dong, Secho-Gu, Seoul 137-070, Korea
Contact Person	:	Seon-Hyun, Cho / Manager
Phone/Fax	:	Phone : +82-2-582-9511 / Fax : +82-2-581-2983

- **EUT Type** : Personal Computer
- **Model Number** : CP370
- **FCC Identifier** : SOLCP370
- **S/N** : Prototype
- **FCC Rule Part(s)** : Part 15 Subpart B Class B
- **Test Procedure** : ANSI C63.4-2003
- **Date of Tests** : May 16, 2006
- **Place of Tests** : BWS TECH Inc.
  EMC Testing Lab (FCC Registration Number : 553281)
  611-1, Maesan-ri, Mohyeon-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do
  449-853, Korea
  TEL: +82 31 333 5997 FAX: +82 31 333 0017
- **Test Report No. :** : BWS-06-EF-0039

2. Description of Test Facility

The measurement for radiated emission test were practiced at the open area test site of BWS TECH Inc. Measurement for conducted emission test were practiced at the semi EMC Anechoic Chamber test site of BWS TECH Inc. facility located at 294-9, Jungdae-Dong, Kwangju-Si, Kyunggi-Do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-2000 and CISPR Publication 16. The BWS TECH measurement facility has been filed to the Commission with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2000 and registered to the Federal Communications Commission(Registration Number : 553281).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-2000) was used in determining radiated and conducted emissions from the CoupDEN Co., Ltd. Personal Computer Model : CP370.

3. Product Information

3.1 Equipment Description

System Specification for CP370
1) CPU
- Intel® Pentium D830 3.0GHz

2) System memory
- 512MB or above

3) Hard Disk Drive
- 160GB or above (Serial ATA type)

4) CD-ROM Drive
- CD-ROM : Sony CDU5221 (52x reading, E-IDE type)
- CD-RW/DVD Drive : Toshiba Samsung Storage TS-H492 (52x32x52 CD-RW, 16xDVD-ROM Combo)

5) Serial connector
- On-Board (9pin male, 1ea)

6) Parallel connector
- On-Board (25pin female, 1ea)

7) Keyboard connector
- On-Board (6pin PS/2 type, 1ea)

8) Mouse connector
- On-Board (6pin PS/2 type 1ea)

9) Sound connector
- Line-In, Line-Out, Mic-In, RS Out, CS Out, SPDIF Out-Optical and Coaxial Audio port

10) Front-End connector
- On-Sub Board in front bezel (Mic jack, Earphone jack and USB connector 2ea
- 1394 connector, 1ea (option for buyer)

11) USB connector
- On-Board (4ea), Front-End (2ea)

12) VGA Card
- GeForce 6600 128MB for dual display(Analog+DVI-I) and TV out

13) Expansion slot
- PCI-16x slot 1ea, PCI-1x slot 2ea and PCI slot 3ea

14) Case spec.
- Dimension : 180mm(W) x 410mm(H) x 450mm(D)
- Bay : 1) 3.5 inch x 7ea(hidden 6 bays included)
  2) 5.25 inch x 4ea
- Weight : 5.5Kg (net), 6.5Kg(gross) with packing parts

15) Cooling Solution
- 120mm x 2ea for CP303 (fixed 1500rpm)
- 120mm x 2ea for CP350, 370 (from 900~1600rpm) with Fan controller and 120mm Fan (fixed 1500rpm)

16) Cable
- Power cable : 1.8m

17) Power Supply Unit (Seventeam BLP-300BLP)
- 300W Maximum
- AC Input Voltage : 115~230VAC,
- AC Input Frequency : 50 ~ 60Hz

18) Environmental conditions
- Operating Temperature : 5˚C~35˚C , Storage Temperature : -20˚C~ 55˚C
- Operating Humidity : 30% ~80%(RH) , Storage Humidity : 30% ~80%(RH)

3.2 Variations covered by this report

Technical Deviation : Tested by model CP-501.

3.3 Additional Information Related to Testing

Test results apply only to the particular sample tested and functionality described in this test report.
This report may be reproduced in full. Partial reproduction may only be made with the written permission of the BWS TECH Inc.

4. Description of Tests

4.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2000. The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50Ω/50uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within an bandwidth of 10KHz or for "quasi-peak" within a bandwidth of 9KHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1m x 1.5m x 0.8m wooden table which is placed 40cm away from the vertical wall and 1.5m away from the side wall of the chamber room. Two LISNs are bonded to the shielded room. The EUT is powered from the PMM LISN and the support equipment is powered from the another Koritsu LISN. Power to the LISNs is filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the EMCO LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling(serprntine fashion) to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to Spectrum Analyzer to determine the frequency producing the max. emission from the EUT. The frequency producing the max. level was reexamined using the detector function set to the CISPR Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.45 to 30MHz. The bandwidth of the Spectrum Analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was maximized by switching power lines, varying the mode of operation or resolution, clock or data exchange speed, if applicable, whichever determined the worst-case emission. Each emission was calibrated using self-calibrating mode.

Photographs of the worst-case emission can be seen in photographs of conducted emission test setup.

4.2 Radiated Emission Measurement

Preliminary measurements were made at indoor 3 meter semi EMC Anechoic Chamber using broadband antennas, broadband amplifier, and spectrum analyzer to determine the emission frequencies producing the maximum EME.

Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000MHz using bi-log antenna and above 1000MHz, linearly polarized double ridge horn antennas were used. Above 1GHz, linearly polarized double ridge horn antennas were used. The measurements were performed with three frequencies which were selected as bottom, middle and top frequency in the operating band. Emission level from the EUT with various configurations were examined on the spectrum analyzer connected with the RF amplifier and plotted graphically.

Final measurements were made outdoors open site at 10-meter test range using biconical and logperiodic antenna. The output from the antenna was connected, via a preselector or a preamplifier, to the input of the EMI Measuring Receiver and Spectrum analyzer(for above 1GHz). The detector function was set to the quasi-peak or peak mode as appropriate. The measurement bandwidth of the Field strength receiver was set to at least 120kHz (1MHz for measurement above 1GHz), with all post-detector filtering no less than 10 times the measurement bandwidth. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during preliminary measurement was examined and investigated as the same set up and configuration which produced the maximum emission The EUT , support equipment and interconnecting cables were configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1m x 1.5 meter table. The turntable containing the system was rotated and the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission.

Each emission was maximized by varying the mode of operating frequencies of the EUT. The system was tested in all the two orthogonal planes and changing the polarity of the antenna. The worst case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor(20dB/decade) as per section 15.31(f).

Photographs of the worst-case emission test setup can be seen in Appendix A.

5. Test Condition

5.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner which tends to maximize its emission level in a typical application.

Radiated Emission Test

Preliminary radiated emission tests were performed using the procedure in ANSI C63.4/2000 Clause 8.3.1.1 to determine the worst operating condition. Final radiated emission tests were conducted at 3 meter open field test site.

5.2 EUT operation

EUT was tested according to the following operation modes provided by the specifications given by the manufacturer, and reported the worst emissions.

5.3 Test System layout on EUT and peripherals

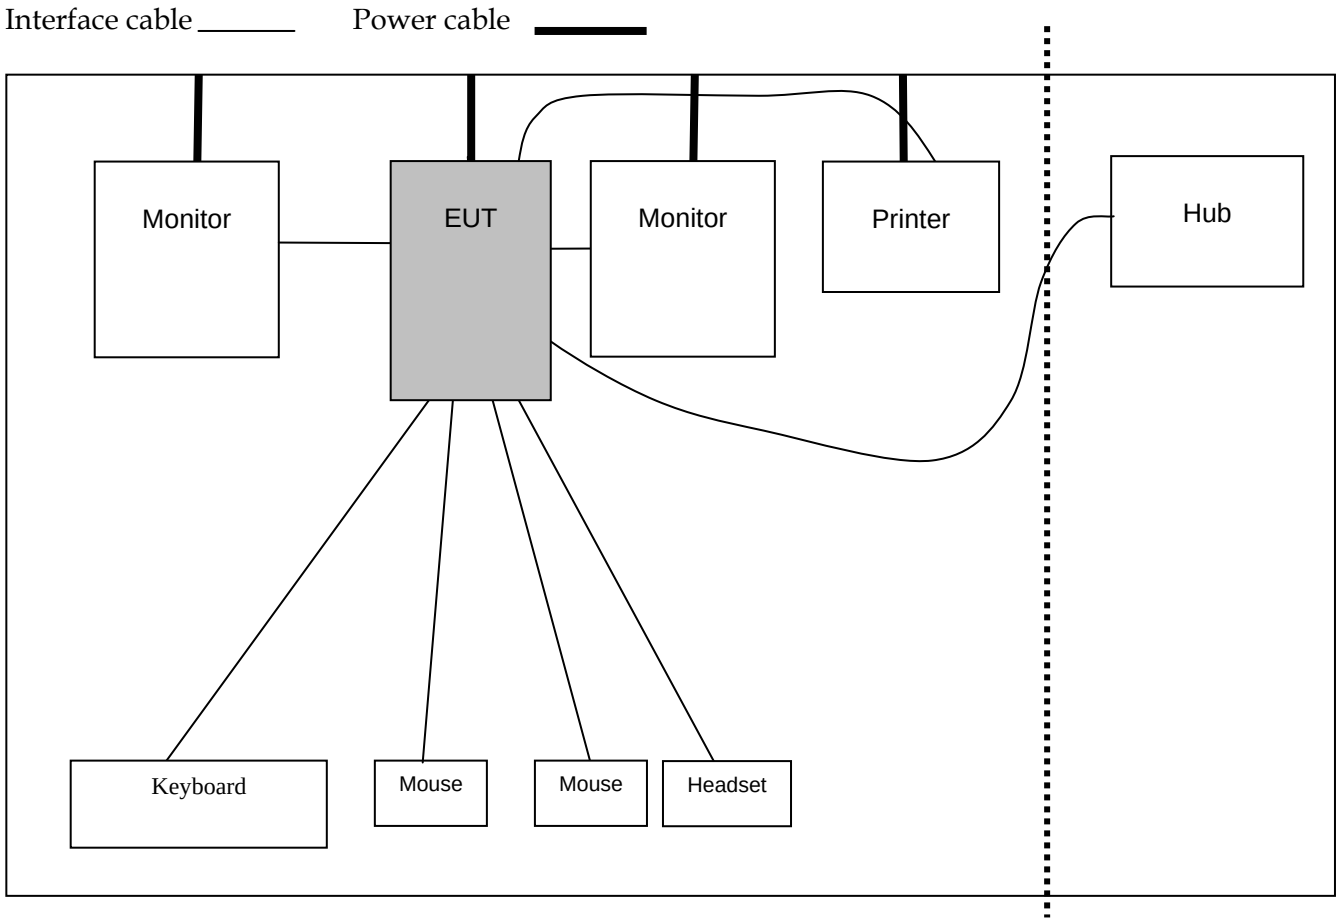

5.4 Peripherals / Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

Type of Peripheral Equipment Used:

Description	Model Name	Serial No.	Manufacturer	FCC ID
EUT	CP370	-	Coupden Corporation	-
Monitor	LT1563	TS1536K02034100040	TEKSON INC	DoC
Monitor	Q7T3	99L8372RSK51300385TABRSK	BenQ	DoC
Keyboard	KB-9963	B28AC0NGANB1WH	COMPAQ	DoC
Mouse	Wheel Mouse 3.0 PS/2	3211626-2	Microsoft	DoC
Mouse	M056UO	E300K3I	NA	DoC
Headset	NA	NA	NA	-
Joystick	Side Winder Plug&Play Game Pad	9760200726905	Microsoft	DoC
Printer	MJC-650G	H3AH703638	Samsung Elec.	DOC

Type of Cables Used:

Device from	Device to	Type of Cable	Length(m)	Type of shield
EUT	Keyboard	PS/2	2.1	Unshielded
EUT	Mouse	PS/2	1.8	Unshielded
EUT	Mouse	USB	1.8	Unshielded
EUT	Headset	Din	1.8	Unshielded
EUT	Power	INLET	1.5	Unshielded
EUT	Monitor	Video	1.8	Shielded
EUT	Monitor	Din	1.8	Shielded
EUT	Joystick	Dsub	1.5	Unshielded
EUT	Printer	Dsub	1.5	Shielded

6. TEST RESULTS

6.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

FCC Rule Parts	Measurement Required	Result
15.107(a)	Conducted Emission	Passed by –9.58 dB
15.109(g)	Radiated Emissions	Passed by –2.74 dB

The data collected shows that the CoupDEN Co., Ltd. Personal Computer model : CP370 complies with technical requirements of the Part 15.107 and 15.109 of the FCC Rules.

Note : Modification to EUT

The device tested is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

6.2 Conducted Emissions

EUT	: Personal Computer model : CP370
Limit apply to	: FCC Part15 Subpart B Class B Section 15.107(a)
Test Date	: May 16, 2006
Operating Condition	: Worst case mode (MONITORING)
Environment Condition	: Humidity Level : 43 %RH, Temperature : 28 ℃
Result	: Passed by –9.58 dB

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Tabulated Conducted Emission Test Data

Detector Mode ; CISPR Quasi Peak mode (6dB Bandwidth : 9kHz).

Freq [MHz]	Correcton		Phase [H/N]	Quasi-Peak Mode			Aberage Mode		
	AMN	C.L		Limit	Reading	Emission Level	Limit	Reading	Emission Level
				[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]
0.170	0.06	0.03	N	65.40	55.73	55.82	55.40		
0.238	0.07	0.10	N	63.60	40.73	40.90	53.60		
0.262	0.07	0.16	N	62.90	41.50	41.73	52.90		
0.306	0.08	0.22	N	61.60	40.96	41.26	51.60		
0.394	0.08	0.24	N	59.10	36.25	36.57	49.10		
0.574	0.07	0.30	N	56.00	30.19	30.56	46.00		
0.710	0.07	0.30	N		28.53	28.90	46.00		
1.182	0.04	0.42	N		24.76	25.22	46.00		
1.658	0.03	0.50	N		26.90	27.43	46.00		
10.970	0.05	1.07	H	60.00	33.91	35.03	50.00		
11.490	0.04	1.11	H		35.10	36.25	50.00		
12.330	0.04	1.16	H		38.43	39.63	50.00		

NOTES :

1. *H : Hot Line , N :Neutral Line*
2. *Emission Level = Reading + Correction Factor*
3. *Measurements were performed at the AC Power Inlet of the host PC with the EUT plugged in the frequency band of 150kHz ~30MHz*

Tested by Lee, Cheol Ho

6.3 Radiated Emissions

EUT	: Personal Computer model : CP370
Limit apply to	: FCC Part15 Subpart B Class B Section 15.109(g)
Test Date	: May 16, 2006
Operating Condition	: Worst case mode (MONITORING)
Environment Condition	: Humidity Level : 39 %RH, Temperature : 21 ℃
Result	: Passed by -2.74 dB

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode : CISPR Quasi-Peak mode (6dB Bandwidth : 120 kHz)

Measurement Distance : 3 meters

Frequency [MHz]	Reading [dBμV]	Polarization [*H/**V]	Ant.Factor [dB]	Cable Loss [dB]	Limit [dBμV/m]	Emission Level [dBμV/m]	Margin 04 [dB]
68.90	20.11	H	10.77	3.33	40.00	34.21	-5.79
73.20	20.61	H	9.88	3.51	40.00	34.00	-6.00
144.00	18.91	H	13.06	2.64	43.50	34.62	-8.88
535.95	19.63	H	18.36	5.27	46.00	43.26	-2.74
564.17	18.10	V	18.98	5.41	46.00	42.49	-3.51
796.43	13.03	H	22.61	6.71	46.00	42.35	-3.65

NOTES :

1. ** H : Horizontal polarization , ** V : Vertical polarization*
2. *Emission Level = Reading + Antenna factor + Cable loss*
3. *Margin value = Limit - Emission Level*
4. *All other emissions not reported were more than 25dB below the permitted limit.*
5. *There is no noise from 1GHz to 16GHz(CPU Cluck 3.2GHz)*

Tested by Lee, Cheol Ho

Plots of Conducted Emission Test

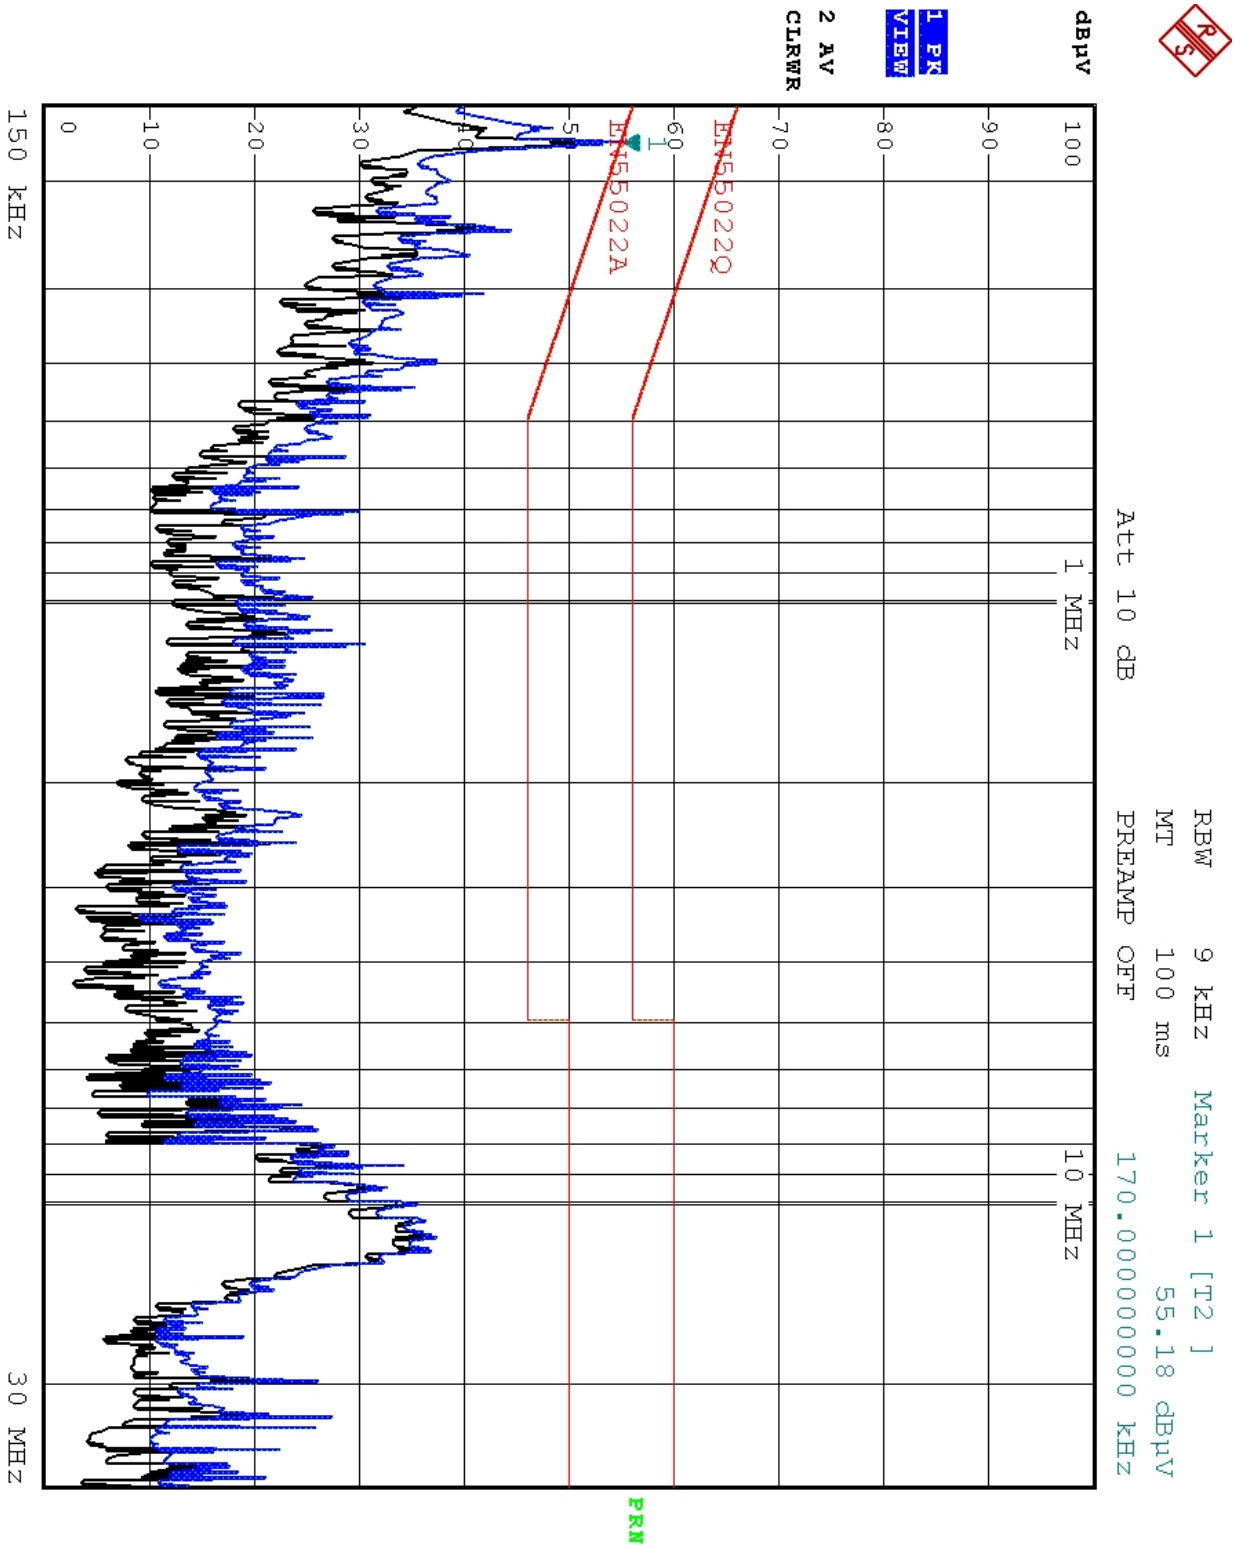

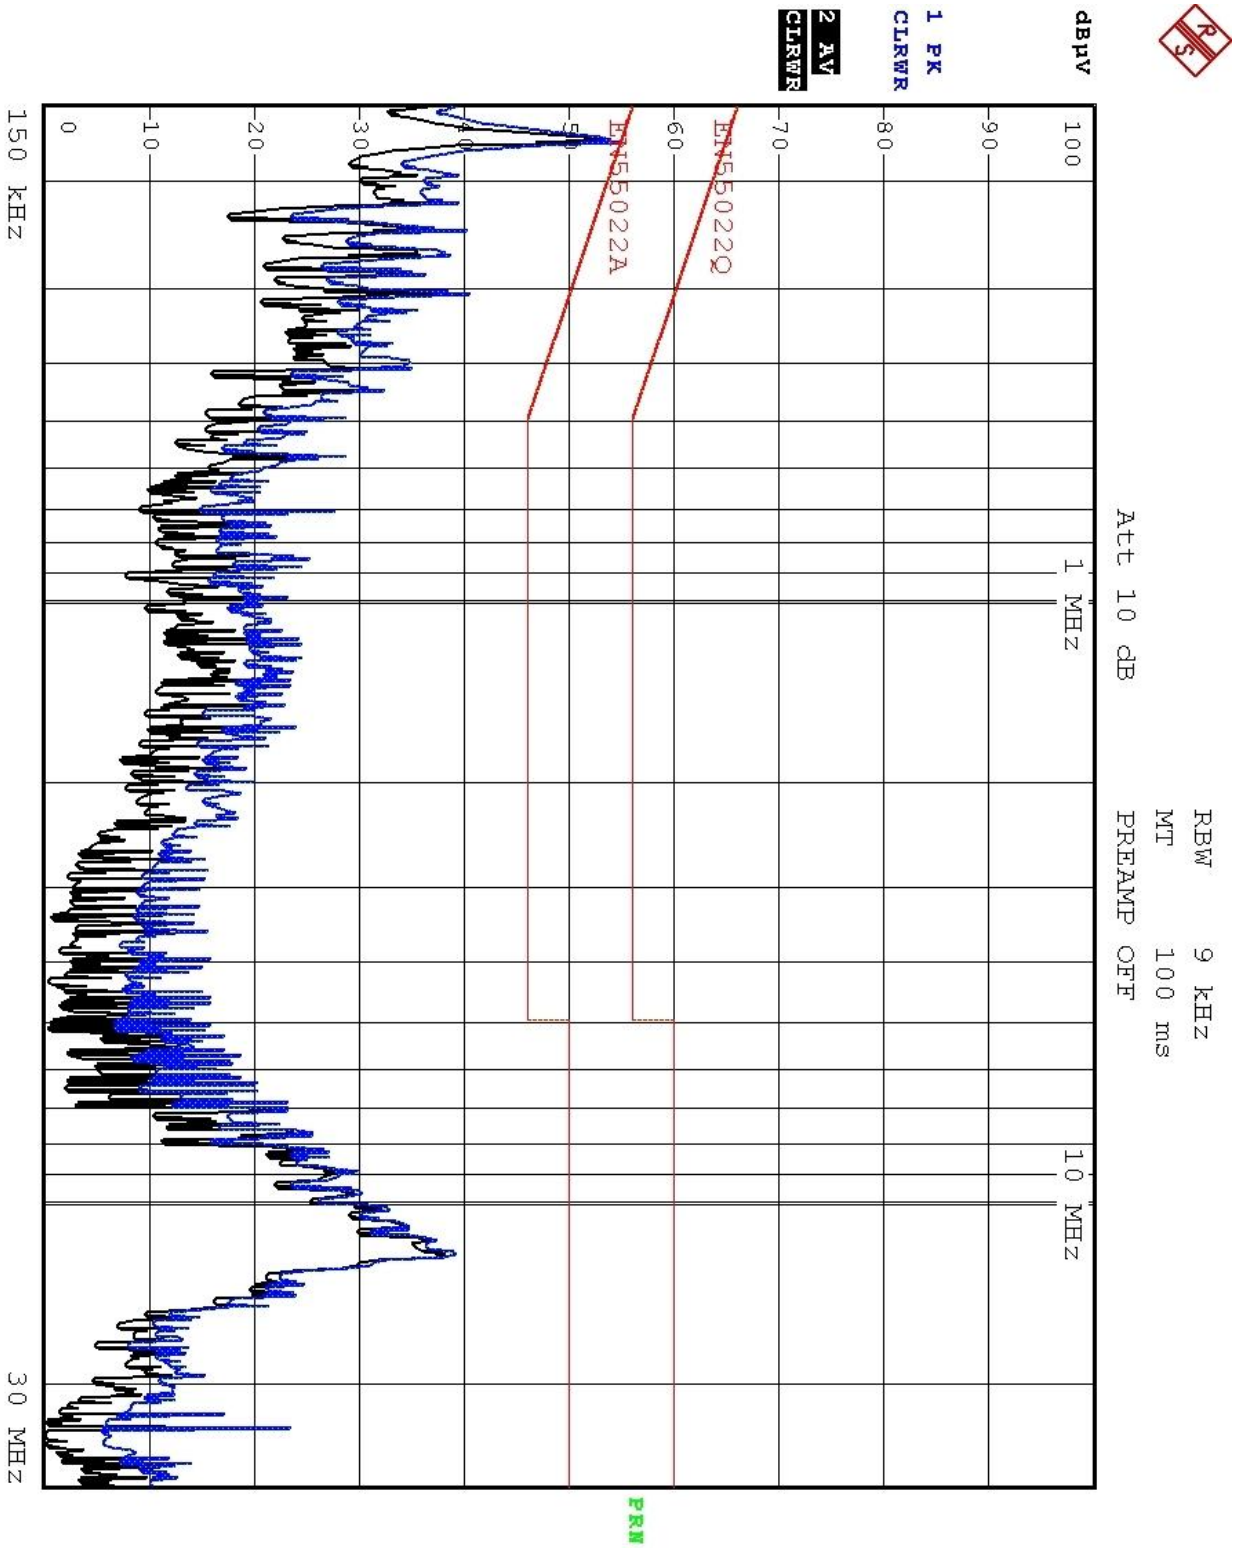
RBW 9 kHz
MT 100 ms
PREAMP OFF
Att 10 dB
dBµV
1 PK
CLRWR
2 AV
CLRWR
EN55022Q
EN55022A
PRN
1 MHz
10 MHz
150 kHz
30 MHz
100
90
80
70
60
50
40
30
20
10
0

7. Sample Calculation and Other Information

7.1 Sample Calculations

$$dB\mu V = 20 \log 10 (\mu V/m)$$

$$\mu V = 10^{(dB\mu V/20)}$$

EX. 1.
@ 0.170MHz Class B limit(Quasi-peak) = 65.40 dBμV

Reading = 55.730 dBμV (calibrated level)
AMN factor + Cable Loss = 0.09 dB
Total = 55.82 dBμV/m
Margin = 55.82 – 65.40 = -9.58
9.58 dB ; below limit

EX. 2.

@ 535.95 MHz Class B limit = 46.00 dBμV/m

Reading = 19.63 dBμV(calibrated level)
Antenna factor + Cable Loss = 23.63 dB
Total = 43.260 dBμV/m
$10^{(43.26/20)}$ = μV/m
Margin = 43.26 – 46.00 = -2.74 dB
14.40 dB ; below limit

7.2. Measurement Uncertainty

Measurement uncertainty of RFI Voltage Measurement test was estimated at ±3.51 dB(k=2).
Measurement uncertainty of RFI Field Strength Measurement test was estimated at ±4.34dB (k=2).

8. TEST EQUIPMENTS LIST

The listing below denotes the test equipments utilized for the test(s).

Equipment Type	Model	Manufacture	Serial No	Cal Due Date	Use
Signal Analyzer	PMM9000	PMM	3100570602	05. 31. 2006	☒
EMC Analyzer	E7403A	HP	US39150108	05. 18. 2006	☒
EMI Receiver	ESVS 10	ROHDE & SCHWARZ	863247/019	05. 25. 2006	☒
Conducted Cable	CC-10	N/A	BWS-02	N/A	☒
LISN Multiline	L1-115	Com-Power	241017	11. 11. 2006	☒
LISN Multiline	L1-115	Com-Power	241018	11. 02. 2006	☒
Bilog Antenna	VULB 9160	SCHWARZBECK	9160-3122	12. 16. 2006	☒
Open Site Cable	OSC-30	N/A	BWS-01	N/A	☒
Antenna Mast	JAC-3	DAIL EMC	N/A	N/A	☒
Antenna Turntable Controller	JAC-2	JAEMC	N/A	N/A	☒