# FCC TEST REPORT

| | | |
|---|---|---|
| **CATEGORY** | : | Portable |
| **PRODUCT NAME** | : | Bluetooth Dongle |
| **FCC ID.** | : | SOO-6120 |
| **FILING TYPE** | : | Certification |
| **MODEL NAME** | : | BAXXXX (X:0~9, A~Z) |
| **APPLICANT** | : | **Nits Technology Inc.**<br>7Fl. No. 7, Alley 16, Lane 235, Bauchiau Rd., Shindian City, Taipei, Taiwan 231 |
| **MANUFACTURER** | : | **EXPLORER TECHNOLOGY CO., LTD.**<br>7F-9, NO. 112, Hsin-Min Street, Chung Ho City, Taipei Hsien, Taiwan, Taipei |
| **ISSUED BY** | : | **SPORTON INTERNATIONAL INC.**<br>6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C. |

## Statements:

The test result in this report refers exclusively to the presented test model / sample.
Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

Certificate or Test Report could not be used by the applicant to claim the product endorsement by NVLAP and any agency of U.S. government.

The test equipment used to perform the test is calibrated and traceable to NML/ROC or NIST/USA.

Lab Code: 200079-0

# Table of Contents

**HISTORY OF THIS TEST REPORT** ..... **II**

**CERTIFICATE OF COMPLIANCE** ..... **III**

**1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST** ..... **1**

1.1. Applicant ..... 1
1.2. Manufacturer ..... 1
1.3. Basic Description of Equipment under Test ..... 1
1.4. Features of Equipment under Test ..... 1
1.5. Antenna Description ..... 2
1.6. Table for Carrier Frequencies ..... 2

**2. TEST CONFIGURATION OF THE EQUIPMENT UNDER TEST** ..... **3**

2.1. Test Configuration ..... 3
2.2. The Test Mode Description ..... 5
2.3. Description of Test Supporting Units ..... 5

**3. GENERAL INFORMATION OF TEST** ..... **6**

3.1. Test Facility ..... 6
3.2. Standards for Methods of Measurement ..... 6
3.3. Frequency Range Investigated ..... 6
3.4. Test Distance ..... 6
3.5. Test Software ..... 6

**4. LIST OF MEASUREMENTS** ..... **7**

4.1. Summary of the Test Results ..... 7

**5. TEST RESULT** ..... **8**

5.1. Test of Hopping Channel Bandwidth ..... 8
5.2. Test of Hopping Channel Separation ..... 12
5.3. Test of Number of Hopping Frequency ..... 16
5.4. Test of Dwell Time of Each Frequency ..... 18
5.5. Maximum Peak Output Power ..... 25
5.6. Test of Band Edges Emission ..... 27
5.7. Test of AC Power Line Conducted Emission ..... 31
5.8. Test of Spurious Radiated Emission ..... 36
5.9. Antenna Requirements ..... 49

**6. LIST OF MEASURING EQUIPMENTS USED** ..... **50**

**7. COMPANY PROFILE** ..... **52**

7.1. Certificate of Accreditation ..... 52
7.2. Test Location ..... 52

**8. CERTIFICATE OF NVLAP ACCREDITATION** ..... **53**

**APPENDIX A. PHOTOGRAPHS OF EUT** ..... **A1 ~ A9**

# HISTORY OF THIS TEST REPORT

Received Date: Aug. 13, 2005
Test Date: Aug. 27, 2005
Original Report Issue Date: Sep. 02, 2005
Report No.: FR581303

■ No additional attachment.

☐ Additional attachment were issued as following record:

| Attachment No. | Issue Date | Description |
|---|---|---|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

# CERTIFICATE OF COMPLIANCE

with

## 47 CFR FCC Part 15 Subpart C

**PRODUCT NAME** : Bluetooth Dongle

**MODEL NAME** : BAXXXX (X:0~9, A~Z)

**APPLICANT** : **Nits Technology Inc.**
7Fl. No. 7, Alley 16, Lane 235, Bauchiau Rd., Shindian City, Taipei, Taiwan 231

**MANUFACTURER** : **EXPLORER TECHNOLOGY CO., LTD.**
7F-9, NO. 112, Hsin-Min Street, Chung Ho City, Taipei Hsien, Taiwan, Taipei

I **HEREBY** CERTIFY THAT:

The measurements shown in this test report were made in accordance with the procedures given in ANSI C63.4-2003 and all test are performed according to 47 CFR FCC Part 15 Subpart C. Testing was carried out on Aug. 27, 2005 at SPORTON International Inc. LAB.

Wayne Hsu / Supervisor
Sporton International Inc.

# 1. General Description of Equipment under Test

## 1.1. Applicant

**Nits Technology Inc.**
7Fl. No. 7, Alley 16, Lane 235, Bauchiau Rd., Shindian City, Taipei, Taiwan 231

## 1.2. Manufacturer

**EXPLORER TECHNOLOGY CO., LTD.**
7F-9, NO. 112, Hsin-Min Street, Chung Ho City, Taipei Hsien, Taiwan, Taipei

## 1.3. Basic Description of Equipment under Test

This product is a Bluetooth Dongle. The technical data has been listed on section " Features of Equipment under Test ".

## 1.4. Features of Equipment under Test

| Items | Description |
|---|---|
| Type of Modulation | GFSK |
| Number of Channels | 79 |
| Frequency Band | 2400 MHz ~ 2483.5 MHz |
| Carrier Frequency | See section 1.6 for details |
| Data Rate | 1Mbps |
| Channel Bandwidth | 1MHz |
| Max. Peak Power | 7.84 dBm |
| Antenna Type | See section 1.5 for details |
| Testing Duty Cycle | 41.27% |
| Test Power Source | AC 120V from host equipment |
| Power Rating | DC 5.00V from host equipment |
| Temperature Range (Operating) | 0 ~ 60 °C |

## 1.5. Antenna Description

| No. | Antenna Type | Gain (dBi) |
|---|---|---|
| 1 | Chip Antenna | 2.00 |

## 1.6. Table for Carrier Frequencies

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---|---|---|---|---|---|---|---|
| 00 | 2402 MHz | 20 | 2422 MHz | 40 | 2442 MHz | 60 | 2462 MHz |
| 01 | 2403 MHz | 21 | 2423 MHz | 41 | 2443 MHz | 61 | 2463 MHz |
| 02 | 2404 MHz | 22 | 2424 MHz | 42 | 2444 MHz | 62 | 2464 MHz |
| 03 | 2405 MHz | 23 | 2425 MHz | 43 | 2445 MHz | 63 | 2465 MHz |
| 04 | 2406 MHz | 24 | 2426 MHz | 44 | 2446 MHz | 64 | 2466 MHz |
| 05 | 2407 MHz | 25 | 2427 MHz | 45 | 2447 MHz | 65 | 2467 MHz |
| 06 | 2408 MHz | 26 | 2428 MHz | 46 | 2448 MHz | 66 | 2468 MHz |
| 07 | 2409 MHz | 27 | 2429 MHz | 47 | 2449 MHz | 67 | 2469 MHz |
| 08 | 2410 MHz | 28 | 2430 MHz | 48 | 2450 MHz | 68 | 2470 MHz |
| 09 | 2411 MHz | 29 | 2431 MHz | 49 | 2451 MHz | 69 | 2471 MHz |
| 10 | 2412 MHz | 30 | 2432 MHz | 50 | 2452 MHz | 70 | 2472 MHz |
| 11 | 2413 MHz | 31 | 2433 MHz | 51 | 2453 MHz | 71 | 2473 MHz |
| 12 | 2414 MHz | 32 | 2434 MHz | 52 | 2454 MHz | 72 | 2474 MHz |
| 13 | 2415 MHz | 33 | 2435 MHz | 53 | 2455 MHz | 73 | 2475 MHz |
| 14 | 2416 MHz | 34 | 2436 MHz | 54 | 2456 MHz | 74 | 2476 MHz |
| 15 | 2417 MHz | 35 | 2437 MHz | 55 | 2457 MHz | 75 | 2477 MHz |
| 16 | 2418 MHz | 36 | 2438 MHz | 56 | 2458 MHz | 76 | 2478 MHz |
| 17 | 2419 MHz | 37 | 2439 MHz | 57 | 2459 MHz | 77 | 2479 MHz |
| 18 | 2420 MHz | 38 | 2440 MHz | 58 | 2460 MHz | 78 | 2480 MHz |
| 19 | 2421 MHz | 39 | 2441 MHz | 59 | 2461 MHz | | |

# 2. Test Configuration of the Equipment under Test

## 2.1. Test Configuration

**Radiation Emissions Test Configuration**

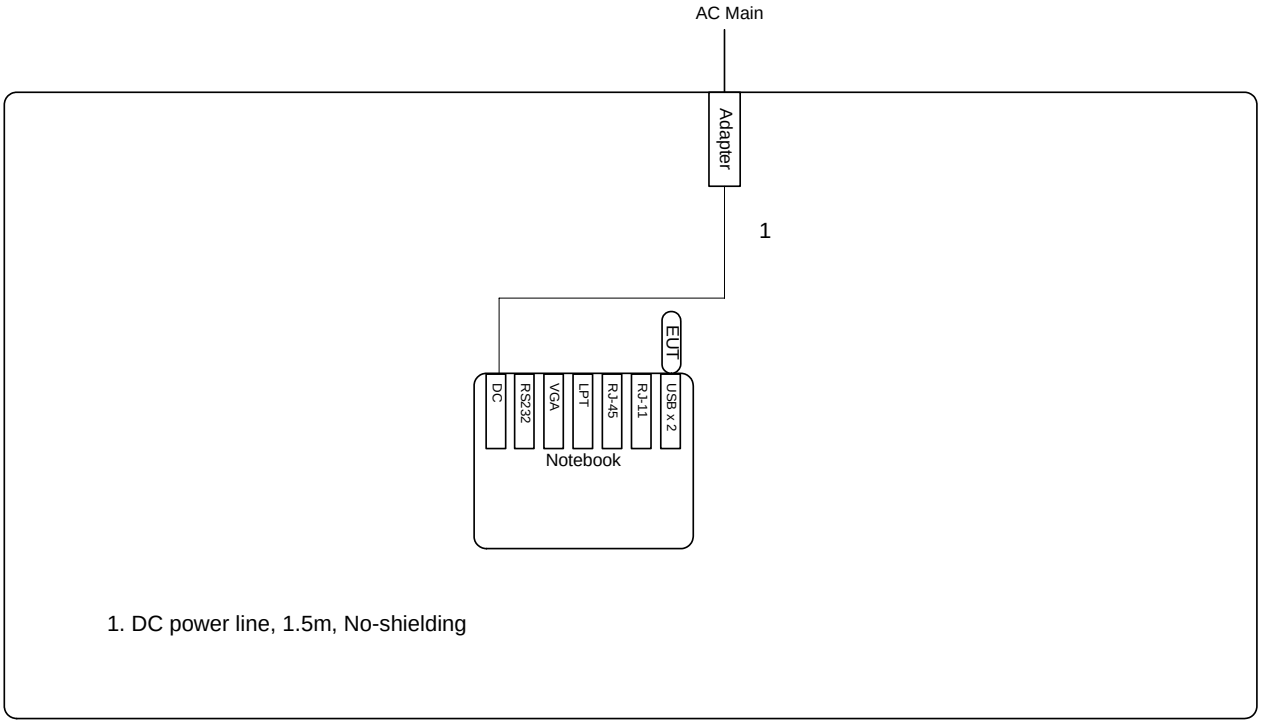

## AC Power Line Conduction Emissions Test Configuration

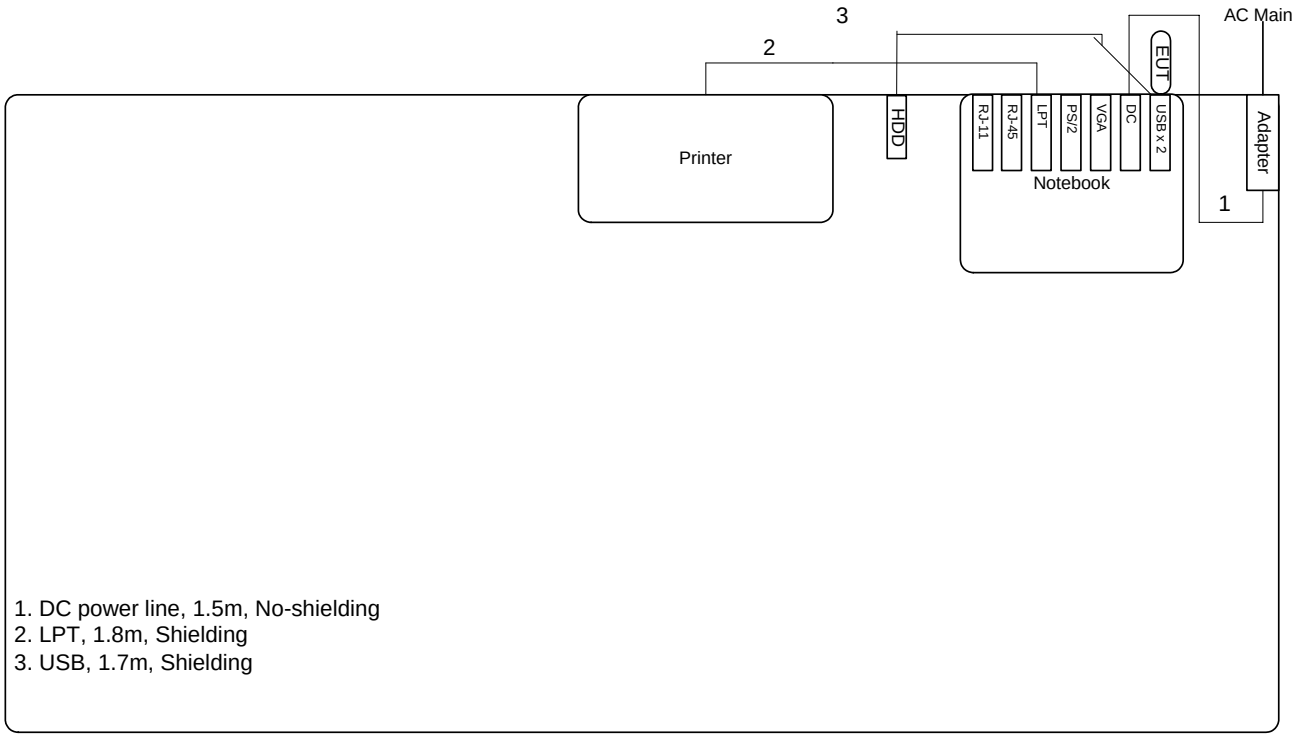

## 2.2. The Test Mode Description

1. For FHSS modulation, GFSK is the worst case on all test items.
2. According to ANSI C63.4-2003: If frequency range of EUT is more than 10 MHz, we have to test the lowest, middle and highest channels of EUT.
3. Spurious emission below 1GHz is independent of channel selection, so only channel 39 with GFSK modulation was tested.
4. AC conduction emission, the EUT link with the EUT wirelessly.

## 2.3. Description of Test Supporting Units

| Support unit | Brand | Model No. | FCC ID |
|---|---|---|---|
| Printer | EPSON | LQ-680 | DoC |
| Notebook | COMPAQ | PP2150 | DoC |
| Notebook | DELL | PP01L | DoC |
| HDD | TeraSYS | F12-UF | DoC |

# 3. General Information of Test

## 3.1. Test Facility

**Test Site Location** : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
: TEL 886-3-327-3456
: FAX 886-3-318-0055

**Test Site No** : 03CH03-HY / TH01-HY / CO04-HY

## 3.2. Standards for Methods of Measurement

Here is the list of the standards followed in this test report.

**ANSI C63.4-2003**

**47 CFR FCC Part 15 Subpart C**

## 3.3. Frequency Range Investigated

Radiated emission test: from 30 MHz to 10th carrier harmonic

## 3.4. Test Distance

The test distance of radiated emission (30MHz~1GHz) test from antenna to EUT is 3 M.
The test distance of radiated emission (1GHz~10th carrier harmonic) test from antenna to EUT is 3 M.

## 3.5. Test Software

During testing, Channel & Power Controlling Software: This was provided by the manufacturer and is able to let the test engineer select the operating channel as well as the RF output power. The parameters for channel selection is trying to offer the test engineer the ability to fix the operating channel for testing, both normal data and continuously transmitting modes are allowed, and that for RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

**Power Parameter Table**

| **Test Software** | **Bluetest** | | |
|---|---|---|---|
| Test Channel | CH 00 | CH 39 | CH 79 |
| Test Frequency | 2402MHz | 2441MHz | 2480MHz |
| TX Power | 32 | 32 | 32 |

Conduction Emission: Executed “ Soleil” to display the status of linking with the Bluetooth Tester.

# 4. List of Measurements

## 4.1. Summary of the Test Results

| Applied Standard: 47 CFR FCC Part 15 Subpart C | | | |
|---|---|---|---|
| **Paragraph** | **FCC Section** | **Description of Test** | **Result** |
| 5.1 | 15.247(a)(1) | Hopping Channel Bandwidth | Pass |
| 5.2 | 15.247(a)(1) | Hopping Channel Separation | Pass |
| 5.3 | 15.247(b)(1) | Number of Hopping Frequency Used | Pass |
| 5.4 | 15.247(a)(1)(iii) | Dwell Time of Each Frequency | Pass |
| 5.5 | 15.247(b)(1) | Maximum Peak Output Power | Pass |
| 5.6 | 15.247(d) | Band Edges Emission | Pass |
| 5.7 | 15.207 | AC Power Line Conducted Emission | Pass |
| 5.8 | 15.247(d) | Spurious Radiated Emission | Pass |
| 5.9 | 15.203/15.247(b)/(c) | Antenna Requirement | Pass |

# 5. Test Result

## 5.1. Test of Hopping Channel Bandwidth

5.1.1. Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.1.2. Measuring Instruments

Please refer to section 6 in this report.

5.1.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
  Attenuation : Auto
  Center Frequency : 2402 MHz / 2441 MHz / 2480 MHz
  Span Frequency : > 20dB Bandwidth
  RB : 30 kHz
  VB : 100 kHz
  Detector : Peak
  Trace : Max Hold
  Sweep Time : Auto

5.1.4. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 30KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The spectrum width with level higher than 20dB below the peak level.
5. Repeat above 1~3 points for the lowest, middle and highest channel of the EUT.

5.1.5. Test Setup Layout

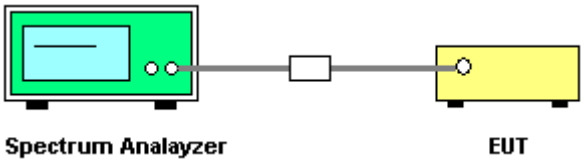


5.1.6. Test Criteria

All test results complied with the requirements of Section 15.247(a)(1). Measurement Uncertainty is $1x10^{-5}$.

5.1.7. Test Result

- Temperature: 26°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 41.27%
- Test Engineer: Sam Lee

| Modulation Type | Channel No. | Frequency (MHz) | 20dB Bandwidth (kHz) | Min. Limit (kHz) |
|---|---|---|---|---|
| GFSK | 00 | 2402 MHz | 828.00 | 25 |
| GFSK | 39 | 2441 MHz | 832.00 | 25 |
| GFSK | 78 | 2480 MHz | 832.00 | 25 |

Modulation Type: GFSK (Channel 00)：

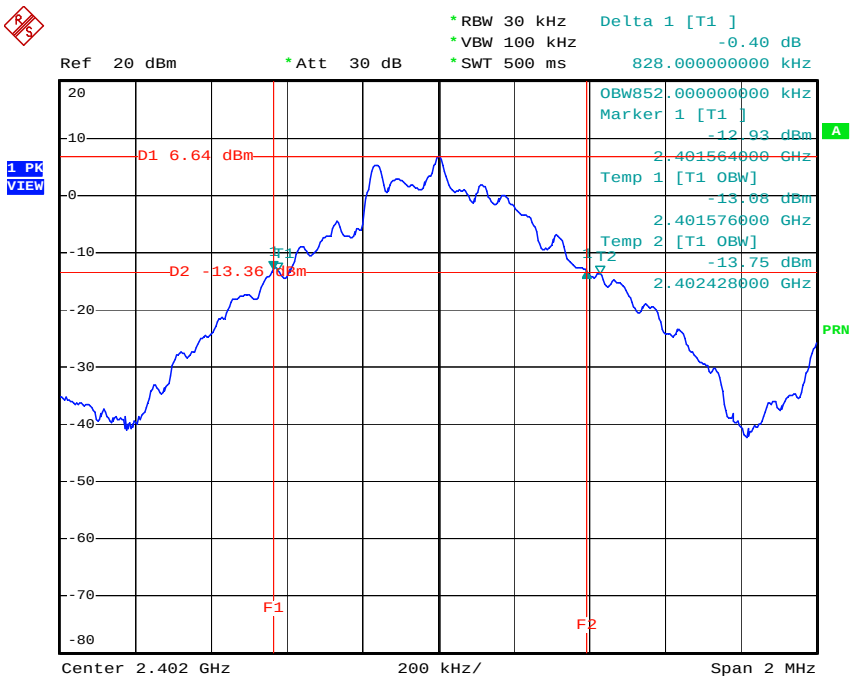


Date: 23.AUG.2005 10:31:12

Modulation Type: GFSK (Channel 39)：

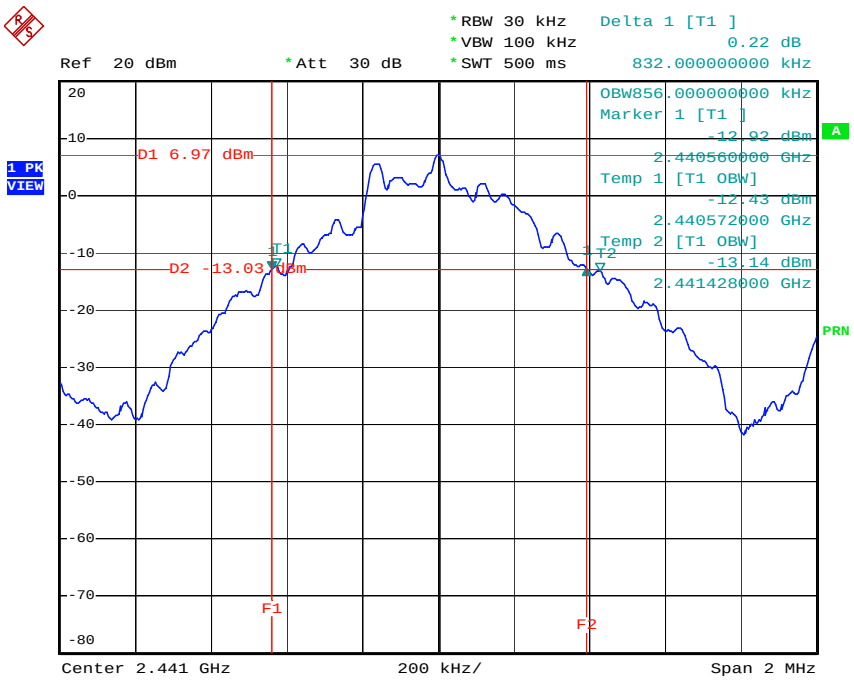


Date: 23.AUG.2005 10:37:07

Modulation Type: GFSK (Channel 78)：

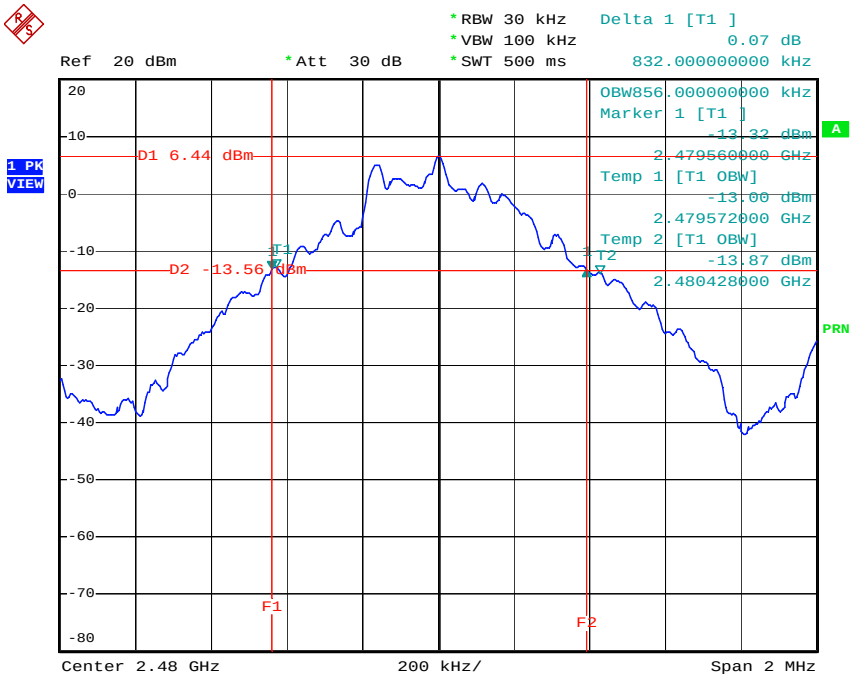


Date: 23.AUG.2005 10:38:52

## 5.2. Test of Hopping Channel Separation

5.2.1. Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.2.2. Measuring Instruments

Please refer to section 6 in this report.

5.2.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
  Attenuation : Auto
  Center Frequency : 2402 MHz / 2441 MHz / 2480 MHz
  Span Frequency : > One time channel separation
  RB : 100 kHz
  VB : 100 kHz
  Detector : Peak
  Trace : Max Hold
  Sweep Time : Auto

5.2.4. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
5. Repeat above 1~3 points for the lowest, middle and highest channel of the EUT.

5.2.5. Test Setup Layout

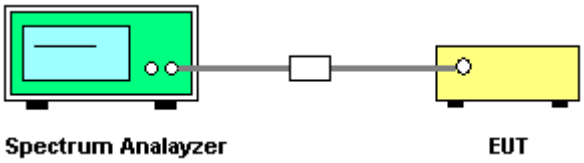


5.2.6. Test Criteria

All test results complied with the requirements of Section 15.247(a)(1). Measurement Uncertainty is $1x10^{-5}$.

5.2.7. Test Result

- Temperature: 26°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 41.27%
- Test Engineer: Sam Lee

| Modulation Type | Channel No. | Frequency (MHz) | Hopping Channel Separation (kHz) | Min. Limit (kHz) |
|---|---|---|---|---|
| GFSK | 00 | 2402 MHz | 1000 | 828.00 |
| GFSK | 39 | 2441 MHz | 1000 | 832.00 |
| GFSK | 78 | 2480 MHz | 1000 | 832.00 |

Modulation Type: GFSK (Channel 00)：

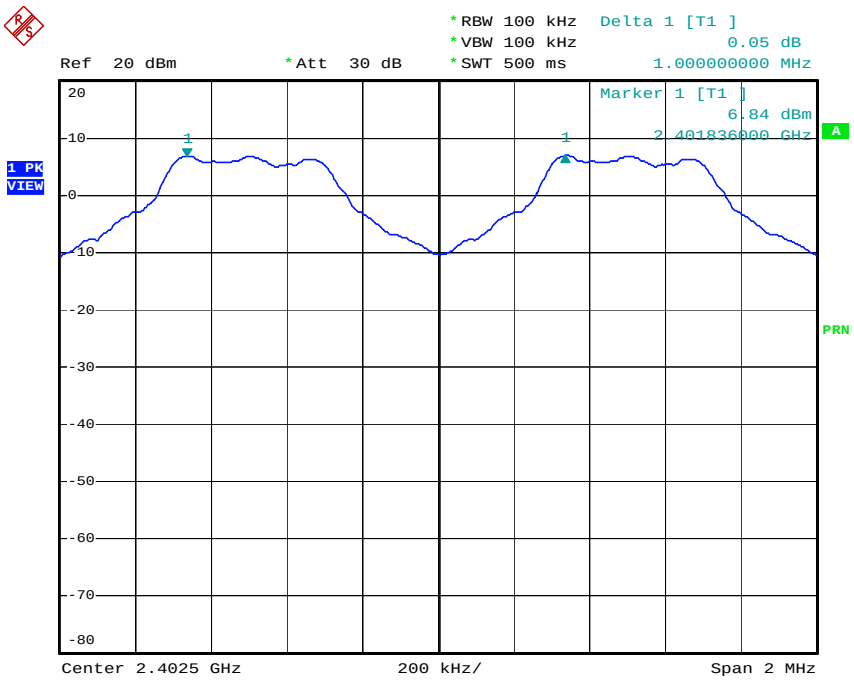


Date: 23.AUG.2005 10:41:38

Modulation Type: GFSK (Channel 39)：

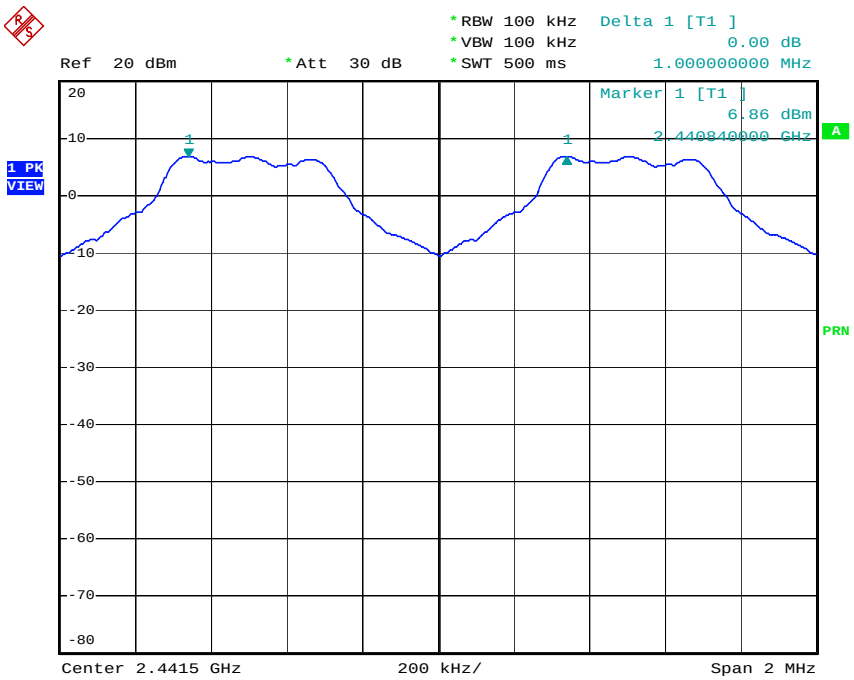


Date: 23.AUG.2005 10:43:12

Modulation Type: GFSK (Channel 78)：

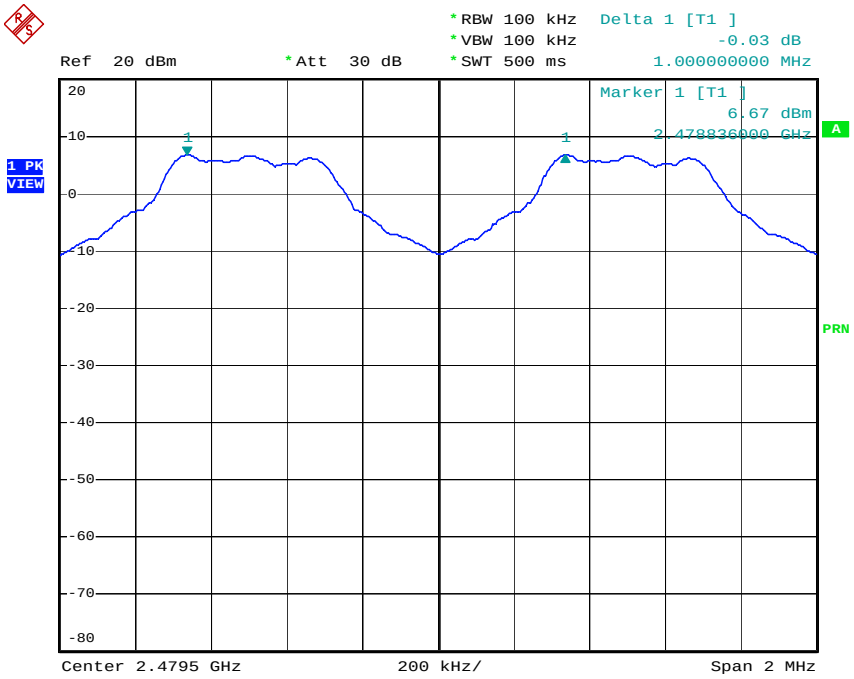


Date: 23.AUG.2005 10:44:05

## 5.3. Test of Number of Hopping Frequency

5.3.1. Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

5.3.2. Measuring Instruments

Please refer to section 6 in this report.

5.3.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
  Attenuation : Auto
  Center Frequency : 2402 MHz ~ 2480 MHz
  Span Frequency : > Operation frequency range
  RB : 100 kHz
  VB : 100 kHz

5.3.4. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

5.3.5. Test Setup Layout

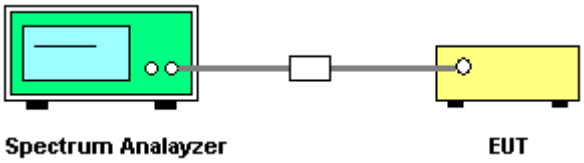


5.3.6. Test Criteria

All test results complied with the requirements of Section 15.247(b)(1).

5.3.7. Test Result

- Temperature: 26°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 41.27%
- Test Engineer: Sam Lee

| Modulation Type | Channel No. | Frequency (MHz) | Number of Hopping Ch. (Channels) | Min. Limit (Channels) |
|---|---|---|---|---|
| GFSK | 00 ~ 78 | 2402 MHz ~ 2480 MHz | 79 | 75 |

Modulation Type: GFSK (Channel 00 ~ Channel 78)：

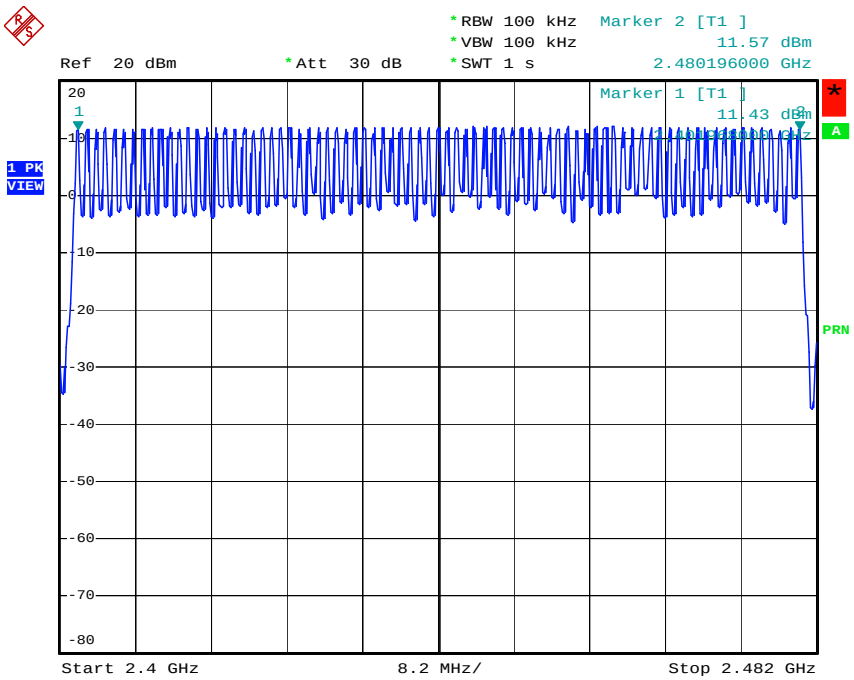


Date: 23.AUG.2005 12:36:50

## 5.4. Test of Dwell Time of Each Frequency

5.4.1. Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band employ at least 75 non-overlapping hopping channels.

5.4.2. Measuring Instruments

Please refer to section 6 in this report.

5.4.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
  Attenuation : Auto
  Center Frequency : 2402 MHz / 2441 MHz / 2480 MHz
  Span Frequency : 0MHz
  RB : 1 MHz
  VB : 1 MHz
  Detector : Peak
  Trigger : Video
  Sweep Time : > One pulse time

5.4.4. T Test Procedures and Test Instruments Setting

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is more than once pulse time.
4. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
5. Set the EUT for DH5, DH3 and DH1 packet transmitting.
6. Measure the maximum time duration of one single pulse.
7. DH5 Packet permit maximum 3.37 hops per second in each channel. So, the dwell time is the time duration of the pulse times 106.6 within 31.6 seconds.
8. DH3 Packet permit maximum 5.06 hops per second in each channel. So, the dwell time is the time duration of the pulse times 160 within 31.6 seconds.
9. DH1 Packet permit maximum 10.12 hops per second in each channel. So, the dwell time is the time duration of the pulse times 320 within 31.6 seconds.

5.4.5. Test Setup Layout

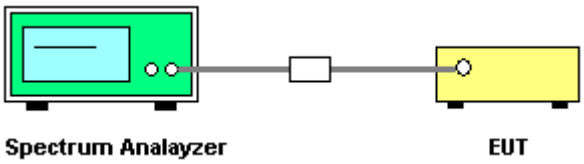


5.4.6. Test Criteria

All test results complied with the requirements of Section 15.247(a)(1)(iii). Measurement Uncertainty is $1x10^{-5}$.

5.4.7. Test Result

- Temperature: 26°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 41.27%
- Test Engineer: Sam Lee

| Data Packet | Frequency (MHz) | Pulse Duration (ms) | Dwell Time (s) | Limits (s) |
|---|---|---|---|---|
| DH5 | 2402 MHz | 3.0400 | 0.3243 | 0.4 |
| DH3 | 2402 MHz | 1.7800 | 0.2848 | 0.4 |
| DH1 | 2402 MHz | 0.5200 | 0.1664 | 0.4 |
| DH5 | 2441 MHz | 3.0300 | 0.3232 | 0.4 |
| DH3 | 2441 MHz | 1.7700 | 0.2832 | 0.4 |
| DH1 | 2441 MHz | 0.5100 | 0.1632 | 0.4 |
| DH5 | 2480 MHz | 3.0400 | 0.3243 | 0.4 |
| DH3 | 2480 MHz | 1.7800 | 0.2848 | 0.4 |
| DH1 | 2480 MHz | 0.5200 | 0.1664 | 0.4 |

DH5 Modulation Type: GFSK (Channel 00)：

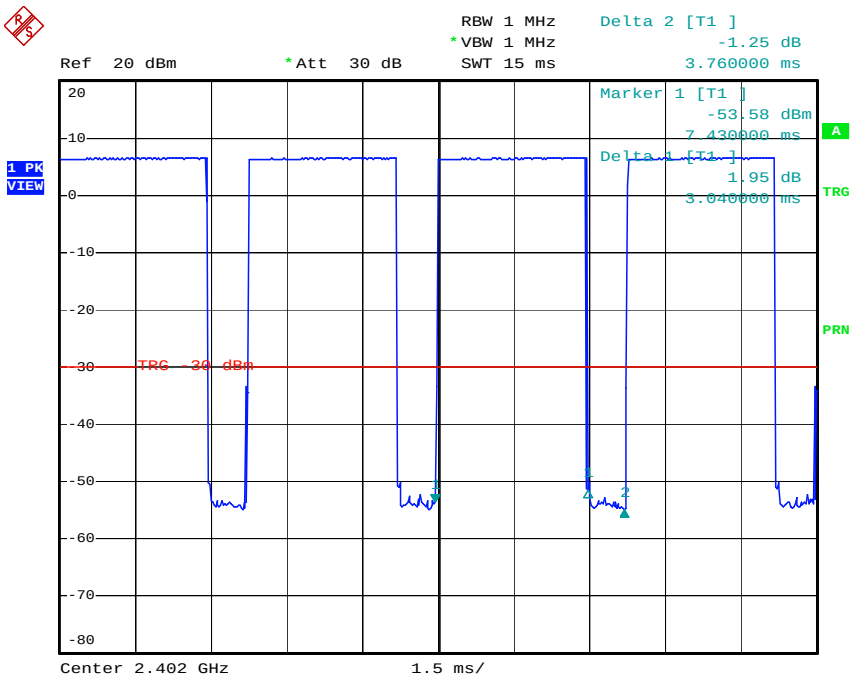


Date: 23.AUG.2005 16:25:05

DH3 Modulation Type: GFSK (Channel 00)：

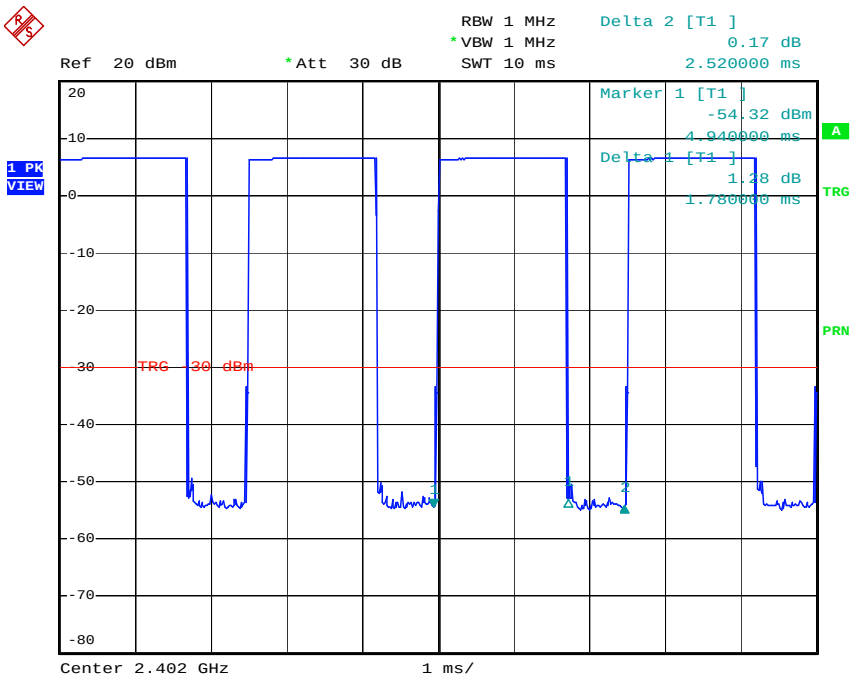


Date: 23.AUG.2005 16:24:25

DH1 Modulation Type: GFSK (Channel 00)：

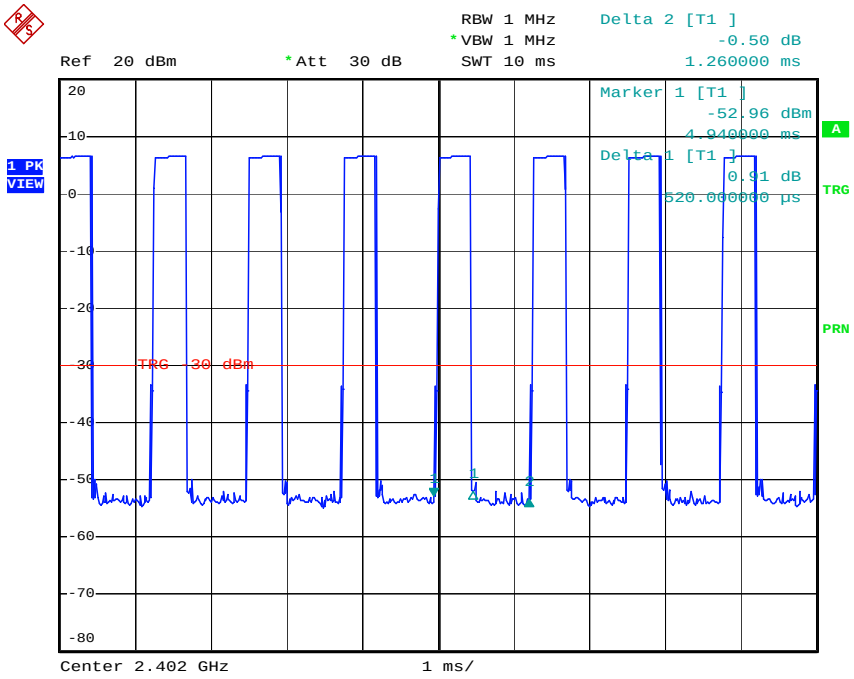


Date: 23.AUG.2005 16:23:44

DH5 Modulation Type: GFSK (Channel 39)：

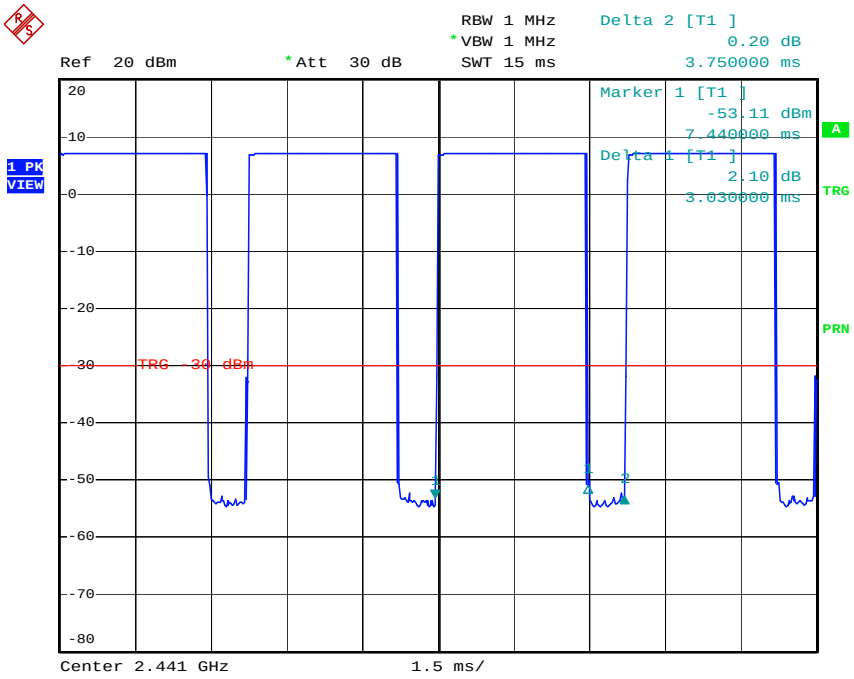


Date: 23.AUG.2005 16:27:38

DH3 Modulation Type: GFSK (Channel 39)：

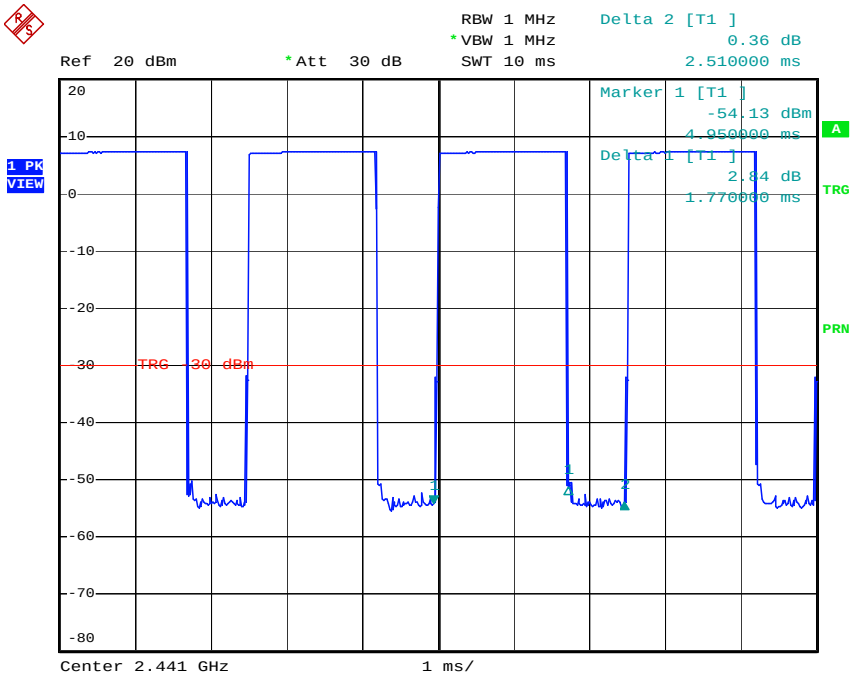


Date: 23.AUG.2005 16:26:57

DH1 Modulation Type: GFSK (Channel 39)：

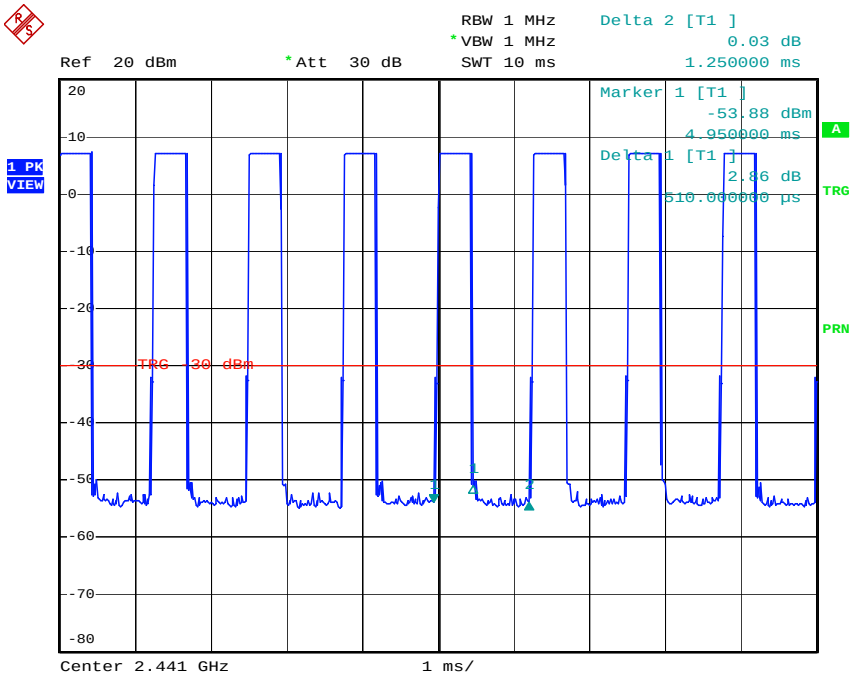


Date: 23.AUG.2005 16:26:18

DH5 Modulation Type: GFSK (Channel 78)：

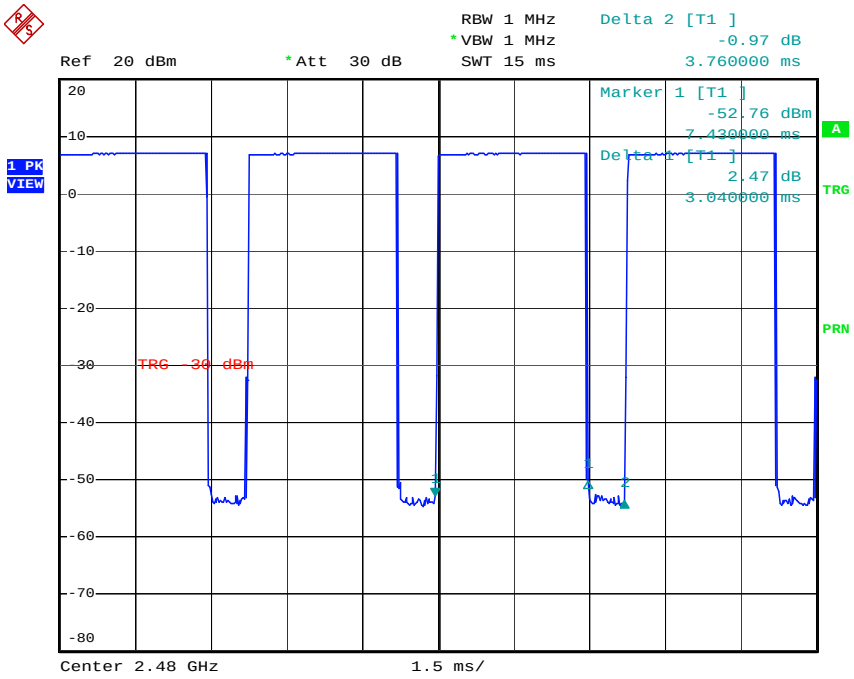


Date: 23.AUG.2005 16:32:26

DH3 Modulation Type: GFSK (Channel 78)：

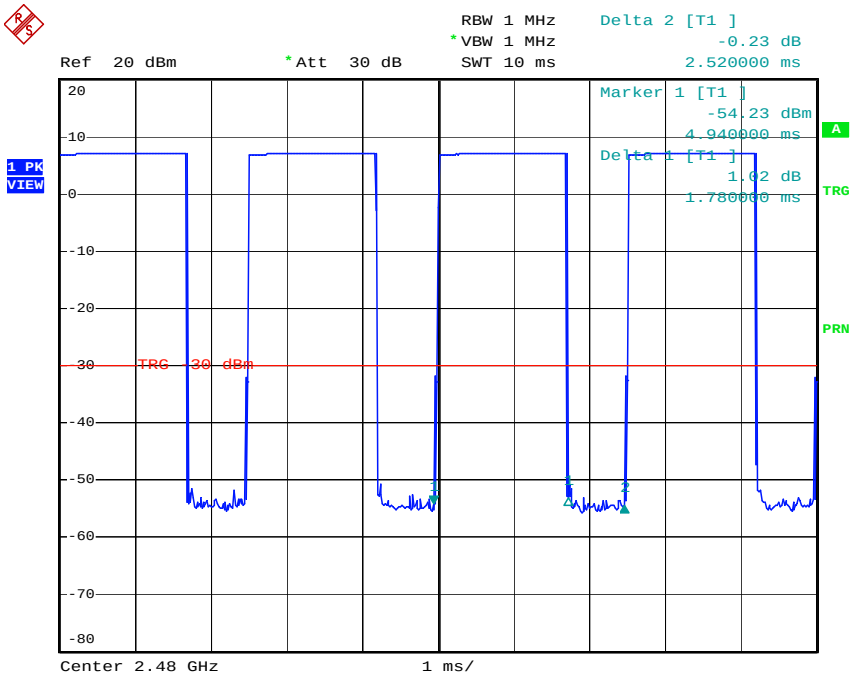


Date: 23.AUG.2005 16:31:31

DH1 Modulation Type: GFSK (Channel 78)：

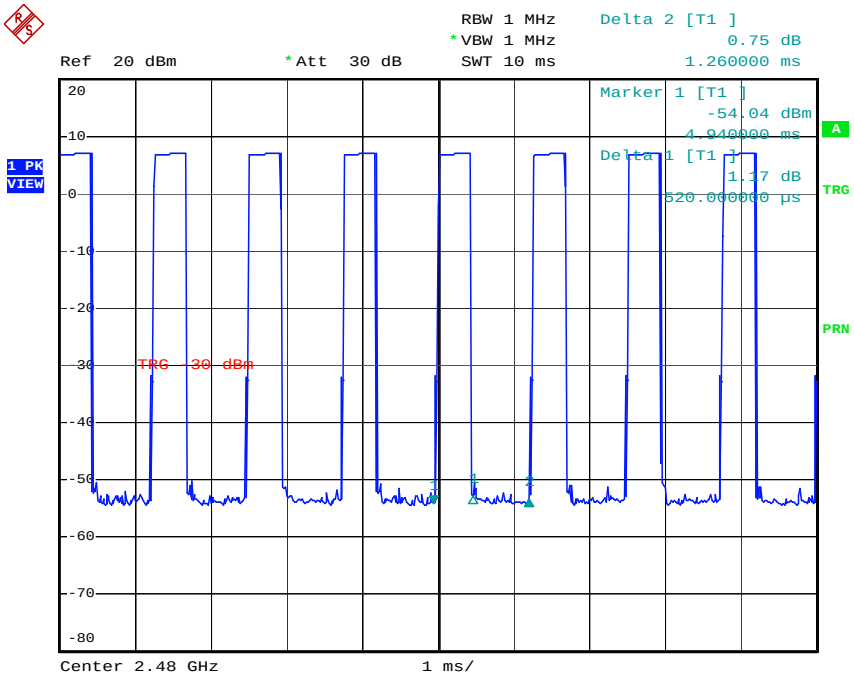


Date: 23.AUG.2005 16:30:58

## 5.5. Maximum Peak Output Power

5.5.1. Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt.

5.5.2. Measuring Instruments

Please refer to section 6 in this report.

5.5.3. Test Procedures and Test Instruments Setting

1. The transmitter output was connected to the peak power meter and recorded the peak value.
2. The filter and attenuator has the same peak value instrument parameters.
3. Repeated the 1 for the lowest, middle and highest channel of the EUT.

5.5.4. Test Setup Layout

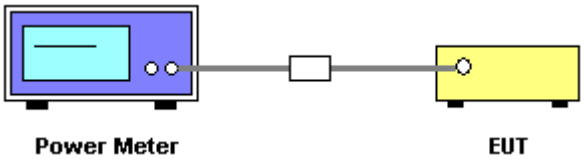


5.5.5. Test Criteria

All test results complied with the requirements of 15.247(b)(1). Measurement Uncertainty is 1.5dB.

5.5.6. Test Result of Conducted Peak Power

- Temperature: 26°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 41.27%
- Test Engineer: Sam Lee

| Modulation Type | Channel No. | Frequency (MHz) | Output Power (dBm) | Limits (dBm) |
|---|---|---|---|---|
| GFSK | 00 | 2402 MHz | 7.76 | 30 |
| GFSK | 39 | 2441 MHz | 7.84 | 30 |
| GFSK | 78 | 2480 MHz | 7.71 | 30 |

5.5.7. Test Result of EIRP Power

- Temperature: 26°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 41.27%
- Test Engineer: Sam Lee

| Antenna No. | Gain (dBi) | Modulation Type | Channel No. | Frequency (MHz) | Power (dBm) | Limits (dBm) |
|---|---|---|---|---|---|---|
| 1 | 2.00 | GFSK | 00 | 2402 MHz | 9.76 | 36 |
| 1 | 2.00 | GFSK | 39 | 2441 MHz | 9.84 | 36 |
| 1 | 2.00 | GFSK | 78 | 2480 MHz | 9.71 | 36 |

## 5.6. Test of Band Edges Emission

5.6.1. Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

5.6.2. Measuring Instruments

Please refer to section 6 in this report.

5.6.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40 (Conducted Measurement)
  Attenuation : Auto
  Center Frequency : 2402 MHz / 2480 MHz
  Span Frequency : 100MHz
  RB : 100 kHz
  VB : 100 kHz
  Detector : Peak
  Trace : Max Hold
  Sweep Time : Auto

- Spectrum Analyzer : R&S FSP40 (Radiated Measurement)
  Attenuation : Auto
  Center Frequency : 2402 MHz / 2480 MHz
  Span Frequency : 100MHz
  RB : 1 MHz for PK value / 1 MHz for AV value
  VB : 1 MHz for PK value / 10 Hz for AV value
  Detector : Peak
  Trace : Max Hold
  Sweep Time : Auto

5.6.4. Test Procedures

**Conducted Measurement**

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

**Radiated Measurement**

1. Configure the EUT according to ANSI C63.4-2003.
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For band edge emission, use 10Hz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1 MHz RBW for reading under PK.
6. Repeat item 2~5.

5.6.5. Test Setup

**Radiated Method**

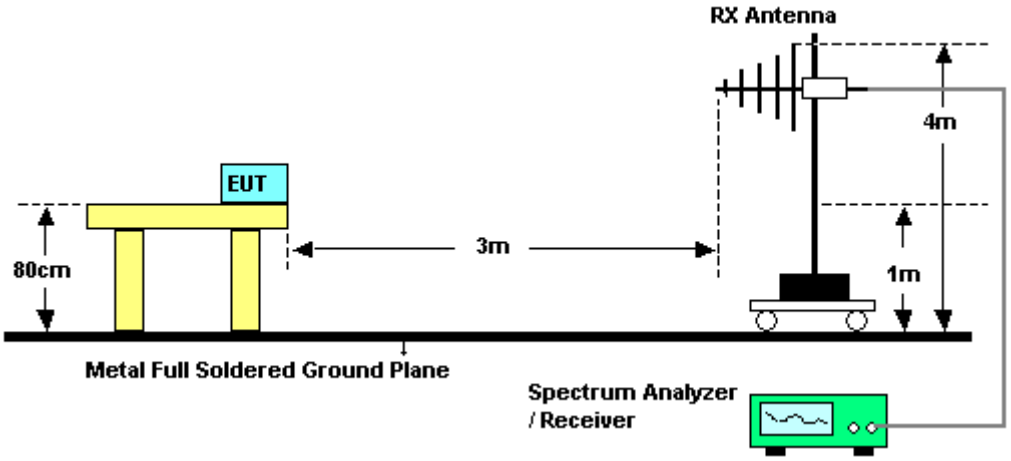


**Conducted Method**

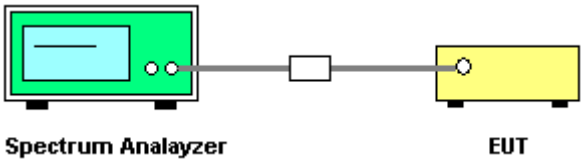

5.6.6. Test Criteria

All test results complied with the requirements of 15.247(d). Measurement Uncertainty is 2.26dB.

5.6.7. Test Result of Radiated Emission

- Temperature: 26°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 41.27%
- Test Engineer: Sam Lee

| Modulation Type | Test Channel | Freq. (MHz) | Level* (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Trace (PK/AV) |
|---|---|---|---|---|---|---|
| GFSK | 00 | 2390.00 | 53.83 | -20.17 | 74 | PK |
| GFSK | 00 | 2390.00 | 46.28 | -7.72 | 54 | AV |
| GFSK | 78 | 2483.50 | 60.40 | -13.60 | 74 | PK |
| GFSK | 78 | 2483.50 | 52.85 | -1.15 | 54 | AV |

Level* : The max field strength in the restricted bands.

Test Result of Conducted Emission

Modulation Type: GFSK (Channel 00)：

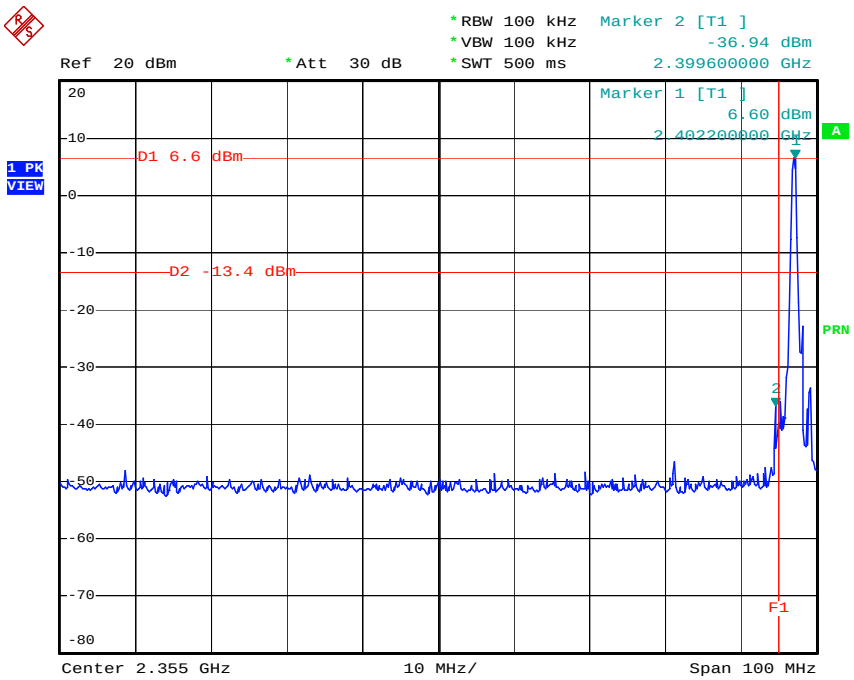


Date: 23.AUG.2005 10:33:06

Modulation Type: GFSK (Channel 78)：

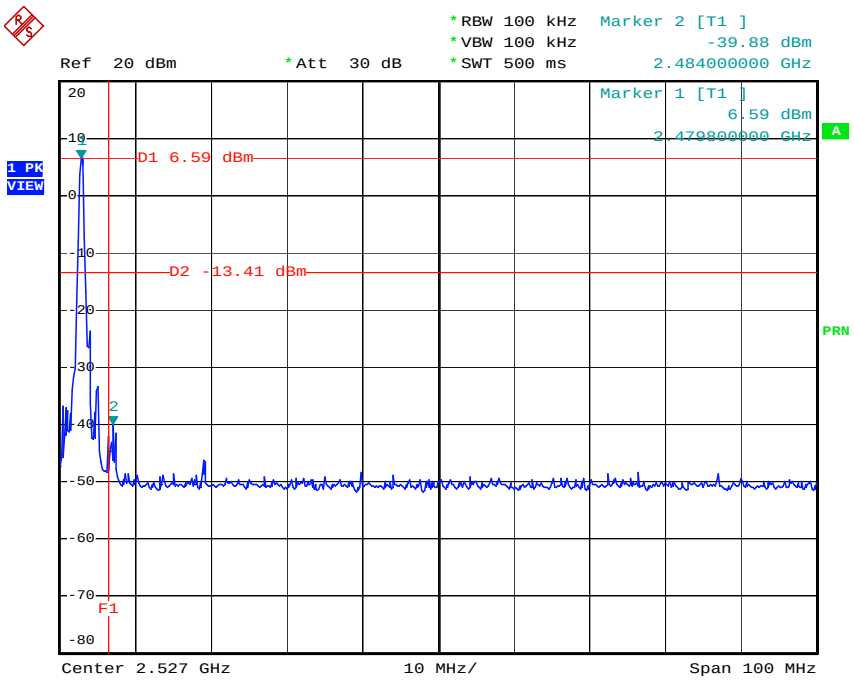


Date: 23.AUG.2005 10:39:58

## 5.7. Test of AC Power Line Conducted Emission

5.7.1. Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|---|---|---|
| 0.15~0.5 | 66~56 | 56~46 |
| 0.5~5 | 56 | 46 |
| 5~30 | 60 | 50 |

5.7.2. Measuring Instruments

Please refer to section 6 in this report.

5.7.3. Description of Major Test Instruments Setting

- Test Receiver : R&S ESCS 30
  Attenuation : 10 dB
  Start Frequency : 0.15 MHz
  Stop Frequency : 30 MHz
  IF Bandwidth : 9 KHz

5.7.4. Test Procedures

1. Configure the EUT according to ANSI C63.4-2003.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN)
4. All the support units are connected to the other LISNs. The LISN should provides 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal for each RF channel. Only one RF channel has to be investigated since this test is independent with the RF channel selection.

5.7.5. Test Setup Layout

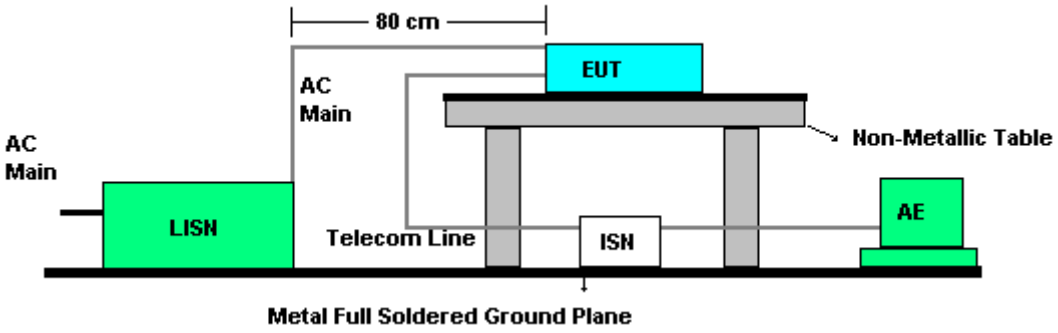


5.7.6. Test Criteria

All test results complied with the requirements of 15.207. Measurement Uncertainty is 2.54dB.

5.7.7. Test Result of Conducted Emission for RF Link

- Modulation Type: GFSK
- Temperature: 26°C
- Relative Humidity: 44%
- Test Engineer: Sky Wu

***Line to Ground***

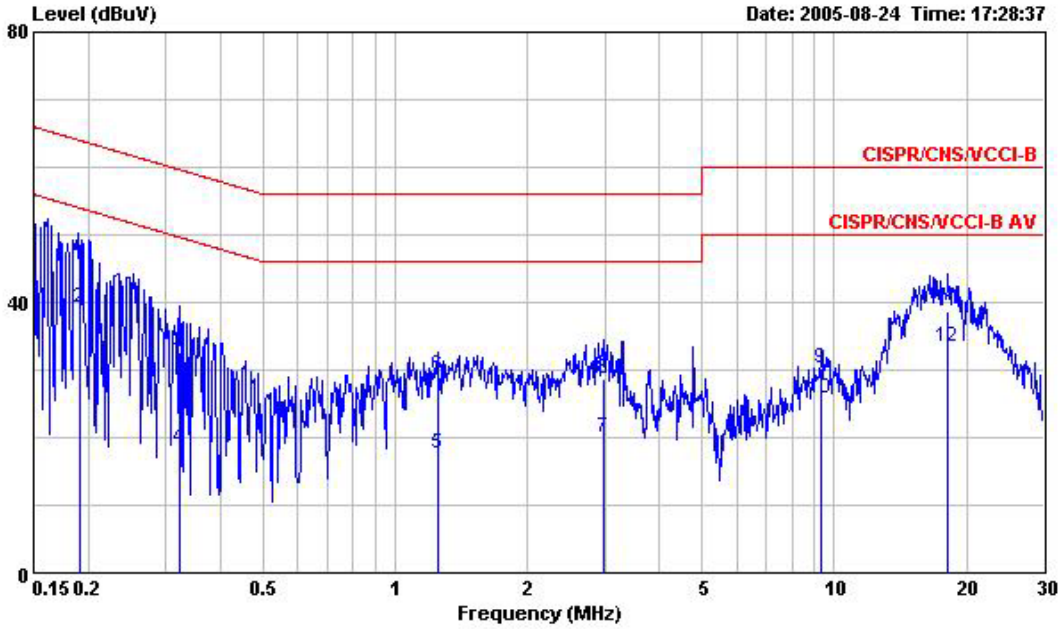


| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.1920500 | 45.44 | -18.51 | 63.95 | 45.14 | 0.06 | 0.24 | QP |
| 2 | 0.1920500 | 39.11 | -14.84 | 53.95 | 38.81 | 0.06 | 0.24 | Average |
| 3 | 0.3216920 | 32.70 | -26.96 | 59.66 | 32.33 | 0.06 | 0.31 | QP |
| 4 | 0.3216920 | 18.38 | -31.28 | 49.66 | 18.01 | 0.06 | 0.31 | Average |
| 5 | 1.251 | 17.60 | -28.40 | 46.00 | 16.98 | 0.11 | 0.51 | Average |
| 6 | 1.251 | 29.09 | -26.91 | 56.00 | 28.47 | 0.11 | 0.51 | QP |
| 7 | 2.981 | 19.98 | -26.02 | 46.00 | 19.54 | 0.17 | 0.27 | Average |
| 8 | 2.981 | 28.74 | -27.26 | 56.00 | 28.30 | 0.17 | 0.27 | QP |
| 9 | 9.351 | 30.37 | -29.63 | 60.00 | 29.69 | 0.21 | 0.47 | QP |
| 10 | 9.351 | 25.70 | -24.30 | 50.00 | 25.02 | 0.21 | 0.47 | Average |
| 11 | 18.140 | 38.56 | -21.44 | 60.00 | 37.95 | 0.28 | 0.33 | QP |
| 12 | 18.140 | 33.38 | -16.62 | 50.00 | 32.77 | 0.28 | 0.33 | Average |

***Neutral to Ground***

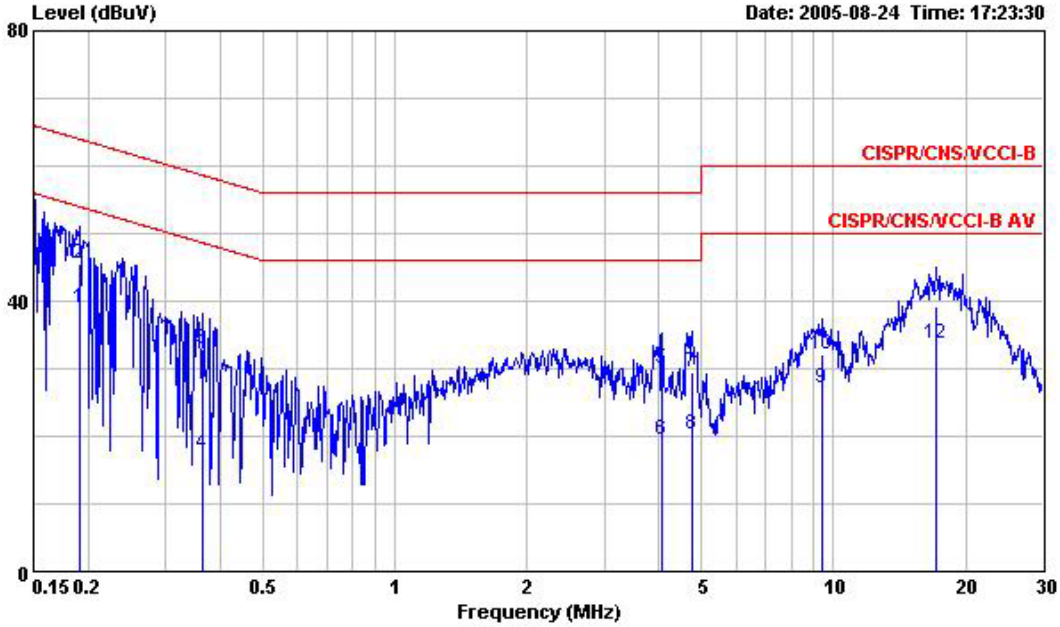


| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.1912820 | 38.96 | -15.02 | 53.98 | 38.60 | 0.11 | 0.25 | Average |
| 2 | 0.1912820 | 45.58 | -18.40 | 63.98 | 45.22 | 0.11 | 0.25 | QP |
| 3 | 0.3640320 | 32.86 | -25.78 | 58.64 | 32.46 | 0.11 | 0.29 | QP |
| 4 | 0.3640320 | 17.24 | -31.40 | 48.64 | 16.84 | 0.11 | 0.29 | Average |
| 5 | 4.073 | 29.95 | -26.05 | 56.00 | 29.42 | 0.23 | 0.30 | QP |
| 6 | 4.073 | 19.43 | -26.57 | 46.00 | 18.90 | 0.23 | 0.30 | Average |
| 7 | 4.770 | 29.55 | -26.45 | 56.00 | 29.03 | 0.25 | 0.27 | QP |
| 8 | 4.770 | 20.35 | -25.65 | 46.00 | 19.83 | 0.25 | 0.27 | Average |
| 9 | 9.449 | 27.00 | -23.00 | 50.00 | 26.20 | 0.32 | 0.48 | Average |
| 10 | 9.449 | 32.17 | -27.83 | 60.00 | 31.37 | 0.32 | 0.48 | QP |
| 11 | 17.109 | 39.11 | -20.89 | 60.00 | 38.28 | 0.38 | 0.45 | QP |
| 12 | 17.109 | 33.71 | -16.29 | 50.00 | 32.88 | 0.38 | 0.45 | Average |

Note:

Corrected Reading: Probe (LISN / ISN) Factor + Cable Loss + Read Level = Level.

5.7.8. Photographs of Conducted Emission Test Configuration

FRONT VIEW

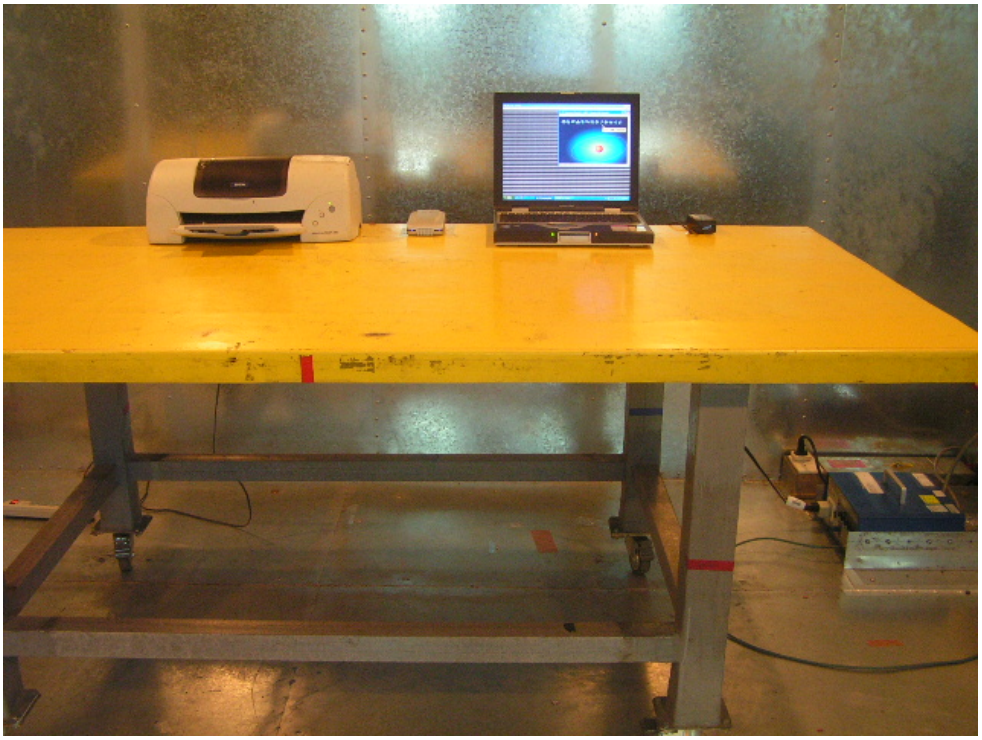

REAR VIEW

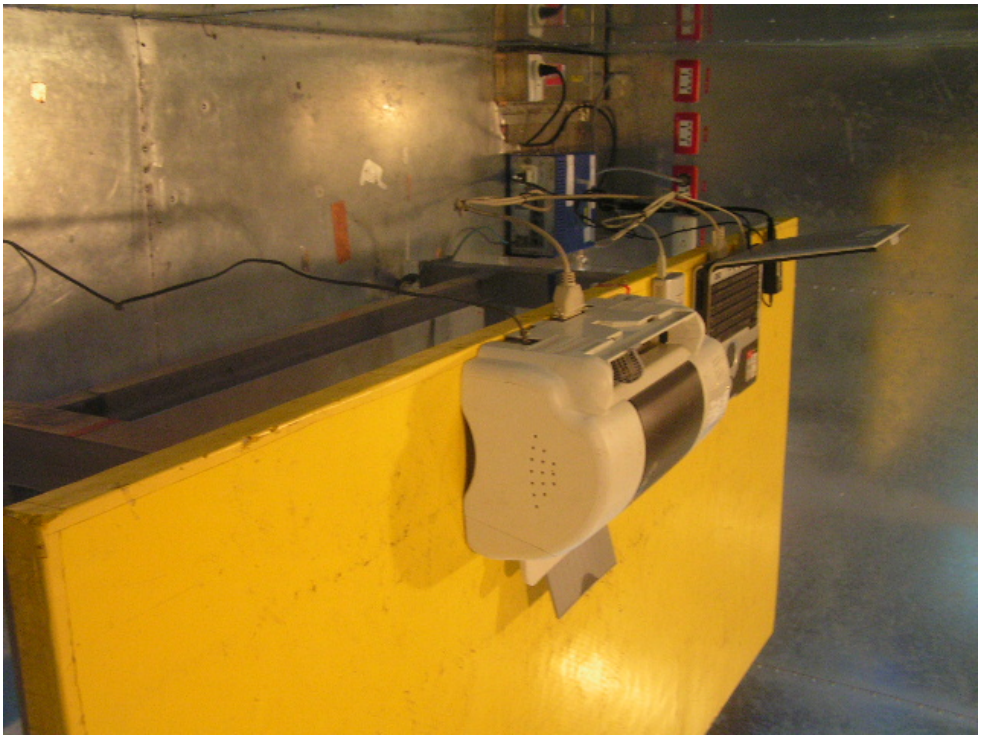

## 5.8. Test of Spurious Radiated Emission

5.8.1. Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

5.8.2. Measuring Instruments

Please refer to section 6 in this report.

5.8.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
  Attenuation : Auto
  Start Frequency : 1000 MHz
  Stop Frequency : 10th carrier harmonic
  RB / VB : 1 MHz / 1MHz for Peak
  RB / VB : 1 MHz / 10Hz for Average

- Test Receiver : R&S ESCS 30
  Attenuation : Auto
  Start Frequency : 30 MHz
  Stop Frequency : 1000 MHz
  RB : 120 KHz for QP or PK

5.8.4. Test Procedures

1. Configure the EUT according to ANSI C63.4-2003.
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
4. Power on the EUT and all the supporting units.
5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
9. For emission above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.

10. If the emission level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz and average method for above the 1GHz. the reported.
11. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB higher than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.8.5. Test Setup Layout

**For radiated emissions below 30MHz**

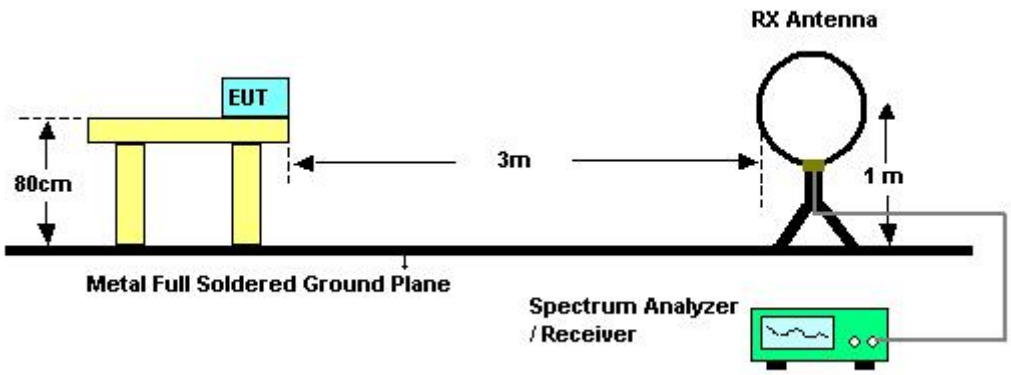


**For radiated emissions above 30MHz**

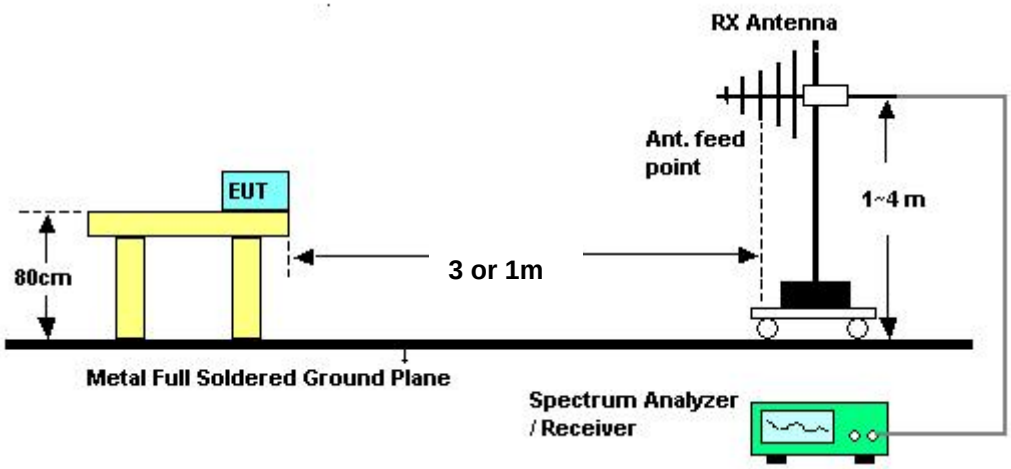


5.8.6. Test Criteria

All test results complied with the requirements of 15.247(d). Measurement Uncertainty is 2.26dB.

5.8.7. Test Results for CH 78 / 2480 MHz (for emission below 1GHz)

- Modulation Type: GFSK
- Temperature: 26°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 41.27%
- Test Engineer: Ted Chiu

***(A) Polarization: Horizontal***

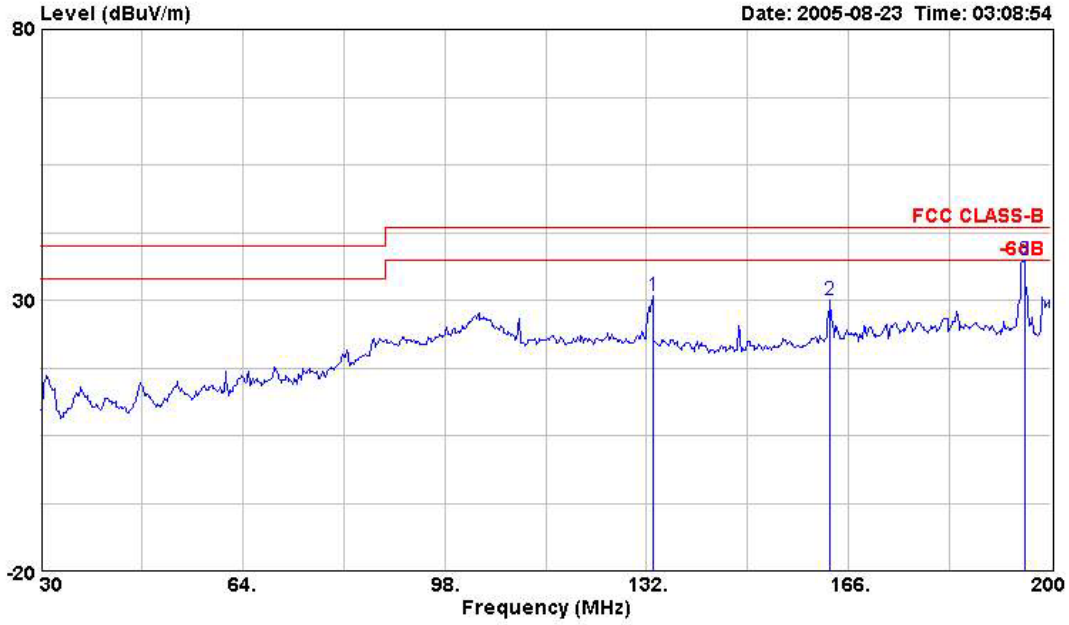


| | Freq | Level | Over Limit | Read Level | Limit Line | Cable Loss | Antenna Factor | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV | dBuV/m | dB | dB/m | dB | | cm | deg |
| 1 | 133.020 | 30.76 | -12.74 | 47.91 | 43.50 | 1.15 | 12.41 | 30.72 | Peak | --- | --- |
| 2 | 162.940 | 29.95 | -13.55 | 46.08 | 43.50 | 1.27 | 12.92 | 30.31 | Peak | --- | --- |
| 3 | 195.580 | 37.35 | -6.15 | 51.25 | 43.50 | 1.30 | 15.45 | 30.65 | Peak | --- | --- |

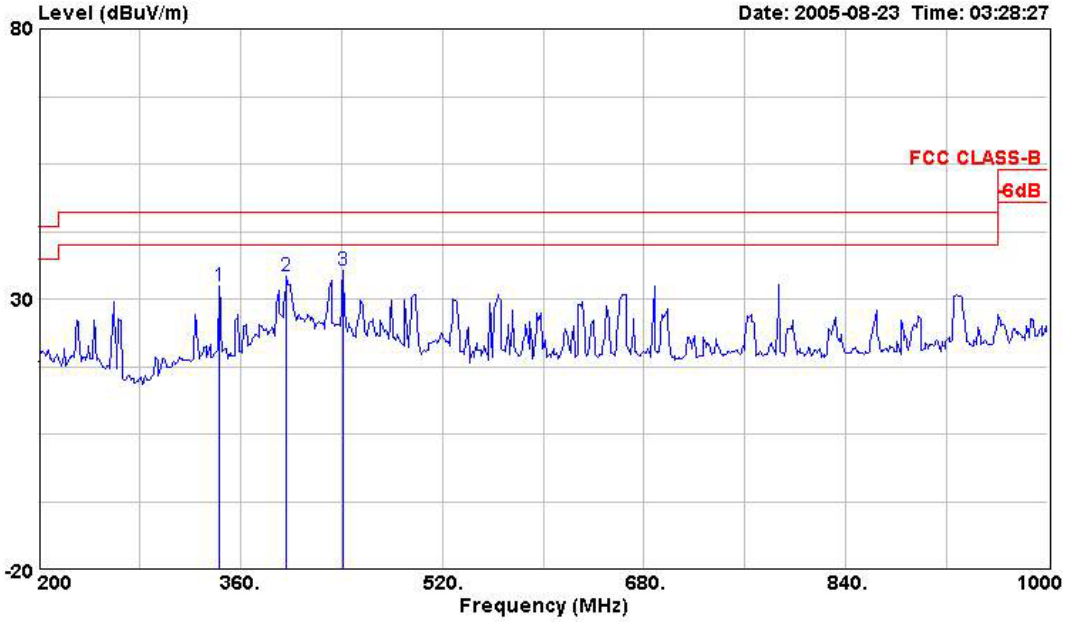


| | Freq | Level | Over Limit | Read Level | Limit Line | Cable Loss | Antenna Factor | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV | dBuV/m | dB | dB/m | dB | | cm | deg |
| 1 | 343.200 | 32.44 | -13.56 | 46.49 | 46.00 | 1.78 | 15.10 | 30.94 | Peak | --- | --- |
| 2 | 396.800 | 34.12 | -11.88 | 46.63 | 46.00 | 1.96 | 16.70 | 31.18 | Peak | --- | --- |
| 3 | 441.600 | 35.15 | -10.85 | 47.34 | 46.00 | 2.12 | 16.47 | 30.77 | Peak | --- | --- |

***(B) Polarization: Vertical***

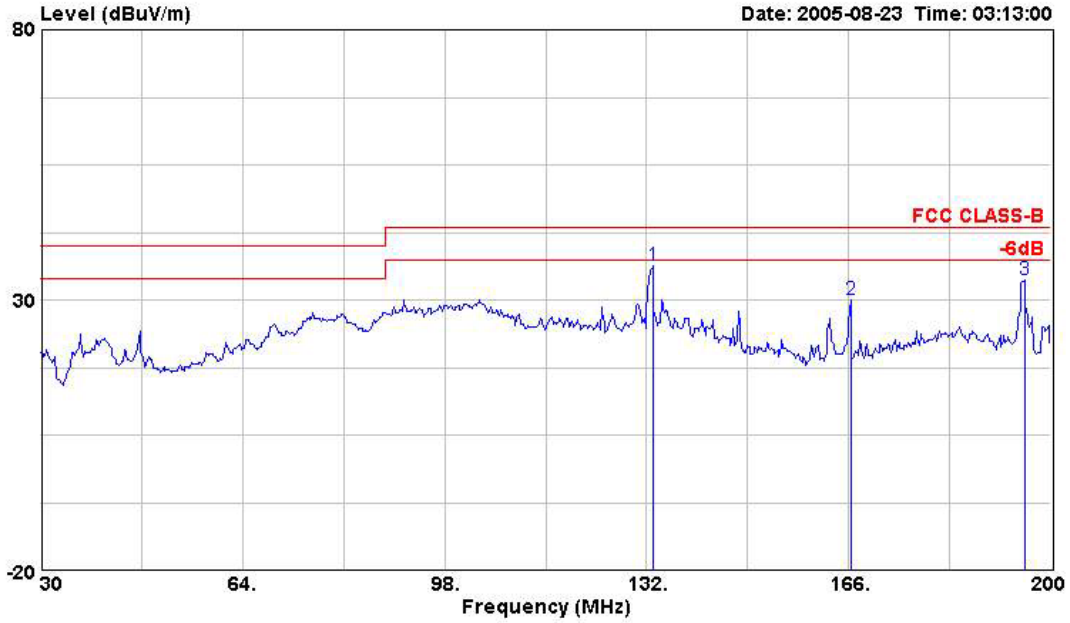


| | Freq | Level | Over Limit | Read Level | Limit Line | Cable Loss | Antenna Factor | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV | dBuV/m | dB | dB/m | dB | | cm | deg |
| 1 | 133.020 | 36.25 | -7.25 | 53.40 | 43.50 | 1.15 | 12.41 | 30.72 | Peak | --- | --- |
| 2 | 166.340 | 29.93 | -13.57 | 45.47 | 43.50 | 1.28 | 13.29 | 30.11 | Peak | --- | --- |
| 3 | 195.580 | 33.70 | -9.80 | 47.60 | 43.50 | 1.30 | 15.45 | 30.65 | Peak | --- | --- |

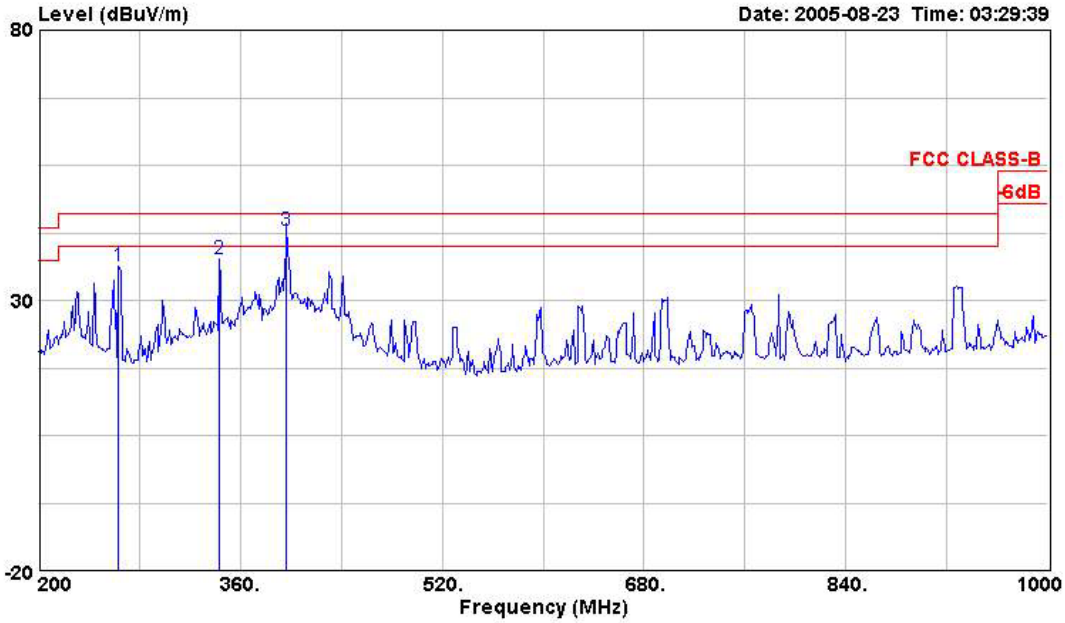


| | Freq | Level | Over Limit | Read Level | Limit Line | Cable Loss | Antenna Factor | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV | dBuV/m | dB | dB/m | dB | | cm | deg |
| 1 | 263.200 | 36.43 | -9.57 | 52.60 | 46.00 | 1.62 | 12.69 | 30.48 | Peak | --- | --- |
| 2 | 343.200 | 37.66 | -8.34 | 51.71 | 46.00 | 1.78 | 15.10 | 30.94 | Peak | --- | --- |
| 3 @ | 396.800 | 42.95 | -3.05 | 55.46 | 46.00 | 1.96 | 16.70 | 31.18 | Peak | --- | --- |

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.8.8. Test Results for CH 00 / 2402 MHz (for emission above 1GHz)

- Modulation Type: GFSK
- Temperature: 26°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 41.27%
- Test Engineer: Ted Chiu

***(A) Polarization: Horizontal***

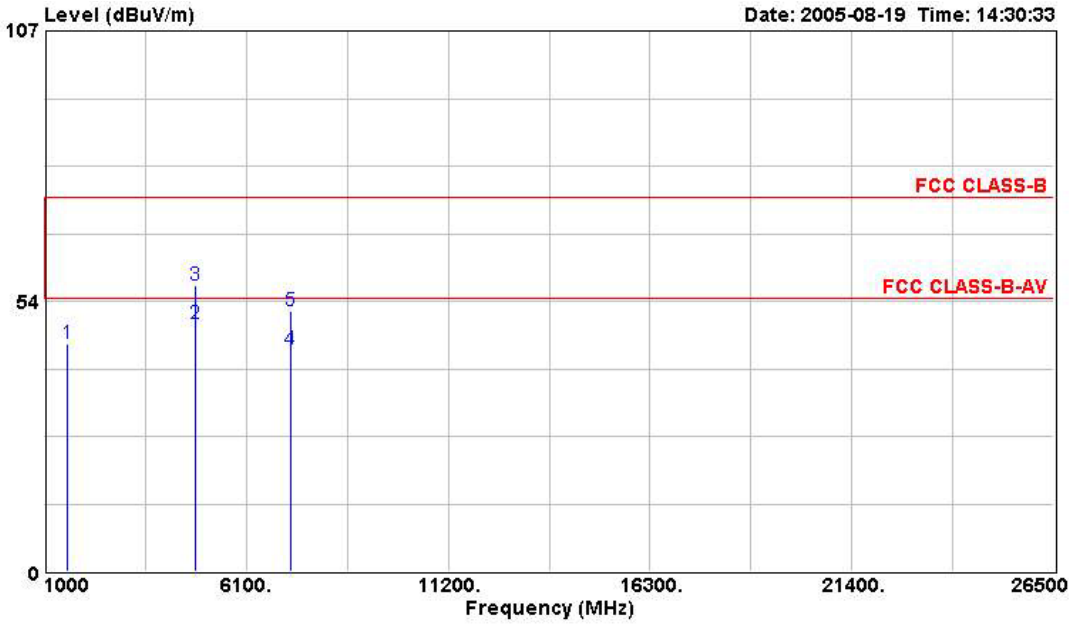


| | Freq | Level | Over Limit | Read Level | Limit Line | Cable Loss | Antenna Factor | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV | dBuV/m | dB | dB/m | dB | | cm | deg |
| 1 | 1588.000 | 45.08 | -28.92 | 50.82 | 74.00 | 1.51 | 25.74 | 32.98 | PEAK | --- | --- |
| 2 | 4804.000 | 48.96 | -5.04 | 45.56 | 54.00 | 2.84 | 33.10 | 32.54 | Average | --- | --- |
| 3 | 4804.000 | 56.51 | -17.49 | 53.11 | 74.00 | 2.84 | 33.10 | 32.54 | PEAK | --- | --- |
| 4 | 7204.000 | 43.94 | -10.06 | 36.79 | 54.00 | 3.61 | 35.90 | 32.35 | Average | --- | --- |
| 5 | 7204.000 | 51.49 | -22.51 | 44.34 | 74.00 | 3.61 | 35.90 | 32.35 | PEAK | --- | --- |

***(B) Polarization: Vertical***

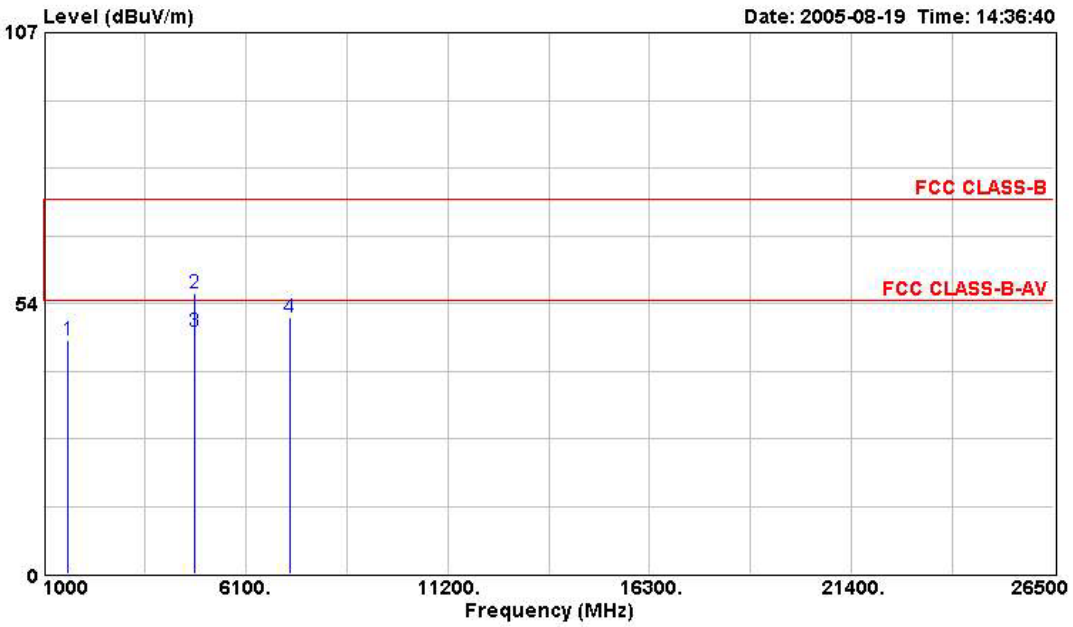


| | Freq | Level | Over Limit | Read Level | Limit Line | Cable Loss | Antenna Factor | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV | dBuV/m | dB | dB/m | dB | | cm | deg |
| 1 | 1596.000 | 46.27 | -27.73 | 52.01 | 74.00 | 1.51 | 25.74 | 32.98 | PEAK | --- | --- |
| 2 | 4804.000 | 55.55 | -18.45 | 52.15 | 74.00 | 2.84 | 33.10 | 32.54 | PEAK | --- | --- |
| 3 | 4804.000 | 48.00 | -6.00 | 44.60 | 54.00 | 2.84 | 33.10 | 32.54 | Average | --- | --- |
| 4 | 7204.000 | 50.61 | -23.39 | 43.46 | 74.00 | 3.61 | 35.90 | 32.35 | PEAK | --- | --- |

Note:
Emission level (dBuV/m) = 20 log Emission level (uV/m)
Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.8.9. Test Results for CH 39 / 2441 MHz (for emission above 1GHz)

- Modulation Type: GFSK
- Temperature: 26°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 41.27%
- Test Engineer: Ted Chiu

***(A) Polarization: Horizontal***

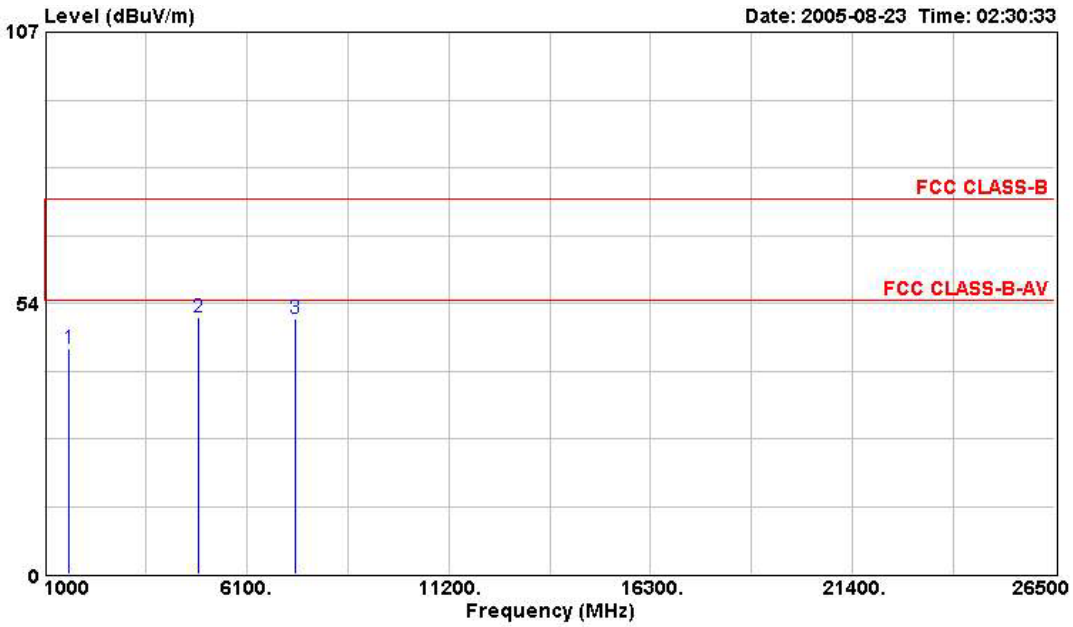


| | Freq | Level | Over Limit | Read Level | Limit Line | Cable Loss | Antenna Factor | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV | dBuV/m | dB | dB/m | dB | | cm | deg |
| 1 | 1592.000 | 44.50 | -29.50 | 50.24 | 74.00 | 1.51 | 25.74 | 32.98 | PEAK | --- | --- |
| 2 | 4884.000 | 50.63 | -23.37 | 47.10 | 74.00 | 2.87 | 33.21 | 32.55 | PEAK | --- | --- |
| 3 | 7324.000 | 50.54 | -23.46 | 43.32 | 74.00 | 3.65 | 36.19 | 32.61 | PEAK | --- | --- |

***(B) Polarization: Vertical***

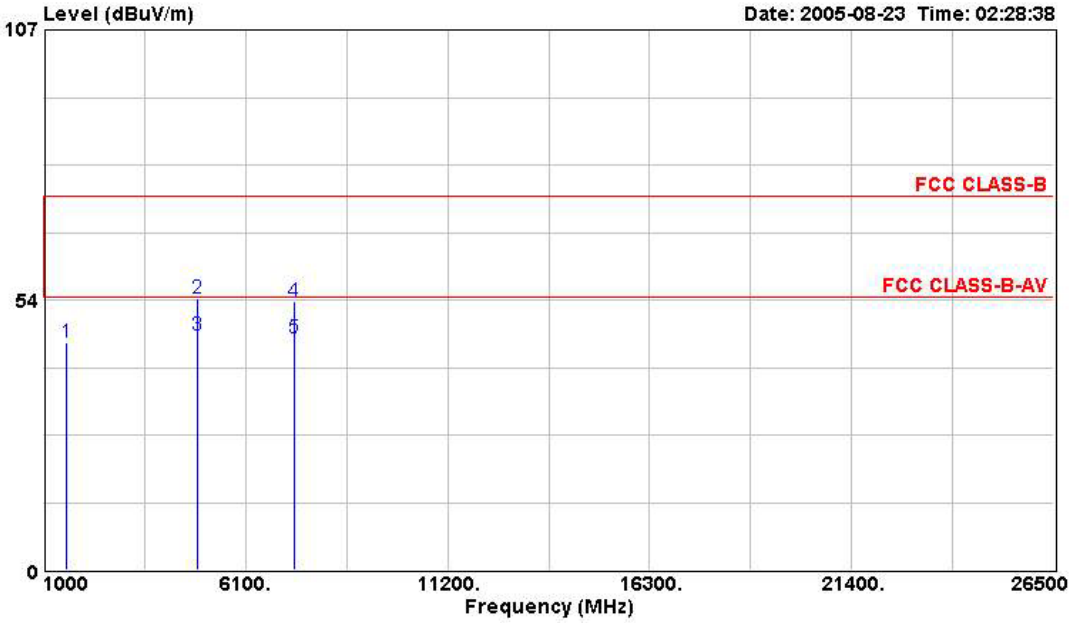


| | Freq | Level | Over Limit | Read Level | Limit Line | Cable Loss | Antenna Factor | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV | dBuV/m | dB | dB/m | dB | | cm | deg |
| 1 | 1588.000 | 44.94 | -29.06 | 50.68 | 74.00 | 1.51 | 25.74 | 32.98 | PEAK | --- | --- |
| 2 | 4884.000 | 53.92 | -20.08 | 50.38 | 74.00 | 2.87 | 33.21 | 32.55 | PEAK | --- | --- |
| 3 | 4884.000 | 46.37 | -7.63 | 42.84 | 54.00 | 2.87 | 33.21 | 32.55 | Average | --- | --- |
| 4 | 7320.000 | 53.36 | -20.64 | 46.13 | 74.00 | 3.65 | 36.19 | 32.61 | PEAK | --- | --- |
| 5 | 7320.000 | 45.81 | -8.19 | 38.58 | 54.00 | 3.65 | 36.19 | 32.61 | Average | --- | --- |

Note:
Emission level (dBuV/m) = 20 log Emission level (uV/m)
Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.8.10. Test Results for CH 78 / 2480 MHz (for emission above 1GHz)

- Modulation Type: GFSK
- Temperature: 26°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 41.27%
- Test Engineer: Ted Chiu

***(A) Polarization: Horizontal***

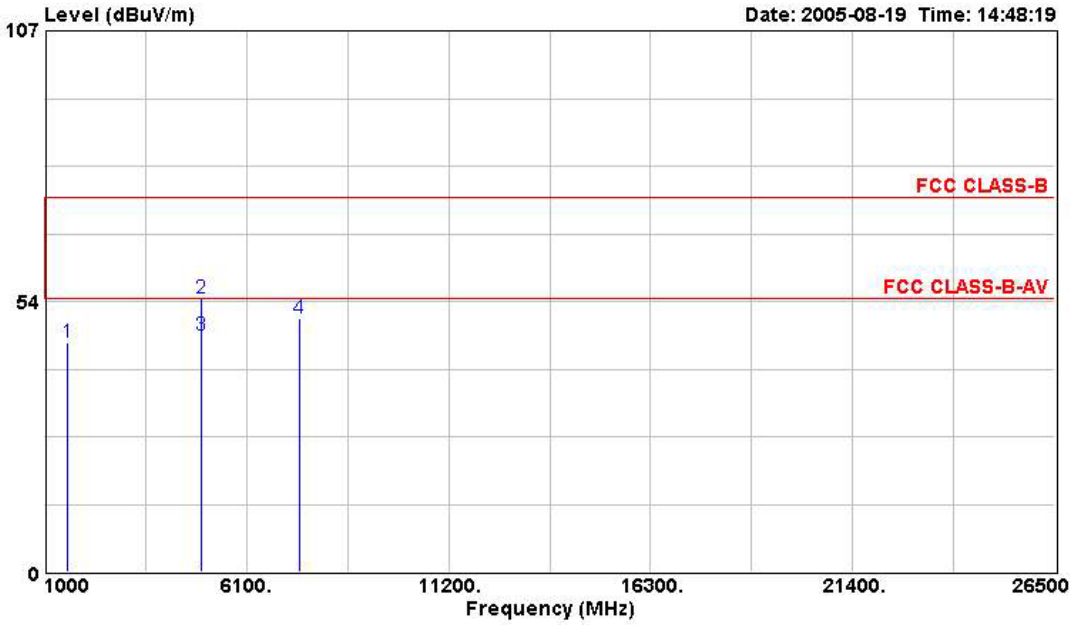


| | Freq | Level | Over Limit | Read Level | Limit Line | Cable Loss | Antenna Factor | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV | dBuV/m | dB | dB/m | dB | | cm | deg |
| 1 | 1588.000 | 45.25 | -28.75 | 50.99 | 74.00 | 1.51 | 25.74 | 32.98 | PEAK | --- | --- |
| 2 | 4960.000 | 54.18 | -19.82 | 50.48 | 74.00 | 2.91 | 33.34 | 32.56 | PEAK | --- | --- |
| 3 | 4960.000 | 46.63 | -7.37 | 42.93 | 54.00 | 2.91 | 33.34 | 32.56 | Average | --- | --- |
| 4 | 7440.000 | 50.09 | -23.91 | 42.79 | 74.00 | 3.69 | 36.48 | 32.87 | PEAK | --- | --- |

***(B) Polarization: Vertical***

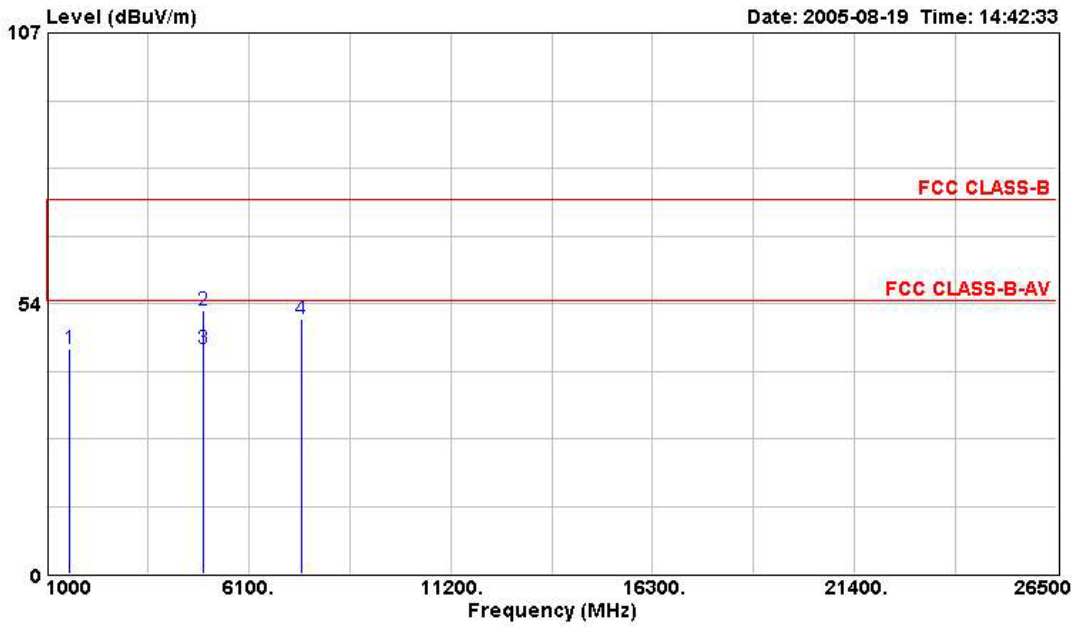


| | Freq | Level | Over Limit | Read Level | Limit Line | Cable Loss | Antenna Factor | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV | dBuV/m | dB | dB/m | dB | | cm | deg |
| 1 | 1588.000 | 44.60 | -29.40 | 50.34 | 74.00 | 1.51 | 25.74 | 32.98 | PEAK | --- | --- |
| 2 | 4960.000 | 52.07 | -21.93 | 48.37 | 74.00 | 2.91 | 33.34 | 32.56 | PEAK | --- | --- |
| 3 | 4960.000 | 44.52 | -9.48 | 40.82 | 54.00 | 2.91 | 33.34 | 32.56 | Average | --- | --- |
| 4 | 7440.000 | 50.44 | -23.56 | 43.14 | 74.00 | 3.69 | 36.48 | 32.87 | PEAK | --- | --- |

Note:
Emission level (dBuV/m) = 20 log Emission level (uV/m)
Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.8.11. Photographs of Radiated Emission Test Configuration

FRONT VIEW

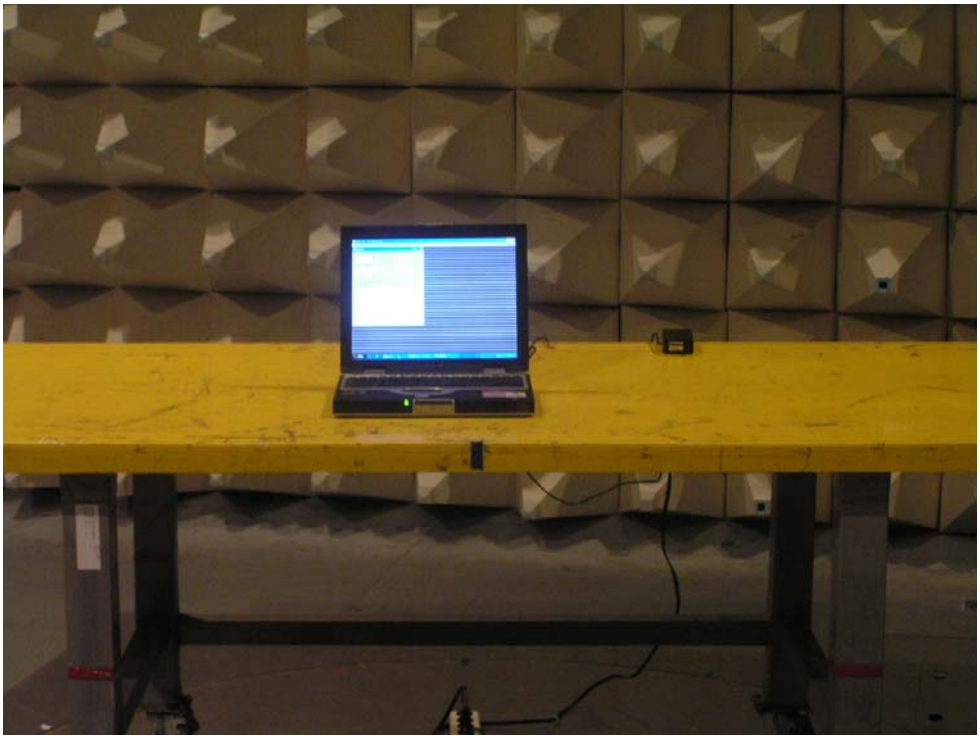

REAR VIEW

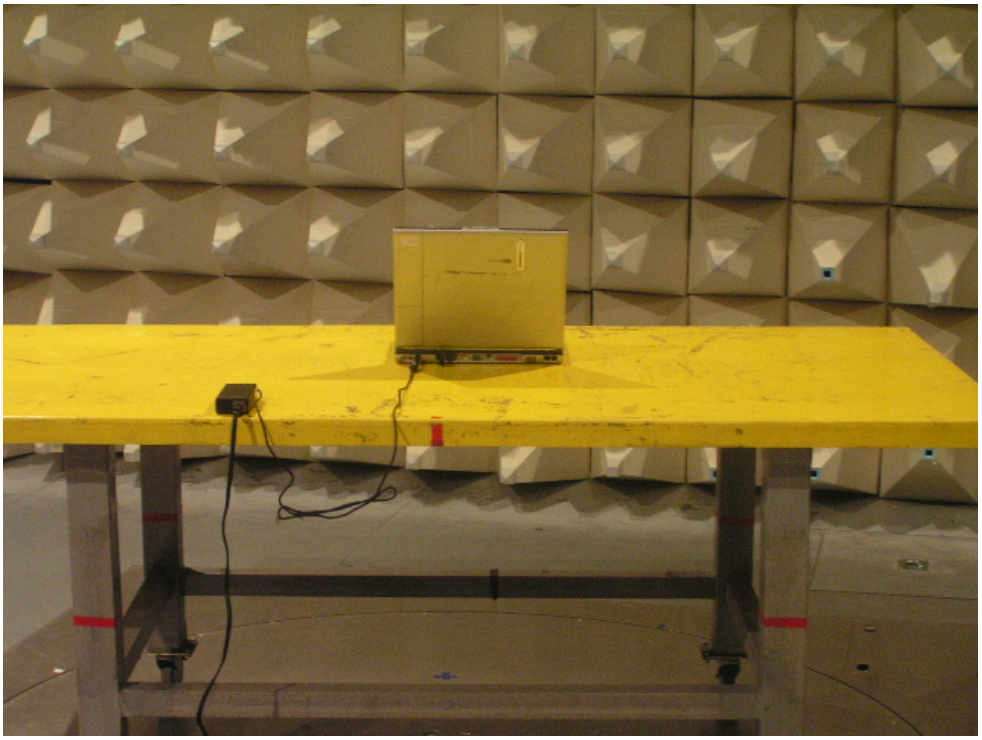

## 5.9. Antenna Requirements

5.9.1. Standard Applicable

Section 15.203:
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 3.10.1(4):
The limitation on type of antenna specified the requirements of 2.2 is not.(Only for DGT)

Section 15.247(b)/(c):
If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.9.2. Antenna Connected Construction

There is no antenna connector for chip antenna.

5.9.3. Antenna Gain

All antenna gain of EUT is less than 6dBi. Therefore peak conducted power limit shall not be degraded any more. Antenna report of manufacturer will have more detail antenna gain or antenna pattern.

5.9.4. Test Criteria

All test results complied with the requirements of 15.203/15.247(b)/(c).

# 6. List of Measuring Equipments Used

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|---|---|---|---|---|---|---|
| EMC Receiver | R&S | ESCS 30 | 100174 | 9kHz – 2.75GHz | Feb. 16, 2005 | Conduction (CO04-HY) |
| LISN | MessTec | NNB-2/16Z | 2001/004 | 9kHz – 30MHz | Apr. 20, 2005 | Conduction (CO04-HY) |
| LISN (Support Unit) | MessTec | NNB-2/16Z | 99041 | 9kHz – 30MHz | May. 05, 2005 | Conduction (CO04-HY) |
| RF Cable-CON | UTIFLEX | 3102-26886-4 | CB049 | 9kHz – 30MHz | Apr. 20, 2005 | Conduction (CO04-HY) |
| EMI Filter | LINDGREN | LRE-2030 | 2651 | < 450 Hz | N/A | Conduction (CO04-HY) |
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 30MHz ~ 1GHz 3m | Jun. 16, 2005 | Radiation (03CH03-HY) |
| Spectrum analyzer | R&S | FSP40 | 100004 | 9KHZ ~ 40GHz | Aug. 31, 2004 | Radiation (03CH03-HY) |
| Amplifier | SCHAFFNER | CPA9231A | 18667 | 9KHz ~ 2GHz | Jan. 10, 2005 | Radiation (03CH03-HY) |
| Amplifier | Agilent | 8449B | 3008A02120 | 1GHz ~ 26.5GHz | May 31, 2005 | Radiation (03CH03-HY) |
| Biconical Antenna | SCHWARZBECK | VHBB 9124 | 301 | 30MHz ~ 200MHz | Jul. 22, 2005 | Radiation (03CH03-HY) |
| Log Antenna | SCHWARZBECK | VUSLP 9111 | 221 | 200MHz ~ 1GHz | Jul. 22, 2005 | Radiation (03CH03-HY) |
| Horn Antenna | EMCO | 3115 | 6741 | 1GHz ~ 18GHz | Apr. 22, 2005 | Radiation (03CH03-HY) |
| RF Cable-R03m | Jye Bao | RG142 | CB021 | 30MHz ~ 1GHz | Feb. 22, 2005 | Radiation (03CH03-HY) |
| RF Cable-HIGH | SUHNER | SUCOFLEX 106 | 03CH03-HY | 1GHz ~ 40GHz | Dec.01, 2004 | Radiation (03CH03-HY) |
| Turn Table | HD | DS 420 | 420/650/00 | 0 ~ 360 degree | N/A | Radiation (03CH03-HY) |
| Antenna Mast | HD | MA 240 | 240/560/00 | 1 m - 4 m | N/A | Radiation (03CH03-HY) |

※ Calibration Interval of instruments listed above is one year.

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|---|---|---|---|---|---|---|
| Amplifier | MITEQ | AMF-6F-260400 | 923364 | 26.5GHz ~ 40GHz | Jan. 05, 2004* | Radiation (03CH03-HY) |
| Loop Antenna | R&S | HFH2-Z2 | 860004/001 | 9kHz ~ 30MHz | May 24, 2004* | Radiation (03CH03-HY) |
| Horn Antenna | SCHWARZBECK | BBHA9170 | BBHA9170154 | 15GHz ~ 40GHz | Jun. 09, 2004* | Radiation (03CH03-HY) |

※ Calibration Interval of instruments listed above is two year.

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|---|---|---|---|---|---|---|
| Spectrum analyzer | R&S | FSP40 | 100004 | 9KHZ ~ 40GHz | Aug. 31, 2004 | Conducted (TH01-HY) |
| Power meter | R&S | NRVS | 100444 | DC ~ 40GHz | Jul. 06, 2005 | Conducted (TH01-HY) |
| Power sensor | R&S | NRV-Z55 | 100049 | DC ~ 40GHz | Jul. 06, 2005 | Conducted (TH01-HY) |
| Power Sensor | R&S | NRV-Z32 | 100057 | 30MHz ~ 6GHz | Apr. 28, 2005 | Conducted (TH01-HY) |
| AC power source | HPC | HPA-500W | HPA-9100024 | AC 0 ~ 300V | Apr. 21, 2005 | Conducted (TH01-HY) |
| DC power source | G.W. | GPC-6030D | C671845 | DC 1V ~ 60V | Nov. 28, 2004 | Conducted (TH01-HY) |
| Temp. and Humidity Chamber | KSON | THS-C3L | 612 | N/A | Oct. 01, 2004 | Conducted (TH01-HY) |
| RF CABLE-1m | Jye Bao | RG142 | CB034-1m | 20MHz ~ 7GHz | Jan. 01, 2005 | Conducted (TH01-HY) |
| RF CABLE-2m | Jye Bao | RG142 | CB035-2m | 20MHz ~ 1GHz | Jan. 01, 2005 | Conducted (TH01-HY) |
| Oscilloscope | Tektronix | TDS1012 | CO38515 | 100MHz / 1GS/s | Apr. 15, 2005 | Conducted (TH01-HY) |
| Signal Generator | R&S | SMR40 | 100116 | 10MHz ~ 40GHz | Dec. 31, 2004 | Conducted (TH01-HY) |
| Data Generator | Tektronix | DG2030 | 063-2920-50 | 0.1Hz~400MHz | Jun. 02, 2005 | Conducted (TH01-HY) |

※ Calibration Interval of instruments listed above is one year.

# 7. Company Profile

SPORTON Lab. was established in 1986 with one shielded room: the first private EMI test facility, offering local manufacturers an alternative EMI test familial apart from ERSO. In 1988, one 3M and 10M/3M open area test site were setup and also obtained official accreditation from FCC, VCCI and NEMKO. In 1993, a Safety laboratory was founded and obtained accreditation from UL of USA, CSA of Canada and TUV (Rhineland & PS) of Germany. In 1995, one EMC lab, including EMI and EMS test facilities was setup. In 1997, SPORTON Group has provided financial expense to relocate the headquarter to Orient Scientific Park in Taipei Hsien to offer more comprehensive, more qualified and better service to local suppliers and manufactures. In 1999, Safety Group and Component Group were setup. In 2001, SPORTON has established 3M/10M chamber in Hwa Ya Technology Park.

## 7.1. Certificate of Accreditation

| | |
|---|---|
| Taiwan | BSMI, CNLA, DGT |
| USA | FCC, NVLAP, UL |
| EU | Nemko, TUV |
| Japan | VCCI |
| Canada | Industry Canada |

## 7.2. Test Location

| | | |
|---|---|---|
| SHIJR | ADD： | 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. |
| | TEL： | 02-2696-2468 |
| | FAX： | 02-2696-2255 |
| HWA YA | ADD： | No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. |
| | TEL： | 03-327-3456 |
| | FAX： | 03-318-0055 |
| LINKOU | ADD： | No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C |
| | TEL： | 02-2601-1640 |
| | FAX： | 02-2601-1695 |
| DUNGHU | ADD： | No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. |
| | TEL： | 02-2631-4739 |
| | FAX： | 02-2631-9740 |
| JUNGHE | ADD： | 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. |
| | TEL： | 02-8227-2020 |
| | FAX： | 02-8227-2626 |
| NEIHU | ADD： | 4Fl., No. 339, Hsin Hu 2nd Rd., Taipei 114, Taiwan, R.O.C. |
| | TEL： | 02-2794-8886 |
| | FAX： | 02-2794-9777 |

# 8. Certificate of NVLAP Accreditation

United States Department of Commerce
National Institute of Standards and Technology

NVLAP®

ISO/IEC 17025:1999
ISO 9002:1994

Certificate of Accreditation

DEPARTMENT OF COMMERCE ★ UNITED STATES OF AMERICA ★

SPORTON INTERNATIONAL, INC.
TAIPEI HSIEN 221
TAIWAN

*is recognized by the National Voluntary Laboratory Accreditation Program for satisfactory compliance with criteria set forth in NIST Handbook 150:2001, all requirements of ISO/IEC 17025:1999, and relevant requirements of ISO 9002:1994. Accreditation is awarded for specific services, listed on the Scope of Accreditation, for:*

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

December 31, 2005
*Effective through*

*For the National Institute of Standards and Technology*
NVLAP Lab Code: 200079-0

NVLAP-01C (06-01)