

1-4F, Huafeng Science Park, Xin'an Sixth Road, 82th District, Bao'an,

Shenzhen, China.

Telephone: +86-755-29451282, Fax: +86-755-22639141

Report No.: FCC13-RTE011501

Page 1 of 67

FCC REPORT

Applicant: Archos SA

Address of Applicant: 12 Rue Ampere 91430 Igny, France

Equipment Under Test (EUT)

Product Name: GT11

Model No.: AN10G4

Trade mark: ARCHOS

FCC ID: SOVAN10G4

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2011

Date of sample receipt: December 20, 2012

Date of Test: January 1-11, 2013

Date of report issued: January 15, 2013

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Kavin Yu Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC13-RTE011501 Page 2 of 67

2 Version

Version No.	Date	Description
00	January 15, 2013	Original

Prepared By:	hank. yan	Date:	January 15, 2013	
	Project Engineer			
Check By:	Mans. Hu	Date:	January 15, 2013	
	Reviewer		_	_



Report No.: FCC13-RTE011501 Page 3 of 67

3 Contents

		Page
1	COVER PAGE	1
2	VERSION	2
3	CONTENTS	3
4	TEST SUMMARY	4
5	GENERAL INFORMATION	5
	5.1 Client Information	5
	5.2 General Description of EUT	
	5.3 Test mode	7
	5.4 Test Facility	7
	5.5 Test Location	
	5.6 Other Information Requested by the Customer	
	5.7 Description of Support Units	
	5.8 Test Instruments list	8
6	TEST RESULTS AND MEASUREMENT DATA	10
	6.1 Antenna requirement:	10
	6.2 Conducted Emissions	
	6.3 Conducted Peak Output Power	
	6.4 Channel Bandwidth	
	6.5 Power Spectral Density	
	6.6 Band edges	
	6.6.1 Conducted Emission Method	
	6.6.2 Radiated Emission Method	
	6.7 Spurious Emission	
	6.7.1 Conducted Emission Wethod	
7	TEST SETUP PHOTO	33
8	EUT CONSTRUCTIONAL DETAILS	33



Report No.: FCC13-RTE011501

Page 4 of 67

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.



Report No.: FCC13-RTE011501 Page 5 of 67

5 General Information

5.1 Client Information

Applicant:	Archos SA
Address of Applicant:	12 Rue Ampere 91430 Igny, France
Manufacturer:	Archos SA
Address of Manufacturer:	12 Rue Ampere 91430 Igny, France

5.2 General Description of EUT

Product Name:	GT11
Floduct Name.	GIII
Model No.:	AN10G4
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(H20))
	2422MHz~2452MHz (802.11n(H40))
Channel numbers:	11 for 802.11b/802.11g /802.11n(H20)
	7 for 802.11(H40)
Channel separation:	5MHz
Modulation technology:	Direct Sequence Spread Spectrum (DSSS)
(IEEE 802.11b)	
Modulation technology:	Orthogonal Frequency Division Multiplexing(OFDM)
(IEEE 802.11g/802.11n)	
Antenna Type:	Integral
Antenna gain:	2dBi (declare by Applicant)
Power supply:	Model No.:HND050200X
	Input: AC 100~240V~50/60Hz 0.35A MAX
	Output: 5.0V 2A
	DC 3.7V Li-ion Battery



Report No.: FCC13-RTE011501 Page 6 of 67

Operation Frequency each of channel							
Channel Frequency Channel Frequency Channel Frequency Channel Frequency						Frequency	
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/802.11g/802.11n(H20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The Highest channel	2462MHz

802.11n(H40)

Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The Highest channel	2452MHz



Report No.: FCC13-RTE011501

Page 7 of 67

5.3 Test mode

Transmitting mode Keep the EUT in transmitting mode.

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(H20)	6.5Mbps
802.11n(H40)	13.0Mbps

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the "worst case" and "worst setup" 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20), 13Mbps for 802.11n(H40)

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. to ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission.

The acceptance letter from the FCC is maintained in out files. Registration 600491, July 20, 2010.

• Industry Canada (IC)

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen,

China

Tel: 0755-27798480 Fax: 0755-27798960



Report No.: FCC13-RTE011501

Page 8 of 67

5.6 Other Information Requested by the Customer

None.

5.7 Description of Support Units

None.

5.8 Test Instruments list

Rad	iated Emission:					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 30 2011	Mar. 29 2013
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Dec. 6, 2012	Dec. 5, 2013
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 03 2012	Jul. 02 2013
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 25 2012	Feb. 24 2013
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2012	June 28 2013
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2011	Mar. 29 2013
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 31 2012	Mar. 30 2013
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 31 2012	Mar. 30 2013
11	Coaxial cable	GTS	N/A	GTS210	Mar. 31 2012	Mar. 30 2013
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 31 2012	Mar. 30 2013
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 03 2012	Jul. 02 2013
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 03 2012	Jul. 02 2013
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 29 2012	June 28 2013
16	Band filter	Amindeon	82346	GTS219	Mar. 31 2012	Mar. 30 2013

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC13-RTE011501 Page 9 of 67

Cond	ducted Emission:					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 08 2011	Sep. 07 2013
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jul. 03 2012	Jul. 02 2013
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	Jul. 03 2012	Jul. 02 2013
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jul. 03 2012	Jul. 02 2013
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Jul. 03 2012	Jul. 02 2013
6	Coaxial Cable	GTS	N/A	GTS227	Jul. 03 2012	Jul. 02 2013
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

Gene	General used equipment:										
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)					
1	Barometer	ChangChun	DYM3	GTS257	July 10 2012	July 09 2013					



Report No.: FCC13-RTE011501

Page 10 of 67

6 Test results and Measurement Data

6.1 Antenna requirement:

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The antenna is Integral antenna, the best case gain of the antenna is 2dBi



Report No.: FCC13-RTE011501

Page 11 of 67

6.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.4:2003					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:						
Receiver setup:	RBW=9KHz, VBW=30KHz, Swee	p time=auto				
Limit:	Fraguerou romas (NALIE)	Limit (c	dBuV)			
	Frequency range (MHz)	Quasi-peak	Average			
	0.15-0.5 66 to 56* 56 to 46*					
	0.5-5 56 46					
	5-30 60 50					
	* Decreases with the logarithm of	the frequency.				
Test setup:	Reference Plane LISN 40cm 80cm Filter AC power Equipment Test table/Insulation plane Remark E U T. Equipment Under Test LISN: Line impedence Stabilization Network Test table height=0.8m					
Test procedure:	 The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement. 					
Test Instruments:	Refer to section 5.8 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Pass					
1 CSt 1 CSuits.	1 400					

Measurement data:



Report No.: FCC13-RTE011501 Page 12 of 67

Line:

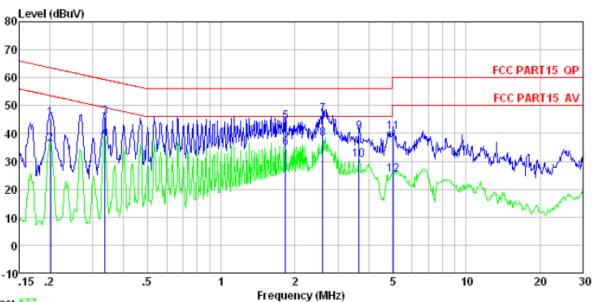

Trace: 177

: FCC PART15 QP LISN-2012 LINE

Condition : FCC PART1 Job No. : 1545RF Test Mode : WiFi mode

Test Engineer: Jim


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	d₿	dBuV	dBuV	dB	
1	0.202	45.71	-0.23	0.10	45.58	63.54	-17.96	QP
2	0.202	36.22	-0.23	0.10	36.09	53.54	-17.45	Average
3	0.336	45.84	-0.22	0.10	45.72	59.31	-13.59	QP
4	0.336	38.11	-0.22	0.10	37.99	49.31	-11.32	Average
4 5	1.829	44.37	-0.24	0.10	44.23	56.00	-11.77	QP
6	1.829	35.11	-0.24	0.10	34.97	46.00	-11.03	Average
7	2.594	47.08	-0.25	0.10	46.93	56.00	-9.07	QP
8	2.594	38.22	-0.25	0.10	38.07	46.00	-7.93	Average
9	3.661	40.82	-0.28	0.10	40.64	56.00	-15.36	QP
10	3.661	30.55	-0.28	0.10	30.37	46.00	-15.63	Average
11	5.031	40.79	-0.30	0.10	40.59	60.00	-19.41	QP
12	5, 031	25, 33	-0.30	0.10	25, 13	50.00	-24.87	Average

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC13-RTE011501 Page 13 of 67

Neutral:

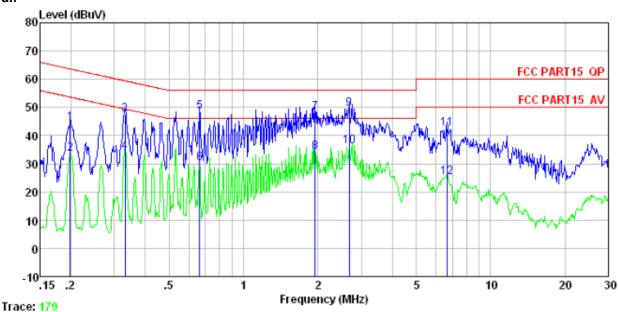

Condition : FCC PART15 QP LISN-2012 NEUTRAL

Job No. : 1545RF Test Mode : WiFi mode

Test Engineer: Jim

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.199	44.29	-0.09	0.10	44.30		-19.37	
2	0.199	33.33	-0.09	0.10	33.34			Average
3	0.332	47.38	-0.09	0.10	47.39	59.40	-12.01	QP
4 5	0.332	34.23	-0.09	0.10	34.24	49.40	-15.16	Average
5	0.665	48.30	-0.08	0.10	48.32	56.00	-7.68	QP
6	0.665	30.11	-0.08	0.10	30.13	46.00	-15.87	Average
7	1.949	48.22	-0.11	0.10	48.21	56.00	-7.79	QP
8	1.949	34.11	-0.11	0.10	34.10	46.00	-11.90	Average
9	2.678	49.55	-0.12	0.10	49.53	56.00	-6.47	
10	2.678	36.22	-0.12	0.10	36.20	46.00	-9.80	Average
11	6.662	42.71	-0.20	0.13	42.64	60.00	-17.36	QP
12	6.662	25.11	-0.20	0.13	25.04	50.00	-24.96	Average

Notes:


- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss



Report No.: FCC13-RTE011501

Page 14 of 67

6.3 Conducted Peak Output Power

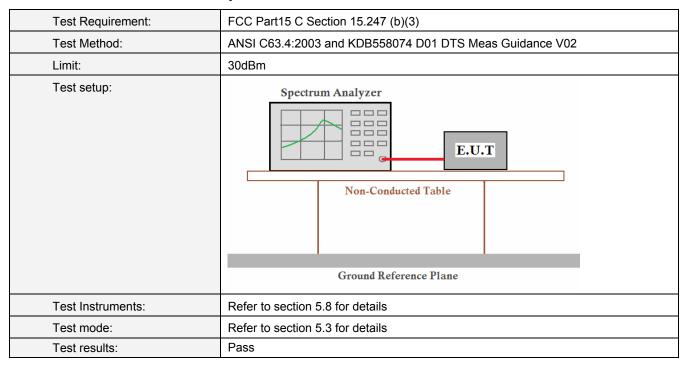

Measurement Data


Test CH		Peak Output	Power (dBm)		Limit(dBm)	Result	
Test CIT	802.11b	802.11g	802.11n(H20)	802.11n(H40)	Lillit(dBill)	Nesuit	
Lowest	7.43	7.00	6.23	6.40			
Middle	7.05	6.88	6.53	6.45	30.00	Pass	
Highest	6.31	6.46	6.12	6.25			

Test plot as follows:




Report No.: FCC13-RTE011501 Page 15 of 67


Test mode: 802.11b



Lowest channel



Middle channel




Highest channel




Report No.: FCC13-RTE011501 Page 16 of 67


Test mode: 802.11g



Lowest channel



Middle channel




Highest channel




Report No.: FCC13-RTE011501 Page 17 of 67


Test mode: 802.11n(H20)



Lowest channel



Middle channel




Highest channel




Report No.: FCC13-RTE011501 Page 18 of 67


Test mode: 802.11n(H40)



Lowest channel



Middle channel




Highest channel



Report No.: FCC13-RTE011501

Page 19 of 67

6.4 Channel Bandwidth

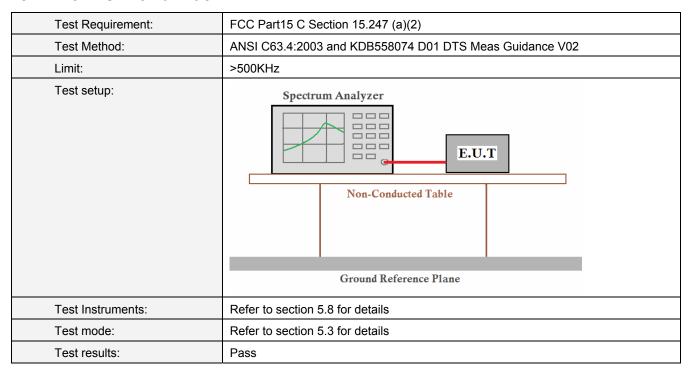

Measurement Data


Test CH		Emission Bar	ndwidth (MHz)		Limit(KHz)	Result	
Test CIT	802.11b	802.11g	802.11n(H20)	802.11n(H40)	Liiiii(Ki iz)	rvesuit	
Lowest	10.137	16.595	17.741	36.423			
Middle	10.127	16.594	17.727	36.415	>500	Pass	
Highest	10.111	16.596	17.784	36.398			

Test plot as follows:




Report No.: FCC13-RTE011501 Page 20 of 67

Test mode: 802.11b



Lowest channel Agilent Meas Setup Avg Number Ch Freq Trig Free 10 0ff Occupied Bandwidth Avg Mode Repeat Max Hold Occ BW % Pwr OBW Span enter 2.437 00 GHz Res BW 100 kHz Span 50 MHz Sweep 4.8 ms (601 pts) •VBW 300 kHz **x dB** -6.00 dB Occupied Bandwidth Occ BW % Pwr 14.6313 MHz Transmit Freq Error x dB Bandwidth -10.963 kHz 10.127 MHz





Highest channel




Report No.: FCC13-RTE011501 Page 21 of 67

Test mode: 802.11g









Highest channel




Report No.: FCC13-RTE011501 Page 22 of 67

Test mode: 802.11n(H20)









Highest channel




Report No.: FCC13-RTE011501 Page 23 of 67

Test mode: 802.11n(H40)








Highest channel



Report No.: FCC13-RTE011501

Page 24 of 67

6.5 Power Spectral Density

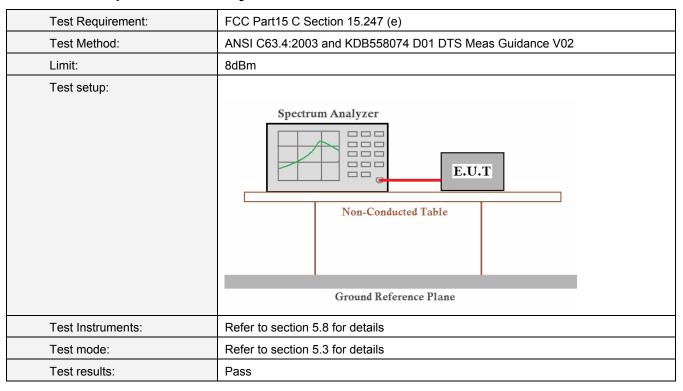

Measurement Data

Test CH		Power	Spectral Density (dBn	า)	Limit(8dBm/3kHz)	Result	
Test Off	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)	EllTill(OdBIT/3KT12)		
Lowest	-5.16	-8.69	-10.13	-14.83			
Middle	-5.37	-9.72	-10.38	-14.52	8.00	Pass	
Highest	-6.04	-9.98	-11.22	-14.71			


Test plot as follows:


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: FCC13-RTE011501 Page 25 of 67

Test mode: 802.11b








Highest channel




Report No.: FCC13-RTE011501 Page 26 of 67


Test mode: 802.11g



Lowest channel



Middle channel





Highest channel




Report No.: FCC13-RTE011501 Page 27 of 67

Test mode: 802.11n(H20)









Highest channel




Report No.: FCC13-RTE011501 Page 28 of 67

Test mode: 802.11n(H40)







Highest channel



Report No.: FCC13-RTE011501 Page 29 of 67

6.6 Band edges


6.6.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)				
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V02				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane				
Test Instruments:	Refer to section 5.8 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Pass				

Test plot as follows:




Report No.: FCC13-RTE011501 Page 30 of 67

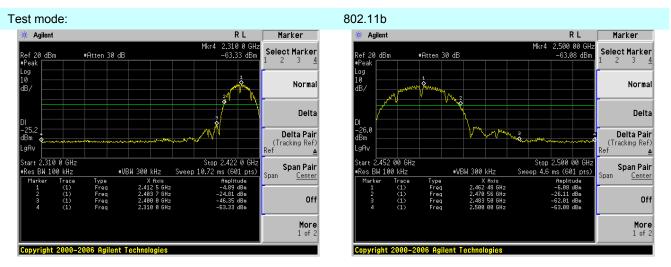

Lowest channel


Highest channel

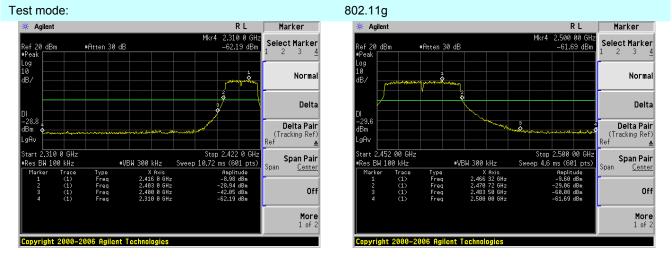


Lowest channel Highest channel



Report No.: FCC13-RTE011501 Page 31 of 67

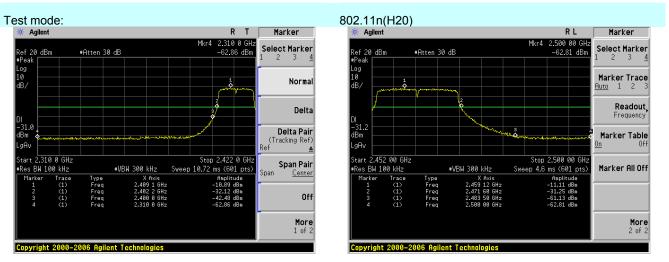

Lowest channel Highest channel

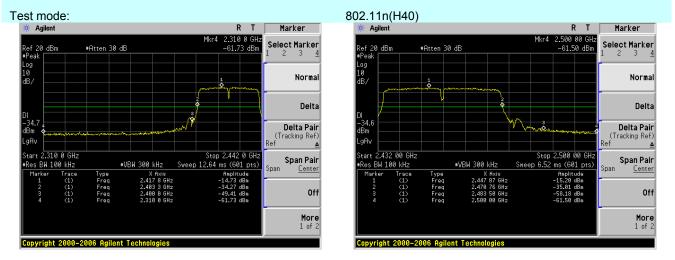

Lowest channel Highest channel



Report No.: FCC13-RTE011501

Page 32 of 67

6.6.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205						
Test Method:	ANSI C63.4: 200	3					
Test Frequency Range:	30MHz to 25GHz	, only worse ca	se is reported				
Test site:	Measurement Dis	stance: 3m					
Receiver setup:	Frequency	Detector	RBW	VBW	Remark		
	Above 1GHz	Peak	1MHz	3MHz	Peak Value		
		AV	1MHz	10Hz	Average Value		
Limit:	Freque	ency	Limit (dBuV/		Remark		
	Above 1	GHz	54.0 74.0		Average Value Peak Value		
Test setup:	Antenna Tower Horn Antenna Spectrum Analyzer Turn Table Amplifier						
Test Procedure:	 The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified 						
Test Instruments:	Refer to section 5	5.8 for details					
Test mode:	Refer to section 5	5.3 for details					
Test results:	Pass						

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis which it is worse case.



Report No.: FCC13-RTE011501 Page 33 of 67

Measurement data:

Test mode:	802.11b	Test channel:	Lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	51.50	27.38	3.91	34.83	47.96	74.00	-26.04	Horizontal
2400.00	54.70	27.38	3.93	34.83	51.18	74.00	-22.82	Horizontal
2390.00	53.30	27.38	3.91	34.83	49.76	74.00	-24.24	Vertical
2400.00	55.40	27.38	3.93	34.83	51.88	74.00	-22.12	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	40.20	27.38	3.91	34.83	36.66	54.00	-17.34	Horizontal
2400.00	42.88	27.38	3.93	34.83	39.36	54.00	-14.64	Horizontal
2390.00	40.49	27.38	3.91	34.83	36.95	54.00	-17.05	Vertical
2400.00	44.15	27.38	3.93	34.83	40.63	54.00	-13.37	Vertical

Test mode:	802.11b	Test channel:	Highest
1 oot mode.	002.110	1 oot onarmon.	i ligitoot

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	52.83	27.32	3.99	34.86	49.28	74.00	-24.72	Horizontal
2500.00	50.51	27.35	4.00	34.87	46.99	74.00	-27.01	Horizontal
2483.50	53.53	27.32	3.99	34.86	49.98	74.00	-24.02	Vertical
2500.00	52.16	27.35	4.00	34.87	48.64	74.00	-25.36	Vertical

Average value:

, troidge value.										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
2483.50	38.43	27.32	3.99	34.86	34.88	54.00	-19.12	Horizontal		
2500.00	35.21	27.35	4.00	34.87	31.69	54.00	-22.31	Horizontal		
2483.50	39.47	27.32	3.99	34.86	35.92	54.00	-18.08	Vertical		
2500.00	35.92	27.35	4.00	34.87	32.40	54.00	-21.60	Vertical		

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.



Report No.: FCC13-RTE011501

Page 34 of 67

Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	50.28	27.38	3.91	34.83	46.74	74.00	-27.26	Horizontal
2400.00	52.48	27.38	3.93	34.83	48.96	74.00	-25.04	Horizontal
2390.00	52.20	27.38	3.91	34.83	48.66	74.00	-25.34	Vertical
2400.00	53.93	27.38	3.93	34.83	50.41	74.00	-23.59	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	35.73	27.38	3.91	34.83	32.19	54.00	-21.81	Horizontal
2400.00	37.93	27.38	3.93	34.83	34.41	54.00	-19.59	Horizontal
2390.00	35.69	27.38	3.91	34.83	32.15	54.00	-21.85	Vertical
2400.00	37.89	27.38	3.93	34.83	34.37	54.00	-19.63	Vertical

mode: 802.11g Test channel: Highest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	50.13	27.32	3.99	34.86	46.58	74.00	-27.42	Horizontal
2500.00	46.91	27.35	4.00	34.87	43.39	74.00	-30.61	Horizontal
2483.50	51.84	27.32	3.99	34.86	48.29	74.00	-25.71	Vertical
2500.00	49.73	27.35	4.00	34.87	46.21	74.00	-27.79	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	36.40	27.32	3.99	34.86	32.85	54.00	-21.15	Horizontal
2500.00	34.88	27.35	4.00	34.87	31.36	54.00	-22.64	Horizontal
2483.50	37.36	27.32	3.99	34.86	33.81	54.00	-20.19	Vertical
2500.00	35.92	27.35	4.00	34.87	32.40	54.00	-21.60	Vertical

Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.



Report No.: FCC13-RTE011501 Page 35 of 67

Test mode:	802.11n(H20)	Test channel:	Lowest	
------------	--------------	---------------	--------	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	50.23	27.38	3.91	34.83	46.69	74.00	-27.31	Horizontal
2400.00	52.01	27.38	3.93	34.83	48.49	74.00	-25.51	Horizontal
2390.00	46.33	27.38	3.91	34.83	42.79	74.00	-31.21	Vertical
2400.00	48.27	27.38	3.93	34.83	44.75	74.00	-29.25	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	37.03	27.38	3.91	34.83	33.49	54.00	-20.51	Horizontal
2400.00	39.41	27.38	3.93	34.83	35.89	54.00	-18.11	Horizontal
2390.00	31.26	27.38	3.91	34.83	27.72	54.00	-26.28	Vertical
2400.00	34.32	27.38	3.93	34.83	30.80	54.00	-23.20	Vertical

Test mode:	802.11n(H20)	Test channel:	Highest
------------	--------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.63	27.32	3.99	34.86	45.08	74.00	-28.92	Horizontal
2500.00	46.98	27.35	4.00	34.87	43.46	74.00	-30.54	Horizontal
2483.50	50.73	27.32	3.99	34.86	47.18	74.00	-26.82	Vertical
2500.00	47.89	27.35	4.00	34.87	44.37	74.00	-29.63	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	35.93	27.32	3.99	34.86	32.38	54.00	-21.62	Horizontal
2500.00	34.28	27.35	4.00	34.87	30.76	54.00	-23.24	Horizontal
2483.50	35.91	27.32	3.99	34.86	32.36	54.00	-21.64	Vertical
2500.00	34.76	27.35	4.00	34.87	31.24	54.00	-22.76	Vertical

Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.



Report No.: FCC13-RTE011501 Page 36 of 67

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	51.42	27.38	3.91	34.83	47.88	74.00	-26.12	Horizontal
2400.00	52.31	27.38	3.93	34.83	48.79	74.00	-25.21	Horizontal
2390.00	52.53	27.38	3.91	34.83	48.99	74.00	-25.01	Vertical
2400.00	56.03	27.38	3.93	34.83	52.51	74.00	-21.49	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	38.13	27.38	3.91	34.83	34.59	54.00	-19.41	Horizontal
2400.00	41.41	27.38	3.93	34.83	37.89	54.00	-16.11	Horizontal
2390.00	37.69	27.38	3.91	34.83	34.15	54.00	-19.85	Vertical
2400.00	40.75	27.38	3.93	34.83	37.23	54.00	-16.77	Vertical

Test mode:	802.11n(H40)	Test channel:	Highest
------------	--------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	53.21	27.32	3.99	34.86	49.66	74.00	-24.34	Horizontal
2500.00	49.68	27.35	4.00	34.87	46.16	74.00	-27.84	Horizontal
2483.50	52.93	27.32	3.99	34.86	49.38	74.00	-24.62	Vertical
2500.00	49.93	27.35	4.00	34.87	46.41	74.00	-27.59	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	38.13	27.32	3.99	34.86	34.58	54.00	-19.42	Horizontal
2500.00	37.29	27.35	4.00	34.87	33.77	54.00	-20.23	Horizontal
2483.50	37.41	27.32	3.99	34.86	33.86	54.00	-20.14	Vertical
2500.00	36.30	27.35	4.00	34.87	32.78	54.00	-21.22	Vertical

Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.



Report No.: FCC13-RTE011501 Page 37 of 67

6.7 Spurious Emission

6.7.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)						
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V02						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane						
Test Instruments:	Refer to section 5.8 for details						
Test mode:	Refer to section 5.3 for details						
Test results:	Pass						


Test plot as follows:



Report No.: FCC13-RTE011501 Page 38 of 67

Test mode: 802.11b

Lowest channel




30MHz~10GHz


Peak Search L 24.80 GHz -55.15 dBm #Atten 30 dB Next Peak 20 dBn Next Pk Right Next Pk Left Min Search Stop 25.00 GH: Sweep 1.434 s (601 pts) Res BW 100 kHz #VBW 300 kHz Pk-Pk Search Trace Amplitude -55.15 dBm X fixis 24.80 GHz Mkr → CF Copyright 2000-2006 Agilent Technologies

10GHz~25GHz

Middle channel



30MHz~10GHz




10GHz~25GHz


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC13-RTE011501 Page 39 of 67

Highest channel






30MHz~10GHz


10GHz~25GHz

Test mode:

802.11g

Lowest channel





30MHz~10GHz

10GHz~25GHz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




🔅 Agilent

Report No.: FCC13-RTE011501 Page 40 of 67

R L

Peak Search


Middle channel




30MHz~10GHz

10GHz~25GHz





30MHz~10GHz



10GHz~25GHz


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC13-RTE011501 Page 41 of 67

Test mode: 802.11n(H20)


Lowest channel




30MHz~10GHz

10GHz~25GHz





30MHz~10GHz




10GHz~25GHz


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC13-RTE011501 Page 42 of 67

Highest channel






30MHz~10GHz


10GHz~25GHz

Test mode:

802.11n(H40)

Lowest channel





30MHz~10GHz 10GHz~25GHz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




🔆 Agilent

Report No.: FCC13-RTE011501 Page 43 of 67

R L

Peak Search


Middle channel




30MHz~10GHz

10GHz~25GHz





30MHz~10GHz



10GHz~25GHz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC13-RTE011501

Page 44 of 67


6.7.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209							
Test Method:	ANSI C63.4: 2003	3						
Test Frequency Range:	30MHz to 25GHz							
Test site:	Measurement Dis	stance: 3m						
Receiver setup:	Frequency	Detector	RBW	VBW	Remark			
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value			
	Above 1GHz	Peak	1MHz	3MHz	Peak Value			
	Above 1GHz	AV	1MHz	10Hz	Average Value			
Limit:	Freque	ency	Limit (dBuV/	m @3m)	Remark			
	30MHz-8	8MHz	40.0)	Quasi-peak Value			
	88MHz-21	16MHz	43.5	j	Quasi-peak Value			
	216MHz-9	60MHz	46.0)	Quasi-peak Value			
	960MHz-	1GHz	54.0		Quasi-peak Value			
	Above 1	GHz	54.0		Average Value			
	7,0000	0112	74.0)	Peak Value			
Test setup:	EUT	4m 4m 0.8m 1m		Anteni Sear Ante RF Test Receiver				

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC13-RTE011501 Page 45 of 67

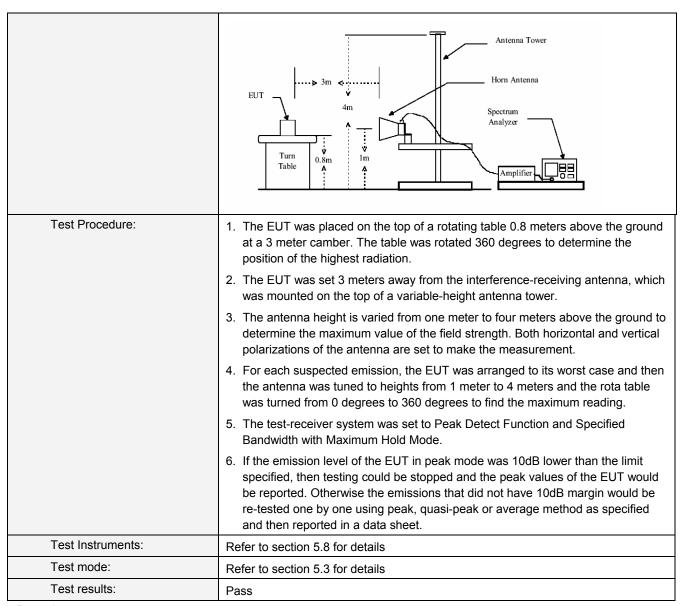

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis which it is worse case.



Report No.: FCC13-RTE011501 Page 46 of 67

■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
33.80	52.56	15.78	0.59	32.06	36.87	40.00	-3.13	Vertical
47.83	45.22	16.49	0.75	31.98	30.48	40.00	-9.52	Vertical
133.15	48.37	11.85	1.46	31.92	29.76	40.00	-10.24	Vertical
239.99	45.69	15.07	2.07	32.16	30.67	47.00	-16.33	Vertical
465.60	53.55	17.71	3.16	31.67	42.75	47.00	-4.25	Vertical
893.86	41.08	24.05	4.83	31.19	38.77	47.00	-8.23	Vertical
58.61	46.71	15.89	0.85	31.94	31.51	40.00	-8.49	Horizontal
80.36	50.91	11.91	1.03	31.76	32.09	40.00	-7.91	Horizontal
216.02	49.59	14.12	1.93	32.15	33.49	40.00	-6.51	Horizontal
239.99	52.61	15.07	2.07	32.16	37.59	47.00	-9.41	Horizontal
396.24	51.67	17.01	2.83	31.90	39.61	47.00	-7.39	Horizontal
465.60	52.33	17.71	3.16	31.67	41.53	47.00	-5.47	Horizontal



802.11b

Shenzhen EBO Technology Co., Ltd.

Report No.: FCC13-RTE011501 Page 47 of 67

Horizontal

Horizontal

Lowest

74.00

74.00

■ Above 1GHz

Test mode:

Test mode.		002.110		1 031 0	Test charmer.		LOWCSt		
Peak value:				·		-			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization	
4824.00	31.33	31.28	8.62	24.17	47.06	74.00	-26.94	Vertical	
7236.00	29.43	35.36	11.68	26.52	49.95	74.00	-24.05	Vertical	
9648.00	28.76	37.44	14.16	25.44	54.92	74.00	-19.08	Vertical	
12060.00	*					74.00		Vertical	
14472.00	*					74.00		Vertical	
16884.00	*					74.00		Vertical	
4824.00	32.21	31.28	8.62	24.17	47.94	74.00	-26.06	Horizontal	
7236.00	30.62	35.36	11.68	26.52	51.14	74.00	-22.86	Horizontal	
9648.00	27.34	37.44	14.16	25.44	53.50	74.00	-20.50	Horizontal	
12060.00	*					74.00		Horizontal	

Test channel:

16884.00 Average value:

14472.00

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	17.47	31.28	8.62	24.17	33.20	54.00	-20.80	Vertical
7236.00	17.58	35.36	11.68	26.52	38.10	54.00	-15.90	Vertical
9648.00	17.22	37.44	14.16	25.44	43.38	54.00	-10.62	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	18.54	31.28	8.62	24.17	34.27	54.00	-19.73	Horizontal
7236.00	18.83	35.36	11.68	26.52	39.35	54.00	-14.65	Horizontal
9648.00	15.97	37.44	14.16	25.44	42.13	54.00	-11.87	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: FCC13-RTE011501 Page 48 of 67

Test mode:	802.11b	Test channel:	Middle

Peak value:

i cak value.								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	31.44	32.02	8.66	24.12	48.00	74.00	-26.00	Vertical
7311.00	29.36	36.64	11.71	26.71	51.00	74.00	-23.00	Vertical
9748.00	26.00	38.54	14.25	25.38	53.41	74.00	-20.59	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	32.12	32.02	8.66	24.12	48.68	74.00	-25.32	Horizontal
7311.00	29.45	36.64	11.71	26.71	51.09	74.00	-22.91	Horizontal
9748.00	25.96	38.54	14.25	25.38	53.37	74.00	-20.63	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	17.90	32.02	8.66	24.12	34.46	54.00	-19.54	Vertical
7311.00	17.50	36.64	11.71	26.71	39.14	54.00	-14.86	Vertical
9748.00	14.43	38.54	14.25	25.38	41.84	54.00	-12.16	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	18.50	32.02	8.66	24.12	35.06	54.00	-18.94	Horizontal
7311.00	17.65	36.64	11.71	26.71	39.29	54.00	-14.71	Horizontal
9748.00	14.53	38.54	14.25	25.38	41.94	54.00	-12.06	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: FCC13-RTE011501 Page 49 of 67

Test mode:	802.11b	Test channel:	Highest
			1.19.1001

Peak value:

reak value.								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	32.10	32.14	8.70	24.05	48.89	74.00	-25.11	Vertical
7386.00	31.36	36.75	11.76	26.90	52.97	74.00	-21.03	Vertical
9848.00	25.69	38.79	14.31	25.30	53.49	74.00	-20.51	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	32.99	32.14	8.70	24.05	49.78	74.00	-24.22	Horizontal
7386.00	31.55	36.75	11.76	26.90	53.16	74.00	-20.84	Horizontal
9848.00	26.24	38.79	14.31	25.30	54.04	74.00	-19.96	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Average value	J.							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	18.40	32.14	8.70	24.05	35.19	54.00	-18.81	Vertical
7386.00	19.39	36.75	11.76	26.90	41.00	54.00	-13.00	Vertical
9848.00	13.99	38.79	14.31	25.30	41.79	54.00	-12.21	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	19.31	32.14	8.70	24.05	36.10	54.00	-17.90	Horizontal
7386.00	19.67	36.75	11.76	26.90	41.28	54.00	-12.72	Horizontal
9848.00	14.74	38.79	14.31	25.30	42.54	54.00	-11.46	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: FCC13-RTE011501 Page 50 of 67

l'est mode:		802.11g		Test	hannel:	lov	lowest		
Peak value:									
Fraguenay	Read	Antenna	Cable	Droomn	Lovel	LimitLin	Over		

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	31.94	31.28	8.62	24.17	47.67	74.00	-26.33	Vertical
7236.00	30.53	35.36	11.68	26.52	51.05	74.00	-22.95	Vertical
9648.00	30.02	37.44	14.16	25.44	56.18	74.00	-17.82	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	33.41	31.28	8.62	24.17	49.14	74.00	-24.86	Horizontal
7236.00	31.76	35.36	11.68	26.52	52.28	74.00	-21.72	Horizontal
9648.00	28.28	37.44	14.16	25.44	54.44	74.00	-19.56	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Average value	.							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	18.01	31.28	8.62	24.17	33.74	54.00	-20.26	Vertical
7236.00	18.21	35.36	11.68	26.52	38.73	54.00	-15.27	Vertical
9648.00	17.94	37.44	14.16	25.44	44.10	54.00	-9.90	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertica
4824.00	19.28	31.28	8.62	24.17	35.01	54.00	-18.99	Horizontal
7236.00	19.52	35.36	11.68	26.52	40.04	54.00	-13.96	Horizontal
9648.00	16.55	37.44	14.16	25.44	42.71	54.00	-11.29	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: FCC13-RTE011501 Page 51 of 67

_				
	Test mode:	802.11g	Test channel:	Middle

Peak value:

reak value.								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	32.23	32.02	8.66	24.12	48.79	74.00	-25.21	Vertical
7311.00	30.43	36.64	11.71	26.71	52.07	74.00	-21.93	Vertical
9748.00	26.57	38.54	14.25	25.38	53.98	74.00	-20.02	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	33.11	32.02	8.66	24.12	49.67	74.00	-24.33	Horizontal
7311.00	30.70	36.64	11.71	26.71	52.34	74.00	-21.66	Horizontal
9748.00	26.36	38.54	14.25	25.38	53.77	74.00	-20.23	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	18.37	32.02	8.66	24.12	34.93	54.00	-19.07	Vertical
7311.00	18.12	36.64	11.71	26.71	39.76	54.00	-14.24	Vertical
9748.00	14.82	38.54	14.25	25.38	42.23	54.00	-11.77	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	19.11	32.02	8.66	24.12	35.67	54.00	-18.33	Horizontal
7311.00	18.40	36.64	11.71	26.71	40.04	54.00	-13.96	Horizontal
9748.00	14.87	38.54	14.25	25.38	42.28	54.00	-11.72	Horizontal
12185.00	*				_	54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: FCC13-RTE011501 Page 52 of 67

Test mode: 802.11g Test channel: Highest
--

Peak value:

reak value.								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	33.47	32.14	8.70	24.05	50.26	74.00	-23.74	Vertical
7386.00	32.52	36.75	11.76	26.90	54.13	74.00	-19.87	Vertical
9848.00	26.67	38.79	14.31	25.30	54.47	74.00	-19.53	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	33.84	32.14	8.70	24.05	50.63	74.00	-23.37	Horizontal
7386.00	32.18	36.75	11.76	26.90	53.79	74.00	-20.21	Horizontal
9848.00	27.15	38.79	14.31	25.30	54.95	74.00	-19.05	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Average value	,·							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	19.24	32.14	8.70	24.05	36.03	54.00	-17.97	Vertical
7386.00	20.11	36.75	11.76	26.90	41.72	54.00	-12.28	Vertical
9848.00	14.65	38.79	14.31	25.30	42.45	54.00	-11.55	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	19.88	32.14	8.70	24.05	36.67	54.00	-17.33	Horizontal
7386.00	20.15	36.75	11.76	26.90	41.76	54.00	-12.24	Horizontal
9848.00	15.37	38.79	14.31	25.30	43.17	54.00	-10.83	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: FCC13-RTE011501

Page 53 of 67

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	30.86	31.28	8.62	24.17	46.59	74.00	-27.41	Vertical
7236.00	28.53	35.36	11.68	26.52	49.05	74.00	-24.95	Vertical
9648.00	27.70	37.44	14.16	25.44	53.86	74.00	-20.14	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	31.93	31.28	8.62	24.17	47.66	74.00	-26.34	Horizontal
7236.00	30.00	35.36	11.68	26.52	50.52	74.00	-23.48	Horizontal
9648.00	26.62	37.44	14.16	25.44	52.78	74.00	-21.22	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	17.21	31.28	8.62	24.17	32.94	54.00	-21.06	Vertical
7236.00	17.21	35.36	11.68	26.52	37.73	54.00	-16.27	Vertical
9648.00	16.78	37.44	14.16	25.44	42.94	54.00	-11.06	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	18.21	31.28	8.62	24.17	33.94	54.00	-20.06	Horizontal
7236.00	18.64	35.36	11.68	26.52	39.16	54.00	-14.84	Horizontal
9648.00	15.72	37.44	14.16	25.44	41.88	54.00	-12.12	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: FCC13-RTE011501 Page 54 of 67

Test mode:	802.11n(H20)	Test channel:	Middle
	` ,		

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	31.29	32.02	8.66	24.12	47.85	74.00	-26.15	Vertical
7311.00	28.47	36.64	11.71	26.71	50.11	74.00	-23.89	Vertical
9748.00	25.17	38.54	14.25	25.38	52.58	74.00	-21.42	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	31.89	32.02	8.66	24.12	48.45	74.00	-25.55	Horizontal
7311.00	28.44	36.64	11.71	26.71	50.08	74.00	-23.92	Horizontal
9748.00	25.10	38.54	14.25	25.38	52.51	74.00	-21.49	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	17.49	32.02	8.66	24.12	34.05	54.00	-19.95	Vertical
7311.00	17.14	36.64	11.71	26.71	38.78	54.00	-15.22	Vertical
9748.00	14.12	38.54	14.25	25.38	41.53	54.00	-12.47	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	17.99	32.02	8.66	24.12	34.55	54.00	-19.45	Horizontal
7311.00	17.27	36.64	11.71	26.71	38.91	54.00	-15.09	Horizontal
9748.00	14.24	38.54	14.25	25.38	41.65	54.00	-12.35	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: FCC13-RTE011501 Page 55 of 67

Peak value:

Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	31.79	32.14	8.70	24.05	48.58	74.00	-25.42	Vertical
7386.00	29.96	36.75	11.76	26.90	51.57	74.00	-22.43	Vertical
9848.00	24.75	38.79	14.31	25.30	52.55	74.00	-21.45	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	32.70	32.14	8.70	24.05	49.49	74.00	-24.51	Horizontal
7386.00	29.58	36.75	11.76	26.90	51.19	74.00	-22.81	Horizontal
9848.00	24.53	38.79	14.31	25.30	52.33	74.00	-21.67	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*				_	74.00		Horizontal

Average value:

Average value	J.							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	17.95	32.14	8.70	24.05	34.74	54.00	-19.26	Vertical
7386.00	18.83	36.75	11.76	26.90	40.44	54.00	-13.56	Vertical
9848.00	13.69	38.79	14.31	25.30	41.49	54.00	-12.51	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	18.60	32.14	8.70	24.05	35.39	54.00	-18.61	Horizontal
7386.00	18.85	36.75	11.76	26.90	40.46	54.00	-13.54	Horizontal
9848.00	14.06	38.79	14.31	25.30	41.86	54.00	-12.14	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

- 1 Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2 "*", means this data is the too weak instrument of signal is unable to test.



Report No.: FCC13-RTE011501 Page 56 of 67

Test mode:	802.11n(H40)	Test channel:	Lowest

Peak value:

reak value.								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	32.56	31.40	8.63	24.04	48.55	74.00	-25.45	Vertical
7266.00	30.79	35.96	11.69	26.47	51.97	74.00	-22.03	Vertical
9688.00	29.92	37.71	14.21	25.30	56.54	74.00	-17.46	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4844.00	33.47	31.40	8.63	24.04	49.46	74.00	-24.54	Horizontal
7266.00	31.46	35.96	11.69	26.47	52.64	74.00	-21.36	Horizontal
9688.00	28.78	37.71	14.21	25.30	55.40	74.00	-18.60	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Average value	.							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	18.32	31.40	8.63	24.04	34.31	54.00	-19.69	Vertical
7266.00	18.34	35.96	11.69	26.47	39.52	54.00	-14.48	Vertical
9688.00	17.89	37.71	14.21	25.30	44.51	54.00	-9.49	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4844.00	19.31	31.40	8.63	24.04	35.30	54.00	-18.70	Horizontal
7266.00	19.37	35.96	11.69	26.47	40.55	54.00	-13.45	Horizontal
9688.00	16.80	37.71	14.21	25.30	43.42	54.00	-10.58	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: FCC13-RTE011501 Page 57 of 67

rest mode: 802.11n(H40) rest channer: Middle	Test mode:	802.11n(H40)	Test channel:	Middle
--	------------	--------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	33.53	32.02	8.66	24.12	50.09	74.00	-23.91	Vertical
7311.00	31.27	36.64	11.71	26.71	52.91	74.00	-21.09	Vertical
9748.00	28.29	38.54	14.25	25.38	55.70	74.00	-18.30	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	34.05	32.02	8.66	24.12	50.61	74.00	-23.39	Horizontal
7311.00	31.64	36.64	11.71	26.71	53.28	74.00	-20.72	Horizontal
9748.00	28.00	38.54	14.25	25.38	55.41	74.00	-18.59	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Average value	е.							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	19.02	32.02	8.66	24.12	35.58	54.00	-18.42	Vertical
7311.00	18.54	36.64	11.71	26.71	40.18	54.00	-13.82	Vertical
9748.00	15.68	38.54	14.25	25.38	43.09	54.00	-10.91	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	19.58	32.02	8.66	24.12	36.14	54.00	-17.86	Horizontal
7311.00	18.87	36.64	11.71	26.71	40.51	54.00	-13.49	Horizontal
9748.00	15.69	38.54	14.25	25.38	43.10	54.00	-10.90	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: FCC13-RTE011501 Page 58 of 67

Test mode:	802.11n(H40)	Test channel:	Highest
			9

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	31.89	32.08	8.68	23.97	48.68	74.00	-25.32	Vertical
7356.00	34.56	36.69	11.74	26.73	56.26	74.00	-17.74	Vertical
9808.00	29.31	38.60	14.29	25.22	56.98	74.00	-17.02	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4904.00	32.42	32.08	8.68	23.97	49.21	74.00	-24.79	Horizontal
7356.00	33.76	36.69	11.74	26.73	55.46	74.00	-18.54	Horizontal
9808.00	29.63	38.60	14.29	25.22	57.30	74.00	-16.70	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

	Attorage value.										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization			
4904.00	19.95	32.08	8.68	23.97	36.74	54.00	-17.26	Vertical			
7356.00	21.13	36.69	11.74	26.73	42.83	54.00	-11.17	Vertical			
9808.00	15.97	38.60	14.29	25.22	43.64	54.00	-10.36	Vertical			
12310.00	*					54.00		Vertical			
14772.00	*					54.00		Vertical			
17234.00	*					54.00		Vertical			
4904.00	20.67	32.08	8.68	23.97	37.46	54.00	-16.54	Horizontal			
7356.00	20.94	36.69	11.74	26.73	42.64	54.00	-11.36	Horizontal			
9808.00	16.61	38.60	14.29	25.22	44.28	54.00	-9.72	Horizontal			
12310.00	*					54.00		Horizontal			
14772.00	*					54.00		Horizontal			
17234.00	*					54.00		Horizontal			

Remark:

- 1 Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2 "*", means this data is the too weak instrument of signal is unable to test.