

*FCC PART 15, SUBPART B and C
TEST REPORT**for*

REMOTE SWITCH UNIT

P/N: H628528427-101

Prepared for

LIFEBELT, LLC
7656 WEST SAHARA AVENUE
LAS VEGAS, NEVADA 89117

Prepared by: _____

KYLE FUJIMOTO

Approved by: _____

MICHAEL CHRISTENSEN

COMPATIBLE ELECTRONICS INC.
114 OLINDA DRIVE
BREA, CALIFORNIA 92823
(714) 579-0500

DATE: NOVEMBER 24, 2004

	REPORT BODY	APPENDICES					TOTAL
		<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>	
PAGES	16	2	2	2	12	18	52

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	4
1. PURPOSE	5
2. ADMINISTRATIVE DATA	6
2.1 Location of Testing	6
2.2 Traceability Statement	6
2.3 Cognizant Personnel	6
2.4 Date Test Sample was Received	6
2.5 Disposition of the Test Sample	6
2.6 Abbreviations and Acronyms	6
3. APPLICABLE DOCUMENTS	7
4. DESCRPTION of TEST CONFIGURATION	8
4.1 Description of Test Configuration - EMI	8
4.1.1 Cable Construction and Termination	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
5.2 EMI Test Equipment	11
6. TEST SITE DESCRIPTION	12
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
7. TEST PROCEDURES	13
7.1 Radiated Emissions (Spurious and Harmonics) Test	13
7.2 Radiated Emissions (Spurious and Harmonics) Test (continued)	14
7.3 Bandwidth of the Fundamental	15
8. CONCLUSIONS	16



LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos • Test Setup Diagrams • Radiated Emissions Photos • Antenna and Effective Gain Factors
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of Radiated Test Site



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product endorsement by NVLAP, NIST or any other agency of the U.S. Government.

Device Tested: Remote Switch Unit
P/N: H628528427-101
S/N: N/A

Product Description: See Expository Statement.

Modifications: The EUT was not modified during the testing.

Manufacturer: LIFE BELT, LLC
7656 West Sahara Avenue
Las Vegas, Nevada 89117

Test Date: November 22, 2004

Test Specifications: EMI requirements
CFR Title 47, Part 15 Subpart B; and Subpart C, Sections 15.205, 15.209, and 15.231

Test Procedure: ANSI C63.4: 2003

Test Deviations: The test procedure was not deviated from during the testing.


SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz	This test was not performed because the EUT operates on batteries only and cannot be plugged into the AC public mains.
2	Radiated RF Emissions, 10 kHz - 4400 MHz	Complies with the Class B limits of CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.231.
3	-20 dB Bandwidth of the Fundamental	Complies with the limits of Subpart C, sections 15.231 [c].



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Remote Switch Unit P/N: H628528427-101. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4: 2003. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.231.

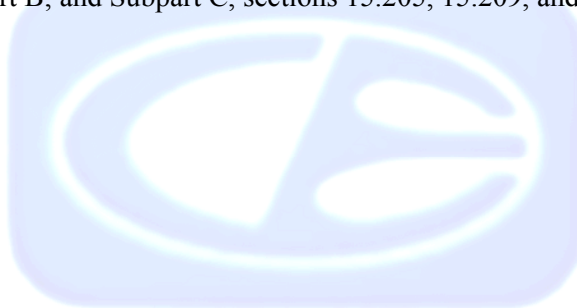

2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

LIFEBELT, LLC

Robert D Allison III	Owner
Tom Wing	Consulting Engineer

Compatible Electronics, Inc.

Kyle Fujimoto	Test Engineer
Michael Christensen	Lab Manager

2.4 Date Test Sample was Received

The test sample was received prior to its qualification testing on November 23, 2004.

2.5 Disposition of the Test Sample

The test sample has not been returned to LIFEBELT, LLC as of November 24, 2004.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
PCB	Printed Circuit Board
TX	Transmit
RX	Receive



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4: 2003	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz



4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration - EMI

Setup and operation of the equipment under test.

Specifics of the EUT and Peripherals Tested

The Remote Switch Unit P/N: H628528427-101 (EUT) was tested as a stand alone unit and tested in three orthogonal axis. The EUT was continuously transmitting.

The antenna is soldered to the PCB of the EUT.

After the transmitter is activated, the transmission will cease operation within 5 seconds after activation.

The final radiated data was taken in the mode described above. Please see Appendix E for the data sheets.



4.1.1 Cable Construction and Termination

There were no external cables connected to the EUT.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
REMOTE SWITCH UNIT (EUT)	LIFEBELT, LLC	P/N: H628528427-101	N/A	SPJH628528427-101



5.2 EMI Test Equipment

EQUIPMENT TYPE	MANU-FACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. CYCLE
Radiate Emissions Data Capture Program	Compatible Electronics	2.0	N/A	N/A	N/A
Spectrum Analyzer – Main Section	Hewlett Packard	8566B	3638A08784	June 16, 2004	1 Year
Spectrum Analyzer – Display Section	Hewlett Packard	85662A	3701A22279	June 16, 2004	1 Year
Quasi-Peak Adapter	Hewlett Packard	85650A	2430A00424	June 16, 2004	1 Year
Preamplifier	Com Power	PA-103	1582	March 11, 2004	1 Year
Biconical Antenna	Com Power	AB-900	15226	April 21, 2004	1 Year
Log Periodic Antenna	Com Power	AL-100	16202	February 18, 2004	1 Year
Antenna Mast	Com-Power	AM-100	N/A	N/A	N/A
Turntable	Com-Power	TT-100	N/A	N/A	N/A
Computer	Hewlett Packard	4530	US91912319	N/A	N/A
Monitor	Hewlett Packard	D5258A	TW74500641	N/A	N/A
Loop Antenna	Com-Power	AL-130	17089	September 4, 2004	1 Year
Horn Antenna	Com Power	AH-118	10073	July 27, 2004	1 Year
Microwave Preamplifier	Com-Power	PA-122	25196	March 4, 2004	1 Year




6. TEST SITE DESCRIPTION**6.1 Test Facility Description**

Please refer to section 2.1 and 7.1 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.

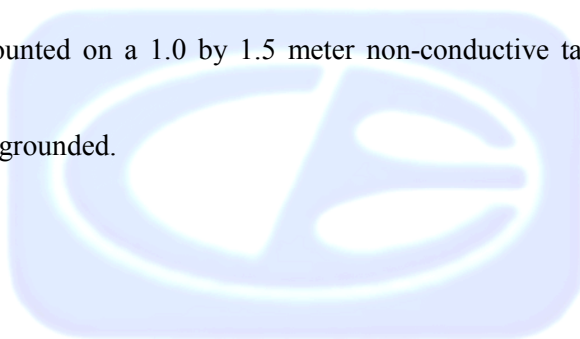

7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 Radiated Emissions (Spurious and Harmonics) Test

The spectrum analyzer and EMI Receiver were used as a measuring meter along with the quasi-peak adapter. Amplifiers were used to increase the sensitivity of the instrument. The Com Power Preamplifier Model: PA-103 was used for frequencies from 30 MHz to 1 GHz, and the Com-Power Microwave Preamplifier Model: PA-122 was used for frequencies above 1 GHz. The spectrum analyzer was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer and EMI Receiver record the highest measured reading over all the sweeps.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 300 MHz	120 kHz	Biconical Antenna
300 MHz to 1 GHz	120 kHz	Log Periodic Antenna
1 GHz to 4.40 GHz	1 MHz	Horn Antenna

The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4: 2003. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results. The loop antenna was also rotated in the horizontal and vertical axis in order to ensure accurate results.



7.2 Radiated Emissions (Spurious and Harmonics) Test (continued)

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance to obtain final test data. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with the limits of CFR Title 47, Part 15, Subpart B; and Subpart C, section 15.205, 15.209 and 15.231 for radiated emissions.




7.3 Bandwidth of the Fundamental

The -20 dB bandwidth was checked to see that it was within 0.25% of the fundamental frequency for the EUT. Photographs of the -20 dB bandwidth are located in Appendix E.

Test Results:

The EUT complies with the limits of CFR Title 47, Part 15, Subpart C, section 15.231 [c].

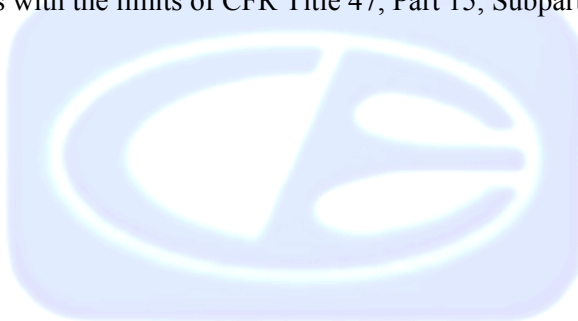

8. CONCLUSIONS

The Remote Switch Unit P/N: H628528427-101 meets all of the Class B specification limits defined in CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.231.



APPENDIX A

LABORATORY RECOGNITIONS



LABORATORY RECOGNITIONS

Compatible Electronics has the following agency accreditations:

National Voluntary Laboratory Accreditation Program - Lab Code: 200528-0

Voluntary Control Council for Interference - Registration Numbers: R-983, C-1026, R-984 and C-1027

Bureau of Standards and Metrology Inspection - Reference Number: SL2-IN-E-1031

Conformity Assessment Body for the EMC Directive Under the US/EU MRA Appointed by NIST

Compatible Electronics is recognized or on file with the following agencies:

Federal Communications Commission

Industry Canada

Radio-Frequency Technologies (Competent Body)



APPENDIX B

MODIFICATIONS TO THE EUT



MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC 15.231 or FCC Class B specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.



APPENDIX C

***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***



ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Remote Switch Unit
P/N: H628528427-101
S/N: N/A

There were no additional models covered under this report.




APPENDIX D

DIAGRAMS, CHARTS, AND PHOTOS




FIGURE 1: PLOT MAP AND LAYOUT OF RADIATED TEST SITE

OPEN LAND > 15 METERS

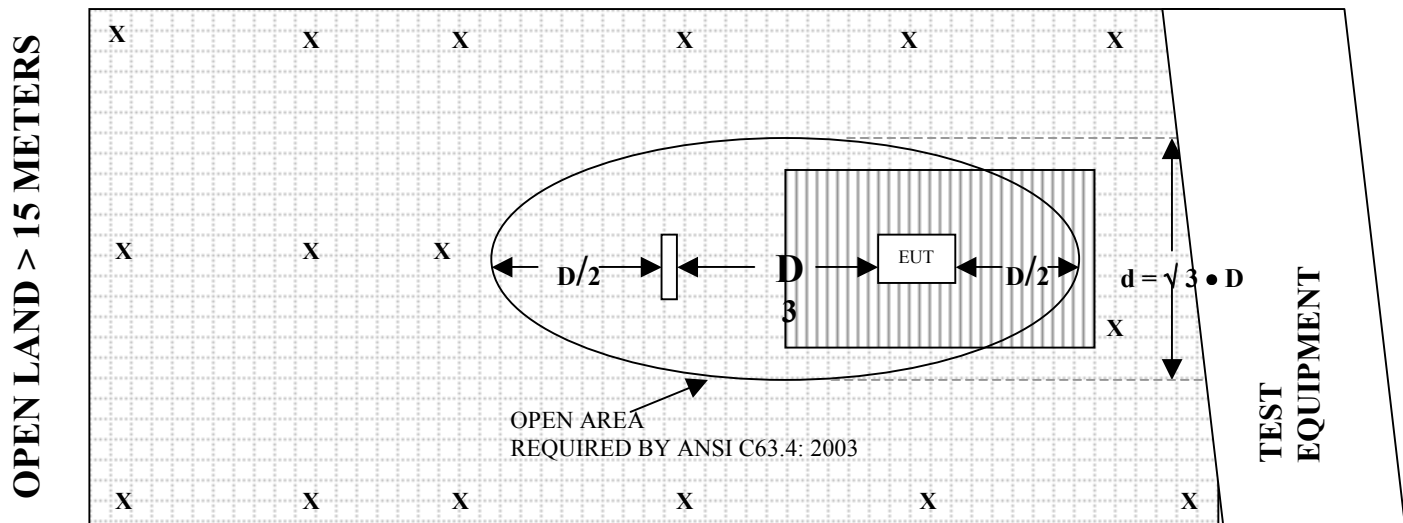

OPEN LAND > 15 METERS

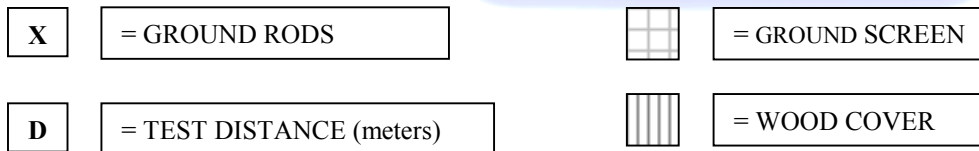

COM-POWER AB-900

BICONICAL ANTENNA

S/N: 15226

CALIBRATION DATE: APRIL 21, 2004

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	11.00	120	13.20
35	10.80	125	13.30
40	11.20	140	12.50
45	9.00	150	12.10
50	11.40	160	12.80
60	10.30	175	15.60
70	8.10	180	15.70
80	5.80	200	16.40
90	7.80	250	14.90
100	11.10	300	24.60



COM-POWER AL-100

LOG PERIODIC ANTENNA

S/N: 16202

CALIBRATION DATE: FEBRUARY 18, 2004

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
300	12.90	700	19.60
400	14.40	800	21.80
500	17.40	900	20.50
600	18.90	1000	22.70



COM-POWER PA-103**PREAMPLIFIER**

S/N: 1582

CALIBRATION DATE: MARCH 11, 2004

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	32.4	300	32.3
40	32.4	350	32.2
50	32.4	400	32.2
60	32.5	450	32.0
70	32.4	500	32.0
80	32.3	550	31.8
90	32.3	600	31.7
100	32.3	650	31.7
125	32.4	700	31.7
150	32.2	750	31.9
175	32.4	800	31.4
200	32.4	850	31.4
225	32.5	900	31.0
250	32.3	950	31.4
275	32.1	1000	31.4



COM-POWER PA-122**MICROWAVE PREAMPLIFIER**

S/N: 25196

CALIBRATION DATE: MARCH 4, 2004

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	32.10	6.0	28.90
1.1	32.00	6.5	29.30
1.2	31.80	7.0	29.70
1.3	31.60	7.5	29.80
1.4	31.50	8.0	29.90
1.5	31.40	8.5	30.20
1.6	31.20	9.0	30.30
1.7	31.00	9.5	29.90
1.8	30.80	10.0	29.30
1.9	30.70	11.0	28.50
2.0	30.50	12.0	30.50
2.5	30.00	13.0	31.10
3.0	29.70	14.0	29.90
3.5	29.20	15.0	29.80
4.0	28.60	16.0	29.10
4.5	28.40	17.0	28.00
5.0	28.30	18.0	26.00
5.5	28.50		



COM POWER AH-118**HORN ANTENNA**

S/N: 10073

CALIBRATION DATE: JULY 27, 2004

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	25.3	10.0	39.8
1.5	28.3	10.5	38.6
2.0	31.5	11.0	38.5
2.5	31.2	11.5	40.4
3.0	30.4	12.0	42.0
3.5	30.5	12.5	41.7
4.0	30.9	13.0	41.9
4.5	32.0	13.5	43.7
5.0	34.1	14.0	45.5
5.5	33.7	14.5	45.8
6.0	34.2	15.0	40.5
6.5	35.1	15.5	41.8
7.0	37.1	16.0	41.5
7.5	40.4	16.5	40.2
8.0	39.8	17.0	43.3
8.5	38.4	17.5	46.6
9.0	37.5	18.0	47.1
9.5	42.4		



COM-POWER AL-130**LOOP ANTENNA**

S/N: 17089

CALIBRATION DATE: SEPTEMBER 4, 2004

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-40.8	10.7
0.01	-40.9	10.6
0.02	-41.8	9.7
0.05	-42.0	9.5
0.07	-41.5	10.0
0.1	-41.7	9.8
0.2	-44.1	7.4
0.3	-41.6	9.9
0.5	-41.5	10.0
0.7	-41.4	10.1
1	-41.0	10.5
2	-40.6	10.9
3	-40.8	10.7
4	-41.0	10.5
5	-40.4	11.1
10	-40.7	10.8
15	-41.6	9.9
20	-41.3	10.2
25	-43.0	8.5
30	-42.6	8.9





FRONT VIEW

LIFEBELT, LLC
REMOTE SWITCH UNIT
P/N: H628528427-101

FCC SUBPART B AND C – RADIATED EMISSIONS – 10 kHz to 1 GHz – 11-22-04

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





REAR VIEW

LIFEBELT, LLC
REMOTE SWITCH UNIT
P/N: H628528427-101

FCC SUBPART B AND C – RADIATED EMISSIONS – 10 kHz to 1 GHz – 11-22-04

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





FRONT VIEW

LIFEBELT, LLC
REMOTE SWITCH UNIT
P/N: H628528427-101

FCC SUBPART B AND C – RADIATED EMISSIONS – 1 GHz to 4.40 GHz – 11-22-04

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





REAR VIEW

LIFEBELT, LLC
REMOTE SWITCH UNIT
P/N: H628528427-101

FCC SUBPART B AND C – RADIATED EMISSIONS – 1 GHz to 4.40 GHz – 11-22-04

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



APPENDIX E

DATA SHEETS



RADIATED EMISSIONS

DATA SHEETS



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	LIFEBELT, LLC	DATE	11/22/2004
EUT	Remote Switch Unit	DUTY CYCLE	41.2 %
MODEL	P/N: H628528427-101	PEAK TO AVG	-7.70205568 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	ARNOLD GAFFUD	LAB	A

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
434.0000	54.9	47.2 A	H	1.0	270	X	LOW	15.4	4.6	0.0	0.0	0.0	67.3	-13.5	80.8	
434.0000	52.0	44.3 A	H	1.0	180	Y	LOW	15.4	4.6	0.0	0.0	0.0	64.4	-16.4	80.8	
434.0000	47.7	40.0 A	H	1.5	180	Z	LOW	15.4	4.6	0.0	0.0	0.0	60.1	-20.7	80.8	
434.0000	38.7	31.0 A	V	1.0	0	X	LOW	15.4	4.6	0.0	0.0	0.0	51.1	-29.7	80.8	
434.0000	52.1	44.4 A	V	1.0	270	Y	LOW	15.4	4.6	0.0	0.0	0.0	64.5	-16.3	80.8	
434.0000	53.1	45.4 A	V	1.0	270	Z	LOW	15.4	4.6	0.0	0.0	0.0	65.5	-15.3	80.8	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	LIFEBELT, LLC	DATE	11/22/2004
EUT	Remote Switch Unit	DUTY CYCLE	41.2 %
MODEL	P/N: H628528427-101	PEAK TO AVG	-7.70205568 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	ARNOLD GAFFUD	LAB	A

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
868.0000	54.3	46.6 A	H	1.0	90	X	LOW	20.9	6.2	31.3	0.0	0.0	42.4	-18.4	60.8	
868.0000	55.0	47.3 A	H	1.0	0	Y	LOW	20.9	6.2	31.3	0.0	0.0	43.1	-17.7	60.8	
868.0000	54.2	46.5 A	H	1.0	0	Z	LOW	20.9	6.2	31.3	0.0	0.0	42.3	-18.5	60.8	
868.0000	53.7	46.0 A	V	1.0	90	X	LOW	20.9	6.2	31.3	0.0	0.0	41.8	-19.0	60.8	
868.0000	54.8	47.1 A	V	1.0	270	Y	LOW	20.9	6.2	31.3	0.0	0.0	42.9	-17.9	60.8	
868.0000	53.7	46.0 A	V	1.0	0	Z	LOW	20.9	6.2	31.3	0.0	0.0	41.8	-19.0	60.8	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	LIFEBELT, LLC	DATE	11/22/2004
EUT	Remote Switch Unit	DUTY CYCLE	41.2 %
MODEL	P/N: H628528427-101	PEAK TO AVG	-7.70205568 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	ARNOLD GAFFUD	LAB	A

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
1302.0000	42.0	34.3 A	H	1.5	315	X	LOW	27.1	3.3	31.6	0.0	0.0	33.1	-20.9	54.0	
1302.0000	42.1	34.4 A	H	3.0	90	Y	LOW	27.1	3.3	31.6	0.0	0.0	33.2	-20.8	54.0	
1302.0000	39.8	32.1 A	H	2.0	270	Z	LOW	27.1	3.3	31.6	0.0	0.0	30.9	-23.1	54.0	
1302.0000	42.7	35.0 A	V	1.0	180	X	LOW	27.1	3.3	31.6	0.0	0.0	33.8	-20.2	54.0	
1302.0000	40.0	32.3 A	V	1.0	270	Y	LOW	27.1	3.3	31.6	0.0	0.0	31.1	-22.9	54.0	
1302.0000	46.3	38.6 A	V	2.0	270	Z	LOW	27.1	3.3	31.6	0.0	0.0	37.4	-16.6	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	LIFEBELT, LLC	DATE	11/22/2004
EUT	Remote Switch Unit	DUTY CYCLE	41.2 %
MODEL	P/N: H628528427-101	PEAK TO AVG	-7.70205568 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	ARNOLD GAFFUD	LAB	A

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
1736.0000	43.8	36.1 A	H	1.0	0	X	LOW	29.8	4.1	30.9	0.0	0.0	39.1	-21.7	60.8	
1736.0000	39.8	32.1 A	H	3.0	180	Y	LOW	29.8	4.1	30.9	0.0	0.0	35.1	-25.7	60.8	
1736.0000	43.7	36.0 A	H	2.0	0	Z	LOW	29.8	4.1	30.9	0.0	0.0	39.0	-21.8	60.8	
1736.0000	42.1	34.4 A	V	1.5	270	X	LOW	29.8	4.1	30.9	0.0	0.0	37.4	-23.4	60.8	
1736.0000	47.6	39.9 A	V	3.0	45	Y	LOW	29.8	4.1	30.9	0.0	0.0	42.9	-17.9	60.8	
1736.0000	42.7	35.0 A	V	2.0	90	Z	LOW	29.8	4.1	30.9	0.0	0.0	38.0	-22.8	60.8	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	LIFEBELT, LLC	DATE	11/22/2004
EUT	Remote Switch Unit	DUTY CYCLE	41.2 %
MODEL	P/N: H628528427-101	PEAK TO AVG	-7.70205568 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	ARNOLD GAFFUD	LAB	A

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
2170.0000	44.1	36.4 A	H	1.0	0	X	LOW	31.4	4.3	30.3	0.0	0.0	41.8	-19.0	60.8	
2170.0000	41.7	34.0 A	H	3.0	270	Y	LOW	31.4	4.3	30.3	0.0	0.0	39.4	-21.4	60.8	
2170.0000	38.5	30.8 A	H	1.5	180	Z	LOW	31.4	4.3	30.3	0.0	0.0	36.2	-24.6	60.8	
2170.0000	43.0	35.3 A	V	1.0	270	X	LOW	31.4	4.3	30.3	0.0	0.0	40.7	-20.1	60.8	
2170.0000	41.4	33.7 A	V	2.0	180	Y	LOW	31.4	4.3	30.3	0.0	0.0	39.1	-21.7	60.8	
2170.0000	44.2	36.5 A	V	3.0	45	Z	LOW	31.4	4.3	30.3	0.0	0.0	41.9	-18.9	60.8	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	LIFEBELT, LLC	DATE	11/22/2004
EUT	Remote Switch Unit	DUTY CYCLE	41.2 %
MODEL	P/N: H628528427-101	PEAK TO AVG	-7.70205568 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	ARNOLD GAFFUD	LAB	A

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
2604.0000	42.8	35.1 A	H	1.0	0	X	LOW	31.0	5.6	29.9	0.0	0.0	41.8	-19.0	60.8	
2604.0000	40.8	33.1 A	H	2.0	270	Y	LOW	31.0	5.6	29.9	0.0	0.0	39.8	-21.0	60.8	
2604.0000	45.7	38.0 A	H	3.0	0	Z	LOW	31.0	5.6	29.9	0.0	0.0	44.7	-16.1	60.8	
2604.0000	44.4	36.7 A	V	1.0	270	X	LOW	31.0	5.6	29.9	0.0	0.0	43.4	-17.4	60.8	
2604.0000	43.5	35.8 A	V	2.0	270	Y	LOW	31.0	5.6	29.9	0.0	0.0	42.5	-18.3	60.8	
2604.0000	44.4	36.7 A	V	3.0	90	Z	LOW	31.0	5.6	29.9	0.0	0.0	43.4	-17.4	60.8	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	LIFEBELT, LLC	DATE	11/22/2004
EUT	Remote Switch Unit	DUTY CYCLE	41.2 %
MODEL	P/N: H628528427-101	PEAK TO AVG	-7.70205568 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	ARNOLD GAFFUD	LAB	A

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
3038.0000	36.3	28.6 A	H	2.0	0	X	LOW	30.4	6.7	29.7	0.0	0.0	36.0	-24.8	60.8	
3038.0000	39.0	31.3 A	H	2.0	0	Y	LOW	30.4	6.7	29.7	0.0	0.0	38.7	-22.1	60.8	
3038.0000	39.1	31.4 A	H	3.0	0	Z	LOW	30.4	6.7	29.7	0.0	0.0	38.8	-22.0	60.8	
3038.0000	38.6	30.9 A	V	1.0	0	X	LOW	30.4	6.7	29.7	0.0	0.0	38.3	-22.5	60.8	
3038.0000	36.6	28.9 A	V	2.0	90	Y	LOW	30.4	6.7	29.7	0.0	0.0	36.3	-24.5	60.8	
3038.0000	36.4	28.7 A	V	2.0	0	Z	LOW	30.4	6.7	29.7	0.0	0.0	36.1	-24.7	60.8	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	LIFEBELT, LLC	DATE	11/22/2004
EUT	Remote Switch Unit	DUTY CYCLE	41.2 %
MODEL	P/N: H628528427-101	PEAK TO AVG	-7.70205568 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	ARNOLD GAFFUD	LAB	A

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
3472.0000	36.4	28.7 A	H	2.0	90	X	LOW	30.5	6.5	29.2	0.0	0.0	36.5	-24.3	60.8	
3472.0000	40.4	32.7 A	H	2.0	0	Y	LOW	30.5	6.5	29.2	0.0	0.0	40.5	-20.3	60.8	
3472.0000	39.9	32.2 A	H	2.0	0	Z	LOW	30.5	6.5	29.2	0.0	0.0	40.0	-20.8	60.8	
3472.0000	37.3	29.6 A	V	1.0	0	X	LOW	30.5	6.5	29.2	0.0	0.0	37.4	-23.4	60.8	
3472.0000	40.5	32.8 A	V	3.0	90	Y	LOW	30.5	6.5	29.2	0.0	0.0	40.6	-20.2	60.8	
3472.0000	38.9	31.2 A	V	1.5	0	Z	LOW	30.5	6.5	29.2	0.0	0.0	39.0	-21.8	60.8	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 8 of PAGE 10

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	LIFEBELT, LLC	DATE	11/22/2004
EUT	Remote Switch Unit	DUTY CYCLE	41.2 %
MODEL	P/N: H628528427-101	PEAK TO AVG	-7.70205568 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	ARNOLD GAFFUD	LAB	A

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
3906.0000	36.7	29.0 A	H	1.5	0	X	LOW	30.8	7.6	28.7	0.0	0.0	38.7	-15.3	54.0	
3906.0000	42.3	34.6 A	H	2.0	0	Y	LOW	30.8	7.6	28.7	0.0	0.0	44.3	-9.7	54.0	
3906.0000	37.5	29.8 A	H	1.0	0	Z	LOW	30.8	7.6	28.7	0.0	0.0	39.5	-14.5	54.0	
3906.0000	38.0	30.3 A	V	1.0	270	X	LOW	30.8	7.6	28.7	0.0	0.0	40.0	-14.0	54.0	
3906.0000	39.1	31.4 A	V	3.0	270	Y	LOW	30.8	7.6	28.7	0.0	0.0	41.1	-12.9	54.0	
3906.0000	39.2	31.5 A	V	2.0	0	Z	LOW	30.8	7.6	28.7	0.0	0.0	41.2	-12.8	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	LIFEBELT, LLC	DATE	11/22/2004
EUT	Remote Switch Unit	DUTY CYCLE	41.2 %
MODEL	P/N: H628528427-101	PEAK TO AVG	-7.70205568 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	ARNOLD GAFFUD	LAB	A

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments	
4340.0000		A	H			X	LOW	31.6	7.6	28.5	0.0				54.0	No emission found	
4340.0000	35.3	27.6	A	H	2.0	0	Y	LOW	31.6	7.6	28.5	0.0	0.0	38.4	-15.6	54.0	
4340.0000		A	H			Z	LOW	31.6	7.6	28.5	0.0				54.0	No emission found	
4340.0000		A	V			X	LOW	31.6	7.6	28.5	0.0				54.0	No emission found	
4340.0000		A	V			Y	LOW	31.6	7.6	28.5	0.0				54.0	No emission found	
4340.0000		A	V			Z	LOW	31.6	7.6	28.5	0.0				54.0	No emission found	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

Test Location : Compatible Electronics
Customer : Lifebelt, LLC
Manufacturer : Lifebelt, LLC
Eut name : Remote Switch Unit
Model : See Below
Serial # : N/A
Specification : FCC B
Distance correction factor ($20 * \log(\text{test}/\text{spec})$) : 0.00
Test Mode : Spurious Radiated Emissions - Vertical and Horizontal Polarization
10 kHz to 4400 MHz
P/N: H628528427-101
Tested By: Arnold Gaffud

Page : 1/1
Date : 11/22/2004
Time : 16:11:19
Lab : A
Test Distance : 3.0 Meters


Pol	Freq	Rdng	Cable	Ant	Amp	Cor'd	Limit	Delta
	MHz	dBuV	loss	factor	gain	rdg = R	= L	R-L
			dB	dB	dB	dBuV	dBuV/m	dB



-20 dB BANDWIDTH


PHOTOGRAPHS



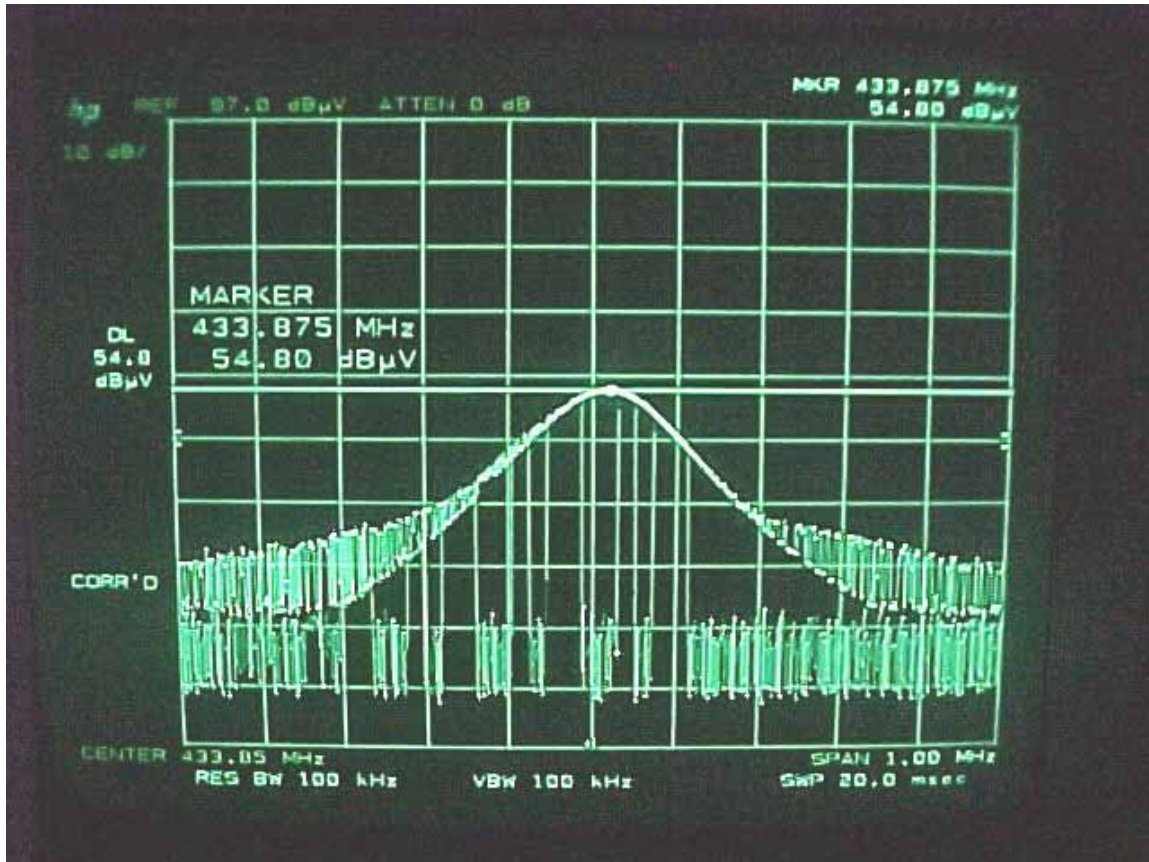


PHOTOGRAPH OF THE -20 dB BANDWIDTH 1 OF 4



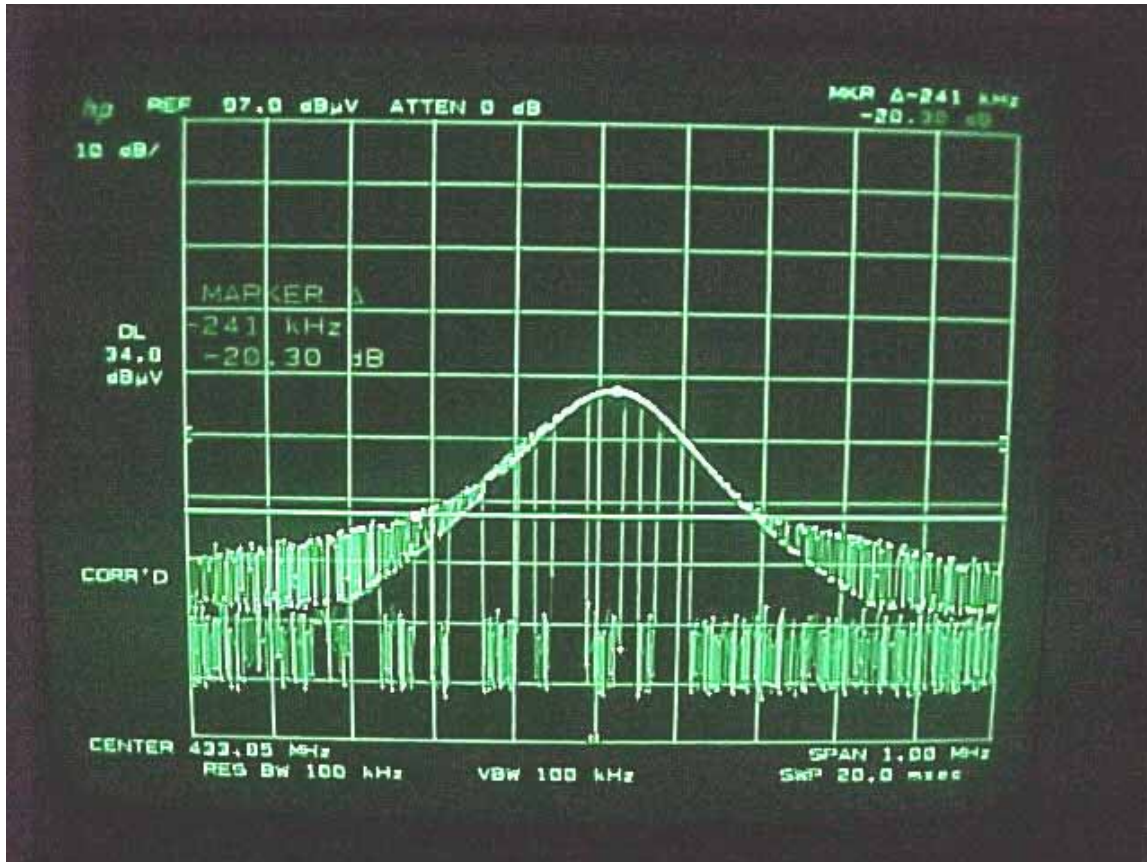


PHOTOGRAPH OF THE -20 dB BANDWIDTH 2 OF 4



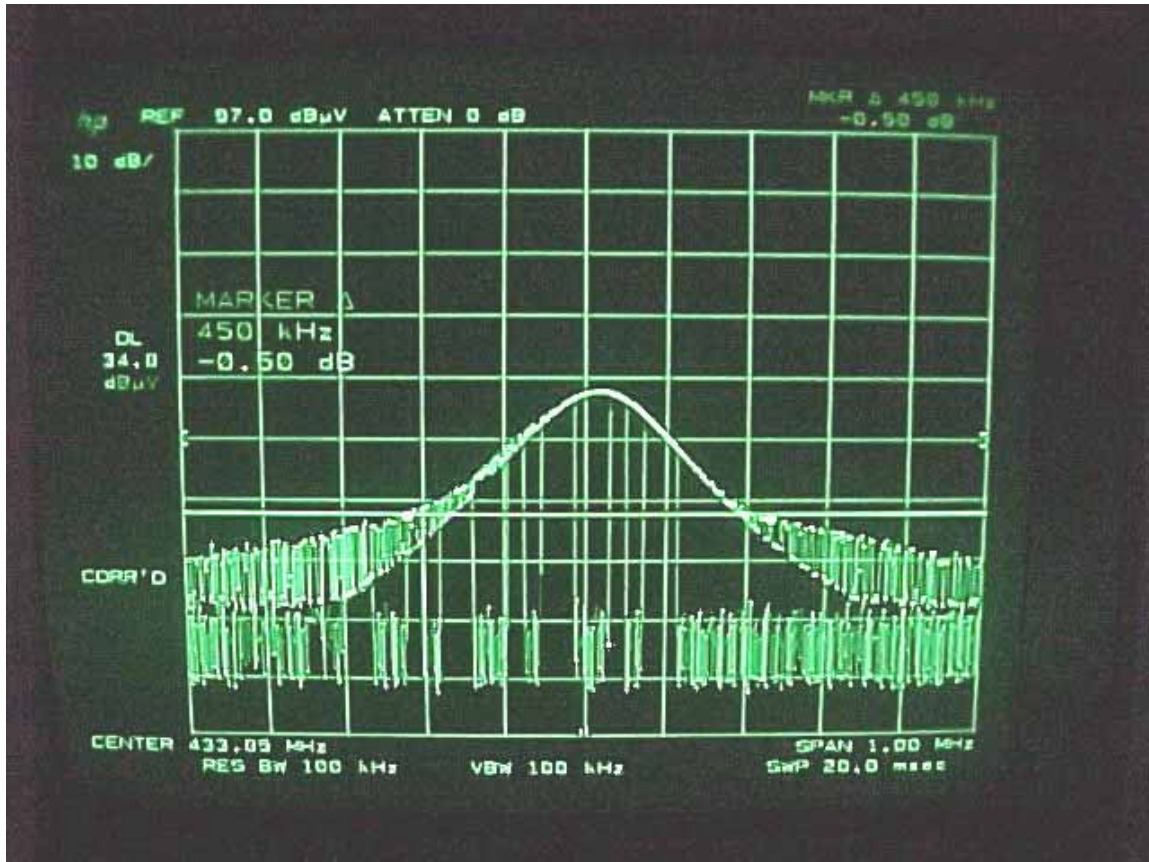

PHOTOGRAPH OF THE -20 dB BANDWIDTH 3 OF 4



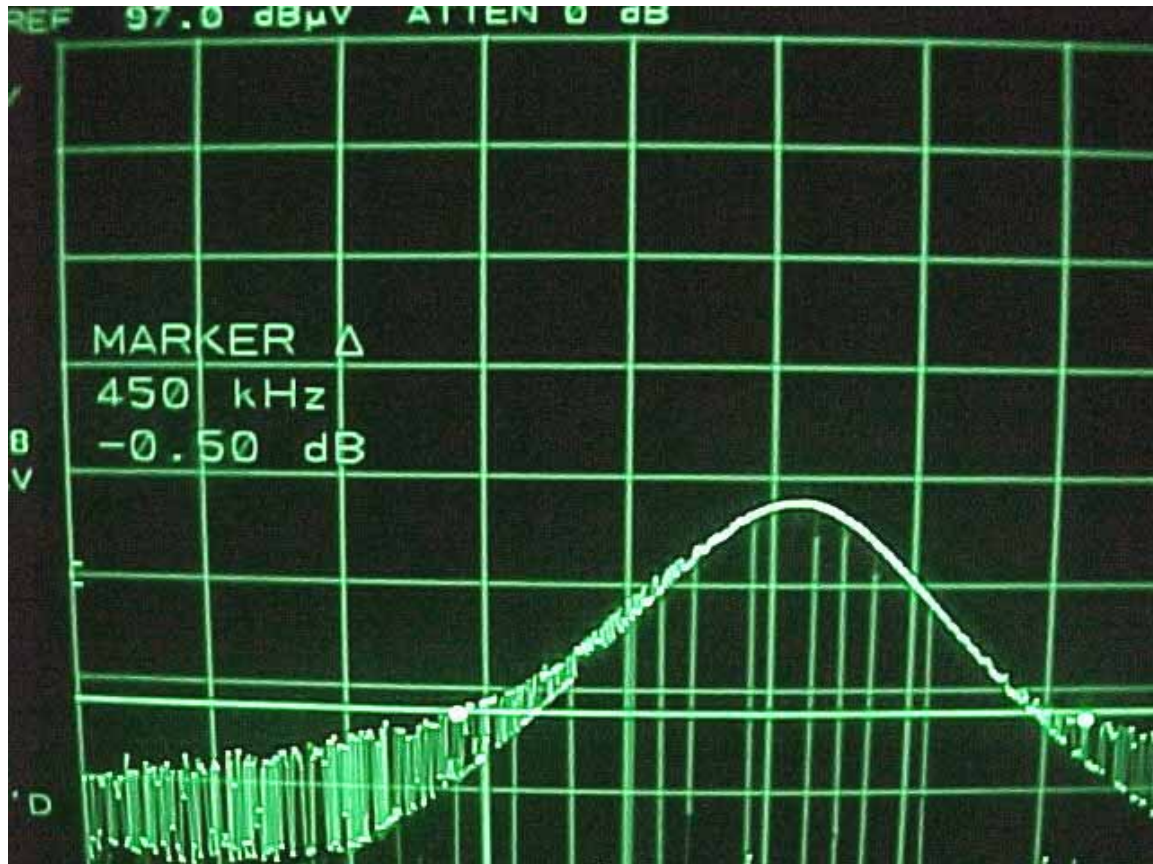

PHOTOGRAPH OF THE -20 dB BANDWIDTH 4 OF 4

