



Test Report

Report No	EF0700-1
Client	Ambient Corporation Aron Viner
Address	79 Chapel Street Newton, MA 02458
Phone	617-332-0004
Items tested	PLC Access Node
Standards	FCC 47 CFR Part 15 Class B emissions requirements (USA)
Test Dates	September 20-21, 2005
Results	As detailed within this report
Prepared by	 Evan Gould – Test Engineer
Authorized by	 Michael Buchholz – EMC Manager
Issue Date	<u>12/2/05</u>
Conditions of Issue	This Test Report is issued subject to the conditions stated in the 'Terms and Conditions' section on page 22 of this report.

Curtis-Straus is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data and engineering opinions which are not covered by the A2LA accreditation.

Contents

Contents	2
Summary	3
Product Tested - Configuration Documentation	4
Compliance Statement	5
Modifications Required for Compliance	5
Test Results	6
Test Configuration Photographs	8
Test Descriptions	11
Radiated Emissions Testing Overview	11
Line Conducted Emissions Overview	14
Test Equipment Used	17
Jurisdictional Labeling and Required Instruction Manual Inserts	19
FCC Requirements	19
Terms and Conditions	22
A2LA Accreditation	24

Form Final Report REV 16-SEP-05 (DW)

Summary

On September 20-21, 2005 we tested the PLC Access Node for compliance with the following requirements:

EMC Emissions:

- FCC 47 CFR Part 15 Class B emissions requirements (USA)
Registration numbers for all open area test sites can be found in the *Test Equipment Used* Section starting on page 17.

We found that the product met the above requirements with modification (see *Modifications Required for Compliance* section on page 5). Aron Viner from Ambient Corporation was present during the testing. The test sample was received in good condition.

Release Control Record

Issue No.	Reason for change	Date Issued
1	Original Release	November 22, 2005

Product Tested - Configuration Documentation

EUT Configuration				
Work Order: F0700				
Company: Ambient Corporation				
Company Address: 79 Chapel Street Newton, MA 02458				
Contact: Aron Viner				
Person Present: Aron Viner				
MN		SN		
EUT: 90-000X-XXX		XN0532-0131		
EUT Description: PLC Access Node				
EUT Max Frequency: 22.755MHz (aside from radio card)				
Support Equipment:	MN	SN		
PLC Access Node	90-000X-XXX	XN0534-0158		
IBM Thinkpad	T41	55274-OEM-0011903-00107		
EUT Cables:	Qty	Shielded?	Length	Ferrites
AC Power	1	Yes	2m	No
AC Power (alternate)	1	No	10ft	1/2 loop 0431164181
coax	3	Yes	30ft	No
Cat-5	1	Yes	6ft	No
Antennas:	P/N	Freq	Gain	
Nearson	I81TR-2450R	2.4 & 5GHz ranges	2dBi (2.4GHz) 0dBi (5GHz)	
Netgate (alternate)	IT-8-OMNI-NF	2.4-2.5GHz	8dBi	
Unpopulated EUT Ports:	Qty	Reason		
console	1	redundant		
Software / Operating Mode Description:				
EUT was operating in two differ modes to simulate indoor and outdoor configurations.				

Compliance Statement

TEST	RESULT	STANDARD	TEST LEVEL	MARGIN	COMMENTS
<i>Radiated Emissions</i>	PASS	FCC CFR 47 Part 15	Class B	-1.0dB @ 900.1MHz	
<i>AC Mains Conducted Emissions</i>	PASS	FCC CFR 47 Part 15	Class B	-11.7dB @ 12.6MHz	

Modifications Required for Compliance

Either of the following two modifications are acceptable for passing radiated emissions.

- 1) A shielded AC Power cable and shielded ethernet.
- 2) An unshielded AC Power cable with a Fair-Rite #0431164181.

Test Results**Table 1**

Radiated Emissions Table							Curtis-Straus LLC		
Date: 20-Sep-05			Company: Ambient				Work Order: F0700		
Engineer: Evan Gould			EUT Desc: PLC Access Node						
Frequency Range: 30-1000MHz						Measurement Distance: 3 m			
Notes: EUT is operating as an intentional radiator									
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	FCC Class B		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
V	100.0	45.4	21.4	9.7	1.4	35.1	43.5	-8.4	Pass
V	133.3	37.8	21.4	14.4	1.6	32.4	43.5	-11.1	Pass
Shielded AC Power									
H	266.7	30.3	21.3	13.6	2.6	25.2	46.0	-20.8	Pass
H	408.4	27.7	21.1	16.3	3.6	26.5	46.0	-19.5	Pass
H	900.1	36.4	20.7	23.0	6.3	45.0	46.0	-1.0	Pass
Unshielded AC Power with Fair-Rite #0431164181									
H	900.1	32.8	20.7	23.0	6.3	41.4	46.0	-4.6	Pass
H	266.7	41.4	21.3	13.6	2.6	36.3	46.0	-9.7	Pass
Table Result:		PASS		by		-1.0 dB		Worst Freq: 900.1 MHz	
Test Site: "M"		Pre-Amp: Green		Cable: EMIR-09		Analyzer: Black		Antenna: Red-White	

Table 2

Radiated Emissions Table							Curtis-Straus LLC		
Date: 21-Sep-05			Company: Ambient				Work Order: F0700		
Engineer: Evan Gould			EUT Desc: PLC Access Node						
Frequency Range: 30-1000MHz						Measurement Distance: 3 m			
Notes: EUT is communicating over the power line shielded ethernet cable and unshielded AC Power w/ ferrite									
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	FCC Class B		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
Vbb	84.5	45.7	22.4	8.5	2.1	33.9	40.0	-6.1	Pass
V	100.0	37.2	22.4	11.3	2.2	28.3	43.5	-15.2	Pass
Vav	118.2	29.3	22.4	12.8	2.4	22.1	43.5	-21.4	Pass
H	166.7	44.0	22.0	10.6	3.0	35.6	43.5	-7.9	Pass
Hbb	182.3	37.6	21.9	10.1	3.2	29.0	43.5	-14.5	Pass
H	233.4	47.7	21.3	12.3	3.5	42.2	46.0	-3.8	Pass
H	266.7	48.3	21.5	13.3	3.8	43.9	46.0	-2.1	Pass
H	900.0	31.9	21.4	21.6	8.1	40.2	46.0	-5.8	Pass
Table Result:		Pass	by		-2.1 dB		Worst Freq:		266.7 MHz
Test Site: "A"		Pre-Amp: Blue-Blk		Cable: EMIR-06		Analyzer: White		Antenna: Grn-Blk	

Table 3

Radiated Emissions Table							Curtis-Straus LLC		
Date: 20-Sep-05			Company: Ambient				Work Order: F0700		
Engineer: Evan Gould			EUT Desc: PLC Access Node						
Frequency Range: 1-40GHz						Test Site: M			
Notes: Testing performed for both antennas listed in the EUT Config with the EUT operating in both frequency ranges (2.4GHz and 5GHz).									
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBμV/m)	FCC Class B		
							Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)
No spurious emissions or harmonics were detected in this range.									
1-18GHz >>		Pre-Amp: Green		Cable: EMIR-09		Analyzer: Orange		Antenna: Orange Horn	
18-26.5GHz >>		Pre-Amp: Yellow		Cable: EMIR-09		Analyzer: Orange		Antenna: White Horn	
26.5-40GHz >>				Cable: EMIR-09 & 02		Analyzer: Orange		Antenna: 26.5-40GHz	

Table 4

AC Mains Conducted Emissions											Curtis-Straus LLC		
Date: 21-Sep-05			Company: Ambient						Work Order: F0700				
Engineer: Evan Gould			EUT Desc: PLC Access Node						Test Site: EMI 1				
Notes: intentional radiator													
LISN(s): Red Green													
Range: 0.15-30MHz			Other Equipment: ---				Spectrum Analyzer: White						
Frequency (MHz)	Q.P. Readings		Ave. Readings		Impedance Factor	---		FCC/CISPR B		FCC/CISPR B		Overall Result	
	QP1 (dBµV)	QP2 (dBµV)	AV1 (dBµV)	AV2 (dBµV)		Limit (dBµV)	Margin dB	qp Limit (dBµV)	qp Margin dB	AVE Limit (dBµV)	AVE Margin dB		(Pass/Fail)
12.60	27.6	27.1	17.4	18.3	20.0	---	---	60.0	-12.4	50.0	-11.7	Pass	
5.35	15.0	10.9			20.0	---	---	60.0	-25.0	50.0	-15.0	Pass	
7.60	15.3	14.8			20.0	---	---	60.0	-24.7	50.0	-14.7	Pass	
14.80	7.1	8.0			20.0	---	---	60.0	-32.0	50.0	-22.0	Pass	
27.40	14.1	15.0			20.0	---	---	60.0	-25.0	50.0	-15.0	Pass	
29.20	16.3	15.5			20.0	---	---	60.0	-23.7	50.0	-13.7	Pass	
Table Result: Pass by -11.70 dB Worst Freq: 12.60 MHz													

Test Configuration Photographs



Radiated Emissions (2.4GHz) – Front



Radiated Emissions (2.4GHz) – Back



Radiated Emissions (5GHz) – Front



Radiated Emissions (5GHz) – Back



Conducted Emissions

Test Descriptions

Radiated Emissions Testing Overview

REV 17-FEB-04

Digital and microprocessor based devices use radio frequency (RF) digital signals for timing purposes. An unintentional consequence of this signal usage is that a certain amount of RF energy is radiated from the device into the local environment. This radiated RF energy has the potential to interfere with constructive uses of the RF spectrum such as television broadcasting, police and fire radio, and the like. In order to reduce the likelihood that a device will interfere with these services, it is required that the amplitudes of radiated RF signals from the device are kept below an allowable level.

These RF signals decrease in strength as the distance from the source increases. Thus if the potential victim of interference, e.g. a TV receiver, is far enough from the radiator, e.g. a computer, then no interference will occur. For certain environments it is appropriate to expect that potential interference victims will be located at least a minimum distance from the radiator. For the residential environment this distance is generally accepted to be 10 meters while in the commercial environment the accepted distance is 30 meters. The allowable emissions levels are therefore specified to protect equipment which is located further than that distance from the radiator. In general, radiation from the Equipment Under Test (EUT) is measured at 3 or 10 meters to insure that it is at or below allowable levels.

Measurements of the radiated energy are made by recording the field strength indicated by an antenna placed at a specific distance from the device. Most devices do not radiate the RF energy in a predictable manner. The emitted energy may vary with changes in operating mode, physical configuration, or orientation. During the measurement process these parameters are varied to confirm that the emissions will remain below the allowable levels in the range of typical installations.

The extent of annoyance experienced by a person who is being affected by interference is related to the persistence of the interfering signal. For example, a low level steady whine from a receiver is considered to be more annoying than brief, loud, intermittent pops or clicks. This “human factor” is accounted for by the use of a “quasi-peak” detector in the receiver or spectrum analyzer which measures the signal from the measurement antenna. The detector is a weighted averaging filter with a fast charge time and a slow discharge time. Thus steady continuous signals will charge the quasi-peak detector fully while intermittent signals (those with pulse repetition rates less than 1kHz) are reported at a level which can be significantly below their peak level. It should be noted that most RF signals produced by digital devices are continuous in nature and thus the quasi-peak reading will be identical to the peak signal reading. To reduce the test time, the peak emission level is recorded for continuous wave signals as it is the same as the quasi-peak signal level.

Testing is performed according to test methods from ANSI C63.4 and CISPR 22.

The test site used for measuring radiated emissions follows the format developed internationally for a weather protected Open Area Test Site (OATS). An antenna mast is

installed at the specified distance from a rotating table and is used to raise and lower the measuring antenna. The reference site is clear of reflecting objects, such as metal fences and buildings for an ellipse of twice the measurement test distance. Measuring equipment and personnel are present within the ellipse to facilitate cable manipulation, but measures are taken to minimize the effects. Often preliminary radiated emissions measurements are made at alternate test sites which do not meet the clear space reference criteria. The data collected at alternate test sites is not considered conclusive unless the alternate site also complies with a volumetric site attenuation survey performed over the area that the EUT occupies. The EUT and measuring antenna mark the two foci of the ellipse. The ground plane is made of a combination of galvanized steel sheets and tight wire mesh electrically connected along the seams. This metal ground plane extends 1 meter beyond the furthest extent of the EUT and the measuring antenna. It also covers the area between the EUT and the measuring antenna. The hardware cloth is connected to the utility ground or to stakes driven into the earth for safety.

In order for accurate emissions measurements to be made the test site must possess propagation characteristics which fall within accepted norms. The site has been checked for suitability using techniques specified in American National Standards Institute (ANSI) document C63.4. This document details a procedure which measures the attenuation of the site which is the chief indicator of site acceptability. The theory behind site attenuation is quite simple. A transmitting antenna is set up at a fixed location at one end of the site with a receiving antenna at the other end. If a signal of some arbitrary amplitude is fed into the transmitting antenna, a lesser amount of signal ought to be measured at the receiving antenna. This difference in signal amplitude is known as the site attenuation, which should follow a predicted curve. Data that does not correspond to the predicted site attenuation curve points to a problem with either the equipment being used or the physical characteristics of the site.

Actual emissions measurements are taken with broadband biconical-log-periodic hybrid antennas calibrated in accordance with the standard site method detailed in ANSI C63.5. Emissions are measured with the receiving antenna oriented in horizontal and vertical polarization with respect to the ground plane. If measurements are made at other than the limit distance, then the readings obtained are scaled to the limit distance using an inverse relationship. The actual test distance used is noted in the report.

The antenna mast is capable of a varying the antenna height between 1 and 4 meters above the ground plane. The receiving antenna is moved over this range at each emission frequency in order to record the maximum observed signal. The mast is non-conductive and remotely controllable. The test distance is measured from the antenna center (marked during calibration) and the periphery of the EUT.

The Equipment Under Test (EUT) is rotated in order to maximize emissions during the test. For equipment intended to operate on a tabletop or desk radiated tests are conducted on a 0.8 meter high, non-conductive platform. Larger floor standing equipment is tested on a floor mounted rotatable platform. In some cases, large equipment on its own casters may be tested without a platform.

Since radiated emissions are a function of cable placement, the cable placement is varied to encompass typical configurations that an end user might encounter to determine the configuration resulting in maximum emissions. At least one cable for each I/O port type is

attached to the EUT. If peripherals or modules are available, at least one of each available type is installed and noted in the report. Excess cable length beyond one meter is bundled in the center into a 30 to 40 cm bundle. Cables requiring non-standard lead dress are recorded in the report.

Network connections are simulated if necessary. Any simulator used matches the expected real network connection in terms of both functionality and impedance. For distributed systems, the support equipment may be placed at such a distance that it does not influence the measured emissions. If this option is used, such placement is noted in the test report.

The possible operating modes of the EUT are explored to determine the configuration which maximizes emissions. Software is investigated as well as different methods of displaying data if available. Data is recorded in the worst case operating mode.

At least the six highest emissions with respect to the limit are recorded. If less than six emissions are visible above the noise floor of the instrumentation, then noise floor measurements at six representative frequencies are recorded. The test report will document if noise floor readings are reported.

FCC and European Norms Radiated Emissions Limits at 10 meters

Frequency (MHz)	FCC Class A	FCC Class B	CISPR Class A	CISPR Class B	Frequency (MHz)
30-88	39.1	29.5	40	30	30-88
88-216	43.5	33.1	40	30	88-216
216-230	46.4	35.6	40	30	216-230
230-960	46.4	35.6	47	37	230-960
960-1000	49.5	43.5	47	37	960-1000
1000+	49.5	43.5	N/A	N/A	1000+

At the transitions, the lower limit applies.
Simple inverse scaling utilized to convert limits where appropriate.

FCC and European Norms Radiated Emissions Limits at 3 meters

Frequency (MHz)	FCC Class A	FCC Class B	CISPR Class A	CISPR Class B	Frequency (MHz)
30-88	49.5	40	50.5	40.5	30-88
88-216	54	43.5	50.5	40.5	88-216
216-230	56.9	46	50.5	40.5	216-230
230-960	56.9	46	57.5	47.5	230-960
960-1000	60	54	57.5	47.5	960-1000
1000+	60	54	N/A	N/A	1000+

At the transitions, the lower limit applies.
Simple inverse scaling utilized to convert limits where appropriate.

For CISPR and EU standards measurements are usually made over the frequency range of 30 MHz to 1GHz. Deviations are noted in the test report. For the FCC, the measurement range is based on the highest frequency signal present or used in the device. The following table details the frequency range of measurements performed.

FCC frequency range of radiated emissions measurements	
Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30 (No radiated measurements)
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower.

The test data is derived from the voltage on the spectrum analyzer. First the reading is corrected for gain factors associated with the use of preamps and loss in the cable. A factor in dB is subtracted from the reading to account for preamp gain, while a factor in dB is added to the signal to account for cable loss. A conversion is performed from the resulting voltage to field strength by multiplying the voltage by the antenna factor. Since antenna factor is expressed as a logarithm (dB/m), this operation takes the form of an addition (to multiply logarithmic numbers, you add them together). Thus:

$$\text{Field Strength (dBuV/m)} = \text{Voltage Reading (dBuV)} - \text{Preamp Gain (dB)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

When the levels of ambient radio signals such as local television stations are within 6 dB of the appropriate limit, the following steps may be taken to assure compliance:

1. The measurement bandwidth may be reduced. A check is made to see that peak readings are not affected. The use of a narrower bandwidth allows examination of emissions close to local ambient signals.
2. The antenna may be brought closer to the EUT to increase signal-to-ambient signal strength.
3. For horizontally polarized signals the axis of the test site may be rotated to discriminate against local ambients.

Standard Uncertainty per NIST Technical Note 1297 1994 for this test is estimated to be 2.8dB. This test method is covered by our A2LA accreditation.

Line Conducted Emissions Overview

REV 25-OCT-02

Digital and microprocessor based devices use radio frequency (RF) digital techniques for timing purposes and in applications such as switching power supplies. An unintentional consequence of this for AC powered devices is that a certain amount of the RF energy is impressed upon the AC power mains in the form of a conducted noise voltage. These

conducted emissions have the potential to interfere with constructive uses of the RF spectrum such as AM radio and may also interfere with other devices attached to the same AC mains circuit. In order to reduce the likelihood that a device will interfere it is required that the conducted RF signals from the device are below an allowable level.

Testing is performed according to test methods from ANSI C63.4 and CISPR 22.

Line conducted emissions are measured from the device over the frequency range of 0.15 to 30 MHz. The EUT is powered from a Line Impedance Stabilization Network (LISN). The purpose of the LISN is to provide a calibrated impedance across which to measure the conducted emissions. The RF noise voltage produced by the EUT across the LISN is measured and compared to the limit. In order for the LISN to perform properly it is attached to a ground plane at least 2 meters by 2 meters in size. For tabletop equipment the measurement is performed with the equipment 40 cm from a vertical conducting surface bonded to a ground plane under the product. The ground plane extends 0.5 meters beyond the product and is 2.5mx3.7m in size. The vertical surface is 2.5mx2.5m.

As with radiated emissions, the "human factor" is accounted for by the use of a "quasi-peak" detector in the receiver or spectrum analyzer that measures the signal from the LISN. For certain tests (such as EN55022), both an average and a quasi-peak limit are specified. Emissions from a device must be below both limits when measured with the appropriate detector. If the emission level is below the average limit when measured with the quasi-peak detector, the EUT is presumed to pass both limits.

The possible operating modes of the EUT are explored to determine the configuration that maximizes emissions. Software is investigated as well as different methods of displaying data if available. Data is recorded in the worst case operating mode.

As of September 9, 2002, the FCC has harmonized it's conducted emission limits with CISPR. The following table displays the limits applicable to both FCC and CISPR.

Line Conducted Emissions Limits: Class A (dBµV)		
Frequency (MHz)	Quasi-Peak	Average
0.15 - 0.5	79	66
0.5 - 30	73	60
Line Conducted Emissions Limits: Class B (dBµV)		
Frequency (MHz)	Quasi-Peak	Average
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50
Note 1: The lower limit applies at the transition frequencies		
*Note 2: The limit decreases linearly with the logarithm of the frequency		

Although the FCC is now accepting the limits shown above, it should be noted that the former FCC limits may be used until July 11, 2005 for any equipment authorized prior to July 12, 2004. At least the six highest emissions with respect to the limit are recorded. If less than six emissions are visible above the noise floor of the instrumentation, then the noise floor at six

representative frequencies is recorded. The test report will document if noise floor readings are reported.

Standard Uncertainty per NIST Technical Note 1297 1994 for this test is estimated to be 2dB.

All testing is performed within the framework of a laboratory quality system modeled on ISO/IEC 17025 *General requirements for the competence of calibration and testing laboratories* and is subject to our terms and conditions. This test method is covered by our A2LA accreditation.

Test Equipment Used

REV. 16-SEP-2005

SPECTRUM ANALYZERS / RECEIVERS	RANGE	MN	MFR	SN	ASSET	CAT	CALIBRATION DUE
RED	9kHz-1.8GHz	8591E	HP	3441A03559	00024	I	13-JAN-2006
WHITE	9kHz-22GHz	8593E	HP	3547U01252	00022	I	08-MAR-2006
BLUE	9kHz-1.8GHz	8591E	HP	3223A00227	00070	I	03-NOV-2005
YELLOW	9kHz-2.9GHz	8594E	HP	3523A01958	00100	I	20-APR-2006
GREEN	9kHz-26.5GHz	8593E	HP	3829A03618	00143	I	02-AUG-2006
BLACK	9kHz-12.8GHz	8596E	HP	3710A00944	00337	I	27-DEC-2005
YELLOW-BLACK	20Hz-40.0MHz	3585A	HP	2504A05219	00030	I	Out of Service
TELECOM 3585A	20Hz-40.0MHz	3585A	HP	1750A02762	01067	I	04-FEB-2006
ORANGE	9kHz-26.5GHz	E4407B	HP	US39440975	00394	I	22-JUN-2006
EMI TEST RECEIVER	20-1000MHz	ESVS3 0	R&S	827957/001	01098	I	27-OCT-2005

LISNs/MEASUREMENT PROBES	RANGE	MN	MFR	SN	ASSET	CAT	CALIBRATION DUE
RED	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	956348	00753	II	15-APR-2006
BLUE (DC)	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	956349	00752	II	02-MAY-2006
YELLOW-BLACK	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	984735	00248	II	15-APR-2006
ORANGE	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	903707	00754	II	02-MAY-2006
GOLD (DC)	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	984734	00247	II	02-MAY-2006
BROWN	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	0411656	00986	II	04-MAY-2006
GREEN	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	0411657	00987	II	04-MAY-2006
YELLOW	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	0411658	1080	II	04-MAY-2006
WHITE-BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972019	00678	II	15-APR-2006
BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972017	00675	II	15-APR-2006
RED-BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972016	00677	II	15-APR-2006
BLUE-BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972018	00676	II	15-APR-2006
BLUE MONITORING PROBE	0.01-150MHz	91550-2	TEGAM	12350	00807	I	26-MAY-2007
YELLOW MONITORING PROBE	0.01-150MHz	91550-2	ETS	50972	00493	I	24-NOV-2005
GREEN CURRENT TRANSFORMER	40Hz-20MHz	150	PEARSON	10226	00793	I	07-APR-2007
BLUE CISPR LINE PROBE	150kHz- 30MHz	N/A	C-S	N/A	00805	II	08-JUN-2007
BLACK CISPR LINE PROBE	150kHz- 30MHz	N/A	C-S	N/A	NONE	II	08-JUN-2007
CISPR TELCO VOLTAGE PROBE	10kHz-30MHz	CS A/C-10	C-S	CS01	00296	II	28-SEP-2005
CISPR 22 TELCO ISN	9kHz-30MHz	FCC-TLISN-T4	FISCHER	20115	00746	I	26-OCT-2006

OPEN AREA TEST SITE (OATS)	FCC CODE	IC CODE	VCCI CODE	CAT	CALIBRATION DUE
SITE F	93448	IC 2762-F	R-1688	II	04-APR-2007
SITE T	93448	IC 2762-T	R-905	II	14-AUG-2007
SITE A	93448	IC 2762-A	R-903	II	13-AUG-2007
SITE M	93448	IC 2762-M	R-904	II	19-MAR-2007

LINE CONDUCTED TEST SITES	FCC CODE	IC CODE	VCCI CODE	CAT	CALIBRATION DUE
EMI 1	93448	N/A	C-1801	II	01-MAY-2006
EMI 2	93448	N/A	C-1802	II	01-MAY-2006
EMI 3	93448	N/A	C-1803	II	01-MAY-2006

MIXERS/DIPLEXERS	RANGE	MN	MFR	SN	ASSET	CAT	CALIBRATION DUE
MIXER / HORN	26.5-40 GHz	11970A/28-442-6	HP/ATM	2332A01695/A046903-01	1087	I	23-AUG-2006
MIXER / HORN	26.5-40 GHz	11970A/28-442-6	HP/ATM	3003A07825/A046903-01	1086	I	23-AUG-2006
MIXER / HORN	40-60 GHz	M19HW/A	OML	U30110-1	00821	I	02-MAR-2007
MIXER / HORN	60-90 GHz	M12HW/A	OML	E30110-1	00822	I	03-MAR-2007
MIXER / HORN	90-140 GHz	MO8HW/A	OML	F21206-1	00811	I	03-MAR-2007
MIXER / HORN	140-220 GHz	MO5HW/A	OML	G21206-1	00812	II	OUT OF CALIBRATION
DIPLEXER	40-220 GHz	DPL.26	OML	N/A	00813	I	03-MAR-2007

PREAMPS / ATTENUATORS / FILTERS	RANGE	MN	MFR	SN	ASSET	CAT	CALIBRATION DUE
RED	0.10-2000MHz	ZFL-1000-LN	C-S	N/A	00798	II	08-APR-2006

BLUE	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00759	II	03-AUG-2006
BLUE-BLACK	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00800	II	10-FEB-2006
GREEN	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00802	II	21-JUL-2006
BLACK	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00799	II	25-AUG-2006
ORANGE	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00765	II	10-FEB-2006
WHITE	1-20GHz	SMC-12A	C-S	426643	00760	II	04-AUG-2006
BROWN	1-20GHz	PM2-38-218-4R5-17-15-SFF	C-S	PL1655	1132	II	27-JUN-2006
YELLOW-BLACK	1-20GHz	SMC-12A	C-S	535055	00801	II	25-AUG-2006
HF (YELLOW)	18-26.5GHz	AFS4-18002650-60-8P-4	C-S	467559	00758	II	23-AUG-2007
HIGH PASS FILTER	1-18 GHz	SPA-F-55204	K&L	36	00817	II	06-JAN-2006
LOW PASS FILTER	1-9 GHz	11SL10-4100/X4400-O/O	K&L	4	00816	II	06-JAN-2006
HF 20dB 50W ATTENUATOR	0.03-20 GHz	PE 7019-20	PASTERNAK	01	00791	II	10-MAY-2007
HF 30dB 50W ATTENUATOR	0.03-20 GHz	PE 7019-30	PASTERNAK	02	1168	II	10-MAY-2007
LOW FREQ LPF	10-100kHz	L200K1G1	MICROWAVE CIRCUITS	4460-01 DC0432	1019	II	OUT OF SERVICE
LOW FREQ LPF	10-100kHz	L200K1G1	MICROWAVE CIRCUITS	4777-01 DC0434	1088	II	30-AUG-2006

ANTENNAS	RANGE	MN	MFR	SN	ASSET	CAT	CALIBRATION DUE
GREEN BILOG	30-2000MHz	CBL6112B	CHASE	2742	00620	II	06-APR-2006
GREEN-BLACK BILOG	30-2000MHz	CBL6112B	CHASE	2412	00127	II	06-JAN-2006
GREEN-RED BILOG	30-2000MHz	CBL6112B	CHASE	2435	00990	II	OUT OF SERVICE
BLUE BILOG	30-1000MHz	3143	EMCO	1271	00803	II	06-MAY-2007
GRAY BILOG	20-2000MHz	3141	EMCO	9703-1038	00066	II	06-MAY-2007(EMI) / 05-AUG-2006(RFI)
YELLOW-BLACK BILOG	20-2000MHz	CBL6140A	CHASE	1112	00126	II	06-MAY-2007(EMI) / 12-AUG-2006(RFI)
RED-WHITE BILOG	30-2000MHz	JB1	SUNOL	A091604-1	01105	II	28-SEP-2006
RED-BLACK BILOG	30-2000MHz	JB1	SUNOL	A091604-2	01106	II	28-SEP-2006
YELLOW HORN	1-18GHz	3115	EMCO	9608-4898	00037	I	27-MAY-2007(EMI) / 05-JUN-2006(RFI)
BLACK HORN	1-18GHz	3115	EMCO	9703-5148	00056	I	17-JUN-2007
ORANGE HORN	1-18GHz	3115	EMCO	0004-6123	00390	I	09-JUN-2007
HF (WHITE) HORN	18-26.5GHz	801-WLM	WAVELINE	00758	00758	I	26-AUG-2007
SMALL LOOP	9kHz-30MHz	PLA-130/A	ARA	1024	00755	I	23-FEB-2006
LARGE LOOP	20Hz-5MHz	6511	EMCO	9704-1154	00067	I	12-NOV-2005
ACTIVE MONOPOLE	30Hz-30MHz	3301B	EMCO	3824	00068	II	04-MAY-2006
INDUCTION COIL	50-60Hz	1000-4-8	C-S	N/A	00778	II	13-SEP-2006
ADJUSTABLE DIPOLE	30-1000MHz	3121C	EMCO	1370	00757	II	18-MAR-2007
ADJUSTABLE DIPOLE	30-1000MHz	3121C	EMCO	1371	00756	II	18-MAR-2007
RE101 LOOP SENSOR	30Hz-100kHz	RE101-13.3CM	C-S	N/A	00818	II	13-MAR-2007
RS101 RADIATING LOOP	30Hz-100kHz	RS101-12CM	C-S	N/A	00819	II	13-MAR-2007
RS101 LOOP SENSOR	30Hz-100kHz	RS101-4CM	C-S	N/A	00820	II	13-MAR-2007

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Jurisdictional Labeling and Required Instruction Manual Inserts

FCC Requirements

Required Equipment Authorization for Device Type

Type of Device	Equipment Authorization Required
TV broadcast receiver	Verification
FM broadcast receiver	Verification
CB receiver	Declaration of Conformity or Certification
Superregenerative receiver	Declaration of Conformity or Certification
Scanning receiver	Certification
All other receivers subject to part 15	Declaration of Conformity or Certification
TV interface device	Declaration of Conformity or Certification
Cable system terminal device	Declaration of Conformity
Stand-alone cable input selector switch	Verification
Class B personal computers and peripherals	Declaration of Conformity or Certification
CPU boards and internal power supplies used with Class B personal computers	Declaration of Conformity or Certification
Class B personal computers assembled using authorized CPU boards or power supplies	Declaration of Conformity
Class B external switching power supplies	Verification
Other Class B digital devices & peripherals	Verification
Class A digital devices, peripherals & external switching power supplies	Verification
All other devices	Verification

FCC Required labeling for Verified Devices 47 CFR Part 15.19

Verified devices must have the following label permanently affixed in a location accessible to the user:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

No distinction is made between Class A or Class B devices on the label.

When the device is so small or for such use that it is not practicable to place label on it, the information may be placed in a prominent location in the instruction manual supplied to the user or, alternatively, shall be placed on the container in which the device is marketed.


Where a device is constructed in two or more sections connected by wires and marketed together, the label is only required to be affixed to the main control unit.

**FCC Required labeling for Class B Personal Computers and Peripherals Devices
47 CFR Part 15.19 subject to Declaration of Conformity**


Personal computers and peripherals subject to authorization under a Declaration of Conformity shall be labeled as follows:

(1) The label shall be located in a conspicuous location on the device and shall contain the unique identification described in Section 2.1074 and the following logo:

(i) If the product is authorized based on testing of the product or system:

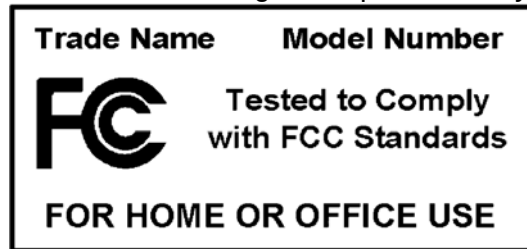

(ii) If the product is authorized based on assembly using separately authorized components and the resulting product is not separately tested:

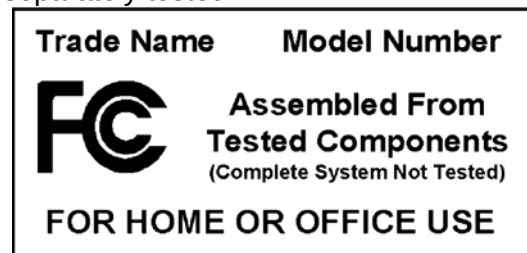

(2) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (b)(1) of this section on it, such as for a CPU board or a plug-in circuit board peripheral device, the text associated with the logo may be placed in a prominent location in the instruction manual or pamphlet supplied to the user. However, the unique identification (trade name and model number) and the logo must be displayed on the device.

(3) The label shall not be a stick-on, paper label. The label on these products shall be permanently affixed to the product and shall be readily visible to the purchaser at the time of purchase, as described in Section 2.925(d). "Permanently affixed" means that the label is etched, engraved, stamped, silk-screened, indelibly printed, or otherwise permanently marked on a permanently attached part of the equipment or on a nameplate of metal, plastic, or other material fastened to the equipment by welding, riveting, or a permanent adhesive. The label must be designed to last the expected lifetime of the equipment in the environment in which the equipment may be operated and must not be readily detachable.

FCC Required Instruction Manual Inserts CFR 47 Part 15.21 and 15.105

The user's manual must caution the user that changes or modifications not expressly approved by the manufacturer could void the user's FCC granted authority to operate the equipment. In addition the following information should be inserted:

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: this equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- *Reorient or relocate the receiving antenna.*
- *Increase the separation between the equipment and receiver.*
- *Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.*
- *Consult the dealer or an experienced radio/TV technician for help.*

(c) The provisions of paragraphs (a) and (b) of this section do not apply to digital devices exempted from the technical standards under the provisions of § 15.103.

(d) For systems incorporating several digital devices, the statement shown in paragraph (a) or (b) of this section needs to be contained only in the instruction manual for the main control unit.

Terms and Conditions

Paragraph 1. SERVICES. LABORATORY will:

- 1.1 Use the degree of care and skill ordinarily exercised by and consistent with the standards of the profession.
- 1.2 Perform all technical services in substantial accordance with the generally accepted laboratory principles and practices.
- 1.3 Retain all pertinent records relating to the services performed for a period of three (3) years following submission of the report describing such services, during which period the records will be made available to CLIENT upon reasonable request.

Paragraph 2. CLIENT'S RESPONSIBILITIES. CLIENT or his authorized representative will:

- 2.1 Provide LABORATORY with all plans, schematics, specifications, addenda, change orders, drawings and other information for the proper performance of technical services.
- 2.2 Designate a person to act as CLIENT's representative with respect to LABORATORY's services to be performed on behalf of the CLIENT; such person or firm to have complete authority to transmit instructions, receive information and data, interpret and define CLIENT's policies and decisions with respect to the LABORATORY's work on behalf of the CLIENT and to order, at CLIENT's expense, such technical services as may be required.
- 2.3 Designate a person who is authorized to receive copies of LABORATORY's reports.
- 2.4 Undertake the following:
 - (a) Secure and deliver to LABORATORY, without cost to LABORATORY, preliminary representative samples of the equipment proposed to require technical services, together with any relevant data.
 - (b) Furnish such labor and equipment needed by LABORATORY to handle samples at the LABORATORY and to facilitate the specified technical services.

Paragraph 3. GENERAL CONDITIONS:

- 3.1 LABORATORY, by the performance of services covered hereunder, does not in any way assume any of those duties or responsibilities customarily vested in the CLIENT, its employees, or any other party, agency or authority.
- 3.2 LABORATORY shall not be responsible for acts of omissions of any other party or parties involved in the design, manufacture or maintenance of the equipment or the failure of any employee, contractor or subcontractor to undertake any aspect of equipment's design, manufacture or maintenance.
- 3.3 LABORATORY is not authorized to revoke, alter, release, enlarge or release any requirement of the equipment's design, manufacture or maintenance unless specifically authorized by CLIENT or his authorized representative.
- 3.4 THE ONLY WARRANTY MADE BY LABORATORY IN CONNECTION WITH ITS SERVICE PERFORMED HEREUNDER IS THAT IT WILL USE THAT DEGREE OF CARE AND SKILL AS SET FORTH IN PARAGRAPH 1 ABOVE. NO OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE OR INTENDED FOR SERVICES PROVIDED HEREUNDER.
- 3.5 Where the LABORATORY indicates that additional testing is advisable to obtain more valid or useful data, and where such testing has not been authorized, CLIENT agrees to view such test reports as inconclusive and preliminary.
- 3.6 The LABORATORY will supply technical service and prepare a report based solely on the sample submitted to the LABORATORY by the CLIENT. The CLIENT understands that application of the data to other devices is highly speculative and should be applied with extreme caution.
- 3.7 The LABORATORY agrees to exercise ordinary care in receiving, preserving and shipping (F.O.B. Littleton, MA) any sample to be tested, but assumes no responsibility for damages, either direct or consequential, which arise from loss, damage or destruction of the samples due to the act of examination, modification or testing, or technical services or circumstances beyond LABORATORY's control.
- 3.8 The LABORATORY will hold samples for thirty (30) days after tests are completed, or until the CLIENT's outstanding debts to the LABORATORY are satisfied, whichever is later.
- 3.9 The CLIENT recognizes that generally accepted error variances apply and agrees to consider such error variances in its use of test data.
- 3.10 It is agreed between LABORATORY and CLIENT that no distribution of any tests, reports or analysis other than that described below shall be made to any third party without the prior written consent of both parties unless such distribution is mandated by operation of law. It is agreed that tests, reports, or analysis results may be disclosed to third party auditors of the laboratory at the laboratory facility in the course of accreditation maintenance audits. No reference to reports or technical services of the LABORATORY shall be made in any advertising or promotional literature without the express written permission of the LABORATORY.
- 3.11 The CLIENT acknowledges that all employees of LABORATORY operate under employment contracts with the LABORATORY and CLIENT agrees not to solicit employment of such employees or to solicit information related to other clients from said employees.
- 3.12 In recognition of the relative risks and benefits of the project to both CLIENT and LABORATORY, the risks have been allocated such that the CLIENT agrees, to the fullest extent permitted by law, to limit the liability of the LABORATORY to the CLIENT for any and all claims, losses, costs, damages of any nature whatsoever or claims expenses from any cause or causes, including attorneys' fees and costs and expert witness fees and costs, so that the total aggregate liability of the LABORATORY to the CLIENT shall not exceed \$100,000, or the LABORATORY'S total fee for services rendered on this project, whichever is greater. It is intended that this limitation apply to any and all liability or cause of action however alleged or arising, unless otherwise prohibited by law.

Paragraph 4. INSURANCE:

- 4.1 LABORATORY shall secure and maintain throughout the full period of the services provided to the CLIENT adequate insurance to protect it from claims under applicable Workmen's Compensation Acts and also shall maintain one million dollars of general liability coverage to cover claims for bodily injury, death or property damage as may arise from the performance of its services.
- 4.2 The CLIENT hereby warrants that it has sufficient insurance to protect its employees adequately under applicable Workmen's Compensation Acts and for bodily injury, death, or property damage.
- 4.3 No insurance of whatever kind or type, which may be carried by either party is to be considered as in any way limiting any other party's responsibility for damages resulting from their operations or for furnishing work and materials.

Paragraph 5. PAYMENT:

- 5.1 CLIENT shall pay to LABORATORY such fees for services as previously agreed, orally or in writing, within 30 days of presentment of a bill for such services performed. In the event CLIENT ordered, orally or in writing, services but such services were not assigned a rate for billing, such services shall be billed at the LABORATORY's reasonable and customary rate.

- 5.2 CLIENT shall be responsible for all shipping, customs and other expenses related to services provided by LABORATORY to the CLIENT, and shall fully insure any test sample or other equipment provided to LABORATORY by the CLIENT.
- 5.3 Amounts overdue from CLIENT to LABORATORY shall be charged interest at a rate of 1½% per month.

Paragraph 6. ISO/IEC GUIDE 17025 ADDITIONS:

- 6.1 CLIENT agrees that this test report will not be reproduced except in full, without written approval from the LABORATORY.
- 6.2 CLIENT agrees that this test report shall not be used to claim product endorsement by A2LA or ANSI or any agency of the U.S. Government.
- 6.3 CLIENT agrees that test results presented herein relate only to the sample tested by the LABORATORY.

A2LA Accreditation

<u>SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999</u> CURTIS-STRAUS¹ 527 Great Road Littleton, MA 01460 Barry Quinlan Phone: 978-486-8880 ELECTRICAL Valid until: November 30, 2005 Certificate Number: 1627-01 In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following <u>Electromagnetic Compatibility (EMC), Telecommunications, and Product Safety tests:</u> Electromagnetic Compatibility (EMC) Radiated emissions testing (electric and magnetic fields); Conducted emissions testing (voltage and current); Electrostatic Discharge testing; Electrical Fast Transient testing; Radiated Immunity testing; Conducted Immunity testing; Lightning Immunity testing; Voltage Dips, Interrupts and Voltage Variations testing; Magnetic Immunity testing; RF Power measurements; Frequency Stability measurements; Longitudinal Induction measurements; Harmonic emissions testing; Light flicker testing; Low frequency disturbance voltage testing; Disturbance Power measurements EMC Standards <i>Emissions</i> CISPR 22 1997 with amendments 1 and 2 CNS13438 1994 EN55022:1994 and 1998 SABS CISPR 22:1997 Canada ICES-003 1997 AS/NZS 3548 1995 CISPR 11 1990, 1997, 1999 <i>Immunity</i> CISPR 14-2 1996, 1997 + A1:2001 CISPR 20: 1995, 2002 with amendment 3 (associated group only) EN 55020: 1995, 2002 (associated group only) CISPR 24 SABS CISPR 24 1997 AS/NZS 3200.1.2: 1995 <i>European Union Basic EMC Standards</i> EN 61000-4-2: 1995, 1999, 2001 EN 61000-4-3:1997, 1998, 2002 AS/NZS 61000.4.3 1999 EN 61000-4-4 1995 EN 61000-4-5 1995 AS/NZS 61000.4.5 1999 EN 61000-4-6 1996 AS/NZS 61000.4.6 1999 EN 61000-4-8 1994 EN 61000-4-11 1994 ENV 61000-2-2 1993 <i>EU Product Family Standards</i> EN 50081-1 1992 EN 50081-2 1993 EN 50082-1 1992, 1998 EN 50082-2 1995		EN 55011 1991, 1998 SABS CISPR 11:1997 Canada ICES-001 1998 CNS13803 AS/NZS 2064: 1997 CSA C108.8 – M1983 CISPR 13:1996, 1998, 2001 EN 55013: 1990, 2001 EN 55013 Amend 12 1994 SABS CISPR 13: 1996 CNS 13439 AS/NZS 1053: 1999 CISPR 14 1993 (except discontinuous disturbances) EN 55014 1993, 1997 (discontinuous disturbances) AS/NZS 1044: 1995 (discontinuous disturbances) <i>Immunity</i> CNS13783-1 SABS CISPR 14-1 1993 SABS CISPR 14-2 1997 + A1:2001 Limits and methods of measurement of radio disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment. Industrial, scientific and medical (ISM) radio-frequency equipment – Electromagnetic disturbance characteristics Limits and methods of measurement Industrial, scientific and medical (ISM) radio-frequency generators Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment. Electromagnetic Emission from Data Processing Equipment and Electronic Office Machines Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment. Sound and television broadcast receivers and associated equipment: Electromagnetic compatibility. Part 1: Specification for limits and methods of measurement of radio disturbance characteristics of broadcast receivers and associated equipment. Limits and methods of measurement of radio disturbance characteristics of broadcast receivers and associated equipment. Amendment 12 Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment. Broadcast receiver and associated equipment Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment. Limits and methods of measurement of radio disturbance characteristics of electrical motor-operated and thermal appliances for household and similar purposes, electric tools and electric apparatus. Limits and methods of measurement of radio disturbance (except characteristics of electrical motor-operated and thermal appliances for household and similar purposes, electric tools and similar electric apparatus). Limits and methods of measurement of radio disturbance (except characteristics of electrical motor-operated and thermal appliances for household and similar purposes, electric tools and similar electric apparatus). Household Electrical Appliances Electromagnetic compatibility – Requirements for household appliances, electric tools and similar apparatus Part 1: Emission – Product family standard Electromagnetic compatibility – Requirements for household appliances, electric tools and similar apparatus Part 2: Immunity - Product family standard	
(A2LA Cert. No. 1627-01) 9/22/05		Page 1 of 11	
CISPR 14-2 1996, 1997 + A1:2001 CISPR 20: 1995, 2002 with amendment 3 (associated group only) EN 55020: 1995, 2002 (associated group only) CISPR 24 SABS CISPR 24 1997 AS/NZS 3200.1.2: 1995 <i>European Union Basic EMC Standards</i> EN 61000-4-2: 1995, 1999, 2001 EN 61000-4-3:1997, 1998, 2002 AS/NZS 61000.4.3 1999 EN 61000-4-4 1995 EN 61000-4-5 1995 AS/NZS 61000.4.5 1999 EN 61000-4-6 1996 AS/NZS 61000.4.6 1999 EN 61000-4-8 1994 EN 61000-4-11 1994 ENV 61000-2-2 1993 <i>EU Product Family Standards</i> EN 50081-1 1992 EN 50081-2 1993 EN 50082-1 1992, 1998 EN 50082-2 1995		Immunity requirements for household appliances, tools and similar apparatus. Limits and methods of measurement of immunity characteristics of sound and television broadcast receivers and associated equipment. Electromagnetic immunity of broadcast receivers and Associated equipment. Information technology equipment – Immunity characteristics – Limits and methods of measurement Information technology equipment – Immunity characteristics – Limits and methods of measurement Approval and test specification – Medical electrical Equipment – General requirements for safety – Collateral Standard: Electromagnetic compatibility – Requirements and tests. Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 2: Electrostatic discharge immunity test – Basic EMC Publication Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 3: Radiated, radio-frequency, electromagnetic field immunity test Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 4: Electrical fast transient/burst immunity test – Basic EMC publication (EMC) Part 4: Testing and measurement techniques. Section 5: Surge immunity test. Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 6: Immunity to conducted disturbances, induced by radio-frequency fields. Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 8: Power frequency magnetic field immunity test. (EMC) Part 4: Testing and measurement techniques. Section 11: Voltage dips, short interruptions and voltage Variations immunity tests. Electromagnetic compatibility (EMC). Part 2: Environment, Section 2: Compatibility levels for low-frequency conducted disturbances and signaling in public low-voltage power supply systems (IEC 1000-2-2:1990) Electromagnetic capability – Generic emission standard. Part 1: Residential, commercial and light industry. (I.S.) Electromagnetic compatibility – Generic emission standard. Part 2: Industrial environment Electromagnetic compatibility – Generic emission standard. Part 1: Residential, commercial and light industry Electromagnetic compatibility – Generic immunity Standard. Part 2: Industrial environment	
(A2LA Cert. No. 1627-01) 9/22/05		Page 3 of 11	
CISPR 14-2 1996, 1997 + A1:2001 CISPR 20: 1995, 2002 with amendment 3 (associated group only) EN 55020: 1995, 2002 (associated group only) CISPR 24 SABS CISPR 24 1997 AS/NZS 3200.1.2: 1995 <i>European Union Basic EMC Standards</i> EN 61000-4-2: 1995, 1999, 2001 EN 61000-4-3:1997, 1998, 2002 AS/NZS 61000.4.3 1999 EN 61000-4-4 1995 EN 61000-4-5 1995 AS/NZS 61000.4.5 1999 EN 61000-4-6 1996 AS/NZS 61000.4.6 1999 EN 61000-4-8 1994 EN 61000-4-11 1994 ENV 61000-2-2 1993 <i>EU Product Family Standards</i> EN 50081-1 1992 EN 50081-2 1993 EN 50082-1 1992, 1998 EN 50082-2 1995		EN 61000-6-1: 1997, 2001 EN 61000-6-2: 1998, 2001 EN 50091-2 1996 EN 55024 1998 EN 55103-1 1997 EN 55103-2 1997 (excluding Annex A3) EN 61326 1998 EN 61547 1996 EN 50130-4 1996 EN 55104 1995 EN 50083-2 1995 EN 60601-1-2: 1993, 2002 IEC 1800-3 1995 EN 60555 Part 2 1987 EN 60555 Part 3 1987 EN 61000-3-2: 1995, 2000 AS/NZS 61000.3.2 1998 EN 61000-3-3 1995 AS/NZS 61000.3.3 1999 ETS 300 386-1 1994 Electromagnetic Compatibility (EMC)- Part 6: Generic standards- Section 1: Immunity for residential, commercial and light-industrial environments Electromagnetic Compatibility (EMC)- Part 6: Generic standards- Section 2: Immunity for industrial environments Specification for Uninterruptible Power Systems (UPS). Part 2: EMC requirements Information technology equipment – Immunity Characteristics – Limits and methods of measurement. Electromagnetic Compatibility – Product family standard for audio, video, audio-visual and entertainment lighting control apparatus for professional use. Part 1: Emission Electromagnetic Compatibility – Product family standard for audio, video, audio-visual and entertainment lighting control professional use. Part 2: Immunity Electrical equipment for measurement, control and laboratory use – EMC requirements Equipment for general lighting purposes – EMC immunity requirements Alarm Systems. Part 4: Electromagnetic compatibility. Product family standard: Immunity requirements for components of fire, intruder and social alarm systems. Electromagnetic compatibility immunity – requirements for household appliances, tools and similar apparatus. Product family standard. Cabled distribution systems for television and sound signals. Part 2: Electromagnetic compatibility for equipment. Medical electrical equipment Part 1: general requirements for safety Section 2: Collateral standard: Electromagnetic compatibility – requirements and tests Adjustable speed electrical power drive systems. Part 3: EMC product standard including specific test methods. Disturbances in supply systems caused by household appliances and similar electrical equipment. Part 2: Harmonics Disturbances in supply systems caused by household appliances and similar electrical equipment. Part 3: Voltage fluctuations. Electromagnetic compatibility (EMC). Part 3: Limits Section 2: Limits for harmonic current emissions Electromagnetic compatibility (EMC). Part 3: Limits Section 2: Limitation of voltage fluctuations and flicker in low-voltage supply systems. Equipment Engineering (EE): Public telecommunication network equipment electro-magnetic compatibility (EMC) requirements Part 1: Product family overview, compliance criteria and test levels	
(A2LA Cert. No. 1627-01) 9/22/05		Page 4 of 11	

ETS EN 300 386-2 1997, 1998, ETS EN 300 386 2000 v1.2.1, 2001 v1.3.1 ETS 300 132-1 1996 ETS 300 132-2 1996 ETR 283 1997 <i>EU radio standards</i> (ETS) EN 300 385 v1.2.1: 1998, 1999 EN 300 330 v1.2.1: 1998, 1999 ETS 300 328 1996 ETS EN 300 440 v1.2.1 1999 EN 301 893:2002 v1.2.1 ETS 300 836-1:1998 EN301 489-17:2002 v1.2.1 (A2LA Cert. No. 1627-01) 9/22/05	Electromagnetic compatibility and radio spectrum matters (ERM); Telecommunication network equipment; Electromagnetic compatibility (EMC) requirements; Part 2: Product family standard. Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 1: Operated by alternating current (ac) derived from direct current (dc) sources Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by direct current (dc) Equipment Engineering (EE); Transient voltages at Interface A on telecommunications direct current (DC) power distributions. Electromagnetic compatibility and Radio spectrum matters (ERM); Electromagnetic Compatibility (EMC) standard for fixed radio links and ancillary equipment (ETS) Electromagnetic compatibility and Radio spectrum matters (ERM); Short range devices (SRD); Technical characteristics and test methods for radio equipment in the range 9 kHz to 25 MHz and inductive loop systems in the frequency range 9 kHz to 30 MHz Radio Equipment and Systems (RES); Wideband transmission systems; Technical characteristics and test conditions for data transmission equipment operating in the 2,4 GHz ISM band and using spread spectrum modulation techniques Electromagnetic compatibility and Radio spectrum matters (ERM); Short range devices; Technical characteristics and test methods for radio equipment to be used in the 1 GHz to 40 GHz frequency range Broadband Radio Access Networks (BRAN); 5 GHz (draft) high performance RLAN; Harmonized EN covering Essential requirements of article 3.2 of the R&TTE Directive Broadband Radio Access Networks (BRAN); High Performance Radio Local Area Network (HIPERLAN) Type 1; Conformance testing specification; Part 1: Radio Type approval and Radio Frequency (RF) conformance test specification Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for 2,4 GHz wideband transmission systems and 5 GHz high performance RLAN equipment Page 5 of 11	EN 300 328-2:2001 v1.2.1 EN 301 489-1:2002 EN 60669-2-1:2002 <i>Canada Radio Standards</i> Canadian GL-36 1995 Canadian RSS-119 1999, 2000 Issue 6 Canadian RSS-134 1996 & 2000, Issue 1 Rev 1 Canadian RSS-210 2000 Issue 3, RFS29 1998 <i>FCC Standards</i> 47 CFR FCC low power transmitters operating on frequencies below 1 GHz, emergency alert systems, unintentional radiators and ISM devices. 47 CFR FCC low power transmitters operating on frequencies above 1 GHz, with the exception of spread spectrum devices. 47 CFR FCC Unlicensed Personal Scope Communications System (PCS) devices 47 CFR FCC Unlicensed National Scope Information Infrastructure devices and low power transmitters using spread spectrum techniques. 47 CFR FCC Personal mobile Scope Radio Services in the following FCC Rule Parts 22, 24, 25, 27. 47 CFR FCC General Mobile Radio Scope Services in the following FCC Rule Parts 22, 74, 90, 95, 97. 47 CFR FCC Maritime and Aviation Scope Radio Services in 47 CFR Parts 80 and 87 47 CFR FCC Microwave Radio Services Scope in 47 CFR Parts 21, 74 and 101. Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using spread spectrum modulation techniques; Part 2: Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements Switches for household and similar fixed electrical installations -- Part 2-1: Particular requirements -- Electronic switches Industry Canada -- technical requirements for low power Devices in the 2400 -- 2483.5 MHz band. Industry Canada -- Land mobile and fixed radio Transmitters and receivers, 27.41 to 960.0 MHz Industry Canada -- 900 MHz narrowband personal communications services Industry Canada -- Low power license-exempt radio 2001 Issue 5 communication devices Specification for Restricted Radiation Radio Apparatus (New Zealand) Scope A1 Scope A2 A3 A4 B1 B2 B3 B4 (A2LA Cert. No. 1627-01) 9/22/05
FCC/OST MP-5 1986 GR-1089-CORE: 1997, 1999 issue 2/ 2002 Issue 3 <i>ANSI EMC Standards</i> ANSI C63.4: 1992, 1999, 2001, 2003 ANSI C63.5 1988 <i>IEEE EMC Standards</i> IEEE C62.41: 1980, 1991 <i>Swedish EMC Standards</i> BAKOM 3336.3 1995 <i>South African EMC standards other than CISPR equivalents</i> SABS 1718-1: 1996 <i>Japanese VCCI Standards</i> VCCI V-3/99.05 1999 VCCI V-4/99.05 1999 Telecommunications Telecommunications Registration; General test methods; Lightning surge; Drop testing; Balance testing; Signal power (metallic and longitudinal); Frequency measurements; Pulse templates; Leakage testing; Impedance testing; Hearing Aid Compatibility testing (<i>excluding volume control</i>); Protocol analysis and Jitter testing. Telecom Standards FCC 47 CFR Part 68 Telephone CS-03 Issue 8 1996 through amendment 5 TIA/EIA TSB31-B 1998 (A2LA Cert. No. 1627-01) 9/22/05	FCC (Federal Communications Commission) methods Of measurement of radio noise emissions from industrial, scientific and medical equipment. Bellcore electromagnetic compatibility and electrical safety -- Generic criteria for network telecommunications equipment. American National Standard for methods of measurement of radio-noise emissions for low-voltage electrical and electronic equipment in the range of 9 kHz to 40GHz. American National Standard for electromagnetic compatibility -- radiated emissions measurements in electromagnetic interference (EMI) control -- calibration of antennas. IEEE recommended practice on surge voltages in low-voltage AC power circuits Electromagnetic compatibility and electrical safety (EMC & S) for wired terminal equipment. Harmonization document information over the OFCOM requirements. South African Bureau of Standards; Specification for Gaming equipment. Part 1: Casino equipment. Technical Requirements Instruction for Test Conditions for Requirement under Test Connection of terminal equipment to the telephone Terminal Equipment network. Analog and Digital Equipment. TCB Scope C1. Specification for terminal equipment, terminal systems, Network protection devices, connection arrangements and hearing aids compatibility. Bulletin Part 68 Rationale and Measurement Guidelines (Feb 1998) Page 7 of 11	TIA/EIA-IS-968 TIA/EIA-IS-883 TIA-968-A T1.TRQ.6-2001 Canada VDSL Issue 1 January 2003 AS/ACIF S002-2001 AS/ACIF S016-2001 AS/ACIF S031-2001 AS/ACIF S038-2001 AS/ACIF S043-2001 ITU-T G.703 HKTA 2028 HKTA 2029 TBR 1 : 1995 TBR 2 : 1997 Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone Network Telecommunications Telephone Terminal Equipment Supplemental Technical Requirements for Connection of Stutter Dial Tone Detection Devices and ADSL Modems to the Telephone Network Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone Network Technical Requirements for SHDSL, HDSL2, HDSL4 Digital Subscriber Line Terminal Equipment to Prevent Harm to the Telephone Network Industry Terminal Attachment Program Requirements and Test Methods for Very-High-Bit-Rate Digital Subscriber Line (VDSL) Terminal Equipment Analogue interworking and non-interference requirements for Customer Equipment for connection to the Public Switched Telephone Network Requirements for Customer Equipment for connection to hierarchical digital interfaces Requirements for ISDN Basic Access Interface Requirements for ISDN Primary Rate Access Interface Requirements for Customer Equipment for Connection to a Metallic Local Loop Interface of a Telecommunications Network --- Part 1: General Part 2: Broadband Part 3: DC, Low Frequency AC and Voiceband Physical/electrical characteristics of hierarchical Digital interfaces Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 1544 kbit/s Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 2048 kbit/s Attachment requirements for terminal equipment to be connected to circuit switched data networks and leased circuits using a CCITT Recommendation X.21 interface, or at an interface physically, functionally and electrically compatible with CCITT Recommendation X.21 but operating at any data signaling rate up to, and including, 1 984 kbit/s Attachment requirements for Data Terminal Equipment (DTE) to connect to Packet Switched Public Data Networks (PSPDNs) for CCITT Recommendation X.25 interfaces at data signaling rates up to 1 920 kbit/s utilizing interfaces derived from CCITT Recommendations X.21 and X.21 bit (A2LA Cert. No. 1627-01) 9/22/05

TBR 3 : 1995 + Amdt : 1997 TBR 4 : 1995 + Amdt : 1997 TBR 012 : 1993 + Amdt : 1996 TBR 013 : 1996 TBR 21 : 1998 TBR 24 : 1997 Australia TS 002 : 1997 TS 016 : 1997 TS 031 : 1997 TS 038 : 1997 AS/ACIF S043.2:2001 Product Safety General test methods; Input tests; Electric strength tests; Impulse tests; Permanency of marking tests; Accessibility tests; Energy Hazard measurements; Capacitor discharge tests; Humidity conditioning; Earthing tests; Limited power source measurements; Stability tests; Steel ball tests; Lithium Battery Reverse Current measurements; Leakage current tests; Transformer abnormal tests; Telecom leakage tests; Over voltage/power cross tests (excluding x-ray tests). <u>Product Safety Standards</u> Specific Product Safety Standards IEC 950 1991 UL 1950 1998 CSA C22.2 No.950-95 UL 60950 2000 (A2LA Cert. No. 1627-01) 9/22/05	Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN basic access Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN primary rate access Business Telecommunications (BT); Open Network Provision (ONP) technical requirements; 2 048 kbit/s digital unstructured leased line (D2048U) Attachment requirements for terminal equipment Business Telecommunications (BTC); 2 048 kbit/s digital structured leased lines (D2048S); Attachment requirements for terminal equipment interface Terminal Equipment (TE); Attachment requirements for pan-European approval for connection to the analogue Public Switched Telephone Networks (PSTNs) of TE (excluding TE supporting the voice telephony service) in which network addressing, if provided, is by means of Dual Tone Multi Frequency (DTMF) signaling Business Telecommunications (BTC); 34 Mbit/s digital Unstructured and structured leased lines (D34U and D34S); Attachment requirements for terminal equipment interface Analogue Interworking and Non interference Requirements for Customer Equipment Connected to the Public Switched Telephone Network General Requirements for Customer Equipment Connected to Hierarchical Digital Interfaces Requirements for ISDN Basic Access Interface Requirements for ISDN Primary Rate Access Interface Requirements for Customer Equipment for connection to a metallic loop interface of a Telecommunications Network – Part 2 Broadband <u>Title</u> Safety of information technology equipment including Includes Amendments 1, 2, 3, and 4 electrical business equipment. Safety of information technology equipment, including lectrical business equipment. Safety of Information Technology Equipment (UL 1950) Safety of information technology equipment Page 9 of 11	IEC 60950 2000 EN 60950 1997, 1998, 2000 IEC 60950-1 2001 UL 60950-1 2003 CSA C22.2 No. 60950-00 CSA C22.2 No. 60950-1 03 AS/NZS 3260 1993 AS/NZS 3260 Supp 1 1996 ACA TS 001 1997 UL 1459 1995 IEC 1010-1 1990 IEC 61010-1 1993 EN 61010-1 1993, 2001 IEC 61010-1 2001 UL 61010B-1 2003 UL 3101-1 1993 CAN/CSA 1010-1 1999 (Including AM 2) UL 3111-1 1996 UL 3121-1 1995 IEC 60601-1 1995 EN 60601-1 1995 (Including AM 2) UL 2601-1 1997 IEC 60065 1998, 2000 ANSI/UL 6500: 1998 CAN/CSA 60065-00 AS/NZS 3250 1995 AS/NZS 60065 2000 Canadian C22.2 No. 1-94 (1-98) 1998 EN 60065 1994 IEC 60825 1990 EN 60825-1 1994 IEC 60825-1 2001 IEC 60825-2 2000-5 IEC 60825-4 1997-11 IEC 60335-1 1995 (Including AM2 – 1997 & AM 12 – 1997) EN 60335-1 2001 UL 60335-1 1998 CAN/CSA E335-1 1994 Page 10 of 11	Safety of information technology equipment Safety of information technology equipment, including Electrical business equipment. Approval and test specification – Safety of information technology equipment including electrical business Equipment. Approval and test specification – Safety of information technology equipment including electrical business equipment – Alphabetical reference index to IEC 950 (Supplement to AS/NZS 3260:1993) Australian Communications Authority – Safety requirements for customer equipment. Telephone Equipment Safety requirements for electrical equipment for measurement, control and laboratory use, Part 1: General requirements. Safety requirements for electrical equipment for measurement, control and laboratory use, Part 1: General requirements. Electrical equipment for laboratory use Part 1: General requirements. Electrical measuring and test equipment. Part 1: General requirements. Medical electrical equipment. Part 1: General requirements for safety. Medical electrical equipment Medical electrical equipment. Part 1: General Requirements for safety. Audio, video and similar electronic apparatus – Safety requirements Audio/video and musical instrument apparatus for Household, commercial and similar general use Australian/New Zealand Standard – Approval and test Specification – Mains operated electronic and related Equipment for household and similar general use Audio, video and similar electronic equipment. Consumer and 1994, commercial products Safety requirements for main operated electronic and related apparatus for household and similar general use. Radiation safety of laser products, equipment Classification, requirements and user's guide Safety of laser products Part 1: equipment Classification, requirements and user's guide. Safety of laser products – Part 2: Safety of optical communication systems Safety of laser products – Part 4: Laser guards Safety of household and similar electrical appliances Part 1: General requirements
UL 61010A-1 : 2002 EN 61010-1 : 2001 AS/NZS 60950 : 2000 Environmental² <u>Environmental Standards</u> GB-63-CORE ETS 300 019 (vibration up to 1000Hz) Page 11 of 11	Electrical equipment for laboratory use; part 1: General requirements Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 1: General requirements Safety information technology equipment <u>Title</u> NEBS Requirements: Physical Protection Environmental conditions and environmental tests For telecommunications equipment		

² Environmental testing is performed at the satellite facility located at 168 Ayer Rd, Littleton, MA 01460