

Test Report

Electromagnetic Compatibility



Test report file no: E-0053-1426-03 JP
Applicant: Funkwerk Enterprise Communications GmbH
Olgastrasse 152
89073 Ulm
Germany

Contact person: Mr. Rolf Leukel
Model: Core 11b
FCC ID: SPT-CM11B-01

Kind of Product: WLAN transmitter module

Manufacturer: Same as applicant

Test result Emission tests: Pay attention to page 7

Date of issue: 2005 December 06

The testresult only responds to the tested sample.
It is not allowed to copy this report partly without the allowance of the test laboratory.

DIRECTORY

IDENTIFICATION OF THE TEST LABORATORY	3
DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT):	4
OPERATION MODES	5
ENVIRONMENTAL CONDITIONS.....	6
STATEMENT OF MEASUREMENT UNCERTAINTY	6
TEST SPECIFICATION.....	7
SUMMARY:.....	8
MEASUREMENT SETUP RADIATED EMISSIONS	27
PHOTO TESTSETUP RADIATED EMISSION.....	28
PHOTOS OF THE EUT	30

IDENTIFICATION OF THE TEST LABORATORY

Company name: *emitel* AG

Address: Ohmstrasse 1
D-94342 Strasskirchen
Germany

Contact person: Dieter Fröhlich

Contact address: Phone: +49 9424 9482-774
Fax.: +49 9424 94-640
eMail: germany@emitel.de
Homepage: www.emitel.de

FCC Registration number: 765810

DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT):

Date of receipt of test sample: According to storage records of Emitel AG
Testing Start Date: 2005-December-05
Testing End Date: 2005-December-05

Number of received/tested samples: 1x Core module "Core11b"
1x Antenna "ANT-UFL.KS-EMB-2-5GHz-17,5cm"
1x Antenna "ANT-RSMA.KS-O-022-03-0,1m"

Serial Number: none

FCC-ID: SPT-CM11B-01

Voltage consumption: 3.3V DC

Product status:
☐ Development Sample
☐ Preproduction Sample
☒ Production Sample

Dimensions:
Core11b
L x W x H: 50.95 mm x 59.75 mm x 8 mm
ANT-UFL.KS-EMB-2-5GHz-17,5cm
L x W x H: 59 mm x 6 mm x 0.5 mm
ANT-RSMA.KS-O-022-03-0,1m
L x W x H: 70 mm x 18 mm x 6 mm

Following system devices are parts of the EUT and were connected during the measurement:

Antenna "ANT-UFL.KS-EMB-2-5GHz-17,5cm", cable length: 15cm
Antenna "ANT-RSMA.KS-O-022-03-0,1m", cable length: 10cm

Following equipment were connected/used during the measurement:

Laboratory Power Supply; PS-302A; Conrad Electronic; Emitel Equipment ID: 01-05/04-01-003
WLAN Device; CPI-b-E-HO-PAC; artem GmbH; SN: 306000013; PN: 200180
Laptop; SP4600; Thoshiba; SN: 11129435G SS460-0; FCC ID: CJ6PS460WL
Mouse; Mouse 2.0; Microsoft; SN: 01729374; PN: 45717; FCC ID: C3KAZB1

OPERATION MODES

OPERATION MODES:

TX&RX-mode at: CH6 middle channel 2437 MHz

EUT MONITORING

Data transfer between Laptop and EUT observed at Laptop screen.

ENVIRONMENTAL CONDITIONS

Temperature 20 °C
Humidity 50 %
Atmospheric pressure: 860-1060 mbar

STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report according to NIS 81 /5.1994 „The Treatment of Uncertainty in EMC Measurements“ and is documented in the emitel quality system according to EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

TEST SPECIFICATION

The tests were performed according to the following specifications:

- | | | | |
|-------------------------------------|-----------------------|--|-----------------|
| ☒ | FCC Part 15 Subpart A | Code of Regulations Part 15 (Radio Frequency Devices), Subpart A (General) of the Federal Communication Commission (FCC) | September, 2005 |
| ☒ | FCC Part 15 Subpart C | Code of Regulations Part 15 (Radio Frequency Devices), Subpart C (Intentional Radiators) of the Federal Communication Commission (FCC) | September, 2005 |
| ☒ | ANSI C63.4 | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz - 40 GHz | 2003 |

FCC Part 15 Subpart C

Specification	Result	Remarks
§15.207 Conducted emission (150kHz-30MHz)	Not performed	None
§15.209 Radiated emission (150kHz-26GHz)	limit kept	None
§15.247 Operation within the band 2400GHz-2483.5GHz	Not performed	None

REMARK:

This testreport is only valid with emitel testsreport no: E-0053-1426-02 JP


SUMMARY:

This testreport is only valid with emitel testsreport no: E-0053-1426-02 JP

FINAL JUDGEMENT

Strasskirchen, 2005 December 06

emitel AG



Dieter Fröhlich
Dipl. Ing. (FH)
Director

Test engineer:



Jürgen Pessinger

Radiated emission

(30 MHz – 1000 MHz)

TEST CONDITIONS AND RESULTS:

Radiated emissions are measured over the frequency range from 30 MHz to 1 GHz. The bandwidth of the EMI-receiver is set to 120 kHz and the detector-function is set to CISPR quasi-peak.

The test setup is made in accordance with ANSI C63.4-2001. Measurements are made in both the horizontal and vertical planes of polarization. Preliminary scans are taken in a full-anechoic room using a spectrum analyzer with the detector function set to peak. This preliminary scans were performed at the lowest, middle and highest channel to find the worst case. Final measurement was performed with in this worst case. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

All tests are performed at a test-distance of 3 meters. For final testing an open-area test-site is used. During the tests the EUT is rotated all around and the receiving-antenna is raised and lowered from 1 meter to 4 meters to find the maximum levels of emissions. The cables and equipment is placed and moved within the range of position likely to find their maximum emissions.

☐ Test not applicable

Test location: ☒ A3, Pretest
☒ OATS 3, Final test

Antenna EuT distance: ☒ 3 m, Pretest
☒ 3 m, Final test

Used test instruments and test accessories:

Test instrument	Type	Manufacturer	ID - No.
Spectrum Analyser	FSP 30	Rohde & Schwarz	01-01/01-01-063
Antenna	3142 B	EMCO	01-01/01-01-067
HF-Cable	RG 213	Suhner	01-05/02-01-043
HF-Cable	RG 213	Emitel	01-05/02-01-038
Preamplifier	TVV 695	MTS	01-05/02-01-016
Receiver	ESVP	Rohde & Schwarz	01-01/01-01-035
Antenna	VULB 9163	Schwarzbeck	01-01/01-01-059
HF-Cable	RG 217	Suhner	01-05/02-01-048
HF-Cable	RG 214	Emitel	01-05/02-01-050

TEST RESULTS:

The requirements are: ☒ MET ☐ NOT MET

Remarks:

FINAL TEST RADIATED EMISSIONS:

Horizontal Antenna Polarization

Test distance: 3 m


Project file:	E-0053-1426-03	Mode:	
Applicant:	Funkwerk GmbH	TX- & RX-mode	
Model:	Core11b	CH06	
Date of test:	05.12.2005	worst case situation	
Operator:	Jürgen Pessinger	115V/60Hz	
		Antenna:	
		ANT-UFL.KS-EMB-2-5GHz-17,5cm	

Detector: QuasiPeak
Result: Limit kept

FCC Part 15

Subpart C, Limit QP

Horizontal Polarization

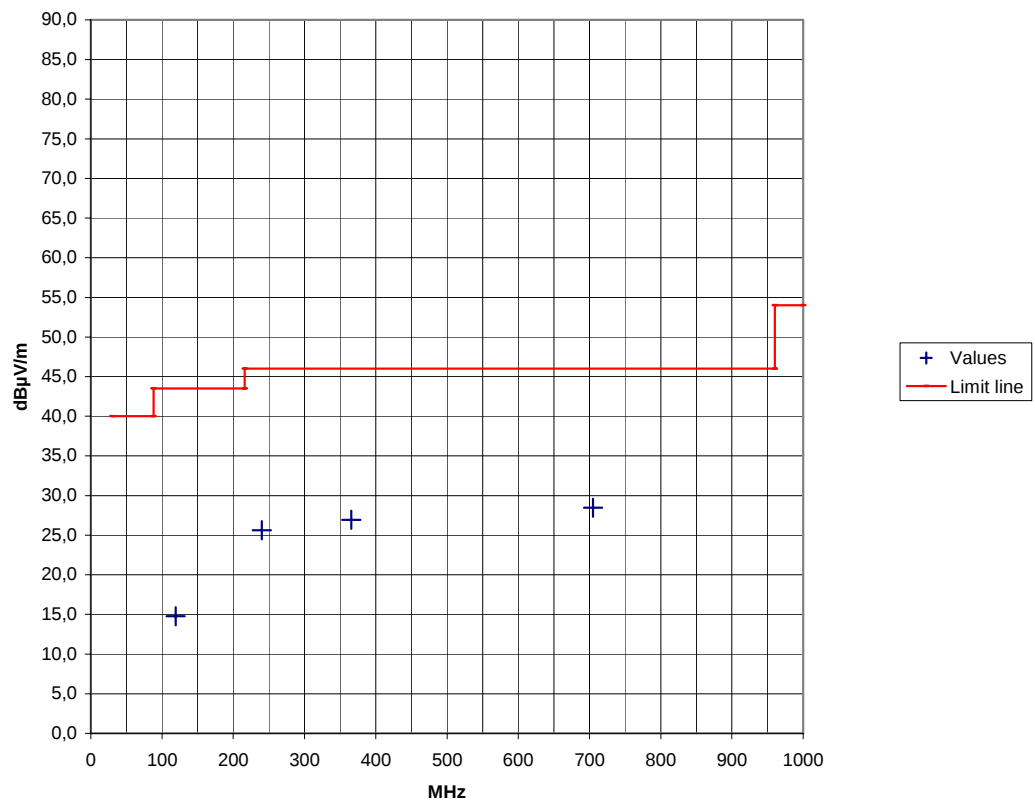

FINAL TEST RADIATED EMISSION:

Vertical Antenna Polarization

Test distance:

3 m

Project file: E-0053-1426-03
Applicant: Funkwerk GmbH
Model: Core11b
Date of test: 05.12.2005
Operator: Jürgen Pessinger


Mode:
TX- & RX-mode
CH06
worst case situation
115V/60Hz
Antenna:
ANT-UFL.KS-EMB-2-5GHz-17,5cm

Detector: QuasiPeak
Result: Limit kept

FCC Part 15

Subpart C, Limit QP

Vertical Polarization

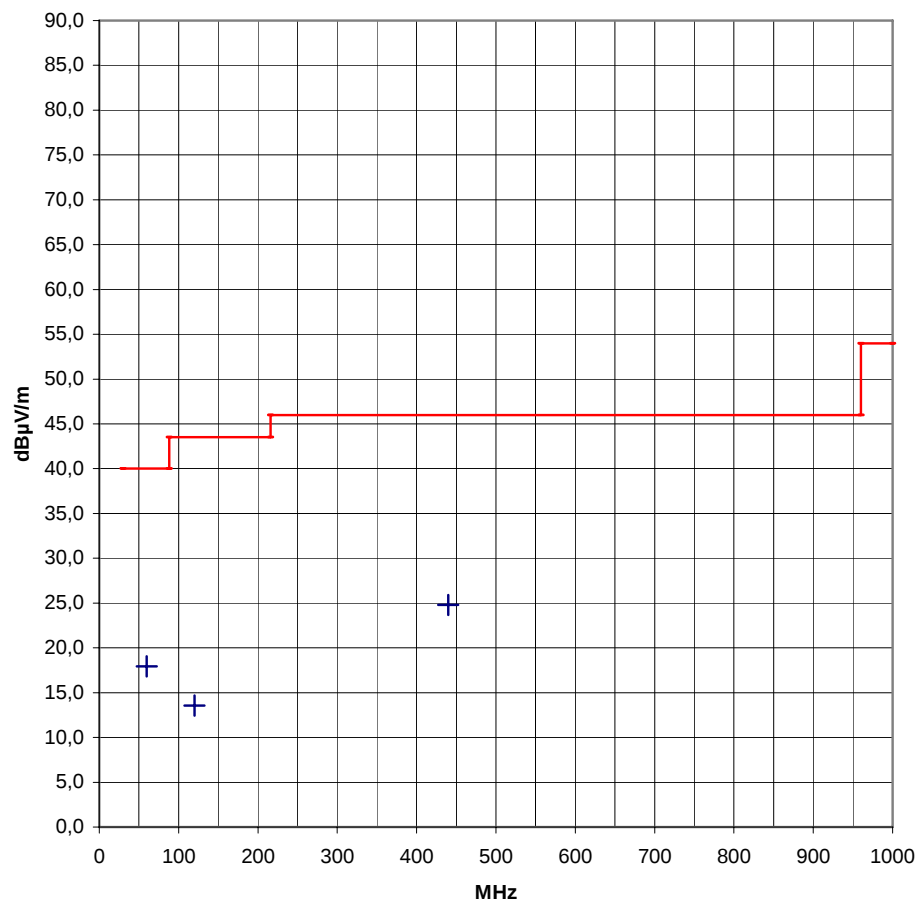

FINAL TEST RADIATED EMISSIONS:

Horizontal Antenna Polarization

Test distance: 3 m


Project file:	E-0053-1426-03	Mode:	
Applicant:	Funkwerk GmbH	TX- & RX-mode	
Model:	Core11b	CH06	
Date of test:	05.12.2005	worst case situation	
Operator:	Jürgen Pessinger	115V/60Hz	
		Antenna:	
		ANT-RSMA.KS-O-022-03-0,1m	

Detector: QuasiPeak
Result: Limit kept

FCC Part 15

Subpart C, Limit QP

Horizontal Polarization

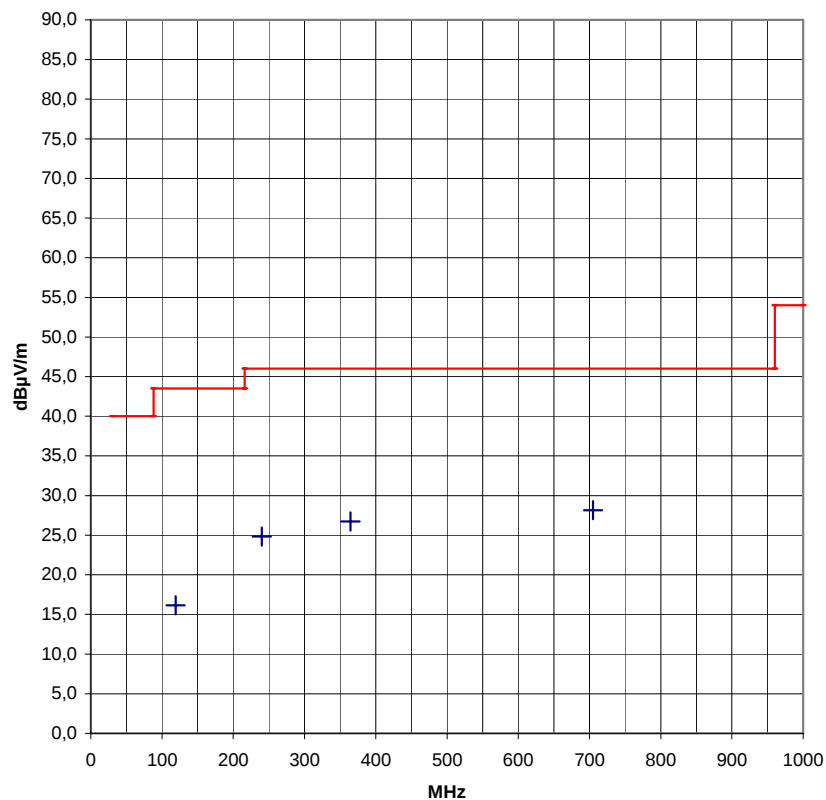

FINAL TEST RADIATED EMISSION:

Vertical Antenna Polarization

Test distance:

3 m

Project file: E-0053-1426-03
Applicant: Funkwerk GmbH
Model: Core11b
Date of test: 05.12.2005
Operator: Jürgen Pessinger


Mode:
TX- & RX-mode
CH06
worst case situation
115V/60Hz
Antenna:
ANT-RSMA.KS-O-022-03-0,1m

Detector: QuasiPeak
Result: Limit kept

FCC Part 15

Subpart C, Limit QP

Vertical Polarization

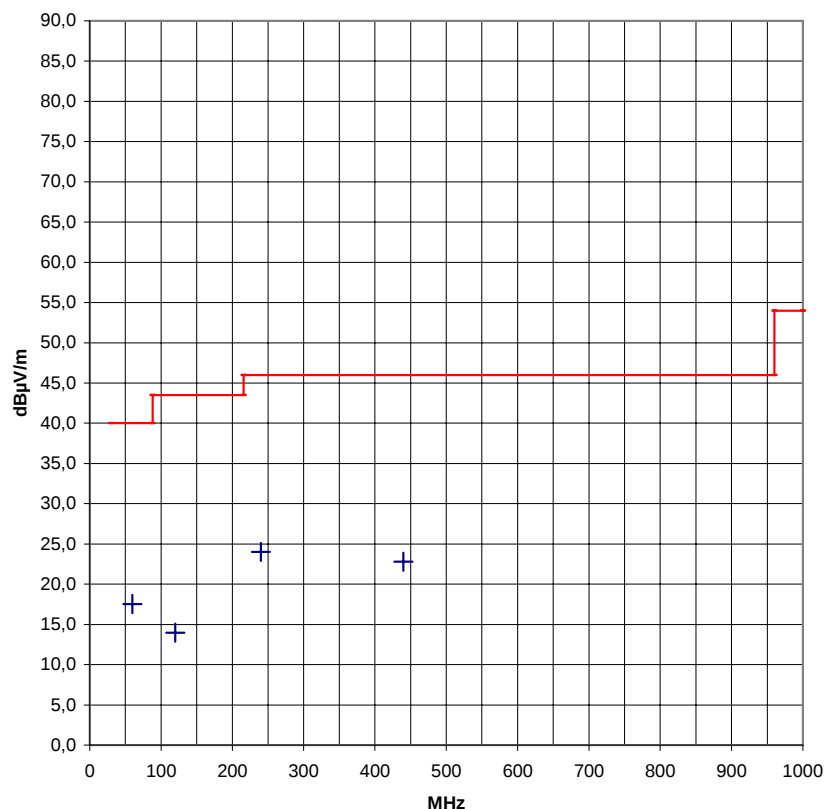

Radiated emission

(1 GHz – 26 GHz)

TEST CONDITIONS AND RESULTS:

Radiated emissions are measured over the frequency range from 1 GHz to 26 GHz. The bandwidth of the spectrum analyser is set to 1 MHz and the detector-function is set to average.

The test setup is made in accordance with ANSI C63.4-2001. Measurements are made in both the horizontal and vertical planes of polarization. Preliminary scans and final testing are performed in a full-anechoic room using a spectrum analyzer with the detector function set to peak. The preliminary scans were performed at the lowest, middle and highest channel to find the worst case. Final measurement was performed with this worst case. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

All tests are performed at a test-distance of 3 meters. The cables and equipment is placed and moved within the range of position likely to find their maximum emissions.

☐ Test not applicable

Test location: ☒ A3

Antenna EuT distance: ☒ 3 m

Used test instruments and test accessories:

Test instrument	Type	Manufacturer	ID - No.
Spectrum Analyser	FSP 30	Rohde & Schwarz	01-01/01-01-063
Preamplifier	AMF-40-005-180-24-10P	MITEQ Inc.	01-02/01-02-005
Antenna Horn 1-18GHz	3115	ETS EMC Systems LP	01-01/01-01-062
Antenna Horn 18-26,5GHz	3160-09	ETS EMC Systems LP	01-05/02-01-002
HF-cable	FA210A0050M	Anritsu GmbH	01-05/02-01-034

TEST RESULTS:

The requirements are: ☒ MET ☐ NOT MET

Remarks:

FINAL TEST RADIATED EMISSIONS:

Horizontal Antenna Polarization

Test distance:

3 m

Project file: E-0053-1426-03

Applicant: Funkwerk GmbH

Model: Core11b

Date of test: 05.12.2005

Operator: Jürgen Pessinger

Detector: AV

Result: Limit kept

Mode:

TX- & RX-mode

CH06

worst case situation


115V/60Hz

Antenna:

ANT-UFL.KS-EMB-2-5GHz-17,5cm

FCC Part 15 Subpart C, Limit AV

Horizontal Polarization

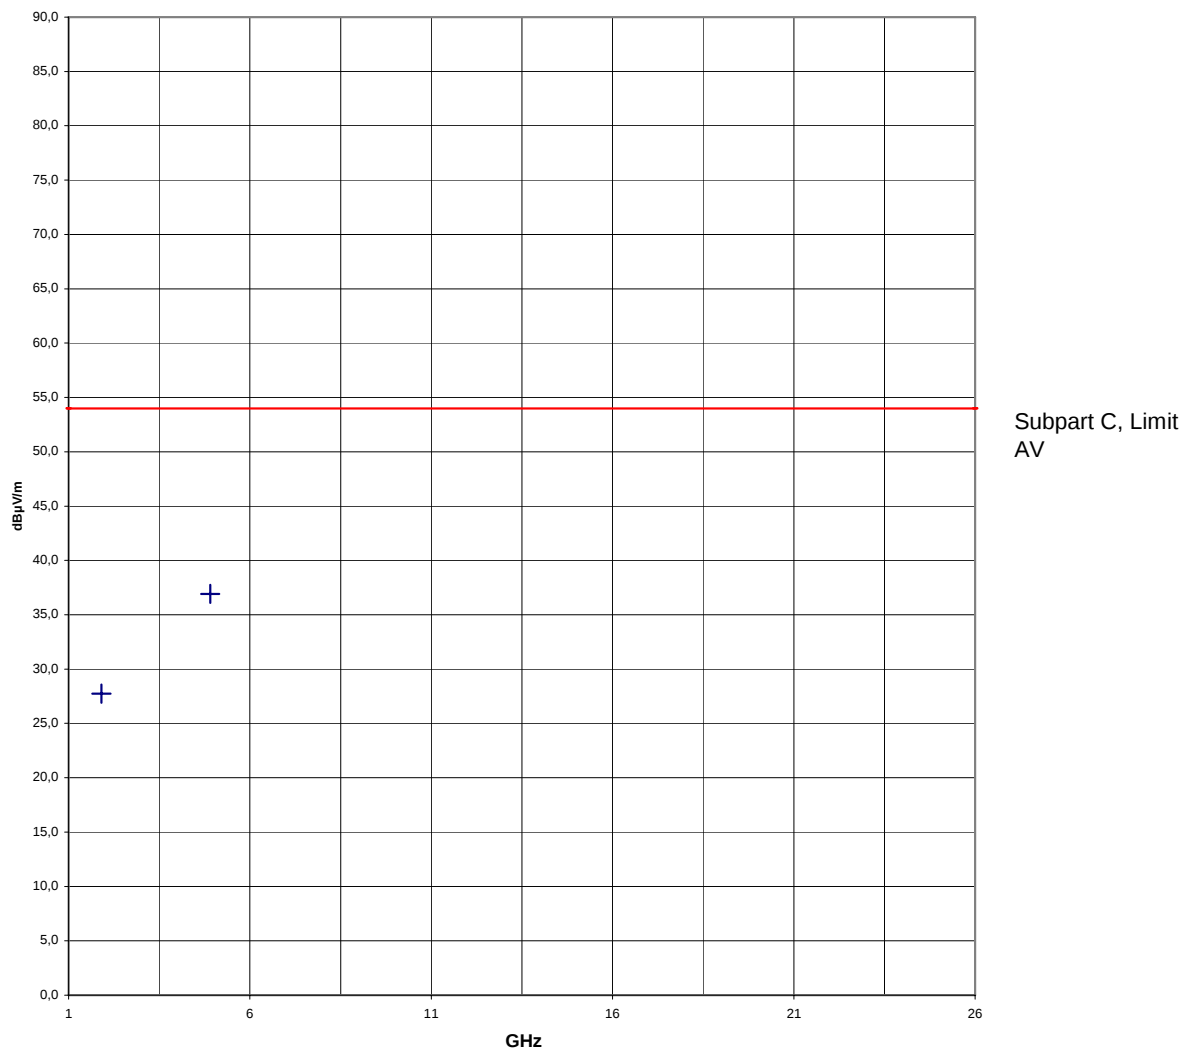

FINAL TEST RADIATED EMISSION:

Vertical Antenna Polarization


Test distance:

3 m

Project file:	E-0053-1426-03	Mode:	
Applicant:	Funkwerk GmbH	TX- & RX-mode	
Model:	Core11b	CH06	
Date of test:	05.12.2005	worst case situation	
Operator:	Jürgen Pessinger	115V/60Hz	
Detector:	AV	Antenna:	
Result:	Limit kept	ANT-UFL.KS-EMB-2-5GHz-17,5cm	

FCC Part 15 Subpart C, Limit AV

Vertical Polarization

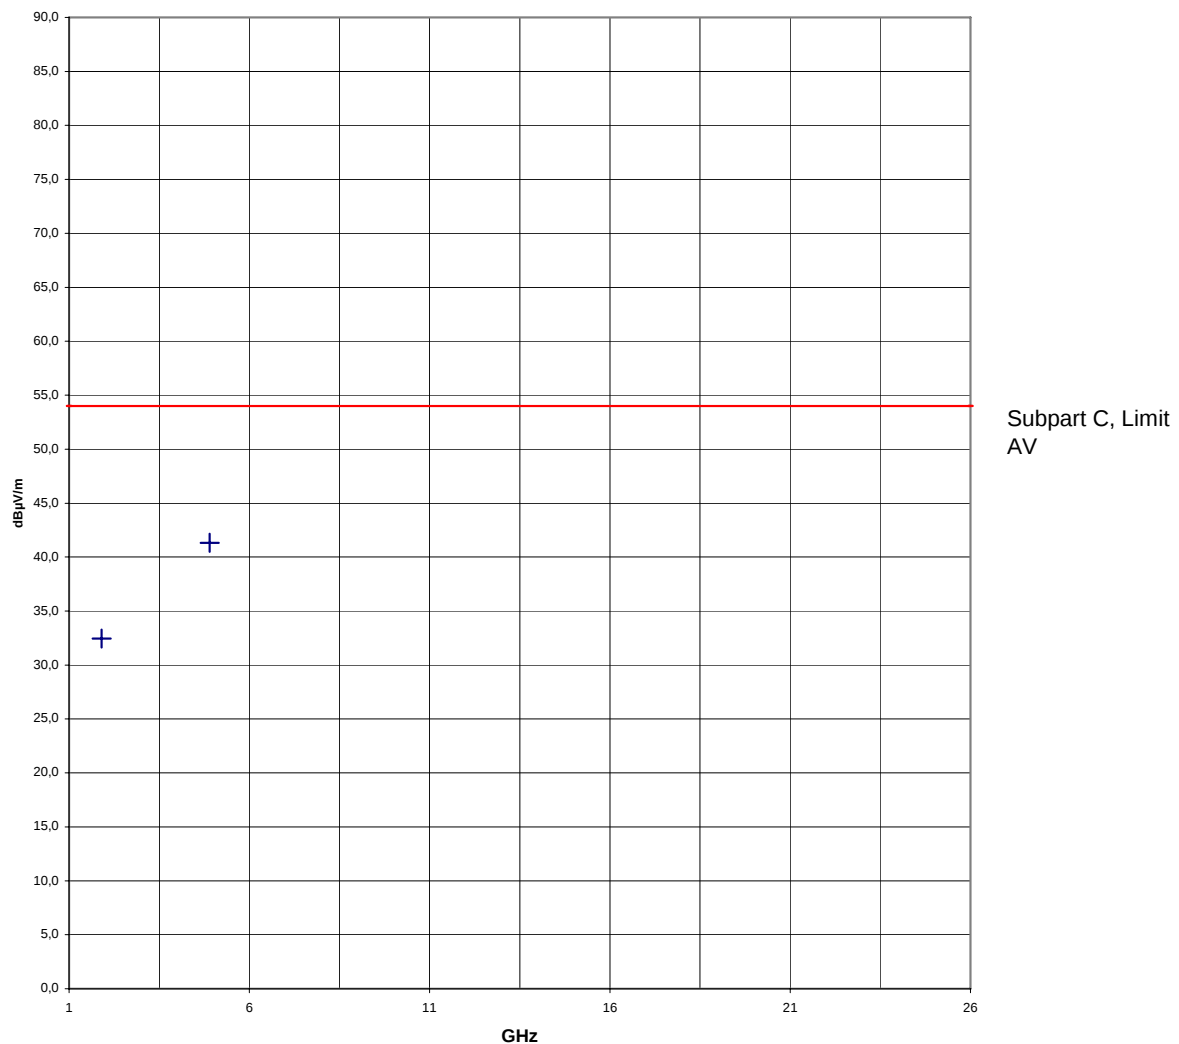

FINAL TEST RADIATED EMISSIONS:

Horizontal Antenna Polarization

Test distance:


3 m

Project file: E-0053-1426-03
Applicant: Funkwerk GmbH
Model: Core11b
Date of test: 05.12.2005
Operator: Jürgen Pessinger
Detector: AV
Result: Limit kept

Mode: TX- & RX-mode
CH06
worst case situation
115V/60Hz
Antenna:
ANT-RSMA.KS-O-022-03-0,1m

FCC Part 15 Subpart C, Limit AV

Horizontal Polarization

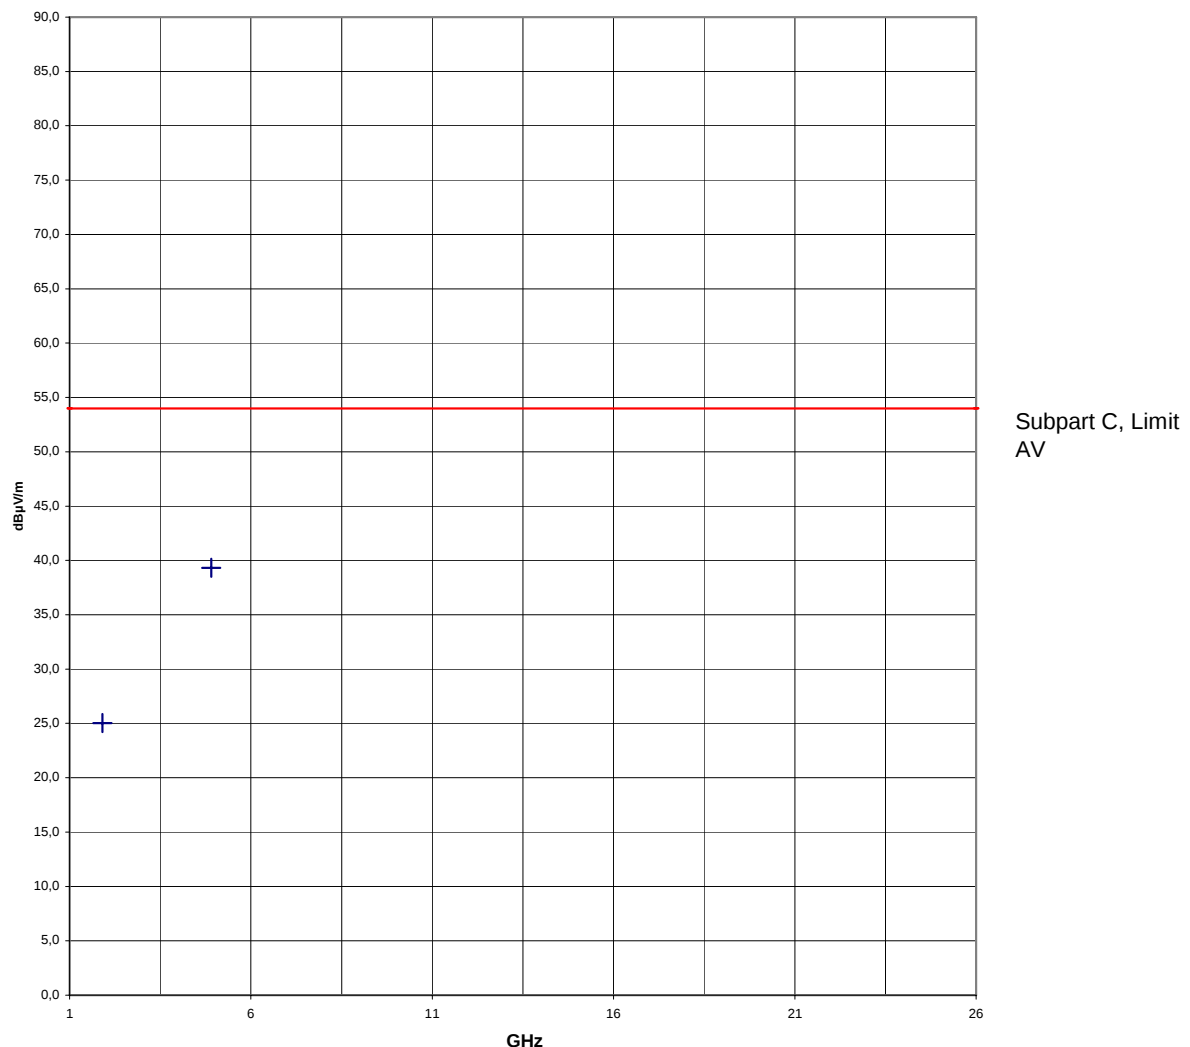

FINAL TEST RADIATED EMISSION:

Vertical Antenna Polarization

Test distance:


3 m

Project file: E-0053-1426-03
Applicant: Funkwerk GmbH
Model: Core11b
Date of test: 05.12.2005
Operator: Jürgen Pessinger
Detector: AV
Result: Limit kept


Mode:
TX- & RX-mode
CH06
worst case situation
115V/60Hz
Antenna:
ANT-RSMA.KS-O-022-03-0,1m

FCC Part 15 Subpart C, Limit AV

Vertical Polarization

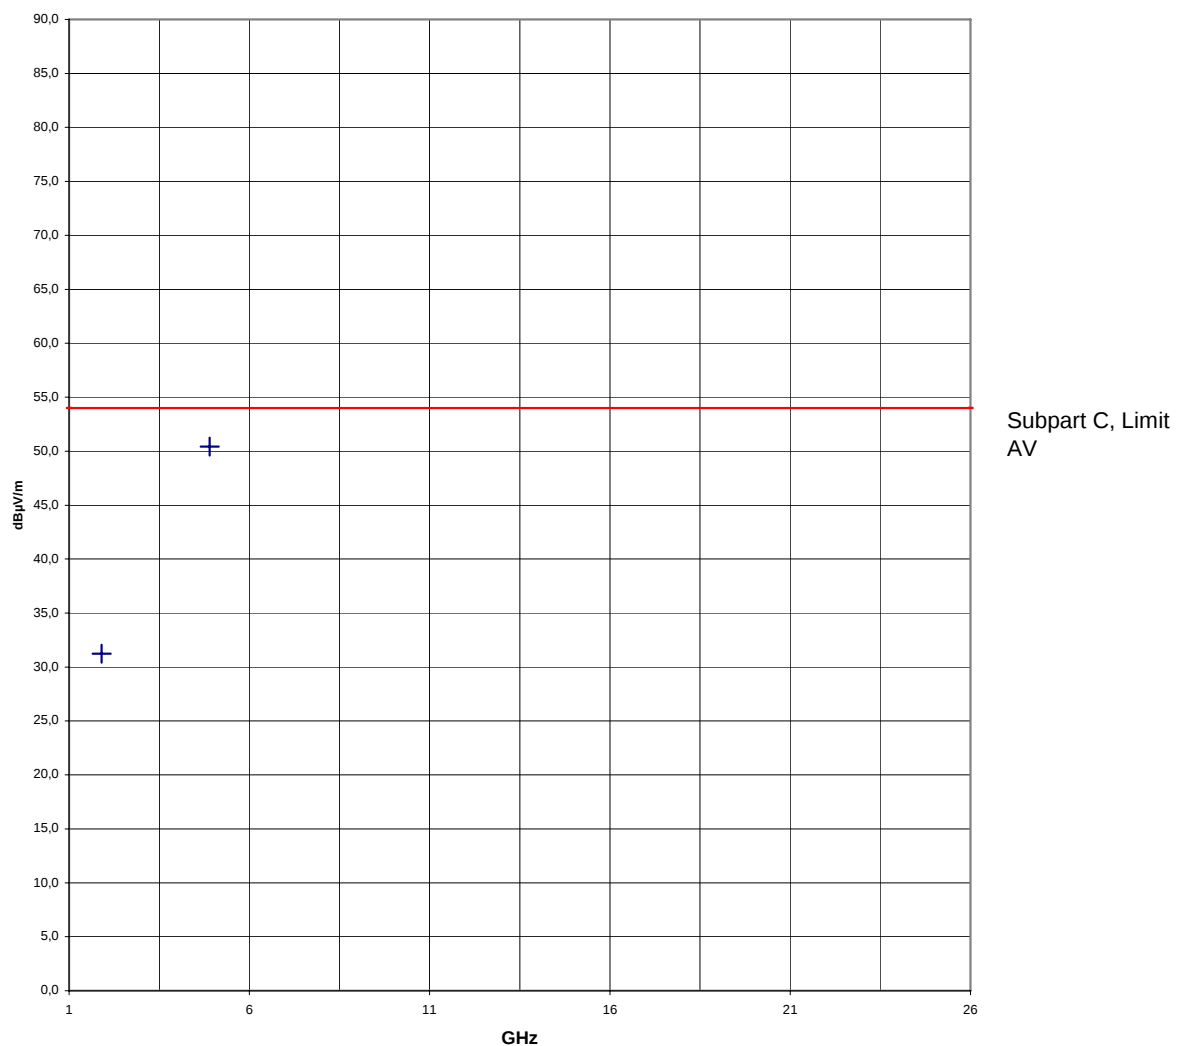

MEASUREMENT SETUP RADIATED EMISSIONS

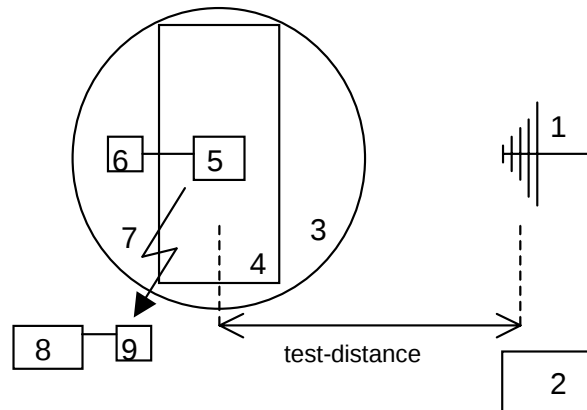


- 1 Measurement antenna
- 3 Turn table
- 5 EUT
- 7 Observed data transmission
- 9 WLAN Device


- 2 Test receiver
- 4 Wooden table
- 6 3.3V DC Powersupply
- 8 Laptop

PHOTO TESTSETUP RADIATED EMISSION

ANT-UFL.KS-EMB-2-5GHz-17,5cm (OATS3)

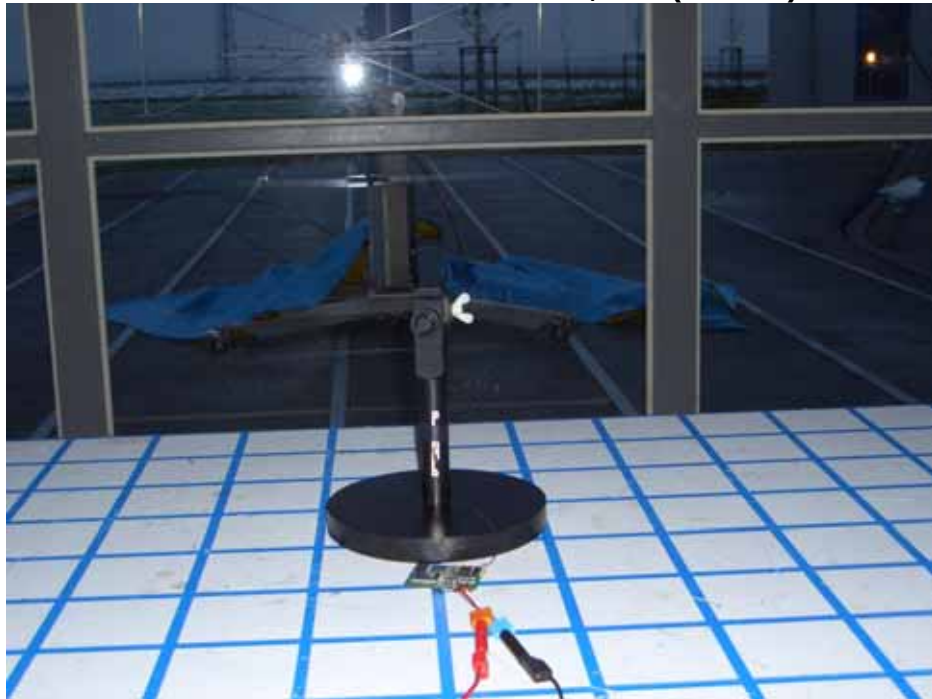

ANT-RSMA.KS-O-022-03-0,1m (OATS3)

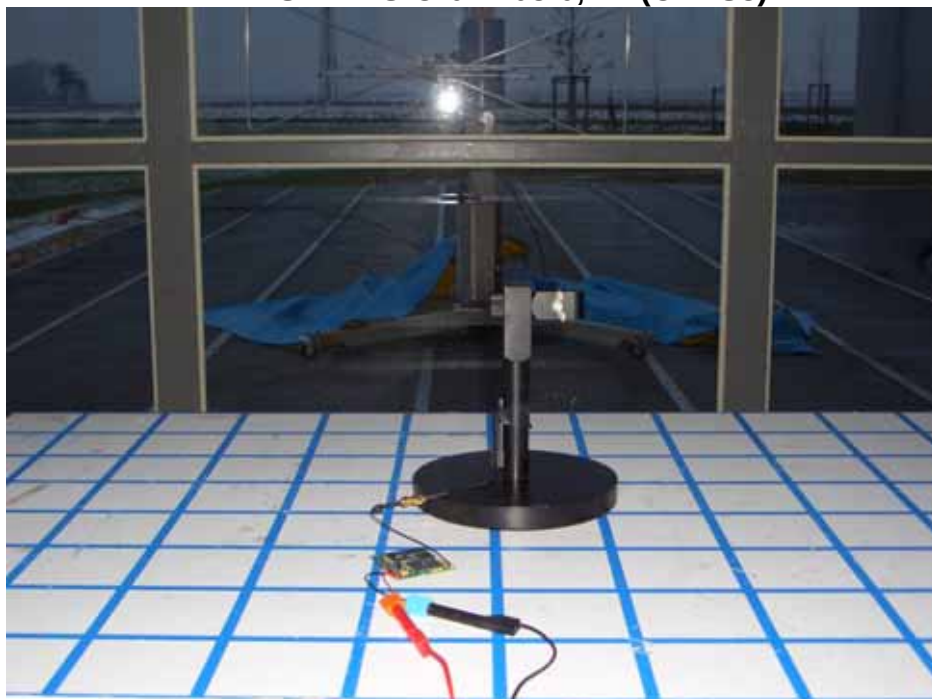

ANT-UFL.KS-EMB-2-5GHz-17,5cm (A3)



ANT-RSMA.KS-O-022-03-0,1m (A3)



PHOTOS OF THE EUT

EUT TOPVIEW



EUT BOTTOMVIEW



ANTENNA: ANT-UFL.KS-EMB-2-5GHz-17,5cm



ANTENNA: ANT-RSMA.KS-O-022-03-0,1m

