




Modulation	ax HE20 RU106	Test Freq. (MHz)	5580																																																												
Polarization	Horizontal																																																														
Test By :Paul Lin Temperature(°C):26 Humidity(%):61																																																															
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11160.00</td><td>42.56</td><td>54.00</td><td>-11.44</td><td>35.37</td><td>7.19</td><td>Average</td><td>100</td><td>33</td></tr><tr><td>2</td><td>11160.00</td><td>55.07</td><td>74.00</td><td>-18.93</td><td>47.88</td><td>7.19</td><td>Peak</td><td>100</td><td>33</td></tr><tr><td>3</td><td>16740.00</td><td>59.37</td><td>68.20</td><td>-8.83</td><td>52.31</td><td>7.06</td><td>Peak</td><td>100</td><td>137</td></tr><tr><td>4</td><td>22320.00</td><td>40.58</td><td>54.00</td><td>-13.42</td><td>35.46</td><td>5.12</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>5</td><td>22320.00</td><td>54.55</td><td>74.00</td><td>-19.45</td><td>49.43</td><td>5.12</td><td>Peak</td><td>100</td><td>176</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11160.00	42.56	54.00	-11.44	35.37	7.19	Average	100	33	2	11160.00	55.07	74.00	-18.93	47.88	7.19	Peak	100	33	3	16740.00	59.37	68.20	-8.83	52.31	7.06	Peak	100	137	4	22320.00	40.58	54.00	-13.42	35.46	5.12	Average	100	176	5	22320.00	54.55	74.00	-19.45	49.43	5.12	Peak	100	176
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11160.00	42.56	54.00	-11.44	35.37	7.19	Average	100	33																																																						
2	11160.00	55.07	74.00	-18.93	47.88	7.19	Peak	100	33																																																						
3	16740.00	59.37	68.20	-8.83	52.31	7.06	Peak	100	137																																																						
4	22320.00	40.58	54.00	-13.42	35.46	5.12	Average	100	176																																																						
5	22320.00	54.55	74.00	-19.45	49.43	5.12	Peak	100	176																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Modulation	ax HE20 RU106	Test Freq. (MHz)	5580																																																												
Polarization	Vertical																																																														
Test By :Paul Lin Temperature(°C):26 Humidity(%):61																																																															
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11160.00</td><td>42.52</td><td>54.00</td><td>-11.48</td><td>35.33</td><td>7.19</td><td>Average</td><td>100</td><td>306</td></tr><tr><td>2</td><td>11160.00</td><td>54.36</td><td>74.00</td><td>-19.64</td><td>47.17</td><td>7.19</td><td>Peak</td><td>100</td><td>306</td></tr><tr><td>3</td><td>16740.00</td><td>59.48</td><td>68.20</td><td>-8.72</td><td>52.42</td><td>7.06</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>4</td><td>22320.00</td><td>40.60</td><td>54.00</td><td>-13.40</td><td>35.48</td><td>5.12</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>5</td><td>22320.00</td><td>54.60</td><td>74.00</td><td>-19.40</td><td>49.48</td><td>5.12</td><td>Peak</td><td>100</td><td>176</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11160.00	42.52	54.00	-11.48	35.33	7.19	Average	100	306	2	11160.00	54.36	74.00	-19.64	47.17	7.19	Peak	100	306	3	16740.00	59.48	68.20	-8.72	52.42	7.06	Peak	100	67	4	22320.00	40.60	54.00	-13.40	35.48	5.12	Average	100	176	5	22320.00	54.60	74.00	-19.40	49.48	5.12	Peak	100	176
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11160.00	42.52	54.00	-11.48	35.33	7.19	Average	100	306																																																						
2	11160.00	54.36	74.00	-19.64	47.17	7.19	Peak	100	306																																																						
3	16740.00	59.48	68.20	-8.72	52.42	7.06	Peak	100	67																																																						
4	22320.00	40.60	54.00	-13.40	35.48	5.12	Average	100	176																																																						
5	22320.00	54.60	74.00	-19.40	49.48	5.12	Peak	100	176																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															

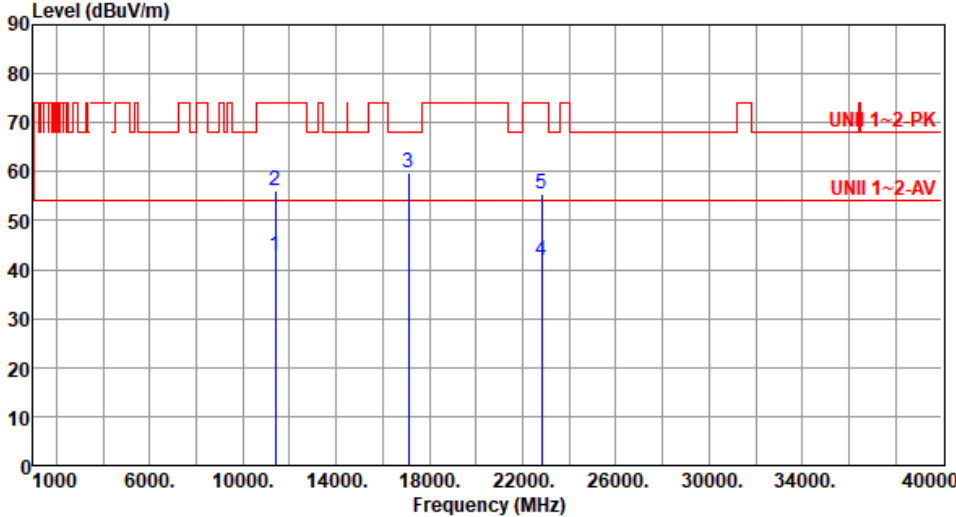


Modulation	ax HE20 RU106	Test Freq. (MHz)	5700																																																												
Polarization	Horizontal																																																														
Test By :Paul Lin Temperature(°C):26 Humidity(%):61																																																															
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11400.00</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>35.55</td><td>7.29</td><td>Average</td><td>100</td><td>89</td></tr><tr><td>2</td><td>11400.00</td><td>56.13</td><td>74.00</td><td>-17.87</td><td>48.84</td><td>7.29</td><td>Peak</td><td>100</td><td>89</td></tr><tr><td>3</td><td>17100.00</td><td>59.89</td><td>68.20</td><td>-8.31</td><td>53.26</td><td>6.63</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>4</td><td>22800.00</td><td>41.81</td><td>54.00</td><td>-12.19</td><td>35.62</td><td>6.19</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>5</td><td>22800.00</td><td>55.52</td><td>74.00</td><td>-18.48</td><td>49.33</td><td>6.19</td><td>Peak</td><td>100</td><td>178</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11400.00	42.84	54.00	-11.16	35.55	7.29	Average	100	89	2	11400.00	56.13	74.00	-17.87	48.84	7.29	Peak	100	89	3	17100.00	59.89	68.20	-8.31	53.26	6.63	Peak	100	128	4	22800.00	41.81	54.00	-12.19	35.62	6.19	Average	100	178	5	22800.00	55.52	74.00	-18.48	49.33	6.19	Peak	100	178
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11400.00	42.84	54.00	-11.16	35.55	7.29	Average	100	89																																																						
2	11400.00	56.13	74.00	-17.87	48.84	7.29	Peak	100	89																																																						
3	17100.00	59.89	68.20	-8.31	53.26	6.63	Peak	100	128																																																						
4	22800.00	41.81	54.00	-12.19	35.62	6.19	Average	100	178																																																						
5	22800.00	55.52	74.00	-18.48	49.33	6.19	Peak	100	178																																																						




Modulation	ax HE20 RU106	Test Freq. (MHz)	5700																																																												
Polarization	Vertical																																																														
Test By :Paul Lin Temperature(°C):26 Humidity(%):61																																																															
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11400.00</td><td>42.67</td><td>54.00</td><td>-11.33</td><td>35.38</td><td>7.29</td><td>Average</td><td>100</td><td>73</td></tr><tr><td>2</td><td>11400.00</td><td>56.19</td><td>74.00</td><td>-17.81</td><td>48.90</td><td>7.29</td><td>Peak</td><td>100</td><td>73</td></tr><tr><td>3</td><td>17100.00</td><td>60.18</td><td>68.20</td><td>-8.02</td><td>53.55</td><td>6.63</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>4</td><td>22800.00</td><td>41.81</td><td>54.00</td><td>-12.19</td><td>35.62</td><td>6.19</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>5</td><td>22800.00</td><td>55.70</td><td>74.00</td><td>-18.30</td><td>49.51</td><td>6.19</td><td>Peak</td><td>100</td><td>176</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11400.00	42.67	54.00	-11.33	35.38	7.29	Average	100	73	2	11400.00	56.19	74.00	-17.81	48.90	7.29	Peak	100	73	3	17100.00	60.18	68.20	-8.02	53.55	6.63	Peak	100	28	4	22800.00	41.81	54.00	-12.19	35.62	6.19	Average	100	176	5	22800.00	55.70	74.00	-18.30	49.51	6.19	Peak	100	176
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11400.00	42.67	54.00	-11.33	35.38	7.29	Average	100	73																																																						
2	11400.00	56.19	74.00	-17.81	48.90	7.29	Peak	100	73																																																						
3	17100.00	60.18	68.20	-8.02	53.55	6.63	Peak	100	28																																																						
4	22800.00	41.81	54.00	-12.19	35.62	6.19	Average	100	176																																																						
5	22800.00	55.70	74.00	-18.30	49.51	6.19	Peak	100	176																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															

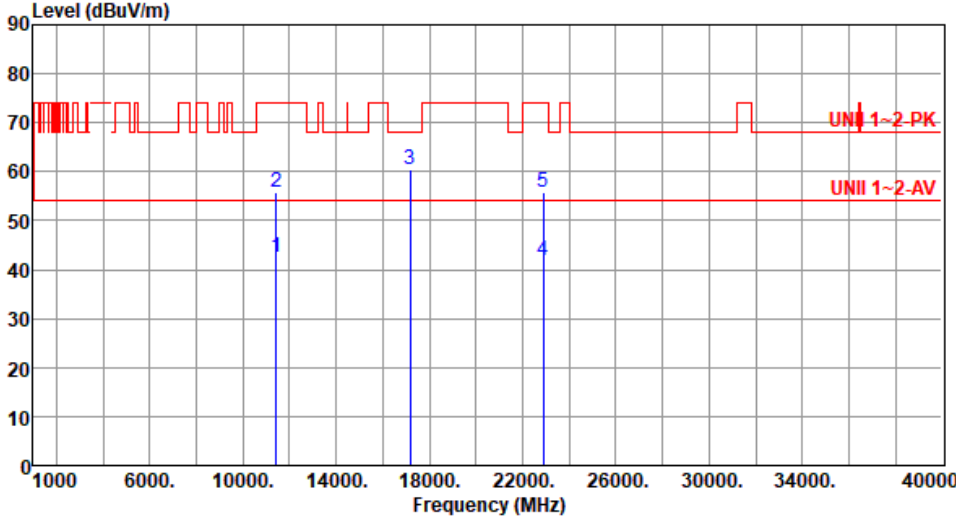


Modulation	ax HE20 RU106	Test Freq. (MHz)	5720																																																												
Polarization	Horizontal																																																														
Test By :Paul Lin Temperature(°C):26 Humidity(%):61																																																															
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11440.00</td><td>42.56</td><td>54.00</td><td>-11.44</td><td>35.21</td><td>7.35</td><td>Average</td><td>100</td><td>72</td></tr><tr><td>2</td><td>11440.00</td><td>55.76</td><td>74.00</td><td>-18.24</td><td>48.41</td><td>7.35</td><td>Peak</td><td>100</td><td>72</td></tr><tr><td>3</td><td>17160.00</td><td>60.54</td><td>68.20</td><td>-7.66</td><td>53.80</td><td>6.74</td><td>Peak</td><td>100</td><td>121</td></tr><tr><td>4</td><td>22880.00</td><td>41.80</td><td>54.00</td><td>-12.20</td><td>35.47</td><td>6.33</td><td>Average</td><td>100</td><td>156</td></tr><tr><td>5</td><td>22880.00</td><td>55.67</td><td>74.00</td><td>-18.33</td><td>49.34</td><td>6.33</td><td>Peak</td><td>100</td><td>156</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11440.00	42.56	54.00	-11.44	35.21	7.35	Average	100	72	2	11440.00	55.76	74.00	-18.24	48.41	7.35	Peak	100	72	3	17160.00	60.54	68.20	-7.66	53.80	6.74	Peak	100	121	4	22880.00	41.80	54.00	-12.20	35.47	6.33	Average	100	156	5	22880.00	55.67	74.00	-18.33	49.34	6.33	Peak	100	156
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11440.00	42.56	54.00	-11.44	35.21	7.35	Average	100	72																																																						
2	11440.00	55.76	74.00	-18.24	48.41	7.35	Peak	100	72																																																						
3	17160.00	60.54	68.20	-7.66	53.80	6.74	Peak	100	121																																																						
4	22880.00	41.80	54.00	-12.20	35.47	6.33	Average	100	156																																																						
5	22880.00	55.67	74.00	-18.33	49.34	6.33	Peak	100	156																																																						

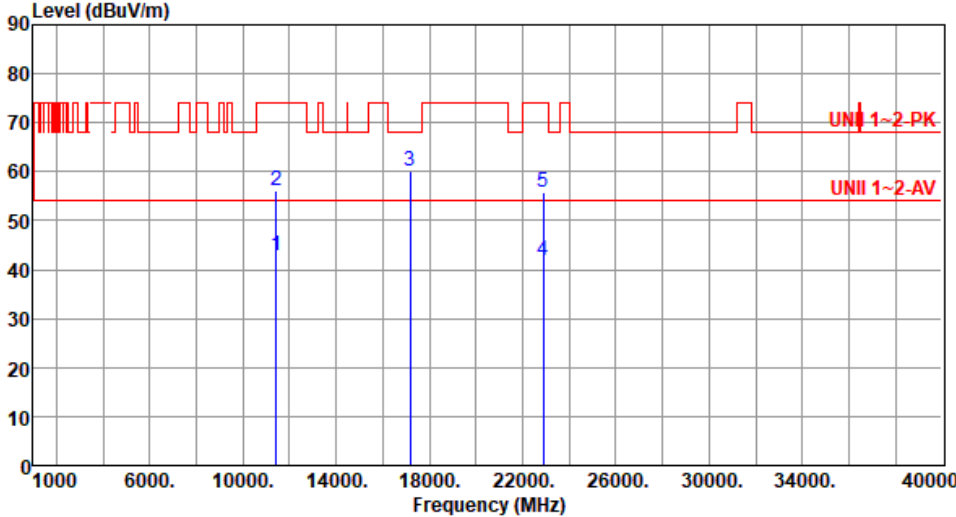

Modulation	ax HE20 RU106	Test Freq. (MHz)	5720																																																												
Polarization	Vertical																																																														
Test By :Paul Lin Temperature(°C):26 Humidity(%):61																																																															
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11440.00</td><td>42.72</td><td>54.00</td><td>-11.28</td><td>35.37</td><td>7.35</td><td>Average</td><td>100</td><td>69</td></tr><tr><td>2</td><td>11440.00</td><td>56.24</td><td>74.00</td><td>-17.76</td><td>48.89</td><td>7.35</td><td>Peak</td><td>100</td><td>69</td></tr><tr><td>3</td><td>17160.00</td><td>60.25</td><td>68.20</td><td>-7.95</td><td>53.51</td><td>6.74</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>4</td><td>22880.00</td><td>41.78</td><td>54.00</td><td>-12.22</td><td>35.45</td><td>6.33</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>5</td><td>22880.00</td><td>55.68</td><td>74.00</td><td>-18.32</td><td>49.35</td><td>6.33</td><td>Peak</td><td>100</td><td>177</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11440.00	42.72	54.00	-11.28	35.37	7.35	Average	100	69	2	11440.00	56.24	74.00	-17.76	48.89	7.35	Peak	100	69	3	17160.00	60.25	68.20	-7.95	53.51	6.74	Peak	100	134	4	22880.00	41.78	54.00	-12.22	35.45	6.33	Average	100	177	5	22880.00	55.68	74.00	-18.32	49.35	6.33	Peak	100	177
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11440.00	42.72	54.00	-11.28	35.37	7.35	Average	100	69																																																						
2	11440.00	56.24	74.00	-17.76	48.89	7.35	Peak	100	69																																																						
3	17160.00	60.25	68.20	-7.95	53.51	6.74	Peak	100	134																																																						
4	22880.00	41.78	54.00	-12.22	35.45	6.33	Average	100	177																																																						
5	22880.00	55.68	74.00	-18.32	49.35	6.33	Peak	100	177																																																						

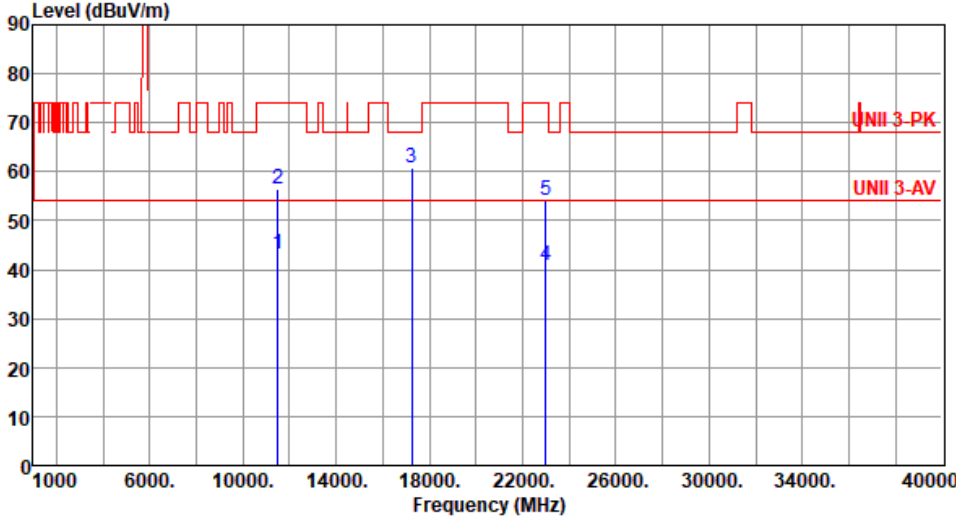


Modulation	ax HE20 RU106	Test Freq. (MHz)	5745																																																													
Polarization	Horizontal																																																															
Test By :Paul Lin Temperature(°C):26 Humidity(%):61																																																																
																																																																
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11490.00</td><td>43.27</td><td>54.00</td><td>-10.73</td><td>35.84</td><td>7.43</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>2</td><td>11490.00</td><td>56.31</td><td>74.00</td><td>-17.69</td><td>48.88</td><td>7.43</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>3</td><td>17235.00</td><td>60.72</td><td>68.20</td><td>-7.48</td><td>53.94</td><td>6.78</td><td>Peak</td><td>100</td><td>139</td></tr><tr><td>4</td><td>22980.00</td><td>40.75</td><td>54.00</td><td>-13.25</td><td>34.22</td><td>6.53</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>5</td><td>22980.00</td><td>54.15</td><td>74.00</td><td>-19.85</td><td>47.62</td><td>6.53</td><td>Peak</td><td>100</td><td>176</td></tr></table>		Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11490.00	43.27	54.00	-10.73	35.84	7.43	Average	100	109	2	11490.00	56.31	74.00	-17.69	48.88	7.43	Peak	100	109	3	17235.00	60.72	68.20	-7.48	53.94	6.78	Peak	100	139	4	22980.00	40.75	54.00	-13.25	34.22	6.53	Average	100	176	5	22980.00	54.15	74.00	-19.85	47.62	6.53	Peak	100	176			
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																							
1	11490.00	43.27	54.00	-10.73	35.84	7.43	Average	100	109																																																							
2	11490.00	56.31	74.00	-17.69	48.88	7.43	Peak	100	109																																																							
3	17235.00	60.72	68.20	-7.48	53.94	6.78	Peak	100	139																																																							
4	22980.00	40.75	54.00	-13.25	34.22	6.53	Average	100	176																																																							
5	22980.00	54.15	74.00	-19.85	47.62	6.53	Peak	100	176																																																							
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																




Modulation	ax HE20 RU106	Test Freq. (MHz)	5745																																																												
Polarization	Vertical																																																														
Test By :Paul Lin Temperature(°C):26 Humidity(%):61																																																															
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11490.00</td><td>43.12</td><td>54.00</td><td>-10.88</td><td>35.69</td><td>7.43</td><td>Average</td><td>100</td><td>17</td></tr><tr><td>2</td><td>11490.00</td><td>56.21</td><td>74.00</td><td>-17.79</td><td>48.78</td><td>7.43</td><td>Peak</td><td>100</td><td>17</td></tr><tr><td>3</td><td>17235.00</td><td>60.32</td><td>68.20</td><td>-7.88</td><td>53.54</td><td>6.78</td><td>Peak</td><td>100</td><td>73</td></tr><tr><td>4</td><td>22980.00</td><td>40.76</td><td>54.00</td><td>-13.24</td><td>34.23</td><td>6.53</td><td>Average</td><td>100</td><td>175</td></tr><tr><td>5</td><td>22980.00</td><td>54.04</td><td>74.00</td><td>-19.96</td><td>47.51</td><td>6.53</td><td>Peak</td><td>100</td><td>175</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11490.00	43.12	54.00	-10.88	35.69	7.43	Average	100	17	2	11490.00	56.21	74.00	-17.79	48.78	7.43	Peak	100	17	3	17235.00	60.32	68.20	-7.88	53.54	6.78	Peak	100	73	4	22980.00	40.76	54.00	-13.24	34.23	6.53	Average	100	175	5	22980.00	54.04	74.00	-19.96	47.51	6.53	Peak	100	175
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11490.00	43.12	54.00	-10.88	35.69	7.43	Average	100	17																																																						
2	11490.00	56.21	74.00	-17.79	48.78	7.43	Peak	100	17																																																						
3	17235.00	60.32	68.20	-7.88	53.54	6.78	Peak	100	73																																																						
4	22980.00	40.76	54.00	-13.24	34.23	6.53	Average	100	175																																																						
5	22980.00	54.04	74.00	-19.96	47.51	6.53	Peak	100	175																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															

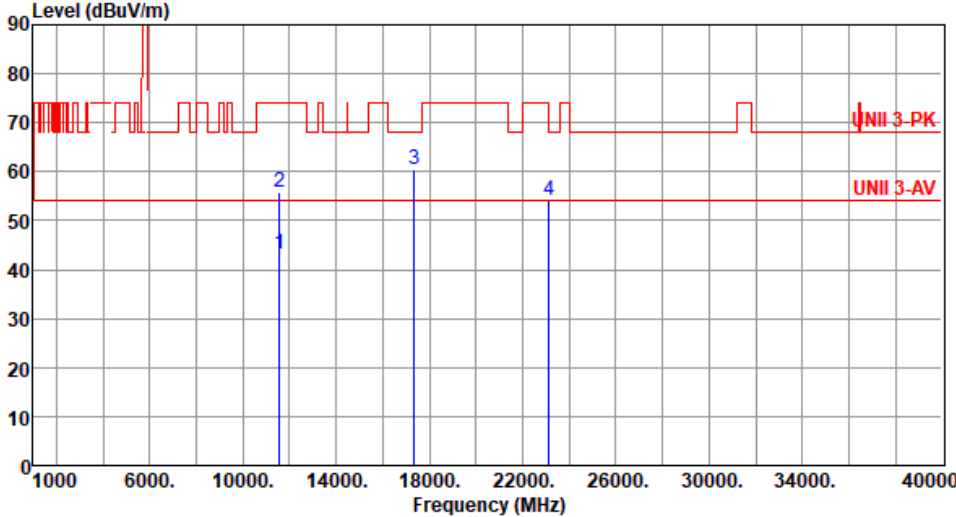

Modulation	ax HE20 RU106	Test Freq. (MHz)	5785						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	11570.00	43.26	54.00	-10.74	36.03	7.23	Average	100	149
2	11570.00	55.79	74.00	-18.21	48.56	7.23	Peak	100	149
3	17355.00	60.39	68.20	-7.81	53.46	6.93	Peak	100	51
4	23140.00	54.03	68.20	-14.17	47.42	6.61	Peak	100	203
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

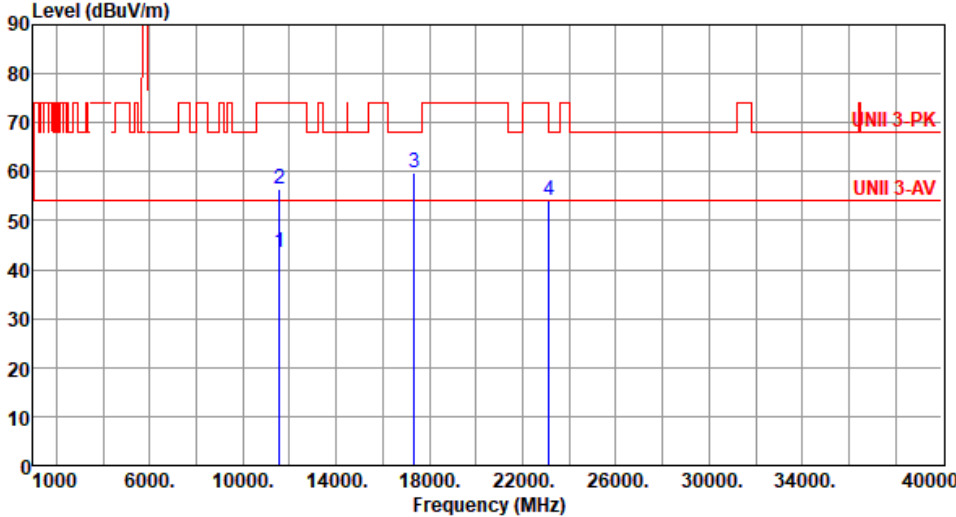

Modulation	ax HE20 RU106	Test Freq. (MHz)	5785																																																		
Polarization	Vertical																																																				
Test By :Paul Lin Temperature(°C):26 Humidity(%):61																																																					
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11570.00</td><td>43.41</td><td>54.00</td><td>-10.59</td><td>36.18</td><td>7.23</td><td>Average</td><td>100</td><td>37</td></tr><tr><td>2</td><td>11570.00</td><td>56.58</td><td>74.00</td><td>-17.42</td><td>49.35</td><td>7.23</td><td>Peak</td><td>100</td><td>37</td></tr><tr><td>3</td><td>17355.00</td><td>59.86</td><td>68.20</td><td>-8.34</td><td>52.93</td><td>6.93</td><td>Peak</td><td>100</td><td>94</td></tr><tr><td>4</td><td>23140.00</td><td>53.97</td><td>68.20</td><td>-14.23</td><td>47.36</td><td>6.61</td><td>Peak</td><td>100</td><td>141</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11570.00	43.41	54.00	-10.59	36.18	7.23	Average	100	37	2	11570.00	56.58	74.00	-17.42	49.35	7.23	Peak	100	37	3	17355.00	59.86	68.20	-8.34	52.93	6.93	Peak	100	94	4	23140.00	53.97	68.20	-14.23	47.36	6.61	Peak	100	141
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	11570.00	43.41	54.00	-10.59	36.18	7.23	Average	100	37																																												
2	11570.00	56.58	74.00	-17.42	49.35	7.23	Peak	100	37																																												
3	17355.00	59.86	68.20	-8.34	52.93	6.93	Peak	100	94																																												
4	23140.00	53.97	68.20	-14.23	47.36	6.61	Peak	100	141																																												




Modulation	ax HE20 RU106	Test Freq. (MHz)	5825						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):26 Humidity(%):61									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	11650.00	42.69	54.00	-11.31	35.71	6.98	Average	100	17
2	11650.00	55.44	74.00	-18.56	48.46	6.98	Peak	100	17
3	17475.00	60.60	68.20	-7.60	53.28	7.32	Peak	100	79
4	23300.00	54.18	68.20	-14.02	47.51	6.67	Peak	100	205
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	ax HE20 RU106	Test Freq. (MHz)	5825						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):26 Humidity(%):61									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	11650.00	42.52	54.00	-11.48	35.54	6.98	Average	100	41
2	11650.00	55.10	74.00	-18.90	48.12	6.98	Peak	100	41
3	17475.00	60.99	68.20	-7.21	53.67	7.32	Peak	100	85
4	23300.00	54.18	68.20	-14.02	47.51	6.67	Peak	100	205
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Unwanted Emissions (Above 1GHz) for ax HE40 RU242

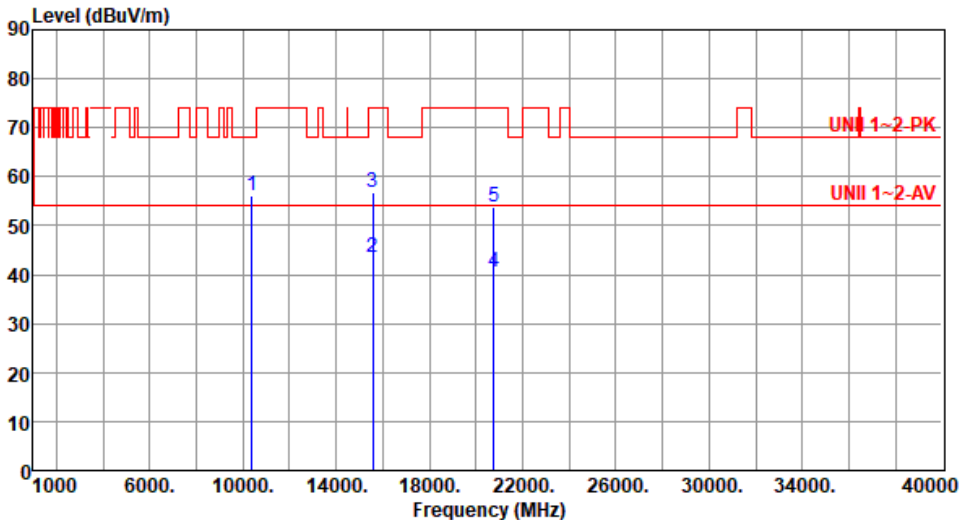Modulation	ax HE40 RU242	Test Freq. (MHz)	5190						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	10380.00	56.11	68.20	-12.09	48.62	7.49	Peak	100	176
2	15570.00	43.54	54.00	-10.46	39.27	4.27	Average	100	208
3	15570.00	56.64	74.00	-17.36	52.37	4.27	Peak	100	208
4	20760.00	40.62	54.00	-13.38	37.47	3.15	Average	100	186
5	20760.00	53.64	74.00	-20.36	50.49	3.15	Peak	100	186
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

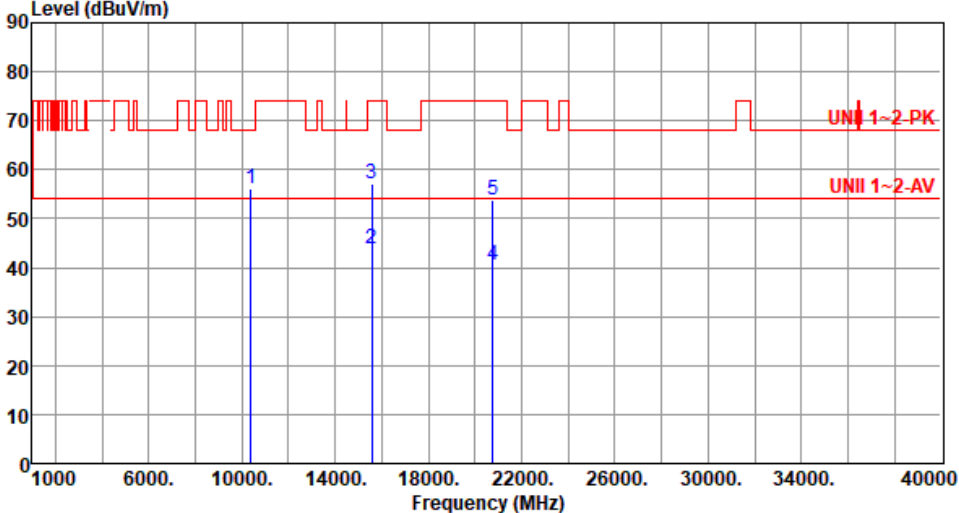

Modulation	ax HE40 RU242	Test Freq. (MHz)	5190																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10380.00</td><td>56.11</td><td>68.20</td><td>-12.09</td><td>48.62</td><td>7.49</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>2</td><td>15570.00</td><td>43.76</td><td>54.00</td><td>-10.24</td><td>39.49</td><td>4.27</td><td>Average</td><td>100</td><td>273</td></tr><tr><td>3</td><td>15570.00</td><td>57.11</td><td>74.00</td><td>-16.89</td><td>52.84</td><td>4.27</td><td>Peak</td><td>100</td><td>273</td></tr><tr><td>4</td><td>20760.00</td><td>40.59</td><td>54.00</td><td>-13.41</td><td>37.44</td><td>3.15</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>5</td><td>20760.00</td><td>53.65</td><td>74.00</td><td>-20.35</td><td>50.50</td><td>3.15</td><td>Peak</td><td>100</td><td>108</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10380.00	56.11	68.20	-12.09	48.62	7.49	Peak	100	211	2	15570.00	43.76	54.00	-10.24	39.49	4.27	Average	100	273	3	15570.00	57.11	74.00	-16.89	52.84	4.27	Peak	100	273	4	20760.00	40.59	54.00	-13.41	37.44	3.15	Average	100	108	5	20760.00	53.65	74.00	-20.35	50.50	3.15	Peak	100	108
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	10380.00	56.11	68.20	-12.09	48.62	7.49	Peak	100	211																																																						
2	15570.00	43.76	54.00	-10.24	39.49	4.27	Average	100	273																																																						
3	15570.00	57.11	74.00	-16.89	52.84	4.27	Peak	100	273																																																						
4	20760.00	40.59	54.00	-13.41	37.44	3.15	Average	100	108																																																						
5	20760.00	53.65	74.00	-20.35	50.50	3.15	Peak	100	108																																																						



Modulation	ax HE40 RU242	Test Freq. (MHz)	5230																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10460.00</td><td>56.02</td><td>68.20</td><td>-12.18</td><td>48.45</td><td>7.57</td><td>Peak</td><td>100</td><td>273</td></tr><tr><td>2</td><td>15690.00</td><td>43.45</td><td>54.00</td><td>-10.55</td><td>39.21</td><td>4.24</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>3</td><td>15690.00</td><td>55.72</td><td>74.00</td><td>-18.28</td><td>51.48</td><td>4.24</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>4</td><td>20920.00</td><td>40.99</td><td>54.00</td><td>-13.01</td><td>37.44</td><td>3.55</td><td>Average</td><td>100</td><td>231</td></tr><tr><td>5</td><td>20920.00</td><td>53.99</td><td>74.00</td><td>-20.01</td><td>50.44</td><td>3.55</td><td>Peak</td><td>100</td><td>231</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10460.00	56.02	68.20	-12.18	48.45	7.57	Peak	100	273	2	15690.00	43.45	54.00	-10.55	39.21	4.24	Average	100	108	3	15690.00	55.72	74.00	-18.28	51.48	4.24	Peak	100	108	4	20920.00	40.99	54.00	-13.01	37.44	3.55	Average	100	231	5	20920.00	53.99	74.00	-20.01	50.44	3.55	Peak	100	231
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	10460.00	56.02	68.20	-12.18	48.45	7.57	Peak	100	273																																																						
2	15690.00	43.45	54.00	-10.55	39.21	4.24	Average	100	108																																																						
3	15690.00	55.72	74.00	-18.28	51.48	4.24	Peak	100	108																																																						
4	20920.00	40.99	54.00	-13.01	37.44	3.55	Average	100	231																																																						
5	20920.00	53.99	74.00	-20.01	50.44	3.55	Peak	100	231																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Modulation	ax HE40 RU242	Test Freq. (MHz)	5230																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10460.00</td><td>56.21</td><td>68.20</td><td>-11.99</td><td>48.64</td><td>7.57</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>2</td><td>15690.00</td><td>43.66</td><td>54.00</td><td>-10.34</td><td>39.42</td><td>4.24</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>3</td><td>15690.00</td><td>56.42</td><td>74.00</td><td>-17.58</td><td>52.18</td><td>4.24</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>4</td><td>20920.00</td><td>41.19</td><td>54.00</td><td>-12.81</td><td>37.64</td><td>3.55</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>5</td><td>20920.00</td><td>54.21</td><td>74.00</td><td>-19.79</td><td>50.66</td><td>3.55</td><td>Peak</td><td>100</td><td>178</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10460.00	56.21	68.20	-11.99	48.64	7.57	Peak	100	176	2	15690.00	43.66	54.00	-10.34	39.42	4.24	Average	100	123	3	15690.00	56.42	74.00	-17.58	52.18	4.24	Peak	100	123	4	20920.00	41.19	54.00	-12.81	37.64	3.55	Average	100	178	5	20920.00	54.21	74.00	-19.79	50.66	3.55	Peak	100	178
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	10460.00	56.21	68.20	-11.99	48.64	7.57	Peak	100	176																																																						
2	15690.00	43.66	54.00	-10.34	39.42	4.24	Average	100	123																																																						
3	15690.00	56.42	74.00	-17.58	52.18	4.24	Peak	100	123																																																						
4	20920.00	41.19	54.00	-12.81	37.64	3.55	Average	100	178																																																						
5	20920.00	54.21	74.00	-19.79	50.66	3.55	Peak	100	178																																																						




Modulation	ax HE40 RU242	Test Freq. (MHz)	5270
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):62			
Level (dBuV/m) <			



Modulation	ax HE40 RU242	Test Freq. (MHz)	5270
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):62			
Level (dBuV/m) </			

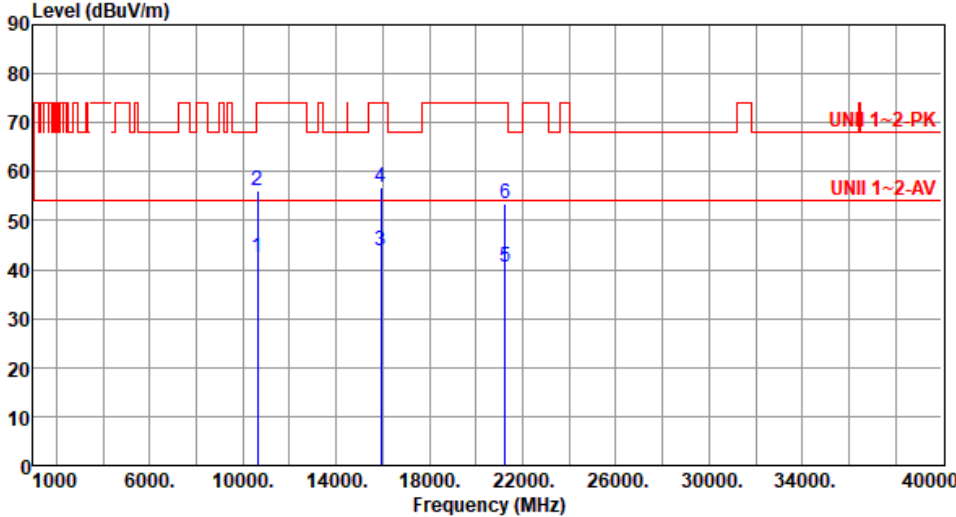


Modulation	ax HE40 RU242	Test Freq. (MHz)	5310																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10620.00</td><td>42.63</td><td>54.00</td><td>-11.37</td><td>35.12</td><td>7.51</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>2</td><td>10620.00</td><td>56.12</td><td>74.00</td><td>-17.88</td><td>48.61</td><td>7.51</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>3</td><td>15930.00</td><td>43.75</td><td>54.00</td><td>-10.25</td><td>39.11</td><td>4.64</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>4</td><td>15930.00</td><td>56.75</td><td>74.00</td><td>-17.25</td><td>52.11</td><td>4.64</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>5</td><td>21240.00</td><td>40.47</td><td>54.00</td><td>-13.53</td><td>36.43</td><td>4.04</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>6</td><td>21240.00</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>49.57</td><td>4.04</td><td>Peak</td><td>100</td><td>117</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10620.00	42.63	54.00	-11.37	35.12	7.51	Average	100	148	2	10620.00	56.12	74.00	-17.88	48.61	7.51	Peak	100	148	3	15930.00	43.75	54.00	-10.25	39.11	4.64	Average	100	208	4	15930.00	56.75	74.00	-17.25	52.11	4.64	Peak	100	208	5	21240.00	40.47	54.00	-13.53	36.43	4.04	Average	100	117	6	21240.00	53.61	74.00	-20.39	49.57	4.04	Peak	100	117
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	10620.00	42.63	54.00	-11.37	35.12	7.51	Average	100	148																																																																
2	10620.00	56.12	74.00	-17.88	48.61	7.51	Peak	100	148																																																																
3	15930.00	43.75	54.00	-10.25	39.11	4.64	Average	100	208																																																																
4	15930.00	56.75	74.00	-17.25	52.11	4.64	Peak	100	208																																																																
5	21240.00	40.47	54.00	-13.53	36.43	4.04	Average	100	117																																																																
6	21240.00	53.61	74.00	-20.39	49.57	4.04	Peak	100	117																																																																




Modulation	ax HE40 RU242	Test Freq. (MHz)	5310
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):62			
Level (dBuV/m)			

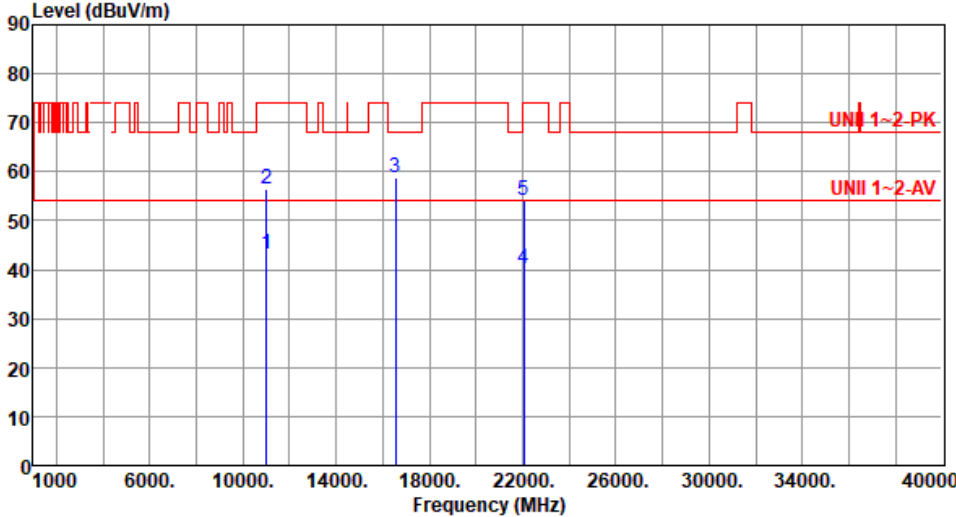


Modulation	ax HE40 RU242	Test Freq. (MHz)	5510																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11020.00</td><td>43.18</td><td>54.00</td><td>-10.82</td><td>35.48</td><td>7.70</td><td>Average</td><td>100</td><td>171</td></tr><tr><td>2</td><td>11020.00</td><td>56.32</td><td>74.00</td><td>-17.68</td><td>48.62</td><td>7.70</td><td>Peak</td><td>100</td><td>171</td></tr><tr><td>3</td><td>16530.00</td><td>58.67</td><td>68.20</td><td>-9.53</td><td>51.94</td><td>6.73</td><td>Peak</td><td>100</td><td>203</td></tr><tr><td>4</td><td>22040.00</td><td>40.34</td><td>54.00</td><td>-13.66</td><td>35.64</td><td>4.70</td><td>Average</td><td>100</td><td>173</td></tr><tr><td>5</td><td>22040.00</td><td>54.13</td><td>74.00</td><td>-19.87</td><td>49.43</td><td>4.70</td><td>Peak</td><td>100</td><td>173</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11020.00	43.18	54.00	-10.82	35.48	7.70	Average	100	171	2	11020.00	56.32	74.00	-17.68	48.62	7.70	Peak	100	171	3	16530.00	58.67	68.20	-9.53	51.94	6.73	Peak	100	203	4	22040.00	40.34	54.00	-13.66	35.64	4.70	Average	100	173	5	22040.00	54.13	74.00	-19.87	49.43	4.70	Peak	100	173
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11020.00	43.18	54.00	-10.82	35.48	7.70	Average	100	171																																																						
2	11020.00	56.32	74.00	-17.68	48.62	7.70	Peak	100	171																																																						
3	16530.00	58.67	68.20	-9.53	51.94	6.73	Peak	100	203																																																						
4	22040.00	40.34	54.00	-13.66	35.64	4.70	Average	100	173																																																						
5	22040.00	54.13	74.00	-19.87	49.43	4.70	Peak	100	173																																																						

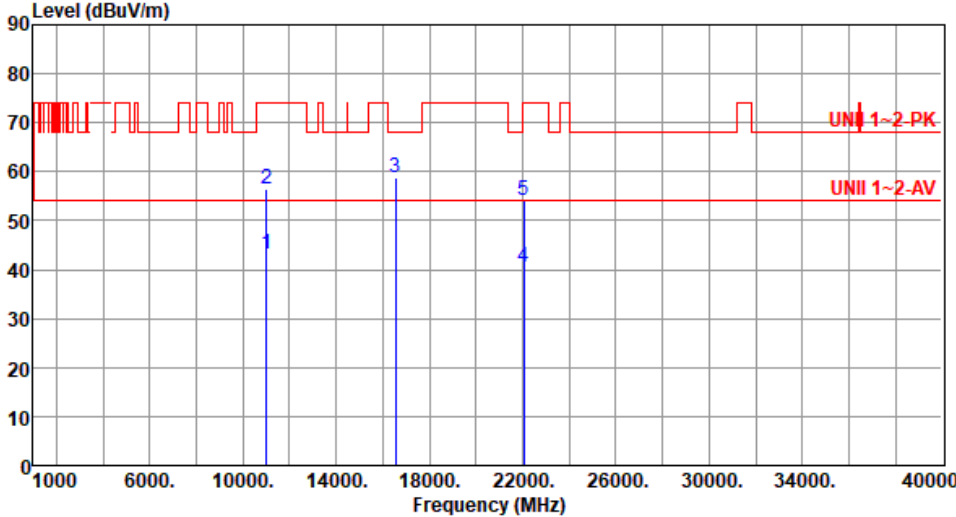

Modulation	ax HE40 RU242	Test Freq. (MHz)	5510																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11020.00</td><td>43.15</td><td>54.00</td><td>-10.85</td><td>35.45</td><td>7.70</td><td>Average</td><td>100</td><td>188</td></tr><tr><td>2</td><td>11020.00</td><td>56.34</td><td>74.00</td><td>-17.66</td><td>48.64</td><td>7.70</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>3</td><td>16530.00</td><td>58.86</td><td>68.20</td><td>-9.34</td><td>52.13</td><td>6.73</td><td>Peak</td><td>100</td><td>224</td></tr><tr><td>4</td><td>22040.00</td><td>40.36</td><td>54.00</td><td>-13.64</td><td>35.66</td><td>4.70</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>5</td><td>22040.00</td><td>54.24</td><td>74.00</td><td>-19.76</td><td>49.54</td><td>4.70</td><td>Peak</td><td>100</td><td>178</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11020.00	43.15	54.00	-10.85	35.45	7.70	Average	100	188	2	11020.00	56.34	74.00	-17.66	48.64	7.70	Peak	100	188	3	16530.00	58.86	68.20	-9.34	52.13	6.73	Peak	100	224	4	22040.00	40.36	54.00	-13.64	35.66	4.70	Average	100	178	5	22040.00	54.24	74.00	-19.76	49.54	4.70	Peak	100	178
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11020.00	43.15	54.00	-10.85	35.45	7.70	Average	100	188																																																						
2	11020.00	56.34	74.00	-17.66	48.64	7.70	Peak	100	188																																																						
3	16530.00	58.86	68.20	-9.34	52.13	6.73	Peak	100	224																																																						
4	22040.00	40.36	54.00	-13.64	35.66	4.70	Average	100	178																																																						
5	22040.00	54.24	74.00	-19.76	49.54	4.70	Peak	100	178																																																						

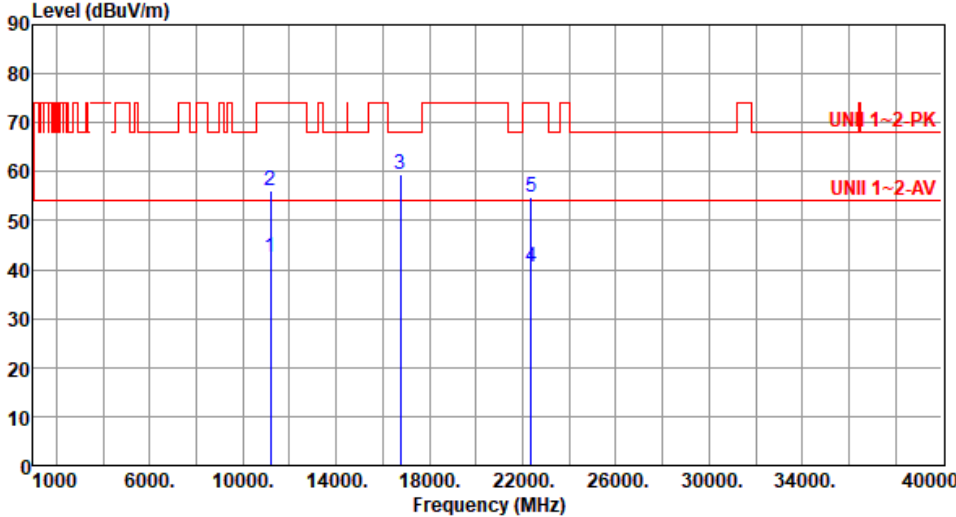


Modulation	ax HE40 RU242	Test Freq. (MHz)	5590																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11180.00</td><td>42.44</td><td>54.00</td><td>-11.56</td><td>35.36</td><td>7.08</td><td>Average</td><td>100</td><td>186</td></tr><tr><td>2</td><td>11180.00</td><td>56.28</td><td>74.00</td><td>-17.72</td><td>49.20</td><td>7.08</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>3</td><td>16770.00</td><td>59.28</td><td>68.20</td><td>-8.92</td><td>52.12</td><td>7.16</td><td>Peak</td><td>100</td><td>205</td></tr><tr><td>4</td><td>22360.00</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>35.44</td><td>5.23</td><td>Average</td><td>100</td><td>186</td></tr><tr><td>5</td><td>22360.00</td><td>54.70</td><td>74.00</td><td>-19.30</td><td>49.47</td><td>5.23</td><td>Peak</td><td>100</td><td>186</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11180.00	42.44	54.00	-11.56	35.36	7.08	Average	100	186	2	11180.00	56.28	74.00	-17.72	49.20	7.08	Peak	100	186	3	16770.00	59.28	68.20	-8.92	52.12	7.16	Peak	100	205	4	22360.00	40.67	54.00	-13.33	35.44	5.23	Average	100	186	5	22360.00	54.70	74.00	-19.30	49.47	5.23	Peak	100	186
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11180.00	42.44	54.00	-11.56	35.36	7.08	Average	100	186																																																						
2	11180.00	56.28	74.00	-17.72	49.20	7.08	Peak	100	186																																																						
3	16770.00	59.28	68.20	-8.92	52.12	7.16	Peak	100	205																																																						
4	22360.00	40.67	54.00	-13.33	35.44	5.23	Average	100	186																																																						
5	22360.00	54.70	74.00	-19.30	49.47	5.23	Peak	100	186																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															




Modulation	ax HE40 RU242	Test Freq. (MHz)	5590																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11180.00</td><td>42.67</td><td>54.00</td><td>-11.33</td><td>35.59</td><td>7.08</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>2</td><td>11180.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>48.23</td><td>7.08</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>3</td><td>16770.00</td><td>59.38</td><td>68.20</td><td>-8.82</td><td>52.22</td><td>7.16</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>4</td><td>22360.00</td><td>40.50</td><td>54.00</td><td>-13.50</td><td>35.27</td><td>5.23</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>5</td><td>22360.00</td><td>54.61</td><td>74.00</td><td>-19.39</td><td>49.38</td><td>5.23</td><td>Peak</td><td>100</td><td>205</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11180.00	42.67	54.00	-11.33	35.59	7.08	Average	100	177	2	11180.00	55.31	74.00	-18.69	48.23	7.08	Peak	100	177	3	16770.00	59.38	68.20	-8.82	52.22	7.16	Peak	100	108	4	22360.00	40.50	54.00	-13.50	35.27	5.23	Average	100	205	5	22360.00	54.61	74.00	-19.39	49.38	5.23	Peak	100	205
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11180.00	42.67	54.00	-11.33	35.59	7.08	Average	100	177																																																						
2	11180.00	55.31	74.00	-18.69	48.23	7.08	Peak	100	177																																																						
3	16770.00	59.38	68.20	-8.82	52.22	7.16	Peak	100	108																																																						
4	22360.00	40.50	54.00	-13.50	35.27	5.23	Average	100	205																																																						
5	22360.00	54.61	74.00	-19.39	49.38	5.23	Peak	100	205																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															

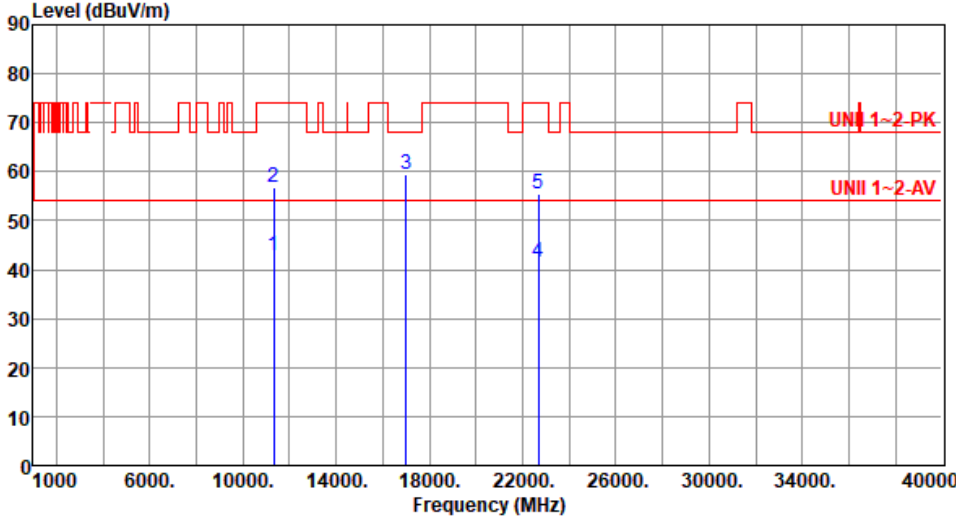

Modulation	ax HE40 RU242	Test Freq. (MHz)	5670																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11340.00</td><td>42.92</td><td>54.00</td><td>-11.08</td><td>35.79</td><td>7.13</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>2</td><td>11340.00</td><td>56.79</td><td>74.00</td><td>-17.21</td><td>49.66</td><td>7.13</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>3</td><td>17010.00</td><td>59.57</td><td>68.20</td><td>-8.63</td><td>52.66</td><td>6.91</td><td>Peak</td><td>100</td><td>277</td></tr><tr><td>4</td><td>22680.00</td><td>41.47</td><td>54.00</td><td>-12.53</td><td>35.52</td><td>5.95</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>5</td><td>22680.00</td><td>55.42</td><td>74.00</td><td>-18.58</td><td>49.47</td><td>5.95</td><td>Peak</td><td>100</td><td>108</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11340.00	42.92	54.00	-11.08	35.79	7.13	Average	100	218	2	11340.00	56.79	74.00	-17.21	49.66	7.13	Peak	100	218	3	17010.00	59.57	68.20	-8.63	52.66	6.91	Peak	100	277	4	22680.00	41.47	54.00	-12.53	35.52	5.95	Average	100	108	5	22680.00	55.42	74.00	-18.58	49.47	5.95	Peak	100	108
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11340.00	42.92	54.00	-11.08	35.79	7.13	Average	100	218																																																						
2	11340.00	56.79	74.00	-17.21	49.66	7.13	Peak	100	218																																																						
3	17010.00	59.57	68.20	-8.63	52.66	6.91	Peak	100	277																																																						
4	22680.00	41.47	54.00	-12.53	35.52	5.95	Average	100	108																																																						
5	22680.00	55.42	74.00	-18.58	49.47	5.95	Peak	100	108																																																						

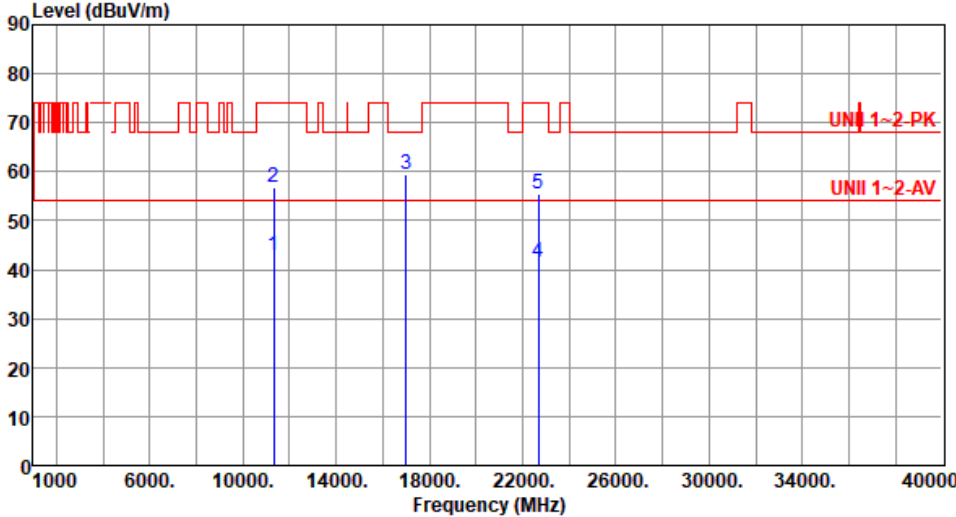


Modulation	ax HE40 RU242	Test Freq. (MHz)	5670																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11340.00</td><td>42.71</td><td>54.00</td><td>-11.29</td><td>35.58</td><td>7.13</td><td>Average</td><td>100</td><td>271</td></tr><tr><td>2</td><td>11340.00</td><td>56.77</td><td>74.00</td><td>-17.23</td><td>49.64</td><td>7.13</td><td>Peak</td><td>100</td><td>271</td></tr><tr><td>3</td><td>17010.00</td><td>59.49</td><td>68.20</td><td>-8.71</td><td>52.58</td><td>6.91</td><td>Peak</td><td>100</td><td>113</td></tr><tr><td>4</td><td>22680.00</td><td>41.60</td><td>54.00</td><td>-12.40</td><td>35.65</td><td>5.95</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>5</td><td>22680.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>49.36</td><td>5.95</td><td>Peak</td><td>100</td><td>118</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11340.00	42.71	54.00	-11.29	35.58	7.13	Average	100	271	2	11340.00	56.77	74.00	-17.23	49.64	7.13	Peak	100	271	3	17010.00	59.49	68.20	-8.71	52.58	6.91	Peak	100	113	4	22680.00	41.60	54.00	-12.40	35.65	5.95	Average	100	118	5	22680.00	55.31	74.00	-18.69	49.36	5.95	Peak	100	118
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11340.00	42.71	54.00	-11.29	35.58	7.13	Average	100	271																																																						
2	11340.00	56.77	74.00	-17.23	49.64	7.13	Peak	100	271																																																						
3	17010.00	59.49	68.20	-8.71	52.58	6.91	Peak	100	113																																																						
4	22680.00	41.60	54.00	-12.40	35.65	5.95	Average	100	118																																																						
5	22680.00	55.31	74.00	-18.69	49.36	5.95	Peak	100	118																																																						



Modulation	ax HE40 RU242	Test Freq. (MHz)	5710																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11420.00</td><td>43.76</td><td>54.00</td><td>-10.24</td><td>36.44</td><td>7.32</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>2</td><td>11420.00</td><td>55.55</td><td>74.00</td><td>-18.45</td><td>48.23</td><td>7.32</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>3</td><td>17130.00</td><td>60.33</td><td>68.20</td><td>-7.87</td><td>53.64</td><td>6.69</td><td>Peak</td><td>100</td><td>205</td></tr><tr><td>4</td><td>22840.00</td><td>41.53</td><td>54.00</td><td>-12.47</td><td>35.27</td><td>6.26</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>5</td><td>22840.00</td><td>55.42</td><td>74.00</td><td>-18.58</td><td>49.16</td><td>6.26</td><td>Peak</td><td>100</td><td>103</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11420.00	43.76	54.00	-10.24	36.44	7.32	Average	100	178	2	11420.00	55.55	74.00	-18.45	48.23	7.32	Peak	100	178	3	17130.00	60.33	68.20	-7.87	53.64	6.69	Peak	100	205	4	22840.00	41.53	54.00	-12.47	35.27	6.26	Average	100	103	5	22840.00	55.42	74.00	-18.58	49.16	6.26	Peak	100	103
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11420.00	43.76	54.00	-10.24	36.44	7.32	Average	100	178																																																						
2	11420.00	55.55	74.00	-18.45	48.23	7.32	Peak	100	178																																																						
3	17130.00	60.33	68.20	-7.87	53.64	6.69	Peak	100	205																																																						
4	22840.00	41.53	54.00	-12.47	35.27	6.26	Average	100	103																																																						
5	22840.00	55.42	74.00	-18.58	49.16	6.26	Peak	100	103																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															

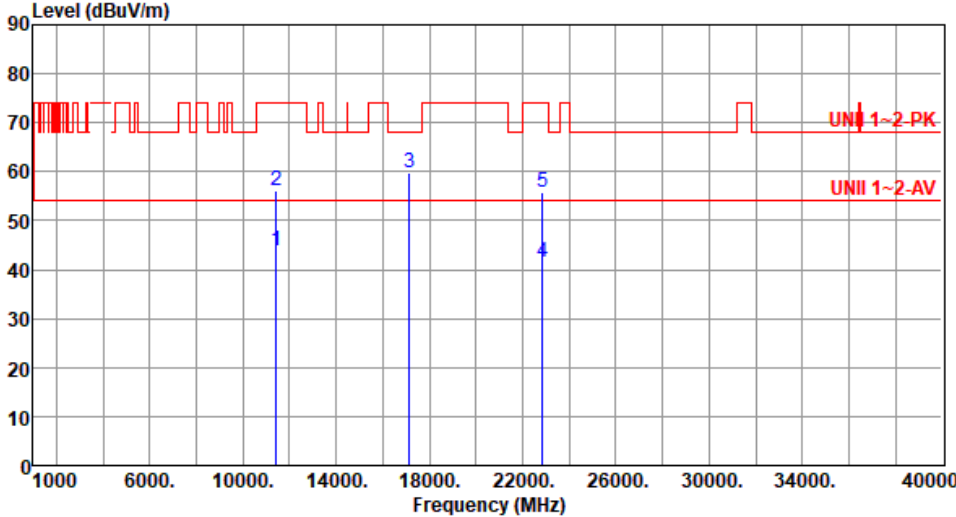


Modulation	ax HE40 RU242	Test Freq. (MHz)	5710																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11420.00</td><td>43.80</td><td>54.00</td><td>-10.20</td><td>36.48</td><td>7.32</td><td>Average</td><td>100</td><td>201</td></tr><tr><td>2</td><td>11420.00</td><td>55.96</td><td>74.00</td><td>-18.04</td><td>48.64</td><td>7.32</td><td>Peak</td><td>100</td><td>201</td></tr><tr><td>3</td><td>17130.00</td><td>59.81</td><td>68.20</td><td>-8.39</td><td>53.12</td><td>6.69</td><td>Peak</td><td>100</td><td>227</td></tr><tr><td>4</td><td>22840.00</td><td>41.52</td><td>54.00</td><td>-12.48</td><td>35.26</td><td>6.26</td><td>Average</td><td>100</td><td>152</td></tr><tr><td>5</td><td>22840.00</td><td>55.79</td><td>74.00</td><td>-18.21</td><td>49.53</td><td>6.26</td><td>Peak</td><td>100</td><td>152</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11420.00	43.80	54.00	-10.20	36.48	7.32	Average	100	201	2	11420.00	55.96	74.00	-18.04	48.64	7.32	Peak	100	201	3	17130.00	59.81	68.20	-8.39	53.12	6.69	Peak	100	227	4	22840.00	41.52	54.00	-12.48	35.26	6.26	Average	100	152	5	22840.00	55.79	74.00	-18.21	49.53	6.26	Peak	100	152
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11420.00	43.80	54.00	-10.20	36.48	7.32	Average	100	201																																																						
2	11420.00	55.96	74.00	-18.04	48.64	7.32	Peak	100	201																																																						
3	17130.00	59.81	68.20	-8.39	53.12	6.69	Peak	100	227																																																						
4	22840.00	41.52	54.00	-12.48	35.26	6.26	Average	100	152																																																						
5	22840.00	55.79	74.00	-18.21	49.53	6.26	Peak	100	152																																																						



Modulation	ax HE40 RU242	Test Freq. (MHz)	5755						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):62									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	11510.00	43.51	54.00	-10.49	36.09	7.42	Average	100	186
2	11510.00	56.46	74.00	-17.54	49.04	7.42	Peak	100	186
3	17265.00	60.74	68.20	-7.46	53.99	6.75	Peak	100	205
4	23020.00	40.81	54.00	-13.19	34.24	6.57	Average	100	108
5	23020.00	54.20	74.00	-19.80	47.63	6.57	Peak	100	108
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

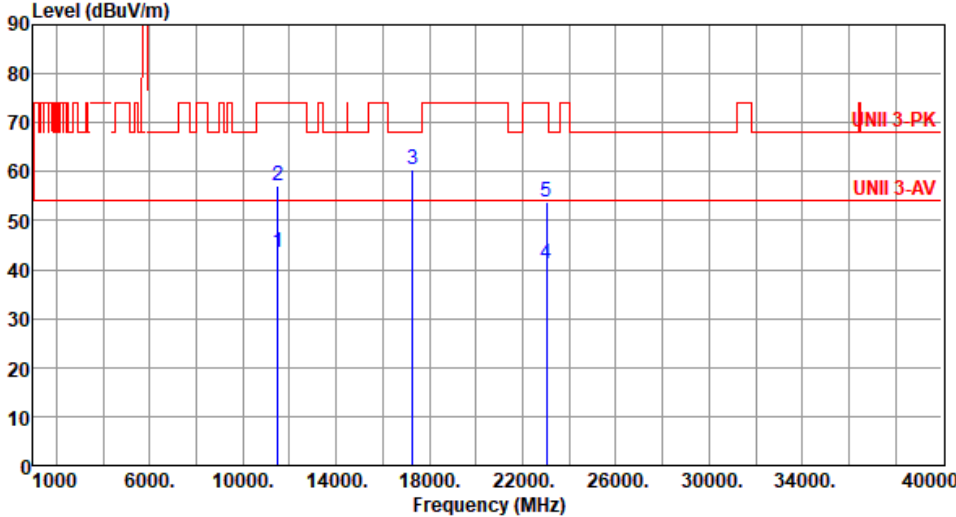

Modulation	ax HE40 RU242	Test Freq. (MHz)	5755						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	11510.00	43.63	54.00	-10.37	36.21	7.42	Average	100	173
2	11510.00	57.10	74.00	-16.90	49.68	7.42	Peak	100	173
3	17265.00	60.35	68.20	-7.85	53.60	6.75	Peak	100	281
4	23020.00	41.09	54.00	-12.91	34.52	6.57	Average	100	241
5	23020.00	53.86	74.00	-20.14	47.29	6.57	Peak	100	241
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	ax HE40 RU242	Test Freq. (MHz)	5795																																																		
Polarization	Horizontal																																																				
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																					
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11590.00</td><td>43.03</td><td>54.00</td><td>-10.97</td><td>35.86</td><td>7.17</td><td>Average</td><td>100</td><td>175</td></tr><tr><td>2</td><td>11590.00</td><td>56.50</td><td>74.00</td><td>-17.50</td><td>49.33</td><td>7.17</td><td>Peak</td><td>100</td><td>175</td></tr><tr><td>3</td><td>17385.00</td><td>60.18</td><td>68.20</td><td>-8.02</td><td>53.14</td><td>7.04</td><td>Peak</td><td>100</td><td>281</td></tr><tr><td>4</td><td>23180.00</td><td>54.29</td><td>68.20</td><td>-13.91</td><td>47.66</td><td>6.63</td><td>Peak</td><td>100</td><td>227</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11590.00	43.03	54.00	-10.97	35.86	7.17	Average	100	175	2	11590.00	56.50	74.00	-17.50	49.33	7.17	Peak	100	175	3	17385.00	60.18	68.20	-8.02	53.14	7.04	Peak	100	281	4	23180.00	54.29	68.20	-13.91	47.66	6.63	Peak	100	227
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	11590.00	43.03	54.00	-10.97	35.86	7.17	Average	100	175																																												
2	11590.00	56.50	74.00	-17.50	49.33	7.17	Peak	100	175																																												
3	17385.00	60.18	68.20	-8.02	53.14	7.04	Peak	100	281																																												
4	23180.00	54.29	68.20	-13.91	47.66	6.63	Peak	100	227																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	ax HE40 RU242	Test Freq. (MHz)	5795						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):62									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	11590.00	42.84	54.00	-11.16	35.67	7.17	Average	100	203
2	11590.00	56.29	74.00	-17.71	49.12	7.17	Peak	100	203
3	17385.00	59.90	68.20	-8.30	52.86	7.04	Peak	100	188
4	23180.00	54.12	68.20	-14.08	47.49	6.63	Peak	100	184
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

Unwanted Emissions (Above 1GHz) for ax HE80 RU484

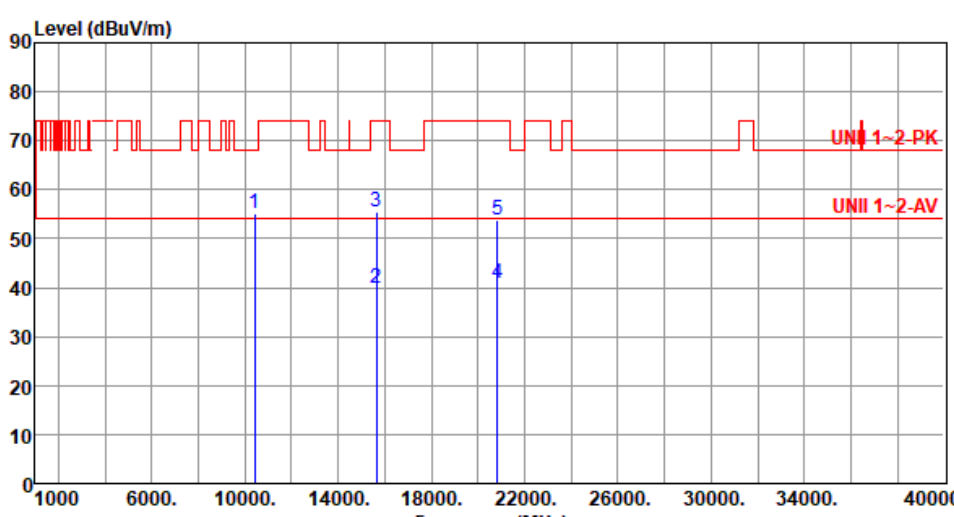Modulation	ax HE80 RU484	Test Freq. (MHz)	5210																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10420.00</td><td>55.19</td><td>68.20</td><td>-13.01</td><td>47.64</td><td>7.55</td><td>Peak</td><td>100</td><td>187</td></tr><tr><td>2</td><td>15630.00</td><td>39.89</td><td>54.00</td><td>-14.11</td><td>35.68</td><td>4.21</td><td>Average</td><td>100</td><td>203</td></tr><tr><td>3</td><td>15630.00</td><td>55.54</td><td>74.00</td><td>-18.46</td><td>51.33</td><td>4.21</td><td>Peak</td><td>100</td><td>203</td></tr><tr><td>4</td><td>20840.00</td><td>40.69</td><td>54.00</td><td>-13.31</td><td>37.33</td><td>3.36</td><td>Average</td><td>100</td><td>227</td></tr><tr><td>5</td><td>20840.00</td><td>53.79</td><td>74.00</td><td>-20.21</td><td>50.43</td><td>3.36</td><td>Peak</td><td>100</td><td>227</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10420.00	55.19	68.20	-13.01	47.64	7.55	Peak	100	187	2	15630.00	39.89	54.00	-14.11	35.68	4.21	Average	100	203	3	15630.00	55.54	74.00	-18.46	51.33	4.21	Peak	100	203	4	20840.00	40.69	54.00	-13.31	37.33	3.36	Average	100	227	5	20840.00	53.79	74.00	-20.21	50.43	3.36	Peak	100	227
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	10420.00	55.19	68.20	-13.01	47.64	7.55	Peak	100	187																																																						
2	15630.00	39.89	54.00	-14.11	35.68	4.21	Average	100	203																																																						
3	15630.00	55.54	74.00	-18.46	51.33	4.21	Peak	100	203																																																						
4	20840.00	40.69	54.00	-13.31	37.33	3.36	Average	100	227																																																						
5	20840.00	53.79	74.00	-20.21	50.43	3.36	Peak	100	227																																																						




Modulation	ax HE80 RU484	Test Freq. (MHz)	5210						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):62									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	10420.00	56.42	68.20	-11.78	48.87	7.55	Peak	100	171
2	15630.00	39.68	54.00	-14.32	35.47	4.21	Average	100	179
3	15630.00	55.59	74.00	-18.41	51.38	4.21	Peak	100	179
4	20840.00	40.77	54.00	-13.23	37.41	3.36	Average	100	226
5	20840.00	53.83	74.00	-20.17	50.47	3.36	Peak	100	226
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	ax HE80 RU484	Test Freq. (MHz)	5290						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):62									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	10580.00	56.78	68.20	-11.42	49.23	7.55	Peak	100	176
2	15870.00	44.04	54.00	-9.96	39.48	4.56	Average	100	117
3	15870.00	56.91	74.00	-17.09	52.35	4.56	Peak	100	117
4	21160.00	40.38	54.00	-13.62	36.44	3.94	Average	100	229
5	21160.00	53.79	74.00	-20.21	49.85	3.94	Peak	100	229

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

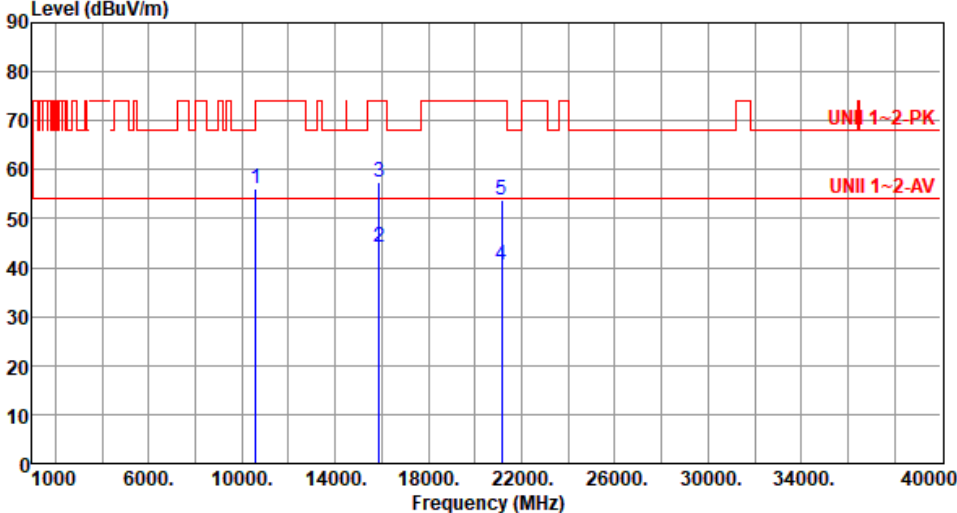

Modulation	ax HE80 RU484	Test Freq. (MHz)	5290																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10580.00</td><td>56.17</td><td>68.20</td><td>-12.03</td><td>48.62</td><td>7.55</td><td>Peak</td><td>100</td><td>185</td></tr><tr><td>2</td><td>15870.00</td><td>44.18</td><td>54.00</td><td>-9.82</td><td>39.62</td><td>4.56</td><td>Average</td><td>100</td><td>203</td></tr><tr><td>3</td><td>15870.00</td><td>57.30</td><td>74.00</td><td>-16.70</td><td>52.74</td><td>4.56</td><td>Peak</td><td>100</td><td>203</td></tr><tr><td>4</td><td>21160.00</td><td>40.43</td><td>54.00</td><td>-13.57</td><td>36.49</td><td>3.94</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>5</td><td>21160.00</td><td>53.78</td><td>74.00</td><td>-20.22</td><td>49.84</td><td>3.94</td><td>Peak</td><td>100</td><td>213</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10580.00	56.17	68.20	-12.03	48.62	7.55	Peak	100	185	2	15870.00	44.18	54.00	-9.82	39.62	4.56	Average	100	203	3	15870.00	57.30	74.00	-16.70	52.74	4.56	Peak	100	203	4	21160.00	40.43	54.00	-13.57	36.49	3.94	Average	100	213	5	21160.00	53.78	74.00	-20.22	49.84	3.94	Peak	100	213
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	10580.00	56.17	68.20	-12.03	48.62	7.55	Peak	100	185																																																						
2	15870.00	44.18	54.00	-9.82	39.62	4.56	Average	100	203																																																						
3	15870.00	57.30	74.00	-16.70	52.74	4.56	Peak	100	203																																																						
4	21160.00	40.43	54.00	-13.57	36.49	3.94	Average	100	213																																																						
5	21160.00	53.78	74.00	-20.22	49.84	3.94	Peak	100	213																																																						




Modulation	ax HE80 RU484	Test Freq. (MHz)	5530																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11060.00</td><td>43.33</td><td>54.00</td><td>-10.67</td><td>35.72</td><td>7.61</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>2</td><td>11060.00</td><td>56.27</td><td>74.00</td><td>-17.73</td><td>48.66</td><td>7.61</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>3</td><td>16590.00</td><td>59.45</td><td>68.20</td><td>-8.75</td><td>52.76</td><td>6.69</td><td>Peak</td><td>100</td><td>201</td></tr><tr><td>4</td><td>22120.00</td><td>40.46</td><td>54.00</td><td>-13.54</td><td>35.67</td><td>4.79</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>5</td><td>22120.00</td><td>54.12</td><td>74.00</td><td>-19.88</td><td>49.33</td><td>4.79</td><td>Peak</td><td>100</td><td>108</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11060.00	43.33	54.00	-10.67	35.72	7.61	Average	100	177	2	11060.00	56.27	74.00	-17.73	48.66	7.61	Peak	100	177	3	16590.00	59.45	68.20	-8.75	52.76	6.69	Peak	100	201	4	22120.00	40.46	54.00	-13.54	35.67	4.79	Average	100	108	5	22120.00	54.12	74.00	-19.88	49.33	4.79	Peak	100	108
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11060.00	43.33	54.00	-10.67	35.72	7.61	Average	100	177																																																						
2	11060.00	56.27	74.00	-17.73	48.66	7.61	Peak	100	177																																																						
3	16590.00	59.45	68.20	-8.75	52.76	6.69	Peak	100	201																																																						
4	22120.00	40.46	54.00	-13.54	35.67	4.79	Average	100	108																																																						
5	22120.00	54.12	74.00	-19.88	49.33	4.79	Peak	100	108																																																						




Modulation	ax HE80 RU484	Test Freq. (MHz)	5530
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):62			
Level (dBuV/m) </			

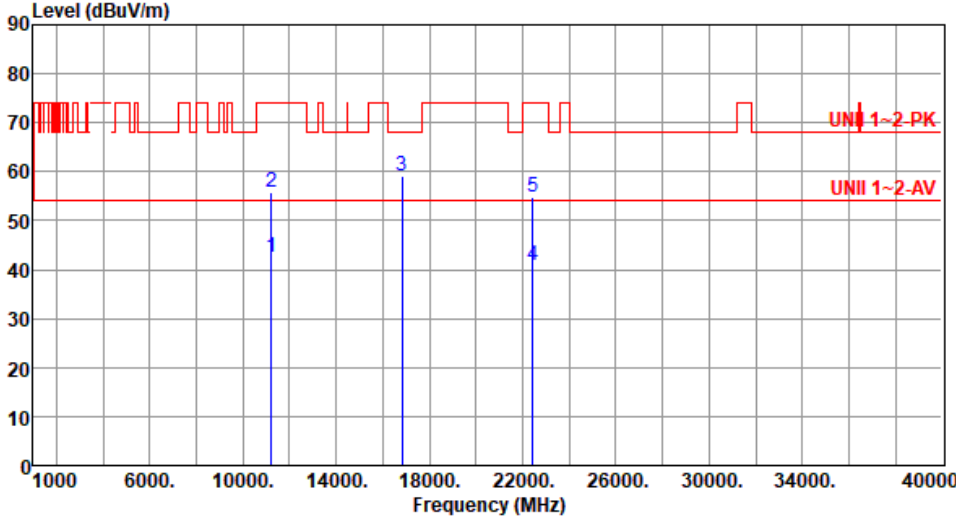


Modulation	ax HE80 RU484	Test Freq. (MHz)	5610																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11220.00</td><td>42.36</td><td>54.00</td><td>-11.64</td><td>35.38</td><td>6.98</td><td>Average</td><td>100</td><td>171</td></tr><tr><td>2</td><td>11220.00</td><td>55.84</td><td>74.00</td><td>-18.16</td><td>48.86</td><td>6.98</td><td>Peak</td><td>100</td><td>171</td></tr><tr><td>3</td><td>16830.00</td><td>58.98</td><td>68.20</td><td>-9.22</td><td>51.65</td><td>7.33</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>4</td><td>22440.00</td><td>40.74</td><td>54.00</td><td>-13.26</td><td>35.30</td><td>5.44</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>5</td><td>22440.00</td><td>54.78</td><td>74.00</td><td>-19.22</td><td>49.34</td><td>5.44</td><td>Peak</td><td>100</td><td>148</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11220.00	42.36	54.00	-11.64	35.38	6.98	Average	100	171	2	11220.00	55.84	74.00	-18.16	48.86	6.98	Peak	100	171	3	16830.00	58.98	68.20	-9.22	51.65	7.33	Peak	100	208	4	22440.00	40.74	54.00	-13.26	35.30	5.44	Average	100	148	5	22440.00	54.78	74.00	-19.22	49.34	5.44	Peak	100	148
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11220.00	42.36	54.00	-11.64	35.38	6.98	Average	100	171																																																						
2	11220.00	55.84	74.00	-18.16	48.86	6.98	Peak	100	171																																																						
3	16830.00	58.98	68.20	-9.22	51.65	7.33	Peak	100	208																																																						
4	22440.00	40.74	54.00	-13.26	35.30	5.44	Average	100	148																																																						
5	22440.00	54.78	74.00	-19.22	49.34	5.44	Peak	100	148																																																						

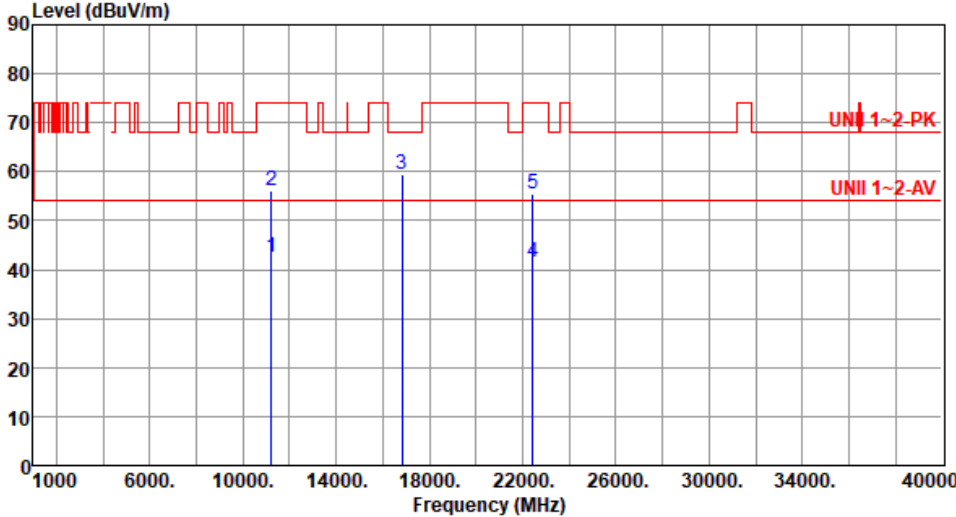


Modulation	ax HE80 RU484	Test Freq. (MHz)	5610																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11220.00</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>35.42</td><td>6.98</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>2</td><td>11220.00</td><td>56.19</td><td>74.00</td><td>-17.81</td><td>49.21</td><td>6.98</td><td>Peak</td><td>100</td><td>243</td></tr><tr><td>3</td><td>16830.00</td><td>59.47</td><td>68.20</td><td>-8.73</td><td>52.14</td><td>7.33</td><td>Peak</td><td>100</td><td>179</td></tr><tr><td>4</td><td>22440.00</td><td>41.62</td><td>54.00</td><td>-12.38</td><td>36.18</td><td>5.44</td><td>Average</td><td>100</td><td>106</td></tr><tr><td>5</td><td>22440.00</td><td>55.49</td><td>74.00</td><td>-18.51</td><td>50.05</td><td>5.44</td><td>Peak</td><td>100</td><td>106</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11220.00	42.40	54.00	-11.60	35.42	6.98	Average	100	243	2	11220.00	56.19	74.00	-17.81	49.21	6.98	Peak	100	243	3	16830.00	59.47	68.20	-8.73	52.14	7.33	Peak	100	179	4	22440.00	41.62	54.00	-12.38	36.18	5.44	Average	100	106	5	22440.00	55.49	74.00	-18.51	50.05	5.44	Peak	100	106
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11220.00	42.40	54.00	-11.60	35.42	6.98	Average	100	243																																																						
2	11220.00	56.19	74.00	-17.81	49.21	6.98	Peak	100	243																																																						
3	16830.00	59.47	68.20	-8.73	52.14	7.33	Peak	100	179																																																						
4	22440.00	41.62	54.00	-12.38	36.18	5.44	Average	100	106																																																						
5	22440.00	55.49	74.00	-18.51	50.05	5.44	Peak	100	106																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															

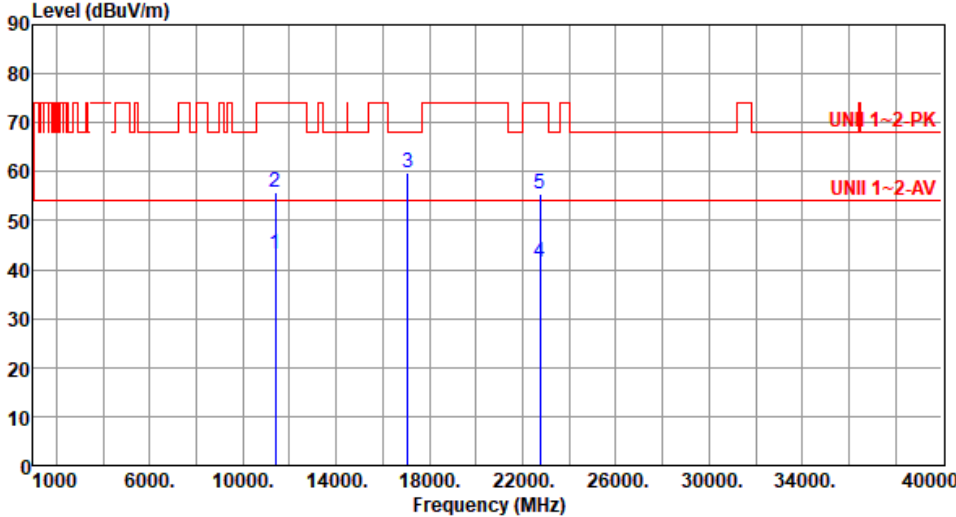


Modulation	ax HE80 RU484	Test Freq. (MHz)	5690						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	11380.00	43.23	54.00	-10.77	35.99	7.24	Average	100	158
2	11380.00	55.90	74.00	-18.10	48.66	7.24	Peak	100	158
3	17070.00	59.74	68.20	-8.46	53.02	6.72	Peak	100	221
4	22760.00	41.59	54.00	-12.41	35.48	6.11	Average	100	102
5	22760.00	55.44	74.00	-18.56	49.33	6.11	Peak	100	102
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

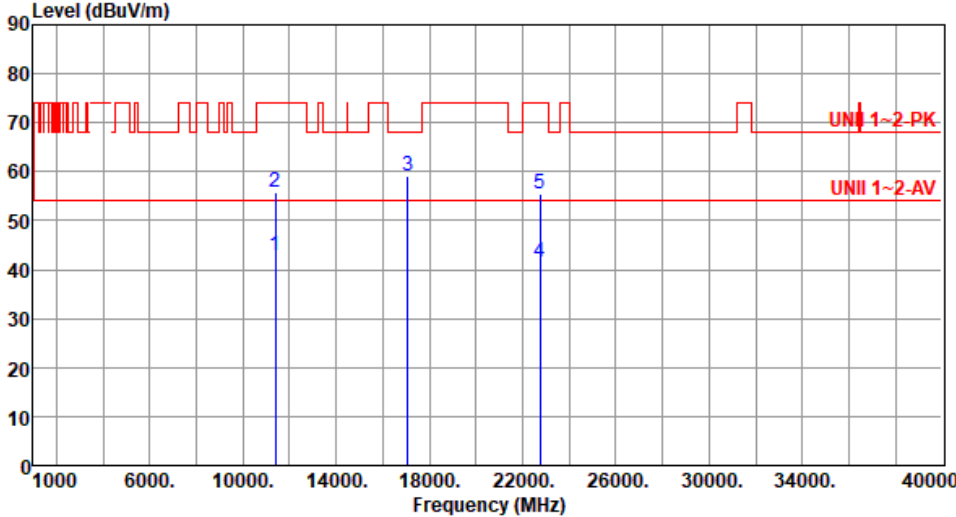

Modulation	ax HE80 RU484	Test Freq. (MHz)	5690																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																															
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11380.00</td><td>42.88</td><td>54.00</td><td>-11.12</td><td>35.64</td><td>7.24</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>2</td><td>11380.00</td><td>55.86</td><td>74.00</td><td>-18.14</td><td>48.62</td><td>7.24</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>3</td><td>17070.00</td><td>59.20</td><td>68.20</td><td>-9.00</td><td>52.48</td><td>6.72</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>4</td><td>22760.00</td><td>41.60</td><td>54.00</td><td>-12.40</td><td>35.49</td><td>6.11</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>5</td><td>22760.00</td><td>55.58</td><td>74.00</td><td>-18.42</td><td>49.47</td><td>6.11</td><td>Peak</td><td>100</td><td>108</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11380.00	42.88	54.00	-11.12	35.64	7.24	Average	100	208	2	11380.00	55.86	74.00	-18.14	48.62	7.24	Peak	100	208	3	17070.00	59.20	68.20	-9.00	52.48	6.72	Peak	100	177	4	22760.00	41.60	54.00	-12.40	35.49	6.11	Average	100	108	5	22760.00	55.58	74.00	-18.42	49.47	6.11	Peak	100	108
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11380.00	42.88	54.00	-11.12	35.64	7.24	Average	100	208																																																						
2	11380.00	55.86	74.00	-18.14	48.62	7.24	Peak	100	208																																																						
3	17070.00	59.20	68.20	-9.00	52.48	6.72	Peak	100	177																																																						
4	22760.00	41.60	54.00	-12.40	35.49	6.11	Average	100	108																																																						
5	22760.00	55.58	74.00	-18.42	49.47	6.11	Peak	100	108																																																						

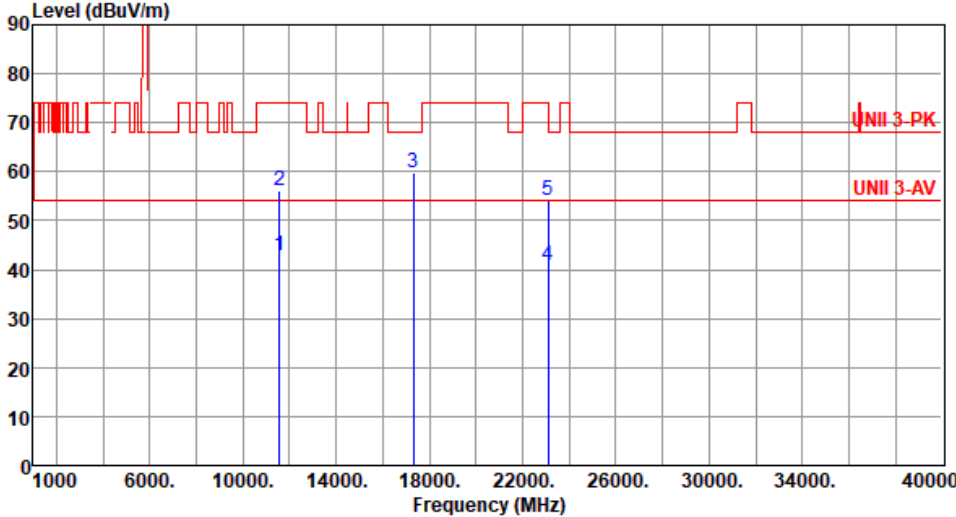

Modulation	ax HE80 RU484	Test Freq. (MHz)	5775						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):62									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	11550.00	42.97	54.00	-11.03	35.68	7.29	Average	100	176
2	11550.00	56.21	74.00	-17.79	48.92	7.29	Peak	100	176
3	17325.00	59.83	68.20	-8.37	53.02	6.81	Peak	100	201
4	23100.00	40.82	54.00	-13.18	34.22	6.60	Average	100	158
5	23100.00	54.03	74.00	-19.97	47.43	6.60	Peak	100	158
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	ax HE80 RU484	Test Freq. (MHz)	5775						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):62									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	11550.00	43.10	54.00	-10.90	35.81	7.29	Average	100	188
2	11550.00	56.42	74.00	-17.58	49.13	7.29	Peak	100	188
3	17325.00	59.99	68.20	-8.21	53.18	6.81	Peak	100	107
4	23100.00	40.88	54.00	-13.12	34.28	6.60	Average	100	254
5	23100.00	54.06	74.00	-19.94	47.46	6.60	Peak	100	254
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



ST Module


Unwanted Emissions (Below 1GHz)

Modulation	ax HE80 RU242	Test Freq. (MHz)	5690
Polarization	Horizontal		

Test By :Sean Yu

Temperature(°C):26

Humidity(%):61

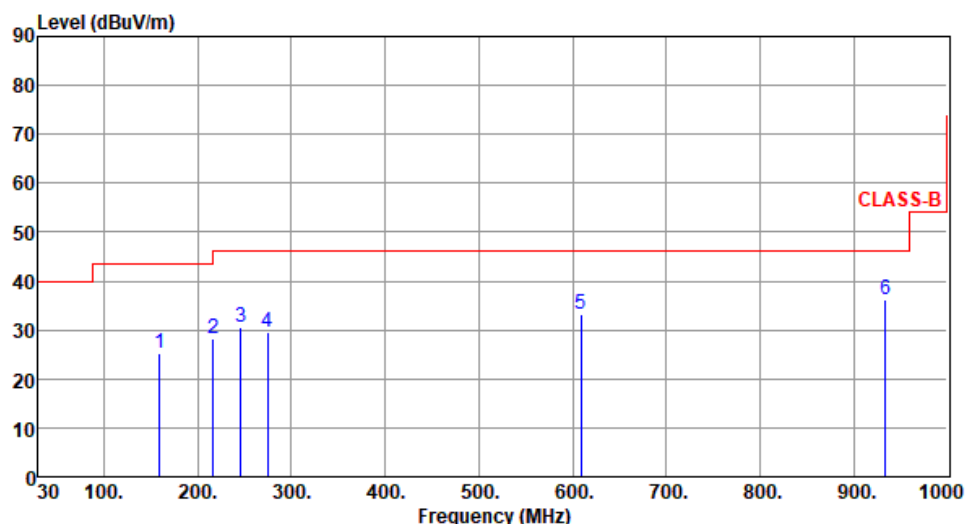

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	159.01	25.16	43.50	-18.34	33.80	-8.64	Peak	---	---
2	216.24	28.09	46.00	-17.91	40.03	-11.94	Peak	---	---
3	246.31	30.50	46.00	-15.50	40.53	-10.03	Peak	---	---
4	274.44	29.43	46.00	-16.57	38.22	-8.79	Peak	---	---
5	609.09	33.18	46.00	-12.82	33.54	-0.36	Peak	---	---
6	934.08	36.24	46.00	-9.76	31.19	5.05	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	ax HE80 RU242	Test Freq. (MHz)	5690
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			




Modulation	ax HE20 RU106	Test Freq. (MHz)	5825
Polarization	Horizontal		

Test By :Sean Yu

Temperature(°C):26

Humidity(%):61

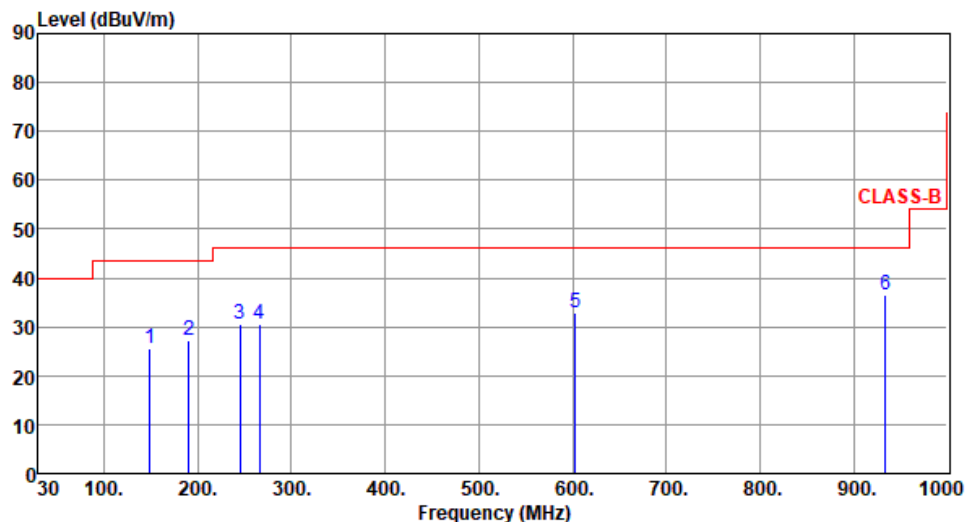

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	149.31	25.49	43.50	-18.01	34.30	-8.81	Peak	---	---
2	191.02	27.21	43.50	-16.29	38.54	-11.33	Peak	---	---
3	245.34	30.51	46.00	-15.49	40.56	-10.05	Peak	---	---
4	265.71	30.60	46.00	-15.40	39.86	-9.26	Peak	---	---
5	603.27	32.86	46.00	-13.14	33.40	-0.54	Peak	---	---
6	934.04	36.57	46.00	-9.43	31.52	5.05	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	ax HE20 RU106	Test Freq. (MHz)	5825
Polarization	Vertical		

Test By :Sean Yu Temperature(°C):26 Humidity(%):61

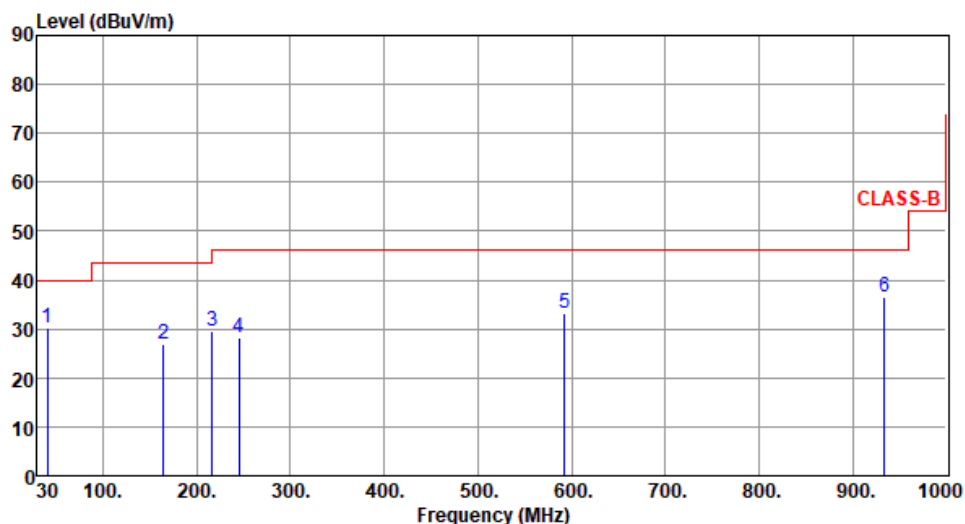

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	40.67	30.13	40.00	-9.87	38.91	-8.78	Peak	---	---
2	164.83	26.97	43.50	-16.53	35.97	-9.00	Peak	---	---
3	216.24	29.48	46.00	-16.52	41.42	-11.94	Peak	---	---
4	245.34	28.31	46.00	-17.69	38.36	-10.05	Peak	---	---
5	592.60	33.25	46.00	-12.75	34.11	-0.86	Peak	---	---
6	934.04	36.57	46.00	-9.43	31.52	5.05	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Unwanted Emissions (Above 1GHz)

Modulation	ax HE20 RU106	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) <			



Modulation	ax HE20 RU106	Test Freq. (MHz)	5180
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			



Modulation	ax HE20 RU52	Test Freq. (MHz)	5320
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			




Modulation	ax HE20 RU52	Test Freq. (MHz)	5320
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			



Modulation	ax HE20 RU26	Test Freq. (MHz)	5720																																																												
Polarization	Horizontal																																																														
Test By :Paul Lin Temperature(°C):26 Humidity(%):61																																																															
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11440.00</td><td>42.43</td><td>54.00</td><td>-11.57</td><td>35.08</td><td>7.35</td><td>Average</td><td>100</td><td>37</td></tr><tr><td>2</td><td>11440.00</td><td>55.93</td><td>74.00</td><td>-18.07</td><td>48.58</td><td>7.35</td><td>Peak</td><td>100</td><td>37</td></tr><tr><td>3</td><td>17160.00</td><td>60.50</td><td>68.20</td><td>-7.70</td><td>53.76</td><td>6.74</td><td>Peak</td><td>100</td><td>102</td></tr><tr><td>4</td><td>22880.00</td><td>41.81</td><td>54.00</td><td>-12.19</td><td>35.48</td><td>6.33</td><td>Average</td><td>100</td><td>168</td></tr><tr><td>5</td><td>22880.00</td><td>55.76</td><td>74.00</td><td>-18.24</td><td>49.43</td><td>6.33</td><td>Peak</td><td>100</td><td>168</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11440.00	42.43	54.00	-11.57	35.08	7.35	Average	100	37	2	11440.00	55.93	74.00	-18.07	48.58	7.35	Peak	100	37	3	17160.00	60.50	68.20	-7.70	53.76	6.74	Peak	100	102	4	22880.00	41.81	54.00	-12.19	35.48	6.33	Average	100	168	5	22880.00	55.76	74.00	-18.24	49.43	6.33	Peak	100	168
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	11440.00	42.43	54.00	-11.57	35.08	7.35	Average	100	37																																																						
2	11440.00	55.93	74.00	-18.07	48.58	7.35	Peak	100	37																																																						
3	17160.00	60.50	68.20	-7.70	53.76	6.74	Peak	100	102																																																						
4	22880.00	41.81	54.00	-12.19	35.48	6.33	Average	100	168																																																						
5	22880.00	55.76	74.00	-18.24	49.43	6.33	Peak	100	168																																																						

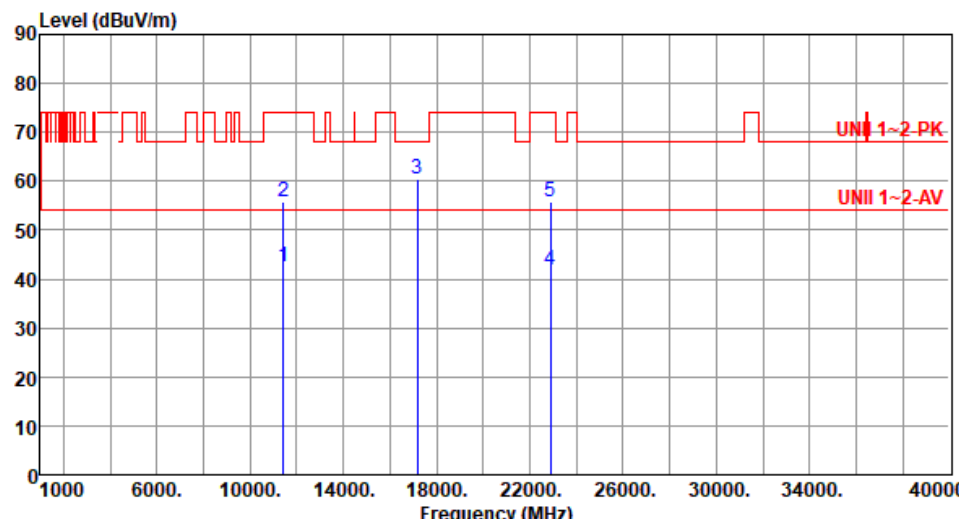


Modulation	ax HE20 RU26	Test Freq. (MHz)	5720						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	11440.00	42.59	54.00	-11.41	35.24	7.35	Average	100	102
2	11440.00	55.87	74.00	-18.13	48.52	7.35	Peak	100	102
3	17160.00	60.39	68.20	-7.81	53.65	6.74	Peak	100	221
4	22880.00	41.76	54.00	-12.24	35.43	6.33	Average	100	208
5	22880.00	55.81	74.00	-18.19	49.48	6.33	Peak	100	208
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	ax HE20 RU26	Test Freq. (MHz)	5785
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			

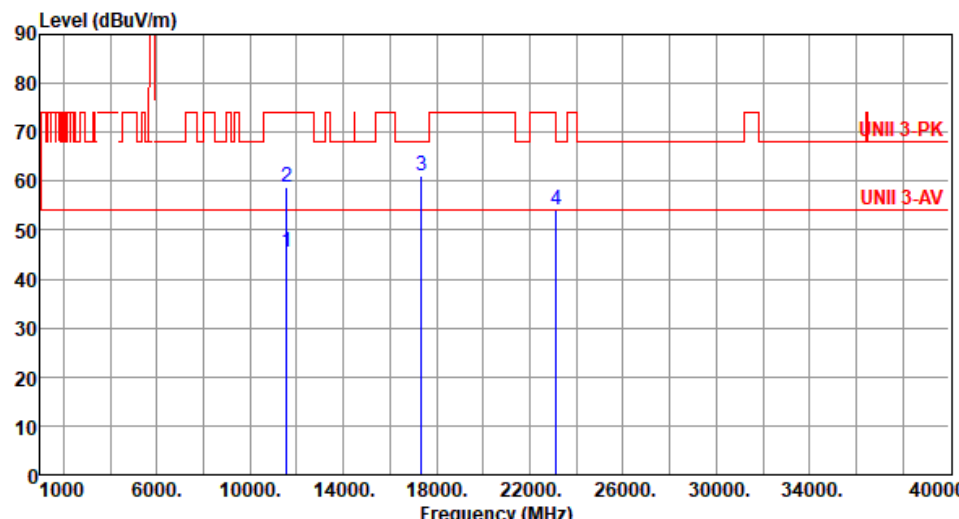

Modulation	ax HE20 RU26	Test Freq. (MHz)	5785																																																			
Polarization	Vertical																																																					
Test By :Paul Lin Temperature(°C):26 Humidity(%):61																																																						
																																																						
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11570.00</td><td>45.65</td><td>54.00</td><td>-8.35</td><td>38.42</td><td>7.23</td><td>Average</td><td>208</td><td>337</td></tr><tr><td>2</td><td>11570.00</td><td>58.91</td><td>74.00</td><td>-15.09</td><td>51.68</td><td>7.23</td><td>Peak</td><td>208</td><td>337</td></tr><tr><td>3</td><td>17355.00</td><td>61.20</td><td>68.20</td><td>-7.00</td><td>54.27</td><td>6.93</td><td>Peak</td><td>100</td><td>31</td></tr><tr><td>4</td><td>23140.00</td><td>54.15</td><td>68.20</td><td>-14.05</td><td>47.54</td><td>6.61</td><td>Peak</td><td>100</td><td>115</td></tr></table>		Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11570.00	45.65	54.00	-8.35	38.42	7.23	Average	208	337	2	11570.00	58.91	74.00	-15.09	51.68	7.23	Peak	208	337	3	17355.00	61.20	68.20	-7.00	54.27	6.93	Peak	100	31	4	23140.00	54.15	68.20	-14.05	47.54	6.61	Peak	100	115			
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																													
1	11570.00	45.65	54.00	-8.35	38.42	7.23	Average	208	337																																													
2	11570.00	58.91	74.00	-15.09	51.68	7.23	Peak	208	337																																													
3	17355.00	61.20	68.20	-7.00	54.27	6.93	Peak	100	31																																													
4	23140.00	54.15	68.20	-14.05	47.54	6.61	Peak	100	115																																													
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																						




Modulation	ax HE80 RU242	Test Freq. (MHz)	5690
Power Phase	Line		

Test by : Joe Liao

Temperature: 22°C

Humidity: 68%

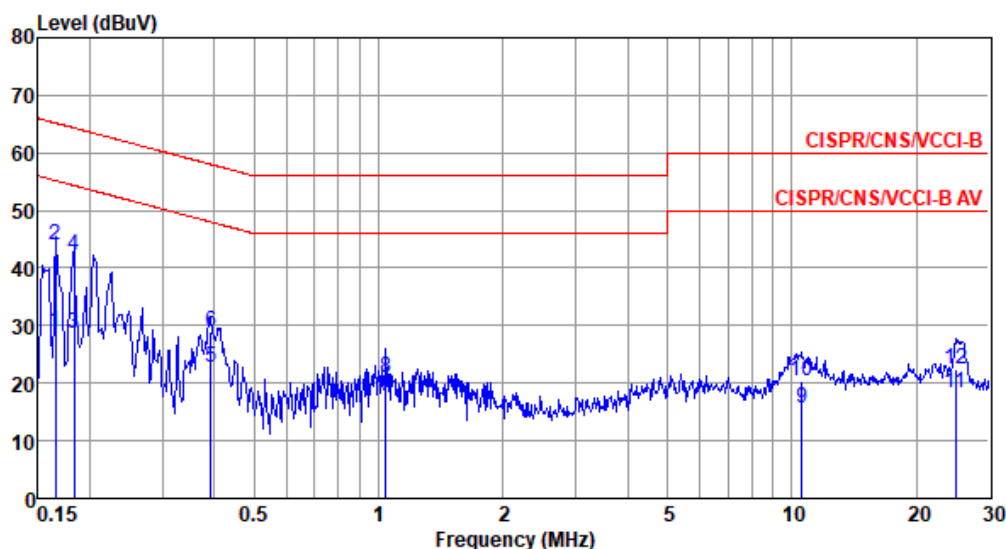

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.165	29.01	55.21	-26.20	19.09	9.63	0.07	0.22	Average
2*	0.165	44.07	65.21	-21.14	34.15	9.63	0.07	0.22	QP
3	0.183	28.76	54.33	-25.57	18.83	9.62	0.07	0.24	Average
4	0.183	42.21	64.33	-22.12	32.28	9.62	0.07	0.24	QP
5	0.393	22.75	47.99	-25.24	12.72	9.62	0.08	0.33	Average
6	0.393	28.88	57.99	-29.11	18.85	9.62	0.08	0.33	QP
7	1.043	17.84	46.00	-28.16	7.76	9.63	0.09	0.36	Average
8	1.043	20.93	56.00	-35.07	10.85	9.63	0.09	0.36	QP
9	10.564	15.63	50.00	-34.37	5.13	9.69	0.36	0.45	Average
10	10.564	20.51	60.00	-39.49	10.01	9.69	0.36	0.45	QP
11	24.922	18.25	50.00	-31.75	7.37	9.65	0.54	0.69	Average
12	24.922	22.47	60.00	-37.53	11.59	9.65	0.54	0.69	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).




Modulation	ax HE80 RU242	Test Freq. (MHz)	5690
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 22°C

Humidity: 68%

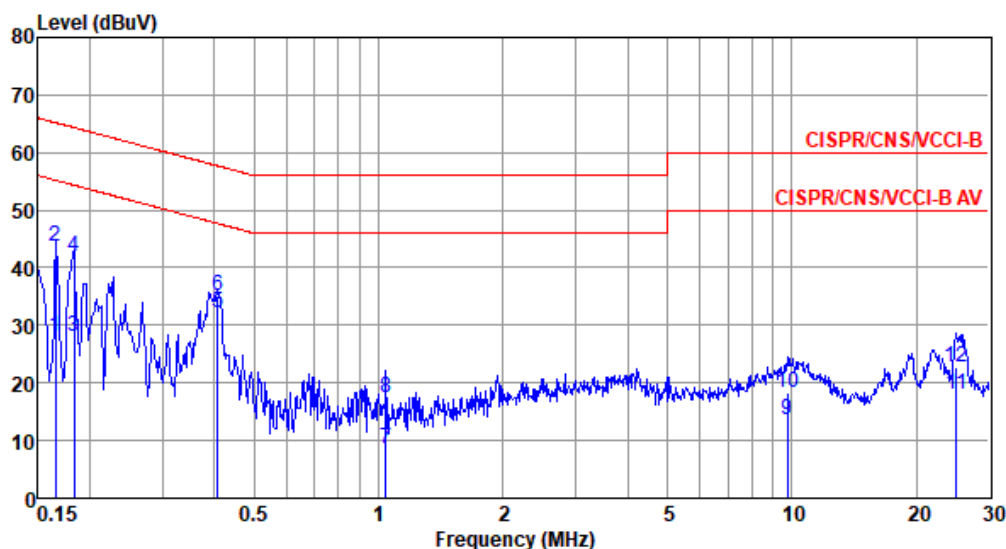

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark
	MHz	dBuV	Line	Limit	Level		loss		
			dBuV	dB	dBuV	dB	dB	dB	
1	0.165	27.95	55.21	-27.26	18.11	9.63	0.07	0.14	Average
2	0.165	43.81	65.21	-21.40	33.97	9.63	0.07	0.14	QP
3	0.183	28.04	54.33	-26.29	18.18	9.63	0.07	0.16	Average
4	0.183	41.80	64.33	-22.53	31.94	9.63	0.07	0.16	QP
5*	0.408	32.26	47.68	-15.42	22.31	9.62	0.08	0.25	Average
6	0.408	35.13	57.68	-22.55	25.18	9.62	0.08	0.25	QP
7	1.043	8.46	46.00	-37.54	-1.56	9.63	0.09	0.30	Average
8	1.043	17.45	56.00	-38.55	7.43	9.63	0.09	0.30	QP
9	9.757	13.59	50.00	-36.41	3.11	9.71	0.35	0.42	Average
10	9.757	18.29	60.00	-41.71	7.81	9.71	0.35	0.42	QP
11	25.055	17.92	50.00	-32.08	6.97	9.79	0.54	0.62	Average
12	25.055	22.59	60.00	-37.41	11.64	9.79	0.54	0.62	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).




Modulation	ax HE20 RU106	Test Freq. (MHz)	5825
Power Phase	Line		

Test by : Joe Liao

Temperature: 22°C

Humidity: 68%

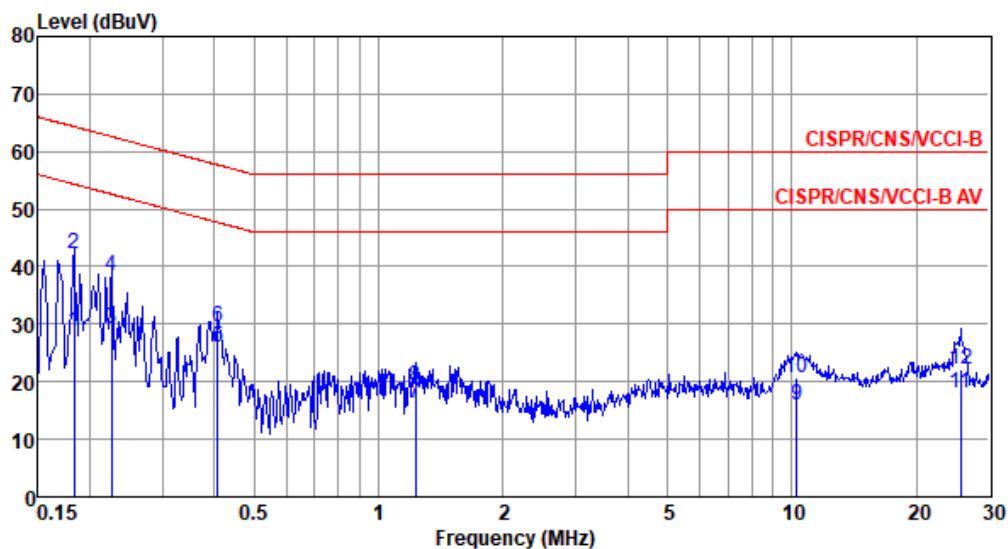

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.183	28.74	54.33	-25.59	18.81	9.62	0.07	0.24	Average
2	0.183	42.14	64.33	-22.19	32.21	9.62	0.07	0.24	QP
3	0.226	29.23	52.61	-23.38	19.29	9.62	0.06	0.26	Average
4	0.226	38.25	62.61	-24.36	28.31	9.62	0.06	0.26	QP
5*	0.408	25.92	47.68	-21.76	15.89	9.62	0.08	0.33	Average
6	0.408	29.50	57.68	-28.18	19.47	9.62	0.08	0.33	QP
7	1.229	16.32	46.00	-29.68	6.22	9.63	0.10	0.37	Average
8	1.229	19.06	56.00	-36.94	8.96	9.63	0.10	0.37	QP
9	10.288	16.03	50.00	-33.97	5.53	9.69	0.36	0.45	Average
10	10.288	20.67	60.00	-39.33	10.17	9.69	0.36	0.45	QP
11	25.591	17.87	50.00	-32.13	6.98	9.64	0.55	0.70	Average
12	25.591	22.10	60.00	-37.90	11.21	9.64	0.55	0.70	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).




Modulation	ax HE20 RU106	Test Freq. (MHz)	5825
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 22°C

Humidity: 68%

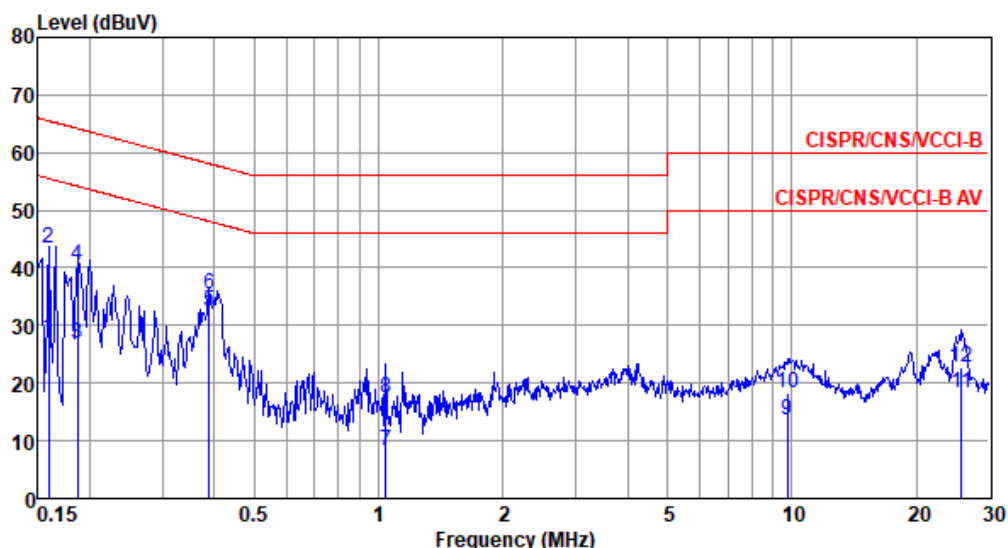

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.159	27.69	55.52	-27.83	17.85	9.63	0.08	0.13	Average
2	0.159	43.26	65.52	-22.26	33.42	9.63	0.08	0.13	QP
3	0.186	26.76	54.20	-27.44	16.91	9.63	0.06	0.16	Average
4	0.186	40.38	64.20	-23.82	30.53	9.63	0.06	0.16	QP
5*	0.389	32.55	48.08	-15.53	22.60	9.62	0.08	0.25	Average
6	0.389	35.43	58.08	-22.65	25.48	9.62	0.08	0.25	QP
7	1.043	8.34	46.00	-37.66	-1.68	9.63	0.09	0.30	Average
8	1.043	17.34	56.00	-38.66	7.32	9.63	0.09	0.30	QP
9	9.757	13.57	50.00	-36.43	3.09	9.71	0.35	0.42	Average
10	9.757	18.40	60.00	-41.60	7.92	9.71	0.35	0.42	QP
11	25.727	18.38	50.00	-31.62	7.40	9.79	0.55	0.64	Average
12	25.727	22.75	60.00	-37.25	11.77	9.79	0.55	0.64	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).