




5.925-6.425GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6175MHz

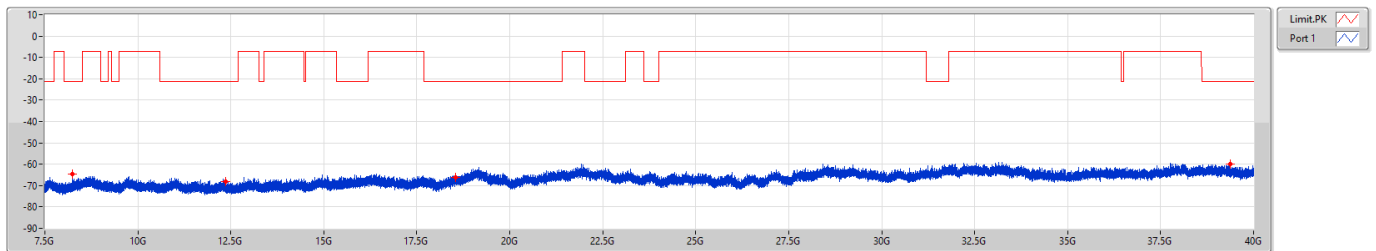


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	8.23336G	-64.59	-64.59
7.5G	18G	1M	PK	12.34969G	-68.21	-68.21
18G	40G	1M	PK	18.53213G	-66.11	-66.11
18G	40G	1M	PK	39.36613G	-60.10	-60.10

5.925-6.425GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6175MHz




F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	8.23303G	-67.59	-67.59
7.5G	18G	1M	AV	12.35002G	-74.73	-74.73
18G	40G	1M	AV	18.50738G	-73.51	-73.51
18G	40G	1M	AV	38.85256G	-68.38	-68.38



5.925-6.425GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6415MHz

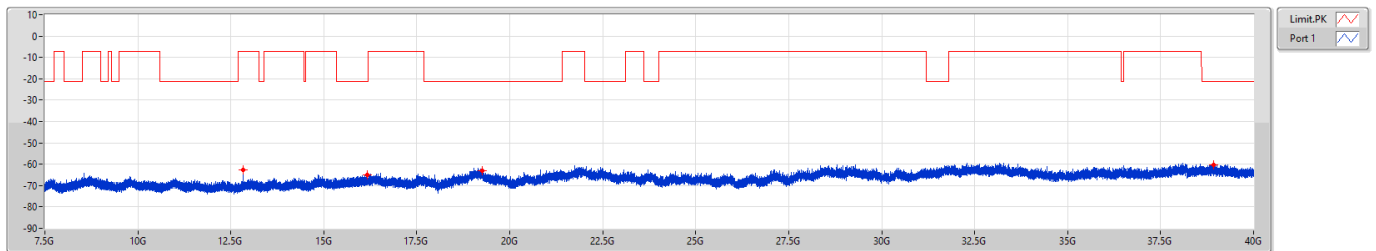


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	12.82416G	-62.77	-62.77
7.5G	18G	1M	PK	16.17103G	-64.93	-64.93
18G	40G	1M	PK	19.25056G	-63.11	-63.11
18G	40G	1M	PK	38.92063G	-60.13	-60.13

5.925-6.425GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6415MHz

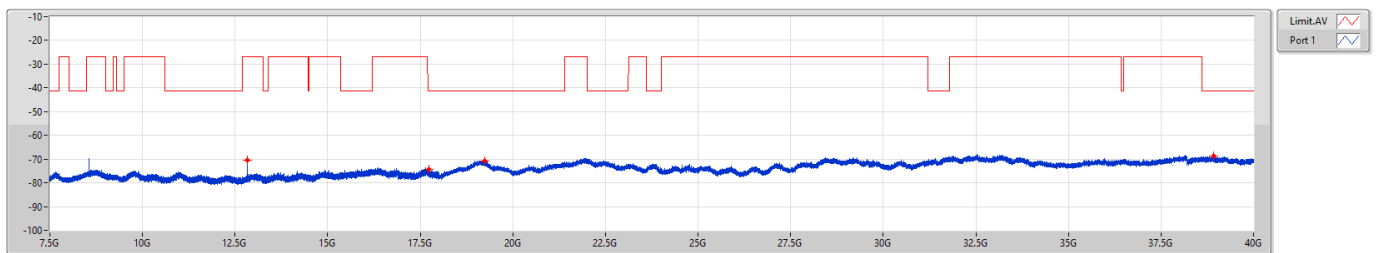


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	12.83006G	-70.35	-70.35
7.5G	18G	1M	AV	17.73783G	-74.25	-74.25
18G	40G	1M	AV	19.25056G	-70.77	-70.77
18G	40G	1M	AV	38.911G	-68.73	-68.73



6.425-6.525GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6435MHz

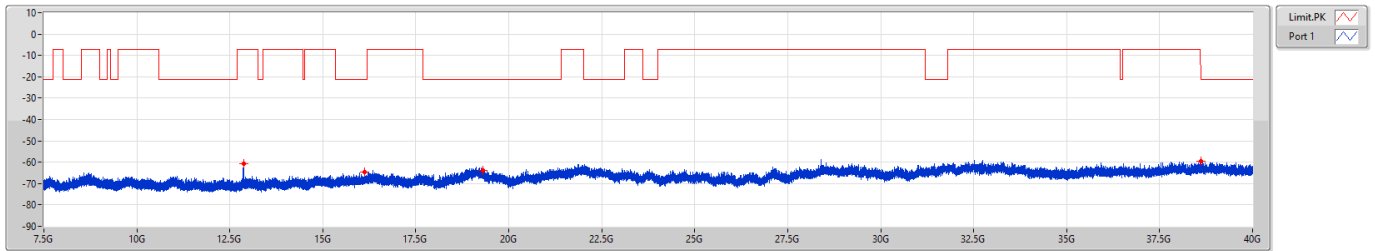


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	12.86452G	-60.73	-60.73
7.5G	18G	1M	PK	16.13002G	-64.62	-64.62
18G	40G	1M	PK	19.29663G	-63.86	-63.86
18G	40G	1M	PK	38.61194G	-59.59	-59.59

6.425-6.525GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6435MHz

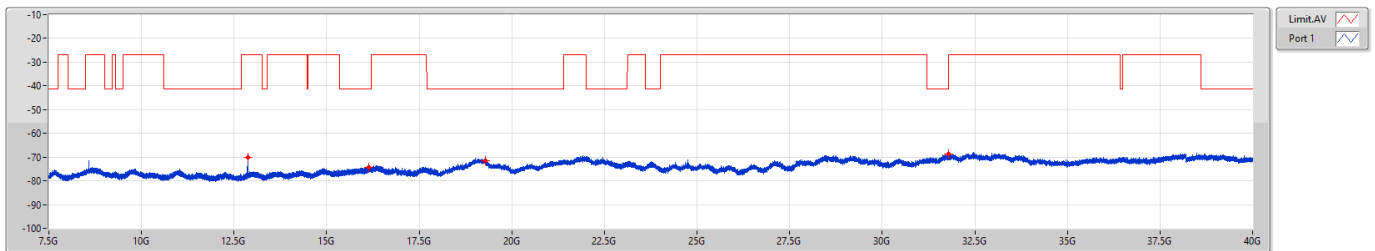


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	12.86977G	-70.01	-70.01
7.5G	18G	1M	AV	16.13691G	-74.23	-74.23
18G	40G	1M	AV	19.29594G	-71.64	-71.64
18G	40G	1M	AV	31.78231G	-68.64	-68.64



6.425-6.525GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


6475MHz

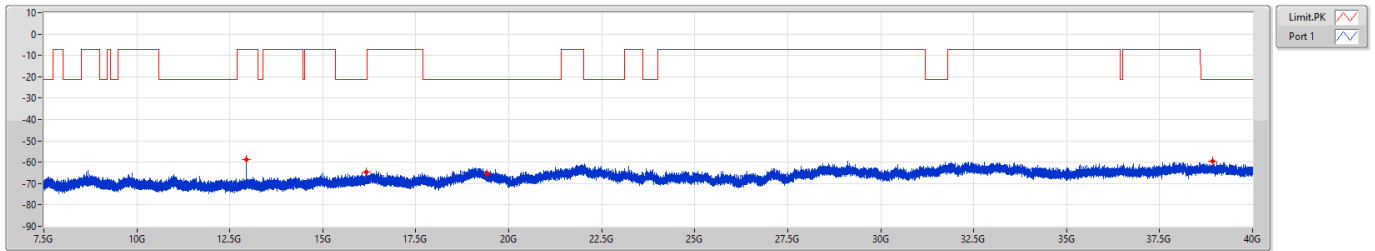

6.425-6.525GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6475MHz

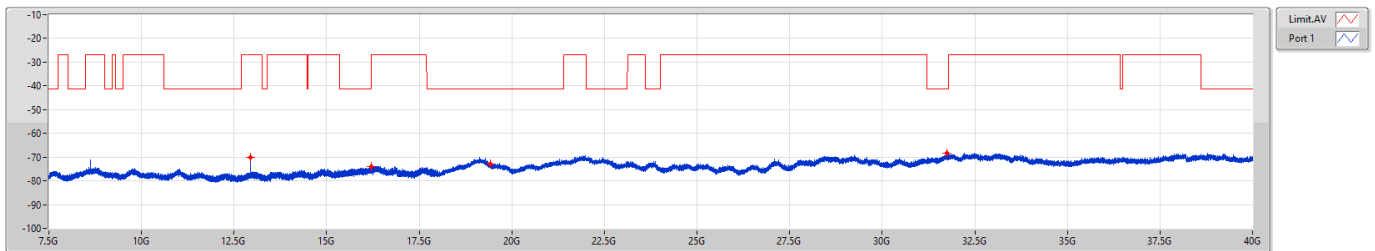




6.425-6.525GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6515MHz

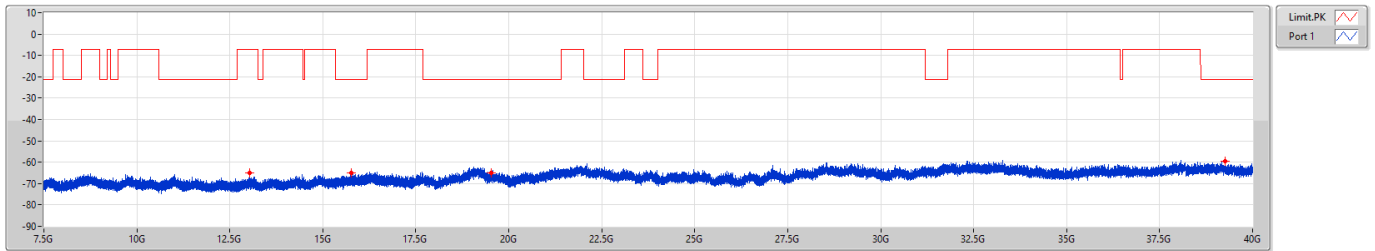


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	13.02563G	-65.08	-65.08
7.5G	18G	1M	PK	15.77006G	-65.17	-65.17
18G	40G	1M	PK	19.53175G	-65.19	-65.19
18G	40G	1M	PK	39.25338G	-59.66	-59.66

6.425-6.525GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6515MHz

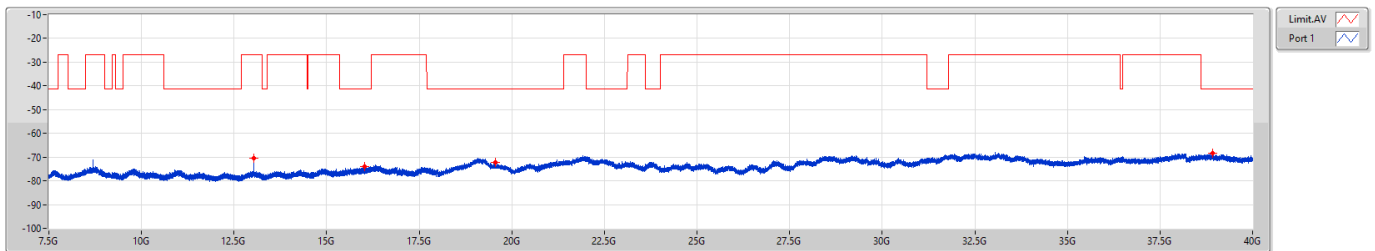


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	13.02989G	-70.60	-70.60
7.5G	18G	1M	AV	16.03059G	-73.90	-73.90
18G	40G	1M	AV	19.56269G	-72.38	-72.38
18G	40G	1M	AV	38.911G	-68.47	-68.47



6.525-6.875GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


6535MHz

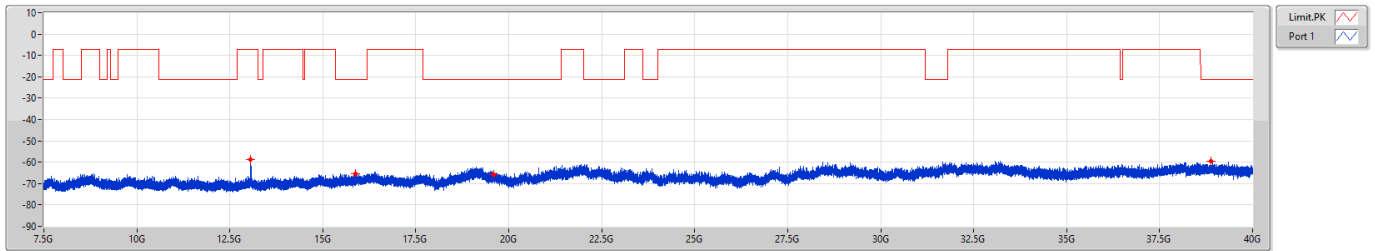

6.525-6.875GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6535MHz

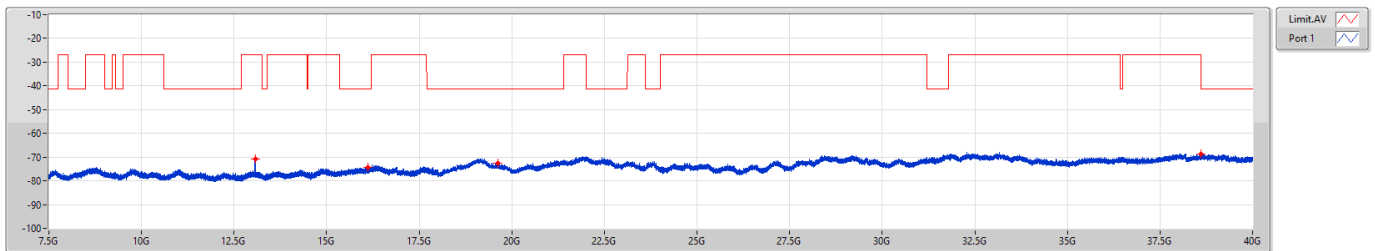




6.525-6.875GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


6715MHz

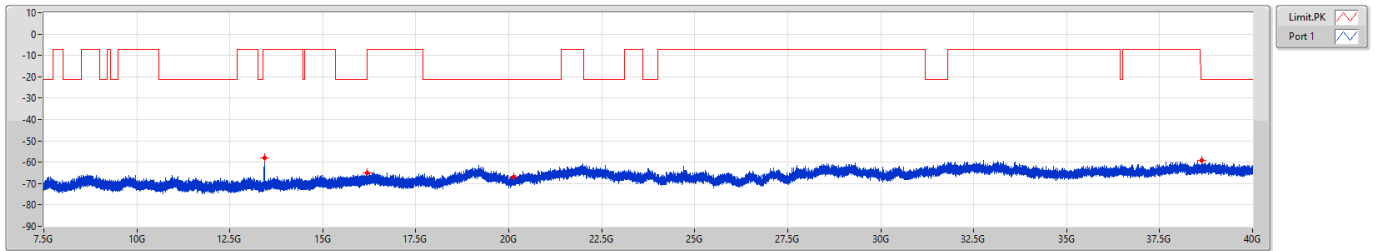

6.525-6.875GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6715MHz

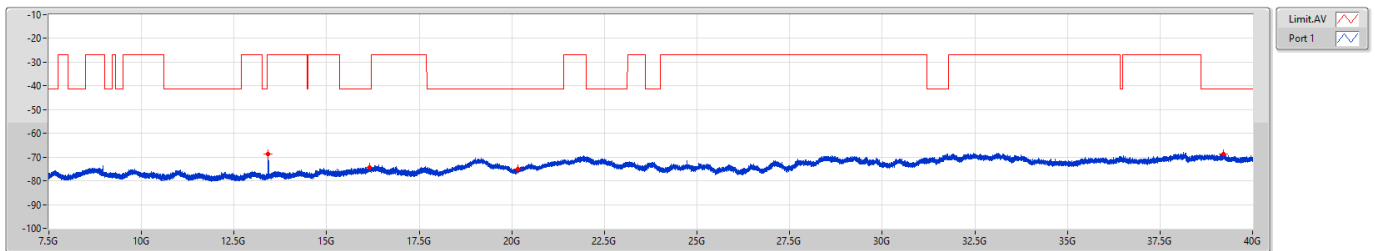




6.525-6.875GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6855MHz

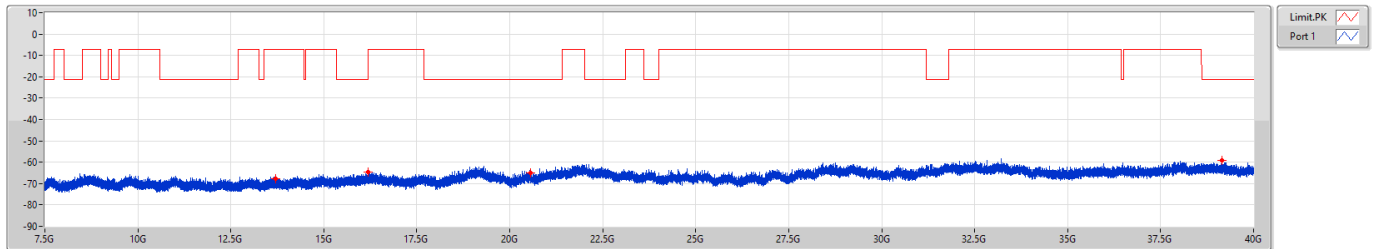


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	13.70484G	-67.59	-67.59
7.5G	18G	1M	PK	16.18514G	-64.61	-64.61
18G	40G	1M	PK	20.56438G	-65.12	-65.12
18G	40G	1M	PK	39.15781G	-59.09	-59.09

6.525-6.875GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6855MHz

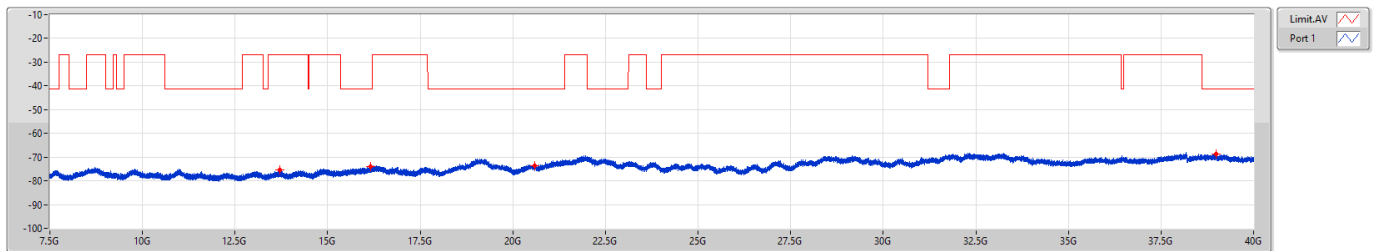


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	13.70977G	-75.34	-75.34
7.5G	18G	1M	AV	16.16578G	-73.90	-73.90
18G	40G	1M	AV	20.58088G	-73.78	-73.78
18G	40G	1M	AV	38.97769G	-68.55	-68.55



6.525-6.875GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


6875MHz Straddle 6.525-6.875GHz

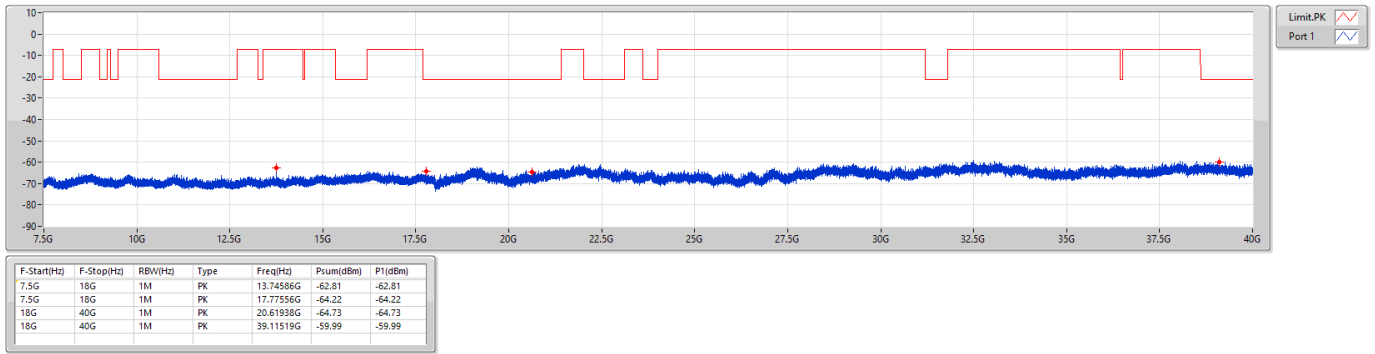

6.525-6.875GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6875MHz Straddle 6.525-6.875GHz

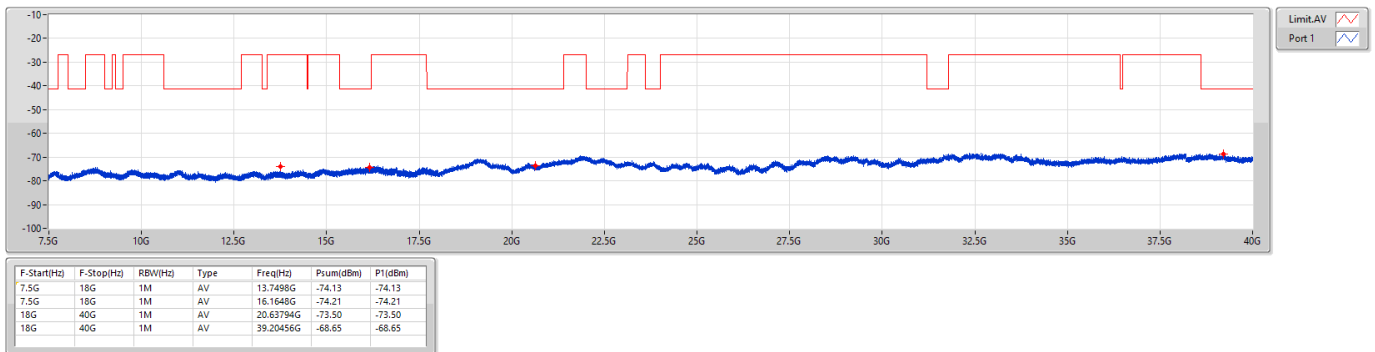




6.875-7.125GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6895MHz

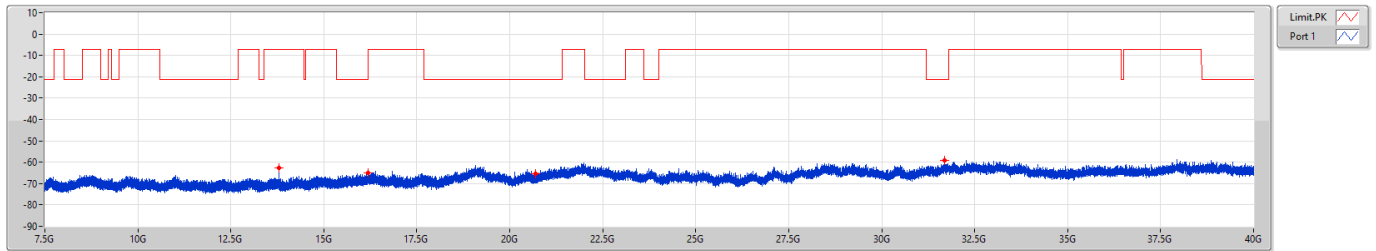


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	13.78622G	-62.81	-62.81
7.5G	18G	1M	PK	16.19039G	-65.13	-65.13
18G	40G	1M	PK	20.68606G	-65.43	-65.43
18G	40G	1M	PK	31.69363G	-59.14	-59.14

6.875-7.125GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6895MHz

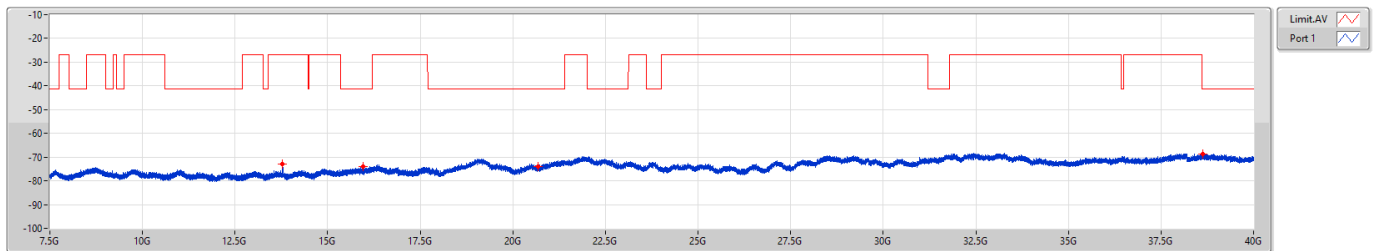


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	13.78491G	-72.84	-72.84
7.5G	18G	1M	AV	15.96563G	-74.00	-74.00
18G	40G	1M	AV	20.67781G	-74.03	-74.03
18G	40G	1M	AV	38.62569G	-68.76	-68.76



6.875-7.125GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


7015MHz

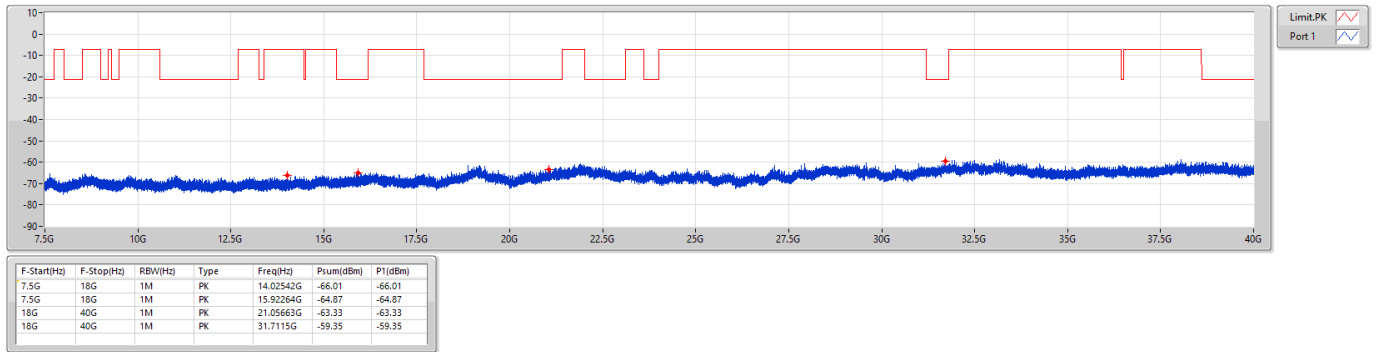

6.875-7.125GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

7015MHz

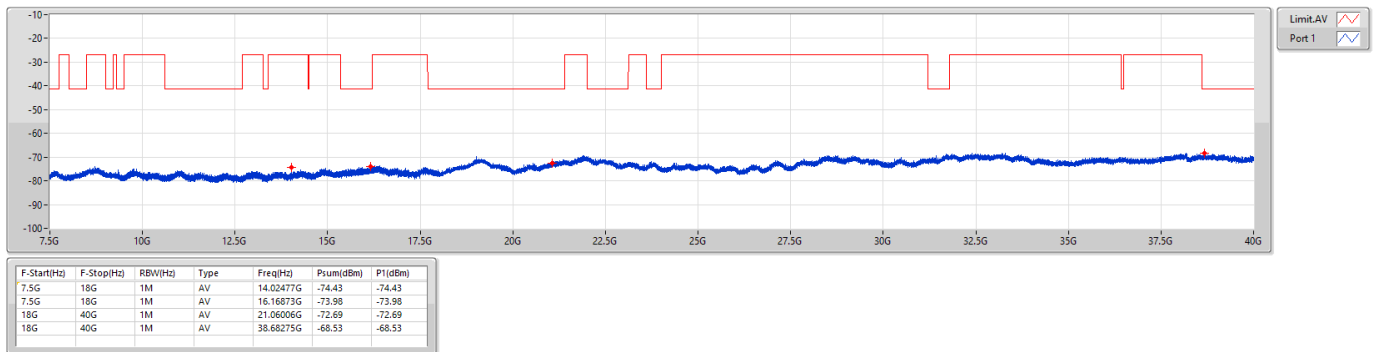




6.875-7.125GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

7095MHz

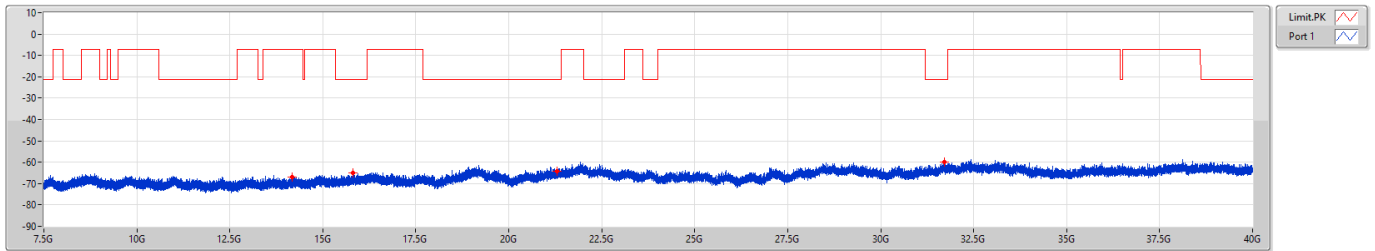


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	14.18095G	-66.98	-66.98
7.5G	18G	1M	PK	15.81534G	-65.08	-65.08
18G	40G	1M	PK	21.29931G	-64.17	-64.17
18G	40G	1M	PK	31.717G	-59.92	-59.92

6.875-7.125GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

7095MHz

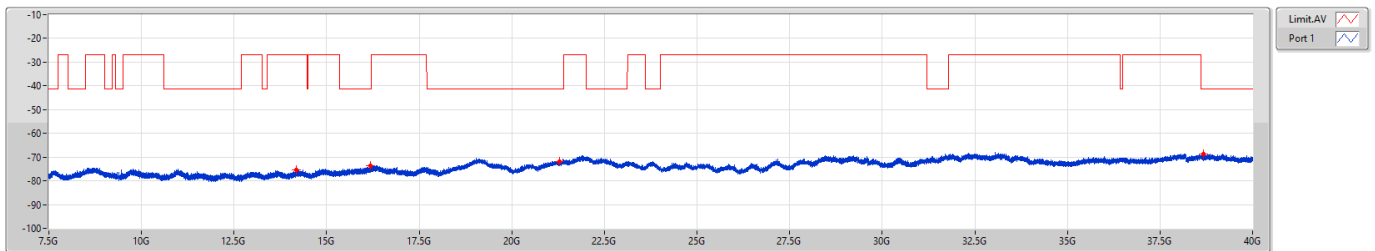


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	14.18981G	-75.23	-75.23
7.5G	18G	1M	AV	16.18153G	-73.62	-73.62
18G	40G	1M	AV	21.29588G	-72.00	-72.00
18G	40G	1M	AV	38.6745G	-68.63	-68.63



6.875-7.125GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

7115MHz

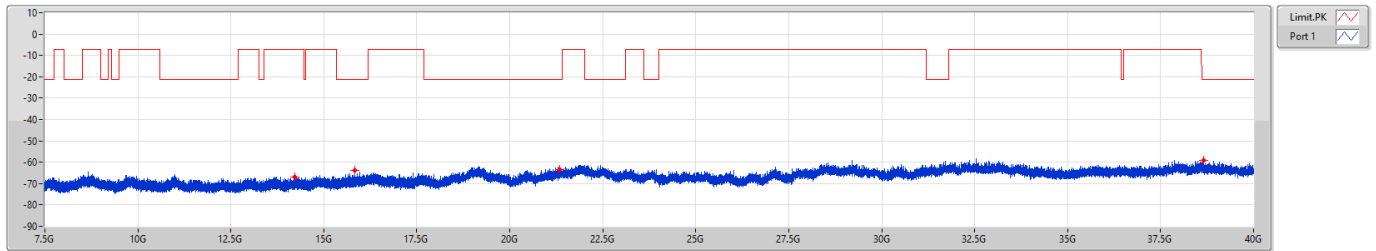


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	14.22525G	-66.87	-66.87
7.5G	18G	1M	PK	15.84225G	-63.83	-63.83
18G	40G	1M	PK	21.34606G	-63.38	-63.38
18G	40G	1M	PK	38.64563G	-59.27	-59.27

6.875-7.125GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

7115MHz

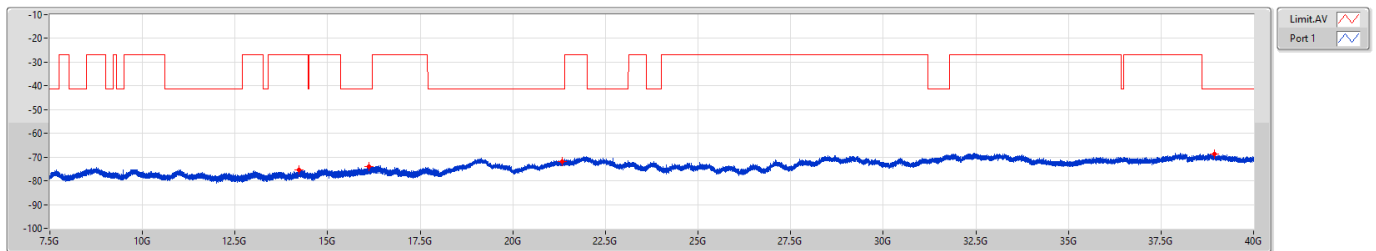


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	14.23017G	-75.26	-75.26
7.5G	18G	1M	AV	16.12116G	-74.12	-74.12
18G	40G	1M	AV	21.33438G	-71.73	-71.73
18G	40G	1M	AV	38.93231G	-68.60	-68.60



5.925-6.425GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

5955MHz

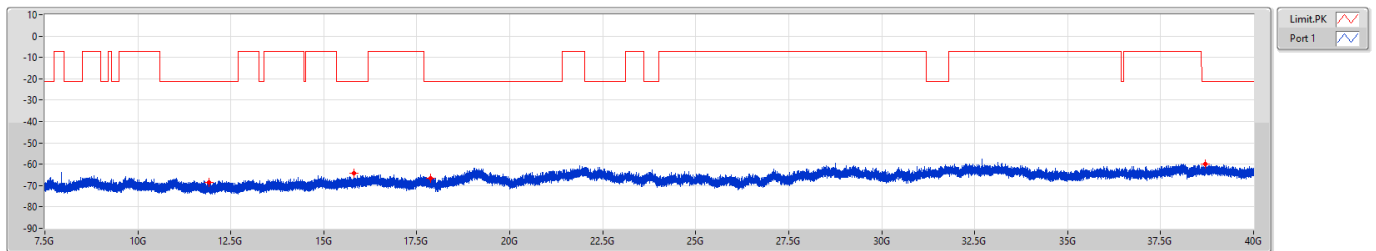


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	11.90377G	-68.57	-68.57
7.5G	18G	1M	PK	15.80386G	-64.34	-64.34
7.5G	18G	1M	PK	17.86809G	-66.53	-66.53
18G	40G	1M	PK	38.69238G	-60.11	-60.11

5.925-6.425GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

5955MHz

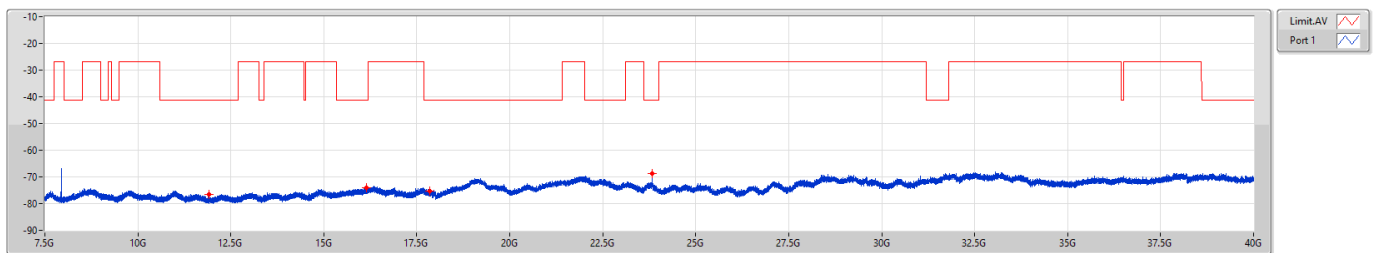


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	11.90967G	-76.47	-76.47
7.5G	18G	1M	AV	16.13625G	-74.02	-74.02
7.5G	18G	1M	AV	17.85464G	-75.21	-75.21
18G	40G	1M	AV	23.81969G	-68.69	-68.69



5.925-6.425GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6175MHz

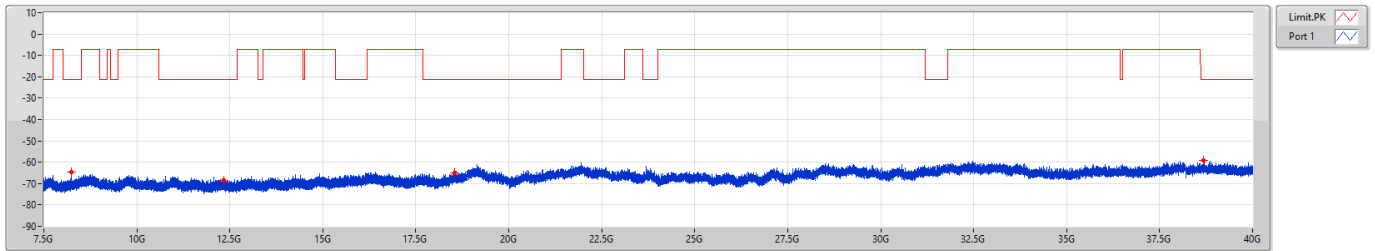


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	8.23336G	-64.71	-64.71
7.5G	18G	1M	PK	12.34509G	-68.58	-68.58
18G	40G	1M	PK	18.54175G	-64.98	-64.98
18G	40G	1M	PK	38.68481G	-59.10	-59.10

5.925-6.425GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6175MHz

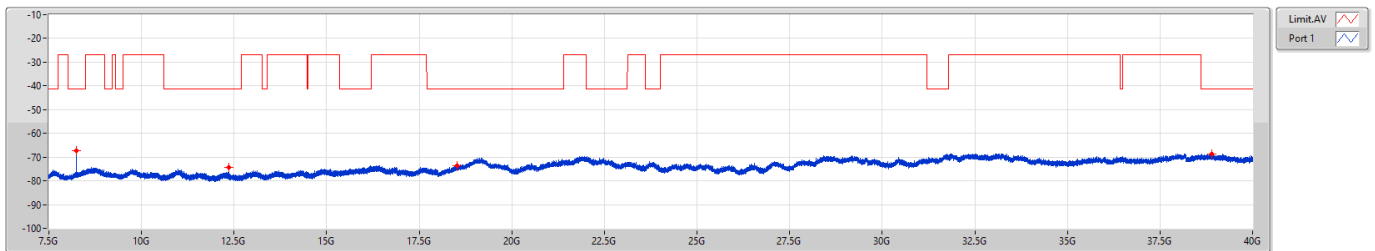


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	8.23336G	-67.20	-67.20
7.5G	18G	1M	AV	12.35002G	-74.46	-74.46
18G	40G	1M	AV	18.52456G	-73.73	-73.73
18G	40G	1M	AV	38.89175G	-68.62	-68.62



5.925-6.425GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6415MHz

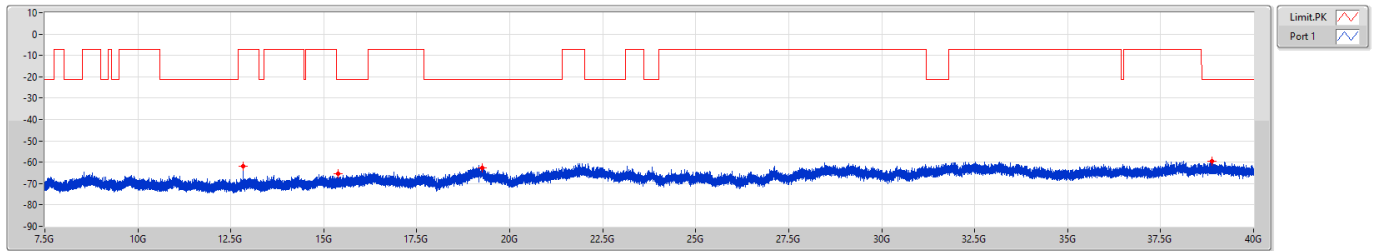


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	12.82219G	-61.73	-61.73
7.5G	18G	1M	PK	15.37303G	-65.28	-65.28
18G	40G	1M	PK	19.25881G	-62.59	-62.59
18G	40G	1M	PK	38.8725G	-59.49	-59.49

5.925-6.425GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6415MHz

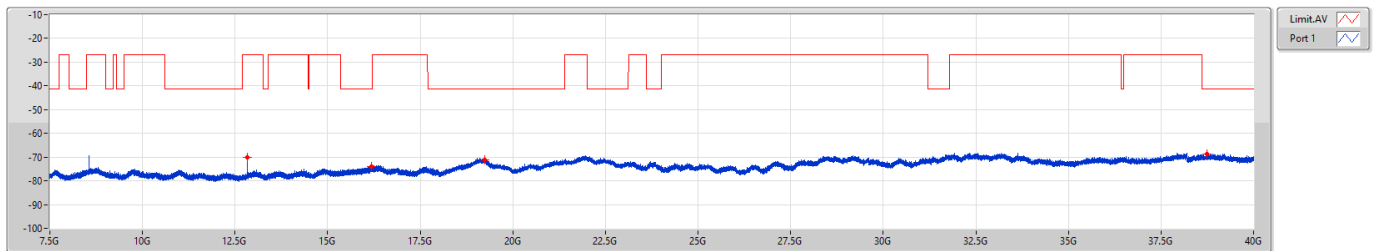


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	12.82973G	-70.10	-70.10
7.5G	18G	1M	AV	16.17431G	-73.96	-73.96
18G	40G	1M	AV	19.24094G	-71.28	-71.28
18G	40G	1M	AV	38.73019G	-68.66	-68.66



6.425-6.525GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6435MHz

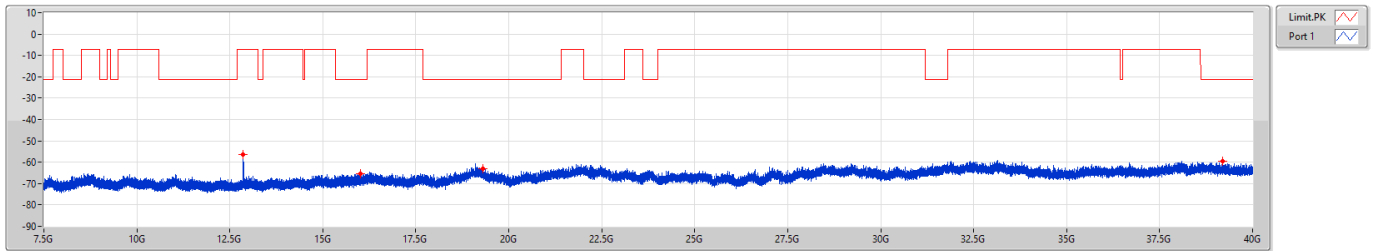


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	12.86255G	-56.27	-56.27
7.5G	18G	1M	PK	16.01517G	-65.43	-65.43
18G	40G	1M	PK	19.29388G	-63.12	-63.12
18G	40G	1M	PK	39.2025G	-59.71	-59.71

6.425-6.525GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6435MHz

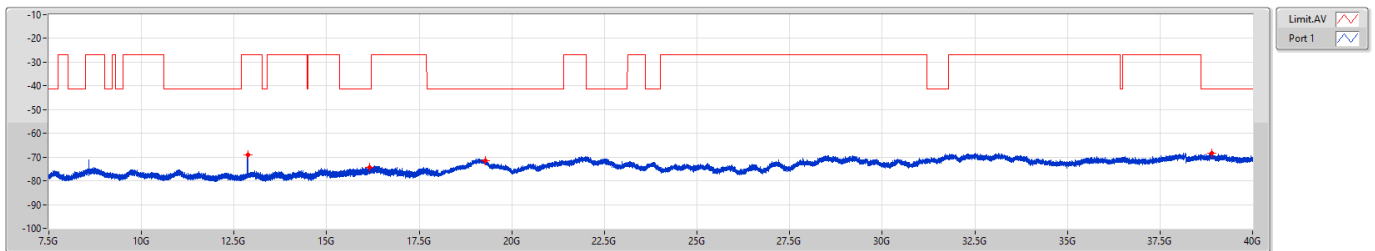


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	12.86452G	-69.04	-69.04
7.5G	18G	1M	AV	16.15758G	-74.27	-74.27
18G	40G	1M	AV	19.28769G	-71.53	-71.53
18G	40G	1M	AV	38.89381G	-68.52	-68.52



6.425-6.525GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6475MHz

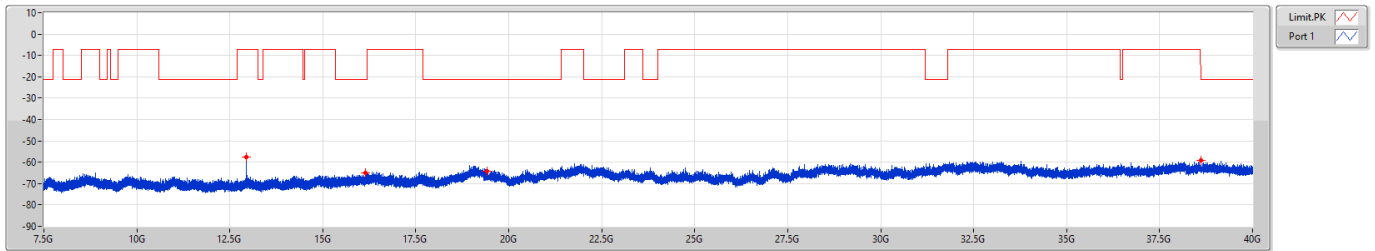


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	12.94228G	-57.69	-57.69
7.5G	18G	1M	PK	16.15364G	-65.08	-65.08
18G	40G	1M	PK	19.41556G	-64.34	-64.34
18G	40G	1M	PK	38.61263G	-59.19	-59.19

6.425-6.525GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6475MHz

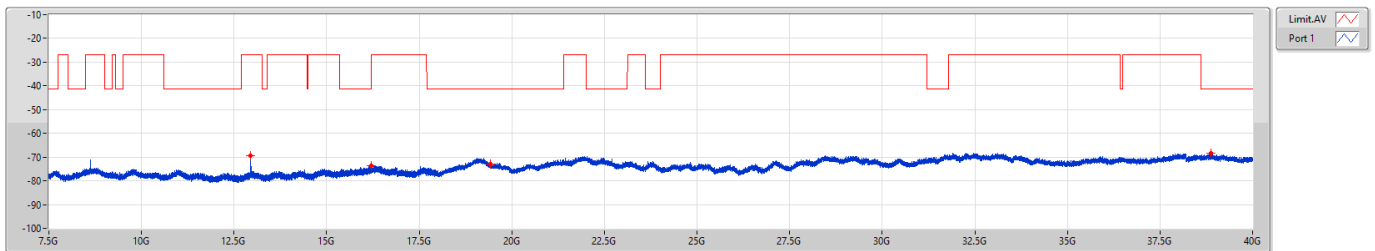


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	12.94359G	-69.53	-69.53
7.5G	18G	1M	AV	16.19695G	-73.71	-73.71
18G	40G	1M	AV	19.41556G	-72.85	-72.85
18G	40G	1M	AV	38.8725G	-68.32	-68.32



6.425-6.525GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6515MHz

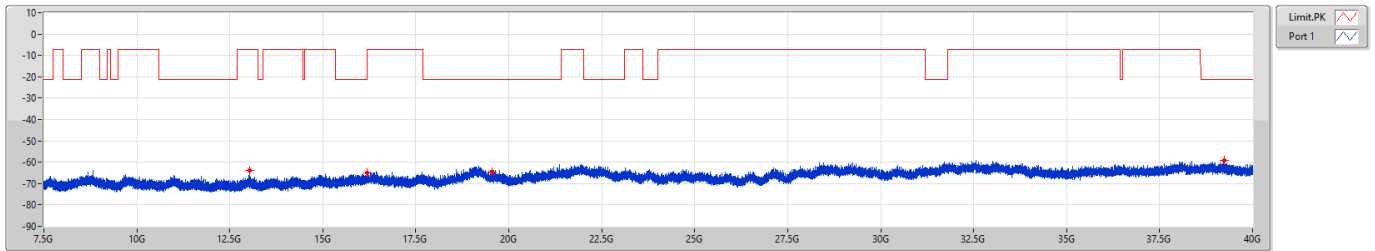


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	13.02398G	-63.75	-63.75
7.5G	18G	1M	PK	16.19761G	-65.06	-65.06
18G	40G	1M	PK	19.56131G	-64.76	-64.76
18G	40G	1M	PK	39.22794G	-59.30	-59.30

6.425-6.525GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6515MHz

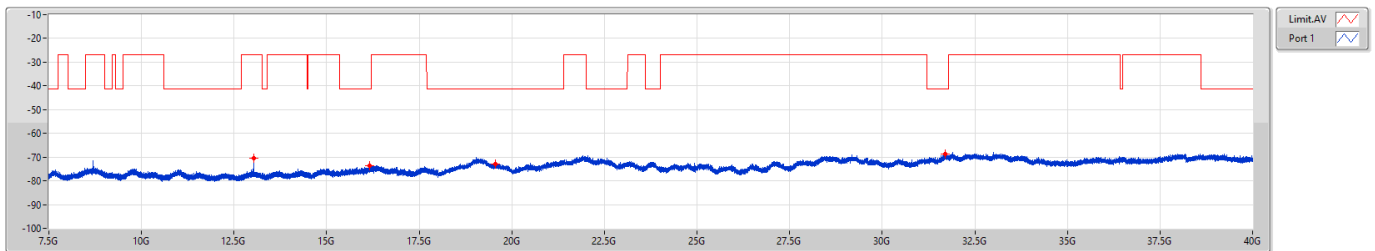


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	13.02989G	-70.45	-70.45
7.5G	18G	1M	AV	16.16578G	-73.55	-73.55
18G	40G	1M	AV	19.5565G	-73.04	-73.04
18G	40G	1M	AV	31.70256G	-68.56	-68.56



6.525-6.875GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


6535MHz

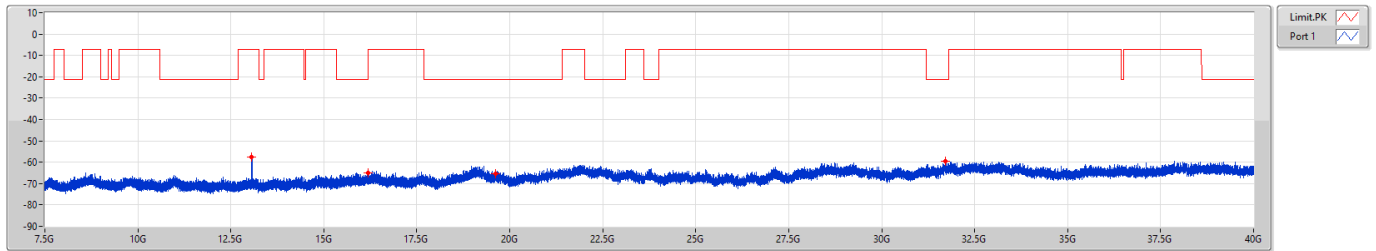

6.525-6.875GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6535MHz

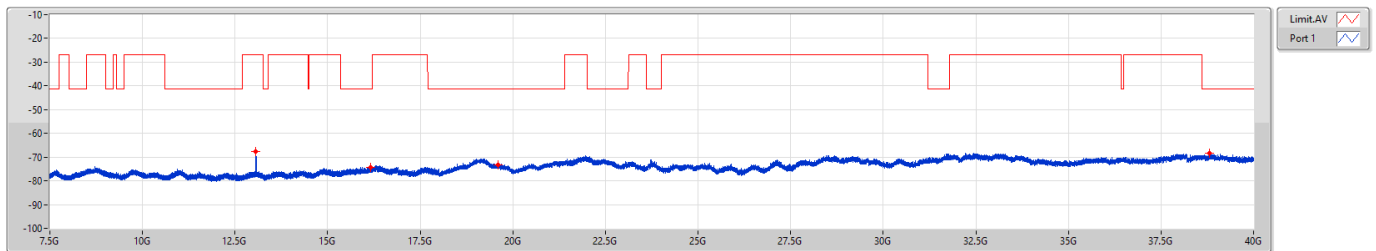




6.525-6.875GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


6715MHz

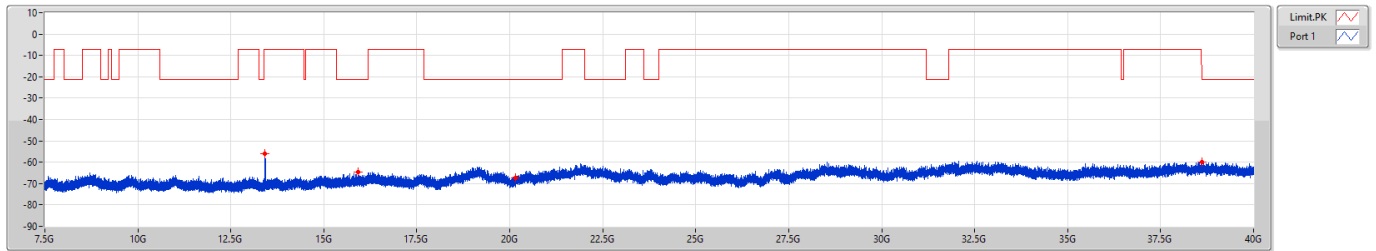

6.525-6.875GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6715MHz

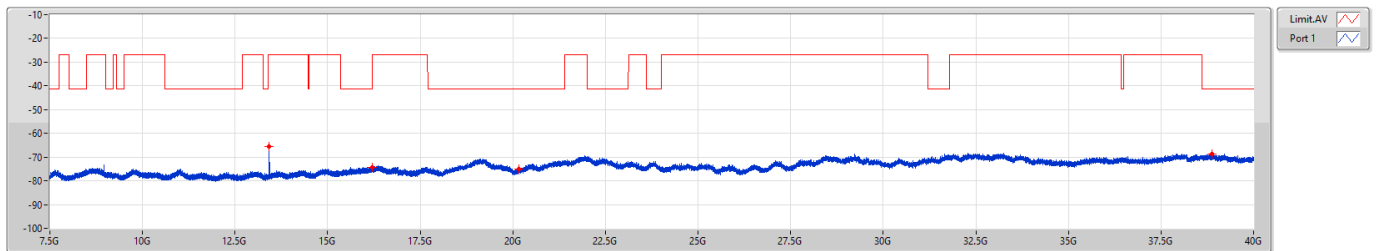




6.525-6.875GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6855MHz

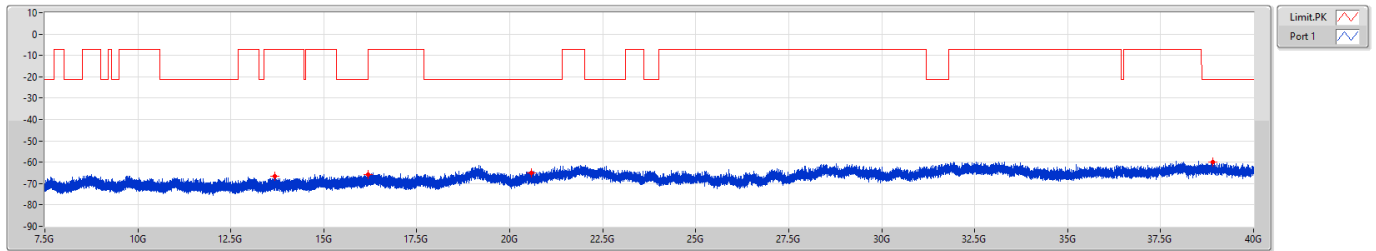


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	13.6927G	-66.73	-66.73
7.5G	18G	1M	PK	16.18186G	-65.87	-65.87
18G	40G	1M	PK	20.57675G	-64.97	-64.97
18G	40G	1M	PK	38.91169G	-59.73	-59.73

6.525-6.875GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6855MHz

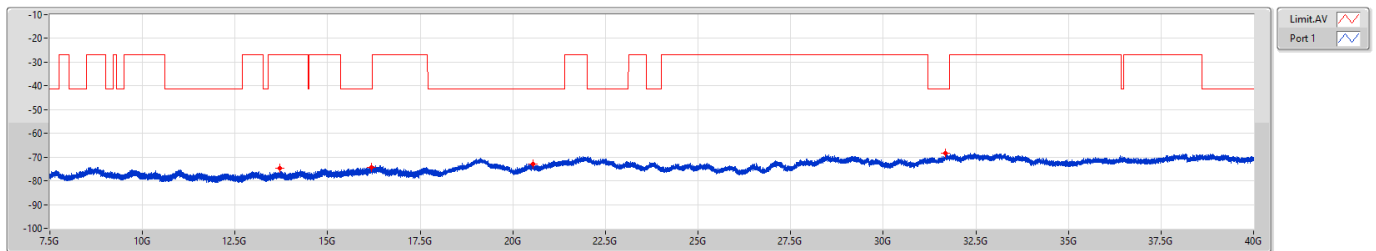


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	13.71009G	-74.61	-74.61
7.5G	18G	1M	AV	16.18645G	-74.28	-74.28
18G	40G	1M	AV	20.54925G	-72.89	-72.89
18G	40G	1M	AV	31.68744G	-68.53	-68.53



6.525-6.875GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


6875MHz Straddle 6.525-6.875GHz

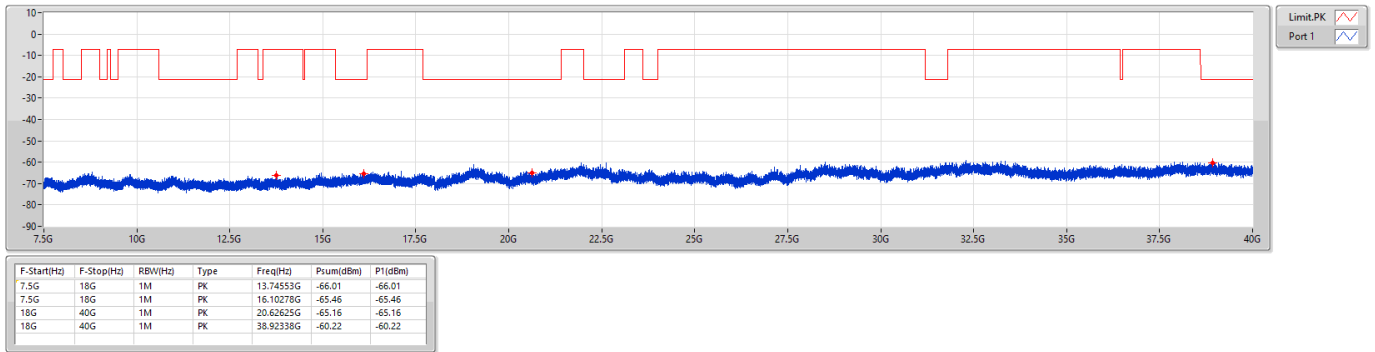

6.525-6.875GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6875MHz Straddle 6.525-6.875GHz

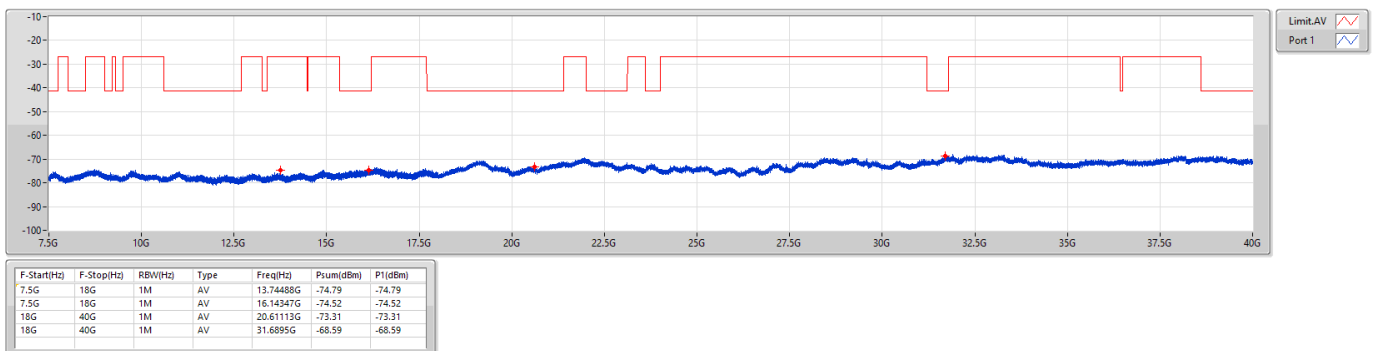




6.875-7.125GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


6895MHz

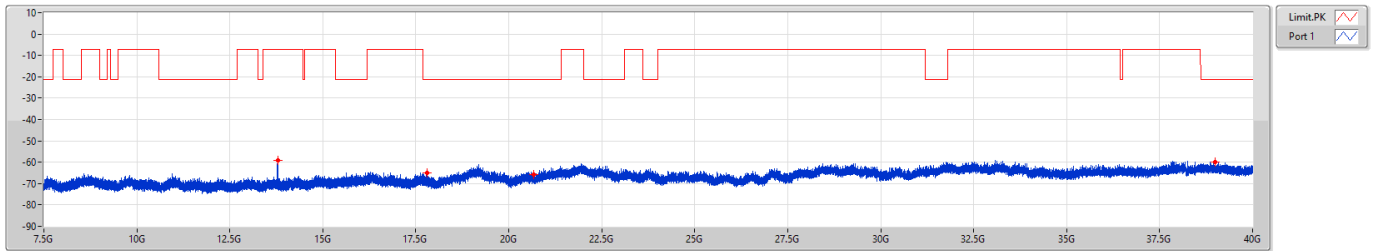

6.875-7.125GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6895MHz

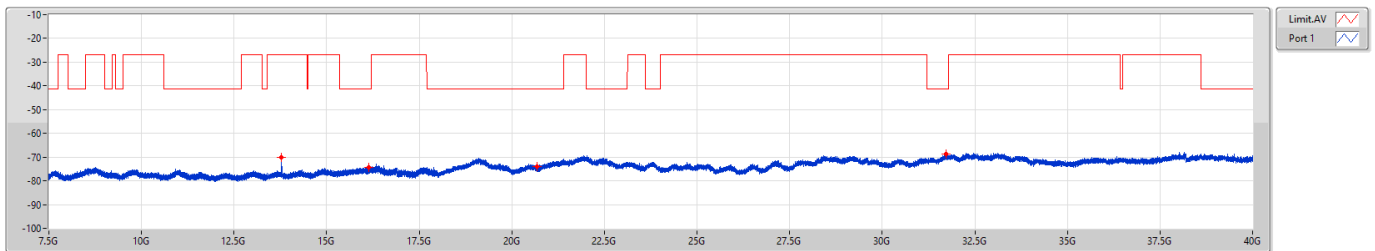




6.875-7.125GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

7015MHz

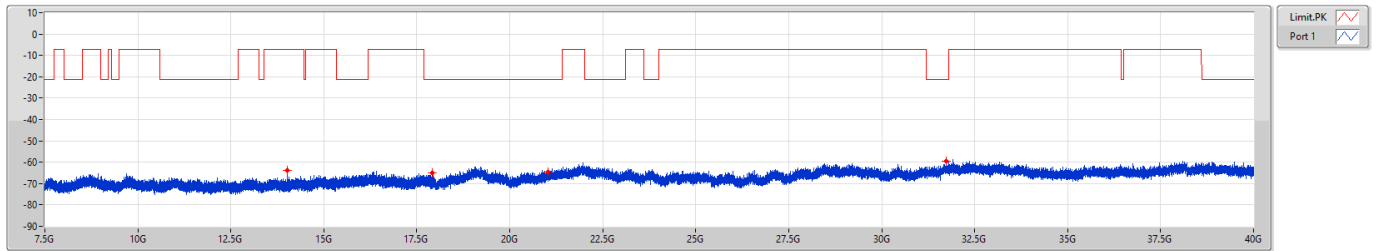


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	14.0228G	-63.79	-63.79
7.5G	18G	1M	PK	17.91272G	-65.11	-65.11
18G	40G	1M	PK	21.03188G	-64.64	-64.64
18G	40G	1M	PK	31.73763G	-59.60	-59.60

6.875-7.125GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

7015MHz

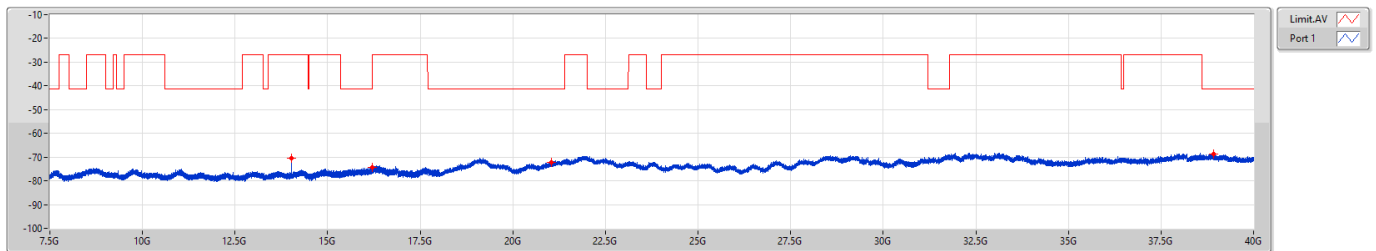


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	14.02345G	-70.63	-70.63
7.5G	18G	1M	AV	16.19892G	-74.37	-74.37
18G	40G	1M	AV	21.04425G	-72.23	-72.23
18G	40G	1M	AV	38.91031G	-68.84	-68.84



6.875-7.125GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

7095MHz

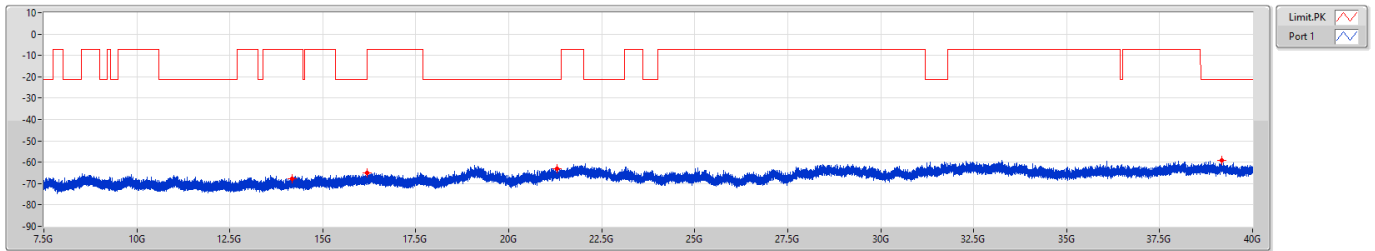


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	14.17898G	-67.66	-67.66
7.5G	18G	1M	PK	16.194G	-65.13	-65.13
18G	40G	1M	PK	21.29038G	-63.14	-63.14
18G	40G	1M	PK	39.16606G	-59.12	-59.12

6.875-7.125GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

7095MHz

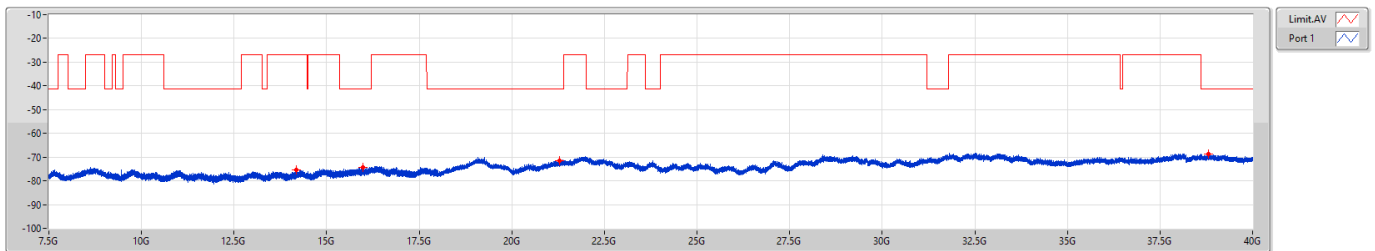


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	14.19014G	-75.24	-75.24
7.5G	18G	1M	AV	15.984G	-74.26	-74.26
18G	40G	1M	AV	21.27731G	-71.45	-71.45
18G	40G	1M	AV	38.80306G	-68.87	-68.87



6.875-7.125GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


7115MHz

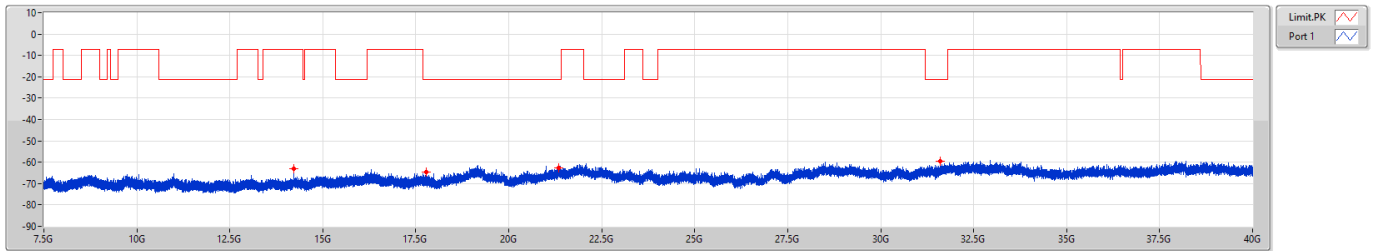

6.875-7.125GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

7115MHz

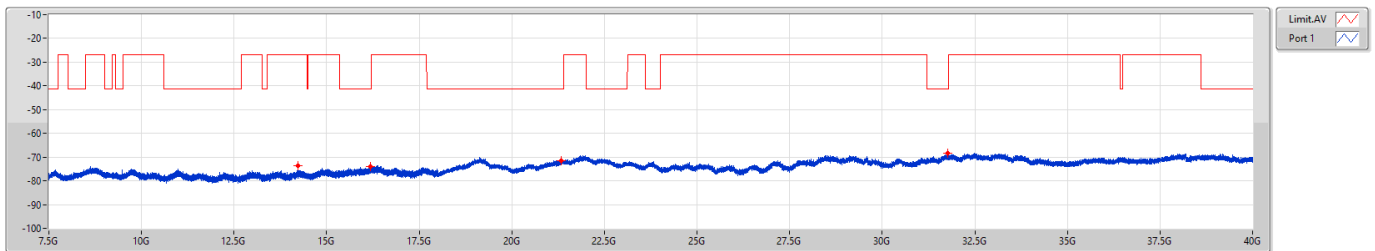




5.925-6.425GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

5955MHz

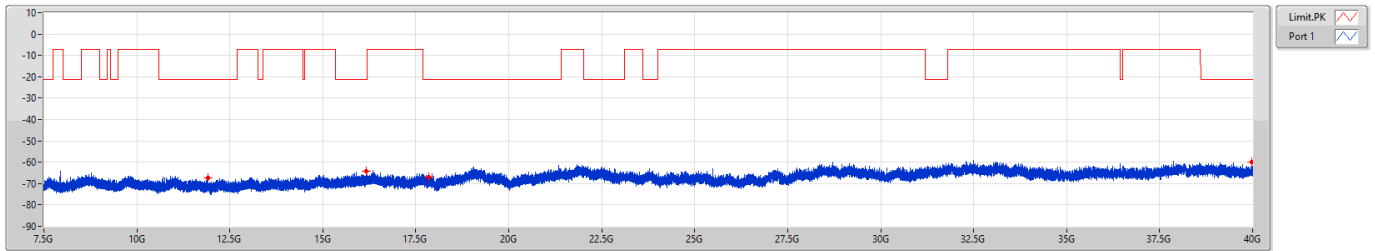


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	11.90213G	-67.25	-67.25
7.5G	18G	1M	PK	16.16381G	-64.41	-64.41
7.5G	18G	1M	PK	17.84906G	-67.11	-67.11
18G	40G	1M	PK	39.98213G	-59.98	-59.98

5.925-6.425GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

5955MHz

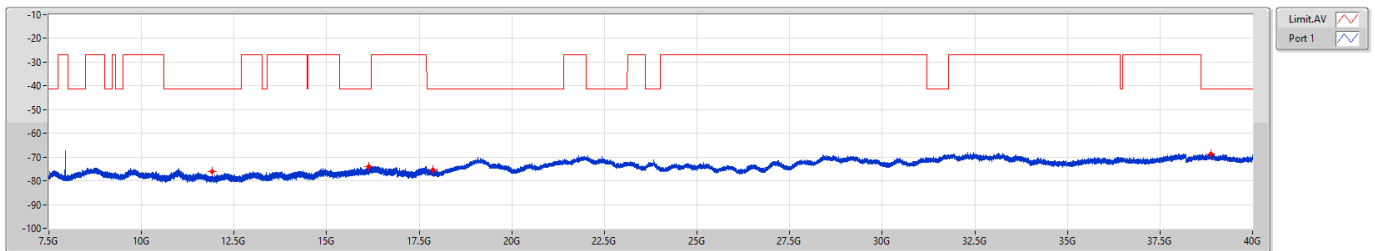


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	11.90081G	-76.09	-76.09
7.5G	18G	1M	AV	16.14019G	-74.09	-74.09
7.5G	18G	1M	AV	17.87203G	-75.29	-75.29
18G	40G	1M	AV	38.87663G	-68.74	-68.74



5.925-6.425GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6175MHz

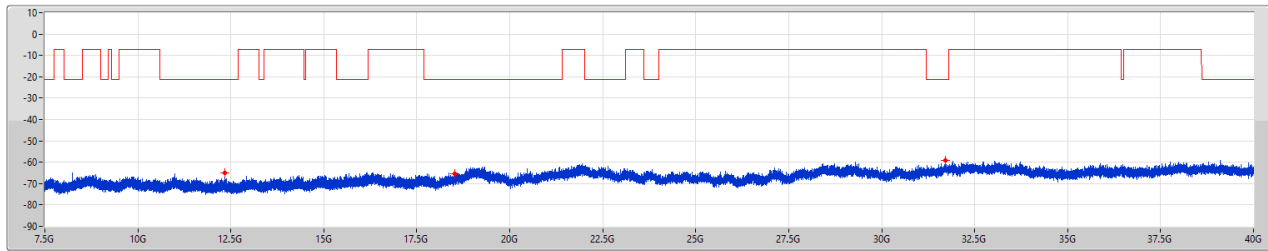


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	12.34181G	-65.03	-65.03
18G	40G	1M	PK	18.51631G	-65.44	-65.44
18G	40G	1M	PK	31.717G	-59.10	-59.10

5.925-6.425GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6175MHz

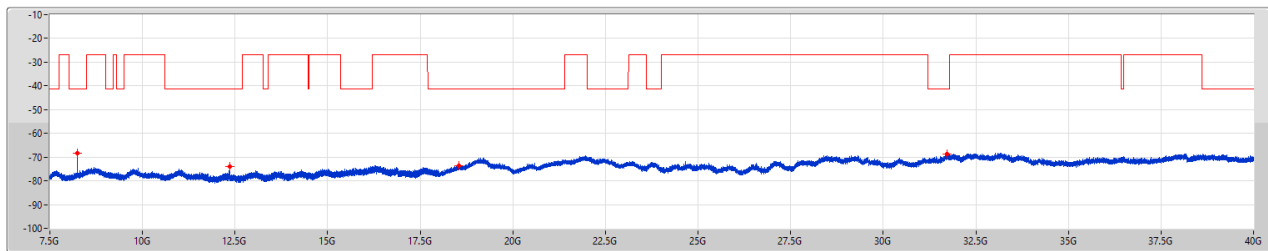


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	8.23303G	-68.27	-68.27
7.5G	18G	1M	AV	12.35002G	-73.82	-73.82
18G	40G	1M	AV	18.53281G	-73.46	-73.46
18G	40G	1M	AV	31.71838G	-68.82	-68.82



5.925-6.425GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


6415MHz

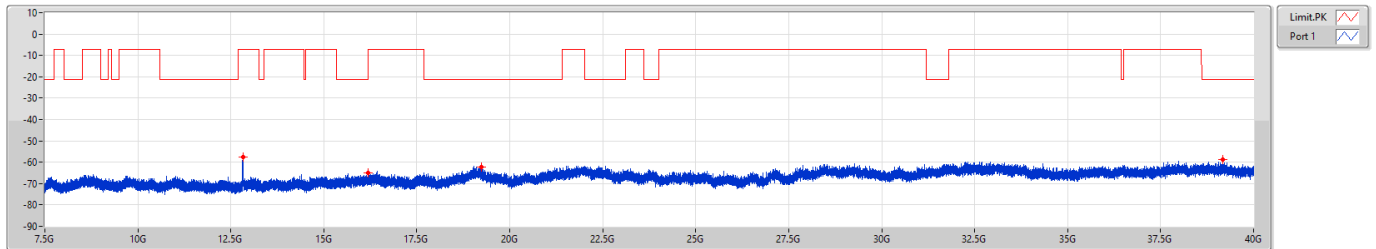

5.925-6.425GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6415MHz

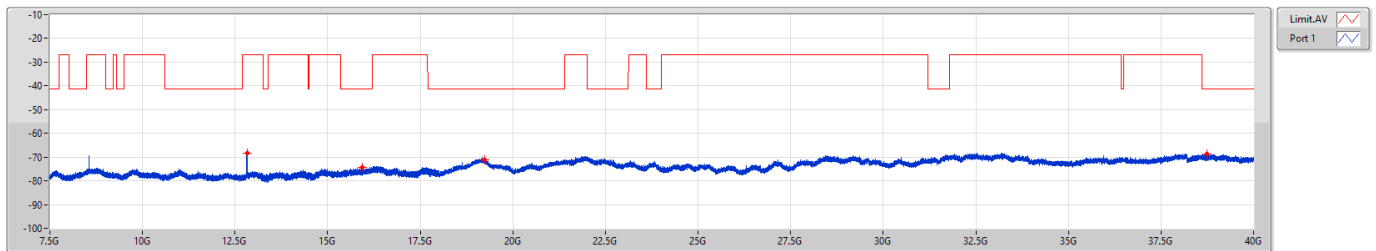




6.425-6.525GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6435MHz

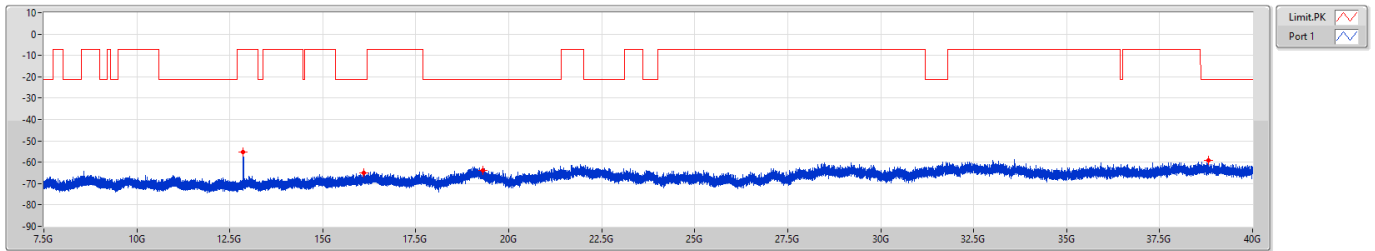


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psrm(dBm)	P1(dBm)
7.5G	18G	1M	PK	12.85795G	-55.16	-55.16
7.5G	18G	1M	PK	16.11098G	-65.07	-65.07
18G	40G	1M	PK	19.30969G	-63.88	-63.88
18G	40G	1M	PK	38.81819G	-59.24	-59.24

6.425-6.525GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6435MHz

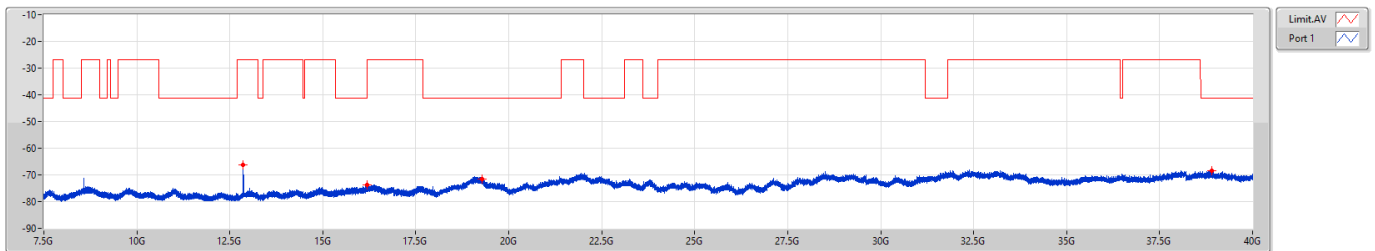


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psrm(dBm)	P1(dBm)
7.5G	18G	1M	AV	12.85927G	-66.28	-66.28
7.5G	18G	1M	AV	16.18514G	-73.70	-73.70
18G	40G	1M	AV	19.2925G	-71.50	-71.50
18G	40G	1M	AV	38.90069G	-68.44	-68.44



6.425-6.525GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


6475MHz

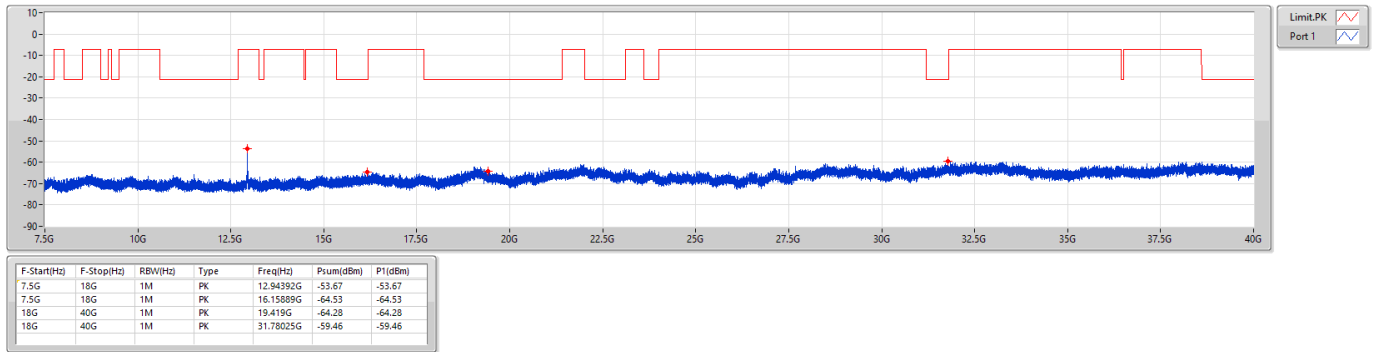

6.425-6.525GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6475MHz

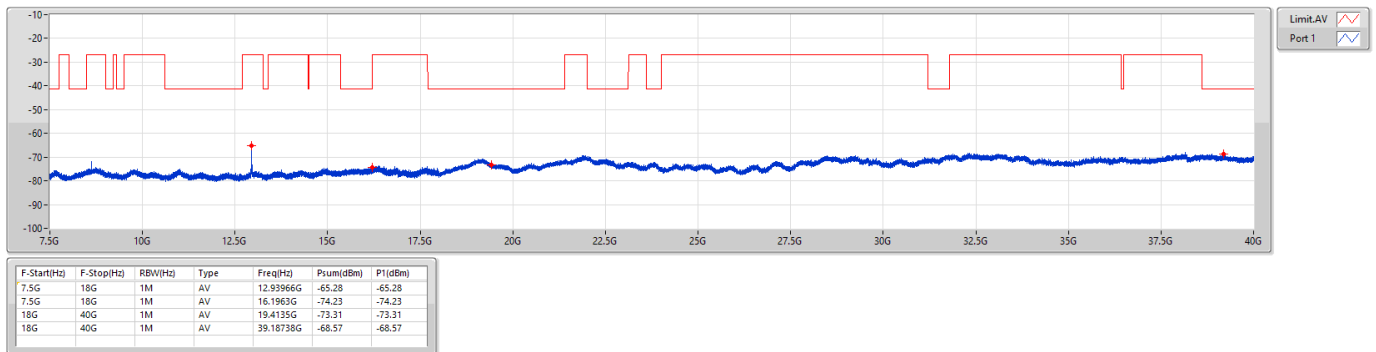




6.425-6.525GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


6515MHz

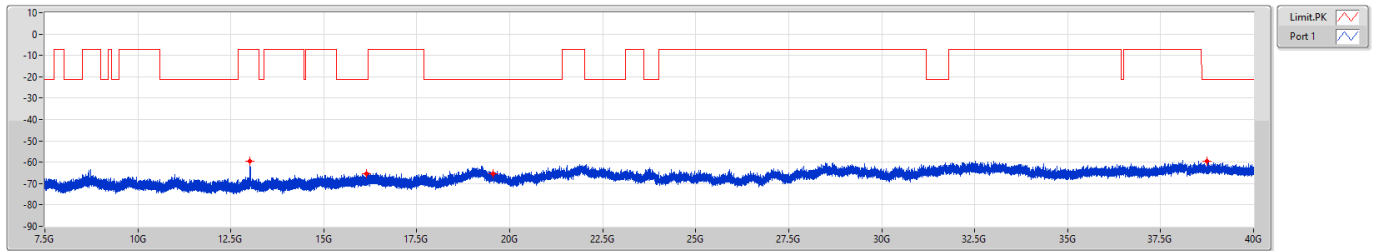

6.425-6.525GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6515MHz

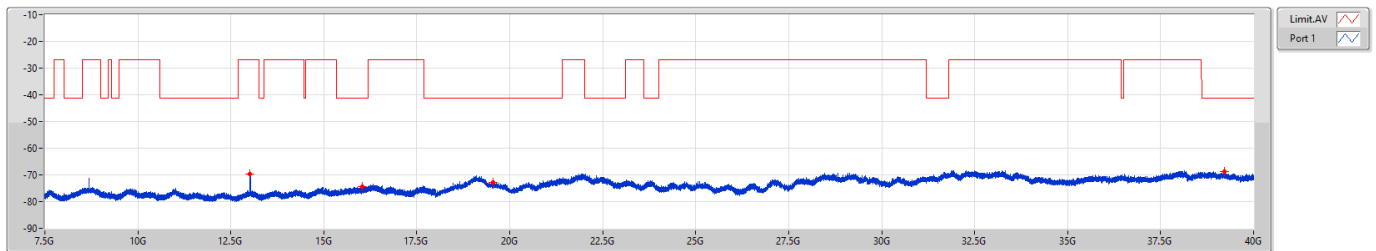




6.525-6.875GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6535MHz

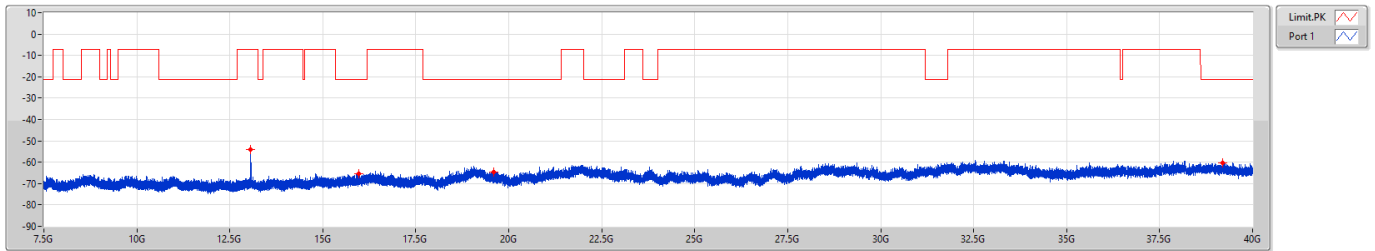


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	13.06073G	-54.25	-54.25
7.5G	18G	1M	PK	15.97383G	-65.53	-65.53
18G	40G	1M	PK	19.59363G	-64.78	-64.78
18G	40G	1M	PK	39.18325G	-60.14	-60.14

6.525-6.875GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6535MHz

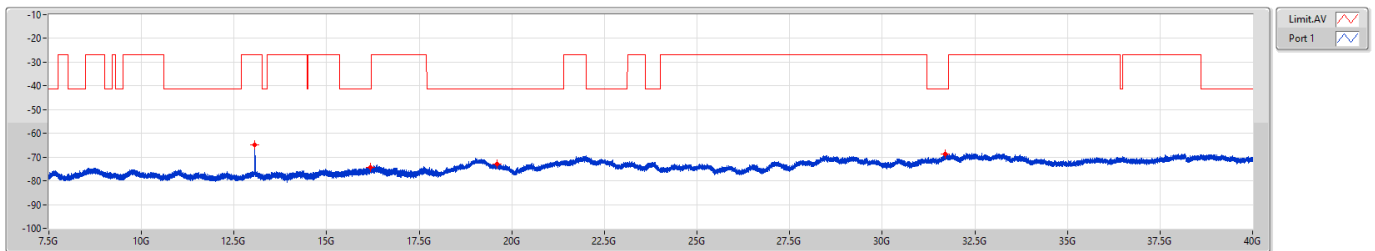


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	13.05942G	-64.93	-64.93
7.5G	18G	1M	AV	16.18514G	-74.26	-74.26
18G	40G	1M	AV	19.60256G	-73.04	-73.04
18G	40G	1M	AV	31.70119G	-68.79	-68.79



6.525-6.875GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


6715MHz

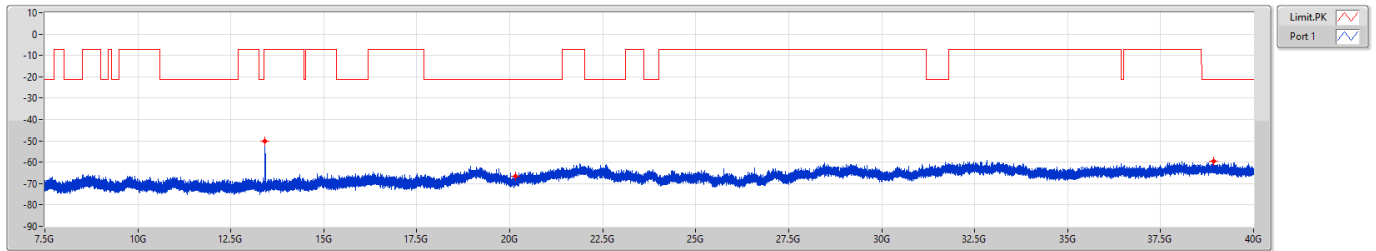

6.525-6.875GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6715MHz

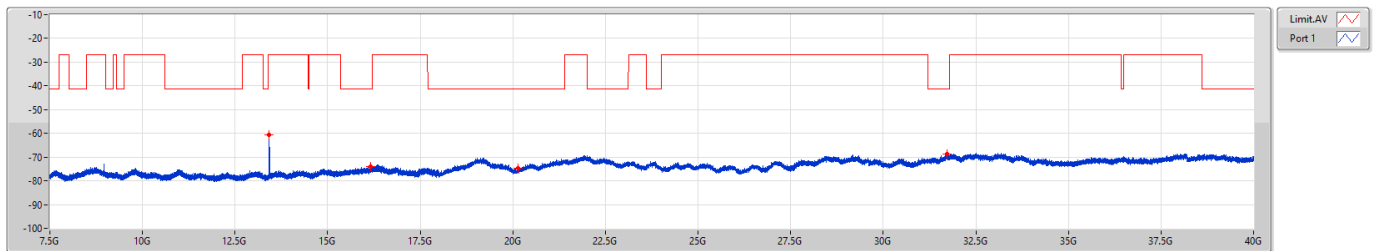




6.525-6.875GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6855MHz

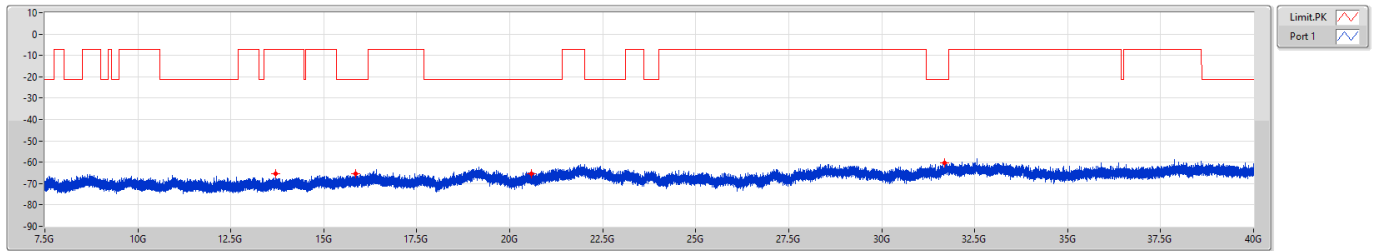


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	13.70386G	-65.46	-65.46
7.5G	18G	1M	PK	15.85013G	-65.51	-65.51
18G	40G	1M	PK	20.58225G	-65.58	-65.58
18G	40G	1M	PK	31.70119G	-60.20	-60.20

6.525-6.875GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6855MHz

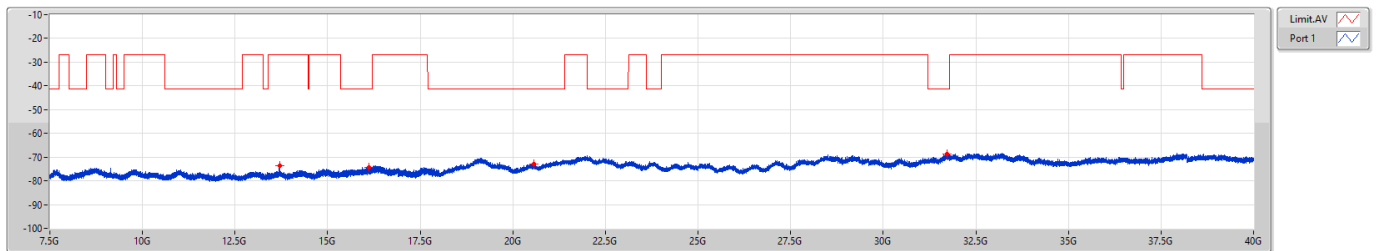


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	13.70156G	-73.60	-73.60
7.5G	18G	1M	AV	16.1077G	-74.26	-74.26
18G	40G	1M	AV	20.55956G	-72.95	-72.95
18G	40G	1M	AV	31.72044G	-68.62	-68.62



6.525-6.875GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


6875MHz Straddle 6.525-6.875GHz

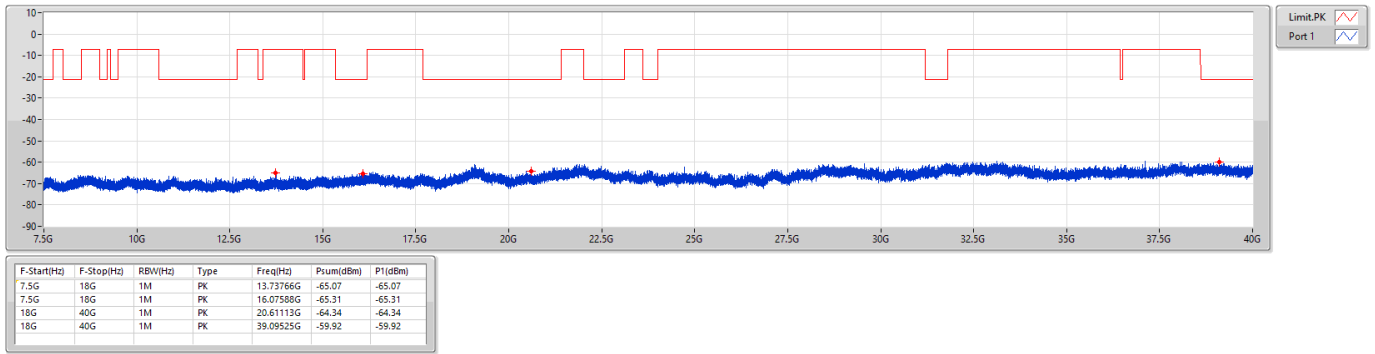

6.525-6.875GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6875MHz Straddle 6.525-6.875GHz

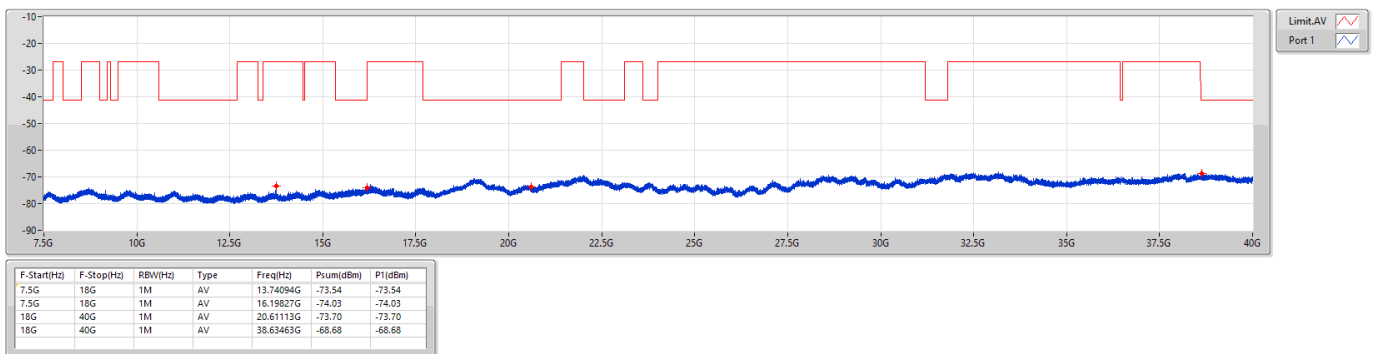




6.875-7.125GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

6895MHz

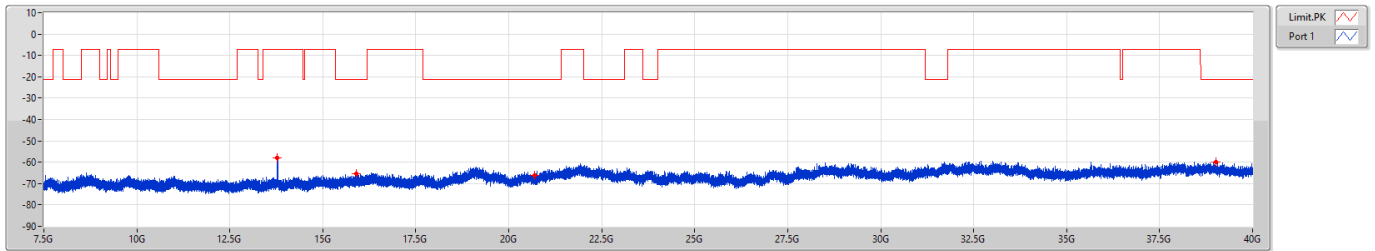


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	13.77933G	-58.16	-58.16
7.5G	18G	1M	PK	15.89573G	-65.31	-65.31
18G	40G	1M	PK	20.69706G	-66.15	-66.15
18G	40G	1M	PK	39.01619G	-59.87	-59.87

6.875-7.125GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

6895MHz

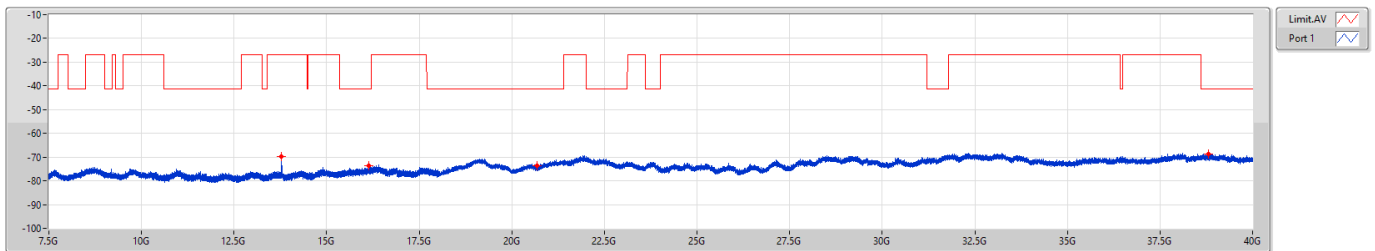


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	13.77998G	-69.61	-69.61
7.5G	18G	1M	AV	16.12772G	-73.56	-73.56
18G	40G	1M	AV	20.67506G	-73.60	-73.60
18G	40G	1M	AV	38.81613G	-68.79	-68.79



6.875-7.125GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

7015MHz

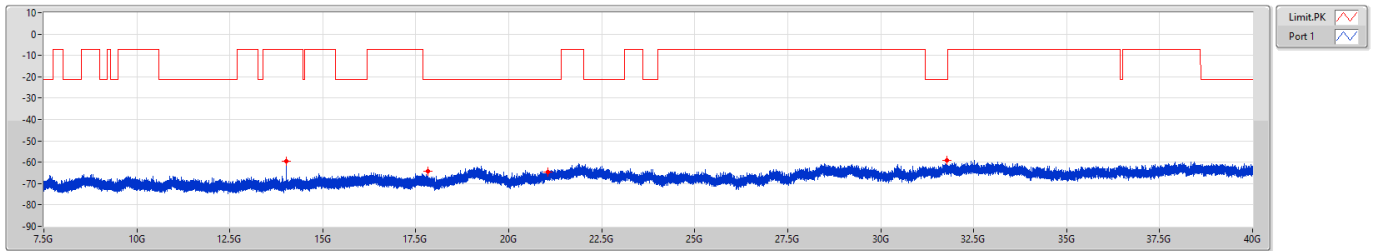


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	14.0205G	-59.46	-59.46
7.5G	18G	1M	PK	17.8192G	-64.30	-64.30
18G	40G	1M	PK	21.04288G	-64.69	-64.69
18G	40G	1M	PK	31.78438G	-59.03	-59.03

6.875-7.125GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

7015MHz

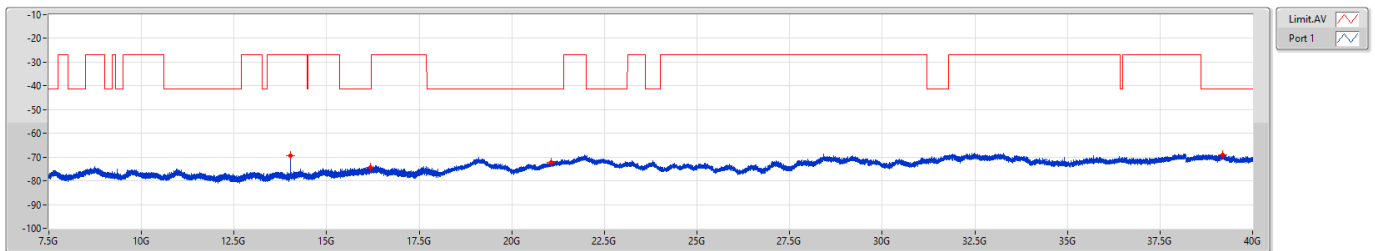


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	14.01919G	-69.50	-69.50
7.5G	18G	1M	AV	16.17891G	-74.32	-74.32
18G	40G	1M	AV	21.05663G	-72.37	-72.37
18G	40G	1M	AV	39.18394G	-68.90	-68.90



6.875-7.125GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

7095MHz

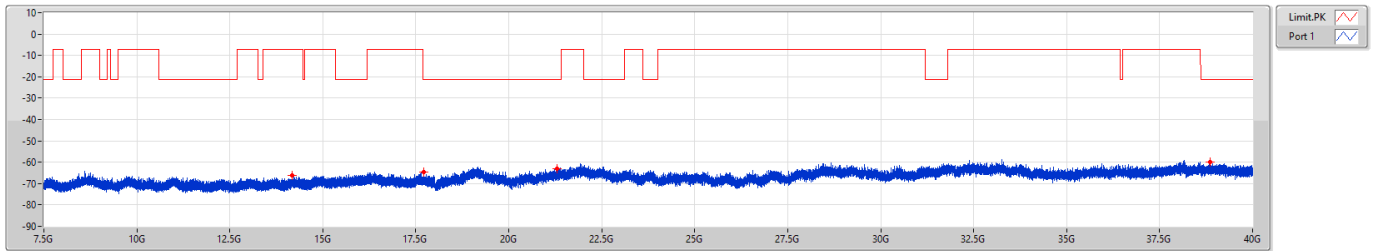


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	14.178G	-66.18	-66.18
7.5G	18G	1M	PK	17.7165G	-64.44	-64.44
18G	40G	1M	PK	21.29931G	-63.16	-63.16
18G	40G	1M	PK	38.85188G	-59.81	-59.81

6.875-7.125GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

7095MHz

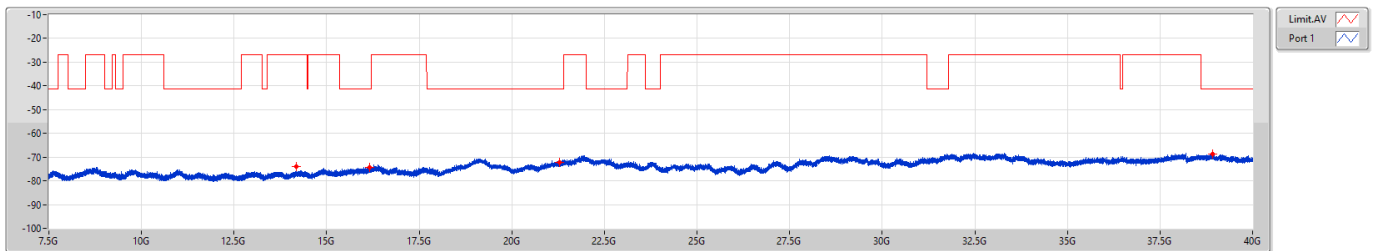


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	14.18063G	-74.00	-74.00
7.5G	18G	1M	AV	16.15331G	-74.20	-74.20
18G	40G	1M	AV	21.28075G	-72.16	-72.16
18G	40G	1M	AV	38.91238G	-68.69	-68.69



6.875-7.125GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

7115MHz

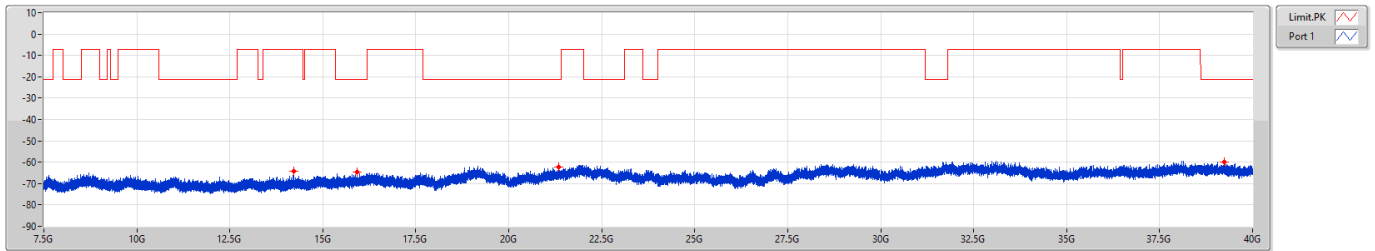


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	PK	14.2177G	-64.14	-64.14
7.5G	18G	1M	PK	15.92133G	-64.68	-64.68
18G	40G	1M	PK	21.333G	-62.38	-62.38
18G	40G	1M	PK	39.24444G	-60.05	-60.05

6.875-7.125GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX


CSE [AV]

7115MHz

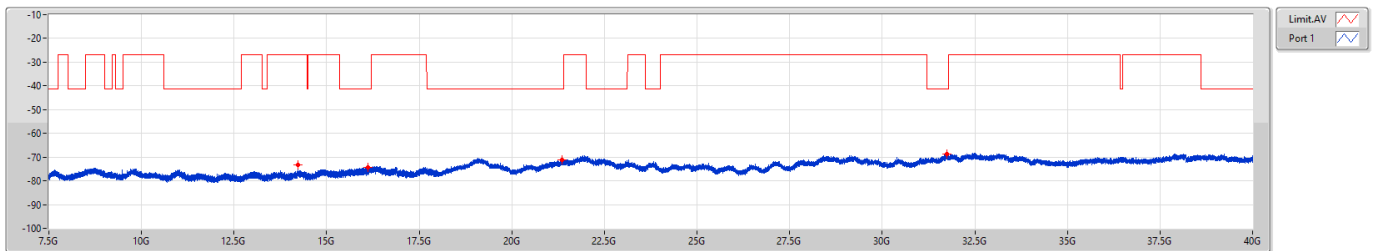

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7.5G	18G	1M	AV	14.21967G	-73.36	-73.36
7.5G	18G	1M	AV	16.11197G	-74.27	-74.27
18G	40G	1M	AV	21.35431G	-71.11	-71.11
18G	40G	1M	AV	31.73969G	-68.74	-68.74


Unwanted Emissions (Below 1GHz)

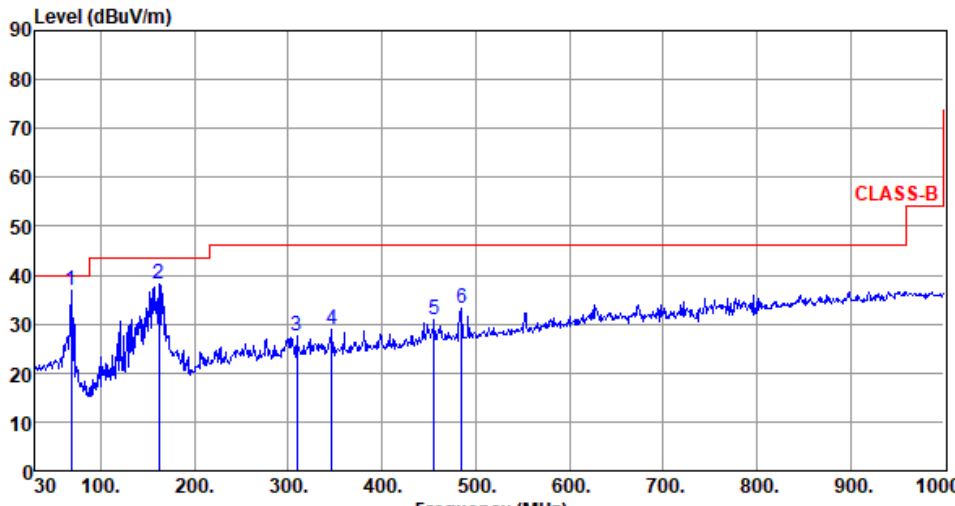Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	6475																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung- Temperature(°C):22 Humidity(%):62																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>68.80</td><td>36.91</td><td>40.00</td><td>-3.09</td><td>47.72</td><td>-10.81</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>161.92</td><td>38.03</td><td>43.50</td><td>-5.47</td><td>46.88</td><td>-8.85</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>309.36</td><td>27.41</td><td>46.00</td><td>-18.59</td><td>35.05</td><td>-7.64</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>346.22</td><td>28.87</td><td>46.00</td><td>-17.13</td><td>35.71</td><td>-6.84</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>455.83</td><td>30.82</td><td>46.00</td><td>-15.18</td><td>34.53</td><td>-3.71</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>484.93</td><td>33.33</td><td>46.00</td><td>-12.67</td><td>36.51</td><td>-3.18</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	68.80	36.91	40.00	-3.09	47.72	-10.81	Peak	---	---	2	161.92	38.03	43.50	-5.47	46.88	-8.85	Peak	---	---	3	309.36	27.41	46.00	-18.59	35.05	-7.64	Peak	---	---	4	346.22	28.87	46.00	-17.13	35.71	-6.84	Peak	---	---	5	455.83	30.82	46.00	-15.18	34.53	-3.71	Peak	---	---	6	484.93	33.33	46.00	-12.67	36.51	-3.18	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	68.80	36.91	40.00	-3.09	47.72	-10.81	Peak	---	---																																																																
2	161.92	38.03	43.50	-5.47	46.88	-8.85	Peak	---	---																																																																
3	309.36	27.41	46.00	-18.59	35.05	-7.64	Peak	---	---																																																																
4	346.22	28.87	46.00	-17.13	35.71	-6.84	Peak	---	---																																																																
5	455.83	30.82	46.00	-15.18	34.53	-3.71	Peak	---	---																																																																
6	484.93	33.33	46.00	-12.67	36.51	-3.18	Peak	---	---																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									



Modulation	ax HE20-OFDMA RU106		Test Freq. (MHz)		6475																																																																							
Polarization	Vertical																																																																											
Test By :Akun Chung- Temperature(°C):22 Humidity(%):62																																																																												
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>68.80</td><td>31.93</td><td>40.00</td><td>-8.07</td><td>42.74</td><td>-10.81</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>117.30</td><td>33.19</td><td>43.50</td><td>-10.31</td><td>44.38</td><td>-11.19</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>163.86</td><td>30.73</td><td>43.50</td><td>-12.77</td><td>39.56</td><td>-8.83</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>298.69</td><td>27.49</td><td>46.00</td><td>-18.51</td><td>35.50</td><td>-8.01</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>340.40</td><td>29.11</td><td>46.00</td><td>-16.89</td><td>36.07</td><td>-6.96</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>484.93</td><td>31.98</td><td>46.00</td><td>-14.02</td><td>35.16</td><td>-3.18</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	68.80	31.93	40.00	-8.07	42.74	-10.81	Peak	---	---	2	117.30	33.19	43.50	-10.31	44.38	-11.19	Peak	---	---	3	163.86	30.73	43.50	-12.77	39.56	-8.83	Peak	---	---	4	298.69	27.49	46.00	-18.51	35.50	-8.01	Peak	---	---	5	340.40	29.11	46.00	-16.89	36.07	-6.96	Peak	---	---	6	484.93	31.98	46.00	-14.02	35.16	-3.18	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																			
1	68.80	31.93	40.00	-8.07	42.74	-10.81	Peak	---	---																																																																			
2	117.30	33.19	43.50	-10.31	44.38	-11.19	Peak	---	---																																																																			
3	163.86	30.73	43.50	-12.77	39.56	-8.83	Peak	---	---																																																																			
4	298.69	27.49	46.00	-18.51	35.50	-8.01	Peak	---	---																																																																			
5	340.40	29.11	46.00	-16.89	36.07	-6.96	Peak	---	---																																																																			
6	484.93	31.98	46.00	-14.02	35.16	-3.18	Peak	---	---																																																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																												

Unwanted Emissions (Above 1GHz) for ax HE20-OFDMA RU26

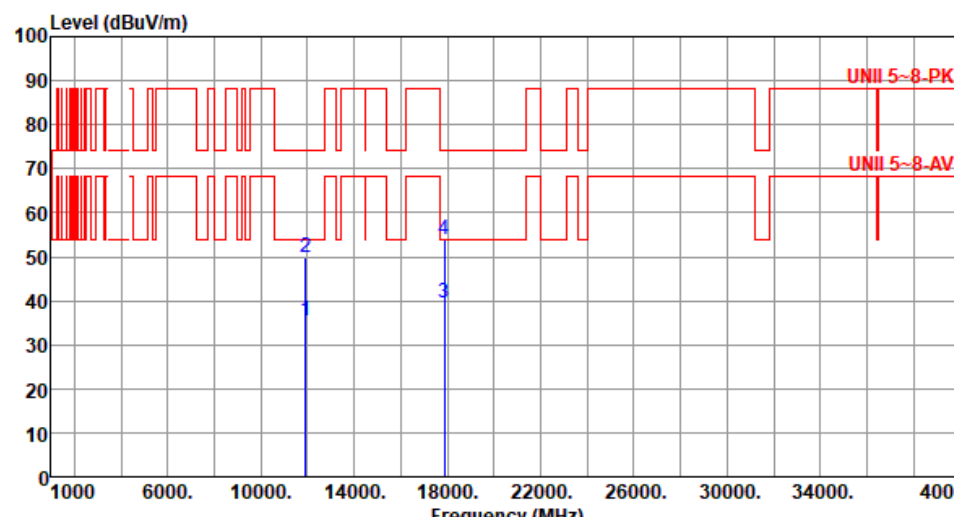Modulation	ax HE20-OFDMA RU26		Test Freq. (MHz)	5955																																																			
Polarization	Horizontal																																																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11910.00</td><td>35.59</td><td>54.00</td><td>-18.41</td><td>27.18</td><td>8.41</td><td>Average</td><td>100</td><td>229</td></tr><tr><td>2</td><td>11910.00</td><td>49.96</td><td>74.00</td><td>-24.04</td><td>41.55</td><td>8.41</td><td>Peak</td><td>100</td><td>229</td></tr><tr><td>3</td><td>17865.00</td><td>39.36</td><td>54.00</td><td>-14.64</td><td>27.19</td><td>12.17</td><td>Average</td><td>100</td><td>143</td></tr><tr><td>4</td><td>17865.00</td><td>53.73</td><td>74.00</td><td>-20.27</td><td>41.56</td><td>12.17</td><td>Peak</td><td>100</td><td>143</td></tr></tbody></table>							Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11910.00	35.59	54.00	-18.41	27.18	8.41	Average	100	229	2	11910.00	49.96	74.00	-24.04	41.55	8.41	Peak	100	229	3	17865.00	39.36	54.00	-14.64	27.19	12.17	Average	100	143	4	17865.00	53.73	74.00	-20.27	41.56	12.17	Peak	100	143
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																														
1	11910.00	35.59	54.00	-18.41	27.18	8.41	Average	100	229																																														
2	11910.00	49.96	74.00	-24.04	41.55	8.41	Peak	100	229																																														
3	17865.00	39.36	54.00	-14.64	27.19	12.17	Average	100	143																																														
4	17865.00	53.73	74.00	-20.27	41.56	12.17	Peak	100	143																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																							



Modulation	ax HE20-OFDMA RU26		Test Freq. (MHz)		5955																																																			
Polarization	Vertical																																																							
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																								
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11910.00</td><td>35.56</td><td>54.00</td><td>-18.44</td><td>27.15</td><td>8.41</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>2</td><td>11910.00</td><td>49.97</td><td>74.00</td><td>-24.03</td><td>41.56</td><td>8.41</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>3</td><td>17865.00</td><td>39.41</td><td>54.00</td><td>-14.59</td><td>27.24</td><td>12.17</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>4</td><td>17865.00</td><td>53.74</td><td>74.00</td><td>-20.26</td><td>41.57</td><td>12.17</td><td>Peak</td><td>100</td><td>162</td></tr></tbody></table>								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11910.00	35.56	54.00	-18.44	27.15	8.41	Average	100	128	2	11910.00	49.97	74.00	-24.03	41.56	8.41	Peak	100	128	3	17865.00	39.41	54.00	-14.59	27.24	12.17	Average	100	162	4	17865.00	53.74	74.00	-20.26	41.57	12.17	Peak	100	162
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																															
1	11910.00	35.56	54.00	-18.44	27.15	8.41	Average	100	128																																															
2	11910.00	49.97	74.00	-24.03	41.56	8.41	Peak	100	128																																															
3	17865.00	39.41	54.00	-14.59	27.24	12.17	Average	100	162																																															
4	17865.00	53.74	74.00	-20.26	41.57	12.17	Peak	100	162																																															
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																								



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6175																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8212.75</td><td>34.07</td><td>54.00</td><td>-19.93</td><td>27.20</td><td>6.87</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>2</td><td>8212.75</td><td>48.44</td><td>74.00</td><td>-25.56</td><td>41.57</td><td>6.87</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>3</td><td>12350.00</td><td>35.67</td><td>54.00</td><td>-18.33</td><td>27.17</td><td>8.50</td><td>Average</td><td>100</td><td>212</td></tr><tr><td>4</td><td>12350.00</td><td>50.06</td><td>74.00</td><td>-23.94</td><td>41.56</td><td>8.50</td><td>Peak</td><td>100</td><td>212</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8212.75	34.07	54.00	-19.93	27.20	6.87	Average	100	123	2	8212.75	48.44	74.00	-25.56	41.57	6.87	Peak	100	123	3	12350.00	35.67	54.00	-18.33	27.17	8.50	Average	100	212	4	12350.00	50.06	74.00	-23.94	41.56	8.50	Peak	100	212
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8212.75	34.07	54.00	-19.93	27.20	6.87	Average	100	123																																												
2	8212.75	48.44	74.00	-25.56	41.57	6.87	Peak	100	123																																												
3	12350.00	35.67	54.00	-18.33	27.17	8.50	Average	100	212																																												
4	12350.00	50.06	74.00	-23.94	41.56	8.50	Peak	100	212																																												



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6175																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8212.75</td><td>34.06</td><td>54.00</td><td>-19.94</td><td>27.19</td><td>6.87</td><td>Average</td><td>100</td><td>152</td></tr><tr><td>2</td><td>8212.75</td><td>48.43</td><td>74.00</td><td>-25.57</td><td>41.56</td><td>6.87</td><td>Peak</td><td>100</td><td>152</td></tr><tr><td>3</td><td>12350.00</td><td>35.70</td><td>54.00</td><td>-18.30</td><td>27.20</td><td>8.50</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>4</td><td>12350.00</td><td>50.01</td><td>74.00</td><td>-23.99</td><td>41.51</td><td>8.50</td><td>Peak</td><td>100</td><td>118</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8212.75	34.06	54.00	-19.94	27.19	6.87	Average	100	152	2	8212.75	48.43	74.00	-25.57	41.56	6.87	Peak	100	152	3	12350.00	35.70	54.00	-18.30	27.20	8.50	Average	100	118	4	12350.00	50.01	74.00	-23.99	41.51	8.50	Peak	100	118
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8212.75	34.06	54.00	-19.94	27.19	6.87	Average	100	152																																												
2	8212.75	48.43	74.00	-25.57	41.56	6.87	Peak	100	152																																												
3	12350.00	35.70	54.00	-18.30	27.20	8.50	Average	100	118																																												
4	12350.00	50.01	74.00	-23.99	41.51	8.50	Peak	100	118																																												



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6415
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6415																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8531.95</td><td>34.16</td><td>68.20</td><td>-34.04</td><td>27.10</td><td>7.06</td><td>Average</td><td>100</td><td>173</td></tr><tr><td>2</td><td>8531.95</td><td>48.62</td><td>88.20</td><td>-39.58</td><td>41.56</td><td>7.06</td><td>Peak</td><td>100</td><td>173</td></tr><tr><td>3</td><td>12830.00</td><td>35.88</td><td>68.20</td><td>-32.32</td><td>27.12</td><td>8.76</td><td>Average</td><td>100</td><td>149</td></tr><tr><td>4</td><td>12830.00</td><td>50.36</td><td>88.20</td><td>-37.84</td><td>41.60</td><td>8.76</td><td>Peak</td><td>100</td><td>149</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8531.95	34.16	68.20	-34.04	27.10	7.06	Average	100	173	2	8531.95	48.62	88.20	-39.58	41.56	7.06	Peak	100	173	3	12830.00	35.88	68.20	-32.32	27.12	8.76	Average	100	149	4	12830.00	50.36	88.20	-37.84	41.60	8.76	Peak	100	149
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8531.95	34.16	68.20	-34.04	27.10	7.06	Average	100	173																																												
2	8531.95	48.62	88.20	-39.58	41.56	7.06	Peak	100	173																																												
3	12830.00	35.88	68.20	-32.32	27.12	8.76	Average	100	149																																												
4	12830.00	50.36	88.20	-37.84	41.60	8.76	Peak	100	149																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6435																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8558.55</td><td>34.32</td><td>68.20</td><td>-33.88</td><td>27.14</td><td>7.18</td><td>Average</td><td>100</td><td>141</td></tr><tr><td>2</td><td>8558.55</td><td>48.71</td><td>88.20</td><td>-39.49</td><td>41.53</td><td>7.18</td><td>Peak</td><td>100</td><td>141</td></tr><tr><td>3</td><td>12870.00</td><td>35.95</td><td>68.20</td><td>-32.25</td><td>27.17</td><td>8.78</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>4</td><td>12870.00</td><td>50.32</td><td>88.20</td><td>-37.88</td><td>41.54</td><td>8.78</td><td>Peak</td><td>100</td><td>254</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8558.55	34.32	68.20	-33.88	27.14	7.18	Average	100	141	2	8558.55	48.71	88.20	-39.49	41.53	7.18	Peak	100	141	3	12870.00	35.95	68.20	-32.25	27.17	8.78	Average	100	254	4	12870.00	50.32	88.20	-37.88	41.54	8.78	Peak	100	254
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8558.55	34.32	68.20	-33.88	27.14	7.18	Average	100	141																																												
2	8558.55	48.71	88.20	-39.49	41.53	7.18	Peak	100	141																																												
3	12870.00	35.95	68.20	-32.25	27.17	8.78	Average	100	254																																												
4	12870.00	50.32	88.20	-37.88	41.54	8.78	Peak	100	254																																												



Modulation	ax HE20-OFDMA RU26		Test Freq. (MHz)		6435																																																			
Polarization	Vertical																																																							
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																								
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8558.55</td><td>34.37</td><td>68.20</td><td>-33.83</td><td>27.19</td><td>7.18</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>2</td><td>8558.55</td><td>48.84</td><td>88.20</td><td>-39.36</td><td>41.66</td><td>7.18</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>3</td><td>12870.00</td><td>36.01</td><td>68.20</td><td>-32.19</td><td>27.23</td><td>8.78</td><td>Average</td><td>100</td><td>101</td></tr><tr><td>4</td><td>12870.00</td><td>50.33</td><td>88.20</td><td>-37.87</td><td>41.55</td><td>8.78</td><td>Peak</td><td>100</td><td>101</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8558.55	34.37	68.20	-33.83	27.19	7.18	Average	100	177	2	8558.55	48.84	88.20	-39.36	41.66	7.18	Peak	100	177	3	12870.00	36.01	68.20	-32.19	27.23	8.78	Average	100	101	4	12870.00	50.33	88.20	-37.87	41.55	8.78	Peak	100	101
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																															
1	8558.55	34.37	68.20	-33.83	27.19	7.18	Average	100	177																																															
2	8558.55	48.84	88.20	-39.36	41.66	7.18	Peak	100	177																																															
3	12870.00	36.01	68.20	-32.19	27.23	8.78	Average	100	101																																															
4	12870.00	50.33	88.20	-37.87	41.55	8.78	Peak	100	101																																															




Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6475						
Polarization	Horizontal								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8611.75	34.49	68.20	-33.71	27.16	7.33	Average	100	131
2	8611.75	48.66	88.20	-39.54	41.33	7.33	Peak	100	131
3	12950.00	36.21	68.20	-31.99	27.52	8.69	Average	100	242
4	12950.00	50.30	88.20	-37.90	41.61	8.69	Peak	100	242
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6475																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8611.75</td><td>34.46</td><td>68.20</td><td>-33.74</td><td>27.13</td><td>7.33</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>2</td><td>8611.75</td><td>48.60</td><td>88.20</td><td>-39.60</td><td>41.27</td><td>7.33</td><td>Peak</td><td>100</td><td>162</td></tr><tr><td>3</td><td>12950.00</td><td>36.24</td><td>68.20</td><td>-31.96</td><td>27.55</td><td>8.69</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>4</td><td>12950.00</td><td>49.87</td><td>88.20</td><td>-38.33</td><td>41.18</td><td>8.69</td><td>Peak</td><td>100</td><td>205</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8611.75	34.46	68.20	-33.74	27.13	7.33	Average	100	162	2	8611.75	48.60	88.20	-39.60	41.27	7.33	Peak	100	162	3	12950.00	36.24	68.20	-31.96	27.55	8.69	Average	100	205	4	12950.00	49.87	88.20	-38.33	41.18	8.69	Peak	100	205
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8611.75	34.46	68.20	-33.74	27.13	7.33	Average	100	162																																												
2	8611.75	48.60	88.20	-39.60	41.27	7.33	Peak	100	162																																												
3	12950.00	36.24	68.20	-31.96	27.55	8.69	Average	100	205																																												
4	12950.00	49.87	88.20	-38.33	41.18	8.69	Peak	100	205																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					

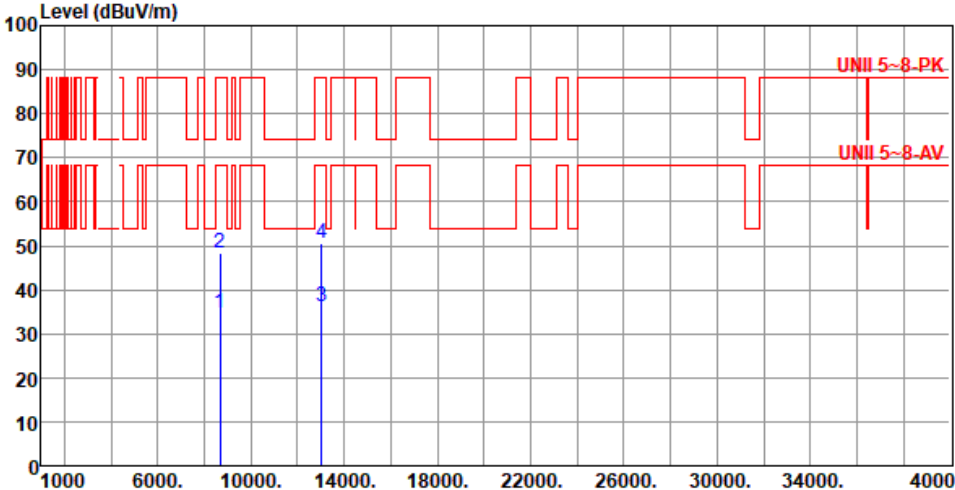


Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6515																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8664.95</td><td>34.50</td><td>68.20</td><td>-33.70</td><td>27.12</td><td>7.38</td><td>Average</td><td>100</td><td>135</td></tr><tr><td>2</td><td>8664.95</td><td>48.52</td><td>88.20</td><td>-39.68</td><td>41.14</td><td>7.38</td><td>Peak</td><td>100</td><td>135</td></tr><tr><td>3</td><td>13030.00</td><td>36.12</td><td>68.20</td><td>-32.08</td><td>27.35</td><td>8.77</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>4</td><td>13030.00</td><td>50.39</td><td>88.20</td><td>-37.81</td><td>41.62</td><td>8.77</td><td>Peak</td><td>100</td><td>246</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8664.95	34.50	68.20	-33.70	27.12	7.38	Average	100	135	2	8664.95	48.52	88.20	-39.68	41.14	7.38	Peak	100	135	3	13030.00	36.12	68.20	-32.08	27.35	8.77	Average	100	246	4	13030.00	50.39	88.20	-37.81	41.62	8.77	Peak	100	246
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8664.95	34.50	68.20	-33.70	27.12	7.38	Average	100	135																																												
2	8664.95	48.52	88.20	-39.68	41.14	7.38	Peak	100	135																																												
3	13030.00	36.12	68.20	-32.08	27.35	8.77	Average	100	246																																												
4	13030.00	50.39	88.20	-37.81	41.62	8.77	Peak	100	246																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					




Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6515
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			

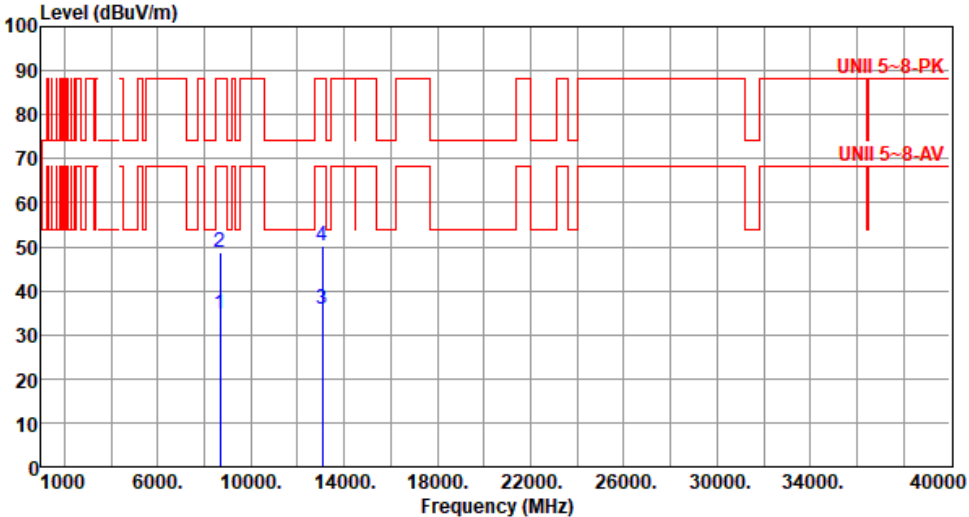

Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6535																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8691.55</td><td>34.54</td><td>68.20</td><td>-33.66</td><td>27.14</td><td>7.40</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>2</td><td>8691.55</td><td>48.58</td><td>88.20</td><td>-39.62</td><td>41.18</td><td>7.40</td><td>Peak</td><td>100</td><td>125</td></tr><tr><td>3</td><td>13070.00</td><td>35.97</td><td>68.20</td><td>-32.23</td><td>27.38</td><td>8.59</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>4</td><td>13070.00</td><td>50.05</td><td>88.20</td><td>-38.15</td><td>41.46</td><td>8.59</td><td>Peak</td><td>100</td><td>218</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	8691.55	34.54	68.20	-33.66	27.14	7.40	Average	100	125	2	8691.55	48.58	88.20	-39.62	41.18	7.40	Peak	100	125	3	13070.00	35.97	68.20	-32.23	27.38	8.59	Average	100	218	4	13070.00	50.05	88.20	-38.15	41.46	8.59	Peak	100	218
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																
	MHz	level			reading			High	Table																																																																
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																
1	8691.55	34.54	68.20	-33.66	27.14	7.40	Average	100	125																																																																
2	8691.55	48.58	88.20	-39.62	41.18	7.40	Peak	100	125																																																																
3	13070.00	35.97	68.20	-32.23	27.38	8.59	Average	100	218																																																																
4	13070.00	50.05	88.20	-38.15	41.46	8.59	Peak	100	218																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

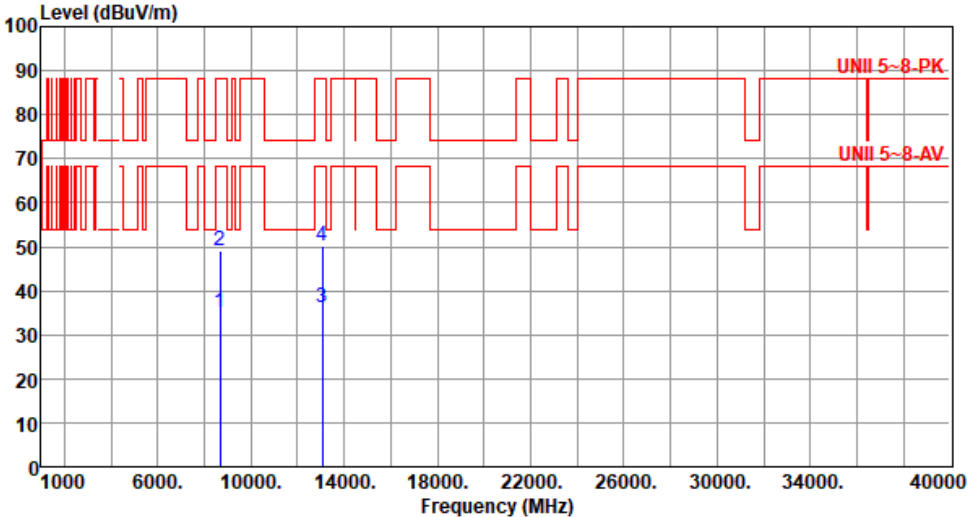

Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6535																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8691.55</td><td>35.12</td><td>68.20</td><td>-33.08</td><td>27.72</td><td>7.40</td><td>Average</td><td>100</td><td>146</td></tr><tr><td>2</td><td>8691.55</td><td>49.15</td><td>88.20</td><td>-39.05</td><td>41.75</td><td>7.40</td><td>Peak</td><td>100</td><td>146</td></tr><tr><td>3</td><td>13070.00</td><td>36.13</td><td>68.20</td><td>-32.07</td><td>27.54</td><td>8.59</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>4</td><td>13070.00</td><td>50.15</td><td>88.20</td><td>-38.05</td><td>41.56</td><td>8.59</td><td>Peak</td><td>100</td><td>114</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8691.55	35.12	68.20	-33.08	27.72	7.40	Average	100	146	2	8691.55	49.15	88.20	-39.05	41.75	7.40	Peak	100	146	3	13070.00	36.13	68.20	-32.07	27.54	8.59	Average	100	114	4	13070.00	50.15	88.20	-38.05	41.56	8.59	Peak	100	114
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8691.55	35.12	68.20	-33.08	27.72	7.40	Average	100	146																																												
2	8691.55	49.15	88.20	-39.05	41.75	7.40	Peak	100	146																																												
3	13070.00	36.13	68.20	-32.07	27.54	8.59	Average	100	114																																												
4	13070.00	50.15	88.20	-38.05	41.56	8.59	Peak	100	114																																												



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6715
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) <			



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6715
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) <			

Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6855
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6855
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) </			



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6875																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9143.75</td><td>35.15</td><td>54.00</td><td>-18.85</td><td>27.22</td><td>7.93</td><td>Average</td><td>100</td><td>164</td></tr><tr><td>2</td><td>9143.75</td><td>49.42</td><td>74.00</td><td>-24.58</td><td>41.49</td><td>7.93</td><td>Peak</td><td>100</td><td>164</td></tr><tr><td>3</td><td>13750.00</td><td>35.83</td><td>68.20</td><td>-32.37</td><td>27.33</td><td>8.50</td><td>Average</td><td>100</td><td>198</td></tr><tr><td>4</td><td>13750.00</td><td>50.14</td><td>88.20</td><td>-38.06</td><td>41.64</td><td>8.50</td><td>Peak</td><td>100</td><td>198</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9143.75	35.15	54.00	-18.85	27.22	7.93	Average	100	164	2	9143.75	49.42	74.00	-24.58	41.49	7.93	Peak	100	164	3	13750.00	35.83	68.20	-32.37	27.33	8.50	Average	100	198	4	13750.00	50.14	88.20	-38.06	41.64	8.50	Peak	100	198
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9143.75	35.15	54.00	-18.85	27.22	7.93	Average	100	164																																												
2	9143.75	49.42	74.00	-24.58	41.49	7.93	Peak	100	164																																												
3	13750.00	35.83	68.20	-32.37	27.33	8.50	Average	100	198																																												
4	13750.00	50.14	88.20	-38.06	41.64	8.50	Peak	100	198																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6875
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) <			



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6895																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9170.35</td><td>35.17</td><td>54.00</td><td>-18.83</td><td>27.17</td><td>8.00</td><td>Average</td><td>100</td><td>152</td></tr><tr><td>2</td><td>9170.35</td><td>49.38</td><td>74.00</td><td>-24.62</td><td>41.38</td><td>8.00</td><td>Peak</td><td>100</td><td>152</td></tr><tr><td>3</td><td>13790.00</td><td>35.82</td><td>68.20</td><td>-32.38</td><td>27.18</td><td>8.64</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>4</td><td>13790.00</td><td>50.05</td><td>88.20</td><td>-38.15</td><td>41.41</td><td>8.64</td><td>Peak</td><td>100</td><td>204</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9170.35	35.17	54.00	-18.83	27.17	8.00	Average	100	152	2	9170.35	49.38	74.00	-24.62	41.38	8.00	Peak	100	152	3	13790.00	35.82	68.20	-32.38	27.18	8.64	Average	100	204	4	13790.00	50.05	88.20	-38.15	41.41	8.64	Peak	100	204
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9170.35	35.17	54.00	-18.83	27.17	8.00	Average	100	152																																												
2	9170.35	49.38	74.00	-24.62	41.38	8.00	Peak	100	152																																												
3	13790.00	35.82	68.20	-32.38	27.18	8.64	Average	100	204																																												
4	13790.00	50.05	88.20	-38.15	41.41	8.64	Peak	100	204																																												



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	6895
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	7015																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>9329.95</td><td>35.78</td><td>54.00</td><td>-18.22</td><td>27.19</td><td>8.59</td><td>Average</td><td>100</td><td>146</td></tr><tr><td>2</td><td>9329.95</td><td>50.03</td><td>74.00</td><td>-23.97</td><td>41.44</td><td>8.59</td><td>Peak</td><td>100</td><td>146</td></tr><tr><td>3</td><td>14030.00</td><td>36.34</td><td>68.20</td><td>-31.86</td><td>27.17</td><td>9.17</td><td>Average</td><td>100</td><td>179</td></tr><tr><td>4</td><td>14030.00</td><td>50.68</td><td>88.20</td><td>-37.52</td><td>41.51</td><td>9.17</td><td>Peak</td><td>100</td><td>179</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	9329.95	35.78	54.00	-18.22	27.19	8.59	Average	100	146	2	9329.95	50.03	74.00	-23.97	41.44	8.59	Peak	100	146	3	14030.00	36.34	68.20	-31.86	27.17	9.17	Average	100	179	4	14030.00	50.68	88.20	-37.52	41.51	9.17	Peak	100	179
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																
		dBuV/m			dBuV			cm	deg																																																																
1	9329.95	35.78	54.00	-18.22	27.19	8.59	Average	100	146																																																																
2	9329.95	50.03	74.00	-23.97	41.44	8.59	Peak	100	146																																																																
3	14030.00	36.34	68.20	-31.86	27.17	9.17	Average	100	179																																																																
4	14030.00	50.68	88.20	-37.52	41.51	9.17	Peak	100	179																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	7015																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9329.95</td><td>36.17</td><td>54.00</td><td>-17.83</td><td>27.58</td><td>8.59</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>2</td><td>9329.95</td><td>50.14</td><td>74.00</td><td>-23.86</td><td>41.55</td><td>8.59</td><td>Peak</td><td>100</td><td>155</td></tr><tr><td>3</td><td>14030.00</td><td>36.39</td><td>68.20</td><td>-31.81</td><td>27.22</td><td>9.17</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>4</td><td>14030.00</td><td>50.73</td><td>88.20</td><td>-37.47</td><td>41.56</td><td>9.17</td><td>Peak</td><td>100</td><td>134</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9329.95	36.17	54.00	-17.83	27.58	8.59	Average	100	155	2	9329.95	50.14	74.00	-23.86	41.55	8.59	Peak	100	155	3	14030.00	36.39	68.20	-31.81	27.22	9.17	Average	100	134	4	14030.00	50.73	88.20	-37.47	41.56	9.17	Peak	100	134
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9329.95	36.17	54.00	-17.83	27.58	8.59	Average	100	155																																												
2	9329.95	50.14	74.00	-23.86	41.55	8.59	Peak	100	155																																												
3	14030.00	36.39	68.20	-31.81	27.22	9.17	Average	100	134																																												
4	14030.00	50.73	88.20	-37.47	41.56	9.17	Peak	100	134																																												



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	7095
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) </			



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	7095
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) </			



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	7115																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9462.95</td><td>35.84</td><td>54.00</td><td>-18.16</td><td>27.16</td><td>8.68</td><td>Average</td><td>100</td><td>133</td></tr><tr><td>2</td><td>9462.95</td><td>50.21</td><td>74.00</td><td>-23.79</td><td>41.53</td><td>8.68</td><td>Peak</td><td>100</td><td>133</td></tr><tr><td>3</td><td>14230.00</td><td>36.49</td><td>68.20</td><td>-31.71</td><td>27.09</td><td>9.40</td><td>Average</td><td>100</td><td>168</td></tr><tr><td>4</td><td>14230.00</td><td>50.91</td><td>88.20</td><td>-37.29</td><td>41.51</td><td>9.40</td><td>Peak</td><td>100</td><td>168</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9462.95	35.84	54.00	-18.16	27.16	8.68	Average	100	133	2	9462.95	50.21	74.00	-23.79	41.53	8.68	Peak	100	133	3	14230.00	36.49	68.20	-31.71	27.09	9.40	Average	100	168	4	14230.00	50.91	88.20	-37.29	41.51	9.40	Peak	100	168
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9462.95	35.84	54.00	-18.16	27.16	8.68	Average	100	133																																												
2	9462.95	50.21	74.00	-23.79	41.53	8.68	Peak	100	133																																												
3	14230.00	36.49	68.20	-31.71	27.09	9.40	Average	100	168																																												
4	14230.00	50.91	88.20	-37.29	41.51	9.40	Peak	100	168																																												



Modulation	ax HE20-OFDMA RU26	Test Freq. (MHz)	7115																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9462.95</td><td>36.02</td><td>54.00</td><td>-17.98</td><td>27.34</td><td>8.68</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>2</td><td>9462.95</td><td>50.13</td><td>74.00</td><td>-23.87</td><td>41.45</td><td>8.68</td><td>Peak</td><td>100</td><td>116</td></tr><tr><td>3</td><td>14230.00</td><td>36.60</td><td>68.20</td><td>-31.60</td><td>27.20</td><td>9.40</td><td>Average</td><td>100</td><td>159</td></tr><tr><td>4</td><td>14230.00</td><td>50.95</td><td>88.20</td><td>-37.25</td><td>41.55</td><td>9.40</td><td>Peak</td><td>100</td><td>159</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9462.95	36.02	54.00	-17.98	27.34	8.68	Average	100	116	2	9462.95	50.13	74.00	-23.87	41.45	8.68	Peak	100	116	3	14230.00	36.60	68.20	-31.60	27.20	9.40	Average	100	159	4	14230.00	50.95	88.20	-37.25	41.55	9.40	Peak	100	159
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9462.95	36.02	54.00	-17.98	27.34	8.68	Average	100	116																																												
2	9462.95	50.13	74.00	-23.87	41.45	8.68	Peak	100	116																																												
3	14230.00	36.60	68.20	-31.60	27.20	9.40	Average	100	159																																												
4	14230.00	50.95	88.20	-37.25	41.55	9.40	Peak	100	159																																												

Unwanted Emissions (Above 1GHz) for ax HE20-OFDMA RU52

Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	5955
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) <			



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	5955
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) </			



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6175																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8212.75</td><td>34.13</td><td>54.00</td><td>-19.87</td><td>27.26</td><td>6.87</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>2</td><td>8212.75</td><td>48.40</td><td>74.00</td><td>-25.60</td><td>41.53</td><td>6.87</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>3</td><td>12350.00</td><td>35.69</td><td>54.00</td><td>-18.31</td><td>27.19</td><td>8.50</td><td>Average</td><td>100</td><td>234</td></tr><tr><td>4</td><td>12350.00</td><td>50.16</td><td>74.00</td><td>-23.84</td><td>41.66</td><td>8.50</td><td>Peak</td><td>100</td><td>234</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8212.75	34.13	54.00	-19.87	27.26	6.87	Average	100	114	2	8212.75	48.40	74.00	-25.60	41.53	6.87	Peak	100	114	3	12350.00	35.69	54.00	-18.31	27.19	8.50	Average	100	234	4	12350.00	50.16	74.00	-23.84	41.66	8.50	Peak	100	234
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8212.75	34.13	54.00	-19.87	27.26	6.87	Average	100	114																																												
2	8212.75	48.40	74.00	-25.60	41.53	6.87	Peak	100	114																																												
3	12350.00	35.69	54.00	-18.31	27.19	8.50	Average	100	234																																												
4	12350.00	50.16	74.00	-23.84	41.66	8.50	Peak	100	234																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6175
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			




Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6415
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6415
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			

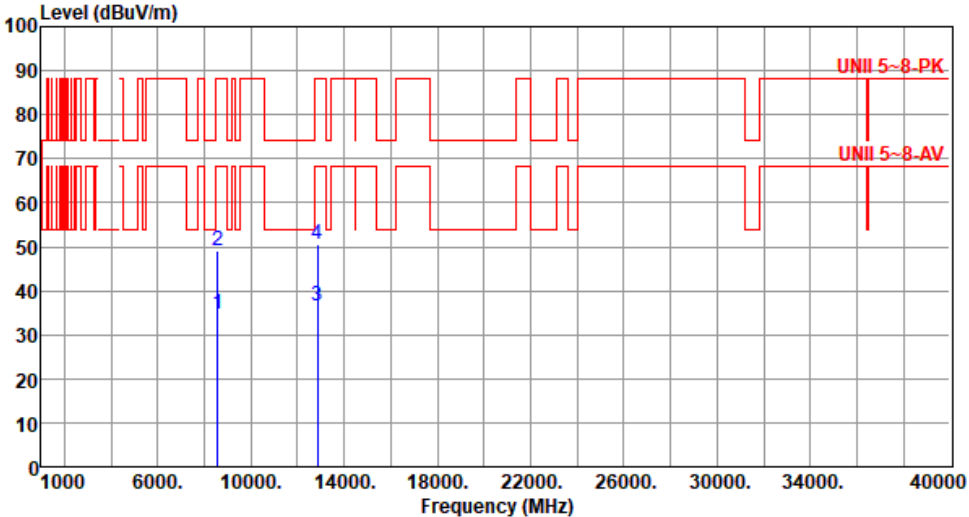

Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6435																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8558.55</td><td>34.73</td><td>68.20</td><td>-33.47</td><td>27.55</td><td>7.18</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>2</td><td>8558.55</td><td>48.91</td><td>88.20</td><td>-39.29</td><td>41.73</td><td>7.18</td><td>Peak</td><td>100</td><td>157</td></tr><tr><td>3</td><td>12870.00</td><td>36.41</td><td>68.20</td><td>-31.79</td><td>27.63</td><td>8.78</td><td>Average</td><td>100</td><td>238</td></tr><tr><td>4</td><td>12870.00</td><td>50.53</td><td>88.20</td><td>-37.67</td><td>41.75</td><td>8.78</td><td>Peak</td><td>100</td><td>238</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8558.55	34.73	68.20	-33.47	27.55	7.18	Average	100	157	2	8558.55	48.91	88.20	-39.29	41.73	7.18	Peak	100	157	3	12870.00	36.41	68.20	-31.79	27.63	8.78	Average	100	238	4	12870.00	50.53	88.20	-37.67	41.75	8.78	Peak	100	238
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8558.55	34.73	68.20	-33.47	27.55	7.18	Average	100	157																																												
2	8558.55	48.91	88.20	-39.29	41.73	7.18	Peak	100	157																																												
3	12870.00	36.41	68.20	-31.79	27.63	8.78	Average	100	238																																												
4	12870.00	50.53	88.20	-37.67	41.75	8.78	Peak	100	238																																												



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6435																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8558.55</td><td>35.01</td><td>68.20</td><td>-33.19</td><td>27.83</td><td>7.18</td><td>Average</td><td>100</td><td>184</td></tr><tr><td>2</td><td>8558.55</td><td>48.97</td><td>88.20</td><td>-39.23</td><td>41.79</td><td>7.18</td><td>Peak</td><td>100</td><td>184</td></tr><tr><td>3</td><td>12870.00</td><td>36.39</td><td>68.20</td><td>-31.81</td><td>27.61</td><td>8.78</td><td>Average</td><td>100</td><td>135</td></tr><tr><td>4</td><td>12870.00</td><td>50.51</td><td>88.20</td><td>-37.69</td><td>41.73</td><td>8.78</td><td>Peak</td><td>100</td><td>135</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8558.55	35.01	68.20	-33.19	27.83	7.18	Average	100	184	2	8558.55	48.97	88.20	-39.23	41.79	7.18	Peak	100	184	3	12870.00	36.39	68.20	-31.81	27.61	8.78	Average	100	135	4	12870.00	50.51	88.20	-37.69	41.73	8.78	Peak	100	135
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8558.55	35.01	68.20	-33.19	27.83	7.18	Average	100	184																																												
2	8558.55	48.97	88.20	-39.23	41.79	7.18	Peak	100	184																																												
3	12870.00	36.39	68.20	-31.81	27.61	8.78	Average	100	135																																												
4	12870.00	50.51	88.20	-37.69	41.73	8.78	Peak	100	135																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6475
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) <			



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6475																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8611.75</td><td>34.88</td><td>68.20</td><td>-33.32</td><td>27.55</td><td>7.33</td><td>Average</td><td>100</td><td>175</td></tr><tr><td>2</td><td>8611.75</td><td>49.01</td><td>88.20</td><td>-39.19</td><td>41.68</td><td>7.33</td><td>Peak</td><td>100</td><td>175</td></tr><tr><td>3</td><td>12950.00</td><td>36.27</td><td>68.20</td><td>-31.93</td><td>27.58</td><td>8.69</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>4</td><td>12950.00</td><td>50.50</td><td>88.20</td><td>-37.70</td><td>41.81</td><td>8.69</td><td>Peak</td><td>100</td><td>218</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8611.75	34.88	68.20	-33.32	27.55	7.33	Average	100	175	2	8611.75	49.01	88.20	-39.19	41.68	7.33	Peak	100	175	3	12950.00	36.27	68.20	-31.93	27.58	8.69	Average	100	218	4	12950.00	50.50	88.20	-37.70	41.81	8.69	Peak	100	218
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8611.75	34.88	68.20	-33.32	27.55	7.33	Average	100	175																																												
2	8611.75	49.01	88.20	-39.19	41.68	7.33	Peak	100	175																																												
3	12950.00	36.27	68.20	-31.93	27.58	8.69	Average	100	218																																												
4	12950.00	50.50	88.20	-37.70	41.81	8.69	Peak	100	218																																												




Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6515																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8664.95</td><td>35.20</td><td>68.20</td><td>-33.00</td><td>27.82</td><td>7.38</td><td>Average</td><td>100</td><td>146</td></tr><tr><td>2</td><td>8664.95</td><td>49.00</td><td>88.20</td><td>-39.20</td><td>41.62</td><td>7.38</td><td>Peak</td><td>100</td><td>146</td></tr><tr><td>3</td><td>13030.00</td><td>36.43</td><td>68.20</td><td>-31.77</td><td>27.66</td><td>8.77</td><td>Average</td><td>100</td><td>263</td></tr><tr><td>4</td><td>13030.00</td><td>50.54</td><td>88.20</td><td>-37.66</td><td>41.77</td><td>8.77</td><td>Peak</td><td>100</td><td>263</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8664.95	35.20	68.20	-33.00	27.82	7.38	Average	100	146	2	8664.95	49.00	88.20	-39.20	41.62	7.38	Peak	100	146	3	13030.00	36.43	68.20	-31.77	27.66	8.77	Average	100	263	4	13030.00	50.54	88.20	-37.66	41.77	8.77	Peak	100	263
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8664.95	35.20	68.20	-33.00	27.82	7.38	Average	100	146																																												
2	8664.95	49.00	88.20	-39.20	41.62	7.38	Peak	100	146																																												
3	13030.00	36.43	68.20	-31.77	27.66	8.77	Average	100	263																																												
4	13030.00	50.54	88.20	-37.66	41.77	8.77	Peak	100	263																																												



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6515
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) <			

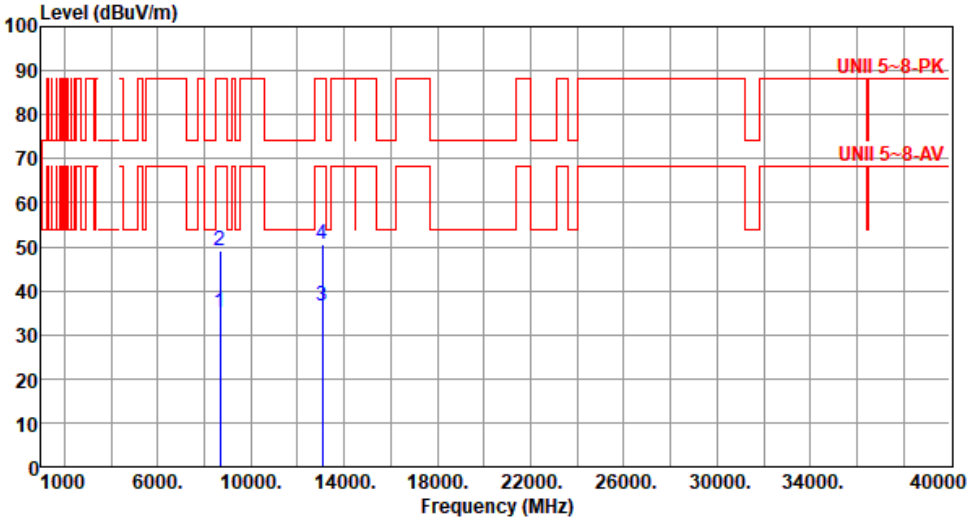

Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6535																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8691.55</td><td>34.95</td><td>68.20</td><td>-33.25</td><td>27.55</td><td>7.40</td><td>Average</td><td>100</td><td>138</td></tr><tr><td>2</td><td>8691.55</td><td>49.14</td><td>88.20</td><td>-39.06</td><td>41.74</td><td>7.40</td><td>Peak</td><td>100</td><td>138</td></tr><tr><td>3</td><td>13070.00</td><td>36.48</td><td>68.20</td><td>-31.72</td><td>27.89</td><td>8.59</td><td>Average</td><td>100</td><td>224</td></tr><tr><td>4</td><td>13070.00</td><td>50.63</td><td>88.20</td><td>-37.57</td><td>42.04</td><td>8.59</td><td>Peak</td><td>100</td><td>224</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8691.55	34.95	68.20	-33.25	27.55	7.40	Average	100	138	2	8691.55	49.14	88.20	-39.06	41.74	7.40	Peak	100	138	3	13070.00	36.48	68.20	-31.72	27.89	8.59	Average	100	224	4	13070.00	50.63	88.20	-37.57	42.04	8.59	Peak	100	224
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8691.55	34.95	68.20	-33.25	27.55	7.40	Average	100	138																																												
2	8691.55	49.14	88.20	-39.06	41.74	7.40	Peak	100	138																																												
3	13070.00	36.48	68.20	-31.72	27.89	8.59	Average	100	224																																												
4	13070.00	50.63	88.20	-37.57	42.04	8.59	Peak	100	224																																												




Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6535
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) </			



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6715
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) </			

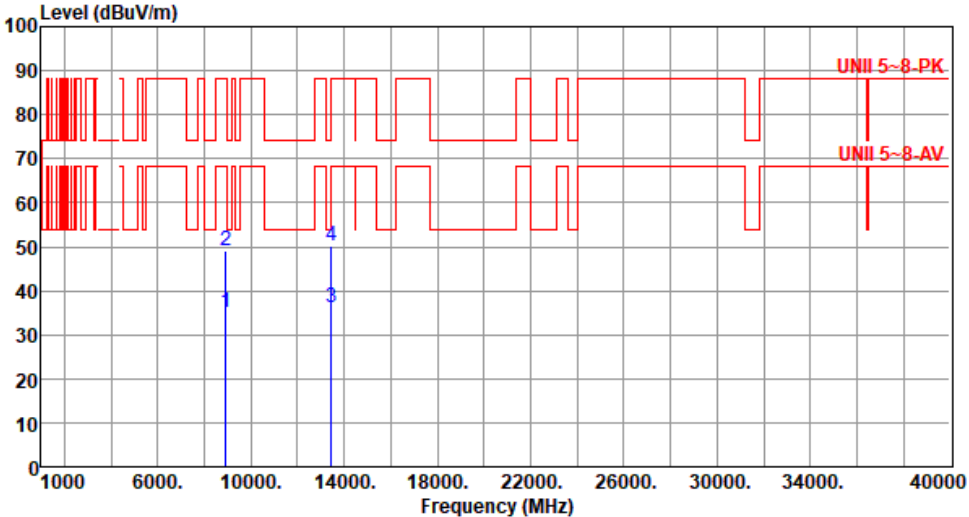

Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6715																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8930.95</td><td>35.09</td><td>68.20</td><td>-33.11</td><td>27.62</td><td>7.47</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>2</td><td>8930.95</td><td>49.06</td><td>88.20</td><td>-39.14</td><td>41.59</td><td>7.47</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>3</td><td>13430.00</td><td>36.33</td><td>68.20</td><td>-31.87</td><td>27.83</td><td>8.50</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>4</td><td>13430.00</td><td>50.21</td><td>88.20</td><td>-37.99</td><td>41.71</td><td>8.50</td><td>Peak</td><td>100</td><td>158</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8930.95	35.09	68.20	-33.11	27.62	7.47	Average	100	124	2	8930.95	49.06	88.20	-39.14	41.59	7.47	Peak	100	124	3	13430.00	36.33	68.20	-31.87	27.83	8.50	Average	100	158	4	13430.00	50.21	88.20	-37.99	41.71	8.50	Peak	100	158
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8930.95	35.09	68.20	-33.11	27.62	7.47	Average	100	124																																												
2	8930.95	49.06	88.20	-39.14	41.59	7.47	Peak	100	124																																												
3	13430.00	36.33	68.20	-31.87	27.83	8.50	Average	100	158																																												
4	13430.00	50.21	88.20	-37.99	41.71	8.50	Peak	100	158																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6855																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9117.15</td><td>35.55</td><td>54.00</td><td>-18.45</td><td>27.71</td><td>7.84</td><td>Average</td><td>100</td><td>147</td></tr><tr><td>2</td><td>9117.15</td><td>49.32</td><td>74.00</td><td>-24.68</td><td>41.48</td><td>7.84</td><td>Peak</td><td>100</td><td>147</td></tr><tr><td>3</td><td>13710.00</td><td>36.26</td><td>68.20</td><td>-31.94</td><td>27.74</td><td>8.52</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>4</td><td>13710.00</td><td>50.14</td><td>88.20</td><td>-38.06</td><td>41.62</td><td>8.52</td><td>Peak</td><td>100</td><td>213</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9117.15	35.55	54.00	-18.45	27.71	7.84	Average	100	147	2	9117.15	49.32	74.00	-24.68	41.48	7.84	Peak	100	147	3	13710.00	36.26	68.20	-31.94	27.74	8.52	Average	100	213	4	13710.00	50.14	88.20	-38.06	41.62	8.52	Peak	100	213
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9117.15	35.55	54.00	-18.45	27.71	7.84	Average	100	147																																												
2	9117.15	49.32	74.00	-24.68	41.48	7.84	Peak	100	147																																												
3	13710.00	36.26	68.20	-31.94	27.74	8.52	Average	100	213																																												
4	13710.00	50.14	88.20	-38.06	41.62	8.52	Peak	100	213																																												



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6855																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>9117.15</td><td>35.41</td><td>54.00</td><td>-18.59</td><td>27.57</td><td>7.84</td><td>Average</td><td>100</td><td>121</td></tr><tr><td>2</td><td>9117.15</td><td>49.46</td><td>74.00</td><td>-24.54</td><td>41.62</td><td>7.84</td><td>Peak</td><td>100</td><td>121</td></tr><tr><td>3</td><td>13710.00</td><td>35.96</td><td>68.20</td><td>-32.24</td><td>27.44</td><td>8.52</td><td>Average</td><td>100</td><td>187</td></tr><tr><td>4</td><td>13710.00</td><td>50.11</td><td>88.20</td><td>-38.09</td><td>41.59</td><td>8.52</td><td>Peak</td><td>100</td><td>187</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	9117.15	35.41	54.00	-18.59	27.57	7.84	Average	100	121	2	9117.15	49.46	74.00	-24.54	41.62	7.84	Peak	100	121	3	13710.00	35.96	68.20	-32.24	27.44	8.52	Average	100	187	4	13710.00	50.11	88.20	-38.09	41.59	8.52	Peak	100	187
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																
		dBuV/m			dBuV			cm	deg																																																																
1	9117.15	35.41	54.00	-18.59	27.57	7.84	Average	100	121																																																																
2	9117.15	49.46	74.00	-24.54	41.62	7.84	Peak	100	121																																																																
3	13710.00	35.96	68.20	-32.24	27.44	8.52	Average	100	187																																																																
4	13710.00	50.11	88.20	-38.09	41.59	8.52	Peak	100	187																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6875																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>9143.75</td><td>35.47</td><td>54.00</td><td>-18.53</td><td>27.54</td><td>7.93</td><td>Average</td><td>100</td><td>153</td></tr><tr><td>2</td><td>9143.75</td><td>49.43</td><td>74.00</td><td>-24.57</td><td>41.50</td><td>7.93</td><td>Peak</td><td>100</td><td>153</td></tr><tr><td>3</td><td>13750.00</td><td>36.03</td><td>68.20</td><td>-32.17</td><td>27.53</td><td>8.50</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>4</td><td>13750.00</td><td>50.17</td><td>88.20</td><td>-38.03</td><td>41.67</td><td>8.50</td><td>Peak</td><td>100</td><td>206</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	9143.75	35.47	54.00	-18.53	27.54	7.93	Average	100	153	2	9143.75	49.43	74.00	-24.57	41.50	7.93	Peak	100	153	3	13750.00	36.03	68.20	-32.17	27.53	8.50	Average	100	206	4	13750.00	50.17	88.20	-38.03	41.67	8.50	Peak	100	206
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																
	MHz	level			reading			High	Table																																																																
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																
1	9143.75	35.47	54.00	-18.53	27.54	7.93	Average	100	153																																																																
2	9143.75	49.43	74.00	-24.57	41.50	7.93	Peak	100	153																																																																
3	13750.00	36.03	68.20	-32.17	27.53	8.50	Average	100	206																																																																
4	13750.00	50.17	88.20	-38.03	41.67	8.50	Peak	100	206																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6875																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9143.75</td><td>35.66</td><td>54.00</td><td>-18.34</td><td>27.73</td><td>7.93</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>2</td><td>9143.75</td><td>49.57</td><td>74.00</td><td>-24.43</td><td>41.64</td><td>7.93</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>3</td><td>13750.00</td><td>36.12</td><td>68.20</td><td>-32.08</td><td>27.62</td><td>8.50</td><td>Average</td><td>100</td><td>104</td></tr><tr><td>4</td><td>13750.00</td><td>50.08</td><td>88.20</td><td>-38.12</td><td>41.58</td><td>8.50</td><td>Peak</td><td>100</td><td>104</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9143.75	35.66	54.00	-18.34	27.73	7.93	Average	100	126	2	9143.75	49.57	74.00	-24.43	41.64	7.93	Peak	100	126	3	13750.00	36.12	68.20	-32.08	27.62	8.50	Average	100	104	4	13750.00	50.08	88.20	-38.12	41.58	8.50	Peak	100	104
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9143.75	35.66	54.00	-18.34	27.73	7.93	Average	100	126																																												
2	9143.75	49.57	74.00	-24.43	41.64	7.93	Peak	100	126																																												
3	13750.00	36.12	68.20	-32.08	27.62	8.50	Average	100	104																																												
4	13750.00	50.08	88.20	-38.12	41.58	8.50	Peak	100	104																																												



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6895																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m) <table><tr><td></td><td>Freq.</td><td>Emission</td><td>Limit</td><td>Margin</td><td>SA</td><td>Factor</td><td>Remark</td><td>ANT</td><td>Turn</td></tr><tr><td></td><td>MHz</td><td>level</td><td></td><td></td><td>reading</td><td></td><td></td><td>High</td><td>Table</td></tr><tr><td></td><td></td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td></td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>9170.35</td><td>35.17</td><td>54.00</td><td>-18.83</td><td>27.17</td><td>8.00</td><td>Average</td><td>100</td><td>152</td></tr><tr><td>2</td><td>9170.35</td><td>49.38</td><td>74.00</td><td>-24.62</td><td>41.38</td><td>8.00</td><td>Peak</td><td>100</td><td>152</td></tr><tr><td>3</td><td>13790.00</td><td>35.82</td><td>68.20</td><td>-32.38</td><td>27.18</td><td>8.64</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>4</td><td>13790.00</td><td>50.05</td><td>88.20</td><td>-38.15</td><td>41.41</td><td>8.64</td><td>Peak</td><td>100</td><td>204</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	9170.35	35.17	54.00	-18.83	27.17	8.00	Average	100	152	2	9170.35	49.38	74.00	-24.62	41.38	8.00	Peak	100	152	3	13790.00	35.82	68.20	-32.38	27.18	8.64	Average	100	204	4	13790.00	50.05	88.20	-38.15	41.41	8.64	Peak	100	204
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																
	MHz	level			reading			High	Table																																																																
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																
1	9170.35	35.17	54.00	-18.83	27.17	8.00	Average	100	152																																																																
2	9170.35	49.38	74.00	-24.62	41.38	8.00	Peak	100	152																																																																
3	13790.00	35.82	68.20	-32.38	27.18	8.64	Average	100	204																																																																
4	13790.00	50.05	88.20	-38.15	41.41	8.64	Peak	100	204																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	6895
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	7015																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9329.95</td><td>35.78</td><td>54.00</td><td>-18.22</td><td>27.19</td><td>8.59</td><td>Average</td><td>100</td><td>146</td></tr><tr><td>2</td><td>9329.95</td><td>50.03</td><td>74.00</td><td>-23.97</td><td>41.44</td><td>8.59</td><td>Peak</td><td>100</td><td>146</td></tr><tr><td>3</td><td>14030.00</td><td>36.34</td><td>68.20</td><td>-31.86</td><td>27.17</td><td>9.17</td><td>Average</td><td>100</td><td>179</td></tr><tr><td>4</td><td>14030.00</td><td>50.68</td><td>88.20</td><td>-37.52</td><td>41.51</td><td>9.17</td><td>Peak</td><td>100</td><td>179</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9329.95	35.78	54.00	-18.22	27.19	8.59	Average	100	146	2	9329.95	50.03	74.00	-23.97	41.44	8.59	Peak	100	146	3	14030.00	36.34	68.20	-31.86	27.17	9.17	Average	100	179	4	14030.00	50.68	88.20	-37.52	41.51	9.17	Peak	100	179
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9329.95	35.78	54.00	-18.22	27.19	8.59	Average	100	146																																												
2	9329.95	50.03	74.00	-23.97	41.44	8.59	Peak	100	146																																												
3	14030.00	36.34	68.20	-31.86	27.17	9.17	Average	100	179																																												
4	14030.00	50.68	88.20	-37.52	41.51	9.17	Peak	100	179																																												



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	7015
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	7095
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) </			



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	7095																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9436.35</td><td>36.32</td><td>54.00</td><td>-17.68</td><td>27.61</td><td>8.71</td><td>Average</td><td>100</td><td>166</td></tr><tr><td>2</td><td>9436.35</td><td>50.22</td><td>74.00</td><td>-23.78</td><td>41.51</td><td>8.71</td><td>Peak</td><td>100</td><td>166</td></tr><tr><td>3</td><td>14190.00</td><td>36.55</td><td>68.20</td><td>-31.65</td><td>27.24</td><td>9.31</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>4</td><td>14190.00</td><td>50.74</td><td>88.20</td><td>-37.46</td><td>41.43</td><td>9.31</td><td>Peak</td><td>100</td><td>125</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9436.35	36.32	54.00	-17.68	27.61	8.71	Average	100	166	2	9436.35	50.22	74.00	-23.78	41.51	8.71	Peak	100	166	3	14190.00	36.55	68.20	-31.65	27.24	9.31	Average	100	125	4	14190.00	50.74	88.20	-37.46	41.43	9.31	Peak	100	125
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9436.35	36.32	54.00	-17.68	27.61	8.71	Average	100	166																																												
2	9436.35	50.22	74.00	-23.78	41.51	8.71	Peak	100	166																																												
3	14190.00	36.55	68.20	-31.65	27.24	9.31	Average	100	125																																												
4	14190.00	50.74	88.20	-37.46	41.43	9.31	Peak	100	125																																												



Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	7115																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9462.95</td><td>35.84</td><td>54.00</td><td>-18.16</td><td>27.16</td><td>8.68</td><td>Average</td><td>100</td><td>133</td></tr><tr><td>2</td><td>9462.95</td><td>50.21</td><td>74.00</td><td>-23.79</td><td>41.53</td><td>8.68</td><td>Peak</td><td>100</td><td>133</td></tr><tr><td>3</td><td>14230.00</td><td>36.49</td><td>68.20</td><td>-31.71</td><td>27.09</td><td>9.40</td><td>Average</td><td>100</td><td>168</td></tr><tr><td>4</td><td>14230.00</td><td>50.91</td><td>88.20</td><td>-37.29</td><td>41.51</td><td>9.40</td><td>Peak</td><td>100</td><td>168</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9462.95	35.84	54.00	-18.16	27.16	8.68	Average	100	133	2	9462.95	50.21	74.00	-23.79	41.53	8.68	Peak	100	133	3	14230.00	36.49	68.20	-31.71	27.09	9.40	Average	100	168	4	14230.00	50.91	88.20	-37.29	41.51	9.40	Peak	100	168
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9462.95	35.84	54.00	-18.16	27.16	8.68	Average	100	133																																												
2	9462.95	50.21	74.00	-23.79	41.53	8.68	Peak	100	133																																												
3	14230.00	36.49	68.20	-31.71	27.09	9.40	Average	100	168																																												
4	14230.00	50.91	88.20	-37.29	41.51	9.40	Peak	100	168																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					




Modulation	ax HE20-OFDMA RU52	Test Freq. (MHz)	7115																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9462.95</td><td>36.02</td><td>54.00</td><td>-17.98</td><td>27.34</td><td>8.68</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>2</td><td>9462.95</td><td>50.13</td><td>74.00</td><td>-23.87</td><td>41.45</td><td>8.68</td><td>Peak</td><td>100</td><td>116</td></tr><tr><td>3</td><td>14230.00</td><td>36.60</td><td>68.20</td><td>-31.60</td><td>27.20</td><td>9.40</td><td>Average</td><td>100</td><td>159</td></tr><tr><td>4</td><td>14230.00</td><td>50.95</td><td>88.20</td><td>-37.25</td><td>41.55</td><td>9.40</td><td>Peak</td><td>100</td><td>159</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9462.95	36.02	54.00	-17.98	27.34	8.68	Average	100	116	2	9462.95	50.13	74.00	-23.87	41.45	8.68	Peak	100	116	3	14230.00	36.60	68.20	-31.60	27.20	9.40	Average	100	159	4	14230.00	50.95	88.20	-37.25	41.55	9.40	Peak	100	159
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9462.95	36.02	54.00	-17.98	27.34	8.68	Average	100	116																																												
2	9462.95	50.13	74.00	-23.87	41.45	8.68	Peak	100	116																																												
3	14230.00	36.60	68.20	-31.60	27.20	9.40	Average	100	159																																												
4	14230.00	50.95	88.20	-37.25	41.55	9.40	Peak	100	159																																												

Unwanted Emissions (Above 1GHz) for ax HE20-OFDMA RU106

Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	5955
Polarization	Horizontal-Peak Value		

Test By :Akun Chung- Temperature(°C):23 Humidity(%):63

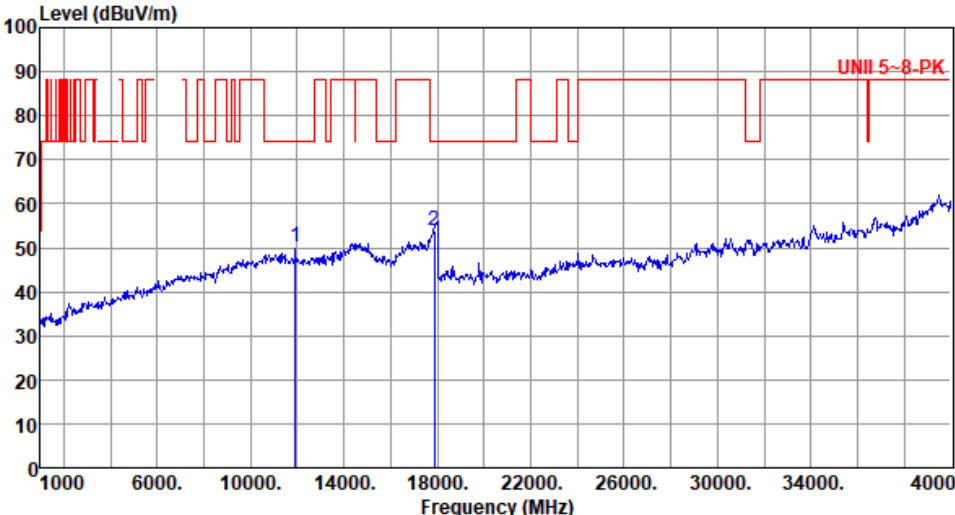


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	11910.00	50.04	74.00	-23.96	41.63	8.41	Peak	100	211
2	17865.00	54.01	74.00	-19.99	41.84	12.17	Peak	100	137

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

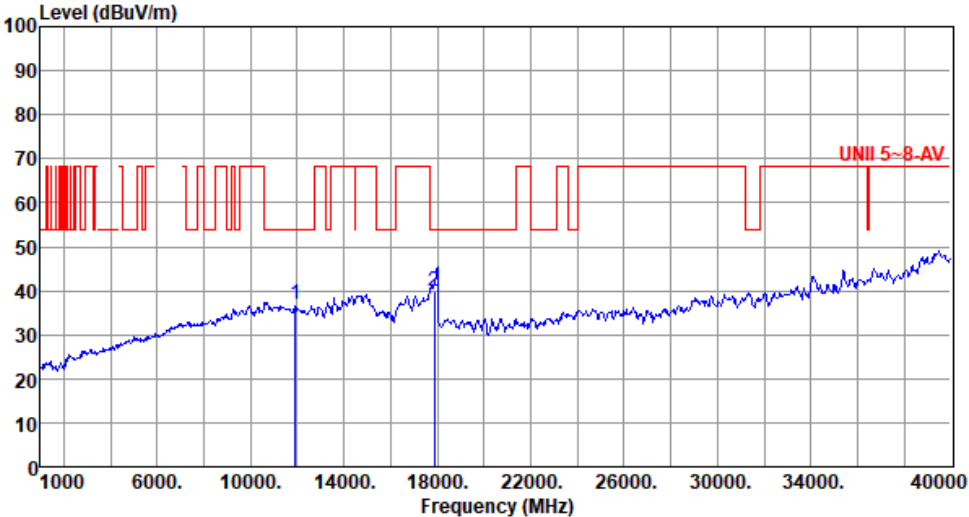


Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	5955																														
Polarization	Horizontal-Average Value																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																	
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11910.00</td><td>36.73</td><td>54.00</td><td>-17.27</td><td>28.32</td><td>8.41</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>2</td><td>17865.00</td><td>40.01</td><td>54.00</td><td>-13.99</td><td>27.84</td><td>12.17</td><td>Average</td><td>100</td><td>137</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11910.00	36.73	54.00	-17.27	28.32	8.41	Average	100	211	2	17865.00	40.01	54.00	-13.99	27.84	12.17	Average	100	137
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	11910.00	36.73	54.00	-17.27	28.32	8.41	Average	100	211																								
2	17865.00	40.01	54.00	-13.99	27.84	12.17	Average	100	137																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	

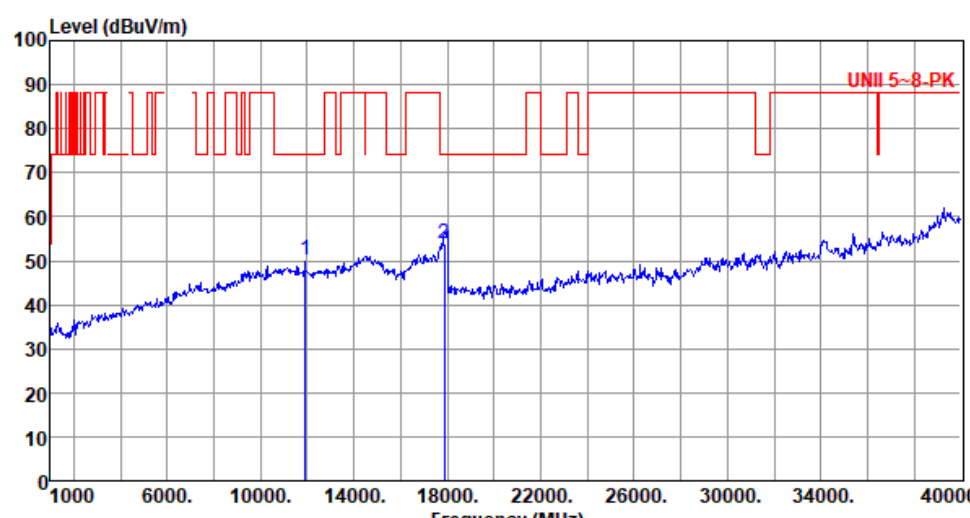

Modulation	ax HE20-OFDMA RU106		Test Freq. (MHz)	5955																															
Polarization	Vertical-Peak Value																																		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																			
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11910.00</td><td>50.16</td><td>74.00</td><td>-23.84</td><td>41.75</td><td>8.41</td><td>Peak</td><td>100</td><td>120</td></tr><tr><td>2</td><td>17865.00</td><td>53.93</td><td>74.00</td><td>-20.07</td><td>41.76</td><td>12.17</td><td>Peak</td><td>100</td><td>173</td></tr></tbody></table>							Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11910.00	50.16	74.00	-23.84	41.75	8.41	Peak	100	120	2	17865.00	53.93	74.00	-20.07	41.76	12.17	Peak	100	173
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																										
1	11910.00	50.16	74.00	-23.84	41.75	8.41	Peak	100	120																										
2	17865.00	53.93	74.00	-20.07	41.76	12.17	Peak	100	173																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																			

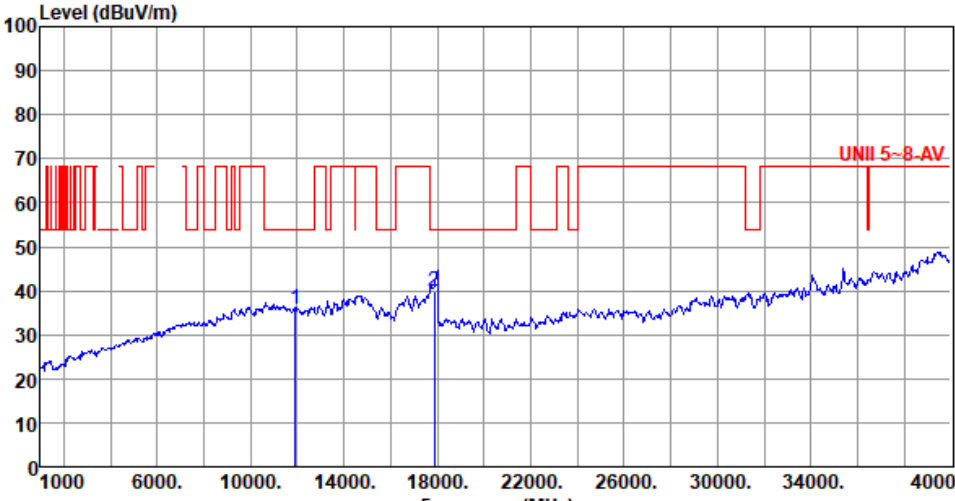

Modulation	ax HE20-OFDMA RU106		Test Freq. (MHz)	5955																															
Polarization	Vertical -Average Value																																		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																			
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11910.00</td><td>35.84</td><td>54.00</td><td>-18.16</td><td>27.43</td><td>8.41</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>2</td><td>17865.00</td><td>39.79</td><td>54.00</td><td>-14.21</td><td>27.62</td><td>12.17</td><td>Average</td><td>100</td><td>173</td></tr></tbody></table>							Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11910.00	35.84	54.00	-18.16	27.43	8.41	Average	100	120	2	17865.00	39.79	54.00	-14.21	27.62	12.17	Average	100	173
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																										
1	11910.00	35.84	54.00	-18.16	27.43	8.41	Average	100	120																										
2	17865.00	39.79	54.00	-14.21	27.62	12.17	Average	100	173																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																			




Modulation	ax HE20-OFDMA RU106		Test Freq. (MHz)	6175	
Polarization	Horizontal				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63					
Level (dBuV/m) <					



Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	6175
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			

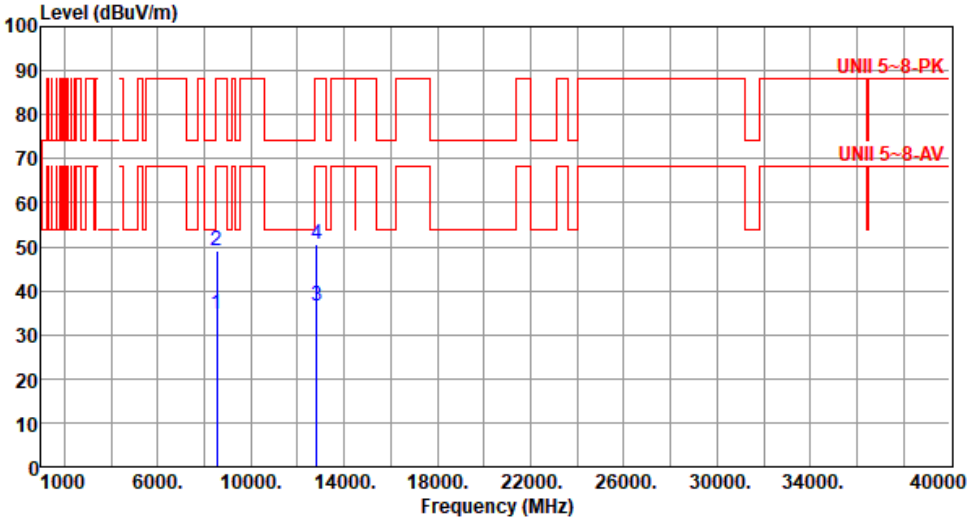


Modulation	ax HE20-OFDMA RU106		Test Freq. (MHz)	6415																																																			
Polarization	Horizontal																																																						
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8531.95</td><td>34.81</td><td>68.20</td><td>-33.39</td><td>27.75</td><td>7.06</td><td>Average</td><td>100</td><td>142</td></tr><tr><td>2</td><td>8531.95</td><td>48.91</td><td>88.20</td><td>-39.29</td><td>41.85</td><td>7.06</td><td>Peak</td><td>100</td><td>142</td></tr><tr><td>3</td><td>12830.00</td><td>36.37</td><td>68.20</td><td>-31.83</td><td>27.61</td><td>8.76</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>4</td><td>12830.00</td><td>50.51</td><td>88.20</td><td>-37.69</td><td>41.75</td><td>8.76</td><td>Peak</td><td>100</td><td>211</td></tr></tbody></table>							Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8531.95	34.81	68.20	-33.39	27.75	7.06	Average	100	142	2	8531.95	48.91	88.20	-39.29	41.85	7.06	Peak	100	142	3	12830.00	36.37	68.20	-31.83	27.61	8.76	Average	100	211	4	12830.00	50.51	88.20	-37.69	41.75	8.76	Peak	100	211
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																														
1	8531.95	34.81	68.20	-33.39	27.75	7.06	Average	100	142																																														
2	8531.95	48.91	88.20	-39.29	41.85	7.06	Peak	100	142																																														
3	12830.00	36.37	68.20	-31.83	27.61	8.76	Average	100	211																																														
4	12830.00	50.51	88.20	-37.69	41.75	8.76	Peak	100	211																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																							



Modulation	ax HE20-OFDMA RU106		Test Freq. (MHz)		6415																																																			
Polarization	Vertical																																																							
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																								
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8531.95</td><td>34.68</td><td>68.20</td><td>-33.52</td><td>27.62</td><td>7.06</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>2</td><td>8531.95</td><td>48.74</td><td>88.20</td><td>-39.46</td><td>41.68</td><td>7.06</td><td>Peak</td><td>100</td><td>158</td></tr><tr><td>3</td><td>12830.00</td><td>36.57</td><td>68.20</td><td>-31.63</td><td>27.81</td><td>8.76</td><td>Average</td><td>100</td><td>135</td></tr><tr><td>4</td><td>12830.00</td><td>50.60</td><td>88.20</td><td>-37.60</td><td>41.84</td><td>8.76</td><td>Peak</td><td>100</td><td>135</td></tr></tbody></table>								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8531.95	34.68	68.20	-33.52	27.62	7.06	Average	100	158	2	8531.95	48.74	88.20	-39.46	41.68	7.06	Peak	100	158	3	12830.00	36.57	68.20	-31.63	27.81	8.76	Average	100	135	4	12830.00	50.60	88.20	-37.60	41.84	8.76	Peak	100	135
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																															
1	8531.95	34.68	68.20	-33.52	27.62	7.06	Average	100	158																																															
2	8531.95	48.74	88.20	-39.46	41.68	7.06	Peak	100	158																																															
3	12830.00	36.57	68.20	-31.63	27.81	8.76	Average	100	135																																															
4	12830.00	50.60	88.20	-37.60	41.84	8.76	Peak	100	135																																															
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																								

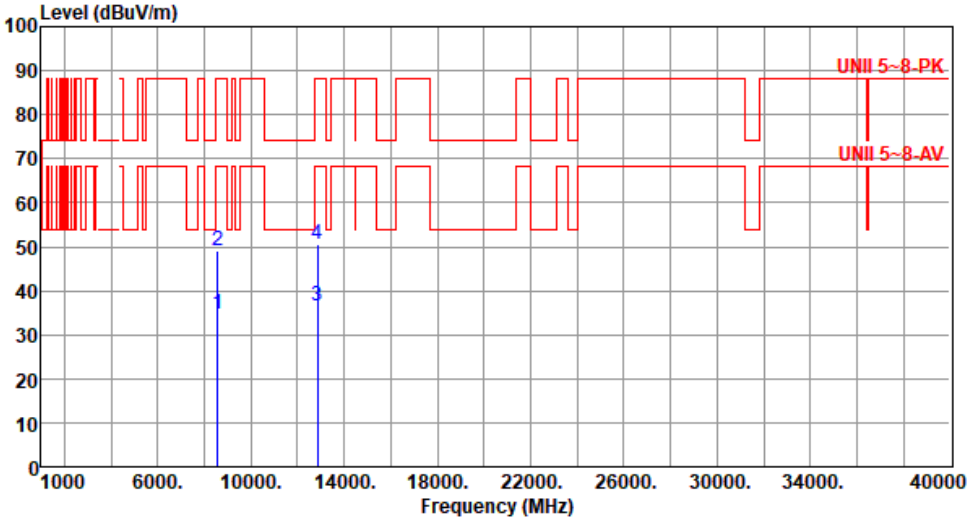


Modulation	ax HE20-OFDMA RU106		Test Freq. (MHz)	6435																																																			
Polarization	Horizontal																																																						
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8558.55</td><td>34.75</td><td>68.20</td><td>-33.45</td><td>27.57</td><td>7.18</td><td>Average</td><td>100</td><td>161</td></tr><tr><td>2</td><td>8558.55</td><td>48.93</td><td>88.20</td><td>-39.27</td><td>41.75</td><td>7.18</td><td>Peak</td><td>100</td><td>161</td></tr><tr><td>3</td><td>12870.00</td><td>36.43</td><td>68.20</td><td>-31.77</td><td>27.65</td><td>8.78</td><td>Average</td><td>100</td><td>241</td></tr><tr><td>4</td><td>12870.00</td><td>50.55</td><td>88.20</td><td>-37.65</td><td>41.77</td><td>8.78</td><td>Peak</td><td>100</td><td>241</td></tr></tbody></table>							Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8558.55	34.75	68.20	-33.45	27.57	7.18	Average	100	161	2	8558.55	48.93	88.20	-39.27	41.75	7.18	Peak	100	161	3	12870.00	36.43	68.20	-31.77	27.65	8.78	Average	100	241	4	12870.00	50.55	88.20	-37.65	41.77	8.78	Peak	100	241
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																														
1	8558.55	34.75	68.20	-33.45	27.57	7.18	Average	100	161																																														
2	8558.55	48.93	88.20	-39.27	41.75	7.18	Peak	100	161																																														
3	12870.00	36.43	68.20	-31.77	27.65	8.78	Average	100	241																																														
4	12870.00	50.55	88.20	-37.65	41.77	8.78	Peak	100	241																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																							



Modulation	ax HE20-OFDMA RU106		Test Freq. (MHz)		6435	
Polarization	Vertical					
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63						
Level (dBuV/m) </						

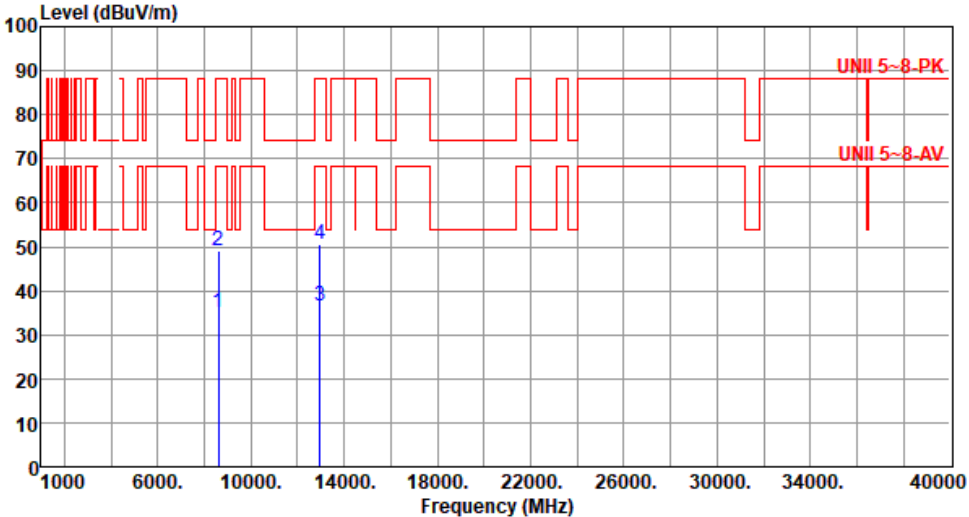


Modulation	ax HE20-OFDMA RU106		Test Freq. (MHz)	6475					
Polarization	Horizontal								
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	8611.75	34.89	68.20	-33.31	27.56	7.33	Average	100	136
2	8611.75	49.03	88.20	-39.17	41.70	7.33	Peak	100	136
3	12950.00	36.56	68.20	-31.64	27.87	8.69	Average	100	245
4	12950.00	50.59	88.20	-37.61	41.90	8.69	Peak	100	245
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	6475
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			

Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	6515
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) </			

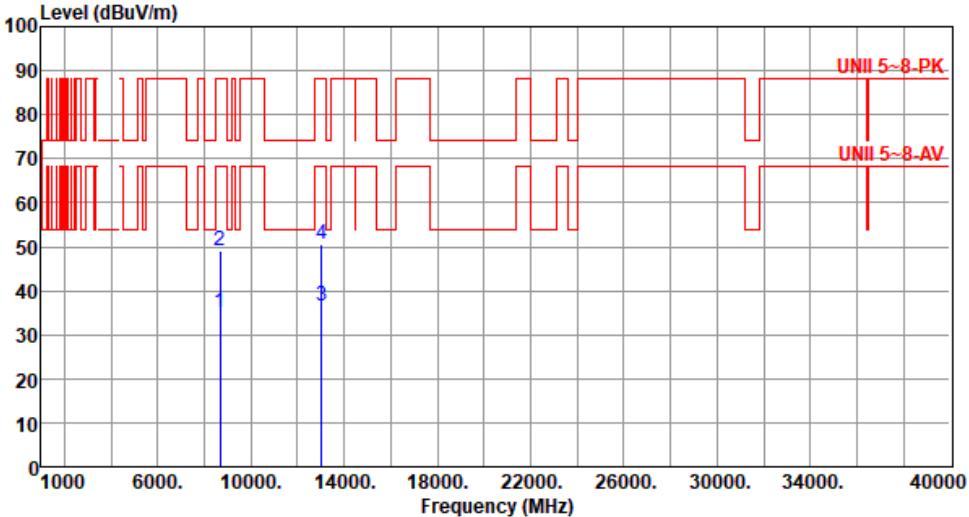


Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	6515																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8664.95</td><td>35.14</td><td>68.20</td><td>-33.06</td><td>27.76</td><td>7.38</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>2</td><td>8664.95</td><td>49.13</td><td>88.20</td><td>-39.07</td><td>41.75</td><td>7.38</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>3</td><td>13030.00</td><td>36.55</td><td>68.20</td><td>-31.65</td><td>27.78</td><td>8.77</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>4</td><td>13030.00</td><td>50.46</td><td>88.20</td><td>-37.74</td><td>41.69</td><td>8.77</td><td>Peak</td><td>100</td><td>117</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	8664.95	35.14	68.20	-33.06	27.76	7.38	Average	100	148	2	8664.95	49.13	88.20	-39.07	41.75	7.38	Peak	100	148	3	13030.00	36.55	68.20	-31.65	27.78	8.77	Average	100	117	4	13030.00	50.46	88.20	-37.74	41.69	8.77	Peak	100	117
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																
	MHz	level			reading			High	Table																																																																
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																
1	8664.95	35.14	68.20	-33.06	27.76	7.38	Average	100	148																																																																
2	8664.95	49.13	88.20	-39.07	41.75	7.38	Peak	100	148																																																																
3	13030.00	36.55	68.20	-31.65	27.78	8.77	Average	100	117																																																																
4	13030.00	50.46	88.20	-37.74	41.69	8.77	Peak	100	117																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE20-OFDMA RU106		Test Freq. (MHz)	6535																																																			
Polarization	Horizontal																																																						
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																							
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8691.55</td><td>34.99</td><td>68.20</td><td>-33.21</td><td>27.59</td><td>7.40</td><td>Average</td><td>100</td><td>141</td></tr><tr><td>2</td><td>8691.55</td><td>49.16</td><td>88.20</td><td>-39.04</td><td>41.76</td><td>7.40</td><td>Peak</td><td>100</td><td>141</td></tr><tr><td>3</td><td>13070.00</td><td>36.43</td><td>68.20</td><td>-31.77</td><td>27.84</td><td>8.59</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>4</td><td>13070.00</td><td>50.54</td><td>88.20</td><td>-37.66</td><td>41.95</td><td>8.59</td><td>Peak</td><td>100</td><td>214</td></tr></table>							Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8691.55	34.99	68.20	-33.21	27.59	7.40	Average	100	141	2	8691.55	49.16	88.20	-39.04	41.76	7.40	Peak	100	141	3	13070.00	36.43	68.20	-31.77	27.84	8.59	Average	100	214	4	13070.00	50.54	88.20	-37.66	41.95	8.59	Peak	100	214
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																														
1	8691.55	34.99	68.20	-33.21	27.59	7.40	Average	100	141																																														
2	8691.55	49.16	88.20	-39.04	41.76	7.40	Peak	100	141																																														
3	13070.00	36.43	68.20	-31.77	27.84	8.59	Average	100	214																																														
4	13070.00	50.54	88.20	-37.66	41.95	8.59	Peak	100	214																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																							

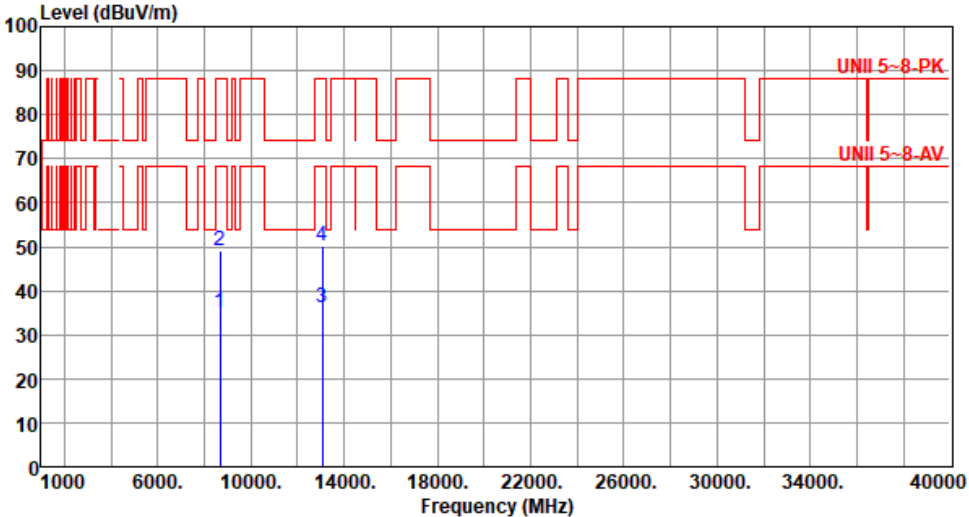

Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	6535																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8691.55</td><td>35.11</td><td>68.20</td><td>-33.09</td><td>27.71</td><td>7.40</td><td>Average</td><td>100</td><td>147</td></tr><tr><td>2</td><td>8691.55</td><td>49.12</td><td>88.20</td><td>-39.08</td><td>41.72</td><td>7.40</td><td>Peak</td><td>100</td><td>147</td></tr><tr><td>3</td><td>13070.00</td><td>36.18</td><td>68.20</td><td>-32.02</td><td>27.59</td><td>8.59</td><td>Average</td><td>100</td><td>129</td></tr><tr><td>4</td><td>13070.00</td><td>50.20</td><td>88.20</td><td>-38.00</td><td>41.61</td><td>8.59</td><td>Peak</td><td>100</td><td>129</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8691.55	35.11	68.20	-33.09	27.71	7.40	Average	100	147	2	8691.55	49.12	88.20	-39.08	41.72	7.40	Peak	100	147	3	13070.00	36.18	68.20	-32.02	27.59	8.59	Average	100	129	4	13070.00	50.20	88.20	-38.00	41.61	8.59	Peak	100	129
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8691.55	35.11	68.20	-33.09	27.71	7.40	Average	100	147																																												
2	8691.55	49.12	88.20	-39.08	41.72	7.40	Peak	100	147																																												
3	13070.00	36.18	68.20	-32.02	27.59	8.59	Average	100	129																																												
4	13070.00	50.20	88.20	-38.00	41.61	8.59	Peak	100	129																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					




Modulation	ax HE20-OFDMA RU106		Test Freq. (MHz)	6715																																																			
Polarization	Horizontal																																																						
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																							
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8930.95</td><td>35.10</td><td>68.20</td><td>-33.10</td><td>27.63</td><td>7.47</td><td>Average</td><td>100</td><td>151</td></tr><tr><td>2</td><td>8930.95</td><td>49.15</td><td>88.20</td><td>-39.05</td><td>41.68</td><td>7.47</td><td>Peak</td><td>100</td><td>151</td></tr><tr><td>3</td><td>13430.00</td><td>36.27</td><td>68.20</td><td>-31.93</td><td>27.77</td><td>8.50</td><td>Average</td><td>100</td><td>234</td></tr><tr><td>4</td><td>13430.00</td><td>49.99</td><td>88.20</td><td>-38.21</td><td>41.49</td><td>8.50</td><td>Peak</td><td>100</td><td>234</td></tr></tbody></table>							Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8930.95	35.10	68.20	-33.10	27.63	7.47	Average	100	151	2	8930.95	49.15	88.20	-39.05	41.68	7.47	Peak	100	151	3	13430.00	36.27	68.20	-31.93	27.77	8.50	Average	100	234	4	13430.00	49.99	88.20	-38.21	41.49	8.50	Peak	100	234
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																														
1	8930.95	35.10	68.20	-33.10	27.63	7.47	Average	100	151																																														
2	8930.95	49.15	88.20	-39.05	41.68	7.47	Peak	100	151																																														
3	13430.00	36.27	68.20	-31.93	27.77	8.50	Average	100	234																																														
4	13430.00	49.99	88.20	-38.21	41.49	8.50	Peak	100	234																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																							




Modulation	ax HE20-OFDMA RU106		Test Freq. (MHz)	6715																																																			
Polarization	Vertical																																																						
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8930.95</td><td>35.12</td><td>68.20</td><td>-33.08</td><td>27.65</td><td>7.47</td><td>Average</td><td>100</td><td>131</td></tr><tr><td>2</td><td>8930.95</td><td>49.01</td><td>88.20</td><td>-39.19</td><td>41.54</td><td>7.47</td><td>Peak</td><td>100</td><td>131</td></tr><tr><td>3</td><td>13430.00</td><td>36.27</td><td>68.20</td><td>-31.93</td><td>27.77</td><td>8.50</td><td>Average</td><td>100</td><td>161</td></tr><tr><td>4</td><td>13430.00</td><td>50.19</td><td>88.20</td><td>-38.01</td><td>41.69</td><td>8.50</td><td>Peak</td><td>100</td><td>161</td></tr></tbody></table>							Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8930.95	35.12	68.20	-33.08	27.65	7.47	Average	100	131	2	8930.95	49.01	88.20	-39.19	41.54	7.47	Peak	100	131	3	13430.00	36.27	68.20	-31.93	27.77	8.50	Average	100	161	4	13430.00	50.19	88.20	-38.01	41.69	8.50	Peak	100	161
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																														
1	8930.95	35.12	68.20	-33.08	27.65	7.47	Average	100	131																																														
2	8930.95	49.01	88.20	-39.19	41.54	7.47	Peak	100	131																																														
3	13430.00	36.27	68.20	-31.93	27.77	8.50	Average	100	161																																														
4	13430.00	50.19	88.20	-38.01	41.69	8.50	Peak	100	161																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																							

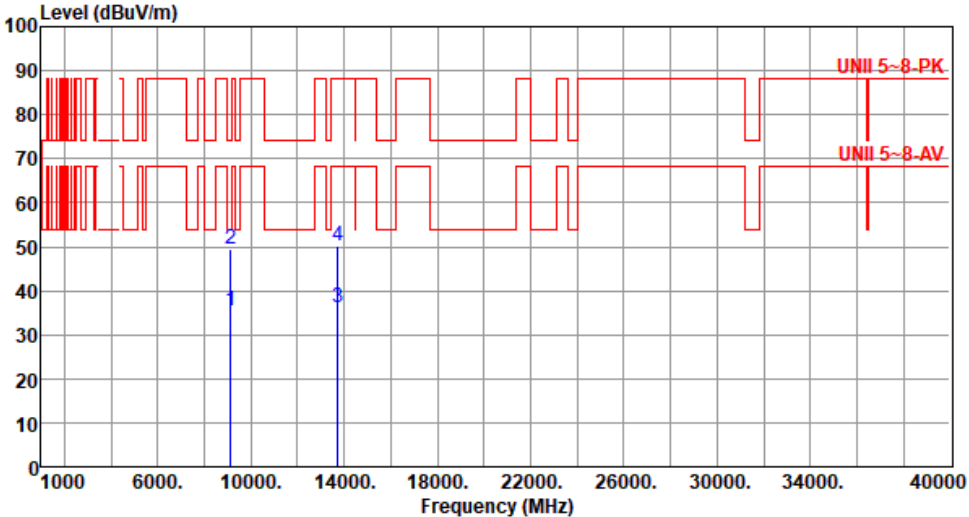

Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	6855																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9117.15</td><td>35.52</td><td>54.00</td><td>-18.48</td><td>27.68</td><td>7.84</td><td>Average</td><td>100</td><td>144</td></tr><tr><td>2</td><td>9117.15</td><td>49.29</td><td>74.00</td><td>-24.71</td><td>41.45</td><td>7.84</td><td>Peak</td><td>100</td><td>144</td></tr><tr><td>3</td><td>13710.00</td><td>36.29</td><td>68.20</td><td>-31.91</td><td>27.77</td><td>8.52</td><td>Average</td><td>100</td><td>215</td></tr><tr><td>4</td><td>13710.00</td><td>50.18</td><td>88.20</td><td>-38.02</td><td>41.66</td><td>8.52</td><td>Peak</td><td>100</td><td>215</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9117.15	35.52	54.00	-18.48	27.68	7.84	Average	100	144	2	9117.15	49.29	74.00	-24.71	41.45	7.84	Peak	100	144	3	13710.00	36.29	68.20	-31.91	27.77	8.52	Average	100	215	4	13710.00	50.18	88.20	-38.02	41.66	8.52	Peak	100	215
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9117.15	35.52	54.00	-18.48	27.68	7.84	Average	100	144																																												
2	9117.15	49.29	74.00	-24.71	41.45	7.84	Peak	100	144																																												
3	13710.00	36.29	68.20	-31.91	27.77	8.52	Average	100	215																																												
4	13710.00	50.18	88.20	-38.02	41.66	8.52	Peak	100	215																																												

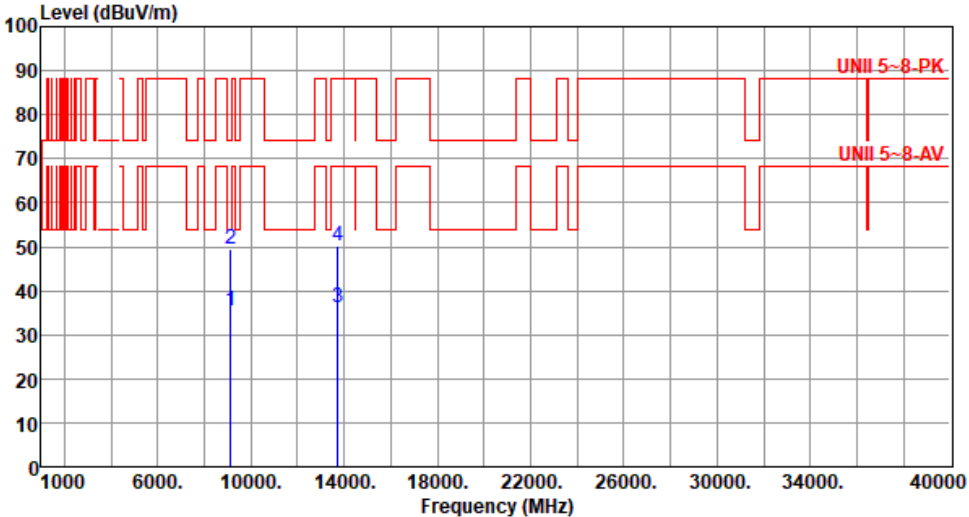

Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	6855																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9117.15</td><td>35.45</td><td>54.00</td><td>-18.55</td><td>27.61</td><td>7.84</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>2</td><td>9117.15</td><td>49.50</td><td>74.00</td><td>-24.50</td><td>41.66</td><td>7.84</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>3</td><td>13710.00</td><td>35.99</td><td>68.20</td><td>-32.21</td><td>27.47</td><td>8.52</td><td>Average</td><td>100</td><td>184</td></tr><tr><td>4</td><td>13710.00</td><td>50.13</td><td>88.20</td><td>-38.07</td><td>41.61</td><td>8.52</td><td>Peak</td><td>100</td><td>184</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9117.15	35.45	54.00	-18.55	27.61	7.84	Average	100	115	2	9117.15	49.50	74.00	-24.50	41.66	7.84	Peak	100	115	3	13710.00	35.99	68.20	-32.21	27.47	8.52	Average	100	184	4	13710.00	50.13	88.20	-38.07	41.61	8.52	Peak	100	184
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9117.15	35.45	54.00	-18.55	27.61	7.84	Average	100	115																																												
2	9117.15	49.50	74.00	-24.50	41.66	7.84	Peak	100	115																																												
3	13710.00	35.99	68.20	-32.21	27.47	8.52	Average	100	184																																												
4	13710.00	50.13	88.20	-38.07	41.61	8.52	Peak	100	184																																												



Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	6875																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9143.75</td><td>35.51</td><td>54.00</td><td>-18.49</td><td>27.58</td><td>7.93</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>2</td><td>9143.75</td><td>49.47</td><td>74.00</td><td>-24.53</td><td>41.54</td><td>7.93</td><td>Peak</td><td>100</td><td>158</td></tr><tr><td>3</td><td>13750.00</td><td>36.05</td><td>68.20</td><td>-32.15</td><td>27.55</td><td>8.50</td><td>Average</td><td>100</td><td>209</td></tr><tr><td>4</td><td>13750.00</td><td>50.12</td><td>88.20</td><td>-38.08</td><td>41.62</td><td>8.50</td><td>Peak</td><td>100</td><td>209</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9143.75	35.51	54.00	-18.49	27.58	7.93	Average	100	158	2	9143.75	49.47	74.00	-24.53	41.54	7.93	Peak	100	158	3	13750.00	36.05	68.20	-32.15	27.55	8.50	Average	100	209	4	13750.00	50.12	88.20	-38.08	41.62	8.50	Peak	100	209
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9143.75	35.51	54.00	-18.49	27.58	7.93	Average	100	158																																												
2	9143.75	49.47	74.00	-24.53	41.54	7.93	Peak	100	158																																												
3	13750.00	36.05	68.20	-32.15	27.55	8.50	Average	100	209																																												
4	13750.00	50.12	88.20	-38.08	41.62	8.50	Peak	100	209																																												



Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	6875																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9143.75</td><td>35.65</td><td>54.00</td><td>-18.35</td><td>27.72</td><td>7.93</td><td>Average</td><td>100</td><td>129</td></tr><tr><td>2</td><td>9143.75</td><td>49.60</td><td>74.00</td><td>-24.40</td><td>41.67</td><td>7.93</td><td>Peak</td><td>100</td><td>129</td></tr><tr><td>3</td><td>13750.00</td><td>36.15</td><td>68.20</td><td>-32.05</td><td>27.65</td><td>8.50</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>4</td><td>13750.00</td><td>50.11</td><td>88.20</td><td>-38.09</td><td>41.61</td><td>8.50</td><td>Peak</td><td>100</td><td>114</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9143.75	35.65	54.00	-18.35	27.72	7.93	Average	100	129	2	9143.75	49.60	74.00	-24.40	41.67	7.93	Peak	100	129	3	13750.00	36.15	68.20	-32.05	27.65	8.50	Average	100	114	4	13750.00	50.11	88.20	-38.09	41.61	8.50	Peak	100	114
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9143.75	35.65	54.00	-18.35	27.72	7.93	Average	100	129																																												
2	9143.75	49.60	74.00	-24.40	41.67	7.93	Peak	100	129																																												
3	13750.00	36.15	68.20	-32.05	27.65	8.50	Average	100	114																																												
4	13750.00	50.11	88.20	-38.09	41.61	8.50	Peak	100	114																																												



Modulation	ax HE20-OFDMA RU106		Test Freq. (MHz)		6895	
Polarization	Horizontal					
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63						
Level (dBuV/m)						



Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	6895
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			



Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	7015																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9329.95</td><td>36.47</td><td>54.00</td><td>-17.53</td><td>27.88</td><td>8.59</td><td>Average</td><td>100</td><td>164</td></tr><tr><td>2</td><td>9329.95</td><td>50.27</td><td>74.00</td><td>-23.73</td><td>41.68</td><td>8.59</td><td>Peak</td><td>100</td><td>164</td></tr><tr><td>3</td><td>14030.00</td><td>36.90</td><td>68.20</td><td>-31.30</td><td>27.73</td><td>9.17</td><td>Average</td><td>100</td><td>200</td></tr><tr><td>4</td><td>14030.00</td><td>50.86</td><td>88.20</td><td>-37.34</td><td>41.69</td><td>9.17</td><td>Peak</td><td>100</td><td>200</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9329.95	36.47	54.00	-17.53	27.88	8.59	Average	100	164	2	9329.95	50.27	74.00	-23.73	41.68	8.59	Peak	100	164	3	14030.00	36.90	68.20	-31.30	27.73	9.17	Average	100	200	4	14030.00	50.86	88.20	-37.34	41.69	9.17	Peak	100	200
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9329.95	36.47	54.00	-17.53	27.88	8.59	Average	100	164																																												
2	9329.95	50.27	74.00	-23.73	41.68	8.59	Peak	100	164																																												
3	14030.00	36.90	68.20	-31.30	27.73	9.17	Average	100	200																																												
4	14030.00	50.86	88.20	-37.34	41.69	9.17	Peak	100	200																																												



Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	7015																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9329.95</td><td>36.14</td><td>54.00</td><td>-17.86</td><td>27.55</td><td>8.59</td><td>Average</td><td>100</td><td>165</td></tr><tr><td>2</td><td>9329.95</td><td>50.28</td><td>74.00</td><td>-23.72</td><td>41.69</td><td>8.59</td><td>Peak</td><td>100</td><td>165</td></tr><tr><td>3</td><td>14030.00</td><td>36.95</td><td>68.20</td><td>-31.25</td><td>27.78</td><td>9.17</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>4</td><td>14030.00</td><td>50.88</td><td>88.20</td><td>-37.32</td><td>41.71</td><td>9.17</td><td>Peak</td><td>100</td><td>116</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9329.95	36.14	54.00	-17.86	27.55	8.59	Average	100	165	2	9329.95	50.28	74.00	-23.72	41.69	8.59	Peak	100	165	3	14030.00	36.95	68.20	-31.25	27.78	9.17	Average	100	116	4	14030.00	50.88	88.20	-37.32	41.71	9.17	Peak	100	116
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9329.95	36.14	54.00	-17.86	27.55	8.59	Average	100	165																																												
2	9329.95	50.28	74.00	-23.72	41.69	8.59	Peak	100	165																																												
3	14030.00	36.95	68.20	-31.25	27.78	9.17	Average	100	116																																												
4	14030.00	50.88	88.20	-37.32	41.71	9.17	Peak	100	116																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	ax HE20-OFDMA RU106		Test Freq. (MHz)	7095	
Polarization	Horizontal				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63					
Level (dBuV/m) </					




Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	7095																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9436.35</td><td>36.38</td><td>54.00</td><td>-17.62</td><td>27.67</td><td>8.71</td><td>Average</td><td>100</td><td>165</td></tr><tr><td>2</td><td>9436.35</td><td>50.42</td><td>74.00</td><td>-23.58</td><td>41.71</td><td>8.71</td><td>Peak</td><td>100</td><td>165</td></tr><tr><td>3</td><td>14190.00</td><td>36.91</td><td>68.20</td><td>-31.29</td><td>27.60</td><td>9.31</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>4</td><td>14190.00</td><td>50.80</td><td>88.20</td><td>-37.40</td><td>41.49</td><td>9.31</td><td>Peak</td><td>100</td><td>124</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9436.35	36.38	54.00	-17.62	27.67	8.71	Average	100	165	2	9436.35	50.42	74.00	-23.58	41.71	8.71	Peak	100	165	3	14190.00	36.91	68.20	-31.29	27.60	9.31	Average	100	124	4	14190.00	50.80	88.20	-37.40	41.49	9.31	Peak	100	124
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9436.35	36.38	54.00	-17.62	27.67	8.71	Average	100	165																																												
2	9436.35	50.42	74.00	-23.58	41.71	8.71	Peak	100	165																																												
3	14190.00	36.91	68.20	-31.29	27.60	9.31	Average	100	124																																												
4	14190.00	50.80	88.20	-37.40	41.49	9.31	Peak	100	124																																												



Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	7115
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			

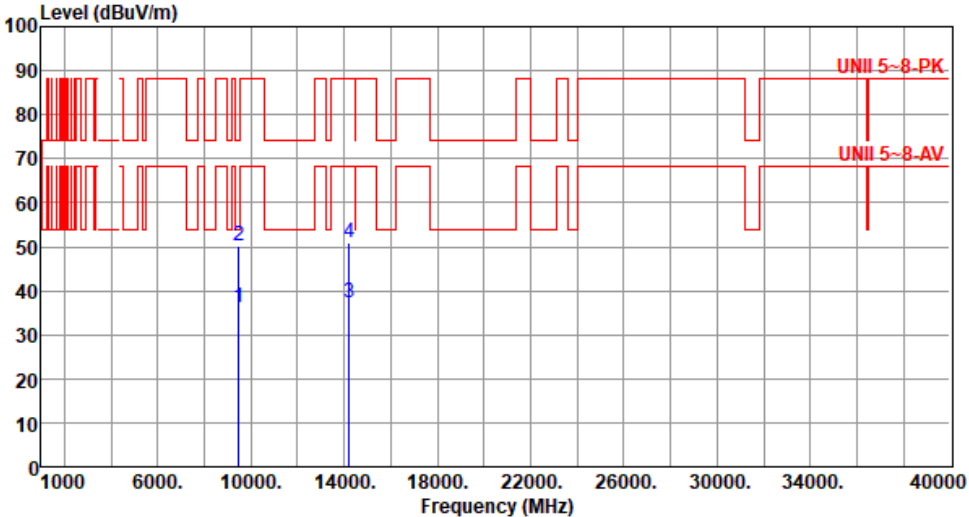

Modulation	ax HE20-OFDMA RU106	Test Freq. (MHz)	7115																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																																					
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9462.95</td><td>36.34</td><td>54.00</td><td>-17.66</td><td>27.66</td><td>8.68</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>2</td><td>9462.95</td><td>50.21</td><td>74.00</td><td>-23.79</td><td>41.53</td><td>8.68</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>3</td><td>14230.00</td><td>37.11</td><td>68.20</td><td>-31.09</td><td>27.71</td><td>9.40</td><td>Average</td><td>100</td><td>156</td></tr><tr><td>4</td><td>14230.00</td><td>51.06</td><td>88.20</td><td>-37.14</td><td>41.66</td><td>9.40</td><td>Peak</td><td>100</td><td>156</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9462.95	36.34	54.00	-17.66	27.66	8.68	Average	100	126	2	9462.95	50.21	74.00	-23.79	41.53	8.68	Peak	100	126	3	14230.00	37.11	68.20	-31.09	27.71	9.40	Average	100	156	4	14230.00	51.06	88.20	-37.14	41.66	9.40	Peak	100	156
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9462.95	36.34	54.00	-17.66	27.66	8.68	Average	100	126																																												
2	9462.95	50.21	74.00	-23.79	41.53	8.68	Peak	100	126																																												
3	14230.00	37.11	68.20	-31.09	27.71	9.40	Average	100	156																																												
4	14230.00	51.06	88.20	-37.14	41.66	9.40	Peak	100	156																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	5.9531G	-13.27	5.9826G	-72.17	-53.27	-18.90	1
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	6.4127G	-13.45	6.4046G	-51.08	-33.48	-17.60	1
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	5.9515G	-11.76	5.9856G	-68.36	-51.53	-16.83	1
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	6.4333G	-13.04	6.4078G	-72.50	-53.04	-19.46	1
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	6.4325G	-13.23	6.4246G	-50.83	-33.29	-17.54	1
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	6.4328G	-11.43	6.4656G	-68.33	-51.10	-17.23	1
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	6.8726G	-13.07	6.9031G	-72.29	-53.07	-19.22	1
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	6.713G	-13.19	6.7047G	-50.14	-33.09	-17.05	1
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	6.8711G	-11.70	6.906G	-68.97	-51.70	-17.27	1
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	7.013G	-13.45	6.9851G	-72.30	-53.45	-18.85	1
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	6.8931G	-13.24	6.8845G	-51.65	-33.36	-18.29	1
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	6.8933G	-11.50	6.9257G	-68.40	-51.39	-17.01	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.9531G	-13.27	5.9826G	-72.17	-53.27	-18.90	1
6175MHz	Pass	6.1727G	-12.64	6.2076G	-72.43	-52.64	-19.79	1
6415MHz	Pass	6.4131G	-12.68	6.388G	-72.18	-52.64	-19.54	1
6435MHz	Pass	6.4333G	-13.04	6.4078G	-72.50	-53.04	-19.46	1
6475MHz	Pass	6.4732G	-12.64	6.4473G	-72.35	-52.64	-19.71	1
6515MHz	Pass	6.513G	-12.78	6.4871G	-72.46	-52.78	-19.68	1
6535MHz	Pass	6.5332G	-12.92	6.5079G	-72.50	-52.92	-19.58	1
6715MHz	Pass	6.713G	-12.69	6.7425G	-72.91	-52.69	-20.22	1
6855MHz	Pass	6.8531G	-13.11	6.885G	-72.40	-53.11	-19.29	1
6875MHz Straddle 6.525-6.875GHz	Pass	6.8726G	-13.07	6.9031G	-72.29	-53.07	-19.22	1
6895MHz	Pass	6.8932G	-13.16	6.9233G	-72.36	-53.16	-19.20	1
7015MHz	Pass	7.013G	-13.45	6.9851G	-72.30	-53.45	-18.85	1
7095MHz	Pass	7.0933G	-12.83	7.085G	-52.40	-32.63	-19.77	1
7115MHz	Pass	7.1131G	-13.21	7.1427G	-72.73	-53.21	-19.52	1
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.9531G	-13.45	5.9832G	-71.50	-53.45	-18.05	1
6175MHz	Pass	6.1733G	-13.17	6.1646G	-50.99	-33.23	-17.76	1
6415MHz	Pass	6.4127G	-13.45	6.4046G	-51.08	-33.48	-17.60	1
6435MHz	Pass	6.4325G	-13.23	6.4246G	-50.83	-33.29	-17.54	1
6475MHz	Pass	6.4729G	-13.07	6.4645G	-51.15	-33.19	-17.96	1
6515MHz	Pass	6.5126G	-13.33	6.4865G	-71.67	-53.31	-18.36	1
6535MHz	Pass	6.5332G	-12.52	6.5247G	-49.02	-31.72	-17.30	1
6715MHz	Pass	6.713G	-13.19	6.7047G	-50.14	-33.09	-17.05	1
6855MHz	Pass	6.8513G	-13.11	6.8841G	-71.68	-53.11	-18.57	1
6875MHz Straddle 6.525-6.875GHz	Pass	6.8725G	-13.03	6.9043G	-71.63	-53.03	-18.60	1
6895MHz	Pass	6.8931G	-13.24	6.8845G	-51.65	-33.36	-18.29	1
7015MHz	Pass	7.0124G	-13.12	7.0046G	-51.46	-33.15	-18.31	1
7095MHz	Pass	7.0922G	-13.31	7.0668G	-72.17	-53.29	-18.88	1
7115MHz	Pass	7.1125G	-13.07	7.1437G	-72.25	-53.07	-19.18	1
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.9515G	-11.76	5.9856G	-68.36	-51.53	-16.83	1
6175MHz	Pass	6.1726G	-11.28	6.2057G	-68.29	-51.17	-17.12	1
6415MHz	Pass	6.4122G	-11.68	6.3838G	-68.60	-51.68	-16.92	1
6435MHz	Pass	6.4328G	-11.43	6.4656G	-68.33	-51.10	-17.23	1
6475MHz	Pass	6.4717G	-10.62	6.5058G	-68.07	-50.62	-17.45	1
6515MHz	Pass	6.5125G	-10.72	6.4837G	-68.39	-50.72	-17.67	1
6535MHz	Pass	6.5331G	-10.80	6.5038G	-68.11	-50.80	-17.31	1
6715MHz	Pass	6.7129G	-10.41	6.7455G	-68.15	-50.19	-17.96	1
6855MHz	Pass	6.8524G	-11.14	6.8859G	-68.62	-51.14	-17.48	1
6875MHz Straddle 6.525-6.875GHz	Pass	6.8711G	-11.70	6.906G	-68.97	-51.70	-17.27	1




Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6895MHz	Pass	6.8933G	-11.50	6.9257G	-68.40	-51.39	-17.01	1
7015MHz	Pass	7.0123G	-11.43	6.9833G	-68.86	-51.43	-17.43	1
7095MHz	Pass	7.0921G	-11.62	7.1259G	-69.46	-51.62	-17.84	1
7115MHz	Pass	7.1129G	-11.61	7.0841G	-69.90	-51.61	-18.29	1



5.925-6.425GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

MASK


5955MHz_TX

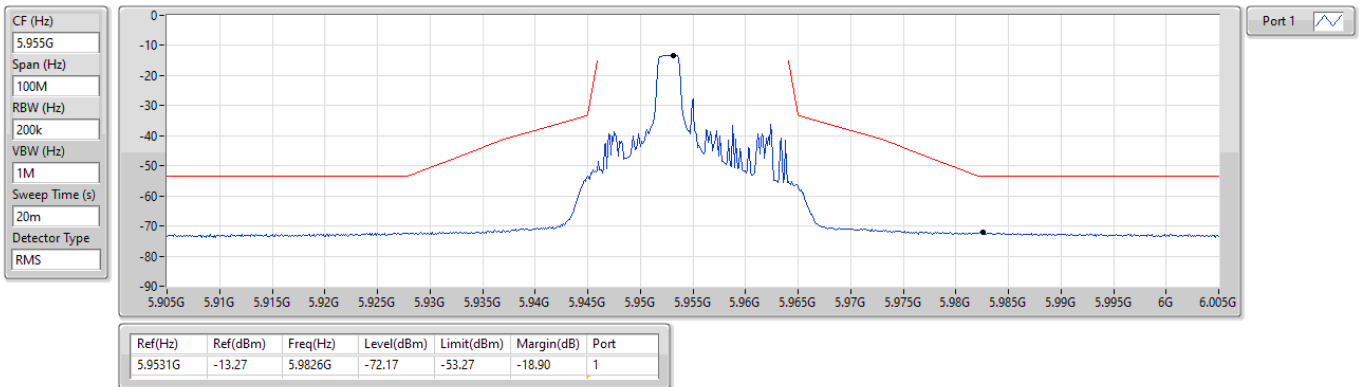

5.925-6.425GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

MASK

6175MHz_TX

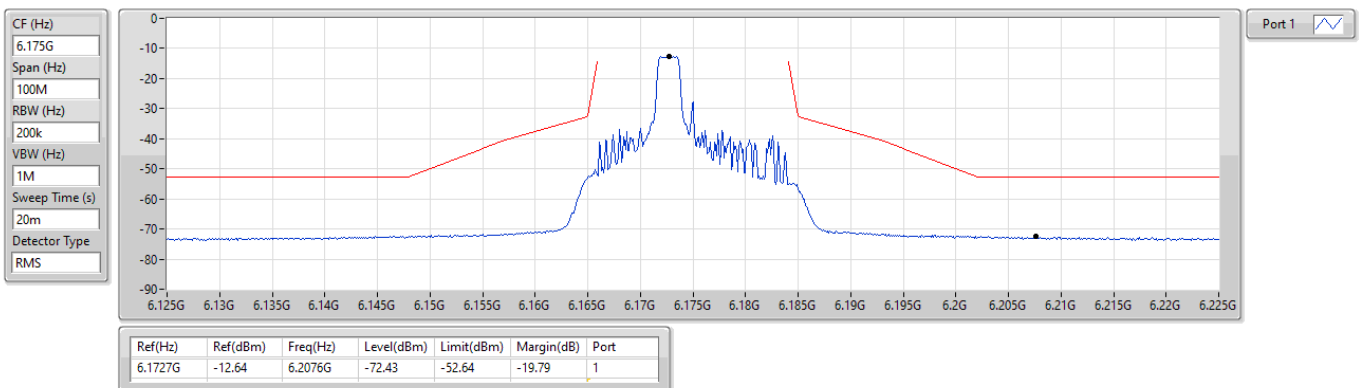




5.925-6.425GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

MASK


6415MHz_TX

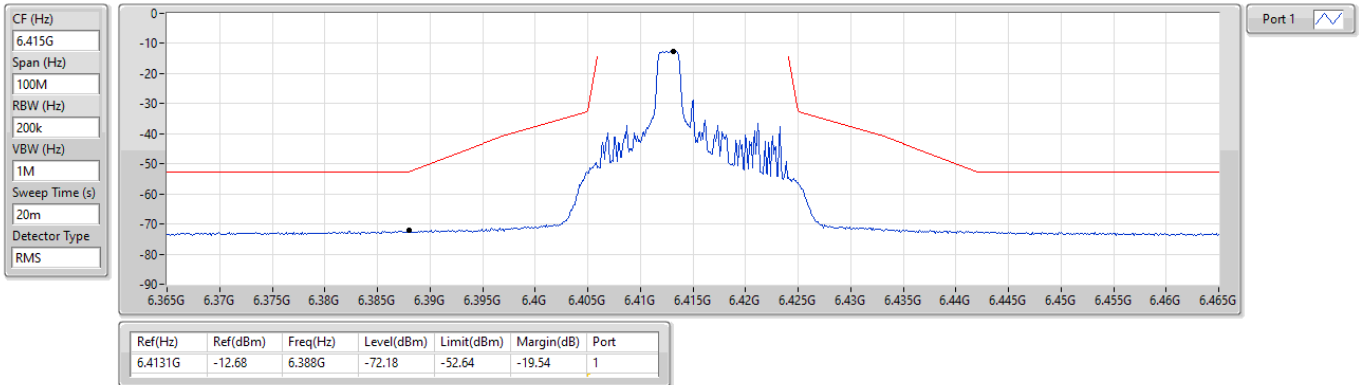

6.425-6.525GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

MASK

6435MHz_TX

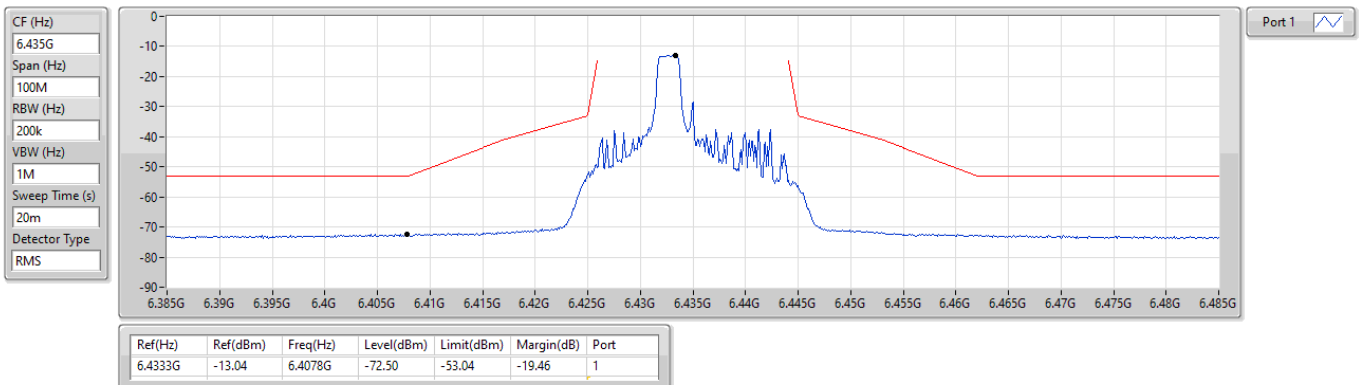




6.425-6.525GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

MASK


6475MHz_TX

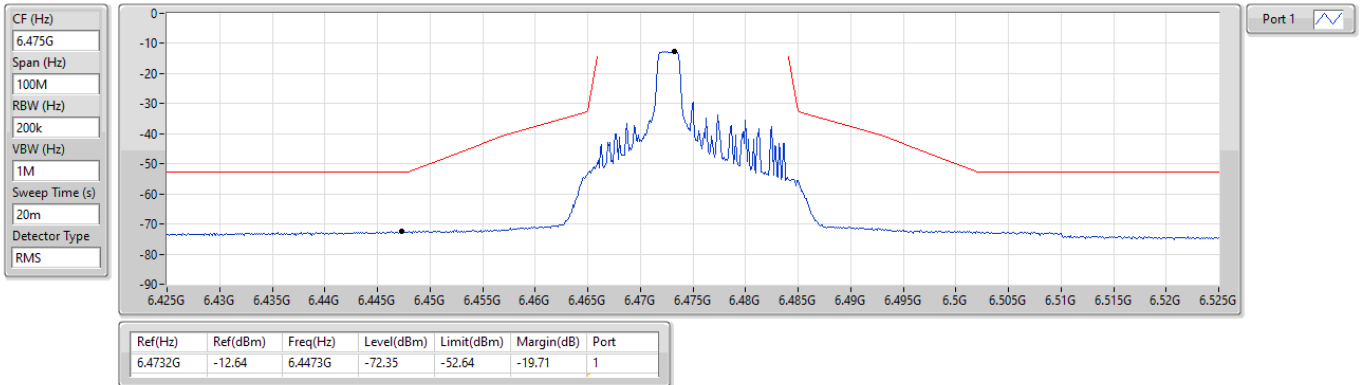

6.425-6.525GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

MASK


6515MHz_TX

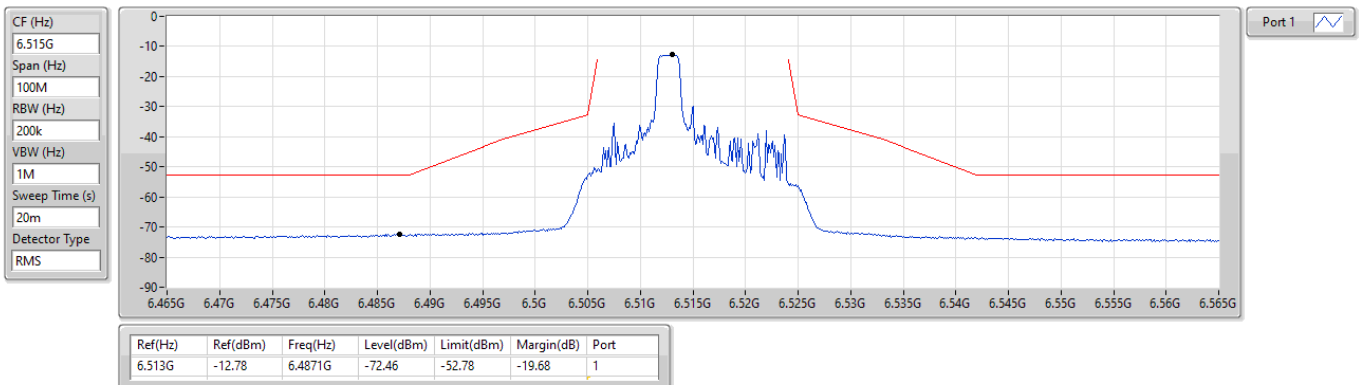

6.525-6.875GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

MASK


6535MHz_TX

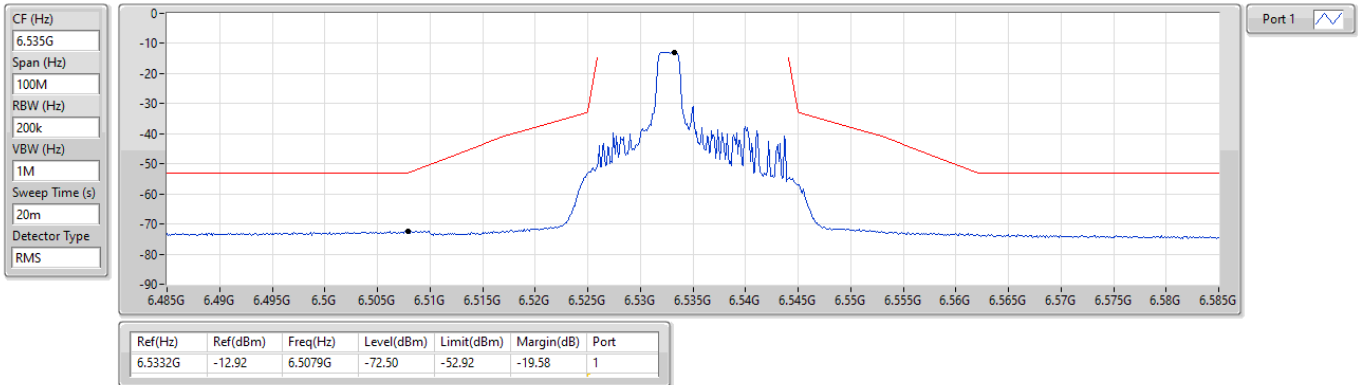

6.525-6.875GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

MASK

6715MHz_TX

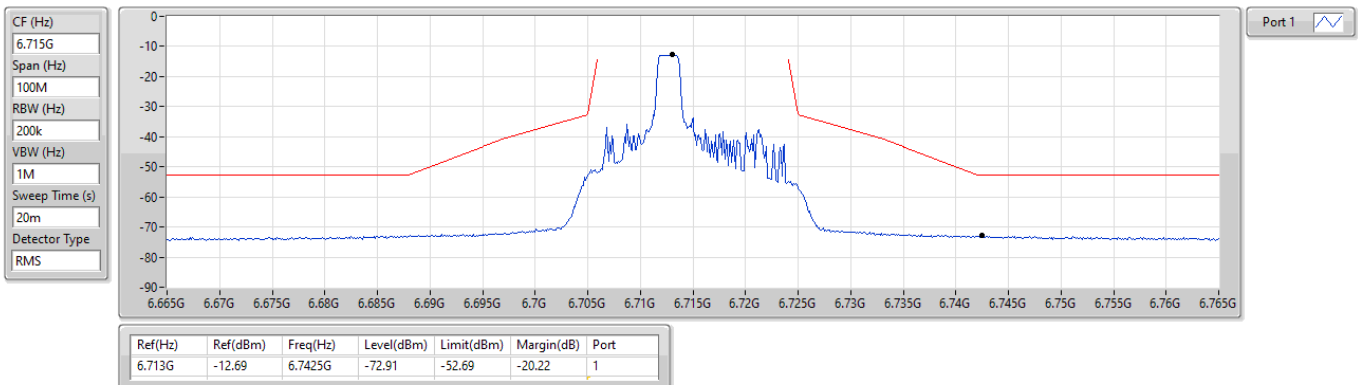




6.525-6.875GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

MASK


6855MHz_TX

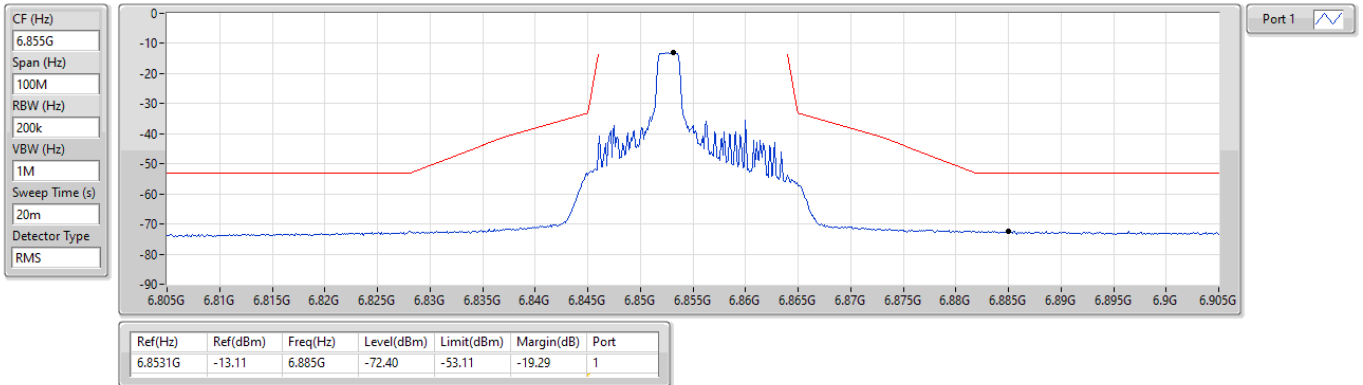

6.525-6.875GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

MASK

6875MHz Straddle 6.525-6.875GHz_TX

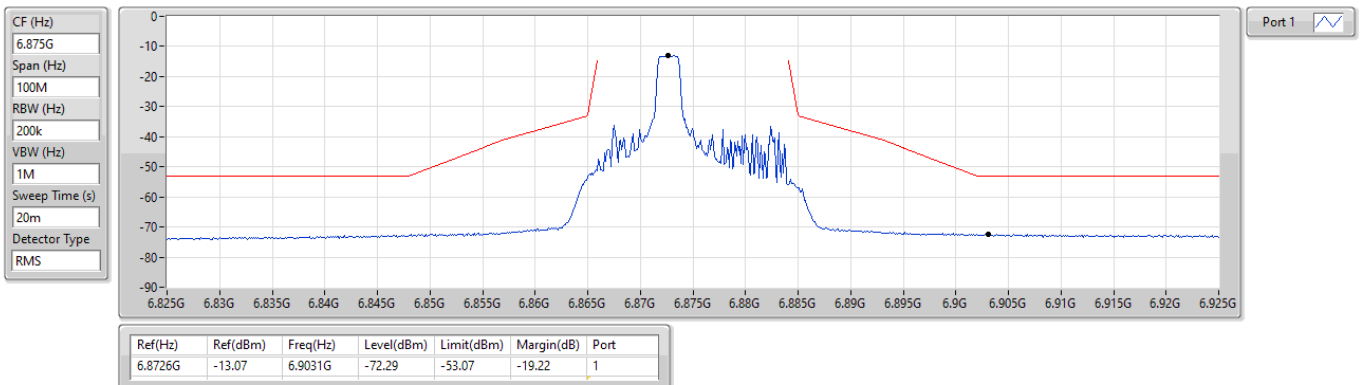




6.875-7.125GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

MASK


6895MHz_TX

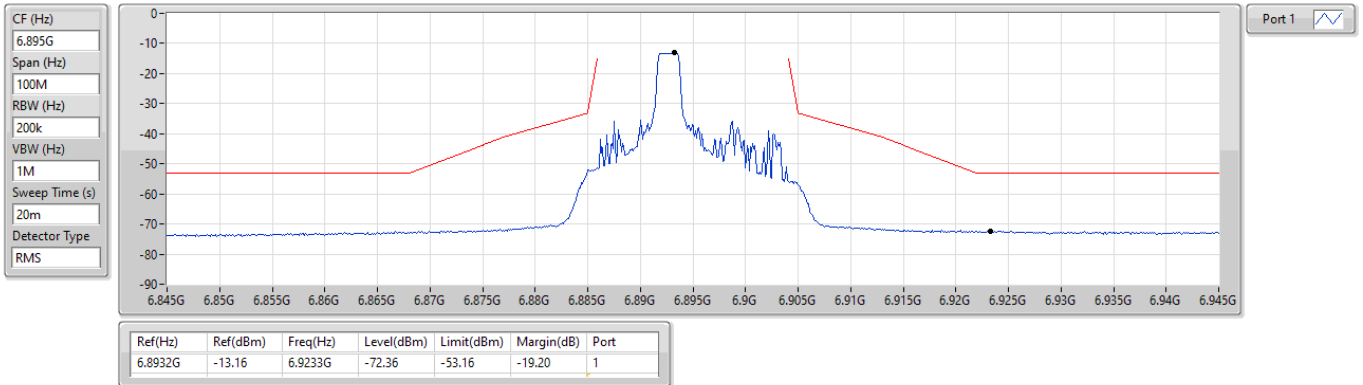

6.875-7.125GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

MASK

7015MHz_TX

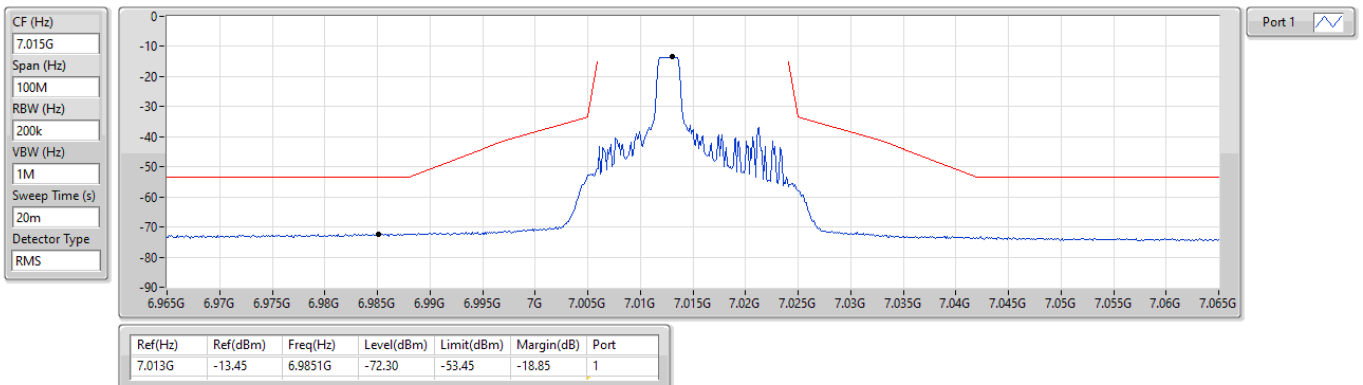




6.875-7.125GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

MASK


7095MHz_TX

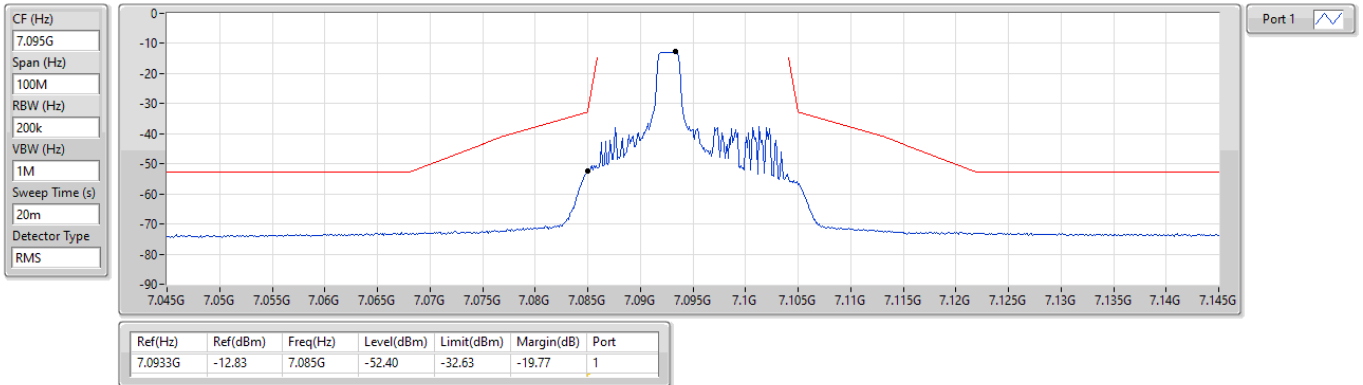

6.875-7.125GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

MASK

7115MHz_TX

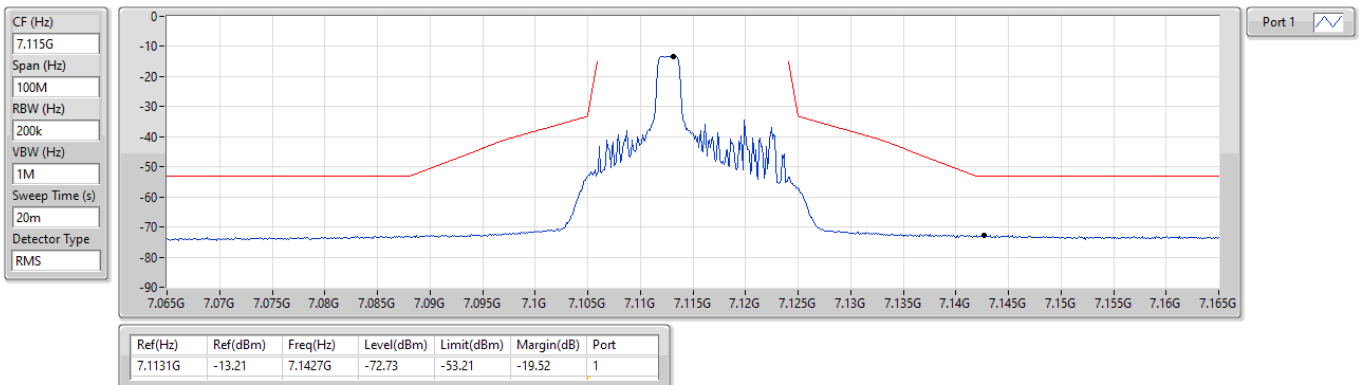




5.925-6.425GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

MASK


5955MHz_TX

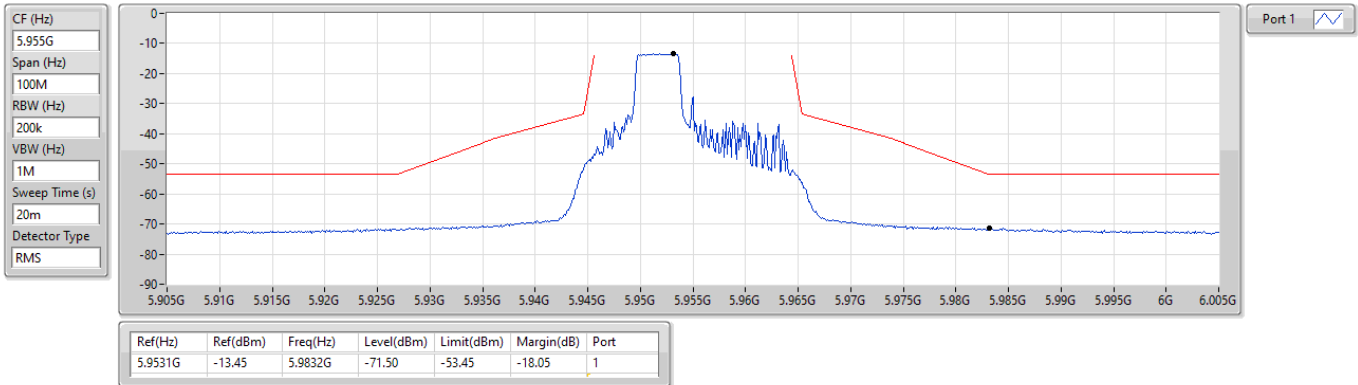

5.925-6.425GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

MASK

6175MHz_TX

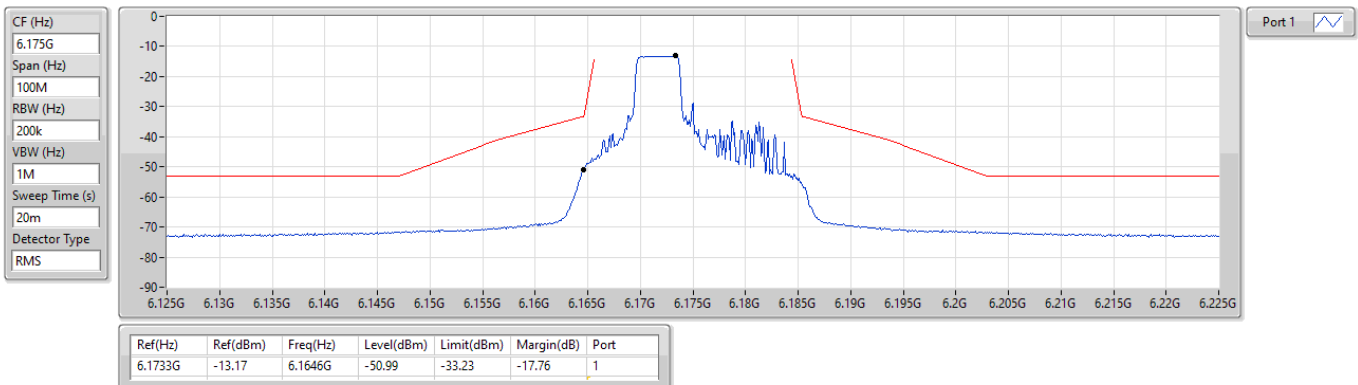




5.925-6.425GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

MASK


6415MHz_TX

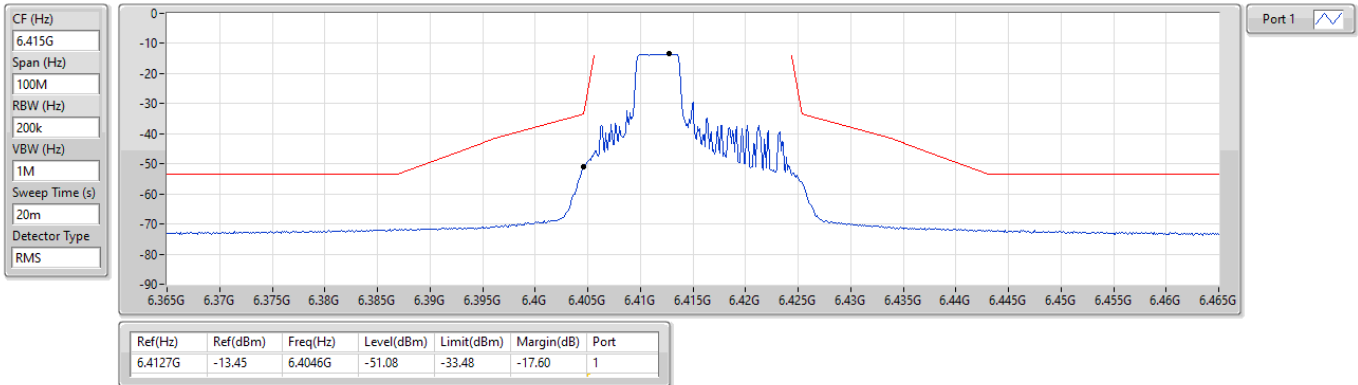

6.425-6.525GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

MASK


6435MHz_TX

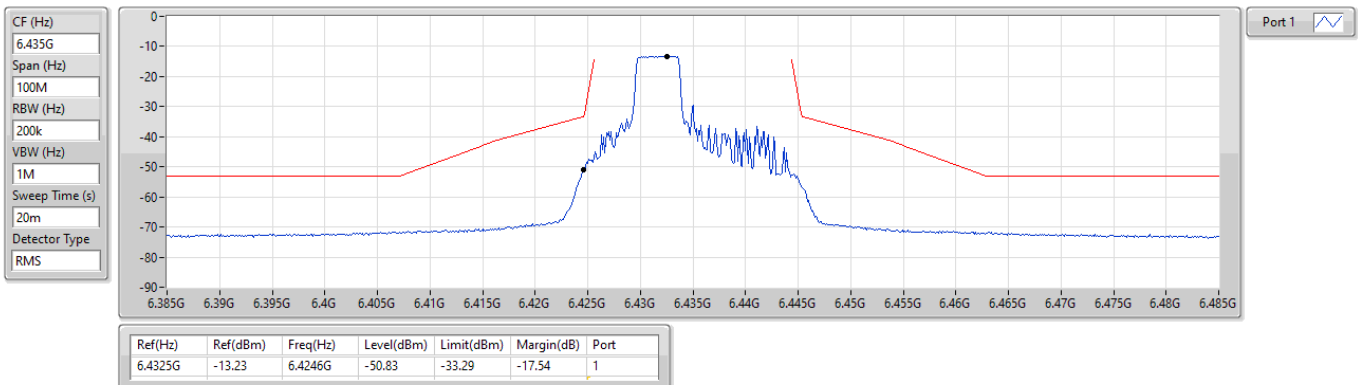

6.425-6.525GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

MASK


6475MHz_TX

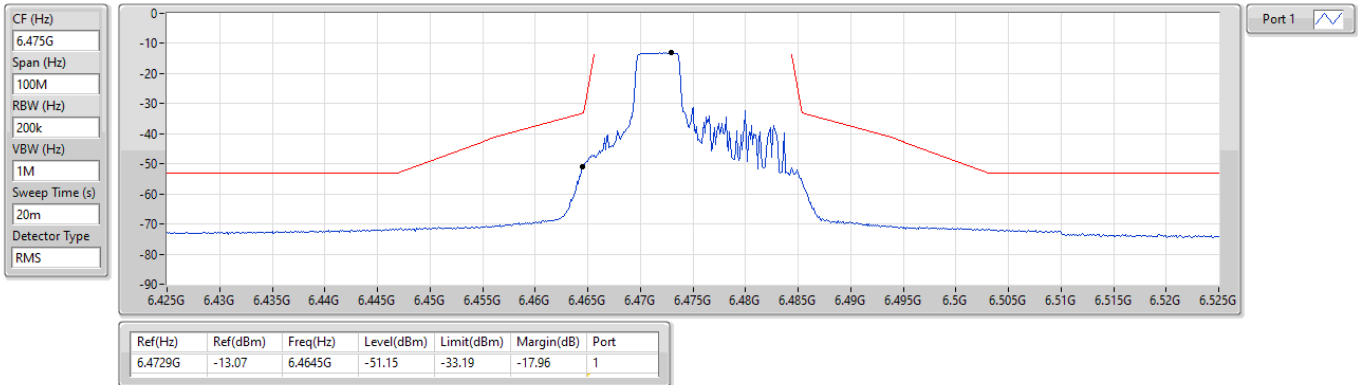

6.425-6.525GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

MASK


6515MHz_TX

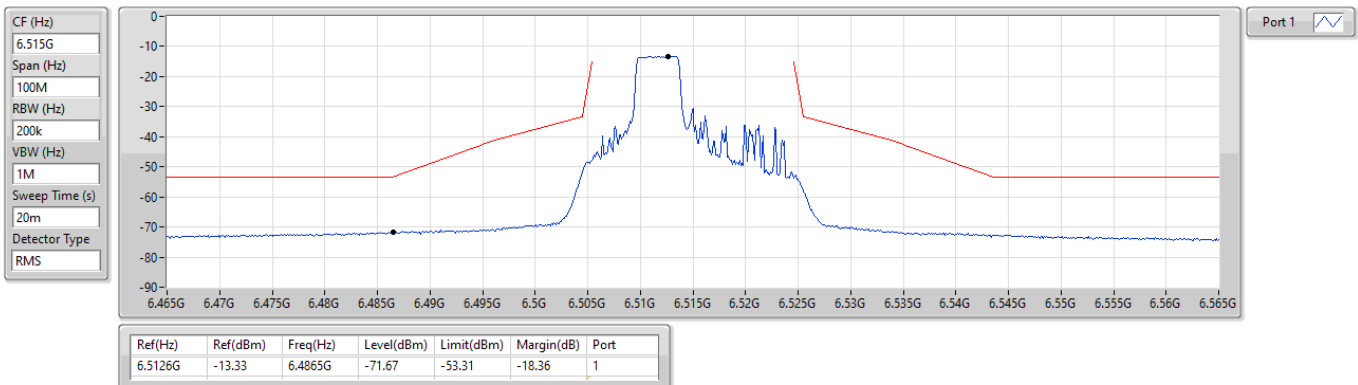

6.525-6.875GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

MASK


6535MHz_TX

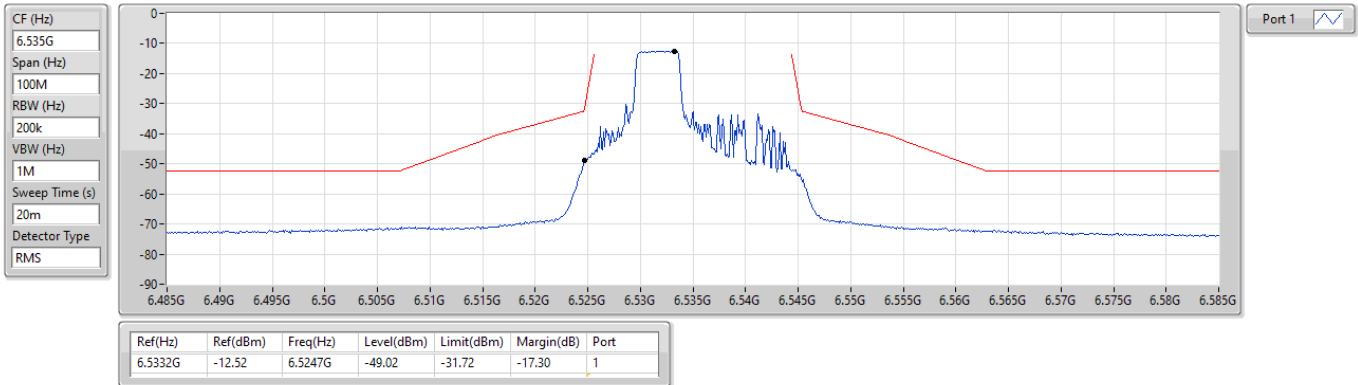

6.525-6.875GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

MASK


6715MHz_TX

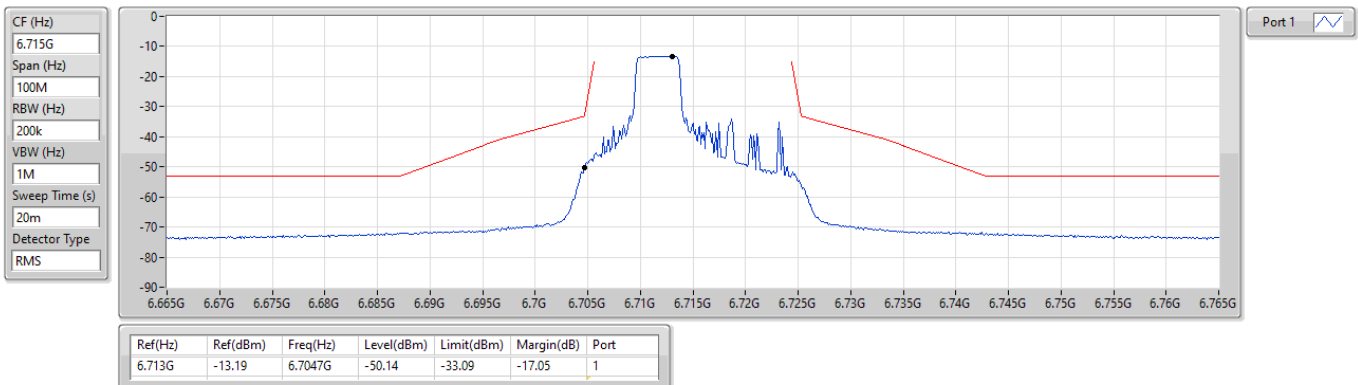

6.525-6.875GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

MASK


6855MHz_TX

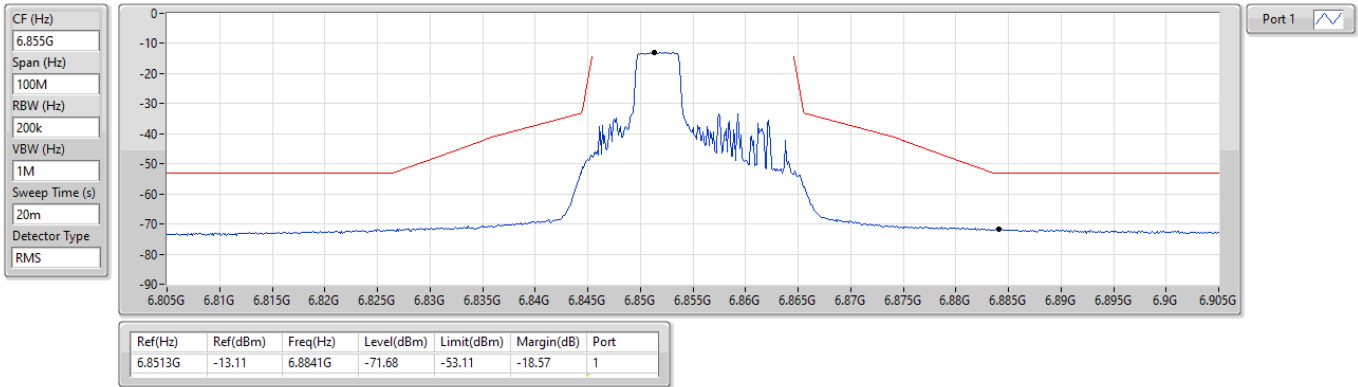

6.525-6.875GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

MASK

6875MHz Straddle 6.525-6.875GHz_TX

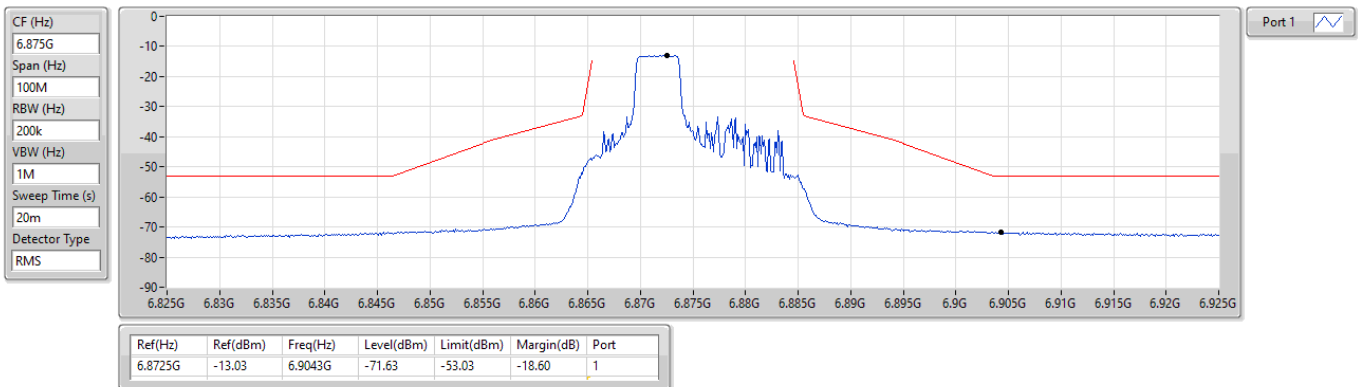




6.875-7.125GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

MASK


6895MHz_TX

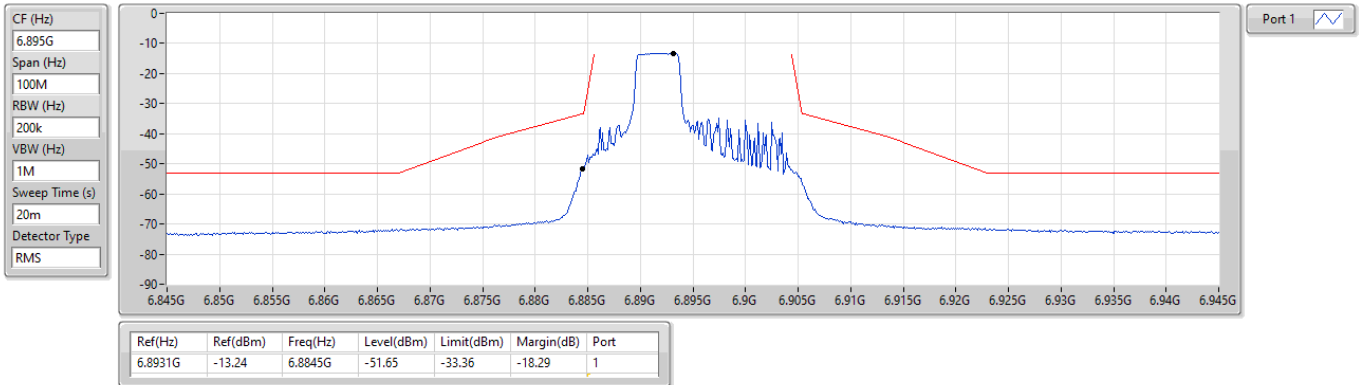

6.875-7.125GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

MASK


7015MHz_TX

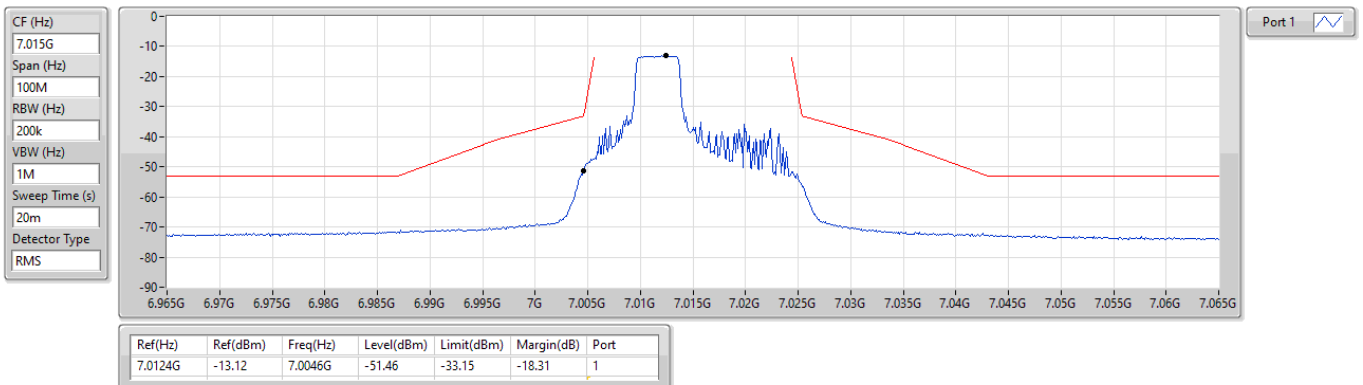

6.875-7.125GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

MASK


7095MHz_TX

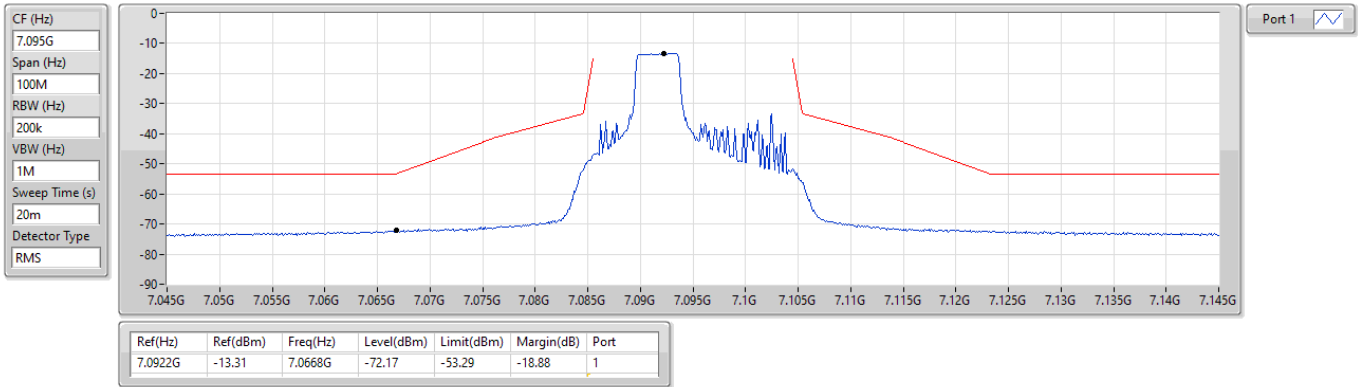

6.875-7.125GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

MASK

7115MHz_TX

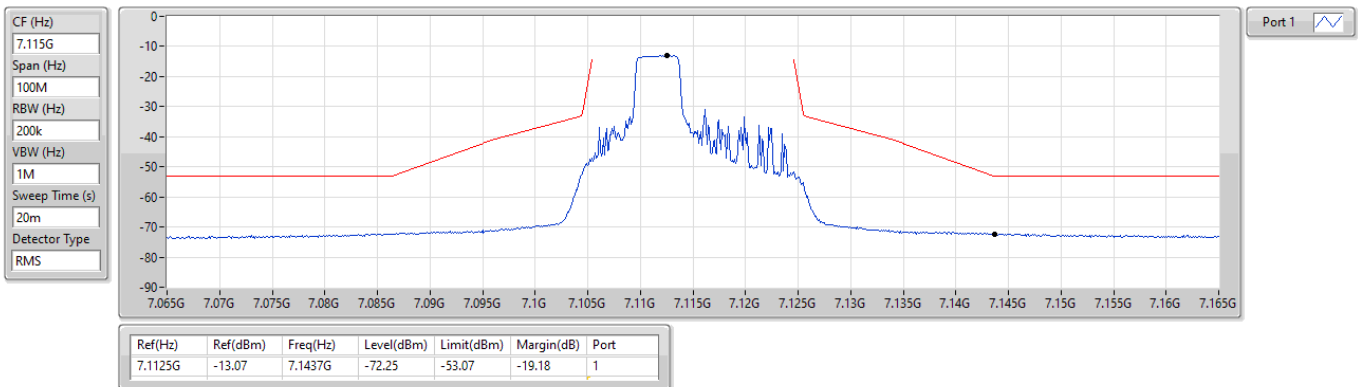




5.925-6.425GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

MASK


5955MHz_TX

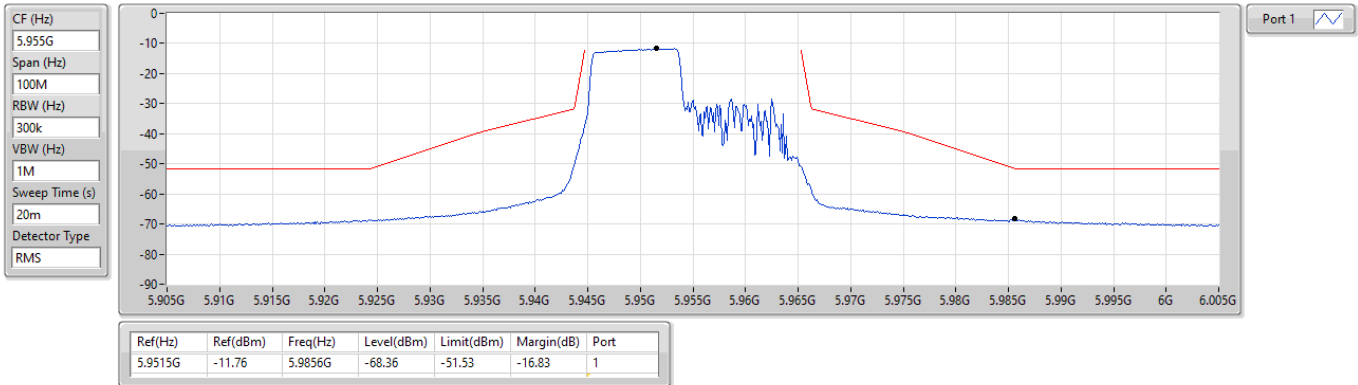

5.925-6.425GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

MASK

6175MHz_TX

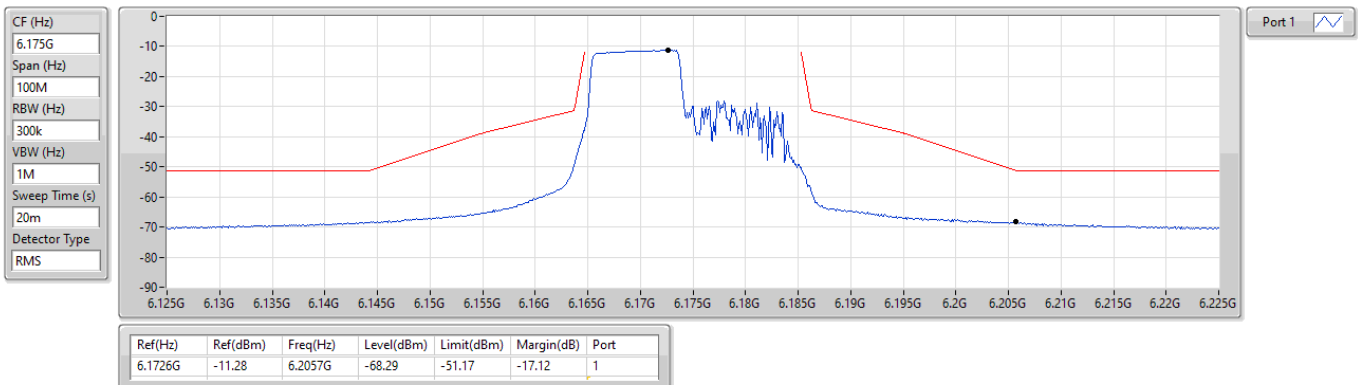




5.925-6.425GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

MASK


6415MHz_TX

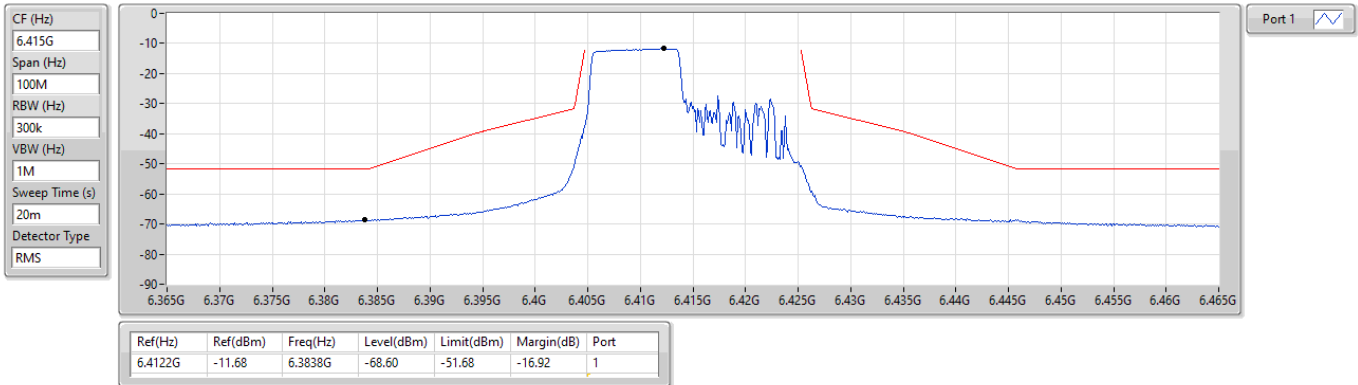

6.425-6.525GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

MASK


6435MHz_TX

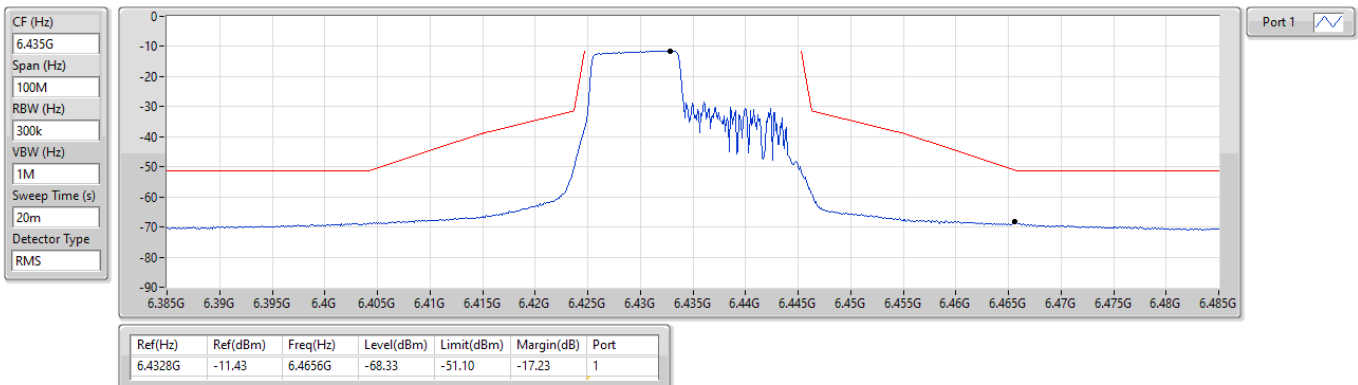

6.425-6.525GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

MASK


6475MHz_TX

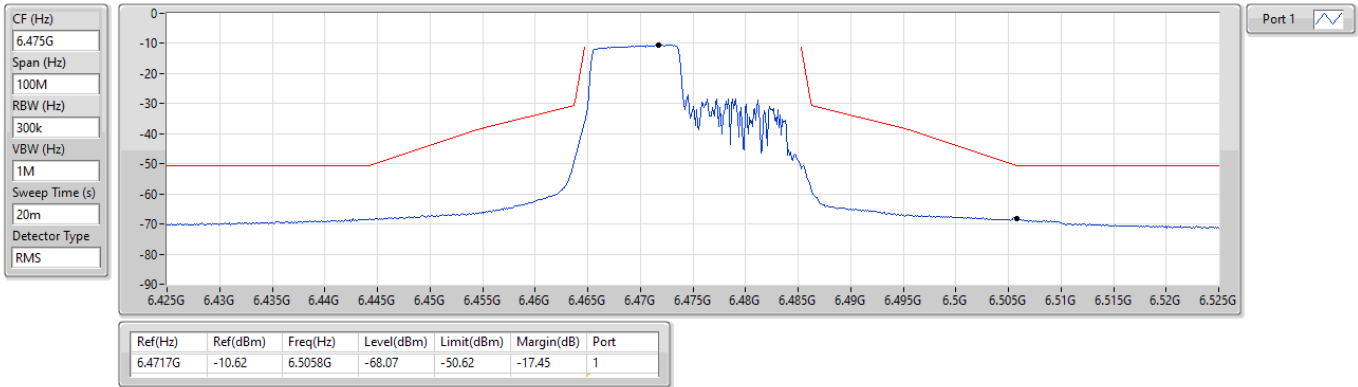

6.425-6.525GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

MASK


6515MHz_TX

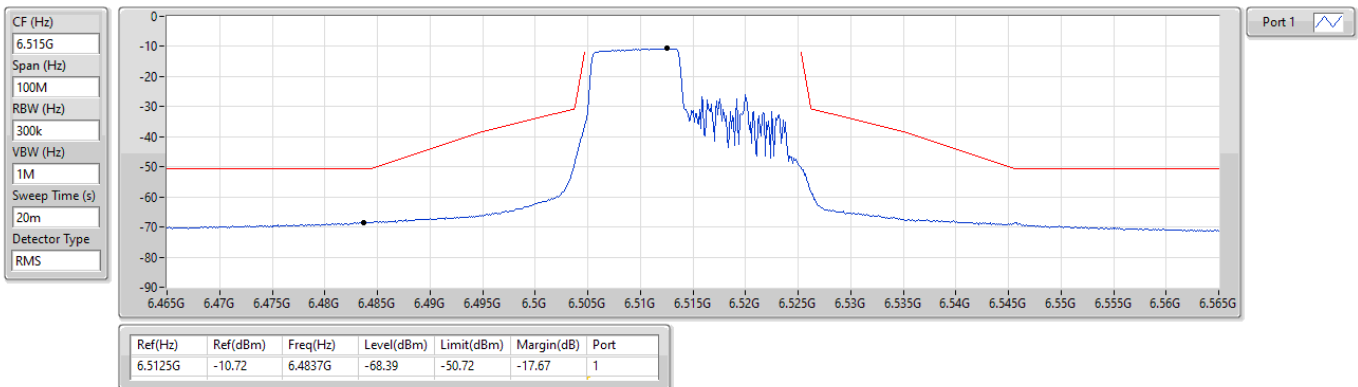

6.525-6.875GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

MASK


6535MHz_TX

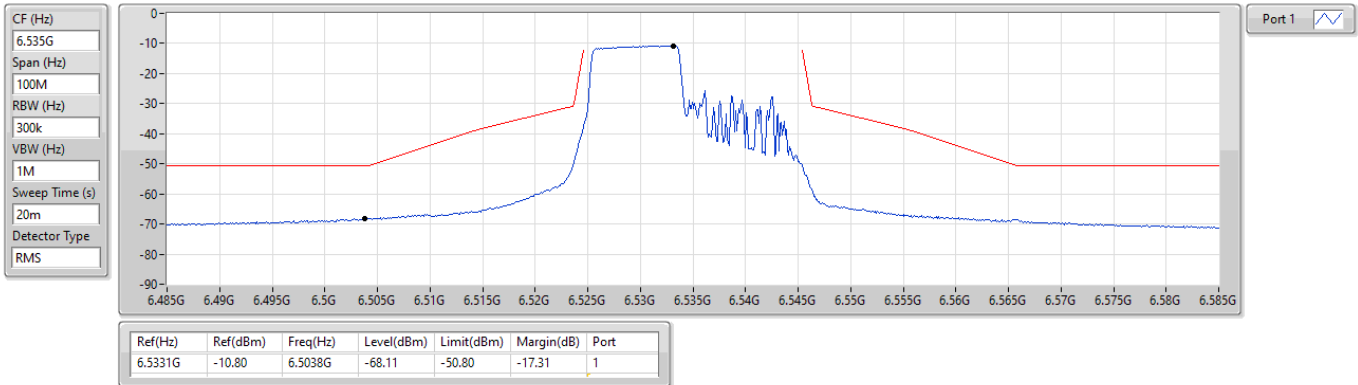

6.525-6.875GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

MASK

6715MHz_TX

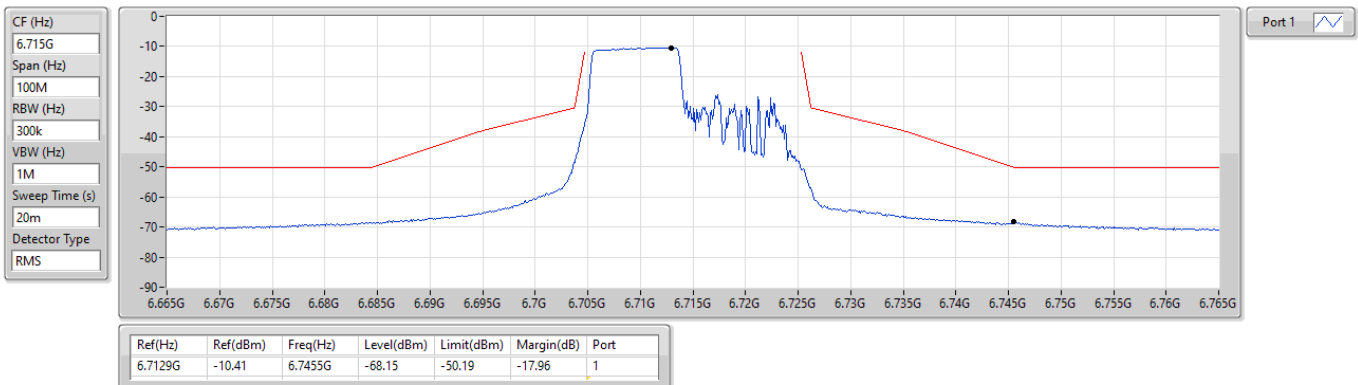




6.525-6.875GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

MASK


6855MHz_TX

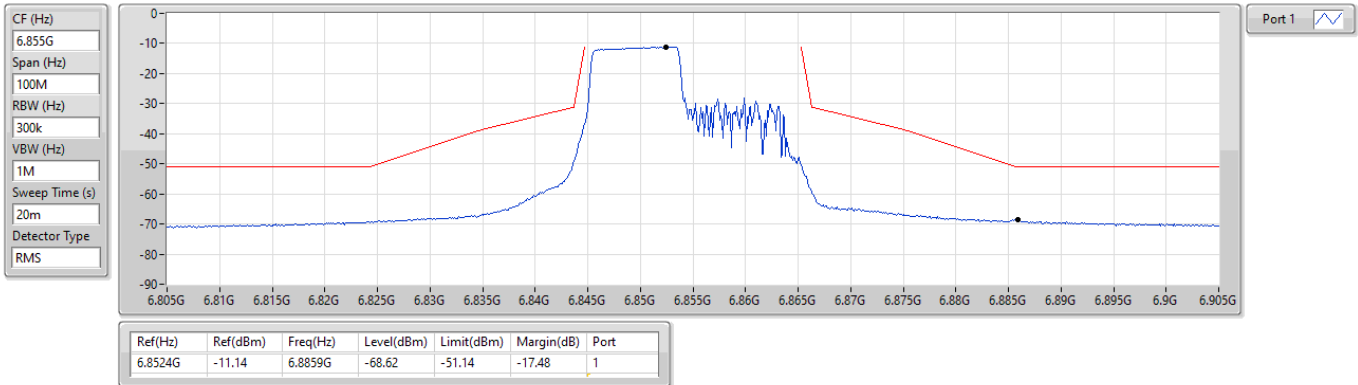

6.525-6.875GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

MASK


6875MHz Straddle 6.525-6.875GHz_TX

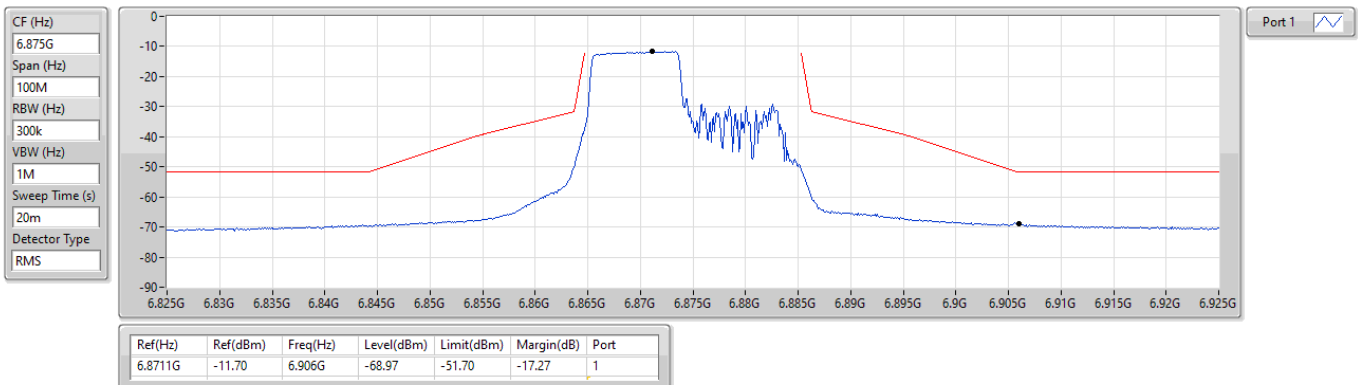

6.875-7.125GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

MASK


6895MHz_TX

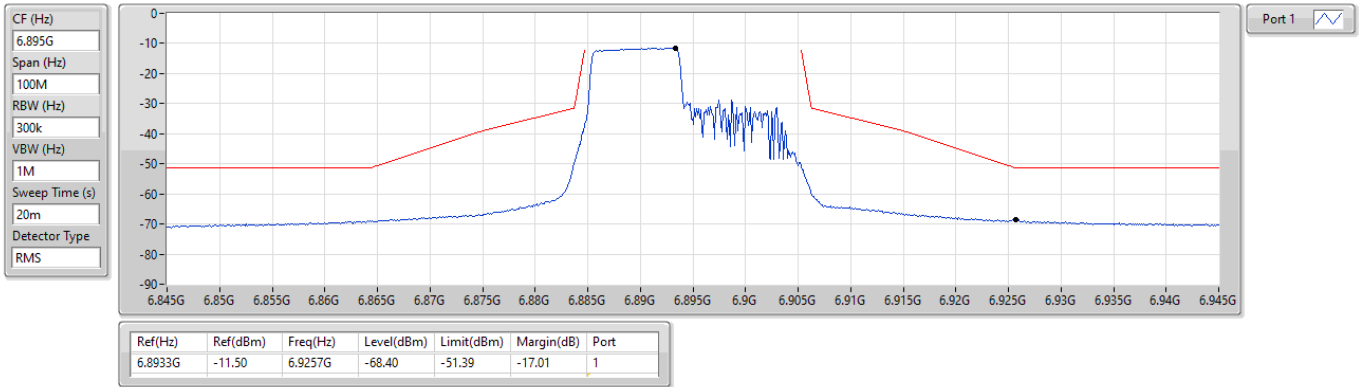

6.875-7.125GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

MASK


7015MHz_TX

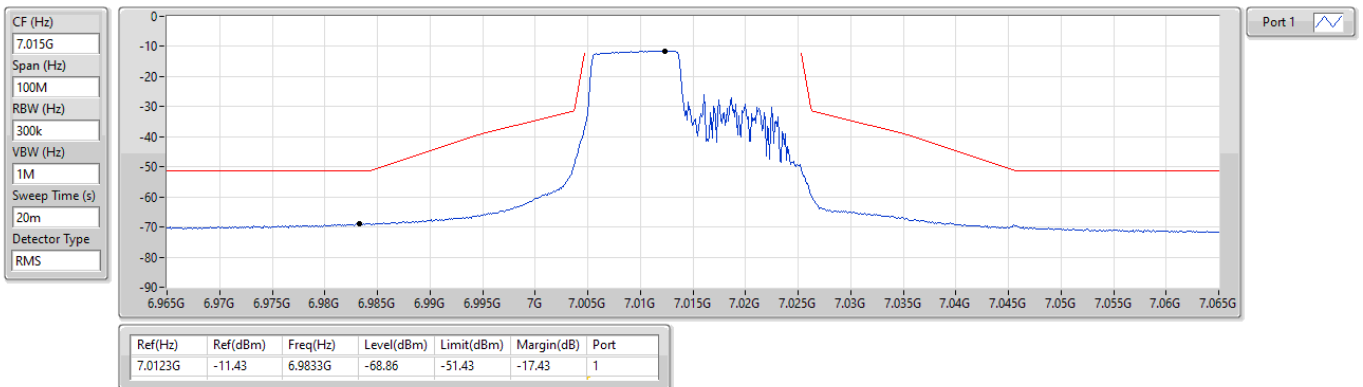

6.875-7.125GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

MASK


7095MHz_TX

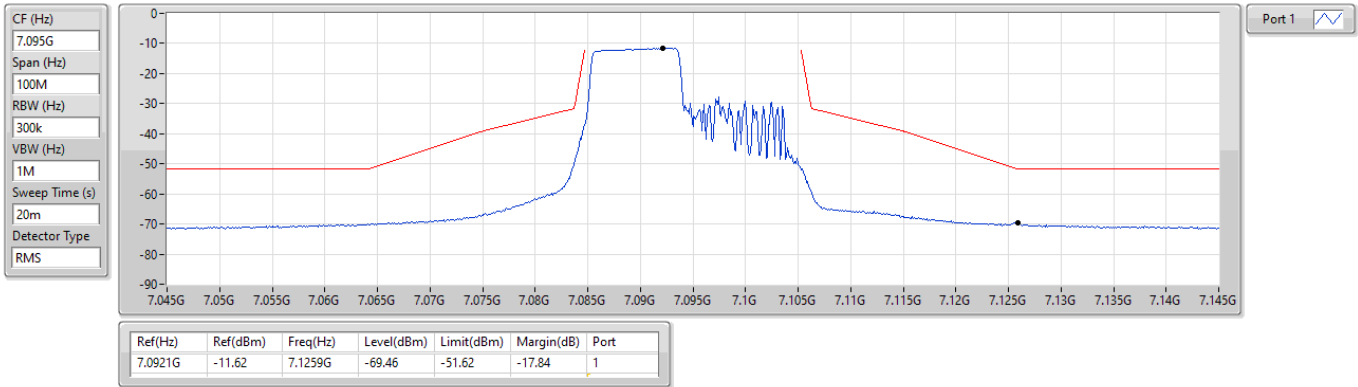

6.875-7.125GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

MASK

7115MHz_TX

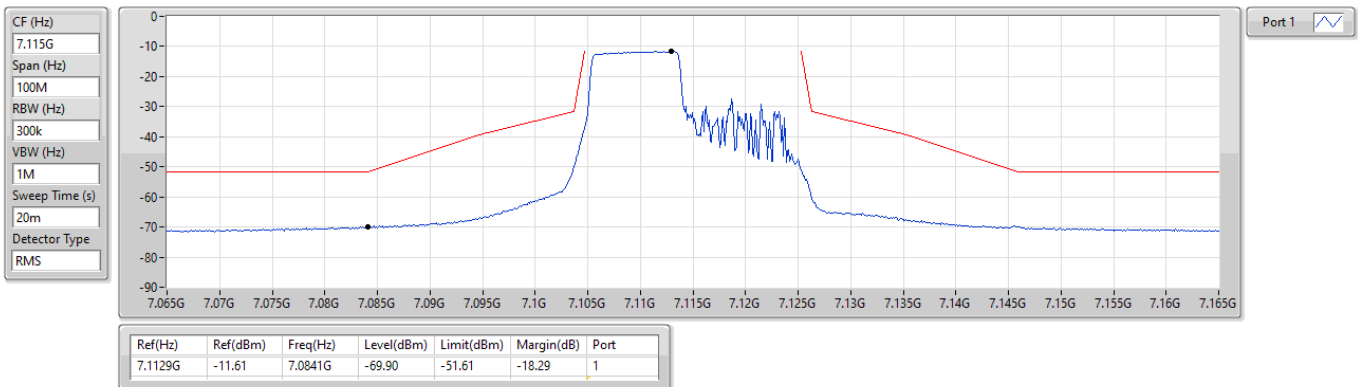




Modulation Mode	ax HE20-OFDMA	Test Freq. (MHz)	6475
Power Phase	Line		

Test by : Joe Liao

Temperature: 21°C

Humidity: 63%

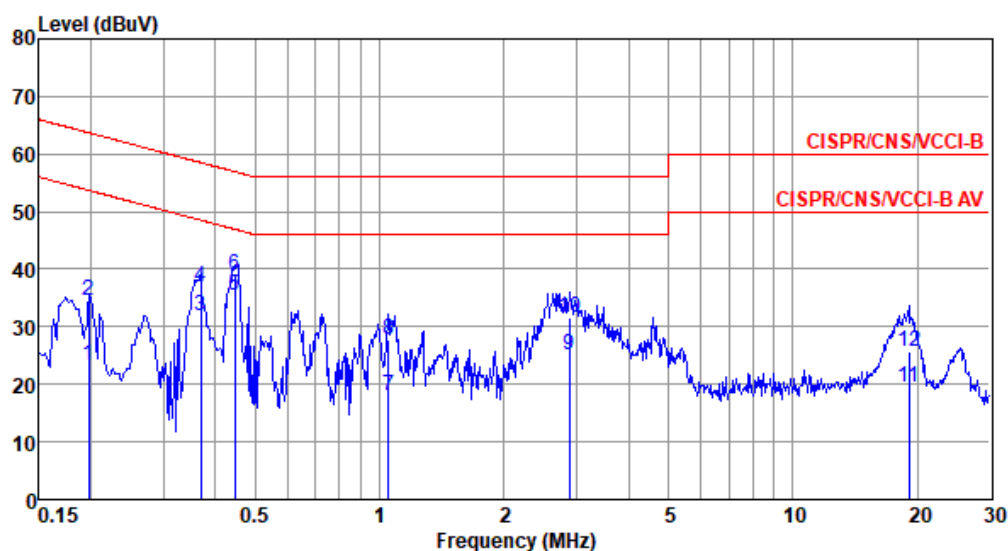

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.198	23.28	53.71	-30.43	13.60	9.64	0.04	0.00	Average
2	0.198	34.40	63.71	-29.31	24.72	9.64	0.04	0.00	QP
3	0.369	31.80	48.52	-16.72	22.12	9.64	0.04	0.00	Average
4	0.369	36.79	58.52	-21.73	27.11	9.64	0.04	0.00	QP
5*	0.447	35.47	46.93	-11.46	25.79	9.64	0.04	0.00	Average
6	0.447	39.08	56.93	-17.85	29.40	9.64	0.04	0.00	QP
7	1.049	17.92	46.00	-28.08	8.21	9.65	0.06	0.00	Average
8	1.049	27.83	56.00	-28.17	18.12	9.65	0.06	0.00	QP
9	2.884	24.99	46.00	-21.01	15.21	9.66	0.12	0.00	Average
10	2.884	31.55	56.00	-24.45	21.77	9.66	0.12	0.00	QP
11	19.122	19.38	50.00	-30.62	9.39	9.69	0.30	0.00	Average
12	19.122	25.77	60.00	-34.23	15.78	9.69	0.30	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Modulation Mode	ax HE20-OFDMA	Test Freq. (MHz)	6475
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 21°C

Humidity: 63%

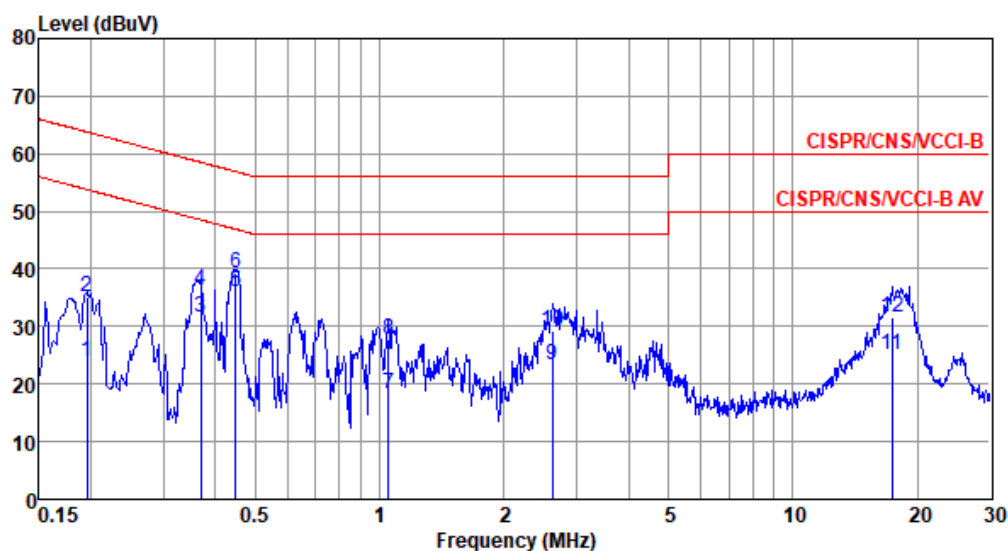

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.195	23.99	53.80	-29.81	14.31	9.64	0.04	0.00	Average
2	0.195	35.01	63.80	-28.79	25.33	9.64	0.04	0.00	QP
3	0.369	31.44	48.52	-17.08	21.77	9.63	0.04	0.00	Average
4	0.369	36.42	58.52	-22.10	26.75	9.63	0.04	0.00	QP
5*	0.449	35.95	46.89	-10.94	26.28	9.63	0.04	0.00	Average
6	0.449	39.17	56.89	-17.72	29.50	9.63	0.04	0.00	QP
7	1.049	18.16	46.00	-27.84	8.46	9.64	0.06	0.00	Average
8	1.049	27.75	56.00	-28.25	18.05	9.64	0.06	0.00	QP
9	2.622	23.20	46.00	-22.80	13.44	9.65	0.11	0.00	Average
10	2.622	29.13	56.00	-26.87	19.37	9.65	0.11	0.00	QP
11	17.383	25.18	50.00	-24.82	15.11	9.78	0.29	0.00	Average
12	17.383	31.71	60.00	-28.29	21.64	9.78	0.29	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).